


DIGITEN

Making Life Better

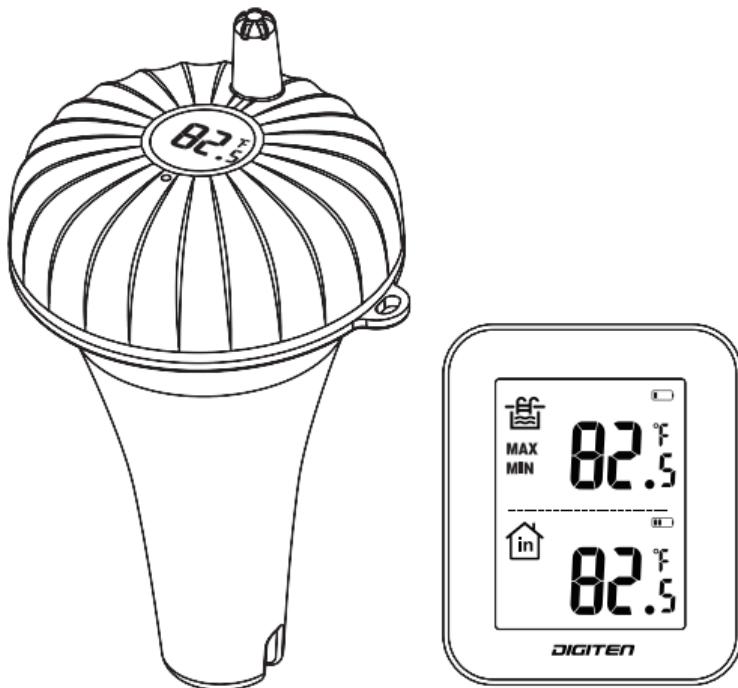


Wireless Pool Thermometer Model:WPT-100

www.digit-en.com


service@digit-en.com

01 Get to know this device

Pool Thermometer (Transmitter)

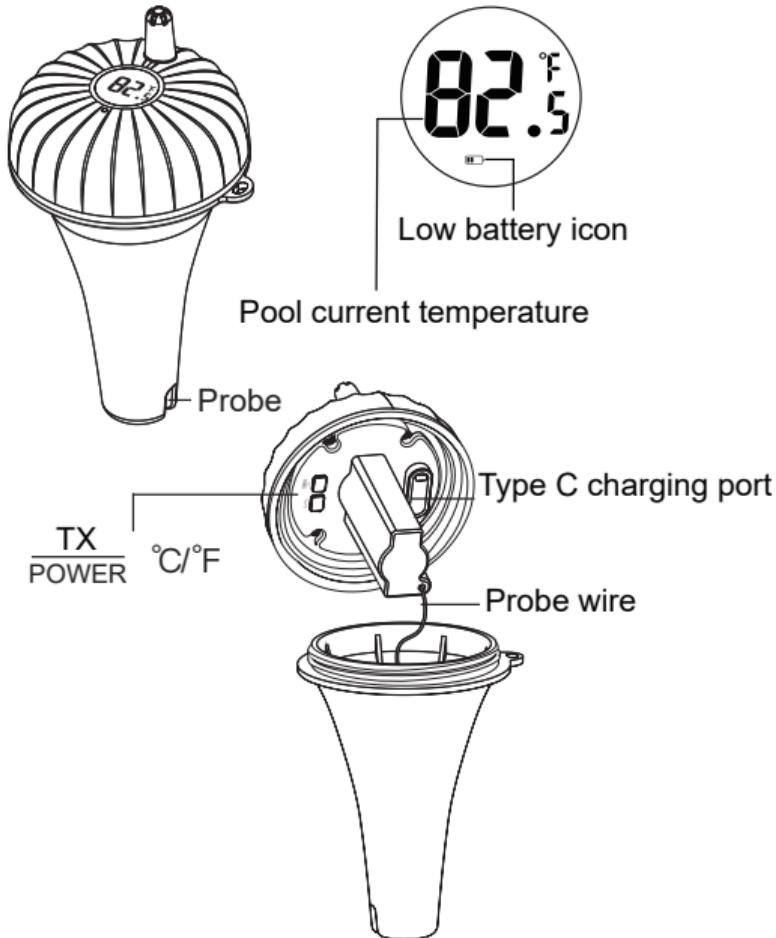

Monitor (Receiver)

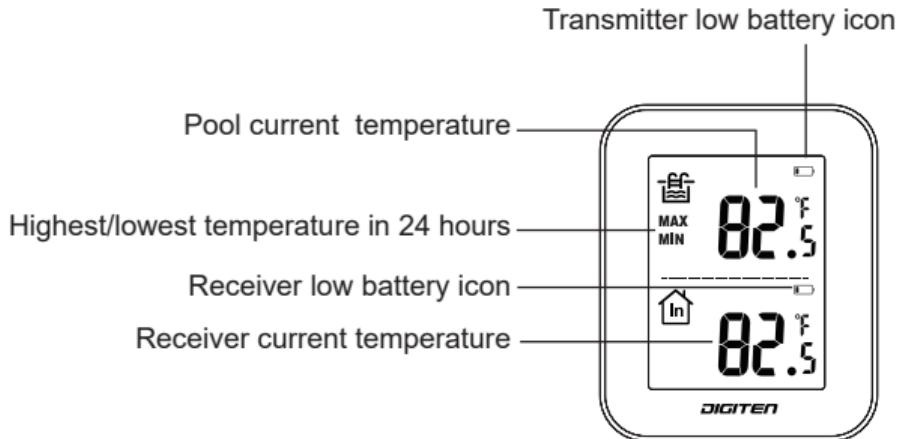

02 Features & Specifications

Monitor (Receiver)

Temperature measurement range: -10°C~70°C (14°F~158°F)

Temperature measurement accuracy: $\pm 1.0^{\circ}\text{C}$ ($\pm 1.8^{\circ}\text{F}$)

Temperature display accuracy: 0.1°C (0.1°F)

Pool Thermometer (Transmitter)

Wireless connection distance up to 100m(300ft)

Temperature measurement range: -40°C~70°C (-40°F~158°F)


Temperature measurement accuracy: $\pm 1^{\circ}\text{C}$ ($\pm 1.8^{\circ}\text{F}$)

Temperature display accuracy: 0.1°C (0.1°F)

03 How to connect

Generally, the pool thermometer will be paired with the receiver, when leaving the factory.

1. Install 2 AAA batteries into the receiver and the screen flashes ---.-
2. Unscrew the cover of the pool thermometer, and press the TX(POWER) button to power on, the screen will display the temperature, then short press the TX button, or wait for 20s, the pool thermometer will connect to the receiver automatically.

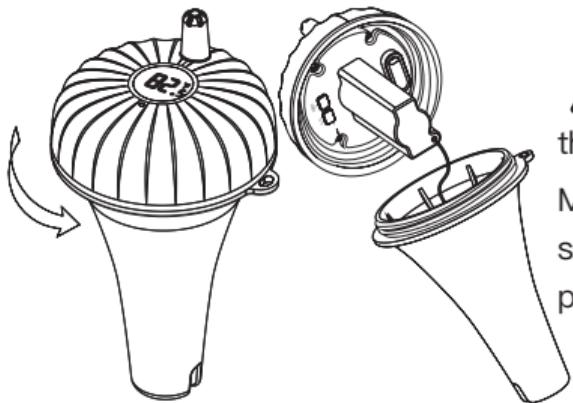


⚠ Please don't remove the O-ring at any time. Make sure the lid is screwed tightly before putting it in the water.

04 How to re-pair

1. Short press the RX button on the receiver and the screen flashes **---.**, the receiver will search signal for 3 minutes.
2. Short press the TX button on the pool thermometer, the monitor(receiver) shows the pool temperature, which means they paired successfully.

05 Operation instruction

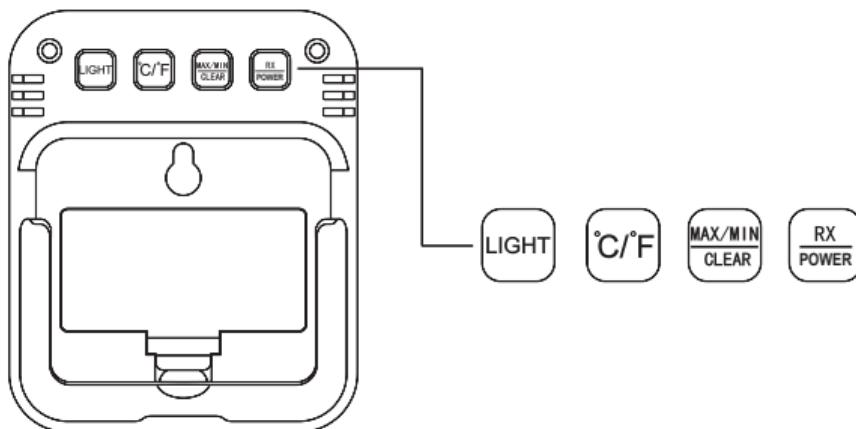

Receiver(monitor)

- **Light**

Press the LIGHT button, and the backlight will on, no operation for 30s, the backlight will off automatically.

- °C / °F

Press the °C / °F button to switch the temperature unit.

- MAX / MIN(CLEAR)

1. View Max/min temperature value

Press the Max/min button, the receiver will display the maximum or minimum value in 24 hours, no operation after 10s, the screen will automatically display the current temperature value.

2. Clear Max/min temperature value

Long press and hold the Max/min button 5s and the values will be cleared.

- RX/POWER

Short press the RX button, and the receiver will search the signal for 3 minutes. Long press this button until the screen display **OF**, the receiver will turn off the wireless signal, press it again, the receiver will turn on the wireless signal.

Pool thermometer

- TX (POWER)

Short press the TX button, and the pool thermometer will

send the signal once. Long press and hold this button until the LCD display **OF**. the pool thermometer will power off. Short press again, and the thermometer will power on.

- **°C / °F**

Press the °C / °F button to switch the temperature unit.

06 Low Battery Indication

1. When the indoor thermometer appears  icon on the receiver, please change 2 AAA new batteries for the receiver.
2. When the pool thermometer appears  icon on the receiver, or the screen of the pool thermometer appears  icon, please charge the pool thermometer. Charging time is about 4–6 hours. The indicator is always on when charge completed.

 When the pool thermometer is not in use for a long time, it is recommended to turn off the pool thermometer (Transmitter) and charge it every 6 months to extend the battery life.

07 Troubleshoot

- No temp reading on the receiver unit.

- 1.The distance is over-range. If the receiver leaves the pool thermometer wireless range (300 feet), The receiver disconnects from the signal. Any obstructions, such as walls between the receiver and the pool thermometer, might affect the strength of the signal.
- 2.Please re-pair. Make sure to pair again within the range of 300 ft. Pairing method reference **04 How to re-pair**.

- **Inaccurate display.** When installing a new device, you need to wait for 5–30 minutes. Or when the water temperature changes greatly, it is necessary to wait for the water temperature to stabilize before accurately displaying the water temperature.

08 Warranty

The DIGITEN products are guaranteed to the original owner for one year against defects in workmanship and materials.

Please contact us:

service@digit-en.com

www.digit-en.com/support

COPYRIGHT 2023 DIGITEN INC. ALLRIGHTS RESERVED

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.

ISED Statement

- English: This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

The digital apparatus complies with Canadian CAN ICES-3 (B)/NMB-3(B).

- French: Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement. L'appareil numérique du ciem conforme canadien peut - 3 (b) / nmb - 3 (b).

This device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2.5 du cnr - 102 et conformité avec rss 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs rf et la conformité.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 0cm between the radiator & your body.

Cet équipement est conforme Canada limites d'exposition aux radiations dans un environnement non contrôlé.

Cet équipement doit être installé et utilisé avec une distance minimale de 0 cm entre le radiateur et votre corps.