

TEST REPORT

Reference No..... : WTX22X02029842W-1
FCC ID : 2A5SSXS11
Applicant : Shenzhen Tailefeng Communication Co., Ltd
Address..... : Room 2599, block C, electronic technology building, No. 2070, Shennan
Middle Road, Futian District, Shenzhen, Guangdong
Manufacturer : The same as Applicant
Address..... : The same as Applicant
Product Name : WCDMA digital mobile phone
Model No..... : XS11
Standards : FCC Part 22H, FCC Part 24E
Date of Receipt sample : 2022-02-28
Date of Test..... : 2022-02-28 to 2022-03-14
Date of Issue : 2022-03-14
Test Report Form No. : WTX_Part 22_ Part 24W
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Approved by:



Mike Shi



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
1.5 EUT SETUP AND TEST MODE	7
1.6 MEASUREMENT UNCERTAINTY	9
1.7 TEST EQUIPMENT LIST AND DETAILS	10
2. SUMMARY OF TEST RESULTS	12
3. RF OUTPUT POWER	13
3.1 STANDARD APPLICABLE	13
3.2 TEST PROCEDURE	13
3.3 SUMMARY OF TEST RESULTS/PLOTS	13
4. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER	17
4.1 STANDARD APPLICABLE	17
4.2 TEST PROCEDURE	17
4.3 SUMMARY OF TEST RESULTS	17
5. EMISSION BANDWIDTH	18
5.1 STANDARD APPLICABLE	18
5.2 TEST PROCEDURE	18
5.3 SUMMARY OF TEST RESULTS/PLOTS	18
6. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL	19
6.1 STANDARD APPLICABLE	19
6.2 TEST PROCEDURE	19
6.3 SUMMARY OF TEST RESULTS/PLOTS	19
7. SPURIOUS RADIATED EMISSIONS	20
7.1 STANDARD APPLICABLE	20
7.2 TEST PROCEDURE	20
7.3 SUMMARY OF TEST RESULTS/PLOTS	20
8. FREQUENCY STABILITY	31
8.1 STANDARD APPLICABLE	31
8.2 TEST PROCEDURE	31
8.3 SUMMARY OF TEST RESULTS/PLOTS	31
9. MODULATION CHARACTERISTICS	32
9.1 STANDARD APPLICABLE	32
9.2 TEST PROCEDURE	32
9.3 SUMMARY OF TEST RESULTS/PLOTS	32
APPENDIX SUMMARY	33
APPENDIX A	34
APPENDIX B	35
APPENDIX C	36
APPENDIX D	48
APPENDIX E	83
APPENDIX F	86
APPENDIX PHOTOGRAPHS	88

Report version

Version No.	Date of issue	Description
Rev.00	2022-03-14	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT:	
Product Name:	WCDMA digital mobile phone
Trade Name:	/
Model No.:	XS11
Adding Model(s):	XS12, S10i, K80, 7S+, S10W, S10T, S10A, S10C, i13, i14, i15, i16, i17, X13, X14, X15, X16, D18, D19, H13, H14, H15, H16
Rated Voltage:	USB Port: DC 5V; Battery: DC 3.7V
Battery:	/
Adapter Model:	/
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i> <i>The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model XS11, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT:	
2G	
Support Networks:	GSM, GPRS
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS 850: 824~849MHz GSM/GPRS 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS 850: 869~894MHz GSM/GPRS 1900: 1930~1990MHz
Max RF Output Power:	GSM850: 33.16dBm, GSM1900: 29.90dBm
Type of Emission:	GSM850: 248KGXW, GSM1900:252KGXW
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: -2.1dBi; GSM1900: -1.1dBi
GPRS/EDGE Class:	Class 12
3G	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2:23.34dBm, WCDMA Band 5:23.61dBm
Type of Emission:	WCDMA Band 2: 4M18F9W WCDMA Band 5: 4M17F9W
Type of Modulation:	BPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: -2.1dBi, WCDMA Band 5: -2.5dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations.

FCC Rules Part 22: Private Land Mobile Radio Services.

FCC Rules Part 24: Public Mobile Services.

TIA/EIA 603 E March 2016: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services.

KDB 971168 D01 Power Measurement License Digital Systems v03r01: Measurement Guidance for Certification of Licensed Digital Transmitters.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603 E/ KDB 971168/ ANSI C63.26

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GSM 850	Low, Middle, High Channels
TM2	GPRS 850	Low, Middle, High Channels
TM3	GSM 1900	Low, Middle, High Channels
TM4	GPRS 1900	Low, Middle, High Channels
TM5	WCDMA Band 5	Low, Middle, High Channels
TM6	HSDPA Band 5	Low, Middle, High Channels
TM7	HSUPA Band 5	Low, Middle, High Channels
TM8	WCDMA Band 2	Low, Middle, High Channels
TM9	HSDPA Band 2	Low, Middle, High Channels
TM10	HSUPA Band 2	Low, Middle, High Channels

Testing Configure			
Support Band	Support Standard	Channel Frequency(MHz)	Channel Number
GSM 850	GSM/GPRS	824.2	128
		836.6	190
		848.8	251
PCS 1900	GSM/GPRS	1850.2	512
		1880.0	661
		1909.8	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4	4132
		836.6	4183
		846.6	4233
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4	9262
		1880.0	9400
		1907.6	9538
Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA compliance test and record the worst case.			

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	0.8	Shielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	TianYi310-14ISK	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Frequency Stability	Conducted	2.3%
Transmitter Spurious Emissions	Conducted	$\pm 0.42\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2021-03-27	2022-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2021-03-27	2022-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2021-03-27	2022-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2021-03-27	2022-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2021-03-27	2022-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2021-03-27	2022-03-26
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2021-03-27	2022-03-26
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
☒ Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-19	2023-03-18
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-19	2023-03-18
☒ Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2021-04-27	2022-04-26

SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2021-03-27	2022-03-26
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2021-03-27	2022-03-26
☐ Chamber B:Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2021-04-12	2022-04-11
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2021-05-06	2022-05-05
☐ Chamber C:Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2021-12-03	2022-12-02
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2021-04-15	2022-04-14

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§22.913(a), §24.232(c)	RF Output Power	Compliant
§24.51	Peak-to-average Ratio (PAR) of Transmitter	Compliant
§22.917(b), §24.238(b)	Emission Bandwidth	Compliant
§22.917(a), §24.238(a)	Spurious Emissions at Antenna Terminal	Compliant
§22.917(a), §24.238(a)	Spurious Radiation Emissions	Compliant
§22.917(a), §24.238(a)	Out of Band Emissions	Compliant
§22.355, §24.235	Frequency Stability	Compliant
§2.1047	Modulation characteristics	Compliant

N/A: Not applicable.

3. RF Output Power


3.1 Standard Applicable

According to §22.913(a)(2), the ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

3.2 Test Procedure

- Conducted output power test method:

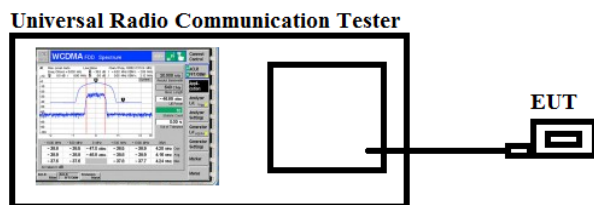

- Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

3.3 Summary of Test Results/Plots

➤ **Max. Radiated Power**

Mode	Channel	Antenna Polar	ERP (dBm)	Limit (dBm)	Result
GSM850	128	V	25.97	<38.45	Pass
		H	19.55		
	190	V	26.05		
		H	20.36		
	251	V	25.91		
		H	19.96		
GPRS850	128	V	25.87	<38.45	Pass
		H	20.38		
	190	V	26.26		
		H	20.46		
	251	V	26.33		
		H	19.75		

Mode	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Result
PCS1900	512	V	24.26	<33.00	Pass
		H	18.34		
	661	V	24.44		
		H	18.01		
	810	V	24.19		
		H	18.02		
GPRS1900	512	V	24.22	<33.00	Pass
		H	18.35		
	661	V	24.20		
		H	17.70		
	810	V	24.36		
		H	18.19		

Mode	Channel	Antenna Polar	ERP	Limit (dBm)	Result
WCDMA Band V	4132	V	20.46	<38.45	Pass
		H	15.04		
	4183	V	20.41		
		H	15.11		
	4233	V	19.93		
		H	14.68		

Mode	Channel	Antenna Polar	EIRP	Limit (dBm)	Result
WCDMA Band II	9262	V	20.77	<33.00	Pass
		H	14.29		
	9400	V	21.18		
		H	14.84		
	9538	V	19.89		
		H	14.75		

Note: Pre-scan mode WCDMA/HSDPA/HSUPA find the worst case at WCDMA mode and recorded in the test report.

➤ **Max. Conducted Power (Average power)**

Please refer to Appendix A

4. Peak-to-average Ratio (PAR) of Transmitter

4.1 Standard Applicable


According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.

4.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled.
2. Frequency = carrier center frequency.
3. Measurement BW > Emission bandwidth of signal.
4. The signal analyzer was set to collect one million samples to generate the CCDF curve.
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power.

Test Configuration for the emission bandwidth testing:

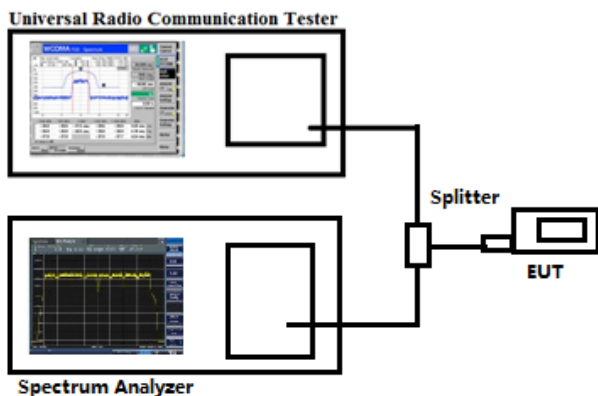

4.3 Summary of Test Results

Please refer to Appendix B.

5. Emission Bandwidth

5.1 Standard Applicable


According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

According to §24.238(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

5.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

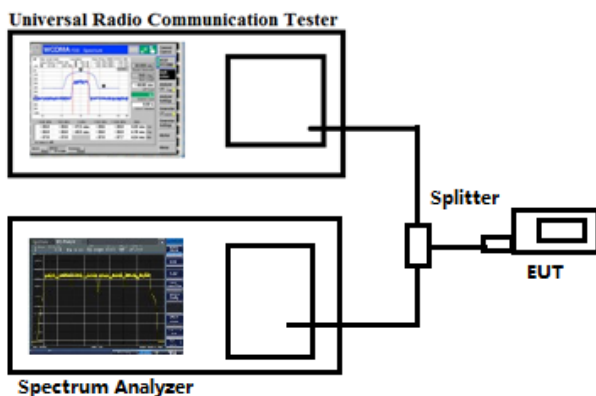

5.3 Summary of Test Results/Plots

Please refer to Appendix C

6. Out of Band Emissions at Antenna Terminal

6.1 Standard Applicable


According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10^{th} harmonic.

Test Configuration for the out of band emissions testing:

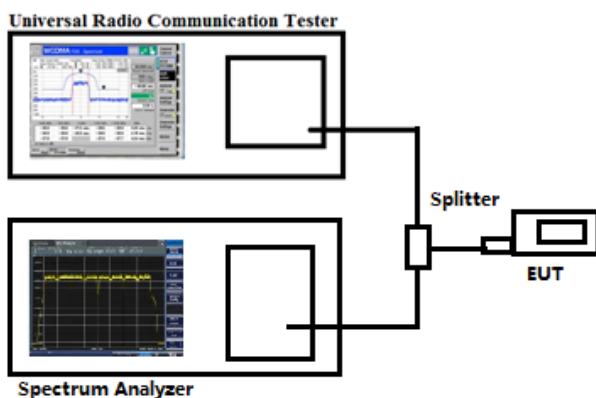

6.3 Summary of Test Results/Plots

Note: Pre-scan mode WCDMA/HSDPA/HSUPA find the worst case at WCDMA mode and recorded in the test report.

Please refer to Appendix D

7. Spurious Radiated Emissions

7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

7.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.


Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

7.3 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


➤ Spurious Emissions Below 1GHz

For Cellular Band			
Test Channel	GSM850	Polarity:	Horizontal

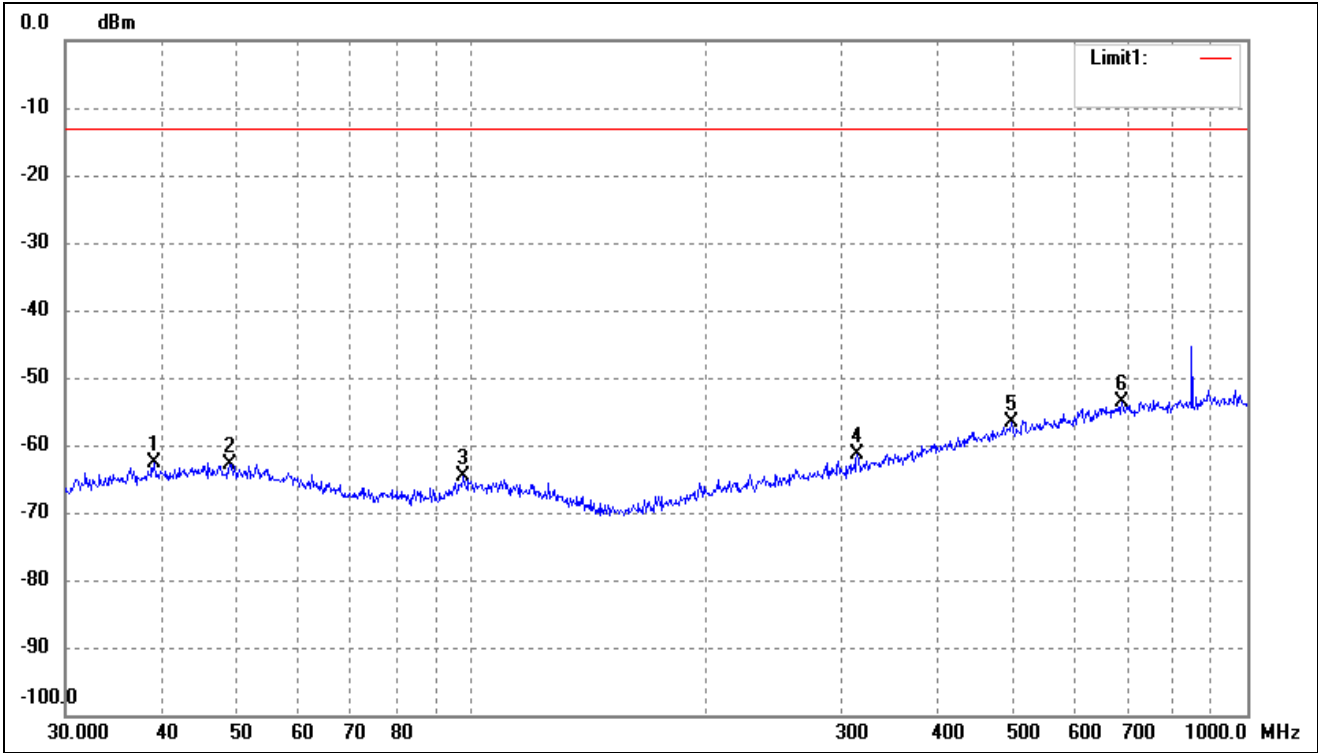


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.0245	-67.18	4.57	-62.61	-13.00	-49.61	-	-	peak
2	48.8429	-67.63	4.83	-62.80	-13.00	-49.80	-	-	peak
3	97.7983	-67.32	2.67	-64.65	-13.00	-51.65	-	-	peak
4	314.3765	-66.75	5.29	-61.46	-13.00	-48.46	-	-	peak
5	497.6765	-67.14	10.45	-56.69	-13.00	-43.69	-	-	peak
6	689.5644	-66.86	13.13	-53.73	-13.00	-40.73	-	-	peak

For Cellular Band			
Test Channel	GSM850	Polarity:	Vertical

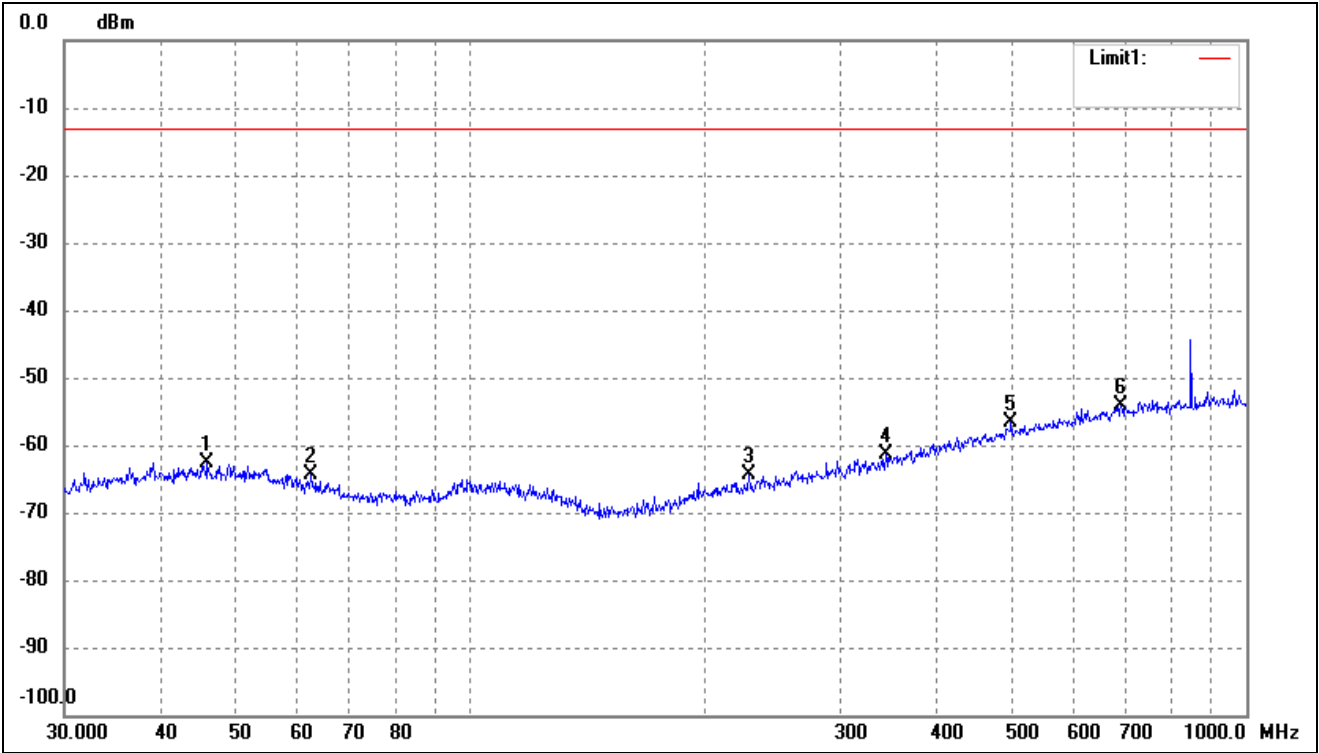


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.8553	-67.52	4.82	-62.70	-13.00	-49.70	-	-	peak
2	62.4314	-67.33	2.95	-64.38	-13.00	-51.38	-	-	peak
3	228.4904	-67.13	2.88	-64.25	-13.00	-51.25	-	-	peak
4	343.1800	-67.66	6.18	-61.48	-13.00	-48.48	-	-	peak
5	497.6765	-67.14	10.45	-56.69	-13.00	-43.69	-	-	peak
6	689.5644	-67.31	13.13	-54.18	-13.00	-41.18	-	-	peak

For Cellular Band			
Test Channel	GSM1900	Polarity:	Horizontal

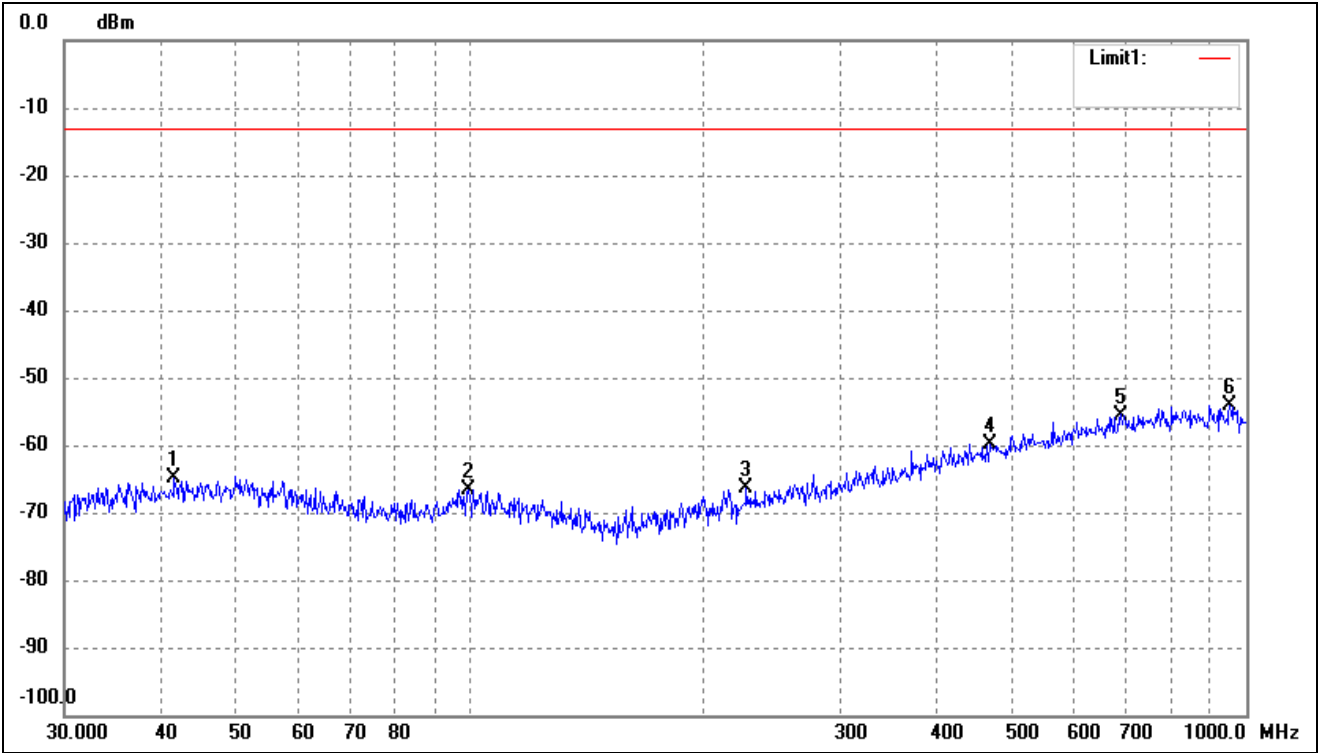

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.5670	-69.65	4.80	-64.85	-13.00	-51.85	-	-	peak
2	99.5281	-69.53	2.99	-66.54	-13.00	-53.54	-	-	peak
3	226.8936	-69.21	2.84	-66.37	-13.00	-53.37	-	-	peak
4	467.2349	-69.52	9.67	-59.85	-13.00	-46.85	-	-	peak
5	689.5644	-68.63	13.13	-55.50	-13.00	-42.50	-	-	peak
6	952.0937	-68.56	14.38	-54.18	-13.00	-41.18	-	-	peak


For Cellular Band			
Test Channel	GSM1900	Polarity:	Vertical

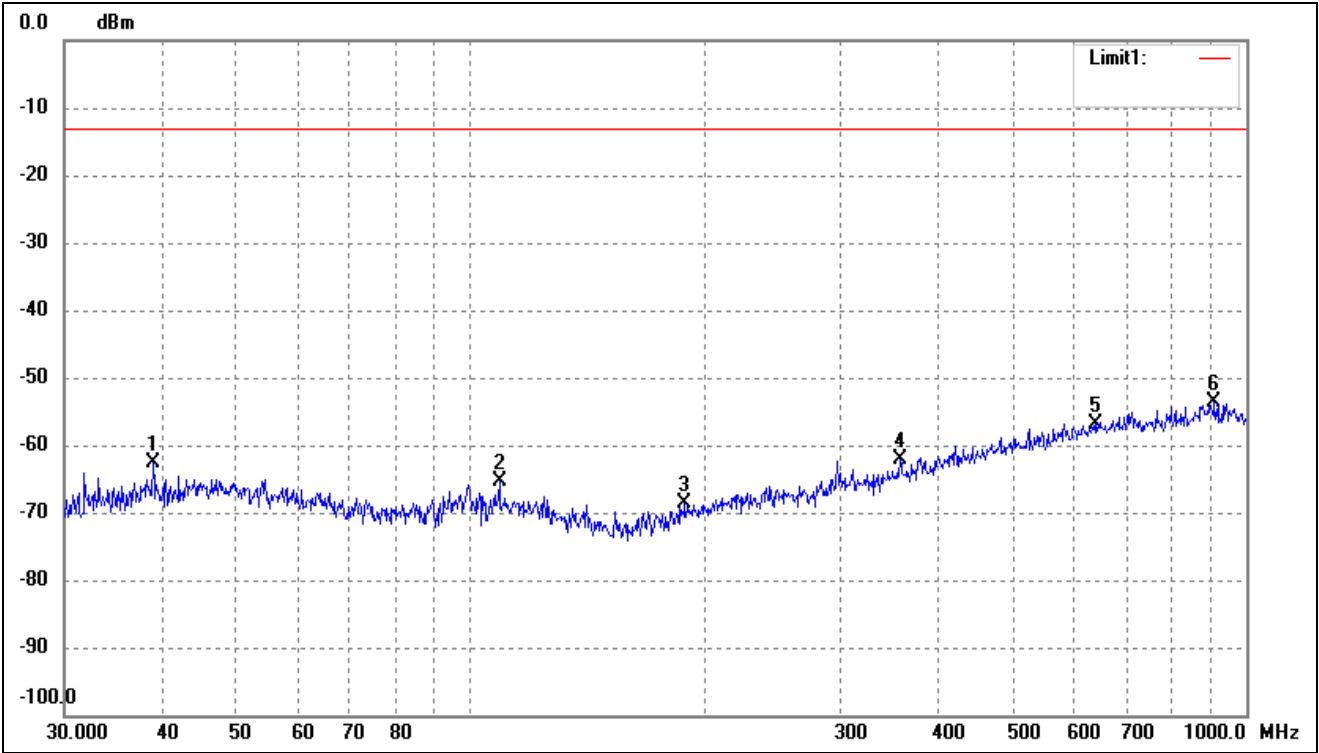

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.0245	-67.18	4.57	-62.61	-13.00	-49.61	-	-	peak
2	109.0286	-68.35	2.95	-65.40	-13.00	-52.40	-	-	peak
3	189.0743	-70.20	1.65	-68.55	-13.00	-55.55	-	-	peak
4	357.9287	-68.87	6.64	-62.23	-13.00	-49.23	-	-	peak
5	640.6110	-69.49	12.62	-56.87	-13.00	-43.87	-	-	peak
6	909.6667	-68.04	14.52	-53.52	-13.00	-40.52	-	-	peak


Note: Margin= (Reading+ Correct)- Limit

Test Channel	band 5	Polarity:	Horizontal
--------------	--------	-----------	------------

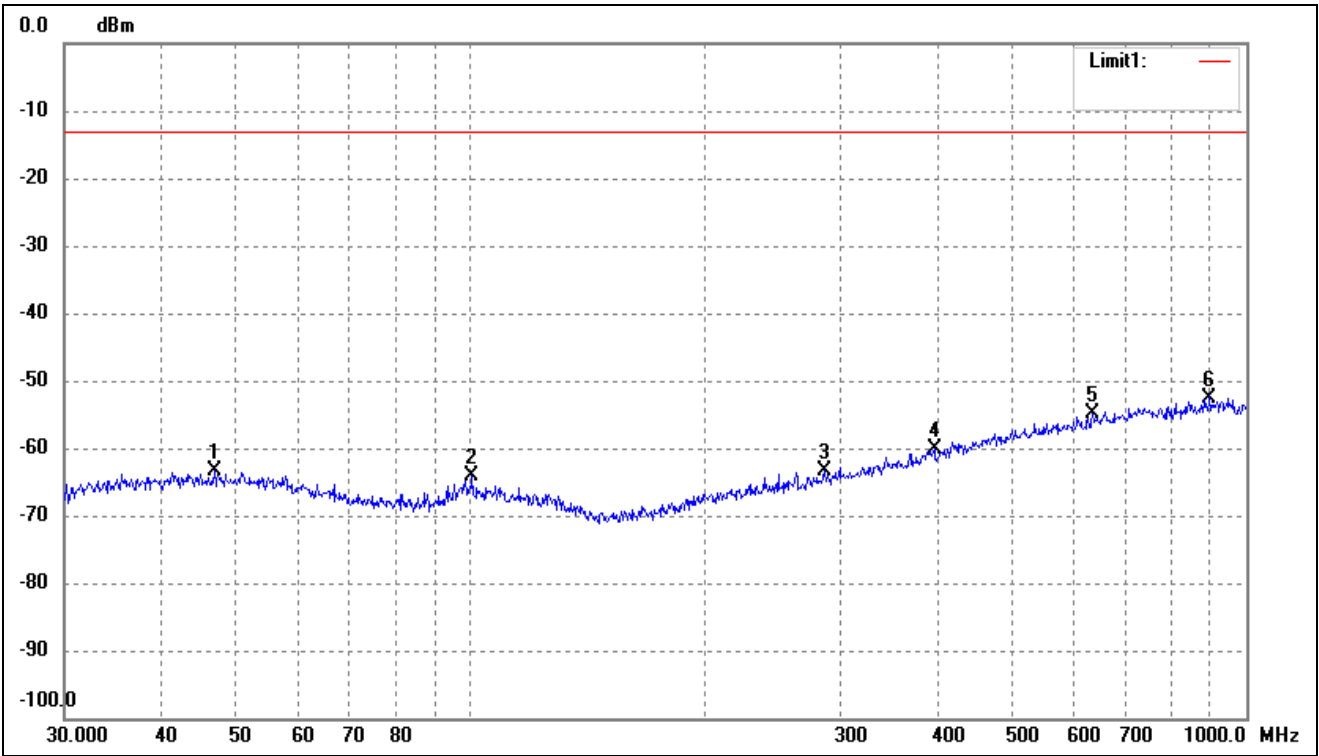


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.8303	-68.32	4.84	-63.48	-13.00	-50.48	-	-	peak
2	100.5806	-67.27	3.07	-64.20	-13.00	-51.20	-	-	peak
3	285.9778	-67.73	4.47	-63.26	-13.00	-50.26	-	-	peak
4	396.2415	-67.81	7.79	-60.02	-13.00	-47.02	-	-	peak
5	633.9073	-67.33	12.54	-54.79	-13.00	-41.79	-	-	peak
6	896.9965	-67.03	14.53	-52.50	-13.00	-39.50	-	-	peak

Test Channel	band 5	Polarity:	Vertical
--------------	--------	-----------	----------

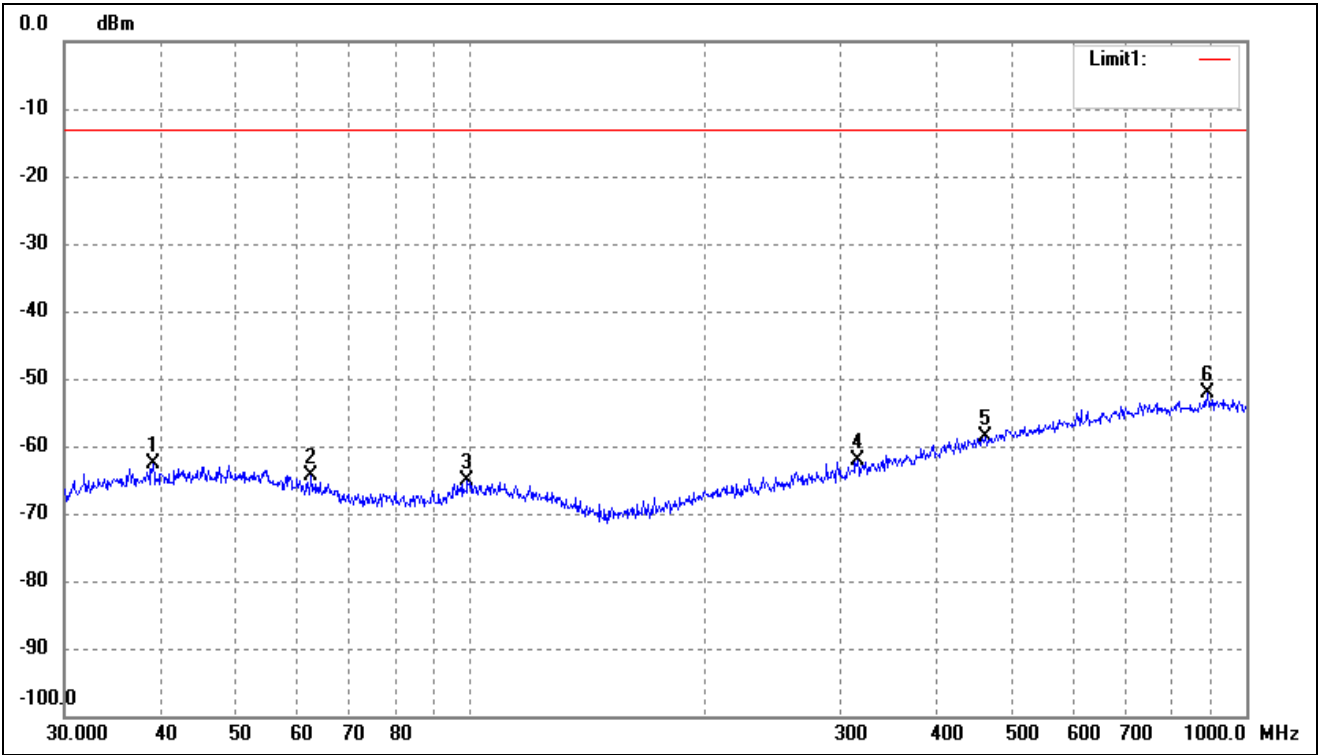


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.0245	-67.18	4.57	-62.61	-13.00	-49.61	-	-	peak
2	62.4314	-67.33	2.95	-64.38	-13.00	-51.38	-	-	peak
3	99.1797	-67.98	2.92	-65.06	-13.00	-52.06	-	-	peak
4	315.4808	-67.34	5.32	-62.02	-13.00	-49.02	-	-	peak
5	460.7271	-68.17	9.51	-58.66	-13.00	-45.66	-	-	peak
6	890.7278	-66.61	14.48	-52.13	-13.00	-39.13	-	-	peak

Test Channel	band 2	Polarity:	Horizontal
--------------	--------	-----------	------------

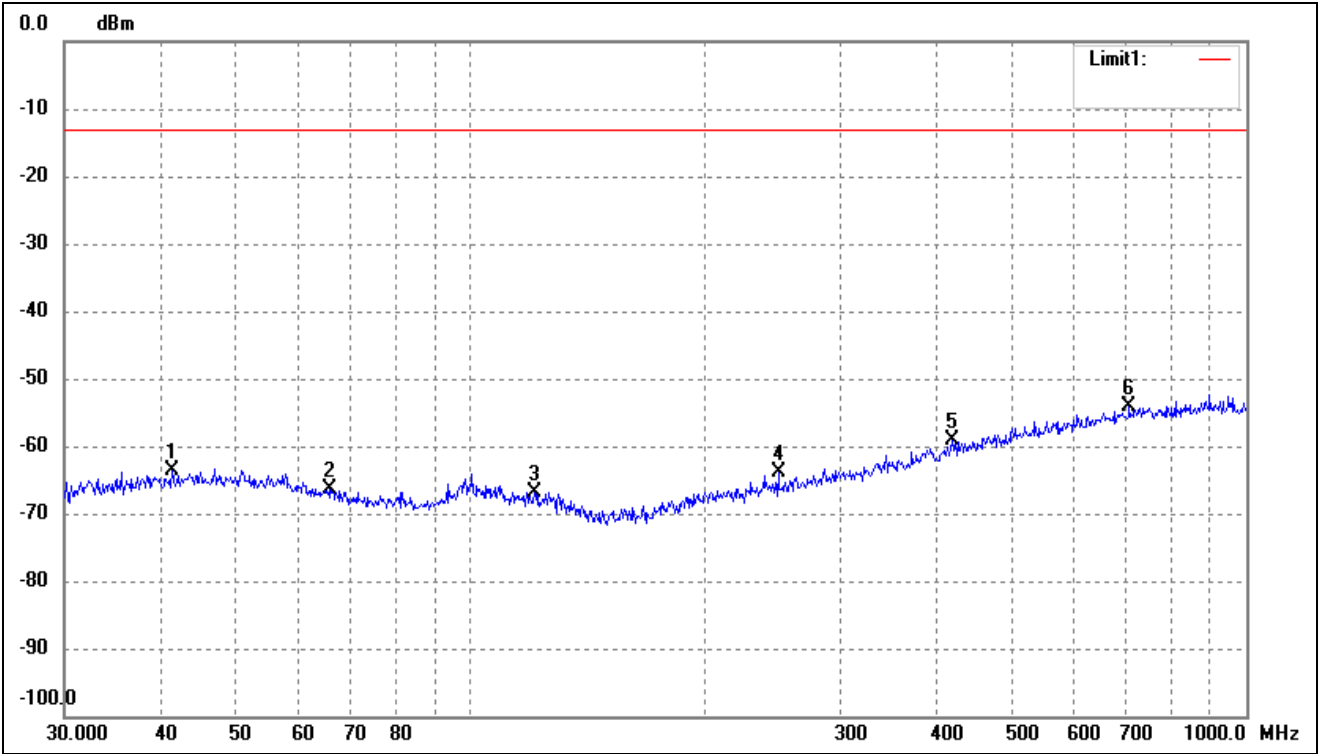

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.2765	-68.40	4.81	-63.59	-13.00	-50.59	-	-	peak
2	65.8031	-68.74	2.36	-66.38	-13.00	-53.38	-	-	peak
3	121.1231	-68.79	2.00	-66.79	-13.00	-53.79	-	-	peak
4	249.4250	-67.30	3.48	-63.82	-13.00	-50.82	-	-	peak
5	417.6411	-67.57	8.38	-59.19	-13.00	-46.19	-	-	peak
6	706.6999	-67.51	13.27	-54.24	-13.00	-41.24	-	-	peak

Test Channel	band 2	Polarity:	Vertical
--------------	--------	-----------	----------

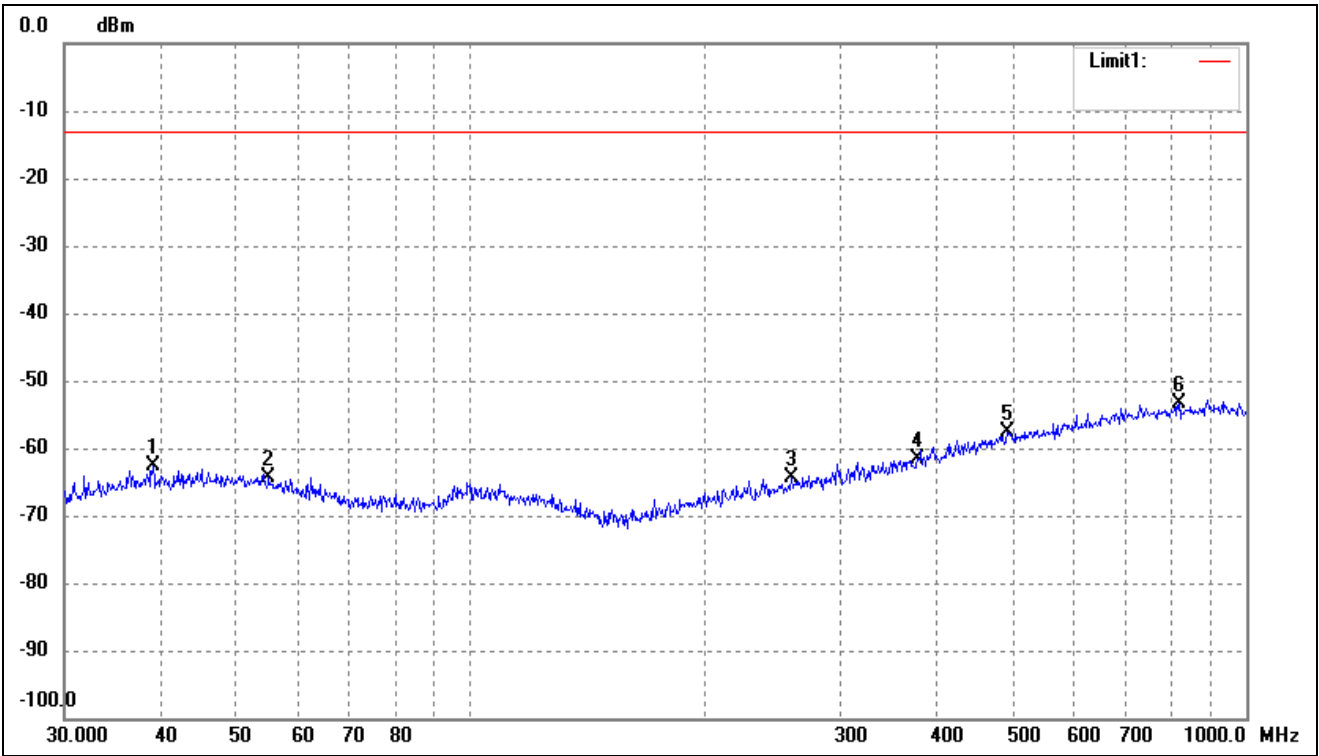

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.0245	-67.18	4.57	-62.61	-13.00	-49.61	-	-	peak
2	55.0274	-68.40	4.11	-64.29	-13.00	-51.29	-	-	peak
3	259.2338	-68.16	3.74	-64.42	-13.00	-51.42	-	-	peak
4	377.2591	-68.85	7.22	-61.63	-13.00	-48.63	-	-	peak
5	492.4685	-68.00	10.31	-57.69	-13.00	-44.69	-	-	peak
6	818.8341	-67.48	14.00	-53.48	-13.00	-40.48	-	-	peak

Note: $Margin = (Reading + Correct) - Limit$

Remark: ‘-’ Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- For Cellular Band_GSM850 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
1648.4	-37.11	4.94	-32.17	-13	-19.17	H
2472.6	-44.17	8.46	-35.71	-13	-22.71	H
1648.4	-37.36	4.94	-32.42	-13	-19.42	V
2472.6	-41.73	8.46	-33.27	-13	-20.27	V
Middle Channel (836.6MHz)						
1673.2	-37.62	5.11	-32.51	-13	-19.51	H
2509.8	-41.02	8.54	-32.48	-13	-19.48	H
1673.2	-34.21	5.11	-29.10	-13	-16.10	V
2509.8	-42.64	8.54	-34.10	-13	-21.10	V
High Channel (848.8MHz)						
1697.6	-33.49	5.25	-28.24	-13	-15.24	H
2546.4	-41.36	8.57	-32.79	-13	-19.79	H
1697.6	-35.32	5.25	-30.07	-13	-17.07	V
2546.4	-41.49	8.57	-32.92	-13	-19.92	V

- For PCS Band_GSM1900 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.2MHz)						
3700.4	-40.01	10.54	-29.47	-13	-16.47	H
5550.6	-46.97	13.37	-33.6	-13	-20.6	H
3700.4	-39.11	10.54	-28.57	-13	-15.57	V
5550.6	-46.52	13.37	-33.15	-13	-20.15	V
Middle Channel (1880MHz)						
3760.0	-38.80	10.64	-28.16	-13	-15.16	H
5640.0	-47.88	13.54	-34.34	-13	-21.34	H
3760.0	-39.03	10.64	-28.39	-13	-15.39	V
5640.0	-45.41	13.54	-31.87	-13	-18.87	V
High Channel (1909.8MHz)						
3819.6	-38.53	10.74	-27.79	-13	-14.79	H
5729.4	-51.26	13.71	-37.55	-13	-24.55	H
3819.6	-42.19	10.74	-31.45	-13	-18.45	V
5729.4	-47.02	13.71	-33.31	-13	-20.31	V

➤ For WCDMA Band V Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (826.4MHz)						
1652.8	-37.71	4.94	-32.77	-13	-19.77	H
2479.2	-42.88	8.46	-34.42	-13	-21.42	H
1652.8	-36.45	4.94	-31.51	-13	-18.51	V
2479.2	-42.71	8.46	-34.25	-13	-21.25	V
Middle Channel (836.6MHz)						
1672.8	-37.53	5.11	-32.42	-13	-19.42	H
2509.2	-44.40	8.54	-35.86	-13	-22.86	H
1672.8	-37.10	5.11	-31.99	-13	-18.99	V
2509.2	-41.15	8.54	-32.61	-13	-19.61	V
High Channel (846.6MHz)						
1693.2	-35.46	5.25	-30.21	-13	-17.21	H
2539.8	-41.13	8.57	-32.56	-13	-19.56	H
1693.2	-36.23	5.25	-30.98	-13	-17.98	V
2539.8	-45.90	8.57	-37.33	-13	-24.33	V

➤ For WCDMA Band II Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1852.4MHz)						
3704.8	-43.89	10.54	-33.35	-13	-20.35	H
5557.2	-45.97	13.37	-32.60	-13	-19.60	H
3704.8	-38.98	10.54	-28.44	-13	-15.44	V
5557.2	-48.14	13.37	-34.77	-13	-21.77	V
Middle Channel (1880MHz)						
3760.8	-40.67	10.64	-30.03	-13	-17.03	H
5640.0	-47.07	13.54	-33.53	-13	-20.53	H
3760.8	-41.87	10.64	-31.23	-13	-18.23	V
5640.0	-50.40	13.54	-36.86	-13	-23.86	V
High Channel (1907.6MHz)						
3815.2	-39.10	10.74	-28.36	-13	-15.36	H
5722.8	-47.20	13.71	-33.49	-13	-20.49	H
3815.2	-41.43	10.74	-30.69	-13	-17.69	V
5722.8	-51.10	13.71	-37.39	-13	-24.39	H

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Frequency Stability

8.1 Standard Applicable

According to §22.355, §24.235 the limit is 2.5ppm.

8.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

8.3 Summary of Test Results/Plots

Please refer to Appendix E

9. Modulation characteristics


9.1 Standard Applicable

According to §2.1047, measurements required: Modulation characteristics is given below:

- (a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.
- (b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.
- (c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.
- (d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

9.2 Test Procedure

According to ANSI C63.26-2015 section 5.3.2, the following test setup was performed.

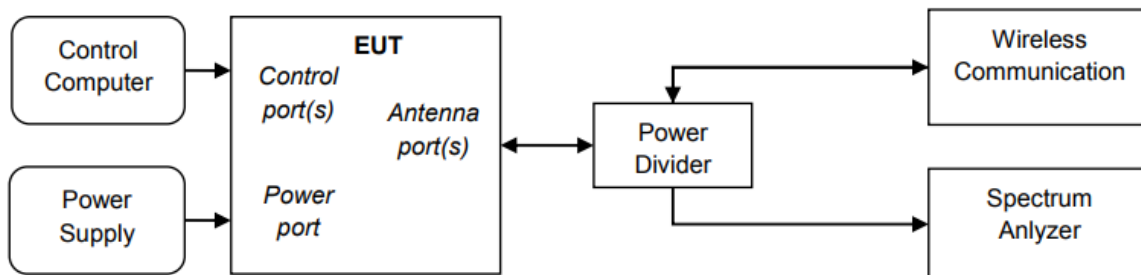

9.3 Summary of Test Results/Plots

Only the worst case was selected to record.

Please refer to Appendix F

APPENDIX SUMMARY

Project No.	WTX22X02029842W	Test Engineer	Gala
Start date	2022/3/5	Finish date	2023/3/5
Temperature	23℃	Humidity	45%
RF specifications	GSM/WCDMA		

APPENDIX	Description of Test Item	Result
A	RF Output Power	Compliant
B	Peak-to-average Ratio (PAR) of Transmitter	Compliant
C	Emission Bandwidth	Compliant
D	Out of Band Emissions at Antenna Terminal	Compliant
E	Frequency Stability	Compliant
F	Modulation characteristics	Compliant

APPENDIX A

Conducted Average power

Conducted Average power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency(MHz)	824.20	836.60	848.80	1850.20	1880.00	1909.80
GSM	33.09	33.16	33.16	28.51	29.57	29.90
GPRS(1Slot)	33.05	33.10	33.08	28.47	29.63	29.97

Conducted Average power (dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4183	4233	9262	9400	9538
Frequency(MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6
RMC 12.2k	23.30	23.61	23.20	23.34	22.92	22.35
HSDPA Subtest-1	22.64	22.80	22.46	22.57	22.06	21.51
HSDPA Subtest-2	22.51	22.57	22.28	22.34	21.90	21.31
HSDPA Subtest-3	22.42	22.60	22.23	22.46	21.86	21.27
HSDPA Subtest-4	22.48	22.59	22.30	22.44	21.86	21.40
HSUPA Subtest-1	22.47	22.79	22.34	22.52	21.80	21.51
HSUPA Subtest-2	22.37	22.56	22.21	22.37	21.63	21.41
HSUPA Subtest-3	22.29	22.60	22.19	22.33	21.68	21.38
HSUPA Subtest-4	22.33	22.56	22.11	22.38	21.67	21.32
HSUPA Subtest-5	22.27	22.58	22.12	22.39	21.57	21.33

APPENDIX B

Peak-to-average Ratio (PAR) of Transmitter

PCS1900				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	661	1850.2	6.56	13
GPRS(1 Slot)	661	1850.2	6.87	13
EDGE(1 Slot)	661	1850.2	6.78	13

WCDMA Band II				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	7.15	13
	9400	1880.0	7.54	13
	9538	1907.6	7.66	13




Note: Only the worst case was selected to record.

APPENDIX C




EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
GSM 850 (GMSK)	128	824.20	250.2534	320.277
	190	836.60	250.6979	316.622
	251	848.80	245.8869	314.778
GPRS850 (GMSK,1Slot)	128	824.20	243.7961	320.900
	190	836.60	246.1504	321.476
	251	848.80	248.8560	317.967
PCS1900 (GMSK)	512	1850.20	243.6233	312.360
	661	1880.00	242.6538	317.759
	810	1909.80	252.0563	322.612
GPRS1900 (GMSK,1Slot)	512	1850.20	244.4636	310.956
	661	1880.00	245.3476	309.031
	810	1909.80	244.9103	315.944

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
WCDMA Band V	4132	826.40	4145.6	4690
	4183	836.60	4166.3	4677
	4233	846.60	4168.3	4696
HSDPA	4132	826.40	4146.9	4686
	4183	836.60	4157.1	4715
	4233	846.60	4160.7	4691
HSUPA	4132	826.40	4167.3	4679
	4183	836.60	4159.6	4680
	4233	846.60	4174.4	4708
WCDMA Band II	9262	1852.40	4173.1	4692
	9400	1880.00	4182.3	4723
	9538	1907.60	4153.4	4720
HSDPA	9262	1852.40	4163.1	4719
	9400	1880.00	4187.3	4708
	9538	1907.60	4174.1	4705
HSUPA	9262	1852.40	4166.3	4710
	9400	1880.00	4169.6	4716
	9538	1907.60	4164.3	4699




GSM 850 (GMSK)-Low	Agilent R T Ch Freq 824.2 MHz Trig Free Occupied Bandwidth Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offset 5 dB Center 824.2 MHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts) Span 1 MHz Occupied Bandwidth 250.2534 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -1.237 kHz x dB Bandwidth 320.277 kHz Sweep Sweep Time 10.36 ms Auto Man Sweep Single Cont Auto Sweep Coupling SA Points 1001 Segmented
-----------------------	---

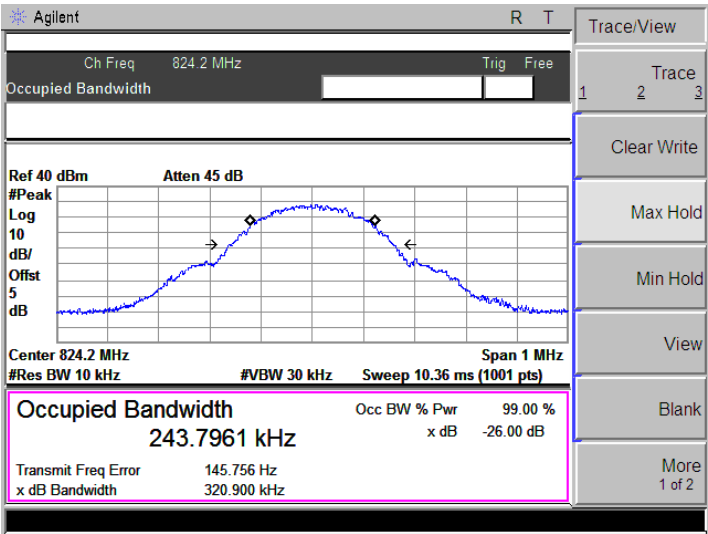
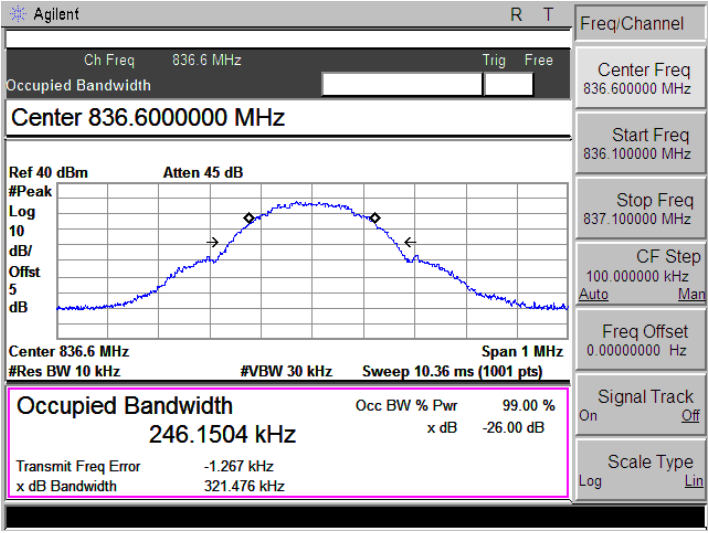
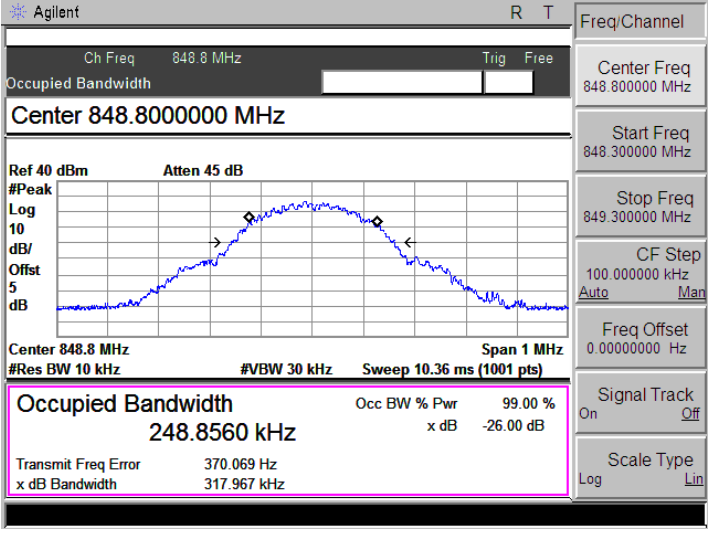
GPRS850 (GMSK,1Slot)-Low	
GPRS850 (GMSK,1Slot)-Middle	
GPRS850 (GMSK,1Slot)-High	




PCS1900 (GMSK)-Low	Agilent R T Ch Freq 1.8502 GHz Trig Free Occupied Bandwidth Center 1.85020000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.85 GHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts) Span 1 MHz Occupied Bandwidth 243.6233 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 472.041 Hz x dB Bandwidth 312.360 kHz Freq/Channel Center Freq 1.85020000 GHz Start Freq 1.84970000 GHz Stop Freq 1.85070000 GHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
PCS1900 (GMSK)-Middle	Agilent R T Ch Freq 1.88 GHz Trig Free Occupied Bandwidth Center 1.880000000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.88 GHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts) Span 1 MHz Occupied Bandwidth 242.6538 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 720.094 Hz x dB Bandwidth 317.759 kHz Freq/Channel Center Freq 1.88000000 GHz Start Freq 1.87950000 GHz Stop Freq 1.88050000 GHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
PCS1900 (GMSK)-High	Agilent R T Ch Freq 1.9098 GHz Trig Free Occupied Bandwidth VBW 30.00000000 kHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.91 GHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts) Span 1 MHz Occupied Bandwidth 252.0563 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 3.643 kHz x dB Bandwidth 322.612 kHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

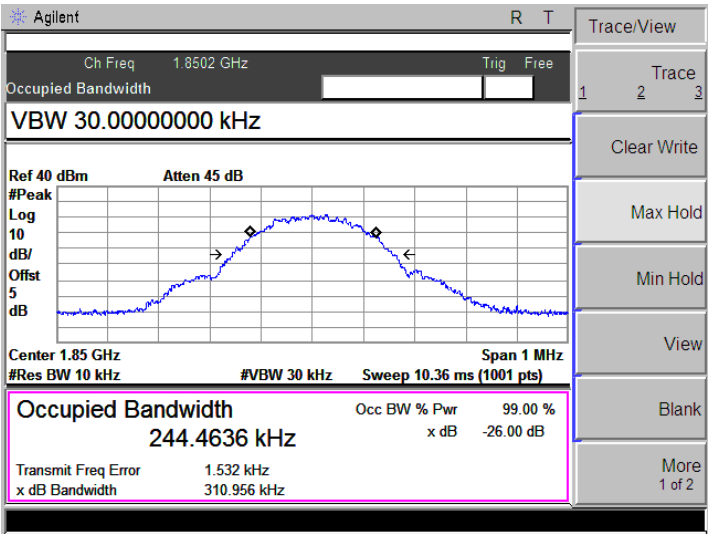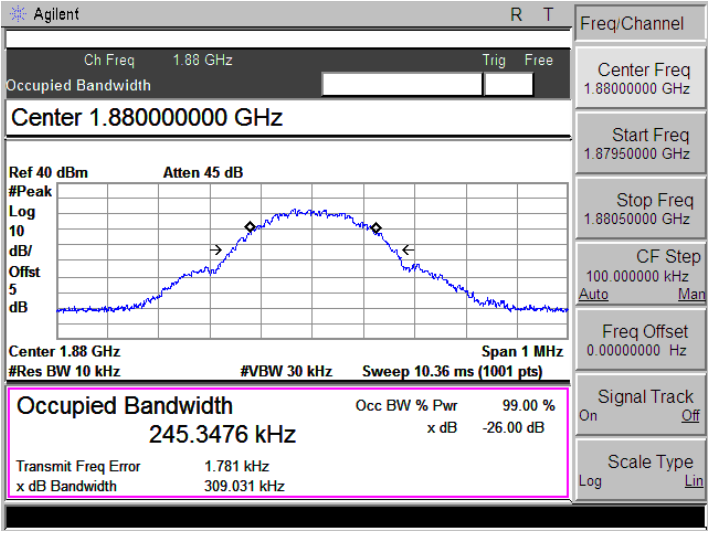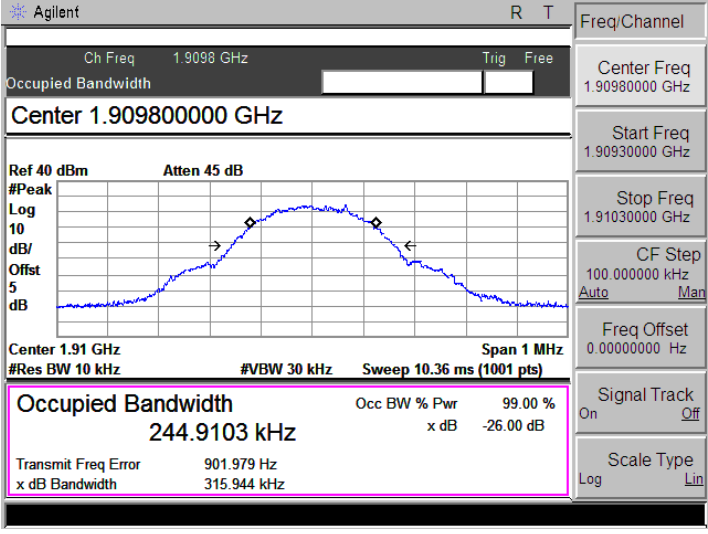GPRS1900 (GMSK,1Slot)-Low	
GPRS1900 (GMSK,1Slot)-Middle	
GPRS1900 (GMSK,1Slot)-High	

WCDMA Band V-Low	Agilent R T Ch Freq 826.4 MHz Trig Free Occupied Bandwidth VBW 300.000000 kHz Ref 30 dBm Atten 35 dB #Peak Log 10 dB/ Offset 5 dB Center 826.4 MHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1456 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -8.683 kHz x dB Bandwidth 4.690 MHz BW.Avg Res BW 100.000000 kHz Auto Man Video BW 300.000000 kHz Auto Man VBW/RBW 10.00000 Auto Man Average 10 On Off Avg Type Video Auto Man EMI Res BW None
------------------	---

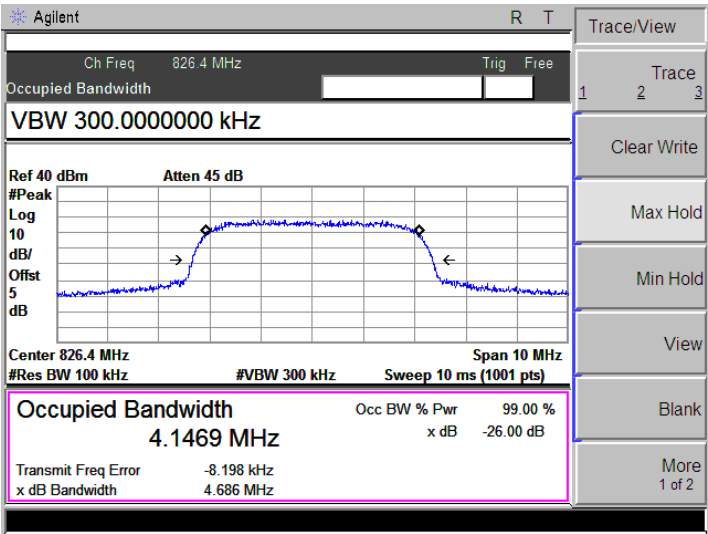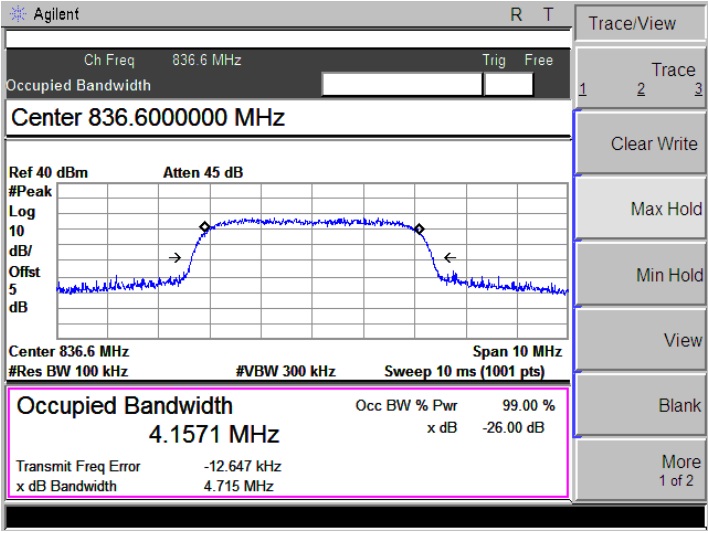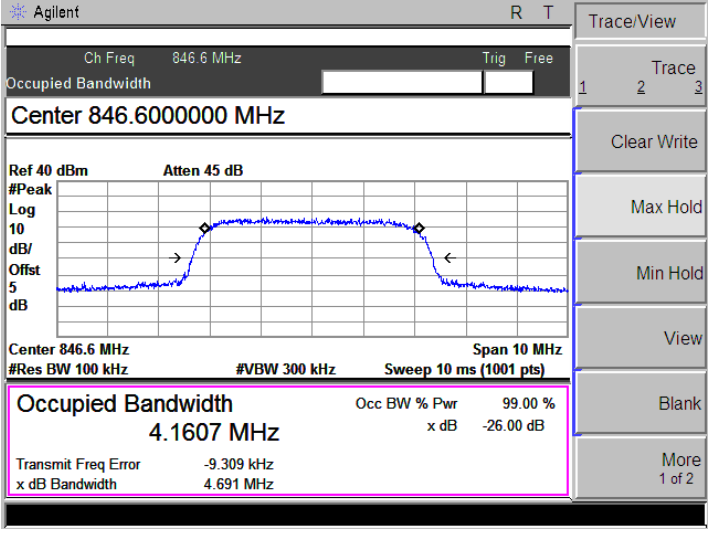HSDPA-Low	
HSDPA-Middle	
HSDPA-High	

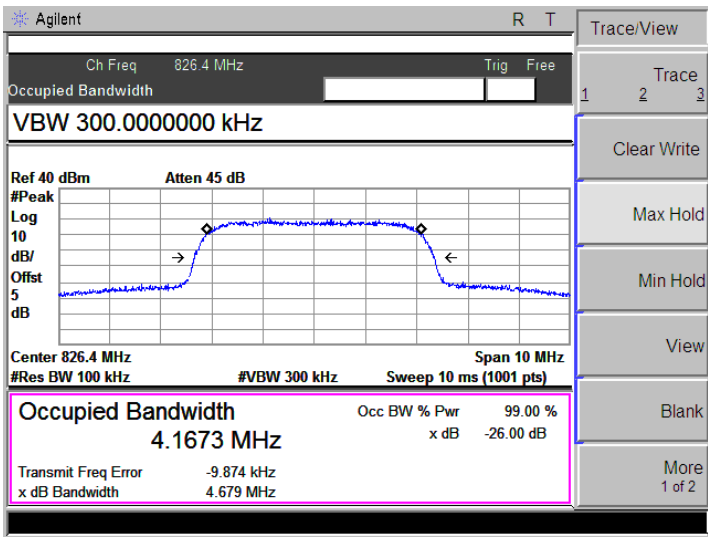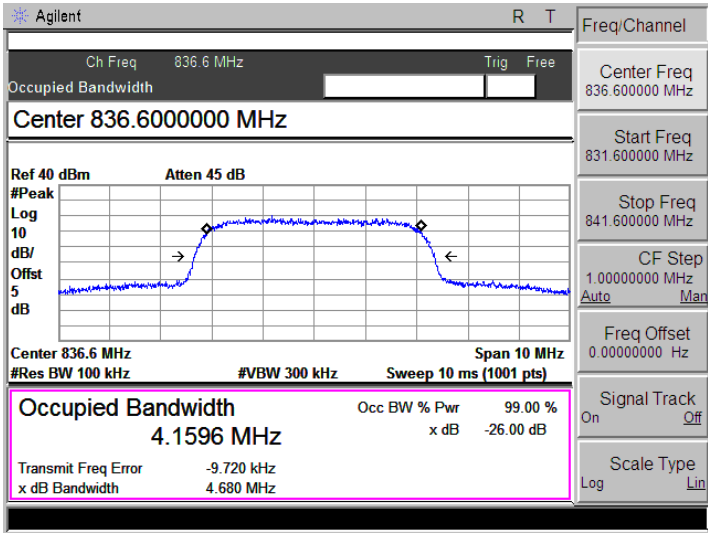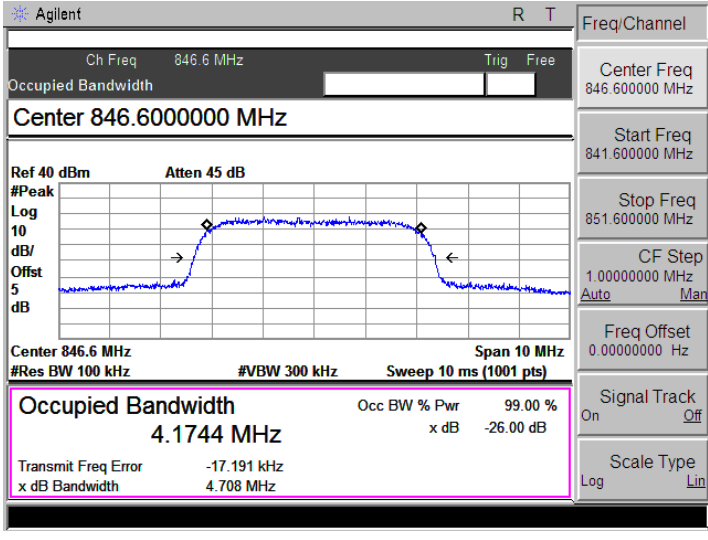HSUPA-Low	
HSUPA-Middle	
HSUPA-High	

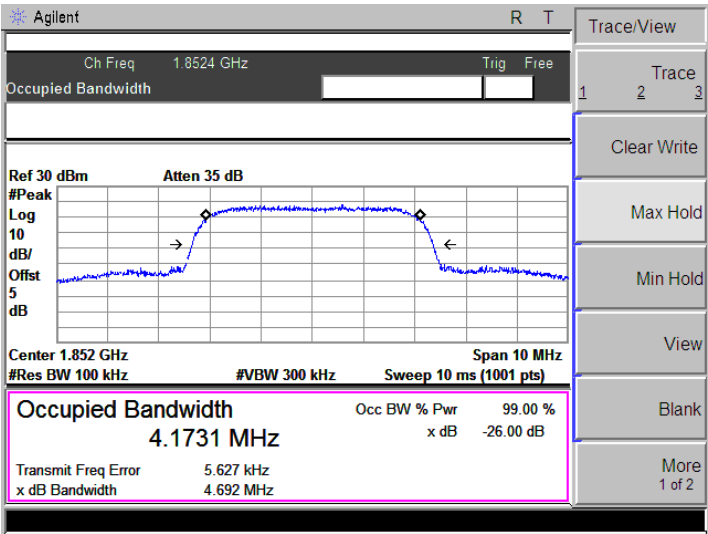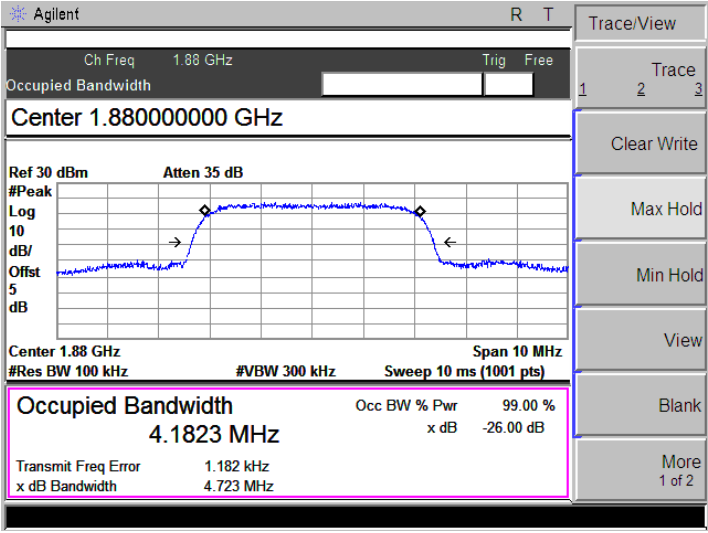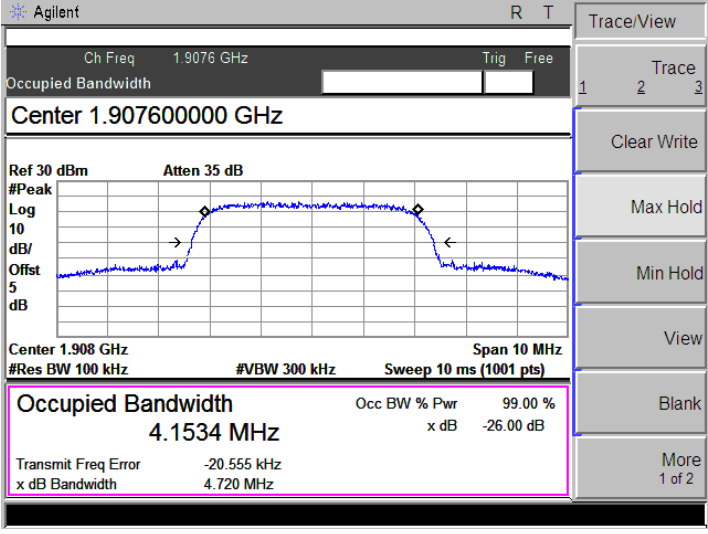
WCDMA Band II-Low	
WCDMA Band II-Middle	
WCDMA Band II-High	

HSDPA-Low	Agilent Ch Freq 1.8524 GHz Occupied Bandwidth Ref 40 dBm Atten 45 dB #Peak 10 Log dB/ Offst 5 dB Center 1.852 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1631 MHz Transmit Freq Error -3.920 kHz x dB Bandwidth 4.719 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Meas Setup Avg Number 10 On Off Avg Mode Repeat Max Hold On Off Occ BW % Pwr 99.00 % OBW Span 10.0000000 MHz x dB -26.00 dB Optimize Ref Level
HSDPA-Middle	Agilent Ch Freq 1.88 GHz Occupied Bandwidth Center 1.880000000 GHz Ref 40 dBm Atten 45 dB #Peak 10 Log dB/ Offst 5 dB Center 1.88 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1873 MHz Transmit Freq Error -2.922 kHz x dB Bandwidth 4.708 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Freq/Channel Center Freq 1.88000000 GHz Start Freq 1.87500000 GHz Stop Freq 1.88500000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
HSDPA-High	Agilent Ch Freq 1.9076 GHz Occupied Bandwidth Center 1.907600000 GHz Ref 40 dBm Atten 45 dB #Peak 10 Log dB/ Offst 5 dB Center 1.908 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1741 MHz Transmit Freq Error -4.612 kHz x dB Bandwidth 4.705 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Freq/Channel Center Freq 1.90760000 GHz Start Freq 1.90260000 GHz Stop Freq 1.91260000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin



HSUPA-Low	Agilent R T Ch Freq 1.8524 GHz Trig Free Occupied Bandwidth Center 1.852400000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.852 GHz #Res BW 100 kHz #VBW 300 kHz Span 10 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1663 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -2.903 kHz x dB Bandwidth 4.710 MHz Freq/Channel Center Freq 1.85240000 GHz Start Freq 1.84740000 GHz Stop Freq 1.85740000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
HSUPA-Middle	Agilent R T Ch Freq 1.88 GHz Trig Free Occupied Bandwidth Center 1.880000000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.88 GHz #Res BW 100 kHz #VBW 300 kHz Span 10 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1696 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -7.411 kHz x dB Bandwidth 4.716 MHz Freq/Channel Center Freq 1.88000000 GHz Start Freq 1.87500000 GHz Stop Freq 1.88500000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
HSUPA-High	Agilent R T Ch Freq 1.9076 GHz Trig Free Occupied Bandwidth Center 1.907600000 GHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 1.908 GHz #Res BW 100 kHz #VBW 300 kHz Span 10 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1643 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -6.174 kHz x dB Bandwidth 4.699 MHz Freq/Channel Center Freq 1.90760000 GHz Start Freq 1.90260000 GHz Stop Freq 1.91260000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

APPENDIX D


Out of Band Emissions at Antenna Terminal



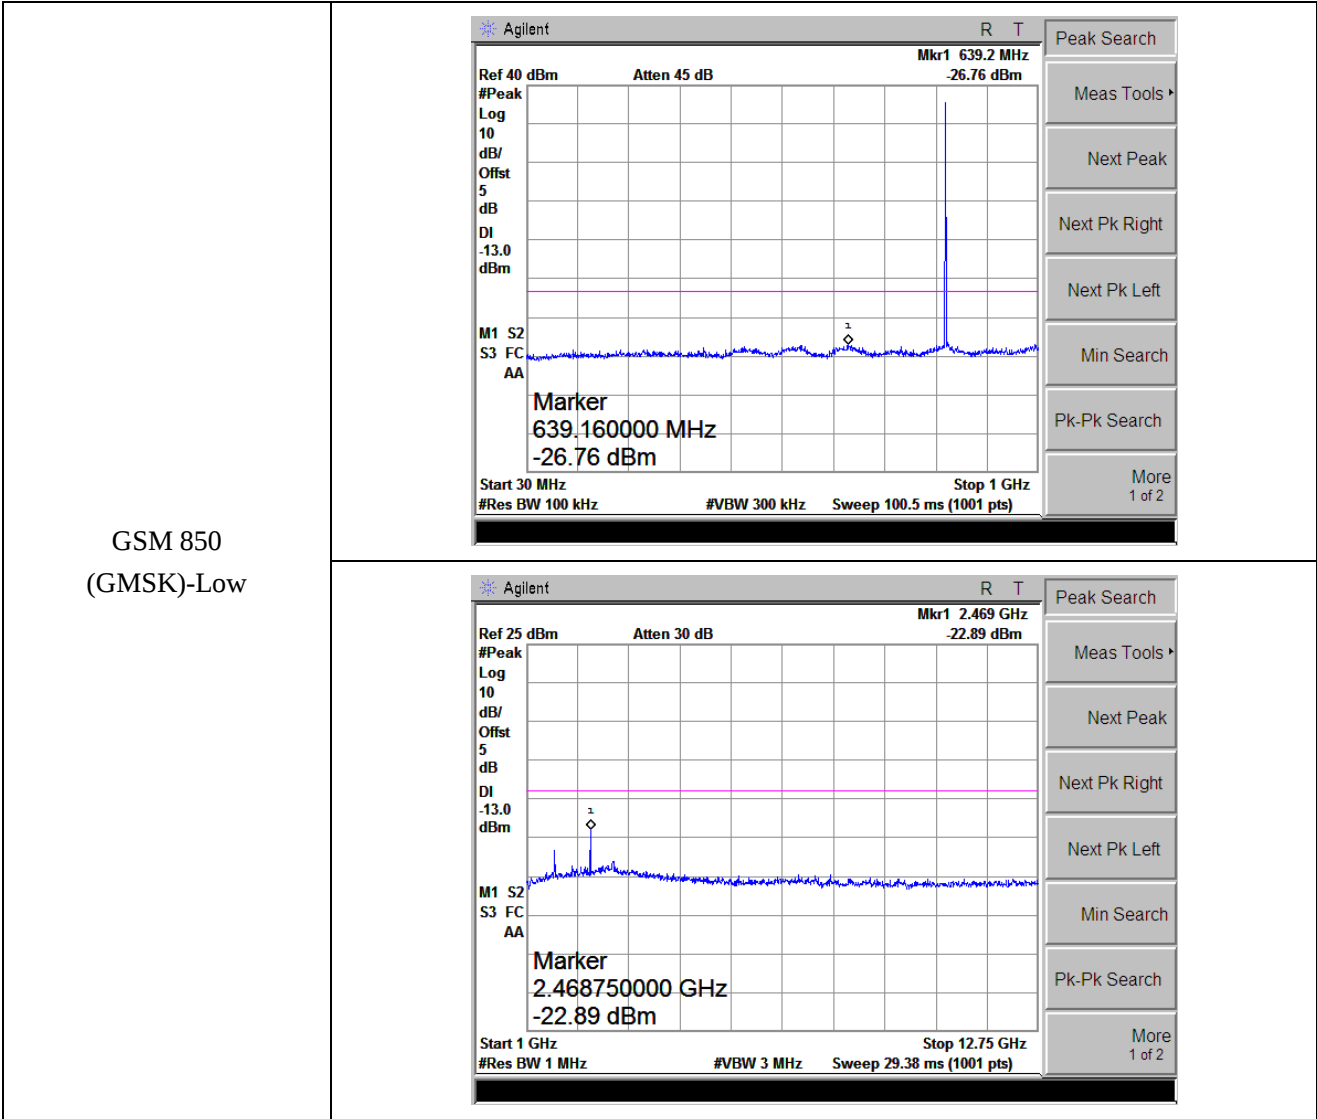





GSM 850
(GMSK)-Middle


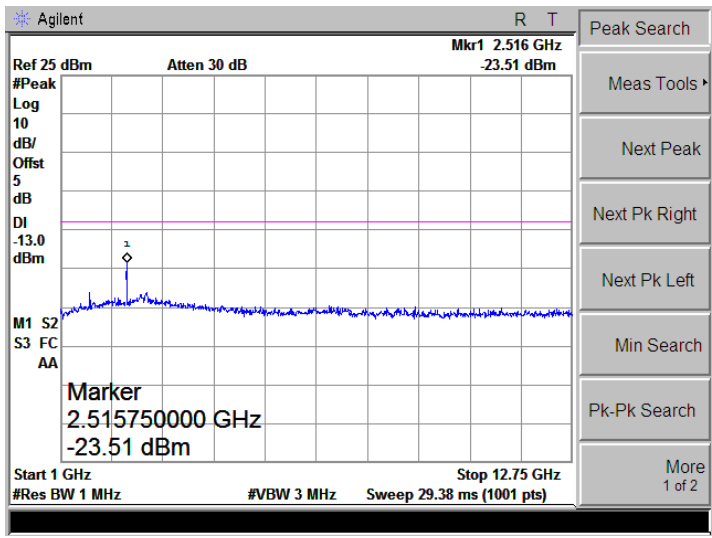
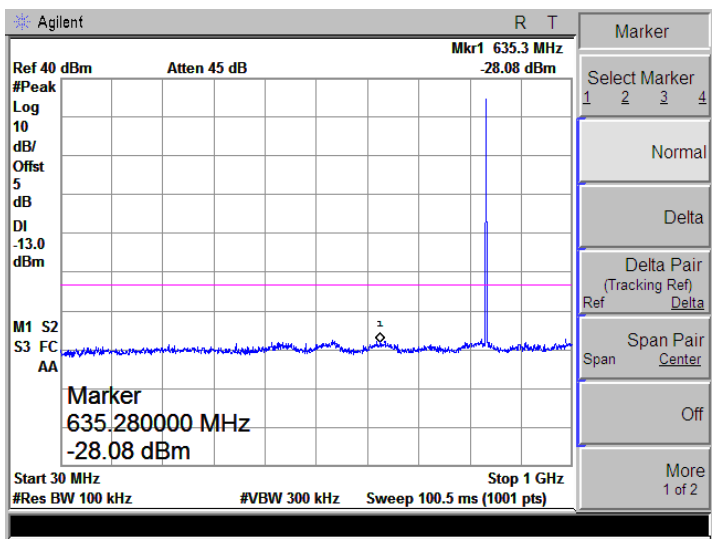


GSM 850
(GMSK)-High


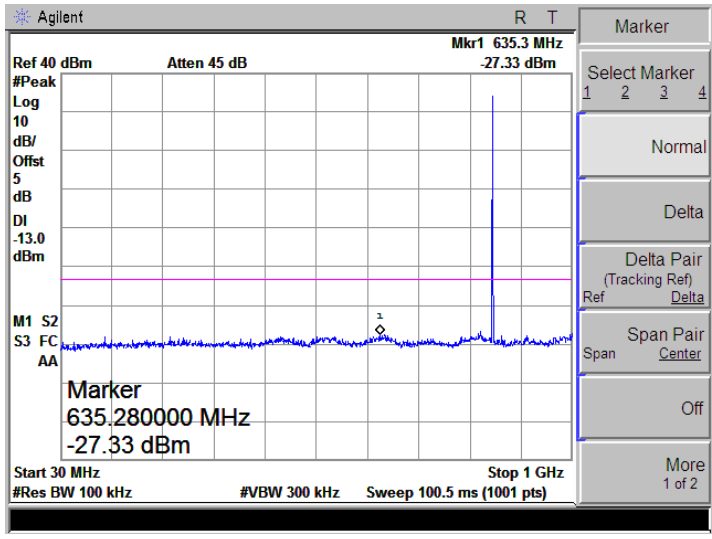


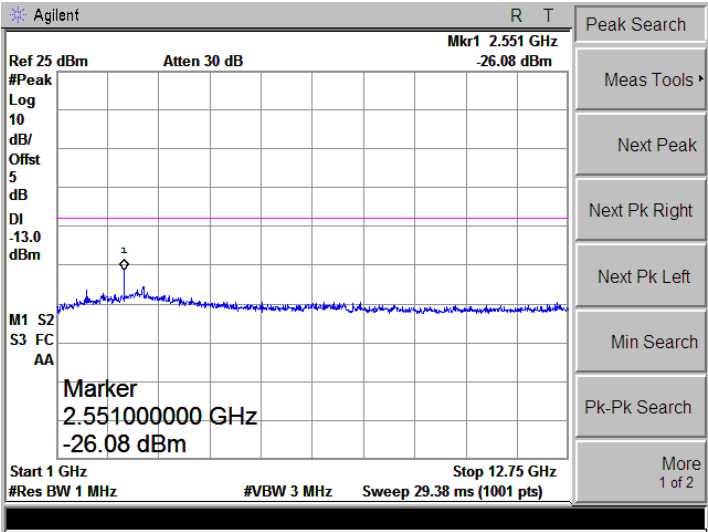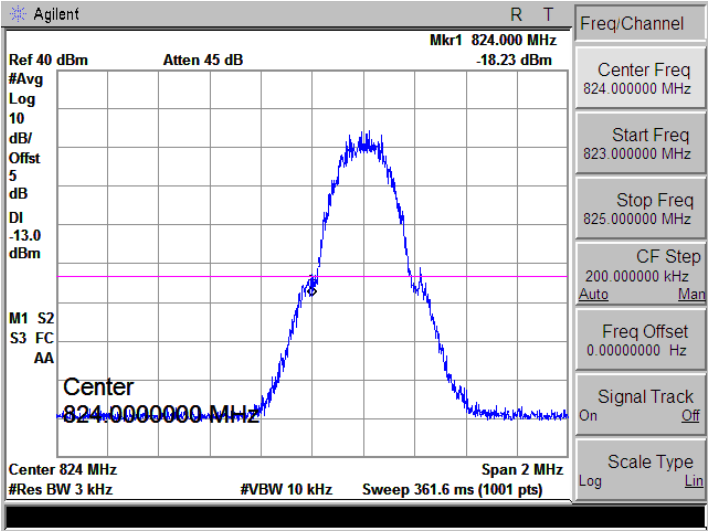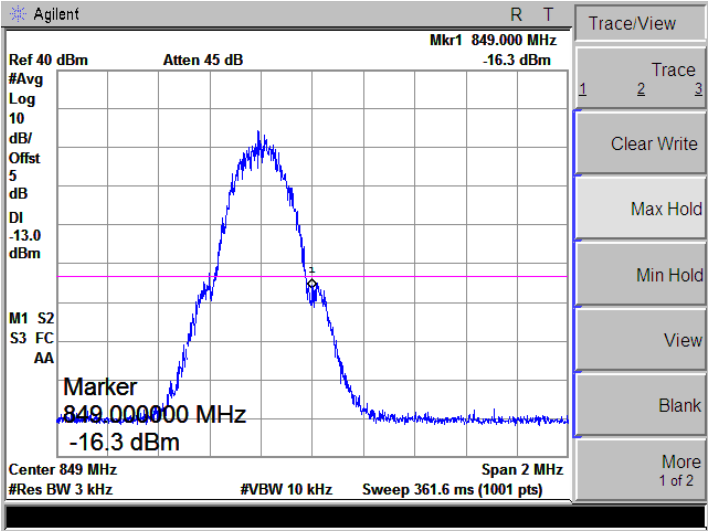	
Bandedge	
	

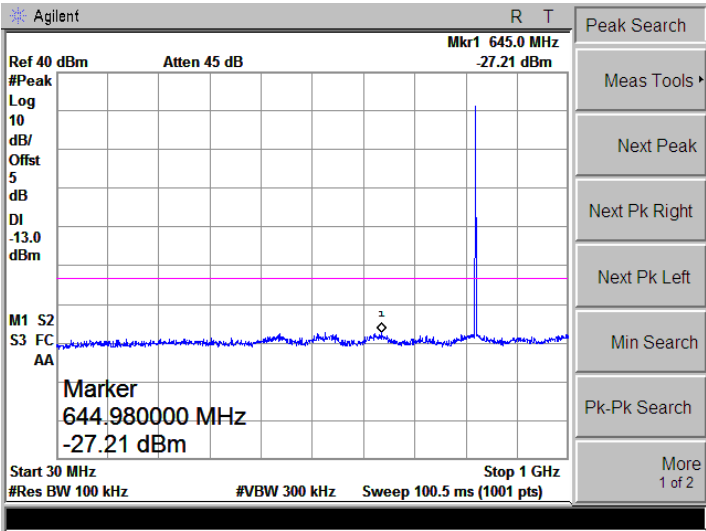
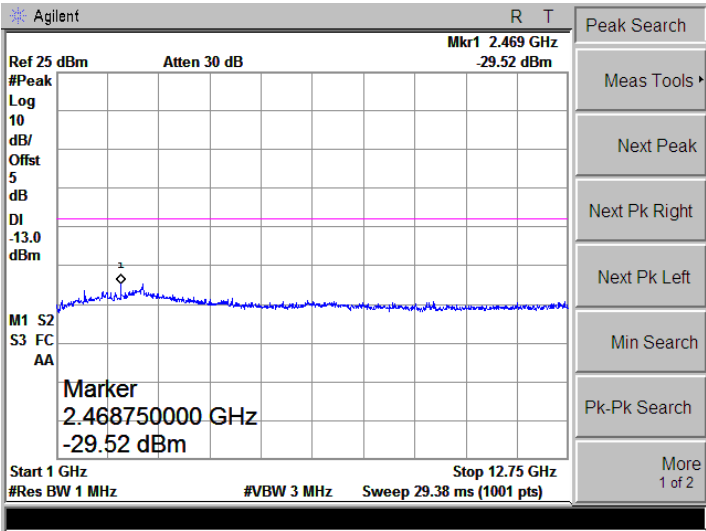
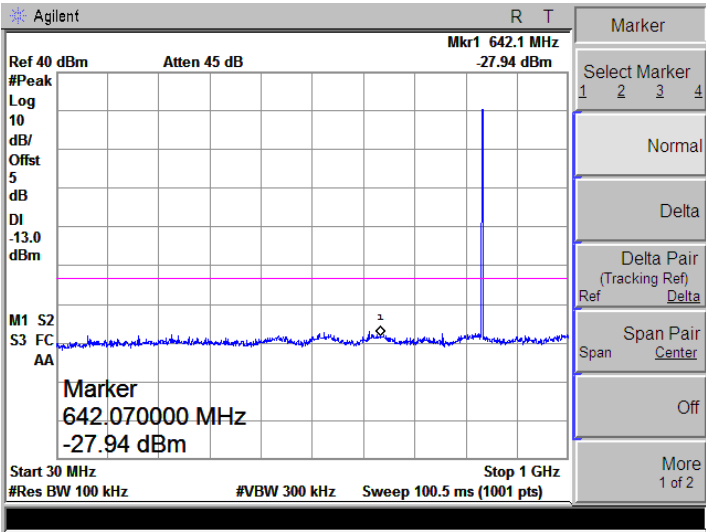
GPRS850 (GMSK,1Slot)-Low	
	
GPRS850 (GMSK,1Slot)-Middle	

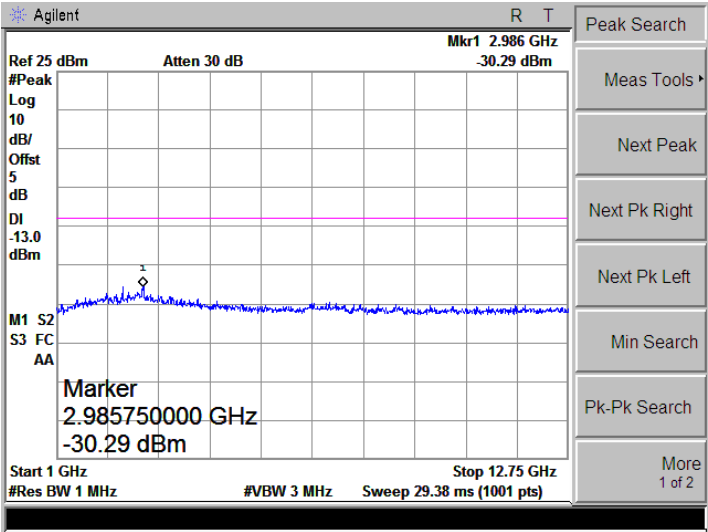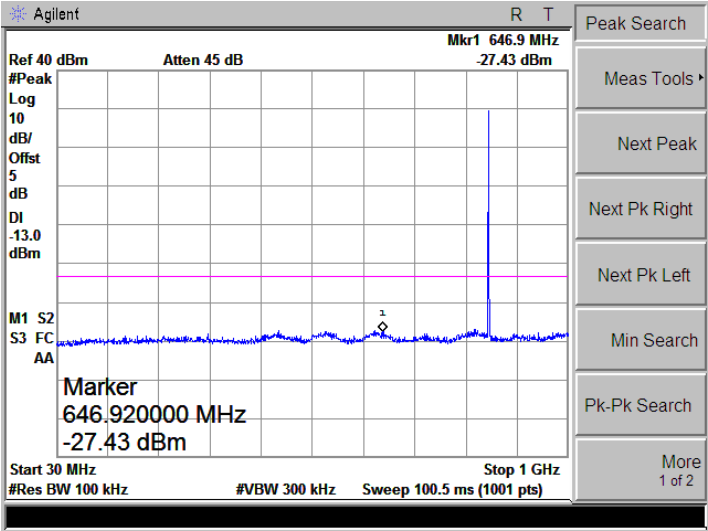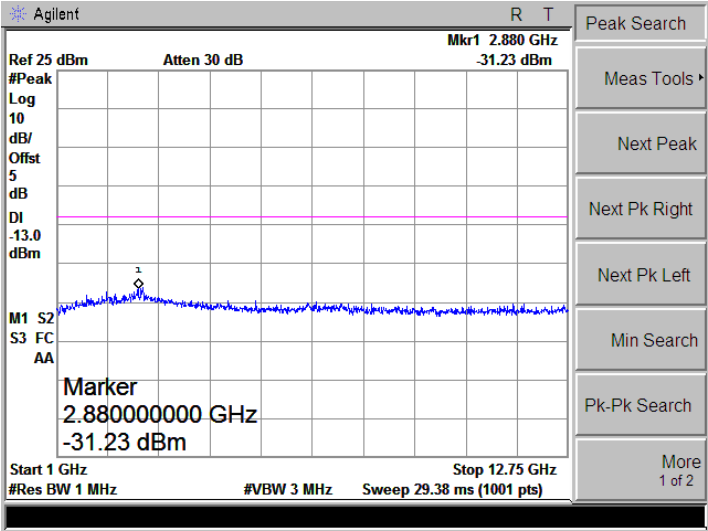	
GPRS850 (GMSK)-High	
	




Bandedge

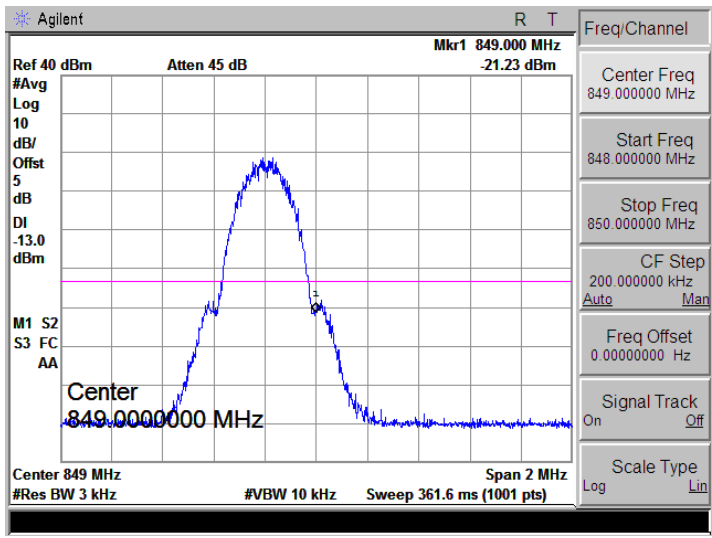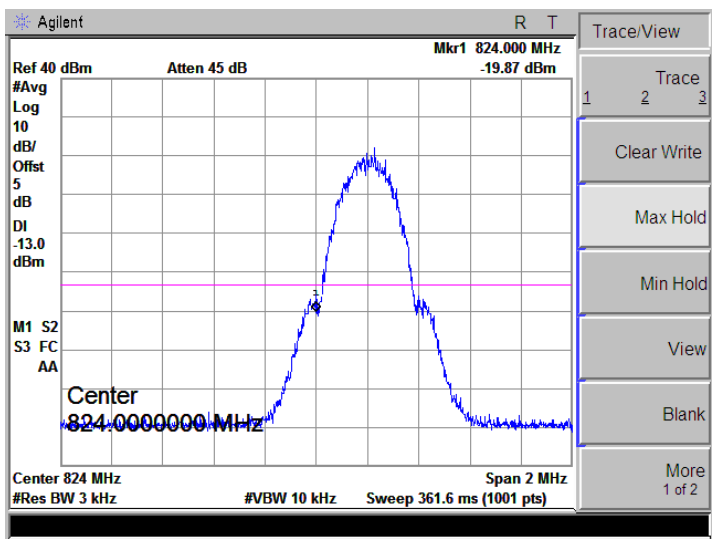




PCS1900
(GMSK)-Low

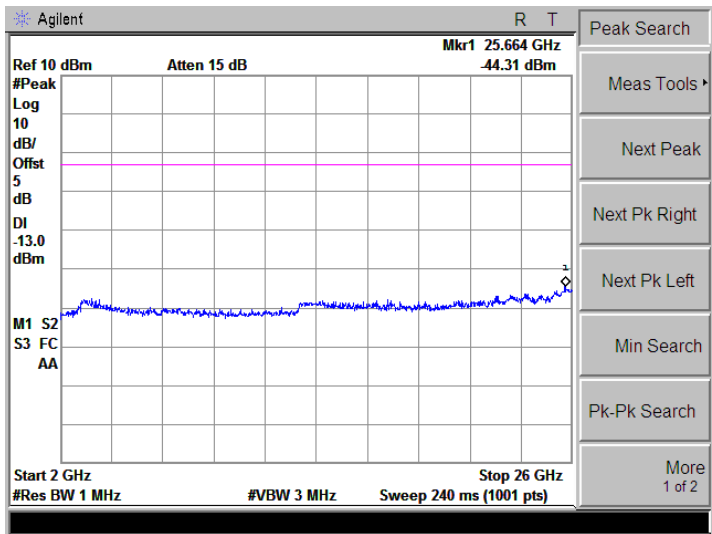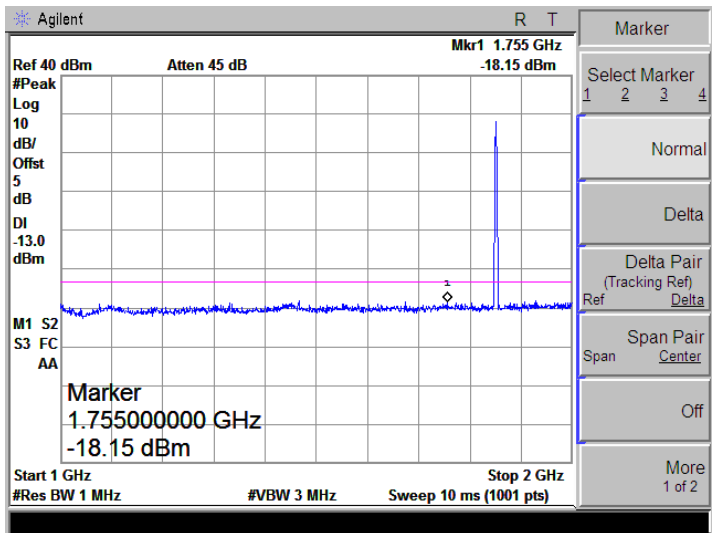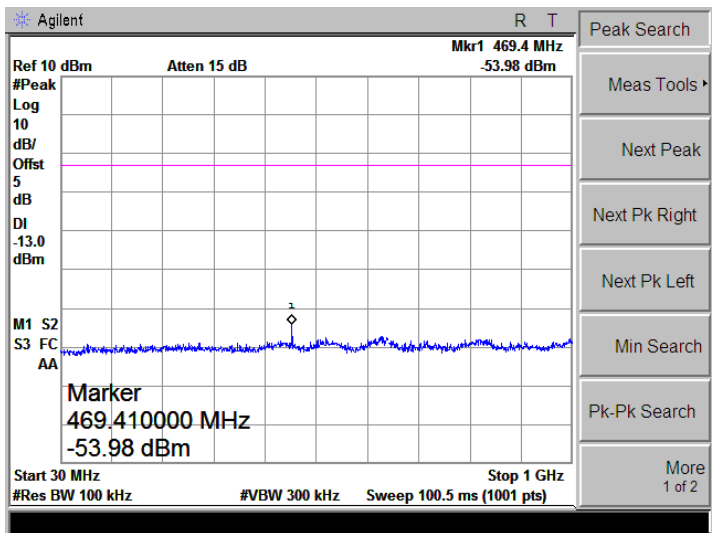



PCS1900
(GMSK)-Middle

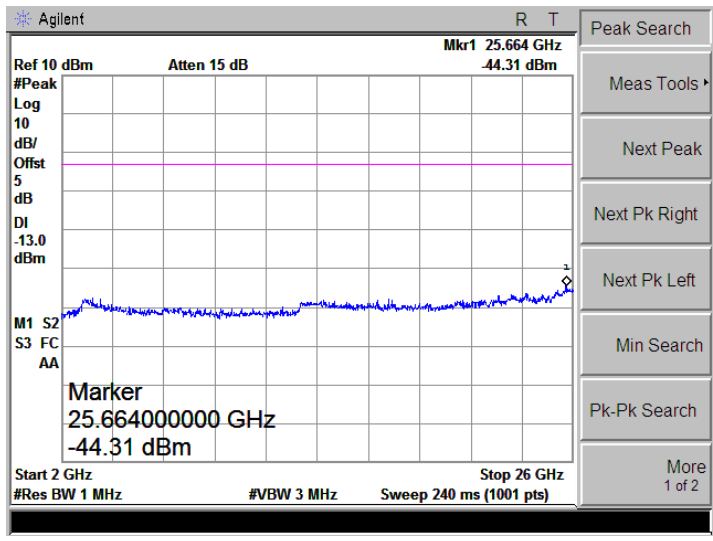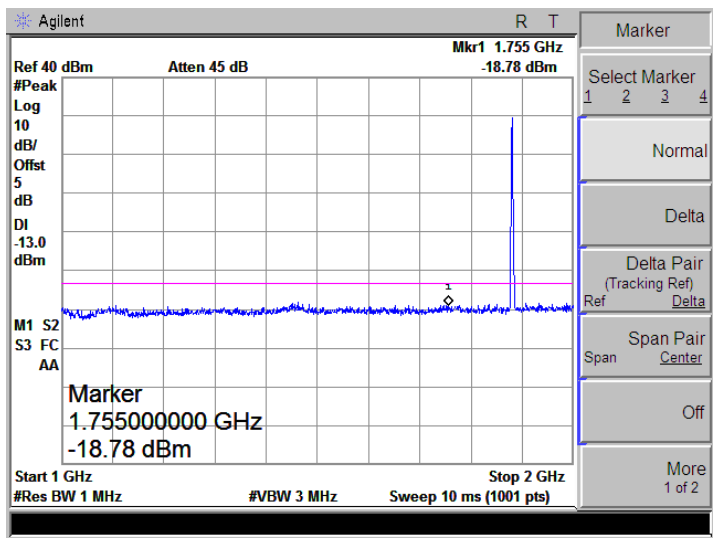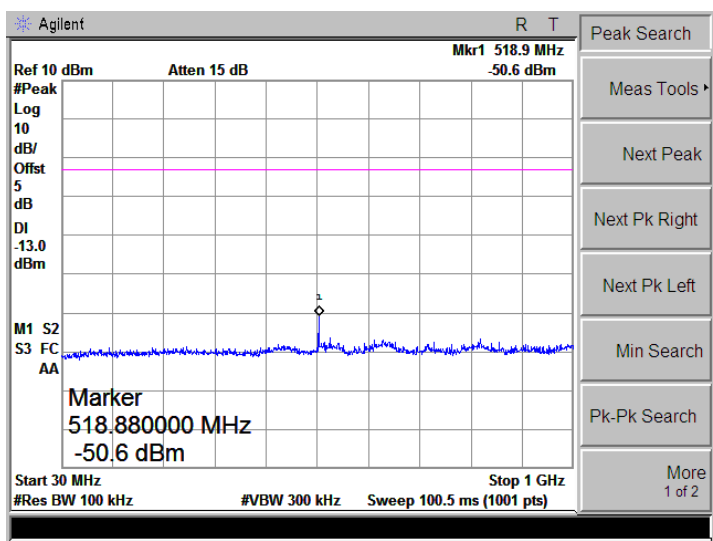




PCS1900
(GMSK)-High

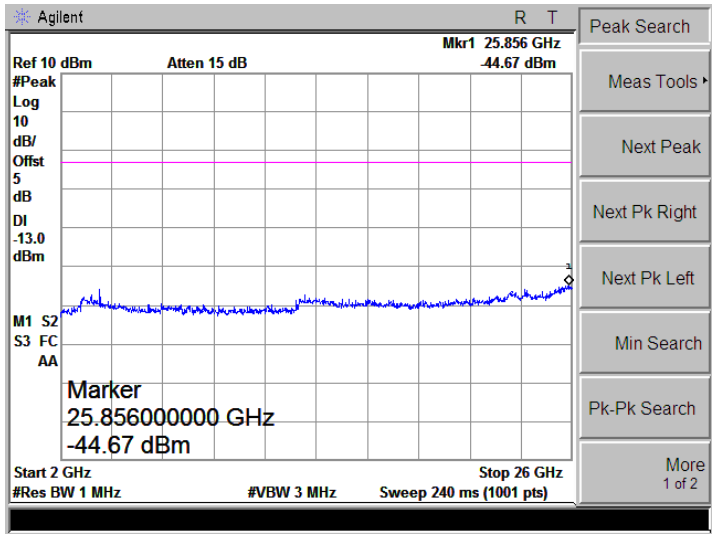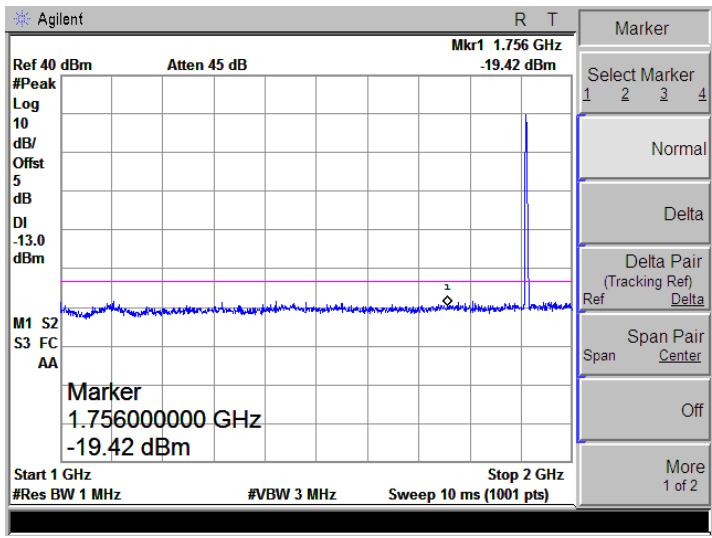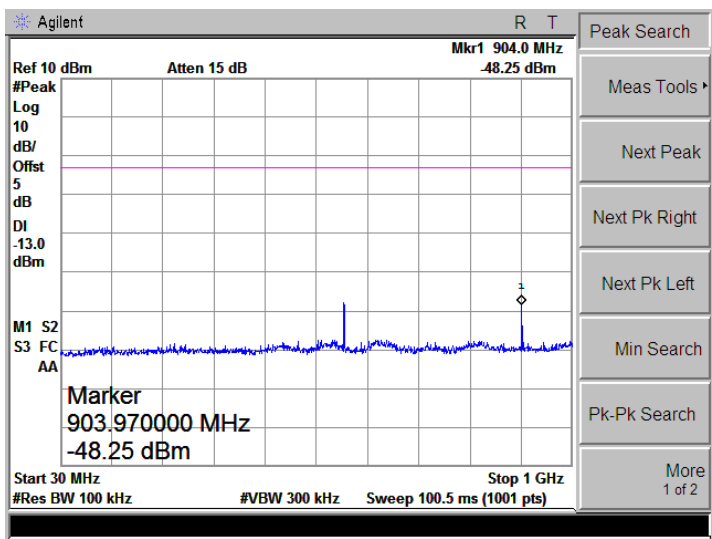




Bandedge

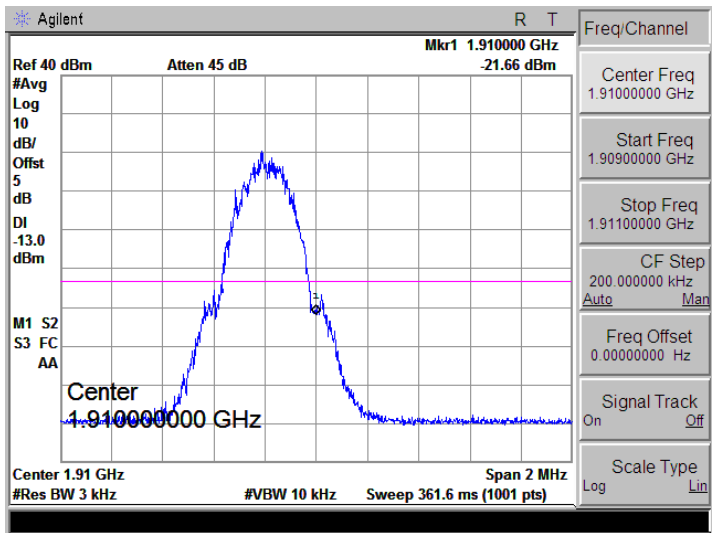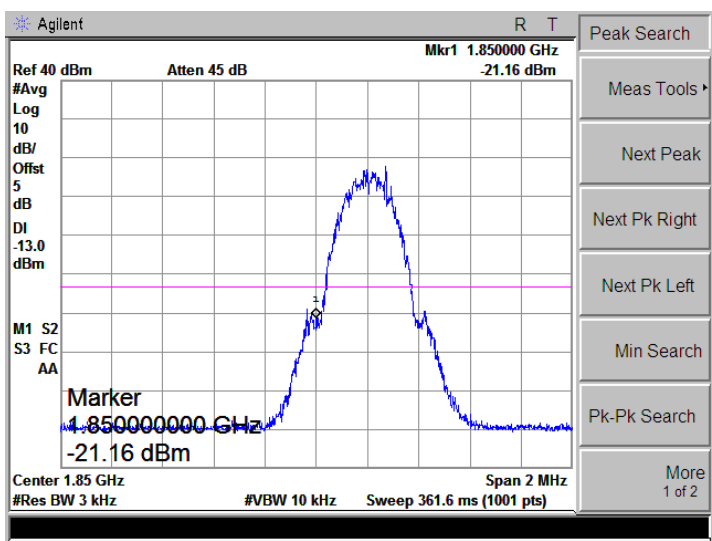




GPRS1900
(GMSK,1Slot)-Low

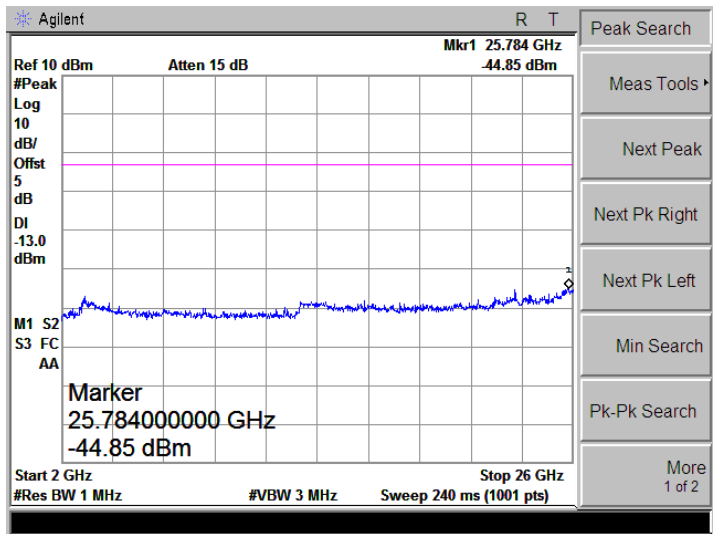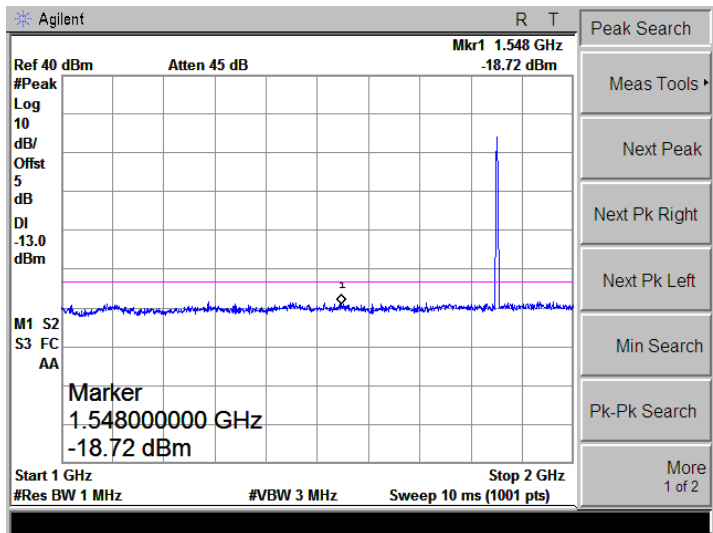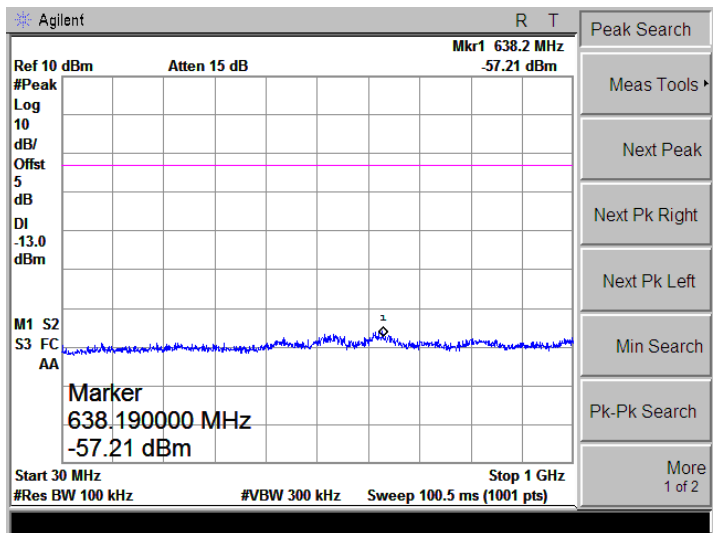



GPRS1900
(GMSK,1Slot)-Middle

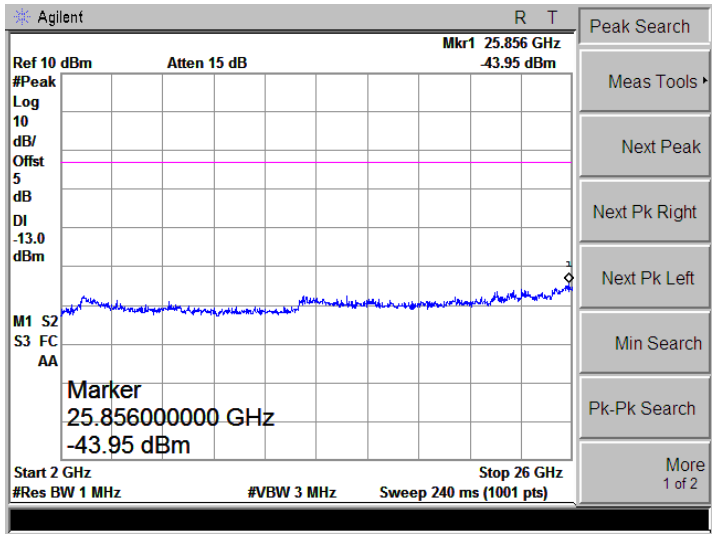
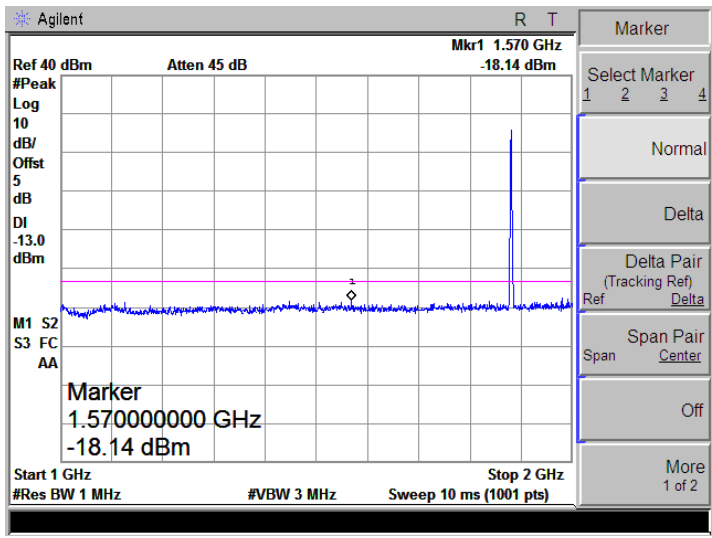
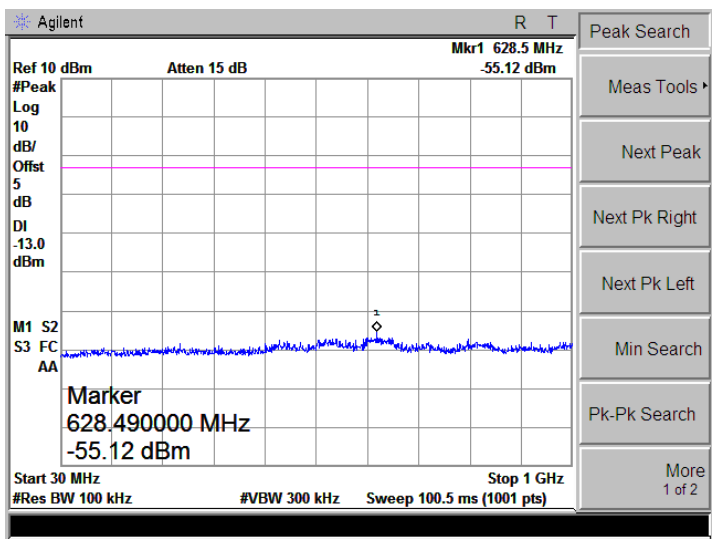





GPRS1900
(GMSK,1Slot)-High

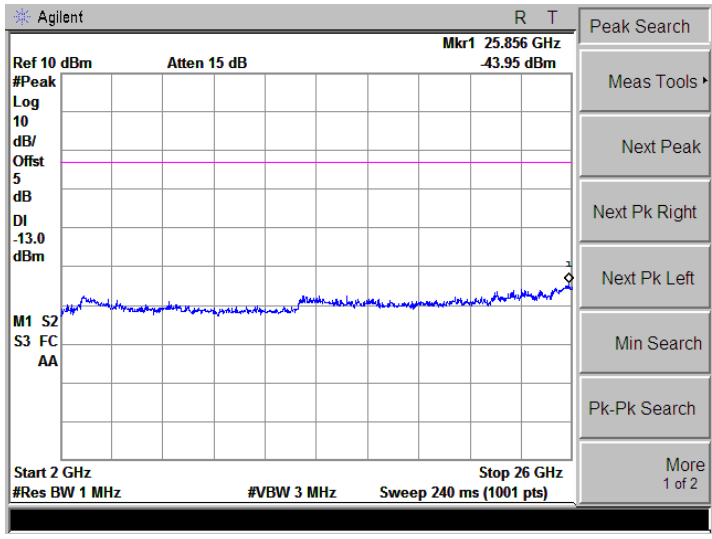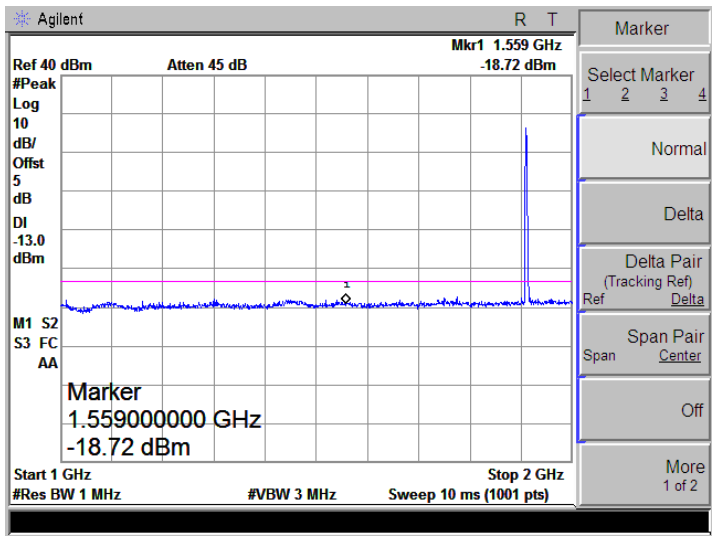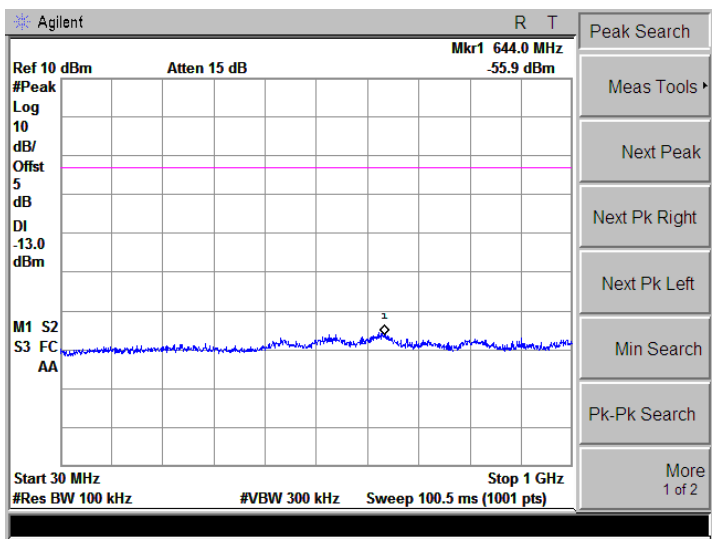



Bandedge


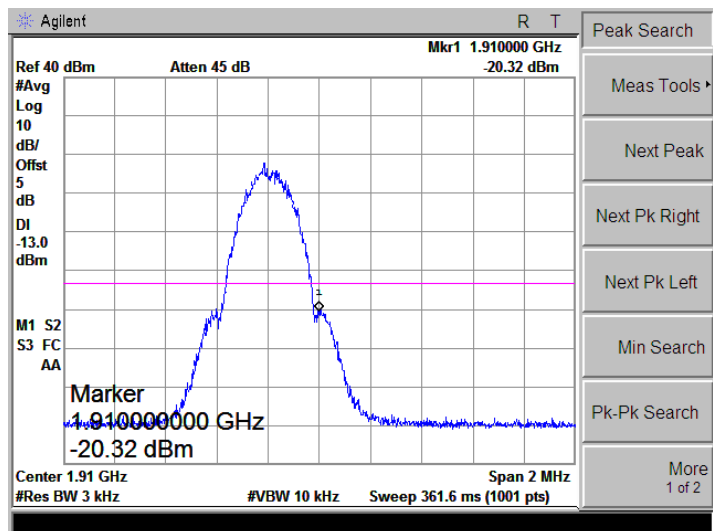
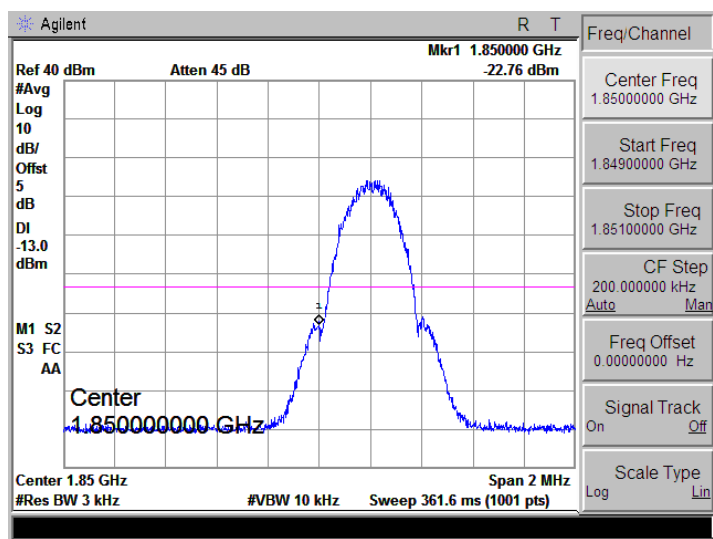


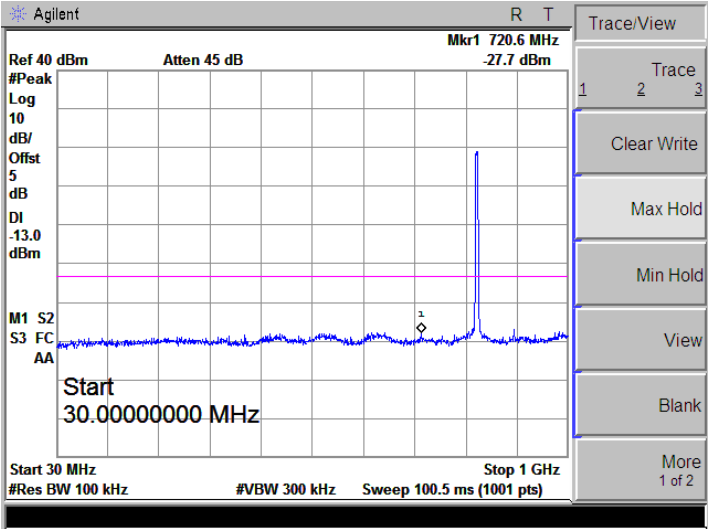
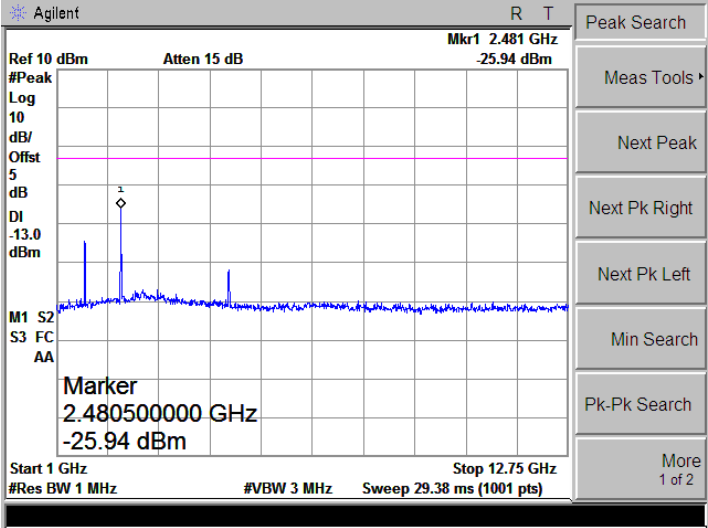
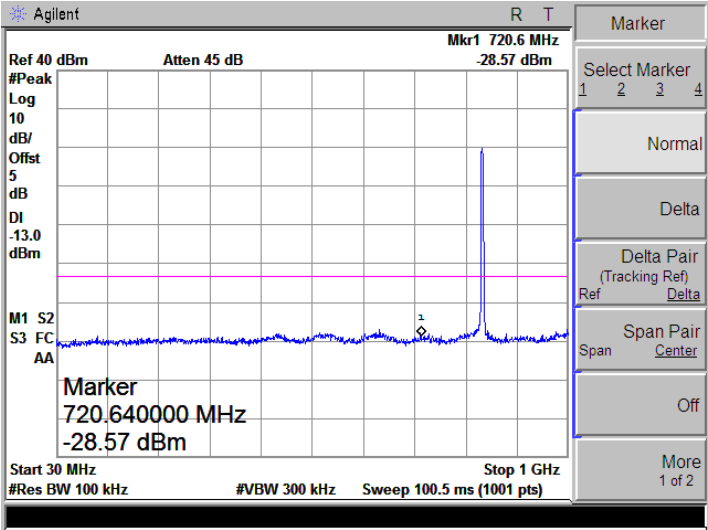
WCDMA Band V-Low	
	
WCDMA Band V-Middle	

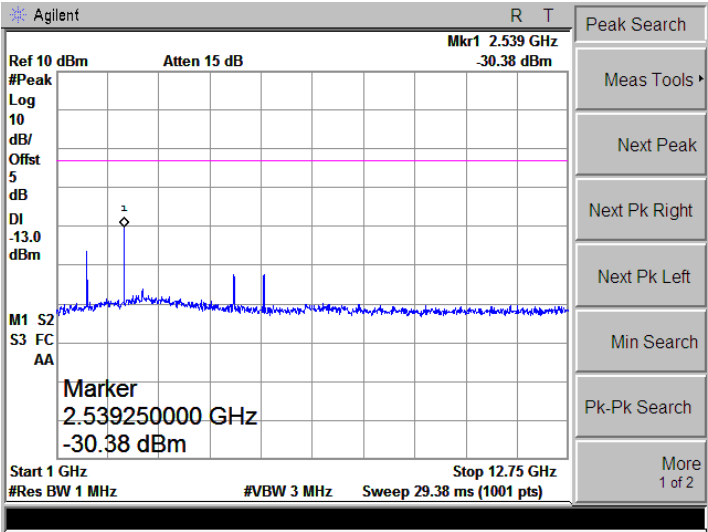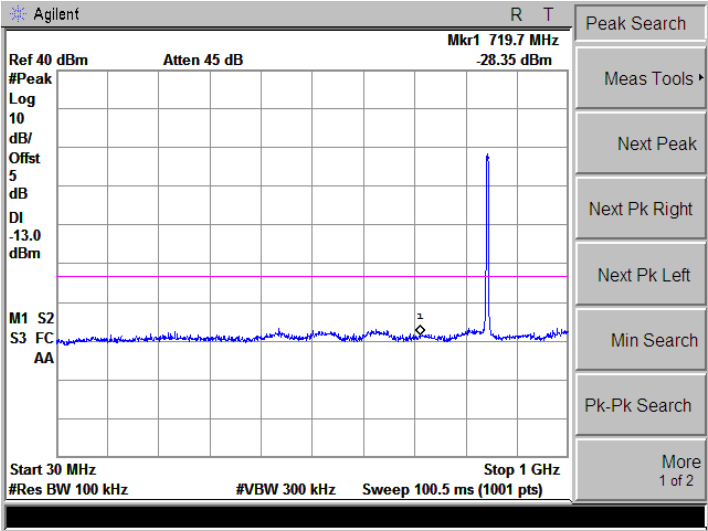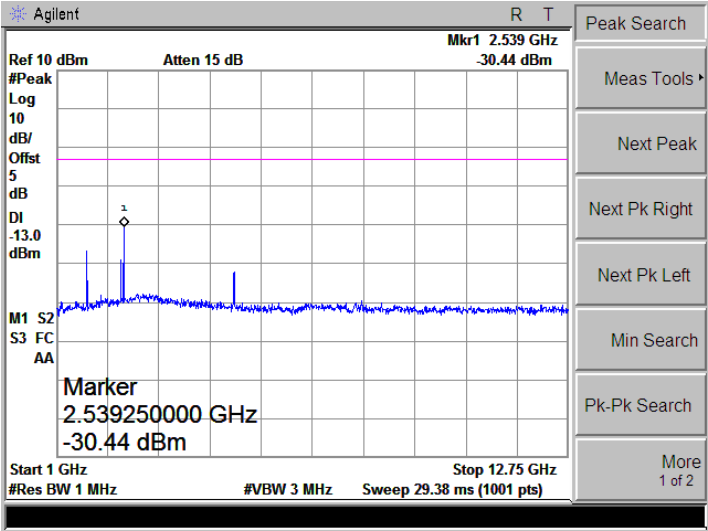	
WCDMA Band V-High	
	



Bandedge


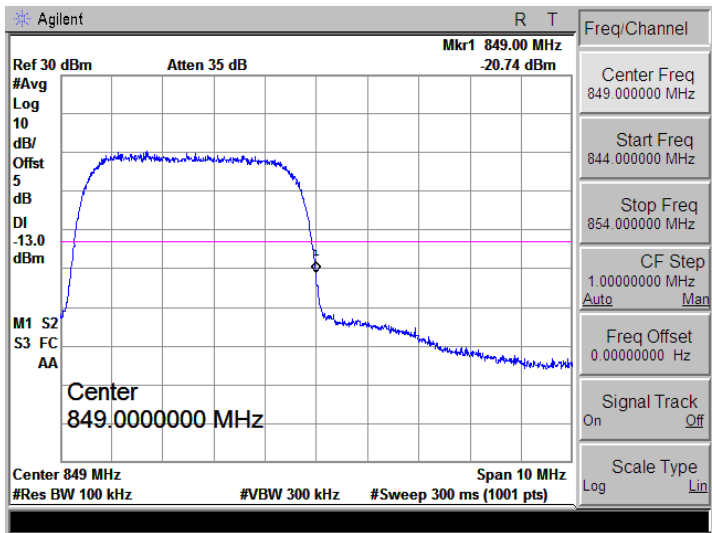
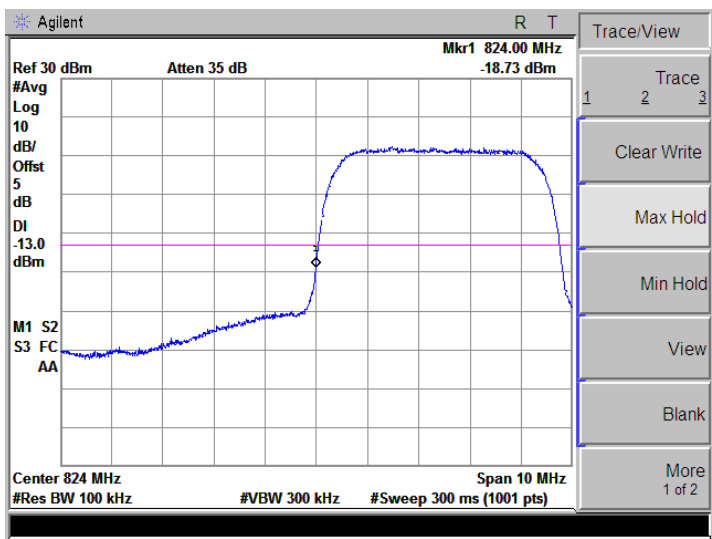


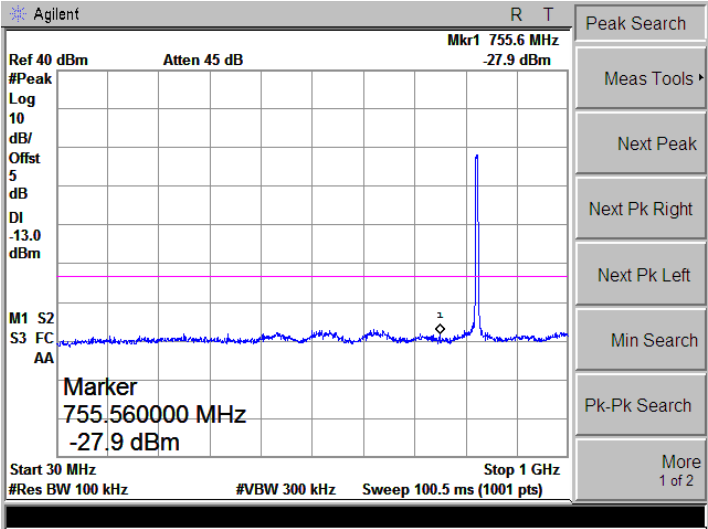
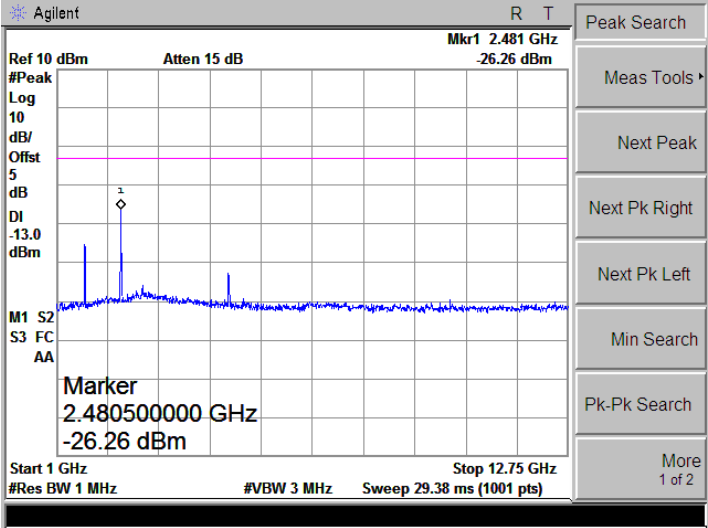
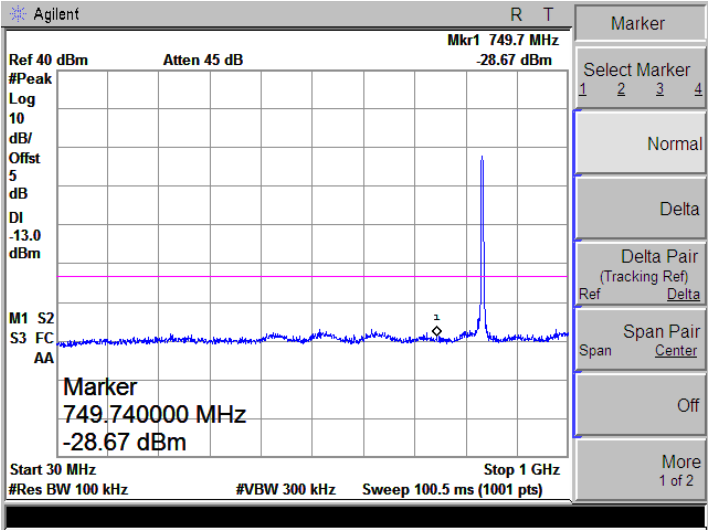
HSDPA Band V-Low	
	
HSDPA Band V-Middle	

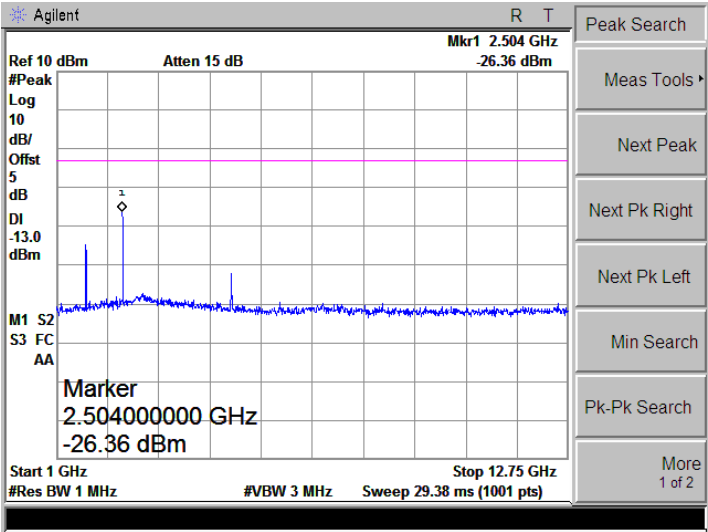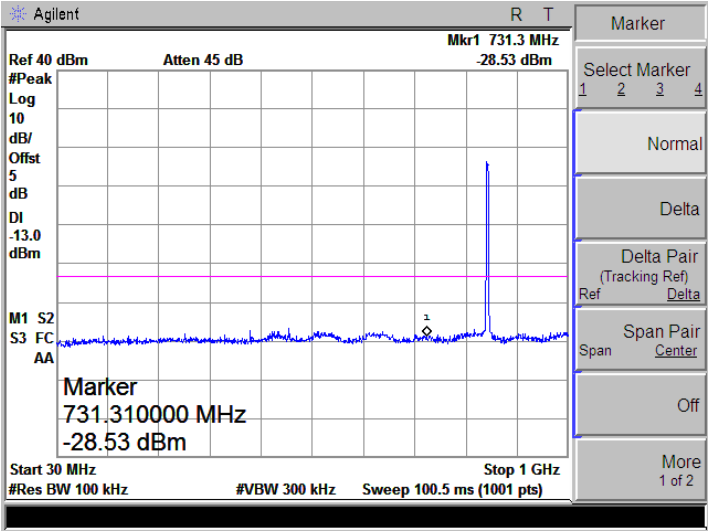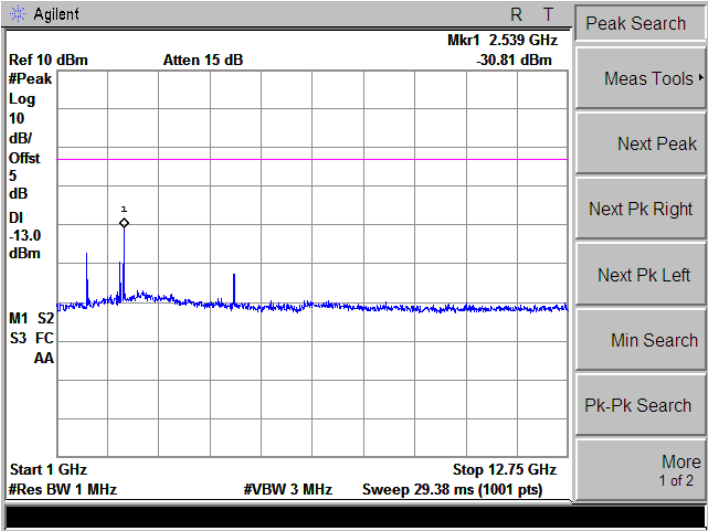	
HSDPA Band V-High	
	



Bandedge

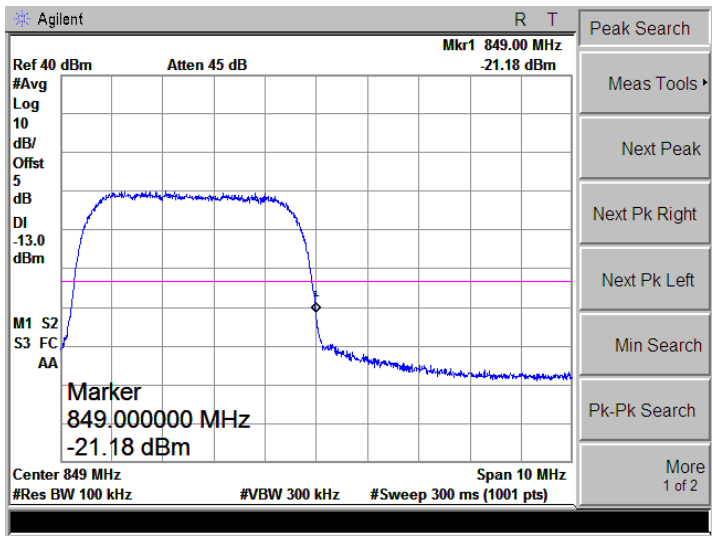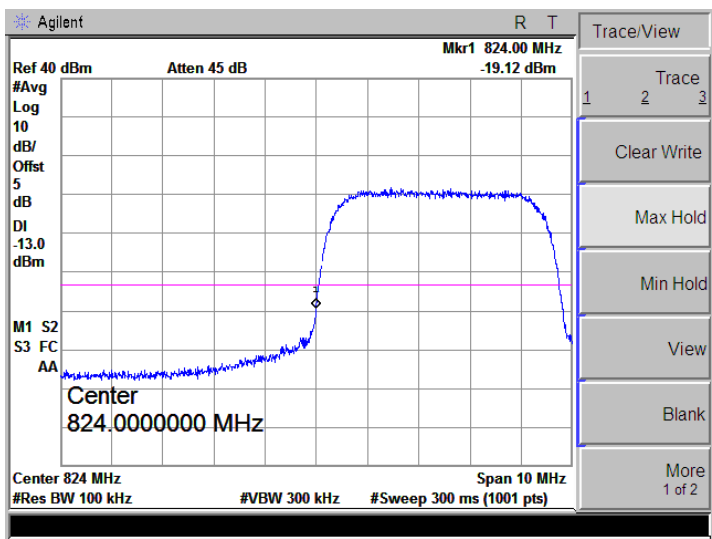

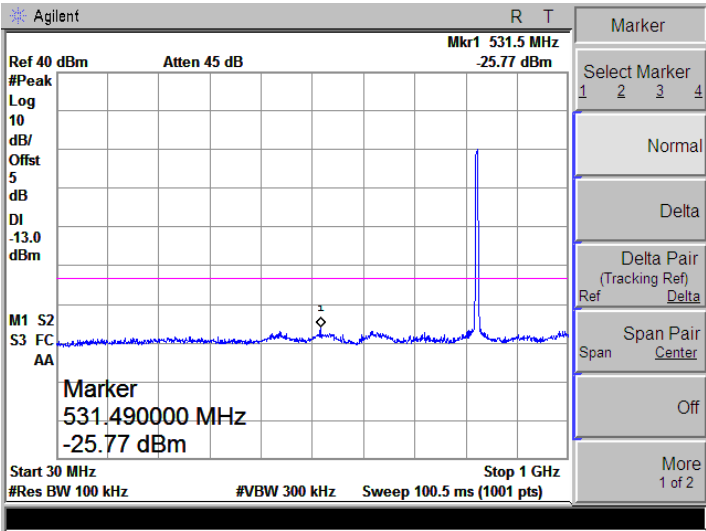
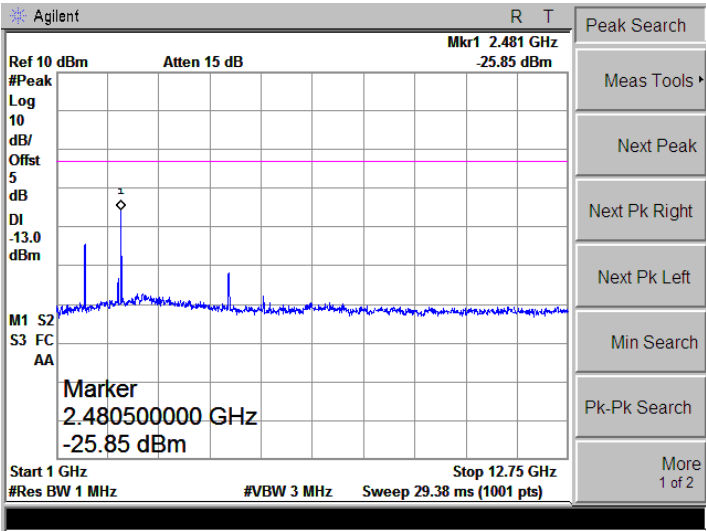
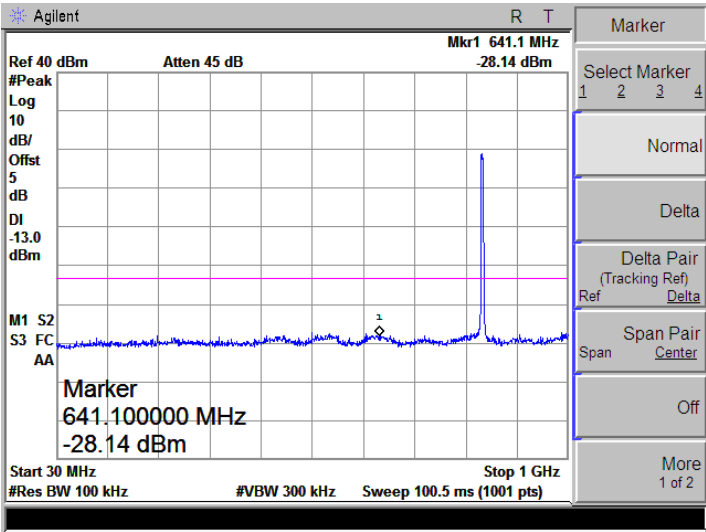
HSUPA Band V-Low	
	
HSUPA Band V-Middle	

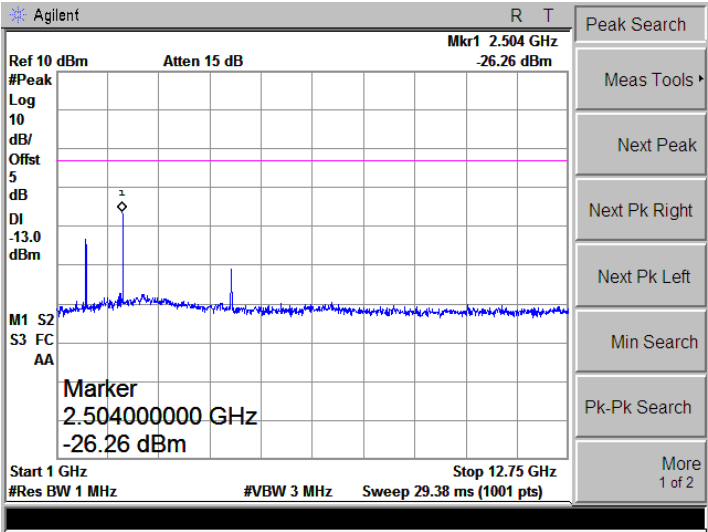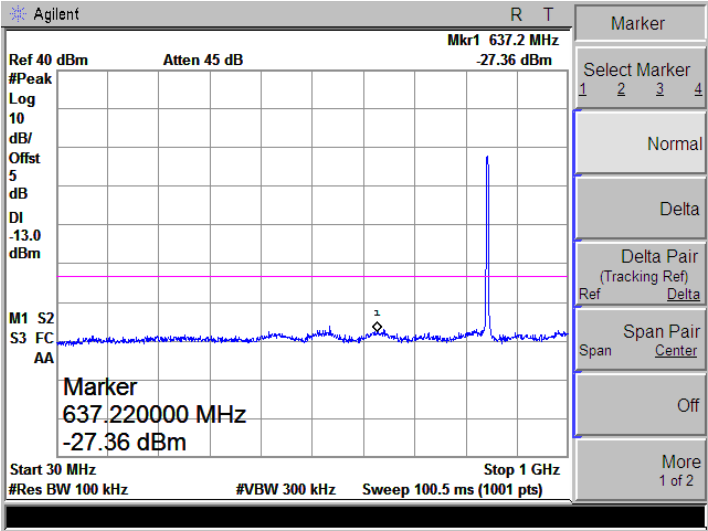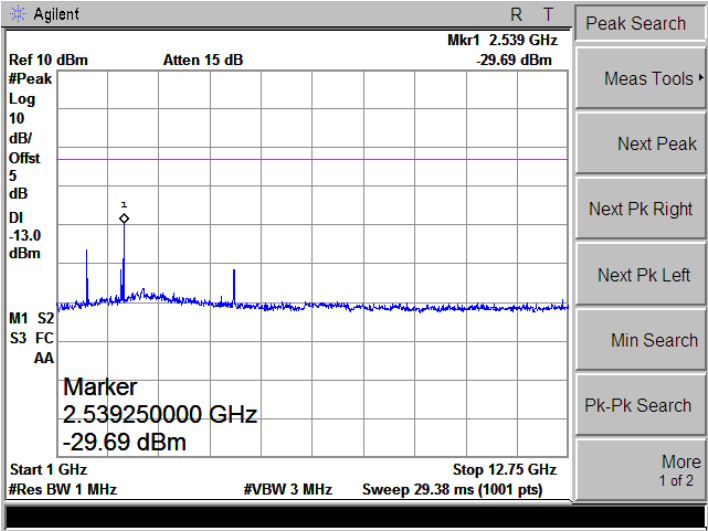	
HSUPA Band V-High	
	




Bandedge

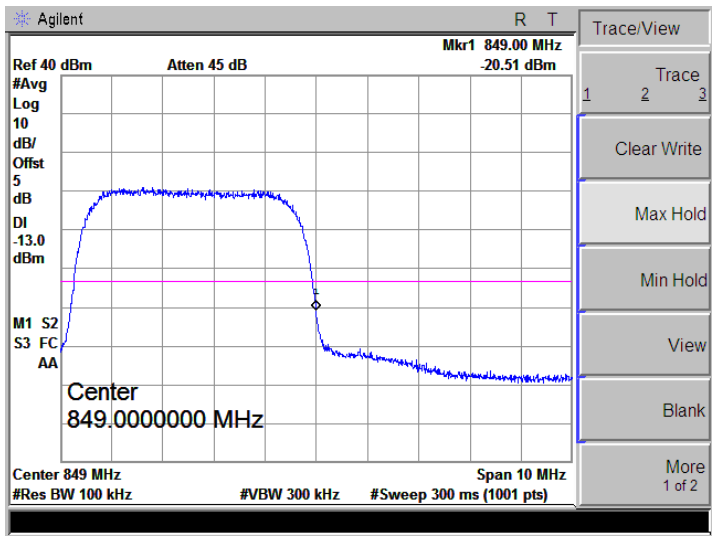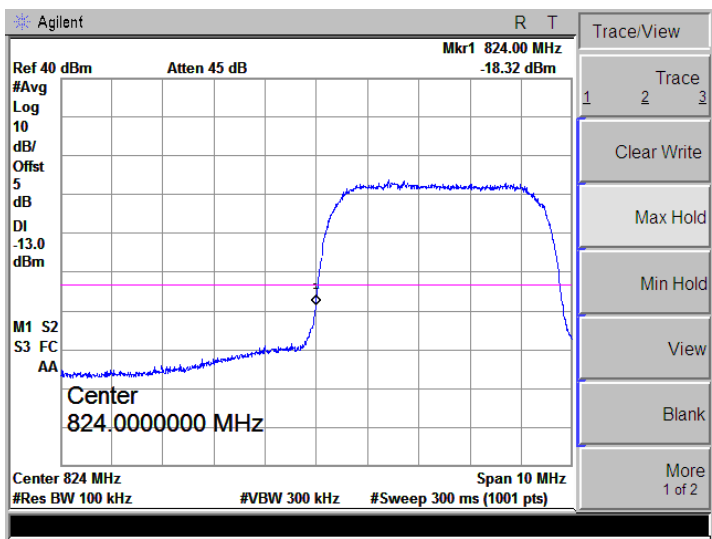




WCDMA Band II-Low

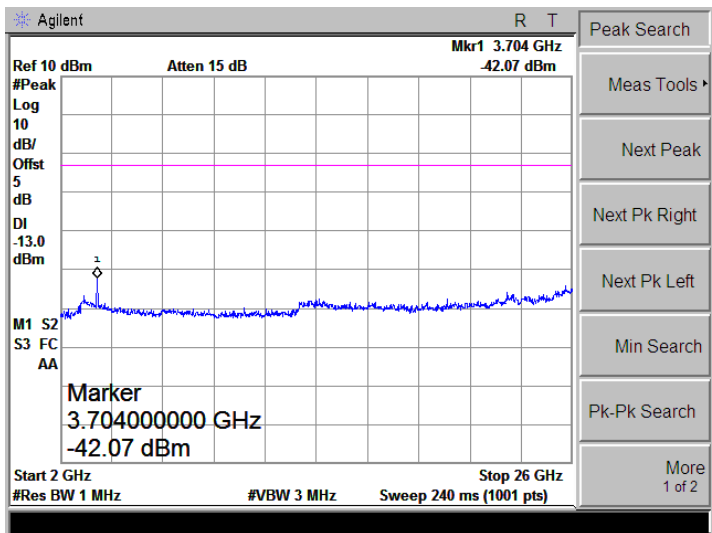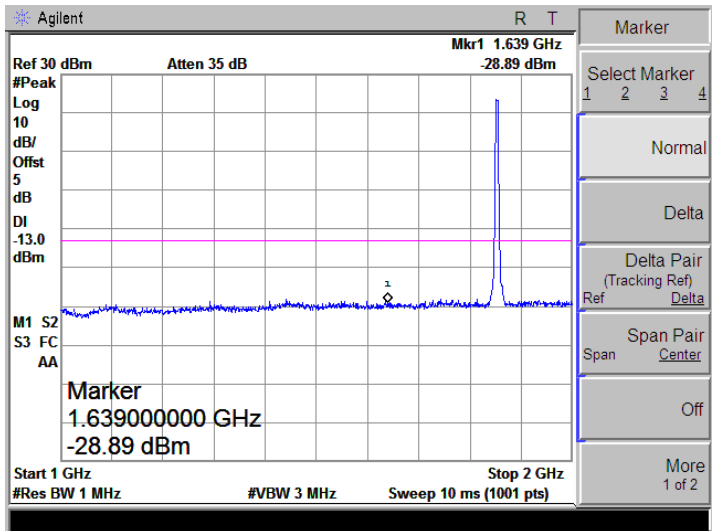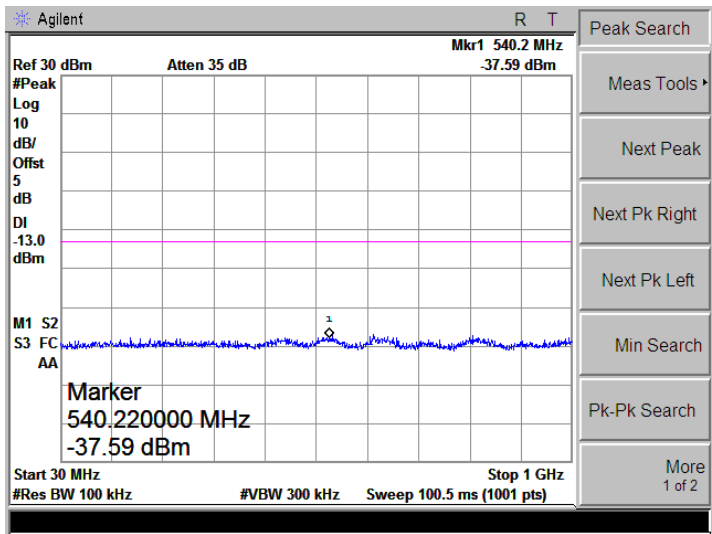



WCDMA Band II-Low

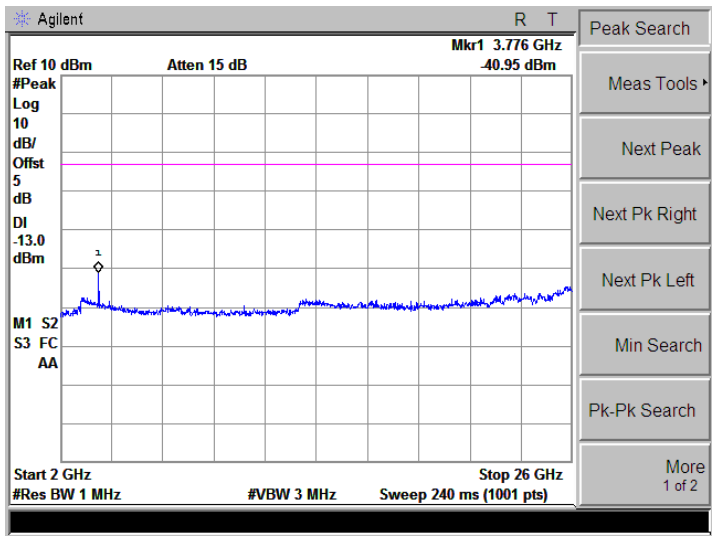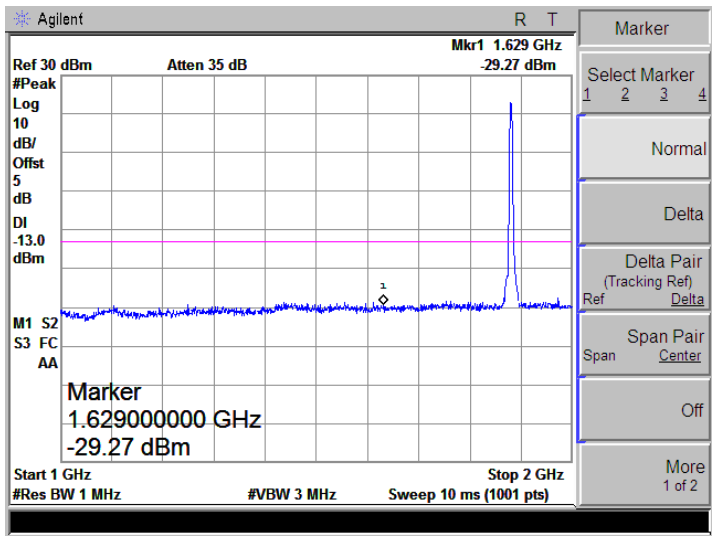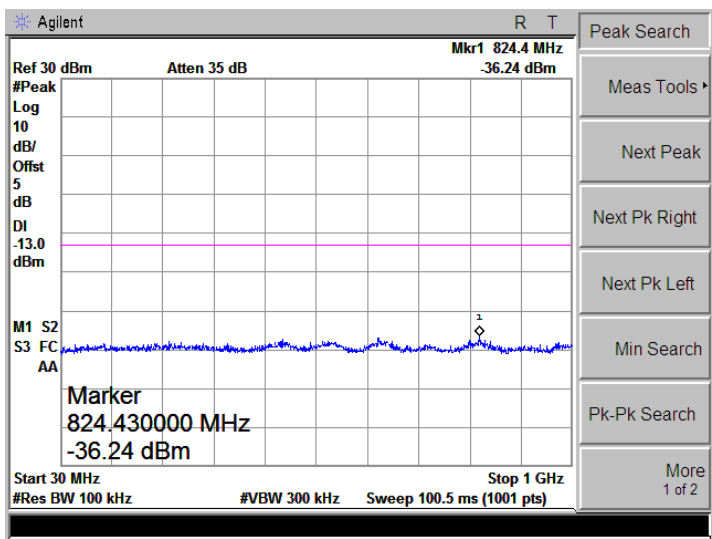




WCDMA Band II-Low

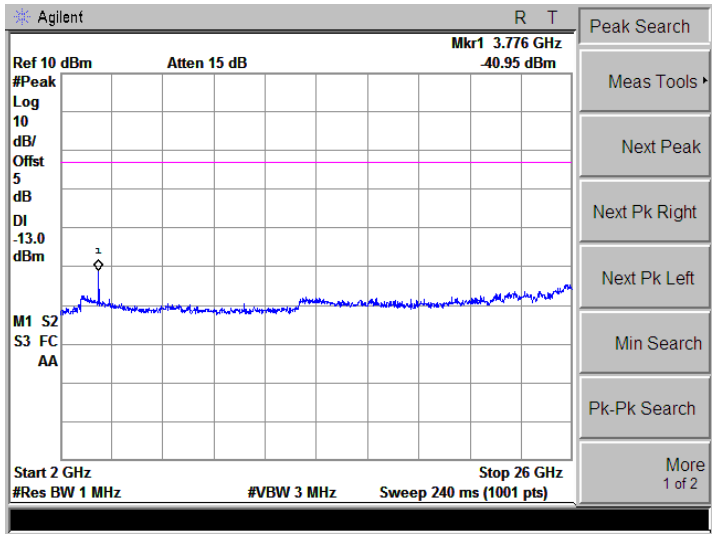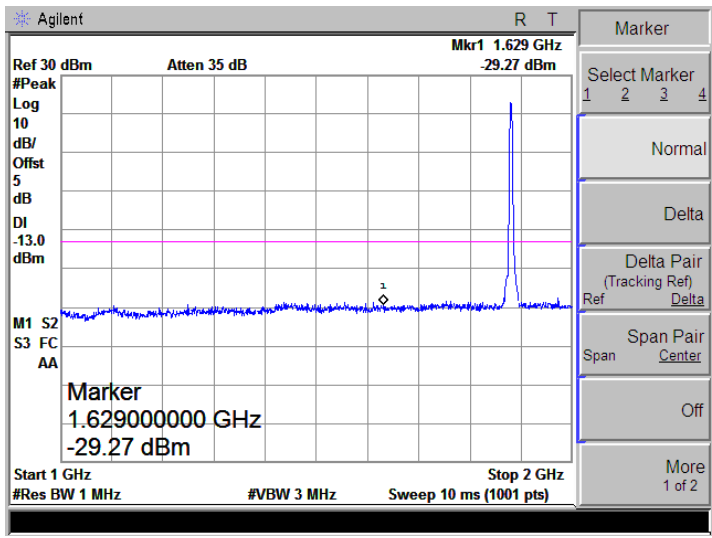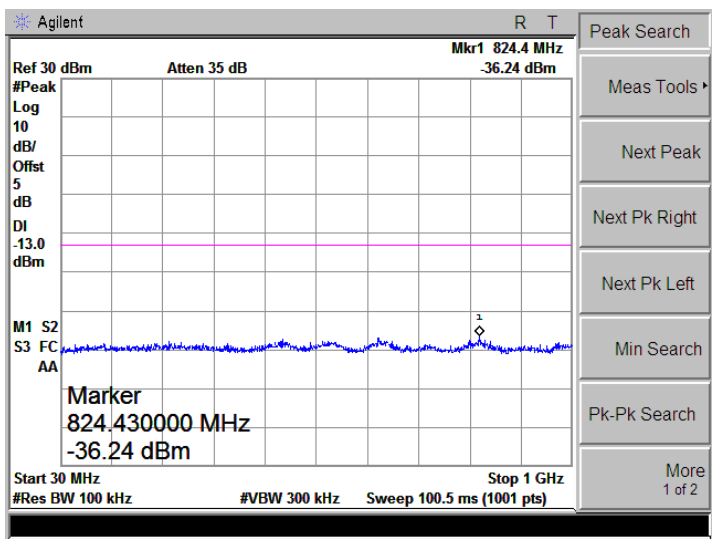




Bandedge

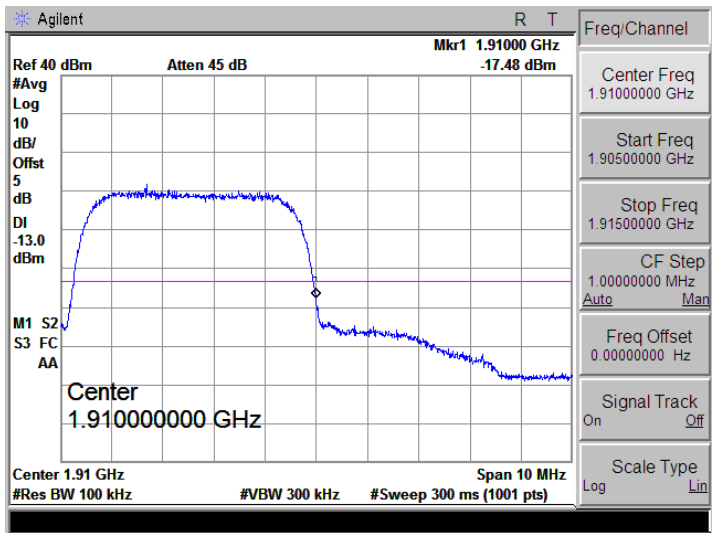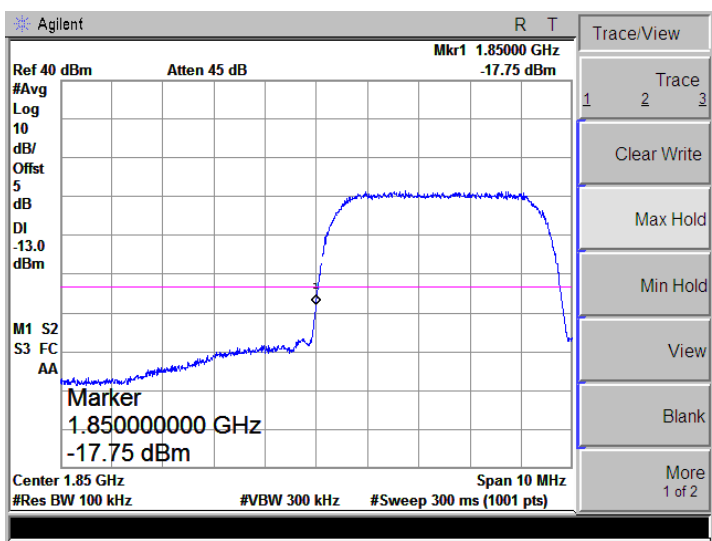




HSDPA Band II-Low

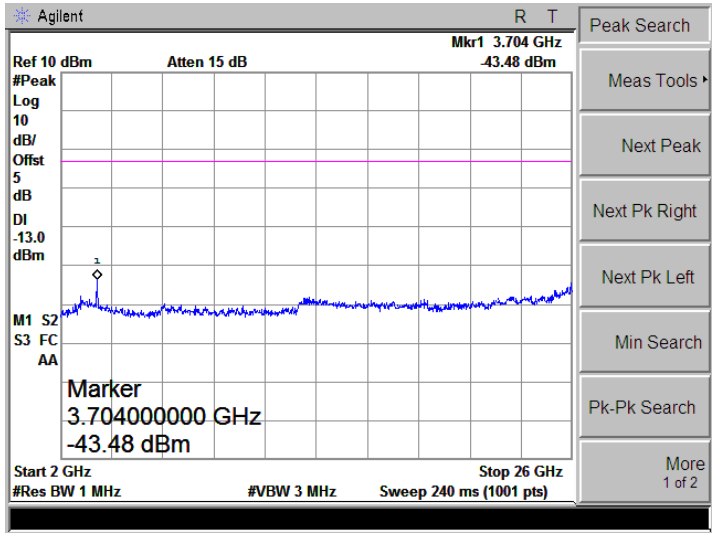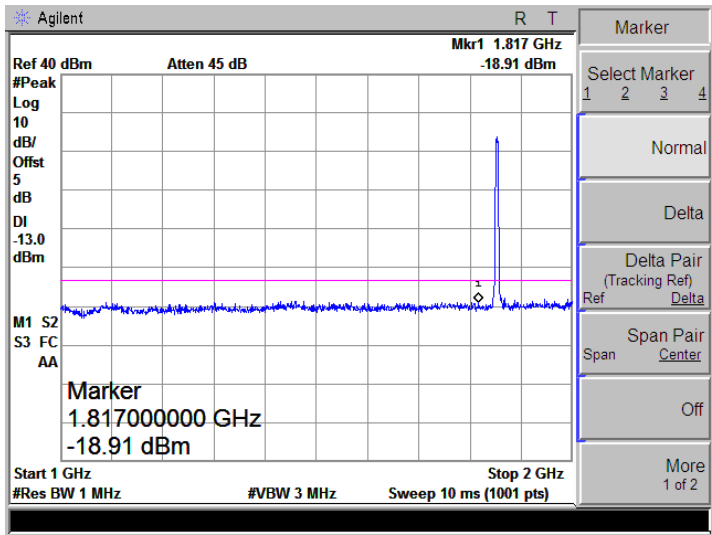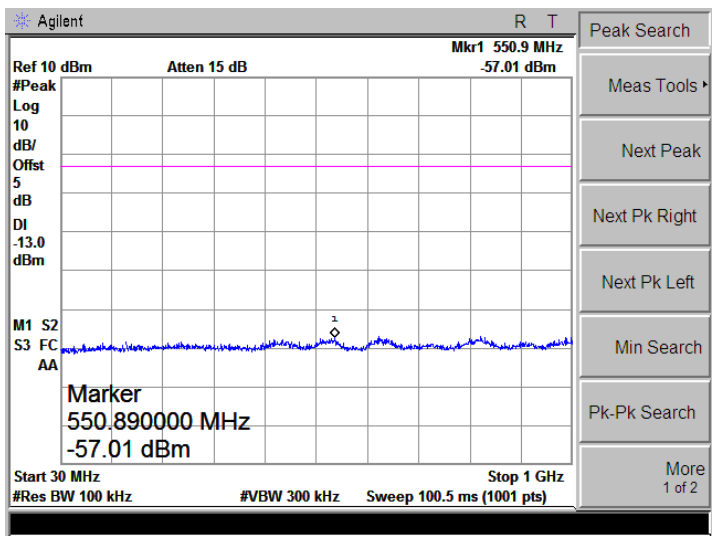



HSDPA Band II-Low

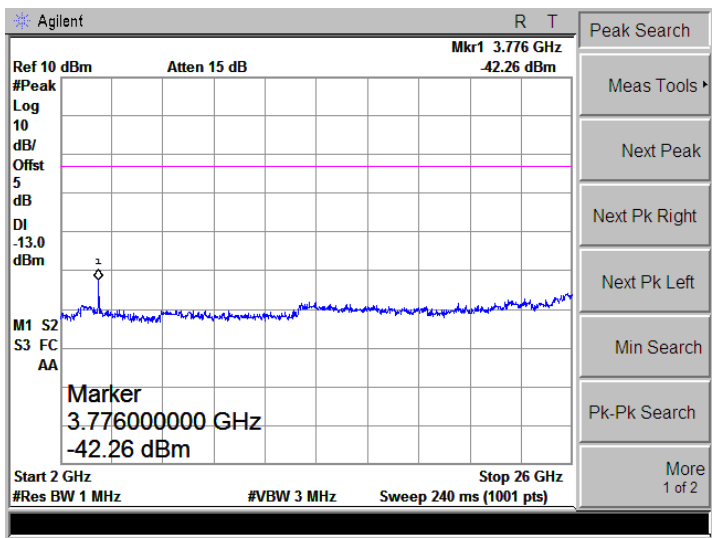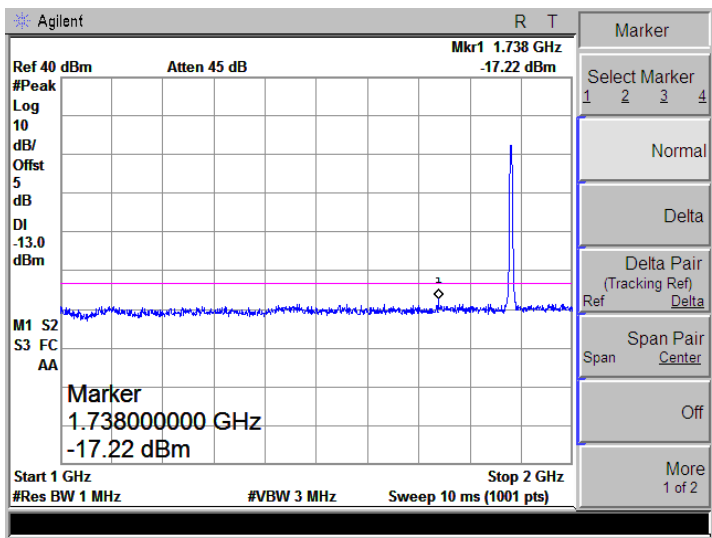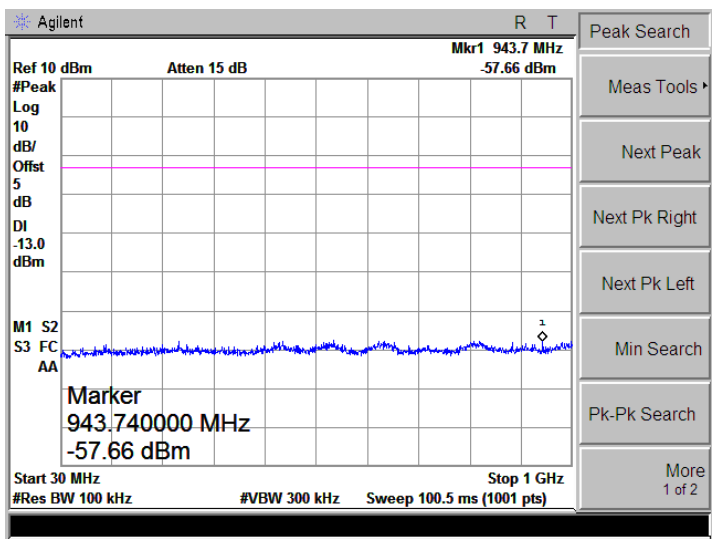




HSDPA Band II-Low

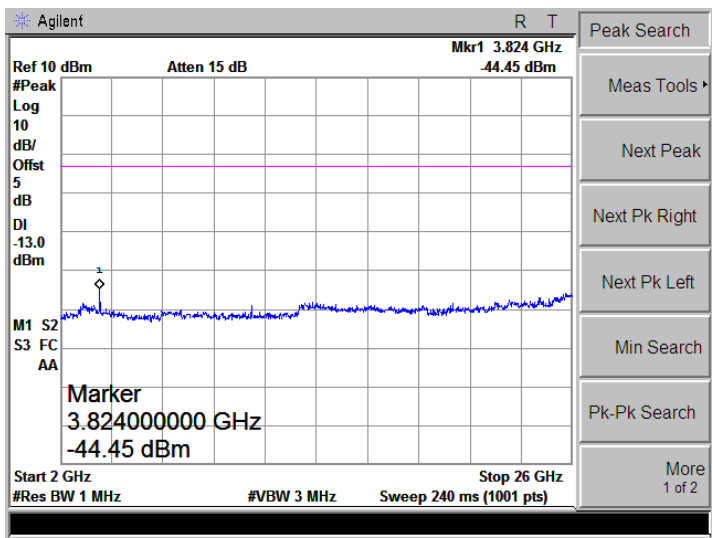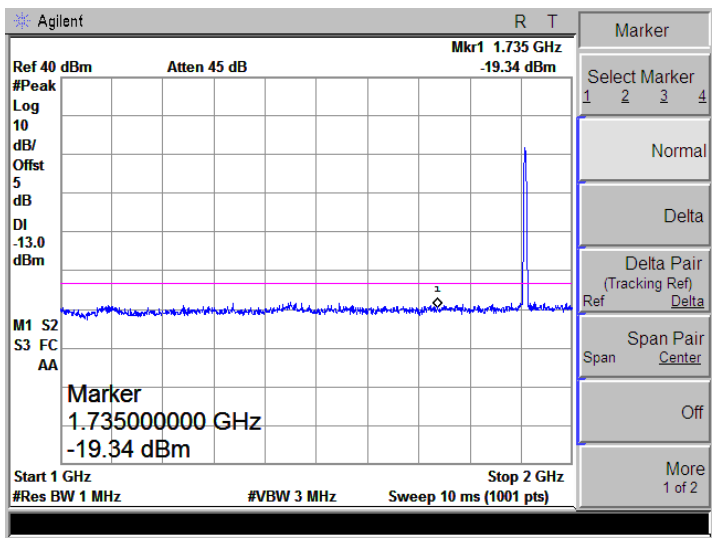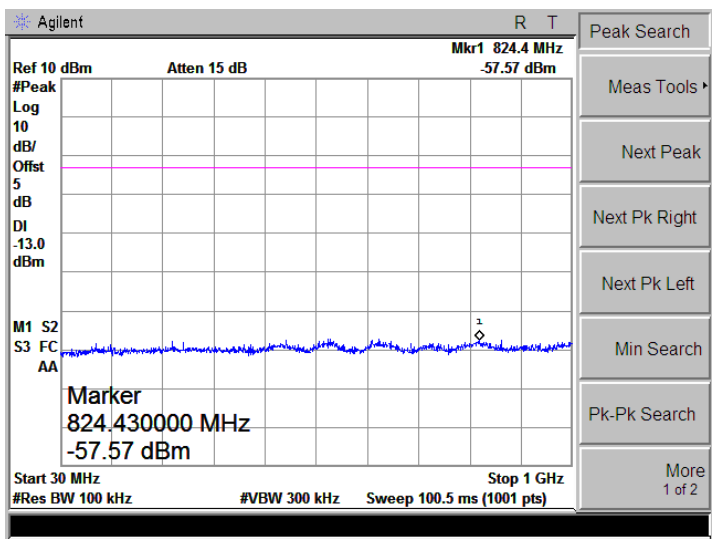




Bandedge

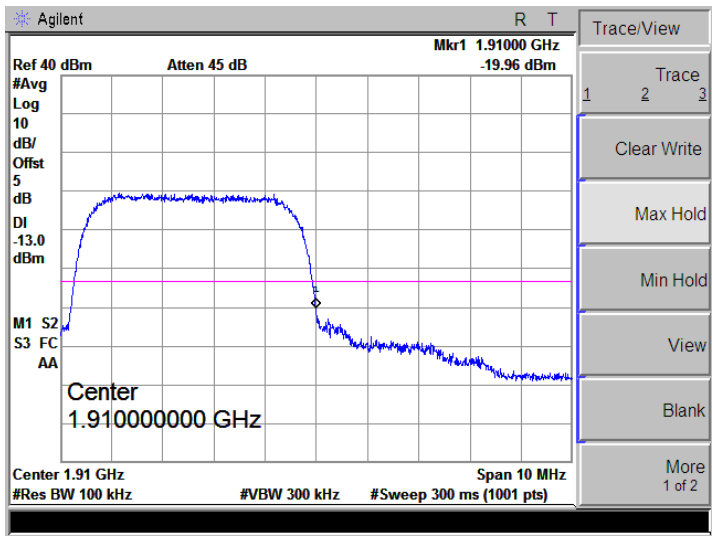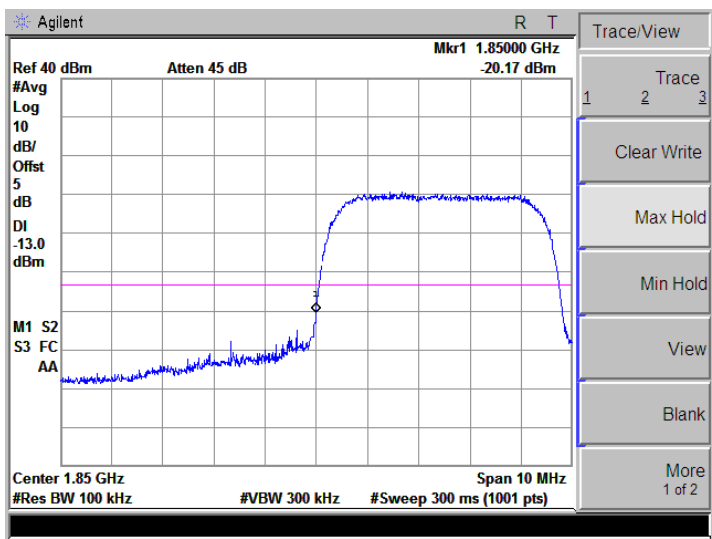




HSUPA Band II-Low

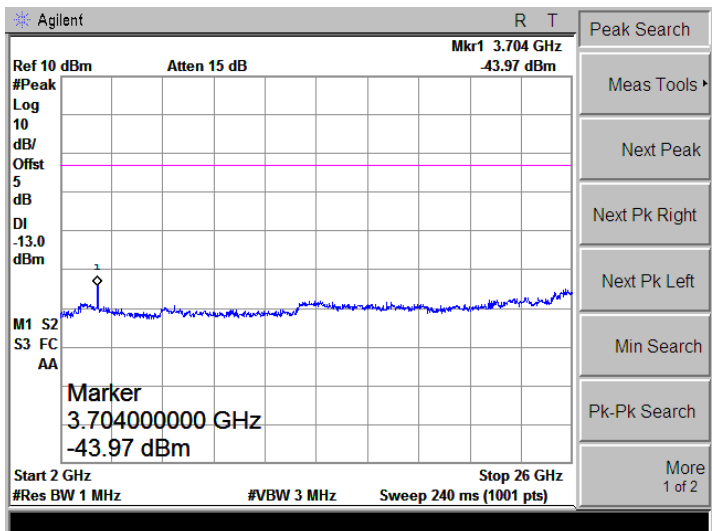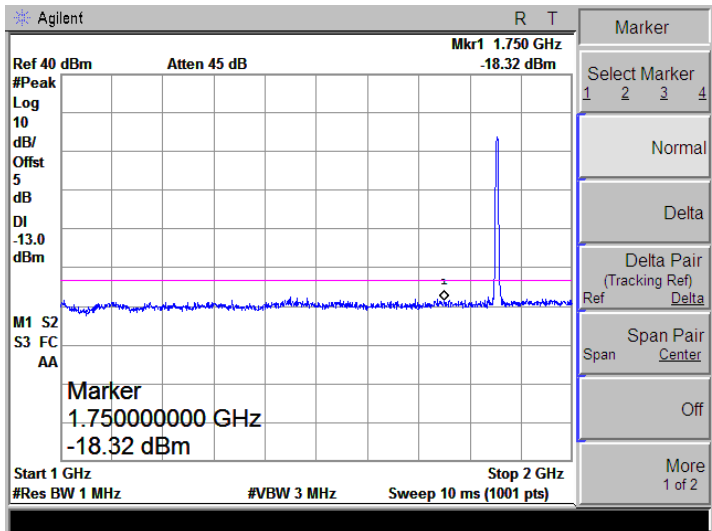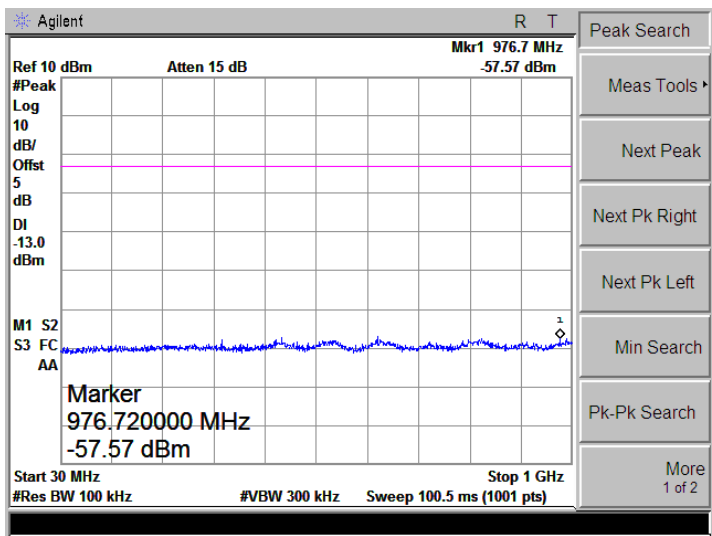



HSUPA Band II-Low

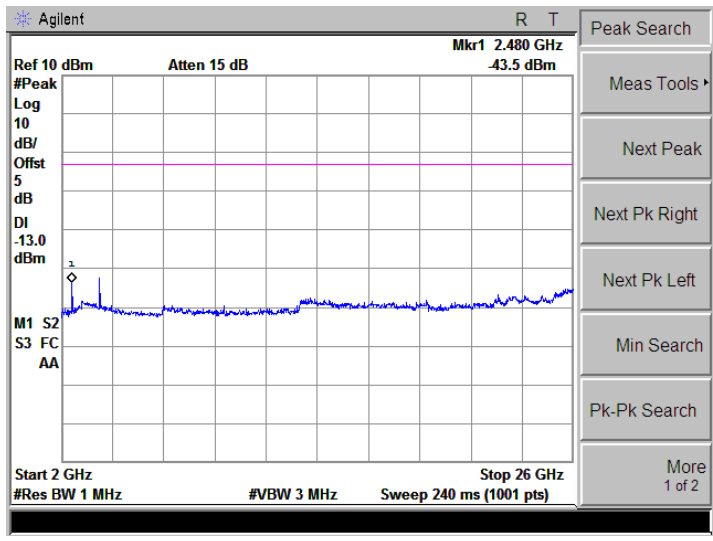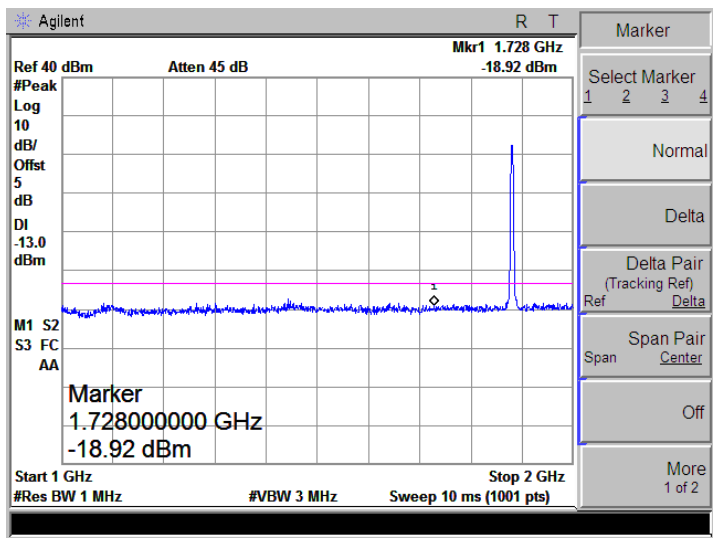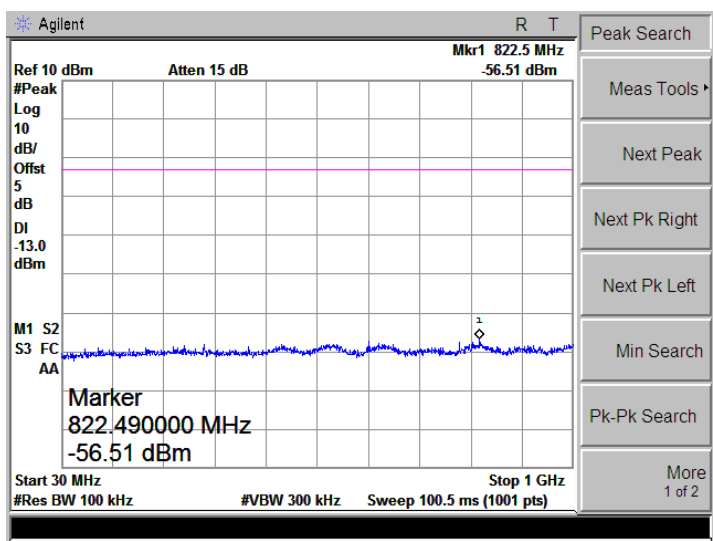

HSUPA Band II-Low

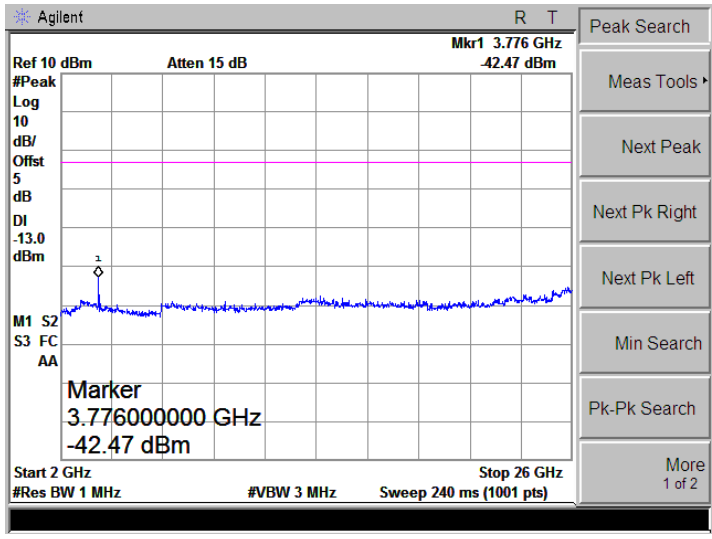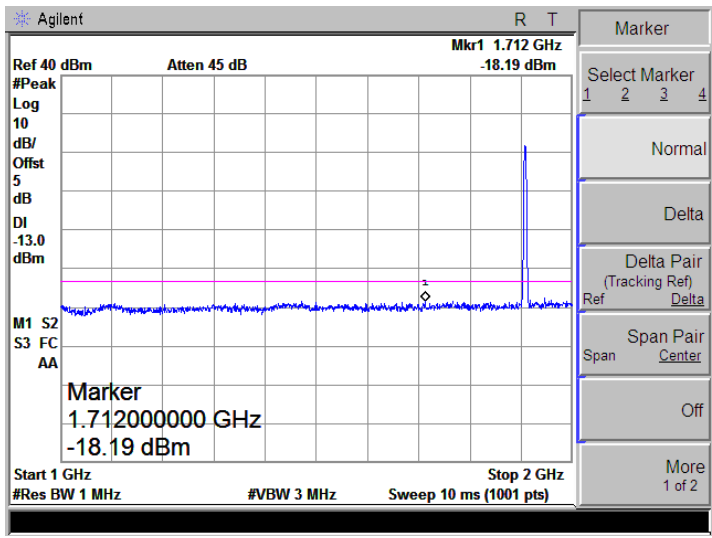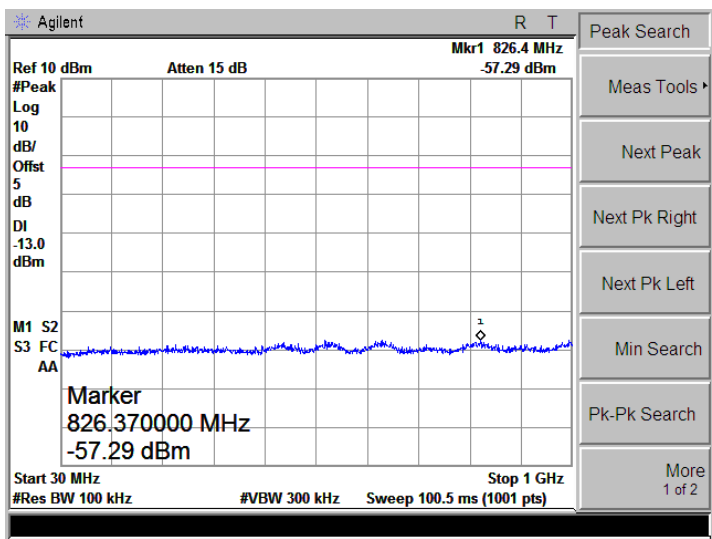

Bandedge

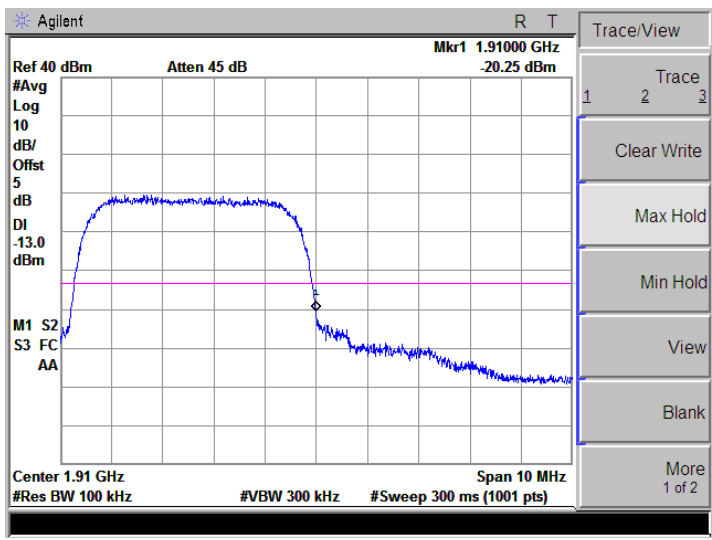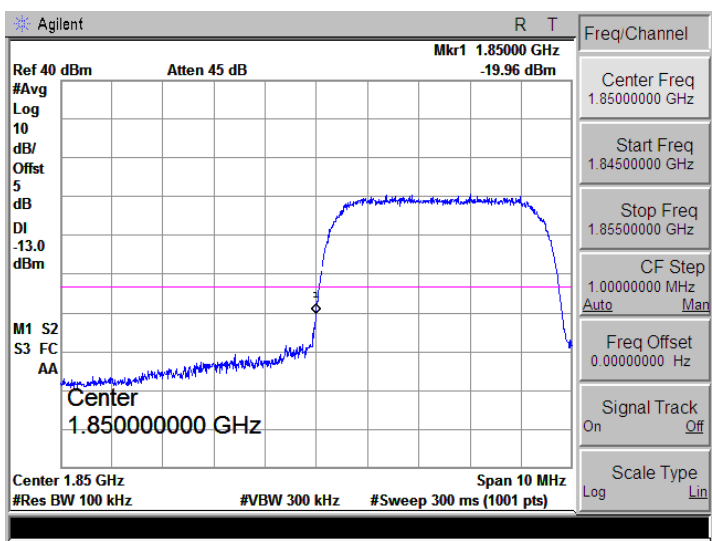

APPENDIX E

Frequency Stability

Note: 1. Worst case at GSM850/PCS1900/WCDMA B2/B5 middle channel

2. Normal Voltage NV=DC3.7V; Low Voltage LV=DC3.4V; High Voltage HV=DC4.2V

➤ Frequency stability V.S. Temperature measurement

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	16	0.0191	2.50	Pass
	-20	21	0.0255		
	-10	18	0.0213		
	0	23	0.0275		
	10	21	0.0250		
	20	19	0.0221		
	30	23	0.0272		
	40	22	0.0258		
	50	22	0.0258		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	32	0.0168	2.50	Pass
	-20	32	0.0172		
	-10	40	0.0214		
	0	40	0.0213		
	10	38	0.0201		
	20	34	0.0178		
	30	32	0.0168		
	40	40	0.0211		
	50	32	0.0168		

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	23	0.0275	2.50	Pass
	-20	26	0.0308		
	-10	27	0.0326		
	0	29	0.0352		
	10	30	0.0353		
	20	23	0.0274		
	30	20	0.0242		
	40	22	0.0262		
	50	23	0.0270		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	36	0.0192	2.50	Pass
	-20	37	0.0199		
	-10	41	0.0215		
	0	37	0.0198		
	10	40	0.0212		
	20	32	0.0170		
	30	31	0.0167		
	40	36	0.0190		
	50	35	0.0184		


➤ Frequency stability V.S. Voltage measurement


Reference Frequency: GSM850 (GSM link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	22	0.0260	2.50	Pass
	NV	27	0.0317		
	LV	24	0.0290		
Reference Frequency: PCS1900 (GSM link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	33	0.0178	2.50	Pass
	NV	39	0.0209		
	LV	34	0.0179		

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	
		Hz	ppm	Result	
25	HV	27	0.0317	2.50	Pass
	NV	22	0.0269		
	LV	27	0.0323		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	37	0.0195	2.50	Pass
	NV	40	0.0211		
	LV	32	0.0171		

APPENDIX F

Modulation characteristics

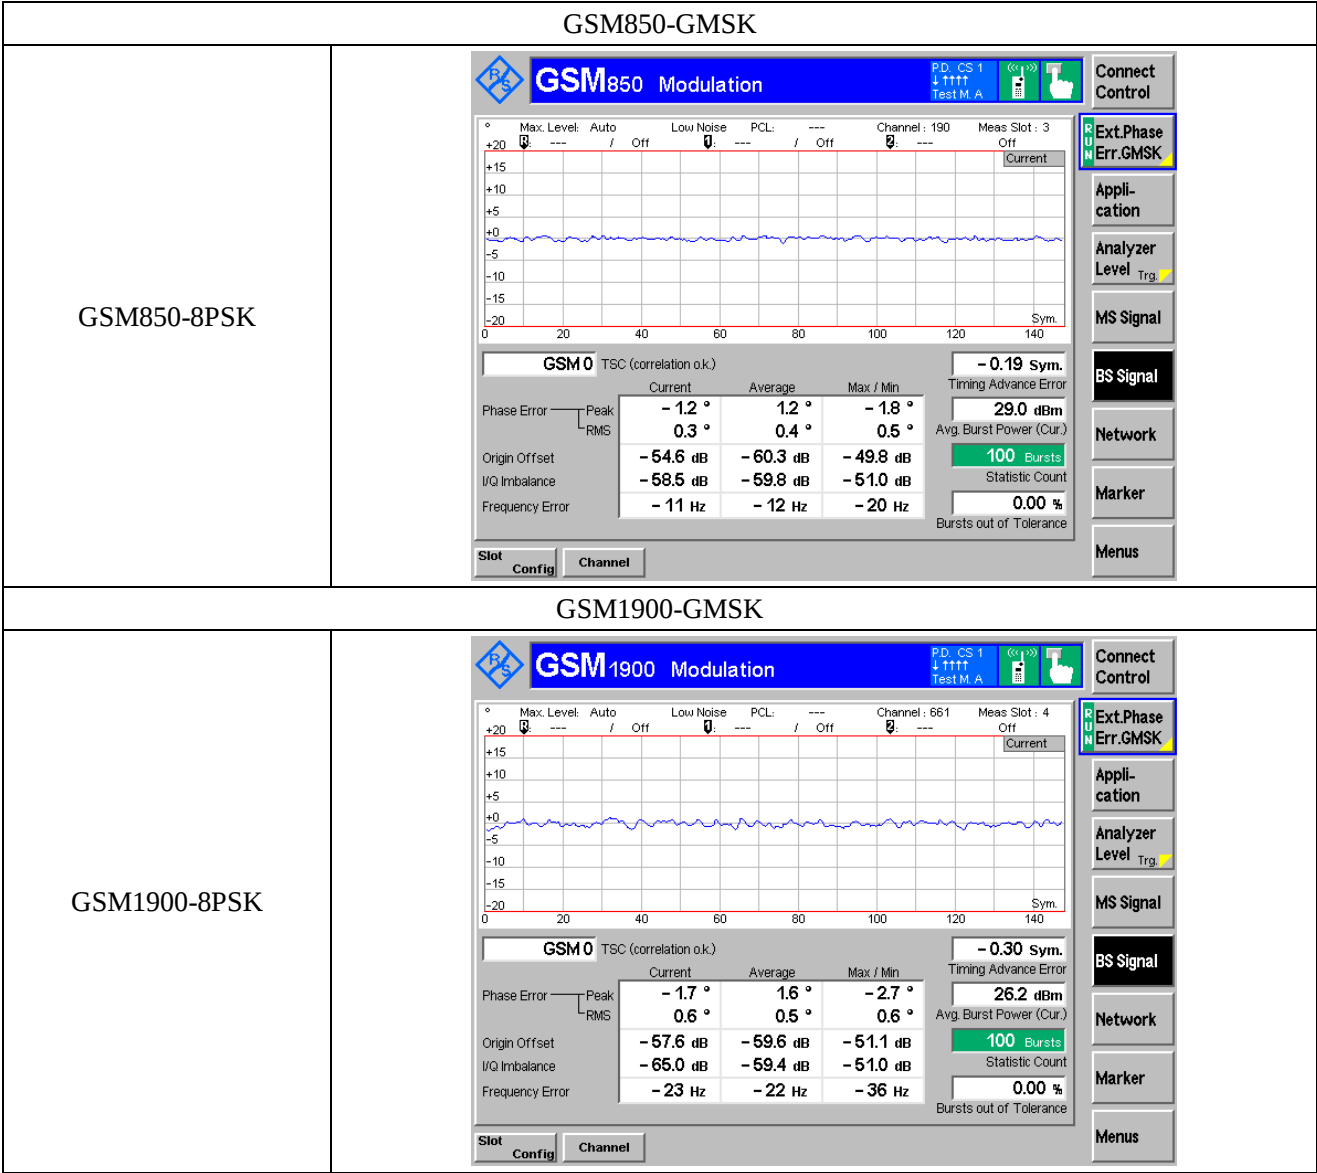

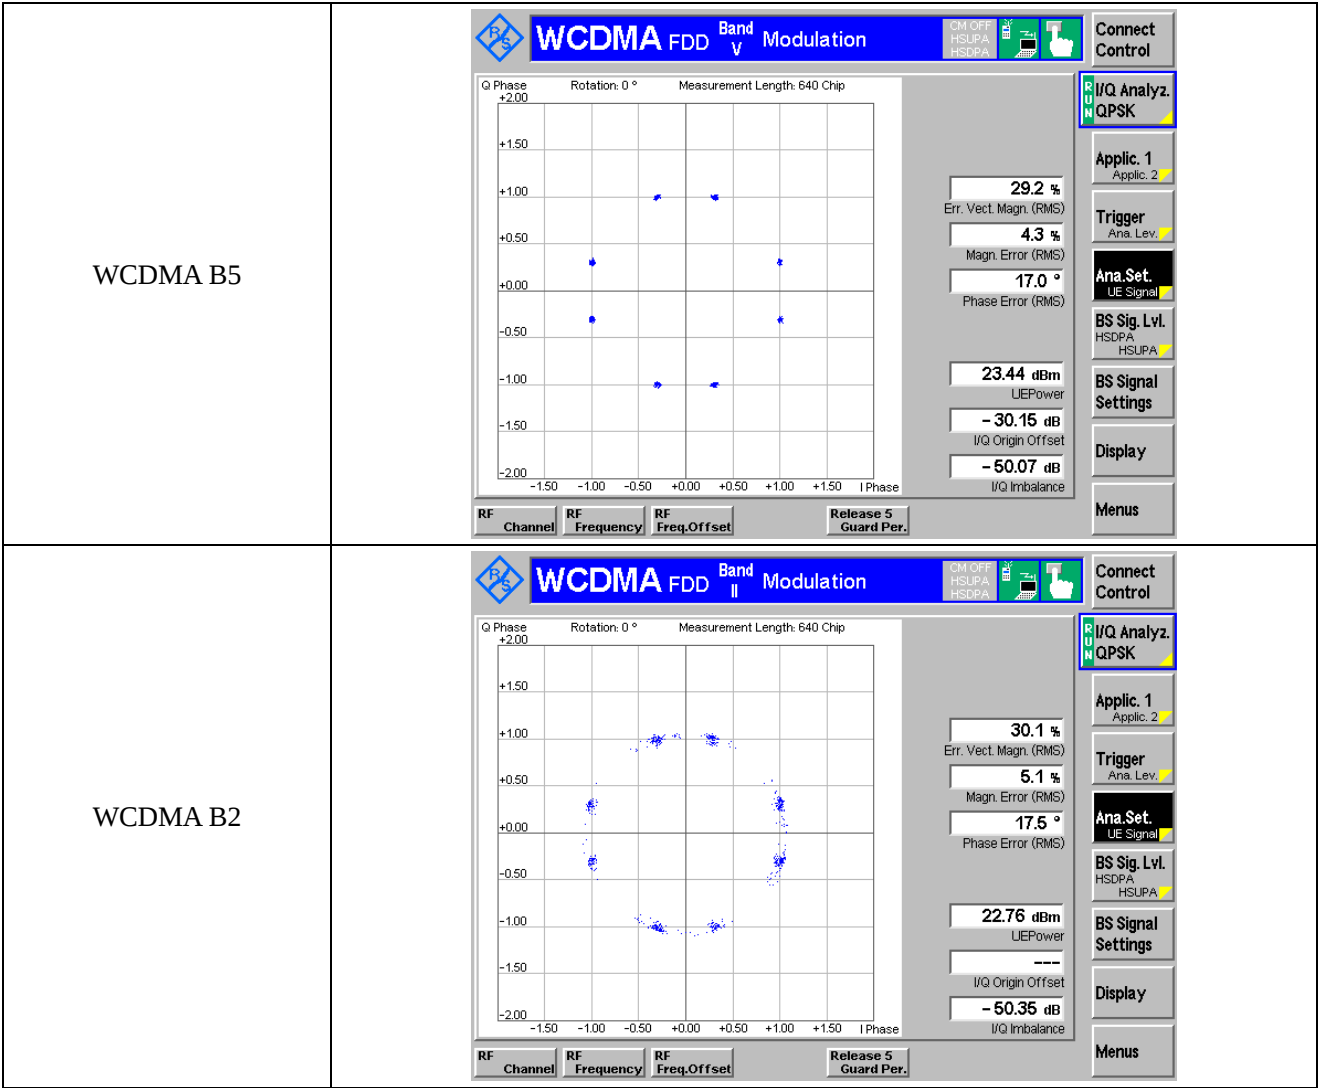

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****