



FCC TEST REPORT

Test report

On Behalf of

Shenzhen Kula Technology Co.,LTD.

For

5000mAh Pocket Portable Charger for Apple Watch

Model No.: KL-YD46

FCC ID: 2A5T7-KLYD46

Prepared For : Shenzhen Kula Technology Co.,LTD.

**Room 306,3 Floor,Block C,Gangzhilong Business Center,No.6, Shenzhen
Guangdong, China**

Prepared By : Shenzhen HUAKE Testing Technology Co., Ltd.

**1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China**

Date of Test: Apr. 10, 2023 ~ Apr. 17, 2023

Date of Report: Apr. 17, 2023

Report Number: HK2304101347-2E

**TEST RESULT CERTIFICATION**

Applicant's name.....: Shenzhen Kula Technology Co.,LTD.

Address.....: Room 306,3 Floor,Block C,Gangzhilong Business Center,No.6,
Shenzhen Guangdong, China

Manufacture's Name.....: Shenzhen Kula Technology Co.,LTD.

Address.....: Room 306,3 Floor,Block C,Gangzhilong Business Center,No.6,
Shenzhen Guangdong, China

Product description

Trade Mark: N/A

Product name.....: 5000mAh Pocket Portable Charger for Apple Watch

Model and/or type reference : KL-YD46

Standards.....: FCC CFR 47 PART 18, KDB680106 D01

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test.....:

Date (s) of performance of tests.....: **Apr. 10, 2023 ~ Apr. 17, 2023**

Date of Issue.....: **Apr. 17, 2023**

Test Result.....: **Pass**

Testing Engineer :

Gary Qian

(Gary Qian)

Technical Manager :

Zden Hu

(Eden Hu)

Authorized Signatory :

Jason Zhou

(Jason Zhou)



Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List							
Channel	Frequency (KHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	118						

The EUT antenna is Coil Antenna. No antenna other than that furnished by the responsible party shall be used with the device.

2. SUMMARY OF TEST RESULTS

2.1. Test procedures according to the technical standards:

FCC KDB680106 D01 RF Exposure Wireless Charging Apps v03r01

FCC CFR 47			
Standard Section	Test Item	Judgment	Remark
FCC CFR 47 part1, 1.1310 KDB680106 D01v03r01 (3)(3)	Electric Field Strength (E) (V/m)	PASS	
	Magnetic Field Strength (H) (A/m)	PASS	

2.2. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	All emissions, radiated(<30M)(9KHz-30MHz)	$\pm 3.90\text{dB}$
2	Temperature	$\pm 0.5^\circ\text{C}$
3	Humidity	$\pm 2\%$



2.3. Operation of EUT during testing

The equipment under test(EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode	Description	Remark
DC mode:	OUT Wireless: 3W	
	OUT Wireless: 3W+ Type-C Port Output: 5V=2.4A	
	OUT Wireless: 3W+ Lightning Cable Output: 5V=2.4A	
AC mode:	OUT Wireless: 3W	Connect to the adapter
	OUT Wireless: 3W+ Type-C Port Output: 5V=2.4A	
	OUT Wireless: 3W+ Lightning Cable Output: 5V=2.4A	

Note: All modes are tested, and the report shows only the worst mode data.

2.4. Test Instruments

Description	Brand	Model No.	Frequency Range	Calibrated Date	Calibrated Until
Exposure Level Tester	narda	ELT-400	N-0231	Feb. 17, 2023	Feb. 16, 2024
Magnetic field probe 100cm ²	narda	ELT probe 100cm ²	B-0324	Feb. 17, 2023	Feb. 16, 2024

NOTE: 1. The calibration interval of the above test instruments is 12 months.



3. MAXIMUM PERMISSIBLE EXPOSURE

Limit of Maximum Permissible Exposure

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6
Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

Note 1: f = frequency in MHz ; *Plane-wave equivalent power density.

Note 2: For the applicable limit, see FCC 1.1310, 680106 D01 RF Exposure Wireless Charging Apps v03r01.


Note 3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.



4. TEST PROCEDURE

a. For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance 0-20cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 0-20 cm measured from the center of the probe(s) to the edge of the device.

4.1 Test Setup

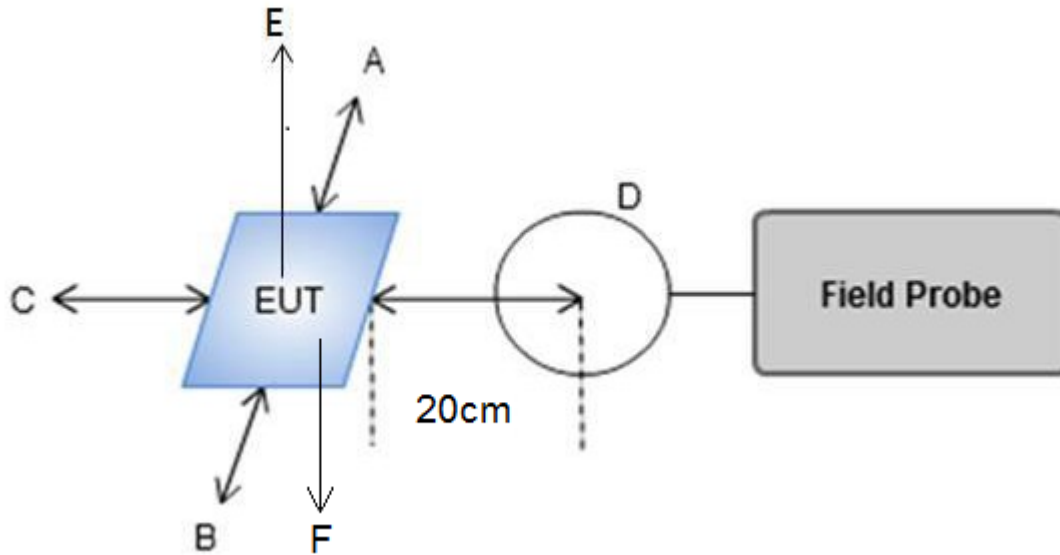

4.2 Result of Maximum Permissible Exposure



DC Mode:

For Full load mode:

H-Field Strength at 0-20 cm from the edges surrounding the EUT (A/m)

Measuring distance (cm)	Field strength	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	Limits (A/m)
0	uT	1.444	1.441	1.506	1.521	1.543	1.539	/
	A/m	1.155	1.153	1.205	1.216	1.234	1.231	1.63
2	uT	1.427	1.357	1.352	1.352	1.429	1.337	/
	A/m	1.141	1.086	1.082	1.082	1.143	1.070	1.63
4	uT	1.330	1.250	1.269	1.326	1.284	1.267	/
	A/m	1.064	1.000	1.015	1.061	1.027	1.014	1.63
6	uT	1.199	1.126	1.194	1.210	1.228	1.138	/
	A/m	0.959	0.901	0.955	0.968	0.982	0.911	1.63
8	uT	1.017	1.113	1.014	1.098	1.090	1.060	/
	A/m	0.814	0.890	0.811	0.878	0.872	0.848	1.63
10	uT	0.991	1.041	1.007	1.062	1.003	0.978	/
	A/m	0.793	0.833	0.806	0.849	0.802	0.782	1.63
12	uT	0.851	0.870	0.907	0.836	0.894	0.835	/
	A/m	0.681	0.696	0.725	0.669	0.715	0.668	1.63
14	uT	0.757	0.738	0.745	0.834	0.783	0.798	/
	A/m	0.606	0.591	0.596	0.667	0.627	0.638	1.63
16	uT	0.671	0.656	0.767	0.652	0.699	0.671	/
	A/m	0.537	0.525	0.614	0.522	0.559	0.537	1.63
18	uT	0.557	0.547	0.652	0.582	0.652	0.593	/
	A/m	0.446	0.438	0.522	0.466	0.522	0.474	1.63
20	uT	0.385	0.413	0.438	0.418	0.444	0.439	/
	A/m	0.308	0.330	0.351	0.334	0.355	0.351	1.63

Note.

Calculation: $A/m = uT/1.25$



For Half Load mode:

H-Field Strength at 0-20 cm from the edges surrounding the EUT (A/m)

Measuring distance (cm)	Field strength	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	Limits (A/m)
0	uT	1.519	1.546	1.435	1.533	1.502	1.441	/
	A/m	1.215	1.236	1.148	1.227	1.202	1.153	1.63
2	uT	1.416	1.424	1.345	1.359	1.431	1.345	/
	A/m	1.133	1.139	1.076	1.088	1.145	1.076	1.63
4	uT	1.257	1.228	1.258	1.223	1.220	1.219	/
	A/m	1.006	0.983	1.006	0.978	0.976	0.975	1.63
6	uT	1.150	1.190	1.167	1.219	1.205	1.198	/
	A/m	0.920	0.952	0.933	0.975	0.964	0.958	1.63
8	uT	1.047	1.065	1.070	1.062	1.074	1.010	/
	A/m	0.837	0.852	0.856	0.849	0.859	0.808	1.63
10	uT	1.019	0.998	0.962	1.015	1.052	0.968	/
	A/m	0.816	0.799	0.769	0.812	0.841	0.774	1.63
12	uT	0.901	0.867	0.833	0.894	0.860	0.908	/
	A/m	0.721	0.694	0.667	0.715	0.688	0.726	1.63
14	uT	0.752	0.749	0.787	0.767	0.831	0.735	/
	A/m	0.602	0.599	0.630	0.613	0.665	0.588	1.63
16	uT	0.662	0.709	0.715	0.700	0.691	0.747	/
	A/m	0.530	0.568	0.572	0.560	0.553	0.597	1.63
18	uT	0.614	0.617	0.648	0.558	0.557	0.569	/
	A/m	0.491	0.494	0.518	0.446	0.446	0.456	1.63
20	uT	0.382	0.375	0.399	0.446	0.472	0.436	/
	A/m	0.306	0.300	0.319	0.357	0.378	0.348	1.63

Note.

Calculation: $A/m = uT/1.25$



For No load mode:

H-Field Strength at 0-20 cm from the edges surrounding the EUT (A/m)

Measuring distance (cm)	Field strength	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	Limits (A/m)
0	uT	1.499	1.440	1.474	1.440	1.510	1.523	/
	A/m	1.199	1.152	1.180	1.152	1.208	1.218	1.63
2	uT	1.423	1.374	1.337	1.401	1.433	1.421	/
	A/m	1.139	1.099	1.070	1.121	1.147	1.137	1.63
4	uT	1.318	1.274	1.305	1.253	1.292	1.312	/
	A/m	1.054	1.019	1.044	1.003	1.034	1.050	1.63
6	uT	1.226	1.178	1.154	1.141	1.145	1.208	/
	A/m	0.981	0.942	0.923	0.913	0.916	0.966	1.63
8	uT	1.034	1.082	1.088	1.091	1.062	1.014	/
	A/m	0.827	0.865	0.870	0.873	0.850	0.811	1.63
10	uT	0.958	1.048	0.957	1.037	0.946	0.987	/
	A/m	0.767	0.839	0.765	0.830	0.757	0.790	1.63
12	uT	0.898	0.836	0.926	0.901	0.909	0.906	/
	A/m	0.719	0.669	0.741	0.721	0.727	0.725	1.63
14	uT	0.833	0.810	0.767	0.804	0.817	0.767	/
	A/m	0.666	0.648	0.613	0.643	0.654	0.613	1.63
16	uT	0.648	0.702	0.757	0.670	0.679	0.657	/
	A/m	0.518	0.561	0.605	0.536	0.544	0.526	1.63
18	uT	0.600	0.636	0.666	0.660	0.559	0.585	/
	A/m	0.480	0.508	0.533	0.528	0.448	0.468	1.63
20	uT	0.378	0.394	0.487	0.394	0.406	0.410	/
	A/m	0.302	0.315	0.389	0.315	0.325	0.328	1.63

Note.

Calculation: $A/m = uT/1.25$



AC Mode:

For Full load mode:

H-Field Strength at 0-20 cm from the edges surrounding the EUT (A/m)

Measuring distance (cm)	Field strength	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	Limits (A/m)
0	uT	1.509	1.466	1.475	1.542	1.447	1.530	/
	A/m	1.207	1.173	1.180	1.233	1.157	1.224	1.63
2	uT	1.383	1.325	1.438	1.375	1.432	1.398	/
	A/m	1.106	1.060	1.151	1.100	1.145	1.119	1.63
4	uT	1.251	1.235	1.289	1.297	1.210	1.330	/
	A/m	1.001	0.988	1.031	1.038	0.968	1.064	1.63
6	uT	1.201	1.213	1.206	1.224	1.140	1.219	/
	A/m	0.961	0.971	0.965	0.979	0.912	0.975	1.63
8	uT	1.072	1.074	1.114	1.086	1.035	1.061	/
	A/m	0.857	0.859	0.891	0.869	0.828	0.849	1.63
10	uT	1.038	1.020	1.046	1.024	1.017	1.039	/
	A/m	0.831	0.816	0.836	0.819	0.813	0.831	1.63
12	uT	0.812	0.860	0.905	0.856	0.896	0.877	/
	A/m	0.650	0.688	0.724	0.685	0.717	0.702	1.63
14	uT	0.805	0.810	0.779	0.744	0.808	0.771	/
	A/m	0.644	0.648	0.623	0.595	0.646	0.617	1.63
16	uT	0.756	0.729	0.721	0.668	0.666	0.650	/
	A/m	0.605	0.583	0.577	0.534	0.533	0.520	1.63
18	uT	0.603	0.582	0.624	0.596	0.545	0.610	/
	A/m	0.483	0.466	0.499	0.477	0.436	0.488	1.63
20	uT	0.491	0.449	0.471	0.432	0.388	0.400	/
	A/m	0.392	0.359	0.377	0.346	0.310	0.320	1.63

Note.

Calculation: $A/m = uT/1.25$



For Half Load mode:

H-Field Strength at 0-20 cm from the edges surrounding the EUT (A/m)

Measuring distance (cm)	Field strength	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	Limits (A/m)
0	uT	1.478	1.537	1.442	1.548	1.558	1.541	/
	A/m	1.182	1.230	1.153	1.238	1.246	1.233	1.63
2	uT	1.356	1.399	1.324	1.444	1.334	1.326	/
	A/m	1.084	1.119	1.059	1.156	1.067	1.061	1.63
4	uT	1.279	1.321	1.218	1.256	1.235	1.322	/
	A/m	1.023	1.056	0.974	1.005	0.988	1.058	1.63
6	uT	1.156	1.208	1.185	1.229	1.156	1.143	/
	A/m	0.925	0.966	0.948	0.983	0.925	0.914	1.63
8	uT	1.011	1.094	1.057	1.039	1.016	1.038	/
	A/m	0.808	0.875	0.846	0.831	0.813	0.830	1.63
10	uT	1.035	1.051	0.958	0.958	1.064	1.033	/
	A/m	0.828	0.841	0.766	0.766	0.851	0.826	1.63
12	uT	0.882	0.914	0.830	0.825	0.931	0.909	/
	A/m	0.705	0.731	0.664	0.660	0.745	0.727	1.63
14	uT	0.745	0.801	0.791	0.786	0.771	0.799	/
	A/m	0.596	0.641	0.633	0.628	0.617	0.639	1.63
16	uT	0.745	0.734	0.708	0.746	0.724	0.657	/
	A/m	0.596	0.588	0.567	0.597	0.579	0.525	1.63
18	uT	0.663	0.646	0.593	0.594	0.601	0.639	/
	A/m	0.530	0.517	0.475	0.475	0.481	0.511	1.63
20	uT	0.411	0.429	0.389	0.417	0.437	0.408	/
	A/m	0.329	0.343	0.311	0.334	0.350	0.326	1.63

Note.

Calculation: $A/m = uT/1.25$



For No load mode:

H-Field Strength at 0-20 cm from the edges surrounding the EUT (A/m)

Measuring distance (cm)	Field strength	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	Limits (A/m)
0	uT	1.496	1.483	1.473	1.511	1.495	1.551	/
	A/m	1.197	1.187	1.178	1.209	1.196	1.241	1.63
2	uT	1.347	1.437	1.428	1.426	1.393	1.431	/
	A/m	1.078	1.149	1.142	1.141	1.114	1.145	1.63
4	uT	1.246	1.215	1.280	1.246	1.232	1.262	/
	A/m	0.997	0.972	1.024	0.996	0.986	1.010	1.63
6	uT	1.157	1.113	1.135	1.122	1.231	1.220	/
	A/m	0.926	0.891	0.908	0.898	0.985	0.976	1.63
8	uT	1.063	1.054	1.025	1.063	1.053	1.081	/
	A/m	0.851	0.843	0.820	0.850	0.843	0.865	1.63
10	uT	1.041	0.989	1.028	0.955	1.018	1.030	/
	A/m	0.833	0.792	0.822	0.764	0.814	0.824	1.63
12	uT	0.908	0.891	0.884	0.859	0.837	0.918	/
	A/m	0.727	0.713	0.707	0.687	0.670	0.734	1.63
14	uT	0.816	0.803	0.818	0.824	0.777	0.737	/
	A/m	0.653	0.643	0.655	0.660	0.621	0.590	1.63
16	uT	0.665	0.763	0.684	0.747	0.694	0.718	/
	A/m	0.532	0.610	0.547	0.597	0.555	0.574	1.63
18	uT	0.570	0.571	0.558	0.650	0.649	0.547	/
	A/m	0.456	0.456	0.446	0.520	0.520	0.437	1.63
20	uT	0.395	0.464	0.393	0.396	0.488	0.475	/
	A/m	0.316	0.371	0.314	0.317	0.391	0.380	1.63

Note.

Calculation: $A/m = uT/1.25$



Remark: According KDB 680106 D01 RF Exposure Wireless Charging App v03r01, section 5, b). The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit. The E- field evaluation conducted assuming a user separation distance of 15 cm according to the KDB 680106 D01 RF Exposure Wireless Charging App v03r01 section 3, c).

Result: The device comply with the RF exposure requirement according to 680106 D01 v03r01, section 5, b):

(1) Power transfer frequency is less than 1 MHz.

-The device operate in the frequency range for 111.5KHz~205KHz

(2) Output power from each primary coil is less than or equal to 15 watts.

-The maximum output power of the primary coil is 3W.

(3) The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time

-The transfer system including a charging system with only single primary coils is to detect and allow only

(4) Client device is placed directly in contact with the transmitter

-The EUT is placed directly in contact with the transmitter

(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

- This is a portable device

(6) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.

- The EUT meet the conditions.



PHOTOGRAPH OF TEST

DC Mode:

A



B





C



D





E



F





AC Mode:

A



B






C




D

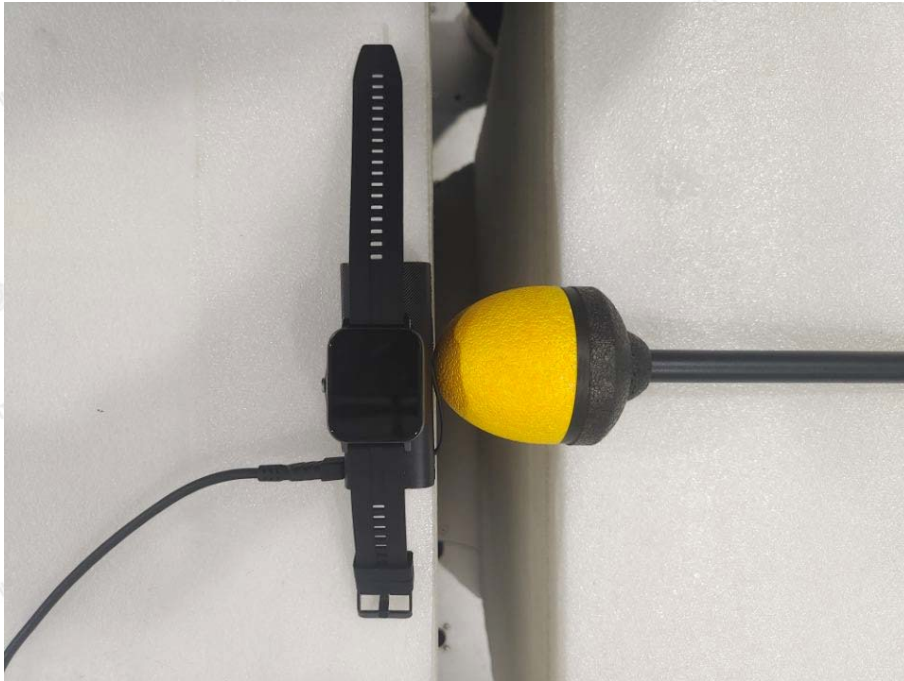



E

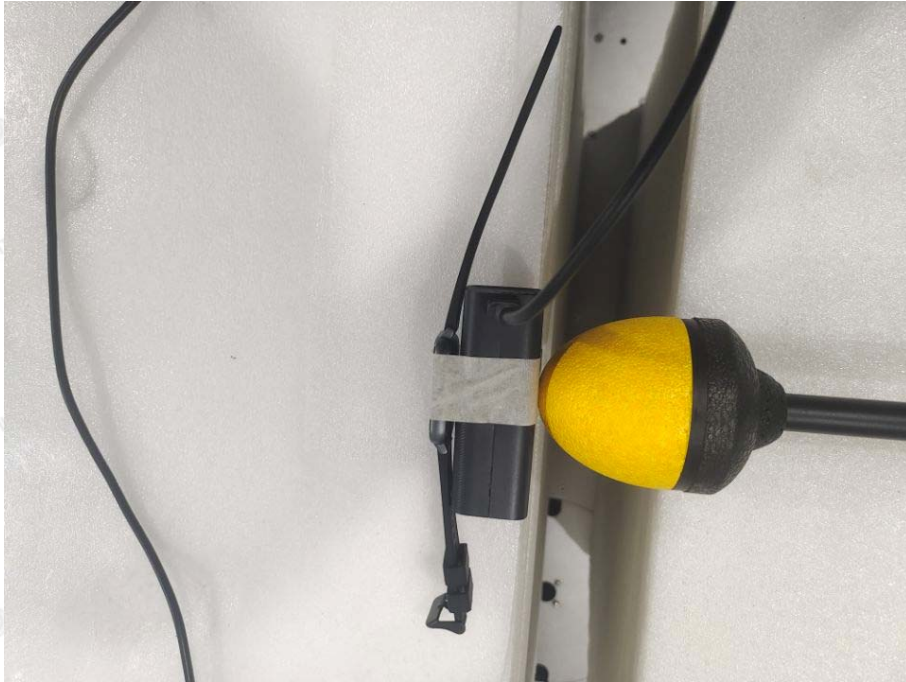

F



*****THE END*****

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China