



FCC 47 CFR PART 15 SUBPART C: 2009 AND ANSI C63.4: 2003

TEST REPORT

For

- (1)WiFi Combo VPN Router (Model: BDW463AM)**
- (2)WiFi Combo VPN Router (Model: BDW462AM)**
- (3)WiFi Combo Router (Model: CDW463AM)**
- (4)WiFi Combo Security Router (Model: BDW462AM-L)**
- (5)WiFi VPN Router (Model: BDE460RP-001)**

Data Applies To :

Brand : AMIT; ZALiP

Issued for

Advance Multimedia Internet Technology Inc.

No. 28, Lane 31, Sec. 1, Huandong Rd., Sinshih District, Tainan City
74146, Taiwan

Issued by

Compliance Certification Services Inc.

Tainan Lab.

**No. 8, Jiu Cheng Ling, Jiaokeng Village, Sinhua
Township, Tainan Hsien 712, Taiwan R.O.C.**

TEL: 886-6-580-2201

FAX: 886-6-580-2202



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document

Total Page: 140



REVISION HISTORY

Rev.		Issue Date		Revisions	Effect Page	Revised By
00		November 1, 2010		Initial Issue	ALL	Leah Peng
01		January 18, 2011		Modify product name and model & Model difference list	Page 1,2,4,5,6	Leah Peng



TABLE OF CONTENTS

1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
2.1 DESCRIPTION OF EUT & POWER	5
3. DESCRIPTION OF TEST MODES	7
4. TEST METHODOLOGY	8
5. FACILITIES AND ACCREDITATIONS.....	8
5.1 FACILITIES.....	8
5.2 EQUIPMENT.....	8
5.3 LABORATORY ACCREDITATIONS LISTINGS	8
5.4 TABLE OF ACCREDITATIONS AND LISTINGS	9
6. CALIBRATION AND UNCERTAINTY.....	10
6.1 MEASURING INSTRUMENT CALIBRATION.....	10
6.2 MEASUREMENT UNCERTAINTY	10
7. SETUP OF EQUIPMENT UNDER TEST.....	11
7.1 SETUP CONFIGURATION OF EUT.....	11
7.2 SUPPORT EQUIPMENT	13
7.3 EUT OPERATING CONDITION	15
8. APPLICABLE LIMITS AND TEST RESULTS.....	16
8.1 6DB BANDWIDTH	16
8.2 MAXIMUM PEAK OUTPUT POWER.....	31
8.3 MAXIMUM PERMISSIBLE EXPOSURE.....	35
8.4 POWER SPECTRAL DENSITY	37
8.5 CONDUCTED SPURIOUS EMISSION.....	56
8.6 RADIATED EMISSIONS	77
8.7 POWERLINE CONDUCTED EMISSIONS	124
9. ANTENNA REQUIREMENT	134
9.1 STANDARD APPLICABLE	134
9.2 ANTENNA CONNECTED CONSTRUCTION	134
APPENDIX I SETUP PHOTOS	135
APPENDIX II PHOTOGRAPHS OF EUT.....	A1

**1. TEST REPORT CERTIFICATION**

Applicant : Advance Multimedia Internet Technology Inc.
Address : No. 28, Lane 31, Sec. 1, Huandong Rd., Sinshih District,
Tainan City 74146, Taiwan

Manufacture : Advance Multimedia Internet Technology Inc.
Address : No. 28, Lane 31, Sec. 1, Huandong Rd., Sinshih District,
Tainan City 74146, Taiwan

Equipment Under Test (Model Number):

- (1) WiFi Combo VPN Router (Model: BDW463AM)
- (2) WiFi Combo VPN Router (Model: BDW462AM)
- (3) WiFi Combo Router (Model: CDW463AM)
- (4) WiFi Combo Security Router (Model: BDW462AM-L)
- (5) WiFi VPN Router (Model: BDE460RP-001)

Brand Name : AMIT; ZALiP

Date of Test : September 29, 2010 – October 7, 2010

APPLICABLE STANDARD	
STANDARD	TEST RESULT
FCC Part 15 Subpart C : 2009 AND ANSI C63.4 : 2003	No non-compliance noted

Approved by:

Jeter Wu
Assistant Manager

Reviewed by:

Eric Huang
Assistant Section Manager



2. EUT DESCRIPTION

2.1 DESCRIPTION OF EUT & POWER

Product Name (Model Number)	(1) WiFi Combo VPN Router (Model: BDW463AM) (2) WiFi Combo VPN Router (Model: BDW462AM) (3) WiFi Combo Router (Model: CDW463AM) (4) WiFi Combo Security Router (Model: BDW462AM-L) (5) WiFi VPN Router (Model: BDE460RP-001)
Brand Name	AMIT; ZALiP
Frequency Range	IEEE 802.11b/g, 802.11n HT20 (DTS Band):2412MHz~2462MHz IEEE 802.11n HT40 (DTS Band):2422MHz~2452MHz
Transmit Power	IEEE 802.11b Mode : 19.29dBm (DTS Band) (84.918 mW) IEEE 802.11g Mode : 23.58dBm (DTS Band) (228.034 mW) IEEE 802.11n HT20 Mode : 26.47dBm (DTS Band) (443.301 mW) IEEE 802.11n HT40 Mode : 25.38dBm (DTS Band) (345.232 mW)
Channel Spacing	IEEE 802.11b/g, 802.11n HT20/HT40: 5MHz
Channel Number	IEEE 802.11b/g, 802.11n HT20:11 Channels IEEE 802.11n HT40 :7 Channels
Transmit Data Rate	IEEE 802.11b : 11, 5.5, 2, 1 Mbps IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6 Mbps IEEE 802.11n HT20 : 130, 117, 104, 78, 52, 39, 26, 13 Mbps IEEE 802.11n HT40 : 300, 270, 243, 216, 162, 108, 81, 54, 27 Mbps
Type of Modulation	IEEE 802.11b : DSSS (CCK, DQPSK, DBPSK)
	IEEE 802.11g : OFDM (64QAM, 16QAM, QPSK, BPSK)
	IEEE 802.11n HT20/40 : OFDM (64QAM, 16QAM, QPSK, BPSK)
Frequency Selection	By software / firmware
Antenna Type	Two antennas 2Tx 2RX RF Antenna Assembly Manufacture:WHA YU GROUP Model: C381-510150-A(SSR-91019) Gain: 2 dBi Connector: SMA Straight Plug Reverse Type: Dipole



Power Source	Adapter1: I.T.E. POWER SUPPLY AMIGO Model: AMS9-1201000FU2 I/P:100-240Vac, 50/60Hz, 0.5A O/P:12Vdc, 1.0A Adapter2: I.T.E. POWER SUPPLY AMIGO Model: AMS4-1202000FU I/P:100-240Vac, 50/60Hz, 0.8A O/P:12Vdc, 2.0A
Temperature Range	0 ~ 40°C

REMARK:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **PBLBDW463AM** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. Client consign five model samples and two adapters to test (The worse case Model Number: BDW463AM). Therefore, the testing Lab. just guarantees the unit, which has been tested.
4. For more details, please refer to the User's manual of the EUT.
5. To add a series model is for business necessary.

No.	Product name	Model	Function I	Function II	Function III	Function IV	Function V	External Case	Internal Case	Adapter	RF Test Mode	EMI Test Mode
			USB Port (connect to 3G dongle)	PCIE	RS232	Green Function	Ethernet Port					
1	WiFi Combo VPN Router	BDW463AM	Yes, * 1	Yes, * 1	Yes, * 1	Yes	1 WAN 4 LAN	Case 1 Case 2	Case 1	12Vdc/2A 12Vdc/1A	O X	O X
2	WiFi Combo VPN Router	BDW462AM	Yes, *2	No	Yes, * 1	No	1 WAN 4 LAN	Case 3	Case 3	12Vdc/2A 12Vdc/1A	X X	O X
3	WiFi Combo Router	CDW463AM	Yes, * 1	Yes, * 1	No	Yes	1 WAN 4 LAN	Case 4 Case 5	Case 4	12Vdc/1A 12Vdc/2A	X X	O O
4	WiFi Combo Security Router	BDW462AM-L	Yes, *2	No	Yes, * 1	No	a. 1 WAN 4 LAN b. 2 WAN 3 LAN 2 Mode Switch	Case 3	Case 3	12Vdc/2A	X	X
5	WiFi VPN Router	BDE460RP-001	No	No	No	No	1 WAN 4 LAN	Case 6	Case 6	12Vdc/2A 12Vdc/1A	X	X

NOTE:

"No": EUT without this function and circuit. "Yes": EUT with this function and circuit.

"X": EUT without test data in this report. "O": EUT with test data in this report (worse case).

1. Each model has the different product name just for marketing purpose.
2. WiFi Combo VPN Router (Model: BDW463AM):
 - a. this model has five functions more than other samples, so it was used for RF test and EMI test(radiated emissions) with an adapter(12Vac/2A).
 - b. This model has two external cases just for marketing purpose.
3. BDW463AM with an adapter(12Vac/2A), BDW462AM with an adapter(12Vac/2A), CDW463AM with an adapter(12Vac/2A), CDW463AM with an adapter(12Vac/1A), these samples have been tested for POWERLINE CONDUCTED EMISSIONS.



3. DESCRIPTION OF TEST MODES

The EUT is a 11n router. It has two transmitter chains and two receive chains (2x2 configurations). The 2x2 configuration is implemented with two outside chains (Chain 0 and Chain 1).

The RF chipset is manufactured by Realtek Semiconductor Corp.

The antenna peak gain 5dBi (highest gain) were chosen for full testing.

IEEE 802.11 b ,802.11g ,802.11n HT20 mode (DTS Band)

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 11Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11g mode: 6Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT20 mode: 13Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT40 mode (DTS Band)

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n HT40 mode: 27Mbps data rate (worst case) were chosen for full testing.

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD, peak power and average power across all the data rates, bandwidths, modulations and spatial stream modes.

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2437 MHz.



4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No. 8, Jiu Cheng Ling, Jiaokeng Village, Sinhua Township, Tainan Hsien 712, Taiwan R.O.C.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by Taiwan Accreditation Foundation for the specific scope of accreditation under Lab Code: 1109 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by TAF or any agency of the Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: TW-1037).



5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 TW-1037
Taiwan	TAF	CISPR 11, FCC METHOD-47 CFR Part 18, EN 55011, EN 60601-1-2, CISPR 22, CNS 13438, EN 55022, EN 55024, AS/NZS CISPR 22 CISPR 14, EN 55014-1, EN 55014-2, CNS 13783-1, CISPR 22, CNS 13439, EN 55013, FCC Method-47 CFR Part 15 Subpart B, IC ICES-003, VCCI V-3 & V-4 FCC Method-47 CFR Part 15 Subpart C and ANSI C63.4, LP 0002 EN / IEC 61000-4-2 / -3 / -4 / -5 / -6 / -8 / -11 EN 61000-3-2, EN 61000-3-3 EN 61000-6-3, EN 61000-6-1, AS/NZS 4251.1, EN 61000-6-4, EN 61000-6-2, AS/NZS 4251.2, EN 61204-3, EN 50130-4, EN 62040-2, EN 50371, EN 50385, AS/NZS 4268, ETSI EN 300 386 ETSI EN 300 328, ETSI EN 301 489-1/-3/-9/-17 ETSI EN 301 893, ETSI EN 300 220-2/-1 ETSI EN 300 440-2/-1 ETSI EN 301 357-2/-1 RSS-310, RSS-210 Issue 7, RSS-Gen Issue 2	
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS13439	 SL2-IN-E-0039 SL2-R1/R2-0039 SL2-A1-E-0039
Canada	Industry Canada	RSS210, Issue 8	

* No part of this report may be used to claim or imply product endorsement by TAF or any agency of the US Government.



6. CALIBRATION AND UNCERTAINTY

6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

6.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz Test Site : OATS-6	$\pm 3.38\text{dB}$
Radiated Emission, 200 to 1000 MHz Test Site : OATS-6	$\pm 3.04\text{dB}$
Radiated Emission, 1 to 26.5 GHz	$\pm 3.20\text{dB}$
Power Line Conducted Emission	$\pm 2.01\text{dB}$


Uncertainty figures are valid to a confidence level of 95%, K=2



7. SETUP OF EQUIPMENT UNDER TEST


7.1 SETUP CONFIGURATION OF EUT

Above 1GHz Test Setup:

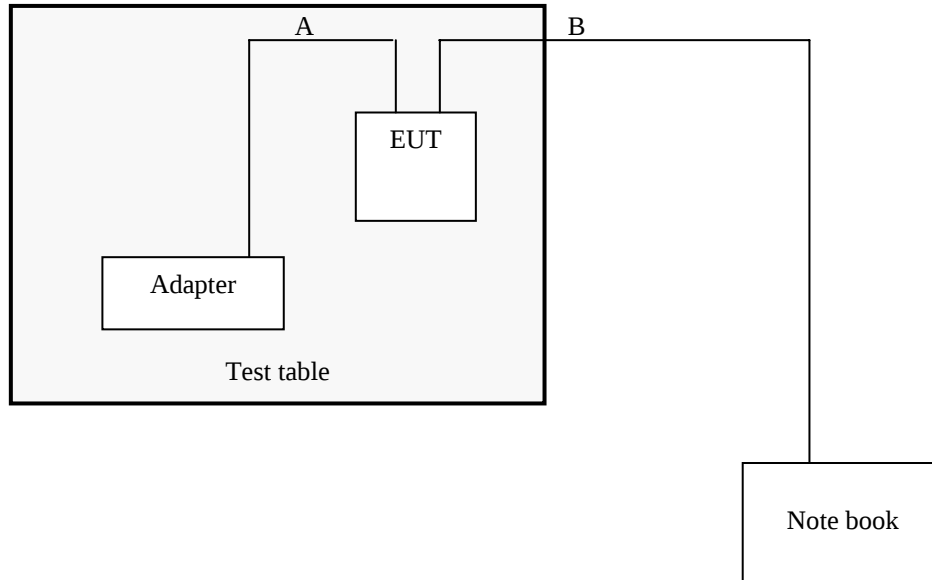



Below 1GHz Test Setup:

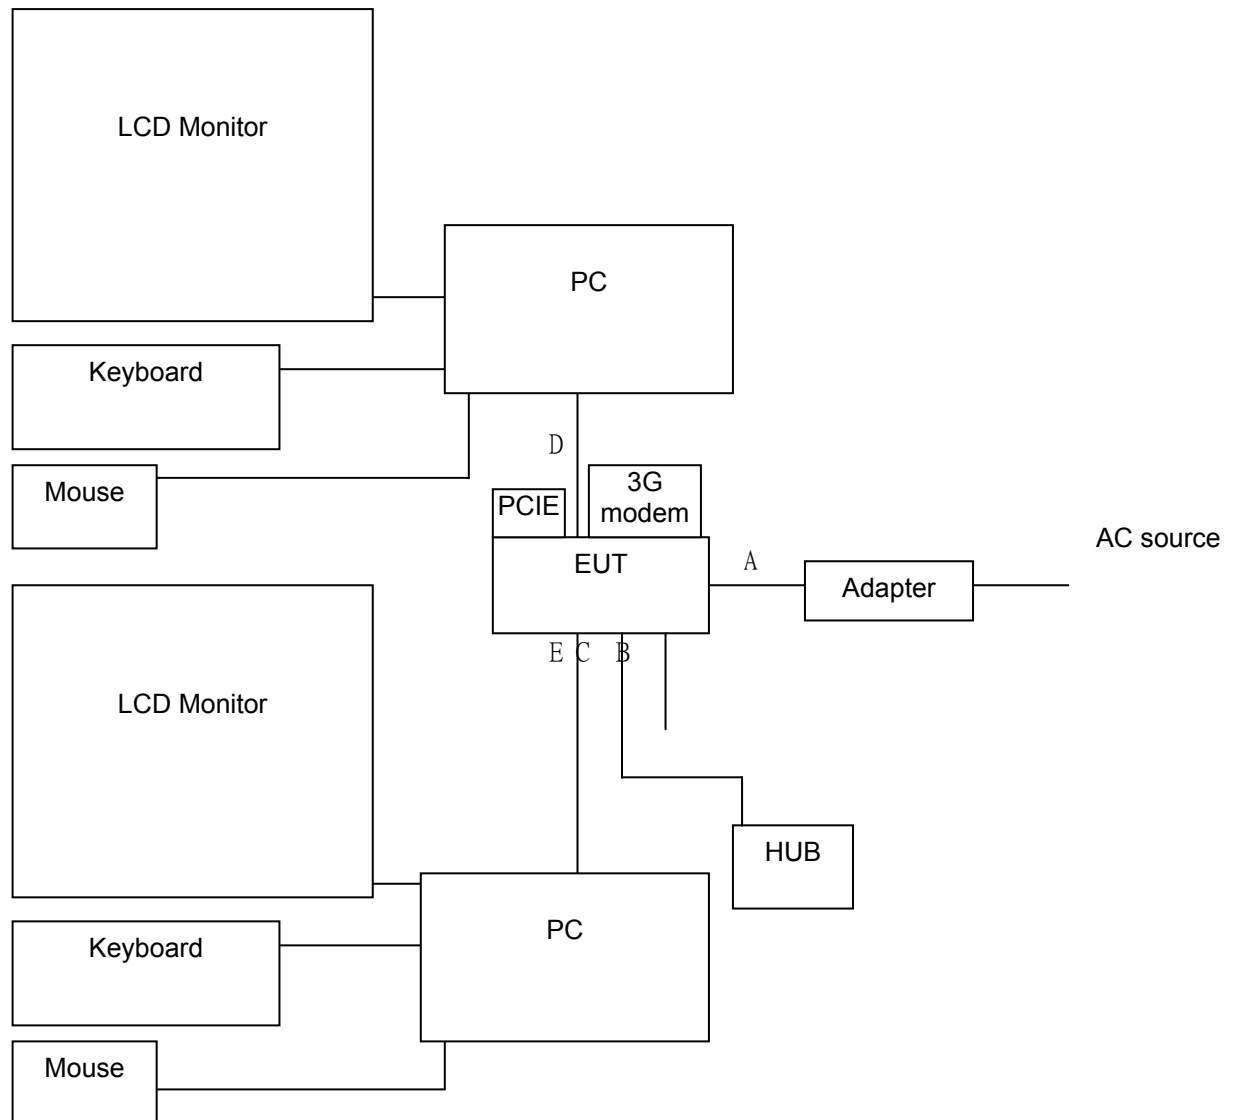



7.2 SUPPORT EQUIPMENT

Above 1GHz Test Setup:

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	Note Book	IBM	T43	DOC	Power cable, unshd, 1.6m

No.	Signal cable description	
A	DC input	Unshielded, 1.8m, 1pcs
B	LAN cable	Unshielded, 10m, 1pcs.

Below 1GHz Test Setup:

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	PC	Acer	M1641	DOC	Power cable, unshd, 1.8m
2	PC	Acer	Aspire M3630	R33142	Power cable, unshd, 1.6m
3	LCD Monitor	BenQ	FP731	R43002	VGA cable, shd, 1.8m
4	Keyboard(PS 2)	HP	KB-0133	R31310	Keyboard cable, shd, 1.9m
5	Mouse(PS2)	HP	M-S69	R41126	Mouse cable, shd, 1.8m
6	Keyboard(US B)	HP	KU-0316	R33001	Keyboard cable, shd, 1.9m
7	Mouse(USB)	HP	M-UV96	R41126	Mouse cable, shd, 1.8m
8	HUB	BARRICAD	SMC7008BR	DOC	Power cable, unshd, 1.6m
9	3G Modem	NOVATEL	Qualcomm 3G CDMA	PKRNVWMC727	N/A
10	PCIE card	Merlin	X950D	NBZNRM-X950D	N/A



No.	Signal cable description	
A	Power Cable	Unshielded, 1.6m, 1pcs.
B	RS-232 Cable	Unshielded, 1m, 1pcs.
C	LAN Cable	Unshielded, 5m, 3pcs.
D	LAN Cable	Unshielded, 10m, 1pcs.
E	LAN Cable	Unshielded, 10m, 1pcs.

REMARK:

1. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



7.3 EUT OPERATING CONDITION

RF Setup

1. Set up all computers like the setup diagram.
2. The "Realtek MP Test Program" software was used for testing

TX Mode:

- ⇒ **Tx Mode:**CCK 、OFDM 、 HT MixMode (Bandwidth: 20 、 40)
- ⇒ **Tx Data Rate:** 11Mbps long (IEEE 802.11b mode ,chain 0 TX)
6Mbps (IEEE 802.11g mode ,chain 0 TX)
13Mbps (IEEE 802.11n HT20 mode ,chain 0, chain 1 TX)
27Mbps (IEEE 802.11n HT40 mode, chain 0, chain 1 TX)

Power control mode

- Target Power:** IEEE 802.11b Channel Low (2412MHz) = **50 (Chain 0)**
IEEE 802.11b Channel Middle (2442MHz) = **48 (Chain 0)**
IEEE 802.11b Channel High (2472MHz) = **48 (Chain 0)**
- Target Power:** IEEE 802.11g Channel Low (2412MHz) = **56 (Chain 0)**
IEEE 802.11g Channel Middle (2442MHz) = **54 (Chain 0)**
IEEE 802.11g Channel High (2472MHz) = **52 (Chain 0)**
- Target Power:** IEEE 802.11n HT20 Channel Low (2412MHz) = **54 (Chain 0)**
IEEE 802.11 n HT20 Channel Middle (2442MHz) = **52 (Chain 0)**
IEEE 802.11 n HT20 Channel High (2472MHz) = **50 (Chain 0)**
IEEE 802.11n HT20 Channel Low (2412MHz) = **54 (Chain 1)**
IEEE 802.11 n HT20 Channel Middle (2442MHz) = **52 (Chain 1)**
IEEE 802.11 n HT20 Channel High (2472MHz) = **50 (Chain 1)**
- Target Power:** IEEE 802.11n HT40 Channel Low (2422MHz) = **52 (Chain 0)**
IEEE 802.11 n HT40 Channel Middle (2442MHz) = **50 (Chain 0)**
IEEE 802.11 n HT40 Channel High (2462MHz) = **49 (Chain 0)**
IEEE 802.11n HT40 Channel Low (2422MHz) = **52 (Chain 1)**
IEEE 802.11 n HT40 Channel Middle (2442MHz) = **50 (Chain 1)**
IEEE 802.11 n HT40 Channel High (2462MHz) = **49 (Chain 1)**

(2) RX Mode :

Start RX

3. All of the function are under run.
4. Start test.

Normal Link Setup

1. Set up all computers like the setup diagram.
 2. All of the function are under run.
 3. Notebook PC (2) ping 192.168.0.10 –t to Notebook PC (1).
 4. Notebook PC (1) ping 192.168.0.20 –t to Notebook PC (2).
 5. Notebook PC (1) ping 192.168.0.50 –t to Wireless Access Point (3).
- Start test.



8. APPLICABLE LIMITS AND TEST RESULTS

8.1 6DB BANDWIDTH


LIMIT

§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSEK 30	835253/002	JUL. 14, 2011

TEST SETUP



TEST PROCEDURE

The transmitter output was connected to a spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 100 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

**TEST RESULTS**

No non-compliance noted.

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	10320	500	PASS
Middle	2437	10320	500	PASS
High	2462	10320	500	PASS

NOTE :

1. At final test to get the worst-case emission at 11Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	16733	500	PASS
Middle	2437	16684	500	PASS
High	2462	16733	500	PASS

NOTE :

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

**IEEE 802.11n HT20 mode (Two TX)**

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain1		
Low	2412	18085	17935	500	PASS
Middle	2437	18036	17935	500	PASS
High	2462	17935	17935	500	PASS

NOTE :

1. At final test to get the worst-case emission at 13Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 mode (Two TX)



Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain1		
Low	2422	36673	36673	500	PASS
Middle	2437	36873	36673	500	PASS
High	2452	36673	36673	500	PASS


NOTE :

1. At final test to get the worst-case emission at 27Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.





6dB BANDWIDTH (802.11b MODE)

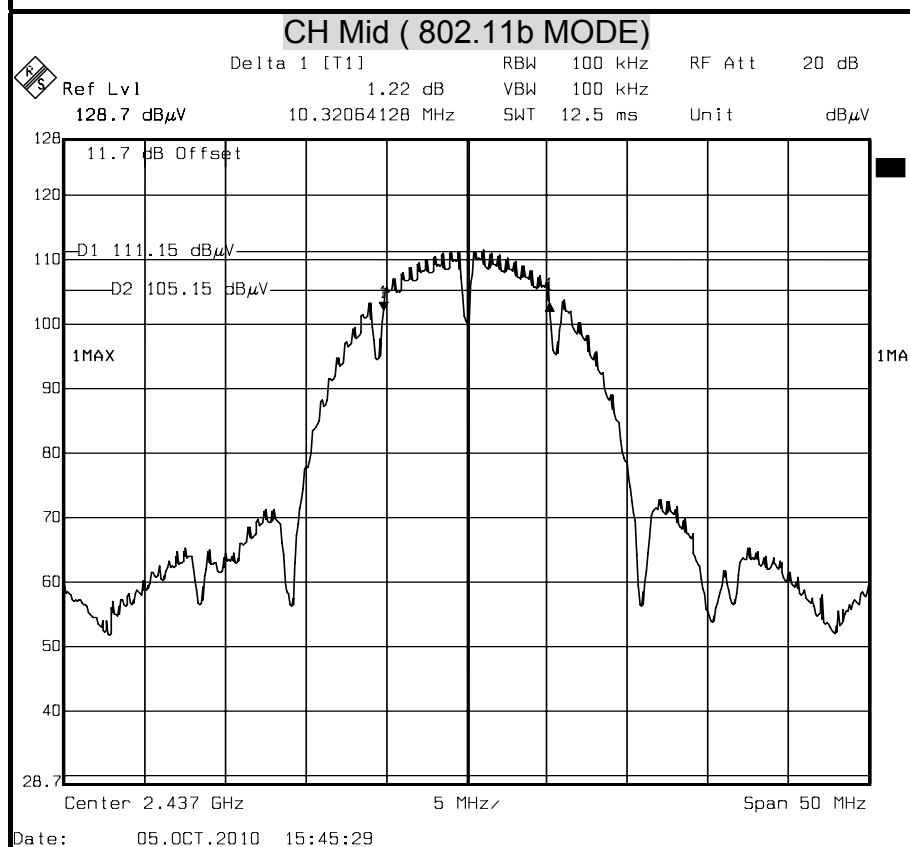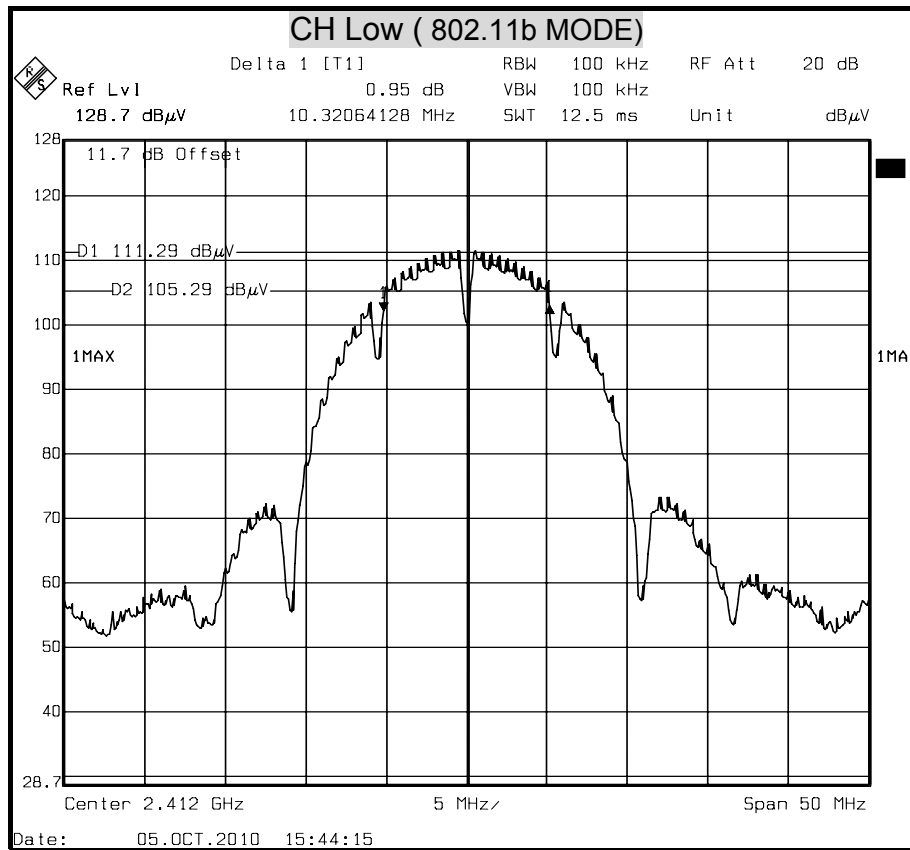


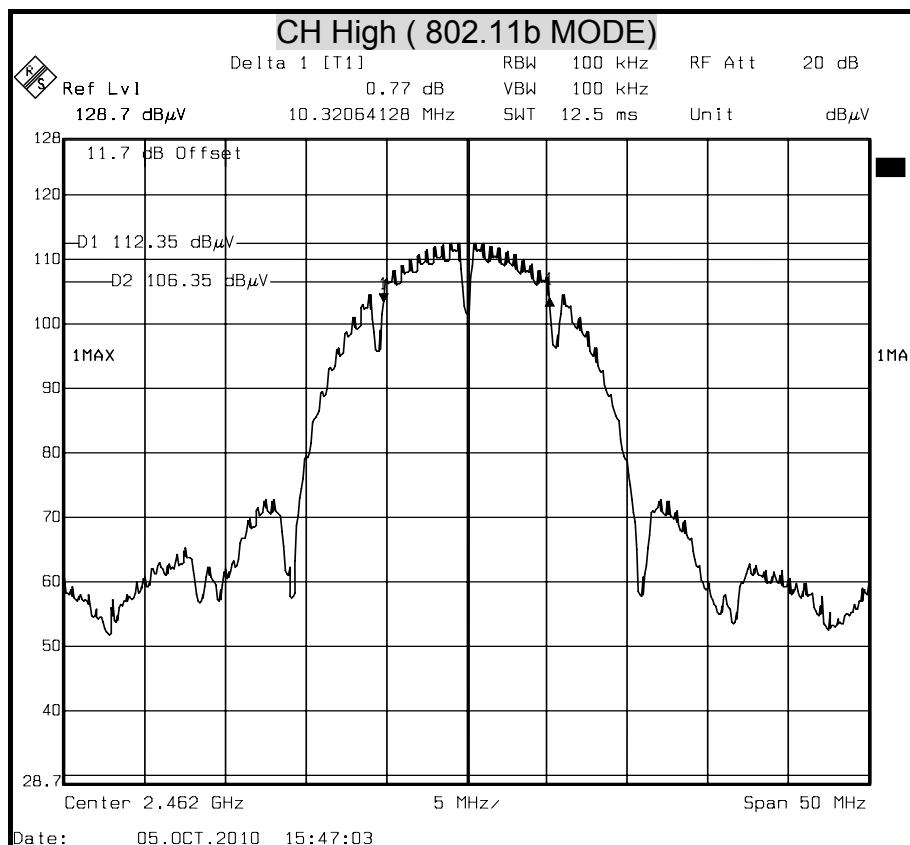





6dB BANDWIDTH (802.11g MODE)

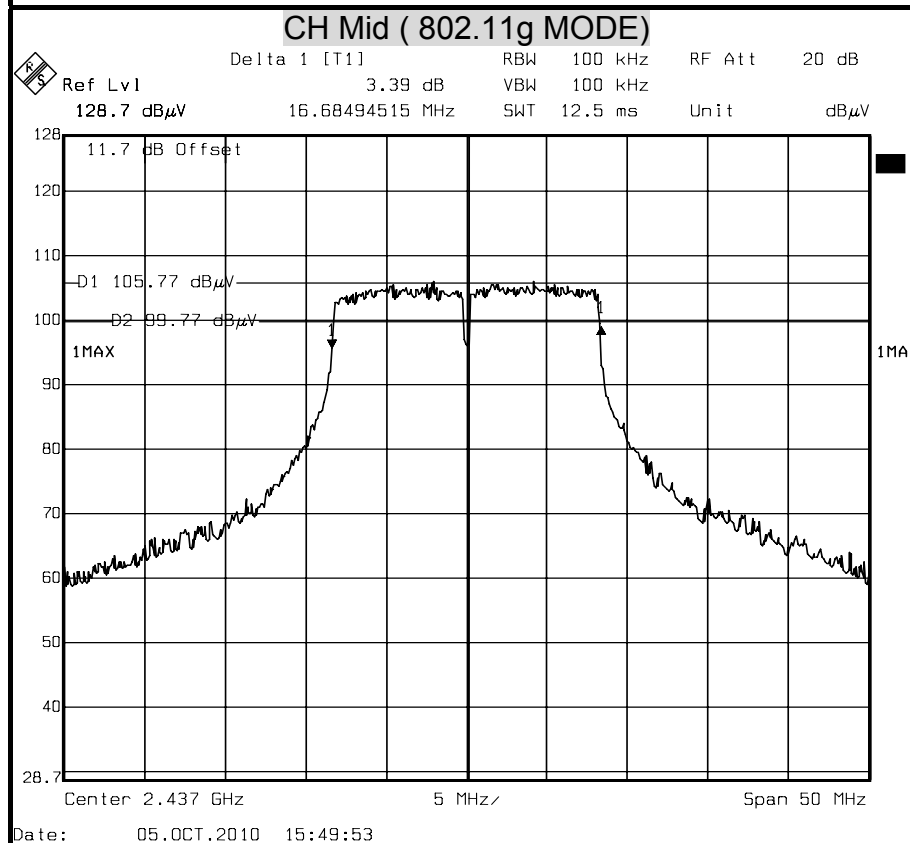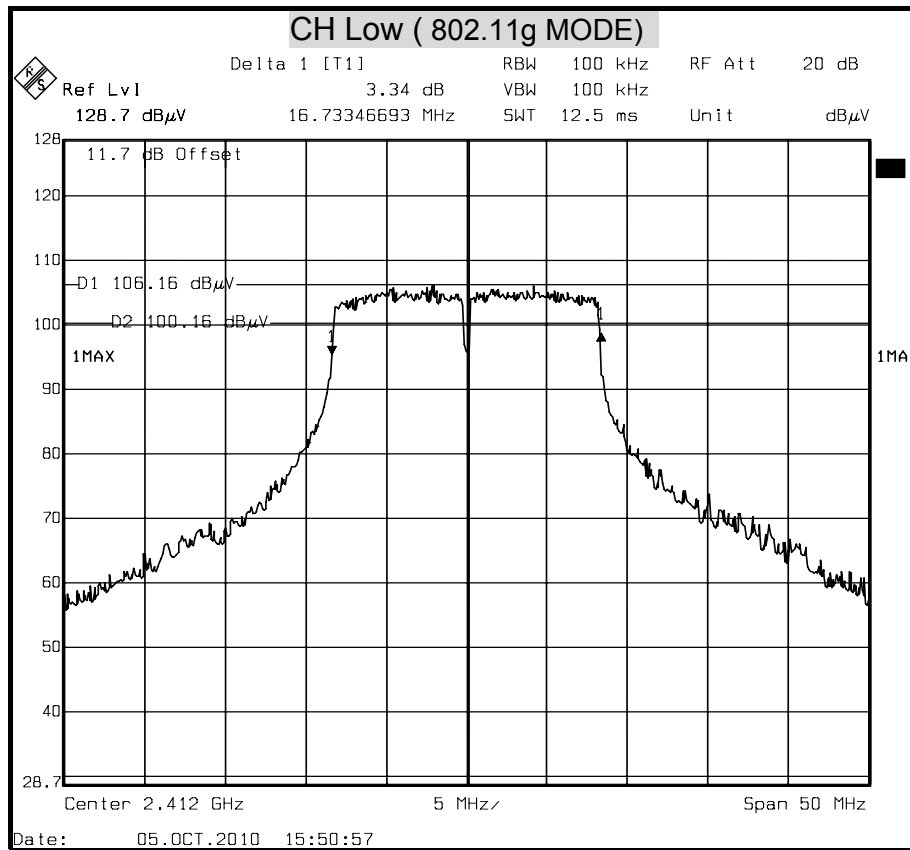


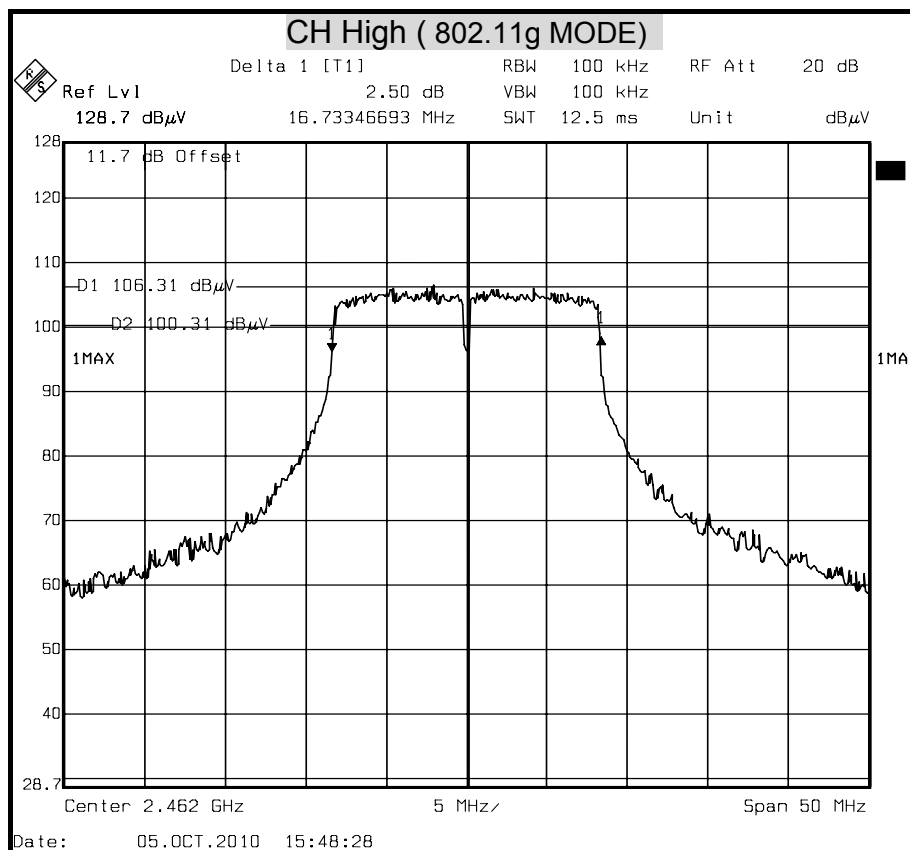




6dB BANDWIDTH (802.11n HT20 MODE) Chain 0

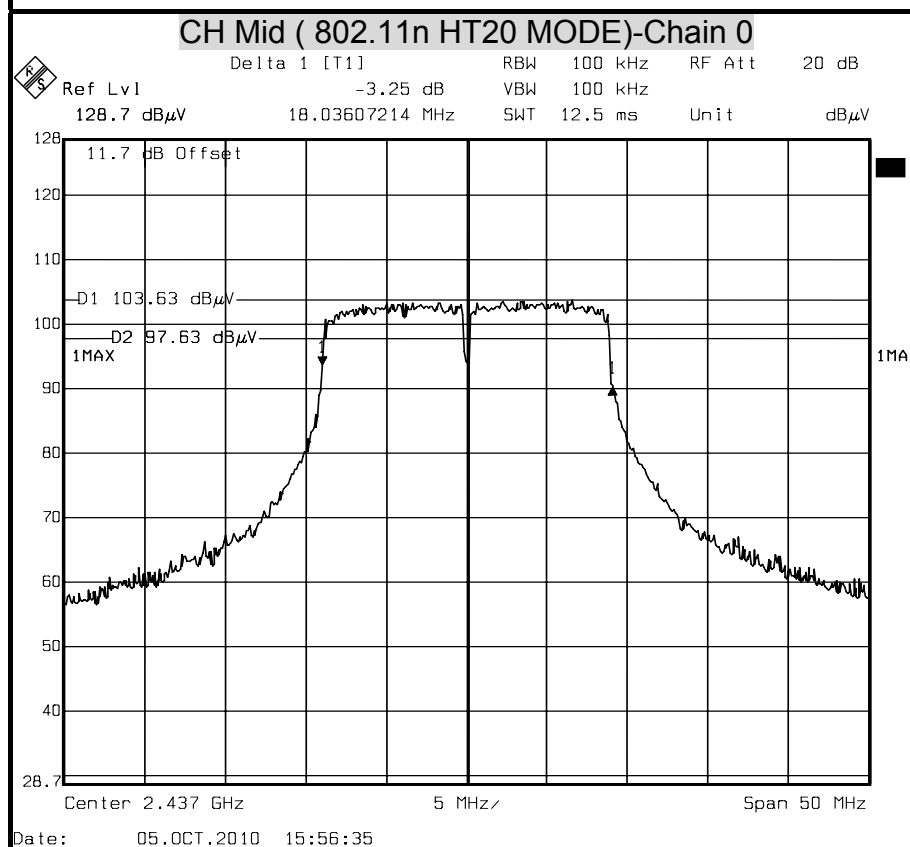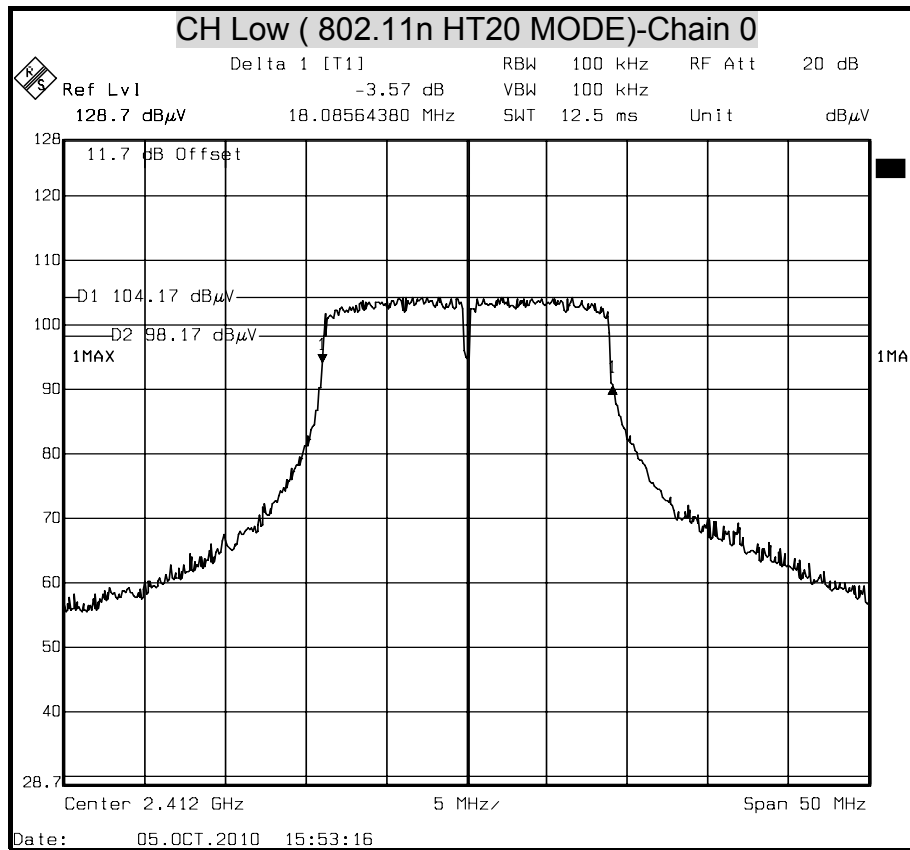

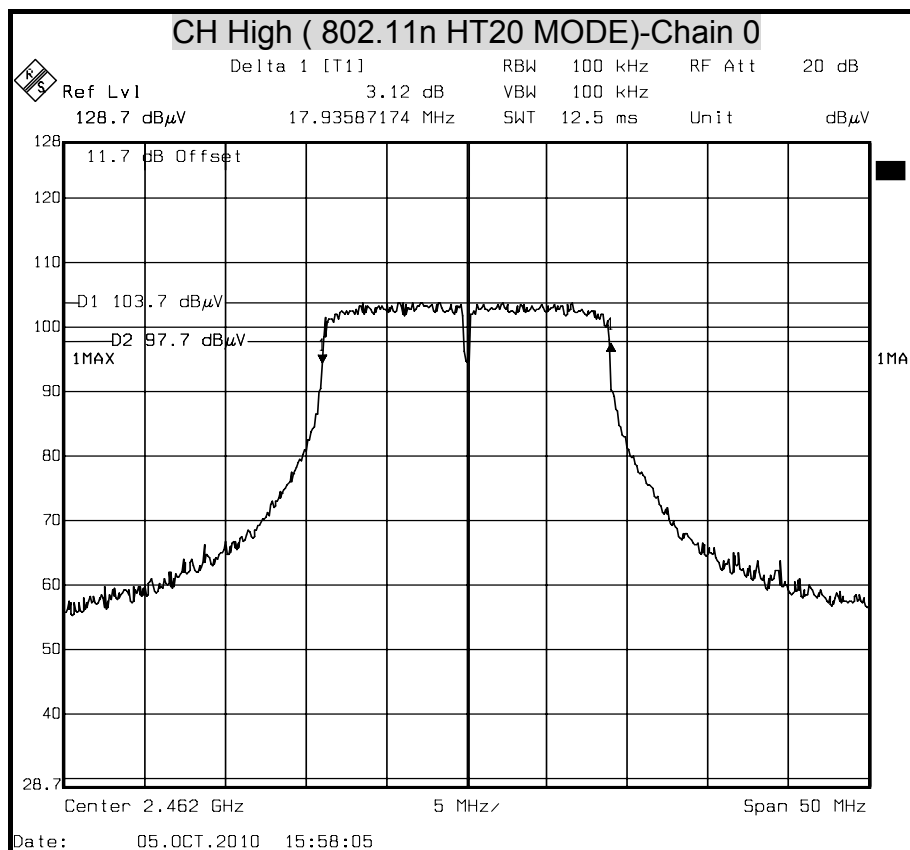






Date of Issue: January 18, 2011

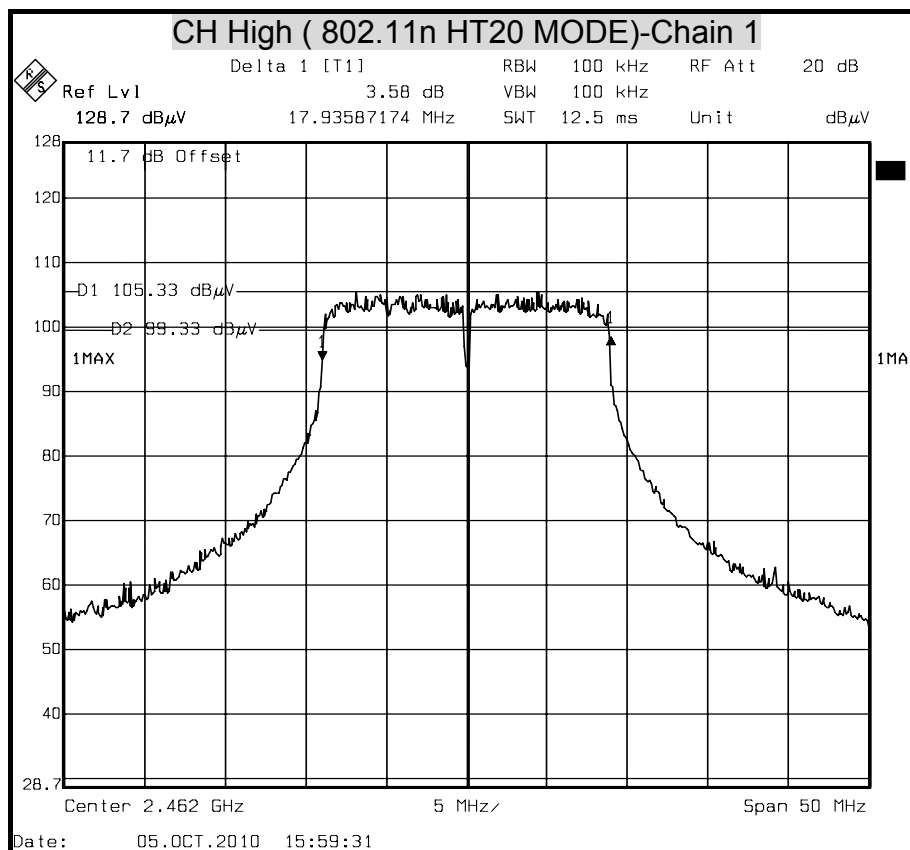





6dB BANDWIDTH (802.11n HT40 MODE) Chain 0

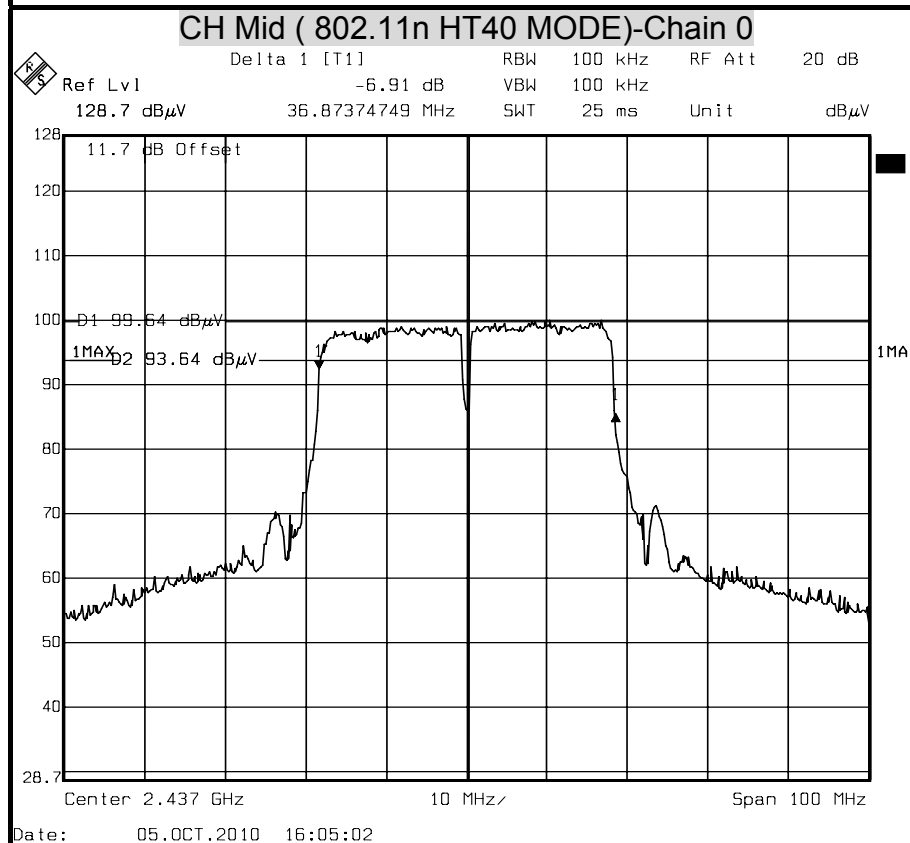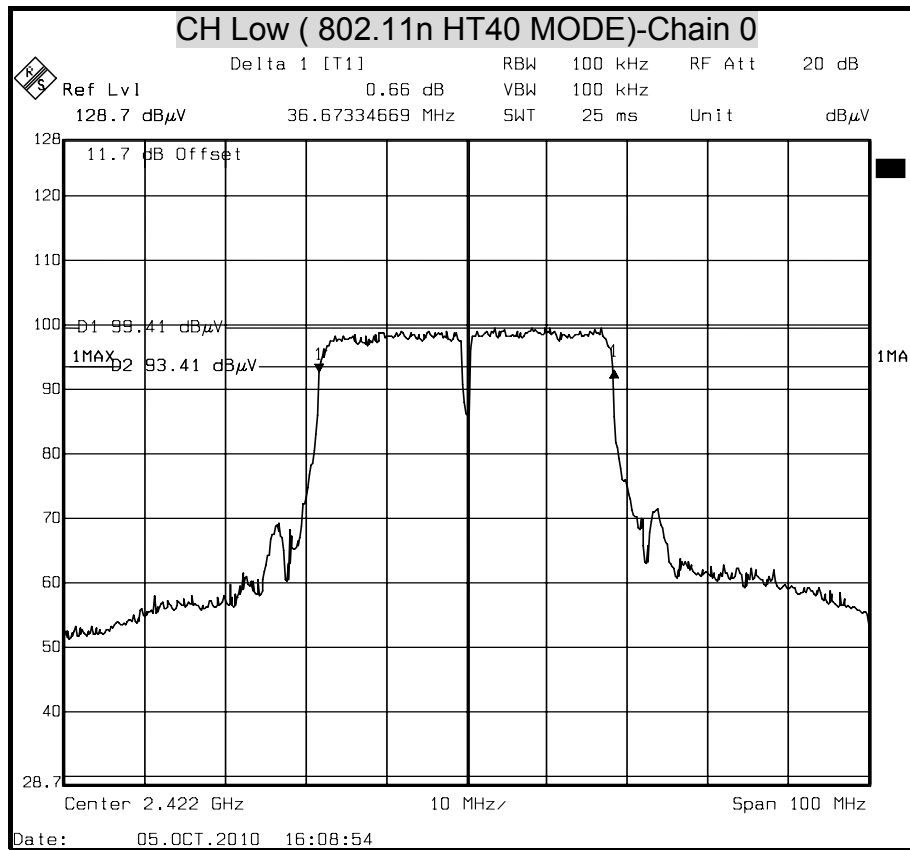


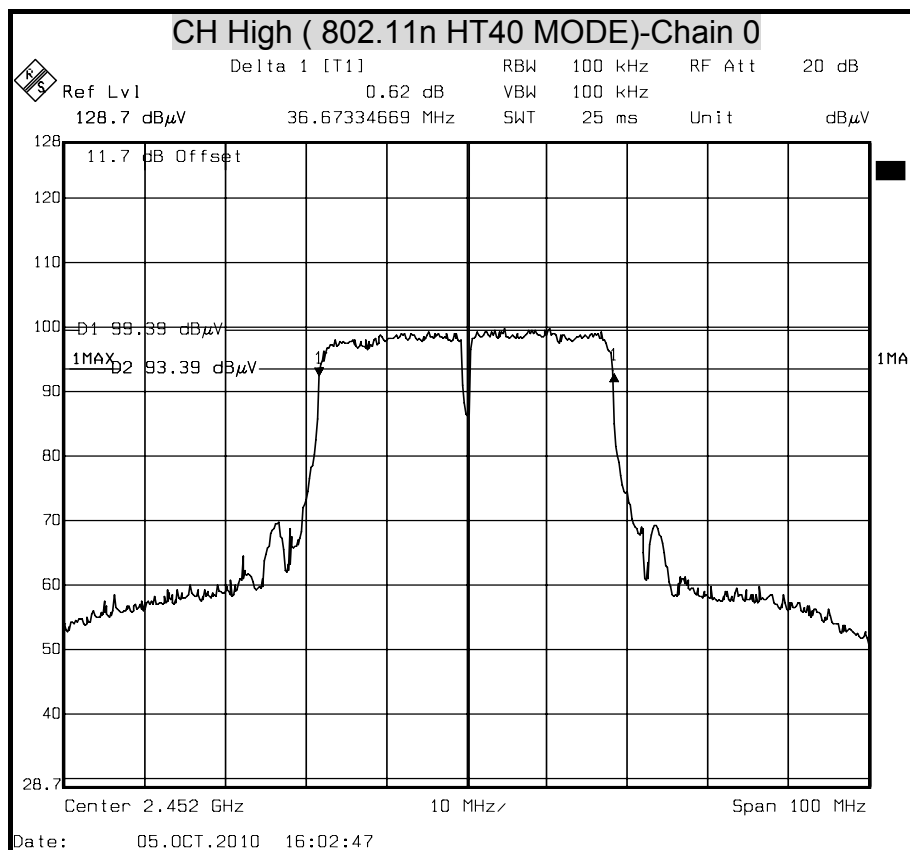



6dB BANDWIDTH (802.11n HT40 MODE) Chain 1

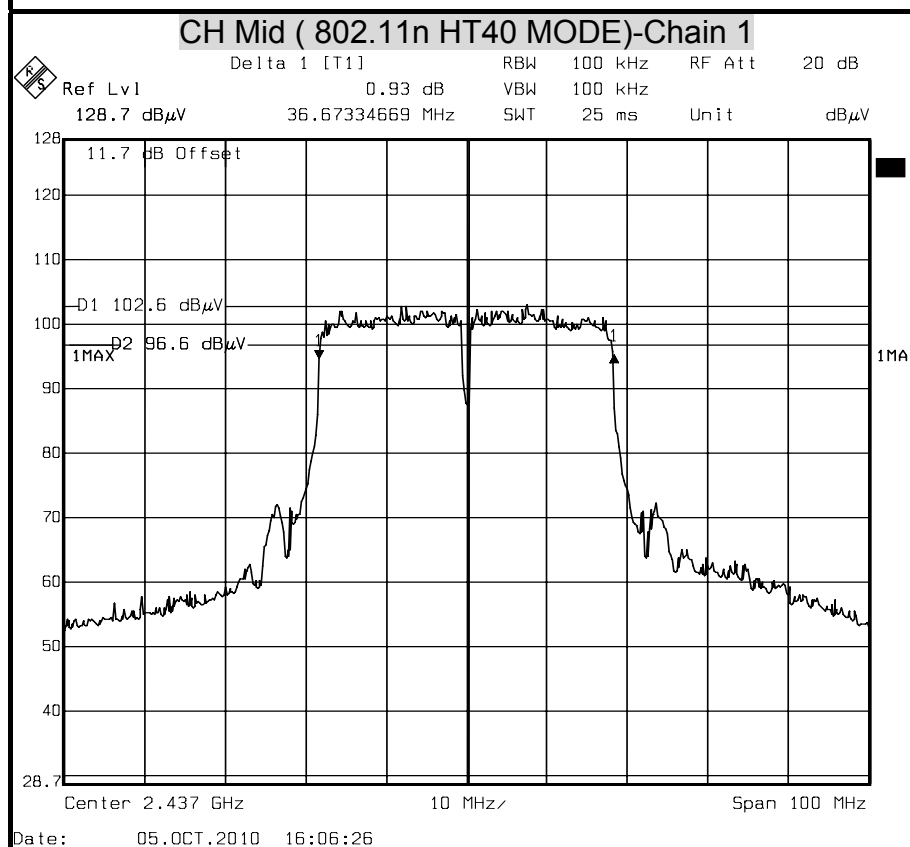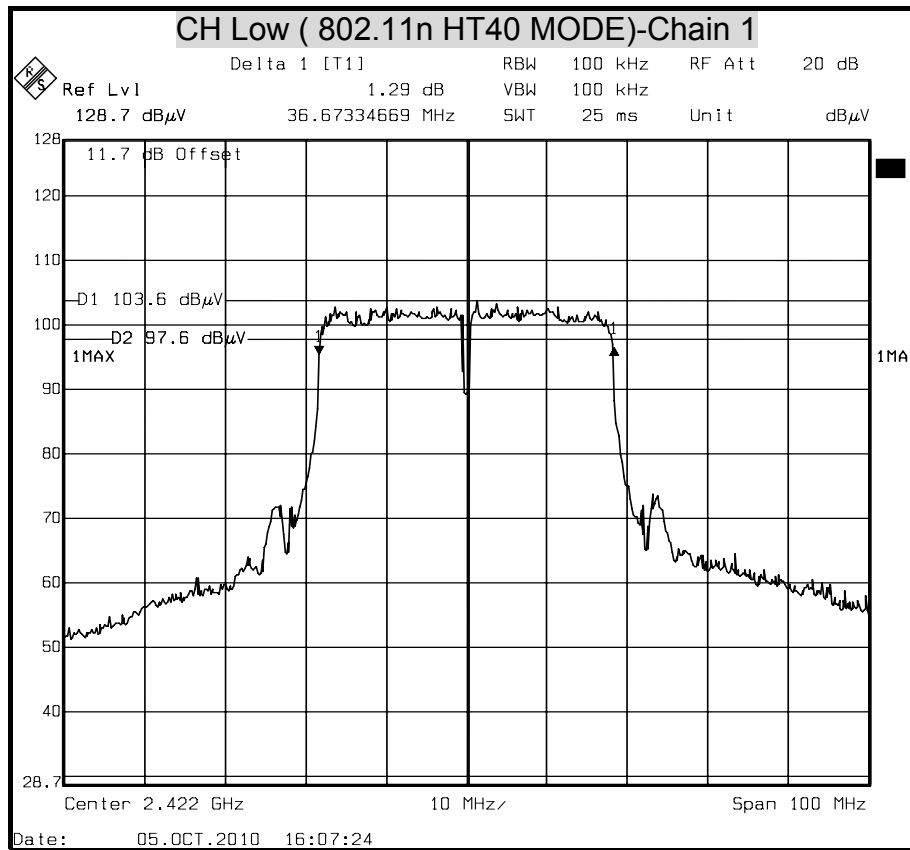

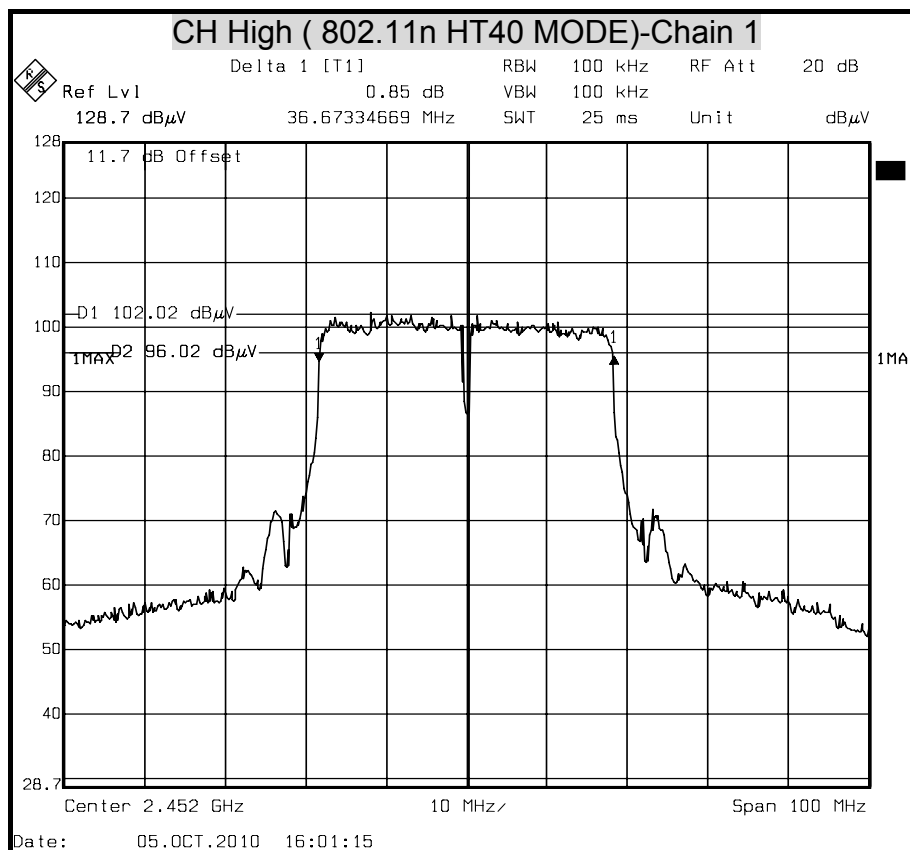



8.2 MAXIMUM PEAK OUTPUT POWER

LIMIT

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section , as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	Anritsu	ML2487A	6K00003888	MAY. 11, 2011

TEST SETUP



TEST PROCEDURE

Connect the EUT to spectrum analyzer, set the center frequency of the spectrum analyzer to the channel center frequency. Set the RBW to 1MHz and VBW to 3MHz.

Set sweep time=auto

Use detector max peak mode

Measurement of Digital Transmission Systems Operating under Section 15.247

TEST RESULTS

No non-compliance noted

**IEEE 802.11b mode**

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Margin (dBm)	Pass / Fail
Low	2412	19.16	30.00	-10.84	PASS
Middle	2437	19.11	30.00	-10.89	PASS
High	2462	19.29	30.00	-10.71	PASS

NOTE : 1. At final test to get the worst-case emission at 11Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was
Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Margin (dBm)	Pass / Fail
Low	2412	22.99	30.00	-7.01	PASS
Middle	2437	23.22	30.00	-6.78	PASS
High	2462	23.58	30.00	-6.42	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was
Entered as an offset in the spectrum analyzer to allow for direct reading of power.

**IEEE 802.11n HT20 mode(Two TX)**

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total (dBm)	Peak Power Limit (dBm)	Margin (dBm)	Pass / Fail
		Chain 0	Chain 1				
Low	2412	22.03	24.26	26.30	30.00	-3.70	PASS
Middle	2437	22.53	24.22	26.47	30.00	-3.53	PASS
High	2462	22.56	22.35	25.47	30.00	-4.53	PASS

NOTE : 1. At final test to get the worst-case emission at 13Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 mode (Two TX)

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total (dBm)	Peak Power Limit (dBm)	Margin (dBm)	Pass / Fail
		Chain 0	Chain 1				
Low	2422	20.65	23.60	25.38	30.00	-4.62	PASS
Middle	2437	20.32	23.24	25.03	30.00	-4.97	PASS
High	2452	19.99	21.65	23.91	30.00	-6.09	PASS

NOTE : 1. At final test to get the worst-case emission at 27Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

**IEEE 802.11b mode****Average Power Data**

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	16.89
Middle	2437	16.83
High	2462	17.01

IEEE 802.11g mode**Average Power Data**

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	14.81
Middle	2437	14.86
High	2462	15.04

IEEE 802.11n HT20 mode**Average Power Data**

Channel	Channel Frequency (MHz)	Average Power Chain 0 (dBm)	Average Power Chain 1 (dBm)
Low	2412	13.19	16.22
Middle	2437	13.30	15.19
High	2462	13.25	13.15

IEEE 802.11n HT40 mode**Average Power Data**

Channel	Channel Frequency (MHz)	Average Power Chain 0 (dBm)	Average Power Chain 1 (dBm)
Low	2422	11.83	14.31
Middle	2437	11.43	13.66
High	2452	11.58	12.63



8.3 MAXIMUM PERMISSIBLE EXPOSURE

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b) LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time
(A) Limits for Occupational / Control Exposures				
300-1,500	--	--	F/300	6
1,500-100,000	--	--	5	6
(B) Limits for General Population / Uncontrol Exposures				
300-1,500	--	--	F/1500	6
1,500-100,000	--	--	1	30

CALCULATIONS

Given $E = \frac{\sqrt{30 \times P \times G}}{d}$ & $S = \frac{E^2}{3770}$

Where E = Field strength in Volts / meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770 d^2}$$

Changing to units of mW and cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = d \text{ (m)} / 100$$

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2}$$

Where d = Distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power density in mW / cm²



LIMIT

Power Density Limit, $S=1.0\text{mW}/\text{cm}^2$

TEST RESULTS

No non-compliance noted.

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2}$$

$G=2.0\text{dBi}=1.58489319\text{mW}$

IEEE 802.11b $=0.0796 \times 84.91805 \times 1.58489319/400=0.026783$

IEEE 802.11g $=0.0796 \times 228.0342 \times 1.58489319/400=0.071921$

IEEE 802.11n HT20 $=0.0796 \times 443.3015 \times 1.58489319/400=0.139815$

IEEE 802.11n HT40 $=0.0796 \times 345.23168 \times 1.58489319/400=0.108884$

Mode	Minimum separation distance (cm)	Output Power (dBm)	Output Power (mw)	Antenna Gain (dBi)	Power Density Limit (mW/cm ²)	Power Density at 20cm (mW/cm ²)
IEEE 802.11b	20	19.29	84.92	2.00	1.00	0.026783
IEEE 802.11g	20	23.58	228.03	2.00	1.00	0.071921
IEEE 802.11n HT20	20	26.47	443.30	2.00	1.00	0.139815
IEEE 802.11n HT40	20	25.38	345.23	2.00	1.00	0.108884

REMARK: For mobile or fixed location transmitters, the maximum power density is $1.0 \text{ mW}/\text{cm}^2$ even if the calculation indicates that the power density would be larger.



8.4 POWER SPECTRAL DENSITY


LIMIT

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSEK 30	835253/002	JUL. 14, 2011

TEST SETUP

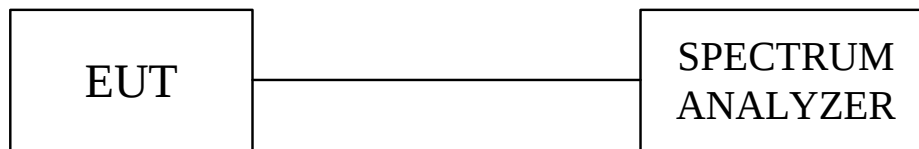

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=3KHz and VBW $\geq$ RBW, set sweep time=span / 3KHz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

TEST RESULTS

Total peak power calculation formula:
 $10 \log (10^{\text{Chain 0 PPSD}} / 10)$.

No non-compliance noted.

**IEEE 802.11b mode**

Channel	Channel Frequency (MHz)	PPSD (dBm)	Maximum Limit (dBm)	Margin (dB)	Pass / Fail
Low	2412	-15.08	8.00	-23.08	PASS
Middle	2437	-15.07	8.00	-23.07	PASS
High	2462	-13.59	8.00	-21.59	PASS

NOTE : 1. At final test to get the worst-case emission at 11Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	PPSD (dBm)	Maximum Limit (dBm)	Margin (dB)	Pass / Fail
Low	2412	-16.52	8.00	-24.52	PASS
Middle	2437	-16.67	8.00	-24.67	PASS
High	2462	-15.82	8.00	-23.82	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.



IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	PPSD(dBm)			Maximum Limit (dBm)	Margin (dB)	Pass / Fail
		Chain 0	Chain 1	Total			
Low	2412	-18.45	-16.95	-14.63	8.00	-22.63	PASS
Middle	2437	-19.16	-16.39	-14.55	8.00	-22.55	PASS
High	2462	-18.51	-18.21	-15.35	8.00	-23.35	PASS

NOTE : 1. At final test to get the worst-case emission at 13Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 mode

Channel	Channel Frequency (MHz)	PPSD(dBm)			Maximum Limit (dBm)	Margin (dB)	Pass / Fail
		Chain 0	Chain 1	Total			
Low	2422	-22.77	-19.78	-18.01	8.00	-26.01	PASS
Middle	2437	-23.01	-19.85	-18.14	8.00	-26.14	PASS
High	2452	-22.47	-20.71	-18.49	8.00	-26.49	PASS



NOTE : 1. At final test to get the worst-case emission at 27Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.


Combined mode

Channel		Channel Frequency (MHz)	PPSD (dBm)	Maximum Limit (dBm)	Margin (dB)	Pass / Fail
802.11n HT20 Combined mode	CH Low	2412	-13.83	8.00	-21.83	PASS
	CH Middle	2437	-14.35	8.00	-22.35	
	CH High	2462	-14.38	8.00	-22.38	
802.11n HT40 Combined mode	CH Low	2422	-16.29	8.00	-24.29	PASS
	CH Middle	2437	-17.48	8.00	-25.48	
	CH High	2452	-16.68	8.00	-24.68	





POWER SPECTRAL DENSITY (IEEE 802.11b MODE)

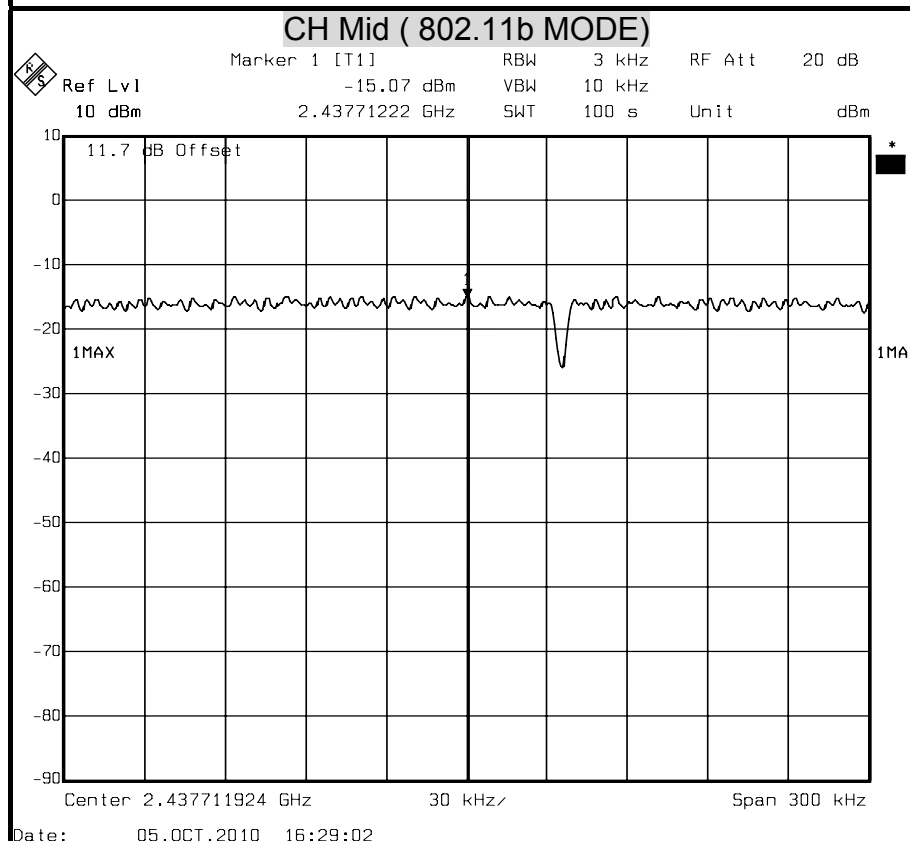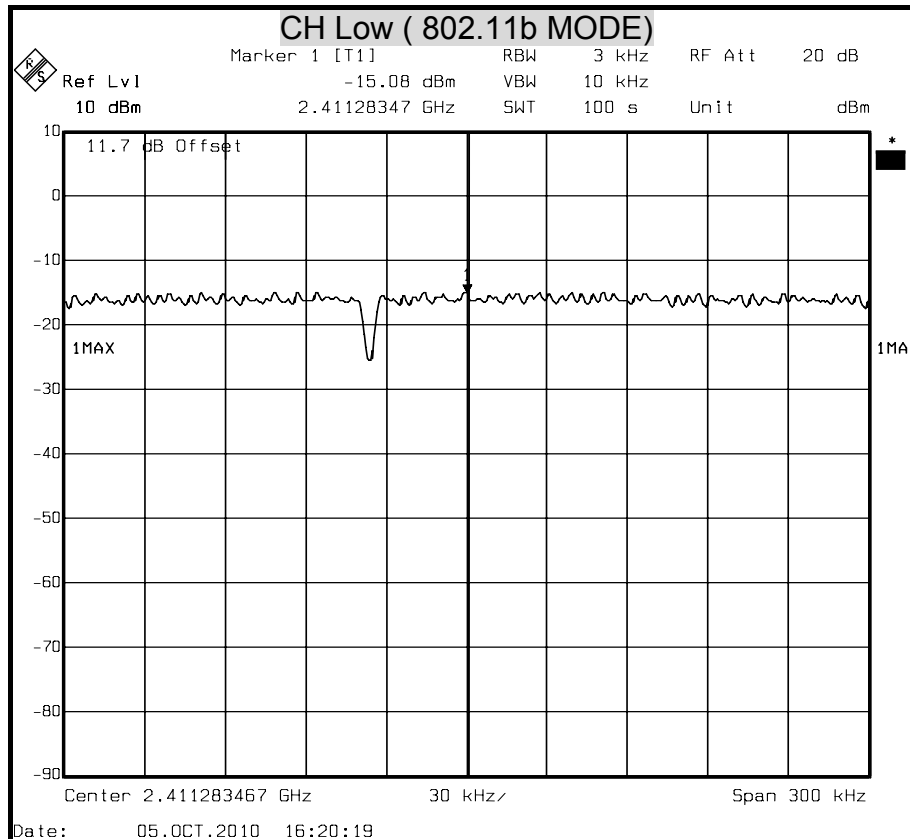


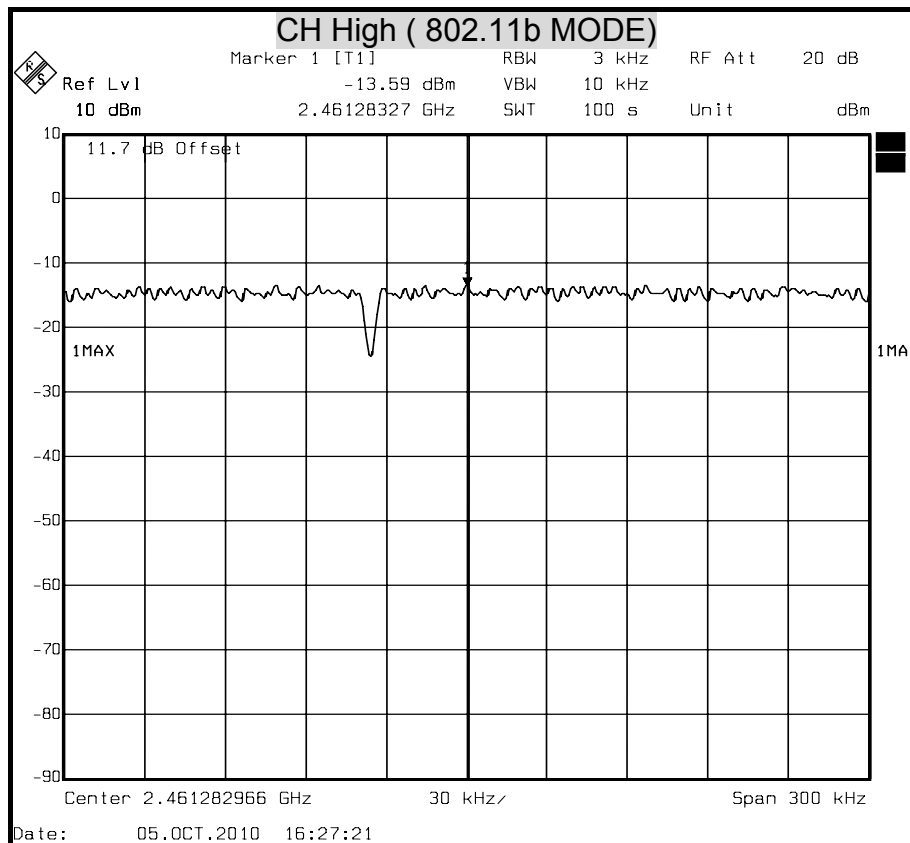





POWER SPECTRAL DENSITY (IEEE 802.11g MODE)

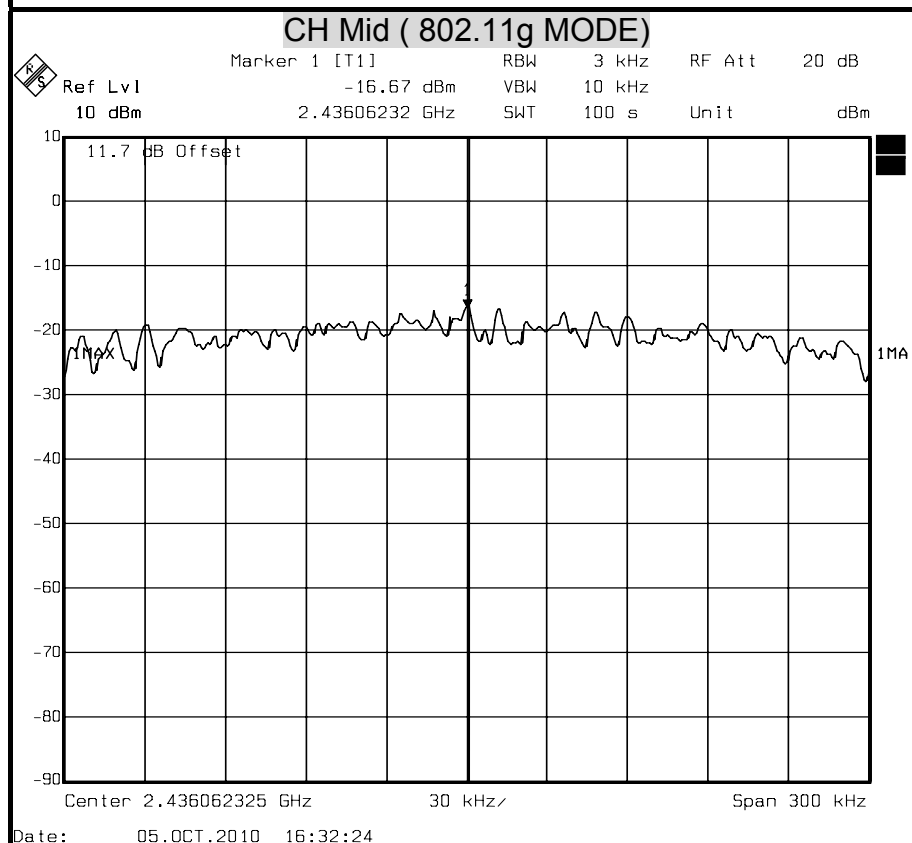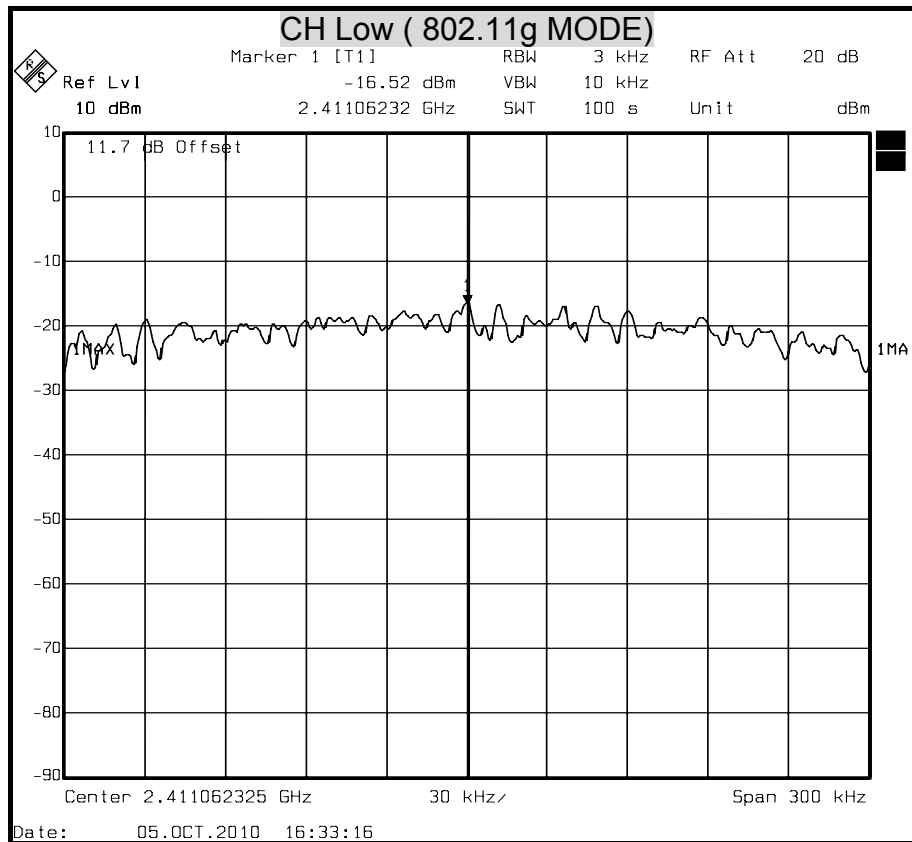


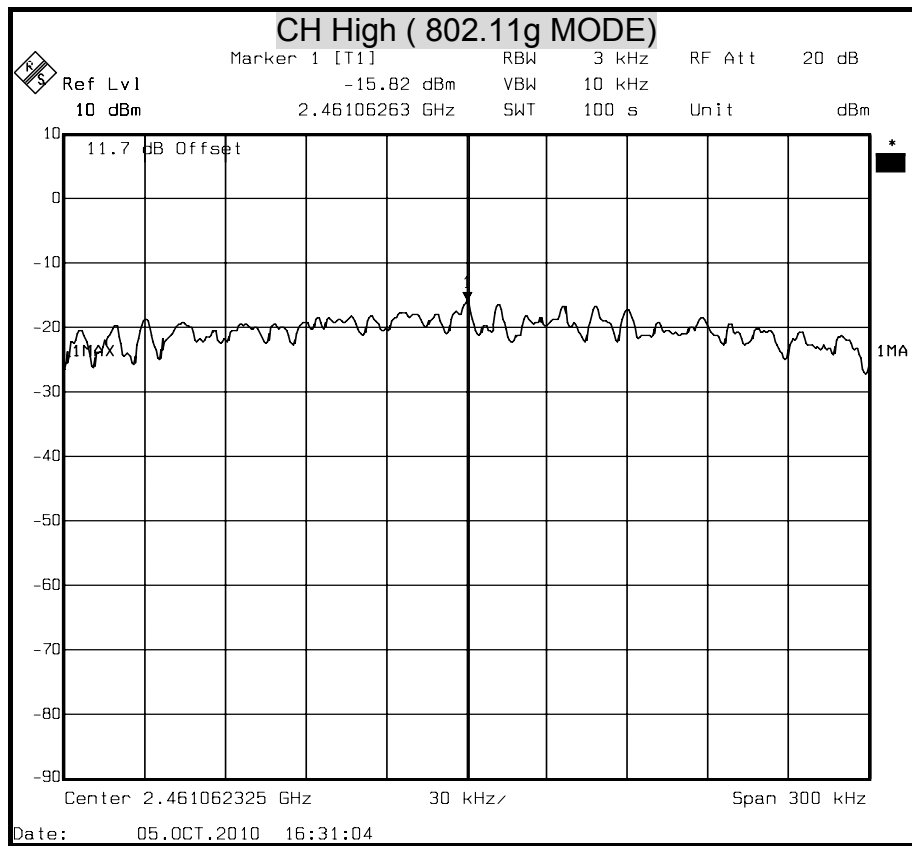





POWER SPECTRAL DENSITY (802.11n HT20 MODE)

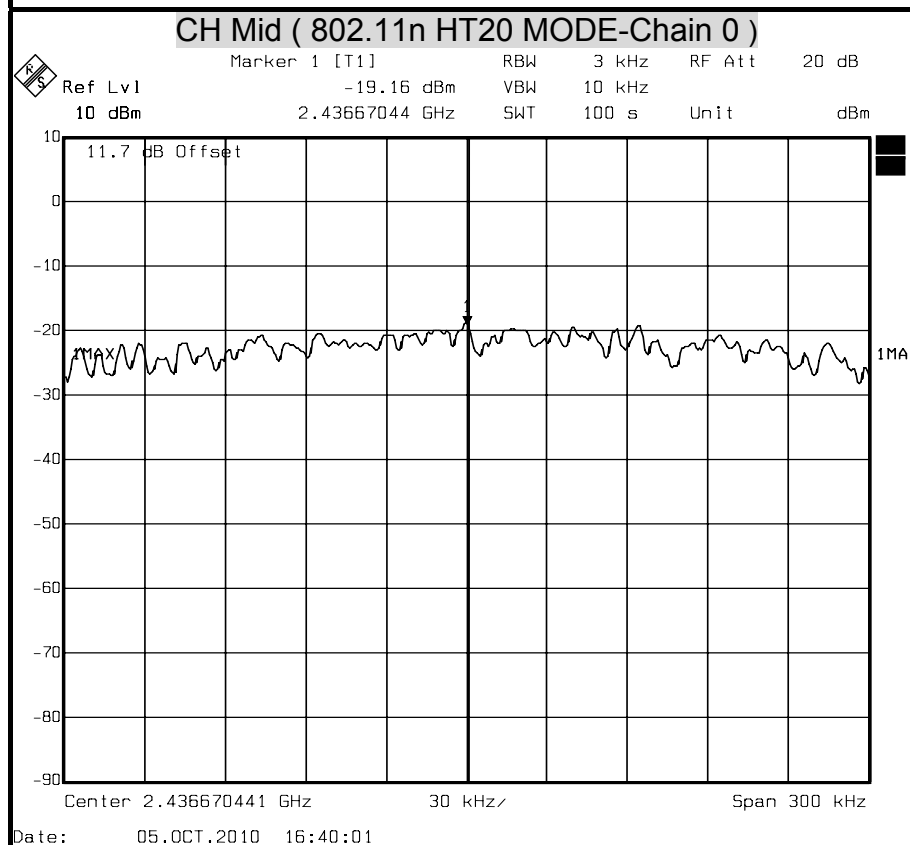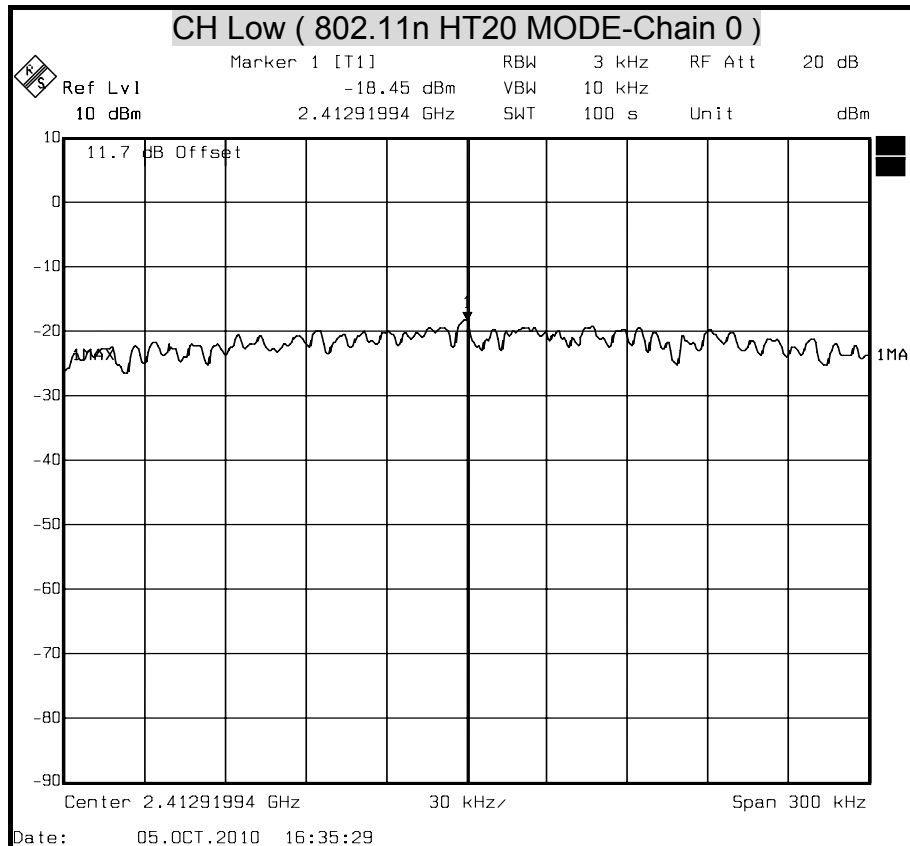


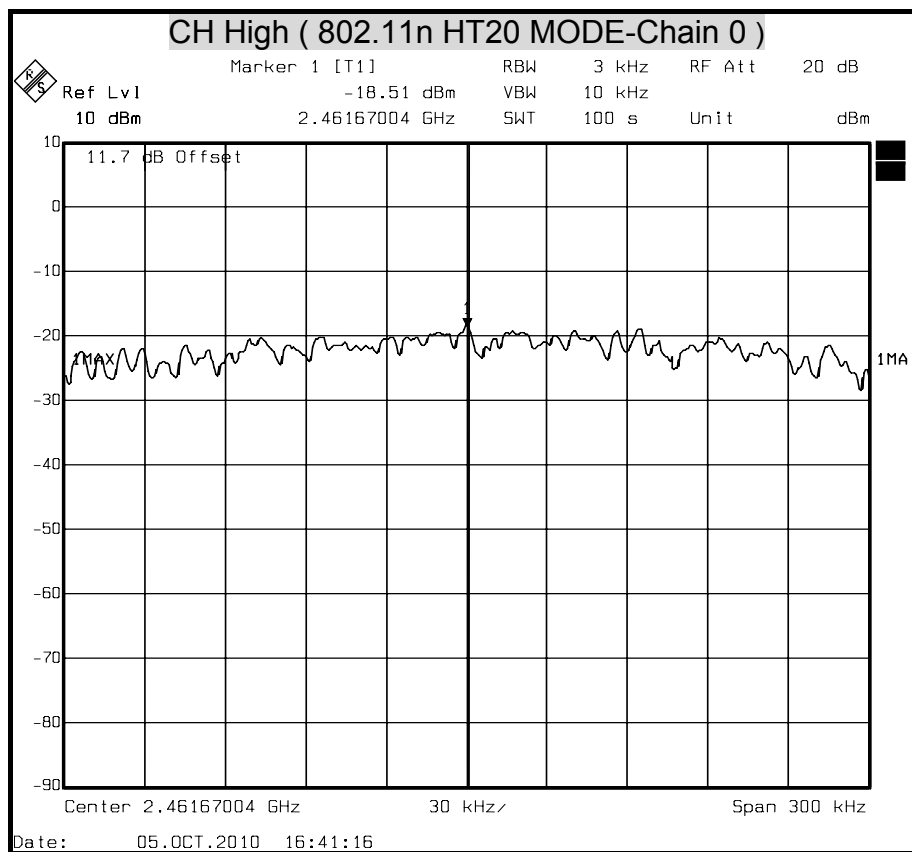





POWER SPECTRAL DENSITY (802.11n HT20 MODE)

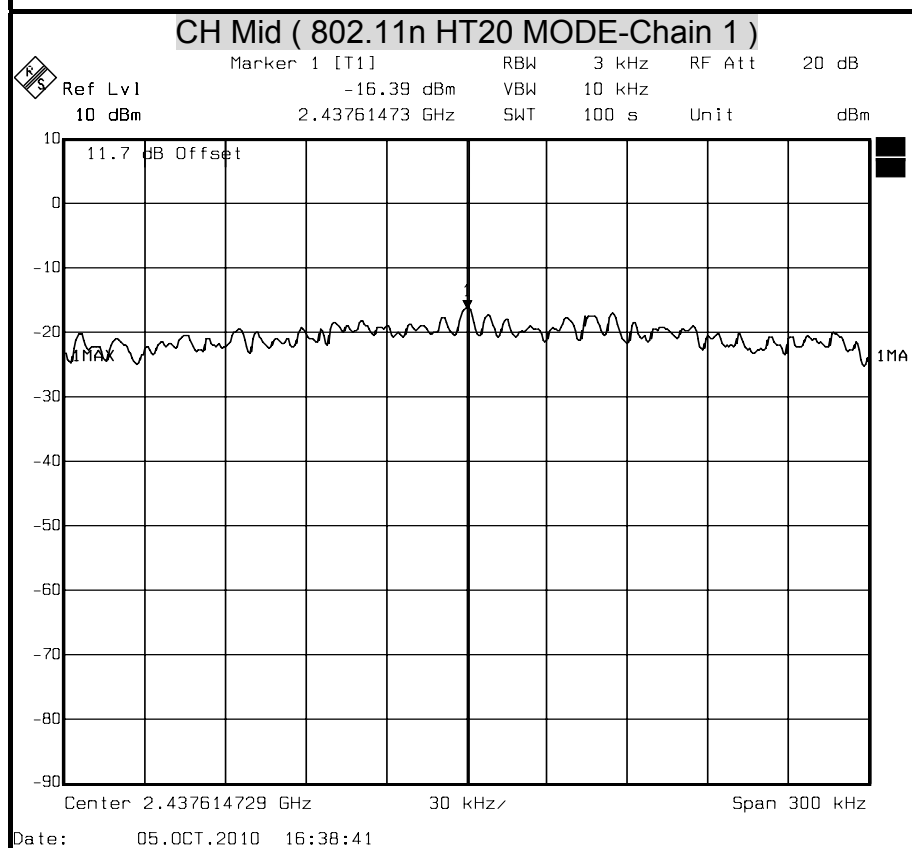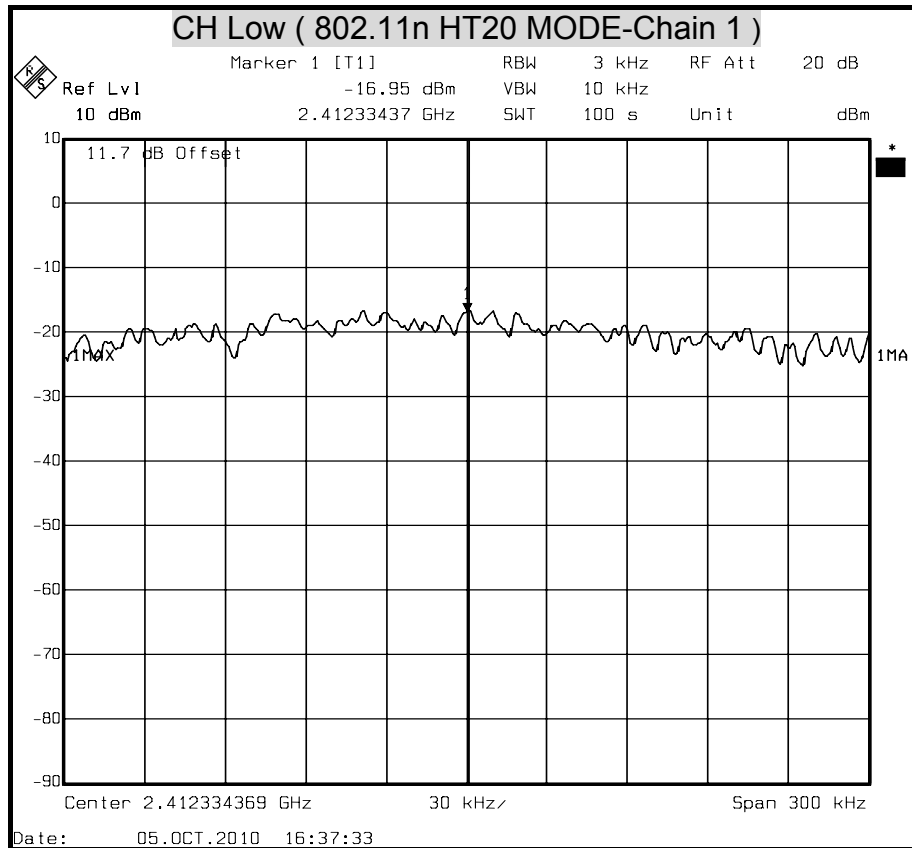


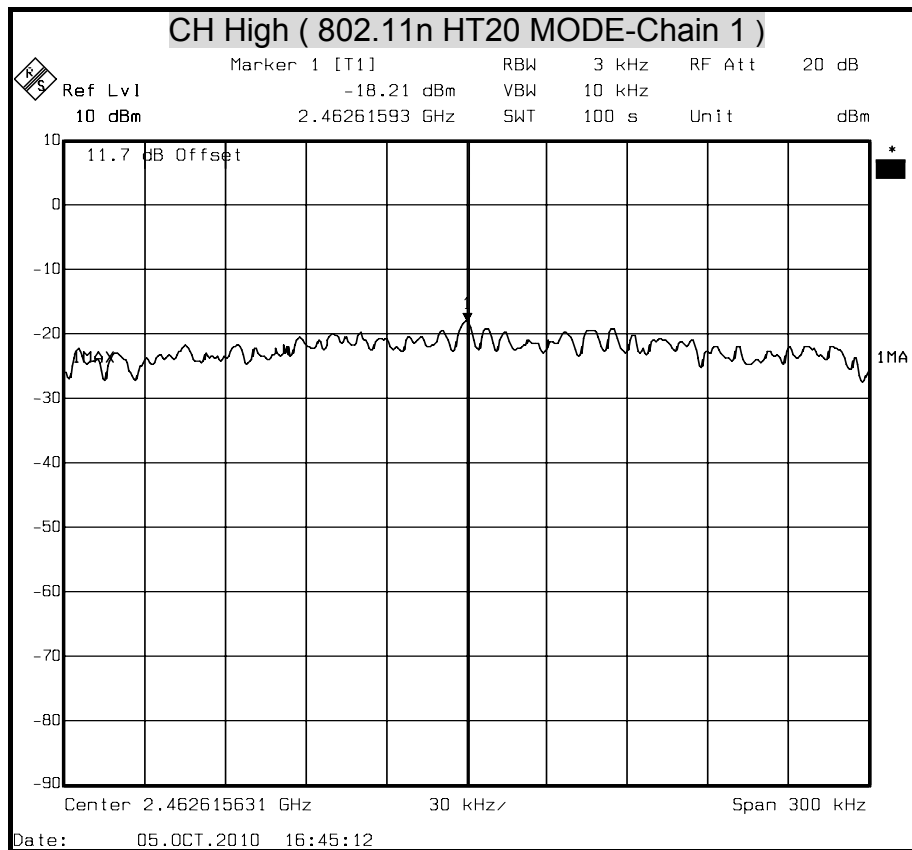





POWER SPECTRAL DENSITY (802.11n HT40 MODE)

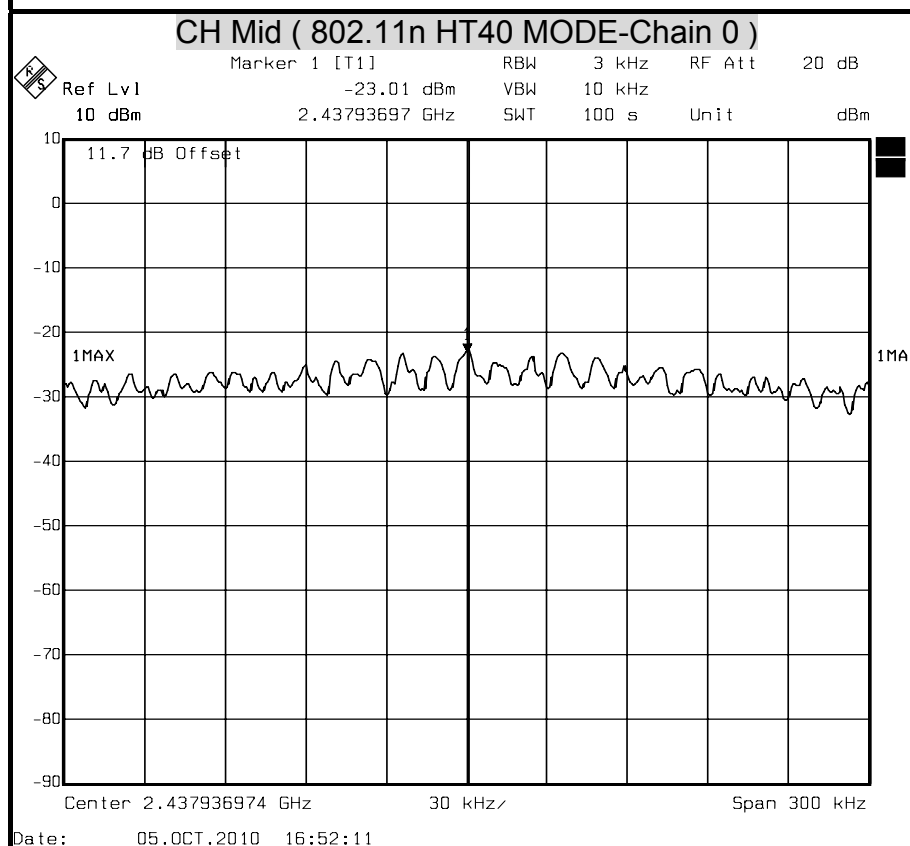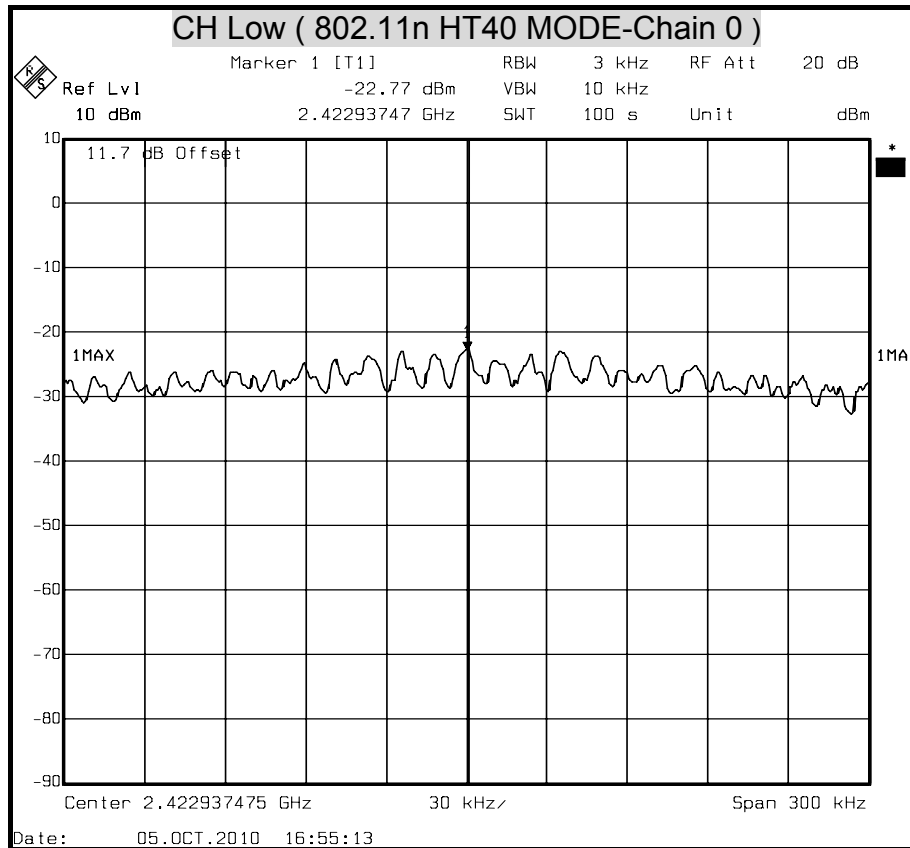


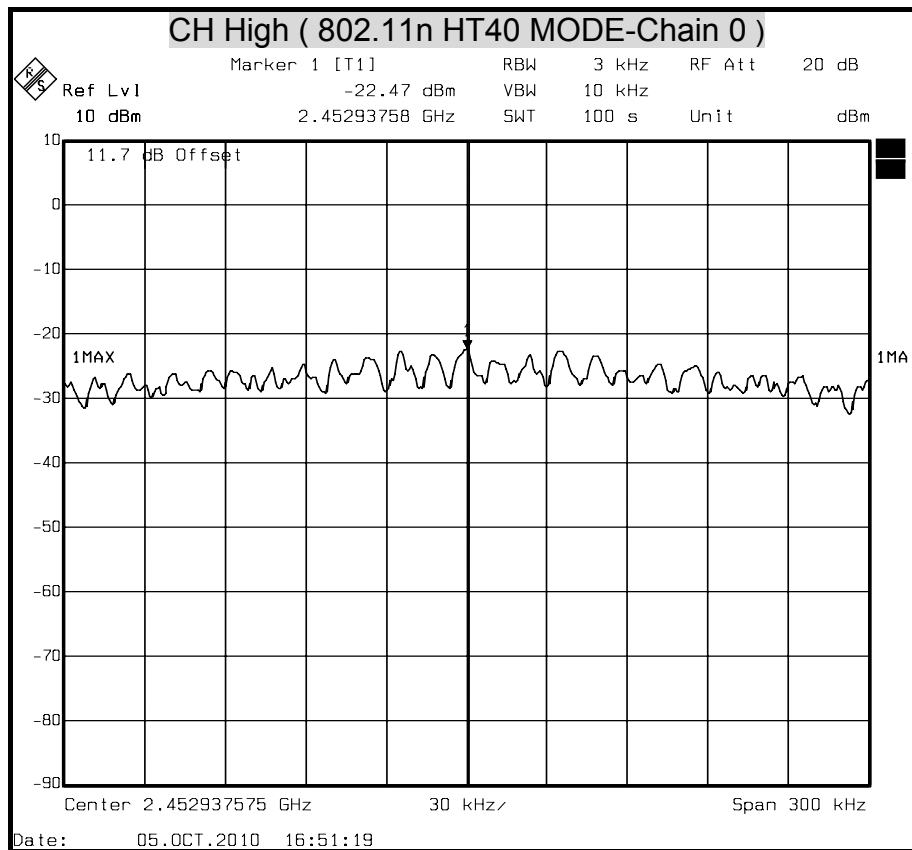





POWER SPECTRAL DENSITY (802.11n HT40 MODE)

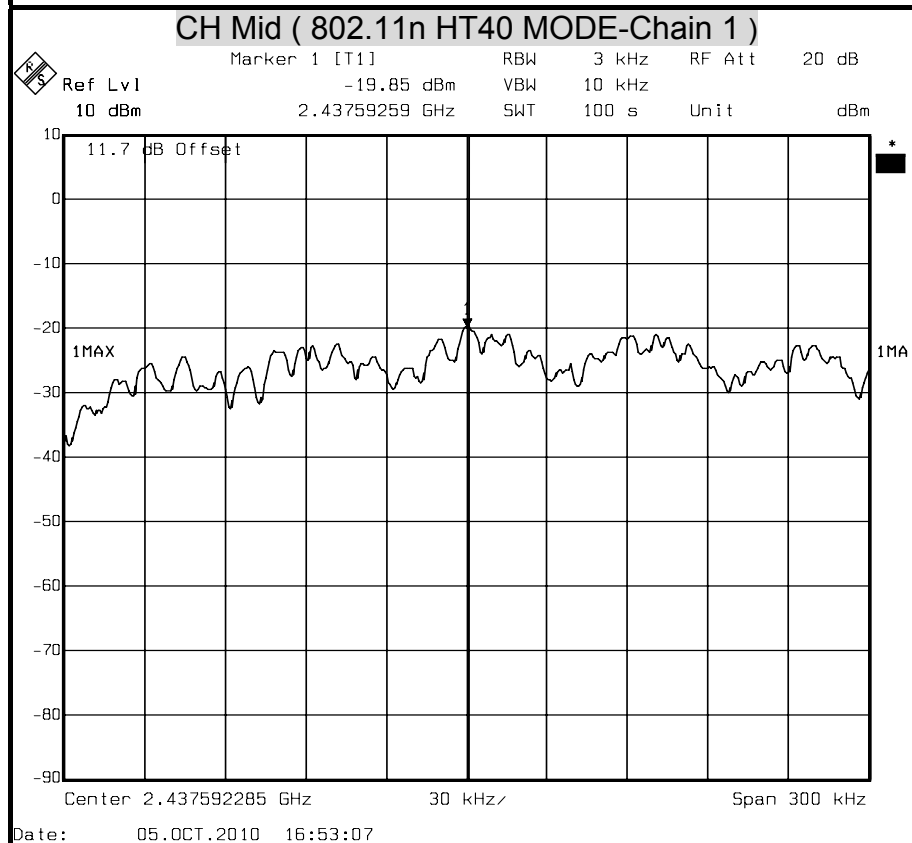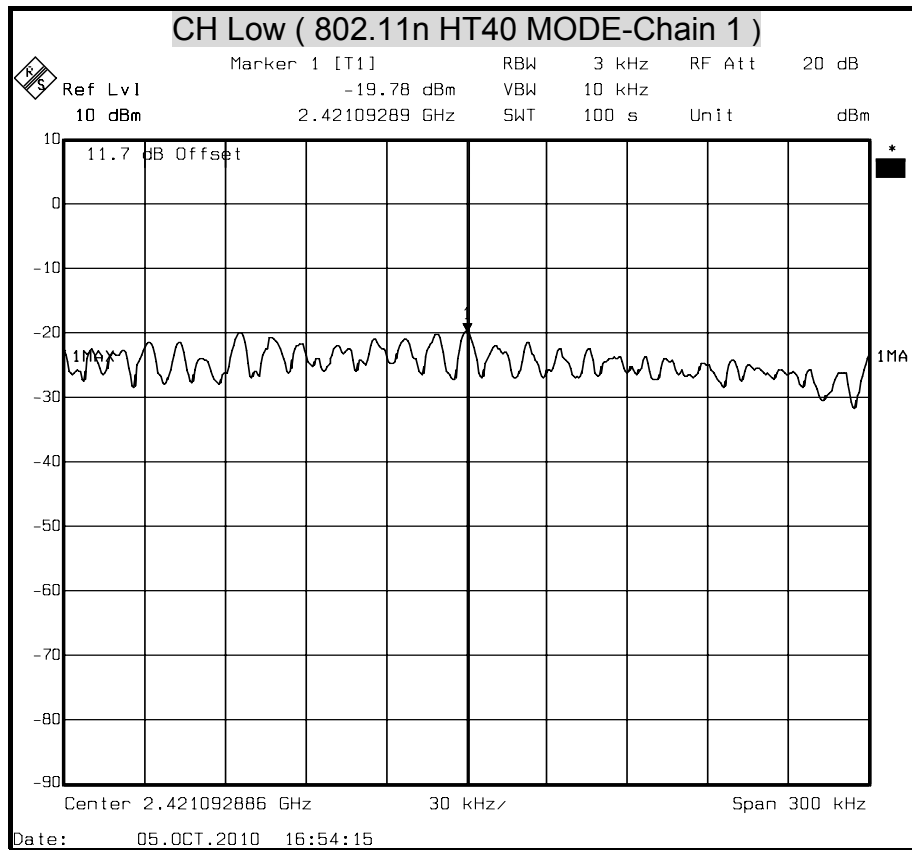


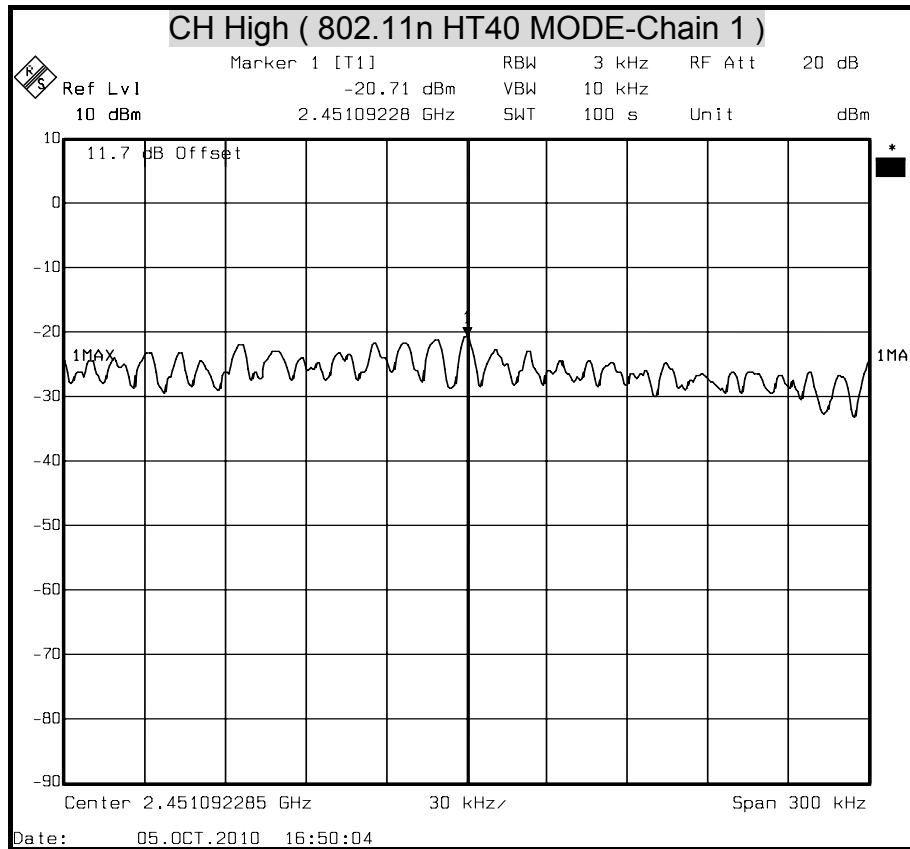





POWER SPECTRAL DENSITY (802.11n HT20 Combined MODE)

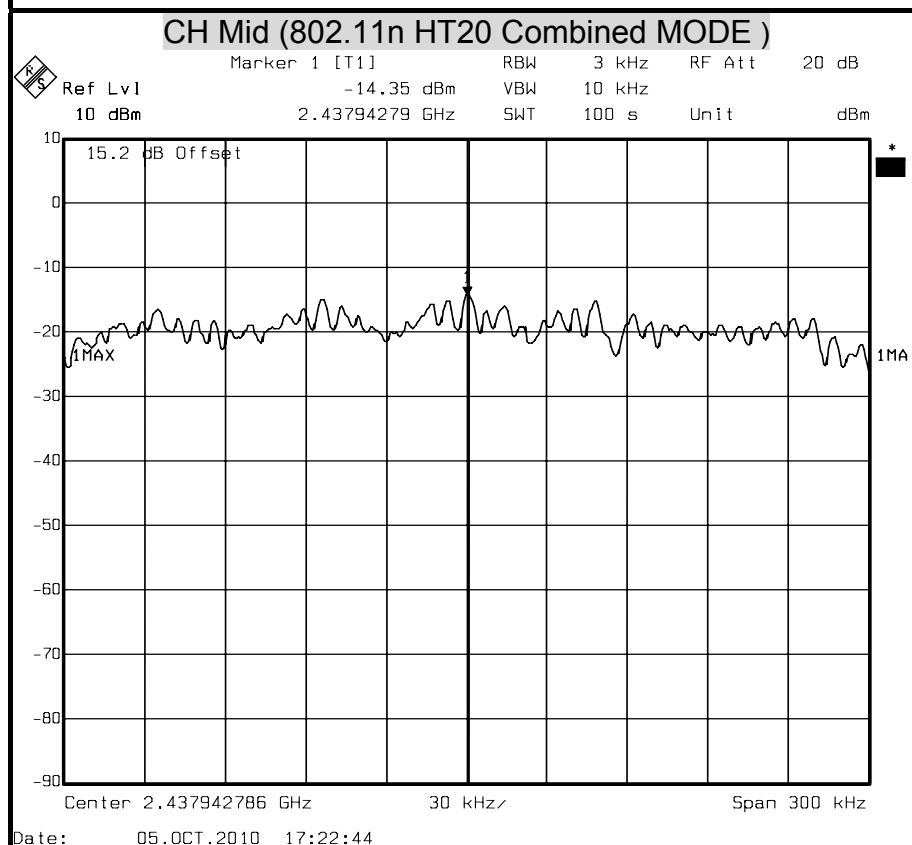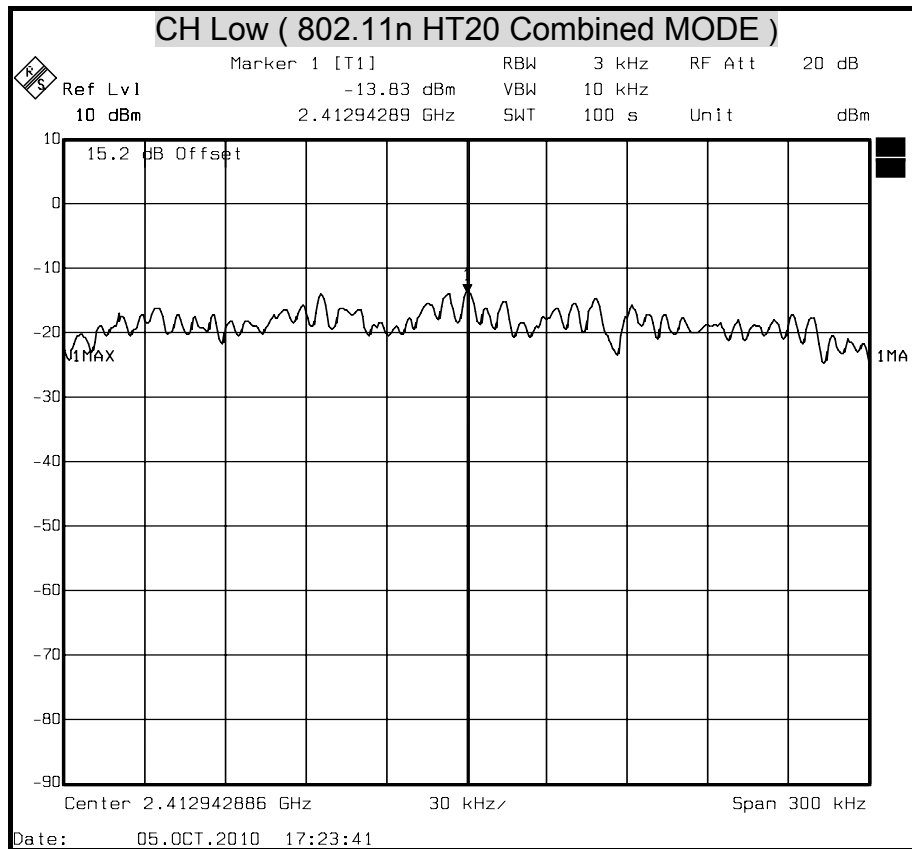


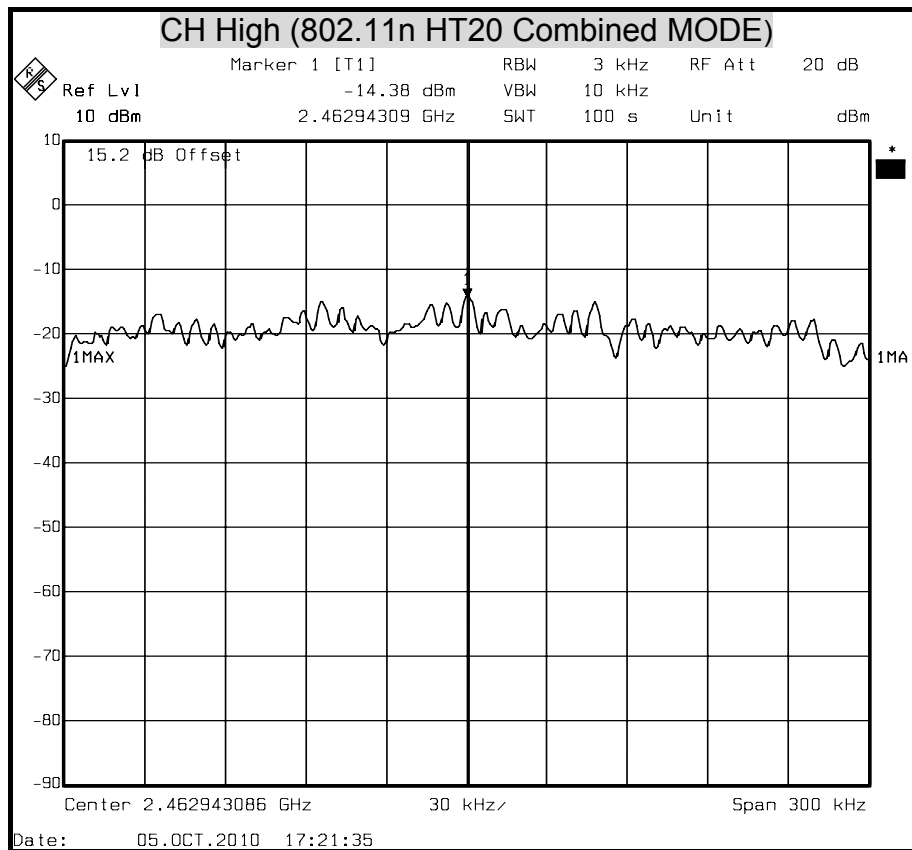



POWER SPECTRAL DENSITY (802.11n HT40 Combined MODE)

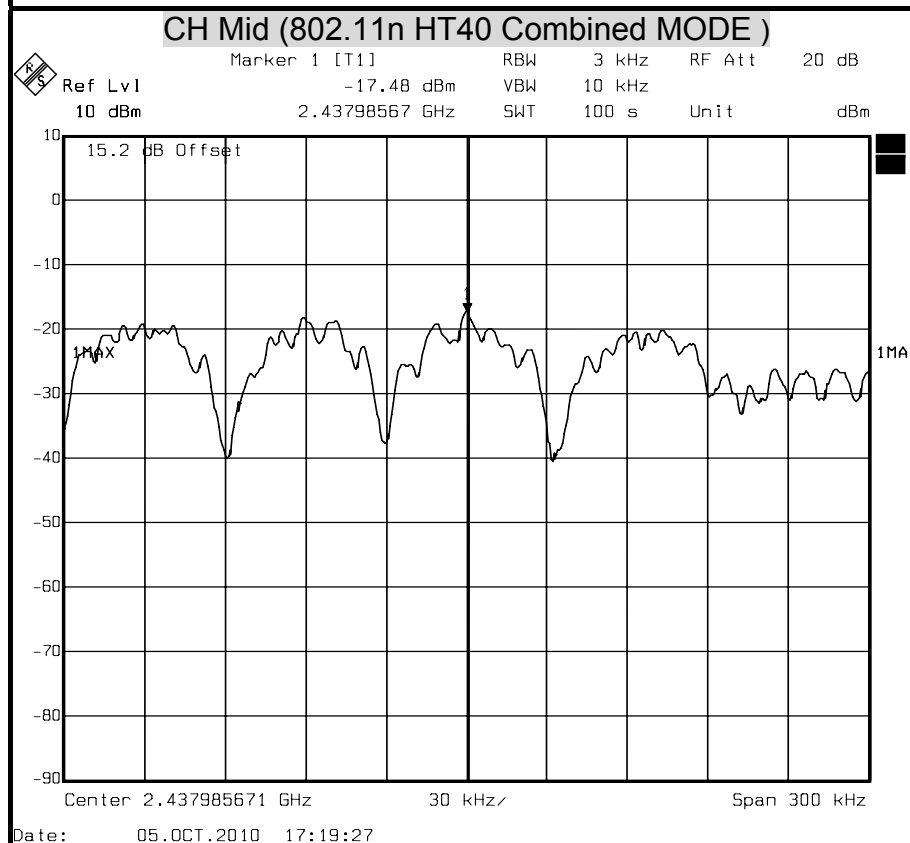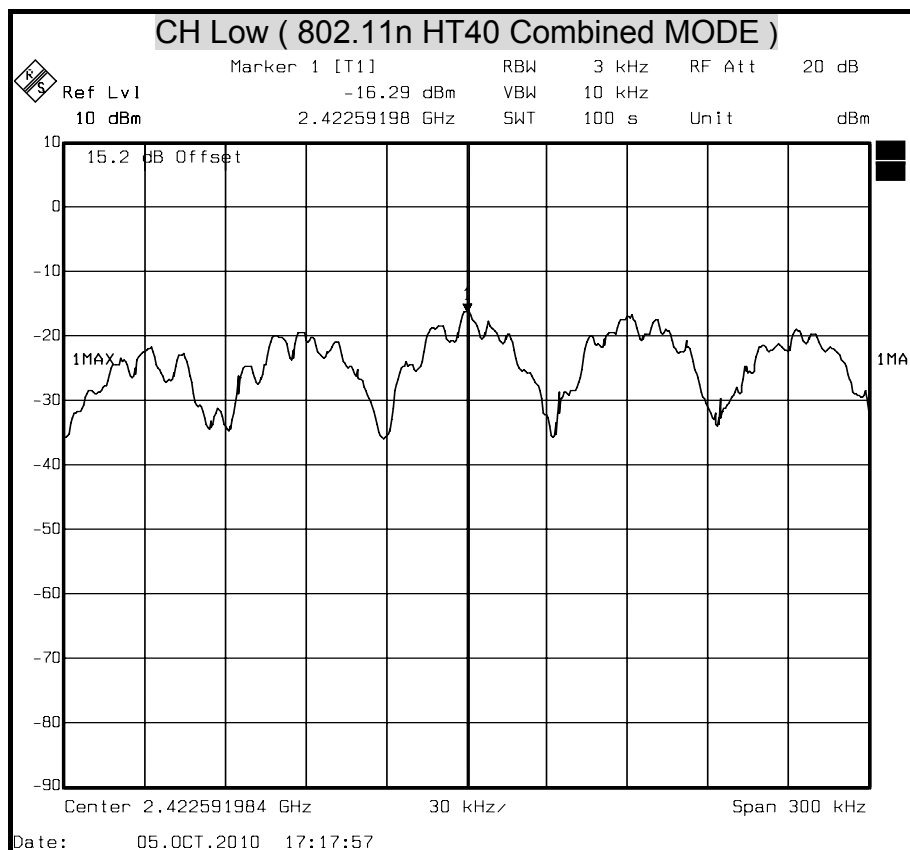

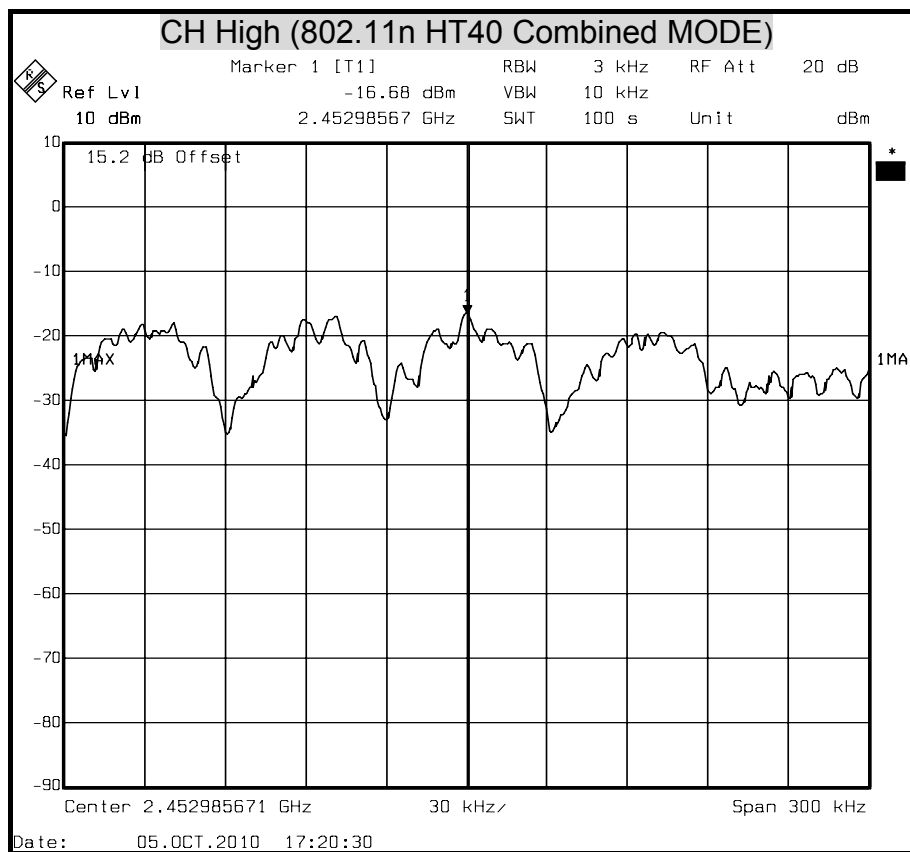



8.5 CONDUCTED SPURIOUS EMISSION

LIMITS


§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

The spectrum from 30 MHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

TEST SETUP

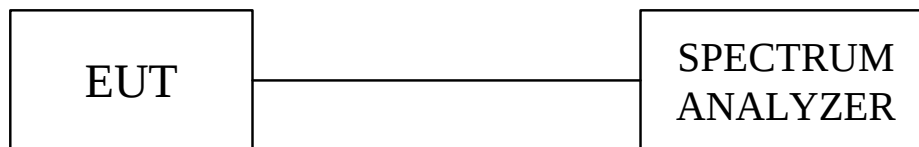

TEST RESULTS

No non-compliance noted.



802.11b Mode

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2412.5796	11.7	95.91	107.61	N/A	N/A
6342.4849	11.7	44.21	55.91	87.61	-31.70
6925.9919	11.7	45.28	56.98	87.61	-30.63

CH Mid

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2437.5444	11.7	98.42	110.12	N/A	N/A
6660.7615	11.7	45.16	56.86	90.12	-33.26
12389.7394	11.7	42.83	54.53	90.12	-35.59

CH High

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2462.6841	11.7	99.76	111.46	N/A	N/A
6979.038	11.7	45.80	57.5	91.46	-33.96
11169.6793	11.7	42.56	54.26	91.46	-37.20

802.11g Mode

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2412.6558	11.7	96.34	108.04	N/A	N/A
6979.038	11.7	46.05	57.75	88.04	-30.29
12708.016	11.7	44.57	56.27	88.04	-31.77

CH Mid

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2437.6577	11.7	92.75	104.45	N/A	N/A
6979.038	11.7	46.04	57.74	84.45	-26.71
11965.3707	11.7	42.84	54.54	84.45	-29.91

CH High

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2462.1476	11.7	92.52	104.22	N/A	N/A
6660.7615	11.7	44.72	56.42	84.22	-27.80
10320.9418	11.7	42.62	54.32	84.22	-29.90

**802.11n HT20 Mode Chain 0**

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2412.5447	11.7	90.20	101.9	N/A	N/A
6713.8076	11.7	44.86	56.56	81.90	-25.34
8517.3747	11.7	42.68	54.38	81.90	-27.52

CH Mid

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2436.4153	11.7	90.51	102.21	N/A	N/A
6024.2084	11.7	45.03	56.73	82.21	-25.48
6979.038	11.7	45.69	57.39	82.21	-24.82

CH High

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2462.4793	11.7	90.39	102.09	N/A	N/A
6979.038	11.7	44.98	56.68	82.09	-25.41
9843.527	11.7	42.19	53.89	82.09	-28.20

802.11n HT20 Mode Chain 1

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2412.5447	11.7	95.06	106.76	N/A	N/A
6925.9919	11.7	45.77	57.47	86.76	-29.29
10108.7575	11.7	43.29	54.99	86.76	-31.77

CH Mid

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2436.4153	11.7	93.09	104.79	N/A	N/A
6979.038	11.7	45.37	57.07	84.79	-27.72
11859.2785	11.7	42.76	54.46	84.79	-30.33

CH High

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2462.4793	11.7	89.74	101.44	N/A	N/A
6979.038	11.7	45.26	56.96	81.44	-24.48
12389.7394	11.7	42.54	54.24	81.44	-27.20



802.11n HT40 Mode Chain 0

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2422.0517	11.7	88.20	99.9	N/A	N/A
6979.038	11.7	45.42	57.12	79.90	-22.78
10745.3106	11.7	42.86	54.56	79.90	-25.34

CH Mid

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2437.4855	11.7	87.53	99.23	N/A	N/A
6979.038	11.7	45.02	56.72	79.23	-22.51
9366.1122	11.7	42.56	54.26	79.23	-24.97

CH High

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2452.3576	11.7	86.82	98.52	N/A	N/A
6979.038	11.7	45.56	57.26	78.52	-21.26
11275.7715	11.7	42.74	54.44	78.52	-24.08

802.11n HT40 Mode Chain 1

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2421.6589	11.7	95.12	106.82	N/A	N/A
6925.9919	11.7	47.88	59.58	86.82	-27.24
8411.2825	11.7	45.78	57.48	86.82	-29.34

CH Mid

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2436.8712	11.7	95.09	106.79	N/A	N/A
6713.8076	11.7	48.55	60.25	86.79	-26.54
12548.87776	11.7	46.76	58.46	86.79	-28.33

CH High

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2452.0236	11.7	95.22	106.92	N/A	N/A
6607.7154	11.7	48.97	60.67	86.92	-26.25
9047.8356	11.7	45.62	57.32	86.92	-29.60

**802.11n HT20 Combined Mode**

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2412.3114	15.2	94.87	110.07	N/A	N/A
6925.9919	15.2	46.07	61.27	90.07	-28.80
12601.9238	15.2	43.88	59.08	90.07	-30.99

CH Mid

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2437.054	15.2	94.96	110.16	N/A	N/A
6979.038	15.2	44.57	59.77	90.16	-30.39
12920.2004	15.2	43.58	58.78	90.16	-31.38

CH High

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2462.6841	15.2	95.31	110.51	N/A	N/A
6979.038	15.2	45.74	60.94	90.51	-29.57
10427.034	15.2	41.79	56.99	90.51	-33.52

802.11n HT40 Combined Mode

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2422.0471	15.2	89.34	104.54	N/A	N/A
6979.038	15.2	44.87	60.07	84.54	-24.47
8305.1903	15.2	43.23	58.43	84.54	-26.11

CH Mid



Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2436.4857	15.2	88.70	103.9	N/A	N/A
6660.7615	15.2	45.22	60.42	83.90	-23.48
10427.034	15.2	42.61	57.81	83.90	-26.09


CH High

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dB)
2453.1544	15.2	88.81	104.01	N/A	N/A
6660.7615	15.2	44.61	59.81	84.01	-24.20
7827.7755	15.2	42.90	58.1	84.01	-25.91



OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT (IEEE 802.11b MODE)

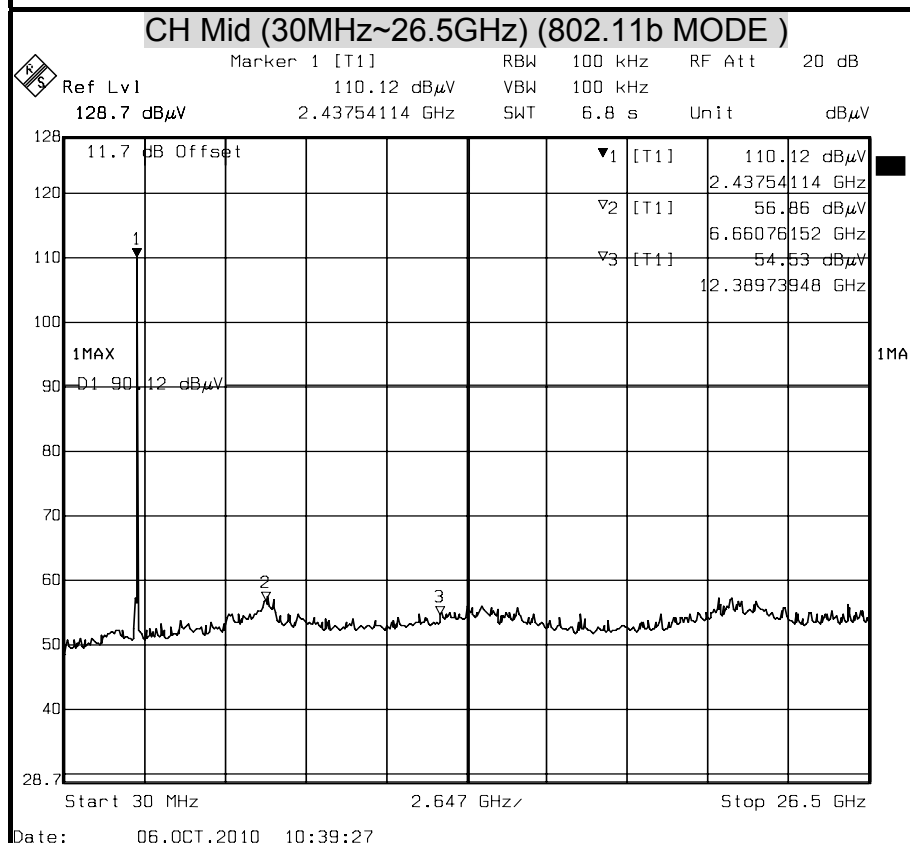
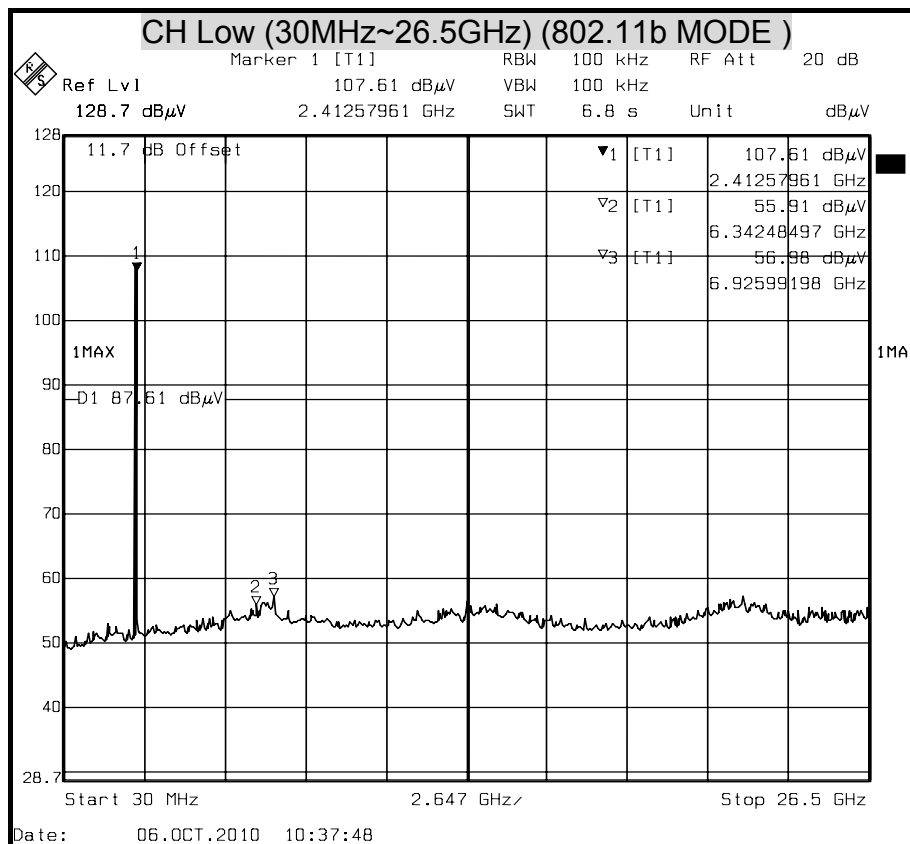


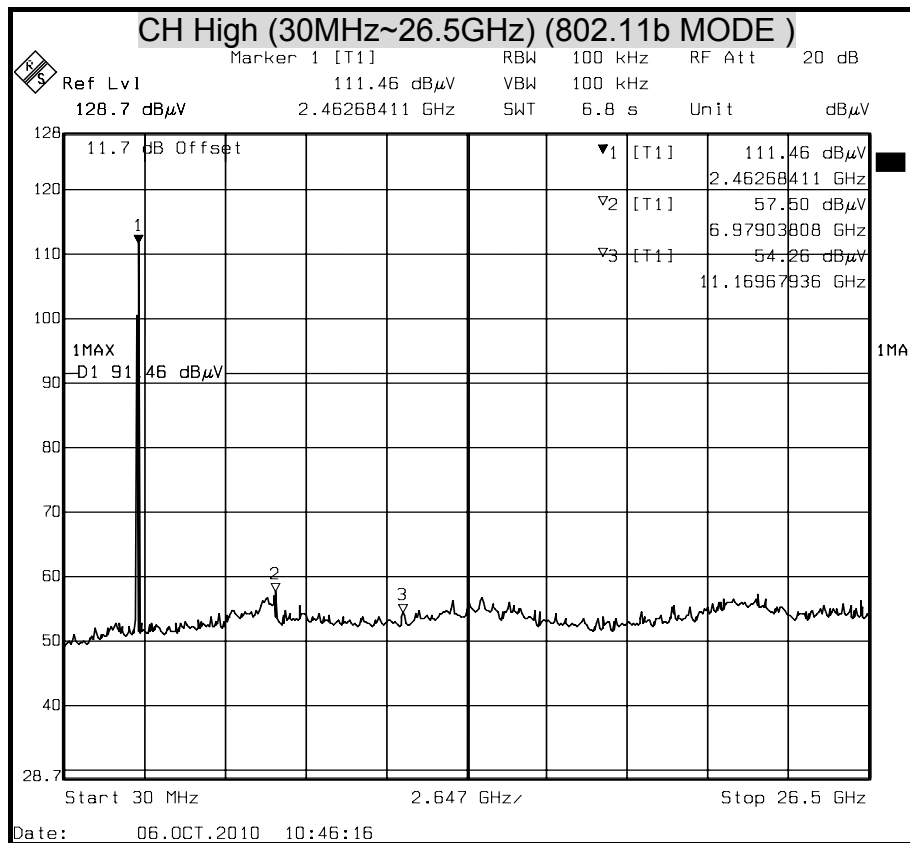




OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

(802.11g MODE)

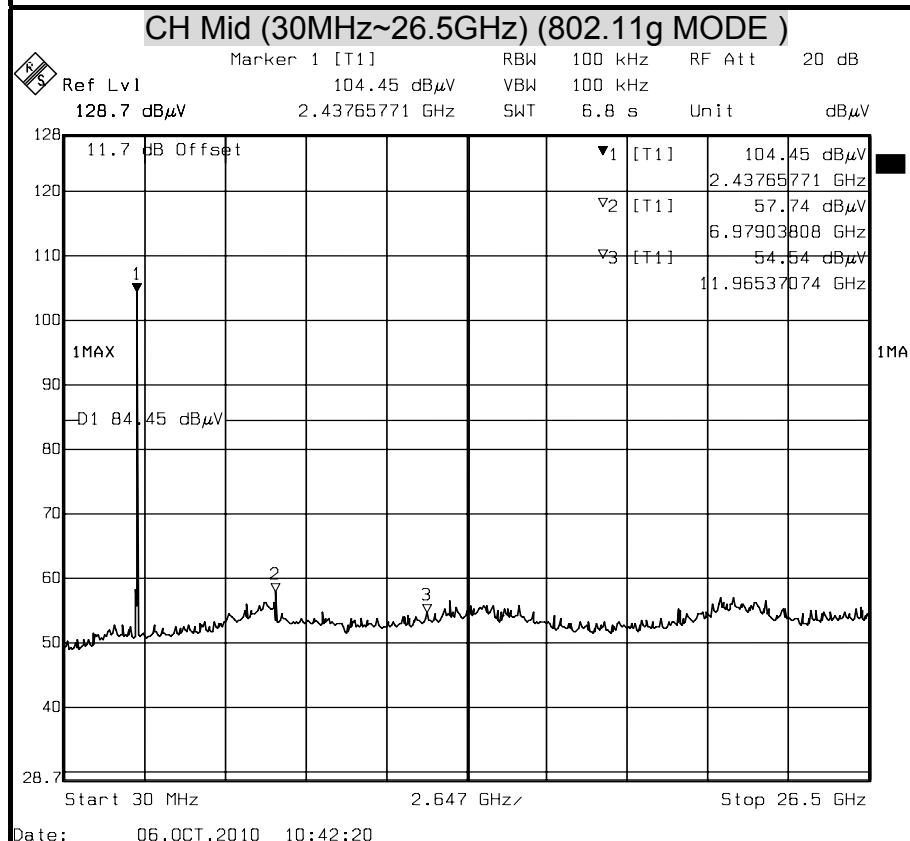
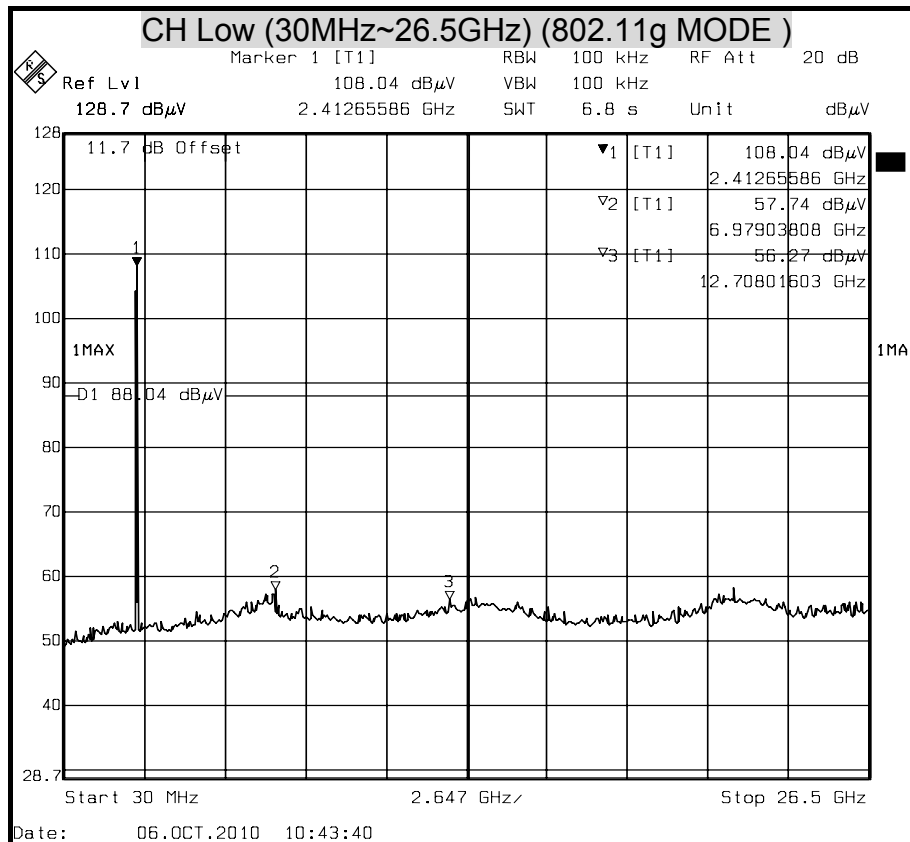


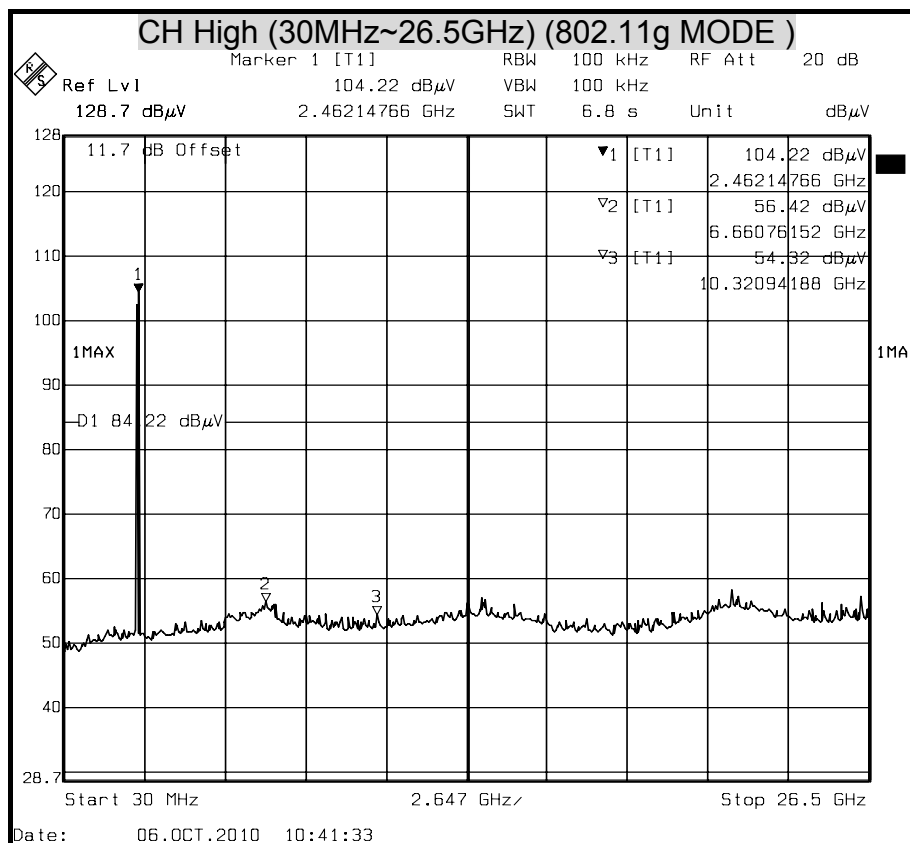




OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

(802.11n HT20 MODE)

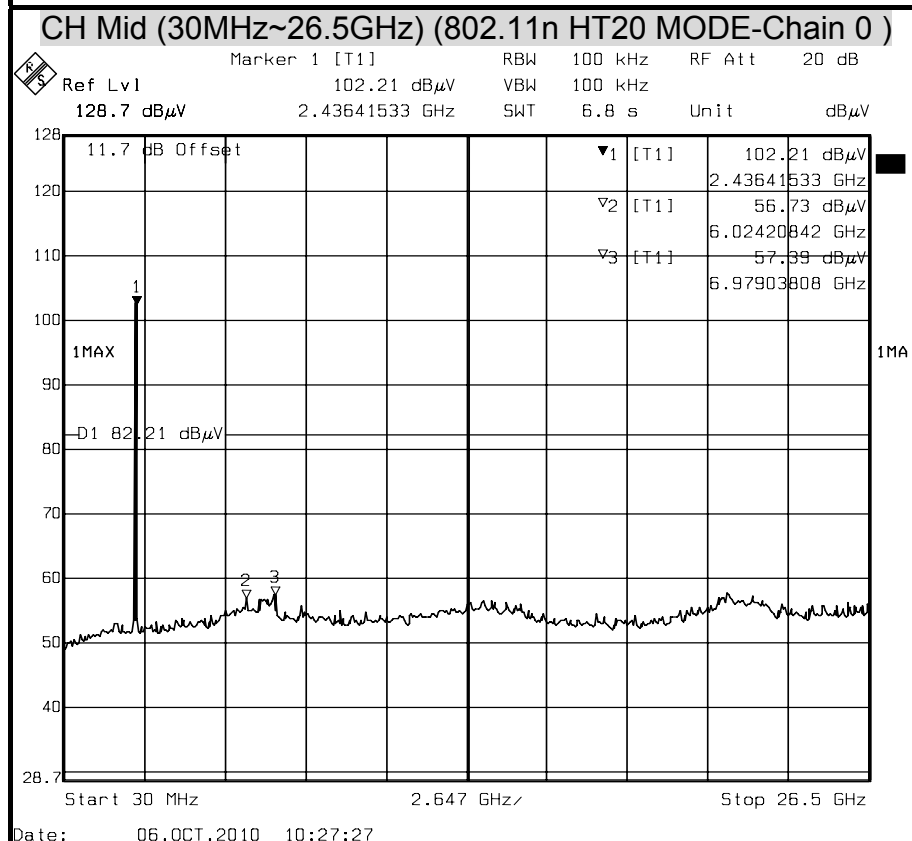
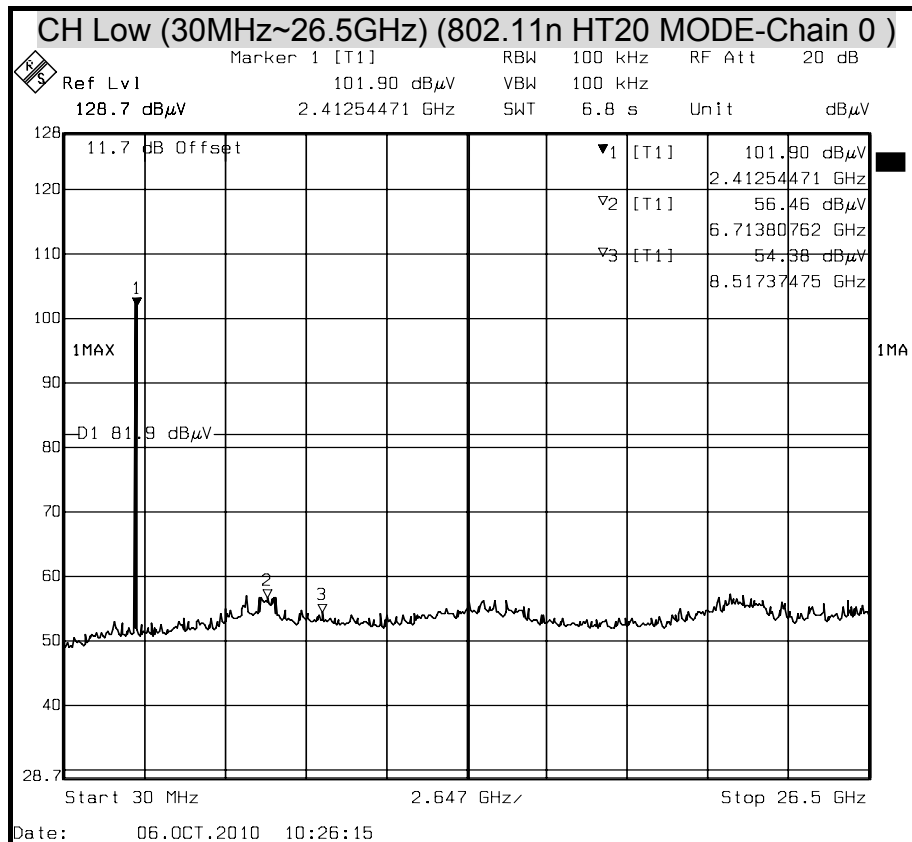


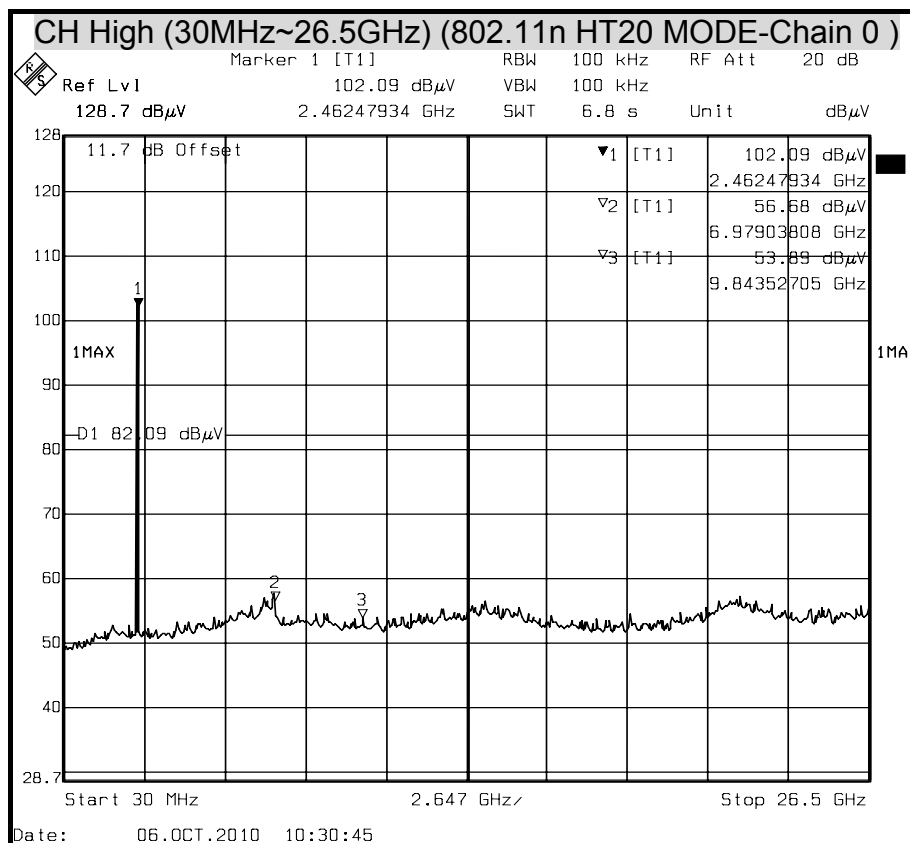




OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

(802.11n HT20 MODE)

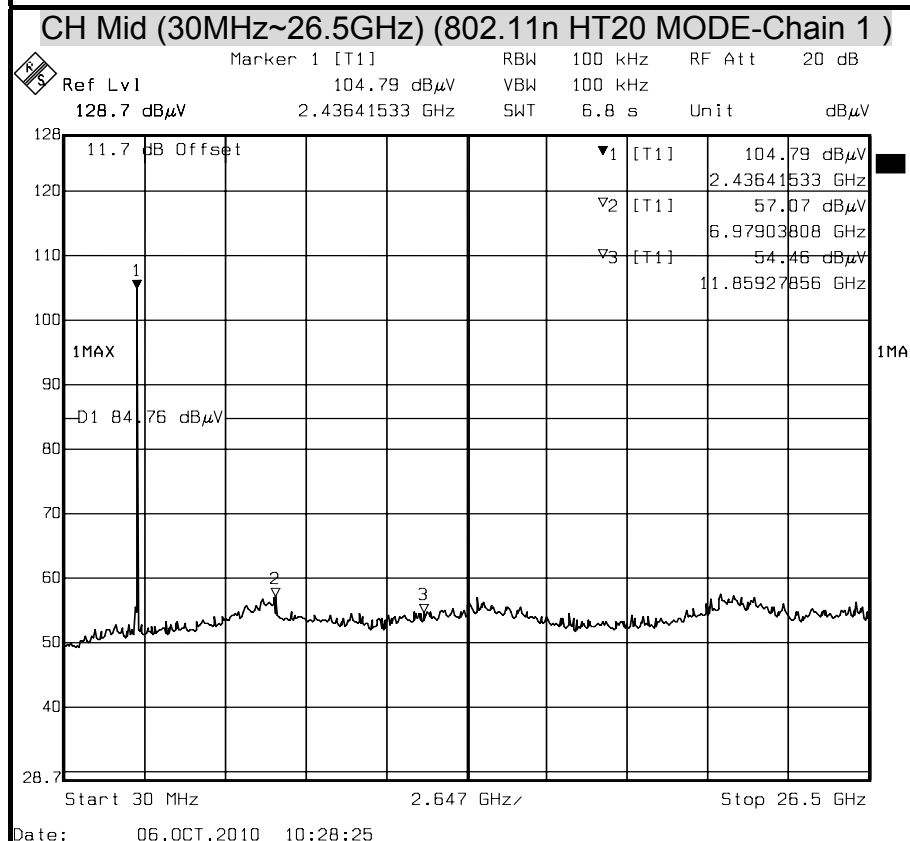
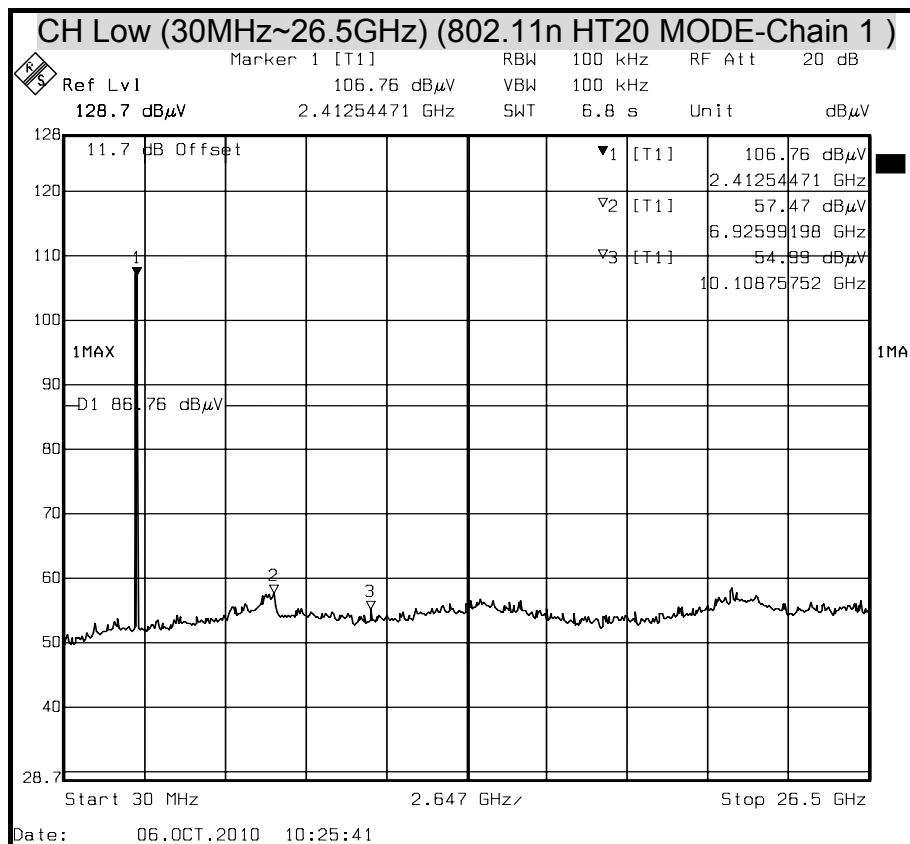


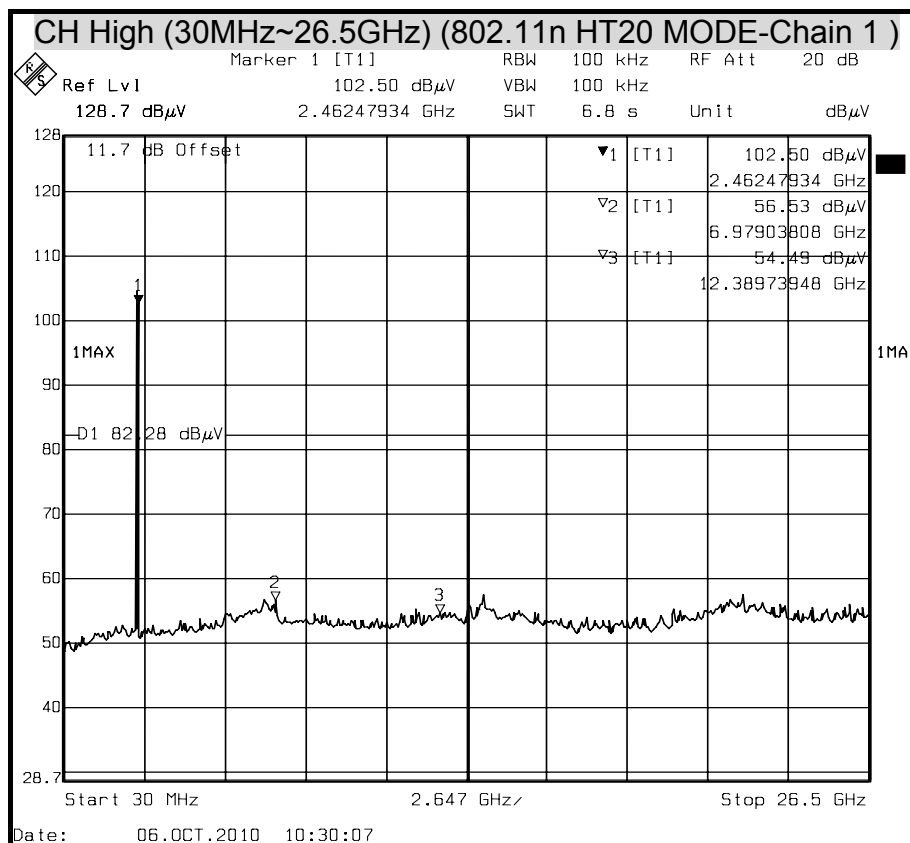




OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

(802.11n HT40 MODE)

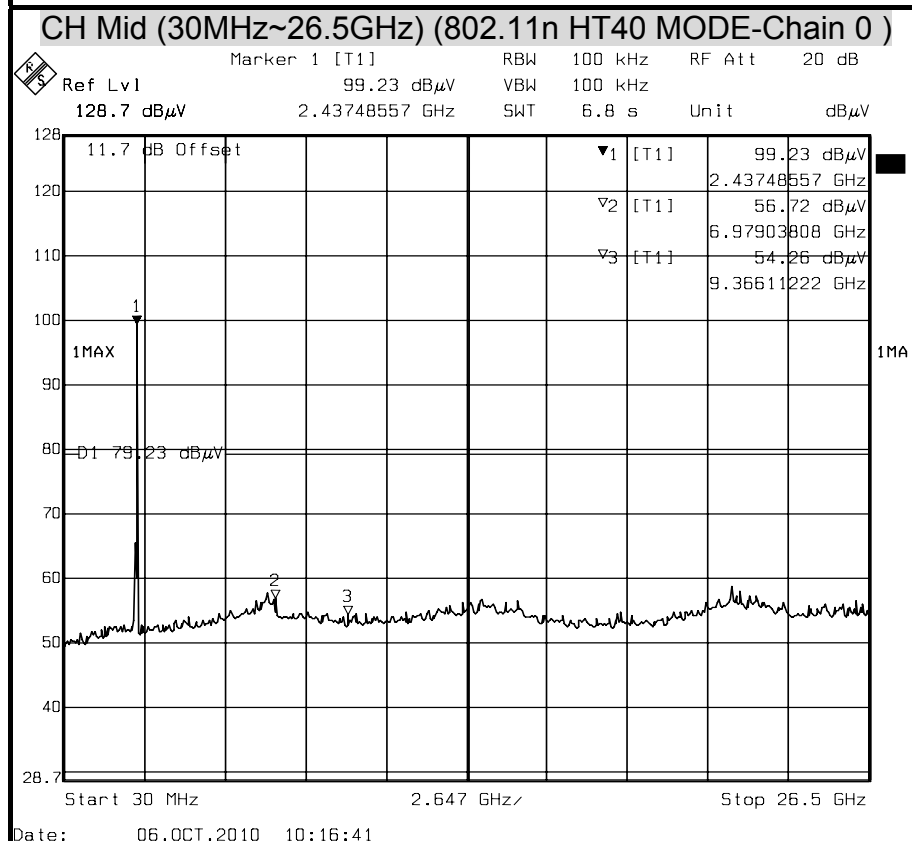
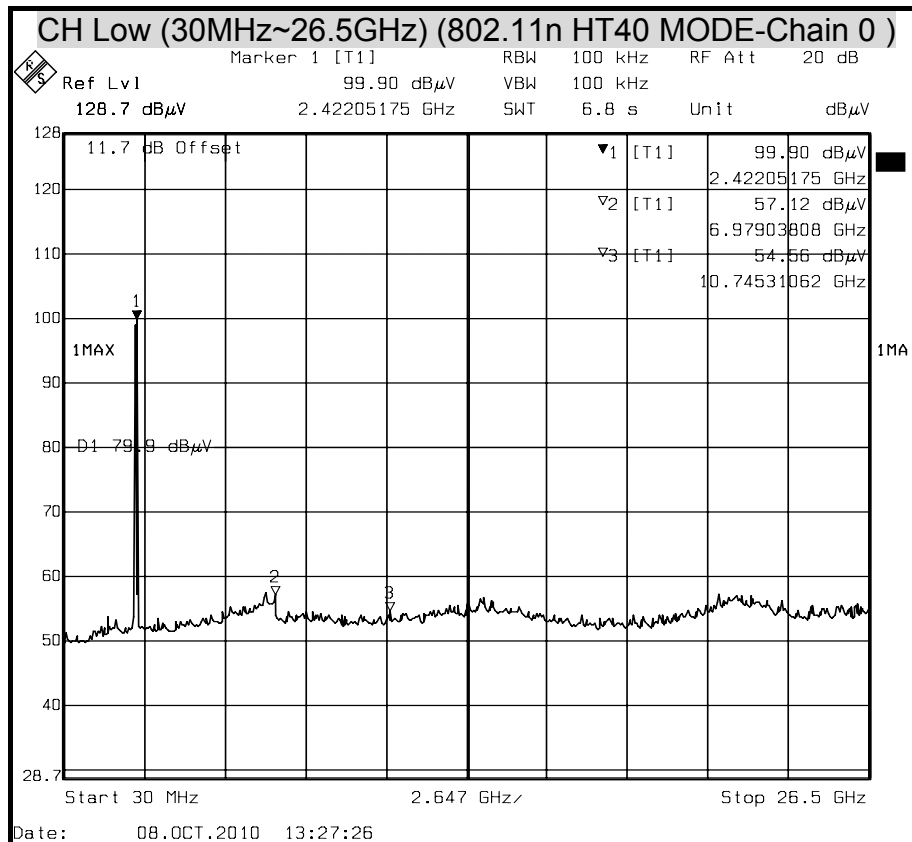


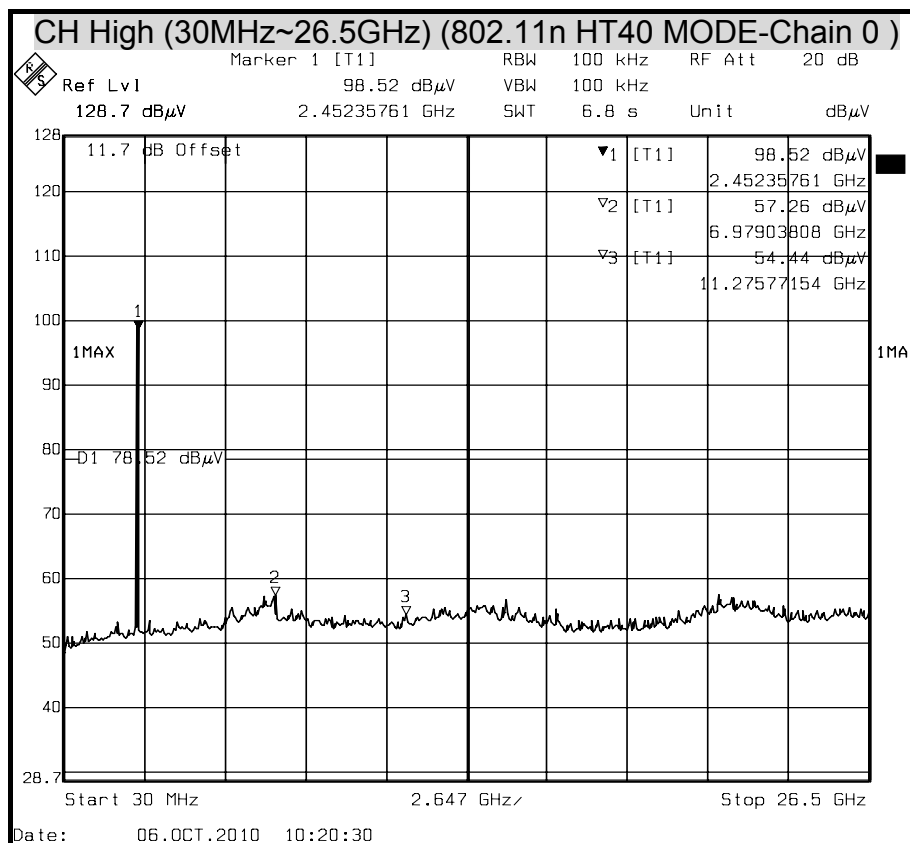




OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT



(802.11n HT40 MODE)

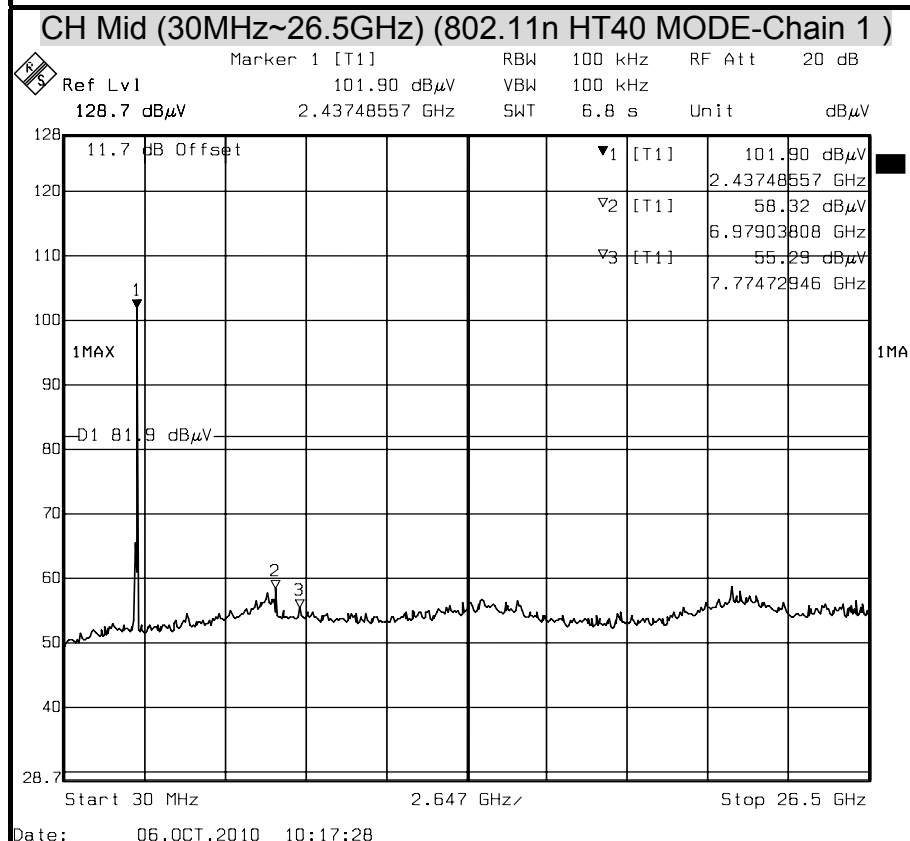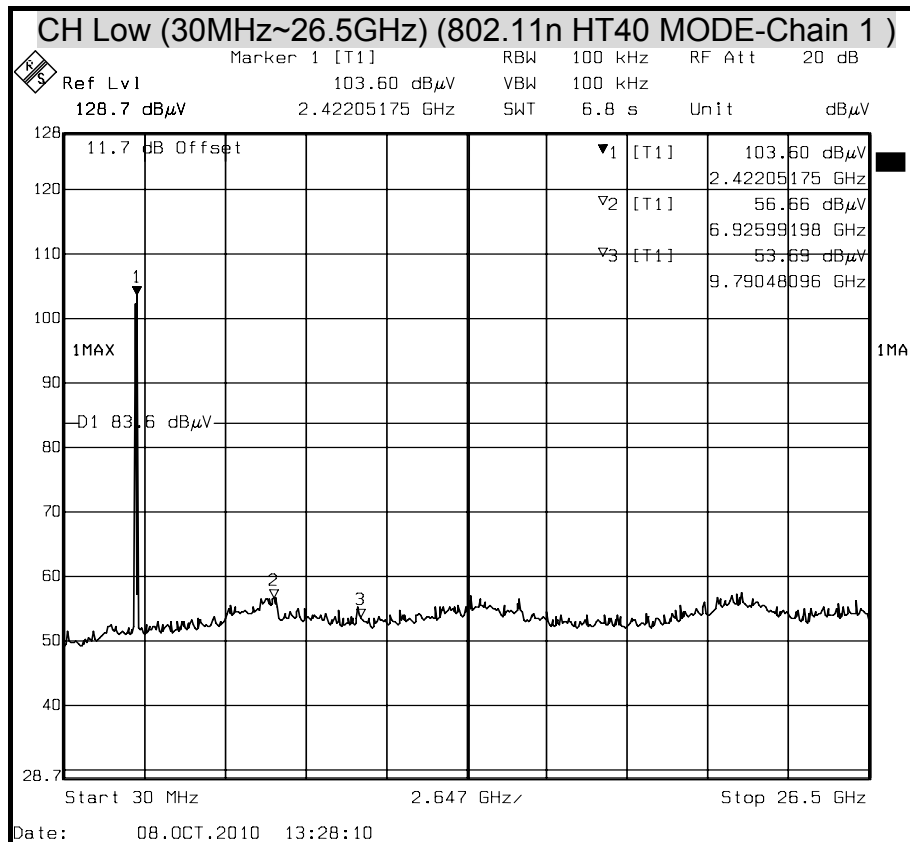


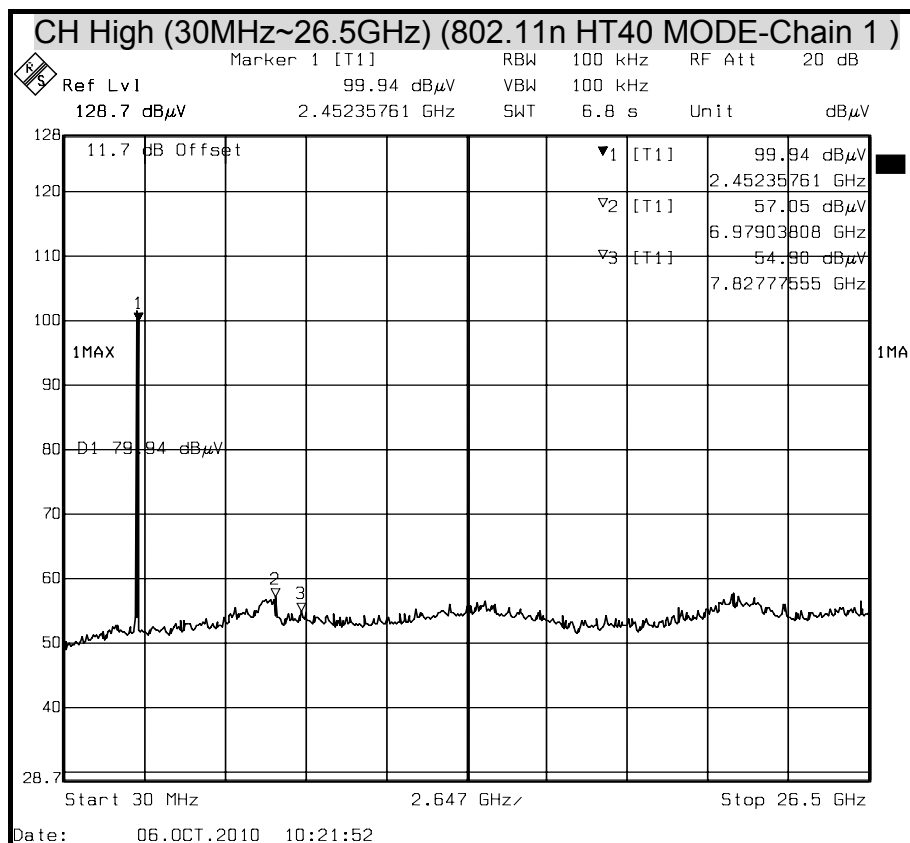



OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT (802.11n HT20 Combined Mode)

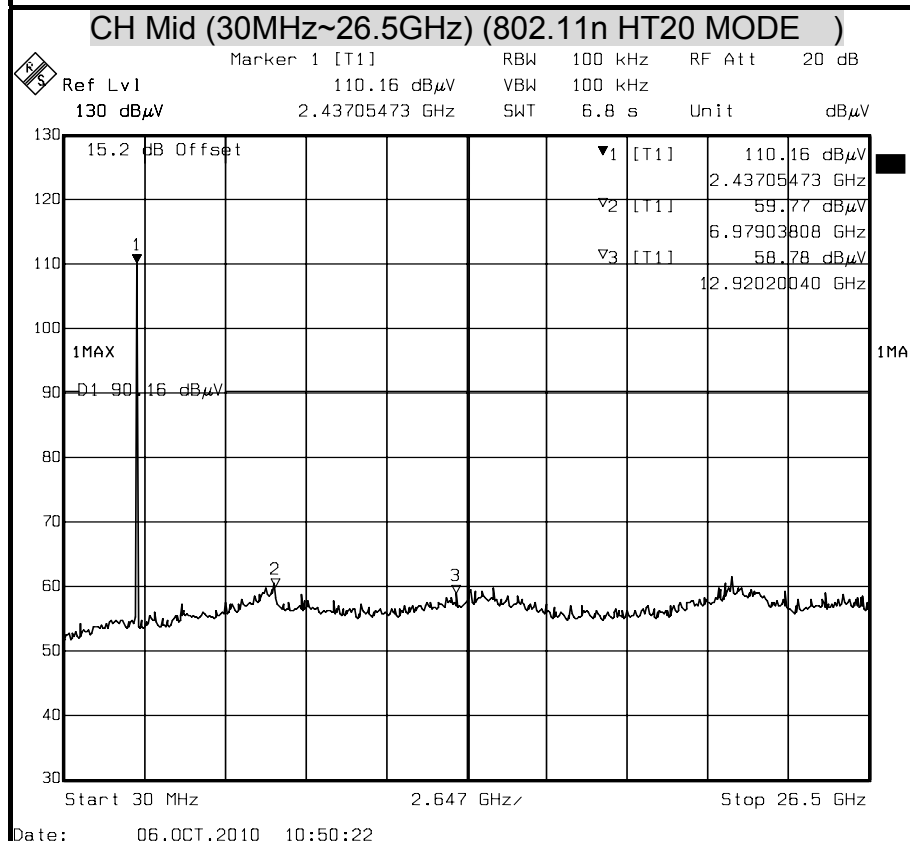
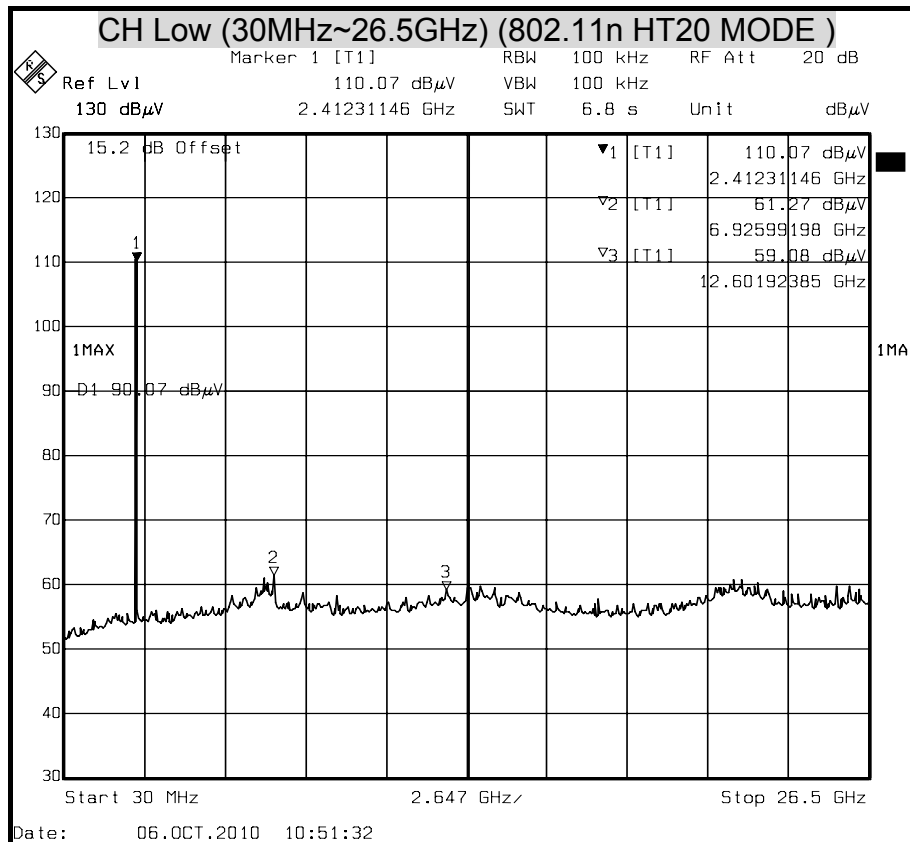


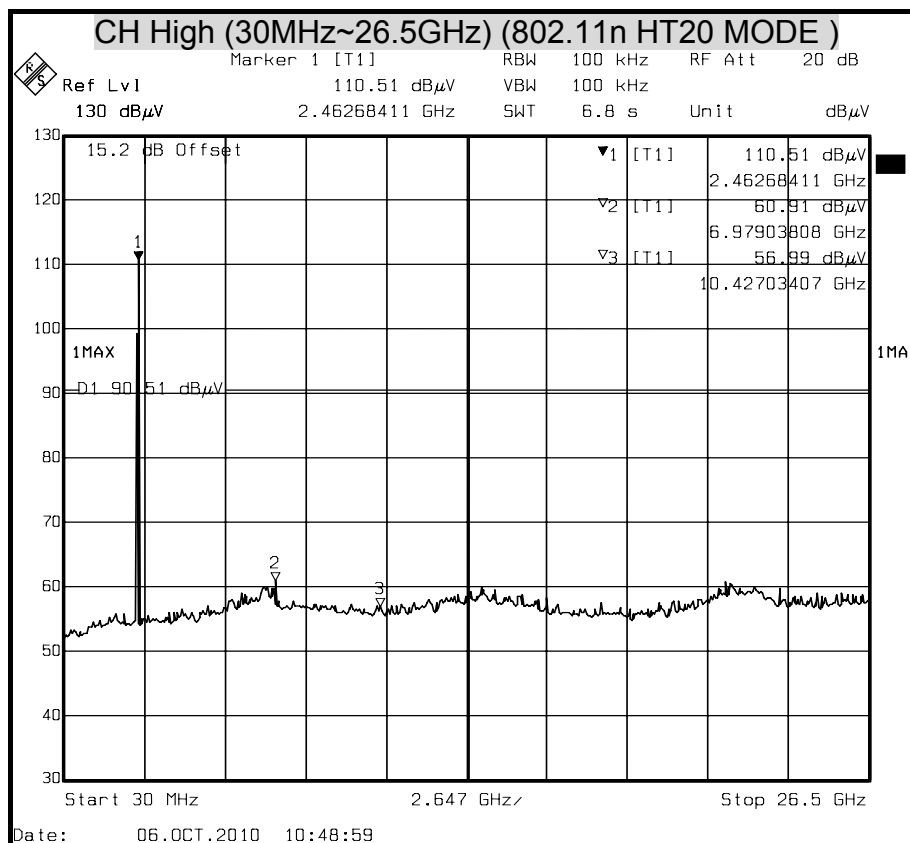




OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

(802.11n HT40 Combined Mode)

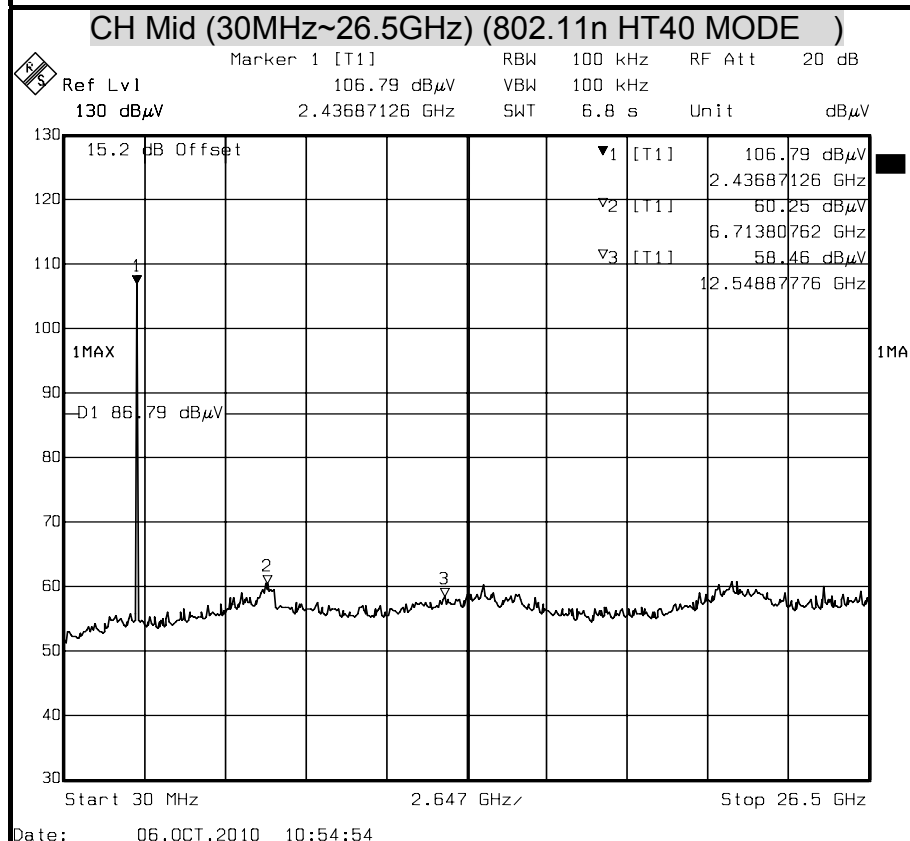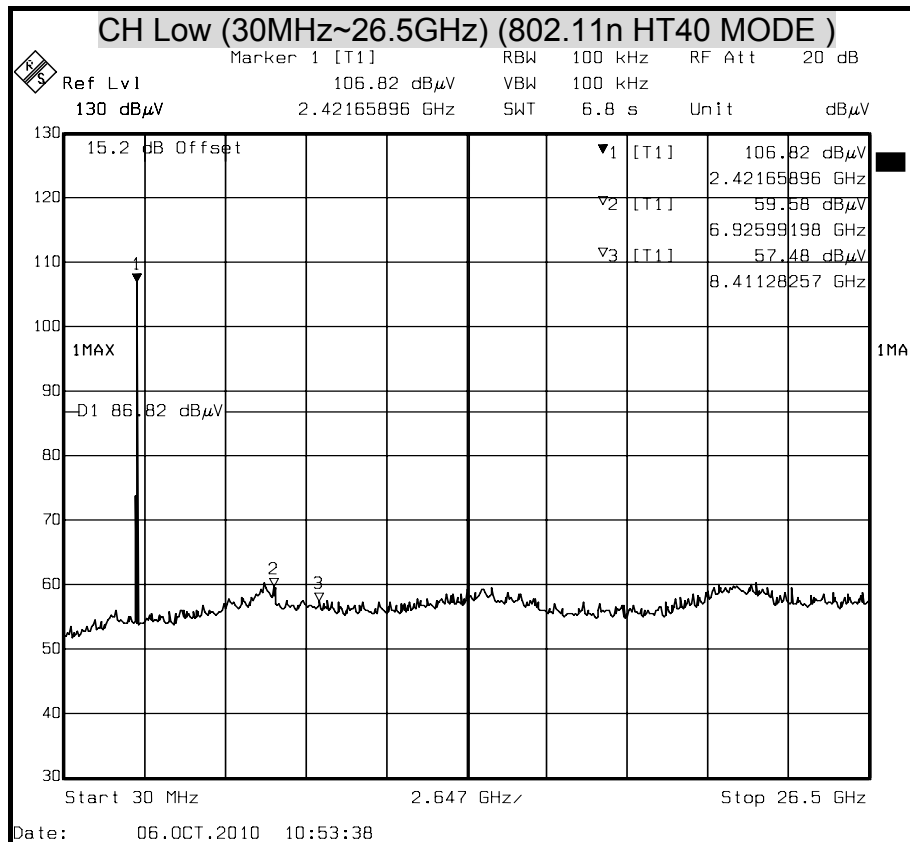

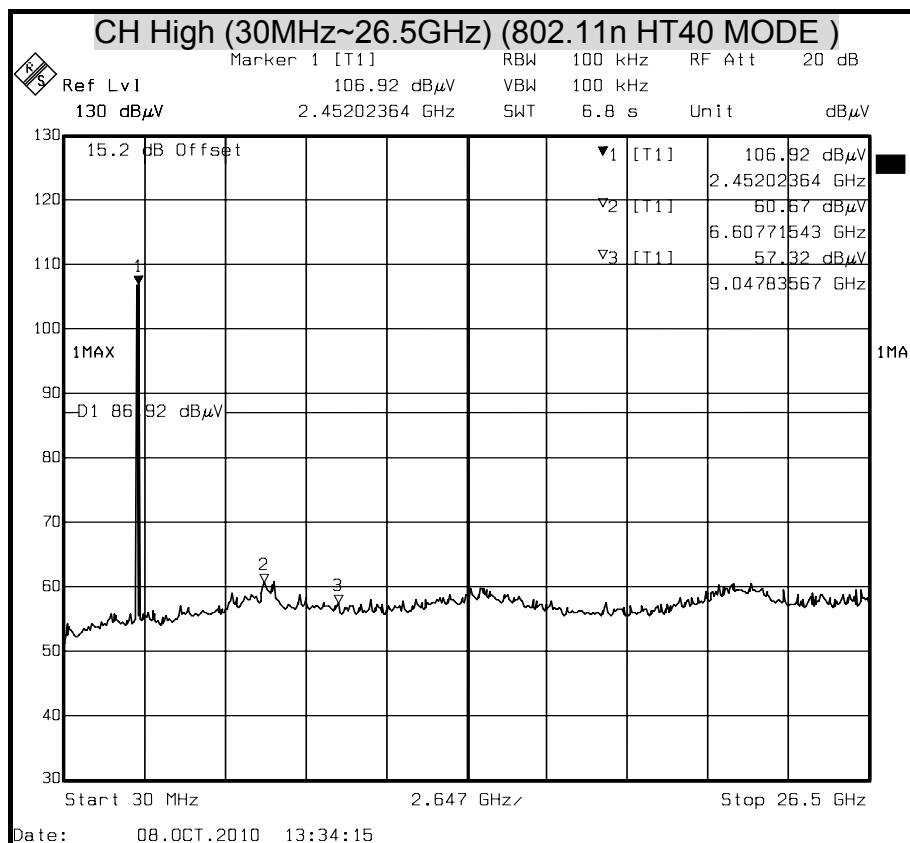



8.6 RADIATED EMISSIONS

8.6.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS

LIMITS

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6



§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

§ 15.209 (b) In the emission table above, the tighter limit applies at the band edges.



TEST EQUIPMENTS

The following test equipments are utilized in making the measurements contained in this report.


Open Area Test Site # 6				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TYPE N COAXIAL CABLE	SUHNER	CHA9513	6	AUG. 31, 2011
BI-LOG Antenna	Sunol	JB1	A070506-2	NOV. 12, 2010
LOOP ANTENNA	EMCO	6502	8905-2356	JUN. 10, 2011
Pre-Amplifier	HP	8447F	2944A03817	AUG. 31, 2011
EMI Receiver	R&S	ESVS10	833206/012	MAY 10, 2011
RF Cable	SUHNER	SUCOFLEX104PEA	20520/4PEA	NOV. 10, 2010
Horn Antenna	Com-Power	AH-118	071032	DEC. 29, 2010
Spectrum Analyzer	R&S	FSEK 30	835253/002	JUL. 14, 2011
Pre-Amplifier	MITEQ	AFS44-00108650-42-10P-44	1205908	NOV. 10, 2010
Turn Table	Yo Chen	001	-----	N.C.R.
Antenna Tower	AR	TP1000A	309874	N.C.R.
Controller	CT	SC101	-----	N.C.R.
RF Swicth	E-INSTRUMENT TELH LTD	ERS-180A	EC1204141	N.C.R
Power Meter	Anritsu	ML2487A	6K00003888	MAY 11, 2011
Power Sensor	Anritsu	MA2491A	33265	MAY 10, 2011
AC Power Source	T-POWER	TFC-3020	N930010	N.C.R
Temp./Humidity Chamber	K.SON	THS-M1	242	AUG. 11, 2011
Signal Generator	HP	8673C	2938A00663	SEP. 12, 2011
DC Power Source	LOKO	DSP-5050	L1507009282	N.C.R




TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from below 1GHz.


9kHz ~ 30MHz

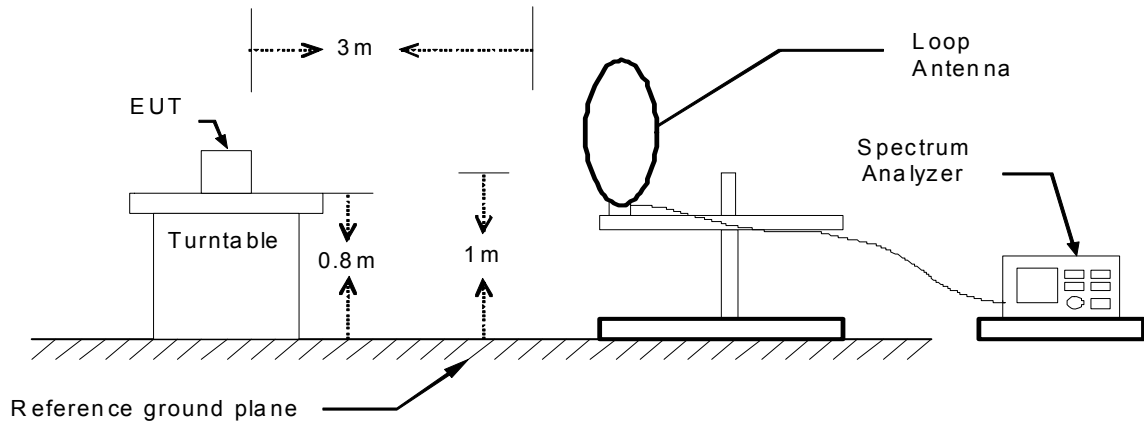

30MHz ~ 1GHz

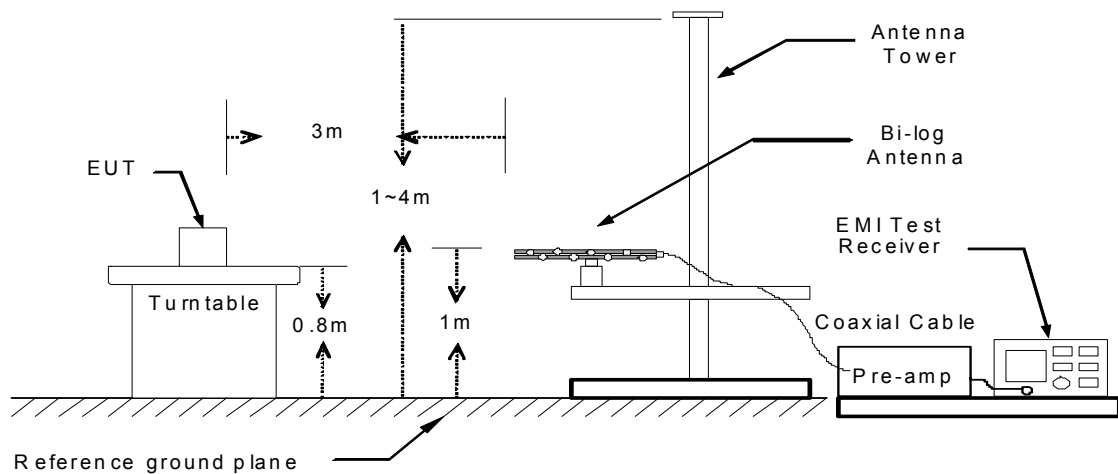

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

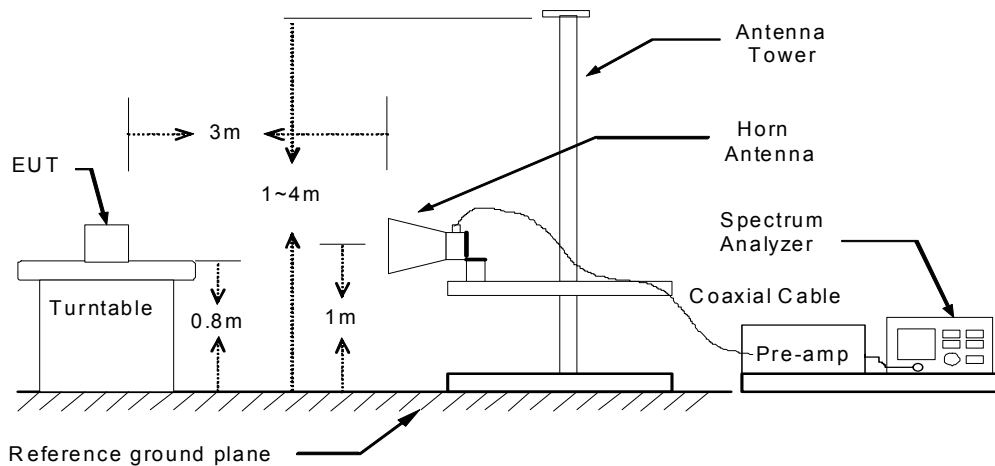



TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. **No emission is found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)**

TEST RESULTS

No non-compliance noted.



8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz

Product Name	WiFi Combo VPN Router	Test Date	2010/10/1
Model	BDW463AM	Test By	Eric Yang
Test Mode	Normal operating (worst case)	TEMP& Humidity	26.8°C, 57%

Horizontal

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Level	Limits	Margin	Detector Mode
(MHz)	(dBμV)	(dB/M)	(dB)	(dBμV/M)	(dBμV/M)	(dB)	PK/QP
143.28	16.50	13.41	2.11	32.02	43.50	-11.48	QP
216.00	14.80	13.01	2.62	30.43	43.50	-13.07	QP
228.00	17.30	12.78	2.75	32.83	46.00	-13.17	QP
500.00	20.40	18.14	4.82	43.36	46.00	-2.64	QP
600.00	20.20	19.28	5.27	44.75	46.00	-1.25	QP
783.00	13.60	21.75	5.94	41.30	46.00	-4.70	QP
800.00	11.90	21.96	5.97	39.83	46.00	-6.17	QP
N/A	-----	-----	-----	-----	-----	-----	-----

Vertical

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Level	Limits	Margin	Detector Mode
(MHz)	(dBμV)	(dB/M)	(dB)	(dBμV/M)	(dBμV/M)	(dB)	PK/QP
68.91	24.80	8.43	1.53	34.75	40.00	-5.25	QP
125.00	15.90	14.05	1.99	31.94	43.50	-11.56	QP
143.30	18.60	13.41	2.11	34.12	43.50	-9.38	QP
216.00	17.50	13.01	2.62	33.13	43.50	-10.37	QP
228.00	19.80	12.78	2.75	35.33	46.00	-10.67	QP
500.00	17.20	18.14	4.82	40.16	46.00	-5.84	QP
600.00	18.60	19.28	5.27	43.15	46.00	-2.85	QP
783.00	13.80	21.75	5.94	41.50	46.00	-4.50	QP
N/A	-----	-----	-----	-----	-----	-----	-----

REMARK: Emission level (dBμV/m) =Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dBμV).



8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

Product Name	WiFi Combo VPN Router	Test Date	2010/10/4
Model	BDW463AM	Test By	Eric Yang
Test Mode	IEEE 802.11b TX (CH Low)	TEMP& Humidity	26.8°C, 57%

Horizontal

TX / IEEE 802.11b mode / CH Low					Measurement Distance at 3m			Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 4823.91	56.72	33.17	3.73	42.38	0.69	51.93	74.00	-22.07	P
* 4823.91	52.27	33.17	3.73	42.38	0.69	47.48	54.00	-6.52	A
7234.53	50.50	38.60	4.67	41.84	1.43	53.36	74.00	-20.64	P
7234.53	41.51	38.60	4.67	41.84	1.43	44.37	54.00	-9.63	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo VPN Router	Test Date	2010/10/11
Model	BDW463AM	Test By	Eric Yang
Test Mode	IEEE 802.11b TX (CH Low)	TEMP& Humidity	26.8°C, 57%

Vertical

TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 4824.06	58.76	33.17	3.73	42.38	0.69	53.97	74.00	-20.03	P
* 4824.54	56.94	33.17	3.73	42.38	0.69	52.15	54.00	-1.85	A
7236.10	54.65	38.61	4.67	41.84	1.44	57.53	74.00	-16.47	P
7237.37	47.02	38.61	4.67	41.84	1.44	49.90	54.00	-4.10	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo VPN Router	Test Date	2010/10/11
Model	BDW463AM	Test By	Eric Yang
Test Mode	IEEE 802.11b TX (CH Middle)	TEMP& Humidity	26.8°C, 57%

Horizontal

TX / IEEE 802.11b mode / CH Middle				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 4873.97	56.37	33.32	3.74	42.43	0.71	51.71	74.00	-22.29	P
* 4873.97	52.19	33.32	3.74	42.43	0.71	47.53	54.00	-6.47	A
* 7311.62	50.94	38.83	4.71	41.72	1.60	54.36	74.00	-19.64	P
* 7311.62	41.63	38.83	4.71	41.72	1.60	45.05	54.00	-8.95	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo VPN Router	Test Date	2010/10/11
Model	BDW463AM	Test By	Eric Yang
Test Mode	IEEE 802.11b TX (CH Middle)	TEMP& Humidity	26.8°C, 57%

Vertical

TX / IEEE 802.11b mode / CH Middle					Measurement Distance at 3m				Vertical	polarity
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 4874.05	59.74	33.32	3.74	42.43	0.71	55.08	74.00	-18.92	P	
* 4874.05	57.45	33.32	3.74	42.43	0.71	52.79	54.00	-1.21	A	
* 7309.89	53.52	38.83	4.71	41.73	1.59	56.93	74.00	-17.07	P	
* 7309.89	45.67	38.83	4.71	41.73	1.59	49.08	54.00	-4.92	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo VPN Router	Test Date	2010/10/11
Model	BDW463AM	Test By	Eric Yang
Test Mode	IEEE 802.11b TX (CH High)	TEMP& Humidity	26.8°C, 57%

Horizontal

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 4924.06	54.51	33.47	3.76	42.48	0.73	49.99	74.00	-24.01	P
* 4924.06	50.44	33.47	3.76	42.48	0.73	45.92	54.00	-8.08	A
* 7385.26	49.64	39.06	4.74	41.61	1.75	53.59	74.00	-20.41	P
* 7385.26	42.32	39.06	4.74	41.61	1.75	46.27	54.00	-7.73	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo VPN Router	Test Date	2010/10/11
Model	BDW463AM	Test By	Eric Yang
Test Mode	IEEE 802.11b TX (CH High)	TEMP& Humidity	26.8°C, 57%

Vertical

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m				Vertical	polarity
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 4924.06	56.84	33.47	3.76	42.48	0.73	52.32	74.00	-21.68	P
* 4924.06	54.85	33.47	3.76	42.48	0.73	50.33	54.00	-3.67	A
* 7385.34	51.51	39.06	4.74	41.61	1.75	55.46	74.00	-18.54	P
* 7385.34	43.24	39.06	4.74	41.61	1.75	47.19	54.00	-6.81	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo VPN Router	Test Date	2010/10/4
Model	BDW463AM	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH Low)	TEMP& Humidity	26.8°C, 57%

Horizontal

TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 4823.65	53.78	33.17	3.73	42.38	0.69	48.99	74.00	-25.01	P
* 4823.65	41.53	33.17	3.73	42.38	0.69	36.74	54.00	-17.26	A
7234.51	52.84	38.60	4.67	41.84	1.43	55.70	74.00	-18.30	P
7234.51	40.79	38.60	4.67	41.84	1.43	43.65	54.00	-10.35	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo VPN Router	Test Date	2010/10/4
Model	BDW463AM	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH Low)	TEMP& Humidity	26.8°C, 57%

Vertical

TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m				Vertical	polarity
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 4824.31	55.76	33.17	3.73	42.38	0.69	50.97	74.00	-23.03	P
* 4824.31	42.95	33.17	3.73	42.38	0.69	38.16	54.00	-15.84	A
7232.68	53.61	38.60	4.67	41.85	1.43	56.46	74.00	-17.54	P
7232.68	41.86	38.60	4.67	41.85	1.43	44.71	54.00	-9.29	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo VPN Router	Test Date	2010/10/4
Model	BDW463AM	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH Middle)	TEMP& Humidity	26.8°C, 57%

Horizontal

TX / IEEE 802.11g mode / CH Middle		Measurement Distance at 3m				Horizontal polarity			
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 4876.43	53.26	33.33	3.75	42.44	0.71	48.61	74.00	-25.39	P
* 4876.43	43.08	33.33	3.75	42.44	0.71	38.43	54.00	-15.57	A
* 7311.96	52.14	38.84	4.71	41.72	1.60	55.56	74.00	-18.44	P
* 7311.96	41.76	38.84	4.71	41.72	1.60	45.18	54.00	-8.82	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo VPN Router	Test Date	2010/10/4
Model	BDW463AM	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH Middle)	TEMP& Humidity	26.8°C, 57%

Vertical

TX / IEEE 802.11g mode / CH Middle					Measurement Distance at 3m		Vertical polarity		Mark
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 4876.98	56.12	33.33	3.75	42.44	0.71	51.48	74.00	-22.52	P
* 4876.98	43.06	33.33	3.75	42.44	0.71	38.41	54.00	-15.59	A
* 7312.64	53.24	38.84	4.71	41.72	1.60	56.66	74.00	-17.34	P
* 7312.64	42.36	38.84	4.71	41.72	1.60	45.78	54.00	-8.22	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo VPN Router	Test Date	2010/10/4
Model	BDW463AM	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH High)	TEMP& Humidity	26.8°C, 57%

Horizontal

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 4924.03	53.84	33.47	3.76	42.48	0.73	49.32	74.00	-24.68	P
* 4924.03	43.63	33.47	3.76	42.48	0.73	39.11	54.00	-14.89	A
* 7384.25	52.34	39.05	4.74	41.61	1.75	56.28	74.00	-17.72	P
* 7384.25	42.19	39.05	4.74	41.61	1.75	46.13	54.00	-7.87	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo VPN Router	Test Date	2010/10/4
Model	BDW463AM	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH High)	TEMP& Humidity	26.8°C, 57%

Vertical

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m				Vertical	polarity
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 4923.98	55.74	33.47	3.76	42.48	0.73	51.22	74.00	-22.78	P
* 4923.98	43.98	33.47	3.76	42.48	0.73	39.46	54.00	-14.54	A
* 7384.06	52.94	39.05	4.74	41.61	1.75	56.88	74.00	-17.12	P
* 7384.06	41.98	39.05	4.74	41.61	1.75	45.92	54.00	-8.08	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo VPN Router	Test Date	2010/10/4
Model	BDW463AM	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH Low)	TEMP& Humidity	26.8°C, 57%

Horizontal

TX / IEEE 802.11n HT20 mode / CH Low					Measurement Distance at 3m			Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 4823.96	53.65	33.17	3.73	42.38	0.69	48.86	74.00	-25.14	P
* 4823.96	42.57	33.17	3.73	42.38	0.69	37.78	54.00	-16.22	A
7231.24	51.54	38.59	4.67	41.85	1.42	54.38	74.00	-19.62	P
7231.24	40.67	38.59	4.67	41.85	1.42	43.51	54.00	-10.49	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo VPN Router	Test Date	2010/10/4
Model	BDW463AM	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH Low)	TEMP& Humidity	26.8°C, 57%

Vertical

TX / IEEE 802.11n HT20 mode / CH Low					Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 4824.05	55.63	33.17	3.73	42.38	0.69	50.84	74.00	-23.16	P	
* 4824.05	44.34	33.17	3.73	42.38	0.69	39.55	54.00	-14.45	A	
7231.45	51.96	38.59	4.67	41.85	1.43	54.80	74.00	-19.20	P	
7231.45	41.23	38.59	4.67	41.85	1.43	44.07	54.00	-9.93	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo VPN Router	Test Date	2010/10/4
Model	BDW463AM	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH Middle)	TEMP& Humidity	26.8°C, 57%

Horizontal

TX / IEEE 802.11n HT20 mode / CH Middle					Measurement Distance at 3m			Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 4874.65	52.13	33.32	3.74	42.43	0.71	47.48	74.00	-26.52	P
* 4874.65	41.63	33.32	3.74	42.43	0.71	36.98	54.00	-17.02	A
* 7311.89	51.16	38.84	4.71	41.72	1.60	54.58	74.00	-19.42	P
* 7311.89	40.23	38.84	4.71	41.72	1.60	43.65	54.00	-10.35	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo VPN Router	Test Date	2010/10/4
Model	BDW463AM	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH Middle)	TEMP& Humidity	26.8°C, 57%

Vertical

TX / IEEE 802.11n HT20 mode / CH Middle					Measurement Distance at 3m				Vertical	polarity
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 4874.06	55.21	33.32	3.74	42.43	0.71	50.55	74.00	-23.45	P	
* 4874.06	44.32	33.32	3.74	42.43	0.71	39.66	54.00	-14.34	A	
* 7312.05	52.39	38.84	4.71	41.72	1.60	55.81	74.00	-18.19	P	
* 7312.05	41.70	38.84	4.71	41.72	1.60	45.12	54.00	-8.88	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo VPN Router	Test Date	2010/10/4
Model	BDW463AM	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH High)	TEMP& Humidity	26.8°C, 57%

Horizontal

TX / IEEE 802.11n HT20 mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 4924.12	51.65	33.47	3.76	42.48	0.73	47.13	74.00	-26.87	P
* 4924.12	40.99	33.47	3.76	42.48	0.73	36.46	54.00	-17.54	A
* 7385.96	50.04	39.06	4.75	41.61	1.76	53.99	74.00	-20.01	P
* 7385.96	40.23	39.06	4.75	41.61	1.76	44.18	54.00	-9.82	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	WiFi Combo VPN Router	Test Date	2010/10/4
Model	BDW463AM	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH High)	TEMP& Humidity	26.8°C, 57%

Vertical

TX / IEEE 802.11n HT20 mode / CH High				Measurement Distance at 3m				Vertical	polarity
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 4924.09	54.65	33.47	3.76	42.48	0.73	50.13	74.00	-23.87	P
* 4924.09	43.32	33.47	3.76	42.48	0.73	38.80	54.00	-15.20	A
* 7385.86	52.96	39.06	4.75	41.61	1.76	56.91	74.00	-17.09	P
* 7385.86	41.27	39.06	4.75	41.61	1.76	45.22	54.00	-8.78	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.