

DFS Test Report

Applicant : Delta Electronics, Inc.
Product Name : 802.11ax enterprise access point
Trade Name : DELTA
Model Number : AP-623E
Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013
Received Date : May 05, 2025
Test Period : May 21, 2025 ~ Jul. 10, 2025
Issued Date : Aug. 19, 2025

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Bade test site :

Test Firm Registration Number: 226252
Test Firm Designation Number: TW0010

Wugu test site :

Test Firm Registration Number: 191812
Test Firm Designation Number: TW0034

Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Rev.	Issued Date	Description	Revised By
00	Aug. 19, 2025	Initial Issue	Abby Huang

Verification of Compliance

Applicant : Delta Electronics, Inc.

Product Name : 802.11ax enterprise access point

Trade Name : DELTA

Model Number : AP-623E

FCC ID : PD5-AP623E

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Test Result : Complied

Issued By : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : _____

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	6
1.3.	Test Site Environment.....	6
2	EUT Description.....	7
3	Test Methodology	9
3.1.	Mode of Operation	9
3.2.	EUT Test Step	9
3.3.	Test Instruments	10
4	Dynamic Frequency Selection	11
4.1.	Limits	11
4.2.	Test and Measurement System	15
5	Test Results	17
5.1.	Radar Waveforms and Traffic	17
5.2.	Channel Loading	32
5.3.	Channel Availability Check Time.....	35
5.4.	Channel Move Time and Channel Closing Transmission Time.....	38
5.5.	Non-Occupancy Period	41
5.6.	U-NII Detection Bandwidth	42
5.7.	Statistical Performance check	45

Appendix A. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(h)(2)	Channel Availability Check Time	PASS	---
15.407(h)(2)	Channel Move Time	PASS	---
15.407(h)(2)	Channel Closing Transmission Time	PASS	---
15.407(h)(2)	Non-Occupancy Period	PASS	---
15.407(h)(2)	U-NII Detection Bandwidth	PASS	---
15.407(h)(2)	Statistical Performance check	PASS	---

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
Canada RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: ☒ No. 140-1, Changan Street, Bade District, Taoyuan City, Taiwan (R.O.C.)

Site Address: ☐ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(*)The measurement ambient temperature is within this range.

2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity

Applicant	Delta Electronics, Inc. 31-1 Shien Pan Rd., Kuei San Industrial Zone, Taoyuan City, 333, Taiwan				
Product Name	802.11ax enterprise access point				
Trade Name	DELTA				
Model Number	AP-623E				
FCC ID	PD5-AP623E				
Operate Frequency	Frequency Band			Frequency Range (MHz)	
	802.11a	U-NII Band 2-A		5260 – 5320	
		U-NII Band 2-C		5500 – 5700	
	802.11n HT20/ 802.11ac VHT20/ 802.11ax HE20	U-NII Band 2-A		5260 – 5320	
		U-NII Band 2-C		5500 – 5700	
	802.11n HT40/ 802.11ac VHT40/ 802.11ax HE40	U-NII Band 2-A		5270 – 5310	
		U-NII Band 2-C		5510 – 5670	
	802.11ac VHT80/ 802.11ax HE80	U-NII Band 2-A		5290	
U-NII Band 2-C		5530 –5610			
Modulation Type	OFDM/OFDMA				
Antenna information	Antenna	Model	Type	Max. Gain (dBi)	
	DB0 (ANT-0)	C393-510381-A	PIFA antenna	U-NII Band 2-A	5.50
				U-NII Band 2-C	5.50
	DB1 (ANT-1)	C393-510381-A	PIFA antenna	U-NII Band 2-A	6.20
				U-NII Band 2-C	5.80
Antenna Delivery	802.11a: 2TX (CDD) 802.11n / ac / ax : 2TX (CDD/Beamforming on)				
Operate Temp. Range	0 ~ +45 ℃				
EUT Power Rating	Adapter 12 Vdc, 2.5 A PoE PD 42.5 – 57.0 Vdc				

Testing Sample No.	
Test Item	Sample Number
DFS	C255024_A008

Items	Description	
Communication Mode	☒ IP Based (Load Based)	☐ Frame Based
TPC Function	☒ With TPC	☐ Without TPC
Weather Band (5600 ~ 5650 MHz)	☒ With 5600 ~ 5650 MHz	☐ Without 5600 ~ 5650 MHz
Beamforming Function	☒ With Beamforming	☐ Without Beamforming
Equipment Type	☐ Outdoor access point	
	☒ Indoor access point	
	☐ Fixed point-to-point access points	
	☐ Client devices	
Operating mode	☒ Master	
	☐ Client with radar detection	
	☐ Client without radar detection	
	☐ Ad-Hoc	
	☐ Bridge	
	☐ MESH	

Note : DFS controls (hardware or software) related to radar detection are NOT accessible to the user.
Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

3 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

The tests documented in this report were performed in accordance with FCC KDB request:

- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
802.11ax HE20
802.11ax HE40
802.11ax HE80

802.11ax HE20:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5560 MHz.

802.11ax HE40:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5550 MHz.

802.11ax HE80:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5530 MHz.

3.2. EUT Test Step

1.	Setup the EUT shown on 3.2.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to Access Point.
4.	The EUT is operated in the normal mode to the purposes of measurement.

3.3. Test Instruments

For Conducted

Test Period: May 21, 2025 ~ Jul. 10, 2025

Testing Engineer: Peter Shui

Test Site		RF01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	Aug. 28, 2024	1 year
☒	Signal Generator	Keysight	N5182B	MY53052569	Apr. 18, 2025	1 year
☒	Signal Generator	Keysight	N5182BX07	MY59360221	Apr. 18, 2025	1 year

☒ means with testing used ;

☐ means without testing used

Note: N.C.R. = No Calibration Request.

4 Dynamic Frequency Selection

4.1. Limits

§15.407 (h) and FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 Compliance measurement procedures for unlicensed-national information infrastructure devcies operating in the 5250-5350 MHZ and 5470-5725 MHZ bands incorporating dynamic frequency selection.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel			
Requirement	Operational Mode		
	Master	Client (without Radar Detection)	Client (with Radar Detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation		
Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client With Radar Detection	Client without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note : Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequencies between the bonded 20 MHz channel blocks		

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	U-NII Band 2-Aalue (See Notes 1,2 and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and Power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to FCC KDB Publication 662911 D01.	

Table 4: DFS Response Requirement U-NII Band 2-Aalues

Parameter	U-NII Band 2-Aalue
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100 % of the U-NII 99 % transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5: Short Pulse Radar Test Waveforms					
Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60 %	30
2	1-5	150-230	23-29	60 %	30
3	6-10	200-500	16-18	60 %	30
4	11-20	200-500	12-16	60 %	30
Aggregate (Radar Types 1-4)				80 %	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 5a: Pulse Repetition Intervals U-NII Band 2-Aalues for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 6 – Long Pulse Radar Test Signal

Radar Waveform	Bursts	Pulses per Burst	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80 %	30


Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (μsec)	PRI (μsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70 %	30

4.2. Test and Measurement System

4.2.1. Setup for Master with injection at the Master

Example Radiated Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

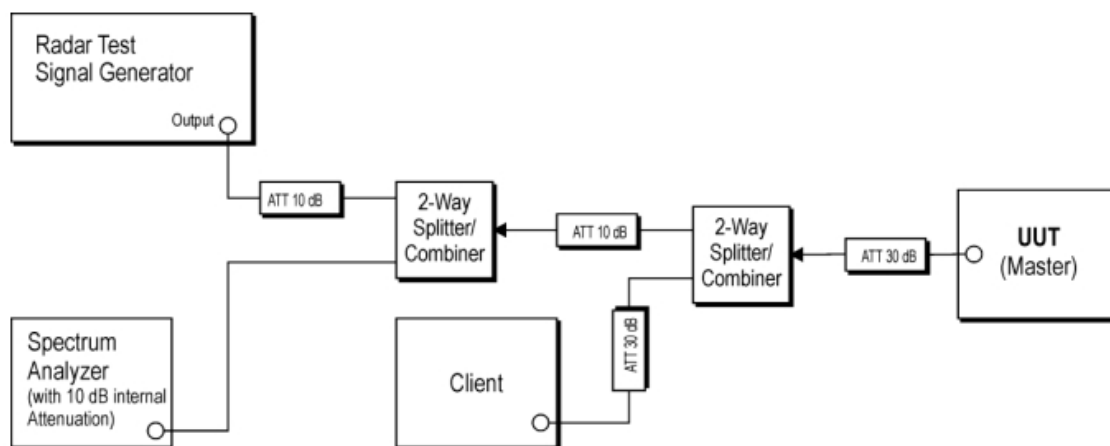

Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	ID
1.	portable handset	SAMSUNG	SM-S928U	FCC: A3LSMS928U

4.2.2. System Calibration

The short pulse types 0,1,2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time. The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the May 2014 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

4.2.3. System Calibration

The Interference Radar Detection Threshold Level is (-63 dBm). The above equipment setup was used to calibrate the radiated Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50 ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (U-NII Band 2-ABW) were set to at least 3 MHz.


The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was (-63 dBm). Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

4.2.4. Adjustment of Displayed Traffic Level

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. Software to ping the client is permitted to simulate data transfer but must have random ping intervals. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


5 Test Results

5.1. Radar Waveforms and Traffic

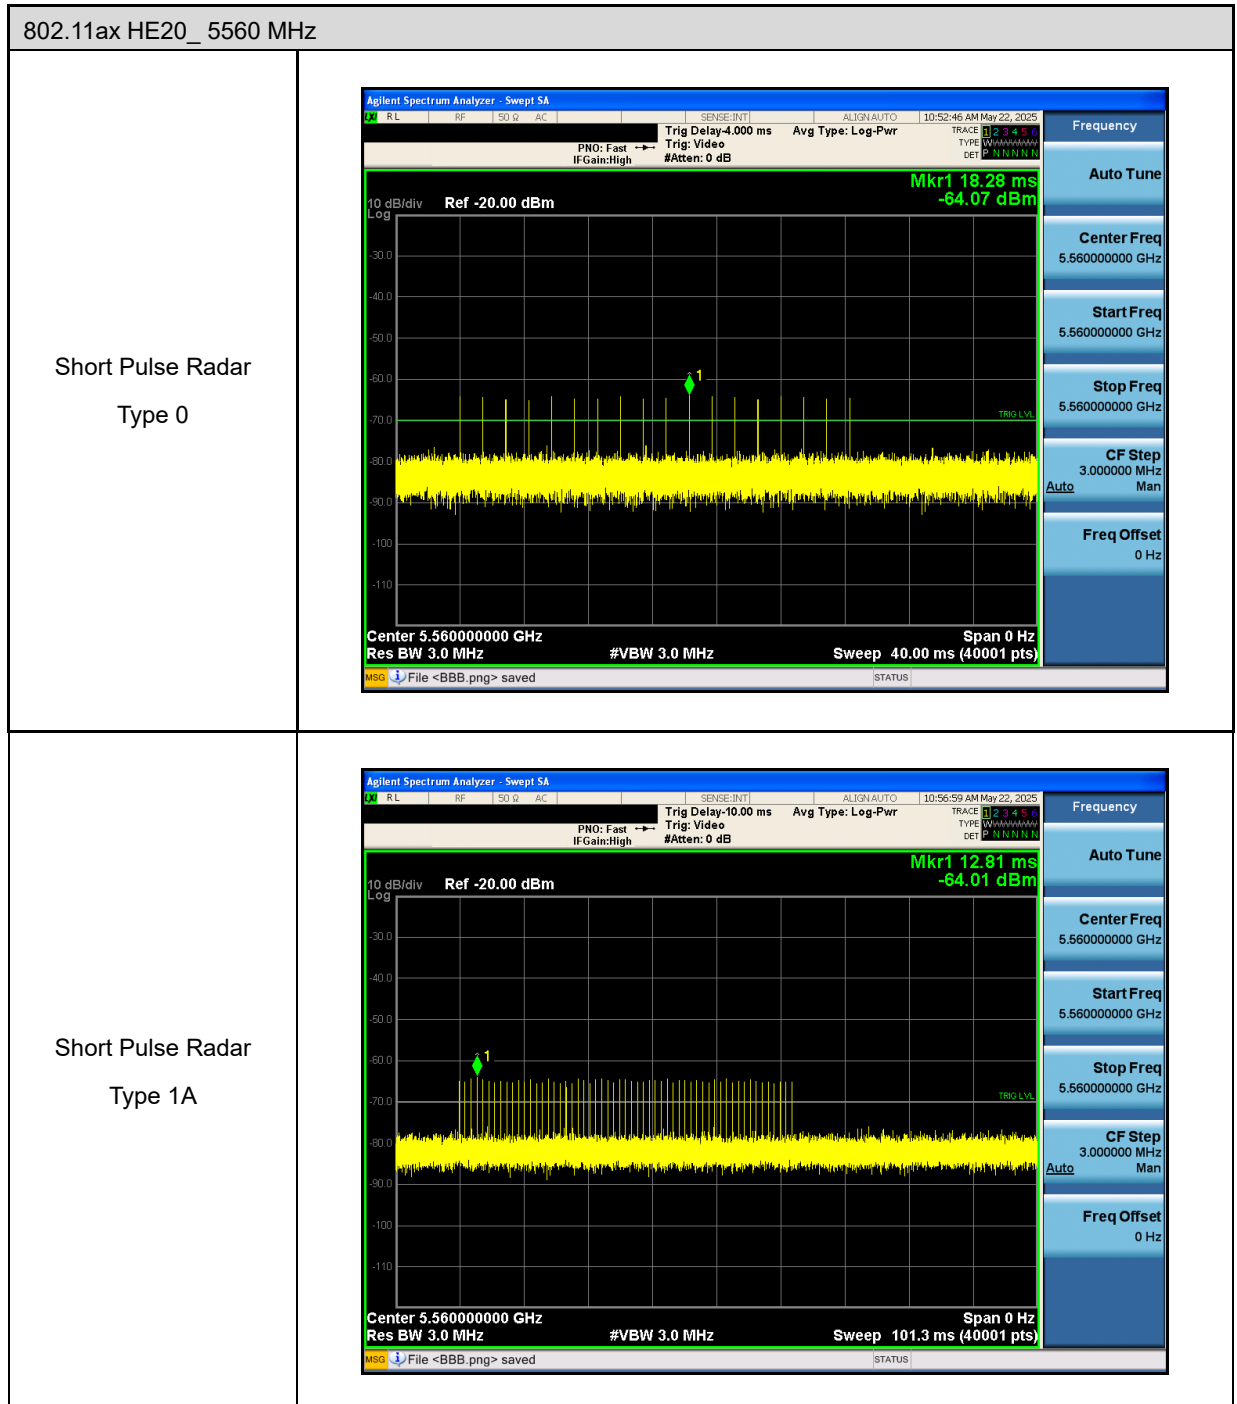


802.11ax HE20_ 5560 MHz

Short Pulse Radar
Type 1B

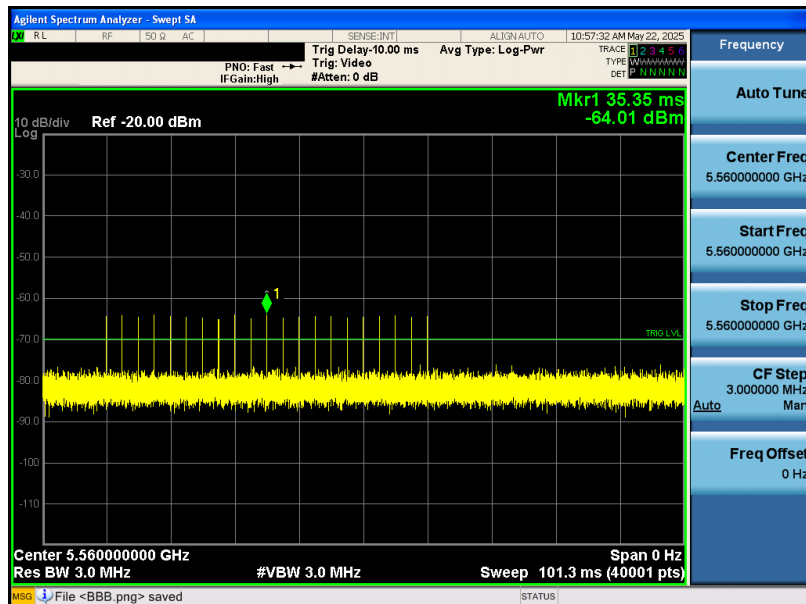


Short Pulse Radar
Type 2

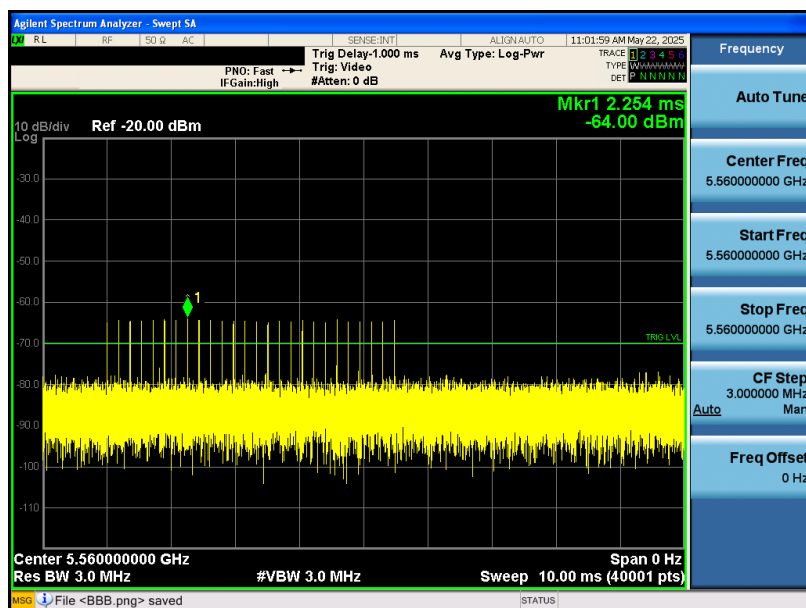


802.11ax HE20_ 5560 MHz

Short Pulse Radar
Type 3

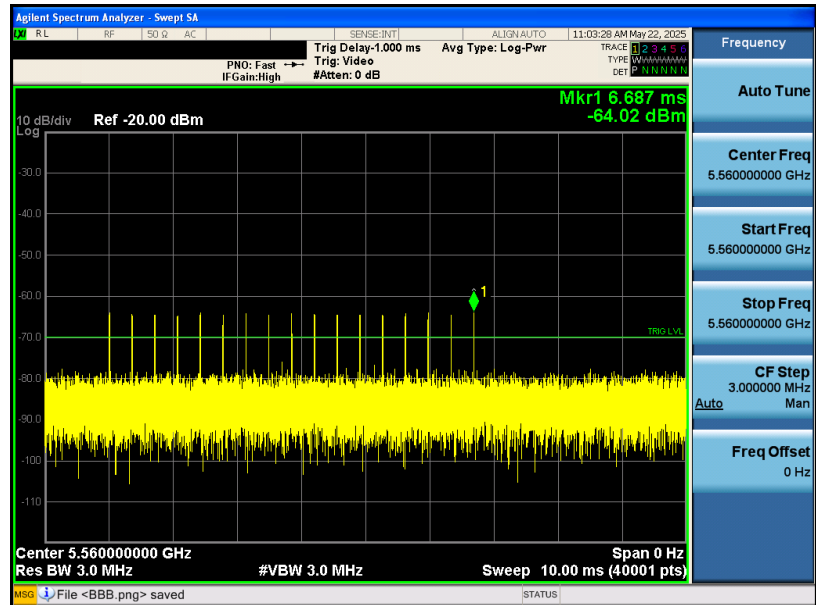


Short Pulse Radar
Type 4

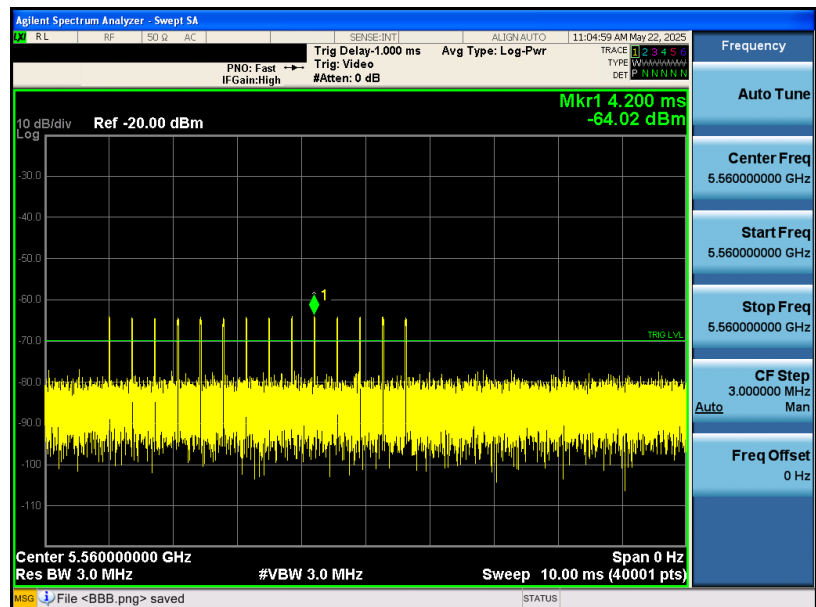


802.11ax HE20_ 5560 MHz

Long Pulse Radar
Type 5

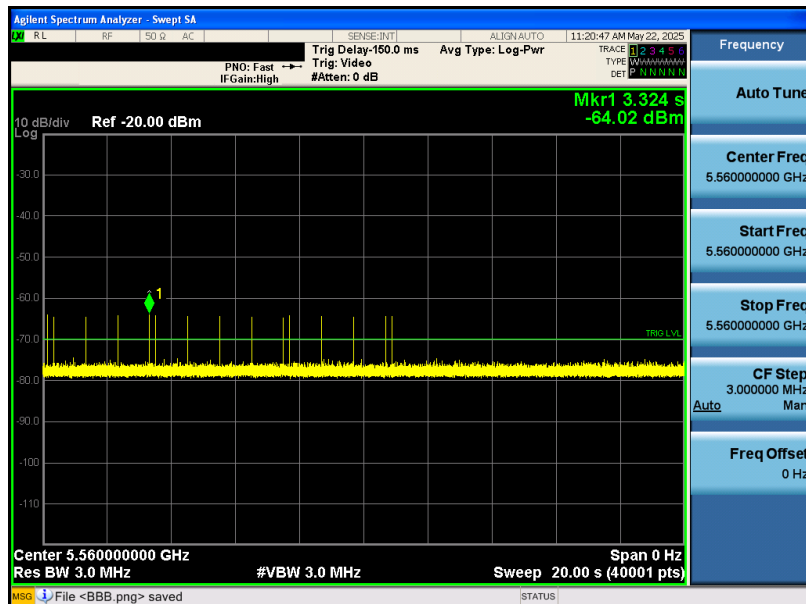


Frequency Hopping
Radar
Type 6

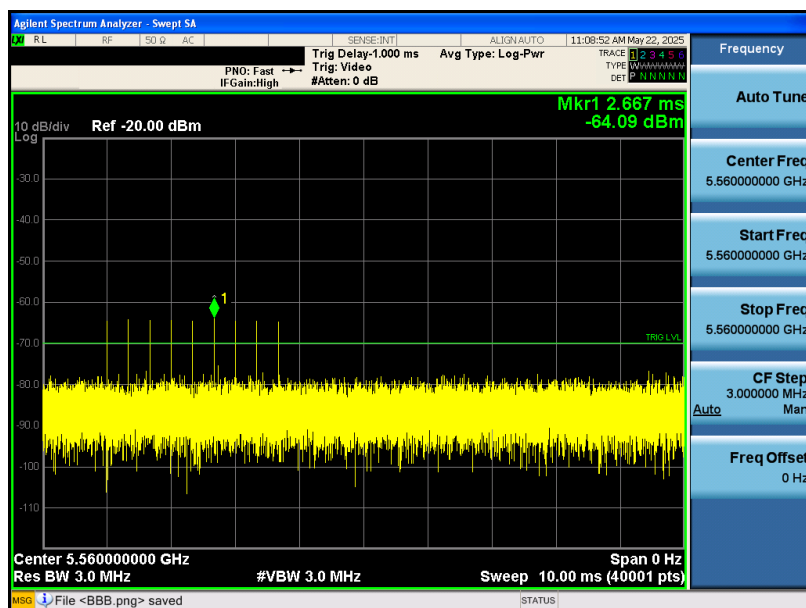


802.11ax HE20_ 5560 MHz

Traffic

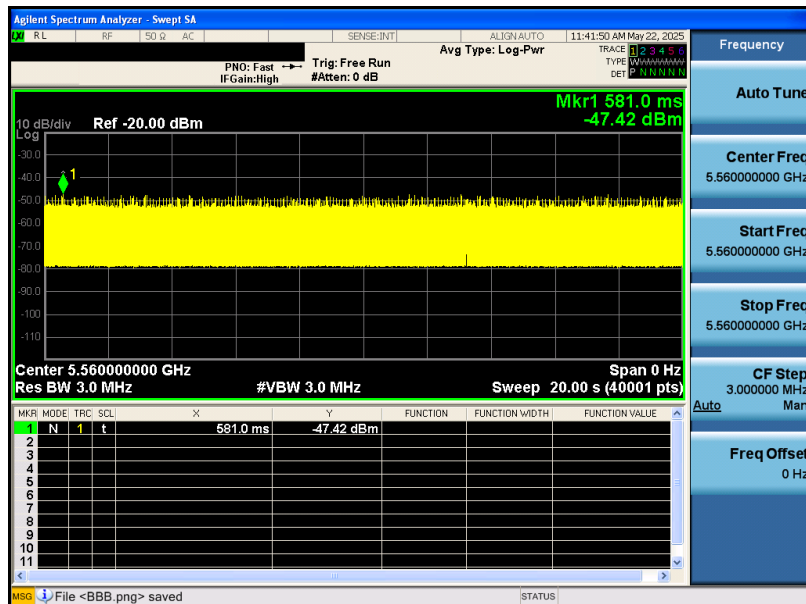


802.11ax HE40_ 5550 MHz

Short Pulse Radar
Type 0

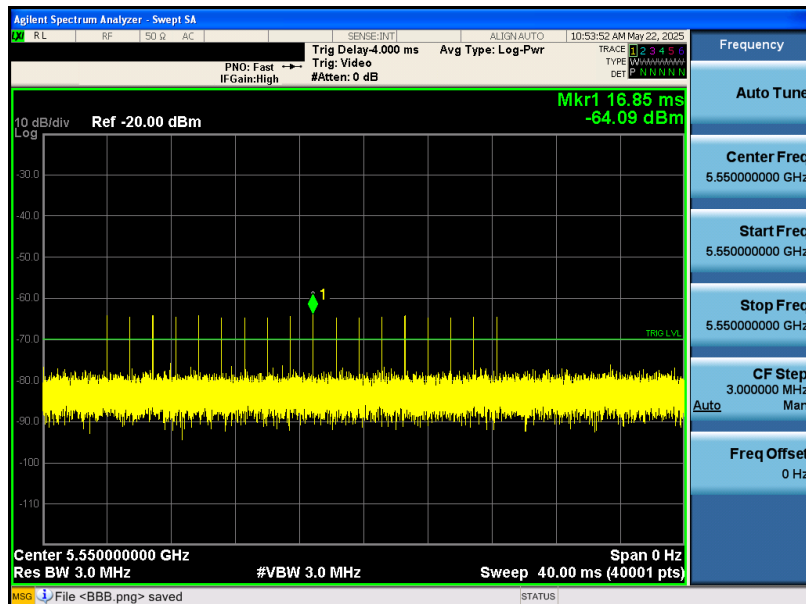


Short Pulse Radar
Type 1A

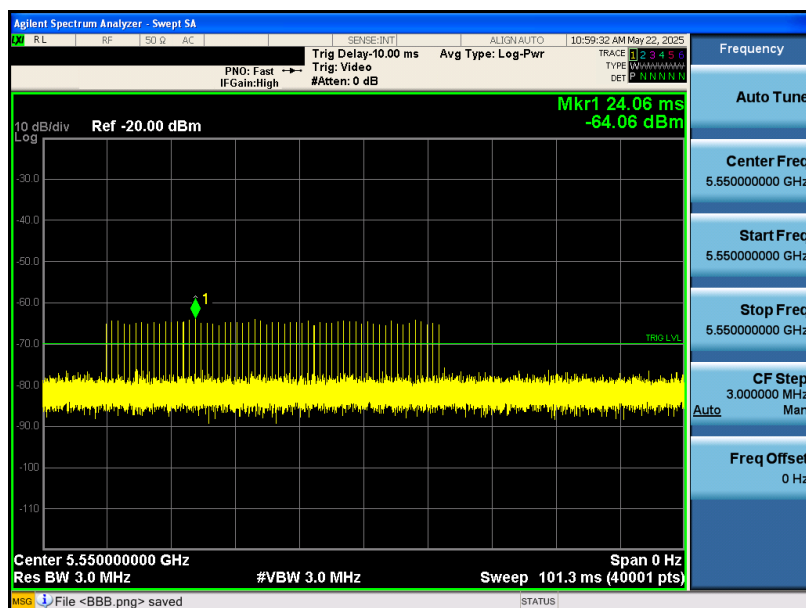


802.11ax HE40_ 5550 MHz

Short Pulse Radar
Type 1B

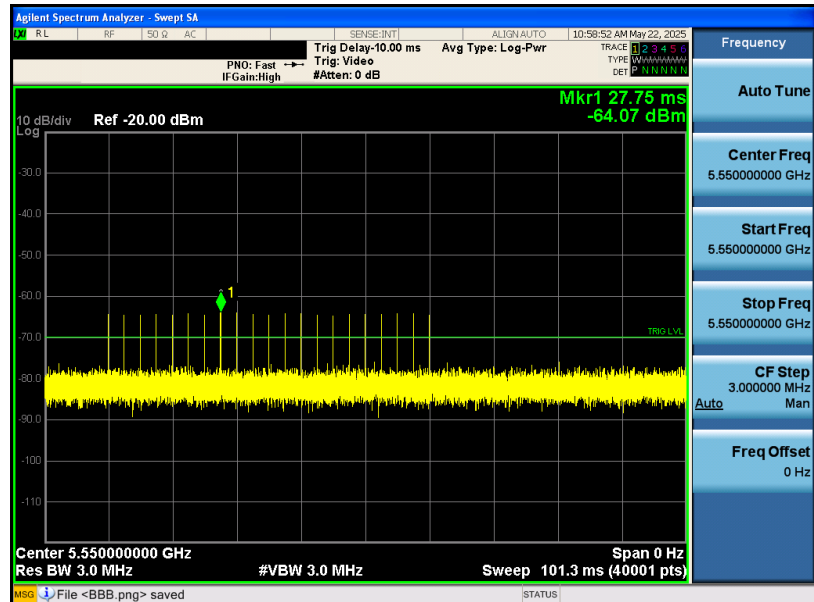


Short Pulse Radar
Type 2

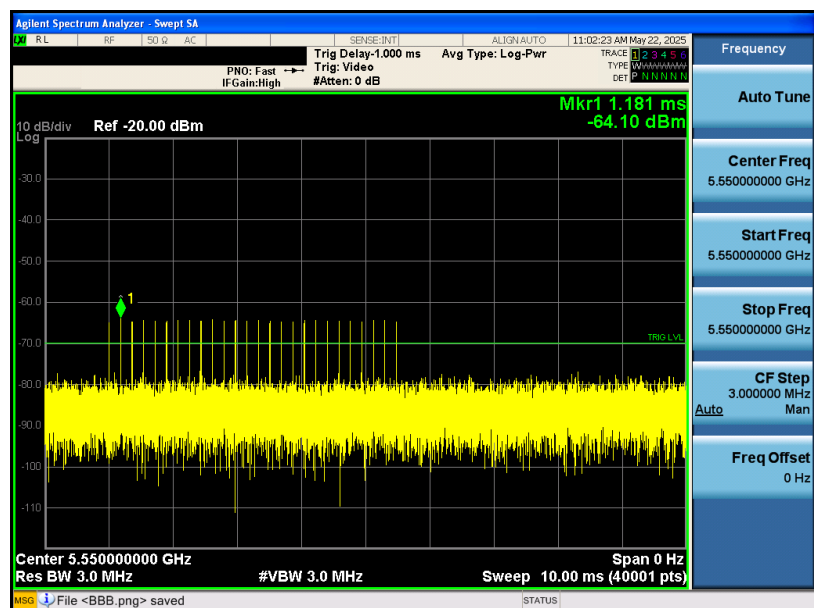


802.11ax HE40_ 5550 MHz

Short Pulse Radar
Type 3

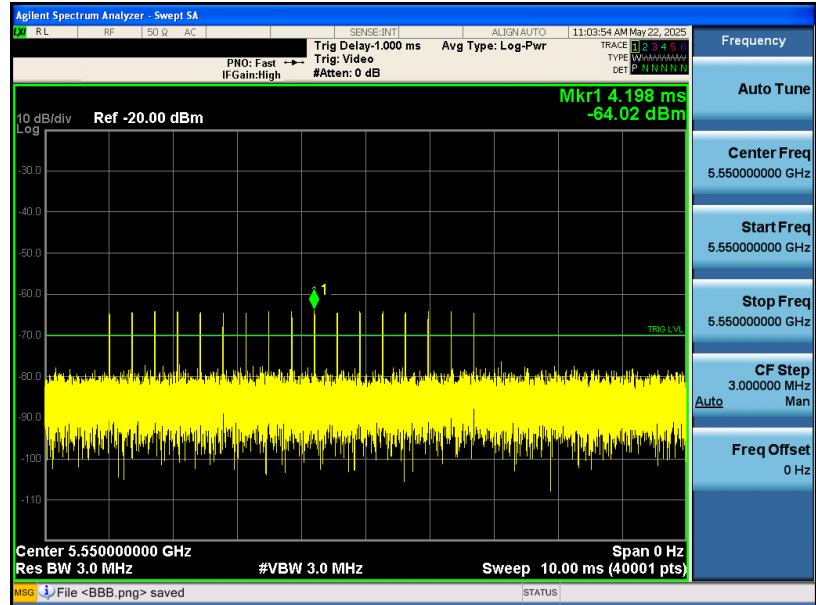


Short Pulse Radar
Type 4

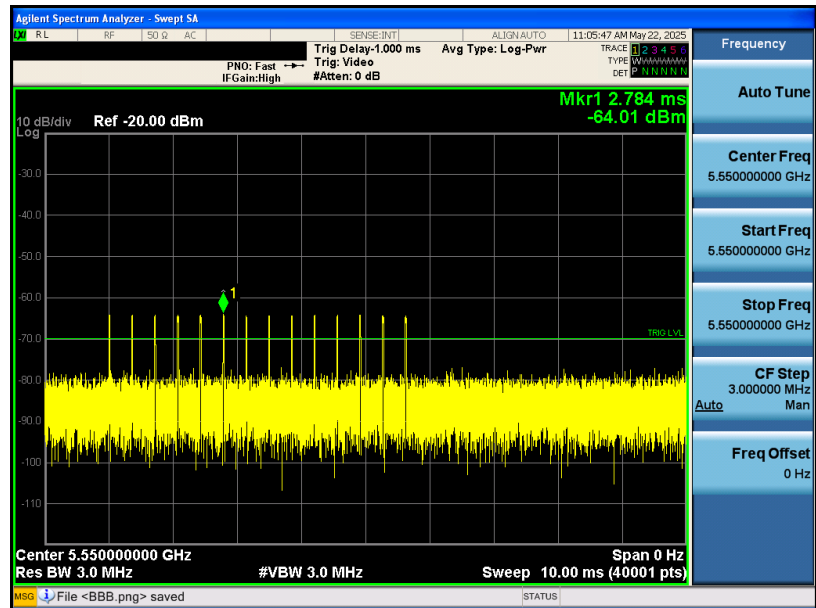


802.11ax HE40_ 5550 MHz

Long Pulse Radar
 Type 5

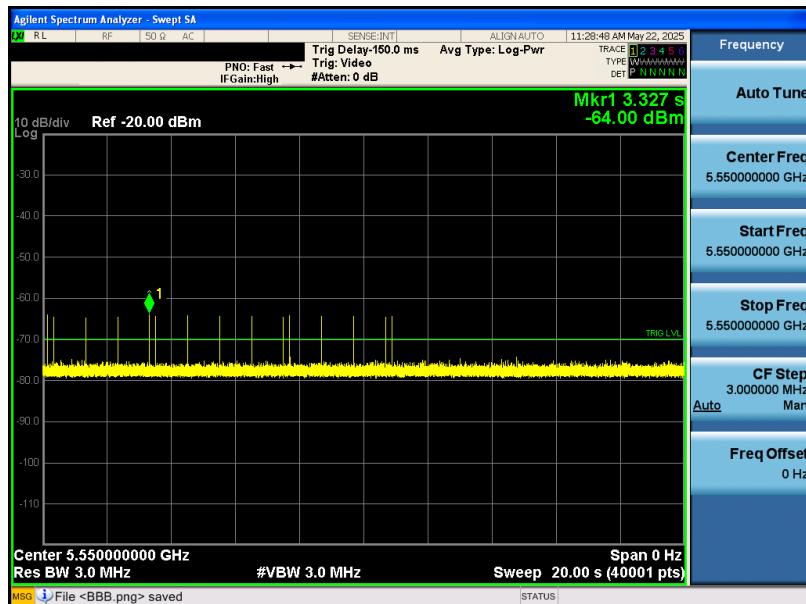


Frequency Hopping
 Radar
 Type 6

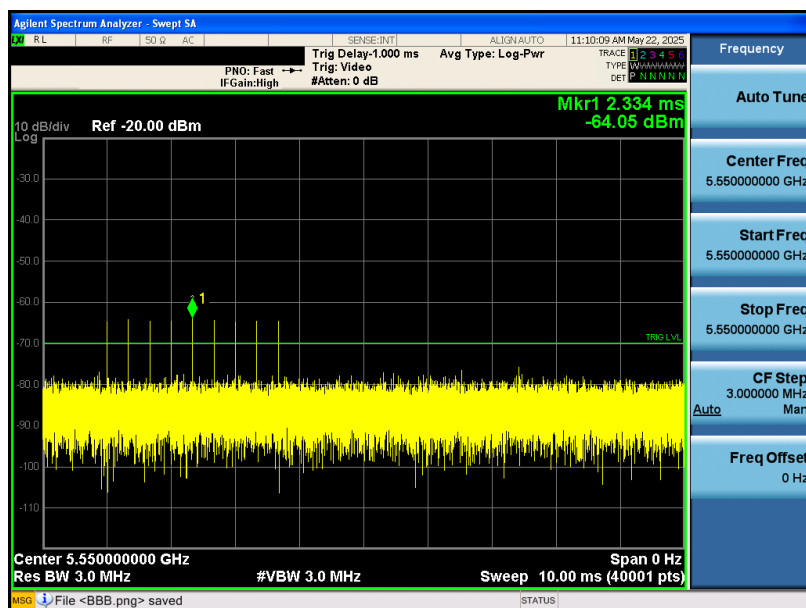


802.11ax HE40_ 5550 MHz

Traffic

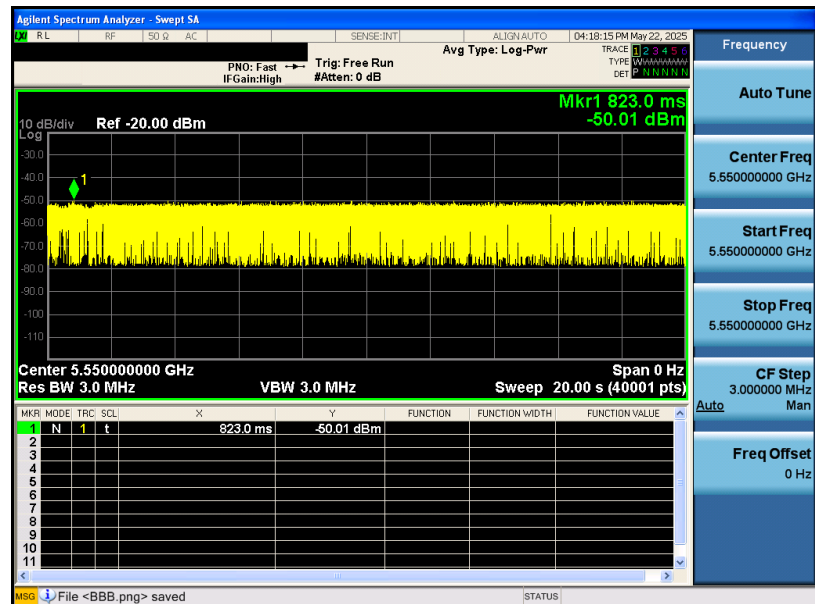


802.11ax HE80_ 5530 MHz

Short Pulse Radar
Type 0

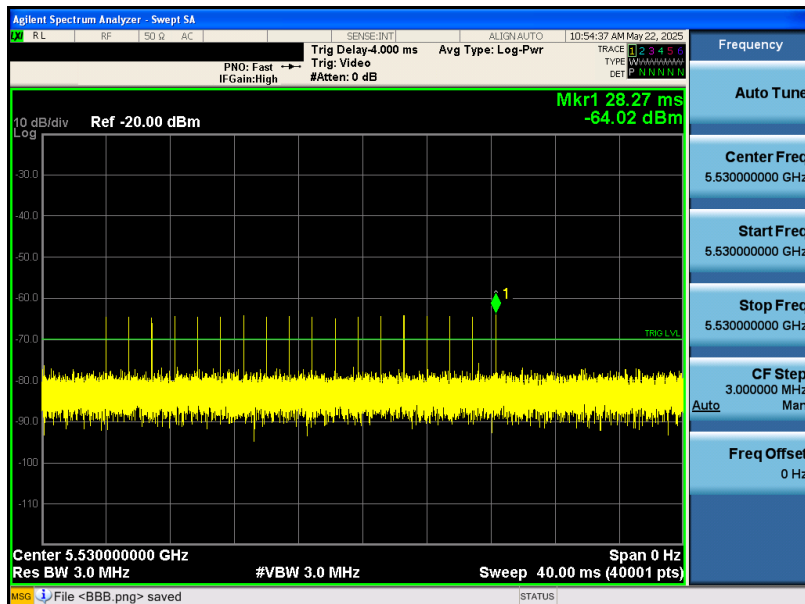


Short Pulse Radar
Type 1A

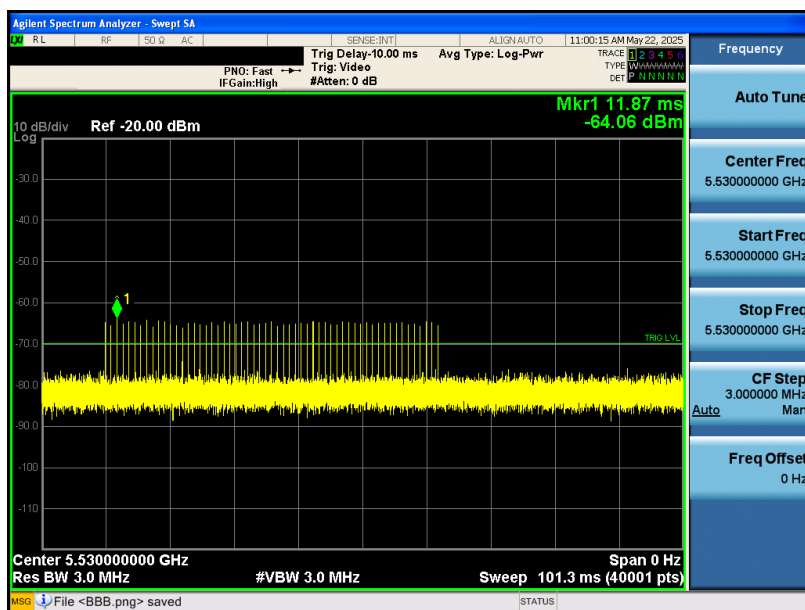


802.11ax HE80_ 5530 MHz

Short Pulse Radar
Type 1B

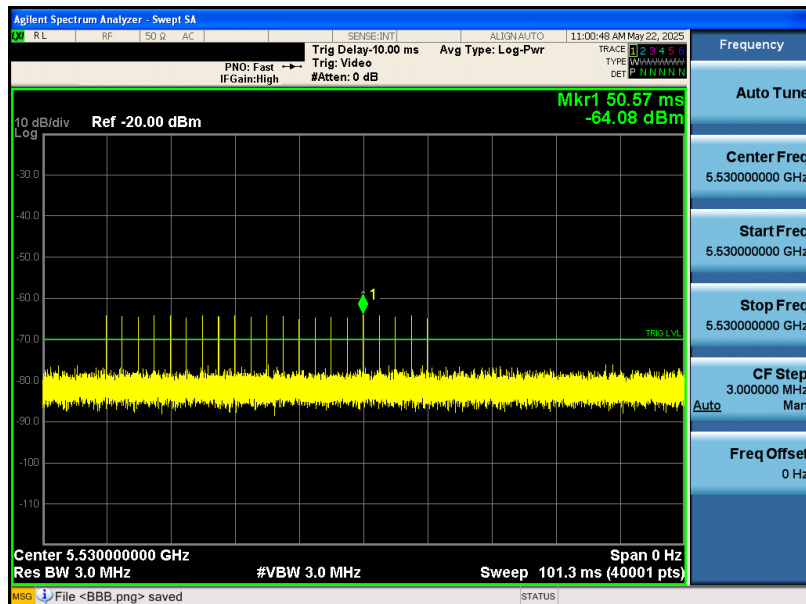


Short Pulse Radar
Type 2

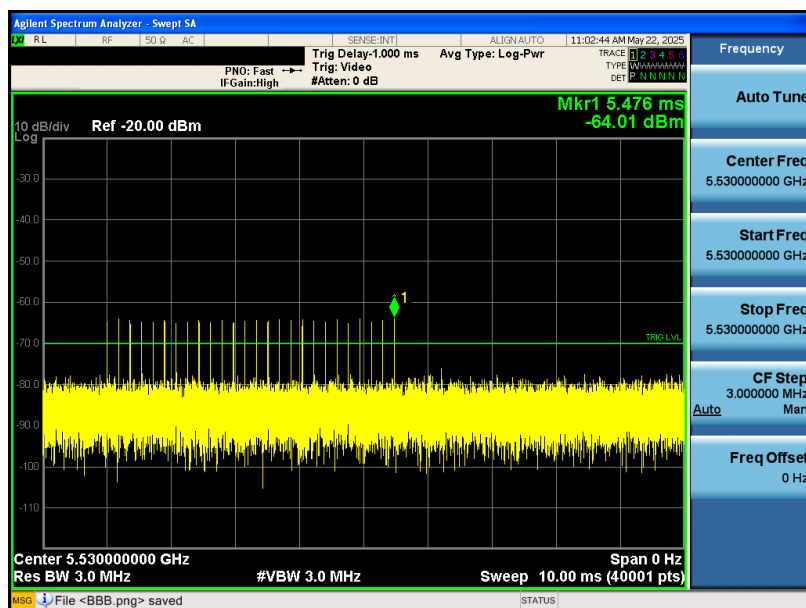


802.11ax HE80_ 5530 MHz

Short Pulse Radar
Type 3

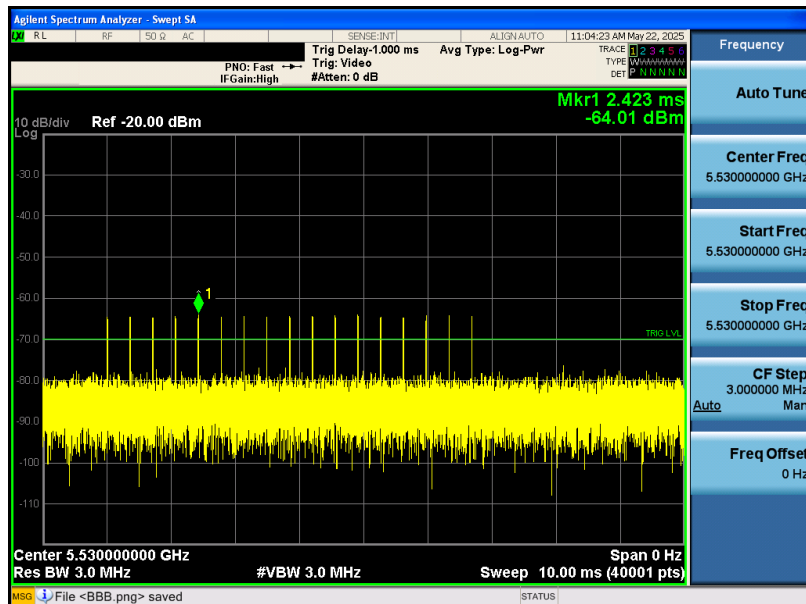


Short Pulse Radar
Type 4

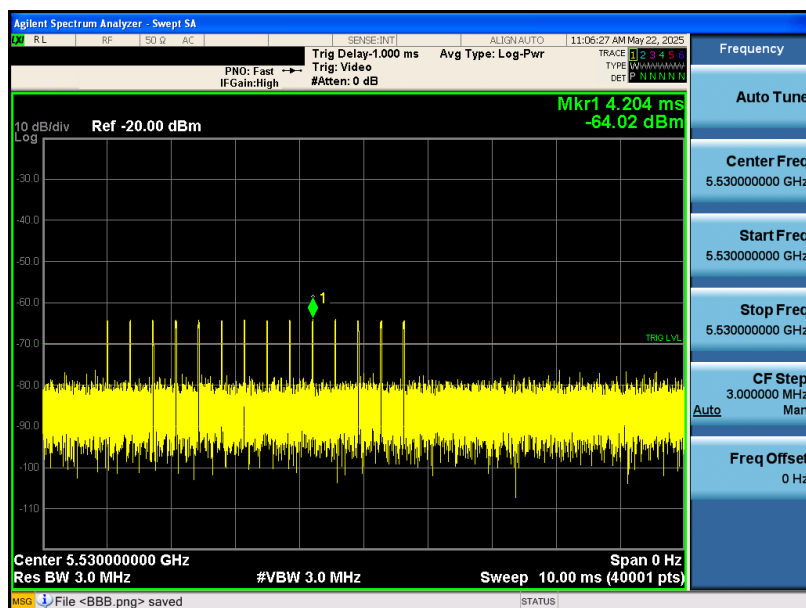


802.11ax HE80_ 5530 MHz

Long Pulse Radar
Type 5

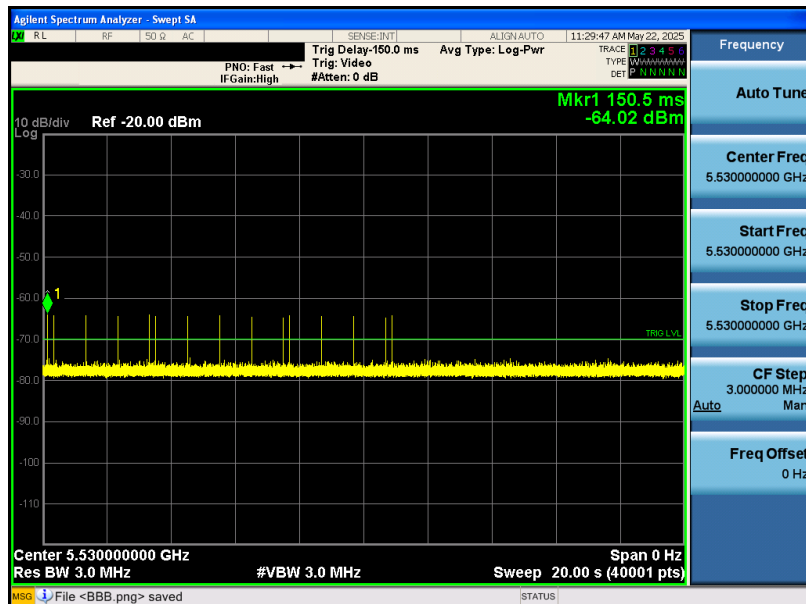


Frequency Hopping
Radar
Type 6

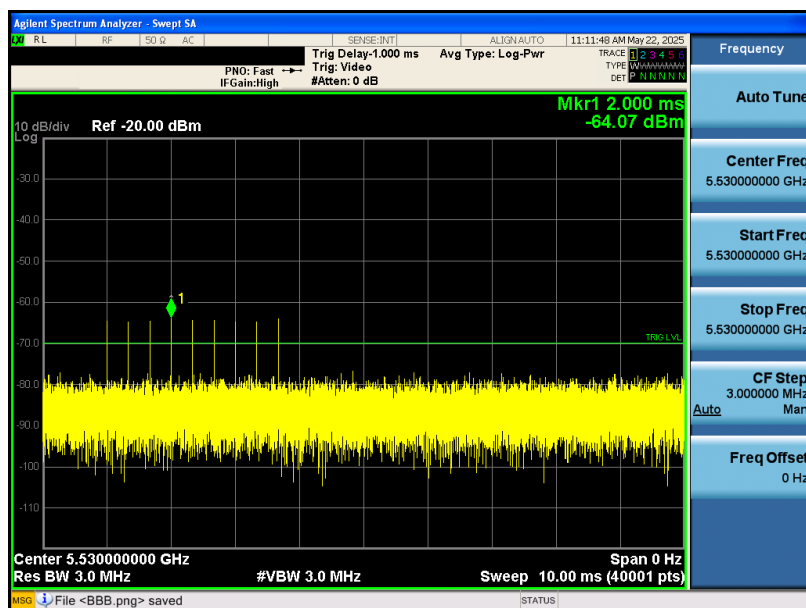

802.11ax HE80_ 5530 MHz


Traffic

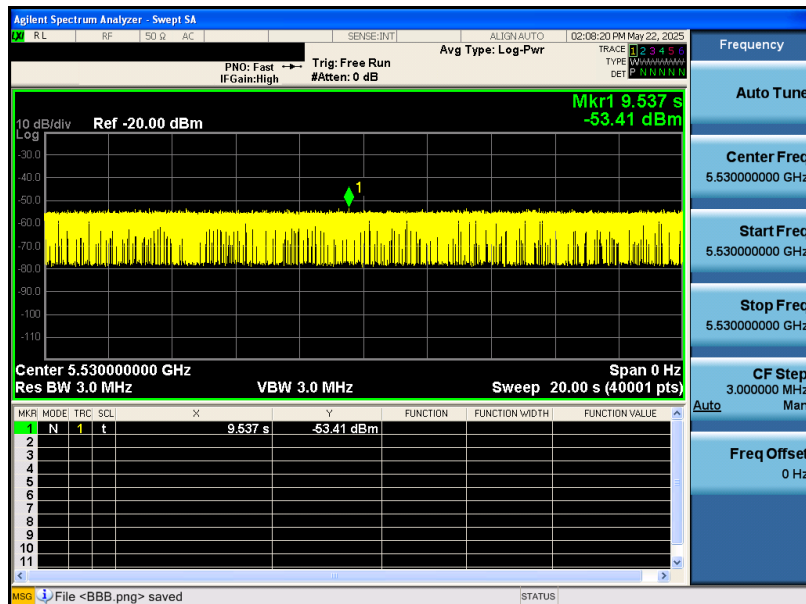

5.2. Channel Loading

■ Duty cycle $\geq 17\%$

802.11ax HE20

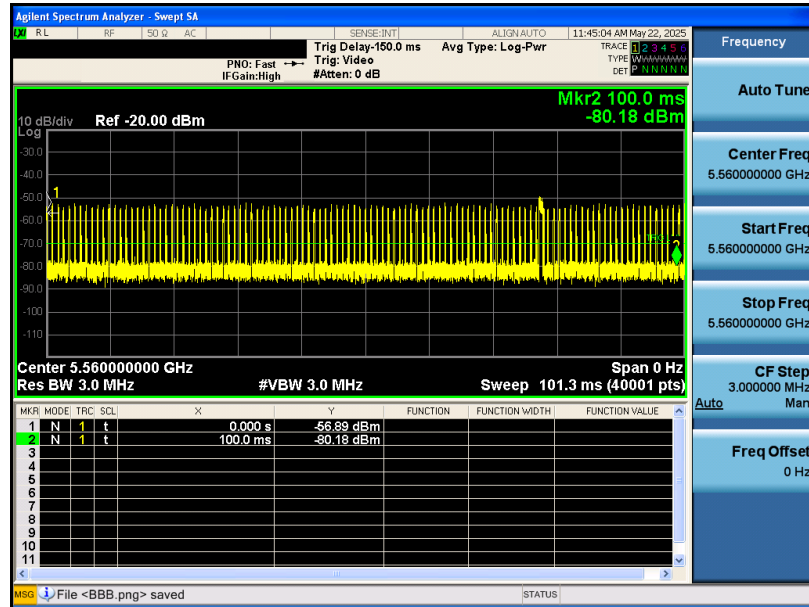


DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-70	0	100.0ms	100.0ms
On Time Point:	Total Point:	Sum of On Time(s):	
7499	39474	19.0ms	
Sweep Time(s):	Sweep Point:	Duty Cycle(%):	
101.3ms	40001	19.00%	

RUN

802.11ax HE40

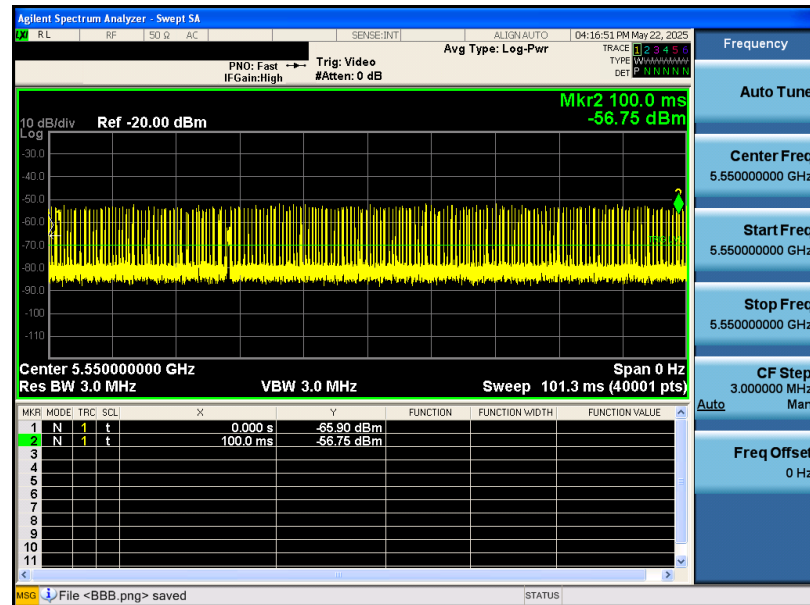


 DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-70	0	100.0ms	100.0ms
On Time Point:		Total Point:	Sum of On Time(s):
7343		39474	18.6ms
Sweep Time(s):		Sweep Point:	Duty Cycle(%):
101.3ms		40001	18.60%

RUN

802.11ax HE80

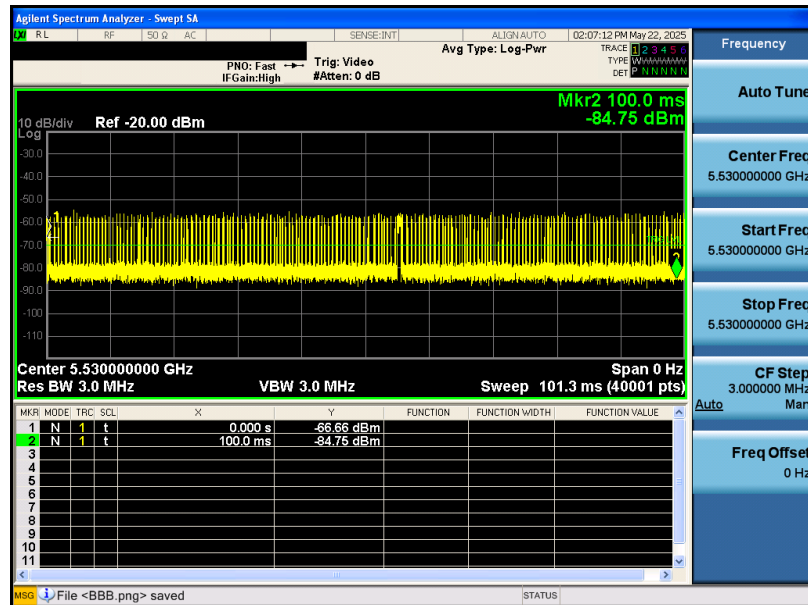

DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-70	0	100.0ms	100.0ms
On Time Point: Total Point: Sum of On Time(s):			
8057	39474	20.4ms	
Sweep Time(s): Sweep Point: Duty Cycle(%):			
101.3ms	40001	20.41%	

eurofins

RUN

5.3. Channel Availability Check Time

5.3.1. Procedure to Determine Initial Power-Up Cycle Time

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

5.3.2. Procedure for Timing Of Radar Burst

With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

5.3.3. Qualitative Results


Timing of Radar Burst	Display on Control Computer	Spectrum Analyzer Display
No Radar Triggered	EUT marks Channel as active	Transmissions begin on channel after completion of the initial power-up cycle and the CAC
Within 0 to 6 second window	EUT indicates radar detected	No transmissions on channel
Within 54 to 60 second window	EUT indicates radar detected	No transmissions on channel


802.11ax HE20_ 5560 MHz

Initial Channel
Availability Check



Initial Channel
Availability Check
Begin

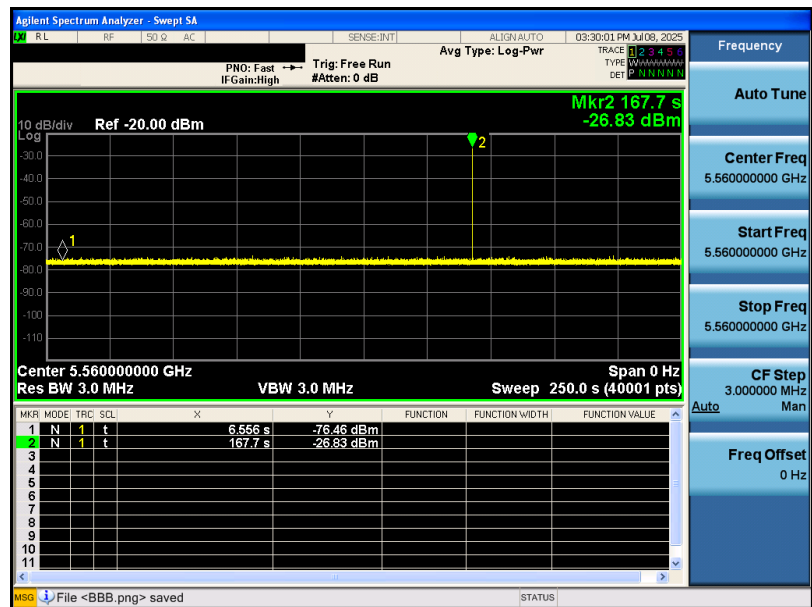

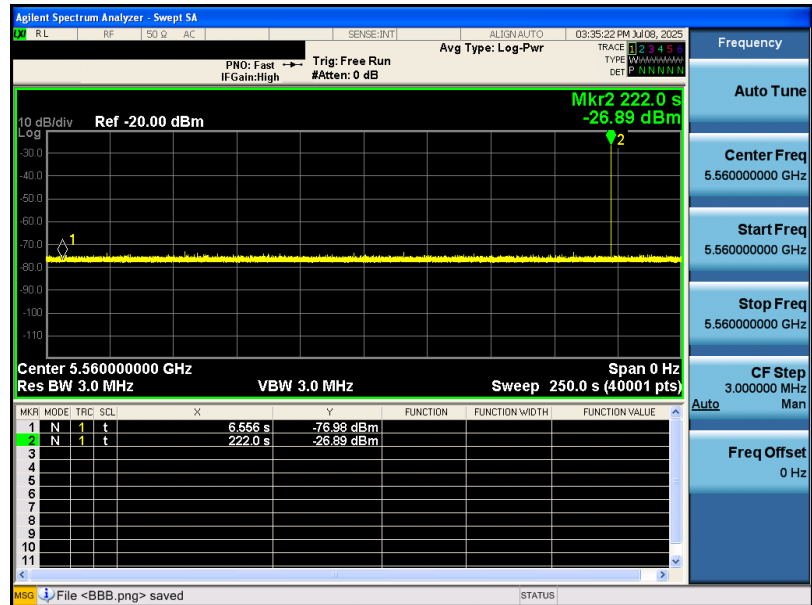

5.4. Channel Move Time and Channel Closing Transmission Time

5.4.1. Reporting Notes

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse.
This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time = (Number of analyzer bins showing transmission) * (dwell time per bin)

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Results


Frequency (MHz)	Radar Type	Channel Move Time (sec)	Limit (sec)
		Master	
5530	Type 0	0.4615	10

Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
		Master	
5530	Type 0	12.9997	60

Master :


802.11ax HE80_ 5530 MHz

Channel Move and
Closing Time
(T0~T1)

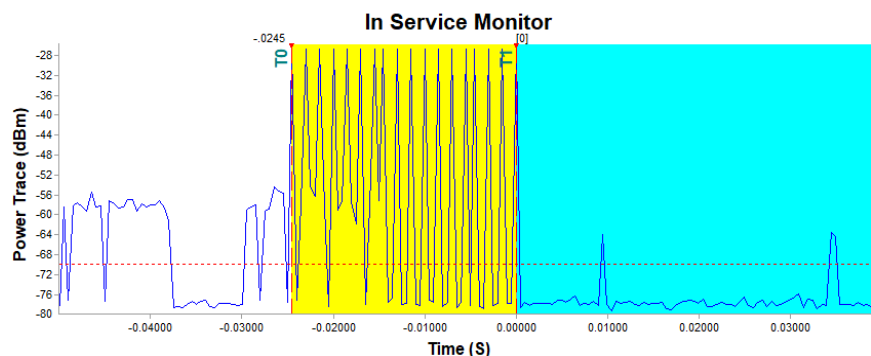


Time Index Info		
T0 : -0.0245 S	Time Per Bin: 0.4999875 ms	Channel Move Time: 0.4614885 S
T1 : 0.0000 S	T2~T3 Bins Over Threshold:	Channel Close Time: 0.0129997 S
T2 : 0.2000 S	= 26 Bins	
T3 : 0.4615 S		


Channel Move and
Closing Time
(T1~T2)

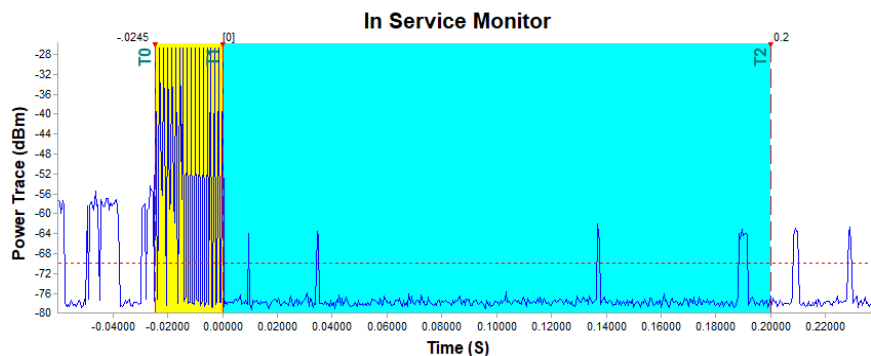

Time Index Info		
T0 : -0.0245 S	Time Per Bin: 0.4999875 ms	Channel Move Time: 0.4614885 S
T1 : 0.0000 S	T2~T3 Bins Over Threshold:	Channel Close Time: 0.0129997 S
T2 : 0.2000 S	= 26 Bins	
T3 : 0.4615 S		

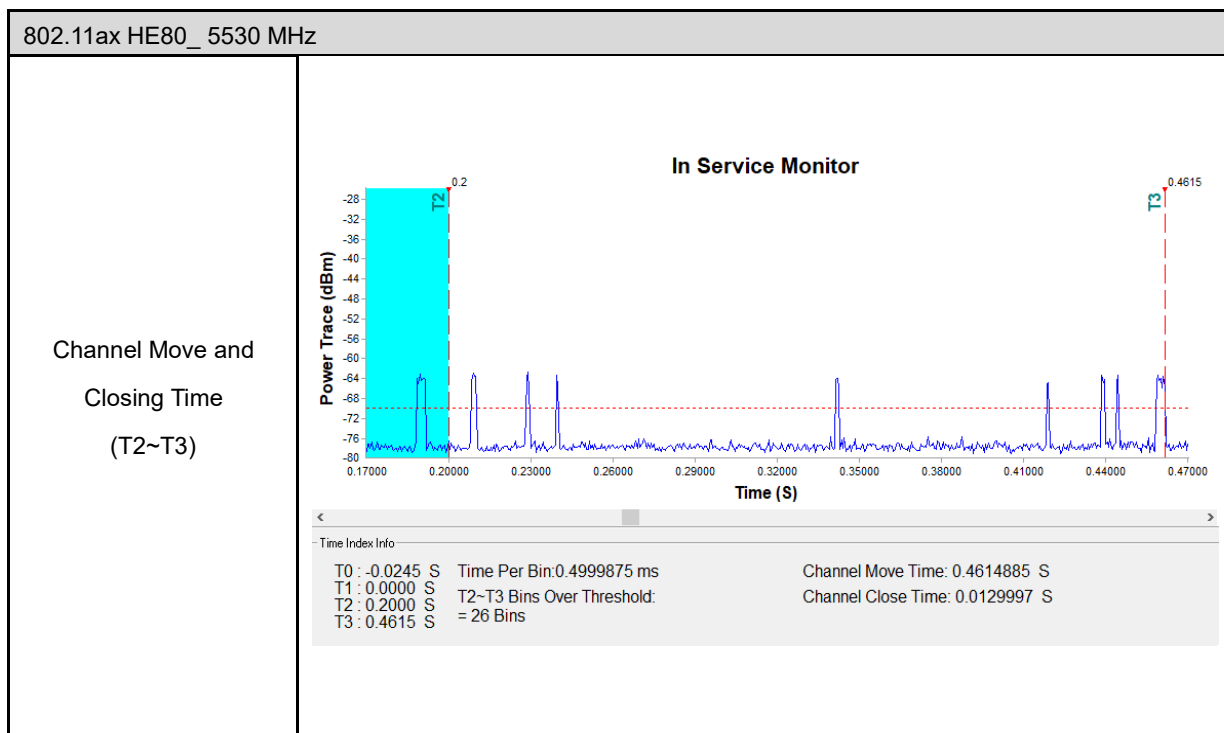

5.5. Non-Occupancy Period

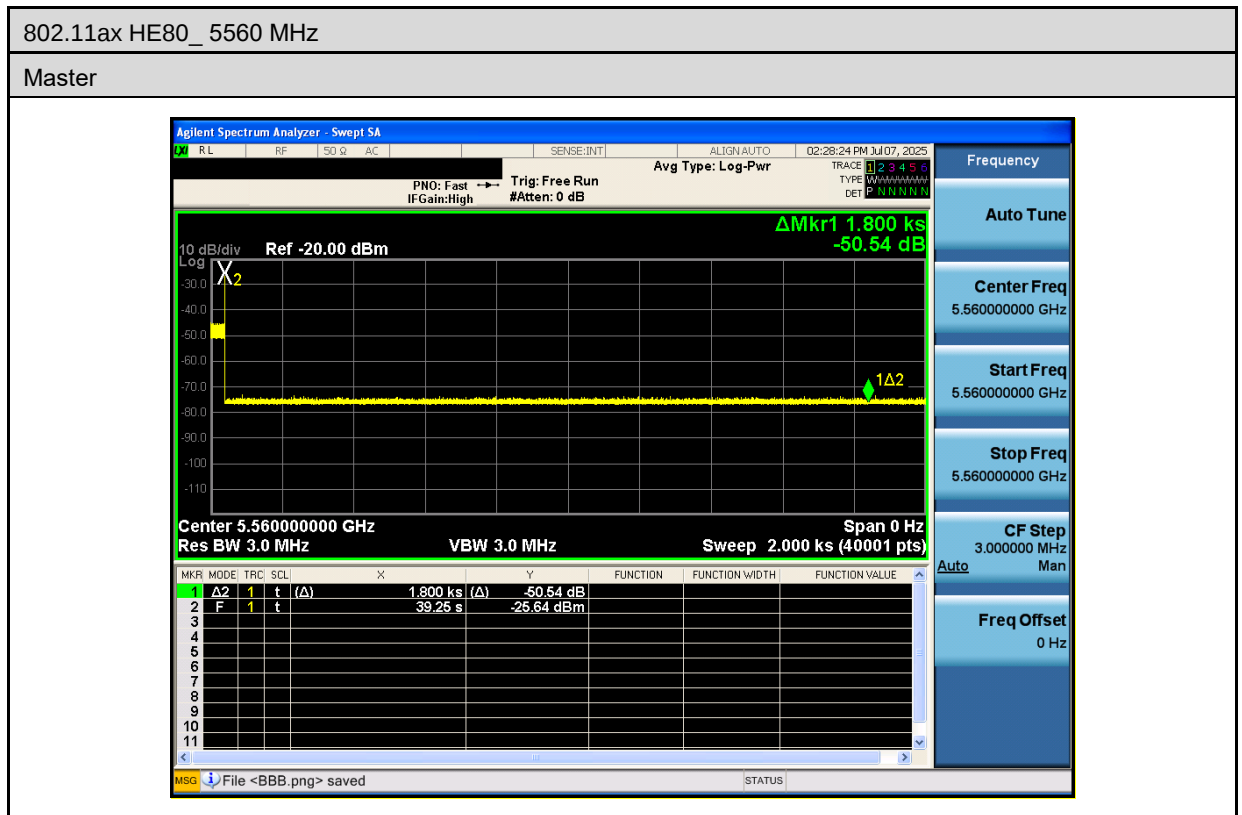

Note: Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

5.6. U-NII Detection Bandwidth

■ Test Results


Test Mode						
802.11ax HE20						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5560	5550	5570	20	19.111	104.65	≥ 100

Test Mode						
802.11ax HE40						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5550	5530	5570	40	37.951	105.40	≥ 100


Test Mode						
802.11ax HE80						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5530	5490	5569	79	77.086	102.48	≥ 100

■ Test Graphs


802.11ax HE20_ 5560 MHz

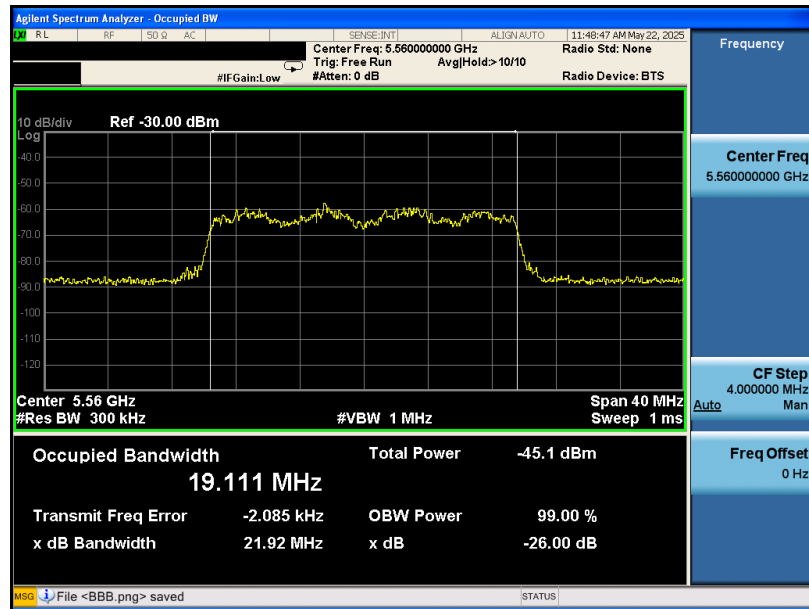

802.11ax HE40_ 5550 MHz

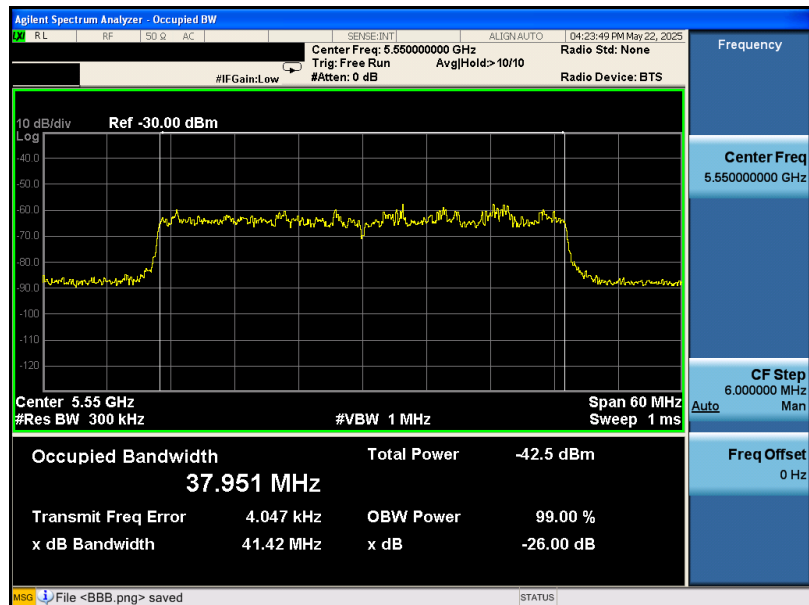

802.11ax HE80_ 5530 MHz

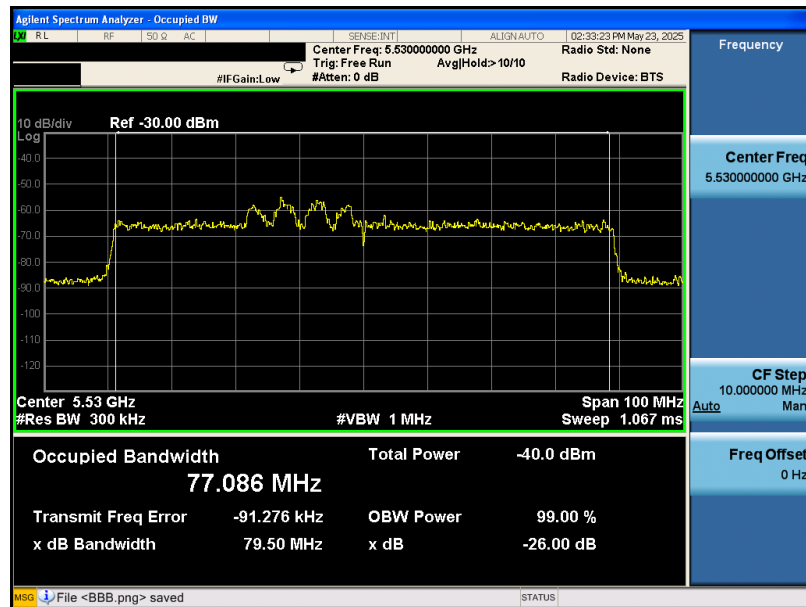

5.7. Statistical Performance check

■ Test Results

Test Mode		802.11ax HE20					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5560	Type1	Table 5a	1	29	1	96.67%	≥ 60 %
	Type2	Random	Random	30	0	100.00%	≥ 60 %
	Type3	Random	Random	28	2	93.33%	≥ 60 %
	Type4	Random	Random	28	2	93.33%	≥ 60 %
	Type1~4					95.83 %	≥ 80 %
	Type5	Random	Random	27	3	90.00%	≥ 80 %
	Type6	Hopping	1	30	0	100.00%	≥ 70 %

Test Mode		802.11ax HE40					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5550	Type1	Table 5a	1	26	4	86.67%	≥ 60 %
	Type2	Random	Random	30	0	100.00%	≥ 60 %
	Type3	Random	Random	27	3	90.00%	≥ 60 %
	Type4	Random	Random	26	4	86.67%	≥ 60 %
	Type1~4					90.83 %	≥ 80 %
	Type5	Random	Random	30	0	100.00%	≥ 80 %
	Type6	Hopping	1	30	0	100.00%	≥ 70 %

Test Mode		802.11ax HE80					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5530	Type1	Table 5a	1	23	7	76.67%	≥ 60 %
	Type2	Random	Random	26	4	86.67%	≥ 60 %
	Type3	Random	Random	26	4	86.67%	≥ 60 %
	Type4	Random	Random	24	6	80.00%	≥ 60 %
	Type1~4					82.50 %	≥ 80 %
	Type5	Random	Random	29	1	96.67%	≥ 80 %
	Type6	Hopping	1	30	0	100.00%	≥ 70 %

Test Mode		802.11ax HE20				
Frequency		5560 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5560	1	738	72	1355	1
2	5560	1	678	78	1475	1
3	5560	1	938	57	1066	1
4	5560	1	698	76	1433	1
5	5560	1	578	92	1730	1
6	5560	1	738	72	1355	1
7	5560	1	878	61	1139	1
8	5560	1	638	83	1567	1
9	5560	1	638	83	1567	1
10	5560	1	798	67	1253	1
11	5560	1	758	70	1319	1
12	5560	1	878	61	1139	0
13	5560	1	598	89	1672	1
14	5560	1	578	92	1730	1
15	5560	1	658	81	1520	1
16	5560	1	2904	19	344	1
17	5560	1	994	54	1006	1
18	5560	1	2409	22	415	1
19	5560	1	551	96	1815	1
20	5560	1	1383	39	723	1
21	5560	1	2056	26	486	1
22	5560	1	1033	52	968	1
23	5560	1	1667	32	600	1
24	5560	1	1109	48	902	1
25	5560	1	2788	19	359	1
26	5560	1	1568	34	638	1
27	5560	1	3047	18	328	1
28	5560	1	797	67	1255	1
29	5560	1	545	97	1835	1
30	5560	1	2007	27	498	1
Detection Percentage (%)						96.67

Test Mode		802.11ax HE20				
Frequency		5560 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5560	4.70	229.60	29	4355	1
2	5560	2.60	183.00	27	5464	1
3	5560	4.60	195.80	25	5107	1
4	5560	4.00	207.80	26	4812	1
5	5560	4.80	175.50	26	5698	1
6	5560	1.40	225.20	28	4440	1
7	5560	3.90	203.00	29	4926	1
8	5560	2.20	212.10	24	4715	1
9	5560	4.00	155.10	24	6447	1
10	5560	2.50	216.50	24	4619	1
11	5560	2.60	193.20	24	5176	1
12	5560	2.70	201.90	23	4953	1
13	5560	1.40	206.10	24	4852	1
14	5560	3.50	204.20	29	4897	1
15	5560	1.50	181.40	23	5513	1
16	5560	3.80	189.40	23	5280	1
17	5560	2.40	226.10	29	4423	1
18	5560	3.50	162.90	27	6139	1
19	5560	4.80	188.70	27	5299	1
20	5560	2.30	167.20	25	5981	1
21	5560	3.50	200.20	29	4995	1
22	5560	3.20	227.70	27	4392	1
23	5560	4.10	209.70	27	4769	1
24	5560	3.00	159.60	27	6266	1
25	5560	2.20	191.90	26	5211	1
26	5560	1.40	197.70	24	5058	1
27	5560	3.10	160.70	25	6223	1
28	5560	3.20	181.20	26	5519	1
29	5560	1.40	219.80	24	4550	1
30	5560	3.70	201.60	24	4960	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE20				
Frequency		5560 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5560	7.90	252.40	16	3961.97	1
2	5560	7.30	247.80	18	4035.51	1
3	5560	7.20	227.70	16	4391.74	1
4	5560	9.00	380.20	18	2630.19	1
5	5560	8.80	297.70	17	3359.09	1
6	5560	7.40	284.90	18	3510.00	1
7	5560	7.00	448.30	17	2230.65	1
8	5560	8.80	494.10	16	2023.88	1
9	5560	8.70	494.00	17	2024.29	1
10	5560	6.80	396.80	16	2520.16	0
11	5560	7.70	477.90	16	2092.49	1
12	5560	9.30	473.00	16	2114.16	1
13	5560	8.80	254.40	17	3930.82	1
14	5560	7.80	394.10	18	2537.43	0
15	5560	8.20	318.80	17	3136.76	1
16	5560	8.60	357.90	18	2794.08	1
17	5560	8.80	487.40	17	2051.70	1
18	5560	8.00	492.60	17	2030.04	1
19	5560	7.30	239.70	17	4171.88	1
20	5560	7.20	405.20	17	2467.92	1
21	5560	9.00	267.60	16	3736.92	1
22	5560	8.70	435.90	18	2294.10	1
23	5560	7.60	423.20	17	2362.95	1
24	5560	6.10	294.70	16	3393.28	1
25	5560	10.00	429.10	17	2330.46	1
26	5560	8.80	474.20	17	2108.81	1
27	5560	9.60	402.80	18	2482.62	1
28	5560	9.40	394.60	16	2534.21	1
29	5560	7.20	422.00	16	2369.67	1
30	5560	8.30	246.10	16	4063.39	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE20				
Frequency		5560 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5560	12.50	425.20	16	2352	1
2	5560	19.00	381.00	13	2625	1
3	5560	14.50	330.80	14	3023	1
4	5560	15.70	411.10	16	2432	1
5	5560	18.50	318.20	14	3143	1
6	5560	14.00	240.70	15	4155	0
7	5560	15.70	371.10	15	2695	1
8	5560	19.40	281.60	15	3551	1
9	5560	11.70	276.70	15	3614	1
10	5560	15.50	400.30	13	2498	1
11	5560	18.60	232.10	16	4308	1
12	5560	13.20	474.90	12	2106	1
13	5560	18.60	378.10	14	2645	1
14	5560	18.90	469.00	13	2132	1
15	5560	14.80	354.80	12	2818	1
16	5560	12.40	441.10	13	2267	1
17	5560	17.20	220.90	12	4527	1
18	5560	13.50	243.80	16	4102	1
19	5560	15.20	303.50	15	3295	1
20	5560	16.50	247.60	12	4039	1
21	5560	16.90	243.90	14	4100	1
22	5560	18.80	459.20	16	2178	1
23	5560	15.60	268.50	12	3724	1
24	5560	14.20	364.30	14	2745	1
25	5560	14.30	497.90	13	2008	1
26	5560	13.10	430.90	15	2321	1
27	5560	17.60	298.50	13	3350	1
28	5560	14.20	228.80	16	4371	0
29	5560	19.80	225.50	14	4435	1
30	5560	13.60	419.80	15	2382	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5554	1	83.5	9	1083.3	3	1
	5555	2	57.7	13	1996.6	1	
	5556	3	63.5	14	1730.6	1	
	5553	4	86.3	7	1009.1	2	
	5553	5	79.0	7	1926.3	3	
	5556	6	87.0	15	1344.6	1	
	5553	7	51.2	7	1653.8	2	
	5556	8	82.8	15	1180.3	3	
	5552	9	53.9	5	1733.8	2	
	5557	10	81.8	17	1341.7	1	
	5557	11	56.2	17	1345.4	3	
2	5554	1	79.0	10	1878.4	1	1
	5556	2	54.2	16	1121.9	2	
	5554	3	86.6	10	1920.8	3	
	5554	4	92.0	10	1270.7	2	
	5556	5	80.2	15	1712.0	2	
	5552	6	80.7	6	1364.0	1	
	5554	7	96.4	9	1652.5	2	
	5555	8	55.2	13	1067.2	3	
	5552	9	76.1	6	1128.3	1	
	5553	10	66.2	8	1396.6	3	
	5556	11	95.9	15	1452.5	1	
	5558	12	56.4	19	1063.6	3	
3	5555	1	88.7	12	1549.1	3	1
	5556	2	69.6	14	1009.6	2	
	5552	3	68.0	6	1131.1	1	
	5556	4	61.3	16	1064.2	2	
	5552	5	85.9	5	1210.3	2	
	5553	6	93.9	8	1709.5	2	
	5556	7	98.7	15	1789.2	3	
	5554	8	50.3	11	1131.5	2	
	5557	9	89.8	17	1561.2	2	
	5557	10	56.0	18	1543.2	1	
	5555	11	64.5	13	1454.2	2	
	5555	12	55.6	13	1695.2	1	
	5554	13	99.0	9	1144.2	3	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5556	1	73.1	14	1945.9	1	1
	5554	2	55.2	11	1450.5	1	
	5553	3	73.8	7	1441.7	2	
	5554	4	57.0	9	1321.4	2	
	5555	5	60.3	13	1414.9	2	
	5552	6	69.4	6	1186.2	3	
	5553	7	66.0	7	1342.6	2	
	5557	8	69.9	17	1794.4	3	
	5552	9	52.5	6	1103.4	3	
5	5558	1	91.5	19	1344.6	1	1
	5556	2	60.4	16	1764.7	2	
	5554	3	73.9	9	1599.1	1	
	5555	4	90.4	12	1323.0	3	
	5558	5	91.4	20	1825.0	3	
	5558	6	57.2	19	1174.2	2	
	5555	7	83.5	13	1052.7	1	
	5555	8	58.3	13	1877.6	1	
	5558	9	92.6	19	1183.4	2	
	5557	10	63.6	17	1527.9	1	
	5554	11	89.7	10	1498.5	2	
	5557	12	80.5	17	1969.8	1	
	5556	13	90.2	15	1842.8	2	
	5552	14	67.2	6	1687.5	3	
	5555	15	96.4	13	1800.2	1	
6	5556	1	56.5	15	1412.8	1	1
	5552	2	61.2	6	1854.8	2	
	5557	3	78.2	18	1779.3	3	
	5554	4	97.2	10	1174.3	3	
	5556	5	71.1	15	1838.1	3	
	5558	6	55.1	20	1600.2	2	
	5553	7	86.5	8	1060.2	1	
	5552	8	85.9	6	1632.5	2	
	5554	9	78.7	10	1767.4	1	
	5556	10	61.0	14	1617.1	3	
	5556	11	65.9	15	1070.1	2	
	5554	12	94.0	10	1714.0	1	
	5554	13	70.8	11	1346.7	3	
	5557	14	57.3	17	1428.5	3	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5552	1	95.8	5	1742.6	2	1
	5555	2	50.8	13	1609.2	3	
	5556	3	56.5	14	1237.1	2	
	5554	4	51.1	9	1438.7	3	
	5557	5	67.9	17	1675.7	2	
	5552	6	93.9	5	1420.5	2	
	5557	7	57.4	17	1124.0	3	
	5556	8	95.6	15	1137.2	3	
	5557	9	70.1	18	1047.4	2	
	5556	10	65.7	14	1388.4	1	
	5557	11	75.6	17	1319.0	3	
	5556	12	66.2	16	1753.7	1	
	5554	13	74.5	11	1031.2	3	
	5554	14	69.7	10	1768.1	2	
	5556	15	92.7	14	1101.9	3	
	5556	16	51.9	14	1968.4	2	
	5553	17	92.8	7	1750.3	1	
8	5556	1	60.6	14	1613.9	3	1
	5556	2	54.6	14	1716.6	2	
	5556	3	73.8	16	1556.2	1	
	5558	4	83.4	20	1054.8	1	
	5557	5	90.8	17	1468.2	1	
	5554	6	63.6	9	1072.2	2	
	5555	7	90.1	12	1898.3	3	
	5553	8	83.6	8	1061.6	1	
	5558	9	99.6	19	1496.6	1	
	5554	10	75.2	9	1302.0	2	
	5556	11	85.4	14	1571.2	1	
	5555	12	72.1	13	1184.1	1	
	5556	13	76.4	16	1821.2	1	
	5552	14	52.7	6	1655.0	3	
	5552	15	64.9	6	1833.3	3	
	5554	16	69.0	9	1666.4	3	
	5556	17	66.3	15	1465.4	1	
	5554	18	96.8	11	1666.0	3	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5555	1	62.0	13	1822.3	3	1
	5557	2	76.9	17	1678.3	3	
	5558	3	56.7	19	1389.6	3	
	5554	4	66.6	9	1482.2	3	
	5554	5	99.2	11	1380.0	2	
	5558	6	96.7	19	1341.1	3	
	5557	7	83.4	18	1670.2	2	
	5558	8	99.9	20	1279.8	3	
	5554	9	59.1	11	1501.2	3	
	5553	10	90.2	7	1933.3	3	
	5557	11	97.7	18	1815.9	3	
	5554	12	52.1	11	1839.4	3	
	5555	13	95.8	12	1449.5	3	
	5555	14	59.7	13	1522.4	2	
	5554	15	62.7	11	1443.5	1	
	5554	16	71.8	10	1146.2	1	
	5555	17	80.8	13	1939.2	2	
	5552	18	73.7	6	1948.4	2	
	5554	19	76.9	9	1310.7	3	
10	5558	1	54.6	20	1661.1	2	1
	5553	2	89.5	7	1273.1	3	
	5552	3	53.1	6	1990.1	2	
	5557	4	60.2	17	1703.4	2	
	5555	5	57.7	13	1968.5	1	
	5553	6	64.4	7	1606.1	3	
	5555	7	93.7	12	1998.3	2	
	5555	8	70.0	12	1139.0	3	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5560	1	93.4	9	1132.8	1	1
	5560	2	67.7	18	1435.3	3	
	5560	3	85.1	7	1458.5	1	
	5560	4	93.2	5	1602.2	2	
	5560	5	73.3	12	1112.7	3	
	5560	6	77.4	10	1362.6	2	
	5560	7	89.9	5	1978.3	2	
	5560	8	97.2	11	1776.9	1	
	5560	9	67.2	11	1050.4	1	
	5560	10	97.8	6	1927.8	1	
	5560	11	80.7	15	1986.8	2	
	5560	12	91.2	7	1199.0	3	
	5560	13	67.9	7	1026.7	2	
	5560	14	70.1	9	1930.0	1	
	5560	15	66.6	18	1263.3	3	
	5560	16	73.8	9	1721.1	3	
12	5560	1	66.3	13	1269.6	3	1
	5560	2	91.7	12	1566.5	1	
	5560	3	77.3	15	1967.2	2	
	5560	4	56.8	12	1207.7	3	
	5560	5	63.9	18	1280.8	3	
	5560	6	79.3	11	1057.7	3	
	5560	7	72.7	11	1797.6	2	
	5560	8	57.0	9	1335.1	1	
	5560	9	95.5	12	1109.3	3	
	5560	10	81.2	15	1325.3	3	
	5560	11	96.6	6	1606.4	3	
	5560	12	70.1	9	1201.9	3	
	5560	13	89.0	11	1567.3	2	
	5560	14	96.6	10	1133.5	2	
	5560	15	59.7	10	1087.5	3	
	5560	16	96.6	10	1585.5	3	
	5560	17	85.3	7	1060.8	3	
	5560	18	53.6	7	1163.0	1	
	5560	19	85.1	9	1982.1	3	
	5560	20	79.6	12	1489.3	1	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5560	1	71.3	12	1882.2	1	1
	5560	2	90.5	10	1075.4	1	
	5560	3	76.3	12	1762.4	1	
	5560	4	69.4	12	1020.2	2	
	5560	5	90.7	9	1618.1	1	
	5560	6	51.8	13	1981.9	1	
	5560	7	82.4	16	1066.9	3	
	5560	8	70.8	15	1010.8	2	
	5560	9	85.2	16	1371.1	3	
	5560	10	62.9	13	1272.4	2	
14	5560	1	52.4	9	1849.6	3	1
	5560	2	60.7	19	1404.0	2	
	5560	3	88.3	19	1105.1	3	
	5560	4	82.8	10	1440.8	2	
	5560	5	75.5	13	1430.9	1	
	5560	6	97.3	8	1645.4	1	
	5560	7	89.5	16	1367.4	2	
	5560	8	91.9	9	1098.8	3	
	5560	9	95.8	16	1810.5	1	
	5560	10	57.4	13	1216.4	3	
	5560	11	96.7	16	1719.3	3	
	5560	12	73.3	8	1972.4	3	
	5560	13	69.0	10	1342.6	2	
	5560	14	82.7	19	1128.5	1	
	5560	15	56.0	19	1127.2	3	
	5560	16	59.9	19	1997.5	2	
	5560	17	91.4	15	1705.2	3	
	5560	18	97.5	8	1021.9	3	
	5560	19	55.4	19	1138.5	2	
	5560	20	87.1	13	1638.7	1	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5560	1	97.6	7	1130.3	1	1
	5560	2	88.0	19	1645.7	2	
	5560	3	78.9	6	1172.6	2	
	5560	4	55.5	8	1241.0	1	
	5560	5	91.7	12	1837.2	1	
	5560	6	53.2	13	1396.1	3	
	5560	7	62.9	6	1061.8	2	
	5560	8	80.9	10	1470.5	3	
	5560	9	52.0	20	1243.5	3	
	5560	10	74.5	18	1406.9	2	
	5560	11	87.7	18	1637.8	2	
	5560	12	61.2	17	1397.0	3	
	5560	13	71.4	19	1380.6	1	
	5560	14	62.8	16	1625.4	2	
	5560	15	97.5	14	1374.6	3	
	5560	16	60.2	18	1141.6	2	
	5560	17	64.6	12	1215.2	3	
	5560	18	90.6	10	1041.6	1	
	5560	19	72.4	13	1798.2	3	
16	5560	1	53.2	18	1274.5	1	0
	5560	2	71.0	8	1987.0	3	
	5560	3	57.4	15	1721.7	1	
	5560	4	75.4	15	1357.0	2	
	5560	5	68.0	9	1155.2	3	
	5560	6	68.1	15	1580.1	3	
	5560	7	74.3	16	1054.9	2	
	5560	8	77.0	12	1463.2	2	
	5560	9	82.9	8	1374.6	2	
	5560	10	51.5	20	1207.1	1	
	5560	11	61.4	8	1970.8	1	
	5560	12	66.1	20	1779.5	2	
	5560	13	97.9	10	1373.4	2	
	5560	14	90.7	15	1961.5	3	
	5560	15	94.9	16	1217.6	2	
	5560	16	77.5	11	1520.8	1	
	5560	17	52.7	15	1310.0	3	
	5560	18	61.3	19	1961.5	1	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5560	1	57.6	15	1424.0	3	1
	5560	2	88.2	17	1988.3	1	
	5560	3	89.4	11	1825.2	1	
	5560	4	95.9	8	1734.1	1	
	5560	5	60.3	5	1352.4	1	
	5560	6	98.8	10	1051.4	3	
	5560	7	72.8	9	1752.5	2	
	5560	8	68.3	7	1624.4	2	
	5560	9	69.3	14	1710.1	3	
	5560	10	94.2	14	1189.9	3	
	5560	11	61.7	20	1102.8	2	
	5560	12	89.3	14	1109.3	1	
	5560	13	60.4	7	1303.3	1	
	5560	14	50.2	13	1312.8	1	
	5560	15	62.6	12	1010.7	2	
	5560	16	95.5	13	1954.2	3	
	5560	17	56.3	10	1768.5	1	
18	5560	1	56.2	12	1558.7	2	1
	5560	2	60.0	13	1568.3	3	
	5560	3	88.2	7	1629.1	2	
	5560	4	77.1	5	1233.5	3	
	5560	5	98.0	7	1322.0	3	
	5560	6	88.3	15	1231.3	1	
	5560	7	74.4	17	1507.7	2	
	5560	8	67.2	9	1529.8	2	
	5560	9	85.0	20	1842.8	3	
	5560	10	93.5	14	1196.9	2	
	5560	11	64.0	11	1476.1	3	
	5560	12	65.2	16	1576.1	3	
	5560	13	73.1	6	1523.0	3	
	5560	14	69.1	6	1436.3	2	
	5560	15	55.3	14	1747.0	3	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5560	1	50.2	11	1479.4	2	1
	5560	2	88.2	17	1910.2	1	
	5560	3	76.8	14	1651.7	3	
	5560	4	63.6	10	1179.7	2	
	5560	5	71.2	18	1045.7	3	
	5560	6	91.7	14	1245.0	2	
	5560	7	78.7	8	1313.9	1	
	5560	8	75.2	16	1635.5	1	
	5560	9	57.1	19	1439.6	2	
	5560	10	51.8	12	1966.7	1	
	5560	11	78.8	16	1125.7	1	
	5560	12	99.0	17	1260.5	3	
	5560	13	65.1	17	1871.4	1	
	5560	14	78.8	12	1923.8	1	
20	5560	1	82.2	18	1278.8	3	1
	5560	2	59.9	10	1541.6	1	
	5560	3	83.0	15	1427.1	2	
	5560	4	76.7	20	1827.0	1	
	5560	5	89.4	6	1041.3	3	
	5560	6	75.4	11	1729.3	1	
	5560	7	82.1	11	1210.4	3	
	5560	8	72.9	7	1178.4	1	
	5560	9	83.2	5	1798.2	3	
	5560	10	66.0	10	1731.7	2	
21	5563	1	73.0	17	1504.7	3	1
	5563	2	98.0	17	1087.3	1	
	5566	3	69.1	10	1126.8	3	
	5566	4	75.5	10	1234.5	1	
	5566	5	79.4	9	1029.0	1	
	5562	6	83.4	19	1442.6	1	
	5567	7	92.5	7	1217.4	3	
	5564	8	83.2	15	1857.2	3	
	5566	9	69.0	9	1766.6	2	
	5564	10	63.9	14	1642.0	3	
	5564	11	86.2	14	1683.8	3	
	5568	12	51.3	5	1876.1	2	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5564	1	64.2	16	1533.3	3	0
	5564	2	73.3	15	1446.6	2	
	5565	3	61.3	12	1951.5	1	
	5564	4	53.7	16	1456.0	1	
	5565	5	92.2	13	1501.0	3	
	5565	6	58.5	12	1751.3	1	
	5563	7	50.9	17	1073.2	1	
	5564	8	83.6	16	1599.6	2	
	5567	9	87.3	7	1688.3	2	
23	5565	1	67.1	13	1240.6	2	1
	5565	2	67.9	12	1367.7	3	
	5562	3	63.3	19	1759.8	1	
	5562	4	72.3	20	1990.9	1	
	5564	5	63.0	14	1916.7	1	
	5562	6	66.1	19	1883.3	2	
	5563	7	82.5	17	1290.8	1	
	5567	8	65.6	8	1504.1	3	
	5567	9	62.7	8	1612.5	3	
	5567	10	64.0	8	1887.2	2	
	5568	11	58.8	6	1652.4	3	
	5564	12	61.4	15	1244.5	3	
	5567	13	99.2	8	1327.3	2	
	5564	14	73.0	14	1772.7	3	
	5564	15	69.6	16	1454.1	1	
24	5566	1	91.3	9	1561.7	2	1
	5564	2	82.6	16	1860.3	1	
	5562	3	66.7	20	1775.2	1	
	5565	4	90.6	13	1917.6	2	
	5566	5	94.0	9	1948.7	2	
	5566	6	85.4	10	1293.8	1	
	5566	7	64.5	11	1561.5	3	
	5563	8	63.6	17	1884.5	3	
	5566	9	72.6	9	1307.6	2	
	5567	10	56.0	7	1089.9	3	
	5568	11	81.3	6	1350.3	2	
	5565	12	54.3	13	1590.3	1	
	5568	13	56.3	6	1837.3	1	
	5564	14	53.0	16	1851.6	3	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5568	1	53.1	6	1268.0	3	1
	5566	2	53.2	9	1672.2	1	
	5563	3	62.2	17	1595.0	3	
	5567	4	67.8	8	1230.0	1	
	5562	5	89.0	20	1706.2	2	
	5562	6	97.0	19	1916.9	2	
	5563	7	68.6	18	1990.2	1	
	5568	8	82.5	5	1437.5	1	
	5566	9	89.3	11	1223.8	1	
	5567	10	70.1	7	1466.5	3	
	5566	11	59.6	10	1989.5	2	
	5564	12	70.5	15	1882.5	3	
	5567	13	58.6	7	1136.0	1	
	5564	14	99.0	16	1295.1	2	
	5567	15	68.7	8	1469.5	3	
	5567	16	77.5	8	1839.9	3	
	5563	17	97.6	18	1504.8	3	
	5568	18	76.2	6	1135.1	3	
26	5565	1	82.3	12	1427.3	2	1
	5566	2	70.9	11	1274.0	2	
	5565	3	81.6	12	1331.6	1	
	5563	4	85.1	18	1620.5	1	
	5567	5	55.5	8	1034.5	2	
	5562	6	77.7	19	1357.4	3	
	5566	7	92.4	10	1353.7	1	
	5566	8	51.4	11	1696.8	2	
	5568	9	97.3	5	1046.4	3	
	5564	10	72.8	15	1727.4	2	
	5563	11	90.5	18	1384.7	3	
	5564	12	81.4	14	1151.4	2	
	5562	13	84.4	19	1614.9	2	
	5566	14	59.7	11	1901.9	3	
	5567	15	59.4	8	1617.7	3	
	5565	16	92.9	12	1691.2	2	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5566	1	91.1	9	1070.9	2	1
	5566	2	95.7	11	1421.8	1	
	5567	3	63.9	8	1596.4	2	
	5566	4	78.7	10	1029.9	3	
	5567	5	88.2	7	1464.4	1	
	5564	6	71.9	14	1423.7	2	
	5564	7	61.0	14	1463.6	2	
	5564	8	50.1	16	1074.7	1	
	5563	9	99.5	18	1023.9	3	
	5567	10	60.8	7	1139.1	2	
	5566	11	96.0	9	1467.0	2	
	5566	12	74.7	9	1931.8	1	
	5562	13	84.2	19	1907.4	2	
	5566	14	62.1	9	1049.3	1	
	5568	15	55.7	5	1692.5	1	
	5566	16	80.3	10	1511.5	3	
	5562	17	50.4	19	1589.5	1	
	5563	18	78.3	18	1763.7	1	
	5565	19	95.8	12	1692.1	1	
	5564	20	65.4	14	1231.9	2	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5567	1	96.8	8	1568.3	2	1
	5565	2	90.4	13	1618.2	2	
	5564	3	58.7	15	1666.7	2	
	5566	4	87.0	9	1136.2	3	
	5566	5	97.7	11	1969.9	2	
	5568	6	51.5	6	1994.1	3	
	5566	7	83.1	9	1681.6	1	
	5568	8	82.2	6	1410.3	2	
	5566	9	75.8	10	1671.1	3	
	5567	10	99.0	7	1585.1	3	
	5566	11	74.7	9	1516.9	2	
	5565	12	54.0	12	1971.4	1	
	5564	13	75.2	16	1995.6	1	
	5562	14	99.7	19	1878.2	1	
	5564	15	68.3	15	1559.4	3	
	5566	16	51.1	11	1321.6	2	
	5564	17	87.4	15	1624.6	3	
	5567	18	99.4	8	1248.2	3	
	5566	19	78.2	9	1161.9	1	
	5564	20	89.4	16	1761.3	1	

Test Mode		802.11ax HE20					
Frequency		5560 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5563	1	80.1	17	1332.3	1	1
	5564	2	86.3	15	1751.8	1	
	5563	3	52.7	18	1520.4	1	
	5568	4	90.3	6	1476.7	1	
	5564	5	85.6	16	1003.6	1	
	5565	6	57.0	13	1135.1	1	
	5566	7	71.5	11	1889.6	3	
	5567	8	64.1	7	1321.3	3	
	5565	9	60.7	13	1510.4	1	
	5564	10	90.9	14	1598.8	1	
	5566	11	87.6	10	1699.1	3	
	5564	12	97.8	16	1751.5	2	
	5565	13	53.2	13	1553.5	3	
	5563	14	84.6	17	1612.8	1	
	5567	15	57.8	8	1228.8	1	
	5564	16	60.2	14	1959.6	3	
	5565	17	58.2	13	1643.7	3	
30	5564	1	63.8	15	1980.7	1	0
	5563	2	52.1	18	1834.8	1	
	5562	3	67.2	20	1658.9	3	
	5564	4	50.1	15	1605.2	2	
	5566	5	72.6	11	1520.0	2	
	5566	6	82.2	11	1558.8	2	
	5564	7	99.1	16	1944.4	1	
	5567	8	64.1	7	1169.2	2	
	5564	9	64.6	14	1175.5	1	
	5564	10	91.5	16	1907.6	2	
	5565	11	82.1	12	1019.9	1	
	5568	12	66.4	6	1452.9	1	
	5568	13	70.8	6	1072.6	3	
	5562	14	71.5	20	1460.6	2	
Detection Percentage (%)							90.00

Test Mode		802.11ax HE20				
Frequency		5560 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE40				
Frequency		5550 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5550	1	758	70	1319	1
2	5550	1	858	62	1166	1
3	5550	1	818	65	1222	1
4	5550	1	578	92	1730	1
5	5550	1	538	99	1859	0
6	5550	1	918	58	1089	1
7	5550	1	738	72	1355	1
8	5550	1	638	83	1567	1
9	5550	1	858	62	1166	1
10	5550	1	938	57	1066	1
11	5550	1	678	78	1475	1
12	5550	1	798	67	1253	0
13	5550	1	538	99	1859	1
14	5550	1	3066	18	326	1
15	5550	1	838	63	1193	1
16	5550	1	1280	42	781	1
17	5550	1	1065	50	939	1
18	5550	1	1523	35	657	1
19	5550	1	2339	23	428	1
20	5550	1	2827	19	354	1
21	5550	1	1677	32	596	0
22	5550	1	1254	43	797	1
23	5550	1	2799	19	357	1
24	5550	1	1950	28	513	1
25	5550	1	546	97	1832	1
26	5550	1	993	54	1007	1
27	5550	1	660	80	1515	1
28	5550	1	643	83	1555	1
29	5550	1	1416	38	706	0
30	5550	1	1643	33	609	1
Detection Percentage (%)						86.67

Test Mode		802.11ax HE40				
Frequency		5550 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5550	1.10	173.20	26	5774	1
2	5550	4.90	150.50	26	6645	1
3	5550	2.20	228.70	27	4373	1
4	5550	3.90	158.00	28	6329	1
5	5550	2.40	201.70	24	4958	1
6	5550	2.80	229.50	28	4357	1
7	5550	3.50	192.20	27	5203	1
8	5550	1.80	188.40	23	5308	1
9	5550	3.90	225.30	25	4439	1
10	5550	3.60	198.50	25	5038	1
11	5550	1.90	229.60	29	4355	1
12	5550	4.50	181.60	28	5507	1
13	5550	2.90	150.60	25	6640	1
14	5550	2.50	219.50	29	4556	1
15	5550	4.90	158.90	24	6293	1
16	5550	2.40	164.60	26	6075	1
17	5550	3.30	200.70	29	4983	1
18	5550	2.10	192.10	27	5206	1
19	5550	4.20	195.00	24	5128	1
20	5550	4.80	220.00	26	4545	1
21	5550	4.20	207.70	29	4815	1
22	5550	2.80	171.40	26	5834	1
23	5550	2.40	179.90	29	5559	1
24	5550	3.70	184.10	24	5432	1
25	5550	3.70	179.30	26	5577	1
26	5550	3.30	183.20	28	5459	1
27	5550	4.30	210.40	23	4753	1
28	5550	1.40	155.80	26	6418	1
29	5550	1.10	192.70	24	5189	1
30	5550	4.10	205.90	29	4857	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE40				
Frequency		5550 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5550	9.20	269.70	17	3707.82	1
2	5550	10.00	483.60	18	2067.82	1
3	5550	9.50	400.10	18	2499.38	1
4	5550	9.10	274.80	18	3639.01	0
5	5550	9.30	491.10	16	2036.25	1
6	5550	9.70	347.40	18	2878.53	1
7	5550	7.70	330.40	17	3026.63	1
8	5550	6.10	228.60	17	4374.45	1
9	5550	7.90	290.50	16	3442.34	1
10	5550	7.70	383.10	17	2610.28	1
11	5550	9.00	455.00	17	2197.80	1
12	5550	7.60	314.60	16	3178.64	1
13	5550	7.30	431.90	18	2315.35	1
14	5550	7.20	368.90	18	2710.76	1
15	5550	8.40	322.80	16	3097.89	1
16	5550	9.10	434.50	17	2301.50	1
17	5550	6.90	456.40	16	2191.06	1
18	5550	7.30	464.80	16	2151.46	1
19	5550	7.70	288.20	18	3469.81	1
20	5550	9.70	284.40	16	3516.17	1
21	5550	9.40	488.50	17	2047.08	1
22	5550	7.00	364.20	17	2745.74	1
23	5550	9.80	256.00	18	3906.25	0
24	5550	6.90	300.60	17	3326.68	1
25	5550	8.30	401.30	17	2491.90	1
26	5550	8.80	259.70	18	3850.60	0
27	5550	10.00	459.30	16	2177.23	1
28	5550	6.70	409.50	17	2442.00	1
29	5550	7.60	213.10	18	4692.63	1
30	5550	7.20	273.50	18	3656.31	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE40				
Frequency		5550 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5550	14.60	299.00	13	3344	1
2	5550	16.40	289.50	13	3454	1
3	5550	14.80	412.00	14	2427	1
4	5550	16.50	219.60	12	4554	1
5	5550	15.70	488.90	14	2045	1
6	5550	19.80	260.90	13	3833	1
7	5550	19.20	434.30	12	2303	0
8	5550	13.10	239.40	16	4177	1
9	5550	12.90	448.80	16	2228	1
10	5550	15.70	220.50	12	4535	1
11	5550	18.90	223.70	12	4470	0
12	5550	12.30	494.40	15	2023	1
13	5550	17.80	239.90	14	4168	0
14	5550	15.70	261.40	16	3826	1
15	5550	18.10	333.00	16	3003	1
16	5550	18.80	362.80	14	2756	1
17	5550	11.10	476.10	13	2100	1
18	5550	19.70	474.70	13	2107	1
19	5550	18.00	448.90	15	2228	1
20	5550	12.00	279.40	12	3579	0
21	5550	12.10	469.20	16	2131	1
22	5550	14.60	380.10	12	2631	1
23	5550	19.90	375.20	16	2665	1
24	5550	20.00	414.30	13	2414	1
25	5550	14.50	229.10	13	4365	1
26	5550	14.00	330.90	16	3022	1
27	5550	18.00	366.90	13	2726	1
28	5550	11.30	412.30	12	2425	1
29	5550	18.40	481.40	12	2077	1
30	5550	13.30	252.60	14	3959	1
Detection Percentage (%)						86.67

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5535	1	69.2	10	1332.0	2	1
	5538	2	89.4	18	1222.7	2	
	5537	3	74.7	15	1635.4	2	
	5534	4	73.2	8	1395.0	2	
	5539	5	51.2	19	1533.4	3	
	5537	6	55.1	14	1243.6	3	
	5536	7	77.3	12	1627.1	1	
	5537	8	61.7	15	1646.9	1	
	5536	9	88.0	13	1230.0	1	
	5534	10	51.6	8	1312.9	3	
	5537	11	62.4	16	1372.2	1	
2	5534	1	56.7	8	1859.9	1	1
	5538	2	66.1	17	1601.0	1	
	5535	3	76.8	9	1857.8	2	
	5537	4	90.7	16	1714.1	1	
	5538	5	88.7	17	1635.3	1	
	5535	6	51.8	10	1078.4	3	
	5538	7	58.3	17	1767.7	1	
	5537	8	94.5	16	1368.5	1	
	5534	9	51.3	8	1103.6	3	
	5537	10	91.6	16	1154.1	1	
	5535	11	62.7	11	1734.1	2	
	5535	12	91.1	9	1212.6	1	
3	5539	1	51.8	19	1737.8	1	1
	5537	2	95.9	16	1539.8	3	
	5534	3	52.6	7	1765.1	3	
	5534	4	86.6	7	1923.5	2	
	5537	5	87.5	14	1264.9	1	
	5538	6	93.5	17	1367.2	3	
	5538	7	91.5	17	1216.1	1	
	5538	8	94.4	18	1161.1	2	
	5539	9	73.5	19	1223.1	3	
	5533	10	58.8	5	1077.9	2	
	5537	11	79.0	14	1230.4	1	
	5539	12	75.6	20	1538.5	2	
	5535	13	92.3	11	1461.4	1	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5534	1	97.4	7	1735.8	2	1
	5537	2	89.9	14	1188.8	3	
	5538	3	83.1	18	1717.8	1	
	5533	4	81.3	6	1383.2	3	
	5533	5	67.7	5	1741.1	3	
	5538	6	99.5	17	1145.7	2	
	5534	7	81.2	7	1138.7	3	
	5539	8	73.7	19	1743.9	2	
	5537	9	51.5	16	1349.3	2	
5	5539	1	99.9	19	1781.1	3	1
	5536	2	95.8	13	1799.5	1	
	5539	3	88.8	19	1040.8	2	
	5537	4	77.0	16	1561.6	3	
	5533	5	61.1	6	1755.7	2	
	5537	6	66.8	15	1925.5	2	
	5539	7	73.4	19	1451.0	2	
	5539	8	72.6	19	1783.6	3	
	5537	9	95.2	14	1758.7	3	
	5533	10	75.2	6	1876.2	2	
	5536	11	99.5	13	1680.7	2	
	5537	12	75.0	15	1459.8	1	
	5539	13	83.6	19	1432.2	1	
	5535	14	78.1	11	1266.8	2	
	5537	15	96.2	15	1669.7	1	
6	5536	1	64.1	12	1320.2	2	1
	5537	2	72.4	14	1097.7	1	
	5537	3	85.1	15	1856.6	1	
	5536	4	82.6	13	1592.1	3	
	5536	5	80.9	13	1770.9	2	
	5535	6	88.9	11	1310.5	1	
	5537	7	75.2	14	1121.5	1	
	5535	8	58.3	9	1156.5	1	
	5535	9	71.9	10	1908.7	1	
	5535	10	52.7	10	1076.6	2	
	5533	11	64.9	5	1398.4	3	
	5535	12	83.2	10	1335.0	3	
	5534	13	51.6	7	1469.9	2	
	5536	14	56.4	13	1343.9	3	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5537	1	83.9	16	1814.2	2	1
	5537	2	82.7	16	1746.9	2	
	5535	3	67.3	10	1255.1	2	
	5537	4	94.1	16	1750.7	3	
	5539	5	87.2	19	1007.4	2	
	5538	6	71.5	18	1074.1	3	
	5537	7	56.6	16	1100.9	2	
	5535	8	75.9	9	1753.8	2	
	5533	9	58.0	5	1674.0	1	
	5539	10	85.7	19	1688.6	2	
	5533	11	81.9	6	1971.2	1	
	5537	12	69.4	14	1197.0	1	
	5535	13	76.6	9	1446.8	3	
	5538	14	52.8	17	1755.4	2	
	5538	15	66.2	18	1371.1	3	
	5533	16	58.4	5	1628.3	2	
	5537	17	64.8	15	1171.6	2	
8	5535	1	94.1	10	1619.6	1	1
	5533	2	59.6	6	1896.2	2	
	5536	3	86.9	13	1116.3	3	
	5536	4	79.4	12	1485.5	3	
	5534	5	63.4	8	1422.3	1	
	5533	6	50.5	6	1054.7	1	
	5535	7	71.3	10	1079.2	2	
	5535	8	88.9	10	1319.4	3	
	5539	9	94.5	19	1488.5	2	
	5538	10	60.1	17	1794.4	2	
	5534	11	67.3	7	1600.2	1	
	5539	12	87.6	20	1256.4	1	
	5533	13	84.8	6	1311.4	1	
	5539	14	70.0	20	1989.5	1	
	5535	15	58.9	11	1701.9	1	
	5537	16	96.3	16	1330.7	2	
	5539	17	66.7	19	1245.6	3	
	5535	18	75.1	9	1939.7	3	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5537	1	91.3	15	1657.9	2	1
	5533	2	88.8	5	1829.4	2	
	5537	3	75.9	15	1016.3	3	
	5537	4	60.1	16	1230.2	1	
	5537	5	81.4	15	1167.1	3	
	5538	6	97.8	17	1075.3	1	
	5535	7	53.4	11	1406.5	1	
	5536	8	93.2	13	1081.0	3	
	5535	9	84.3	11	1236.0	1	
	5538	10	69.6	18	1611.2	1	
	5536	11	67.4	12	1374.5	1	
	5538	12	87.1	18	1911.8	3	
	5538	13	92.6	18	1452.3	3	
	5535	14	95.0	11	1390.5	1	
	5534	15	81.3	8	1610.8	1	
	5535	16	64.4	11	1827.8	3	
	5538	17	67.1	18	1261.4	3	
	5535	18	51.0	9	1384.4	2	
	5534	19	70.0	8	1027.2	2	
10	5535	1	97.0	9	1040.0	1	1
	5534	2	87.8	7	1145.9	3	
	5537	3	51.5	16	1856.6	3	
	5535	4	55.1	10	1790.7	3	
	5537	5	90.3	15	1417.0	2	
	5535	6	86.0	10	1991.5	2	
	5534	7	92.0	8	1069.3	2	
	5533	8	89.3	5	1663.2	2	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5550	1	84.3	17	1976.1	2	1
	5550	2	59.4	16	1069.1	1	
	5550	3	88.1	9	1018.2	3	
	5550	4	60.5	18	1209.0	2	
	5550	5	59.1	6	1084.5	3	
	5550	6	61.3	19	1843.3	3	
	5550	7	96.3	5	1027.8	2	
	5550	8	51.1	12	1817.3	1	
	5550	9	53.8	14	1955.7	3	
	5550	10	66.9	6	1654.2	1	
	5550	11	85.7	14	1117.5	2	
	5550	12	97.1	19	1418.4	2	
	5550	13	52.2	12	1349.7	2	
	5550	14	50.5	15	1004.2	3	
	5550	15	75.9	5	1365.6	2	
	5550	16	80.5	12	1591.4	2	
12	5550	1	86.7	17	1762.5	2	1
	5550	2	79.7	7	1645.8	3	
	5550	3	91.6	13	1140.7	3	
	5550	4	90.4	9	1409.3	2	
	5550	5	56.6	15	1269.0	2	
	5550	6	73.7	11	1321.4	1	
	5550	7	60.5	9	1341.9	2	
	5550	8	50.6	12	1582.8	3	
	5550	9	84.6	15	1753.4	3	
	5550	10	78.6	5	1115.4	1	
	5550	11	95.7	17	1778.6	2	
	5550	12	99.3	9	1614.1	2	
	5550	13	63.9	18	1817.6	3	
	5550	14	94.1	11	1798.1	3	
	5550	15	62.1	19	1379.8	2	
	5550	16	59.9	20	1549.7	3	
	5550	17	84.9	15	1814.7	3	
	5550	18	68.3	20	1001.1	1	
	5550	19	53.4	15	1949.1	1	
	5550	20	65.3	17	1368.7	3	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5550	1	70.5	10	1693.1	1	1
	5550	2	97.9	17	1359.0	1	
	5550	3	83.4	9	1173.8	3	
	5550	4	55.5	10	1237.5	2	
	5550	5	60.2	16	1098.7	1	
	5550	6	82.1	14	1184.0	1	
	5550	7	78.8	14	1148.3	3	
	5550	8	67.2	9	1548.6	1	
	5550	9	88.4	5	1796.5	3	
	5550	10	62.6	7	1853.4	1	
14	5550	1	76.7	10	1370.6	1	1
	5550	2	66.2	16	1927.0	1	
	5550	3	67.1	7	1702.8	1	
	5550	4	65.3	13	1818.0	2	
	5550	5	94.7	7	1787.1	3	
	5550	6	57.3	18	1790.1	2	
	5550	7	91.4	14	1114.2	3	
	5550	8	98.2	14	1034.1	2	
	5550	9	54.7	8	1502.3	2	
	5550	10	85.8	16	1874.5	3	
	5550	11	80.4	9	1322.7	1	
	5550	12	50.3	10	1766.5	3	
	5550	13	90.2	12	1293.7	3	
	5550	14	94.3	13	1316.3	3	
	5550	15	66.9	10	1432.1	3	
	5550	16	66.4	9	1781.6	3	
	5550	17	82.6	18	1612.4	1	
	5550	18	77.1	10	1483.6	2	
	5550	19	95.6	19	1534.6	2	
	5550	20	60.1	5	1476.0	3	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5550	1	66.9	16	1508.4	3	1
	5550	2	88.9	13	1561.6	2	
	5550	3	97.7	8	1069.7	3	
	5550	4	52.7	6	1556.2	2	
	5550	5	99.2	8	1641.6	2	
	5550	6	96.5	16	1710.3	1	
	5550	7	91.2	12	1978.0	2	
	5550	8	67.6	9	1681.2	2	
	5550	9	71.4	15	1896.9	2	
	5550	10	61.7	9	1756.2	3	
	5550	11	96.9	13	1166.2	2	
	5550	12	98.2	12	1536.6	1	
	5550	13	69.3	13	1431.0	1	
	5550	14	81.8	15	1390.6	1	
	5550	15	75.5	18	1578.6	2	
	5550	16	85.8	10	1754.5	2	
	5550	17	94.5	6	1096.9	1	
	5550	18	53.4	12	1420.4	2	
	5550	19	51.1	16	1420.9	3	
16	5550	1	65.8	19	1607.4	1	1
	5550	2	88.8	11	1409.9	3	
	5550	3	90.0	10	1209.6	2	
	5550	4	55.9	15	1292.8	3	
	5550	5	65.5	13	1433.9	3	
	5550	6	60.4	9	1162.9	2	
	5550	7	73.1	8	1342.2	2	
	5550	8	63.9	19	1037.2	3	
	5550	9	65.3	12	1790.1	3	
	5550	10	90.2	6	1488.1	3	
	5550	11	97.4	19	1523.4	2	
	5550	12	71.4	15	1973.9	1	
	5550	13	95.1	17	1214.5	2	
	5550	14	78.1	12	1487.4	1	
	5550	15	67.1	7	1107.8	3	
	5550	16	61.9	10	1764.4	1	
	5550	17	52.7	15	1010.9	3	
	5550	18	84.1	11	1750.5	1	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5550	1	89.8	12	1423.2	3	1
	5550	2	90.6	16	1582.7	2	
	5550	3	85.6	13	1060.4	3	
	5550	4	58.6	5	1044.0	2	
	5550	5	79.4	13	1341.7	3	
	5550	6	76.0	13	1772.0	3	
	5550	7	77.1	8	1121.8	3	
	5550	8	66.1	14	1723.9	2	
	5550	9	78.6	20	1696.2	3	
	5550	10	68.7	16	1305.6	3	
	5550	11	54.2	18	1565.8	1	
	5550	12	51.3	17	1201.5	3	
	5550	13	53.1	19	1137.0	1	
	5550	14	59.5	9	1436.6	1	
	5550	15	56.7	17	1586.7	2	
	5550	16	71.6	17	1591.0	3	
	5550	17	73.4	17	1879.5	2	
18	5550	1	98.8	8	1377.6	1	1
	5550	2	90.4	16	1276.8	1	
	5550	3	69.6	8	1338.7	2	
	5550	4	55.5	13	1130.5	3	
	5550	5	77.3	8	1649.8	1	
	5550	6	71.0	15	1110.4	1	
	5550	7	56.8	20	1866.4	2	
	5550	8	76.7	13	1319.4	3	
	5550	9	93.2	19	1630.7	1	
	5550	10	55.3	18	1544.3	3	
	5550	11	81.3	9	1037.7	3	
	5550	12	91.1	7	1949.3	3	
	5550	13	85.6	10	1485.5	3	
	5550	14	60.7	8	1253.5	3	
	5550	15	89.2	17	1158.8	1	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5550	1	59.1	7	1194.1	3	1
	5550	2	93.3	10	1165.7	2	
	5550	3	84.6	12	1837.5	3	
	5550	4	83.3	9	1478.9	1	
	5550	5	54.8	6	1629.5	2	
	5550	6	58.4	8	1524.0	2	
	5550	7	64.3	12	1049.6	1	
	5550	8	62.4	16	1275.8	3	
	5550	9	74.6	8	1691.1	2	
	5550	10	60.4	7	1235.4	3	
	5550	11	84.6	16	1581.1	3	
	5550	12	53.8	13	1438.9	1	
	5550	13	96.1	19	1095.4	1	
	5550	14	75.5	10	1204.2	1	
20	5550	1	68.7	9	1745.1	1	1
	5550	2	61.2	11	1565.9	2	
	5550	3	71.7	17	1800.9	3	
	5550	4	54.9	18	1910.4	3	
	5550	5	67.9	20	1027.2	3	
	5550	6	96.3	16	1736.5	1	
	5550	7	85.9	18	1558.2	3	
	5550	8	76.6	19	1080.2	1	
	5550	9	65.9	7	1572.6	1	
	5550	10	70.2	12	1896.3	3	
21	5563	1	82.3	16	1079.7	3	1
	5567	2	87.5	5	1513.1	1	
	5565	3	60.6	11	1843.8	1	
	5564	4	61.7	13	1831.5	1	
	5562	5	66.5	17	1198.8	2	
	5564	6	100.0	12	1415.9	3	
	5564	7	60.9	13	1280.6	2	
	5565	8	70.7	11	1661.8	1	
	5567	9	56.3	6	1112.4	2	
	5564	10	89.8	12	1914.3	3	
	5561	11	55.8	19	1409.9	1	
	5561	12	92.7	19	1609.9	3	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5566	1	71.0	8	1927.2	3	1
	5564	2	73.0	13	1700.5	3	
	5561	3	83.9	19	1002.6	3	
	5564	4	68.8	13	1455.7	3	
	5563	5	93.5	16	1158.3	1	
	5564	6	70.8	13	1753.1	1	
	5567	7	64.7	6	1804.6	1	
	5565	8	92.7	11	1559.9	1	
	5564	9	63.8	12	1934.1	2	
23	5565	1	86.6	11	1812.3	2	1
	5562	2	65.8	18	1768.7	2	
	5565	3	88.9	10	1867.7	3	
	5567	4	61.1	6	1910.2	3	
	5567	5	56.3	5	1633.5	2	
	5563	6	95.0	14	1961.3	1	
	5565	7	82.2	10	1800.9	3	
	5561	8	95.4	19	1852.0	2	
	5561	9	99.7	20	1877.2	1	
	5564	10	83.7	12	1981.9	1	
	5565	11	77.4	11	1070.6	1	
	5566	12	83.8	8	1536.5	2	
	5565	13	96.3	9	1975.2	2	
	5562	14	83.2	17	1511.0	2	
	5565	15	99.2	10	1234.6	1	
24	5566	1	87.9	7	1531.2	1	1
	5565	2	59.0	10	1842.1	1	
	5566	3	92.1	8	1208.4	3	
	5561	4	50.1	20	1994.4	1	
	5566	5	67.7	7	1393.3	1	
	5565	6	50.6	9	1289.2	1	
	5561	7	73.7	19	1768.7	2	
	5565	8	58.5	10	1033.0	1	
	5561	9	73.2	20	1270.0	2	
	5563	10	70.7	16	1268.1	3	
	5563	11	77.1	15	1111.8	3	
	5564	12	94.8	12	1489.2	3	
	5565	13	97.9	10	1532.8	3	
	5567	14	76.2	5	1052.7	1	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5567	1	88.7	6	1621.6	1	1
	5562	2	73.6	18	1039.9	1	
	5564	3	85.7	13	1886.7	3	
	5561	4	91.7	20	1131.1	3	
	5563	5	72.1	14	1207.7	1	
	5563	6	65.0	16	1774.7	1	
	5564	7	62.4	13	1914.0	3	
	5566	8	64.8	8	1232.7	2	
	5561	9	92.0	19	1056.5	1	
	5566	10	71.4	7	1126.9	3	
	5561	11	89.1	19	1576.9	3	
	5564	12	74.7	12	1927.1	2	
	5561	13	74.4	19	1427.3	1	
	5567	14	73.6	6	1004.7	1	
	5566	15	64.9	7	1245.0	1	
	5564	16	73.3	12	1417.1	1	
	5565	17	86.9	9	1008.0	3	
	5565	18	87.9	11	1465.6	2	
26	5566	1	83.9	8	1592.6	2	1
	5562	2	82.1	18	1284.1	2	
	5563	3	75.7	16	1762.6	2	
	5563	4	82.6	15	1170.0	2	
	5564	5	75.8	13	1125.8	1	
	5566	6	85.2	8	1080.5	2	
	5565	7	72.4	9	1783.7	3	
	5563	8	98.9	16	1105.9	1	
	5561	9	86.8	19	1629.7	2	
	5567	10	56.5	5	1196.2	3	
	5567	11	55.5	5	1067.3	1	
	5565	12	50.3	11	1935.6	2	
	5565	13	71.7	9	1327.2	2	
	5566	14	74.8	7	1107.8	1	
	5562	15	65.9	18	1654.6	2	
	5567	16	58.2	5	1642.5	1	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5565	1	91.0	11	1058.1	1	1
	5566	2	91.3	8	1373.1	1	
	5566	3	85.9	7	1145.3	1	
	5562	4	96.6	18	1544.4	2	
	5561	5	57.3	20	1682.3	1	
	5563	6	79.9	14	1067.1	2	
	5566	7	73.9	8	1456.3	3	
	5566	8	81.9	7	1318.4	2	
	5564	9	65.9	13	1283.9	3	
	5567	10	58.9	6	1181.5	2	
	5562	11	78.2	17	1195.2	3	
	5565	12	97.6	9	1706.5	3	
	5566	13	55.0	7	1892.6	2	
	5562	14	90.9	18	1880.4	1	
	5567	15	59.5	6	1373.8	2	
	5563	16	79.3	16	1509.3	2	
	5565	17	73.3	10	1971.9	2	
	5563	18	97.7	15	1031.5	1	
	5565	19	68.2	10	1724.4	1	
	5564	20	60.2	12	1738.3	3	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5561	1	79.3	19	1673.8	1	1
	5563	2	88.5	15	1951.7	1	
	5563	3	81.2	14	1738.3	2	
	5563	4	97.0	15	1112.4	2	
	5562	5	90.3	18	1817.3	2	
	5563	6	76.9	16	1237.3	1	
	5567	7	89.2	5	1067.5	1	
	5564	8	93.1	13	1777.8	2	
	5566	9	79.6	8	1919.8	1	
	5564	10	52.7	12	1424.6	2	
	5562	11	65.8	18	1559.5	1	
	5561	12	67.1	19	1450.9	1	
	5563	13	58.5	14	1880.1	2	
	5561	14	60.9	19	1428.2	3	
	5567	15	77.6	6	1018.9	1	
	5566	16	82.5	8	1029.9	1	
	5565	17	89.4	11	1893.1	3	
	5564	18	74.8	12	1845.0	2	
	5565	19	52.1	9	1987.0	2	
	5565	20	90.0	11	1771.4	3	

Test Mode		802.11ax HE40					
Frequency		5550 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5562	1	66.9	18	1995.6	2	1
	5562	2	72.2	17	1056.8	1	
	5561	3	93.7	20	1298.6	1	
	5565	4	61.9	9	1900.7	2	
	5566	5	51.6	8	1008.6	2	
	5565	6	58.8	11	1464.1	3	
	5565	7	83.8	9	1972.9	1	
	5562	8	65.8	18	1195.0	2	
	5564	9	61.6	12	1467.3	2	
	5566	10	91.1	7	1551.2	3	
	5565	11	84.8	9	1572.7	3	
	5565	12	69.9	11	1348.4	1	
	5564	13	81.7	13	1143.4	1	
	5564	14	56.6	13	1851.0	1	
	5564	15	80.7	12	1498.1	1	
	5565	16	80.0	10	1683.1	2	
	5562	17	80.7	18	1965.8	2	
30	5567	1	58.8	6	1450.7	3	1
	5562	2	78.8	17	1915.7	3	
	5564	3	60.2	13	1024.4	2	
	5565	4	62.8	11	1441.8	3	
	5563	5	60.3	16	1711.4	2	
	5567	6	87.7	6	1826.8	1	
	5562	7	91.4	17	1083.4	3	
	5565	8	77.5	11	1109.4	2	
	5563	9	58.0	16	1384.4	1	
	5561	10	52.5	19	1531.7	2	
	5564	11	69.7	13	1967.4	1	
	5562	12	90.3	18	1207.6	3	
	5564	13	83.2	13	1830.3	2	
	5565	14	73.5	11	1767.7	3	
Detection Percentage (%)							100.00

Test Mode		802.11ax HE40				
Frequency		5550 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5530	1	578	92	1730	1
2	5530	1	758	70	1319	1
3	5530	1	838	63	1193	1
4	5530	1	558	95	1792	1
5	5530	1	938	57	1066	1
6	5530	1	798	67	1253	0
7	5530	1	838	63	1193	1
8	5530	1	878	61	1139	1
9	5530	1	3066	18	326	1
10	5530	1	698	76	1433	1
11	5530	1	758	70	1319	0
12	5530	1	618	86	1618	0
13	5530	1	898	59	1114	1
14	5530	1	898	59	1114	1
15	5530	1	818	65	1222	1
16	5530	1	2595	21	385	1
17	5530	1	1925	28	519	1
18	5530	1	914	58	1094	1
19	5530	1	907	59	1103	0
20	5530	1	2904	19	344	0
21	5530	1	906	59	1104	1
22	5530	1	1303	41	767	1
23	5530	1	550	96	1818	0
24	5530	1	1287	42	777	1
25	5530	1	564	94	1773	0
26	5530	1	541	98	1848	1
27	5530	1	1848	29	541	1
28	5530	1	2862	19	349	1
29	5530	1	638	83	1567	1
30	5530	1	1283	42	779	1
Detection Percentage (%)						76.67

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5530	3.00	216.90	23	4610	0
2	5530	1.70	198.60	26	5035	1
3	5530	1.20	202.40	26	4941	1
4	5530	1.40	197.70	27	5058	1
5	5530	3.40	221.20	29	4521	1
6	5530	4.10	197.00	26	5076	1
7	5530	4.40	168.30	25	5942	1
8	5530	3.10	227.20	23	4401	1
9	5530	4.90	152.90	24	6540	1
10	5530	5.00	190.60	26	5247	1
11	5530	3.60	195.30	26	5120	1
12	5530	4.90	225.30	25	4439	1
13	5530	4.50	172.60	25	5794	1
14	5530	3.60	195.50	23	5115	1
15	5530	3.20	204.40	29	4892	1
16	5530	2.40	194.50	23	5141	1
17	5530	1.80	222.50	26	4494	0
18	5530	4.10	199.10	29	5023	1
19	5530	1.40	164.30	24	6086	1
20	5530	4.10	163.90	24	6101	1
21	5530	2.00	166.60	29	6002	1
22	5530	3.30	156.00	25	6410	1
23	5530	4.20	196.30	29	5094	1
24	5530	1.30	206.80	29	4836	1
25	5530	4.70	210.20	29	4757	1
26	5530	1.50	188.30	28	5311	1
27	5530	2.20	152.10	23	6575	1
28	5530	3.50	229.40	27	4359	0
29	5530	4.40	222.90	28	4486	0
30	5530	2.90	183.50	29	5450	1
Detection Percentage (%)						86.67

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5530	7.10	409.00	18	2444.99	1
2	5530	8.90	488.80	17	2045.83	1
3	5530	7.00	249.30	16	4011.23	1
4	5530	6.00	361.10	17	2769.32	1
5	5530	8.30	456.20	17	2192.02	1
6	5530	6.40	206.80	16	4835.59	1
7	5530	6.90	298.00	17	3355.70	1
8	5530	6.30	363.70	17	2749.52	1
9	5530	7.20	285.00	18	3508.77	1
10	5530	6.40	379.60	17	2634.35	1
11	5530	9.00	277.10	18	3608.81	1
12	5530	7.20	267.90	17	3732.74	1
13	5530	9.50	468.90	18	2132.65	1
14	5530	6.50	485.00	17	2061.86	0
15	5530	6.50	444.30	17	2250.73	1
16	5530	7.70	411.90	17	2427.77	1
17	5530	9.40	322.20	17	3103.66	1
18	5530	9.70	417.30	16	2396.36	1
19	5530	7.80	290.10	16	3447.09	1
20	5530	8.50	394.20	17	2536.78	1
21	5530	9.40	276.80	16	3612.72	1
22	5530	8.60	420.70	16	2376.99	0
23	5530	6.20	347.40	18	2878.53	1
24	5530	7.10	215.60	16	4638.22	1
25	5530	9.00	366.00	16	2732.24	1
26	5530	9.60	349.00	17	2865.33	1
27	5530	7.90	473.10	16	2113.72	1
28	5530	6.10	309.90	18	3226.85	0
29	5530	6.80	421.10	18	2374.73	1
30	5530	7.10	449.50	18	2224.69	0
Detection Percentage (%)						86.67

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5530	12.80	497.00	14	2012	1
2	5530	11.90	389.40	12	2568	1
3	5530	12.40	382.40	12	2615	0
4	5530	11.80	238.80	16	4188	1
5	5530	17.50	486.20	14	2057	1
6	5530	18.20	242.60	15	4122	1
7	5530	11.50	427.80	13	2338	1
8	5530	11.90	282.40	14	3541	1
9	5530	12.40	389.80	12	2565	1
10	5530	17.90	302.90	14	3301	1
11	5530	19.80	351.30	15	2847	1
12	5530	13.80	259.70	14	3851	1
13	5530	17.30	224.70	16	4450	0
14	5530	13.10	278.50	15	3591	0
15	5530	11.90	424.00	16	2358	1
16	5530	14.30	216.50	14	4619	1
17	5530	18.20	356.90	12	2802	1
18	5530	14.20	345.30	15	2896	0
19	5530	11.20	304.80	14	3281	1
20	5530	13.00	360.10	16	2777	0
21	5530	14.80	452.50	13	2210	1
22	5530	17.20	472.60	12	2116	1
23	5530	17.50	256.80	13	3894	1
24	5530	17.90	425.60	14	2350	0
25	5530	18.10	398.80	15	2508	1
26	5530	13.90	345.70	14	2893	1
27	5530	20.00	491.90	14	2033	1
28	5530	15.90	494.60	13	2022	1
29	5530	15.70	455.70	15	2194	1
30	5530	17.20	225.90	12	4427	1
Detection Percentage (%)						80.00

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5498.5	1	71.7	18	1193.1	1	1
	5494.5	2	96.6	7	1932.7	2	
	5493.5	3	98.5	6	1675.4	3	
	5498.5	4	85.1	17	1338.5	3	
	5493.5	5	86.7	5	1700.0	3	
	5495.5	6	85.9	11	1155.8	3	
	5496.5	7	91.8	13	1512.3	1	
	5495.5	8	82.7	10	1109.2	1	
	5495.5	9	66.0	9	1054.8	1	
	5496.5	10	60.9	12	1996.5	3	
	5497.5	11	74.1	16	1210.3	2	
2	5494.5	1	67.8	8	1590.2	2	1
	5495.5	2	69.9	10	1205.0	3	
	5499.5	3	67.0	19	1444.5	3	
	5496.5	4	74.8	13	1363.3	1	
	5495.5	5	96.8	9	1988.6	1	
	5495.5	6	66.4	10	1782.3	2	
	5494.5	7	52.6	7	1182.6	1	
	5497.5	8	85.2	14	1667.0	1	
	5494.5	9	50.9	7	1321.7	1	
	5497.5	10	95.0	14	1020.9	2	
	5497.5	11	72.4	15	1879.6	2	
	5495.5	12	51.5	10	1811.4	2	
3	5497.5	1	78.0	16	1222.1	1	1
	5494.5	2	91.1	8	1035.3	2	
	5497.5	3	85.9	16	1026.2	2	
	5499.5	4	72.7	19	1808.9	1	
	5497.5	5	57.8	14	1065.5	3	
	5495.5	6	99.8	10	1631.9	1	
	5495.5	7	76.1	10	1015.1	2	
	5493.5	8	88.1	6	1346.5	2	
	5495.5	9	89.3	10	1047.7	3	
	5495.5	10	93.9	11	1788.9	1	
	5493.5	11	70.1	6	1090.0	2	
	5497.5	12	77.5	15	1501.3	2	
	5494.5	13	63.2	7	1767.9	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5494.5	1	57.4	7	1109.3	3	1
	5499.5	2	83.5	20	1878.7	1	
	5497.5	3	89.2	16	1467.1	3	
	5495.5	4	93.5	9	1056.5	2	
	5495.5	5	55.6	9	1542.5	2	
	5499.5	6	77.0	19	1140.6	2	
	5498.5	7	87.6	17	1512.3	2	
	5499.5	8	96.3	20	1584.4	3	
	5498.5	9	79.7	18	1259.8	3	
5	5493.5	1	87.7	6	1282.6	3	1
	5496.5	2	97.4	12	1108.3	1	
	5498.5	3	81.5	17	1038.9	3	
	5497.5	4	89.9	16	1247.8	3	
	5499.5	5	87.8	19	1011.8	1	
	5499.5	6	62.8	19	1796.3	1	
	5499.5	7	70.7	19	1939.3	1	
	5498.5	8	63.5	18	1851.3	3	
	5496.5	9	75.1	12	1476.8	3	
	5495.5	10	94.6	10	1948.6	2	
	5494.5	11	91.2	8	1267.3	2	
	5496.5	12	94.1	13	1548.6	3	
	5494.5	13	81.5	7	1250.5	2	
	5499.5	14	86.3	19	1469.9	2	
	5497.5	15	66.2	15	1878.6	1	
6	5493.5	1	52.5	6	1232.6	2	1
	5493.5	2	90.8	6	1157.6	1	
	5496.5	3	95.6	13	1564.7	1	
	5495.5	4	67.2	11	1203.9	2	
	5495.5	5	96.0	11	1545.4	2	
	5496.5	6	94.6	12	1364.3	2	
	5495.5	7	99.1	11	1577.2	3	
	5493.5	8	73.6	6	1213.4	2	
	5494.5	9	51.3	7	1154.3	1	
	5497.5	10	82.4	16	1147.5	1	
	5496.5	11	52.8	13	1316.0	2	
	5494.5	12	98.5	7	1549.4	3	
	5493.5	13	68.4	5	1301.2	1	
	5497.5	14	54.8	14	1716.2	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5494.5	1	98.3	8	1290.6	1	1
	5495.5	2	63.0	9	1896.5	2	
	5496.5	3	50.1	12	1443.3	3	
	5499.5	4	56.7	20	1460.1	1	
	5494.5	5	81.0	7	1822.2	1	
	5497.5	6	85.8	16	1873.3	1	
	5496.5	7	63.5	13	1395.1	1	
	5494.5	8	54.1	8	1630.2	3	
	5498.5	9	96.5	18	1178.7	1	
	5497.5	10	81.9	15	1085.1	3	
	5493.5	11	68.0	6	1628.9	3	
	5495.5	12	51.3	9	1456.2	2	
	5497.5	13	63.0	14	1002.2	3	
	5498.5	14	62.9	18	1497.5	2	
	5498.5	15	86.1	18	1069.0	3	
	5497.5	16	51.7	16	1233.6	1	
	5495.5	17	86.4	11	1369.9	2	
8	5497.5	1	93.9	16	1142.5	3	1
	5493.5	2	51.6	6	1626.6	1	
	5499.5	3	61.7	19	1276.8	1	
	5498.5	4	70.4	18	1543.7	3	
	5497.5	5	87.1	16	1268.6	1	
	5495.5	6	95.1	11	1593.6	3	
	5494.5	7	70.5	7	1268.7	2	
	5496.5	8	55.7	12	1435.0	3	
	5494.5	9	74.4	8	1776.3	3	
	5499.5	10	96.2	20	1121.0	3	
	5497.5	11	53.4	14	1286.4	2	
	5496.5	12	87.1	13	1541.3	1	
	5493.5	13	91.3	6	1623.1	3	
	5494.5	14	85.3	7	1406.7	3	
	5496.5	15	75.1	12	1502.6	2	
	5495.5	16	67.5	11	1401.6	1	
	5496.5	17	52.3	13	1874.8	3	
	5498.5	18	85.9	17	1940.3	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5497.5	1	83.0	15	1333.1	1	1
	5494.5	2	99.5	7	1997.3	1	
	5495.5	3	64.4	9	1682.7	2	
	5498.5	4	74.4	18	1446.8	3	
	5495.5	5	79.9	9	1424.5	1	
	5496.5	6	75.0	12	1763.9	1	
	5495.5	7	68.3	10	1672.9	3	
	5496.5	8	86.8	12	1885.4	2	
	5494.5	9	60.2	7	1403.4	3	
	5499.5	10	92.6	19	1317.1	2	
	5495.5	11	74.1	11	1498.8	1	
	5498.5	12	76.2	18	1418.8	3	
	5497.5	13	56.5	14	1328.3	1	
	5497.5	14	83.4	15	1491.1	1	
	5495.5	15	99.9	9	1118.2	1	
	5494.5	16	94.1	7	1616.0	1	
	5495.5	17	55.9	9	1650.3	2	
	5495.5	18	84.0	10	1833.1	1	
	5494.5	19	90.9	7	1063.9	3	
10	5496.5	1	76.2	13	1435.5	1	1
	5497.5	2	60.8	14	1746.1	1	
	5494.5	3	71.6	8	1123.5	2	
	5497.5	4	70.3	16	1233.2	1	
	5498.5	5	56.6	17	1456.3	1	
	5496.5	6	90.6	12	1683.4	3	
	5495.5	7	92.7	10	1054.5	2	
	5499.5	8	96.6	19	1929.9	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5530	1	57.9	8	1914.3	3	1
	5530	2	69.4	6	1700.1	2	
	5530	3	63.4	5	1018.0	2	
	5530	4	73.8	6	1885.4	1	
	5530	5	62.9	18	1751.6	2	
	5530	6	87.4	15	1815.1	3	
	5530	7	82.7	20	1831.6	3	
	5530	8	70.5	12	1893.2	1	
	5530	9	95.7	14	1818.0	1	
	5530	10	53.6	18	1028.7	2	
	5530	11	74.8	13	1370.9	2	
	5530	12	94.3	5	1271.5	3	
	5530	13	84.6	19	1037.7	3	
	5530	14	52.3	8	1257.9	1	
	5530	15	78.1	14	1282.4	3	
	5530	16	92.4	15	1290.8	3	
12	5530	1	97.7	16	1706.8	3	1
	5530	2	57.7	17	1935.9	3	
	5530	3	68.0	17	1080.5	2	
	5530	4	85.9	12	1995.8	2	
	5530	5	53.7	16	1661.8	1	
	5530	6	94.3	10	1265.4	3	
	5530	7	93.9	17	1996.5	3	
	5530	8	59.6	10	1149.4	3	
	5530	9	83.3	8	1887.7	2	
	5530	10	71.5	15	1847.2	3	
	5530	11	55.3	14	1601.2	2	
	5530	12	57.4	14	1375.3	3	
	5530	13	66.1	12	1610.0	1	
	5530	14	66.8	18	1864.3	2	
	5530	15	83.2	17	1159.9	3	
	5530	16	78.4	9	1897.6	1	
	5530	17	95.5	12	1865.9	1	
	5530	18	90.5	17	1965.9	1	
	5530	19	84.9	9	1196.8	2	
	5530	20	59.9	16	1349.3	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5530	1	74.5	19	1009.5	1	1
	5530	2	54.4	14	1840.5	1	
	5530	3	68.7	17	1599.6	2	
	5530	4	76.6	18	1433.1	3	
	5530	5	99.1	15	1112.1	3	
	5530	6	52.3	6	1634.3	1	
	5530	7	65.5	13	1221.7	2	
	5530	8	86.6	9	1650.2	1	
	5530	9	76.5	15	1181.2	1	
	5530	10	76.0	5	1265.5	2	
14	5530	1	86.8	16	1183.3	3	1
	5530	2	67.8	14	1181.5	1	
	5530	3	52.9	12	1727.0	2	
	5530	4	96.7	20	1689.4	1	
	5530	5	95.5	11	1301.1	2	
	5530	6	50.8	9	1661.6	1	
	5530	7	51.8	5	1136.3	2	
	5530	8	62.6	7	1624.2	3	
	5530	9	63.9	13	1347.2	3	
	5530	10	77.2	12	1290.6	1	
	5530	11	93.6	14	1988.6	3	
	5530	12	91.7	15	1063.4	2	
	5530	13	53.5	8	1692.0	2	
	5530	14	57.3	12	1769.7	1	
	5530	15	93.1	6	1005.6	2	
	5530	16	80.7	6	1413.1	1	
	5530	17	52.0	6	1098.0	3	
	5530	18	88.2	19	1003.4	1	
	5530	19	88.6	12	1505.9	2	
	5530	20	91.7	16	1218.2	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5530	1	63.4	19	1126.0	2	1
	5530	2	95.0	13	1789.3	1	
	5530	3	69.8	14	1187.0	3	
	5530	4	73.2	18	1019.9	1	
	5530	5	68.7	8	1914.0	2	
	5530	6	65.5	20	1936.8	2	
	5530	7	99.8	17	1302.3	3	
	5530	8	69.5	8	1585.4	2	
	5530	9	53.1	19	1498.8	3	
	5530	10	54.2	11	1244.1	2	
	5530	11	70.1	7	1941.0	2	
	5530	12	76.7	14	1463.7	2	
	5530	13	89.5	9	1702.6	3	
	5530	14	62.8	18	1900.7	1	
	5530	15	82.8	18	1654.8	1	
	5530	16	70.7	17	1336.1	1	
	5530	17	82.9	13	1511.2	1	
	5530	18	71.8	19	1479.3	3	
	5530	19	72.9	9	1017.1	1	
16	5530	1	79.4	11	1049.9	1	1
	5530	2	89.4	8	1790.0	2	
	5530	3	54.6	9	1797.9	3	
	5530	4	71.4	7	1939.6	3	
	5530	5	63.2	18	1072.3	3	
	5530	6	92.2	8	1611.2	3	
	5530	7	77.4	18	1167.1	1	
	5530	8	82.3	14	1755.2	1	
	5530	9	56.6	9	1715.0	2	
	5530	10	76.5	10	1217.9	2	
	5530	11	92.5	11	1599.0	2	
	5530	12	66.5	15	1485.1	1	
	5530	13	80.8	11	1494.4	1	
	5530	14	54.5	12	1250.3	1	
	5530	15	94.2	20	1396.4	1	
	5530	16	86.0	14	1272.5	2	
	5530	17	89.5	20	1726.4	1	
	5530	18	51.1	5	1019.8	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5530	1	54.5	15	1077.5	1	1
	5530	2	99.2	15	1451.0	2	
	5530	3	71.7	13	1288.4	3	
	5530	4	73.4	14	1686.4	2	
	5530	5	95.2	15	1547.0	2	
	5530	6	84.2	18	1450.3	2	
	5530	7	72.2	7	1483.8	3	
	5530	8	62.7	13	1945.4	1	
	5530	9	82.3	6	1017.1	2	
	5530	10	63.1	14	1090.9	3	
	5530	11	85.0	9	1112.9	3	
	5530	12	68.5	15	1172.0	2	
	5530	13	63.0	9	1054.2	2	
	5530	14	77.4	14	1324.4	3	
	5530	15	97.4	10	1082.0	2	
	5530	16	75.5	14	1821.5	3	
	5530	17	78.5	13	1542.2	2	
18	5530	1	83.1	15	1097.3	3	1
	5530	2	71.2	14	1436.4	1	
	5530	3	76.2	20	1915.7	1	
	5530	4	92.5	8	1355.9	2	
	5530	5	58.6	18	1855.3	3	
	5530	6	58.2	5	1071.8	2	
	5530	7	84.4	12	1636.5	3	
	5530	8	84.2	20	1300.3	2	
	5530	9	63.6	8	1655.0	2	
	5530	10	69.4	9	1664.9	2	
	5530	11	90.5	6	1889.8	2	
	5530	12	76.4	12	1608.8	1	
	5530	13	59.7	15	1497.8	3	
	5530	14	71.7	12	1921.3	2	
	5530	15	84.8	7	1501.3	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5530	1	73.5	20	1661.1	2	1
	5530	2	94.7	13	1301.7	1	
	5530	3	68.4	15	1956.8	3	
	5530	4	55.9	7	1558.9	2	
	5530	5	62.0	17	1093.4	3	
	5530	6	50.4	14	1004.6	3	
	5530	7	78.4	8	1117.3	3	
	5530	8	64.8	18	1991.1	1	
	5530	9	81.7	7	1200.7	2	
	5530	10	85.4	12	1706.2	3	
	5530	11	55.0	18	1331.2	2	
	5530	12	99.6	17	1615.3	2	
	5530	13	88.6	14	1336.1	3	
	5530	14	71.4	12	1674.2	2	
20	5530	1	53.1	20	1910.3	2	1
	5530	2	59.0	19	1333.9	2	
	5530	3	80.7	17	1811.8	3	
	5530	4	94.6	6	1752.7	3	
	5530	5	88.1	18	1925.3	1	
	5530	6	64.6	11	1359.4	1	
	5530	7	55.6	9	1478.8	2	
	5530	8	68.5	13	1802.5	3	
	5530	9	55.4	18	1892.4	2	
	5530	10	82.3	9	1052.5	1	
21	5564.5	1	96.3	9	1877.1	1	1
	5560.5	2	80.8	20	1658.0	2	
	5565.5	3	68.4	8	1605.4	2	
	5562.5	4	99.4	16	1187.6	2	
	5566.5	5	52.1	6	1510.6	1	
	5564.5	6	52.4	11	1306.7	2	
	5566.5	7	82.9	6	1349.4	1	
	5561.5	8	60.3	18	1335.3	3	
	5562.5	9	79.8	14	1741.1	1	
	5562.5	10	62.7	14	1738.3	3	
	5565.5	11	76.4	7	1192.5	2	
	5564.5	12	67.8	9	1043.9	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5560.5	1	66.3	19	1042.7	3	0
	5561.5	2	87.4	18	1467.7	2	
	5564.5	3	60.7	9	1260.5	2	
	5562.5	4	87.0	16	1517.7	3	
	5566.5	5	96.5	6	1931.2	2	
	5566.5	6	71.9	6	1363.7	3	
	5560.5	7	50.7	20	1259.6	1	
	5563.5	8	73.9	13	1626.7	1	
	5561.5	9	62.0	17	1732.1	3	
23	5564.5	1	59.3	10	1153.7	1	1
	5562.5	2	56.2	15	1768.8	2	
	5566.5	3	99.0	6	1852.7	2	
	5564.5	4	60.3	9	1348.1	1	
	5566.5	5	62.9	5	1795.9	2	
	5565.5	6	69.3	8	1573.9	2	
	5562.5	7	67.4	14	1013.9	3	
	5566.5	8	80.2	6	1343.7	3	
	5564.5	9	67.5	9	1523.8	1	
	5560.5	10	54.4	20	1188.2	3	
	5560.5	11	99.6	20	1909.3	2	
	5562.5	12	59.8	14	1882.0	2	
	5563.5	13	53.5	13	1382.5	3	
	5560.5	14	62.1	20	1389.7	1	
	5562.5	15	63.3	16	1315.4	2	
24	5562.5	1	64.9	16	1403.2	2	1
	5565.5	2	72.8	7	1449.4	2	
	5562.5	3	94.7	15	1430.6	2	
	5562.5	4	80.5	14	1992.1	2	
	5564.5	5	69.4	11	1582.8	2	
	5562.5	6	63.0	15	1934.1	1	
	5565.5	7	89.1	8	1108.3	2	
	5560.5	8	81.6	19	1222.3	1	
	5566.5	9	97.1	6	1228.1	3	
	5561.5	10	69.6	18	1379.5	1	
	5564.5	11	63.3	9	1762.0	1	
	5561.5	12	53.1	17	1891.9	1	
	5564.5	13	79.7	9	1582.5	2	
	5561.5	14	60.5	17	1256.7	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5564.5	1	83.1	10	1698.0	1	1
	5563.5	2	74.3	12	1317.0	2	
	5565.5	3	72.3	8	1571.0	2	
	5563.5	4	80.9	12	1271.7	3	
	5564.5	5	67.6	10	1702.0	2	
	5565.5	6	84.8	8	1868.5	2	
	5563.5	7	55.5	13	1034.0	1	
	5562.5	8	62.6	16	1958.8	3	
	5564.5	9	59.3	10	1409.9	2	
	5565.5	10	83.6	8	1895.2	1	
	5566.5	11	56.8	6	1937.0	3	
	5562.5	12	92.9	16	1301.0	2	
	5561.5	13	89.5	18	1636.8	1	
	5564.5	14	59.7	10	1864.7	2	
	5563.5	15	75.5	12	1947.4	1	
	5564.5	16	66.1	10	1097.6	2	
	5560.5	17	61.7	20	1764.6	1	
	5561.5	18	53.6	18	1761.3	3	
26	5566.5	1	90.7	6	1210.8	1	1
	5563.5	2	53.5	13	1575.1	3	
	5562.5	3	58.8	14	1652.7	2	
	5565.5	4	97.1	7	1005.7	2	
	5564.5	5	73.5	11	1992.0	2	
	5564.5	6	77.4	10	1762.8	3	
	5563.5	7	80.2	13	1565.4	3	
	5565.5	8	84.8	8	1036.7	3	
	5566.5	9	90.2	6	1708.1	3	
	5563.5	10	59.3	13	1684.3	1	
	5563.5	11	93.9	12	1485.3	1	
	5561.5	12	67.1	18	1368.4	1	
	5566.5	13	84.6	6	1101.5	2	
	5566.5	14	93.1	6	1767.9	1	
	5564.5	15	98.5	9	1070.6	3	
	5564.5	16	56.4	9	1723.8	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5566.5	1	94.3	6	1366.3	2	1
	5561.5	2	95.6	18	1950.7	1	
	5565.5	3	89.4	8	1214.9	3	
	5565.5	4	62.8	7	1356.6	2	
	5564.5	5	92.7	10	1683.2	1	
	5561.5	6	50.0	18	1109.7	1	
	5563.5	7	56.6	12	1600.4	3	
	5565.5	8	73.1	8	1594.4	3	
	5564.5	9	98.2	9	1117.7	3	
	5564.5	10	68.1	9	1515.4	3	
	5563.5	11	65.3	12	1024.4	3	
	5562.5	12	66.6	15	1034.2	3	
	5565.5	13	82.6	8	1163.6	2	
	5564.5	14	52.1	10	1995.3	2	
	5564.5	15	67.3	10	1903.3	2	
	5562.5	16	54.1	15	1463.9	2	
	5561.5	17	91.3	18	1528.9	3	
	5560.5	18	96.7	19	1100.2	1	
	5563.5	19	54.0	13	1783.0	3	
	5562.5	20	79.4	14	1669.6	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5562.5	1	76.2	15	1352.8	1	1
	5565.5	2	70.9	8	1377.8	2	
	5566.5	3	86.6	5	1331.9	3	
	5566.5	4	80.2	5	1945.0	3	
	5565.5	5	53.5	8	1115.9	3	
	5566.5	6	75.4	6	1127.9	2	
	5565.5	7	72.1	7	1739.5	3	
	5560.5	8	71.9	19	1968.3	2	
	5565.5	9	75.8	8	1184.5	3	
	5560.5	10	76.0	20	1423.2	2	
	5561.5	11	62.0	18	1160.8	3	
	5560.5	12	96.2	19	1629.1	1	
	5565.5	13	64.4	8	1323.8	1	
	5566.5	14	87.9	6	1268.0	3	
	5566.5	15	86.4	6	1716.6	3	
	5565.5	16	79.0	7	1122.4	2	
	5562.5	17	56.9	14	1663.0	1	
	5560.5	18	87.7	19	1995.2	1	
	5566.5	19	56.1	6	1594.1	3	
	5566.5	20	79.7	6	1695.9	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5560.5	1	61.1	19	1210.7	3	1
	5563.5	2	66.3	13	1991.6	2	
	5560.5	3	68.4	20	1856.1	3	
	5564.5	4	75.9	11	1653.8	1	
	5562.5	5	57.7	16	1298.9	1	
	5566.5	6	94.0	5	1688.5	1	
	5564.5	7	95.5	10	1745.2	2	
	5564.5	8	90.6	11	1790.3	2	
	5562.5	9	70.8	15	1963.2	1	
	5563.5	10	93.7	12	1392.8	2	
	5565.5	11	87.0	8	1068.8	1	
	5562.5	12	92.3	15	1883.1	1	
	5565.5	13	66.7	8	1251.3	2	
	5566.5	14	66.0	5	1719.5	3	
	5565.5	15	68.9	7	1408.6	3	
	5560.5	16	68.6	20	1412.2	3	
	5566.5	17	95.9	5	1460.1	2	
30	5563.5	1	63.4	12	1915.4	3	1
	5563.5	2	55.1	13	1573.0	2	
	5566.5	3	75.3	5	1775.7	2	
	5566.5	4	73.3	6	1961.0	1	
	5565.5	5	99.0	7	1472.7	2	
	5565.5	6	62.0	8	1118.7	1	
	5560.5	7	68.1	20	1233.2	3	
	5564.5	8	64.4	10	1332.3	3	
	5560.5	9	99.3	19	1941.4	3	
	5560.5	10	88.2	19	1846.1	2	
	5562.5	11	82.5	15	1832.6	3	
	5563.5	12	61.0	12	1876.7	1	
	5561.5	13	64.7	17	1802.8	1	
	5560.5	14	61.8	19	1136.6	1	
Detection Percentage (%)							96.67

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

---END---