

Test results for 5.47 GHz – 5.725 GHz band

TEST CONDITIONS

Power supply (V):

$V_{nominal} = 3.3 \text{ Vdc}$

Type of power supply = DC voltage from HMC/NGFC test board.

Type of antenna = External attachable PIFA antenna.

Declared Gain for antenna = 4.8 dBi

Operating frequencies in the sub-band 5.47-5.725 GHz.

-For IEEE 802.11a, the equipment uses channels 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140.

-For IEEE 802.11n, there are two bandwidths:

For 20 MHz bandwidth the equipment uses channels 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140.

For 40 MHz bandwidth the equipment uses channels 102, 110, 118, 126, 134.

-For IEEE 802.11ac, there are three bandwidths:

For 20 MHz bandwidth the equipment uses channels 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 144.

For 40 MHz bandwidth the equipment uses channels 102, 110, 118, 126, 134, 142.

For 80 MHz bandwidth the equipment uses channels 106, 122, 138.

TEST FREQUENCIES:

For WiFi a/n20/ac20:

Lowest channel (100): 5500 MHz

Middle channel (120): 5600 MHz

Highest channel (140) 5700 MHz for 802.11n20 and 5720 MHz (144) for 802.11ac20

For WiFi n40/ac40:

Lowest channel (102): 5510 MHz

Middle channel (118): 5590 MHz

Highest channel (134) 5670 MHz for 802.11n40 and 5710 MHz (142) for 802.11ac40

For WiFi ac80:

Lowest channel (106): 5530 MHz

Middle channel (122): 5610 MHz

Highest channel (138): 5690 MHz

The test set-up was made in accordance to the general provisions of ANSI C63.10: 2009 and FCC KDB 789033 D01 General UNII Test Procedures v01r03 and FCC KBD 662911 D01 Multiple Transmitter Output v02r01 dated 10/31/2013.

For 802.11a mode the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually but not simultaneously.

For 802.11n/ac modes 802.11n20/ac20 (20 MHz channel bandwidth), 802.11n40/ac40 (40MHz channel bandwidth) and 802.11ac80 (80MHz channel bandwidth) mode the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually and simultaneously.

For radio testing purposes the card was installed in a test fixture. The test fixture is connected to a laptop computer and dc power supplied. The laptop computer was used to configure the EUT to continuously transmit at a specified output power with different modes and modulation schemes.

The data rates of 6Mb/s for 802.11a, HT0 (SISO) for 802.11n20/ac20 and n40/ac40, and VHT0 (SISO) for 802.11 ac80 were selected based on preliminary testing that identified those rates corresponding to the worst cases for output power and spurious levels at the band edges.

The field strength at the band edges was evaluated for each mode and on each chain individually on the lowest and highest channels at the rated power for the channel under test. Where the power at the edge channels was lower than the power at the center channels additional measurements were made at the adjacent channels. Single transmission at each chain and simultaneous transmission at both chains modes were fully evaluated.

The PC was using the Intel test utility DRTU Version “DRTU 1.7.3-859”

During transmitter test the EUT was being controlled by the Intel DRTU tool to operate in a continuous transmit mode on the test channels as required and in each of the different modulation modes.

The conducted RF output power at each chain was adjusted according to the client's supplied Target values (see following table) using the Intel DRTU tool and measuring the power by using a calibrated average power meter. Measured values for adjustment were within -0.2 dB/+0.3 dB respect to the Target values.

RF conducted output power target values

| Mode | BW (MHz) | Channel / Freq. | SISO Chain A (dBm) | SISO Chain B (dBm) | MIMO at both ports A and B (dBm) |
|----------------------------|----------|-----------------|--------------------|--------------------|----------------------------------|
| 5.47–5.725 GHz Band | | | | | |
| 802.11a | 20 | 100 / 5500 | 13.5 | 13.5 | n/a |
| | | 104 / 5520 | 15.5 | 16 | n/a |
| | | 120 / 5600 | 15.5 | 16 | n/a |
| | | 136 / 5680 | 15.5 | 16 | n/a |
| | | 140 / 5700 | 13 | 13 | n/a |
| 802.11n | 20 | 100 / 5500 | 13.5 | 13.5 | 10.50 |
| | | 104 / 5520 | 15.5 | 16 | 14.50 |
| | | 120 / 5600 | 15.5 | 16 | 14.50 |
| | | 136 / 5680 | 15.5 | 16 | 14.50 |
| | | 140 / 5700 | 13 | 13 | 11.00 |
| 802.11n* | 40 | 102 / 5510 | 13.5 | 14 | 11.50 |
| | | 110 / 5550 | 16.5 | 16.5 | 16.50 |
| | | 118 / 5590 | 16.5 | 16.5 | 16.50 |
| | | 134 / 5670 | 16.5 | 16.5 | 16.50 |
| 802.11ac | 20 | 144 / 5720 | 15.5 | 16 | 13.50 |
| | | | | | |
| 802.11ac | 40 | 142 / 5710 | 16.5 | 16.5 | 16.50 |
| | | | | | |
| 802.11ac | 80 | 106 / 5530 | 13.5 | 13.5 | 11.50 |
| | | 122 / 5610 | 16.5 | 16.5 | 16.50 |
| | | 138 / 5690 | 16.5 | 16.5 | 16.50 |

CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and it is connected to the spectrum analyzer using low loss RF cables with sma type connectors. The reading in the spectrum analyzer is corrected taking into account the cable loss.

RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 1m for the frequency range 1 GHz-40 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).

For radiated emissions in the range 1 GHz-40 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive (wooden) platform one meter above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360°.

Measurements were made in both horizontal and vertical planes of polarization.

99 % and 26 dB Bandwidth

RESULTS

1. 802.11a mode (see next plots).

CHAIN A

| | Lowest frequency 5500 MHz | Middle frequency 5600 MHz | Highest frequency 5700 MHz |
|-------------------------------|------------------------------|------------------------------|-------------------------------|
| 99% bandwidth (MHz) | 17.32 | 17.44 | 17.45 |
| 26 dB bandwidth (MHz) | 24.80 | 25.36 | 25.24 |
| Measurement uncertainty (kHz) | ± 7 | | ± 21.7 |

CHAIN B

| | Lowest frequency 5500 MHz | Middle frequency 5600 MHz | Highest frequency 5700 MHz |
|-------------------------------|------------------------------|------------------------------|-------------------------------|
| 99% bandwidth (MHz) | 17.36 | 17.44 | 17.55 |
| 26 dB bandwidth (MHz) | 25.44 | 25.92 | 25.56 |
| Measurement uncertainty (kHz) | ± 7 | | ± 21.7 |

2. 802.11 n20 MHz and 802.11 ac 20 MHz (except channel 144) modes. (see next plots).

CHAIN A

| | Lowest frequency 5500 MHz | Middle frequency 5600 MHz | Highest frequency 5700 MHz |
|-------------------------------|------------------------------|------------------------------|-------------------------------|
| 99% bandwidth (MHz) | 18.36 | 18.44 | 18.44 |
| 26 dB bandwidth (MHz) | 25.36 | 26.60 | 25.51 |
| Measurement uncertainty (kHz) | ± 7 | | ± 21.7 |

CHAIN B

| | Lowest frequency 5500 MHz | Middle frequency 5600 MHz | Highest frequency 5700 MHz |
|-------------------------------|------------------------------|------------------------------|-------------------------------|
| 99% bandwidth (MHz) | 18.32 | 18.40 | 17.60 |
| 26 dB bandwidth (MHz) | 26.00 | 25.92 | 26.46 |
| Measurement uncertainty (kHz) | ± 7 | | ± 21.7 |

Note: the test was performed with 802.11 n20 MHz mode which is the same modulation scheme as 802.11 ac 20 MHz.

802.11 ac 20MHz (channel 144):

CHAIN A

| | |
|-------------------------------|---|
| | Frequency 5720 MHz |
| 99% bandwidth (MHz) | 19.26 |
| 26 dB bandwidth (MHz) | 17.93 in UNII_3, 8.61 in UNII_4 and 26.58 (Total) |
| Measurement uncertainty (kHz) | ±21.7 |

CHAIN B

| | |
|-------------------------------|---|
| | Frequency 5720 MHz |
| 99% bandwidth (MHz) | 19.38 |
| 26 dB bandwidth (MHz) | 18.06 in UNII_3, 8.96 in UNII_4 and 27.00 (Total) |
| Measurement uncertainty (kHz) | ±21.7 |

3. 802.11 n40 MHz and 802.11 ac 40 MHz (except channel 142) modes. (see next plots).

CHAIN A

| | Lowest frequency 5510 MHz | Middle frequency 5590 MHz | Highest frequency 5670 MHz |
|-------------------------------|------------------------------|------------------------------|-------------------------------|
| 99% bandwidth (MHz) | 36.40 | 36.60 | 36.60 |
| 26 dB bandwidth (MHz) | 44.71 | 45.03 | 45.17 |
| Measurement uncertainty (kHz) | ±21.7 | | |

CHAIN B

| | Lowest frequency 5510 MHz | Middle frequency 5590 MHz | Highest frequency 5670 MHz |
|-------------------------------|------------------------------|------------------------------|-------------------------------|
| 99% bandwidth (MHz) | 36.40 | 36.60 | 36.60 |
| 26 dB bandwidth (MHz) | 43.32 | 45.51 | 44.56 |
| Measurement uncertainty (kHz) | ±21.7 | | |

Note: the test was performed with 802.11 n40 MHz mode which is the same modulation scheme as 802.11 ac 40 MHz.

802.11 ac 40MHz (channel 142):

CHAIN A

| | |
|-------------------------------|---|
| | Frequency 5710 MHz |
| 99% bandwidth (MHz) | 36.90 |
| 26 dB bandwidth (MHz) | 38.45 in UNII_3, 8.18 in UNII_4 and 46.79 (Total) |
| Measurement uncertainty (kHz) | ±21.7 |

CHAIN B

| | |
|-------------------------------|---|
| | Frequency 5710 MHz |
| 99% bandwidth (MHz) | 36.90 |
| 26 dB bandwidth (MHz) | 38.94 in UNII_3, 7.69 in UNII_4 and 47.12 (Total) |
| Measurement uncertainty (kHz) | ±21.7 |

4. 802.11 ac 80 MHz mode. (see next plots).

CHAIN A


| | Lowest frequency 5530 MHz | Highest frequency 5610 MHz | Highest frequency 5690 MHz |
|-------------------------------|------------------------------|-------------------------------|--|
| 99% bandwidth (MHz) | 75.60 | 75.45 | 75.45 |
| 26 dB bandwidth (MHz) | 82.22 | 81.97 | 76.20 in UNII_3 + 6.01 in UNII_4 and 82.21 (Total) |
| Measurement uncertainty (kHz) | ±21.7 | | |

CHAIN B


| | Lowest frequency 5530 MHz | Highest frequency 5610 MHz | Highest frequency 5690 MHz |
|-------------------------------|------------------------------|-------------------------------|--|
| 99% bandwidth (MHz) | 75.45 | 75.45 | 75.30 |
| 26 dB bandwidth (MHz) | 82.05 | 82.21 | 76.20 in UNII_3 + 6.01 in UNII_4 and 82.21 (Total) |
| Measurement uncertainty (kHz) | ±21.7 | | |

802.11a mode CHAIN A


Lowest Channel

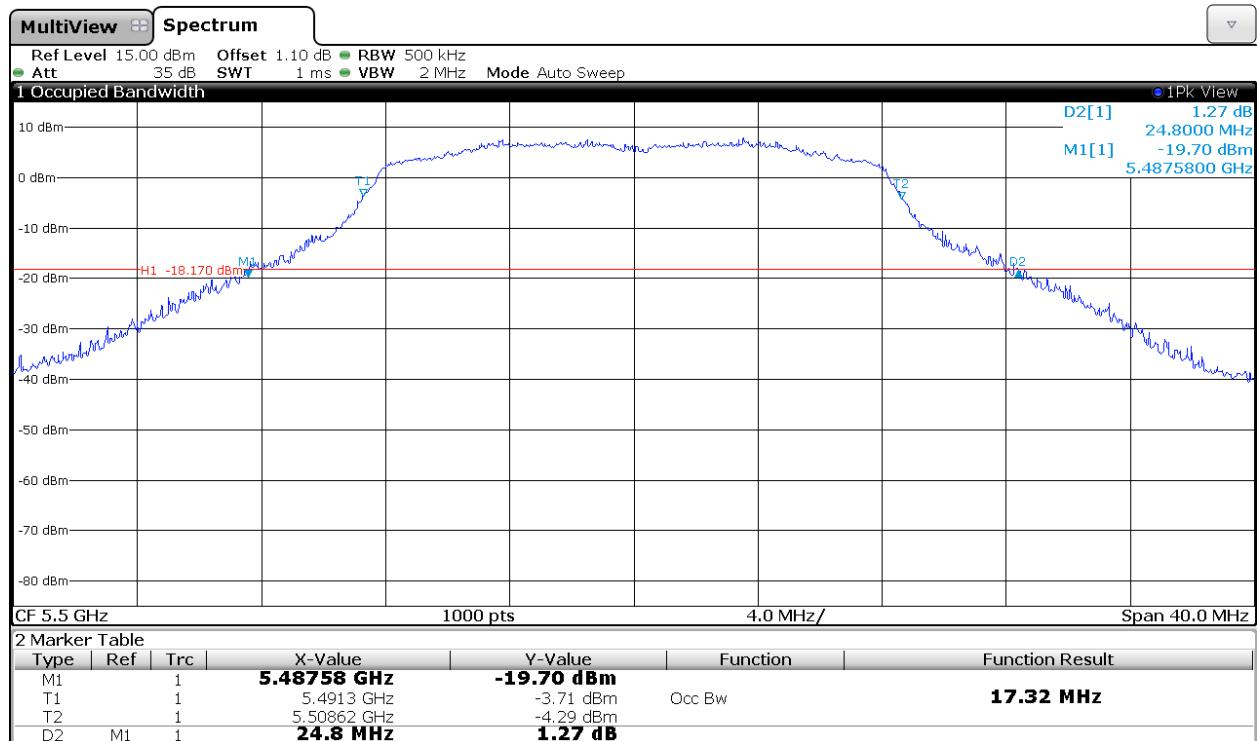

Middle Channel

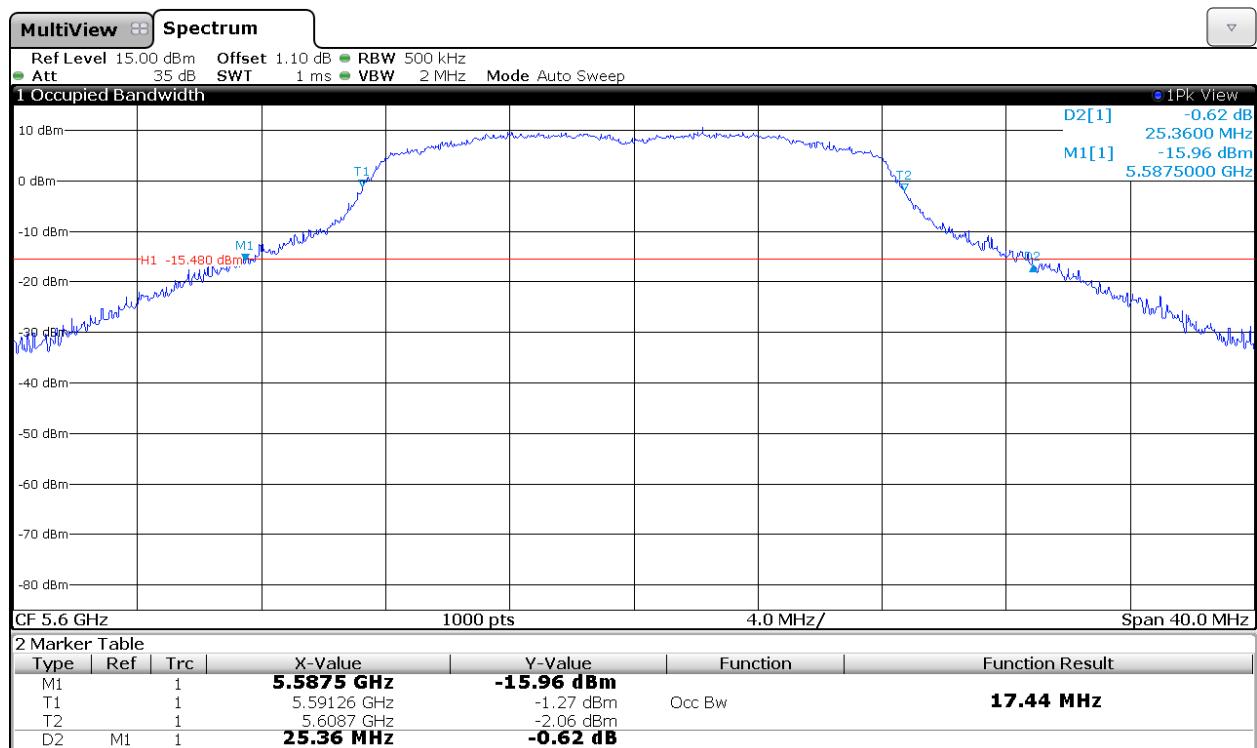


Highest Channel

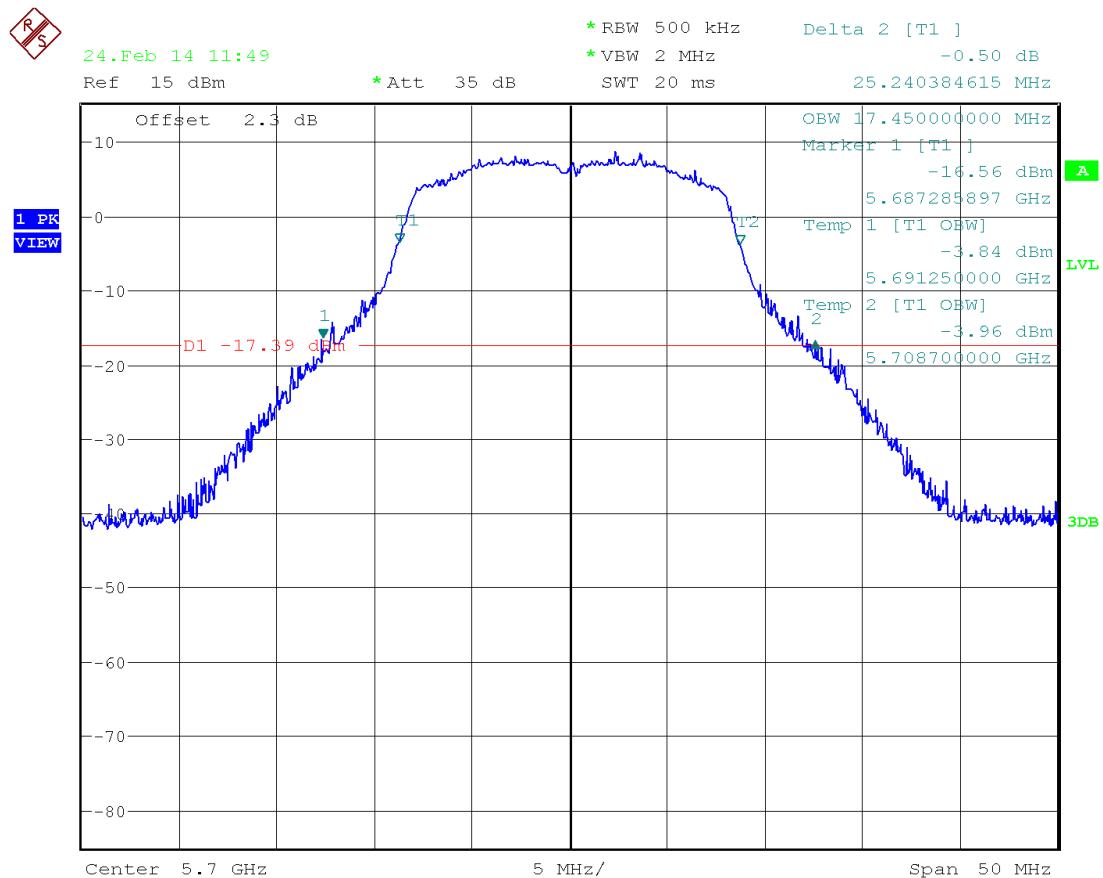


802.11a mode CHAIN B


Lowest Channel

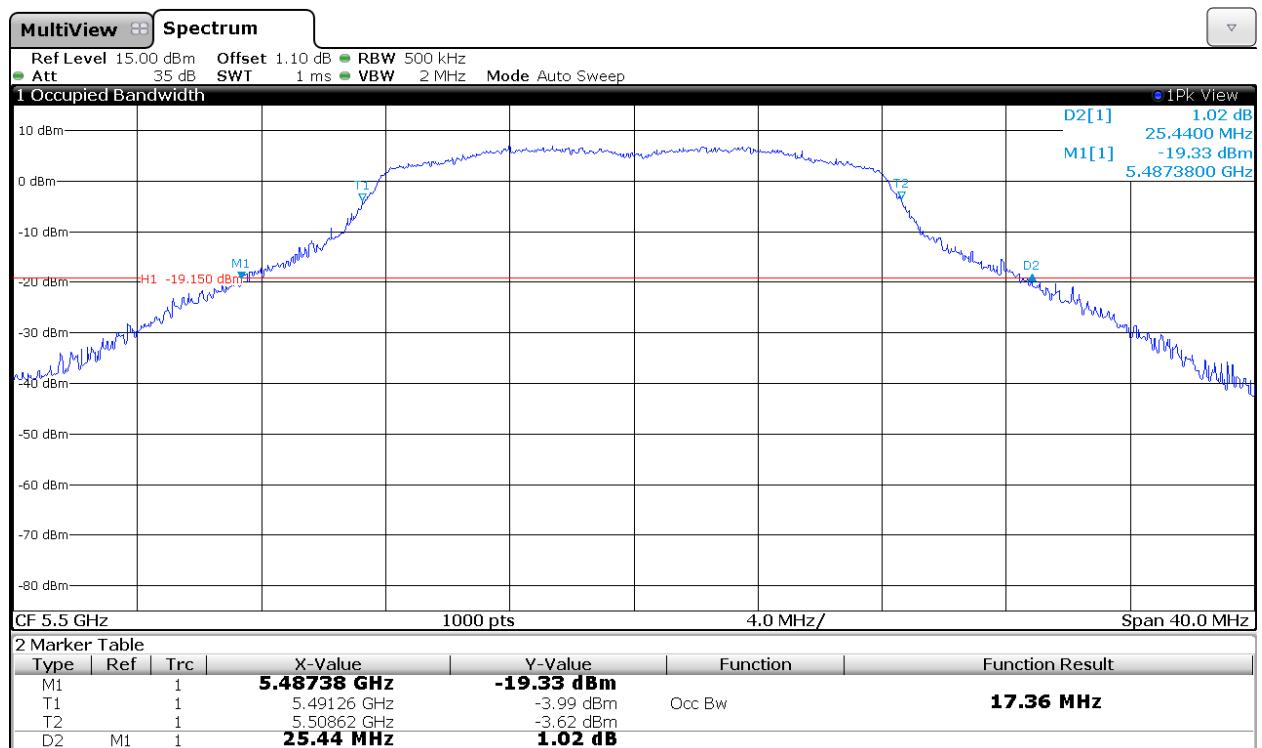

Middle Channel

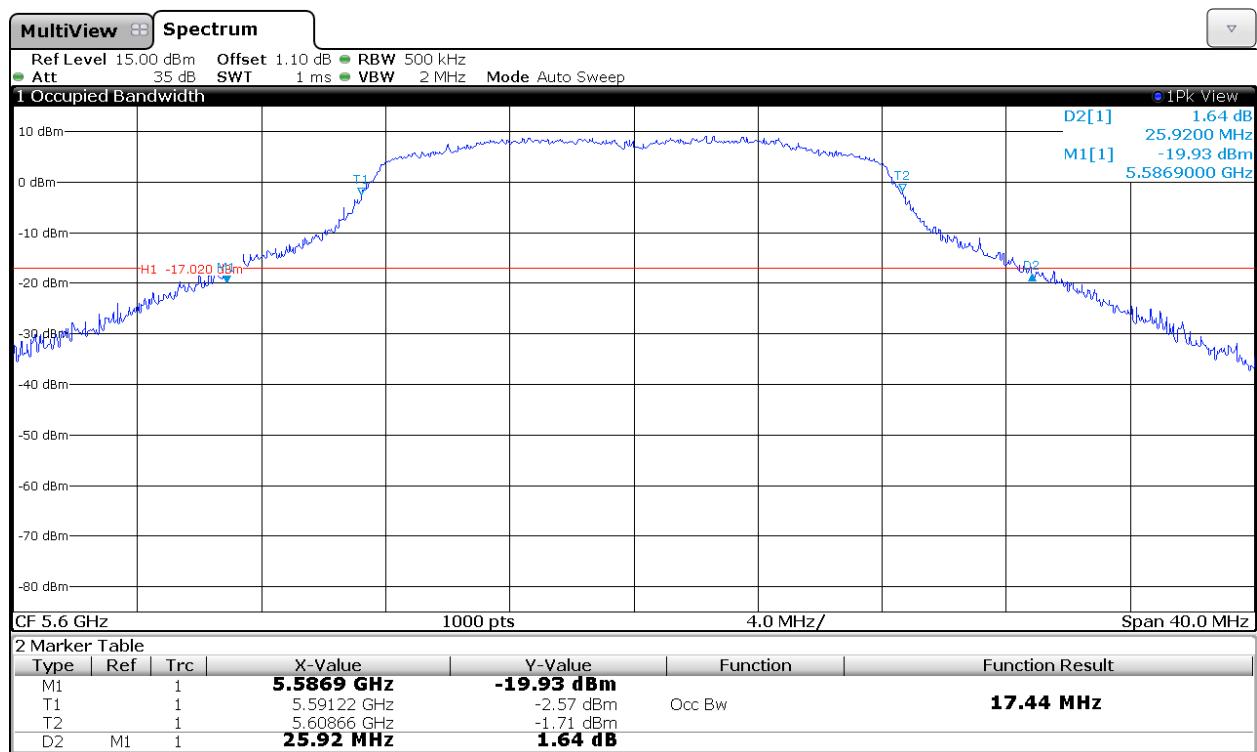


Highest Channel

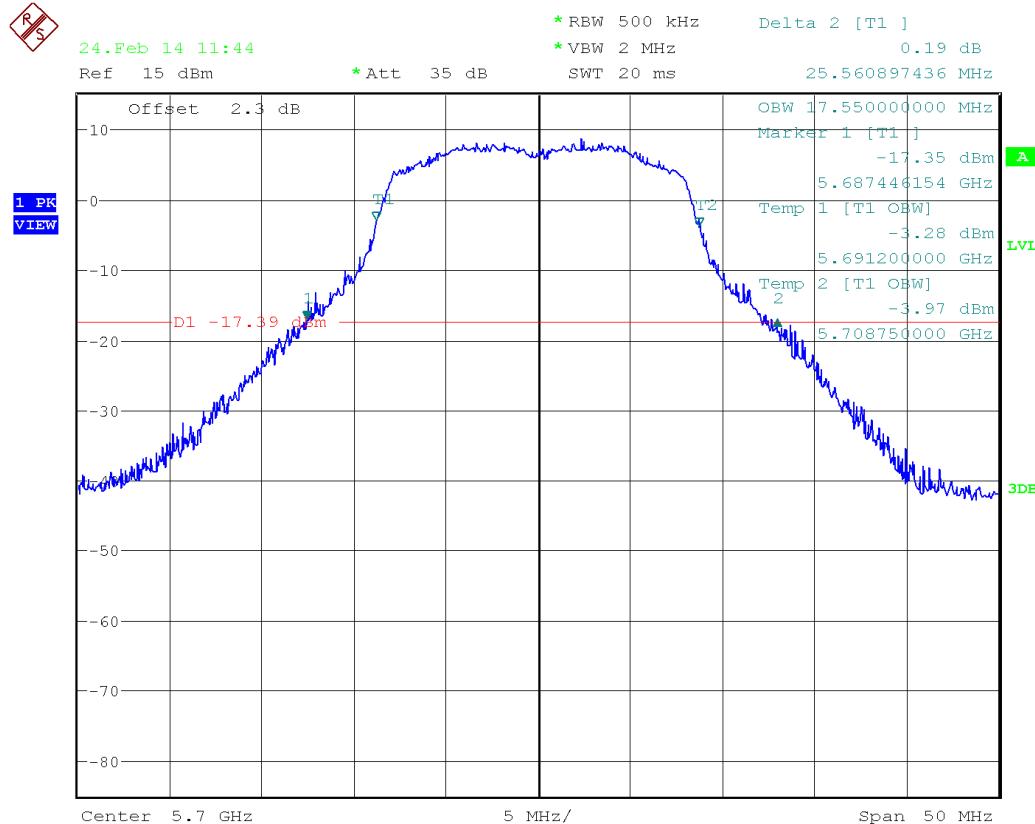


802.11 n20 MHz and 802.11 ac 20 MHz modes (except channel 144) CHAIN A


Lowest Channel

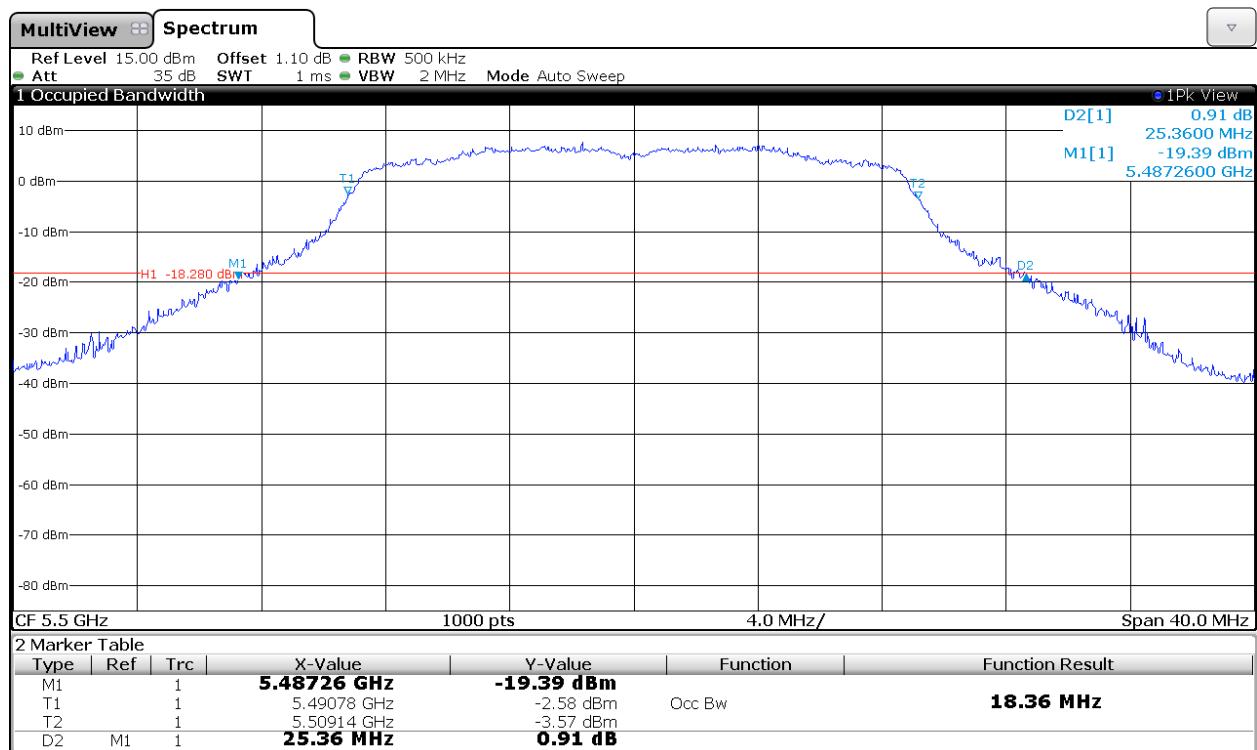


Middle Channel

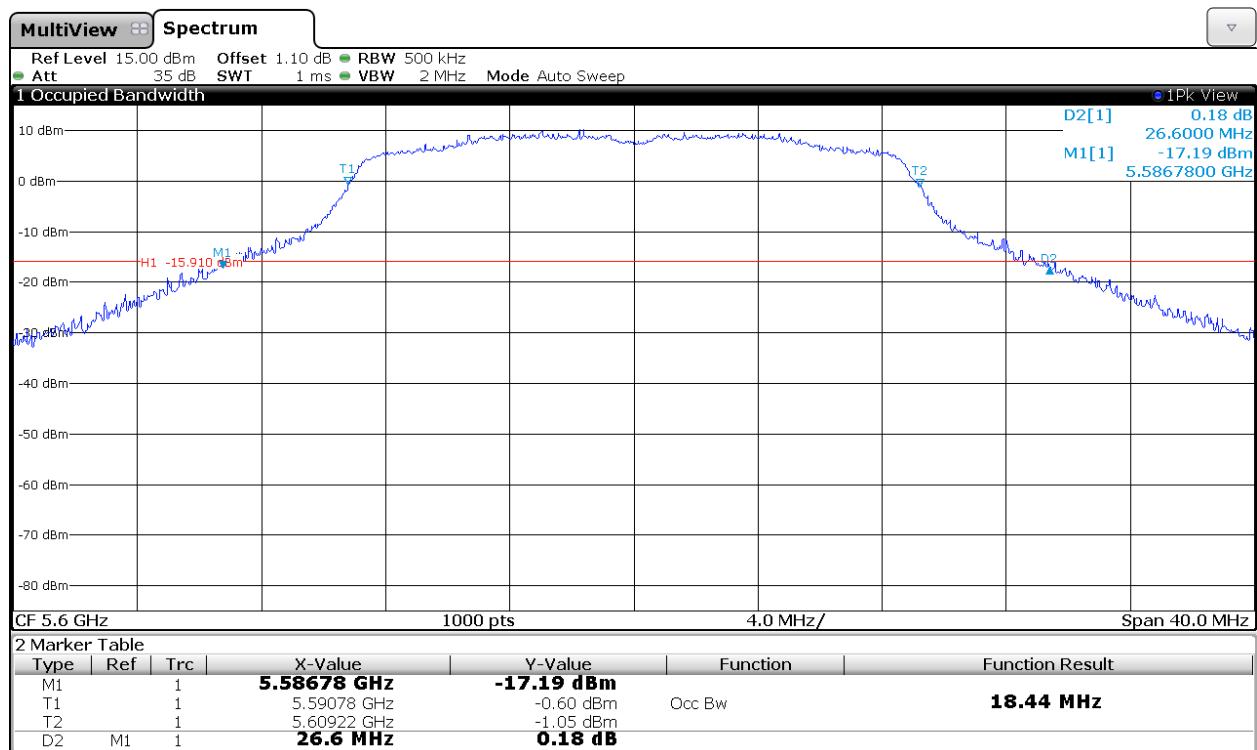


Highest Channel

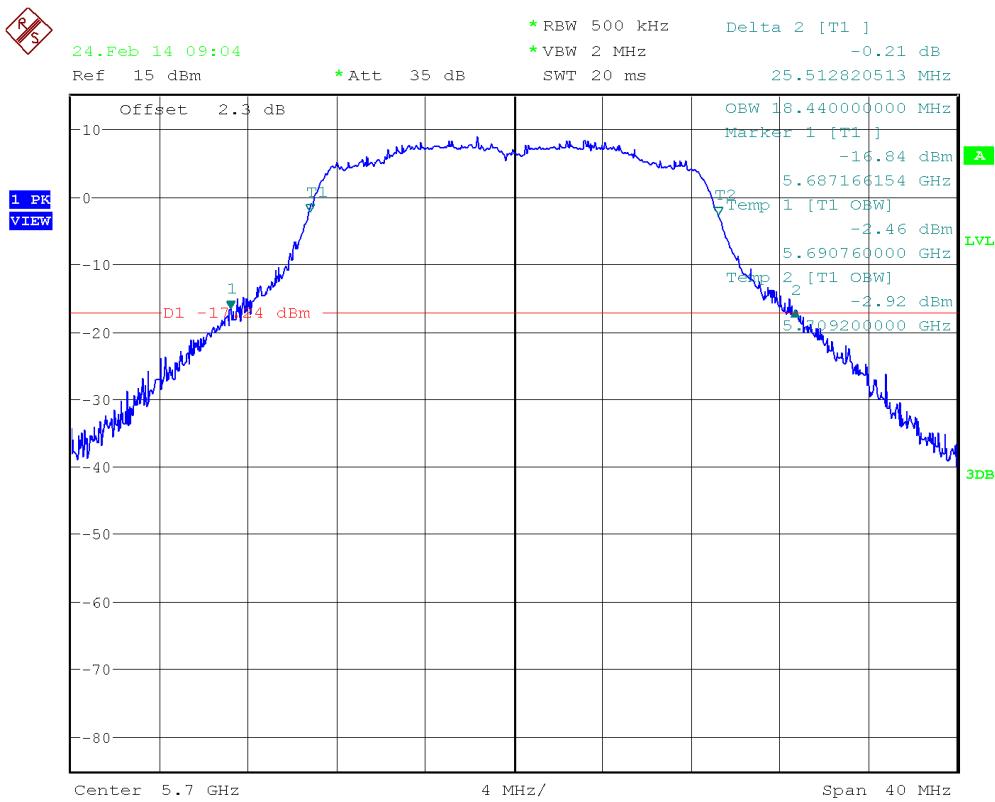


802.11 ac 20MHz: Channel 144. Total Bandwidth

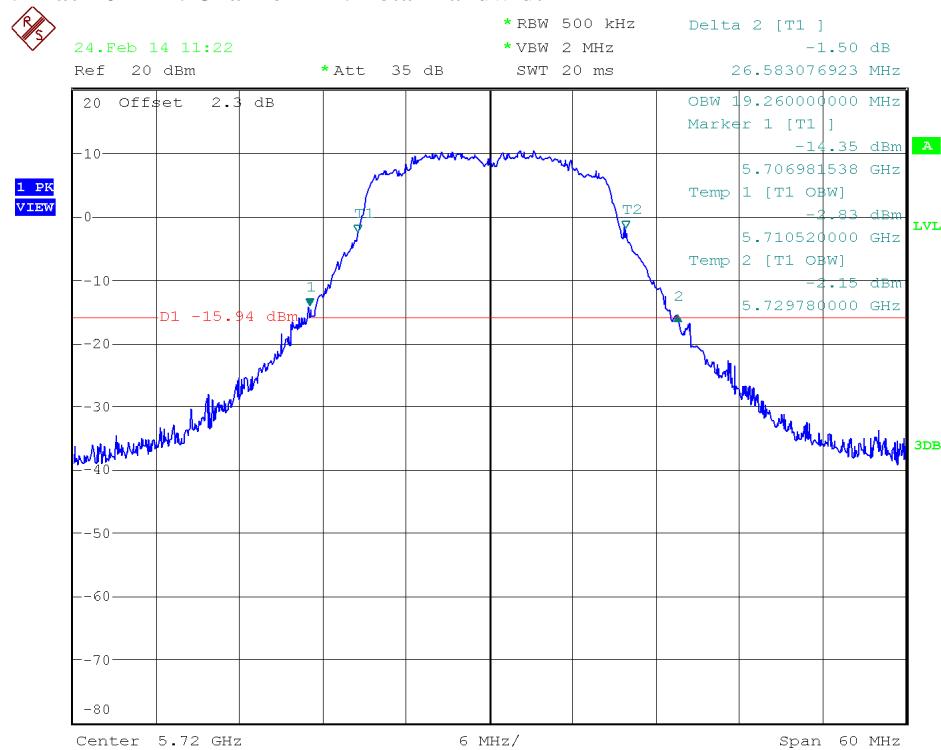

26 dB BW inside UNII_3 sub-band:

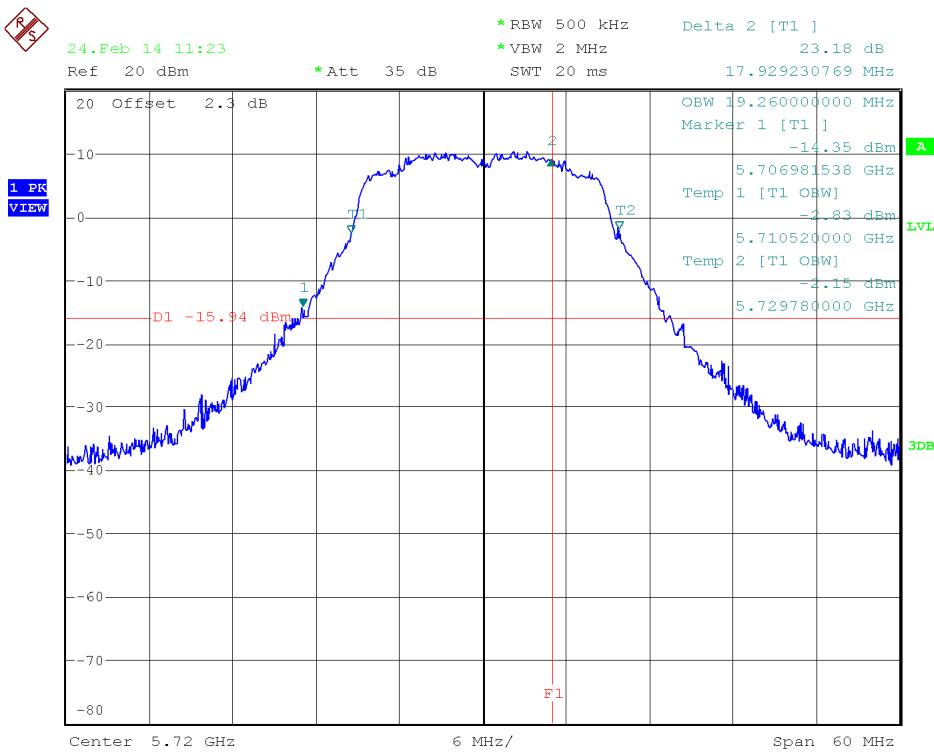


26 dB BW inside UNII_4 sub-band:

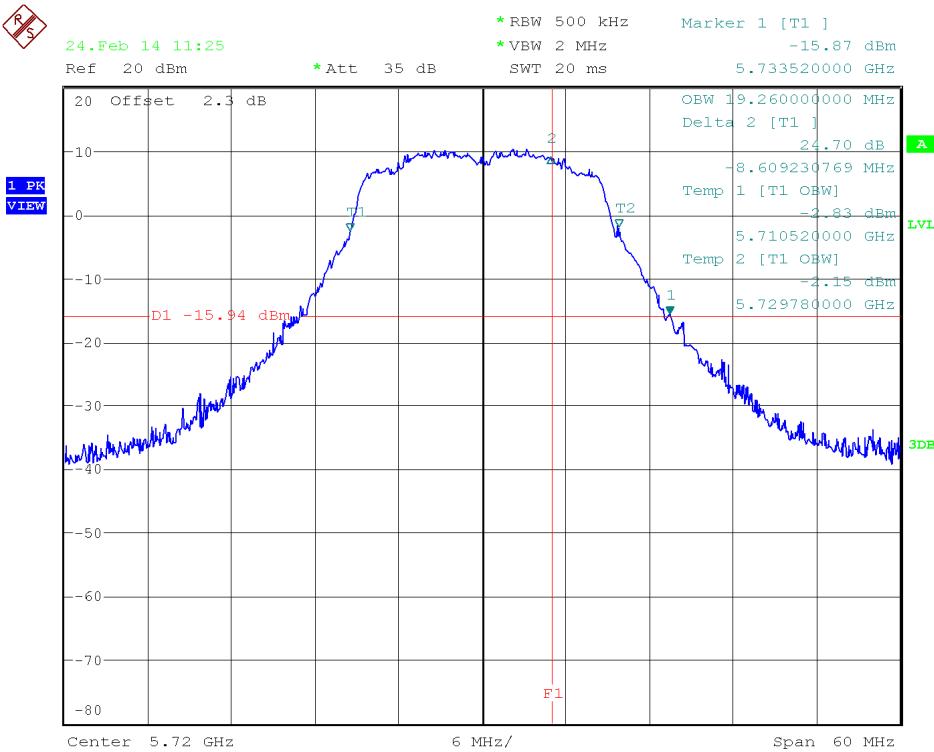


802.11 n20 MHz and 802.11 ac 20 MHz modes (except channel 144) CHAIN B


Lowest Channel

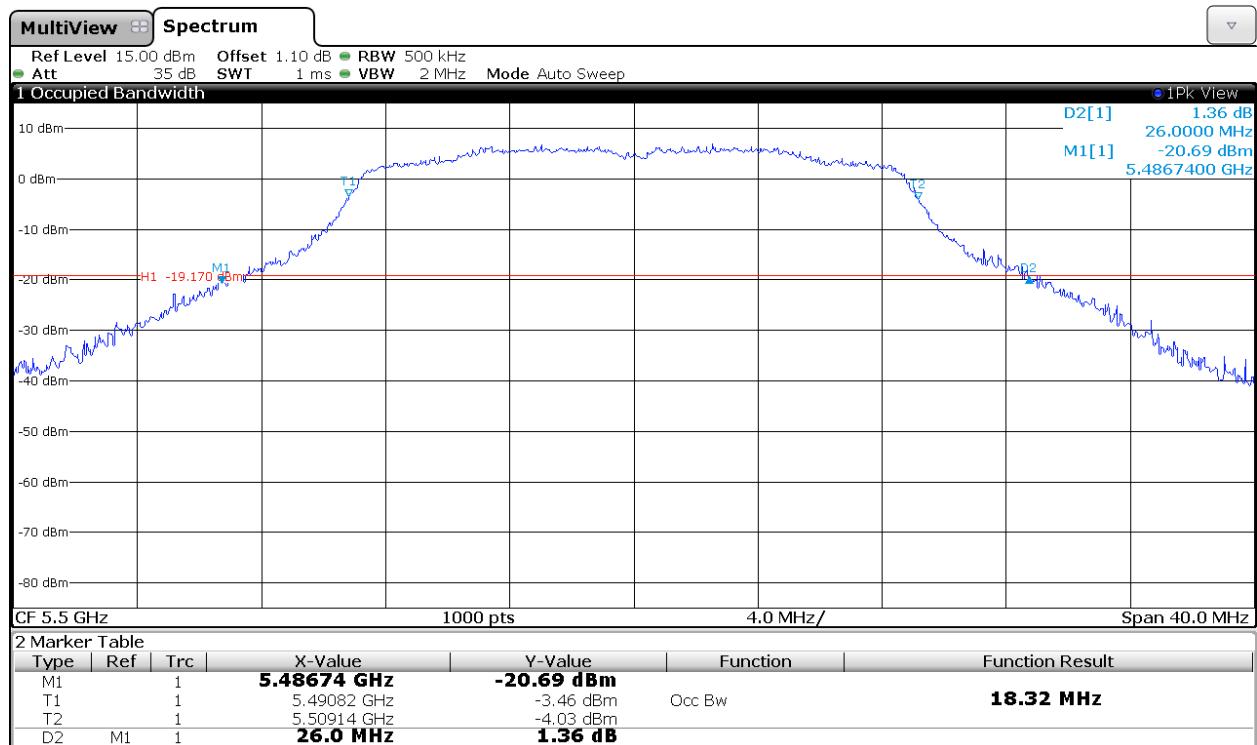


Middle Channel

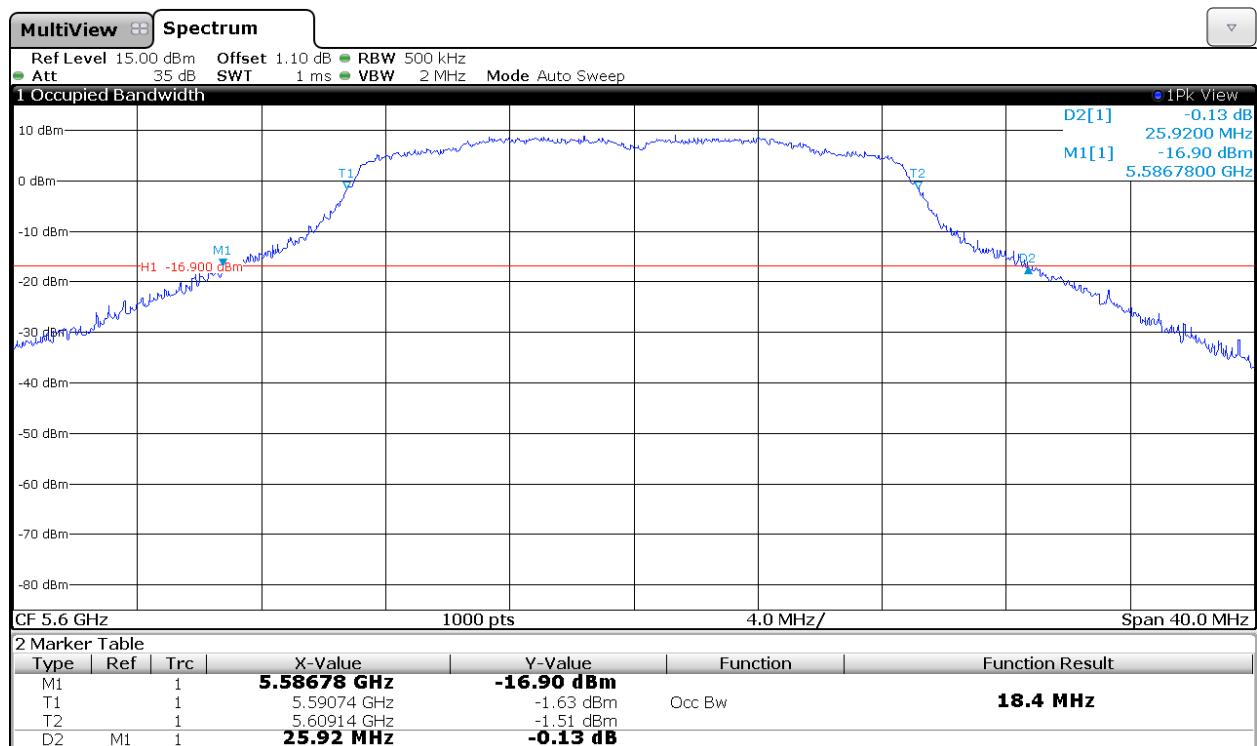


Highest Channel

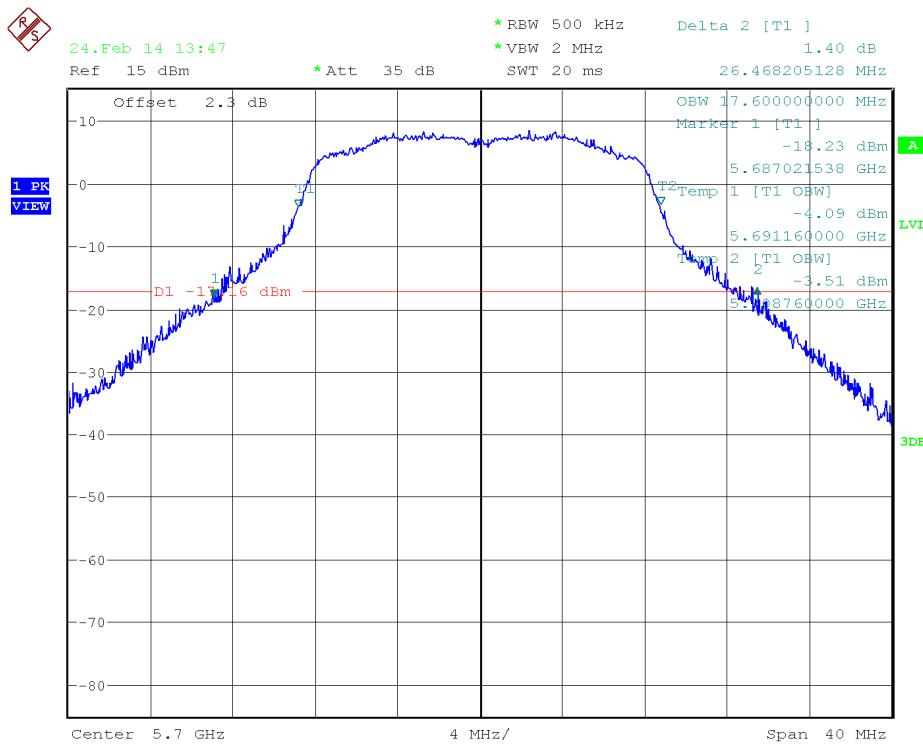


802.11 ac 20MHz: Channel 144. Total Bandwidth.

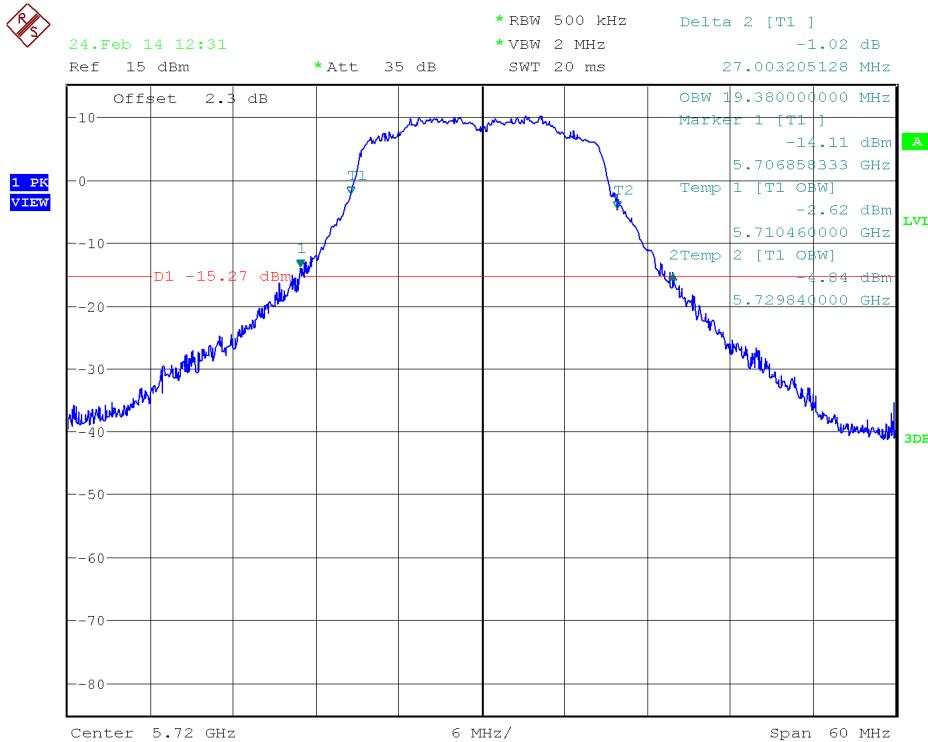

26 dB BW inside UNII_3 sub-band:

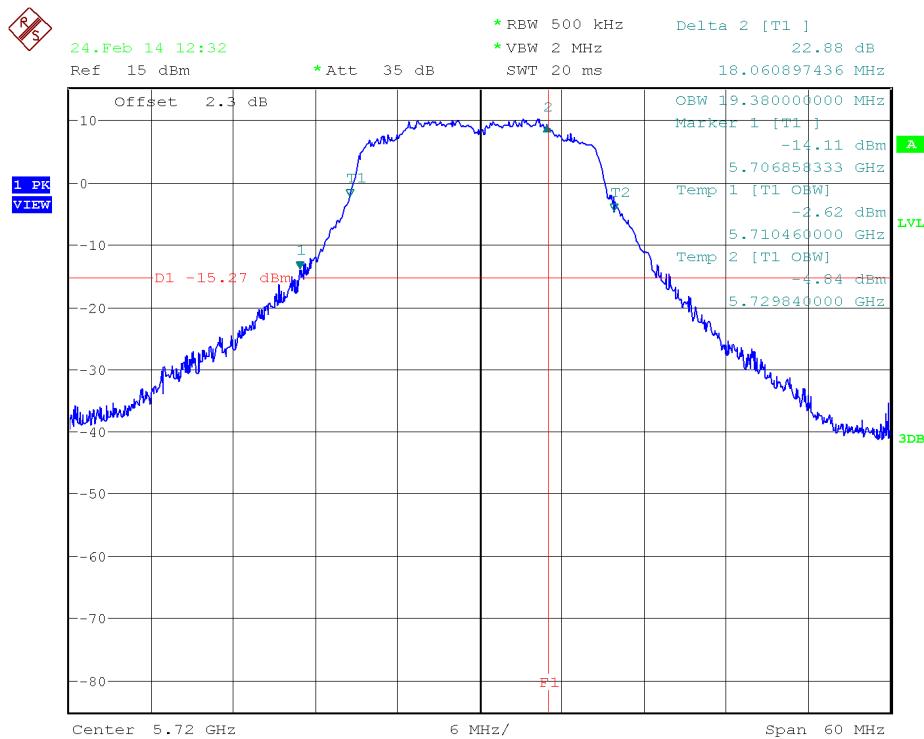


26 dB BW inside UNII_4 sub-band:

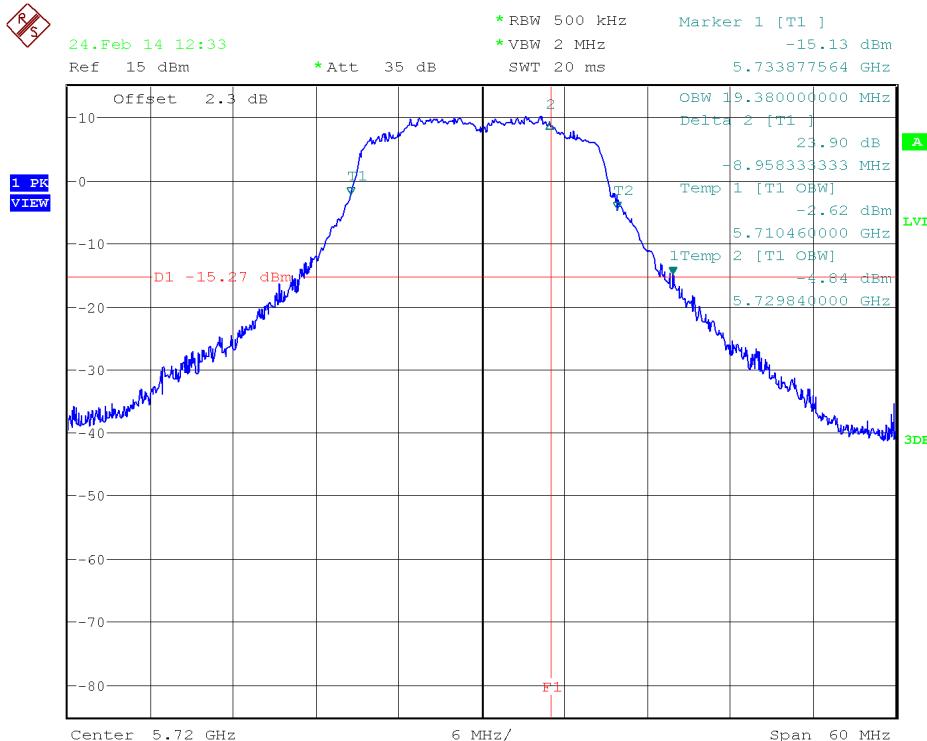


802.11 n40 MHz and 802.11 ac 40 MHz modes (except channel 142) CHAIN A


Lowest Channel

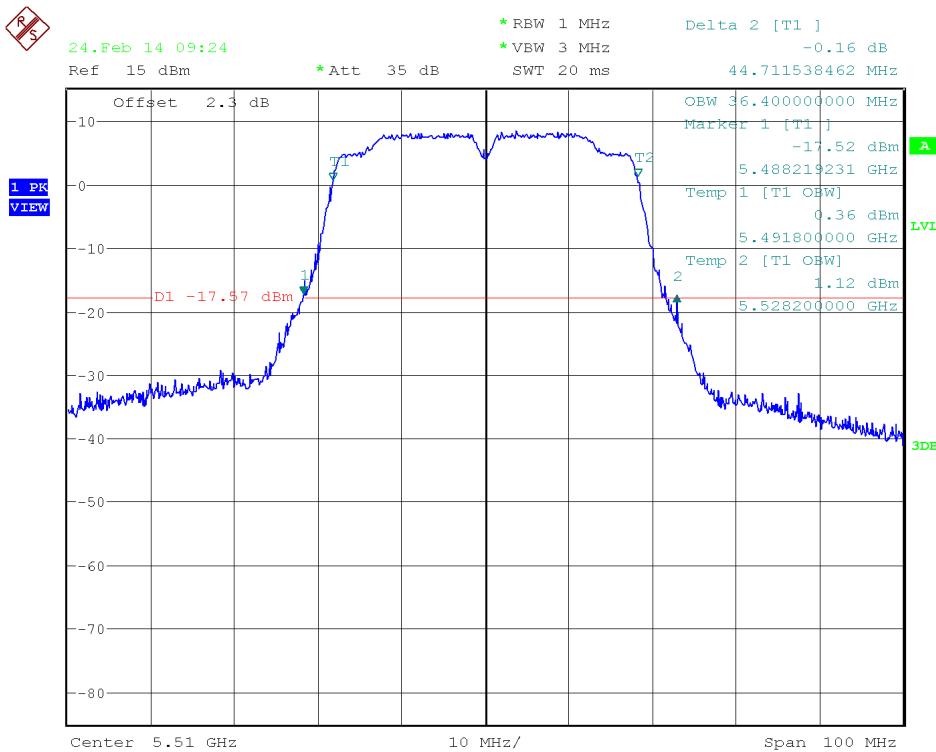


Middle Channel

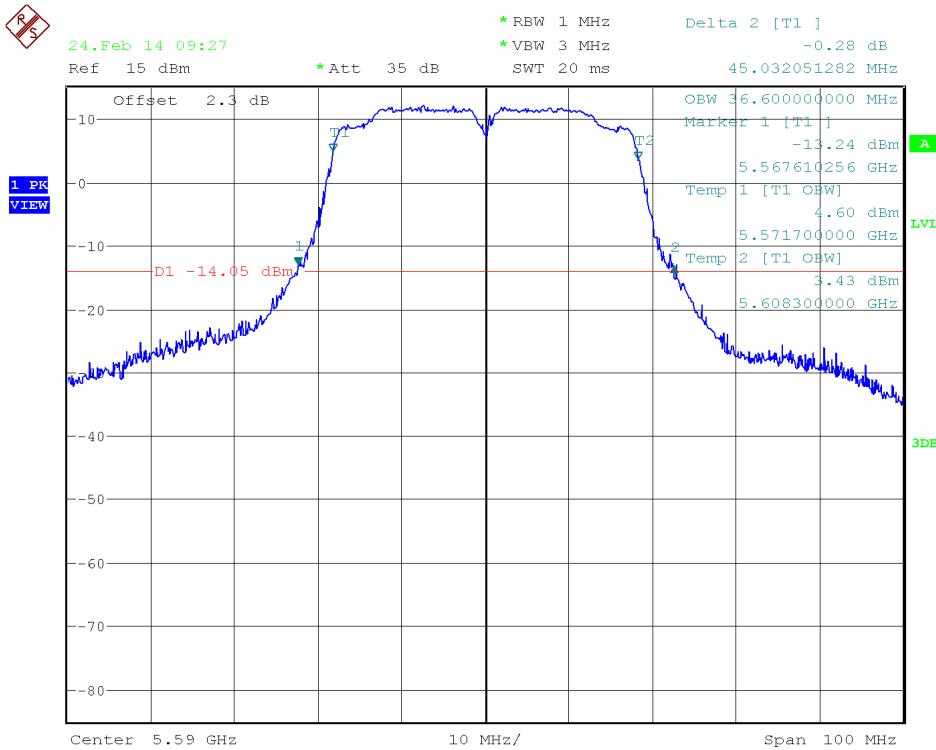


Highest Channel

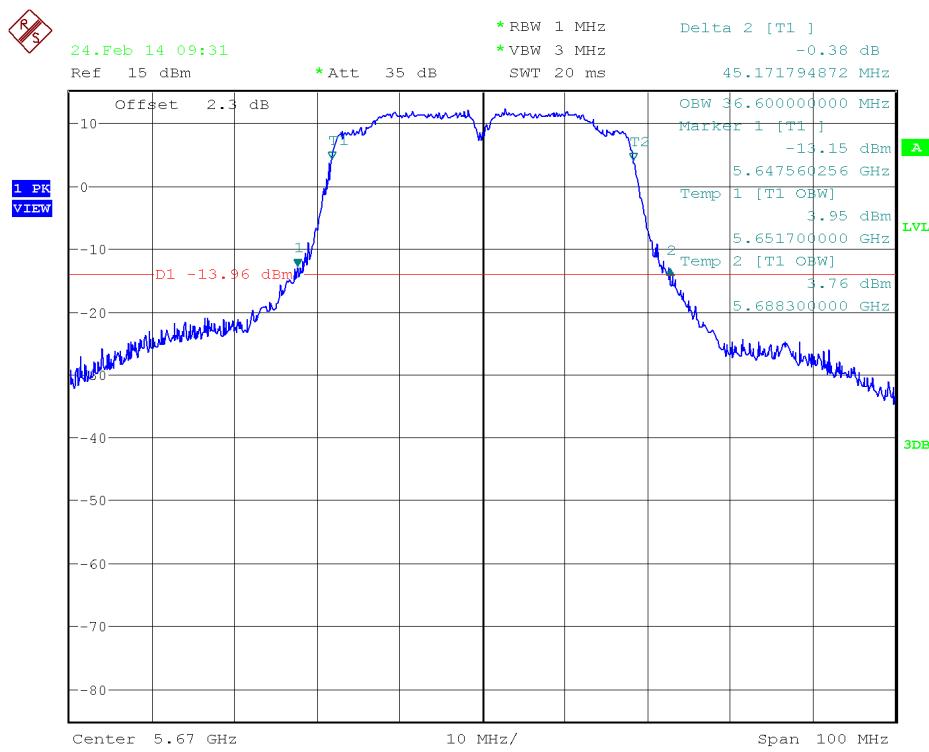


802.11 ac 40MHz: Channel 142. Total Bandwidth

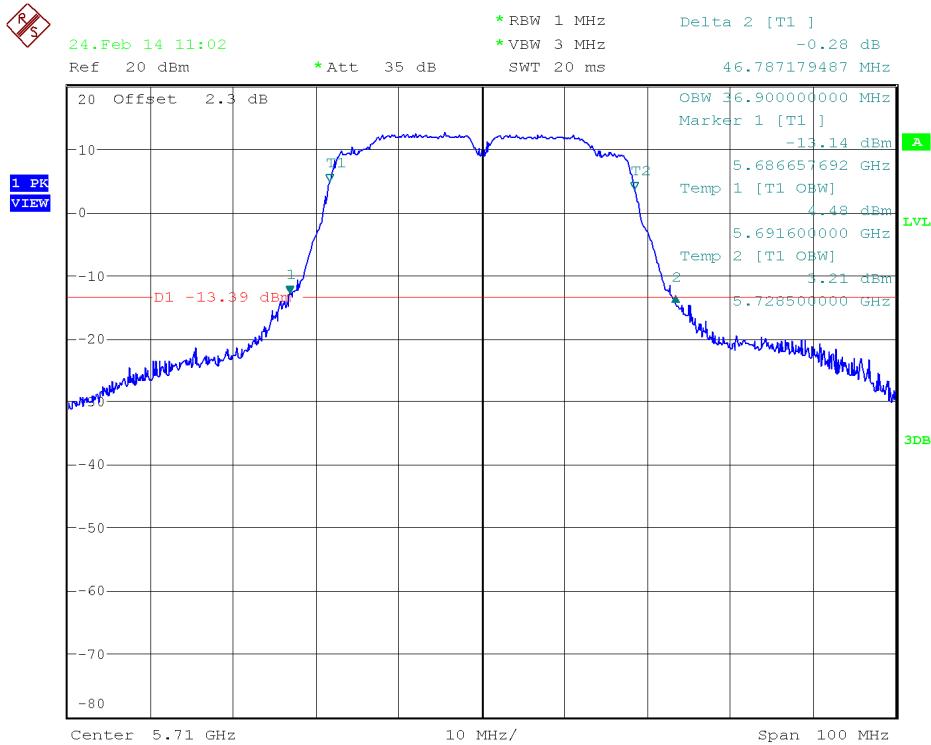

26 dB BW inside UNII_3 sub-band:

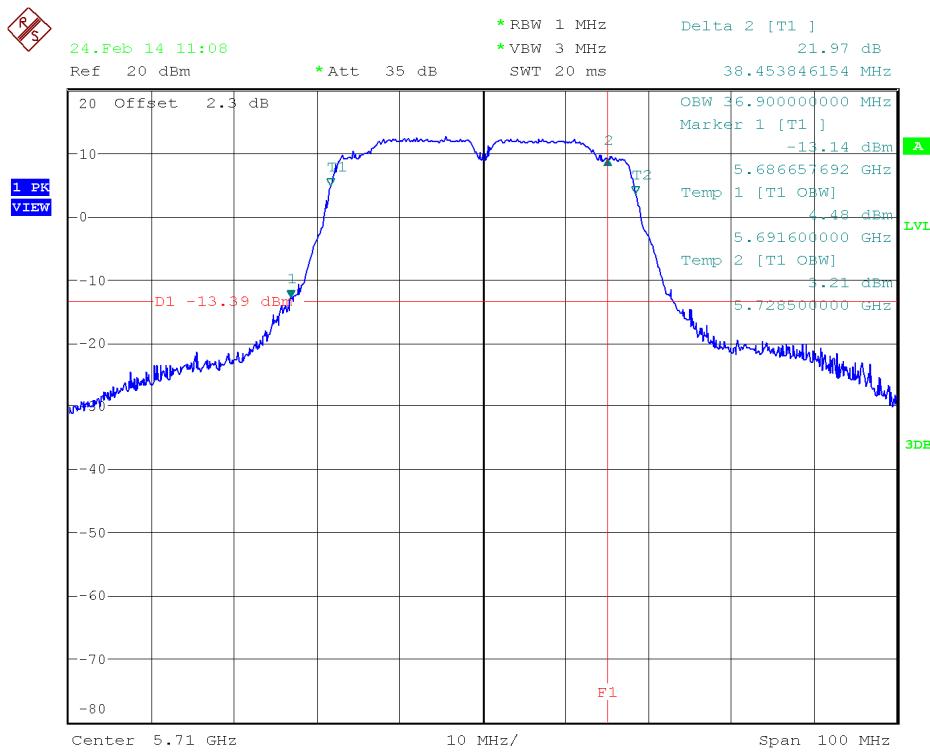


26 dB BW inside UNII_4 sub-band:

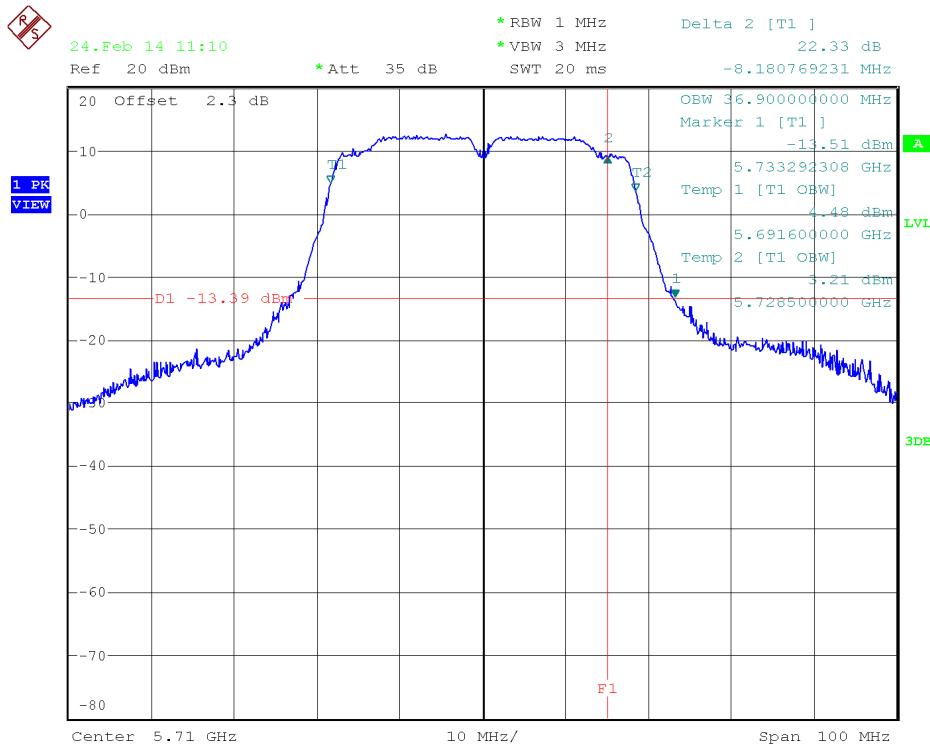


802.11 n40 MHz and 802.11 ac 40 MHz modes (except channel 142) CHAIN B


Lowest Channel

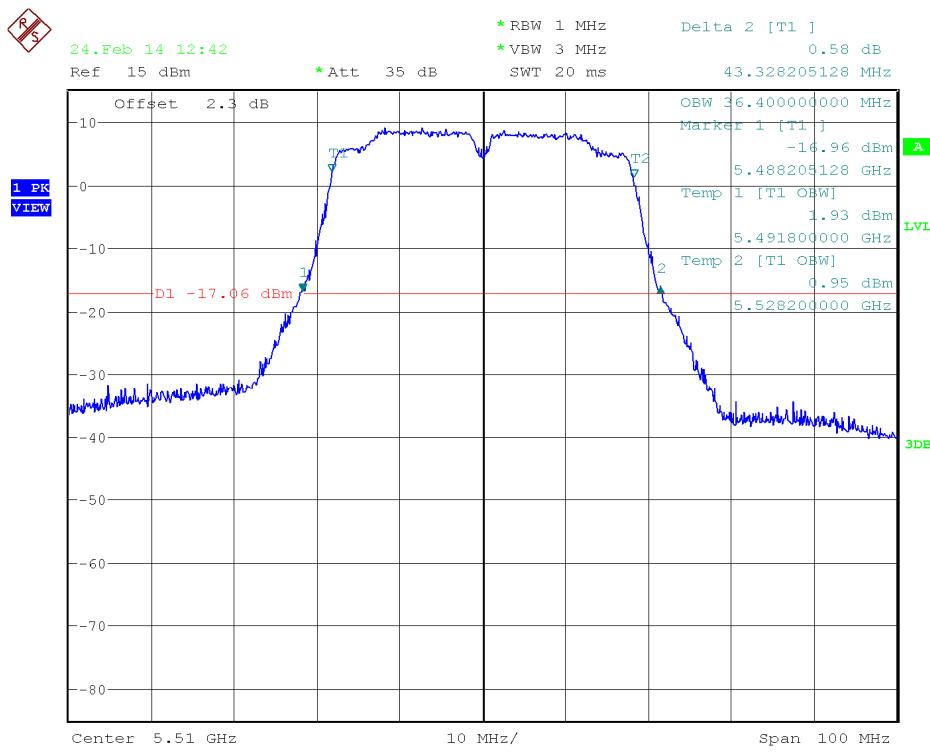


Middle Channel

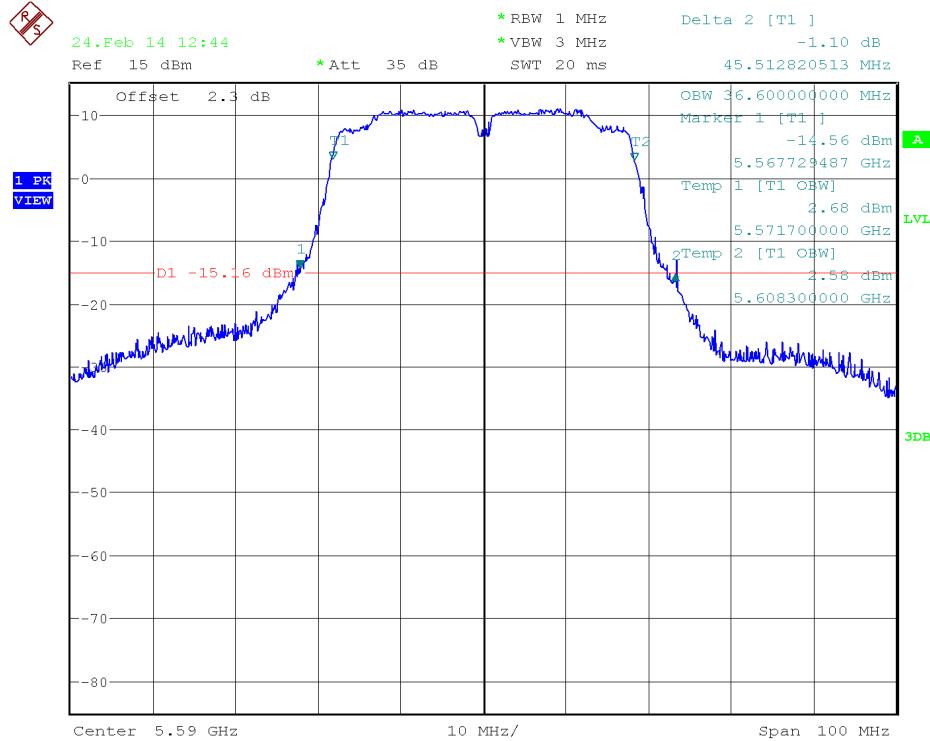


Highest Channel

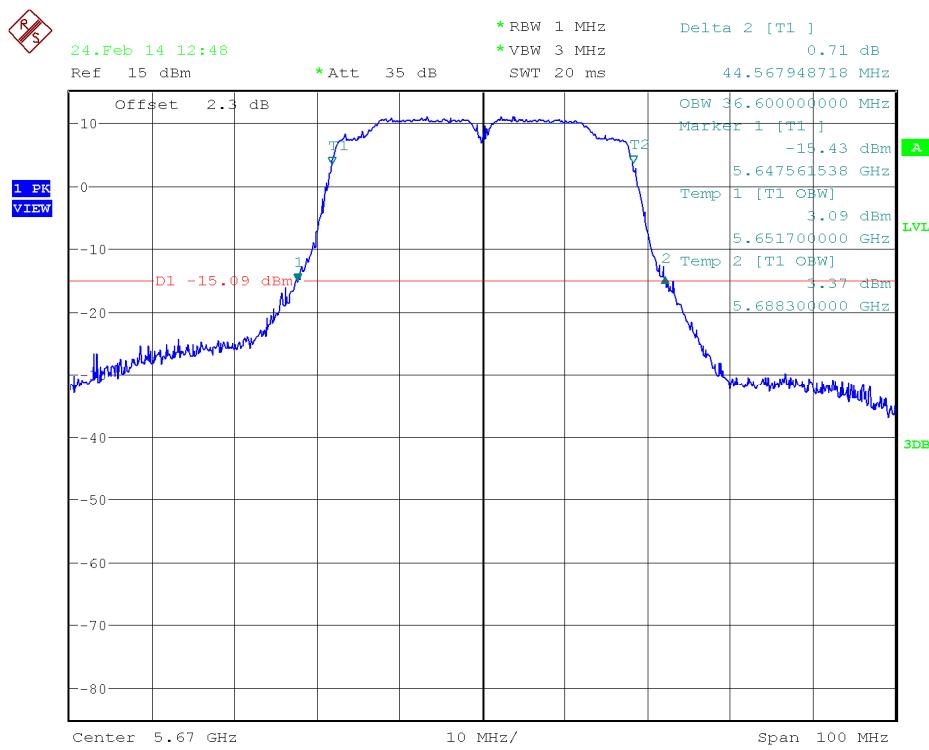


802.11 ac 40MHz: Channel 142. Total Bandwidth.

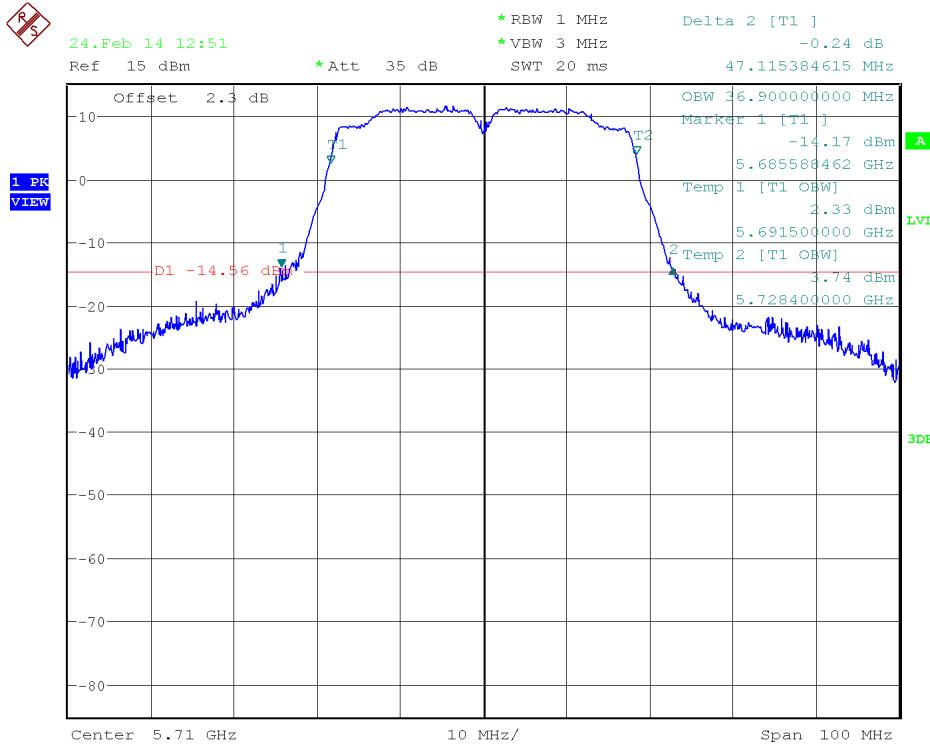

26 dB BW inside UNII_3 sub-band:

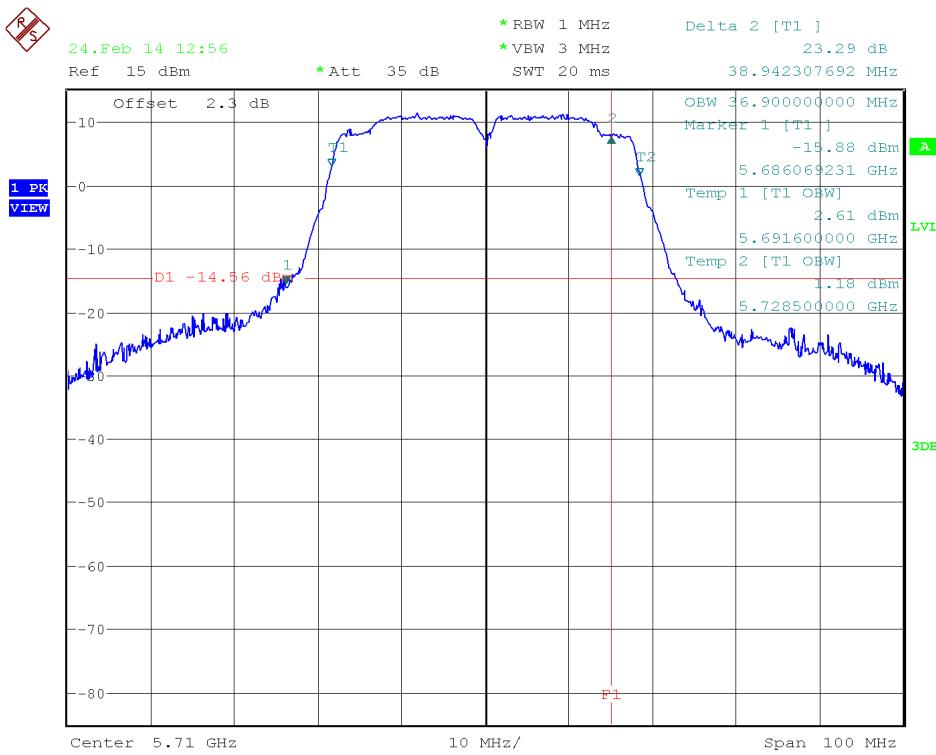


26 dB BW inside UNII_4 sub-band:

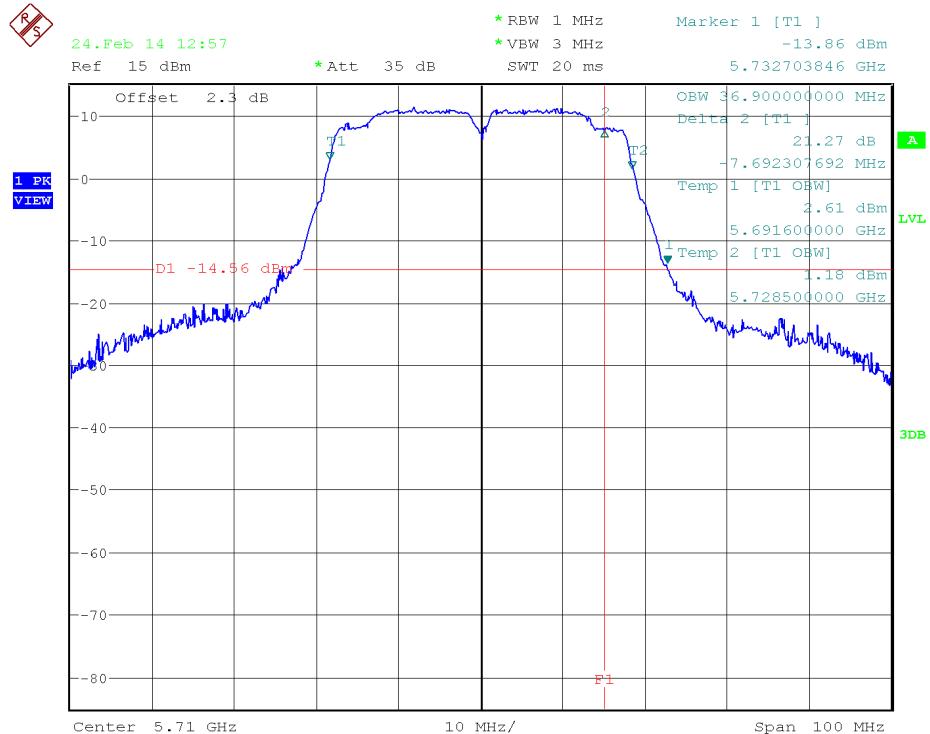


802.11 ac 80 MHz mode (except channel 138) CHAIN A


Lowest Channel

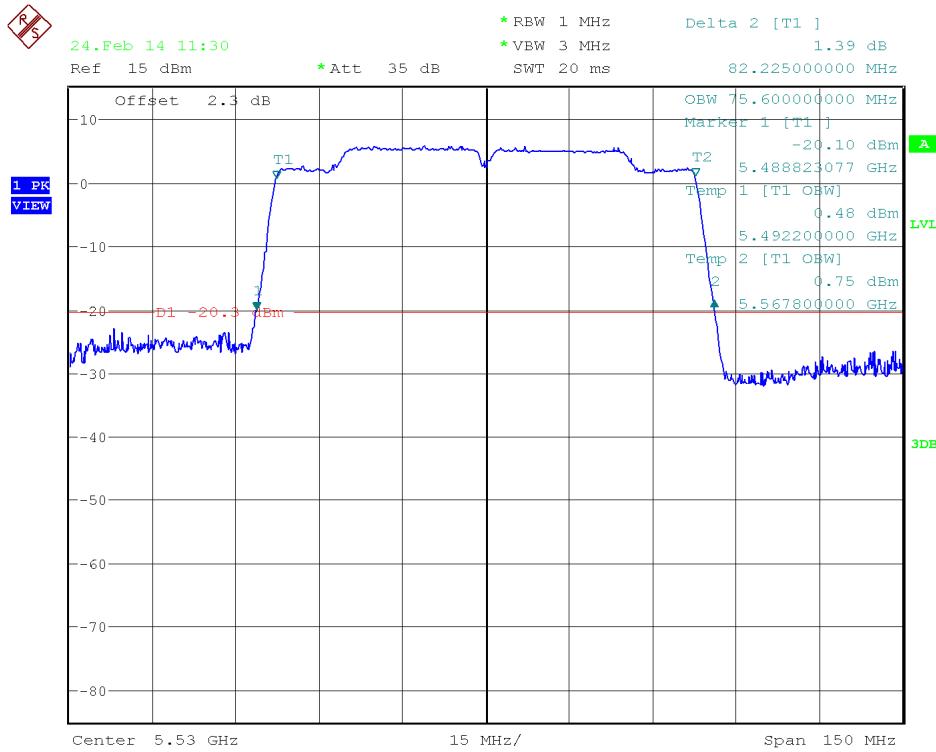


Middle Channel

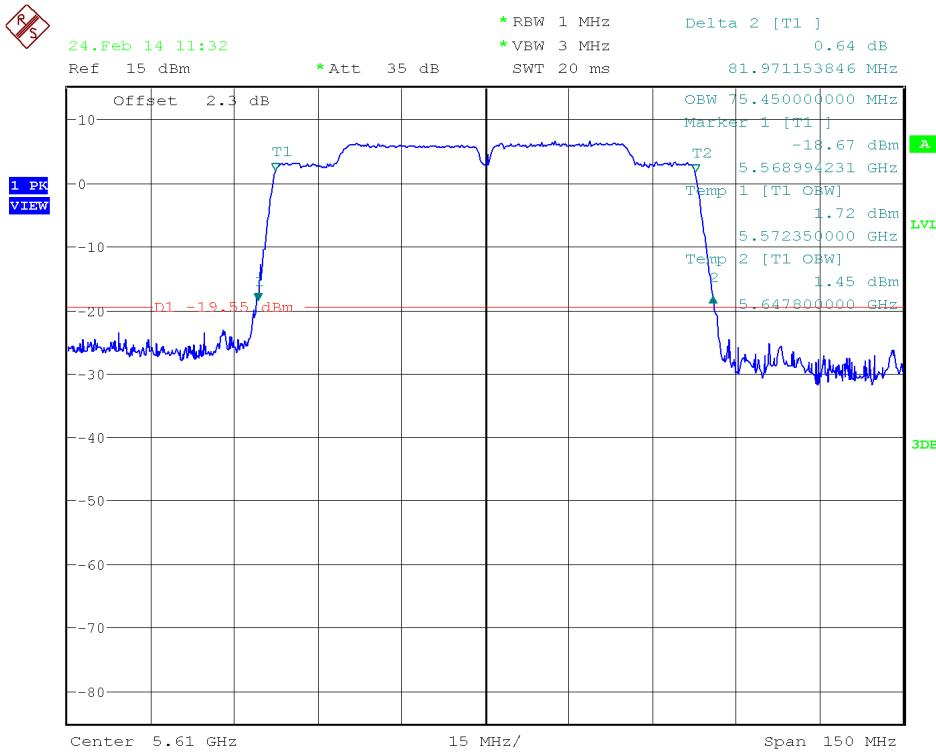


802.11 ac 80MHz: Channel 138. Total Bandwidth.

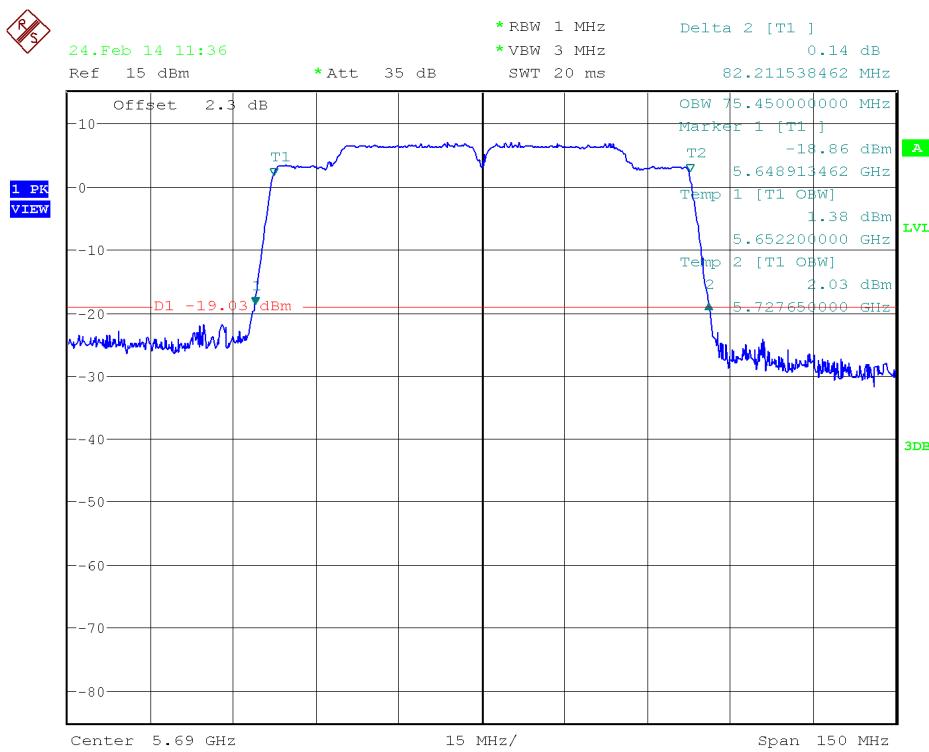

26 dB BW inside UNII_3 sub-band:

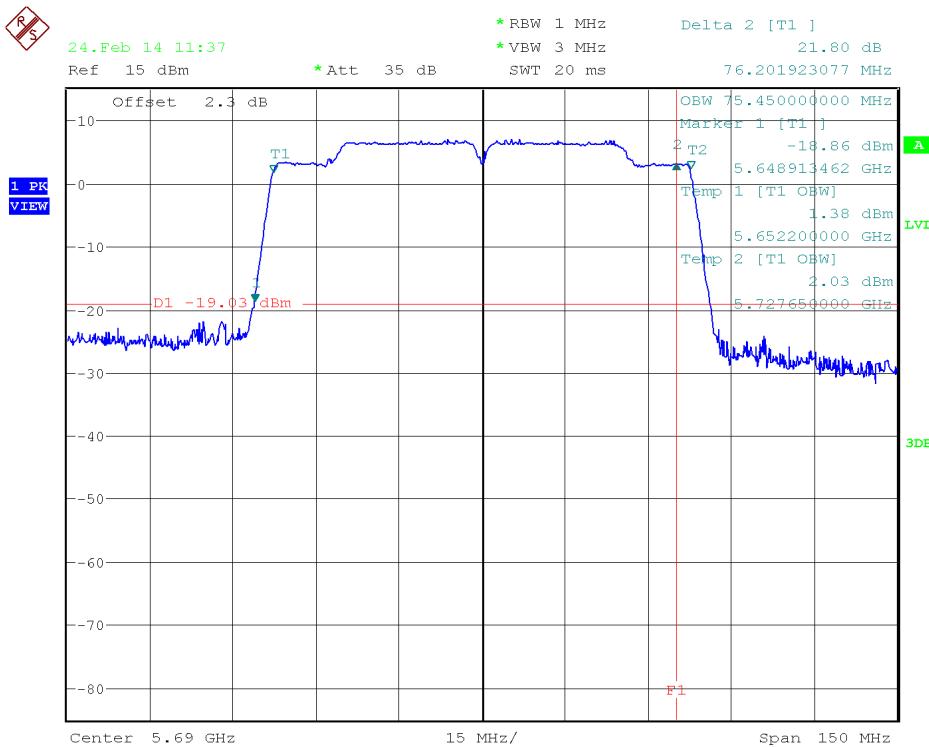


26 dB BW inside UNII_4 sub-band:

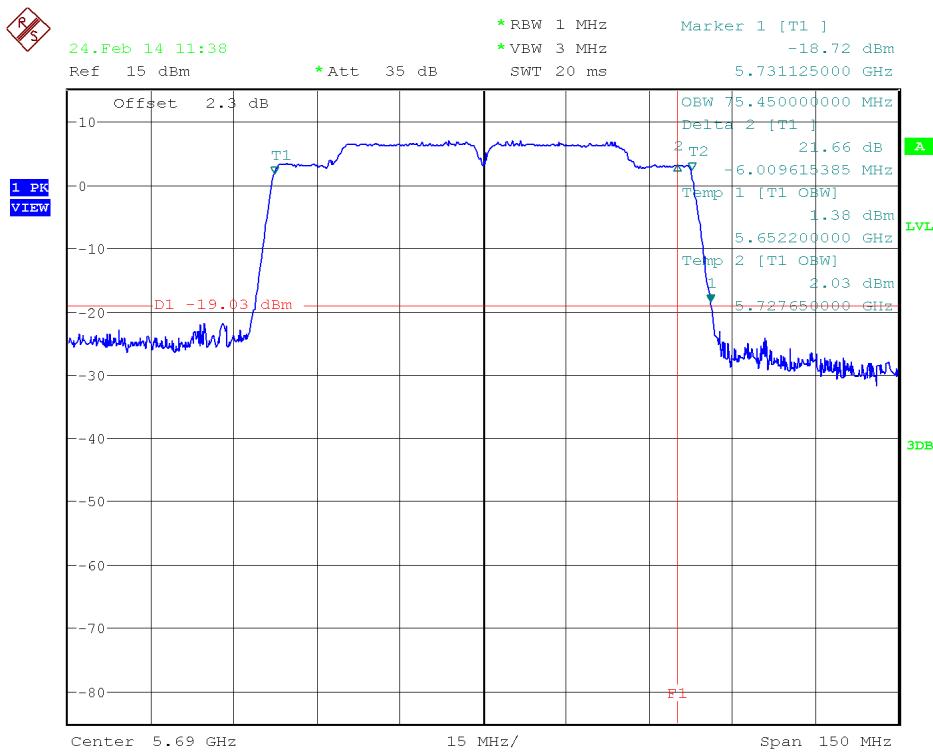


802.11 ac 80 MHz mode (except channel 138) CHAIN B


Lowest Channel

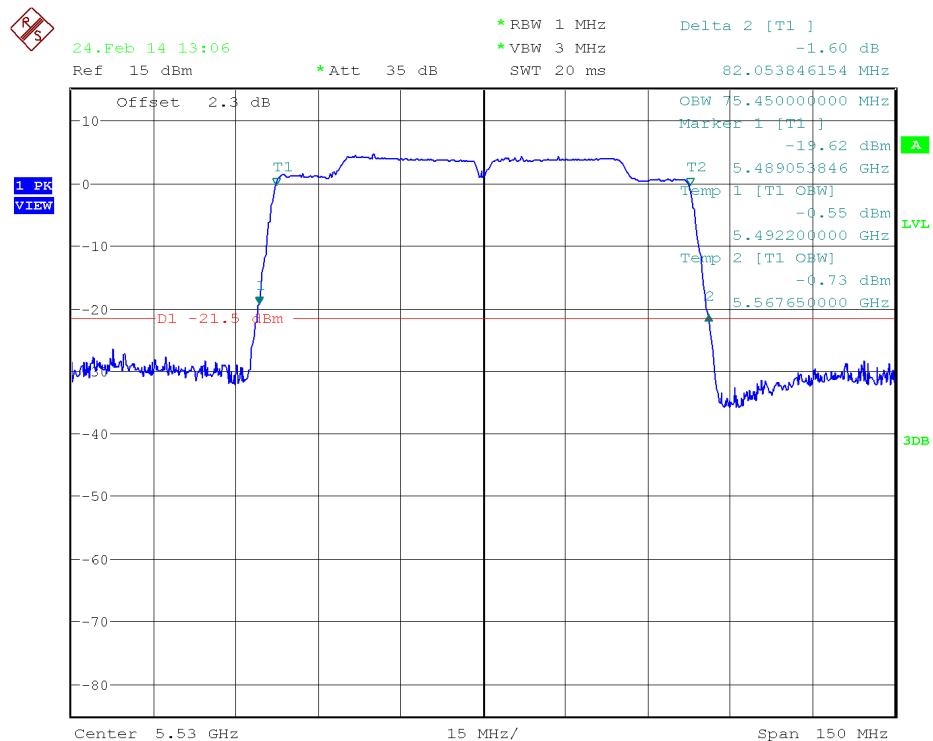


Middle Channel

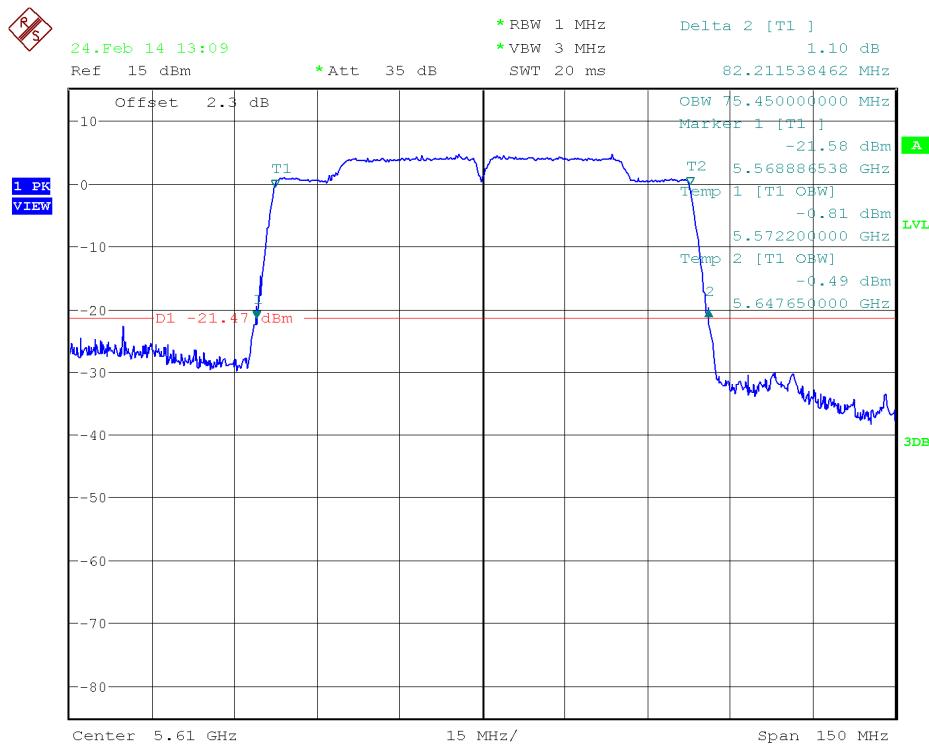


802.11 ac 80MHz: Channel 138. Total Bandwidth.

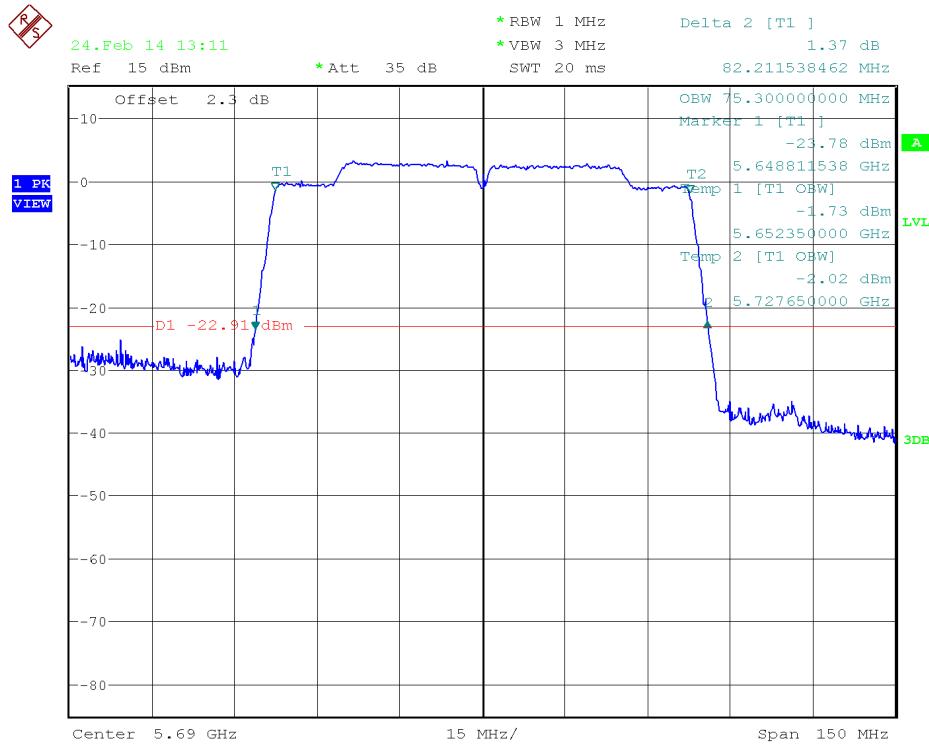

26 dB BW inside UNII_3 sub-band:

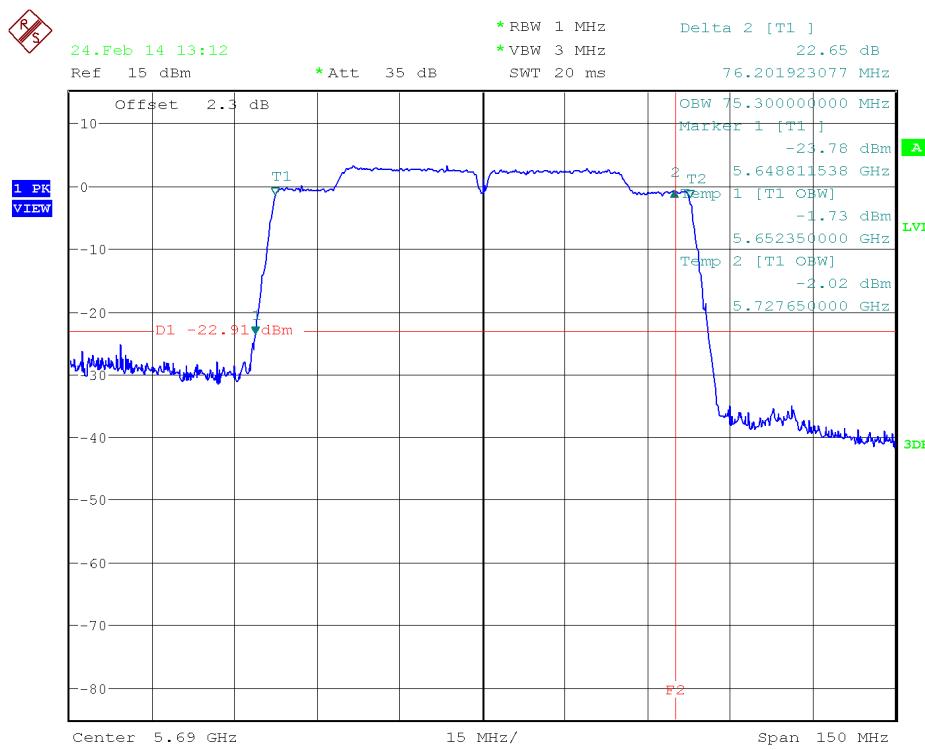

26 dB BW inside UNII_4 sub-band:

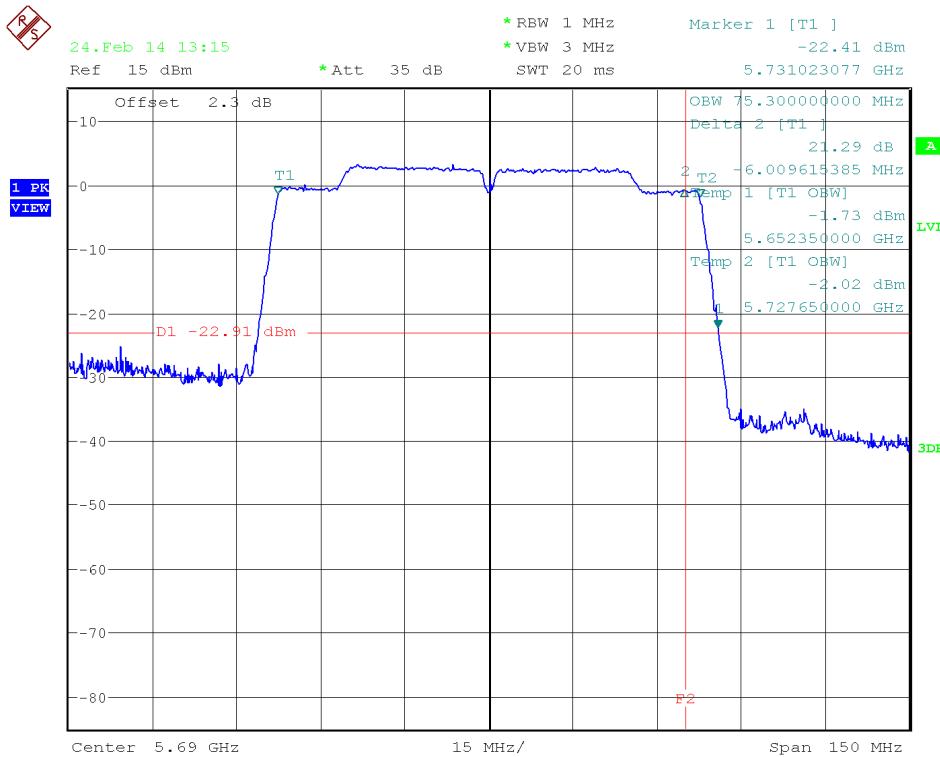

Section 15.407 Subclause (a) (2) / RSS-210 A9.2. (3). Maximum output power, Peak power spectral density and antenna gain

SPECIFICATION

FCC 15.407: For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (23.97 dBm) or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725–5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W (30 dBm) or $17 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 17 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RSS-210: For the band 5.47-5.725 GHz the maximum conducted output power shall not exceed 250 mW (23.97 dBm) or $10 + 10 \log_{10} B$, dBm, whichever power is less. The power spectral density shall not exceed 11dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W (30 dBm) or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

For the band 5.725–5.825 GHz the maximum conducted output power shall not exceed 1.0 W (30 dBm) or $17 + 10 \log_{10} B$, dBm, whichever power is less. The power spectral density shall not exceed 17 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 4.0 W or $23 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

Within the emission bandwidth, when the peak spectral density per MHz over any continuous transmission exceeds the average ($10 \log_{10} B$) value by more than 3 dB, the permissible power spectral density shall be reduced by the excess amount.

RESULTS

The maximum conducted output power was measured using the channel power integration method according to point E) 2) b) (Method SA-1) of Guidance 789033 D01.

For channel 144 ac20MHz, channel 142 ac40 MHz and channel 138 ac80MHz the maximum conducted output power was measured using the method according to point H) 2) b) (ii) (Integration across the entire U-NII band) of the Guidance for IEEE 802.11ac and Pre-ac Device Emissions Testing “Guidance 644545 D01 for IEEE 802.11ac v01r02 dated 10/31/2013.

Conducted output power within a U-NII band: Integrate over the band or integrate over a span including the 26-dB EBWs of transmission segments within the band or integrate over 26-dB EBW of each transmission segment in the band and sum.

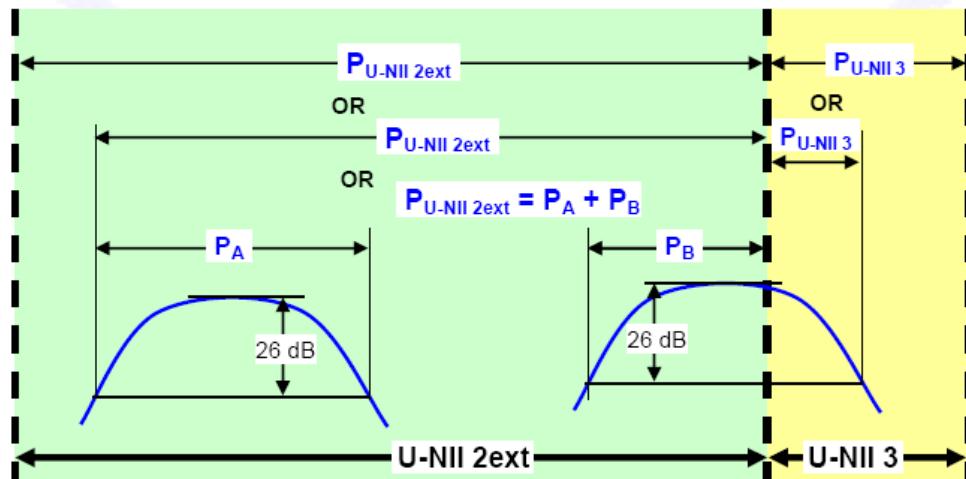


Figure 6. Conducted Output Power Measurement Examples

In the measure-and-sum approach for MIMO mode, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units (mW—not dBm).

The e.i.r.p. levels are calculated by adding the declared maximum antenna gain (dBi).

The peak power spectral density (PPSD) was measured using the method according to point F) (Method SA-1) of Guidance 789033 D01.

The e.i.r.p. levels are calculated by adding the declared maximum antenna gain (dBi).

For MIMO mode, the Measure and add $10 \log(NANT)$ dB, (where NANT is the number of outputs) technique was used according to the Guidance for Emission Testing of Transmitters with Multiple Outputs in the Same Band 662911 D01 Multiple Transmitter Output v02r01 dated 10/31/2013.

With this technique, spectrum measurements are performed at each output of the device, and the quantity $10 \log(NANT)$ dB is added to each spectrum value before comparing to the emission limit. Number of outputs = 2.

The number of transmit antennas (NANT) are 2 and the number of spatial streams (Nss) are 2 and therefore the Array Gain is 0 dB.

1. 802.11a mode (see next plots).

CHAIN A

Maximum declared antenna gain = 4.8 dBi

| Frequency | Maximum conducted output power (dBm) | Maximum output power e.i.r.p. (dBm) | PPSD/MHz (dBm) | PPSD/MHz e.i.r.p. (dBm) |
|-----------|--------------------------------------|-------------------------------------|----------------|-------------------------|
| 5500 MHz | 13.58 | 18.38 | 3.20 | 8.00 |
| 5600 MHz | 15.44 | 20.24 | 5.10 | 9.90 |
| 5700 MHz | 13.00 | 17.80 | 2.74 | 7.54 |

CHAIN B

Maximum declared antenna gain = 4.8 dBi

| Frequency | Maximum conducted output power (dBm) | Maximum output power e.i.r.p. (dBm) | PPSD/MHz (dBm) | PPSD/MHz e.i.r.p. (dBm) |
|-----------|--------------------------------------|-------------------------------------|----------------|-------------------------|
| 5500 MHz | 13.18 | 17.98 | 2.99 | 7.79 |
| 5600 MHz | 15.71 | 20.51 | 5.28 | 10.08 |
| 5700 MHz | 13.14 | 17.94 | 2.79 | 7.59 |

Measurement uncertainty = ± 1.2 dB

Verdict: Pass

2. 802.11 n20 MHz and 802.11 ac 20 MHz modes (except channel 144). (see next plots).

Note: the test was performed with 802.11 n20 MHz mode which is the same modulation scheme as 802.11 ac 20 MHz.

CHAIN A

Maximum declared antenna gain = 4.8 dBi

| Frequency | Maximum conducted output power (dBm) | Maximum output power e.i.r.p. (dBm) | PPSD/MHz (dBm) | PPSD/MHz e.i.r.p. (dBm) |
|-----------|--------------------------------------|-------------------------------------|----------------|-------------------------|
| 5500 MHz | 13.30 | 18.10 | 3.07 | 7.87 |
| 5600 MHz | 15.44 | 20.24 | 4.92 | 9.72 |
| 5700 MHz | 12.71 | 17.51 | 2.15 | 6.95 |

CHAIN B

Maximum declared antenna gain = 4.8 dBi

| Frequency | Maximum conducted output power (dBm) | Maximum output power e.i.r.p. (dBm) | PPSD/MHz (dBm) | PPSD/MHz e.i.r.p. (dBm) |
|-----------|--------------------------------------|-------------------------------------|----------------|-------------------------|
| 5500 MHz | 13.29 | 18.09 | 2.79 | 7.59 |
| 5600 MHz | 16.22 | 21.02 | 5.65 | 10.45 |
| 5700 MHz | 12.82 | 17.62 | 2.21 | 7.01 |

MIMO CHAIN A+B. MAXIMUM OUTPUT POWER

Maximum declared antenna gain = 4.8 dBi

| Frequency | Maximum conducted output power Chain A (dBm) | Maximum conducted output power Chain B (dBm) | Total conducted output power (dBm) A+B | Total output power e.i.r.p. (dBm) A+B |
|-----------|--|--|--|---------------------------------------|
| 5500 MHz | 10.67 | 10.34 | 13.52 | 18.32 |
| 5600 MHz | 14.65 | 14.65 | 17.66 | 22.46 |
| 5700 MHz | 11.19 | 11.07 | 14.14 | 18.94 |

MIMO CHAIN A+B. PPSD/MHz

Maximum declared antenna gain = 4.8 dBi

| Frequency | PPSD/MHz Chain A (dBm) | PPSD/MHz Chain B (dBm) | Total PPSD/MHz Chain A (dBm) ¹ | Total PPSD/MHz Chain B (dBm) ¹ | Total PPSD/MHz Chain A e.i.r.p. (dBm) | Total PPSD/MHz Chain B e.i.r.p. (dBm) |
|-----------|------------------------|------------------------|---|---|---------------------------------------|---------------------------------------|
| 5500 MHz | 0.09 | -0.21 | 3.10 | 2.80 | 7.90 | 7.60 |
| 5600 MHz | 4.01 | 4.42 | 7.02 | 7.43 | 11.82 | 12.23 |
| 5700 MHz | 0.71 | 0.45 | 3.72 | 3.46 | 8.52 | 8.26 |

 Note 1: The quantity $10 \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

 Measurement uncertainty = ± 1.2 dB

Verdict: PASS

802.11 ac 20MHz. Channel 144
CHAIN A

Maximum declared antenna gain = 4.8 dBi

| Frequency | PPSD/MHz (dBm) per sub-band | | PPSD/MHz e.i.r.p. (dBm) per sub-band | | Maximum conducted output power (dBm) per sub-band | | Maximum output power e.i.r.p. (dBm) per sub-band | |
|-----------|-----------------------------|--------|--------------------------------------|--------|---|--------|--|--------|
| | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 |
| 5720 MHz | 4.87 | 3.20 | 9.67 | 8.00 | 14.79 | 7.11 | 19.59 | 11.91 |

CHAIN B

Maximum declared antenna gain = 4.8 dBi

| Frequency | PPSD/MHz (dBm) per sub-band | | PPSD/MHz e.i.r.p. (dBm) per sub-band | | Maximum conducted output power (dBm) per sub-band | | Maximum output power e.i.r.p. (dBm) per sub-band | |
|-----------|-----------------------------|--------|--------------------------------------|--------|---|--------|--|--------|
| | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 |
| 5720 MHz | 5.70 | 3.77 | 10.50 | 8.57 | 15.75 | 7.63 | 20.55 | 12.43 |

MIMO CHAIN A+B. MAXIMUM OUTPUT POWER

| Frequency | Maximum conducted output power per sub-band Chain A (dBm) | | Maximum conducted output power per sub-band Chain B (dBm) | | Total conducted output power (dBm) | | Total output power e.i.r.p. (dBm) | |
|-----------|---|--------|---|--------|------------------------------------|--------|-----------------------------------|--------|
| | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 |
| 5720 MHz | 12.70 | 4.88 | 12.96 | 4.15 | 15.84 | 7.54 | 20.64 | 12.34 |

Measurement uncertainty = ± 1.2 dB

Verdict: PASS

MIMO CHAIN A+B. PPSD/MHz

Maximum declared antenna gain = 4.8 dBi

| Freq. | PPSD/MHz per sub-band Chain A (dBm) | | PPSD/MHz per sub-band Chain B (dBm) | | Total PPSD/MHz per sub-band Chain A (dBm) ¹ | | Total PPSD/MHz per sub-band Chain B (dBm) ¹ | | Total PPSD/MHz per sub-band Chain B e.i.r.p. (dBm) | | | |
|----------|-------------------------------------|--------|-------------------------------------|--------|--|--------|--|--------|--|--------|-------|------|
| | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | | |
| 5720 MHz | 2.67 | 1.03 | 2.84 | 0.24 | 5.68 | 4.04 | 5.85 | 3.25 | 10.48 | 8.84 | 10.65 | 8.05 |

Note 1: The quantity $10 \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

3. 802.11 n40 MHz and 802.11 ac 40 MHz modes (except channel 142). (see next plots).

Note: the test was performed with 802.11 n40 MHz mode which is the same modulation scheme as 802.11 ac 40 MHz.

CHAIN A

Maximum declared antenna gain = 4.8 dBi

| Frequency | Maximum conducted output power (dBm) | Maximum output power e.i.r.p. (dBm) | PPSD/MHz (dBm) | PPSD/MHz e.i.r.p. (dBm) |
|-----------|--------------------------------------|-------------------------------------|----------------|-------------------------|
| 5510 MHz | 13.22 | 18.02 | -0.61 | 4.19 |
| 5590 MHz | 16.17 | 20.97 | 2.46 | 7.26 |
| 5670 MHz | 16.22 | 21.02 | 2.29 | 7.09 |

CHAIN B

Maximum declared antenna gain = 4.8 dBi

| Frequency | Maximum conducted output power (dBm) | Maximum output power e.i.r.p. (dBm) | PPSD/MHz (dBm) | PPSD/MHz e.i.r.p. (dBm) |
|-----------|--------------------------------------|-------------------------------------|----------------|-------------------------|
| 5510 MHz | 13.21 | 18.01 | -0.62 | 4.18 |
| 5590 MHz | 16.20 | 21.00 | 2.48 | 7.28 |
| 5670 MHz | 16.73 | 21.53 | 2.93 | 7.73 |

MIMO CHAIN A+B. MAXIMUM OUTPUT POWER

Maximum declared antenna gain = 4.8 dBi

| Frequency | Maximum conducted output power Chain A (dBm) | Maximum conducted output power Chain B (dBm) | Total conducted output power (dBm) A+B | Total output power e.i.r.p. (dBm) A+B |
|-----------|--|--|--|---------------------------------------|
| 5510 MHz | 11.29 | 11.57 | 14.44 | 19.24 |
| 5590 MHz | 16.69 | 16.28 | 19.50 | 24.30 |
| 5670 MHz | 16.70 | 16.31 | 19.51 | 24.31 |

 Measurement uncertainty = ± 1.2 dB

Verdict: PASS

MIMO CHAIN A+B. PPSD/MHz

Maximum declared antenna gain = 4.8 dBi

| Frequency | PPSD/MHz Chain A (dBm) | PPSD/MHz Chain B (dBm) | Total PPSD/MHz Chain A (dBm) ¹ | Total PPSD/MHz Chain B (dBm) ¹ | Total PPSD/MHz Chain A e.i.r.p. (dBm) | Total PPSD/MHz Chain B e.i.r.p. (dBm) |
|-----------|------------------------|------------------------|---|---|---------------------------------------|---------------------------------------|
| 5510 MHz | -2.18 | -2.18 | 0.83 | 0.83 | 5.63 | 5.63 |
| 5590 MHz | 2.92 | 2.53 | 5.93 | 5.54 | 10.73 | 10.34 |
| 5670 MHz | 3.08 | 2.58 | 6.09 | 5.59 | 10.89 | 10.39 |

 Note 1: The quantity $10 \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

 Measurement uncertainty = ± 1.2 dB

Verdict: PASS

802.11 ac 40MHz. Channel 142.
CHAIN A

Maximum declared antenna gain = 4.8 dBi

| Frequency | Maximum conducted output power (dBm) per sub-band | | Maximum output power e.i.r.p. (dBm) per sub-band | | PPSD/MHz (dBm) per sub-band | | PPSD/MHz e.i.r.p. (dBm) per sub-band | |
|-----------|---|--------|--|--------|-----------------------------|--------|--------------------------------------|--------|
| | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 |
| 5710 MHz | 16.00 | 3.23 | 20.80 | 8.03 | 2.23 | -1.15 | 7.03 | 3.65 |

CHAIN B

Maximum declared antenna gain = 4.8 dBi

| Frequency | Maximum conducted output power (dBm) per sub-band | | Maximum output power e.i.r.p. (dBm) per sub-band | | PPSD/MHz (dBm) per sub-band | | PPSD/MHz e.i.r.p. (dBm) per sub-band | |
|-----------|---|--------|--|--------|-----------------------------|--------|--------------------------------------|--------|
| | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 |
| 5710 MHz | 16.17 | 3.36 | 20.97 | 8.16 | 2.47 | -1.13 | 7.27 | 3.67 |

MIMO CHAIN A+B. MAXIMUM OUTPUT POWER

Maximum declared antenna gain = 4.8 dBi

| Frequency | Maximum conducted output power per sub-band Chain A (dBm) | | Maximum conducted output power per sub-band Chain B (dBm) | | Total conducted output power (dBm) per sub-band | | Total output power e.i.r.p. (dBm) per sub-band | |
|-----------|---|--------|---|--------|---|--------|--|--------|
| | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 |
| 5710 MHz | 16.21 | 3.77 | 16.38 | 4.29 | 19.31 | 7.05 | 24.11 | 11.85 |

 Measurement uncertainty = ± 1.2 dB

Verdict: PASS

MIMO CHAIN A+B. PPSD/MHz

Maximum declared antenna gain = 4.8 dBi

| Freq. | PPSD/MHz per sub-band Chain A (dBm) | | PPSD/MHz per sub-band Chain B (dBm) | | Total PPSD/MHz per sub-band Chain A (dBm) ¹ | | Total PPSD/MHz per sub-band Chain B (dBm) ¹ | | Total PPSD/MHz per sub-band Chain A e.i.r.p. (dBm) | | Total PPSD/MHz Chain B e.i.r.p. per sub-band (dBm) | |
|----------|-------------------------------------|--------|-------------------------------------|--------|--|--------|--|--------|--|--------|--|--------|
| | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 |
| 5710 MHz | 3.57 | -0.96 | 2.39 | -0.22 | 6.58 | 2.05 | 5.4 | 1.83 | 11.38 | 6.85 | 10.2 | 6.63 |

 Note 1: The quantity $10 \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

 Measurement uncertainty = ± 1.2 dB

Verdict: PASS

4. 802.11 ac 80 MHz mode (except channel 138). (see next plots).

CHAIN A

Maximum declared antenna gain = 4.8 dBi

| Frequency | Maximum conducted output power (dBm) | Maximum output power e.i.r.p. (dBm) | PPSD/MHz (dBm) | PPSD/MHz e.i.r.p. (dBm) |
|-----------|--------------------------------------|-------------------------------------|----------------|-------------------------|
| 5530 MHz | 13.52 | 18.32 | -2.84 | 1.96 |
| 5610 MHz | 16.50 | 21.30 | 0.70 | 5.50 |

CHAIN B

Maximum declared antenna gain = 4.8 dBi

| Frequency | Maximum conducted output power (dBm) | Maximum output power e.i.r.p. (dBm) | PPSD/MHz (dBm) | PPSD/MHz e.i.r.p. (dBm) |
|-----------|--------------------------------------|-------------------------------------|----------------|-------------------------|
| 5530 MHz | 13.67 | 18.47 | -2.07 | 2.73 |
| 5610 MHz | 16.55 | 21.35 | 0.58 | 5.38 |

MIMO CHAIN A+B. MAXIMUM OUTPUT POWER

Maximum declared antenna gain = 4.8 dBi

| Frequency | Maximum conducted output power Chain A (dBm) | Maximum conducted output power Chain B (dBm) | Total conducted output power (dBm) A+B | Total output power e.i.r.p. (dBm) A+B |
|-----------|--|--|--|---------------------------------------|
| 5530 MHz | 11.40 | 11.69 | 14.56 | 19.36 |
| 5610 MHz | 16.75 | 16.38 | 19.58 | 24.38 |

Measurement uncertainty = ± 1.2 dB

Verdict: PASS

MIMO CHAIN A+B. PPSD/MHz

Maximum declared antenna gain = 4.8 dBi

| Frequency | PPSD/MHz Chain A (dBm) | PPSD/MHz Chain B (dBm) | Total PPSD/MHz Chain A (dBm) ¹ | Total PPSD/MHz Chain B (dBm) ¹ | Total PPSD/MHz Chain A e.i.r.p. (dBm) | Total PPSD/MHz Chain B e.i.r.p. (dBm) |
|-----------|------------------------|------------------------|---|---|---------------------------------------|---------------------------------------|
| 5530 MHz | -4.84 | -3.73 | -1.83 | -0.72 | 2.97 | 4.08 |
| 5610 MHz | 1.35 | 1.33 | 4.36 | 4.34 | 9.16 | 9.14 |

Note 1: The quantity $10 \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Measurement uncertainty = ± 1.2 dB

Verdict: PASS

802.11 ac 80MHz. Channel 138.
CHAIN A

Maximum declared antenna gain = 4.8 dBi

| Frequency | Maximum conducted output power (dBm) per sub-band | | Maximum output power e.i.r.p. (dBm) per sub-band | | PPSD/MHz (dBm) per sub-band | | PPSD/MHz e.i.r.p. (dBm) per sub-band | |
|-----------|---|--------|--|--------|-----------------------------|--------|--------------------------------------|--------|
| | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 |
| 5690 MHz | 16.30 | 0.49 | 21.1 | 5.29 | 0.69 | -4.36 | 5.49 | 0.44 |

CHAIN B

Maximum declared antenna gain = 4.8 dBi

| Frequency | Maximum conducted output power (dBm) per sub-band | | Maximum output power e.i.r.p. (dBm) per sub-band | | PPSD/MHz (dBm) per sub-band | | PPSD/MHz e.i.r.p. (dBm) per sub-band | |
|-----------|---|--------|--|--------|-----------------------------|--------|--------------------------------------|--------|
| | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 |
| 5690 MHz | 16.33 | -0.28 | 21.13 | 4.52 | 0.63 | -5.06 | 5.43 | -0.26 |

MIMO CHAIN A+B. MAXIMUM OUTPUT POWER

Maximum declared antenna gain = 4.8 dBi

| Frequency | Maximum conducted output power per sub-band Chain A (dBm) | | Maximum conducted output power per sub-band Chain B (dBm) | | Total conducted output power (dBm) per sub-band | | Total output power e.i.r.p. (dBm) per sub-band | |
|-----------|---|--------|---|--------|---|--------|--|--------|
| | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 |
| 5690 MHz | 16.28 | 1.02 | 16.37 | 0.51 | 19.33 | 3.78 | 24.13 | 8.58 |

 Measurement uncertainty = ± 1.2 dB

Verdict: PASS

MIMO CHAIN A+B. PPSD/MHz

Maximum declared antenna gain = 4.8 dBi

| Freq. | PPSD/MHz per sub-band Chain A (dBm) | | PPSD/MHz per sub-band Chain B (dBm) | | Total PPSD/MHz per sub-band Chain A (dBm) ¹ | | Total PPSD/MHz per sub-band Chain B (dBm) ¹ | | Total PPSD/MHz per sub-band Chain B e.i.r.p. (dBm) | | | |
|----------|-------------------------------------|--------|-------------------------------------|--------|--|--------|--|--------|--|--------|------|------|
| | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | UNII_3 | UNII_4 | | |
| 5690 MHz | -0.33 | -3.85 | -0.13 | -4.43 | 2.68 | -0.84 | 2.88 | -1.42 | 7.48 | 3.96 | 7.68 | 3.38 |


 Note 1: The quantity $10 \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

 Measurement uncertainty = ± 1.2 dB


Verdict: PASS

802.11a mode CHAIN A


Lowest Channel

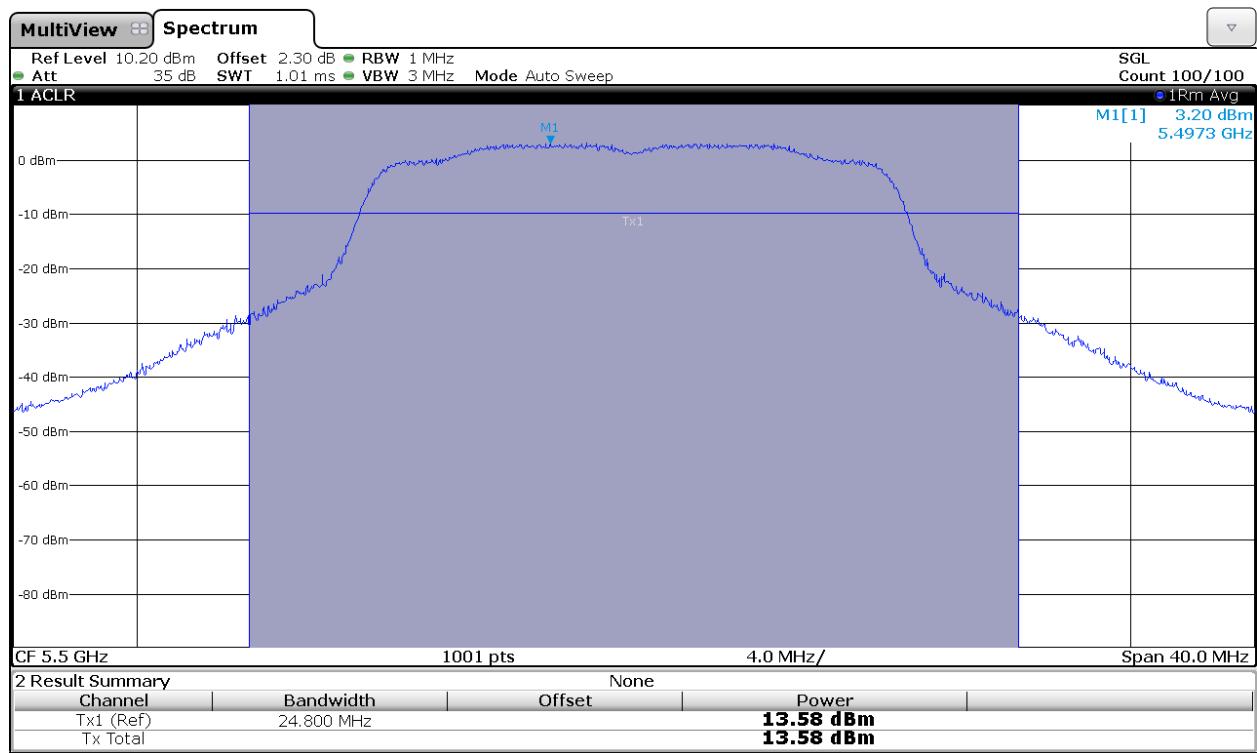

Middle Channel

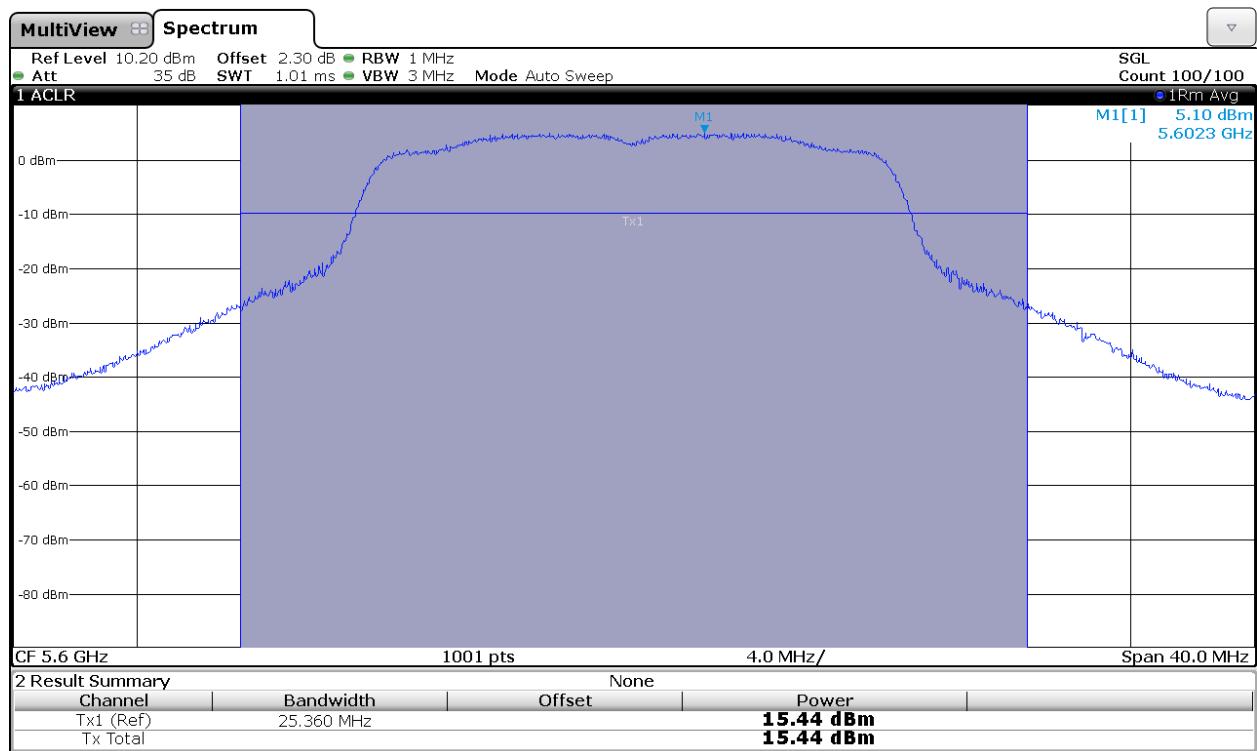


Highest Channel

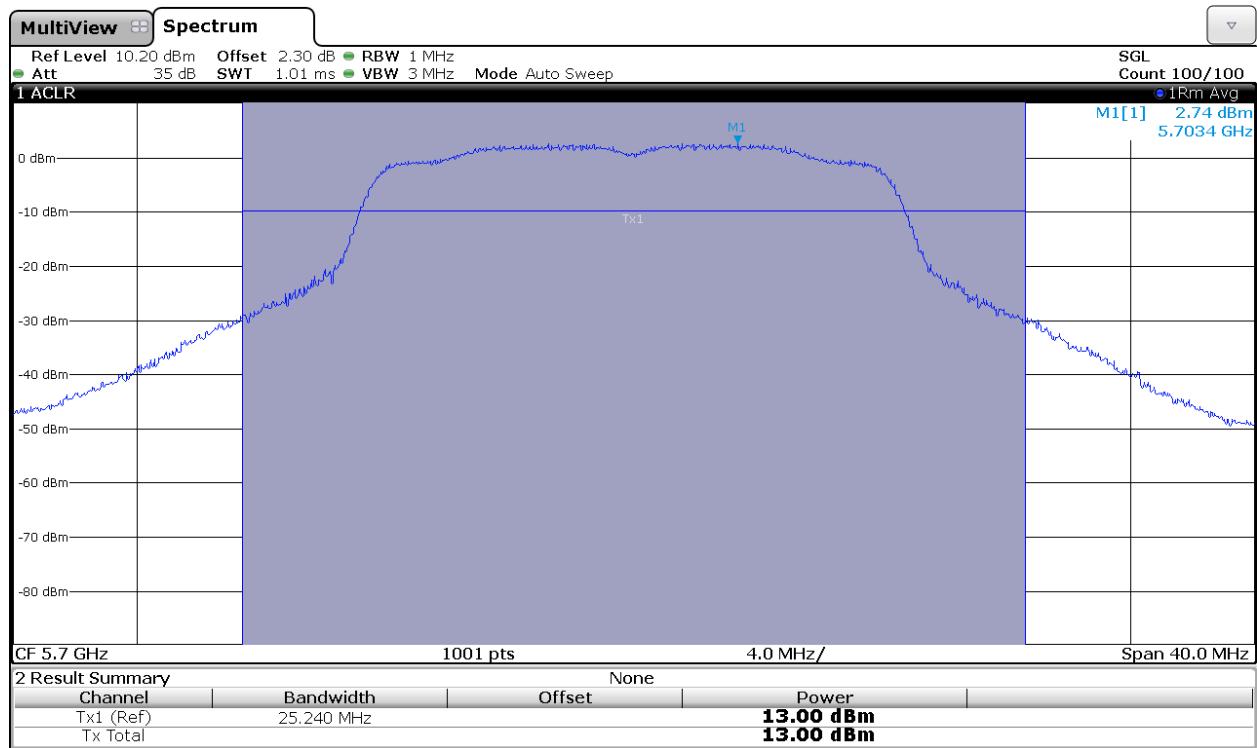


802.11a mode CHAIN B


Lowest Channel

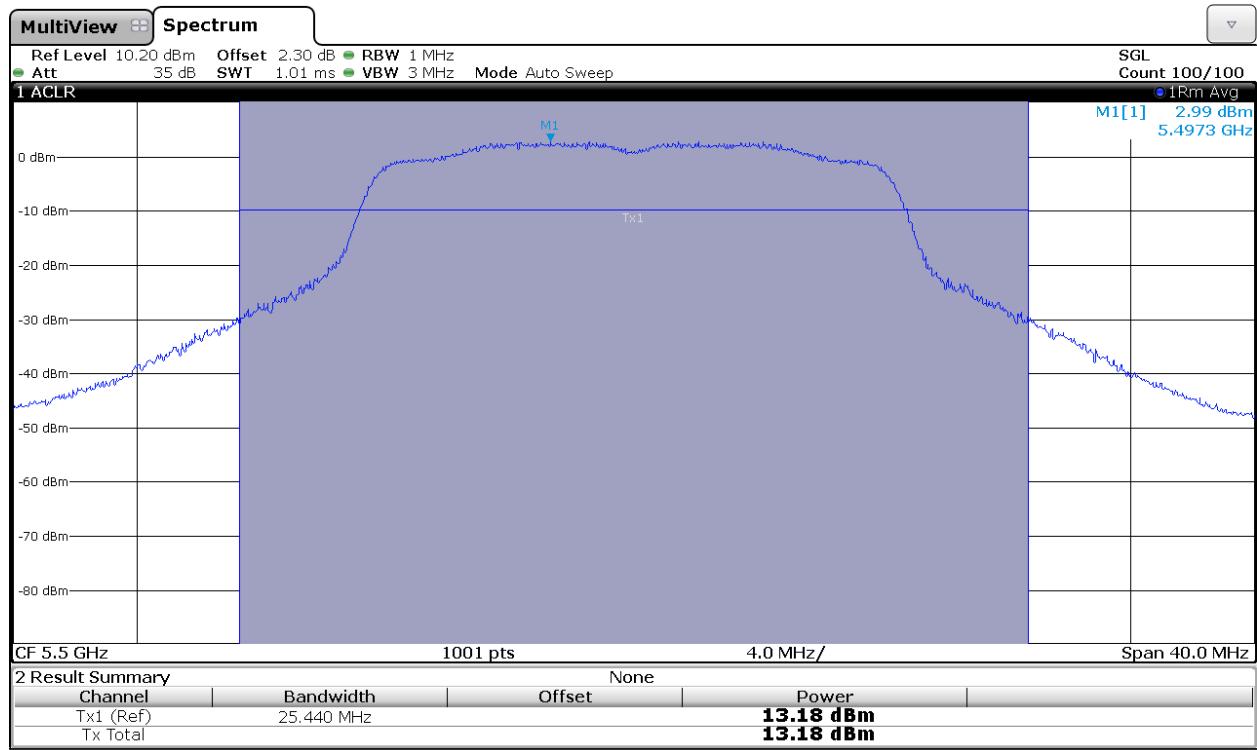

Middle Channel

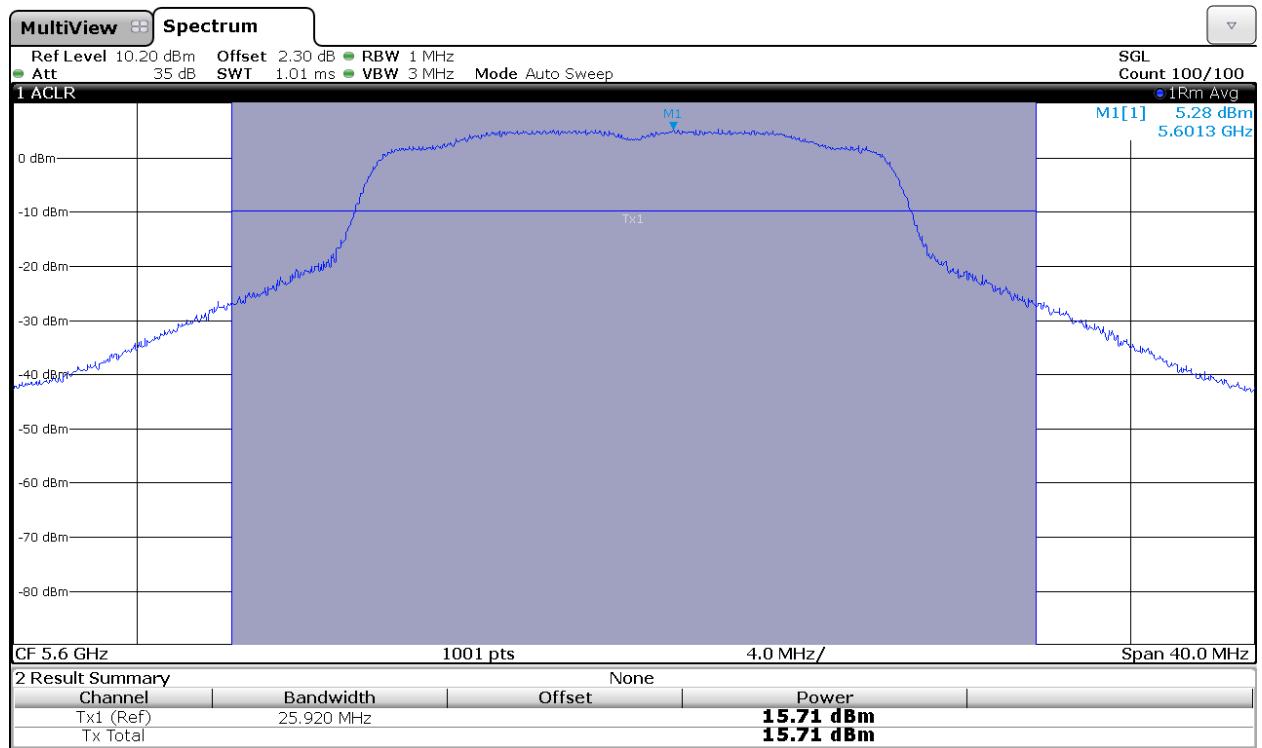


Highest Channel

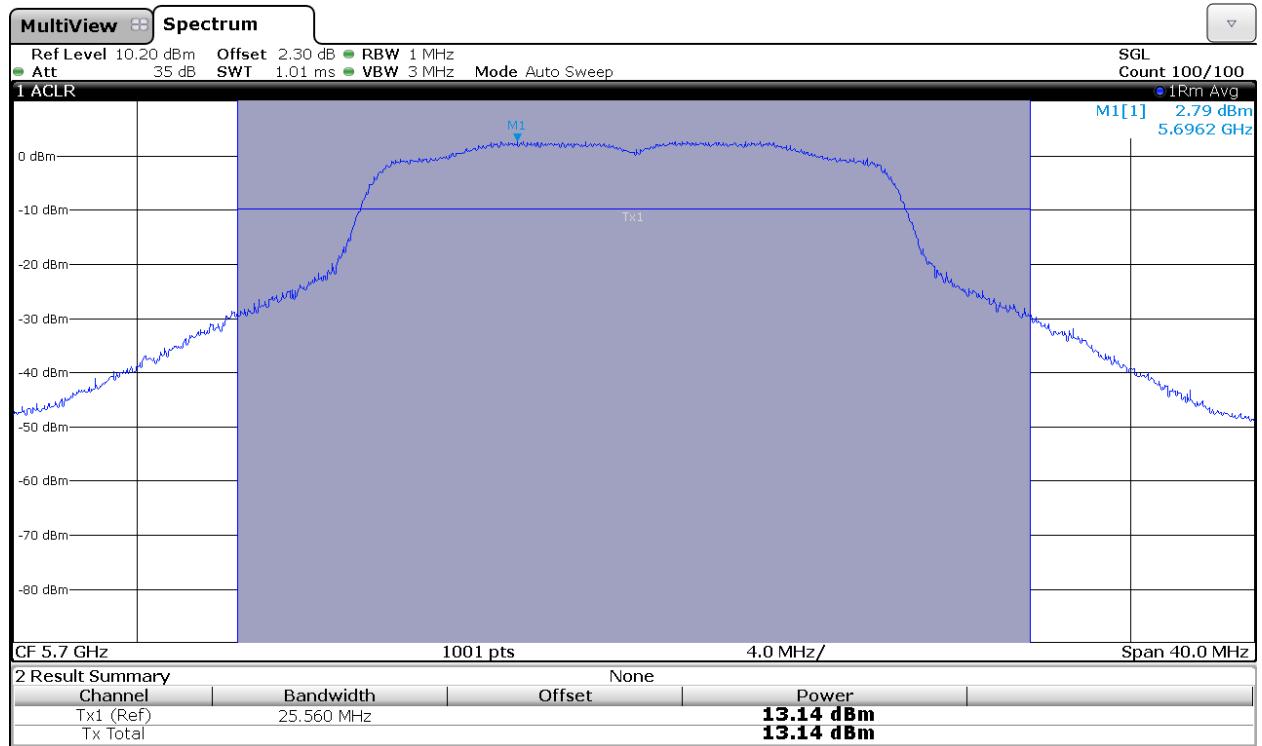


802.11 n20 MHz modes (except channel 144) CHAIN A


Lowest Channel

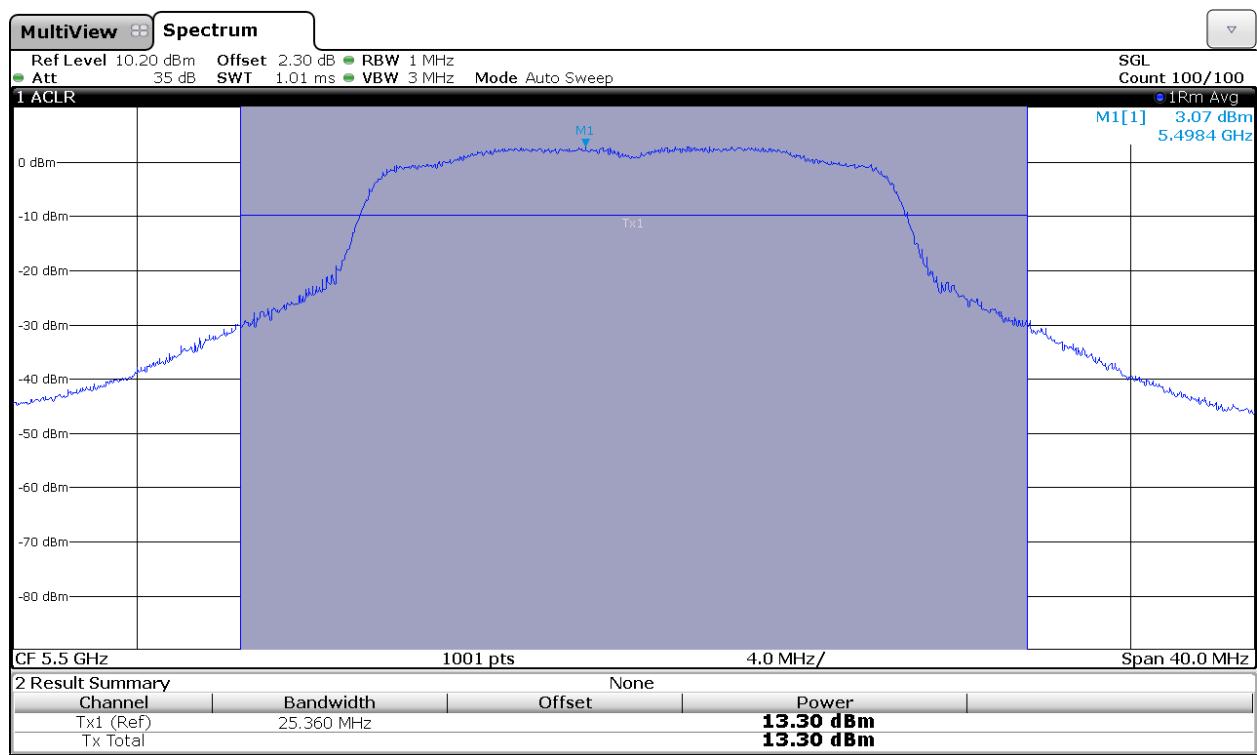

Middle Channel

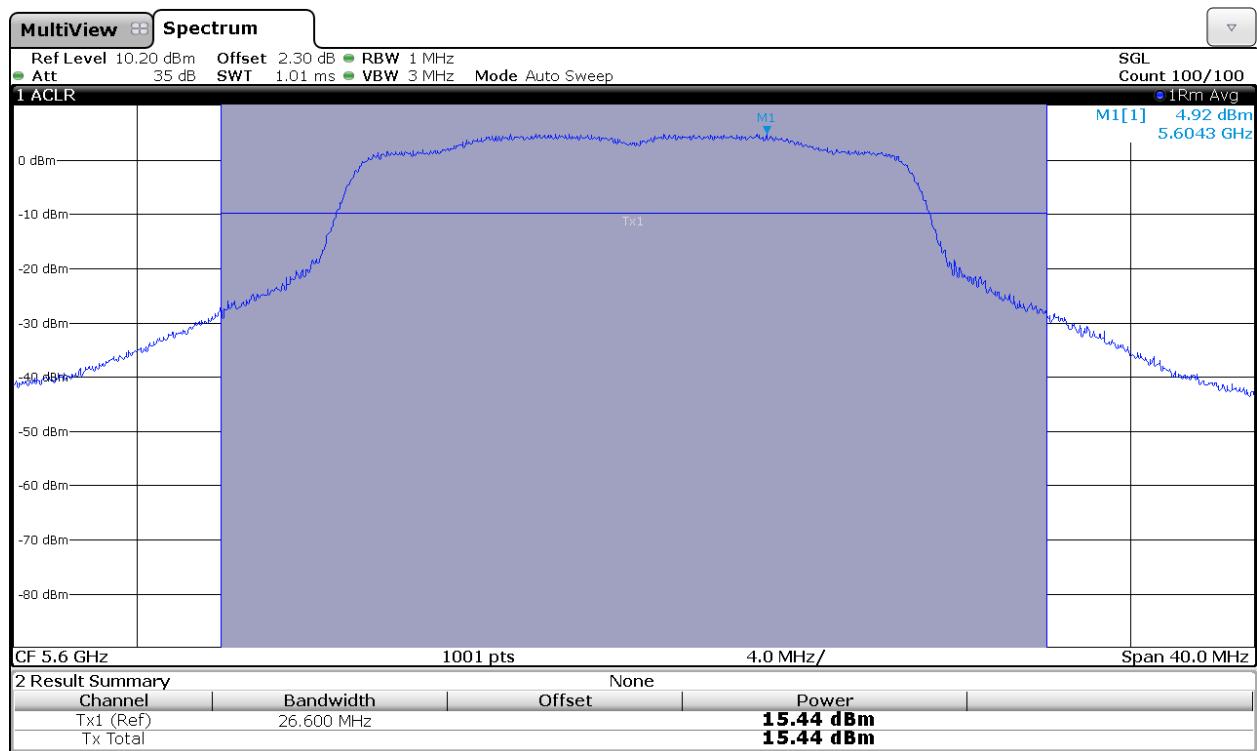


Highest Channel

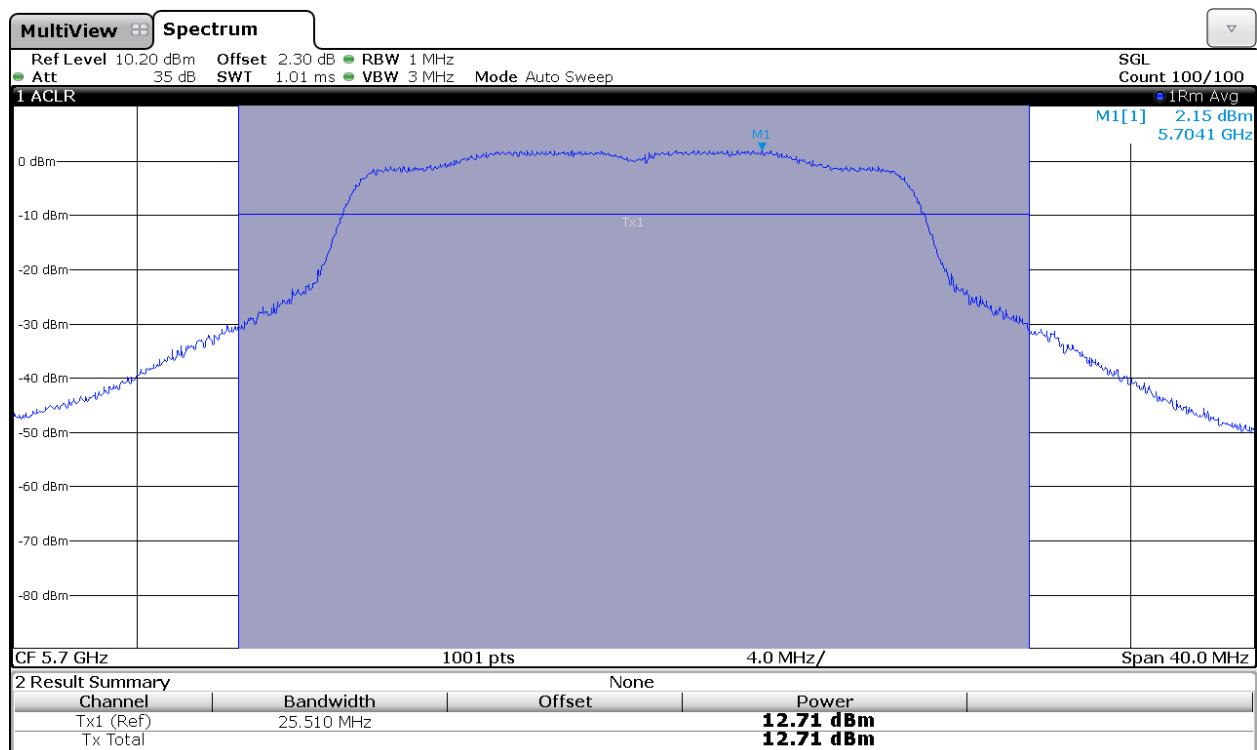


802.11 ac 20MHz : Channel 144

Power and PPSD in sub-band UNII_3:

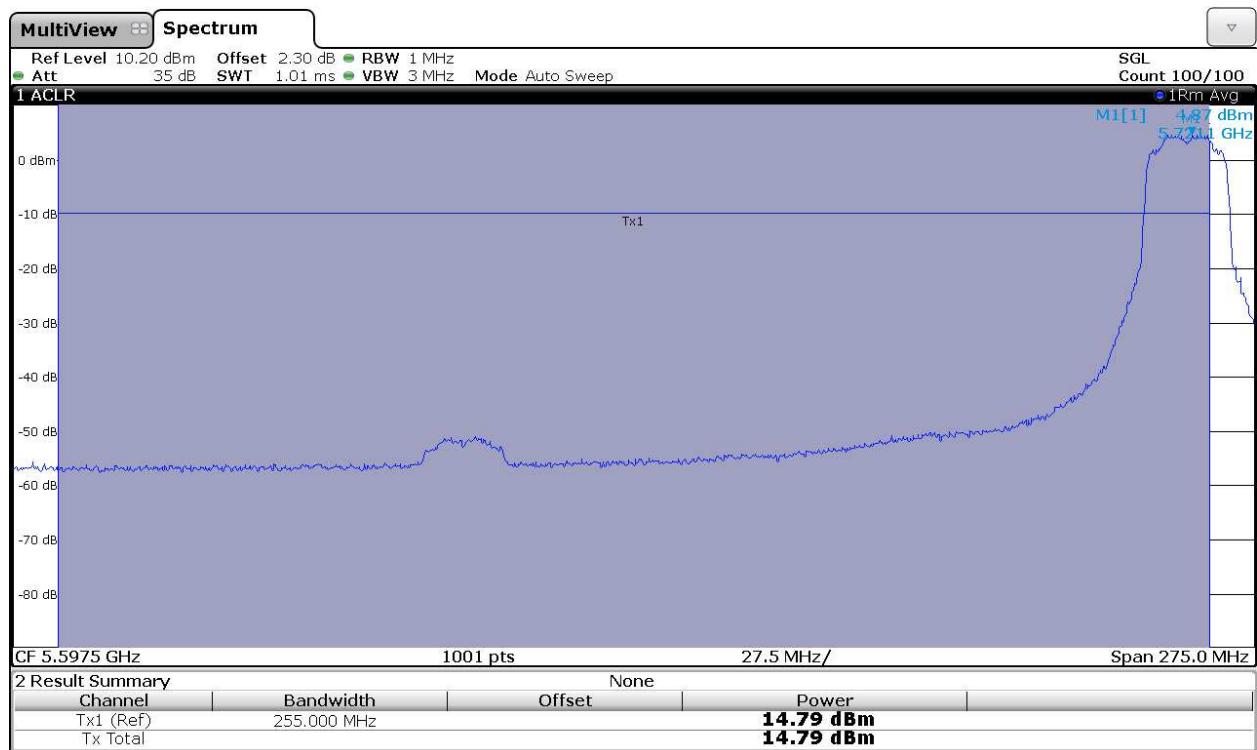


Power and PPSD in sub-band UNII_4:

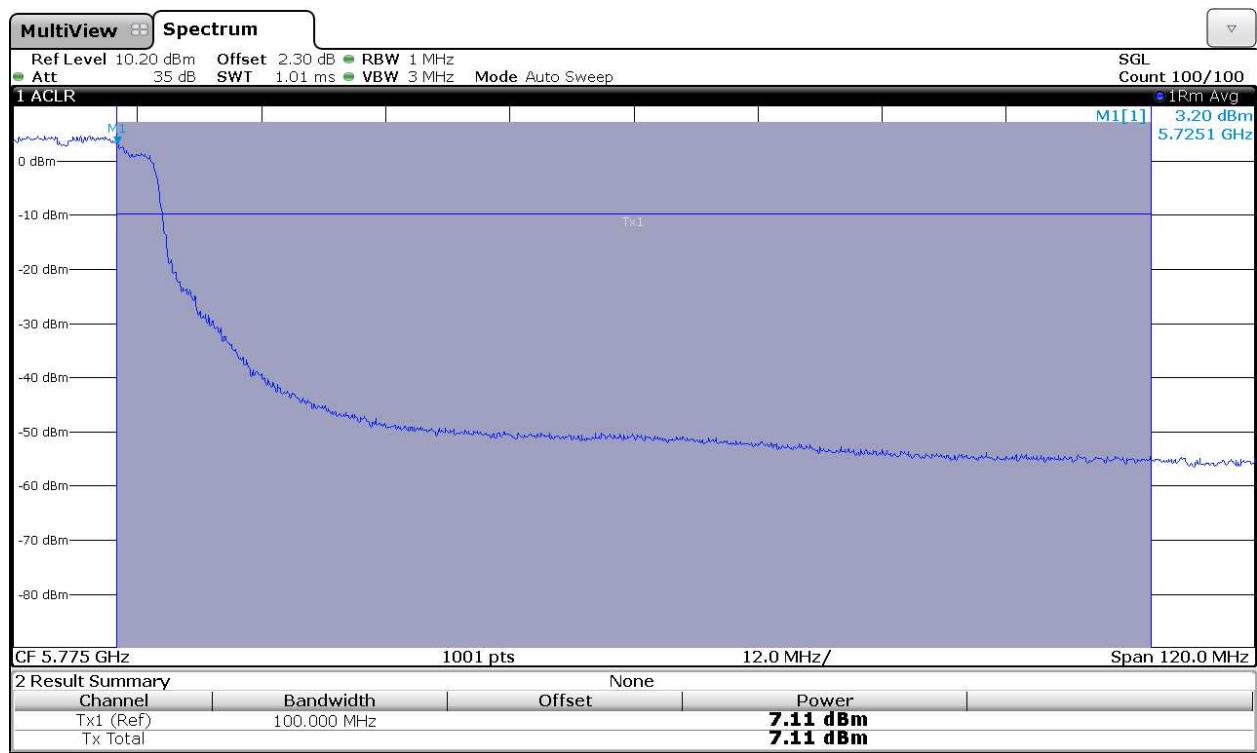


802.11 n20 MHz and 802.11 ac 20 MHz modes (except channel 144) CHAIN B


Lowest Channel

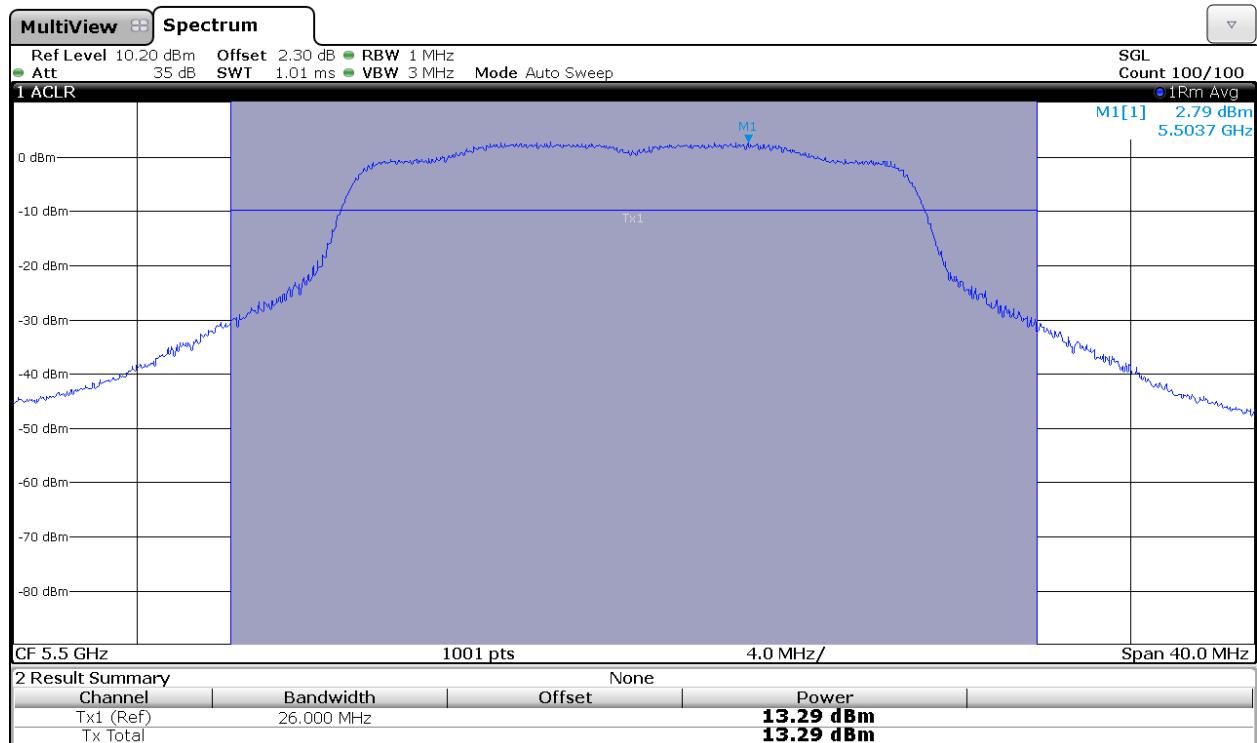

Middle Channel

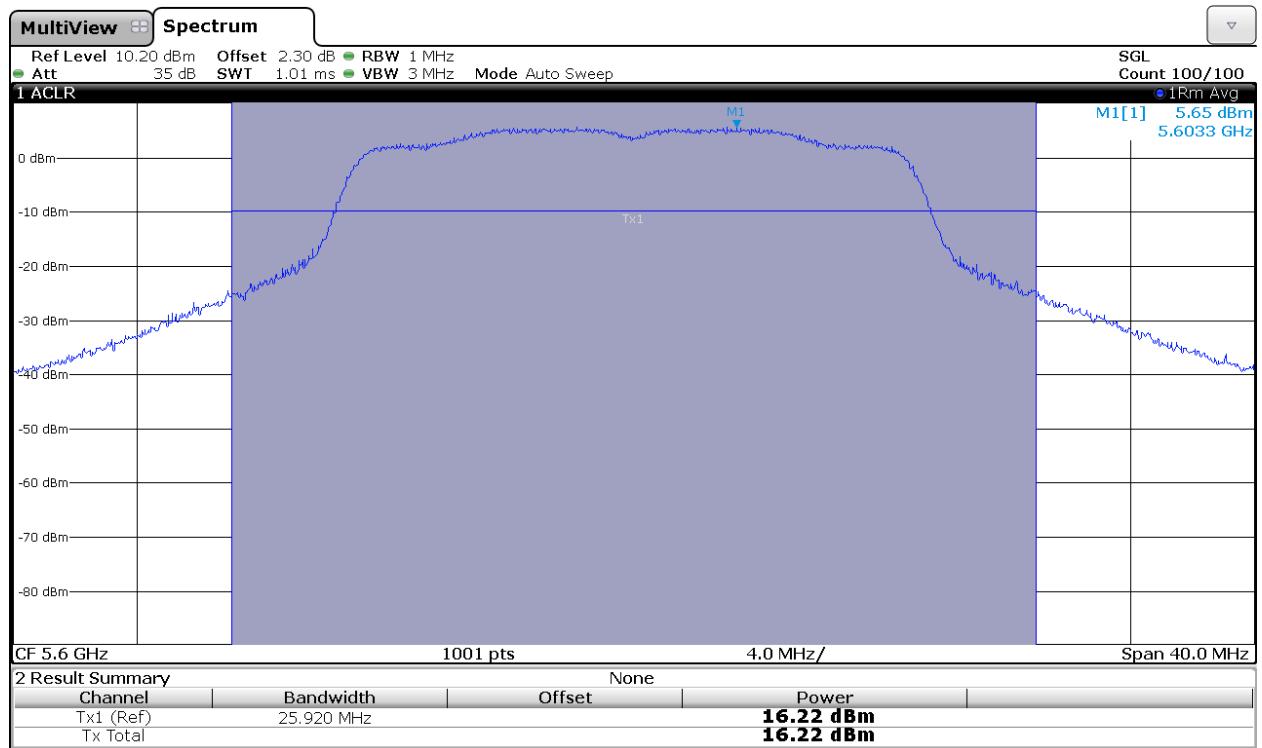


Highest Channel

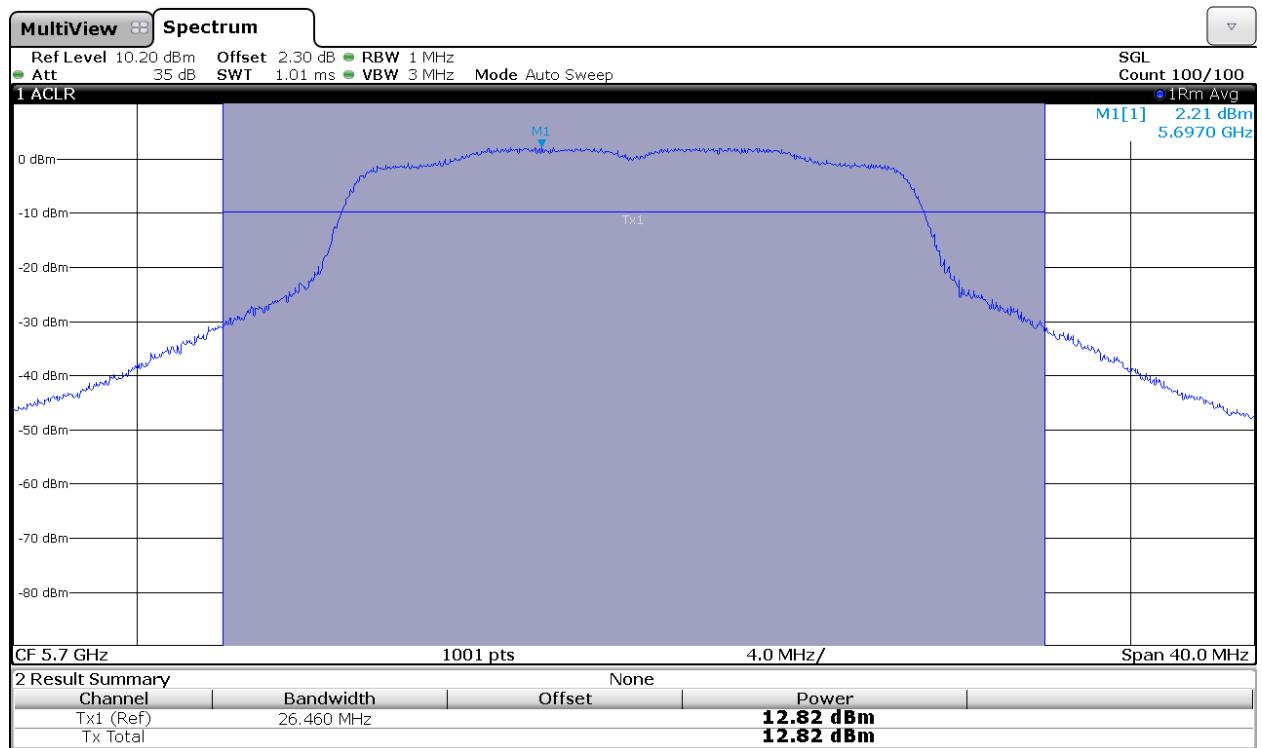


802.11 ac 20MHz : Channel 144

Power and PPSD in sub-band UNII_3:

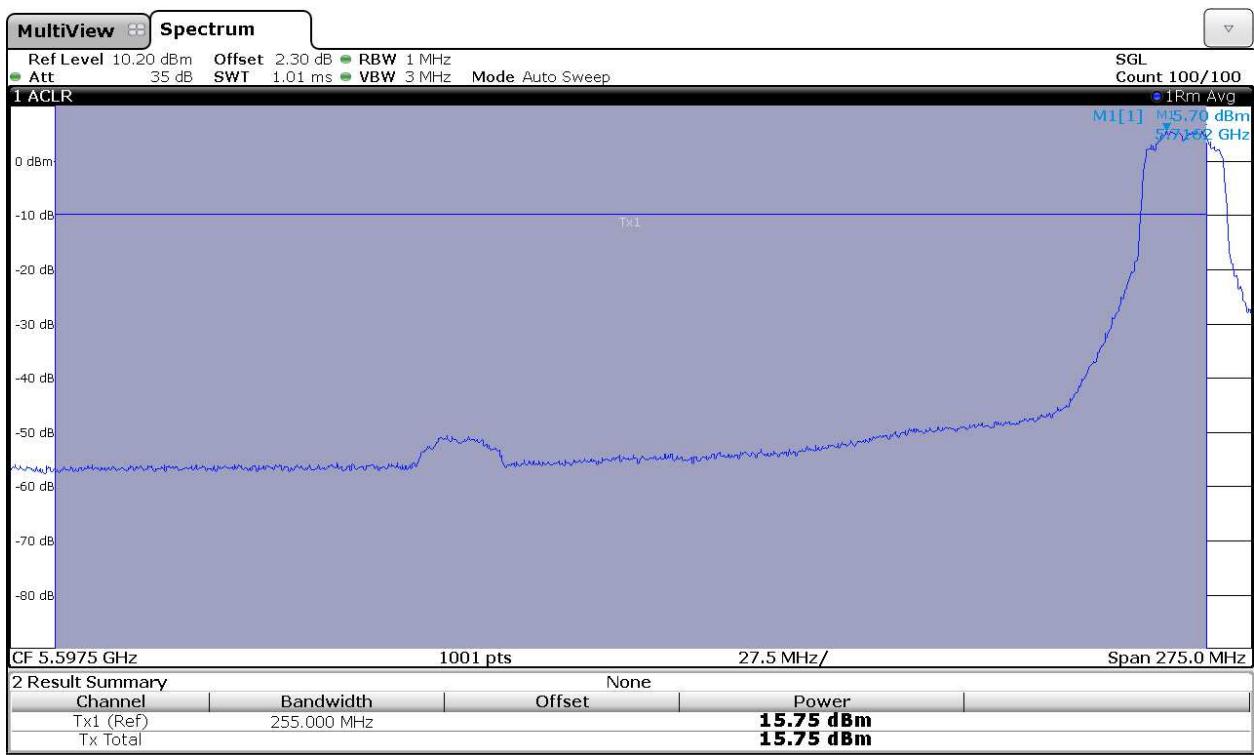


Power and PPSD in sub-band UNII_4:

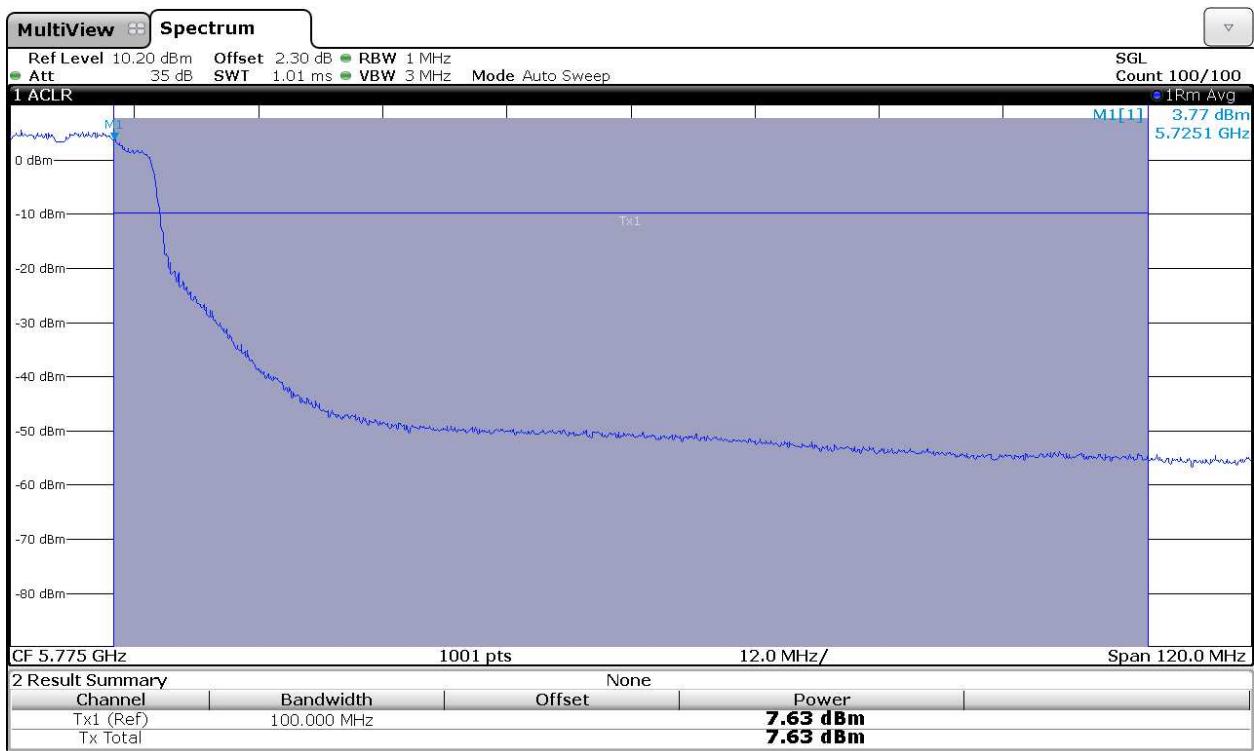


802.11 n20 MHz and 802.11 ac 20 MHz modes (except channel 144) MIMO CHAIN A+B


Lowest Channel. Chain A

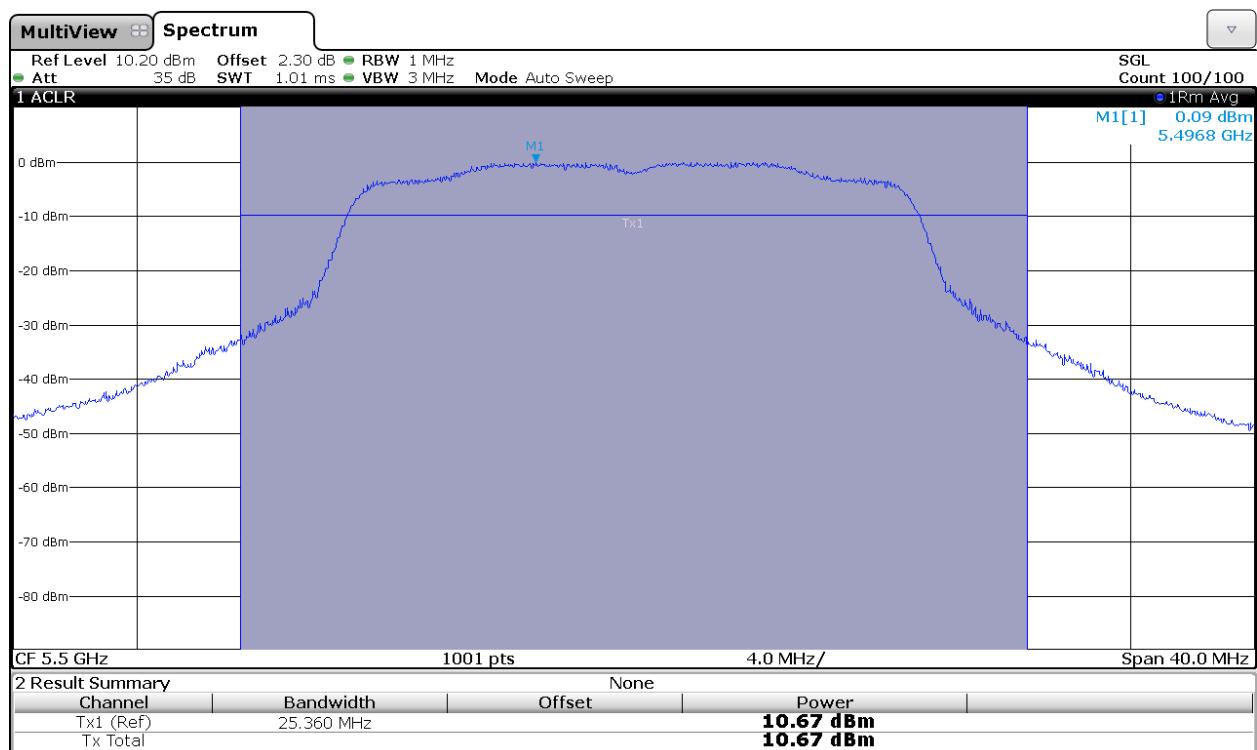


Lowest Channel. Chain B

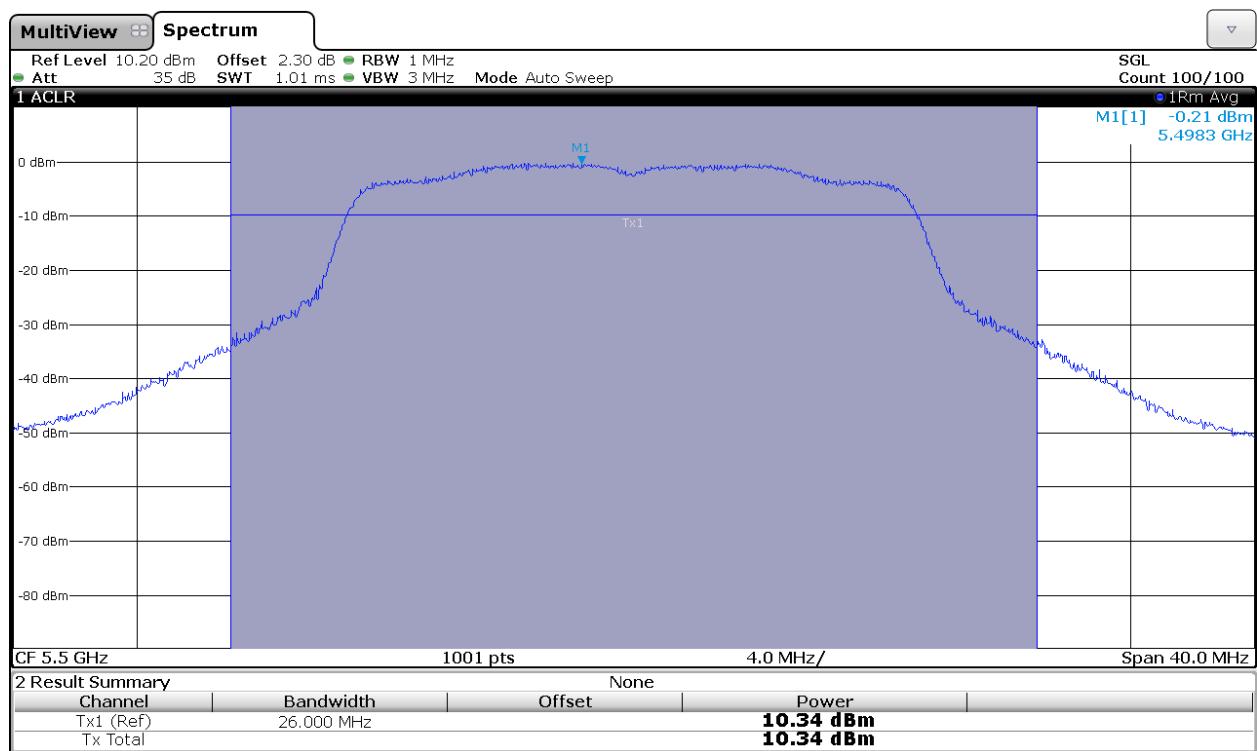


Middle Channel. Chain A

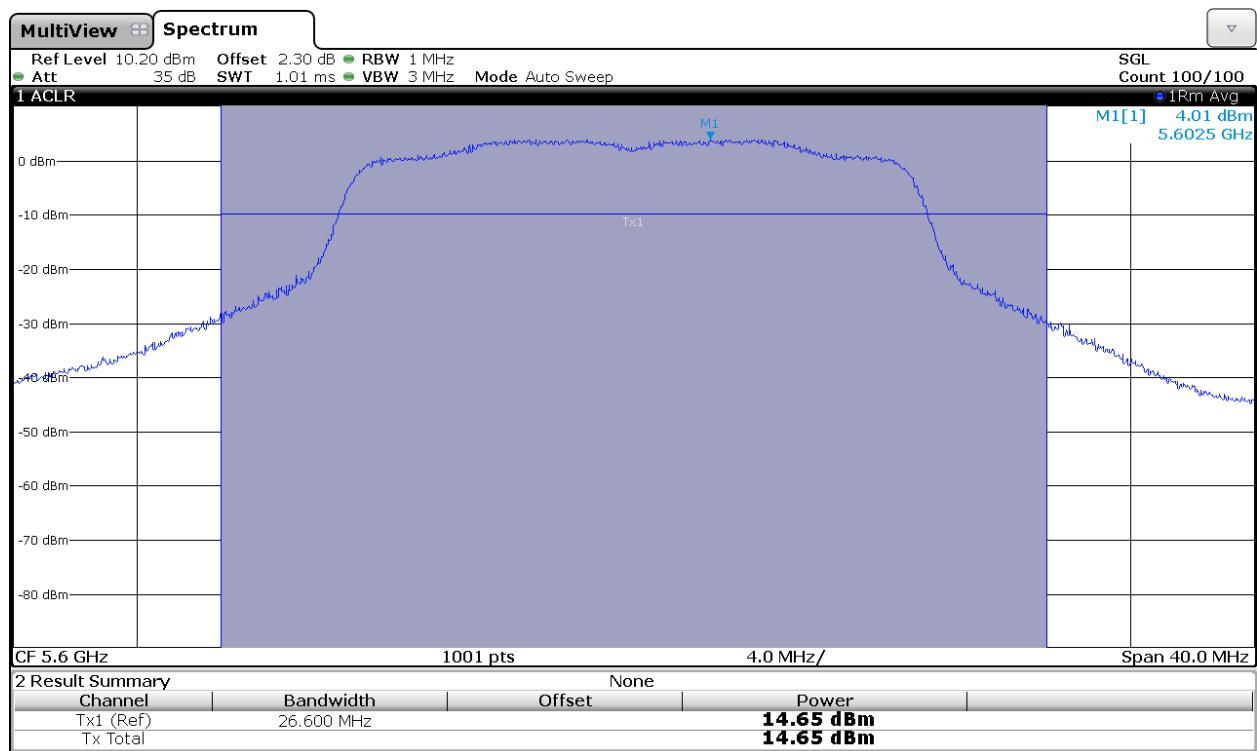


Middle Channel. Chain B

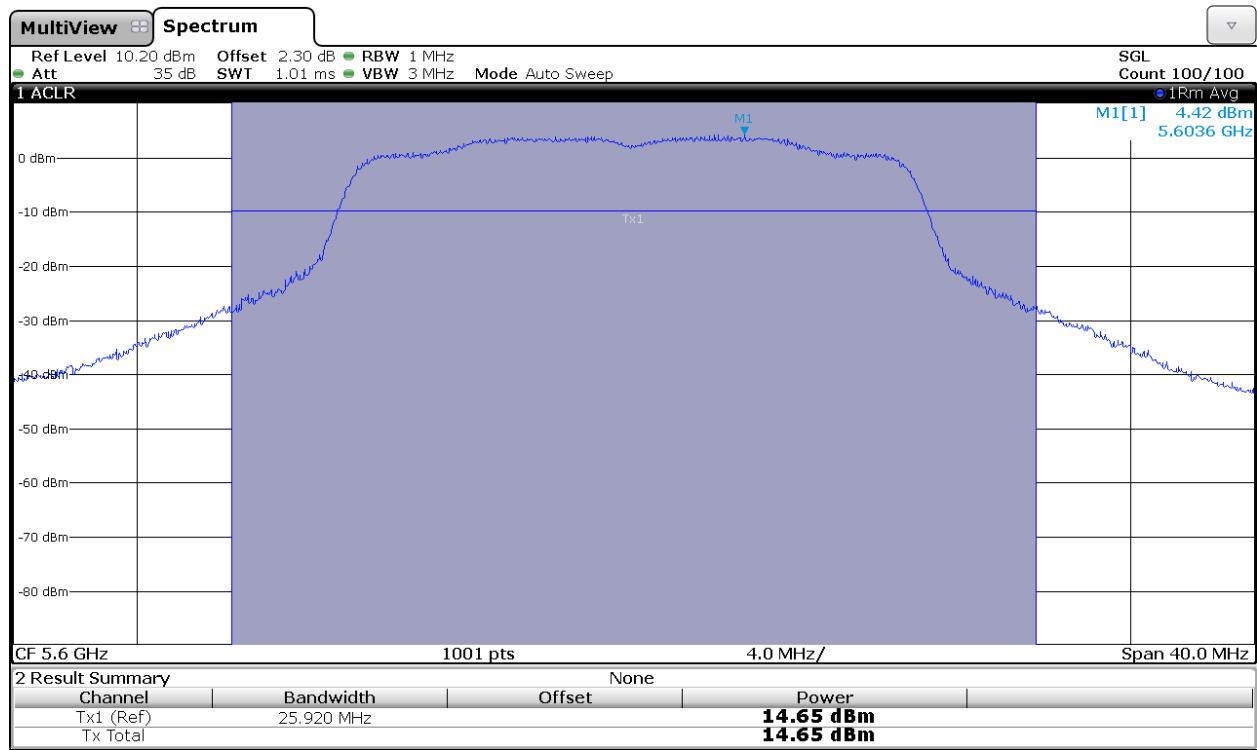

Highest Channel. Chain A

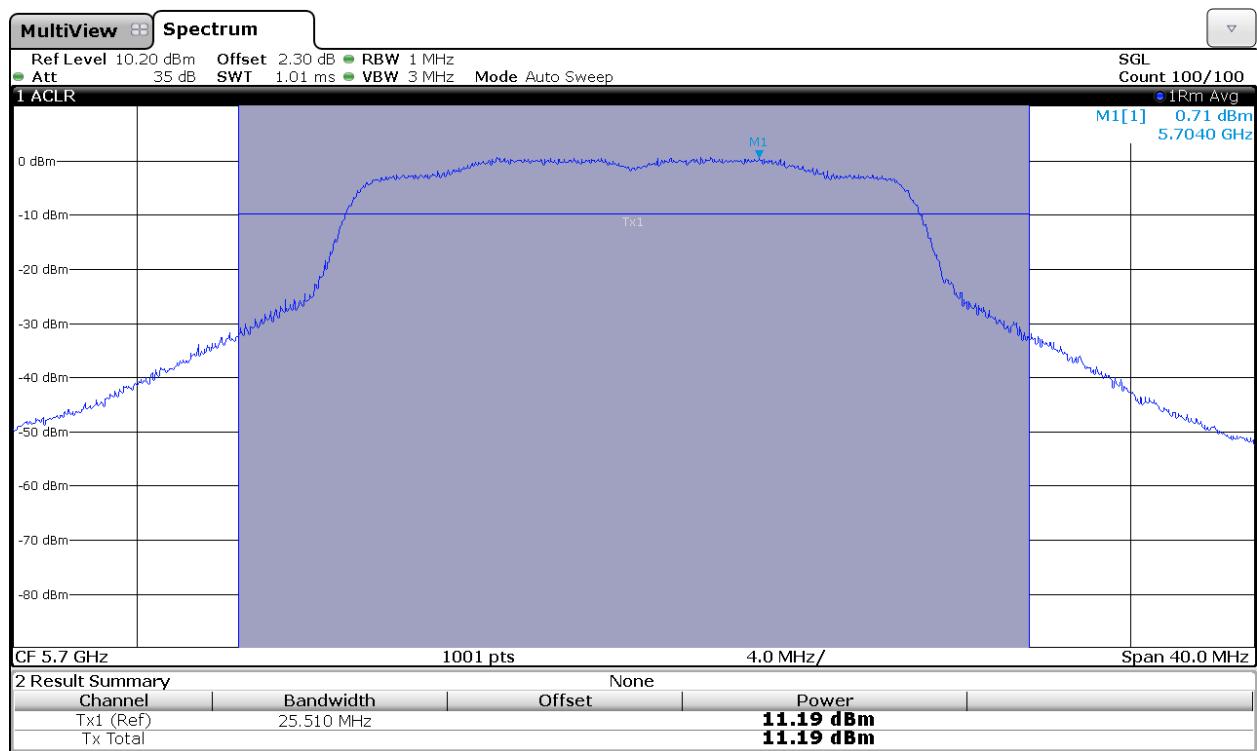


Highest Channel. Chain B

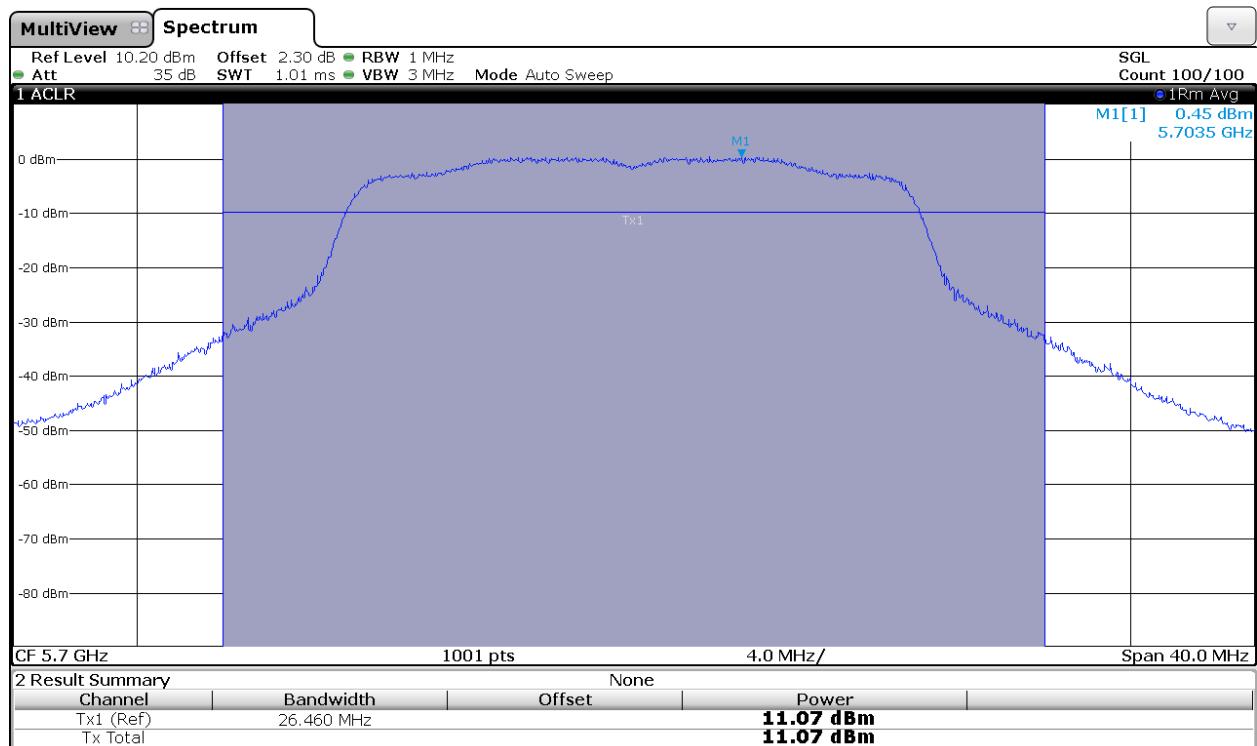


802.11 ac 20MHz : Channel 144


Power and PPSD in sub-band UNII_3: Chain A

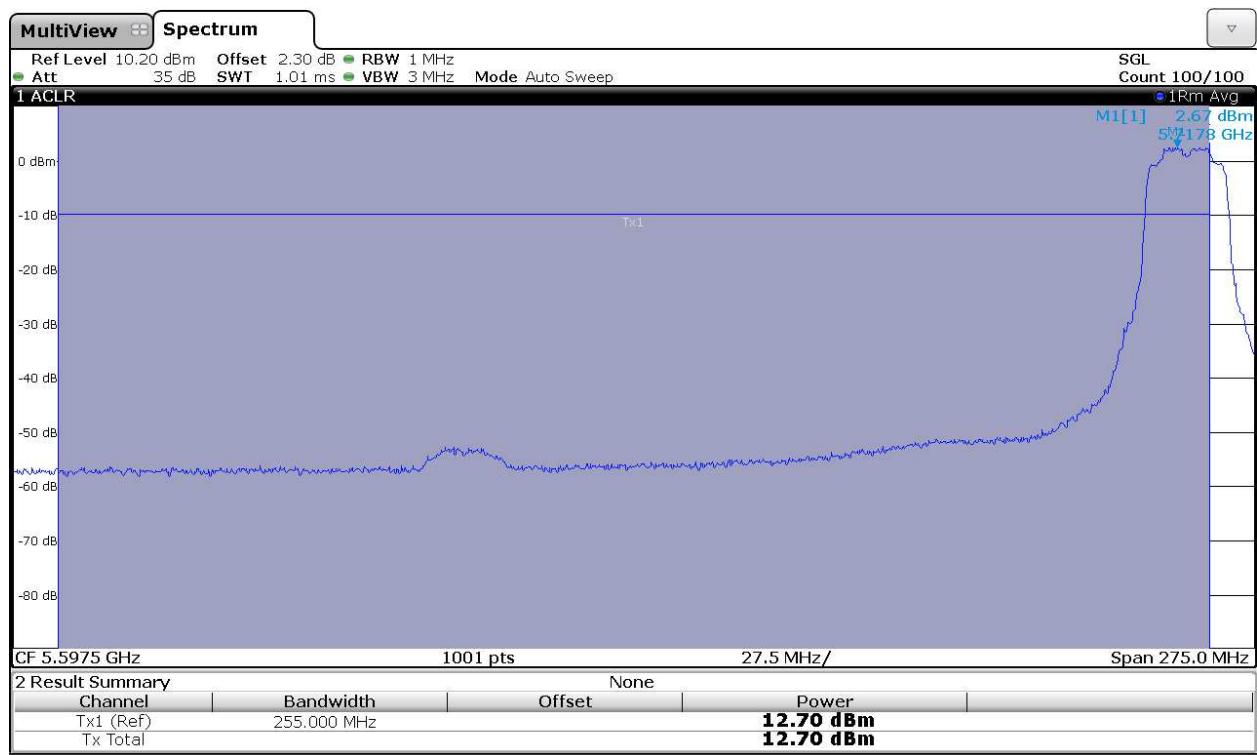


Power and PPSD in sub-band UNII_4: Chain A

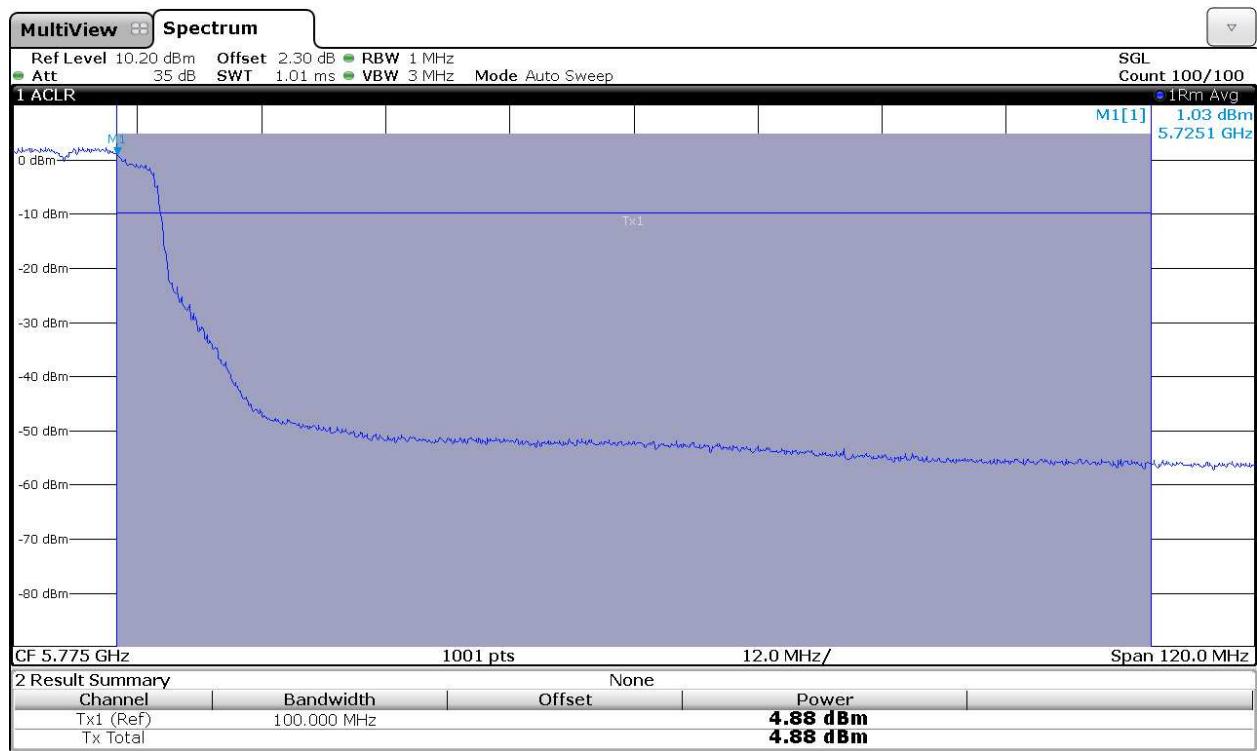

Power and PPSD in sub-band UNII_3: Chain B

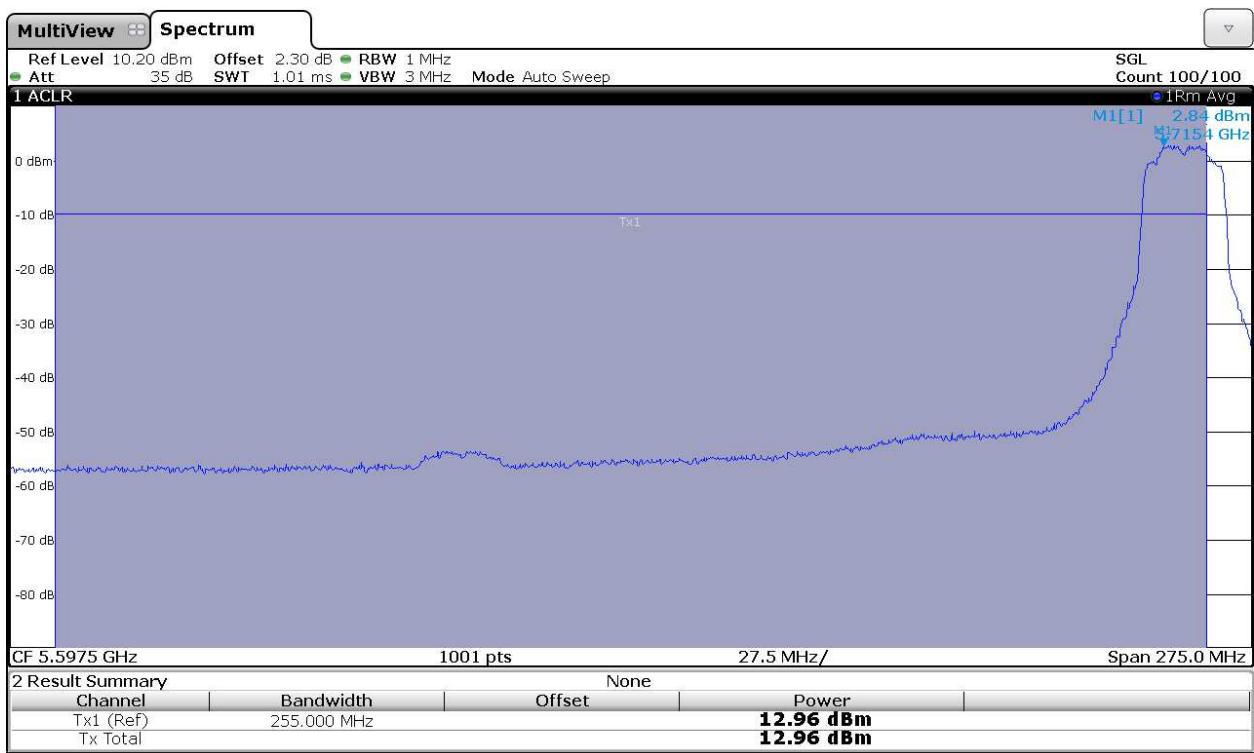


Power and PPSD in sub-band UNII_4: Chain B

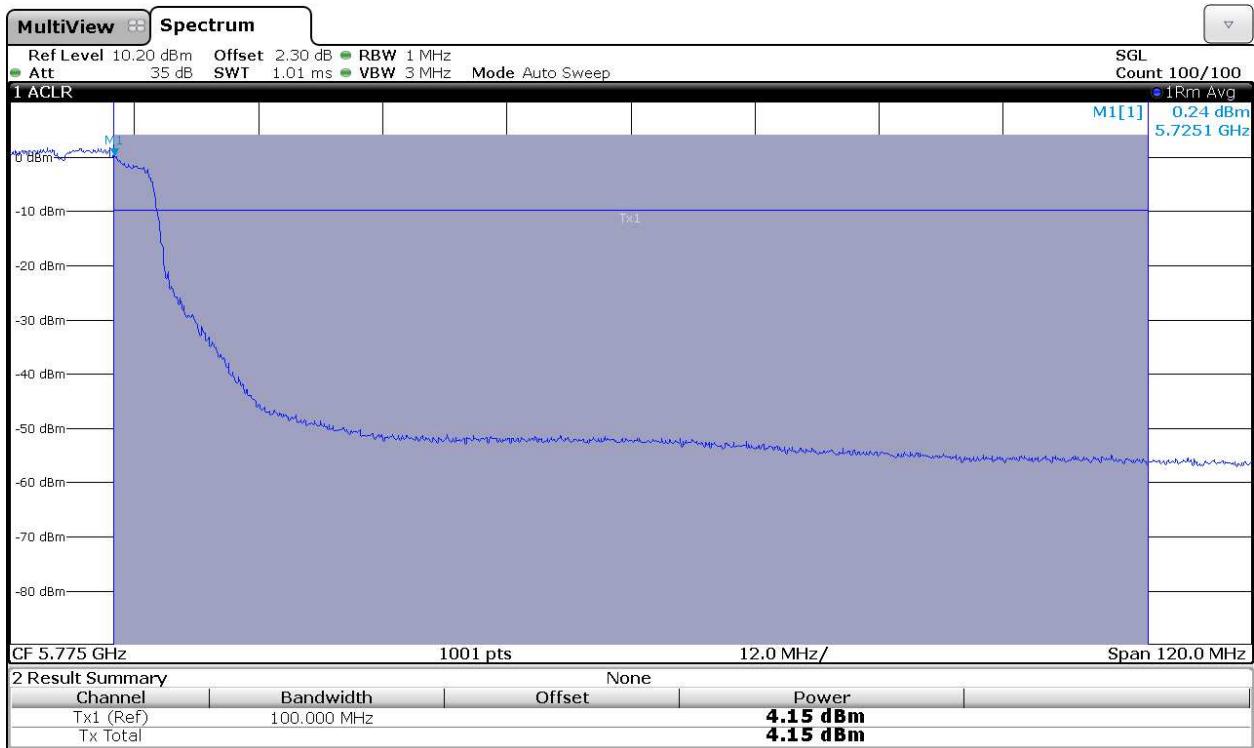


802.11 n40 MHz modes (except channel 142) CHAIN A


Lowest Channel

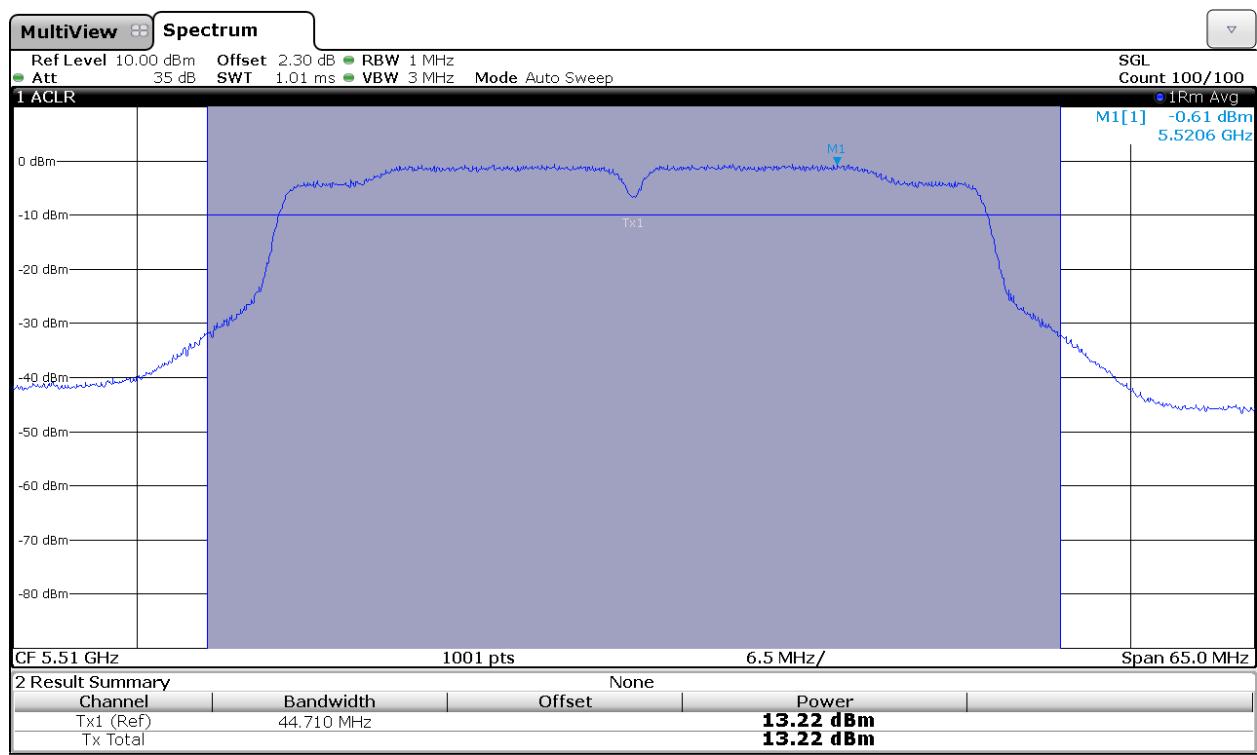

Middle Channel

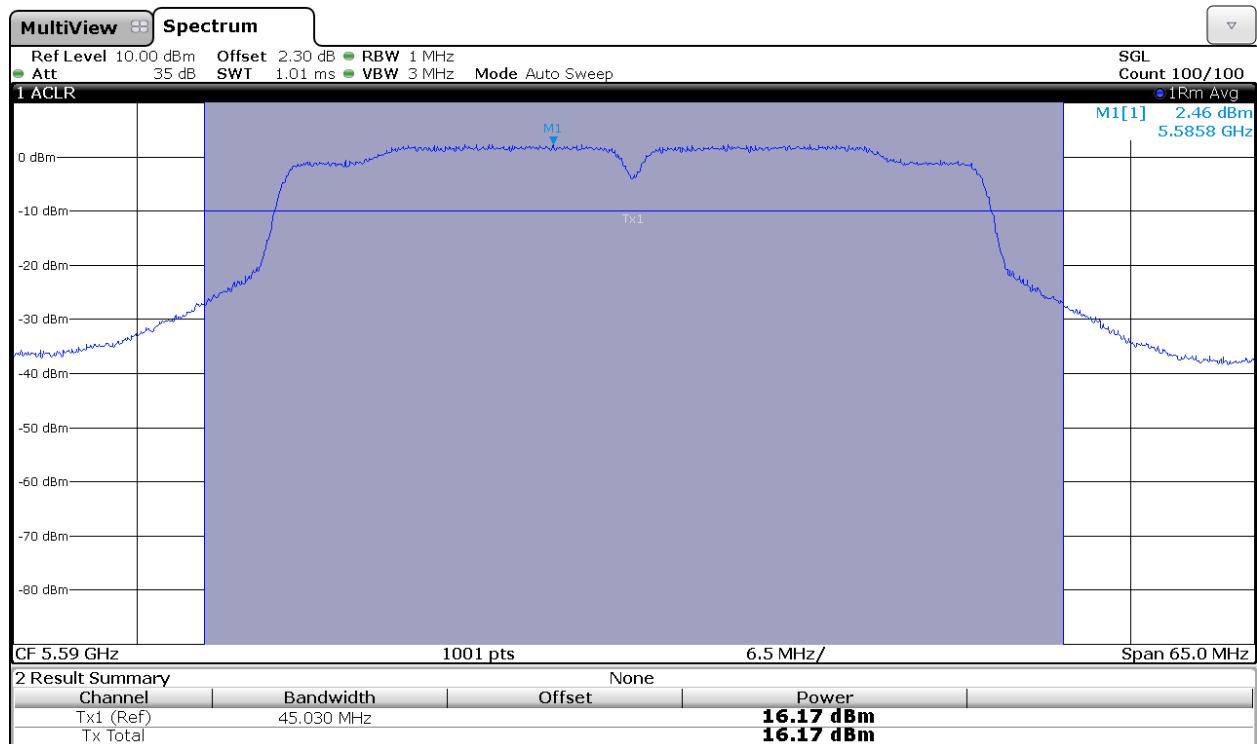


Highest Channel

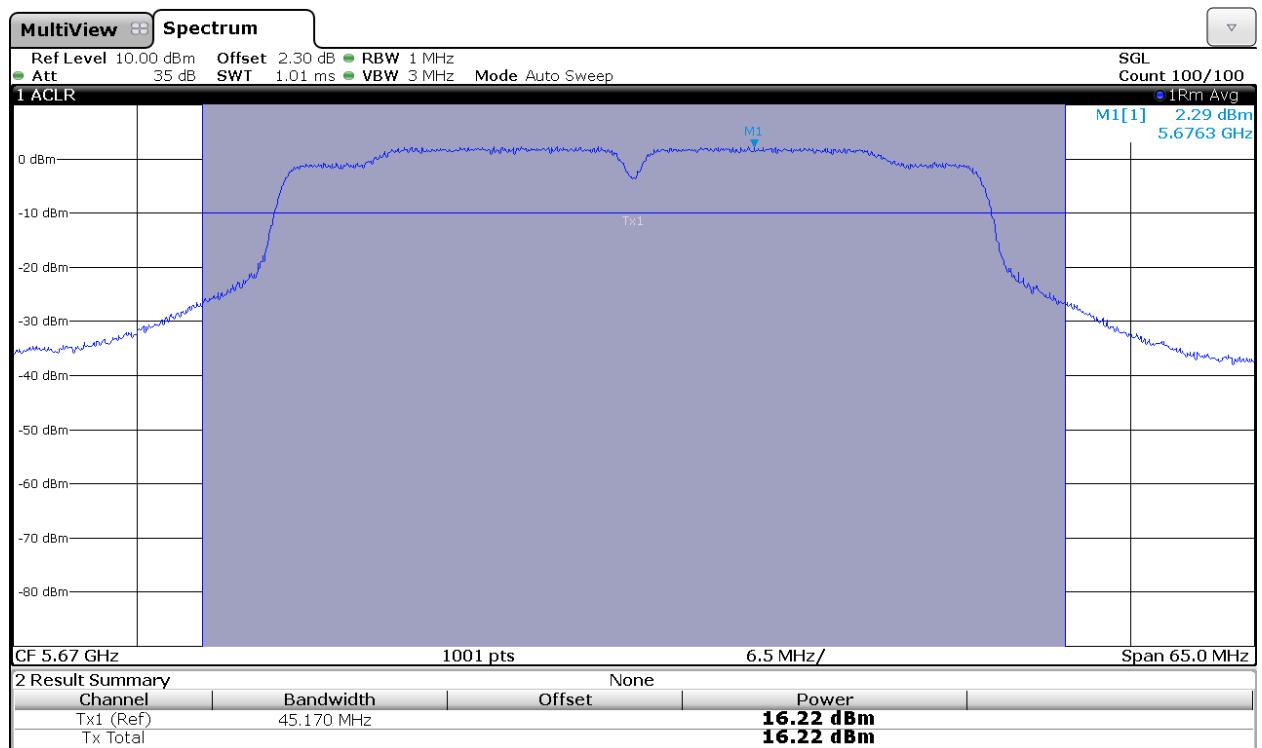


802.11 ac 40MHz : Channel 142

Power and PPSD in sub-band UNII_3:

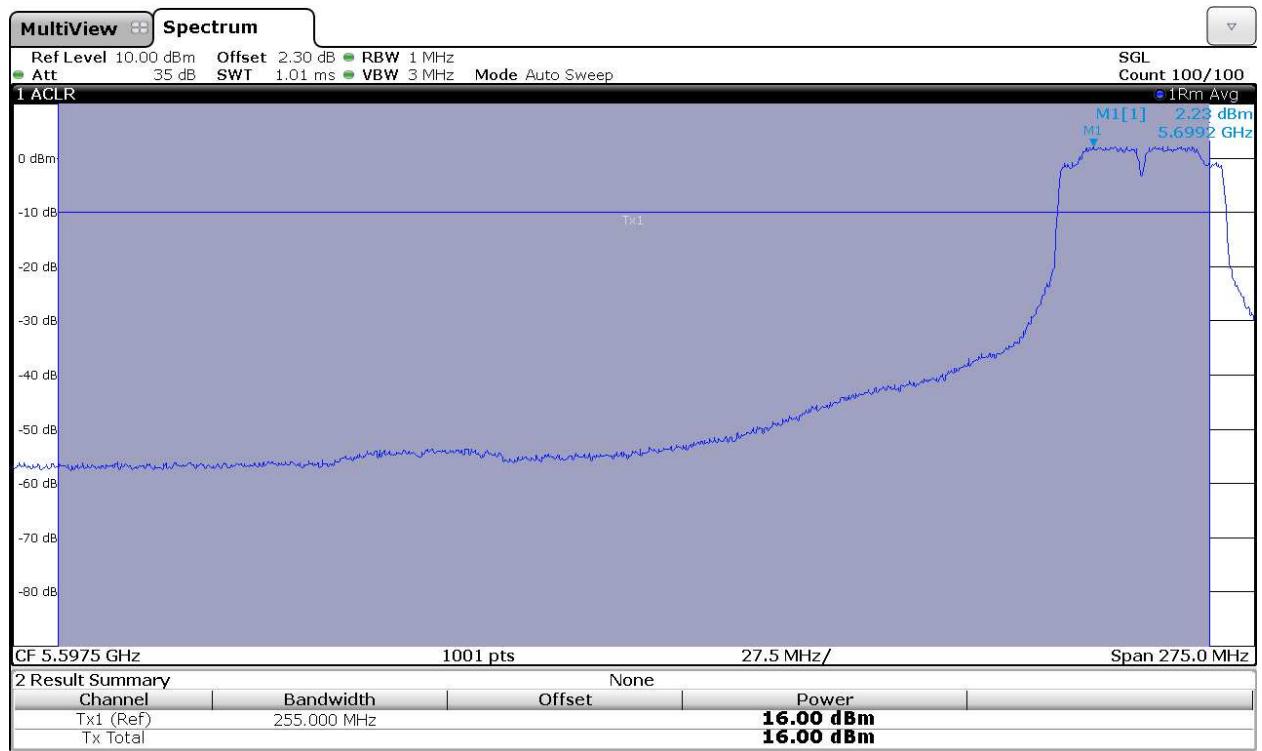


Power and PPSD in sub-band UNII_4:

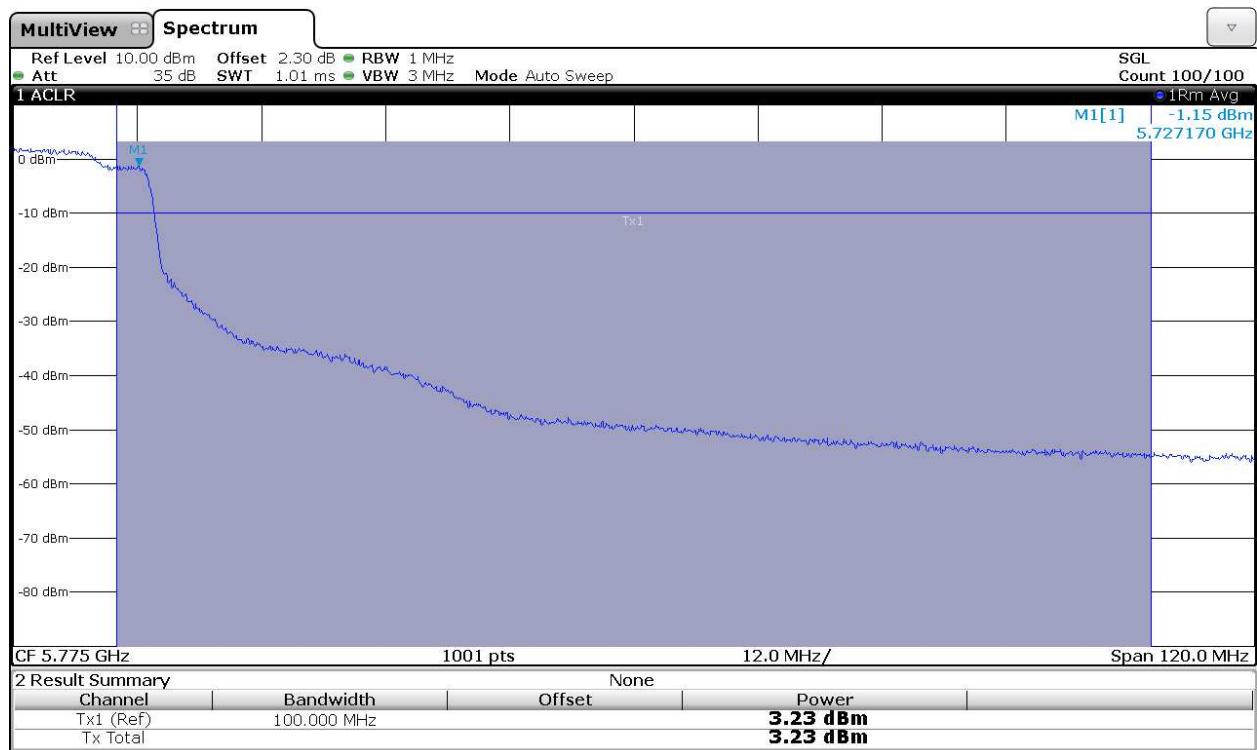


802.11 n40 MHz modes (except channel 142) CHAIN B


Lowest Channel

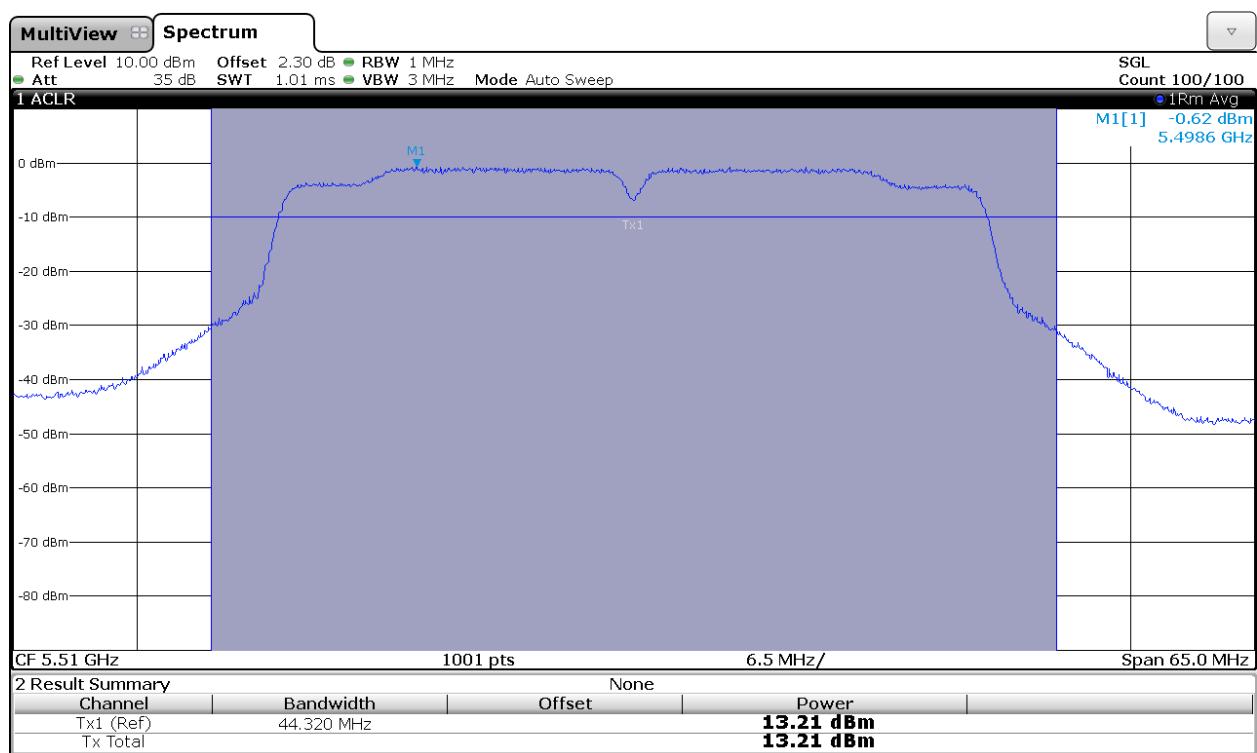

Middle Channel

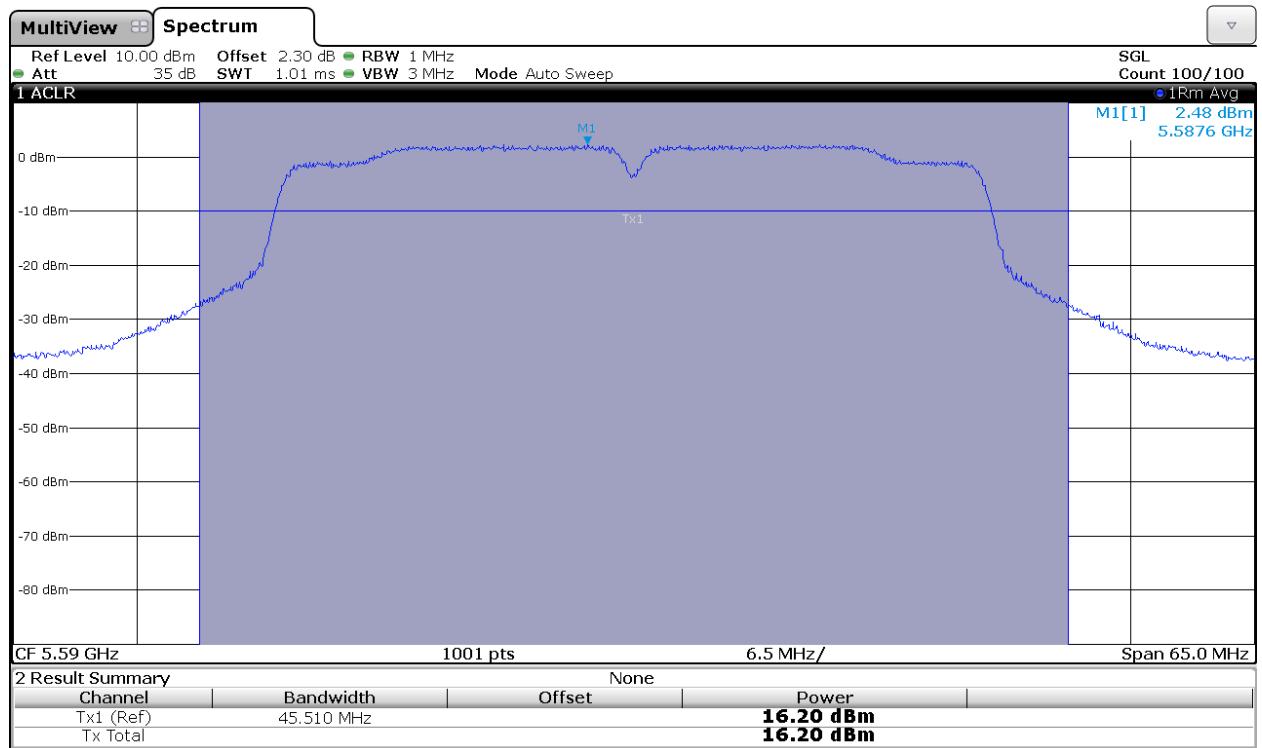


Highest Channel

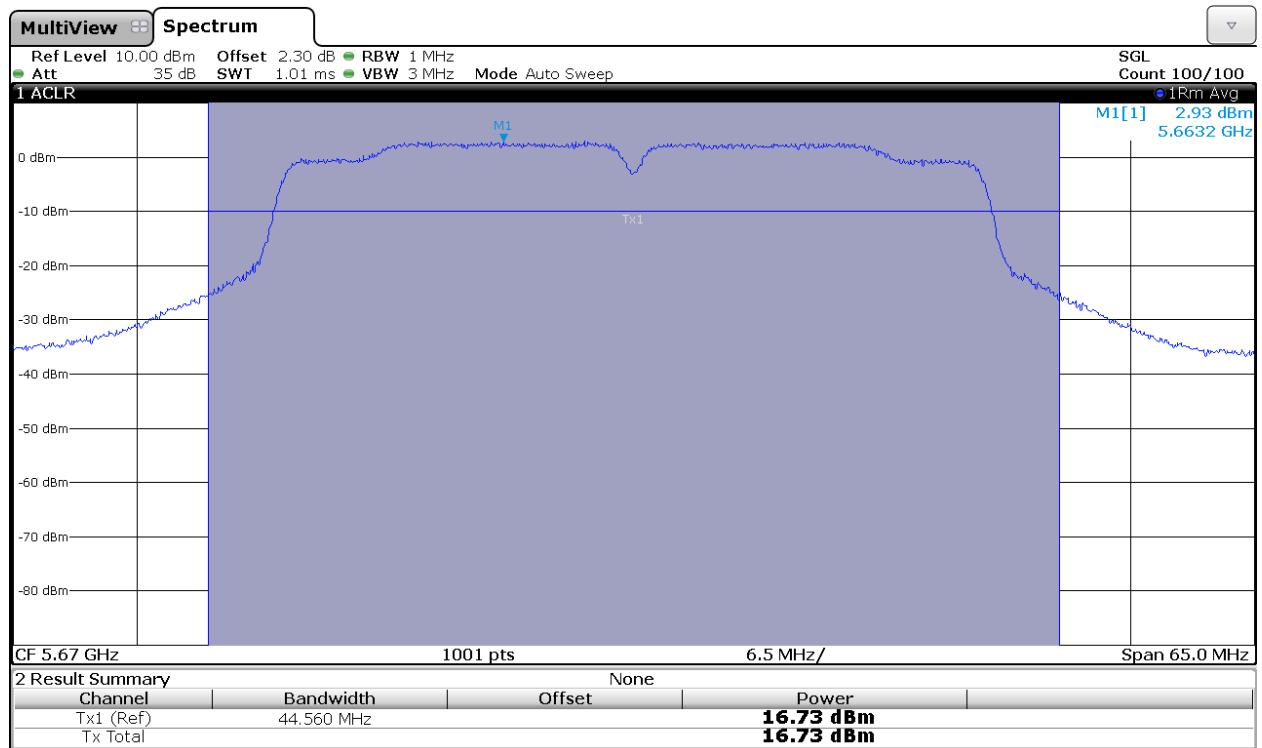


802.11 ac 40MHz : Channel 142

Power and PPSD in sub-band UNII_3:

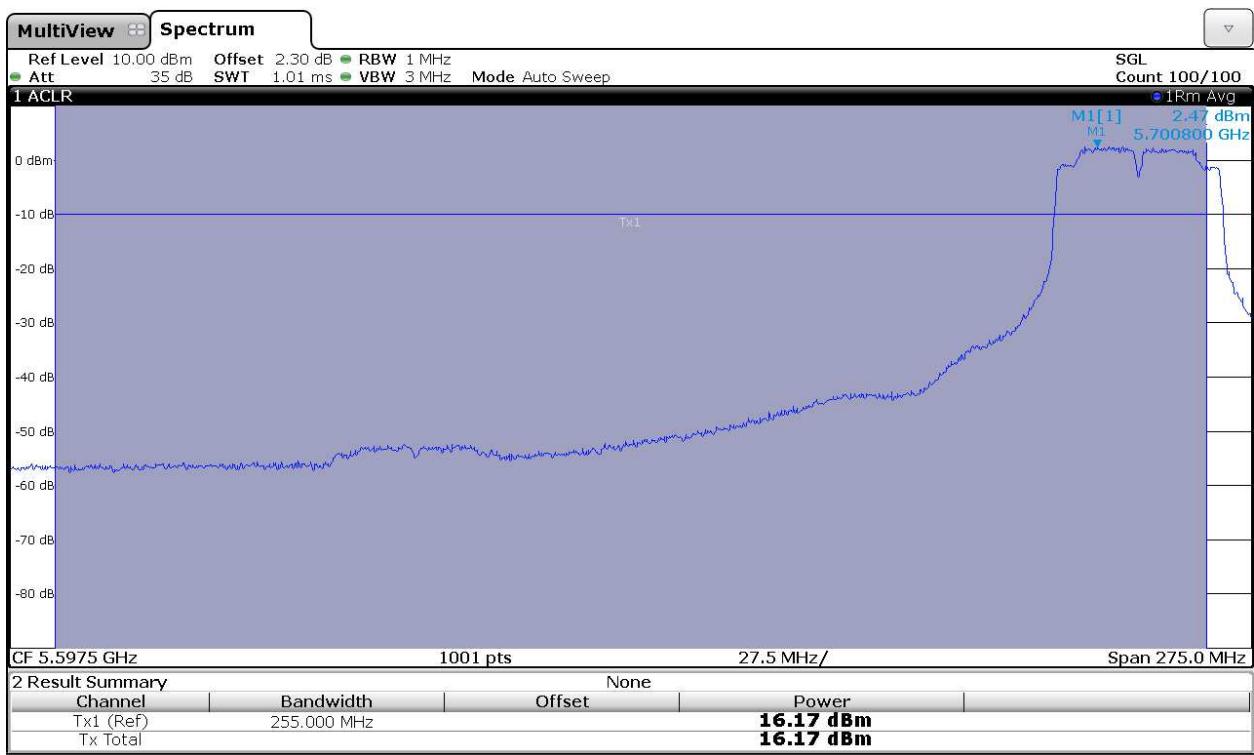


Power and PPSD in sub-band UNII_4:

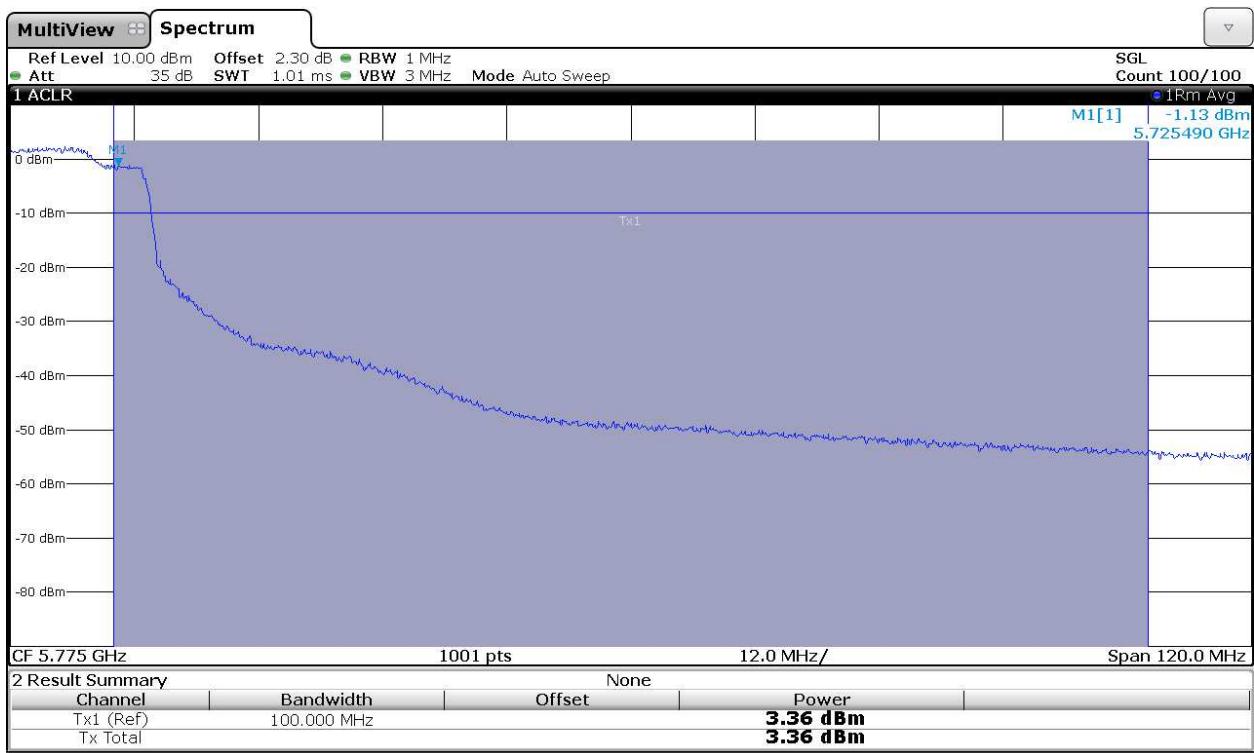


802.11 n40 MHz modes (except channel 142) CHAIN A+B


Lowest Channel. Chain A

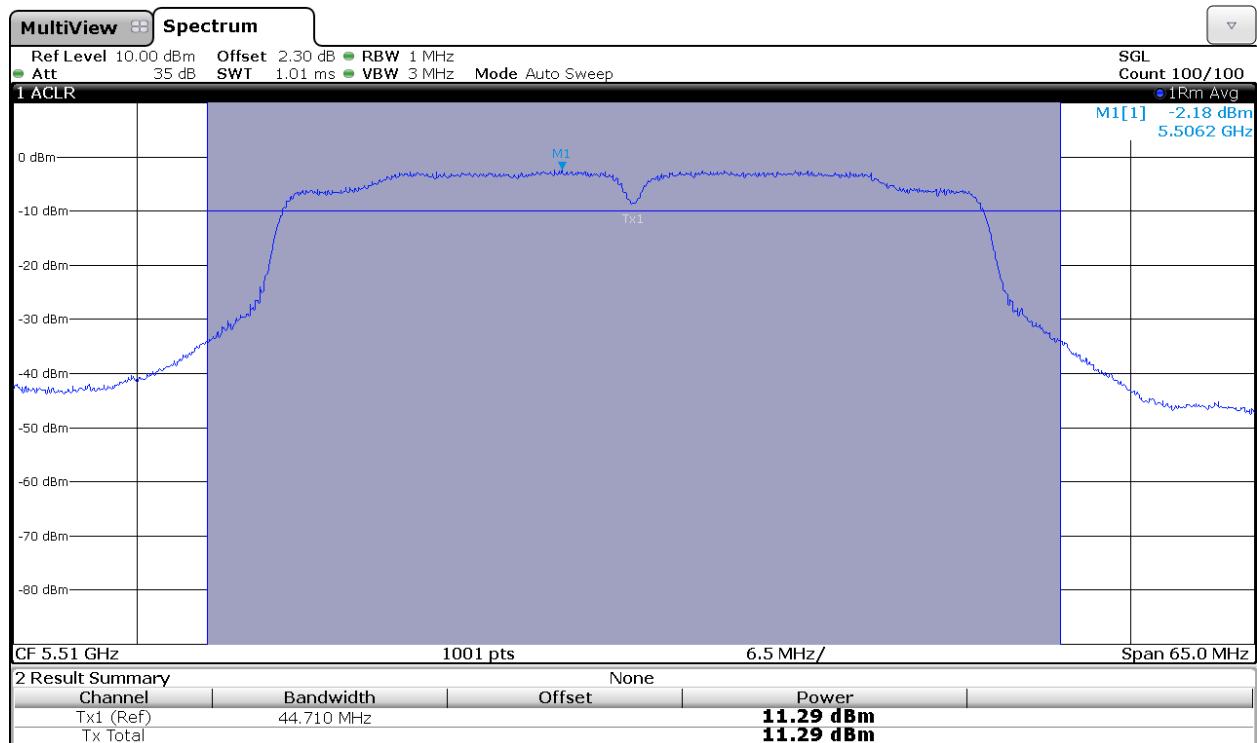


Lowest Channel. Chain B

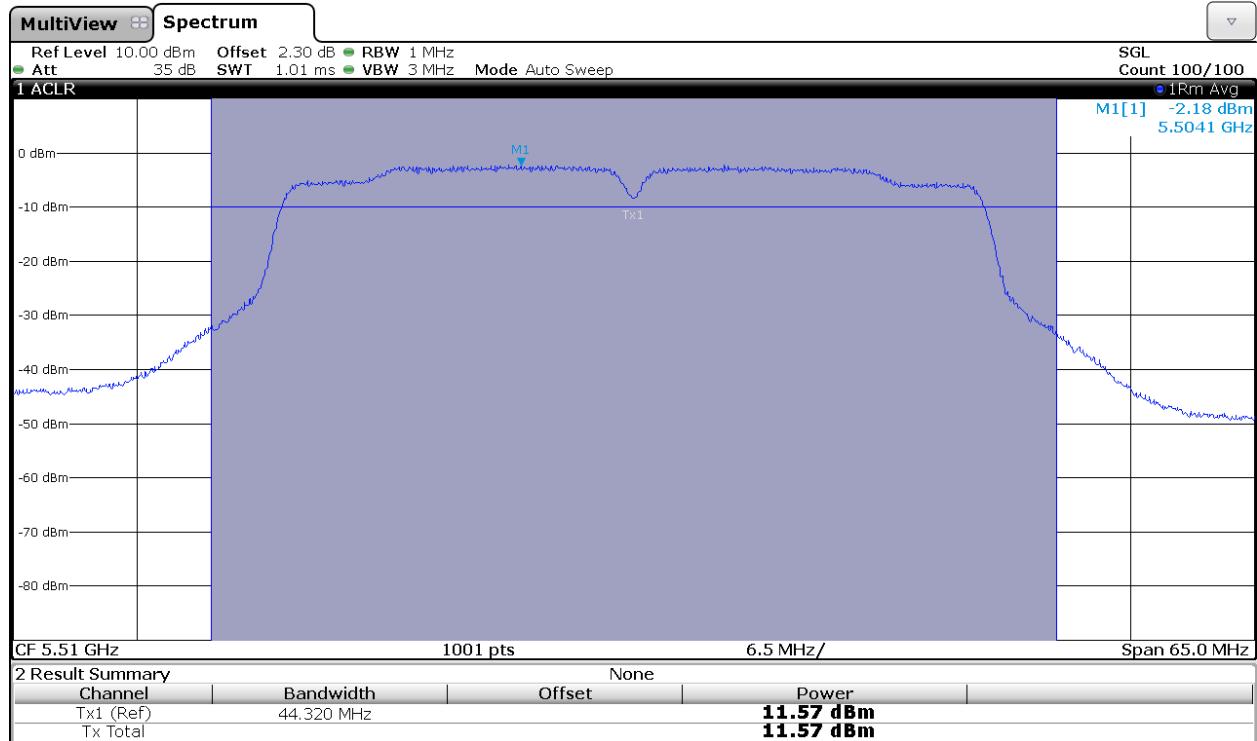


Middle Channel. Chain A

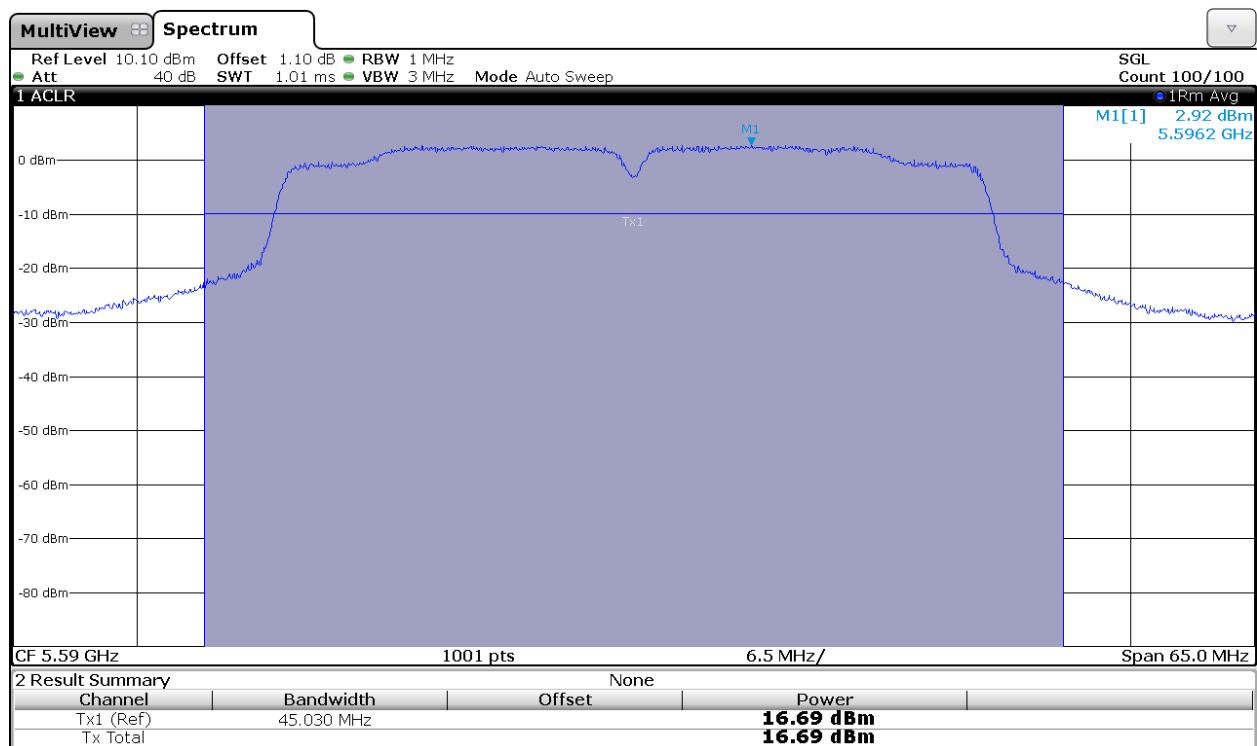


Middle Channel. Chain B

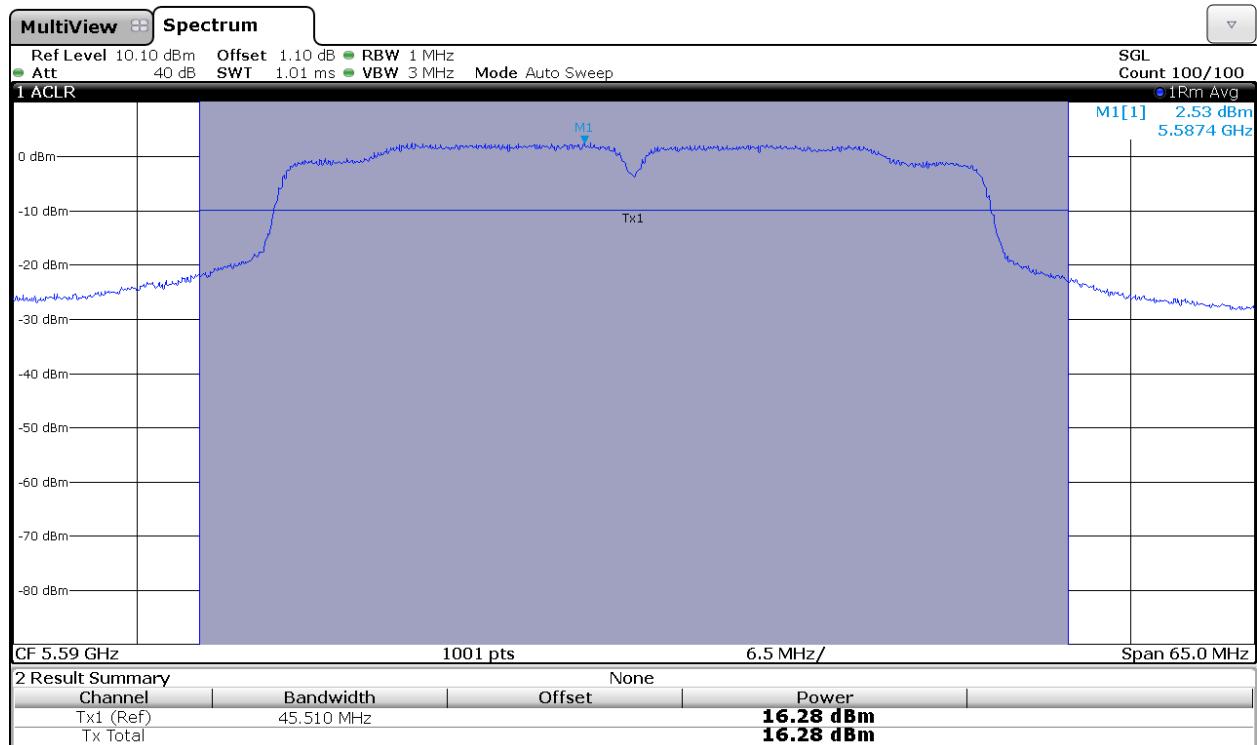

Highest Channel. Chain A

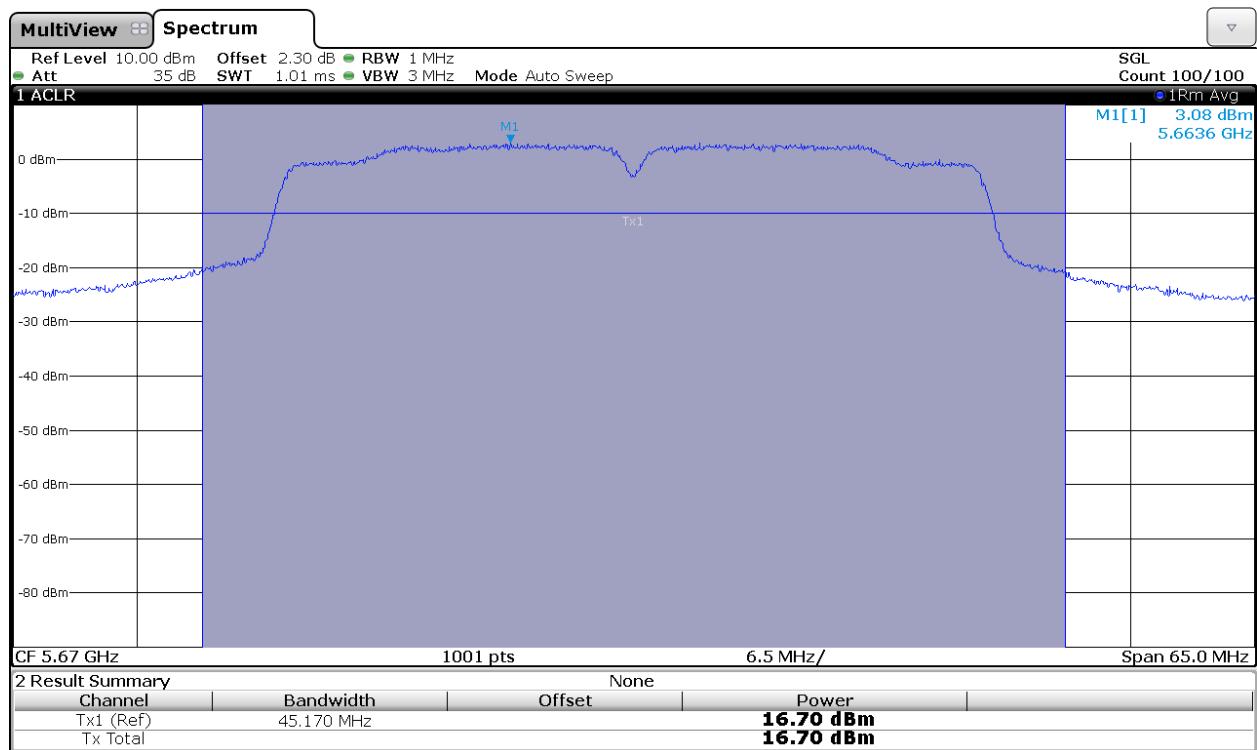


Highest Channel. Chain B

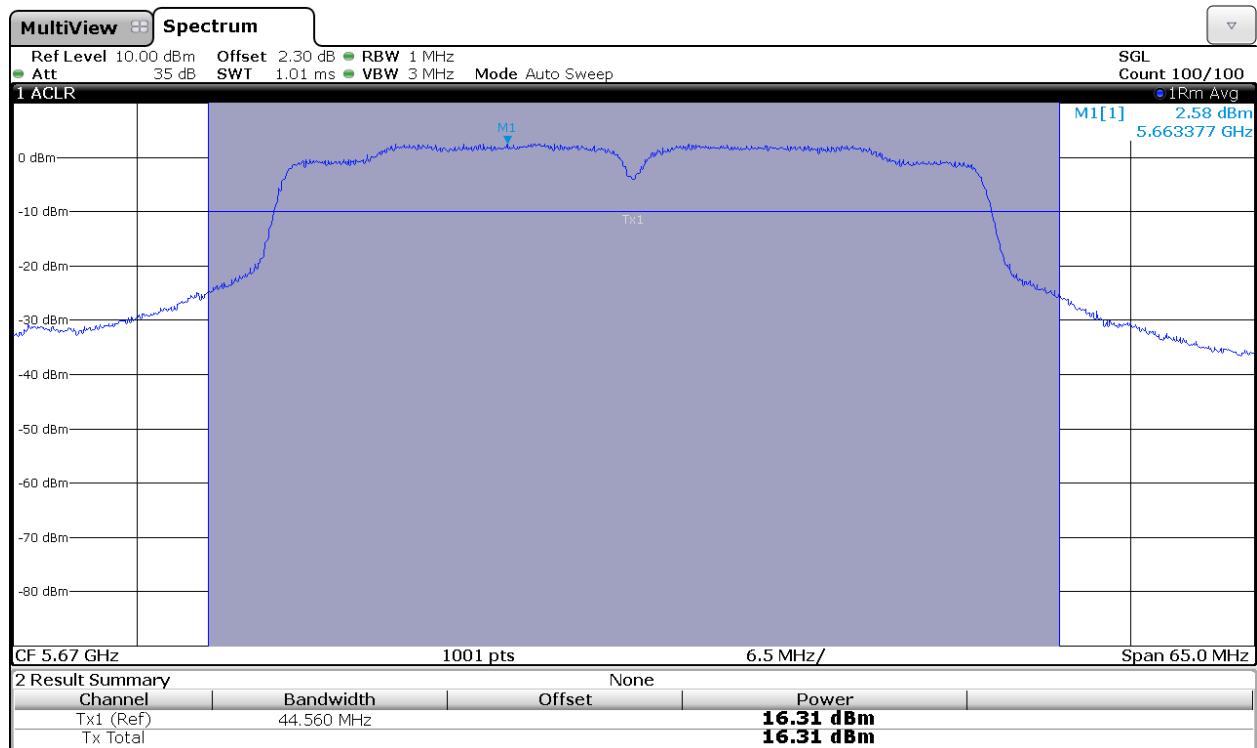


802.11 ac40MHz : Channel 142


Power and PPSD in sub-band UNII_3: Chain A

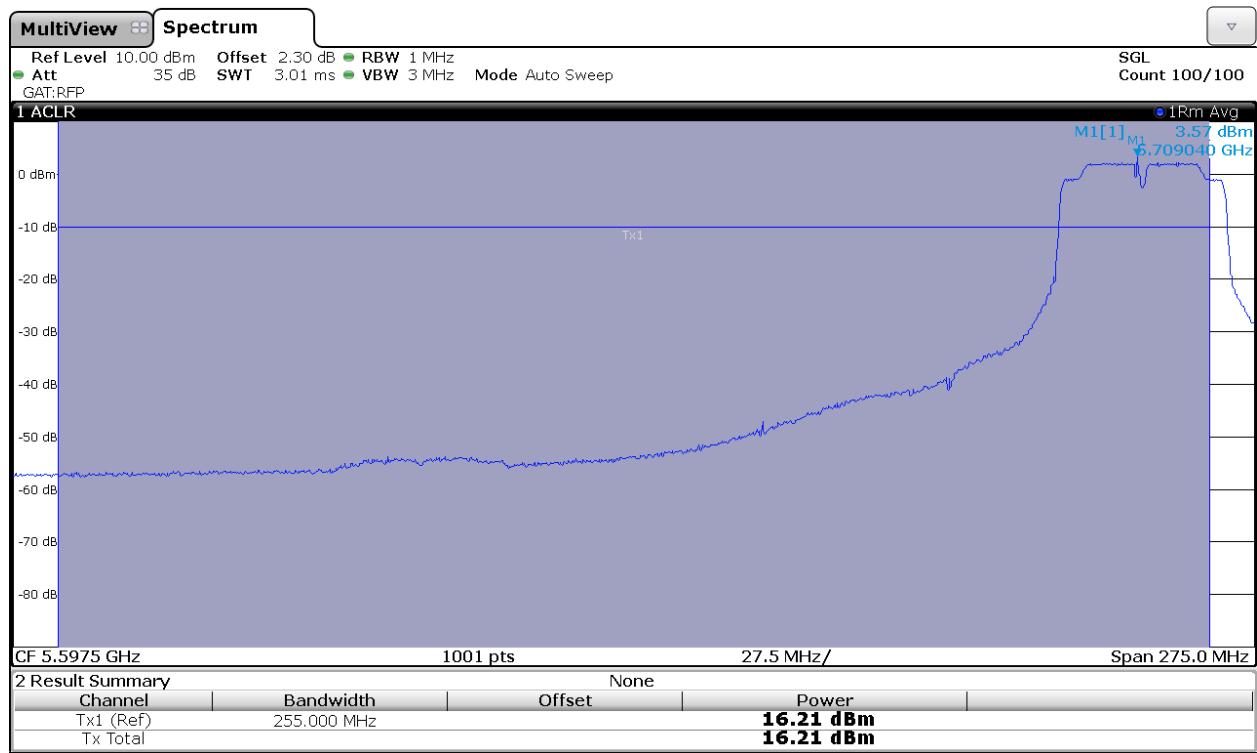


Power and PPSD in sub-band UNII_4: Chain A

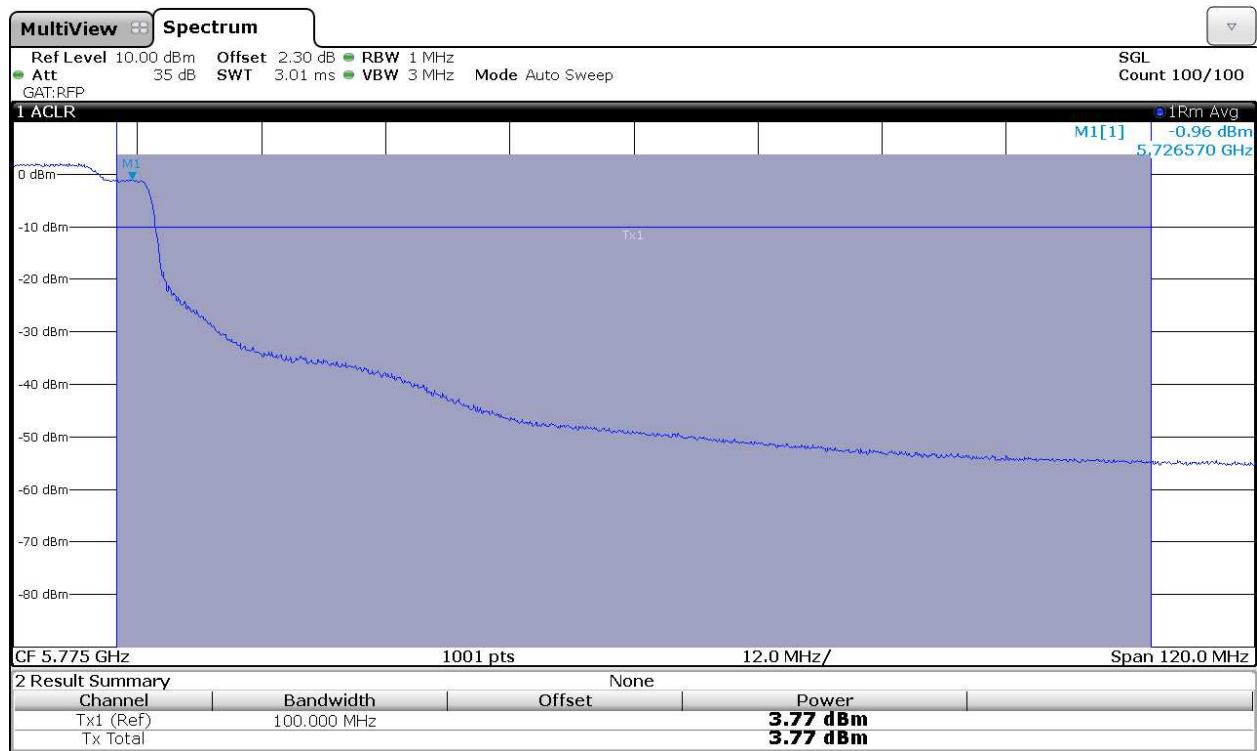

Power and PPSD in sub-band UNII_3: Chain B

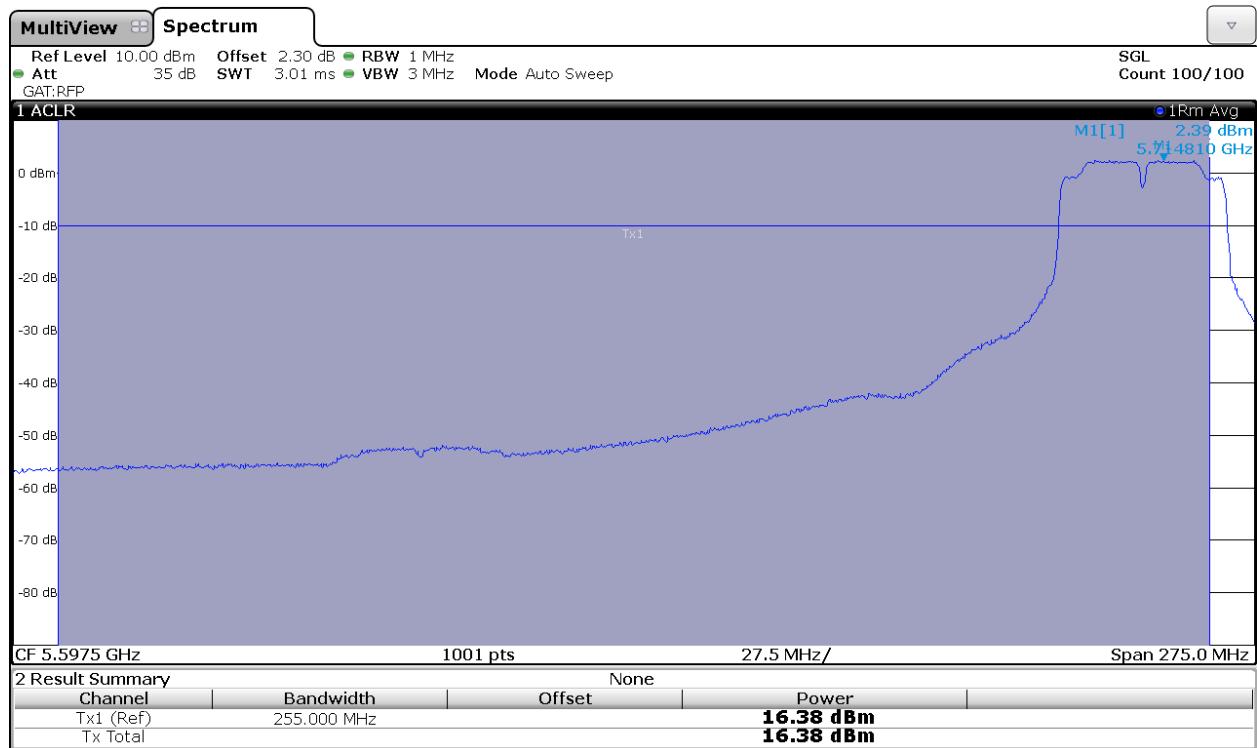

Power and PPSD in sub-band UNII_4: Chain B

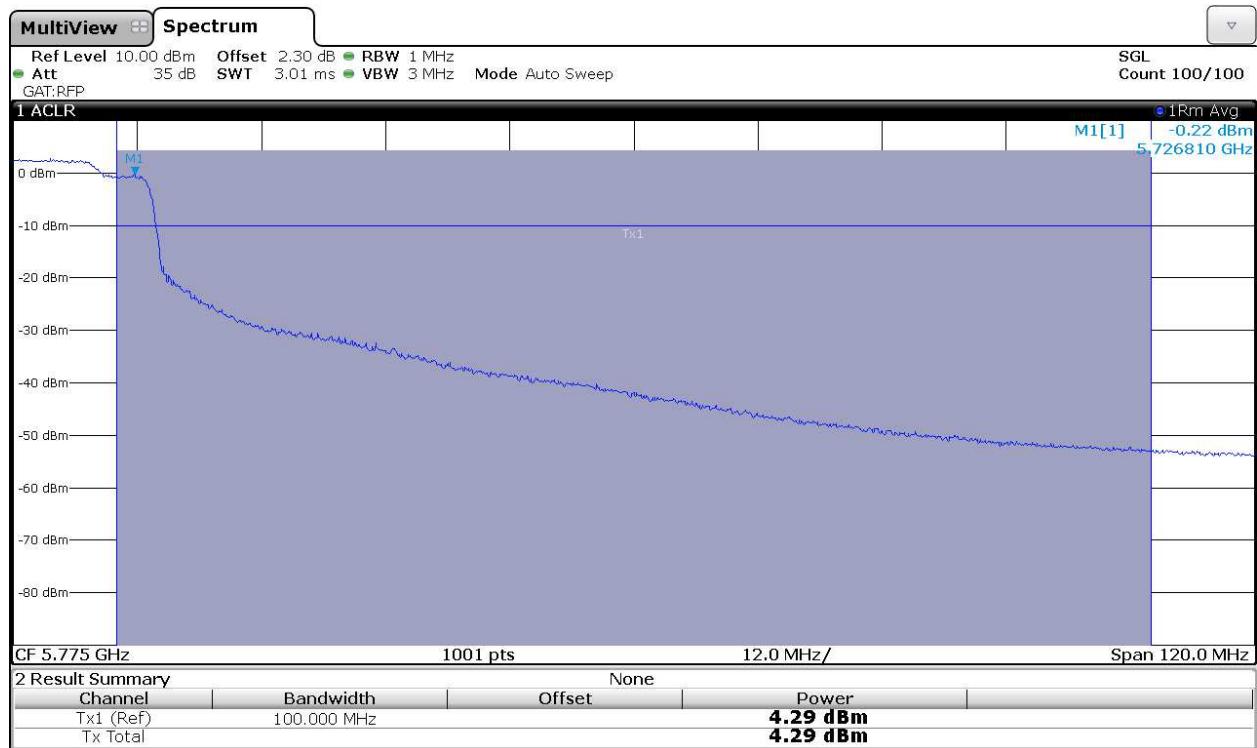


802.11 ac80 MHz modes (except channel 138) CHAIN A

Lowest Channel




Middle Channel

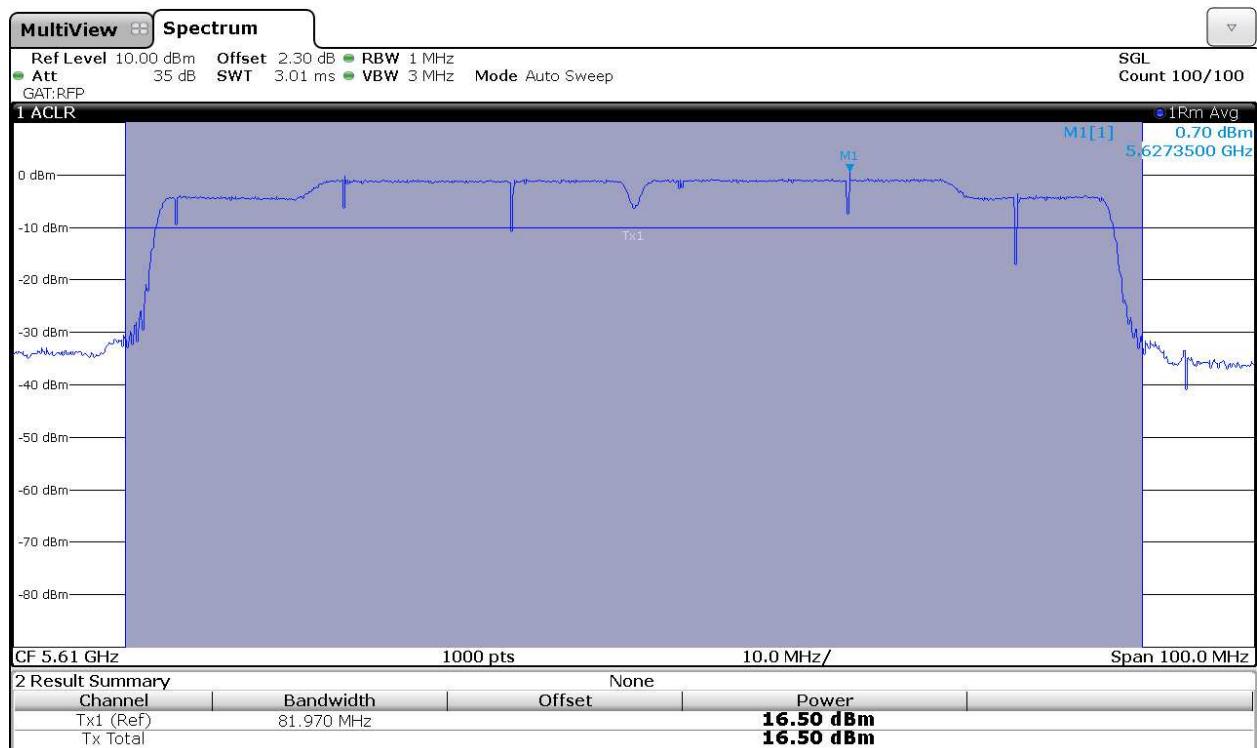


802.11 ac80MHz : Channel 138

Power and PPSD in sub-band UNII_3:

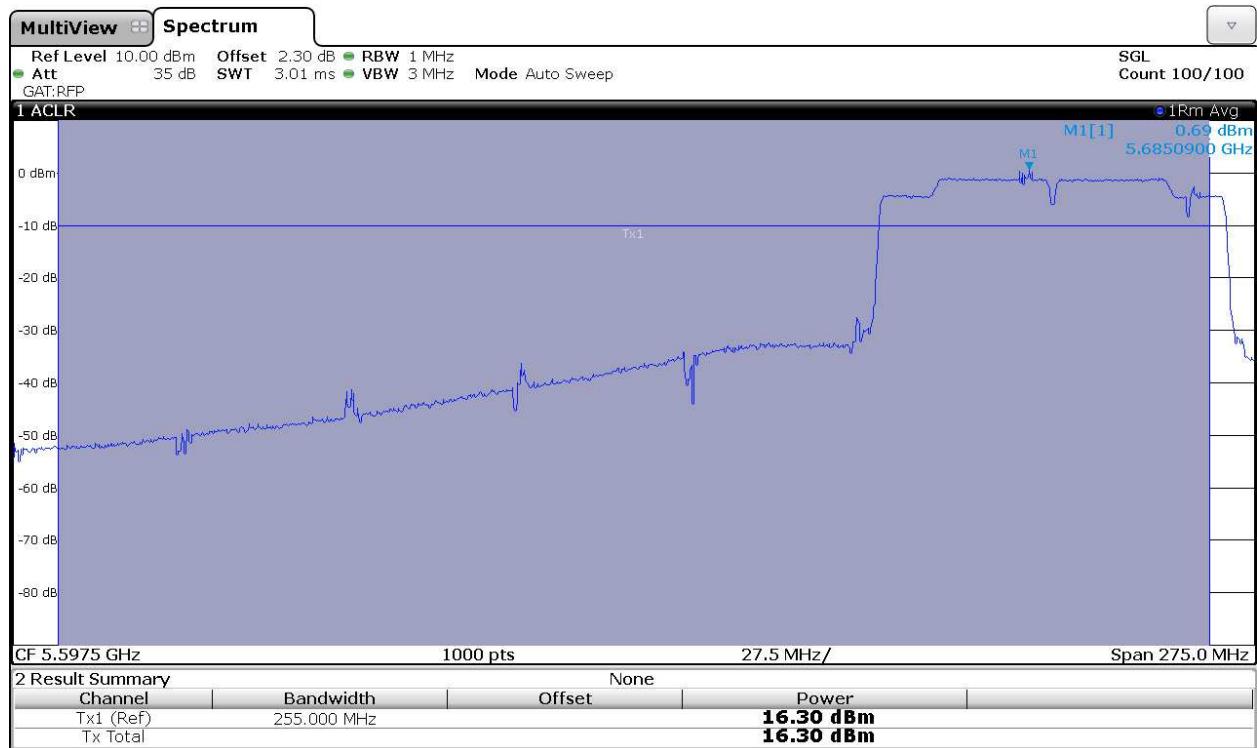


Power and PPSD in sub-band UNII_4:

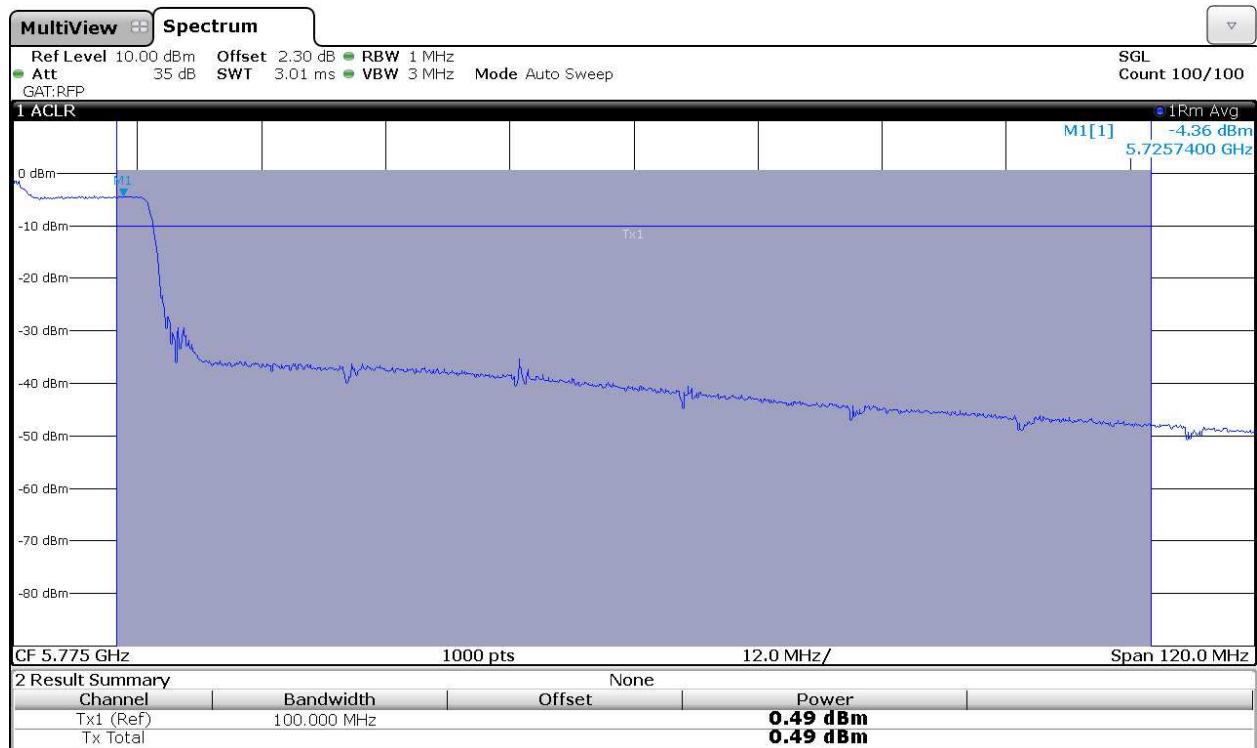


802.11 ac80 MHz modes (except channel 138) CHAIN B

Lowest Channel

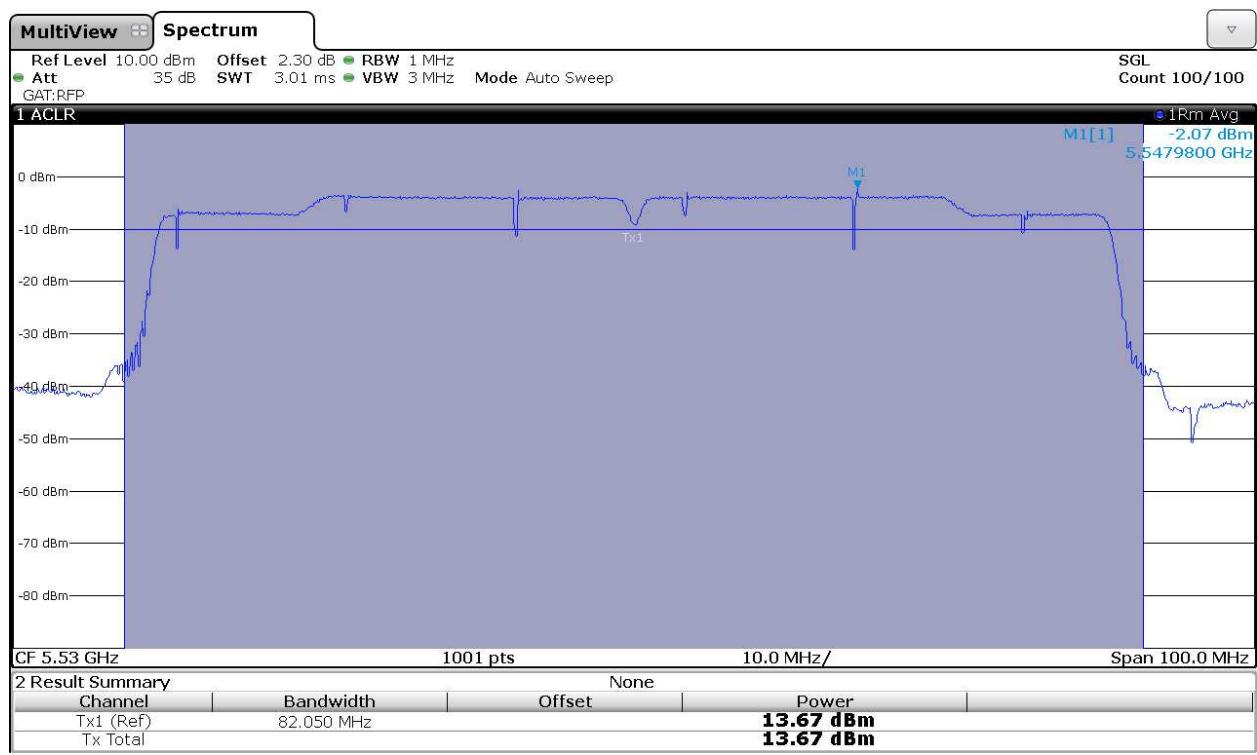


Middle Channel

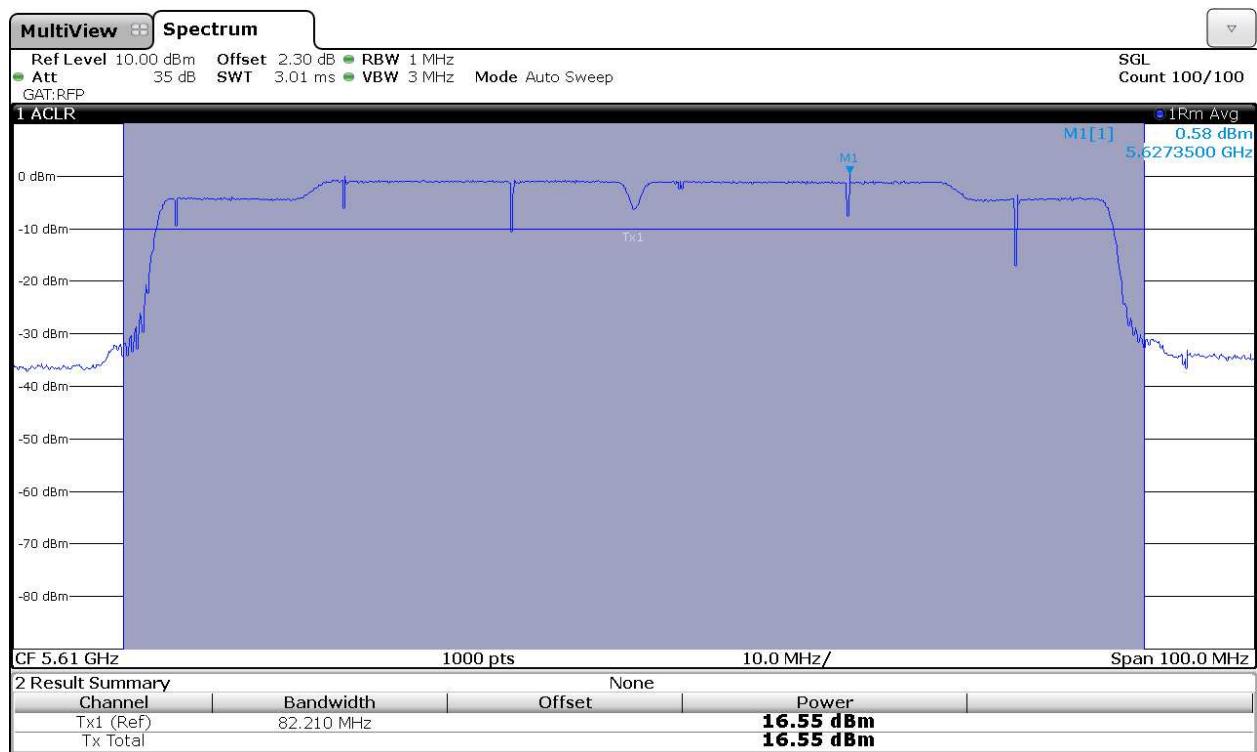


802.11 ac80MHz : Channel 138

Power and PPSD in sub-band UNII_3:

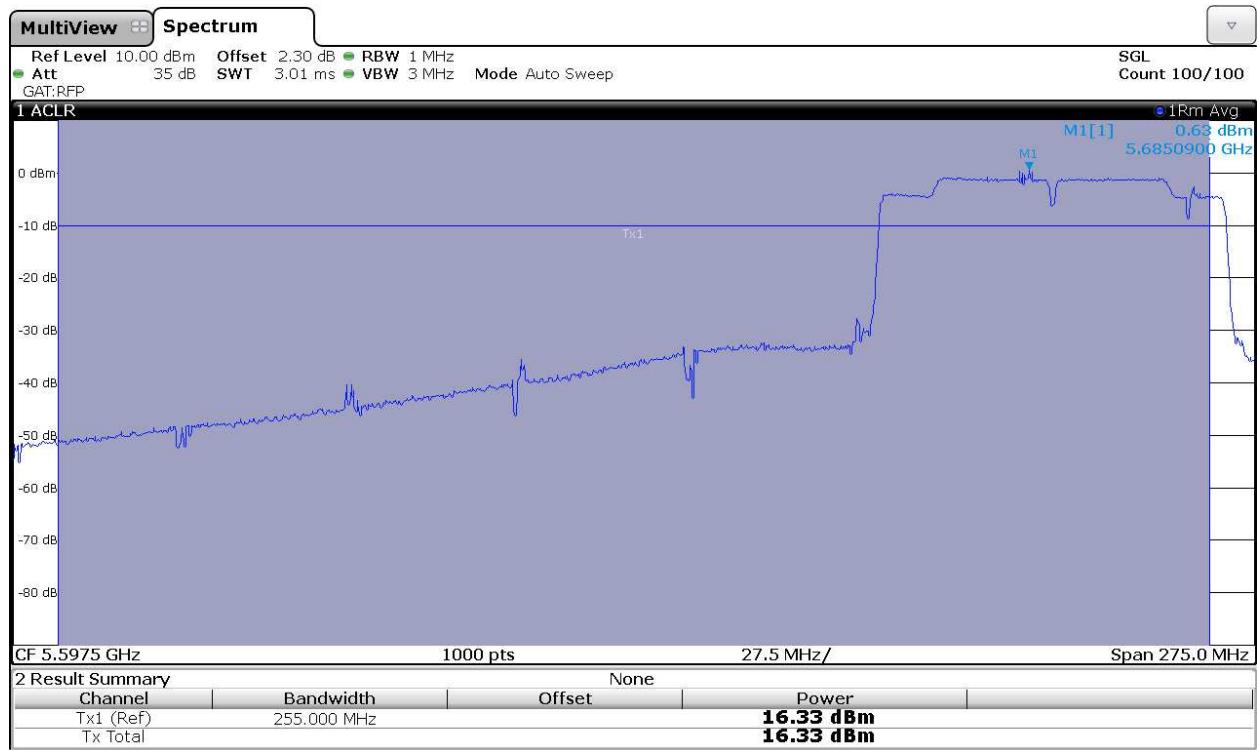


Power and PPSD in sub-band UNII_4:

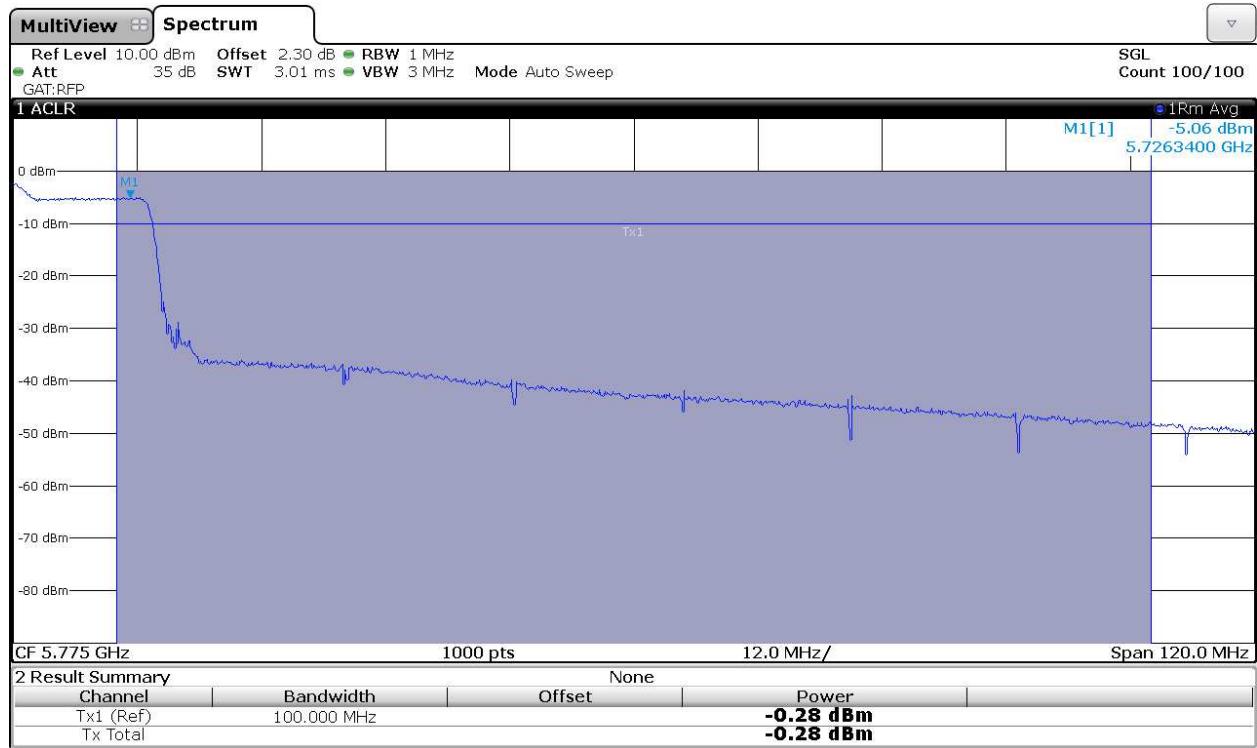


802.11 ac80 MHz modes (except channel 138) CHAIN A+B


Lowest Channel. Chain A.

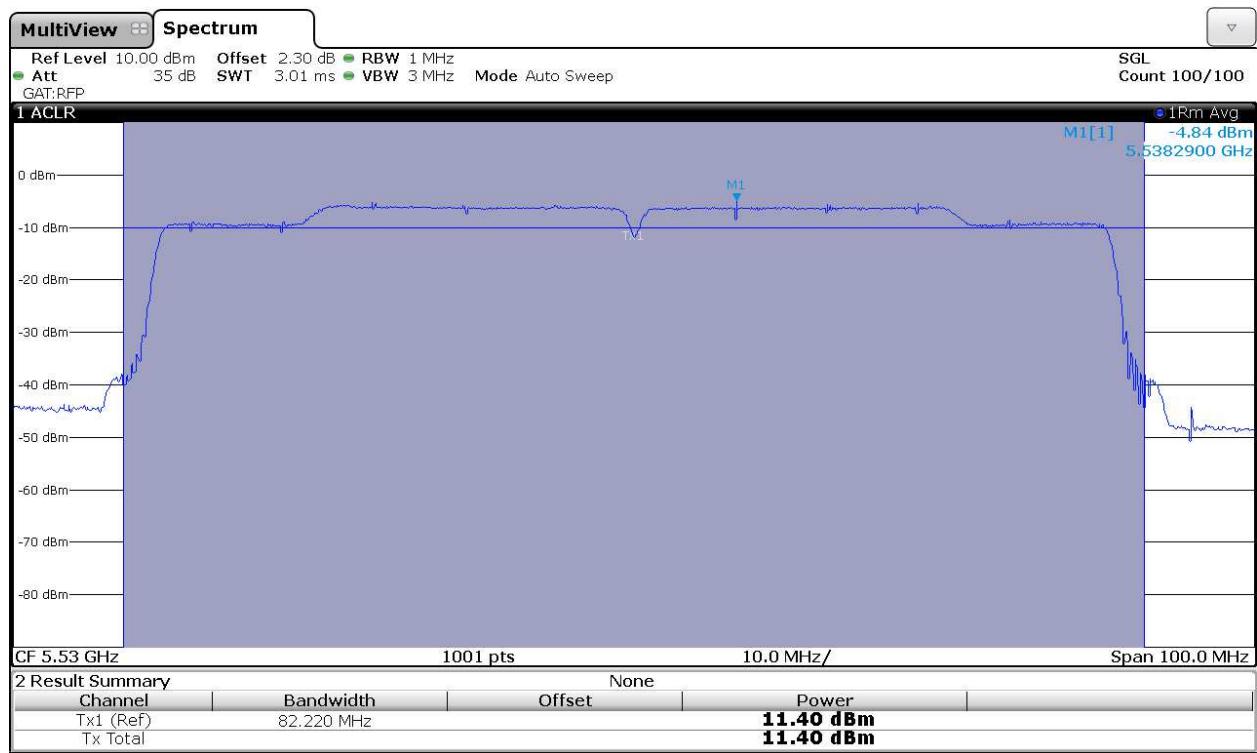


Lowest Channel. Chain B.

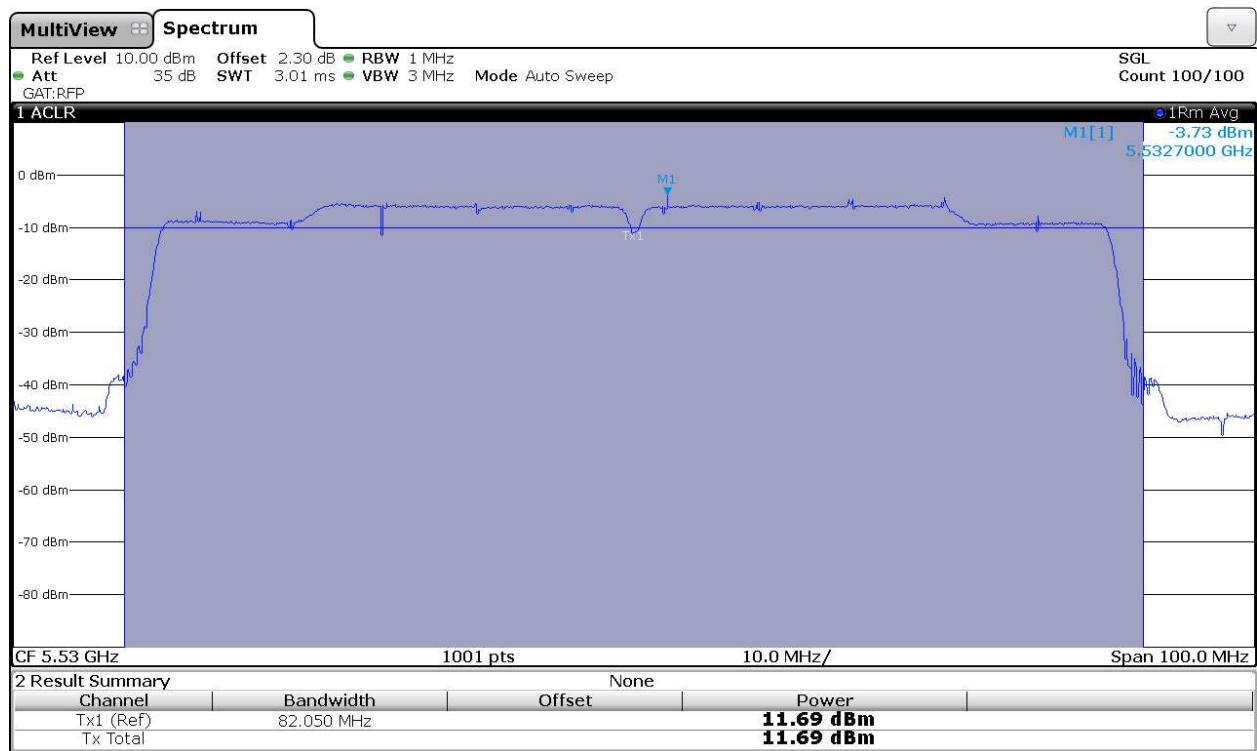

Middle Channel. Chain A.

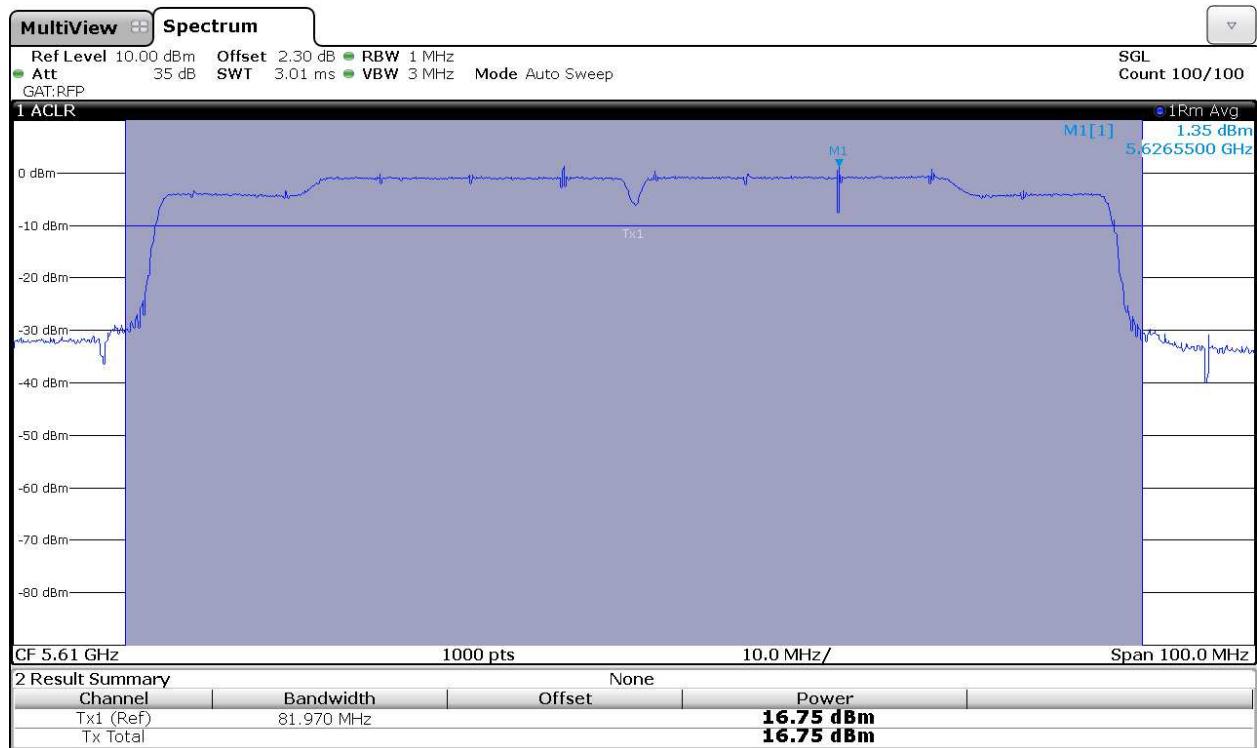


Middle Channel. Chain B.

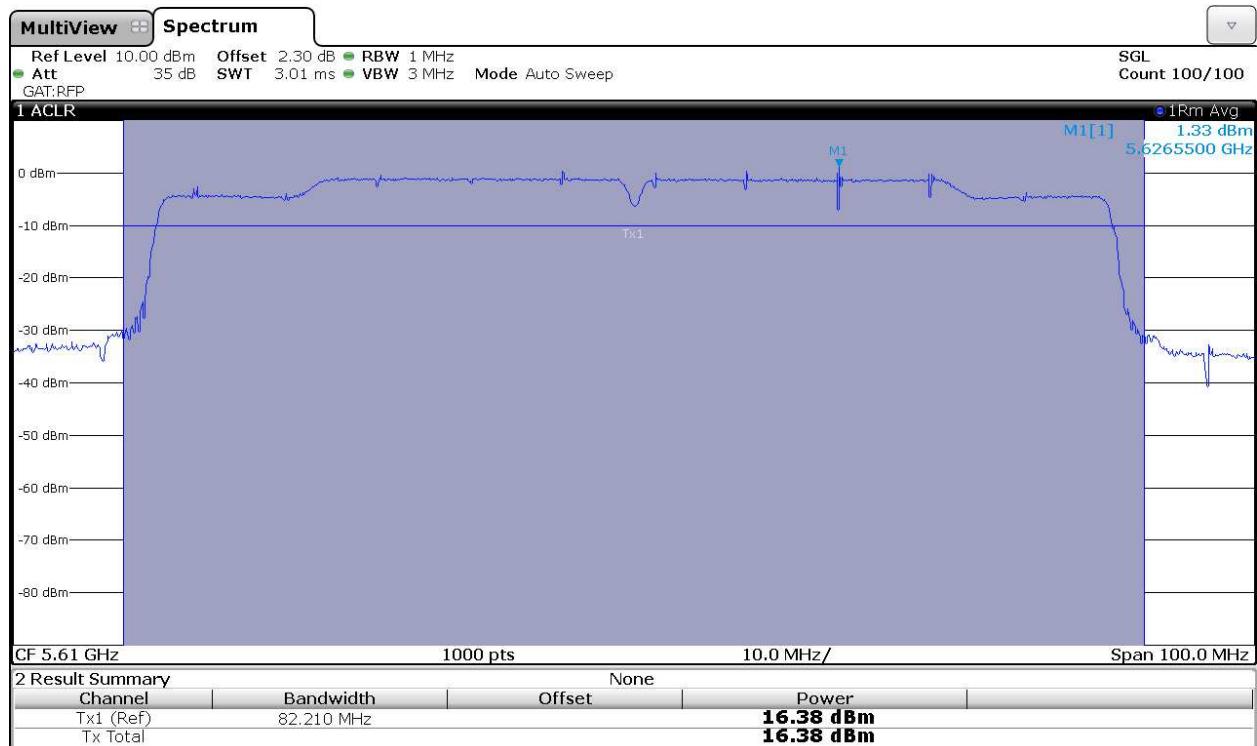


802.11 ac80MHz : Channel 138 CHAIN A+B


Power and PPSD in sub-band UNII_3: Chain A

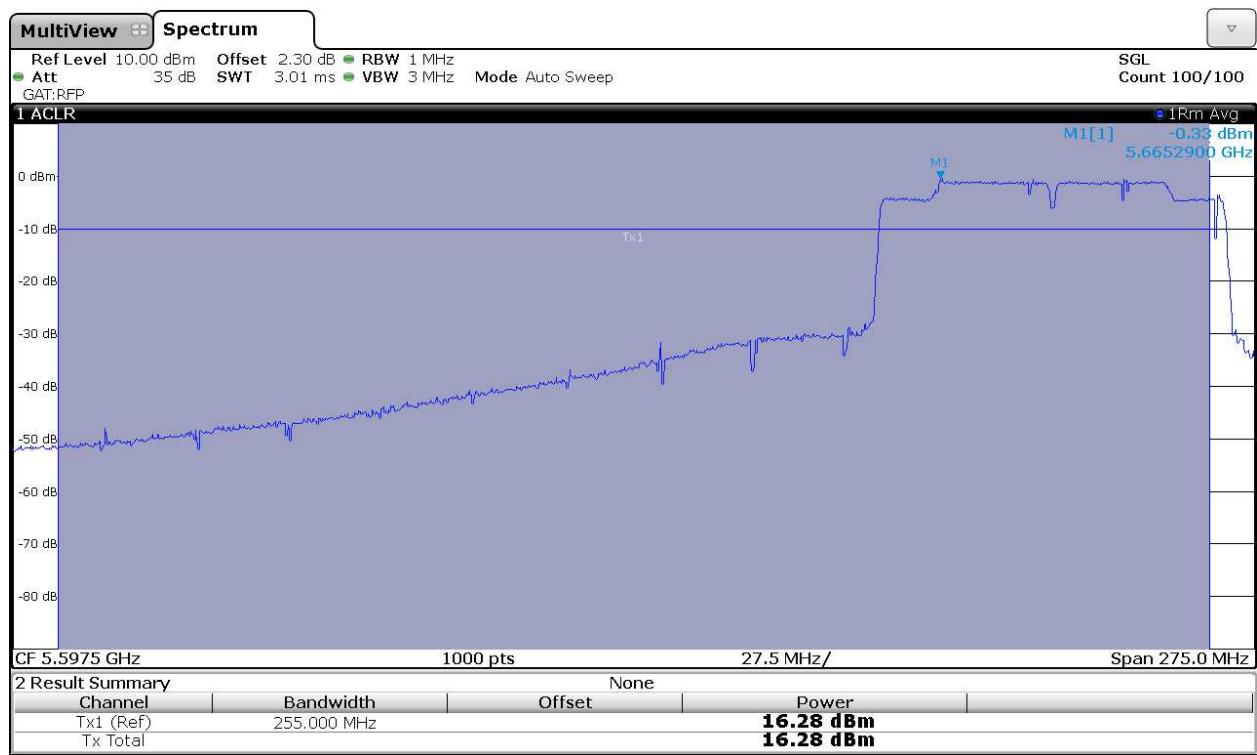

Power and PPSD in sub-band UNII_4: Chain A

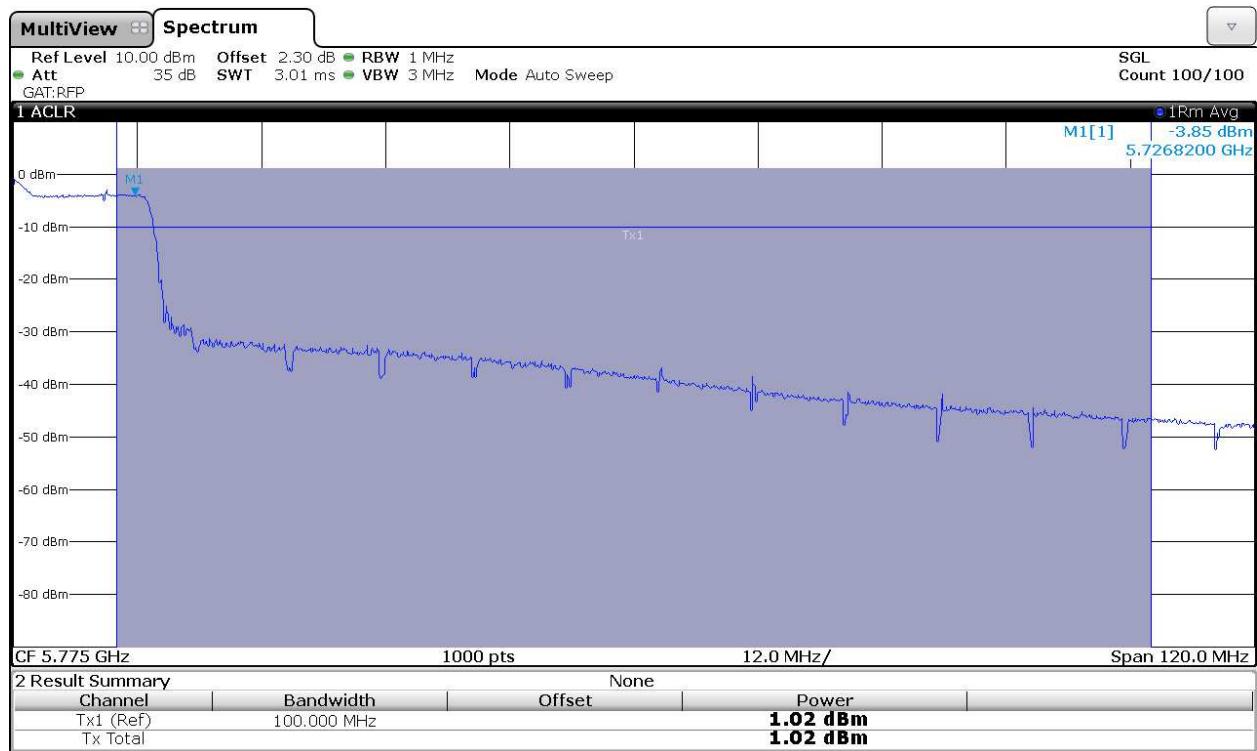

Power and PPSD in sub-band UNII_3: Chain B

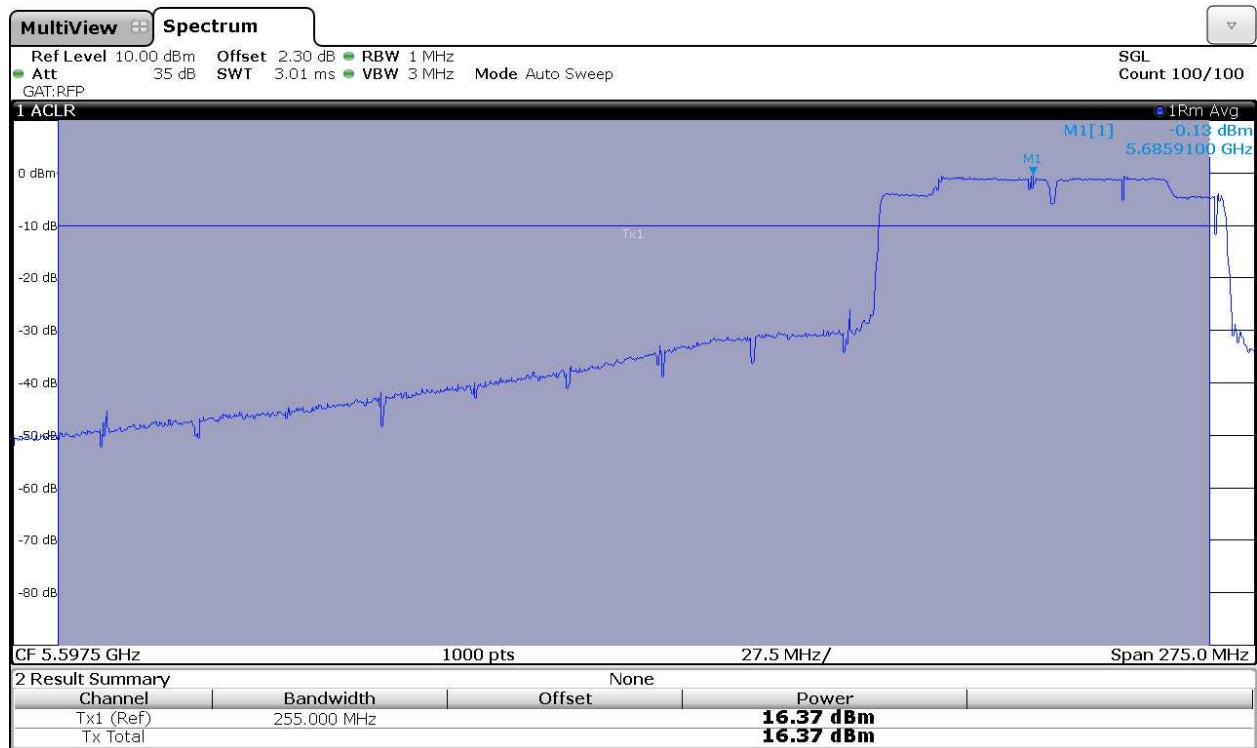

Power and PPSD in sub-band UNII_4: Chain B

