



TEST REPORT

EUT Description	Wireless Module installed in Convertible PC
Brand Name	Intel® Wi-Fi 6E AX211
Model Name	AX211D2W
FCC ID	PD9AX211D2
Date of Test Start/End	2022-11-23 / 2022-11-26
Features	802.11ax, Dual Band, 2x2 Wi-Fi 6 + Bluetooth® 5.2 (see section 5)
Description	P175G + SPEED antenna

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 / Columbia, SC 29210 / United States
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC 47 CFR Part §2.1093 (see section 1)	
RF Exposure Environment	Portable devices - General population/uncontrolled exposure	
Maximum Power Density	Testing Result	Limit
Result & Limit	7.18 W/m² (4cm²)	10 W/m² (4cm²)
Maximum SAR Result & Limit	1.16 W/kg (1g)	
Min. test separation distance	0mm to phantom, 1.40mm to antenna edge (SAR), 2.5mm to probe tip (PD)	

Test Report identification	221026-05.TR02
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.

Issued by

Reviewed by

Robin LUCIANI
(SAR Test Engineer)

Adel LOUNES
(SAR Test Lead Engineer)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600 Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	4
2. General conditions, competences and guarantees	4
3. Environmental Conditions	5
4. Test samples	5
5. EUT Features	6
6. Remarks and comments	9
7. Test Verdicts summary	9
8. Document Revision History	9
Annex A. PD Test & System Description	10
A.1 POWER DENSITY DEFINITION	10
A.2 SPEAG FREE SPACE MEASUREMENT SYSTEM	10
A.2.1 Measurement Setup	10
A.2.2 E-Field Measurement Probe	11
A.2.3 Worst Case Linearization Error	12
A.2.4 Data Evaluation	12
A.2.4.1 SCAN	12
A.2.4.2 TOTAL FIELD AND POWER FLUX DENSITY RECONSTRUCTION	12
A.3 SYSTEM CHECK	13
A.4 TEST EQUIPMENT LIST	14
A.5 MEASUREMENT UNCERTAINTY EVALUATION	15
A.6 RF EXPOSURE LIMITS	16
Annex B. SAR Test & System Description	17
B.1 SAR DEFINITION	17
B.2 SPEAG SAR MEASUREMENT SYSTEM	18
B.2.1 SAR MEASUREMENT SETUP	18
B.2.2 E-FIELD MEASUREMENT PROBE	19
B.2.3 FLAT PHANTOM	19
B.2.4 DEVICE POSITIONER	20
B.3 DATA EVALUATION	21
B.4 SYSTEM AND LIQUID CHECK	23
B.4.1 SYSTEM CHECK	23
B.4.2 LIQUID CHECK	24
B.5 TEST EQUIPMENT LIST	25
B.5.1 TISSUE SIMULANT LIQUID	25
B.6 MEASUREMENT UNCERTAINTY EVALUATION	26
B.7 RF EXPOSURE LIMITS	27
Annex C. Test Results	28
C.1 TEST CONDITIONS	28
C.1.1 TEST POSITIONS RELATIVE TO THE PHANTOM	28
C.1.2 TEST SIGNAL, OUTPUT POWER AND TEST FREQUENCIES	28
C.1.3 EVALUATION EXCLUSION AND TEST REDUCTIONS	29
C.2 CONDUCTED POWER MEASUREMENTS	30
C.2.1 WLAN 6-7GHz (U-NII)	30
C.2.1.1 6.2GHz (U-NII-5) – NOTEBOOK MODE	30
C.2.1.2 6.2GHz (U-NII-5) – TABLET MODE	30

C.2.1.3	6.5GHZ (U-NII-6) – NOTEBOOK MODE	31
C.2.1.4	6.5GHZ (U-NII-6) – TABLET MODE	31
C.2.1.5	6.7GHz (U-NII-7) – NOTEBOOK MODE	32
C.2.1.6	6.7GHz (U-NII-7) – TABLET MODE	32
C.2.1.7	7.0GHz (U-NII-8) – NOTEBOOK MODE	33
C.2.1.8	7.0GHz (U-NII-8) – TABLET MODE	33
C.3	TISSUE PARAMETERS MEASUREMENT	34
C.4	SYSTEM CHECK MEASUREMENTS	34
C.5	TEST RESULTS	36
C.5.1	SAR - 802.11AX – 6.2 GHz – U-NII-5	36
C.5.2	SAR - 802.11AX – 6.5 GHz – U-NII-6	37
C.5.3	SAR - 802.11AX – 6.7 GHz – U-NII-7	37
C.5.4	SAR - 802.11AX – 7.0 GHz – U-NII-8	38
C.5.5	POWER DENSITY - 802.11AX – 6.2 GHz – U-NII-5	39
C.5.6	POWER DENSITY - 802.11AX – 6.5 GHz – U-NII-6	39
C.5.7	POWER DENSITY - 802.11AX – 6.7 GHz – U-NII-7	39
C.5.8	POWER DENSITY - 802.11AX – 7.0 GHz – U-NII-8	39
C.5.9	MEASUREMENT VARIABILITY	40
C.5.10	SIMULTANEOUS TRANSMISSION EVALUATION – SAR	41
Annex D.	Test System Plots	43
Annex E.	TSL Dielectric Parameters	55
E.1	HEAD WiFi 6E 6500MHz	55
Annex F.	Calibration Certificates	56
Annex G.	Photographs	57
G.1	TEST SAMPLE – 221026-05.S01	57
G.2	PD TEST POSITIONS	58
G.3	SAR TEST POSITION	59
G.4	ANTENNA HOST PLATFORM LOCATION AND ADJACENT EDGE POSITIONS RELATIVE TO THE BODY	60
G.5	PHANTOM LIQUID LEVEL DURING MEASUREMENTS	61

1. Standards, reference documents and applicable test methods

FCC

1. FCC 47 CFR Part §2.1093 – Radiofrequency radiation exposure evaluation: portable devices. Edition October 2020
2. FCC 47 CFR Part §1.1310 – Radiofrequency radiation exposure limits. Edition October 2020
3. FCC OET KDB 248227 D01 v02r02 - SAR guidance for IEEE 802.11 (Wi-Fi) transmitters.
4. FCC OET KDB 447498 D04 v01 General RF Exposure Guidance v01 – RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices
5. FCC OET KDB 616217 D04 v01r02 - SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers.
6. FCC OET KDB 865664 D01 v01r04 - SAR Measurement Requirements for 100 MHz to 6 GHz.
7. FCC OET KDB 865664 D02 v01r02 - RF Exposure Compliance Reporting and Documentation Considerations.
8. IEEE Std 1528-2013 - IEEE Recommended Practice Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques...
9. RF Exposure Policies and Procedures: TCB Workshop – October 2020
10. IEC/IEEE 62209-1528:2020 Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)
11. SPEAG Application Note – 5G Compliance Testing with DASY6 (5GModule V1.0Beta)
12. SPEAG Application Note – 5G Compliance Testing with DASY6/8 (5GModule V5.0)

2. General conditions, competences and guarantees

- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	20°C ± 2°C
Humidity	35% ± 10%
Liquid Temperature	22.5°C ± 2°C

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt
#01	221026-05.S01	Wireless Module installed in Convertible PC	AX211D2W	7449256000003	2022-11-10

5. EUT Features

The herein information is provided by the customer

Intel WRF Lab declines any responsibility for the accuracy of the stated customer provided information, especially if it has any impact on the correctness of test results presented in this report.

Brand Name	Intel® Wi-Fi 6E AX211														
Model Name	AX211D2W														
Software Version	DRTU-02593.22.170.0														
Driver Version	22.170.2.1														
Prototype / Production	Production														
Host Identification	P175G														
Supported Radios	802.11b/g/n/ax 802.11a/n/ac/ax 802.11ax Bluetooth	2.4GHz (2400.0 – 2483.5 MHz) 5.2GHz (5150.0 – 5250.0 MHz) 5.3GHz (5250.0 – 5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5895.0 MHz) 6.0GHz (5925.0 - 7125.0 MHz) * 2.4GHz (2400.0 – 2483.5 MHz)													
Antenna Information	<table border="1"> <tr> <td>Transmitter</td> <td>Main – Chain B</td> <td>Aux – Chain A</td> </tr> <tr> <td>Manufacturer</td> <td>Intel</td> <td>Intel</td> </tr> <tr> <td>Antenna type</td> <td>PIFA</td> <td>PIFA</td> </tr> <tr> <td>Part number</td> <td>F-0G-FH-6165-001-00 DC33002RF0L</td> <td>F-0G-FH-6165-001-00 DC33002RF0L</td> </tr> </table> <p>See Annex G for more details on antennas location.</p>			Transmitter	Main – Chain B	Aux – Chain A	Manufacturer	Intel	Intel	Antenna type	PIFA	PIFA	Part number	F-0G-FH-6165-001-00 DC33002RF0L	F-0G-FH-6165-001-00 DC33002RF0L
Transmitter	Main – Chain B	Aux – Chain A													
Manufacturer	Intel	Intel													
Antenna type	PIFA	PIFA													
Part number	F-0G-FH-6165-001-00 DC33002RF0L	F-0G-FH-6165-001-00 DC33002RF0L													
Simultaneous Transmission Configurations	WLAN 6GHz Main + BT Aux* WLAN 6GHz Main + WLAN 6GHz Aux* WLAN 6GHz Main + WLAN 6GHz Aux + BT Aux* WLAN 2.4GHz Main + BT Aux WLAN 2.4GHz Main + WLAN 2.4GHz Aux WLAN 5GHz Main + BT Aux WLAN 5GHz Main + WLAN 5GHz Aux WLAN 5GHz Main + WLAN 5GHz Aux + BT Aux														
Additional Information	No WWAN transmitter is considered in this report														
	5.60-5.65 GHz band (TDWR) is supported by the device														
	Band gap is supported by the device														

*Only these combinations are treated on this document since this report is limited to WiFi 6E capabilities

Supported Radios

Mode	Duty Cycle	Modulation	Band	UL Freq Range (MHz)	Measured Max. Conducted Power (dBm)
802.11ax	100%	BPSK QPSK 16QAM 64QAM 256QAM	6.2GHz	5955-6415	11.99
802.11ax	100%	BPSK QPSK 16QAM 64QAM 256QAM	6.5GHz	6435-6515	12.00
802.11ax	100%	BPSK QPSK 16QAM 64QAM 256QAM	6.7GHz	6535-6855	11.98
802.11ax	100%	BPSK QPSK 16QAM 64QAM 256QAM	7.0GHz	6875-7125	11.96

NM: Not Measured

Maximum Output power specification + Tune up tolerance limit, specified by the client			SISO mode	
Equipment Class	Mode	BW (MHz)	Main/Tx2 (dBm)	Aux/Tx1 (dBm)
U-NII-5	802.11ax	20	7.00	7.00
		40	10.00	10.00
		80	12.00	12.00
		160	12.00	12.00
U-NII-6	802.11ax	20	7.00	7.00
		40	10.00	10.00
		80	12.00	12.00
		160	12.00	12.00
U-NII-7	802.11ax	20	7.00	7.00
		40	10.00	10.00
		80	12.00	12.00
		160	12.00	12.00
U-NII-8	802.11ax	20	7.00	7.00
		40	10.00	10.00
		80	12.00	12.00
		160	12.00	12.00

6. Remarks and comments

1. The conducted values are obtained by applying the available power table to the AX211D2W Intel module installed in the P175G identified in this report, as requested by the customer
2. Only the plots for the test positions with the highest measured SAR/PD per band/mode are included in Annex C
3. Variability and simultaneous transmission results shown in this report are based on the highest SAR value obtained among all antenna manufacturers.

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

Standard	Band	Highest Reported PS_{tot} avg [W/m ²] 4cm ²	Verdict
802.11ax	6.2GHz	7.18	P
802.11ax	6.5GHz	2.59	P
802.11ax	6.7GHz	6.82	P
802.11ax	7.0GHz	3.89	P

Standard	Band	Highest Reported SAR [W/kg]	Verdict
802.11ax	6.2GHz	1.16	P
802.11ax	6.5GHz	0.97	P
802.11ax	6.7GHz	1.13	P
802.11ax	7.0GHz	0.92	P

P: Pass

F: Fail

NM: Not Measured

NA: Not Applicable

According to the FCC OET KDB 690783 D01, this is the summary of the values for the Grant Listing:

Highest Reported SAR (1g) (W/kg)		
Exposure Condition	Equipment Class	
	DSS	6XD
Body Worn	0.24	1.16
Simultaneous Tx	Sum-SAR: 2.34 SPLSR : 0.02	Sum-SAR: 2.34 SPLSR : 0.02

Considering the results of the performed test according to FCC 47CFR Part 2.1093 the item under test is IN COMPLIANCE with the requested specifications specified in Section1. Standards, reference documents and applicable test methods

8. Document Revision History

Revision #	Modified by	Revision Details
Rev. 00	R. LUCIANI	First Issue

Annex A. PD Test & System Description

A.1 Power Density Definition

The power density for an electromagnetic field represents the rate of energy transfer per unit area.

The local power density (i.e. Poynting vector) at a given spatial point is deduced from electromagnetic fields by the following formula:

$$\overrightarrow{P_{local}} = \frac{1}{2} \operatorname{Re} (\vec{E} \times \vec{H}^*)$$


Where \vec{E} is the complex electric field peak phasor and \vec{H}^* is the complex conjugate magnetic field peak phasor. This power density is also called "single-point" or "spot power density".

Considering that the FCC's Maximum Permissible Exposure (MPE) limit is applicable on the average power density inside 1cm² area, the single point power densities in the evaluation plane should be averaged inside the 1cm² area.

A.2 SPEAG free space Measurement System

A.2.1 Measurement Setup

The DASY6 system for performing compliance tests consists of the following items:

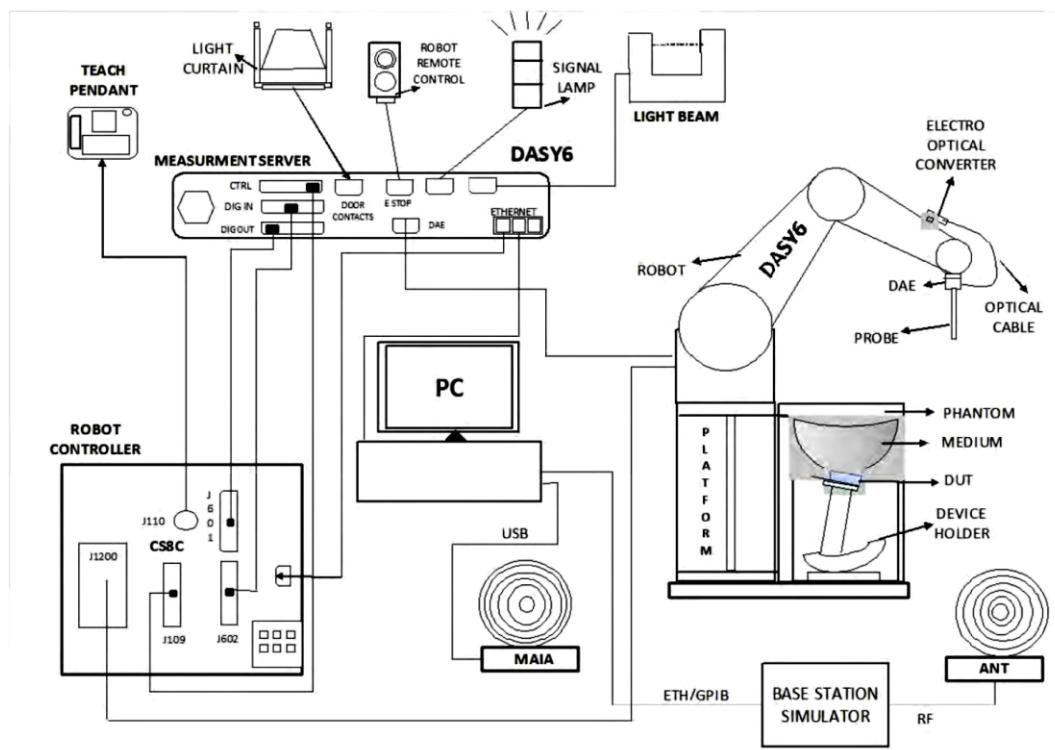

- ✓ A standard high precision 6-axis robot (Staubli TX/RX family) with controller, teach pendant and software. It includes an arm extension for accommodating the data acquisition electronics (DAE)
- ✓ An mm-wave E-field probe optimized and calibrated for the targeted measurements.
- ✓ A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- ✓ The Electro-optical Converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. The EOC signal is transmitted to the measurement server.
- ✓ The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movements interrupts.
- ✓ The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- ✓ A computer running Win7 professional operating system and the cDASY6 software.
- ✓ Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.


A.2.2 E-Field Measurement Probe

The probe consists of two dipoles (0.8 mm length) optimally arranged with different angles (γ_1 and γ_2) to obtain pseudo-vector information, printed on glass substrate protected by high density foam that allows low perturbation of the measured field.

Three or more measurements are taken for different probe rotational angles, deriving the amplitude and polarization information.

The probe's characteristics are:

Frequency Range	750 MHz – 110 GHz
Length	320 mm
Probe tip external diameter	8 mm
Probe's two dipoles length	0.9mm – Diode loaded
Probe's substrate	Quartz 0.9 x 20 x 0.18mm ($\epsilon_r=3.8$)
Distance between diode sensors and probe's tip	1.5 mm
Axial Isotropy	± 0.6 dB
Maximum operating E-field	3000 V/m
Lower E-field detection threshold	5 V/m @ 60 GHz
Minimum Mechanical separation between probe tip and a Surface	0.5mm
Calibration reference point	Diode Sensor

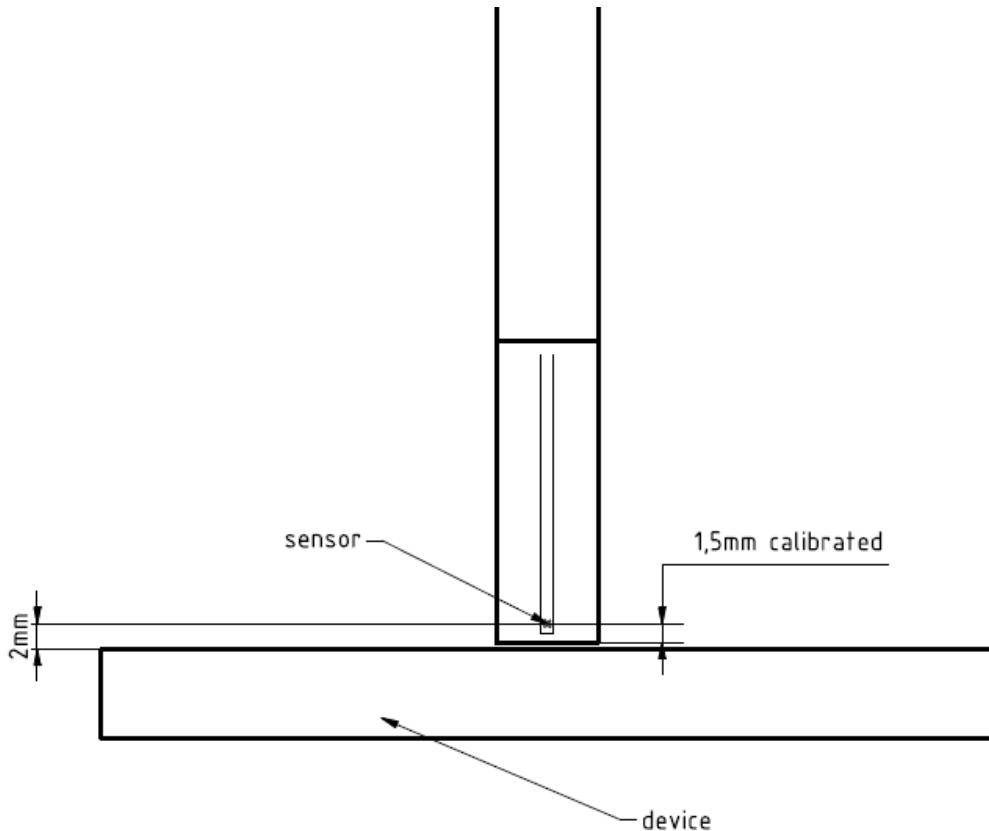

A.2.3 Worst Case Linearization Error

For continuously transmitting signals (100% duty cycle), the worst case linearization error is given by the difference between non linearized voltage and linearized voltage using CW parameters. The error is increasing with the voltage levels. In our particular case, the measured voltages averaged over the signal period are below 1mV. We use 1mV in the below calculation to have the worst case condition. The signal PAR (Peak to Average Ratio) is 6dB and the diode compression point 100mV.

The maximum voltage through the diode is given by:

$$v_{peak} = v_{meas\ avg} \times PAR_{linear}$$

$$v_{peak} = 1 \times 4 = 4\ mV$$

The linearized voltage using CW parameter is given by:

$$v_{lin\ peak} = v_{peak} + \frac{v_{peak}^2}{diode\ compression\ point}$$

$$v_{lin\ peak} = 4 + \frac{4^2}{100} = 4.16\ mV$$

The worst case linearization error is:

$$lin\ error = \frac{v_{lin\ peak}}{v_{peak}} = \frac{4.16}{4} = 1.04 = 4\%$$

A.2.4 Data Evaluation

A.2.4.1 Scan

The scan involves the measurement of two planes with three different probe rotations. The grid steps are optimized by the software based on the test frequency. The location of the lowest measurement plane is defined by the distance of first measurement layer from device under test (DUT) entered by the user. The DUT location settings can be used to offset the center of the grid.

A.2.4.2 Total Field and Power Flux Density Reconstruction

Computation of the power density in general requires knowledge of the electric (E-) and magnetic (H-) field amplitudes and phases in the plane of incidence. Reconstruction of these quantities from pseudo-vector E-field measurements is feasible, as they are constrained by Maxwell's equations.

The reconstruction algorithm developed by the system manufacturer, together with the ability of the probe to measure extremely close to the source without perturbing the field, permits reconstruction of the E- and H-fields, as well as of the power density, on measurement planes located as near as 0.5mm away in the frequency band of 60 GHz.

The average of the reconstructed power density is evaluated over a circular area in each measurement plane. The area of the circle is defined by the user; the default is 1 cm².


A.3 System Check

The system performance check verifies that the system operates within its specifications. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal E-field measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system check, the EUT is replaced by a calibrated source and the power source is replaced by a controlled continuous wave generated by a signal generator. The calibrated source must be placed at the correct distance from the E-field probe according to the calibration certificate.



First, the power meter is connected to the output of the signal generator to measure the forward power at the location of the connector to the system check source. The signal generator is adjusted for the desired forward power to match the system check source calibration setup at the connector as read by power meter. Then the power meter is replaced by the system check source.

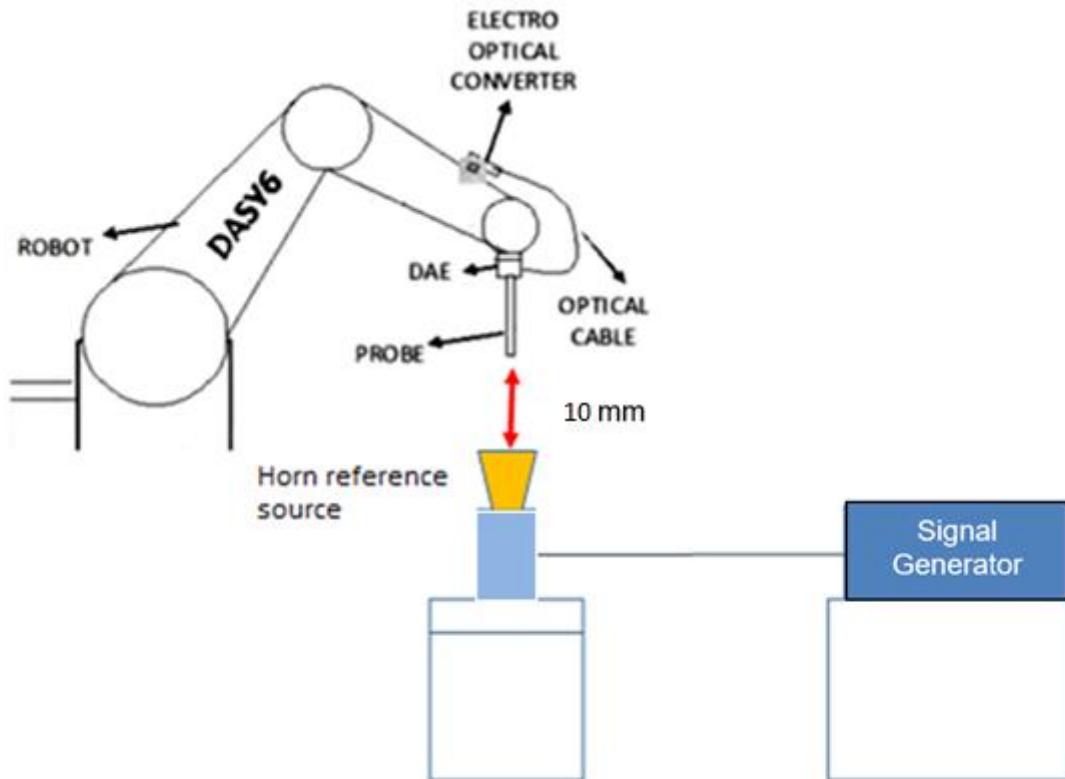

The output power on the reference source is set to 10.0 dBm (10 mW) and the measurement results E, H and Avg PD are compared with the Numerical modeling.

A.4 Test Equipment List

SAR system #4

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
443-000	E-Field probe 750MHz-110GHz	EUmmWV3	9538	SPEAG	2022-05-18	2023-05-18
004-014	Data Acquisition Electronics	DAE4	1704	SPEAG	2022-04-29	2023-04-29
004-000	6-axis Robot	TX90 XL	F11/5JL2A1/A/01	STAÜBLI	n/a	n/a
004-001	Robot Controller	CS8C	F11/5JL2A1/C/01	STAÜBLI	n/a	n/a
004-005	Measurement Server	DASY6 P/N: SE UMS 028 BB	-	SPEAG	n/a	n/a
004-004	Light Beam Unit	SE UKS 030 AA	1030	Di-soric	n/a	n/a
003-002	5G Phantom	mmWave	NA	SPEAG	NA	NA
003-006	Measurement Software	DASY mmWave V3.0.0.841	9-5ED1AC01	SPEAG	NA	NA
004-010	Laptop Holder	P/N SM LH1 001 CD	-	SPEAG	n/a	n/a

Shared equipment

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
123-000	USB Power Sensor	NRP-Z81	102278	R&S	2021-04-13	2023-04-13
124-000	USB Power Sensor	NRP-Z81	102279	R&S	2021-04-13	2023-04-13
078-000	RF Cable	ST-18/SMAm/SMAm/48	-	Huber & Suhner	2022-08-26	2023-01-26
079-000	RF Cable	ST-18/SMAm/SMAm/48	-	Huber & Suhner	2022-08-26	2023-01-26
141-000	USB Power Sensor	NRP-Z81	104381	R&S	2022-05-18	2024-05-18
327-000	Temp & Humidity Logger	RA32E-TH1-RAS	RA32-F0DED9	AVTECH	2021-03-09	2023-03-09
130-000	Vector Signal Generator	SMB100A	178217	R&S	2021-07-20	2023-07-20
198-000	0.8-21GHz RF amplifier	TVA-82-213A+	2004003	Mini-Circuits	2022-08-26	2023-01-26
014-023	Horn reference source	PE9859/SF-15	--	Pasternack	NA	NA

A.5 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

For PTP measurement method:

Table 2: DASY6 Uncertainty Budget in Compliance with IEC/IEEE 63195-1 for the cases indicated in the REFRENCE TABLE						
Error Description	Uncertainty Value (\pm dB)	Probability Distribution	Div.	(c_i)	Std. Unc. (\pm dB)	(v_i) v_{eff}
Measurement System						
Probe calibration	0.49	N	1	1	0.49	∞
Hemispherical Isotropy	0.50	R	$\sqrt{3}$	1	0.29	∞
	0.20	R	$\sqrt{3}$	1	0.12	∞
System Detection Limits	0.04	R	$\sqrt{3}$	1	0.02	∞
	0.03	N	1	1	0.03	∞
Field reconstruction ¹	2	R	$\sqrt{3}$	1	1.15	∞
Probe Positioning Repeatability	0.04	R	$\sqrt{3}$	1	0.02	∞
	0.30	R	$\sqrt{3}$	1	0.17	∞
Probe Positioning offset	0.04	R	$\sqrt{3}$	1	0.02	∞
	0.1	R	$\sqrt{3}$	1	0.06	∞
Amplitude and Phase Noise	0.04	R	$\sqrt{3}$	1	0.02	∞
	0.2	R	$\sqrt{3}$	1	0.12	∞
Test Sample Related						
Power Drift	0.21	R	$\sqrt{3}$	1	0.12	∞
	0.40	R	$\sqrt{3}$	1	0.23	∞
Modulation response	0.1	R	$\sqrt{3}$	1	0.06	∞
	0.04	R	$\sqrt{3}$	1	0.02	∞
Device holder influence	0.04	R	$\sqrt{3}$	1	0.02	∞
	0.04	R	$\sqrt{3}$	1	0.02	∞
Combined Std. Uncertainty						1.34 dB
Expanded Std. Uncertainty 95%						2.68 dB

The REC at distance d must be modified as follows:

$$1 \quad unc_{RECdB} = \begin{cases} 2.35 - 8.75d/\lambda & \text{for } d = 0.04 \dots 0.2\lambda \\ 0.6 & \text{for } d \geq 0.2\lambda \end{cases}$$

The minimal distance is 2mm, and the minimal frequency tested is 6 GHz. This corresponds to an MU value of $(2.35-8.75*0.04 = 2$ dB) --
Ref: Speag, DASY6 Module mmWave Manual, February 2022.

A.6 RF Exposure Limits

Power density assessments have been made in line with the requirements of FCC 47CFR Part 2.1093, in particular chapter 1.1310 specifying the MPE limits, on the limitation of exposure of the general population / uncontrolled exposure for portable devices.

Exposure Type	Power density (S)
Limits for Occupational/Controlled Exposure. 1.5GHz – 100GHz	50.0 W/m²
Limits for General Population/ Uncontrolled Exposure. 1.5GHz – 100GHz	10.0 W/m²

Annex B. SAR Test & System Description

B.1 SAR Definition

Specific Absorption rate is defined as the time derivative of the incremental energy (dW) absorbed by (dissipated in) and incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \cdot \left(\frac{dW}{dm} \right) = \frac{d}{dt} \cdot \left(\frac{dW}{\rho \cdot dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:

σ = Conductivity of the tissue (S/m)


ρ = Mass density of the tissue (kg/m³)

E = RMS electric field strength (V/m)

B.2 SPEAG SAR Measurement System

B.2.1 SAR Measurement Setup


The DASY6 system for performing compliance tests consists of the following items:

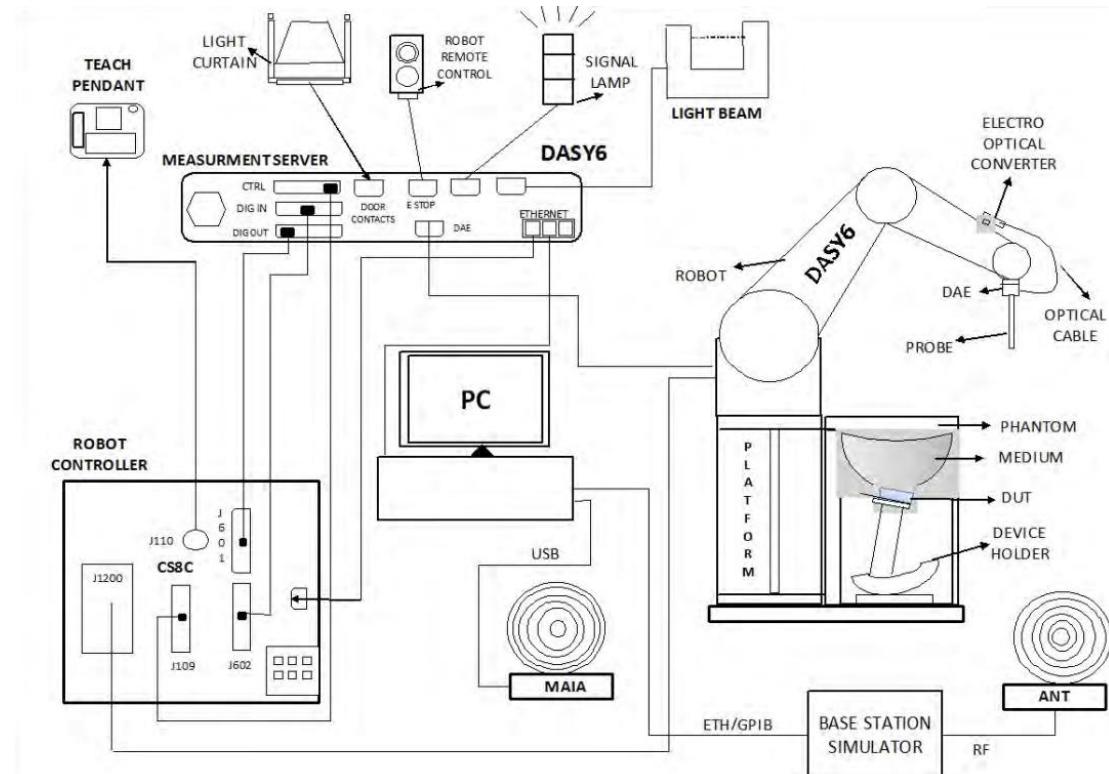

- ✓ A standard high precision 6-axis robot (Staubli TX/RX family) with controller, teach pendant and software. It includes an arm extension for accommodating the data acquisition electronics (DAE)
- ✓ An isotropic field probe optimized and calibrated for the targeted measurements.
- ✓ A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- ✓ The Electro-optical Converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. The EOC signal is transmitted to the measurement server.
- ✓ The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movements interrupts.
- ✓ The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- ✓ A computer running Win7 professional operating system and the DASY6 software.
- ✓ Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- ✓ The phantom, the device holder and other accessories according to the targeted measurement.
- ✓ MAIA is a hardware interface (Antenna) used to evaluate the modulation and audio interference characteristics of RF signals.
- ✓ ANT is an ultra-wideband antenna for use with the base station simulators over 698 MHz to 6GHz for SAR cellular testing (not used for WLAN testing).
- ✓ The base station simulator is an equipment used for SAR cellular tests in order to emulate the cellular signals characteristics and behavior between a regular base station and the equipment under test.
- ✓ Tissue simulating liquid.
- ✓ System Validation dipoles.
- ✓ Network emulator or RF test tool

B.2.2 E-Field Measurement Probe

The probe is constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probe has built-in shielding against static charges and is contained within a PEEK cylindrical enclosure material at the tip.



The probe's characteristics are:


Frequency Range	30MHz – 10GHz
Length	337 mm
Probe tip external diameter	2.5 mm
Typical distance between dipoles and the probe tip	1 mm
Axial Isotropy (in human-equivalent liquids)	± 0.3 dB
Hemispherical Isotropy (in human-equivalent liquids)	± 0.5 dB
Linearity	± 0.2 dB
Maximum operating SAR	100 W/kg
Lower SAR detection threshold	0.001 W/kg

B.2.3 Flat Phantom

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm ± 0.2 mm
Filling volume	30 Liters approx.
Dimensions	Major axis: 600mm / Minor axis: 400mm

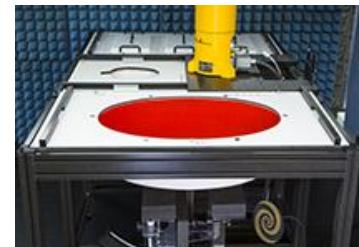

B.2.4 Device Positioner

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of 0.5 mm would produce a SAR uncertainty of 20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.); lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI and other Flat Phantoms.



B.3 Data Evaluation

- **Power Reference measurement**

The robot measures the E field in a specified reference position that can be either the selected section's grid reference point or a user point in this section at 4mm of the inner surface of the phantom, 2mm for frequencies above 3GHz.

- **Area Scan**

Measurement procedures for evaluating SAR from wireless handsets typically start with a coarse measurement grid to determine the approximate location of the local peak SAR values. This is known as the area-scan procedure. The SAR distribution is scanned along the inside surface of one side of the phantom head, at least for an area larger than the projection of the handset and antenna. The distance between the measured points and phantom surface should be less than 8 mm, and should remain constant (with variation less than ± 1 mm) during the entire scan in order to determine the locations of the local peak SAR with sufficient accuracy. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30°. If this angle is larger than 30° and the closest point on the probe-tip housing to the phantom surface is closer than a probe diameter, the boundary effect may become larger and polarization dependent. This additional uncertainty needs to be analyzed and accounted for. To achieve this, modified test procedures and additional uncertainty analyses not described in this recommended practice may be required. The measurement and interpolation point spacing should be chosen such as to allow identification of the local peak locations to within one-half of the linear dimension of a side of the zoom-scan volume. Because a local peak having specific amplitude and steep gradients may produce a lower peak spatial-average SAR compared to peaks with slightly lower amplitude and less steep gradients, it is necessary to evaluate these other peaks as well. However, since the spatial gradients of local SAR peaks are a function of the wavelength inside the tissue-equivalent liquid and the incident magnetic field strength, it is not necessary to evaluate local peaks that are less than 2 dB or more below the global maximum peak. Two-dimensional spline algorithms (Brishoual et al. 2001; Press et al., 1996) are typically used to determine the peaks and gradients within the scanned area. If a peak is found at a distance from the scan border of less than one-half the edge dimension of the desired 1 g or 10 g cube, the measurement area should be enlarged if possible.

- **Zoom Scan**

To evaluate the peak spatial-average SAR values for 1 g or 10 g cubes, fine resolution volume scans, called zoom scans, are performed at the peak SAR locations identified during the area scan. The minimum zoom scan volume size should extend at least 1.5 times the edge dimension of a 1 g cube in all directions from the center of the scan volume, for both 1 g and 10 g peak spatial-average SAR evaluations. Along the phantom curved surfaces, the front face of the volume facing the tissue/liquid interface conforms to the curved boundary, to ensure that all SAR peaks are captured. The back face should be equally distorted to maintain the correct averaging mass. The flatness and orientation of the four side faces are unchanged from that of a cube whose orientation is within ± 30 ° of the line normal to the phantom at the center of the cube face next to the phantom surface. The peak local SAR locations that were determined in the area scan (interpolated values) should be used for the centers of the zoom scans. If a scan volume cannot be centered due to proximity of a phantom shape feature, the probe should be tilted to allow scan volume enlargement. If probe tilt is not feasible, the zoom-scan origin may be shifted, but not by more than half of the 1 g or 10 g cube edge dimension.

After the zoom-scan measurement, extrapolations from the closest measured points to the surface, for example along lines parallel to the zoom-scan centerline, and interpolations to a finer resolution between all measured and extrapolated points are performed. Extrapolation algorithm considerations are described in 6.5.3, and 3-D spline methods (Brishoual et al., 2001; Kreyszig, 1983; Press et al., 1996) can be used for interpolation. The peak spatial-average SAR is finally determined by a numerical averaging of the local SAR values in the interpolation grid, using for example a trapezoidal algorithm for the integration (averaging).

In some areas of the phantom, such as the jaw and upper head regions, the angle of the probe with respect to the line normal to the surface may be relatively large, e.g., greater than ± 30 °, which could increase the boundary effect error to a larger level. In these cases, during the zoom scan a change in the orientation of the probe, the phantom, or both is recommended but not required for the duration of the zoom scan, so that the angle between the probe axis and the line normal to the surface is within 30° for all measurement points.

- **Power Drift measurement**

The robot re-measures the E-Field in the same reference location measured at the Power Reference. The drift measurement gives the field difference in dB from the first to the last reference reading. This allows a user to monitor the power drift of the device under test that must remain within a maximum variation of $\pm 5\%$.

- **Post-processing**

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528 and IEC 62209-1/2 standards. It can be conducted for 1g and 10g.

The software allows evaluations that combine measured data and robot positions, such as:

- ✓ Maximum search
- ✓ Extrapolation
- ✓ Boundary correction
- ✓ Peak search for averaged SAR

Interpolation between the measured points is performed when the resolution of the grid is not fine enough to compute the average SAR over a given mass.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.


B.4 System and Liquid Check

B.4.1 System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results.

The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system check, the EUT is replaced by a calibrated dipole and the power source is replaced by a controlled continuous wave generated by a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the phantom at the correct distance.

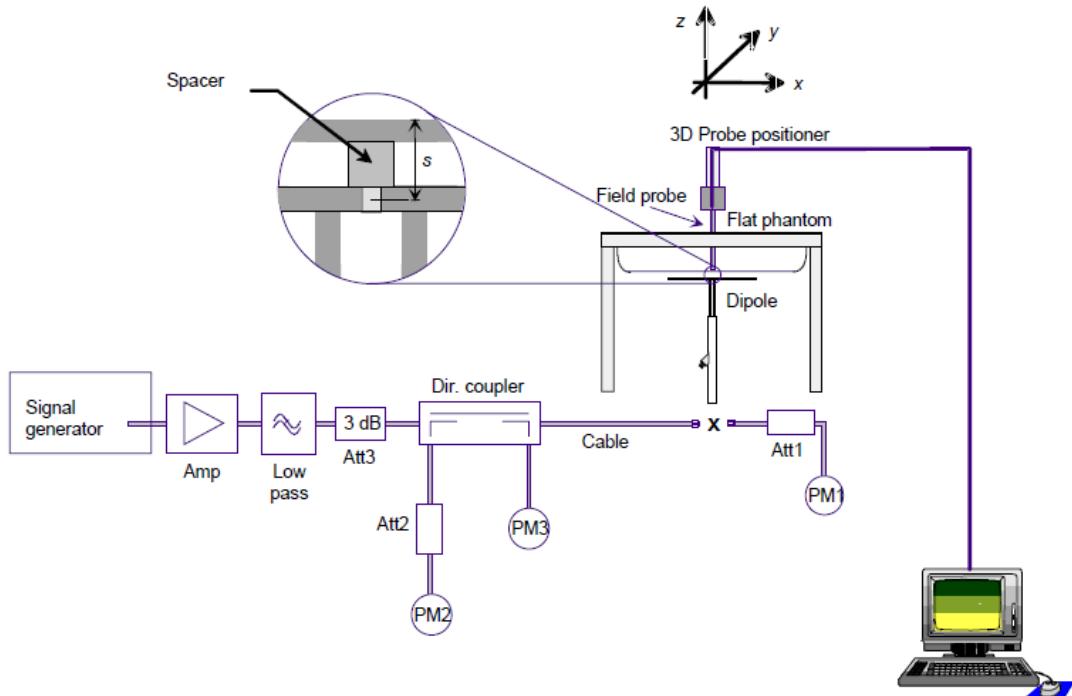

The equipment setup is shown below:

- ✓ Signal Generator
- ✓ Amplifier
- ✓ Directional coupler
- ✓ Power meter
- ✓ Calibrated dipole

First, the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the connector (x) to the system check source. The signal generator is adjusted for the desired forward power at the connector as read by power meter PM1 after attenuation Att1 and also as coupled through Att2 to PM2. After connecting the cable to the source, the signal generator is readjusted for the same reading at power meter PM2.

SAR results are normalized to a forward power of 1W to compare the values with the calibration reports results as described at IEC/IEEE 62209-1528:2020 standards.

B.4.2 Liquid Check

The dielectric parameters check is done prior to the use of the tissue simulating liquid. The verification is made by comparing the relative permittivity and conductivity to the values recommended by the applicable standards.

The liquid verification was performed using the following test setup:

- ✓ VNA (Vector Network Analyzer)
- ✓ Open-Short-Load calibration kit
- ✓ RF Cable
- ✓ Open-Ended Coaxial probe
- ✓ DAK software tool
- ✓ SAR Liquid
- ✓ De-ionized water
- ✓ Thermometer

These are the target dielectric properties of the tissue-equivalent liquid material according to the manufacturer's datasheet:

Head Tissue Simulating Media		
Frequency (MHz)	ϵ_r (F/m)	σ (S/m)
6000	35.07	5.48
6500	34.46	6.07
7000	33.88	6.65

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000$ kg/m³)

The measurement system implements a SAR error compensation algorithm as documented IEC/IEEE 62209-1528:2020 to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters (applied to only scale up the measured SAR, and not downward) so, according to FCC OET KDB 865664 D01, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$.

B.5 Test Equipment List

SAR system #3

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
003-000	6-Axis Robot	TX60 Lspeag	F17/59RCB1/A/01	STAÜBLI	NA	NA
003-001	Robot Controller	CS8C	F17/59RCB1/C/01	STAÜBLI	NA	NA
003-002	Oval Flat Phantom	ELI V5.0	1260	SPEAG	NA	NA
003-003	Light Beam Unit	SE UKS 030 AA	1170	Di-soric	NA	NA
003-004	Measurement Server	DASY6	1547	SPEAG	NA	NA
003-005	Electro Optical Converter	EOC60	1104	SPEAG	NA	NA
004-005	Measurement Software	DASY6 v16.0.2.83	9-658E90FA	SPEAG	NA	NA
086-000	Dosimetric E-Field probe	EX3DV4	7455	SPEAG	2022-03-21	2023-03-21
002-013	Data Acquisition Electronics	DAE4	1658	SPEAG	2022-08-19	2023-08-19
003-009	Laptop Holder	N/A	N/A	SPEAG	NA	NA

Shared equipment

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
123-000	USB Power Sensor	NRP-Z81	102278	R&S	2021-04-13	2023-04-13
124-000	USB Power Sensor	NRP-Z81	102279	R&S	2021-04-13	2023-04-13
099-000	Liquid measurement SW	DAK-3.5 V3.0.2.3	9-2687B491	SPEAG	n/a	n/a
069-000	Dielectric Probe Kit	DAK-3.5	1309	SPEAG	2021-03-10	2023-03-10
078-000	RF Cable	ST-18/SMAm/SMAm/48	1158830	Huber & Suhner	2022-08-26	2023-01-26
079-000	RF Cable	ST-18/SMAm/SMAm/48	1158831	Huber & Suhner	2022-08-26	2023-01-26
077-000	Coupler	CD0.5-8-20-30	1251-002	Amd-group	2022-08-26	2023-01-26
384-000	0.1-6GHz RF amplifier	AMT-A0328	1818	Agile Microwave Technology	2022-08-26	2023-01-26
097-000	7GHz System Validation Dipole	7GHzv2	1008	SPEAG	2022-08-24	2024-08-24
398-000	Thermometer	TESTO 922	33622932/208	TESTO	2021-11-09	2023-11-09
327-000	Temp & Humidity Logger	RA32E-TH1-RAS	RA32-F0DEF9	AVTECH	2021-03-09	2023-03-09
089-000	Vector Reflectometer	R140 1-Port 14 GHz Analyzer	0190616	Copper Mountain tech	2021-09-02	2023-09-02
129-000	Signal Generator	SMB100A	178212	R&S	2022-01-03	2024-01-03

B.5.1 Tissue Simulant Liquid

TSL	Manufacturer / Model	Freq Range (MHz)	Main Ingredients
Head WideBand	SPEAG HBBL600-10000 Batch 220721-02	600-10000	Ethanediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2,4-diol, Alkoxylated alcohol

B.6 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

SPEAG DASY6 Uncertainty Budget According to IEC/IEEE 62209-1528 (6 GHz - 10 GHz)								
Symbol	Error Description	Uncert. Value	Prob Dist.	Div.	(ci) 1g	(ci) 10g	Std Unc. (1g)	Std Unc. (10g)
Measurement System Errors								
CF	Probe Calibration	±18.6 %	N	2	1	1	±9.3 %	±9.3 %
CF _{drift}	Probe Calibration Drift	±1.0 %	N	1	1	1	±1.0 %	±1.0 %
LIN	Probe Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %
BBS	Broadband Signal	±3.0 %	N	2	1	1	±1.5 %	±1.5 %
ISO	Axial Isotropy	±4.7 %	R	√3	0.5	0.5	±1.4 %	±1.4 %
ISO	Hemispherical Isotropy	±9.6 %	R	√3	0.5	0.5	±2.8 %	±2.8 %
DAE	Data Acquisition	±0.3 %	N	1	1	1	±0.3 %	±0.3 %
AMB	RF Ambient	±1.8 %	N	1	1	1	±1.8 %	±1.8 %
Δ _{sys}	Probe Positioning	±0.2 %	N	1	0.33	0.33	±0.1 %	±0.1 %
DAT	Data Processing	±3.5 %	N	1	1	1	±3.5 %	±3.5 %
Phantom and Device Errors								
LIQ(σ)	Conductivity (meas.) _{DAK}	±2.5 %	N	1	0.78	0.71	±2.0 %	±1.8 %
LIQ(Tσ)	Conductivity (temp.) _{BB}	±2.4 %	R	√3	0.78	0.71	±1.1 %	±1.0 %
EPS	Phantom Permittivity	±14.0 %	R	√3	0.5	0.5	±4.0 %	±4.0 %
DAS	Distance DUT - TSL	±2.0 %	N	1	2	2	±4.0 %	±4.0 %
H	Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %
MOD	DUT Modulation _m	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %
TAS	Time-average SAR	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %
RF _{drift}	DUT drift	±5.0 %	N	1	1	1	±2.9 %	±2.9 %
Correction to the SAR results								
C(ε, σ)	Deviation to Target	±1.9 %	N	1	1	0.84	±1.9 %	±1.6 %
C(R)	SAR scaling _p	±0 %	R	√3	1	1	±0 %	±0 %
Combined Std. Uncertainty							±13.7 %	±13.7 %
Expanded STD Uncertainty							±27.5 %	±27.3 %

B.7 RF Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47CFR Part 2.1093 on the limitation of exposure of the general population / uncontrolled exposure for portable devices.

Exposure Type	General Population / Uncontrolled Environment
Peak spatial-average SAR (averaged over any 1 gram of tissue)	1.6 W/kg
Whole body average SAR	0.08 W/kg
Peak spatial-average SAR (extremities) (averaged over any 10 grams of tissue)	4.0 W/kg

Annex C. Test Results

The herein test results were performed by:

Test case measurement	Test Personnel
Conducted measurement	Heurtematte Franck
SAR/PD measurement	Haddad Yamine

C.1 Test Conditions

C.1.1 Test positions relative to the phantom

The device under test was an Intel® Wi-Fi 6E AX211 card inside an extender host platform (P175G) using a set of PIFA antennas. The card was operated utilizing proprietary software (DRTU version DRTU-02593.22.170.0) and each channel was measured using a broadband power meter to determine the maximum average power.

As per the Interim Procedures for UNII 6-7GHz RF Exposure, explained in *RF Exposure Policies and Procedures: TCB Workshop – October 2020*, the testing has been performed on SAR following IEC/IEEE 62209-1528:2020 and then on Power Density for the highest SAR test configurations.

The testing has been performed on all positions (except back face) in both chains and the four considered bands. U-NII-5, U-NII-6, U-NII-7 and U-NII-8 in SAR mode. The back face position has been tested in power density mode. All the above results show that Front Face is the worst case position compared to the other sides of the antenna, with more than 3dB of difference compared to the other positions. This worst case, in addition with back face position, was tested in Power Density mode for Chain A and Chain B. In both metrics, we have passing results compared to the relative pass/fail criteria

Considering the antenna location diagrams in Annex G and the test exclusions described before, the surfaces/edges to be measured for each antenna are:

Antenna	Chain A/Aux	Chain B/Main
Position	<ul style="list-style-type: none"> • Laptop • Back Face • Bottom Edge • Right Edge 	<ul style="list-style-type: none"> • Laptop • Back Face • Bottom Edge • Left Edge

See G.2 SAR/PD Test positions section for more information on the tested positions

C.1.2 Test signal, Output power and Test Frequencies

For 802.11 transmission modes the device was put into operation by using an own control software to program the test mode required to select the continuous transmission with 100% duty cycle.

The output power of the device was set to transmit at maximum power for all tests.

C.1.3 Evaluation Exclusion and Test Reductions

The SAR Test Exclusion Threshold in FCC OET KDB 447498 can be applied to determine SAR test exclusion for adjacent edge configurations. For 100MHz to 6GHz and test separation distances $\leq 50\text{mm}$, the 1-g and 10-g SAR test exclusion thresholds are determined by the following formula:

$$[(\text{max. power of channel, including tune - up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot \left[\sqrt{f_{(\text{GHz})}} \right] \leq 3.0 \text{ for 1g SAR, and } \leq 7.5 \text{ for 10g extremity SAR} \quad (1)$$

Where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- The values 3.0 and 7.5 are referred to as numeric thresholds

The test exclusions are applicable only when the minimum test separation distance is $\leq 50\text{ mm}$, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is $< 5\text{ mm}$, a distance of 5 mm is applied to determine SAR test exclusion.

For test separation distances $> 50\text{ mm}$, the 1-g and 10-g SAR test exclusion thresholds are determined using the following formulas:

$$((\text{Power allowed at numeric threshold for } 50\text{ mm in (1)}) + (\text{test separation distance} - 50\text{ mm}) \cdot (f_{(\text{MHz})}/150))\text{mW}, \quad (2)$$

for 100MHz to 1500MHz

$$((\text{Power allowed at numeric threshold for } 50\text{ mm in (1)}) + (\text{test separation distance} - 50\text{ mm}) \cdot 10)\text{mW}, \quad (3)$$

for 1500MHz and $\leq 6\text{GHz}$

LAN Antenna	Band Name	Output power		Laptop	Back Face	Top Edge	Bottom Edge	Left Edge	Right Edge
		dBm	mW						
WLAN Main	U-NII-5	12.00	15.85	<50	<50	>50	<50	<50	>50
	U-NII-6	12.00	15.85	<50	<50	>50	<50	<50	>50
	U-NII-7	12.00	15.85	<50	<50	>50	<50	<50	>50
	U-NII-8	12.00	15.85	<50	<50	>50	<50	<50	>50
WLAN Aux	U-NII-5	12.00	15.85	<50	<50	>50	<50	>50	<50
	U-NII-6	12.00	15.85	<50	<50	>50	<50	>50	<50
	U-NII-7	12.00	15.85	<50	<50	>50	<50	>50	<50
	U-NII-8	12.00	15.85	<50	<50	>50	<50	>50	<50

Laptop	Back Face	Top Edge	Bottom Edge	Left Edge	Right Edge
T	T	R	T	T	R
T	T	R	T	T	R
T	T	R	T	T	R
T	T	R	T	T	R
T	T	R	T	R	T
T	T	R	T	R	T
T	T	R	T	R	T
T	T	R	T	R	T

T: Tested position

R: Reduced

See Annex G for a more detailed explanation of the separation distance related to the platform.

C.2 Conducted Power Measurements

C.2.1 WLAN 6-7GHz (U-NII)

C.2.1.1 6.2GHz (U-NII-5) – Notebook Mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Avg Pwr (dBm)				SAR Test?	
					Main		Aux			
					SPEED	Tune-up Pwr (dBm)	SPEED	Tune-up Pwr (dBm)		
U-NII-5	802.11ax HE0	20	1	5955	NR	7.00	NR	7.00	No	
		20	45	6175		7.00		7.00		
		20	93	6415		7.00		7.00		
		40	3	5985		11.00		11.00		
		40	43	6165		11.00		11.00		
		40	91	6405		11.00		11.00		
		80	7	5985		12.00		12.00		
		80	39	6145		12.00		12.00		
		80	87	6385		12.00		12.00		
		160	15	6025		12.00		12.00	Yes	
		160	47	6185		11.66		11.79	12.00	
		160	79	6345		11.71		11.81	12.00	

Initial test configuration

1. NR: Not Required

C.2.1.2 6.2GHz (U-NII-5) – Tablet Mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Avg Pwr (dBm)				SAR Test?	
					Main		Aux			
					SPEED	Tune-up Pwr (dBm)	SPEED	Tune-up Pwr (dBm)		
U-NII-5	802.11ax HE0	20	1	5955	NR	7.00	NR	7.00	No	
		20	45	6175		7.00		7.00		
		20	93	6415		7.00		7.00		
		40	3	5985		11.00		11.00		
		40	43	6165		11.00		11.00		
		40	91	6405		11.00		11.00		
		80	7	5985		12.00		12.00		
		80	39	6145		12.00		12.00		
		80	87	6385		12.00		12.00		
		160	15	6025	11.48	12.00	11.97	12.00	Yes	
		160	47	6185	11.42	12.00	11.94	12.00	No	
		160	79	6345	11.79	12.00	11.99	12.00	Yes	

Initial test configuration

2. NR: Not Required

C.2.1.3 6.5GHz (U-NII-6) – Notebook Mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Avg Pwr (dBm)				SAR Test?	
					Main		Aux			
					SPEED	Tune-up Pwr (dBm)	SPEED	Tune-up Pwr (dBm)		
U-NII-6	802.11ax HE0	20	97	6435	NR	7.00	NR	7.00	No	
		20	105	6475		7.00		7.00		
		20	113	6515		7.00		7.00		
		40	99	6445		11.00		11.00		
		40	107	6485		11.00		11.00		
		80	103	6465		12.00		12.00		
		80	119	6545		12.00		12.00		
		160	111	6505		12.00		12.00		

Initial test configuration

1. NR: Not Required

C.2.1.4 6.5GHz (U-NII-6) – Tablet Mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Avg Pwr (dBm)				SAR Test?	
					Main		Aux			
					SPEED	Tune-up Pwr (dBm)	SPEED	Tune-up Pwr (dBm)		
U-NII-6	802.11ax HE0	20	97	6435	NR	7.00	NR	7.00	No	
		20	105	6475		7.00		7.00		
		20	113	6515		7.00		7.00		
		40	99	6445		11.00		11.00		
		40	107	6485		11.00		11.00		
		80	103	6465		12.00		12.00		
		80	119	6545		12.00		12.00		
		160	111	6505		11.38		11.87		

Initial test configuration

2. NR: Not Required

C.2.1.5 6.7GHz (U-NII-7) – Notebook Mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Avg Pwr (dBm)				SAR Test?	
					Main		Aux			
					SPEED	Tune-up Pwr (dBm)	SPEED	Tune-up Pwr (dBm)		
U-NII-7	802.11ax HE0	20	117	6535	NR	7.00	NR	7.00	No	
		20	149	6695		7.00		7.00		
		20	181	6855		7.00		7.00		
		40	115	6525		11.00		11.00		
		40	147	6685		11.00		11.00		
		40	179	6845		11.00		11.00		
		80	135	6625		12.00		12.00		
		80	151	6705		12.00		12.00		
		80	167	6785		12.00		12.00		
		160	143	6665	11.72	12.00	11.98	12.00	Yes	
		160	175	6825	11.93	12.00	11.96	12.00	Yes	

Initial test configuration

1. NR: Not Required

C.2.1.6 6.7GHz (U-NII-7) – Tablet Mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Avg Pwr (dBm)				SAR Test?	
					Main		Aux			
					SPEED	Tune-up Pwr (dBm)	SPEED	Tune-up Pwr (dBm)		
U-NII-7	802.11ax HE0	20	117	6535	NR	7.00	NR	7.00	No	
		20	149	6695		7.00		7.00		
		20	181	6855		7.00		7.00		
		40	115	6525		11.00		11.00		
		40	147	6685		11.00		11.00		
		40	179	6845		11.00		11.00		
		80	135	6625		12.00		12.00		
		80	151	6705		12.00		12.00		
		80	167	6785		12.00		12.00		
		160	143	6665	11.32	12.00	11.92	12.00	Yes	
		160	175	6825	11.53	12.00	11.70	12.00	No	

Initial test configuration

2. NR: Not Required

C.2.1.7 7.0GHz (U-NII-8) – Notebook Mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Avg Pwr (dBm)				SAR Test?	
					Chain A		Chain B			
					SPEED	Tune-up Pwr (dBm)	SPEED	Tune-up Pwr (dBm)		
U-NII-8	802.11ax HE0	20	185	6875	NR	7.00	NR	7.00	No	
		20	209	6995		7.00		7.00		
		20	233	7115		7.00		7.00		
		40	187	6885		11.00		11.00		
		40	227	7085		11.00		11.00		
		80	183	6865		12.00		12.00		
		80	199	6945		12.00		12.00		
		80	215	7025		12.00		12.00		
		160	207	6985		11.95		11.74		
						12.00		12.00	Yes	

Initial test configuration

1. NR: Not Required

C.2.1.8 7.0GHz (U-NII-8) – Tablet Mode

Band	Mode	Data Rate	Ch #	Freq (MHz)	Avg Pwr (dBm)				SAR Test?	
					Chain A		Chain B			
					SPEED	Tune-up Pwr (dBm)	SPEED	Tune-up Pwr (dBm)		
U-NII-8	802.11ax HE0	20	185	6875	NR	7.00	NR	7.00	No	
		20	209	6995		7.00		7.00		
		20	233	7115		7.00		7.00		
		40	187	6885		11.00		11.00		
		40	227	7085		11.00		11.00		
		80	183	6865		12.00		12.00		
		80	199	6945		12.00		12.00		
		80	215	7025		12.00		12.00		
		160	207	6985		11.59		11.96		
						12.00		12.00	Yes	

Initial test configuration

2. NR: Not Required

C.3 Tissue Parameters Measurement

Head TSL

Freq. (MHz)	Target Parameters		Measured TSL Parameters		Deviation (%)		Date
	ϵ' (F/m)	σ (S/m)	ϵ' (F/m)	σ (S/m)	ϵ'	σ	
6500.0	34.46	6.07	32.22	6.0	-6.5	-1.15	2022-11-23
7000.0	33.88	6.65	31.31	6.55	-7.59	-1.5	

See Annex E for more details.

C.4 System Check Measurements

C.4.1 E-Field

Frequency	Signal Type	Target E-field (V/m)	Measured E-field (V/m)	Deviation (%)	Date
6.5 GHz	Continuous Wave	60.60	59.24	-2.24	2022-11-21

The E-fields presented in the System Check Measurements table are Peak values. The target E-field value is obtained by simulation. The maximum target E-field value at 10 mm with 10 dBm (10 mW) source power is 60.60 V/m. The maximum measured E-field value at 10 mm with 10 dBm (10 mW) is 59.24 V/m.

C.4.2 H-Field

Frequency	Signal Type	Target H-field (A/m)	Measured H-field (A/m)	Deviation (%)	Date
6.5 GHz	Continuous Wave	0.17	0.17	0.00	2022-11-21

The H-fields presented in the System Check Measurements table are Peak values. The target H-field value is obtained by simulation. The maximum target H-field value at 10 mm with 10 dBm (10 mW) source power is 0.17 A/m. The maximum measured E-field value at 10 mm with 10 dBm (10 mW) is 0.17 A/m.

C.4.3 Local Power Density

Frequency	Signal Type	Target Local Power Density (W/m ²)	Measured Local Power Density (W/m ²)	Deviation (%)	Date
6.5 GHz	Continuous Wave	5.12	4.90	-4.30	2022-11-21

The Local Power Density presented in the System Check Measurements table are Peak values. The target Local Power Density value is obtained by simulation. The maximum target Local Power Density value at 10 mm with 10 dBm (10 mW) source power is 5.12 W/m². The maximum measured E-field value at 10 mm with 10 dBm (10 mW) is 4.90 W/m².

C.4.4 Averaged Power Density

Frequency	Signal Type	Target Spatially Averaged Power Density (W/m ²)	Measured Spatially Averaged Power Density (W/m ²)	Deviation (%)	Date
6.5 GHz	Continuous Wave	4.93	4.68	-5.07	2022-11-21

The Spatially Averaged Power Density presented in the System Check Measurements table are Peak values. The target Spatially Averaged Power Density value is obtained by simulation. The maximum target Spatially Averaged Power Density value at 10 mm with 10 dBm (10 mW) source power is 4.93 W/m². The maximum measured Spatially Averaged Power Density value at 10 mm with 10 dBm (10 mW) is 4.68 W/m².

See Annex D for more details.

C.4.5 SAR

Head Measurements

Frequency (MHz)	Average	Target SAR (W/kg)	Measured SAR (W/kg)	Forwarded Power (mW)	Deviation to target (%)	Limit (%)	Date
7000	1g	278.0	267.33	25.10	-3.84	±10	2022-11-24
	10g	48.7	46.61		-4.29		

C.5 Test Results

C.5.1 SAR - 802.11ax – 6.2 GHz – U-NII-5

Antenna Manufacturer	Mode Data Rate	BW (MHz)	Chann el Number	Freq (MHz)	Test position mode	Ant	Scalin g Factor (dB).	Measure d SAR 1g. (W/kg)	Reporte d SAR 1g (W/kg)	SAR 10g (W/kg)	Estimated epithelial PD (W/m ²)*		No Plot	
										Measure d	1cm ²	4cm ²		
SPEED	802.11ax HE0	160	15	6025	Laptop	Main	0.19	0.64	0.67	0.18				
			79	6345			0.29	0.88	0.94	0.25				
			15	6025	Back Face		0.52	1.03	1.16	0.26				
			79	6345			0.21	1.11	1.16	0.26	11.1	6.24	1	
			15	6025	Bottom Edge		0.52	0.17	0.19	0.05				
			79	6345			0.21	0.12	0.13	0.04				
			15	6025	Left Edge		0.52	0.25	0.28	0.01				
			79	6345			0.21	0.14	0.15	0.01				
SPEED	802.11ax HE0	160	15	6025	Laptop	Aux	0.07	0.57	0.58	0.15				
			79	6345			0.20	0.81	0.85	0.19				
			15	6025	Back Face		0.03	0.89	0.89	0.24				
			79	6345			0.01	0.93	0.94	0.24				
			15	6025	Bottom Edge		0.03	0.32	0.32	0.09				
			79	6345			0.01	0.15	0.15	0.04				
			15	6025	Right Edge		0.03	0.05	0.05	0.06				
			79	6345			0.01	0.04	0.04	0.03				

* For reference purposes only, not specifically for compliance, the estimated absorbed (epithelial) power density derived from the measured SAR is shown

C.5.2 SAR - 802.11ax – 6.5 GHz – U-NII-6

Antenna Manufacturer	Mode Data Rate	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Ant	Scaling Factor (dB.)	Measured SAR 1g. (W/kg)	Reported SAR 1g (W/kg)	SAR 10g (W/kg)	Estimated epithelial PD (W/m ²)		No Plot
										Measured	1cm ²	4cm ²	
SPEED	802.11ax HE0	160	111	6505	Laptop	Main	0.00	0.74	0.75	0.21			
			111	6505	Back Face		0.62	0.84	0.97	0.19	8.44	4.50	2
			111	6505	Bottom Edge		0.62	0.09	0.10	0.02			
			111	6505	Left Edge		0.62	0.07	0.08	0.01			
SPEED	802.11ax HE0	160	111	6505	Laptop	Aux	0.08	0.83	0.85	0.20			
			111	6505	Back Face		0.13	0.73	0.75	0.19			
			111	6505	Bottom Edge		0.13	0.11	0.12	0.03			
			111	6505	Right Edge		0.13	0.05	0.05	0.02			

* For reference purposes only, not specifically for compliance, the estimated absorbed (epithelial) power density derived from the measured SAR is shown

C.5.3 SAR - 802.11ax – 6.7 GHz – U-NII-7

Antenna Manufacturer	Mode	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Ant	Scaling Factor (dB.)	Measured SAR 1g. (W/kg)	Reported SAR 1g (W/kg)	SAR 10g (W/kg)	Estimated epithelial PD (W/m ²)		No Plot	
										Measured	1cm ²	4cm ²		
SPEED	802.11ax HE0	160	175	6825	Laptop	Main	0.07	1.11	1.13	0.27	11.10	6.48	3	
			143	6665			0.28	0.72	0.76	0.20				
			175	6825	Back Face		0.47	0.89	0.99	0.20				
			143	6665			0.68	0.82	0.96	0.19				
			175	6825	Bottom Edge		0.47	0.06	0.07	0.02				
			175	6825	Left Edge		0.47	0.10	0.11	0.02				
SPEED	802.11ax HE0	160	143	6665	Laptop	Aux	0.02	0.80	0.80	0.18				
			175	6825			0.04	0.88	0.89	0.21				
			143	6665	Back Face		0.08	0.71	0.72	0.18				
			143	6665	Bottom Edge		0.08	0.09	0.09	0.02				
			143	6665	Right Edge		0.08	0.04	0.04	0.01				

* For reference purposes only, not specifically for compliance, the estimated absorbed (epithelial) power density derived from the measured SAR is shown

C.5.4 SAR - 802.11ax – 7.0 GHz – U-NII-8

Antenna Manufacturer	Mode	BW (MHz)	Channel Number	Freq (MHz)	Test position mode	Ant	Scaling Factor (dB)	Measured SAR 1g. (W/kg)	Reported SAR 1g (W/kg)	SAR 10g (W/kg)	Estimated epithelial PD (W/m²)		No Pilot
										Measured	1cm²	4cm²	
SPEED	802.11ax HE0	160	207	6985	Laptop	Main	0.05	0.91	0.92	0.22	9.07	5.19	4
			207	6985	Back Face		0.41	0.78	0.86	0.20			
			207	6985	Bottom Edge		0.41	0.08	0.09	0.03			
			207	6985	Left Edge		0.41	0.06	0.06	0.01			
SPEED	802.11ax HE0	160	207	6985	Laptop	Aux	0.26	0.63	0.67	0.15			
			207	6985	Back Face		0.04	0.81	0.81	0.20			
			207	6985	Bottom Edge		0.04	0.10	0.10	0.03			
			207	6985	Right Edge		0.04	0.02	0.02	0.01			

* For reference purposes only, not specifically for compliance, the estimated absorbed (epithelial) power density derived from the measured SAR is shown

C.5.5 Power Density - 802.11ax – 6.2 GHz – U-NII-5

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	*Uncertainty Cor. Factor	PStot avg [W/m ²] 1cm ²	**C-PStot avg [W/m ²] 1cm ²	PStot avg [W/m ²] 4cm ²	**C-PStot avg [W/m ²] 4cm ²	EM E [V/m]	EM H [A/m]	Plot #
Main	802.11 ax	160	15	6025	Laptop	1.55	6.00	9.30	4.63	7.18	91.0	0.231	5
			79	6345		1.55	4.08	6.32	3.36	5.21	107	0.206	

* The correction factor uncertainty in dB corresponds to the difference between the actual uncertainty and the 30% target value, as per the TCB Workshop Oct 20

**C-PStot = Compensated PStot

C.5.6 Power Density - 802.11ax – 6.5 GHz – U-NII-6

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Uncertainty Cor. Factor	PStot avg [W/m ²] 1cm ²	C-PStot avg [W/m ²] 1cm ²	PStot avg [W/m ²] 4cm ²	C-PStot avg [W/m ²] 4cm ²	EM E [V/m]	EM H [A/m]	Plot #
Main	802.11 ax	160	111	6505	Laptop	1.55	2.09	3.24	1.67	2.59	91.8	0.181	6

C.5.7 Power Density - 802.11ax – 6.7 GHz – U-NII-7

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Uncertainty Cor. Factor	PStot avg [W/m ²] 1cm ²	C-PStot avg [W/m ²] 1cm ²	PStot avg [W/m ²] 4cm ²	C-PStot avg [W/m ²] 4cm ²	EM E [V/m]	EM H [A/m]	Plot #
Main	802.11ax	160	175	6825	Laptop	1.55	6.87	10.65	4.40	6.82	108.0	0.243	7
			143	6665		1.55	2.76	4.28	2.35	3.64	103.0	0.205	

C.5.8 Power Density - 802.11ax – 7.0 GHz – U-NII-8

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Uncertainty Cor. Factor	PStot avg [W/m ²] 1cm ²	C-PStot avg [W/m ²] 1cm ²	PStot avg [W/m ²] 4cm ²	C-PStot avg [W/m ²] 4cm ²	EM E [V/m]	EM H [A/m]	Plot #
Main	802.11ax	160	207	6985	Laptop	1.55	3.41	5.29	2.51	3.89	114.0	0.226	8

C.5.9 Measurement Variability

According to FCC OET KDB 865664, SAR Measurement variability is assessed when the maximum initial measured SAR is =0.8 W/kg for a certain band mode. If the measured SAR value of the initial repeated measurement is <1.45 W/kg with <20% variation, only one repeated measurement is required to confirm that the results are not expected to have substantial variations.

A second repeated measurement is required only if the measured results for the initial repeated measurement are within 10% of the SAR limit or vary by more than 20%.

A third repeated measurement is required only if the original, first or second repeated measurement =1.5W/Kg and the ratio of largest to smallest SAR for the original, first and second repeated measurement is > 1.2.

Band / Mode	Position	Ch #	Freq. (MHz)	Measured SAR 1g (W/kg)	1 st Repeated SAR 1g (W/Kg)	2 nd Repeated SAR 1g (W/Kg)	Highest Ratio
6.5GHz 802.11ax160 HT0	Back Face	79	6345	1.11	1.10		1.01

C.5.10 Simultaneous Transmission Evaluation – SAR

According to FCC OET KDB 447498, when the sum of 1g SAR for all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

All the values stated in the table below are the worst case found for standalone measurement with disregard of the transmission mode or channel where the worst case was found

Antenna	Position	Highest Reported SAR (1g) (W/kg)	
		WLAN 6.5GHz	Bluetooth*
Chain B	Laptop	1.13	
	Back Face	1.16	
	Bottom Edge	0.19	
	Left Edge	0.28	
	Right Edge	0.40*	
Chain A	Laptop	0.89	0.19
	Back Face	0.94	0.24
	Bottom Edge	0.32	0.04
	Left Edge	0.40*	0.40*
	Right Edge	0.05	0.04

* For Bluetooth values refer to test report 221026-05.TR01_Dell P175G_Oasis 14 360_wAX211D2W

Position	Simultaneous Tx Antenna Combination		Σ SAR 1g (W/kg)	Limit (W/kg)
	Chain A	Chain B		
Laptop	WLAN 6.5GHz	WLAN 6.5GHz	2.02	1.60
	WLAN 6.5GHz + BT	WLAN 6.5GHz	2.21	
	BT	WLAN 6.5GHz	1.32	
Back Face	WLAN 6.5GHz	WLAN 6.5GHz	2.10	1.60
	WLAN 6.5GHz + BT	WLAN 6.5GHz	2.34	
	BT	WLAN 6.5GHz	1.40	
Bottom Edge	WLAN 6.5GHz	WLAN 6.5GHz	0.51	1.60
	WLAN 6.5GHz + BT	WLAN 6.5GHz	0.55	
	BT	WLAN 6.5GHz	0.23	
Left Edge	WLAN 6.5GHz	WLAN 6.5GHz	0.68	1.60
	WLAN 6.5GHz + BT	WLAN 6.5GHz	1.08	
	BT	WLAN 6.5GHz	0.68	
Right Edge	WLAN 6.5GHz	WLAN 6.5GHz	0.45	1.60
	WLAN 6.5GHz + BT	WLAN 6.5GHz	0.49	
	BT	WLAN 6.5GHz	0.44	

Considering the results described above and according to the simultaneous transmission SAR test exclusion considerations described in FCC OET KDB 447498, no SAR to Peak Location Separation Ratio is required.

In case the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio:

Position	Antenna	Reported SAR 1g (W/kg)	Σ SAR 1g (W/Kg)	Peak Location (mm) (x,y,z)	SAR to peak location separation ratio	Limit
Laptop	Main WLAN 6GHz	1.13	2.02	(10.8 ; 132.2 ; -177.1)	0.01	0.04
	Aux WLAN 6GHz	0.89		(18.9 ; -120.6 ; -177.1)		
Laptop	Main WLAN 6GHz	1.13	2.21	(10.8 ; 132.2 ; -177.1)	0.01	0.04
	Aux WLAN 6GHz	0.89		(18.9 ; -120.6 ; -177.1)		
	Aux BT	0.19		(6.0 ; -102.0 ; -177.0)		
Back Face	Main WLAN 6GHz	1.16	2.10	(3.3 ; -124.6 ; -177.1)	0.01	0.04
	Aux WLAN 6GHz	0.94		(9.1 ; 115.9 ; -177.1)		
Back Face	Main WLAN 6GHz	1.16	2.34	(3.3 ; -124.6 ; -177.1)	0.02	0.04
	Aux WLAN 6GHz	0.94		(9.1 ; 115.9 ; -177.1)		
	Aux BT	0.24		(1.5 ; 110.5 ; -177.0)		

* The worst case for simultaneous SAR to peak location separation ratio calculation was made considering the sum of 3 SAR results and the closest maxima distance between Main and Aux antenna (i.e. the closest distance between the peak location between Main WLAN to Aux WLAN and Main WLAN to Aux BT).


Considering the results described above and according to the simultaneous transmission evaluation exclusions described in FCC OET KDB 447498 D01, no enlarged zoom scan measurements are required

Annex D. Test System Plots

1. U-NII-5 - 802.11ax, CH79, Chain B – Position Back Face (SAR).....	444
2. U-NII-6 - 802.11ax, CH111, Chain B – Position Back Face (SAR).....	455
3. U-NII-7 - 802.11ax, CH175, Chain B – Position Laptop (SAR).....	466
4. U-NII-8 - 802.11ax, CH207, Chain B – Position Laptop (SAR).....	477
5. U-NII-5 - 802.11ax, CH15, Chain B – Position Laptop (PD)	488
6. U-NII-6 - 802.11ax, CH111, Chain B – Position Laptop (PD)	499
7. U-NII-7 - 802.11ax, CH175, Chain B – Position Laptop (PD)	50
8. U-NII-8 - 802.11ax, CH207, Chain B – Position Laptop (PD)	51
9. Power Density System Check From 6500MHz.....	52
10. SAR System Check From 7000MHz.....	544


1. U-NII-5 - 802.11ax, CH79, Chain B – Position Back Face (SAR)

Model, Manufacturer	Dimensions [mm]		IMEI	DUT Type					
P175G, Dell	310.0 x 210.0 x 20.0		7449256000003	Convertible PC					
Exposure Conditions									
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity		
Flat, HSL	BACK, 0.00	U-NII-5	WLAN, 10755-AAC	6345.0, 79	5.23	5.79	32.5		
Hardware Setup									
Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date				
ELI V8.0 (20deg probe tilt) -	HBBL-600-10000, 2022-Nov-23		EX3DV4 - SN7455, 2022-03-21		DAE4ip Sn1658, 2022-08-19				
Scan Setup									
	Area Scan	Zoom Scan			Measurement Results				
Grid Extents [mm]	120.0 x 120.0	22.0 x 22.0 x 22.0			Date	2022-11-24, 08:48	2022-11-24, 08:58		
Grid Steps [mm]	10.0 x 10.0	3.4 x 3.4 x 1.4			psSAR1g [W/kg]	0.899	1.11		
Sensor Surface [mm]	3.0	1.4			psSAR10g [W/kg]	0.291	0.264		
Graded Grid	n/a	Yes			Power Drift [dB]	-0.20	0.01		
Grading Ratio	n/a	1.4			Power Scaling	Disabled	Disabled		
MAIA	Confirmed by Maia	Confirmed by Maia			Scaling Factor [dB]				
Surface Detection	VMS + 6p	VMS + 6p			TSL Correction	Positive only	Positive only		
Scan Method	Measured	Measured			M2/M1 [%]		51.0		
					Dist 3dB Peak [mm]		5.5		

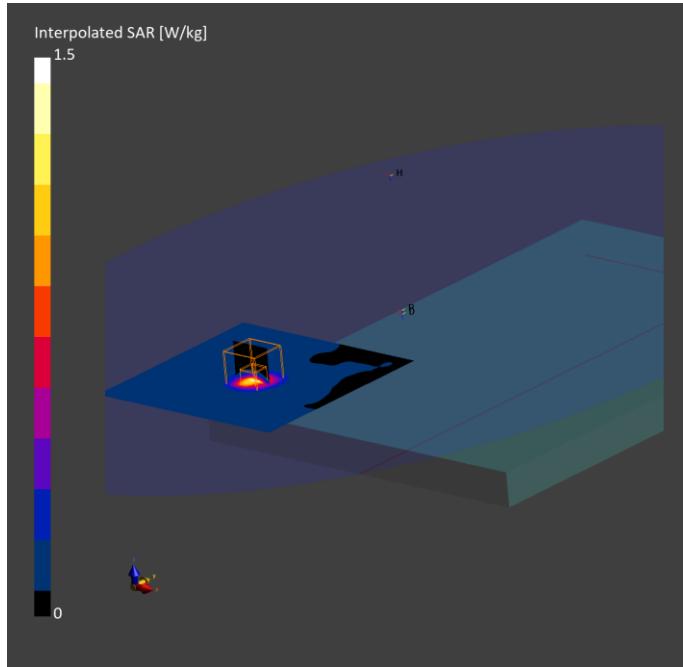


2. U-NII-6 - 802.11ax, CH111, Chain B – Position Back Face (SAR)

Model, Manufacturer	Dimensions [mm]		IMEI	DUT Type			
P175G, Dell	310.0 x 210.0 x 20.0		7449256000003	Convertible PC			
Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	U-NII-6	WLAN, 10755-AAC	6505.0, 111	5.23	6.01	32.2
Hardware Setup							
Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date		
ELI V8.0 (20deg probe tilt) -	HBBL-600-10000, 2022-Nov-23		EX3DV4 - SN7455, 2022-03-21		DAE4ip Sn1658, 2022-08-19		
Scan Setup							
	Area Scan	Zoom Scan				Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	22.0 x 22.0 x 22.0				Date	2022-11-23, 20:13
Grid Steps [mm]	10.0 x 10.0	3.4 x 3.4 x 1.4				psSAR1g [W/kg]	0.611
Sensor Surface [mm]	3.0	1.4				psSAR10g [W/kg]	0.190
Graded Grid	n/a	Yes				Power Drift [dB]	0.21
Grading Ratio	n/a	1.4				Power Scaling	0.03
MAIA	Confirmed by Maia	Confirmed by Maia				Scaling Factor [dB]	Disabled
Surface Detection	VMS + 6p	VMS + 6p				TSL Correction	Positive only
Scan Method	Measured	Measured				M2/M1 [%]	51.1
						Dist 3dB Peak [mm]	5.0

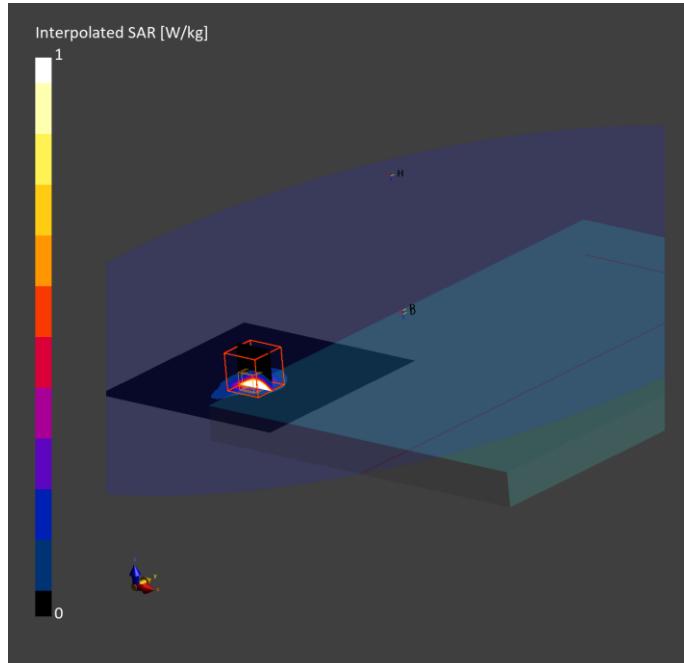


3. U-NII-7 - 802.11ax, CH175, Chain B – Position Laptop (SAR)

Model, Manufacturer	Dimensions [mm]		IMEI	DUT Type					
P175G, Dell	310.0 x 210.0 x 20.0		7449256000003	Convertible PC					
Exposure Conditions									
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity		
Flat, HSL	FRONT, 0.00	U-NII-7	WLAN, 10755-AAC	6825.0, 175	5.23	6.36	31.6		
Hardware Setup									
Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date				
ELI V8.0 (20deg probe tilt) -	HBBL-600-10000, 2022-Nov-23		EX3DV4 - SN7455, 2022-03-21		DAE4ip Sn1658, 2022-08-19				
Scan Setup									
	Area Scan	Zoom Scan			Measurement Results				
Grid Extents [mm]	120.0 x 120.0	22.0 x 22.0 x 22.0			Area Scan	Zoom Scan			
Grid Steps [mm]	10.0 x 10.0	3.4 x 3.4 x 1.4			Date	2022-11-24, 15:29			
Sensor Surface [mm]	3.0	1.4			psSAR1g [W/kg]	1.09			
Graded Grid	n/a	Yes			psSAR10g [W/kg]	0.314			
Grading Ratio	n/a	1.4			Power Drift [dB]	-0.09			
MAIA	Confirmed by Maia	Confirmed by Maia			Power Scaling	Disabled			
Surface Detection	VMS + 6p	VMS + 6p			Scaling Factor [dB]	Disabled			
Scan Method	Measured	Measured			TSL Correction	Positive only			
					M2/M1 [%]	Positive only			
					Dist 3dB Peak [mm]	48.5			
						5.9			

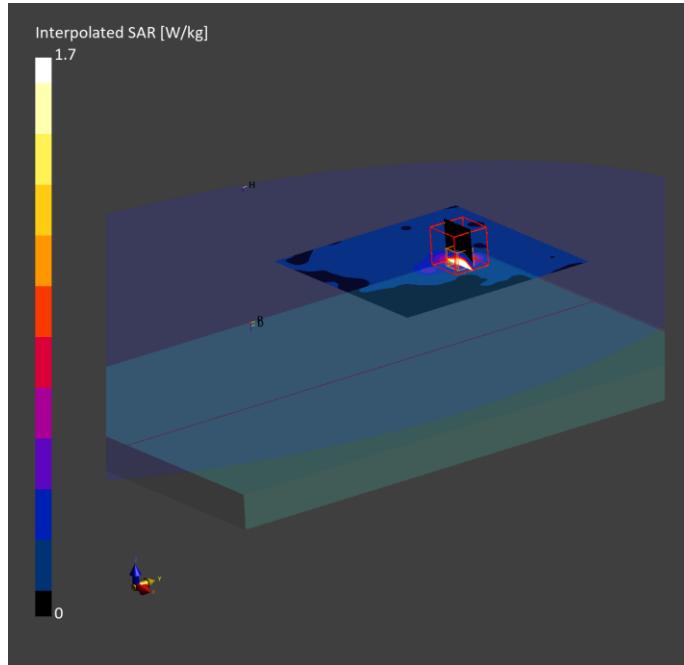

4. U-NII-8 - 802.11ax, CH207, Chain B – Position Laptop (SAR)

Model, Manufacturer	Dimensions [mm]		IMEI	DUT Type			
P175G, Dell	310.0 x 210.0 x 20.0		7449256000003	Convertible PC			
Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 0.00	U-NII-8	WLAN, 10755-AAC	6985.0, 207	5.23	6.53	31.3
Hardware Setup							
Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date		
ELI V8.0 (20deg probe tilt) -	HBBL-600-10000, 2022-Nov-23		EX3DV4 - SN7455, 2022-03-21		DAE4ip Sn1658, 2022-08-19		
Scan Setup							
	Area Scan	Zoom Scan			Area Scan	Zoom Scan	
Grid Extents [mm]	120.0 x 120.0	22.0 x 22.0 x 22.0			Date	2022-11-24, 11:55	2022-11-24, 12:05
Grid Steps [mm]	10.0 x 10.0	3.4 x 3.4 x 1.4			psSAR1g [W/kg]	0.919	0.907
Sensor Surface [mm]	3.0	1.4			psSAR10g [W/kg]	0.278	0.220
Graded Grid	n/a	Yes			Power Drift [dB]	0.10	0.12
Grading Ratio	n/a	1.4			Power Scaling	Disabled	Disabled
MAIA	Confirmed by Maia	Confirmed by Maia			Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p			TSL Correction	Positive only	Positive only
Scan Method	Measured	Measured			M2/M1 [%]		48.1
					Dist 3dB Peak [mm]		5.2

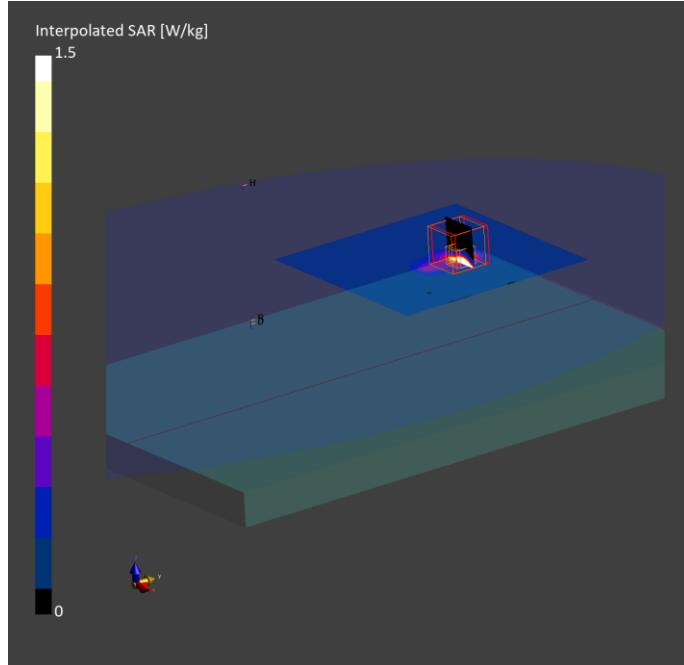

5. U-NII-5 - 802.11ax, CH15, Chain B – Position Laptop (PD)

DUT: P175G w AX211D2W; Type: SPEED F-0G-FH-6165-001-00 DC33002RF0L

Signal Source: modulation Custom Channel for 802.11ax, level 12.00dBm.

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Phantom section: Table Section

Measurement Standard: DASY6 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EUmmW – SN9538; ConvF(1, 1, 1); Calibrated: 2022-05-18;
 - Modulation Compensation:
- Sensor-Surface : 0mm (Fix Surface), $z = 2.5 \text{ mm}$
- Electronics: DAE4 Sn1704; Calibrated: 2022-04-29;
- Phantom: Cover; Type: SPEAG Phantom Cover;
- cDASY6 5G Module v3.0.0.841
- Test Date: 2022-11-26

Distance-2.5mm:

Measurement Resolution = $\lambda/20 \text{ mm}$

Measurement Scan area = 120 mm x 120 mm

The plots below show the average PStot (1cm²), PStot (4cm²) the E-field and the H Field

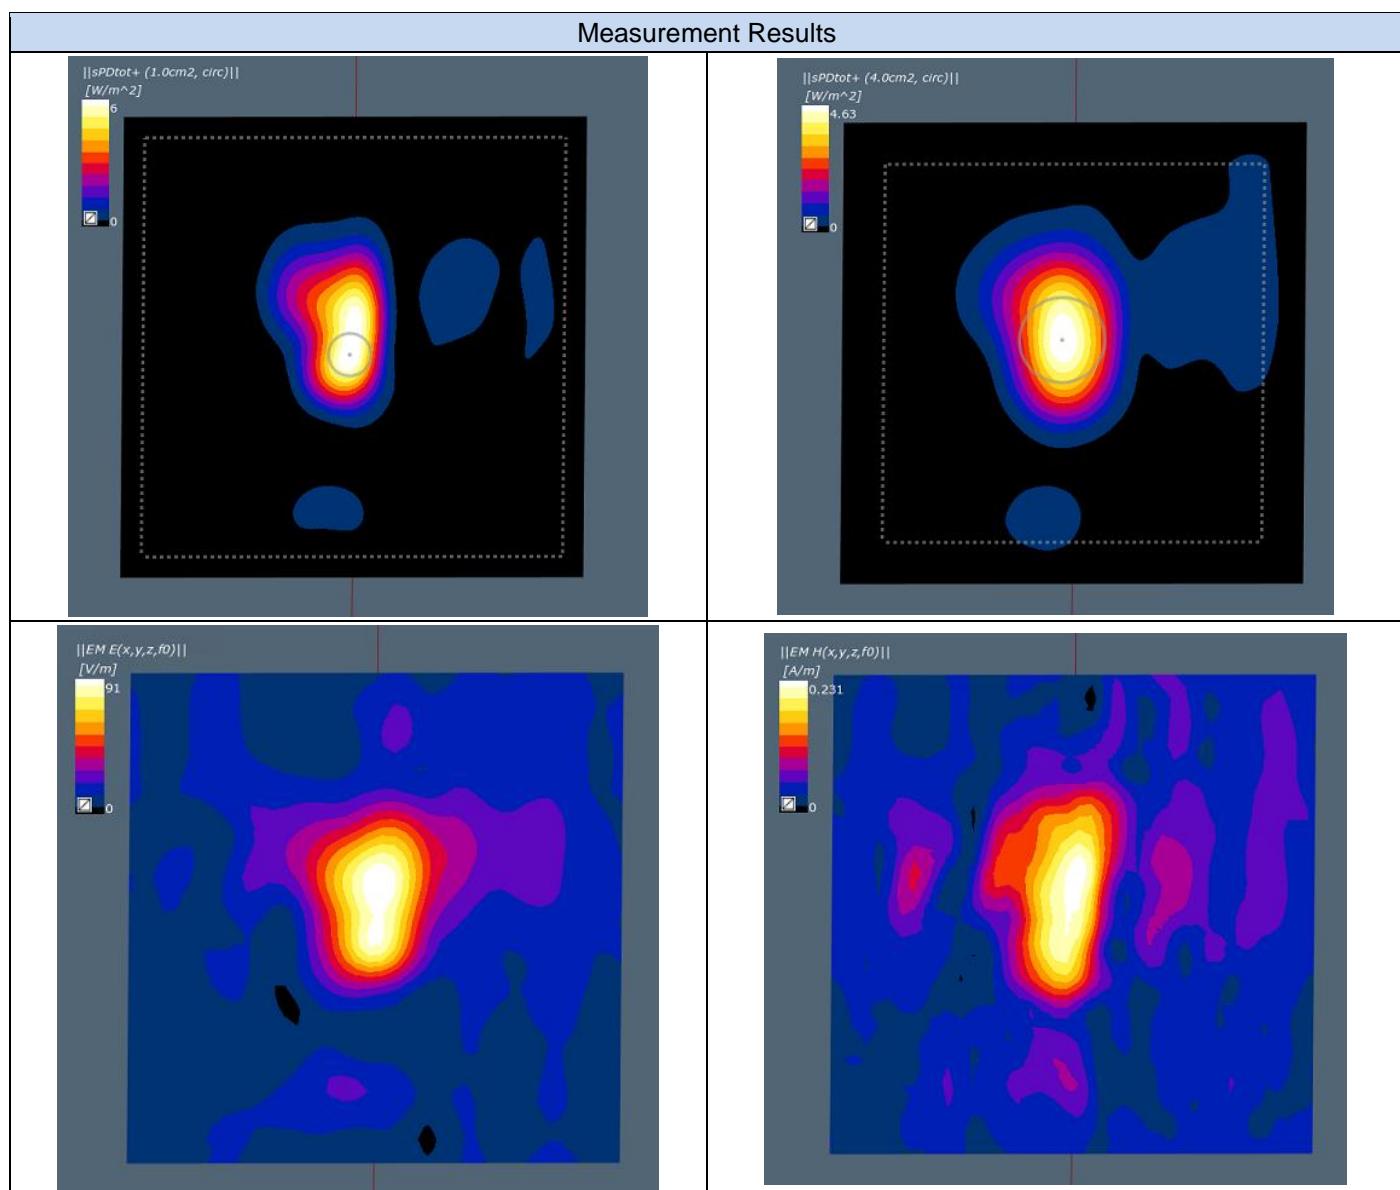

6. U-NII-6 - 802.11ax, CH111, Chain B – Position Laptop (PD)

DUT: P175G w AX211D2W; Type: SPEED F-0G-FH-6165-001-00 DC33002RF0L

Signal Source: modulation Custom Channel for 802.11ax, level 12.00dBm.

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Phantom section: Table Section

Measurement Standard: DASY6 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EUmmW – SN9538; ConvF(1, 1, 1); Calibrated: 2022-05-18;
 - Modulation Compensation:
- Sensor-Surface : 0mm (Fix Surface), $z = 2.5 \text{ mm}$
- Electronics: DAE4 Sn1704; Calibrated: 2022-04-29;
- Phantom: Cover; Type: SPEAG Phantom Cover;
- cDASY6 5G Module v3.0.0.841
- Test Date: 2022-11-26

Distance-2.5mm:

Measurement Resolution = $\lambda/20 \text{ mm}$

Measurement Scan area = 120 mm x 120 mm

The plots below show the average PStot (1cm²), PStot (4cm²) the E-field and the H Field

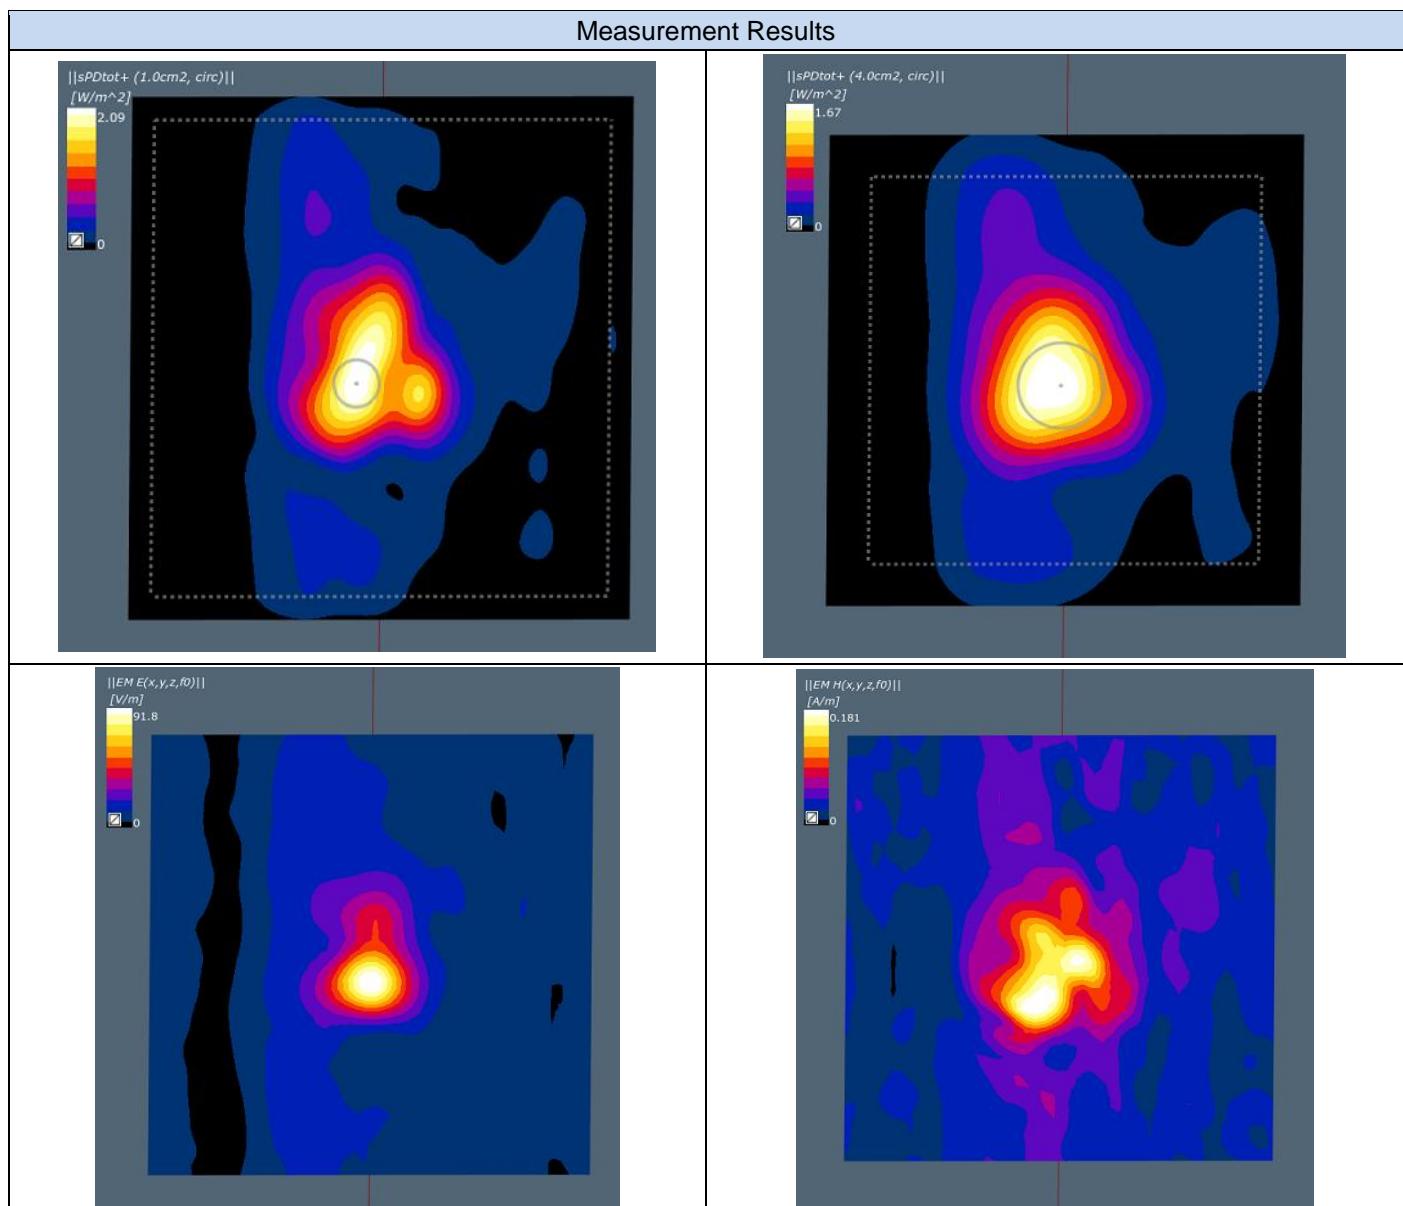

7. U-NII-7 - 802.11ax, CH175, Chain B – Position Laptop (PD)

DUT: P175G w AX211D2W; Type: SPEED F-0G-FH-6165-001-00 DC33002RF0L

Signal Source: modulation Custom Channel for 802.11ax, level 12.00dBm.

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Phantom section: Table Section

Measurement Standard: DASY6 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EUmmW – SN9538; ConvF(1, 1, 1); Calibrated: 2022-05-18;
 - Modulation Compensation:
- Sensor-Surface : 0mm (Fix Surface), $z = 2.5 \text{ mm}$
- Electronics: DAE4 Sn1704; Calibrated: 2022-04-29;
- Phantom: Cover; Type: SPEAG Phantom Cover;
- cDASY6 5G Module v3.0.0.841
- Test Date: 2022-11-26

Distance-2.5mm:

Measurement Resolution = $\lambda/20 \text{ mm}$

Measurement Scan area = 120 mm x 120 mm

The plots below show the average PStot (1cm²), PStot (4cm²) the E-field and the H Field

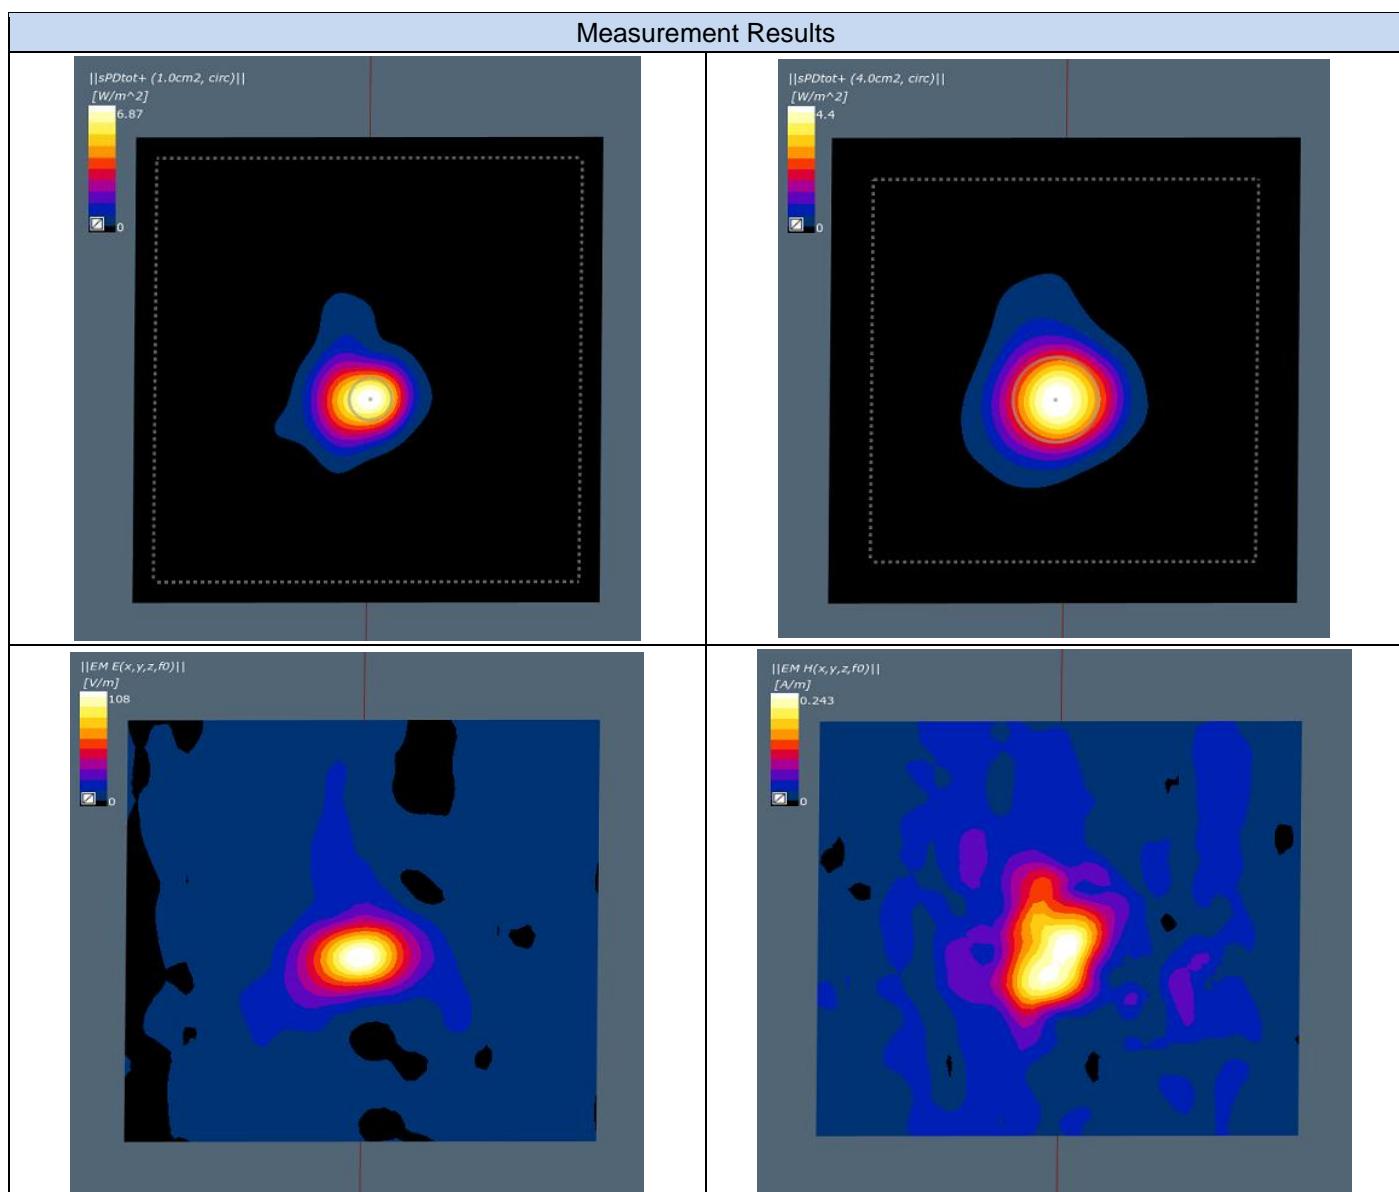

8. U-NII-8 - 802.11ax, CH207, Chain B – Position Laptop (PD)

DUT: P175G w AX211D2W; Type: SPEED F-0G-FH-6165-001-00 DC33002RF0L

Signal Source: modulation Custom Channel for 802.11ax, level 12.00dBm.

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Phantom section: Table Section

Measurement Standard: DASY6 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EUmmW – SN9538; ConvF(1, 1, 1); Calibrated: 2022-05-18;
 - Modulation Compensation:
- Sensor-Surface : 0mm (Fix Surface), $z = 2.5 \text{ mm}$
- Electronics: DAE4 Sn1704; Calibrated: 2022-04-29;
- Phantom: Cover; Type: SPEAG Phantom Cover;
- cDASY6 5G Module v3.0.0.841
- Test Date: 2022-11-26

Distance-2.5mm:

Measurement Resolution = $\lambda/20 \text{ mm}$


Measurement Scan area = 120 mm x 120 mm

The plots below show the average PStat (1cm²), PStat (4cm²) the E-field and the H Field

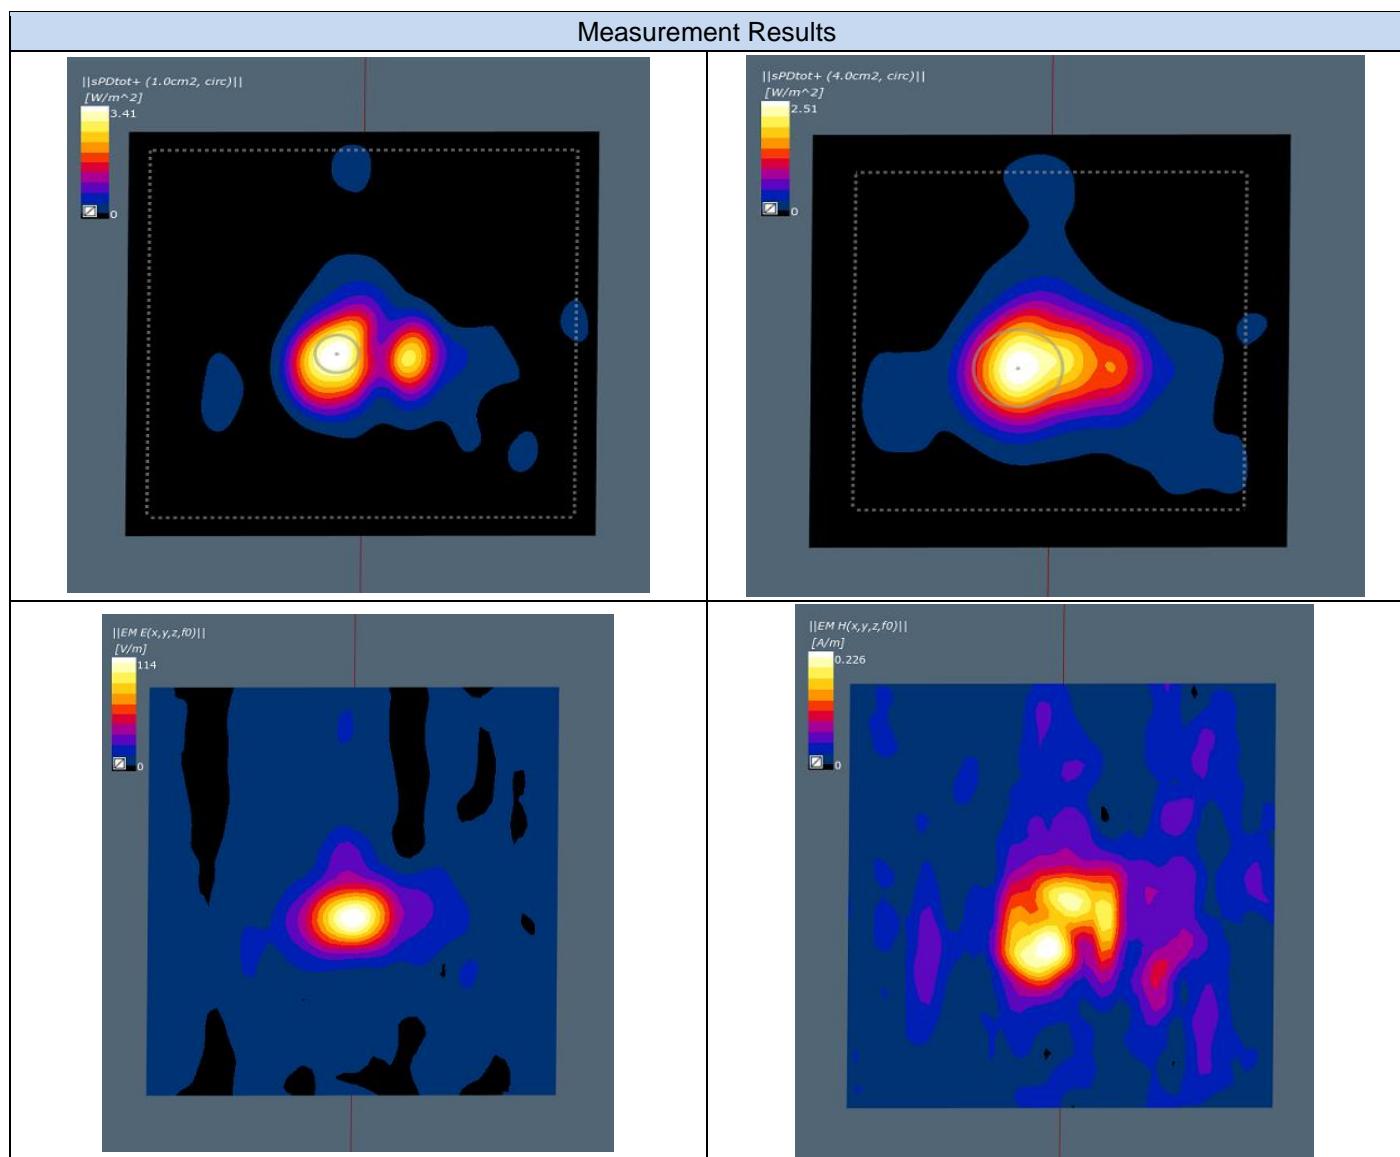


9. Power Density System Check From 6500MHz

The plots below show the comparison between the Numerical Modeling results and the system check measurement results in terms of E-field, H Field, single point power density and Avg Power density 1cm^2 .

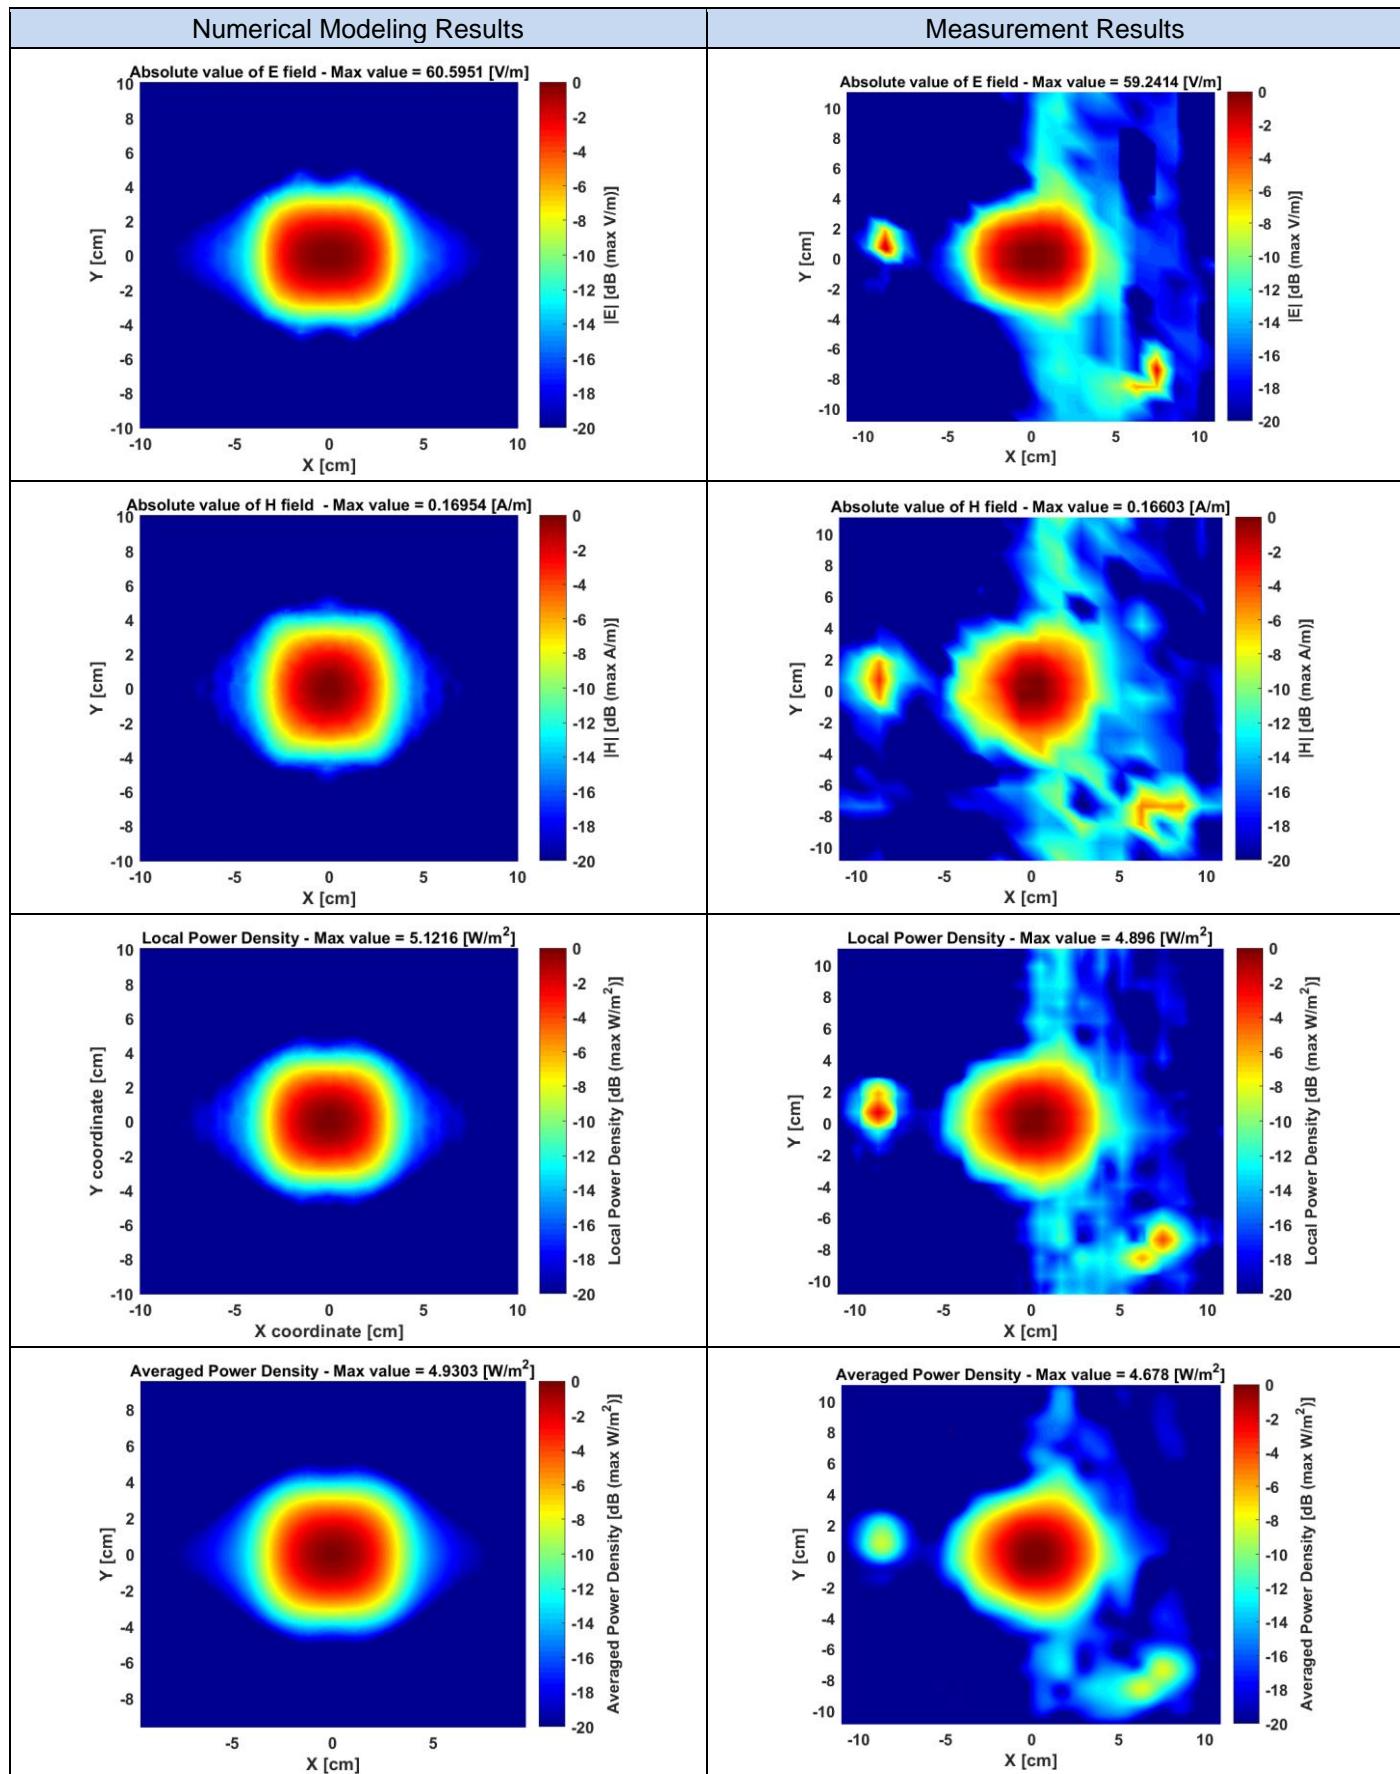


The plots below show the comparison between the numerical modeling and the system check results in terms of normalized E-field distribution and the 1D variation along the two axis of the maximum.

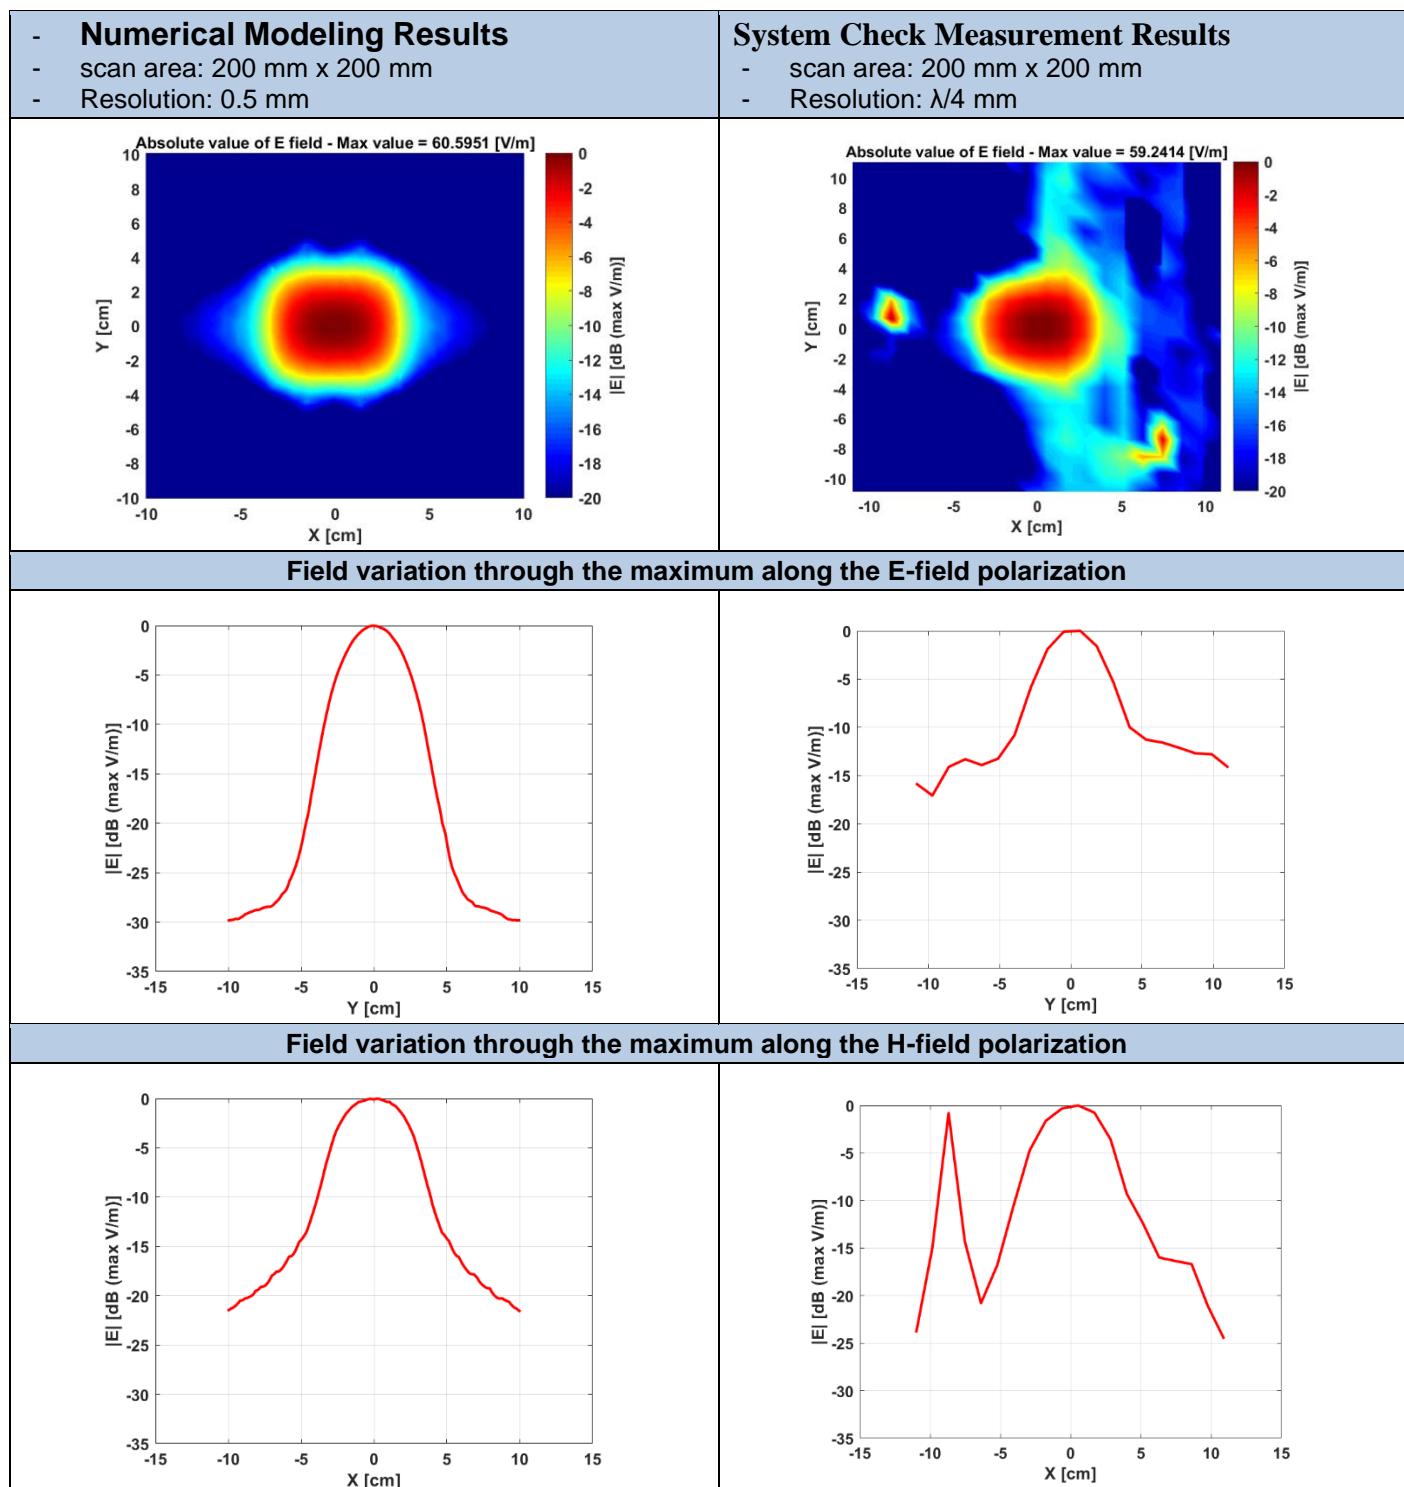

10. SAR System Check From 7000MHz

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type								
D7.0GHzV2, Speag	50.0 x 10.0 x 20.0	1008	Validation Dipole								
Exposure Conditions	Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity			
Flat, HSL	,	,		0--	7000.0, 0	5.23	6.55	31.3			
Hardware Setup											
Phantom	TSL, Measured Date			Probe, Calibration Date		DAE, Calibration Date					
ELI V8.0 (20deg probe tilt) -	HBBL-600-10000 , 2022-Nov-23			EX3DV4 - SN7455, 2022-03-21		DAE4ip Sn1658, 2022-08-19					
Scan Setup											
	Area Scan	Zoom Scan		Measurement Results							
Grid Extents [mm]	45.0 x 90.0	22.0 x 22.0 x 22.0		Date	Area Scan		Zoom Scan				
Grid Steps [mm]	7.5 x 7.5	3.0 x 3.0 x 1.4		2022-11-24, 16:09	2022-11-24,		16:19				
Sensor Surface [mm]	3.0	1.4		psSAR1g [W/kg]	6.34		6.71				
Graded Grid	n/a	Yes		psSAR10g [W/kg]	1.20		1.17				
Grading Ratio	n/a	1.4		Power Drift [dB]	0.14		-0.21				
MAIA	Confirmed by Maia	Confirmed by Maia		Power Scaling	Disabled		Disabled				
Surface Detection	VMS + 6p	VMS + 6p		Scaling Factor [dB]							
Scan Method	Measured	Measured		TSL Correction	Positive only		Positive only				
				M2/M1 [%]			47.7				
				Dist 3dB Peak [mm]			3.8				

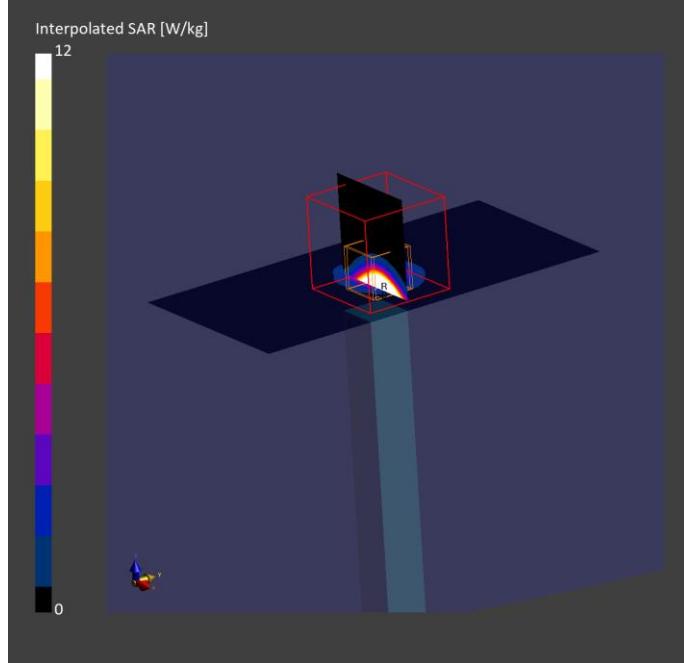

Annex E. TSL Dielectric Parameters

E.1 Head WiFi 6E 6500MHz

Freq.(MHz)	Target		Measured – 2022-11-23	
	$\epsilon'(F/m)$	$\sigma(S/m)$	$\epsilon'_1(F/m)$	$\sigma_1(S/m)$
6000.0	35.07	5.48	33.02	5.38
6050.0	35.01	5.54	32.99	5.44
6100.0	34.95	5.59	32.93	5.5
6150.0	34.89	5.65	32.85	5.55
6200.0	34.83	5.71	32.79	5.61
6250.0	34.77	5.77	32.7	5.67
6300.0	34.70	5.83	32.61	5.74
6350.0	34.64	5.89	32.53	5.8
6400.0	34.58	5.95	32.45	5.87
6450.0	34.52	6.01	32.34	5.94
6500.0	34.46	6.07	32.22	6.0
6550.0	34.40	6.13	32.09	6.07
6600.0	34.34	6.19	31.97	6.13
6650.0	34.29	6.25	31.88	6.19
6700.0	34.23	6.30	31.8	6.25
6750.0	34.17	6.36	31.73	6.29
6800.0	34.11	6.42	31.65	6.34
6850.0	34.05	6.48	31.57	6.39
6900.0	33.99	6.53	31.49	6.44
6950.0	33.94	6.59	31.4	6.49
7000.0	33.88	6.65	31.31	6.55

