



RF TEST REPORT

Applicant Mercado Libre SRL

FCC ID 2A5U9-MP300

Product Mobile POS

Brand MercadoPago

Model MP300

Report No. R2203A0258-R1V2

Issue Date July 15, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2021)/ FCC CFR 47 Part 22H (2021)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Xu Ying

Approved by: Xu Kai

TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	5
1.1. Notes of the Test Report	5
1.2. Test facility.....	5
1.3. Testing Location	5
2. General Description of Equipment under Test.....	6
2.1. Applicant and Manufacturer Information	6
2.2. General Information.....	6
3. Applied Standards.....	8
4. Test Configuration.....	9
5. Test Case	10
5.1. RF Power Output and Effective Radiated Power	10
5.2. Radiates Spurious Emission	11
6. Test Result	14
6.1. RF Power Output and Effective Radiated Power	14
6.2. Radiates Spurious Emission	16
7. Main Test Instruments	18
ANNEX A: The EUT Appearance	19
ANNEX B: Test Setup Photos	20



Version	Revision description	Issue Date
Rev.0	Initial issue of report.	May 26, 2022
Rev.1	Update Product name.	June 17, 2022
Rev.2	Update data.	July 15, 2022
Note: This revised report (Report No. R2203A0258-R1V2) supersedes and replaces the previously issued report (Report No. R2203A0258-R1V1). Please discard or destroy the previously issued report and dispose of it accordingly.		



Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Radiated Power	2.1046 22.913(a)(5)	PASS
2	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS

Date of Testing: April 22, 2022, May 18, 2022 and July 15, 2022

Date of Sample Received: April 22, 2022

Note: PASS: The EUT complies with the essential requirements in the standard.
FAIL: The EUT does not comply with the essential requirements in the standard.
All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

There is only test Effective Radiated Power and Radiated Spurious Emissions for MP300 in this report. Other test items refer to the module report (Model: BG95-M3; Report No.: R2108A0735-R1; FCC ID: XMR201910BG95M3).



1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com



2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

Applicant	Mercado Libre SRL
Applicant address	Caseros 3039, Buenos Aires, Argentina Buenos Aires 1264 ARGENTINA
Manufacturer	Dspread Technology (Beijing) Inc.
Manufacturer address	Rm.407, b12c. #10 (Universal Business Park), Jiuxianqiao Road, Chaoyang District, Beijing, China,100015

2.2. General Information

EUT Description						
Model	MP300					
IMEI	864593058276063					
Hardware Version	1.0					
Software Version	1.0.1					
Power Supply	Battery					
Antenna Type	Internal Antenna					
Antenna Gain	Frequency (MHz)	Gain (dBi)	Frequency (MHz)	Gain (dBi)		
	820	-4.07	840	-3.61		
	830	-3.66	850	-3.72		
Test Mode(s)	GSM 850; LTE eMTC band 5;					
Test Modulation	(GSM/GPRS)GMSK, (EGPRS) GMSK/ 8PSK; (LTE eMTC band) QPSK, 16QAM;					
LTE Category	M1					
Maximum E.R.P.	GSM 850		26.44dBm			
	LTE eMTC band 5		14.98dBm			
Rated Power Supply Voltage	3.8V					
Operating Voltage	Minimum: 3.65V Maximum: 4.2V					
Operating Temperature	Lowest: 0°C Highest: +45°C					
Testing Temperature	Lowest: -20°C Highest: +50°C					
Operating Frequency Range(s)	Band		Tx (MHz)			
	GSM 850		824 ~ 849			
	LTE eMTC band 5		824 ~ 849			
EUT Accessory						
Battery	Manufacturer: Beijing Guocai Huayang Technology Co., Ltd. Model: GCHY 643656					
USB Cable 1	Manufacturer: JiangXi JieYe Electronics Co., Ltd. Model: JY-C15-09 100cm Cable, Shielded					



USB Cable 2	Manufacturer: SHENZHEN LITKCONN TECHNOLOGY CO., LTD Model: ZY-1130018 100cm Cable, Shielded
<p>Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.</p> <p>2. There is more than one USB cable/Battery, each one should be applied throughout the compliance test respectively, and however, only the worst case (USB cable 2) will be recorded in this report.</p> <p>3. This product supports (WWAN) GSM 850/900/1800/1900/LTE eMTC Band 4/5/28, this report only tests FCC frequency band: GSM 850/1900/LTE eMTC Band 4/5.</p>	



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 22H (2021)

FCC CFR47 Part 2 (2021)

Reference standard:

ANSI C63.26 - 2015

KDB 971168 D01 Power Meas License Digital Systems v03r01



4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (GSM for X axis, horizontal polarization; LTE for Z axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in GSM/LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation	
	GSM 850	
Radiates Spurious Emission	GSM/8-PSK	

Test modes are chosen as the worst case configuration below for LTE eMTC band 5.

Test items	Bandwidth (MHz)				Modulation		RB			Test Channel		
	1.4	3	5	10	QPSK	16QAM	1	50%	100%	L	M	H
RF power output and Effective Radiated power	-	-	O	O	O	O	O	O	O	O	O	O
Radiates Spurious Emission	O	-	O	O	O	-	O	-	-	O	-	
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.											

5. Test Case

5.1. RF Power Output and Effective Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.

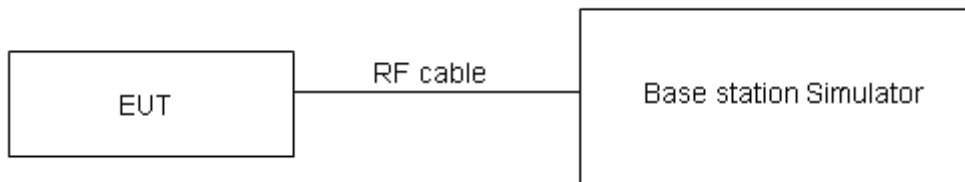
ERP can then be calculated as follows:

$$\text{EIRP (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$$

where: dBd refers to gain relative to an ideal dipole.

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15 \text{ (dB)}.$$

Test Setup



Limits

No specific RF power output requirements in part 2.1046.

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	$\leq 7 \text{ W (38.45 dBm)}$
-------	--------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4 \text{ dB}$ for RF power output, $k = 2$, $U = 1.19 \text{ dB}$ for ERP.

Test Results

Refer to the section 6.1 of this report for test data.

**Ambient condition**

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26-2015.
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz,VBW=300kHz, and the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:

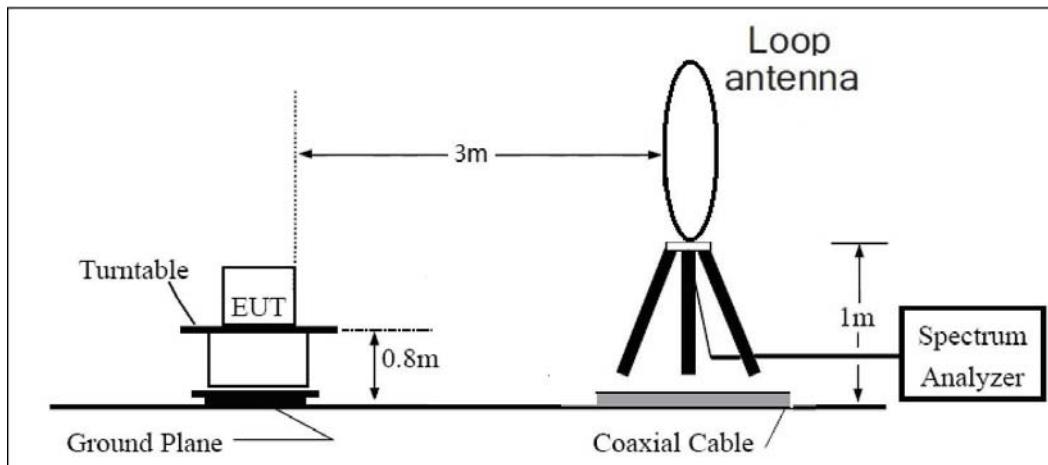
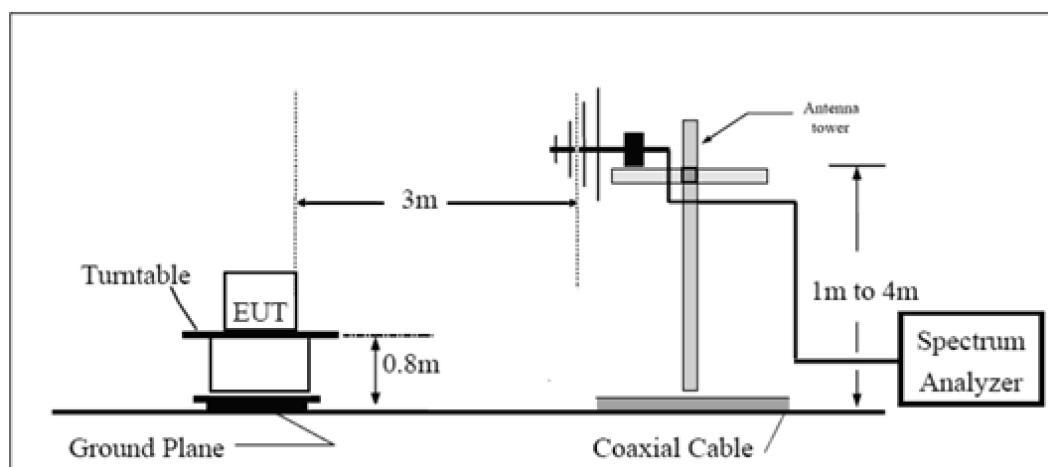
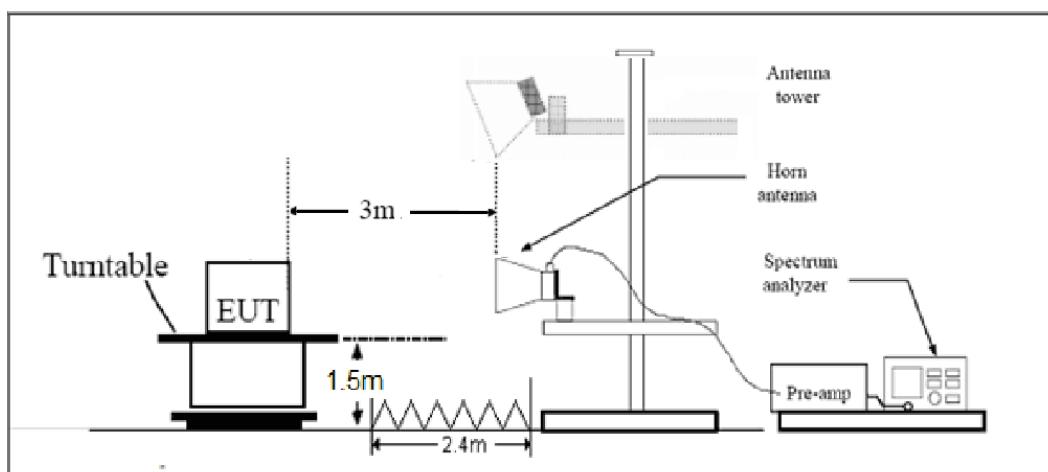
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$

The measurement results are amend as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$

8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dB.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup**9KHz~ 30MHz****30MHz~ 1GHz****Above 1GHz**

Note: Area side:2.4mX3.6m



Limits

Rule Part 22.917(a) specifies that "The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB."

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

Test Results

Refer to the section 6.2 of this report for test data.



6. Test Result

6.1. RF Power Output and Effective Radiated Power

RF Power Output refer to Module Report.

GSM 850		Conducted Power(dBm)			ERP(dBm)		
		Channel 128	Channel 190	Channel 251	Channel 128	Channel 190	Channel 251
		824.2 (MHz)	836.6 (MHz)	848.8 (MHz)	824.2 (MHz)	836.6 (MHz)	848.8 (MHz)
GSM	Results	32.13	32.20	32.24	25.91	26.44	26.37
GPRS/EGPRS (GMSK)	1TXslot	32.20	32.05	32.07	25.98	26.29	26.20
	2TXslots	31.05	31.10	31.12	24.83	25.34	25.25
	3TXslots	29.51	29.10	29.14	23.29	23.34	23.27
	4TXslots	27.97	28.10	28.13	21.75	22.34	22.26
EGPRS (8PSK)	1TXslot	25.07	25.01	25.00	18.85	19.25	19.13
	2TXslots	24.32	24.12	24.20	18.10	18.36	18.33
	3TXslots	22.16	22.07	22.42	15.94	16.31	16.55
	4TXslots	20.87	21.02	21.03	14.65	15.26	15.16

LTE Band5	Channel/ Frequency(MHz)	Index	RB# RBstart	Conducted Power (dBm)		ERP (dBm)	
				QPSK	16QAM	QPSK	16QAM
1.4MHz	20407/824.7	0	1#0	20.87	19.51	14.65	13.29
		0	6#0	18.82	19.48	12.60	13.26
	20525/836.5	0	1#0	20.24	20.45	14.48	14.69
		0	6#0	18.83	18.39	13.07	12.63
	20643/848.3	0	1#5	20.44	19.36	14.57	13.49
		0	6#0	18.61	19.31	12.74	13.44
3MHz	20415/825.5	0	1#0	20.50	20.38	14.69	14.57
		0	6#0	18.79	19.02	12.98	13.21
	20525/836.5	0	1#0	20.53	20.07	14.77	14.31
		0	6#0	18.91	18.99	13.15	13.23
	20635/847.5	1	1#5	20.44	19.42	14.57	13.55
		1	6#0	18.67	19.09	12.80	13.22
5MHz	20425/826.5	0	1#0	20.37	20.68	14.56	14.87
		0	6#0	19.94	19.73	14.13	13.92
	20525/836.5	0	1#0	20.41	20.58	14.65	14.82
		0	6#0	19.97	19.89	14.21	14.13
	20625/846.5	3	1#5	20.03	20.41	14.16	14.54
		3	6#0	19.86	19.91	13.99	14.04
10MHz	20450/829	0	1#0	20.37	20.78	14.56	14.97



		0	4#0	20.56	20.28	14.75	14.47
20525/836.5		0	1#0	20.41	20.74	14.65	14.98
		0	4#0	20.53	20.32	14.77	14.56
	20600/844	7	1#5	20.02	20.34	14.26	14.58
		7	4#2	20.30	20.08	14.54	14.32



6.2. Radiates Spurious Emission

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

GSM 850 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.20	-42.35	1.70	8.70	Horizontal	-37.50	-13.00	24.50	45
3	2509.80	-47.06	2.30	12.00	Horizontal	-39.51	-13.00	26.51	135
4	3346.40	-53.29	2.70	12.70	Horizontal	-45.44	-13.00	32.44	135
5	4183.00	-64.01	3.00	12.50	Horizontal	-56.66	-13.00	43.66	225
6	5019.60	-55.61	3.40	12.50	Horizontal	-48.66	-13.00	35.66	90
7	5856.20	-61.28	3.40	12.80	Horizontal	-54.03	-13.00	41.03	45
8	6692.80	-59.74	4.10	11.50	Horizontal	-54.49	-13.00	41.49	315
9	7529.40	-56.46	4.20	12.20	Horizontal	-50.61	-13.00	37.61	90
10	8366.00	-54.37	4.30	12.50	Horizontal	-48.32	-13.00	35.32	225

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE eMTC band 5 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-54.29	1.70	8.70	Horizontal	-49.44	-13.00	36.44	270
3	2509.5	-59.39	2.30	12.00	Horizontal	-51.84	-13.00	38.84	135
4	3346.0	-66.08	2.70	12.70	Horizontal	-58.23	-13.00	45.23	45
5	4182.5	-64.22	3.00	12.50	Horizontal	-56.87	-13.00	43.87	270
6	5019.0	-62.99	3.40	12.50	Horizontal	-56.04	-13.00	43.04	135
7	5855.5	-63.63	3.40	12.80	Horizontal	-56.38	-13.00	43.38	45
8	6692.0	-58.78	4.10	11.50	Horizontal	-53.53	-13.00	40.53	90
9	7528.5	-55.24	4.20	12.20	Horizontal	-49.39	-13.00	36.39	270
10	8365.0	-54.65	4.30	12.50	Horizontal	-48.60	-13.00	35.60	135

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE eMTC band 5 5MHz CH-Middle

Harmonic	Frequency	SG	Cable	Gain	Antenna	ERP	Limit	Margin	Azimuth
----------	-----------	----	-------	------	---------	-----	-------	--------	---------



	(MHz)	(dBm)	Loss (dB)	(dBi)	Polarization	Level (dBm)	(dBm)	(dB)	(deg)
2	1673.0	-53.92	1.70	8.70	Horizontal	-49.07	-13.00	36.07	45
3	2509.5	-58.97	2.30	12.00	Horizontal	-51.42	-13.00	38.42	90
4	3346.0	-64.99	2.70	12.70	Horizontal	-57.14	-13.00	44.14	90
5	4182.5	-63.78	3.00	12.50	Horizontal	-56.43	-13.00	43.43	0
6	5019.0	-61.92	3.40	12.50	Horizontal	-54.97	-13.00	41.97	45
7	5855.5	-63.81	3.40	12.80	Horizontal	-56.56	-13.00	43.56	270
8	6692.0	-58.84	4.10	11.50	Horizontal	-53.59	-13.00	40.59	45
9	7528.5	-56.39	4.20	12.20	Horizontal	-50.54	-13.00	37.54	270
10	8365.0	-53.97	4.30	12.50	Horizontal	-47.92	-13.00	34.92	180

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE eMTC band 5 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-54.50	1.70	8.70	Horizontal	-49.65	-13.00	36.65	270
3	2509.5	-59.29	2.30	12.00	Horizontal	-51.74	-13.00	38.74	90
4	3346.0	-62.90	2.70	12.70	Horizontal	-55.05	-13.00	42.05	0
5	4182.5	-64.04	3.00	12.50	Horizontal	-56.69	-13.00	43.69	270
6	5019.0	-63.01	3.40	12.50	Horizontal	-56.06	-13.00	43.06	90
7	5855.5	-63.55	3.40	12.80	Horizontal	-56.30	-13.00	43.30	270
8	6692.0	-58.41	4.10	11.50	Horizontal	-53.16	-13.00	40.16	180
9	7528.5	-55.34	4.20	12.20	Horizontal	-49.49	-13.00	36.49	0
10	8365.0	-54.29	4.30	12.50	Horizontal	-48.24	-13.00	35.24	270

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



7. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Signal Analyzer	R&S	FSV30	100815	2021-12-12	2022-12-11
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	01111	2019-09-12	2022-09-11
Horn Antenna	Schwarzbeck	BBHA 9120D	1594	2020-12-17	2023-12-16
Software	R&S	EMC32	10.35.10	/	/

*****END OF REPORT*****



ANNEX A: The EUT Appearance

The EUT Appearance is submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos is submitted separately.