

Regulatory WLAN Antenna Information

English Language Required for Intel Regulatory Review / Approval

(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.

Remove Intel references and make this your own document)

Platform information										
Brand	ODM	****End product model name	Intel platform (ex: Yes, No or NA)	Platform type (ex: regular NB, convertible PC, AIO...etc)	*SAR minimum separation (mm)					
Lenovo	LCFC	IP 5 Chrome 16IAU7	Yes	NB	9.45mm					
*****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.										
Antenna information										
Vendor		Type	Antenna Part number (Main)	Antenna Part number (Aux)						
Luxshare-Ict		PIFA	DC33001YC00	DC33001YC00						
Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz	
Main	1.89	2.66	2.75	2.83	2.82	2.92	2.92	1.05	2.26	
Aux	1.15	0.82	0.88	0.92	0.98	0.72	0.11	0.11	-0.58	
Intel Reference Gain/Type/ Separation distance										
Antenna Type	Antenna Peak gain (In dBi)*									Distance to the end user (mm)
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0GHz 6875-7125MHz	Generic: refer to modular FCC SAR report Mid-power: ≥ 8 mm Low power: ≥ 5 mm
	Design	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	
	PIFA	3.24	3.64	3.73	4.77	4.97	4.83	4.30	5.37	
Dipole	2.89	2.92	3.19	4.41	4.22	4.83	4.30	4.49	5.34	
Notes (marked with *)										
* SAR minimum separation (mm)										
- Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device)										
- Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device)										
- Mini-tablet: Minimum antenna-to-edge (6 sides of the device)										
* 3D Peak Antenna gain should be equal or greater than -2 dBi										
- If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.										

Table of contents

1. Applicable test method
2. Test & System Description
 - a. Test setup
 - b. Equipment list
3. Setup photo

[Section 1. Antenna Assembly Specifications](#)

[Section 2. Dimensioned Photos or Drawings of Antennas](#)

[Section 3. Radiation characteristics of antenna loaded in Host Platform](#)

[Section 4. Antenna Host Platform Location Information](#)

[Section 5. Antenna dimensional information for SAR evaluation](#)

[Section 6. Diagram Example of Co-Location Antenna Separation](#)

1. **Applicable test methods**

<insert test description here for test method>

This test report is prepared for host antenna testing under a Full Anechoic Chamber.


This test with host with fixed position and allow to UUT turn different angels.

2. **Test & System Description**

- a. Test setup

<insert test diagram here for test site utilized>

ETS 8500

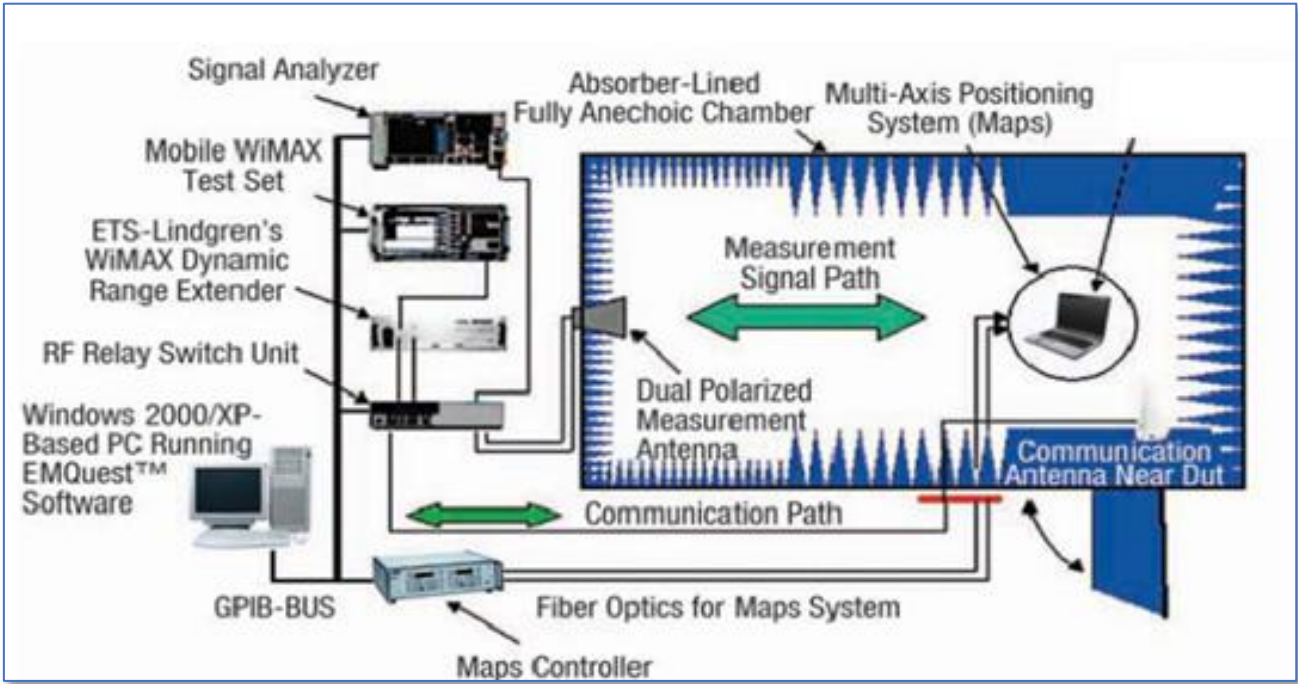


b. Equipment list

<insert test diagram here for test site utilized>

Device	Type/Model	Serial#	Manufacturer	Cal. Date	Cal. Due Date
Anechoic Chamber	AMS-8500	1191	ETS-Lindgren	2022/3/9	2024/3/9
Turn Table	2090	-	ETS-Lindgren	N/A	N/A
Switch & Positioning systems	7001-002	116599	ETS-Lindgren	N/A	N/A
Measurement SW	EMQuest v1.0.8	1352	ETS-Lindgren	N/A	N/A
Boresight antenna mast	2090	-	ETS-Lindgren	N/A	N/A
Spectrum Analyzer	N9010A	X16-96096	Agilent Technologies	2021/7/25	2023/7/25
Horn antenna	3164-08	00143257	ETS-Lindgren	2022/4/3	2024/4/3
Horn antenna + Amplifier + HPF6.4	115195	00117614	ETS-Lindgren	2021/8/18	2023/8/18
Cable 2.5m - 30MHz to 18GHz	0500990992500KE	19.23.395	Radial	2022/1/10	2024/1/10
Cable 1.2m - 18 to 40GHz	UFA147A-0-0480-200200	MFR 64639223720-003	Micro-caox	2022/1/10	2024/1/10
Cable 1m - 1GHz to 18GHz	UFA147A	-	Utileflex	2022/1/10	2024/1/10
Cable 2m - 26.5MHz to 40GHz	794-9191-200A	E00327	Atem	2022/1/10	2024/1/10
Cable 1m - 30MHz to 18GHz	UFB311A-0-0590-50U50U	MFR 64639223230-001	Micro-caox	2022/1/10	2024/1/10
Cable 7m - DC-18GHz	0501051057000GX	19.35.850	Radial	2022/1/10	2024/1/10
Cable 7m - 18GHz to 40GHz	R286304009	-	Radial	2022/1/10	2024/1/10
Cable 1.5m - DC-18GHz	CBL-1.5M-SMSM+	202879	Mini-Circuits	2022/1/10	2024/1/10
Temp & Humidity Logger	GM-108A	-		2021/5/2	2023/5/2

D

3. Setup photo

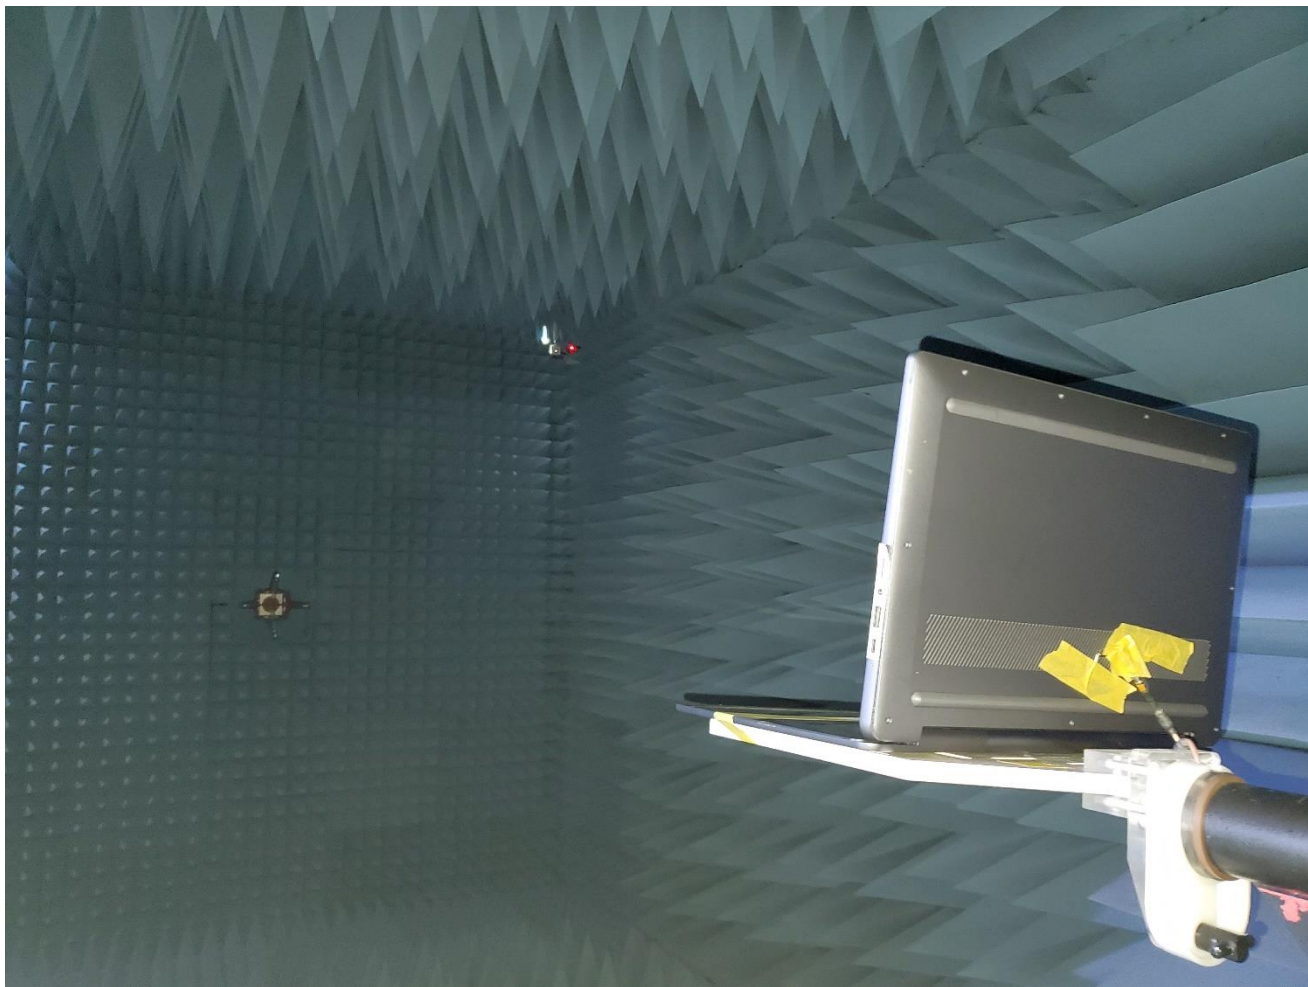

Antenna Information

Section 1. Antenna Assembly Specifications


1A	1B	1C	1D		1E	1F	1G	1H
Antenna Part Number	Manufacturer	Antenna Type	Cable Assembly Part Number and Information	Freq Range MHz	* Peak Gain W/ Cable loss (dBi)	Peak Gain w/o Cable Loss (dBi)	Max VSWR	Cable Loss (dB)
(P/N: xxxxxx) Main Antenna	Luxshare-Ict	PIFA	P/N:00C-50130M-005H 50 ohm Coaxial length: 30.5cm diameter: 1.1mm	2400-2483.5	1.89	2.73	3.0 max	0.84
				5150-5250	2.66	4.03	3.0 max	1.37
				5250-5350	2.75	4.12	3.0 max	1.37
				5470-5725	2.83	4.20	3.0 max	1.37
				5725-5850	2.82	4.19	3.0 max	1.37
				5925-6425	2.92	4.60	3.0 max	1.68
				6425-6525	2.92	4.60	3.0 max	1.68
				6525-6875	1.05	2.73	3.0 max	1.68
				6875-7125	2.26	3.94	3.0 max	1.68
(P/N: xxxxxx) Aux Antenna	Luxshare-Ict	PIFA	P/N:00C-50130M-005H 50 ohm Coaxial length: 60cm diameter: 1.1mm	2400-2483.5	1.15	2.80	3.0 max	1.65
				5150-5250	0.82	3.52	3.0 max	2.70
				5250-5350	0.88	3.58	3.0 max	2.70
				5470-5725	0.92	3.62	3.0 max	2.70
				5725-5850	0.98	3.68	3.0 max	2.70
				5925-6425	0.72	4.02	3.0 max	3.30
				6425-6525	0.11	3.41	3.0 max	3.30
				6525-6875	0.11	3.41	3.0 max	3.30
				6875-7125	-0.58	2.72	3.0 max	3.30

- 3D Antenna Peak Gain required being test in system basis.


Section 2. Dimensioned Photos and Drawings of Antennas

Include the dimensioned photo and drawing of Main antenna here.

Main Antenna Drawing:

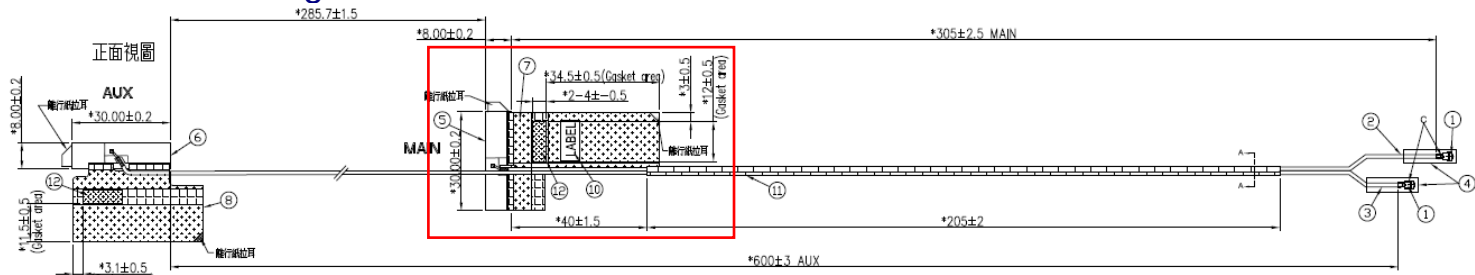


Main Antenna Photo (Front/Back):

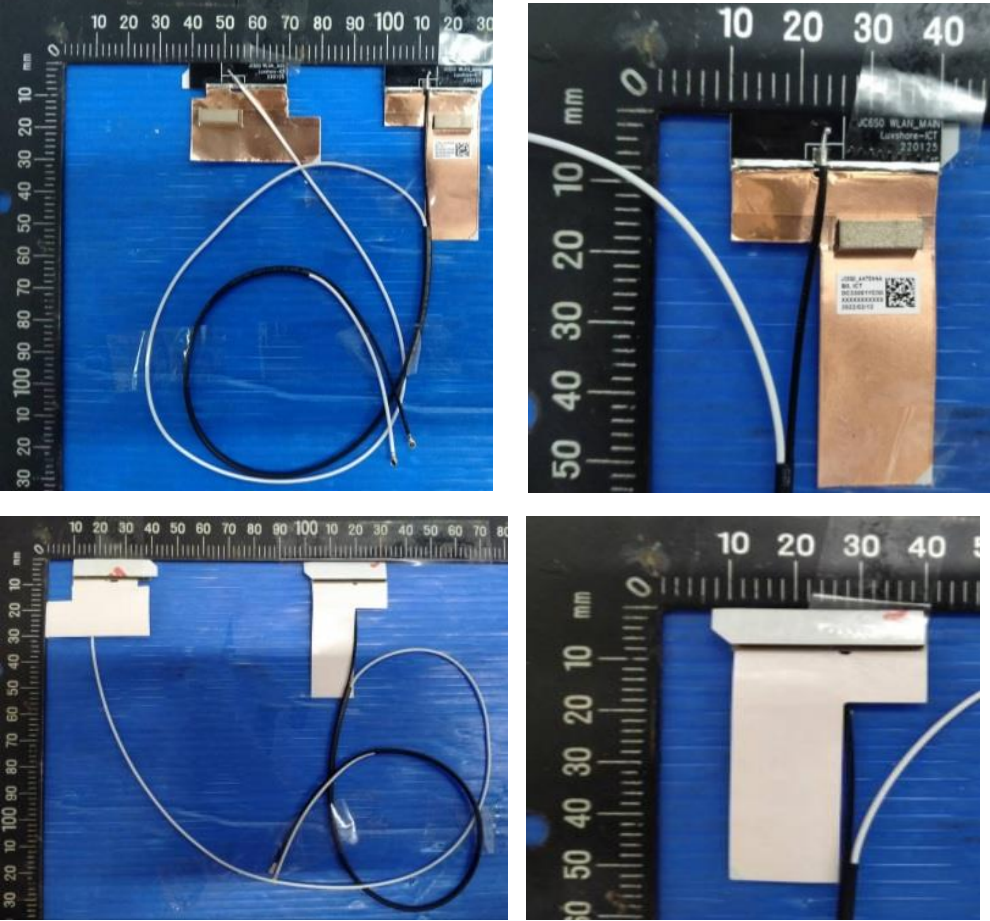


Note: antenna photo should include L type ruler

Include the dimensioned photo and drawing of Aux antenna here.

Aux Antenna Drawing:

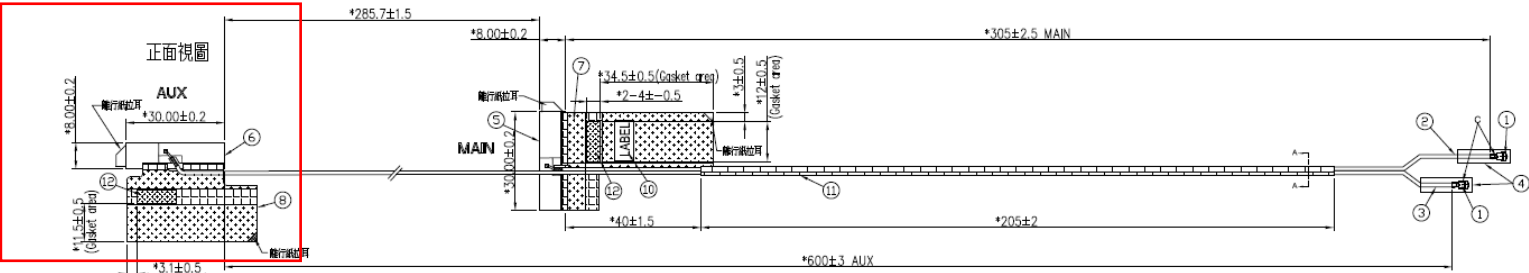

Aux Antenna Photo (Front/Back):

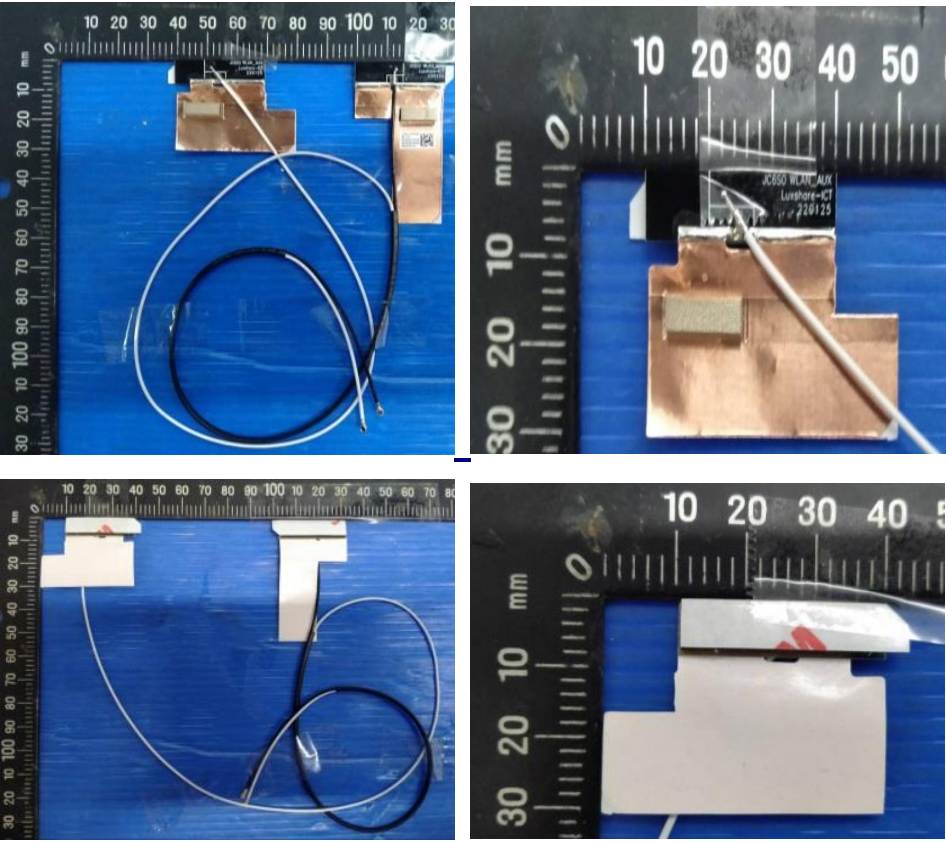


Note: antenna photo should include L type ruler

Section 3. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.89

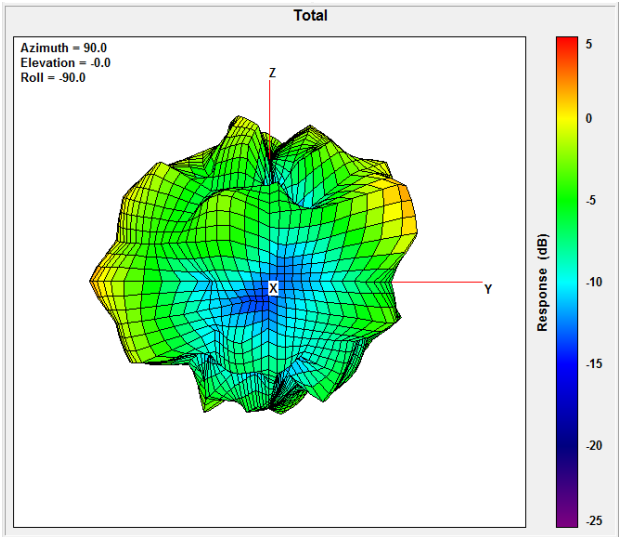


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.66

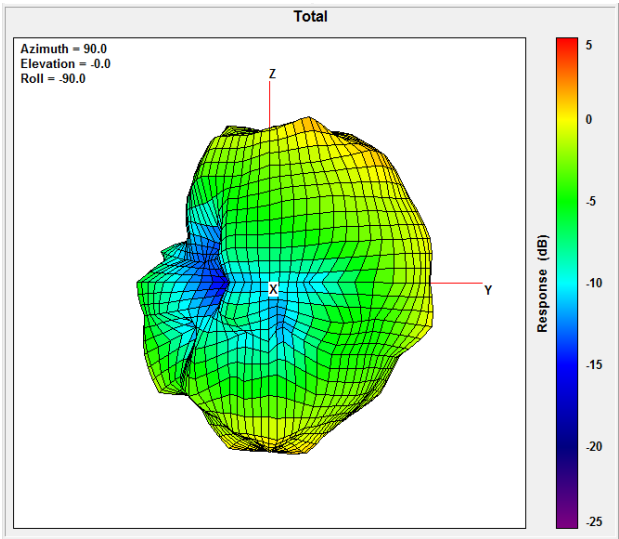


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.75

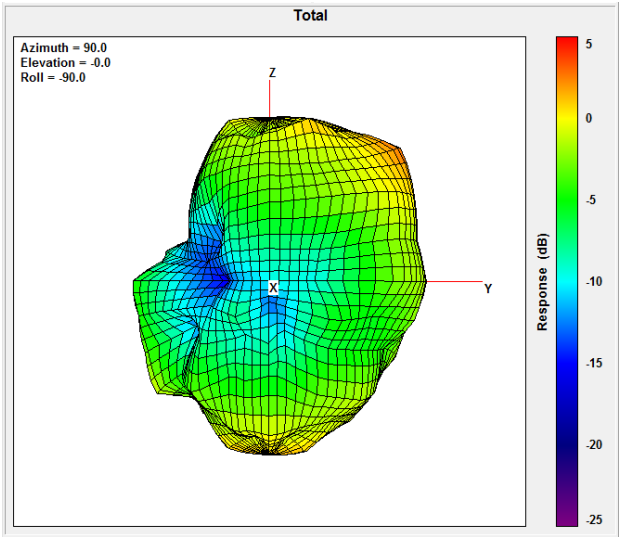


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.83

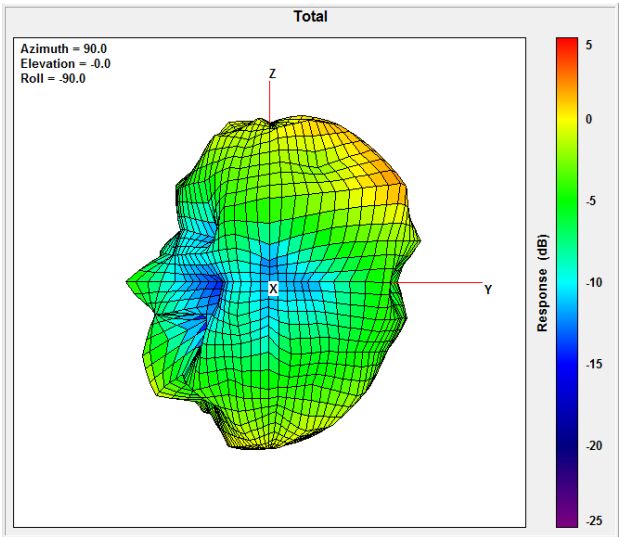


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	2.82

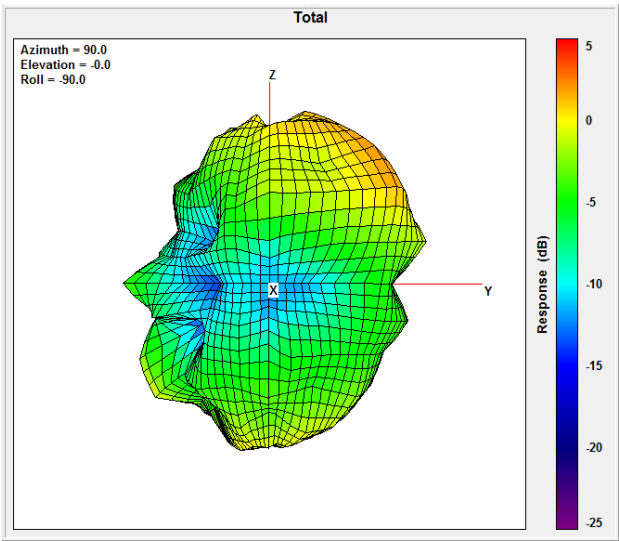


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	2.92

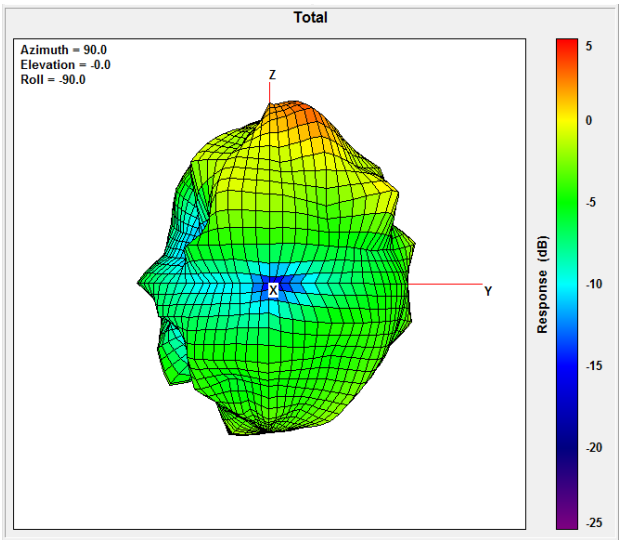


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	2.92

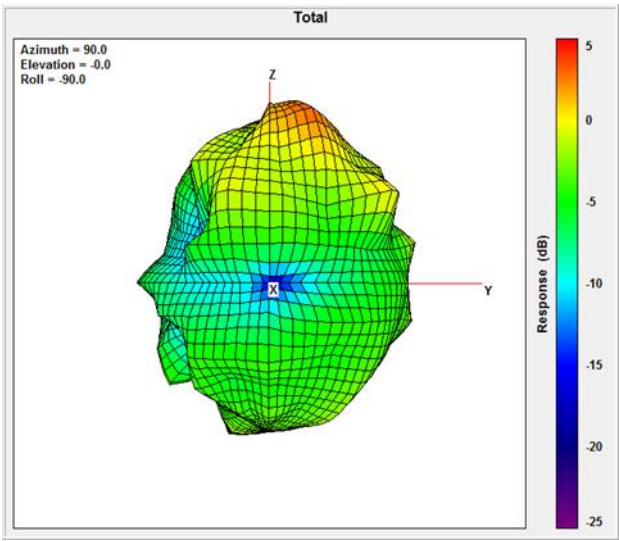


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	1.05

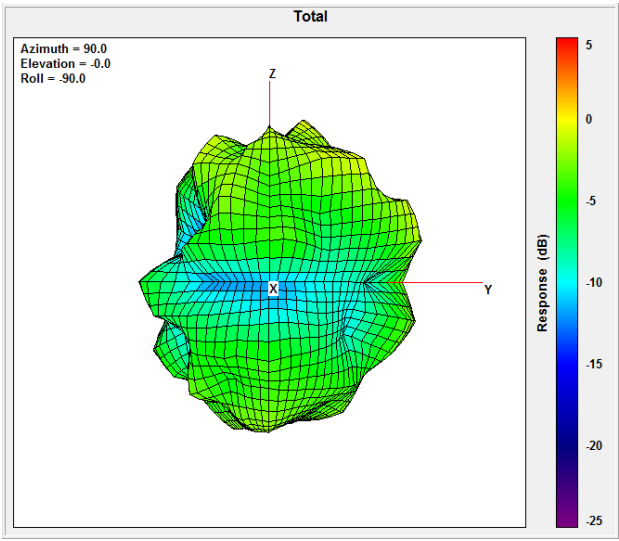

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	2.26

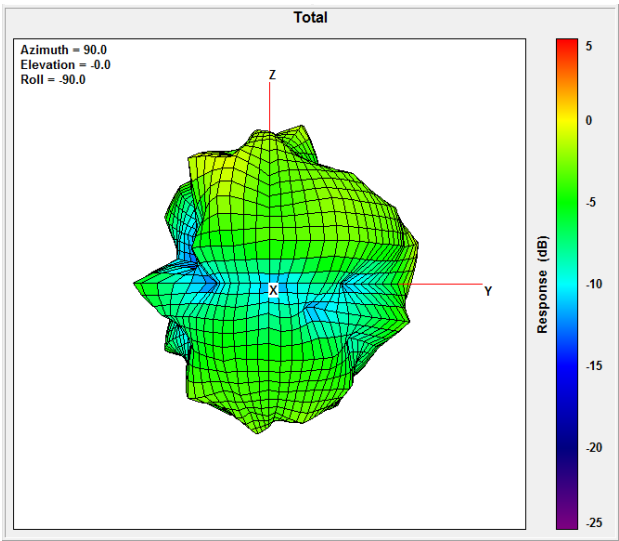

Auxiliary Antenna


Aux Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.15

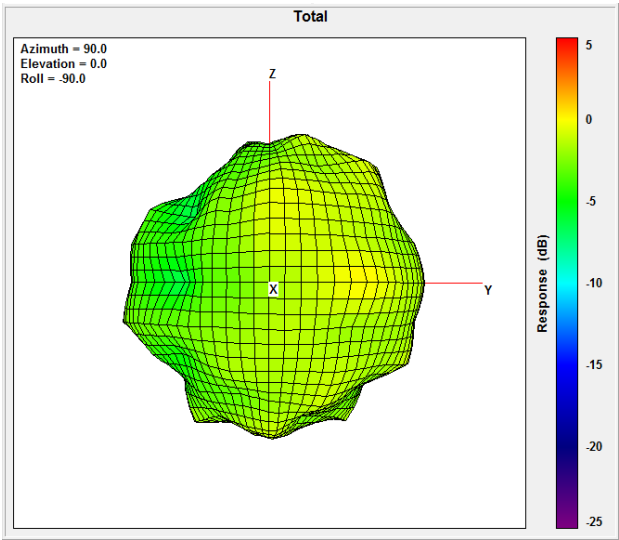


Aux Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	0.82

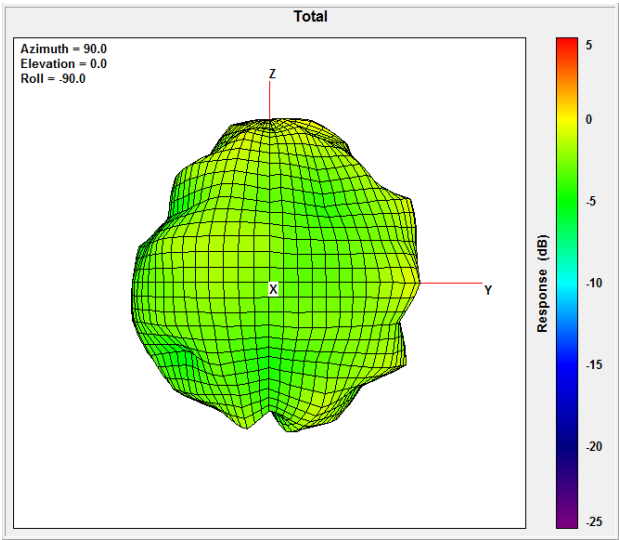


Aux Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	0.88

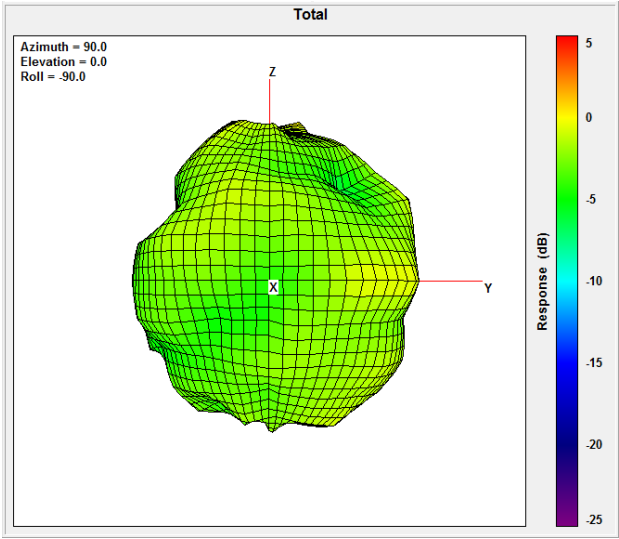


Aux Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	0.92

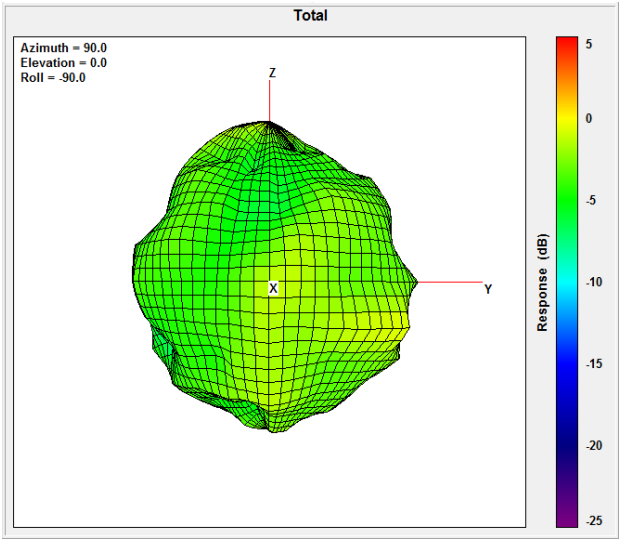


Aux Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	0.98

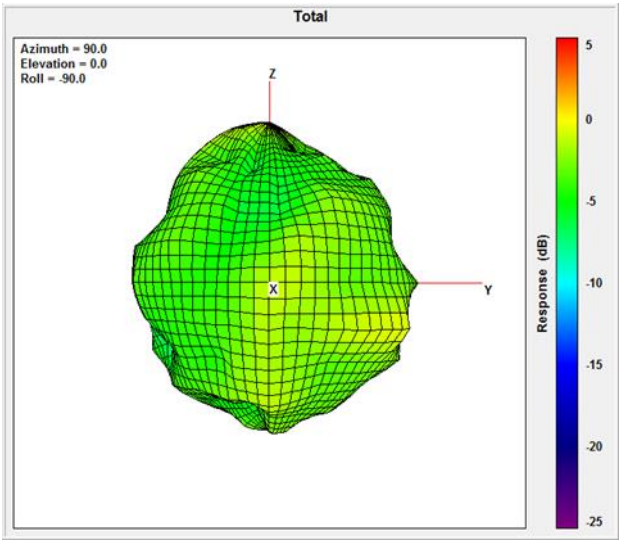


Aux Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	0.72

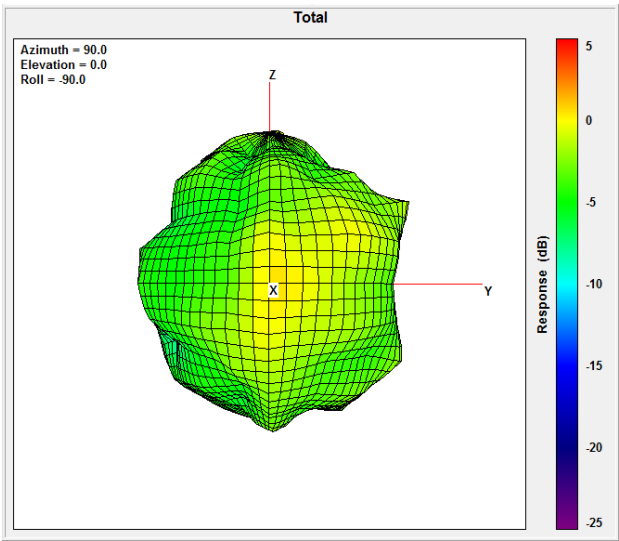


Aux Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	0.11

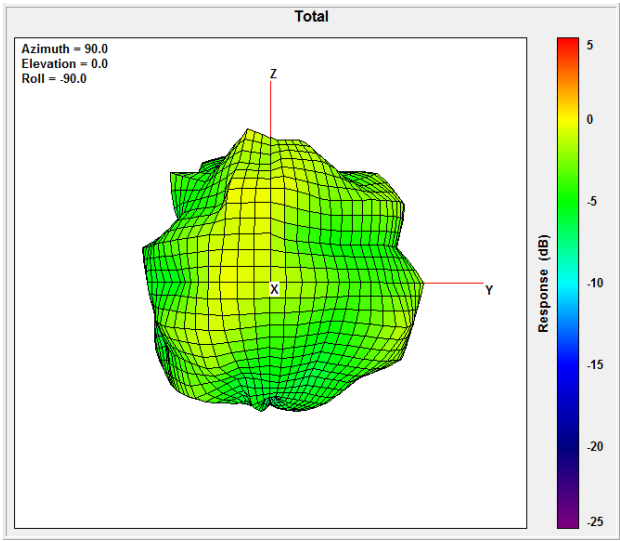


Aux Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	0.11

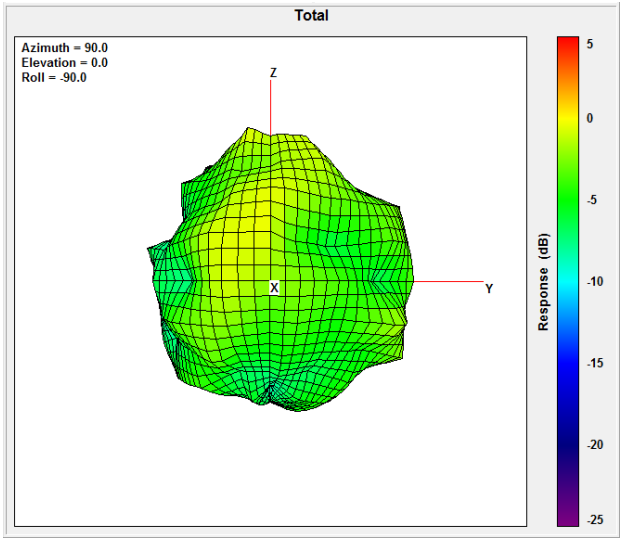

Aux Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	-0.58

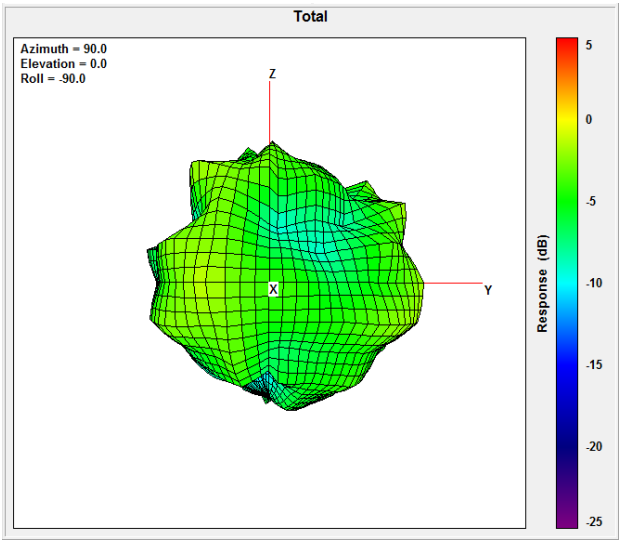

Section 4. Antenna Host Platform Location Information


Include a **dimensioned photo(s) or dimensioned drawing(s)** of Main and Aux antenna placements (measurements are not required for receive-only antenna).

Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

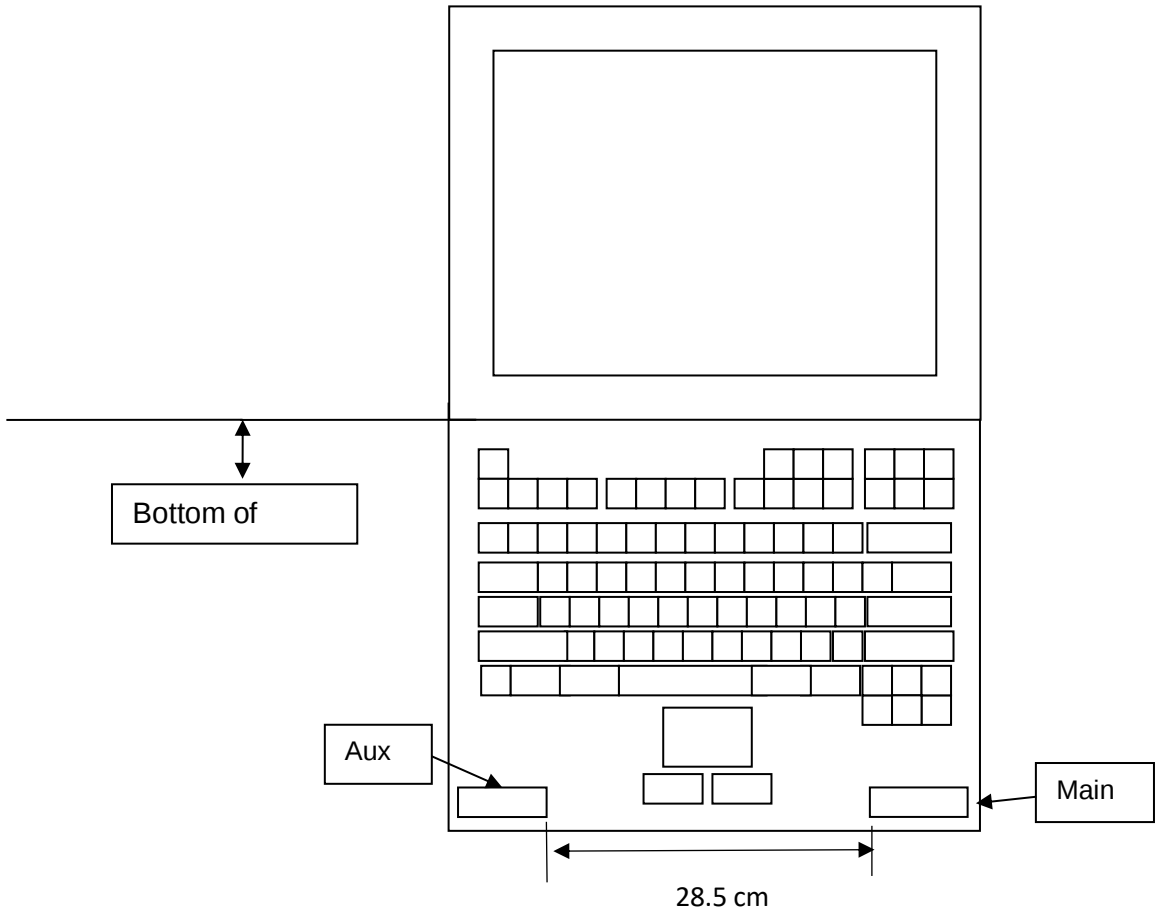

Section 5. Antenna dimensional information for SAR evaluation

Include a **dimensioned photo(s) or dimensioned drawing(s)** showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

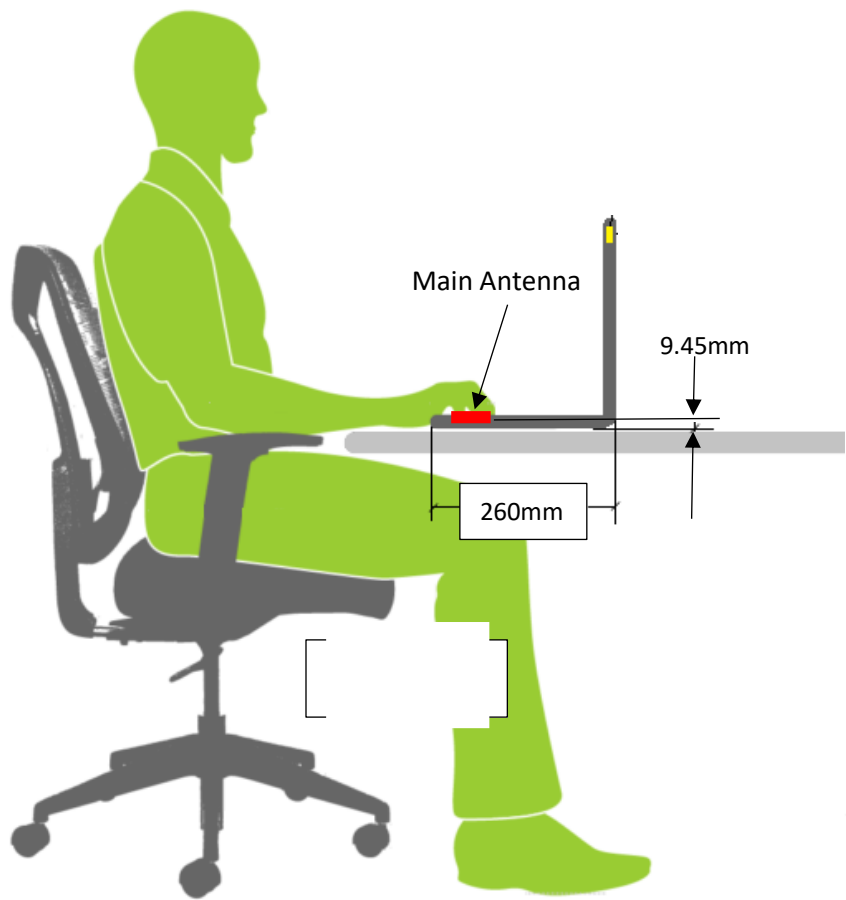

Section 6. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between all WLAN transmit antennas and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

