



TEST REPORT

FCC ID: 2A5UI-BM7IIDS

Product: LCD monitors

Model No.: BM7IIDS

Additional Model No.: BM7DS ,LH6W,LH6X,LH6P,LS7P ,RECKEY II BT II,BTIII
WRX ,WTX,LH5X,Keygrip J,Keygrip N,Pico Mini,LINKEY Mini,LINKEY
CTRL,LH5PIII,WRV7

Trade Mark: **PortKeys**

Report No.: WSCT-A2LA-R&E240600028A-BT

Issued Date: 22 July 2024

Issued for:

SHENZHEN PORTKEYS ELECTRONIC TECHNOLOGY CO.,LTD
Room 201, Building 1 , No. 101, ShangWei Road, ShangWei Village,
ZhangKengJing Community, GuanHu Street, LongHua District, ShenZhen

Issued By:

World Standardization Certification & Testing Group(Shenzhen) Co.,Ltd.
Building A-B, Baoshi Science & Technology Park, Baoshi Road,
Bao'an District, Shenzhen, Guangdong, China

TEL: +86-755-26996192

FAX: +86-755-86376605

Note: The results contained in this report pertain only to the tested sample. This report shall not be reproduced, except in full, without written approval of World Standardization Certification & Testing Group(Shenzhen) Co., Ltd. This report must not be used by the client to claim product certification, approval, or any agency of the U.S. Government.





TABLE OF CONTENTS

1. Test Certification.....	3
2. Test Result Summary	4
3. EUT Description	5
4. General Information.....	7
4.1. TEST ENVIRONMENT AND MODE	7
4.2. DESCRIPTION OF SUPPORT UNITS	7
5. Facilities and Accreditations	8
5.1. FACILITIES	8
5.2. ACCREDITATIONS	8
5.3. MEASUREMENT UNCERTAINTY	9
5.4. MEASUREMENT INSTRUMENTS	10
6. Test Results and Measurement Data	11
6.1. ANTENNA REQUIREMENT.....	11
6.2. CONDUCTED EMISSION	12
6.3. CONDUCTED OUTPUT POWER	15
6.4. 20dB OCCUPY BANDWIDTH.....	23
6.5. CARRIER FREQUENCIES SEPARATION	31
6.6. HOPPING CHANNEL NUMBER	39
6.7. DWELL TIME.....	43
6.8. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	54
6.9. CONDUCTED BAND EDGE MEASUREMENT	55
6.10. CONDUCTED SPURIOUS EMISSION MEASUREMENT.....	58
6.11. RADIATED SPURIOUS EMISSION MEASUREMENT	68





Report No.: WSCT-A2LA-R&E240600028A-BT

1. Test Certification

Product: LCD monitors

Model No.: BM7IIDS

Additional Model: BM7DS ,LH6W,LH6X,LH6P,LS7P ,RECKEY II ,BT II ,BTIII
WRX ,WTX,LH5X,Keygrip J,Keygrip N,Pico Mini,LINKEY
Mini,LINKEY CTRL,LH5PIII,WRV7

Additional Model: **PortKeys**

Applicant: SHENZHEN PORTKEYS ELECTRONIC TECHNOLOGY CO.,LTD

Address: Room 201, Building 1 , No. 101, ShangWei Road, ShangWei Village,
ZhangKengJing Community, GuanHu Street, LongHua District,
ShenZhen

Manufacturer: SHENZHEN PORTKEYS ELECTRONIC TECHNOLOGY CO.,LTD

Address: Room 201, Building 1 , No. 101, ShangWei Road, ShangWei Village,
ZhangKengJing Community, GuanHu Street, LongHua District,
ShenZhen

Date of Test: 11 June 2024 to 22 July 2024

Applicable Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen)Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Wang Xiang

(Wang Xiang)

Checked By:

Chen Xu

(Chen Xu)

Approved By:

Liu Fuxin

(Liu Fuxin)

Date:

22 July 2024



世标检测认证股份

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

ADD: Building A-B, Baoshi Science & Technology Park, Baoshi Road, Baoan District, Shenzhen, Guangdong, China
TEL: 0086-755-26996192 26996053 FAX: 0086-755-86376605 E-mail: fengbing.wang@wsct-cert.com Http: www.wsct-cert.com

Member of the WSCT INC.



2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna Requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(1) §2.1046	PASS
20dB Occupied Bandwidth	§15.247 (a)(1) §2.1049	PASS
Carrier Frequencies Separation	§15.247 (a)(1)	PASS
Hopping Channel Number	§15.247 (a)(1)	PASS
Dwell Time	§15.247 (a)(1)	PASS
Radiated Emission	§15.205/§15.209 §2.1053, §2.1057	PASS
Band Edge	§15.247(d) §2.1051, §2.1057	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.





3. EUT Description

Product Name:	LCD monitors
Model No.:	BM7IIDS
Additional Model:	BM7DS ,LH6W,LH6X,LH6P,LS7P ,RECKEY II BT II ,BTIII WRX ,WTX,LH5X,Keygrip J,Keygrip N,Pico Mini,LINKEY Mini,LINKEY CTRL,LH5PIII,WRV7
Trade Mark:	PortKeys
Operation Frequency:	2402MHz~2480MHz
Channel Separation:	1MHz
Number of Channel:	79
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Modulation Technology:	FHSS
Antenna Type:	RP-SMA Antenna
Antenna Gain:	3.0dBi
Power Supply	DC 12V
Remark:	N/A.

Models difference:

BM7IIDS, BM7DS, LH6W,LH6X,LH6P,LS7P ,RECKEYII BTII,BTIII WRX ,WTX,LH5X,Keygrip J,Keygrip N,Pico Mini,LINKEY Mini,LINKEY CTRL,LH5PIII,WRV7 are series models, only the appearance size is different,the main test is BM7IIDS.



Operation Frequency each of channel for GFSK, $\pi/4$ -DQPSK, 8DPSK

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
...	...	...	...	...	...	...	...
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
...	...	...	...	...	...	...	...
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz	-	-

Remark: Channel 0, 39 & 78 have been tested for GFSK, $\pi/4$ -DQPSK, 8DPSK modulation mode.



4. Genera Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations with Fully-charged battery
The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Adapter	60-12-3-B	/	/	/
Laptop	/	/	/	HP

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



5. Facilities and Accreditations

5.1. Facilities

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China of the World Standardization Certification & Testing Group(Shenzhen) CO., LTD**

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2. ACCREDITATIONS

CNAS - Registration Number: L3732

China National Accreditation Service for Conformity Assessment, The test firm Registration Number: L3732

FCC - Designation Number: CN1303

World Standardization Certification & Testing Group(Shenzhen) CO., LTD. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Designation Number: CN1303.

A2LA - Certificate Number: 5768.01

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number: 5768.01





5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Duty Cycle and Tx-Sequence and Tx-Gap	$\pm 1\%$
2	Dwell Time and Minimum Frequency Occupation	$\pm 1.2\%$
3	Medium Utilisation Factor	$\pm 1.3\%$
4	Occupied Channel Bandwidth	$\pm 2.4\%$
5	Transmitter Unwanted Emission in the out-of Band	$\pm 1.3\%$
6	Transmitter Unwanted Emissions in the Spurious Domain	$\pm 2.5\%$
7	Receiver Spurious Emissions	$\pm 2.5\%$
8	Conducted Emission Test	$\pm 3.2\text{dB}$
9	RF power, conducted	$\pm 0.16\text{dB}$
10	Spurious emissions, conducted	$\pm 0.21\text{dB}$
11	All emissions, radiated(<1GHz)	$\pm 4.7\text{dB}$
12	All emissions, radiated(>1GHz)	$\pm 4.7\text{dB}$
13	Temperature	$\pm 0.5^{\circ}\text{C}$
14	Humidity	$\pm 2.0\%$



Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com**5.4. MEASUREMENT INSTRUMENTS**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
Test software	--	EZ-EMC	CON-03A	-	-
Test software	--	MTS8310	-	-	-
EMI Test Receiver	R&S	ESCI	100005	11/05/2023	11/04/2024
LISN	AFJ	LS16	16010222119	11/05/2023	11/04/2024
LISN(EUT)	Mestec	AN3016	04/10040	11/05/2023	11/04/2024
Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	11/05/2023	11/04/2024
Coaxial cable	Megalon	LMR400	N/A	11/05/2023	11/04/2024
GPIO cable	Megalon	GPIO	N/A	11/05/2023	11/04/2024
Spectrum Analyzer	R&S	FSU	100114	11/05/2023	11/04/2024
Pre Amplifier	H.P.	HP8447E	2945A02715	11/05/2023	11/04/2024
Pre-Amplifier	CDSI	PAP-1G18-38	--	11/05/2023	11/04/2024
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	11/05/2023	11/04/2024
9*6*6 Anechoic	--	--	--	11/05/2023	11/04/2024
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	--	11/05/2023	11/04/2024
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	11/05/2023	11/04/2024
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	11/05/2023	11/04/2024
System-Controller	CCS	N/A	N/A	N.C.R	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R	N.C.R
RF cable	Murata	MXHQ87WA3000	-	11/05/2023	11/04/2024
Loop Antenna	EMCO	6502	00042960	11/05/2023	11/04/2024
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	11/05/2023	11/04/2024
Power meter	Anritsu	ML2487A	6K00003613	11/05/2023	11/04/2024
Power sensor	Anritsu	MX248XD	--	11/05/2023	11/04/2024
Spectrum Analyzer	Keysight	N9010B	MY60241089	11/05/2023	11/04/2024





6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
------------------------------	-------------------------------------

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:	
-----------------------	--

The Bluetooth antenna is a RP-SMA Antenna. it meets the standards, and the best case gain of the antenna is 3.0dBi.

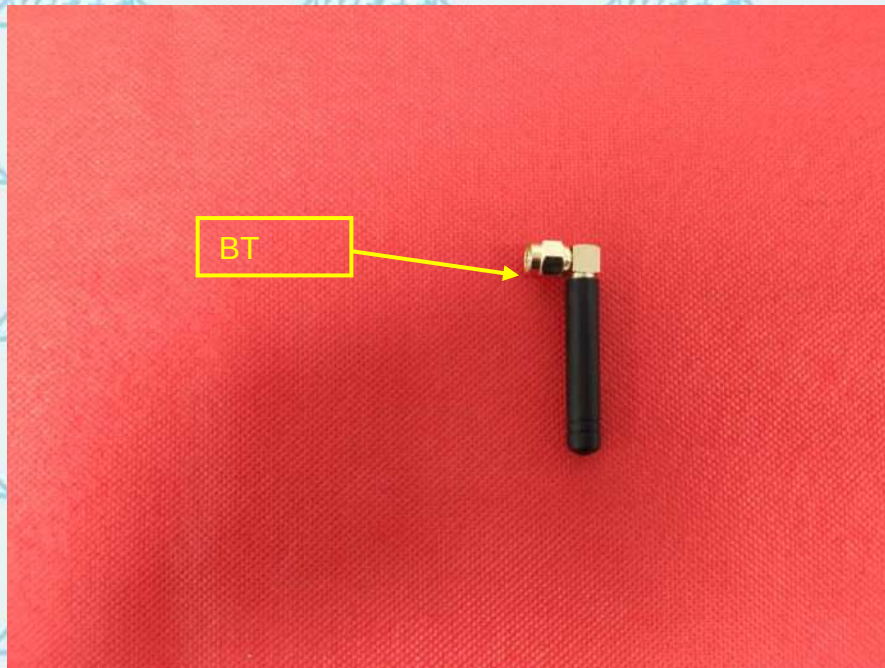



6.2. Conducted Emission


6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2014														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane 40cm 80cm E.U.T AC power Test table/Insulation plane LISN Filter AC power EMI Receiver Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Refer to item 4.1														
Test Procedure:	1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2014 on conducted measurement.														
Test Result:	PASS														



6.2.2. Test data(worst case)

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)
The worst mode is 8DPSK

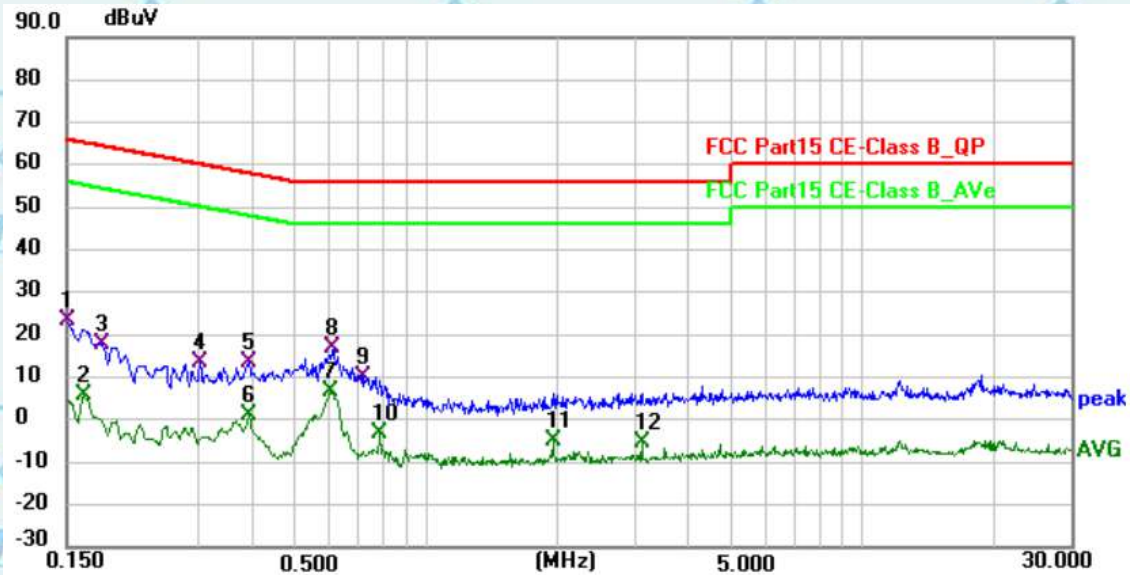

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	2.77	20.73	23.50	66.00	-42.50	QP
2	0.1635	-15.06	20.72	5.66	55.28	-49.62	AVG
3	0.1815	-2.70	20.70	18.00	64.42	-46.42	QP
4	0.3030	-7.07	20.63	13.56	60.16	-46.60	QP
5	0.3930	-7.00	20.57	13.57	58.00	-44.43	QP
6	0.3930	-19.56	20.57	1.01	48.00	-46.99	AVG
7	0.6045	-13.84	20.53	6.69	46.00	-39.31	AVG
8 *	0.6134	-3.76	20.53	16.77	56.00	-39.23	QP
9	0.7215	-10.51	20.55	10.04	56.00	-45.96	QP
10	0.7845	-23.90	20.58	-3.32	46.00	-49.32	AVG
11	1.9590	-25.45	20.61	-4.84	46.00	-50.84	AVG
12	3.1335	-26.01	20.59	-5.42	46.00	-51.42	AVG




Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

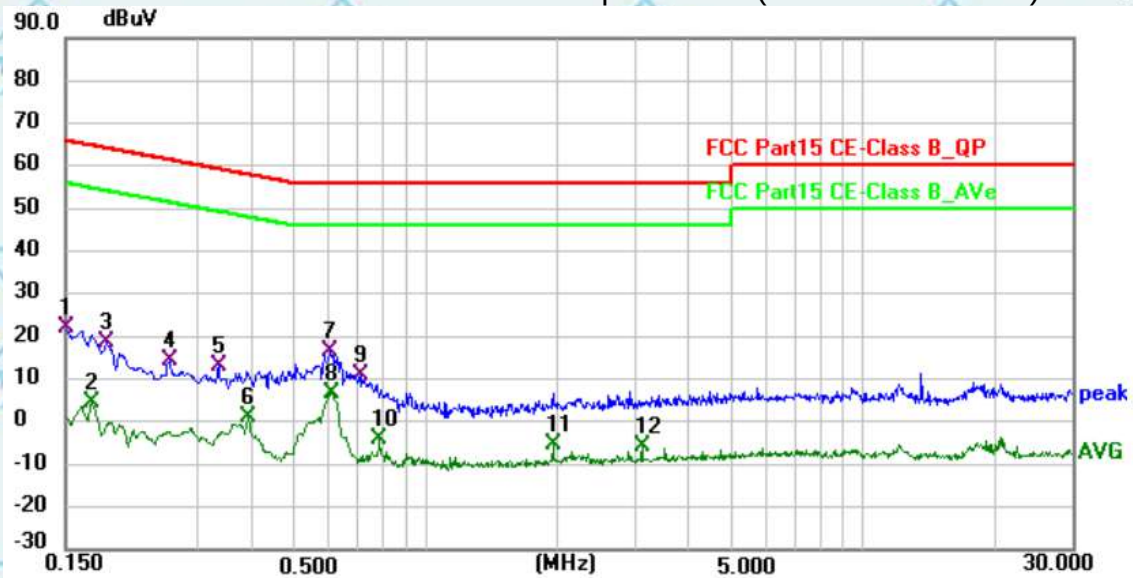

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	22.19	0.00	22.19	66.00	-43.81	QP
2	0.1725	4.65	0.00	4.65	54.84	-50.19	AVG
3	0.1860	18.52	0.00	18.52	64.21	-45.69	QP
4	0.2580	14.40	0.00	14.40	61.50	-47.10	QP
5	0.3345	13.22	0.00	13.22	59.34	-46.12	QP
6	0.3930	0.96	0.00	0.96	48.00	-47.04	AVG
7	0.6045	16.56	0.00	16.56	56.00	-39.44	QP
8 *	0.6090	6.58	0.00	6.58	46.00	-39.42	AVG
9	0.7080	10.80	0.00	10.80	56.00	-45.20	QP
10	0.7845	-4.04	0.00	-4.04	46.00	-50.04	AVG
11	1.9590	-5.36	0.00	-5.36	46.00	-51.36	AVG
12	3.1335	-5.94	0.00	-5.94	46.00	-51.94	AVG

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) - Limits (dBuV)

Q.P. = Quasi-Peak AVG = average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.



6.3. Conducted Output Power

6.3.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2014
Limit:	Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	Use the following spectrum analyzer settings: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel RBW > the 20 dB bandwidth of the emission being measured VBW ≥ RBW Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.
Test Result:	PASS

**6.3.2. Test Data**

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	8.75	20.97	PASS
Middle	9.33	20.97	PASS
Highest	9.60	20.97	PASS

Pi/4DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	8.64	20.97	PASS
Middle	9.39	20.97	PASS
Highest	9.58	20.97	PASS

8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	9.05	20.97	PASS
Middle	9.63	20.97	PASS
Highest	9.93	20.97	PASS

Test plots as follows:

Report No.: WSCT-A2LA-R&E240600028A-BT
GFSK Modulation


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Lowest channel



Middle channel

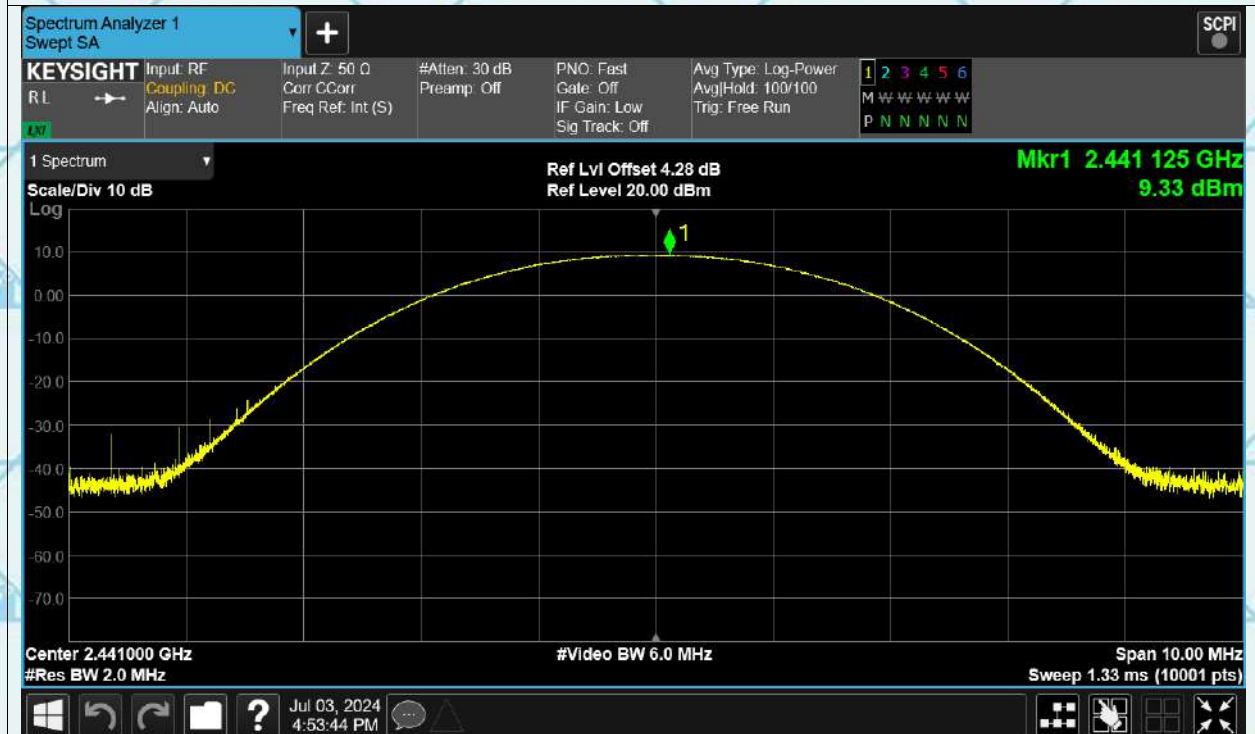




Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Highest channel

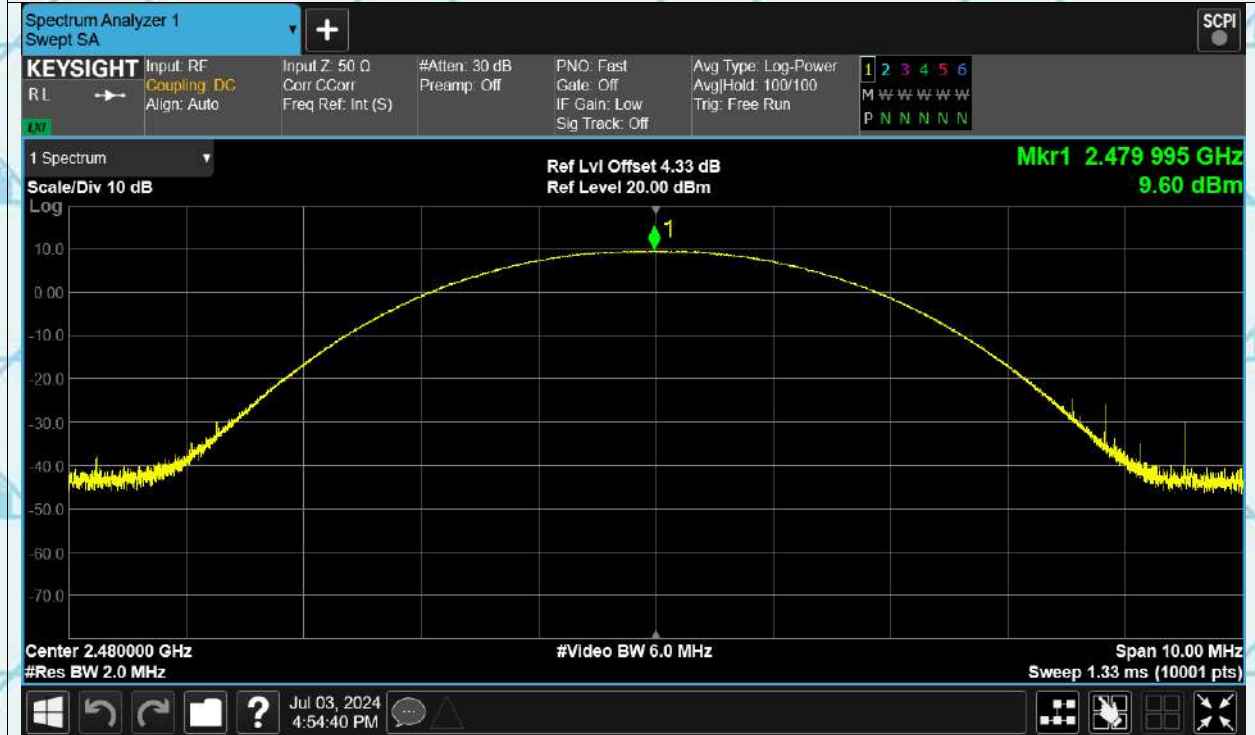

世标检测认证股份

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

ADD: Building A-8 Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL: 86-755-26996192 26992300 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com

Report No.: WSCT-A2LA-R&E240600028A-BT
Pi/4DQPSK Modulation

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Lowest channel



Middle channel






Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Highest channel

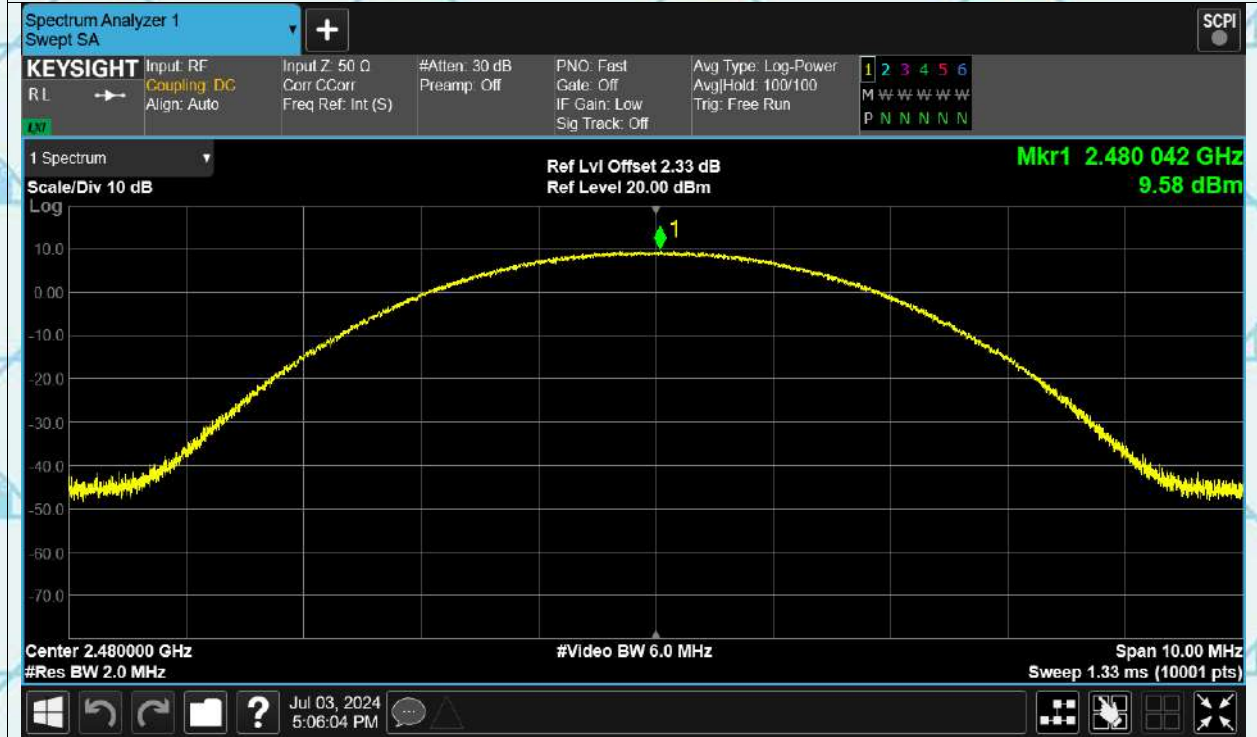

世标检测认证股份

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

ADD: Building A-8 Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL: 86-755-26996192 26992300 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com



Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

8DPSK Modulation

Lowest channel



Middle channel





Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com


Highest channel





6.4. 20dB Occupy Bandwidth

6.4.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2014
Limit:	N/A
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows ANSI C63.10:2014 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel; $1\% \leq RBW \leq 5\%$ of the 20 dB bandwidth; $VBW \geq 3RBW$; Sweep = auto; Detector function = peak; Trace = max hold. 5. Measure and record the results in the test report.
Test Result:	PASS

6.4.2. Test data

Test channel	-20dB Occupy Bandwidth (MHz)			
	GFSK	$\pi/4$ -DQPSK	8DPSK	Conclusion
Lowest	0.934	1.313	1.295	PASS
Middle	0.927	1.313	1.300	PASS
Highest	0.940	1.312	1.303	PASS

Test plots as follows:



Report No.: WSCT-A2LA-R&E240600028A-BT
GFSK Modulation

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Lowest channel



Middle channel





Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Highest channel




Report No.: WSCT-A2LA-R&E240600028A-BT
Pi/4DQPSK Modulation


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Lowest channel

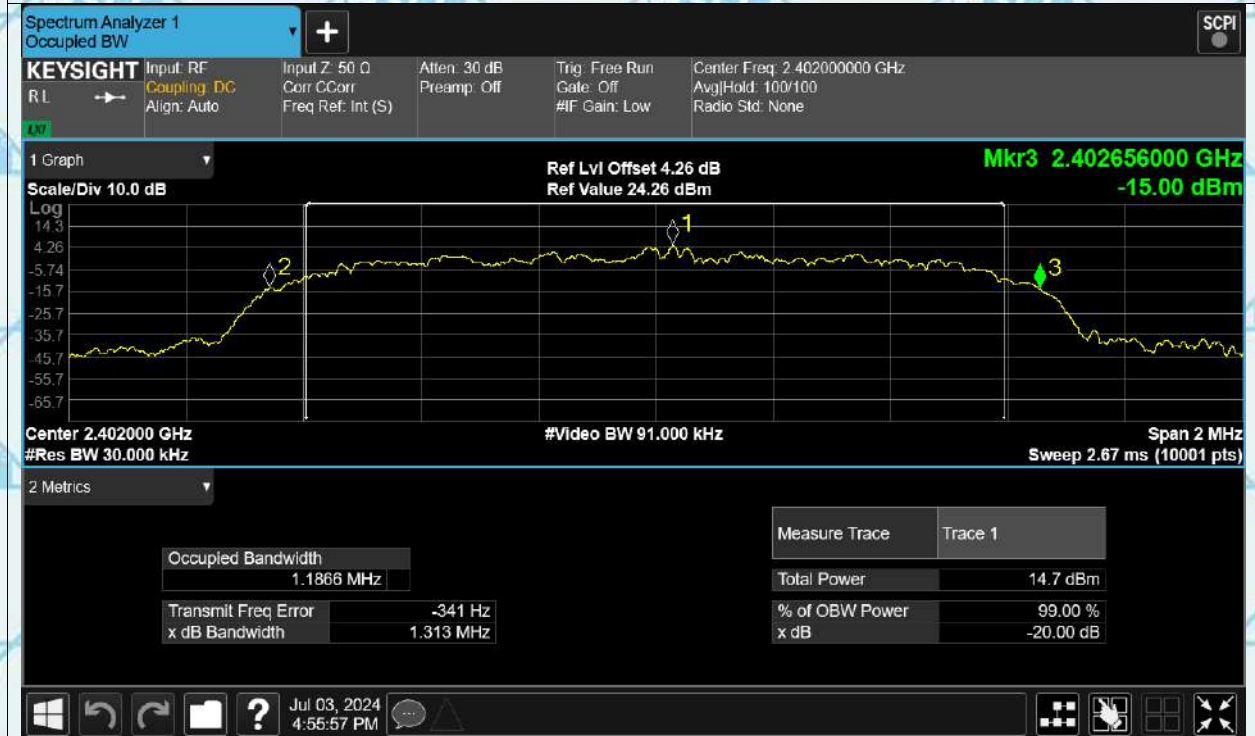

Middle channel

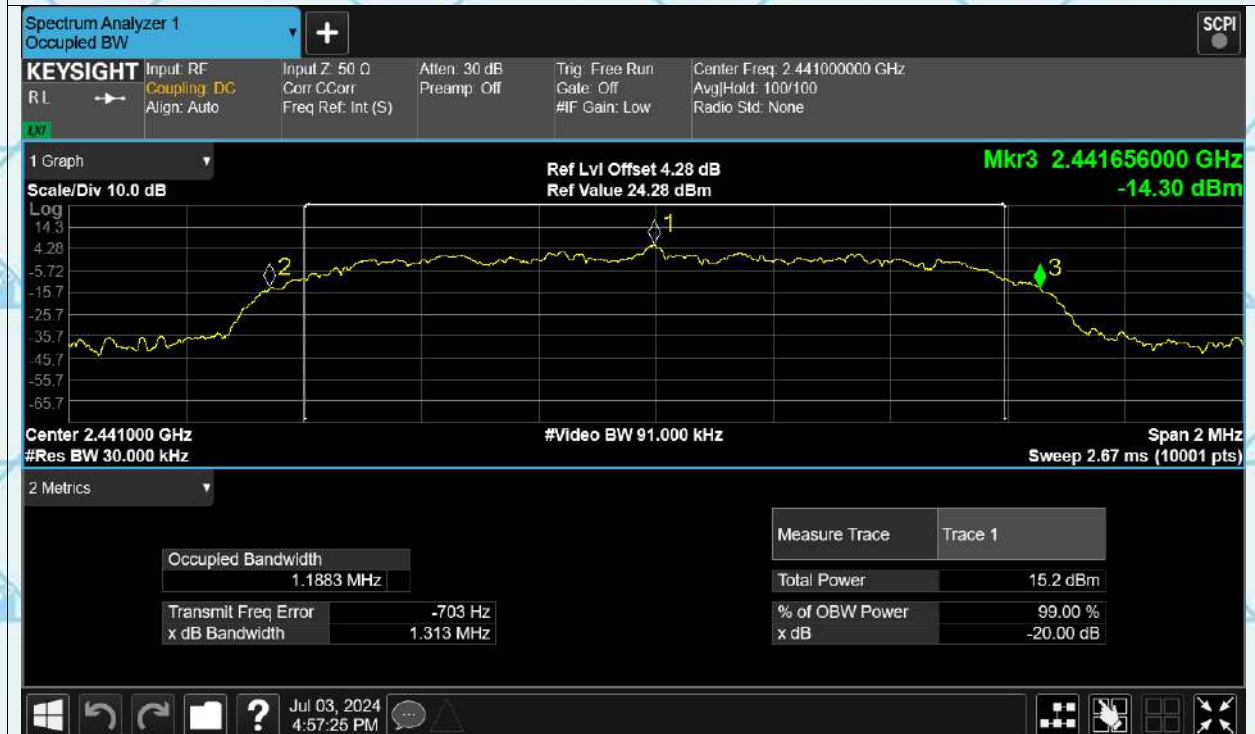




Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Highest channel

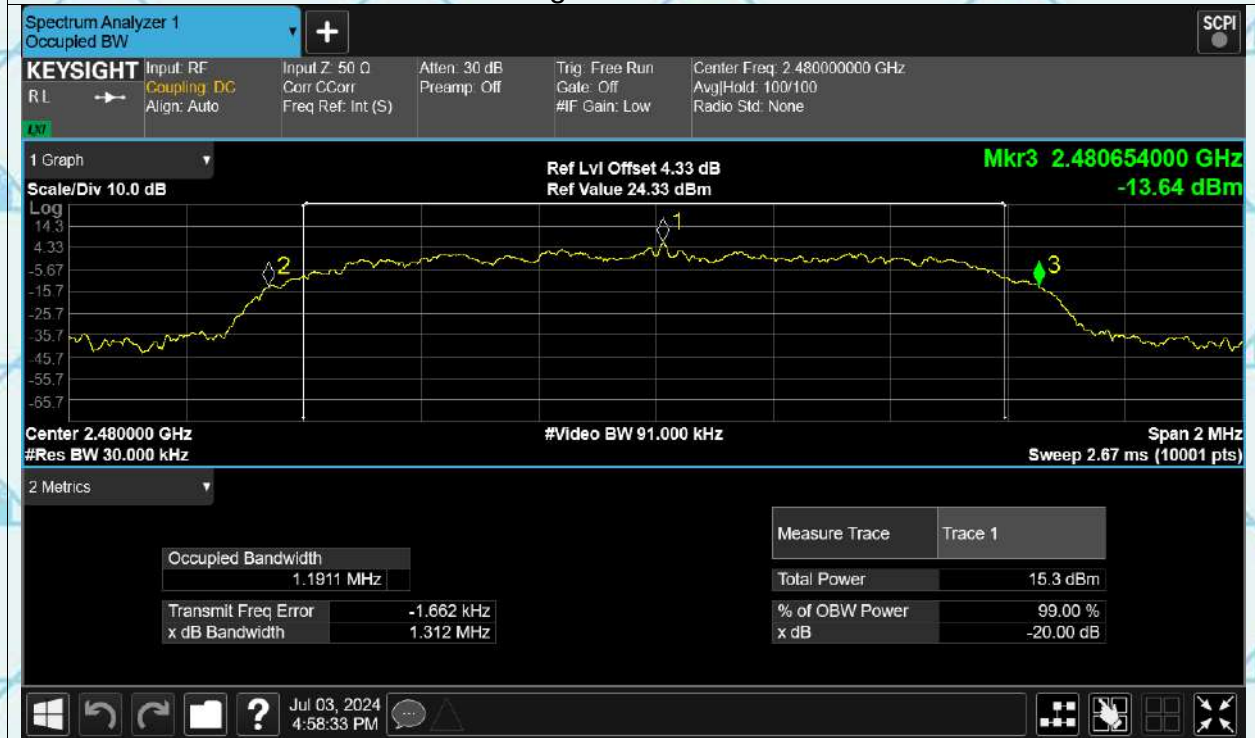

Report No.: WSCT-A2LA-R&E240600028A-BT
8DPSK Modulation


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Lowest channel



Middle channel

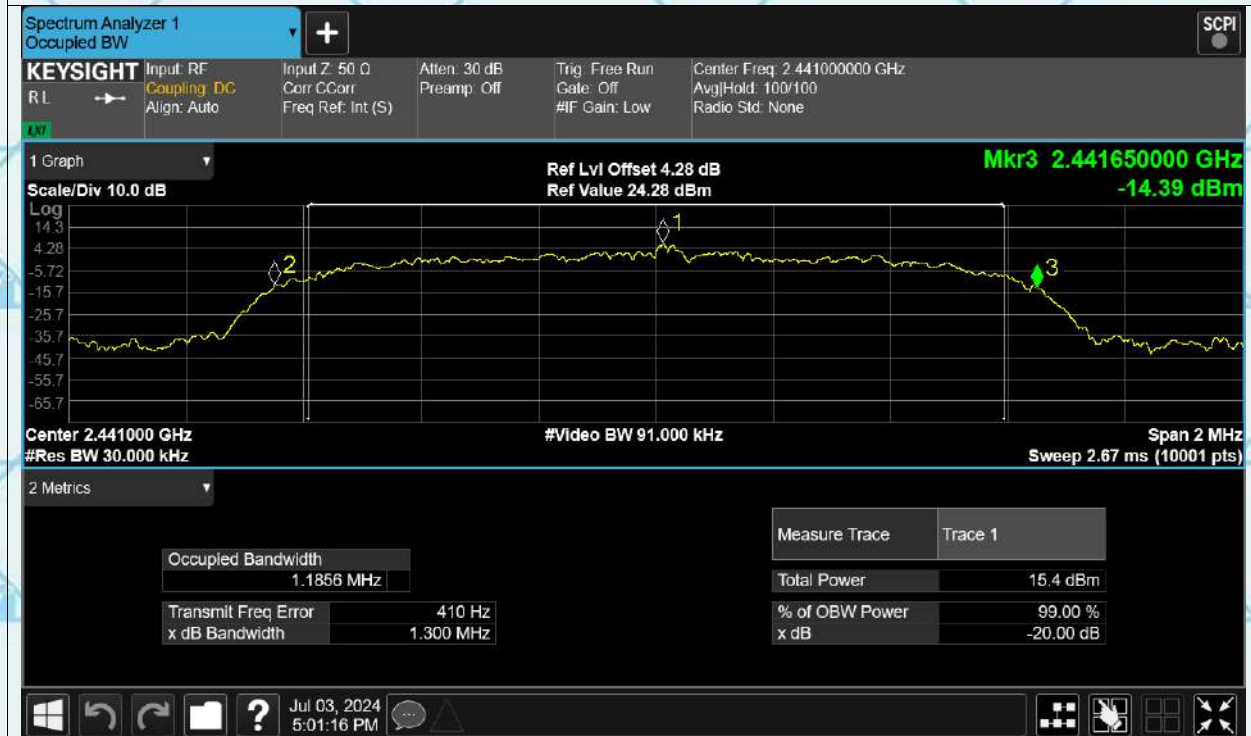



Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com


Highest channel





6.5. Carrier Frequencies Separation

6.5.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2014
Limit:	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	1. The testing follows ANSI C63.10:2014 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels; RBW is set to approximately 30% of the channel spacing, adjust as necessary to best identify the center of each individual channel; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold. 6. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Record the value in report.
Test Result:	PASS

**6.5.2. Test data**

GFSK mode			
Test channel	Carrier Frequencies Separation (MHz)	Limit (MHz)	Result
Lowest	0.998	0.623	PASS
Middle	1.004	0.618	PASS
Highest	0.994	0.627	PASS

Pi/4 DQPSK mode			
Test channel	Carrier Frequencies Separation (MHz)	Limit (MHz)	Result
Lowest	1.014	0.875	PASS
Middle	1.012	0.875	PASS
Highest	0.990	0.875	PASS

8DPSK mode			
Test channel	Carrier Frequencies Separation (MHz)	Limit (MHz)	Result
Lowest	1.000	0.863	PASS
Middle	1.138	0.867	PASS
Highest	0.998	0.869	PASS



Report No.: WSCT-A2LA-R&E240600028A-BT
GFSK Modulation

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Lowest channel



Middle channel





Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Highest channel



Report No.: WSCT-A2LA-R&E240600028A-BT
Pi/4DQPSK Modulation

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Lowest channel



Middle channel





Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Highest channel



Report No.: WSCT-A2LA-R&E240600028A-BT
8DPSK Modulation

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Lowest channel



Middle channel





Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com


Highest channel





6.6. Hopping Channel Number

6.6.1. Test Specification

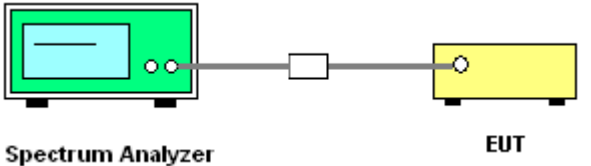Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2014
Limit:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	1. The testing follows ANSI C63.10:2014 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = the frequency band of operation; set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller; VBW$\geq$RBW; Sweep = auto; Detector function = peak; Trace = max hold. 6. The number of hopping frequency used is defined as the number of total channel. 7. Record the measurement data in report.
Test Result:	PASS

6.6.2. Test data

Mode	Hopping channel numbers	Limit	Result
GFSK, P/4-DQPSK, 8DPSK	79	15	PASS

Test plots as follows:




Report No.: WSCT-A2LA-R&E240600028A-BT


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

GFSK

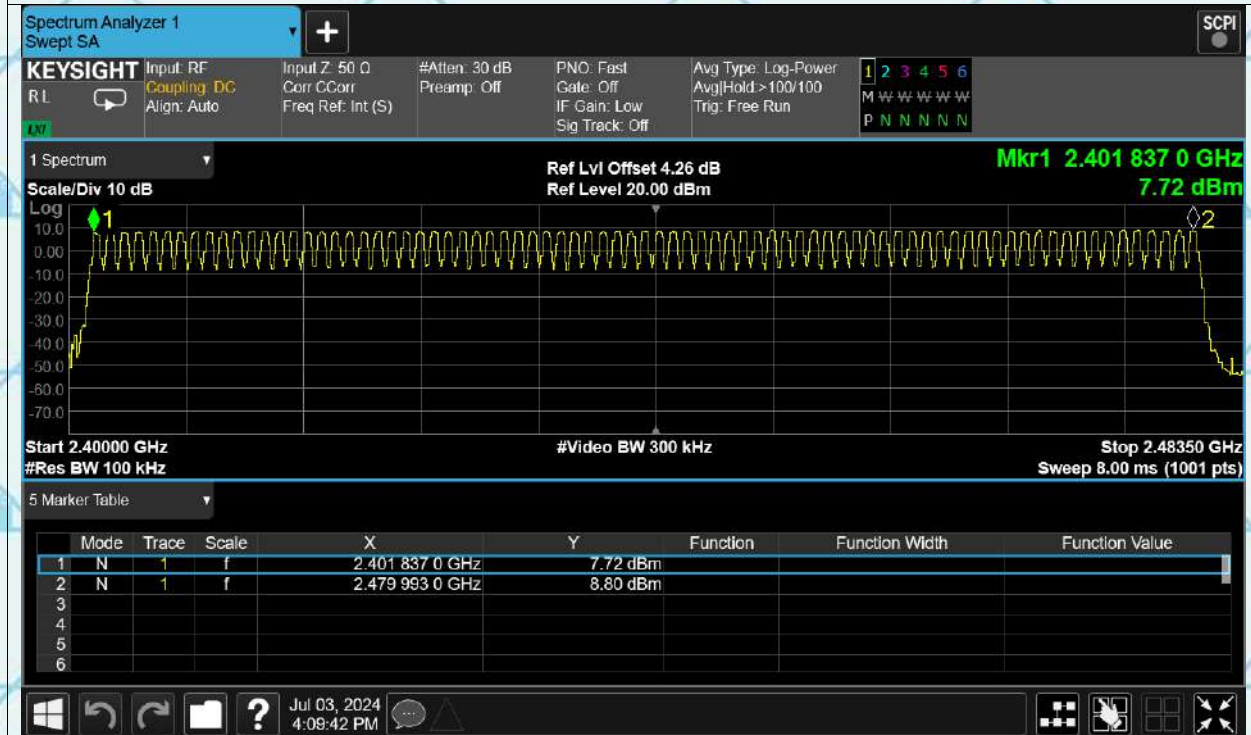

P/4-DQPSK

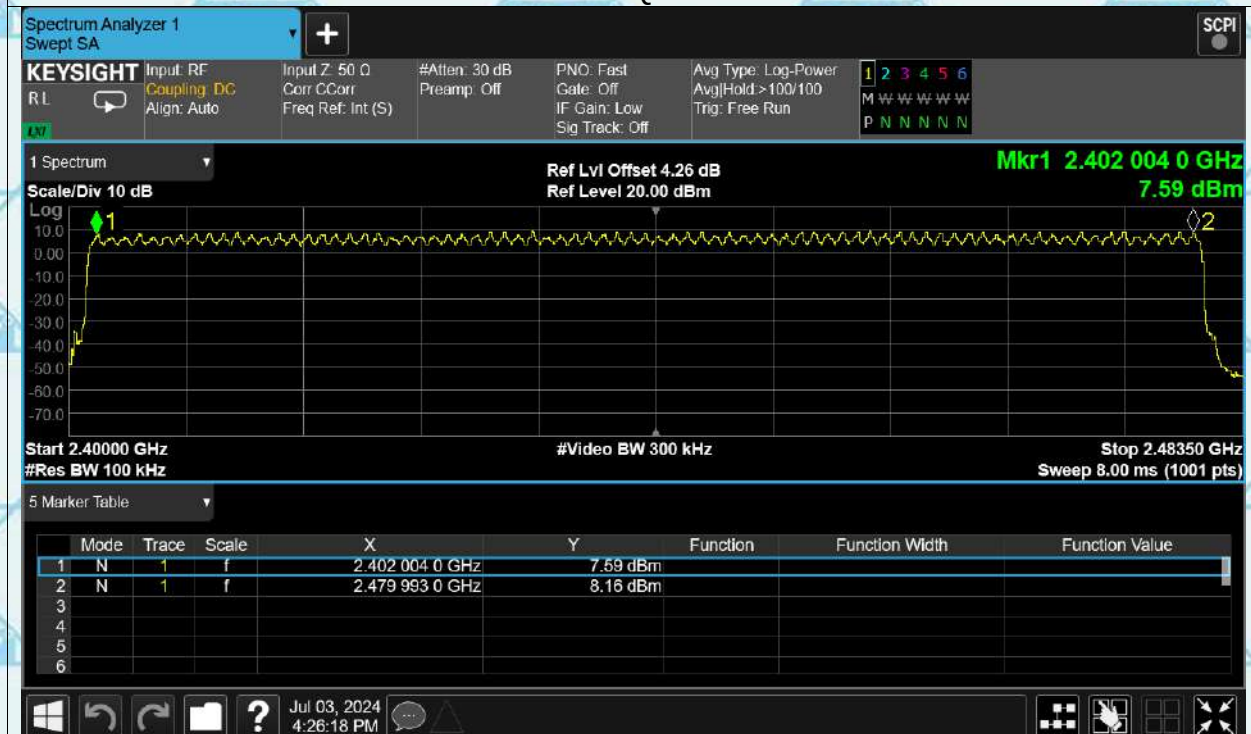

世标检测认证股份

ADD: Building A-8 Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL: 86-755-26996192 26992300 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com




Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com


8DPSK

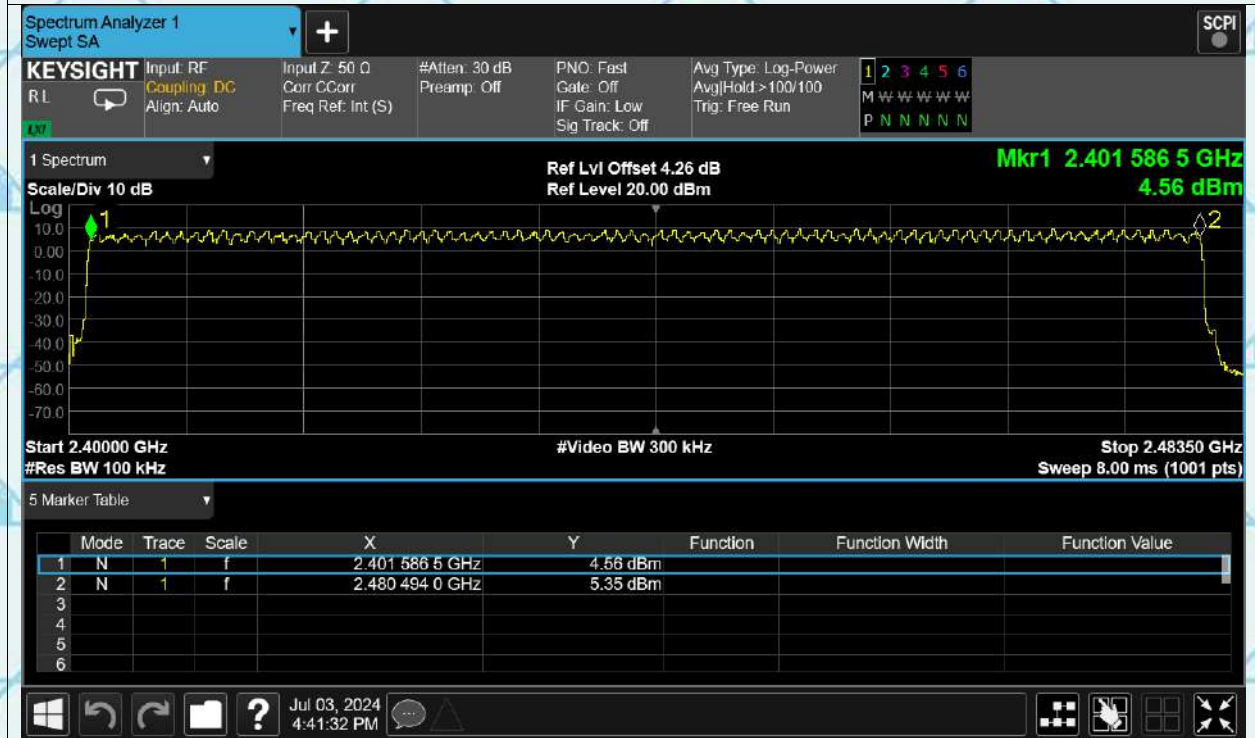



6.7. Dwell Time

6.7.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2014
Limit:	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	1. The testing follows ANSI C63.10:2014 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold. 6. Measure and record the results in the test report.
Test Result:	PASS



6.7.2. Test Data

Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH1	2402	0.377	44.109	117	31600	400	Pass
1-DH1	2441	0.377	45.994	122	31600	400	Pass
1-DH1	2480	0.378	46.872	124	31600	400	Pass
1-DH3	2402	1.634	220.59	135	31600	400	Pass
1-DH3	2441	1.633	192.694	118	31600	400	Pass
1-DH3	2480	1.633	187.795	115	31600	400	Pass
1-DH5	2402	2.882	230.56	80	31600	400	Pass
1-DH5	2441	2.881	227.599	79	31600	400	Pass
1-DH5	2480	2.882	219.032	76	31600	400	Pass

Note: 1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.

For DH1, With channel hopping rate $(1600 / 2 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 2 / 79) \times (0.4 \times 79) = 320$ hops

For DH3, With channel hopping rate $(1600 / 4 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 4 / 79) \times (0.4 \times 79) = 160$ hops

For DH5, With channel hopping rate $(1600 / 6 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 6 / 79) \times (0.4 \times 79) = 106.67$ hops

2. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

Test plots as follows:




Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.comGFSK
1-DH1 2402MHZ

1-DH1 2402MHZ

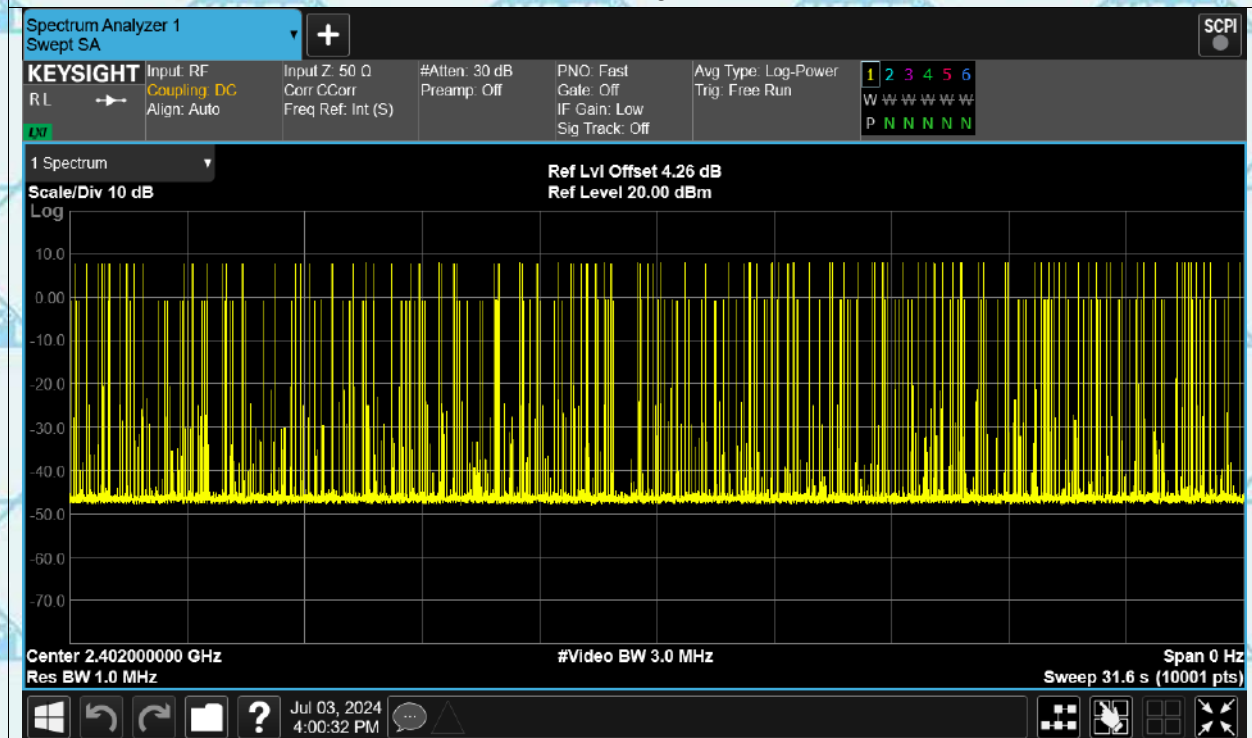

世标检测认证股份

ADD: Building A-8 Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL: 86-755-26996192 26992300 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com



Report No.: WSCT-A2LA-R&E240600028A-BT


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

1-DH1 2441MHz



1-DH1 2441MHz

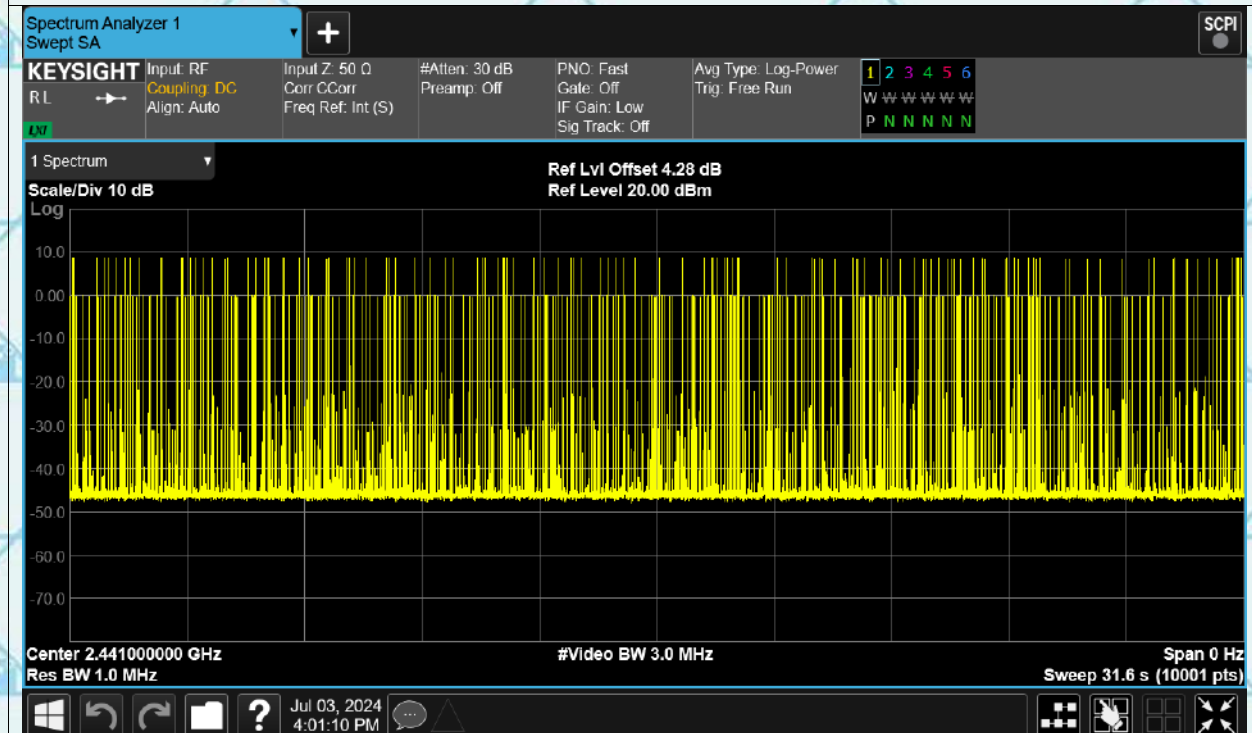



Report No.: WSCT-A2LA-R&E240600028A-BT


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

1-DH1 2480MHz Ant1



1-DH1 2480MHz

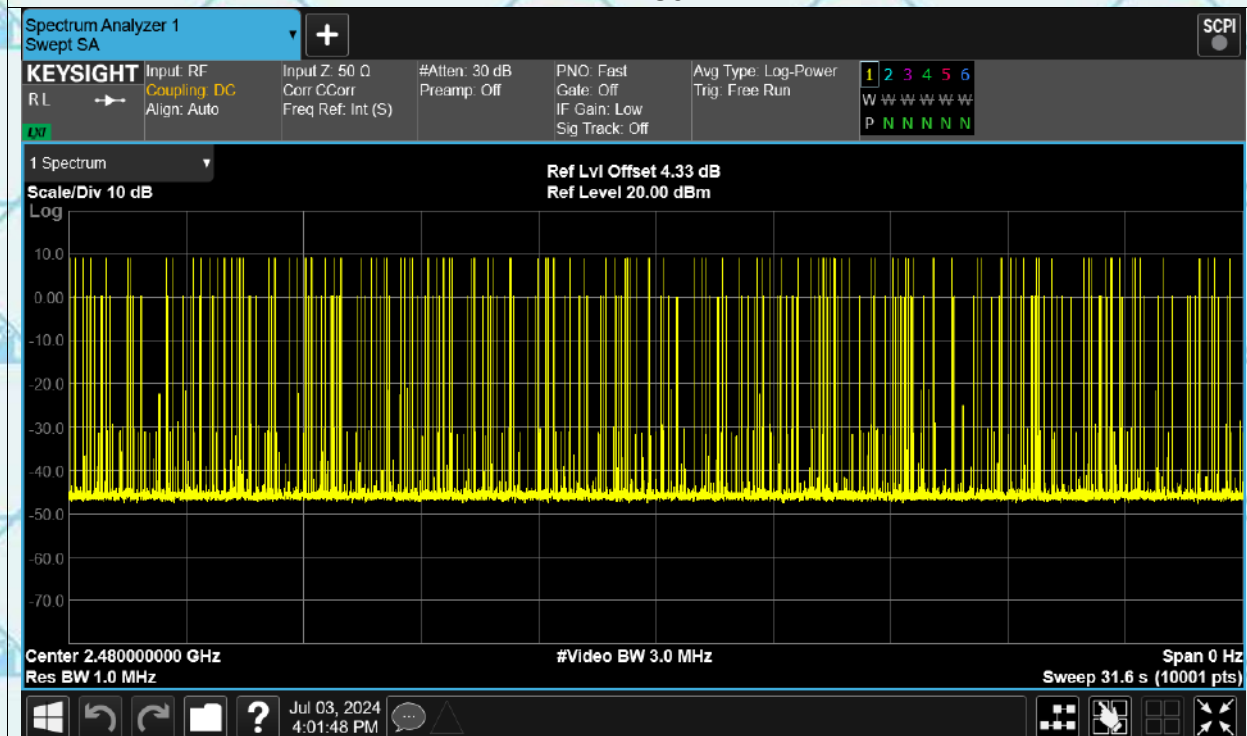



Report No.: WSCT-A2LA-R&E240600028A-BT


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

1-DH3 2402MHz



1-DH3 2402MHz

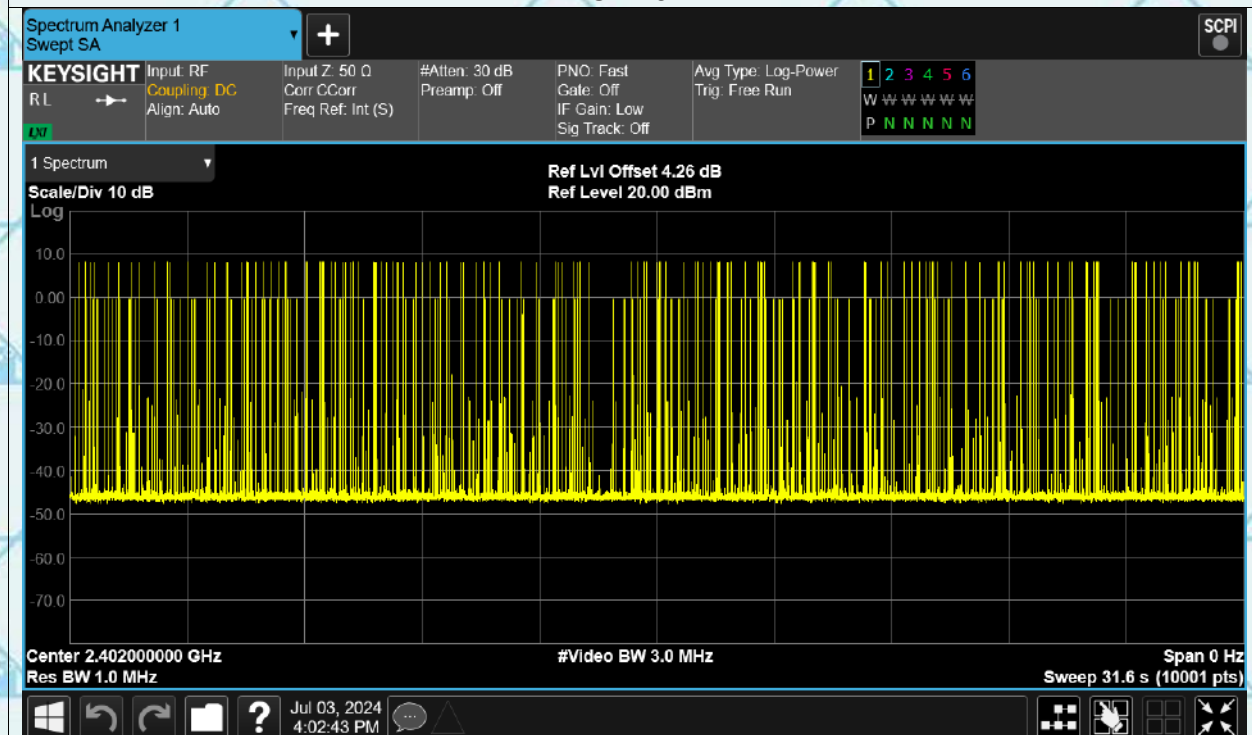



Report No.: WSCT-A2LA-R&E240600028A-BT


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

1-DH3 2441MHz



1-DH3 2441MHz

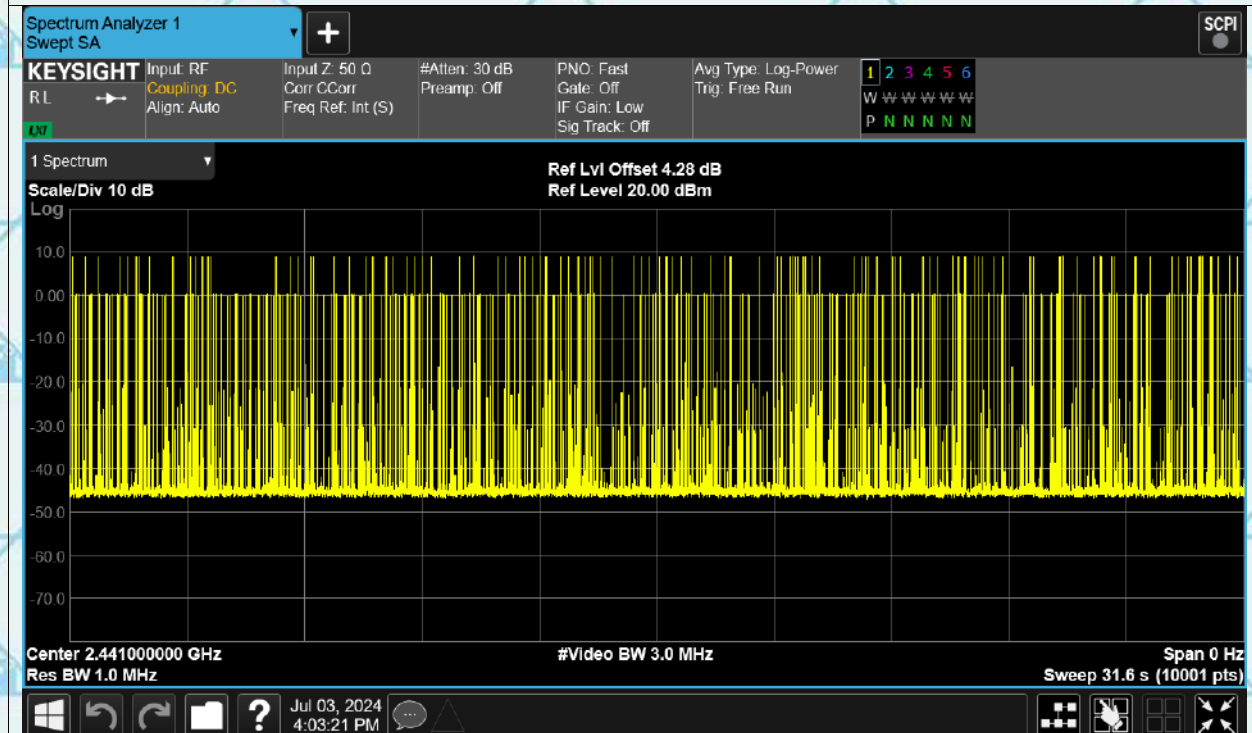



Report No.: WSCT-A2LA-R&E240600028A-BT


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

1-DH3 2480MHz



1-DH3 2480MHz

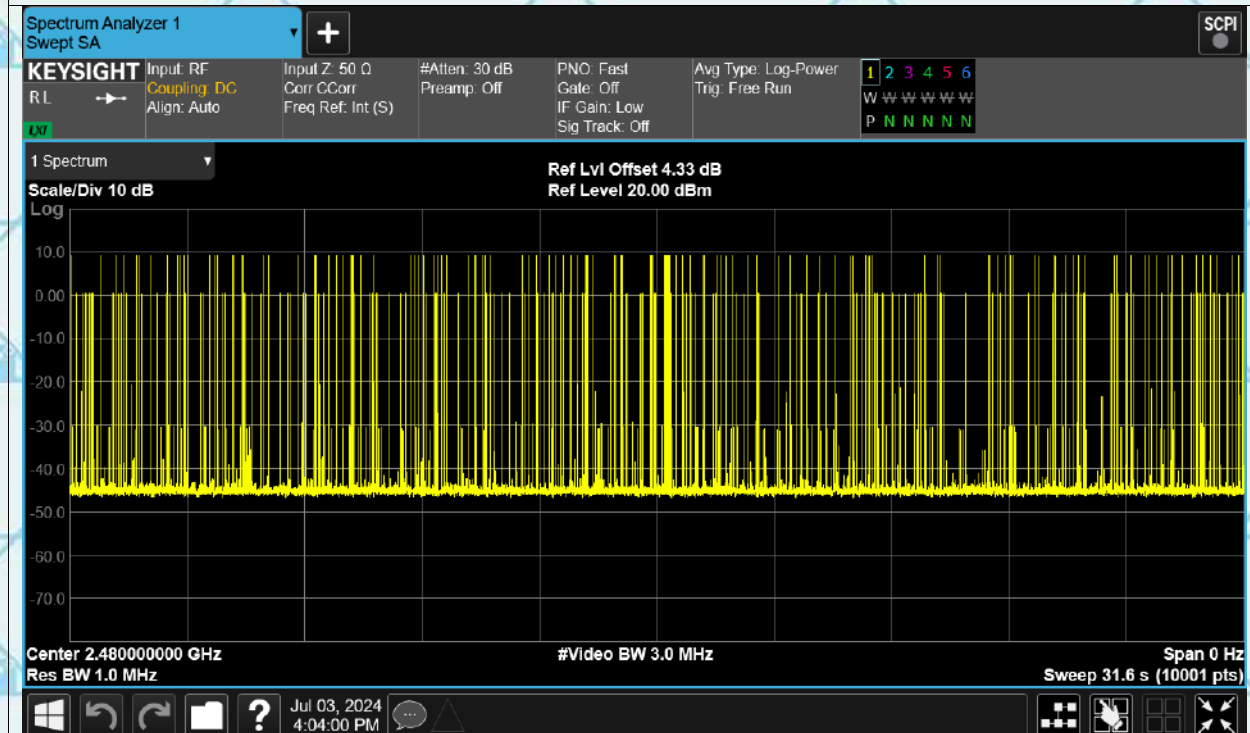



Report No.: WSCT-A2LA-R&E240600028A-BT


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

1-DH5 2402MHz



1-DH5 2402MHz Ant1

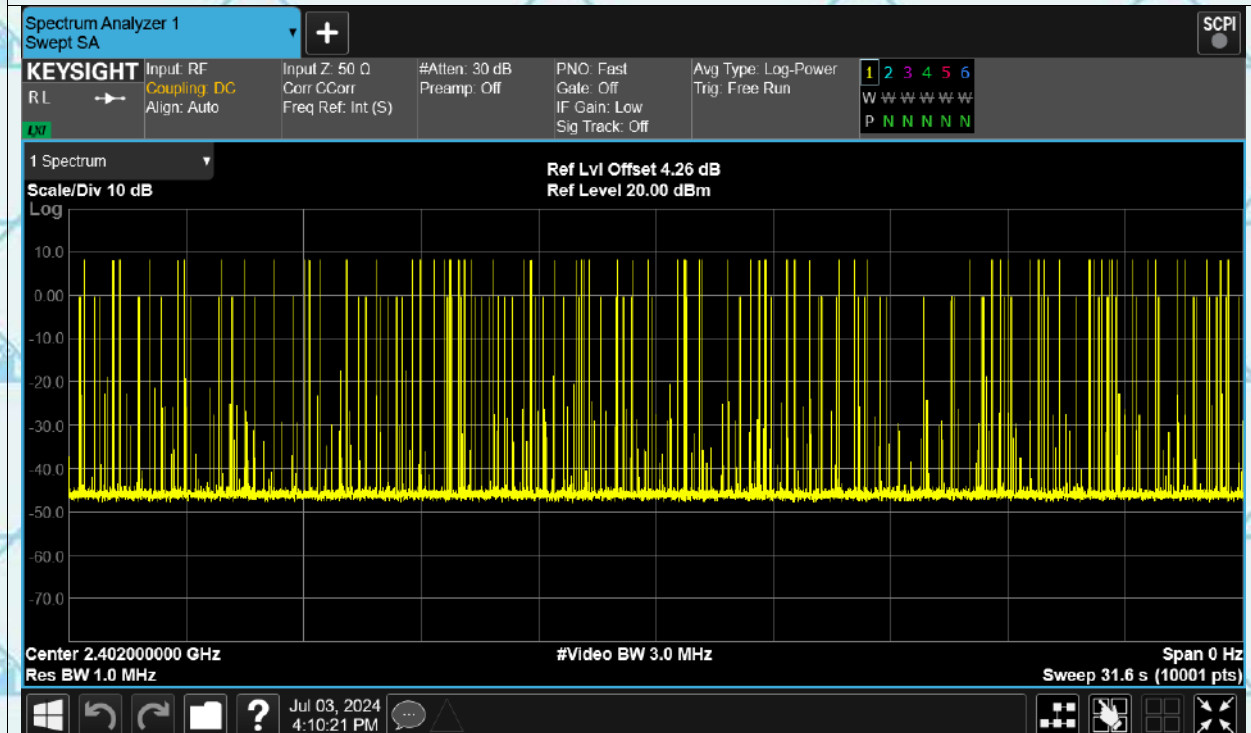



Report No.: WSCT-A2LA-R&E240600028A-BT


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

1-DH5 2441MHz



1-DH5 2441MHz

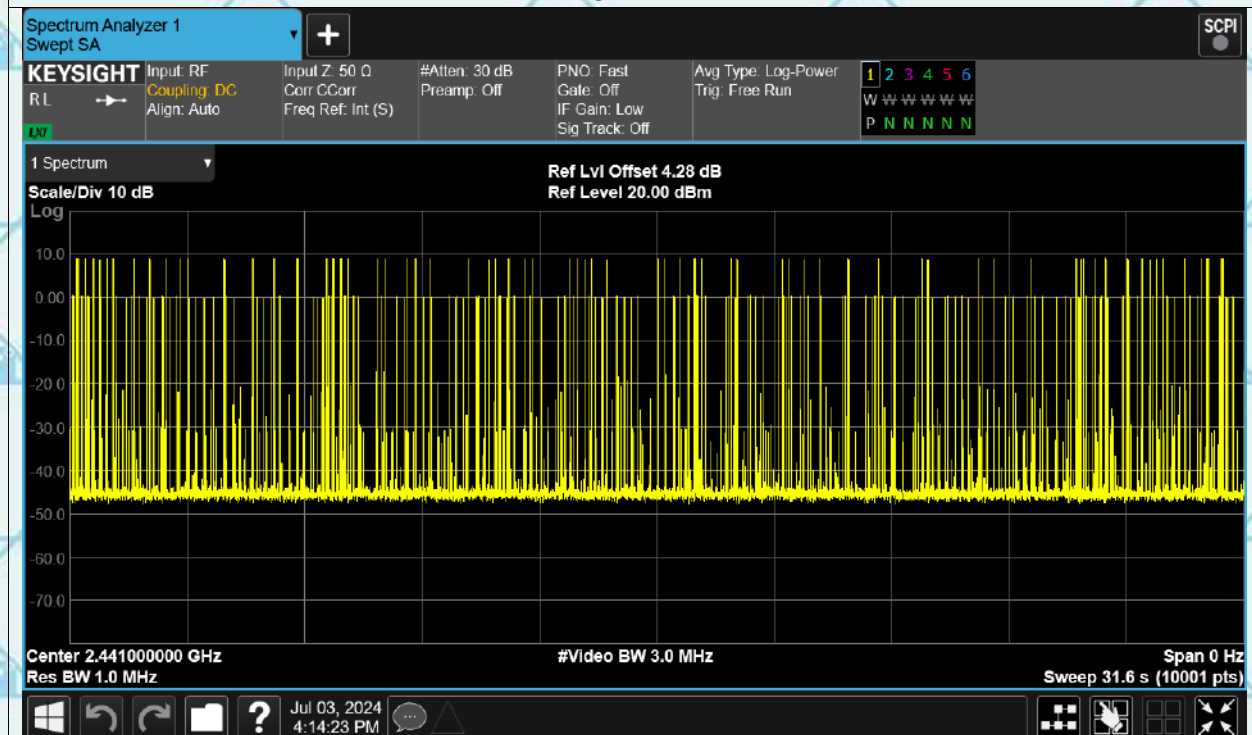



Report No.: WSCT-A2LA-R&E240600028A-BT


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

1-DH5 2480MHz



1-DH5 2480MHz

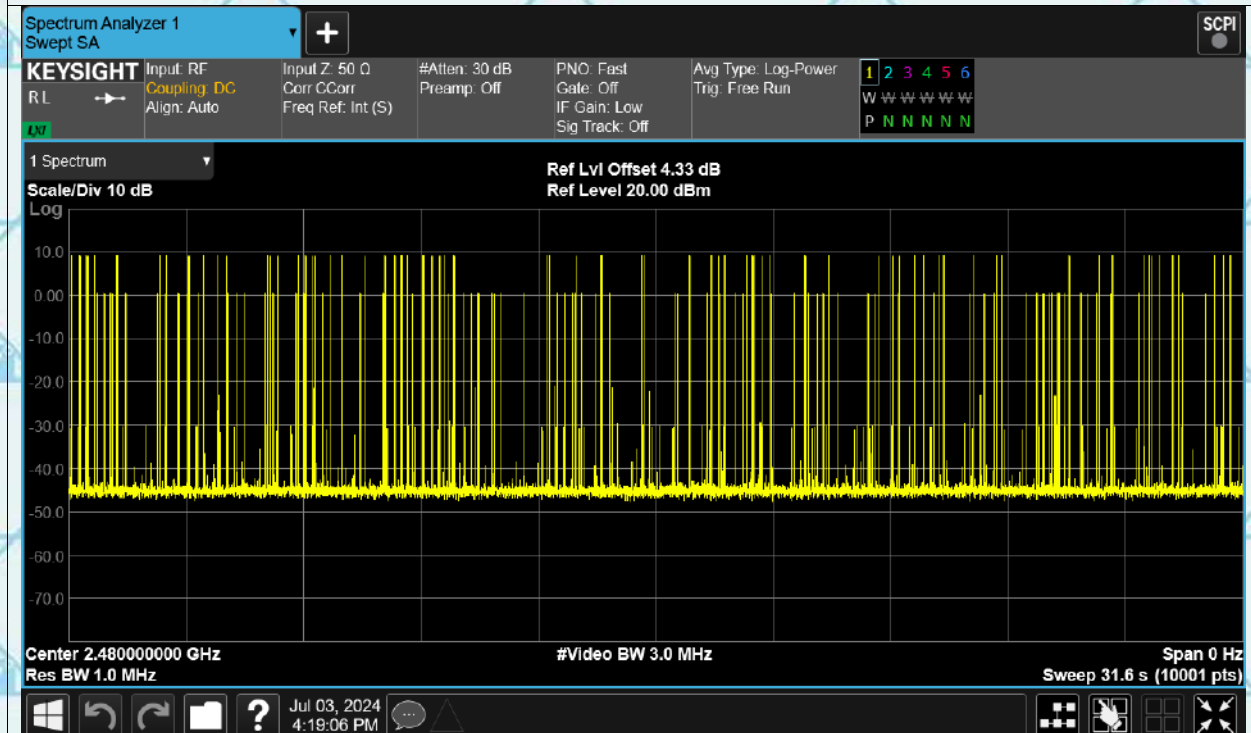



6.8. Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

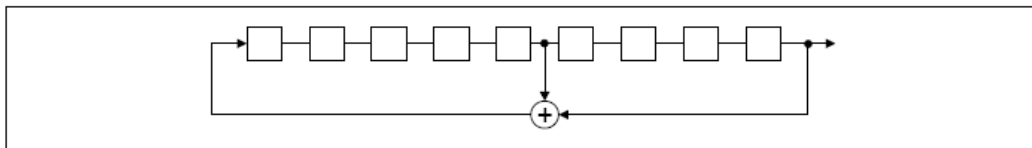

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

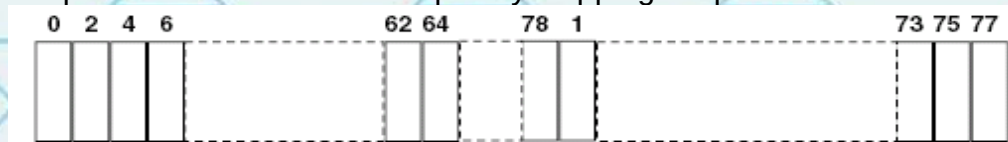


Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



6.9. Conducted Band Edge Measurement

6.9.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2014
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of ANSI C63.10:2014 Measurement Guidelines. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz ($\geq 1\%$ span=10MHz), VBW = 300 kHz ($\geq$RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used. 4. Enable hopping function of the EUT and then repeat step 2 and 3. 5. Measure and record the results in the test report.
Test Result:	PASS



Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com


6.9.2. Test Data

GFSK Modulation (the worst case)

Band Edge(Hopping) 1-DH5 2402MHz



Band Edge(Hopping) 1-DH5 2402MHz

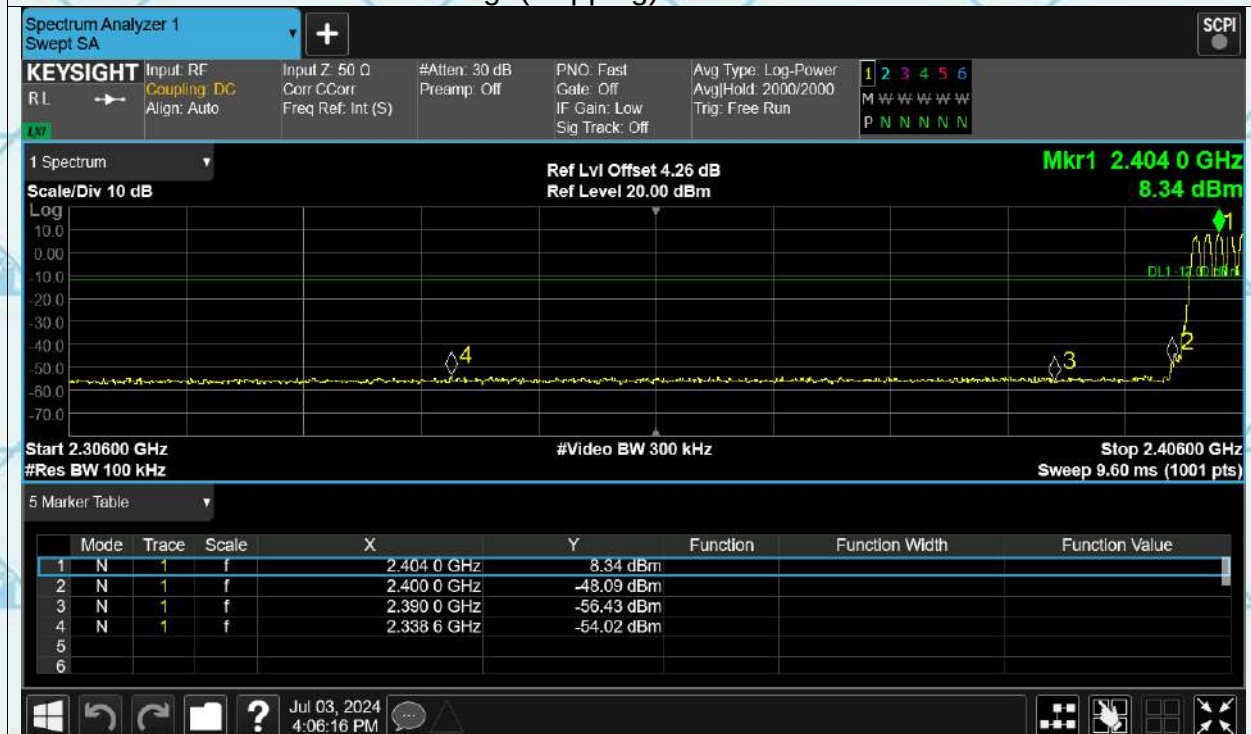



Report No.: WSCT-A2LA-R&E240600028A-BT


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Band Edge(Hopping) 1-DH5 2480MHz



Band Edge(Hopping) 1-DH5 2480MHz

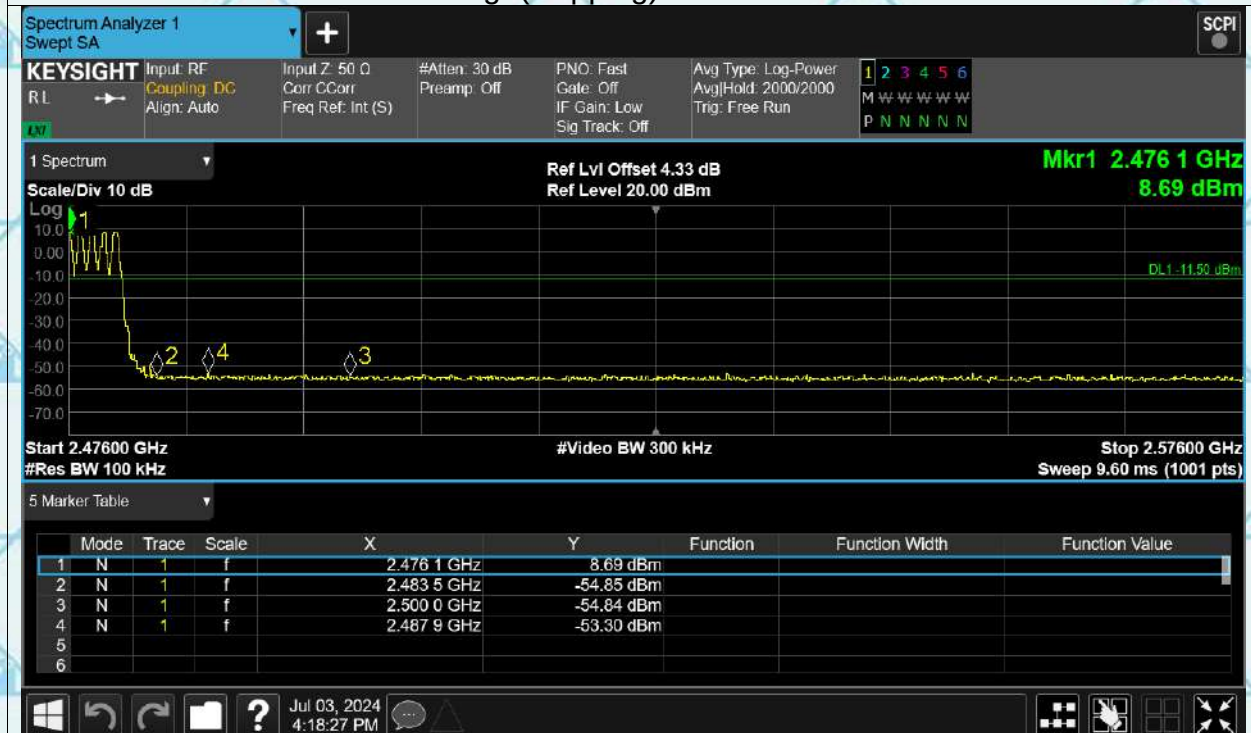



6.10. Conducted Spurious Emission Measurement

6.10.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2014
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Spurious RF Conducted Emissions of ANSI C63.10:2014 Measurement Guidelines 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS



Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Test Data

GFSK mode

1-DH5 2402MHz



1-DH5 2402MHz





Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

1-DH5 2441MHz



1-DH5 2441MHz





Report No.: WSCT-A2LA-R&E240600028A-BT


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

1-DH5 2480MHz



1-DH5 2480MHz

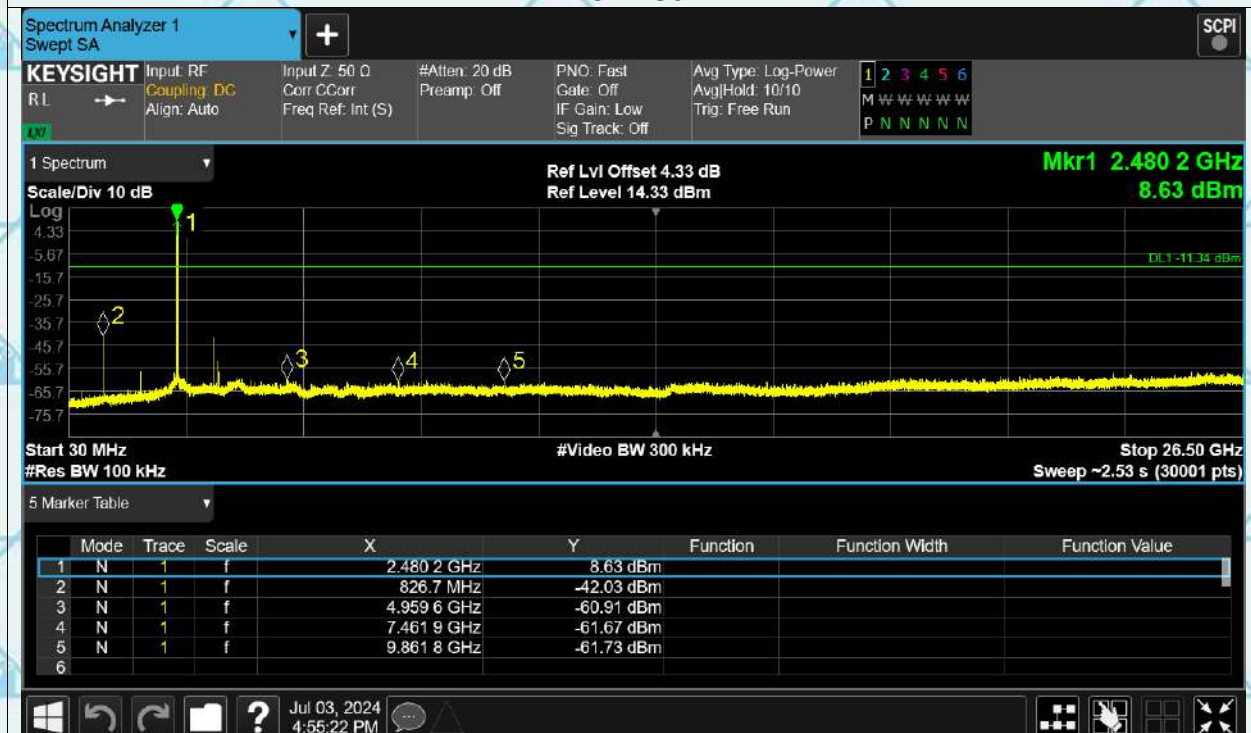



Report No.: WSCT-A2LA-R&E240600028A-BT
Pi/4DQPSK mode


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

2-DH5 2402MHz



2-DH5 2402MHz

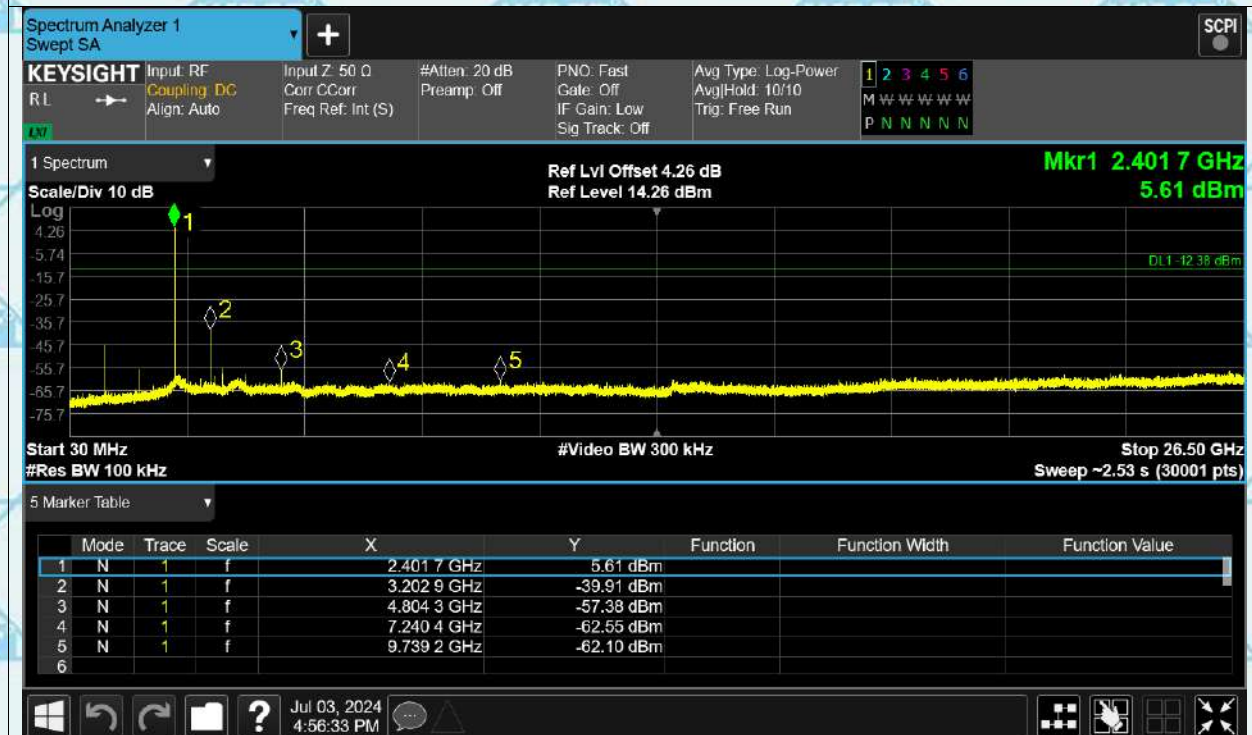



Report No.: WSCT-A2LA-R&E240600028A-BT


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

2-DH5 2441MHz



2-DH5 2441MHz

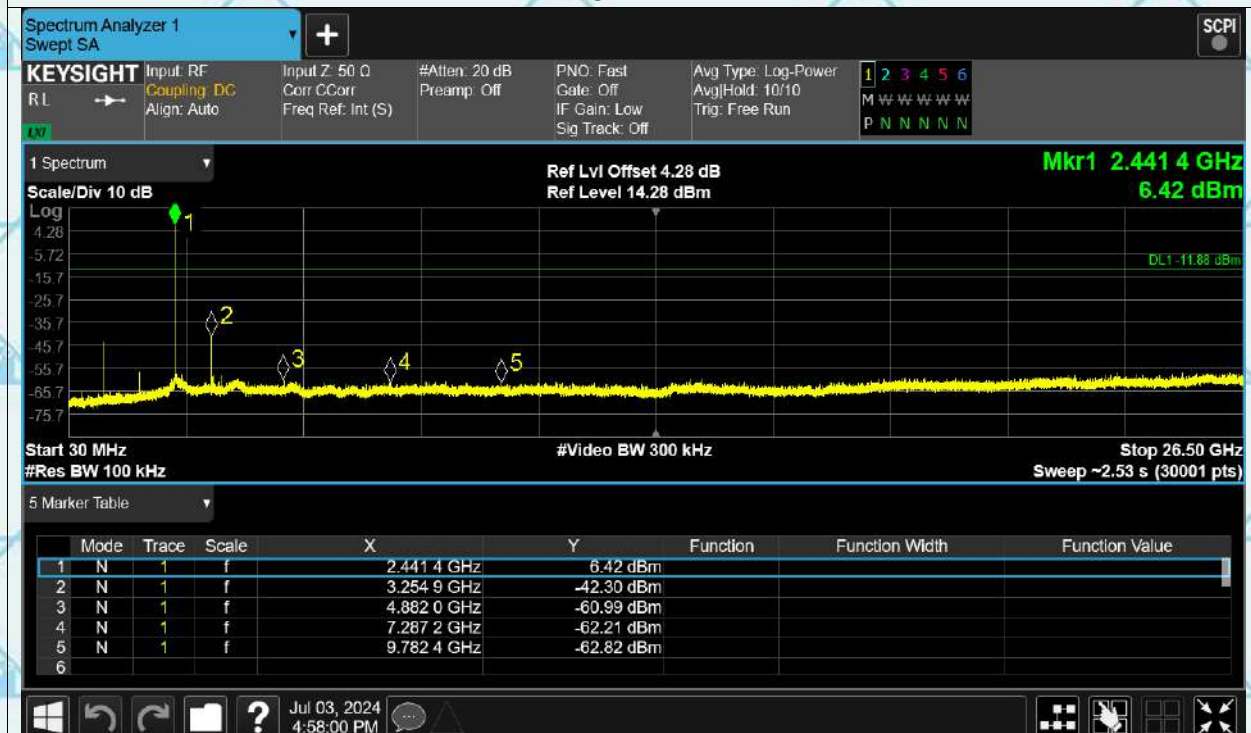



Report No.: WSCT-A2LA-R&E240600028A-BT


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

2-DH5 2480MHz



2-DH5 2480MHz

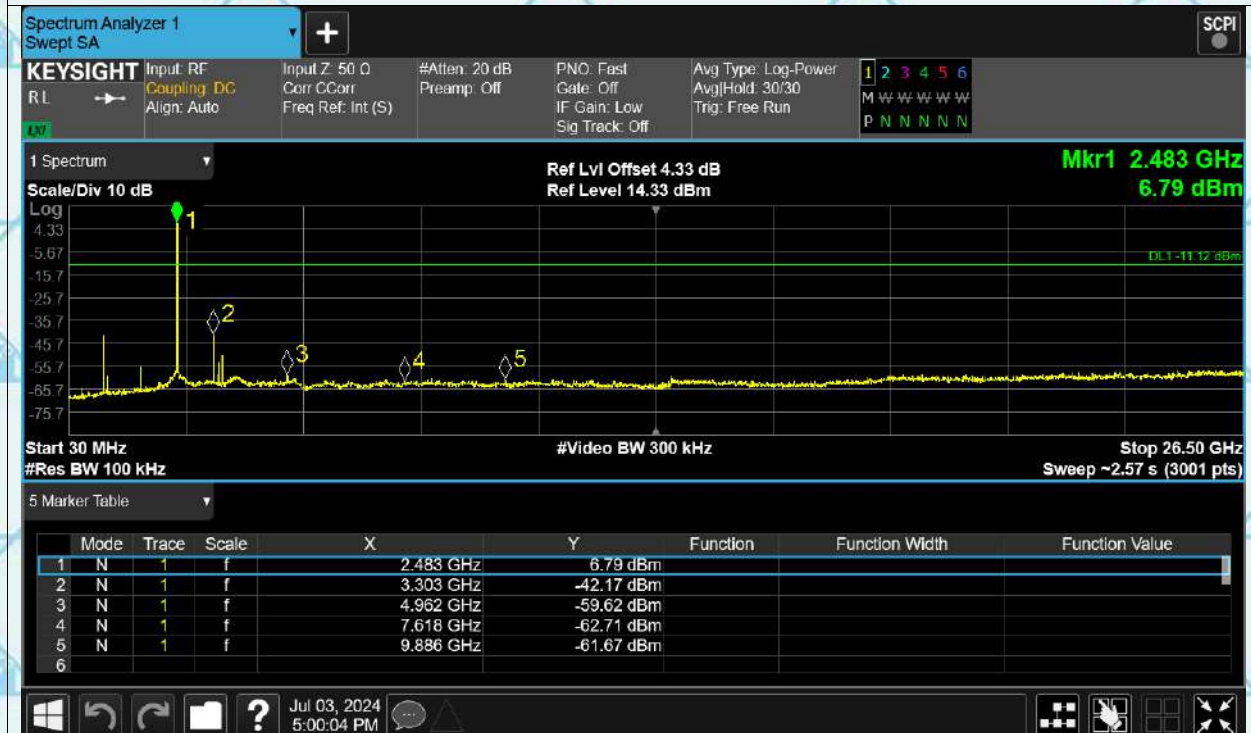



Report No.: WSCT-A2LA-R&E240600028A-BT
8DPSK mode

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

3-DH5 2402MHz



3-DH5 2402MHz





Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

3-DH5 2441MHz



3-DH5 2441MHz





Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

3-DH5 2480MHz




3-DH5 2480MHz







6.11. Radiated Spurious Emission Measurement

6.11.1. Test Specification

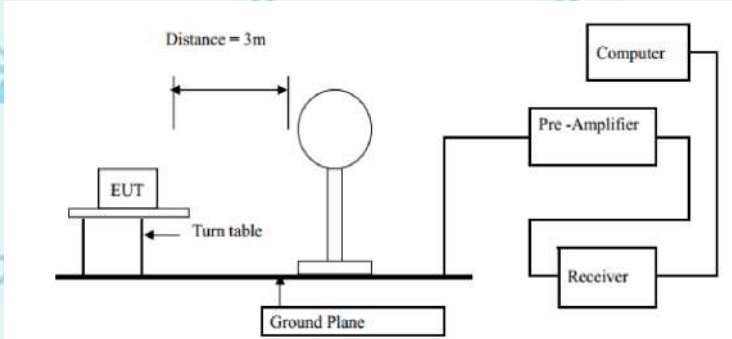Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2014				
Frequency Range:	9 kHz to 25 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit:	Frequency	Field Strength (microvolts/meter)		Measurement Distance (meters)	
	0.009-0.490	2400/F(KHz)		300	
	0.490-1.705	24000/F(KHz)		30	
	1.705-30	30		30	
	30-88	100		3	
	88-216	150		3	
	216-960	200		3	
	Above 960	500		3	
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector	
	Above 1GHz	500	3	Average	
		5000	3	Peak	
Test setup:	For radiated emissions below 30MHz				
					
	30MHz to 1GHz				

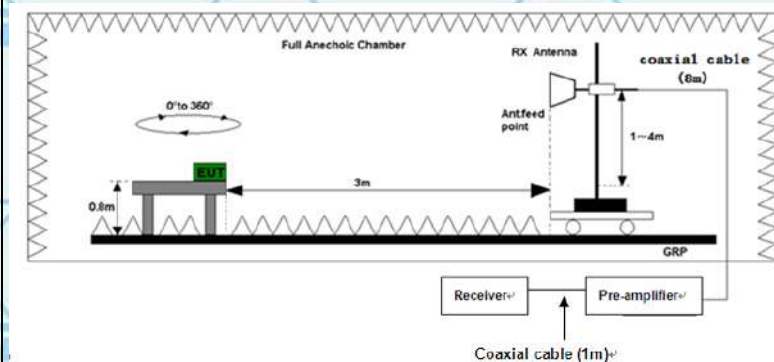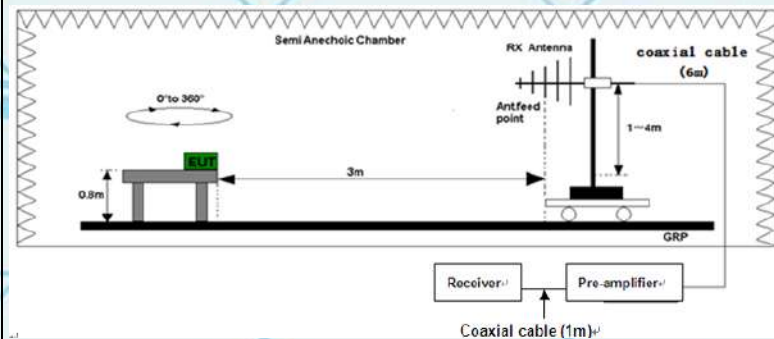

Test Mode:

Transmitting mode with modulation

Test Procedure:

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10:2014 Measurement Guidelines.
2. For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
For the radiated emission test above 1GHz:
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final



	measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$GHz ; VBW$\geq$RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak (3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time = $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$ Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc. Average Emission Level = Peak Emission Level + $20 \cdot \log(\text{Duty cycle})$ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
Test results:	PASS



Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

6.11.2. Test Data(worst case)

Please refer to following diagram for individual

The worst mode is 8DPSK

Below 1GHz

Horizontal:



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		37.0248	34.39	-1.87	32.52	40.00	-7.48	QP
2	!	191.7450	43.89	-5.60	38.29	43.50	-5.21	QP
3	*	275.1570	46.17	-3.19	42.98	46.00	-3.02	QP
4	!	323.3204	42.79	-1.82	40.97	46.00	-5.03	QP
5		477.1694	32.48	1.43	33.91	46.00	-12.09	QP
6		979.1804	26.51	8.36	34.87	54.00	-19.13	QP



Report No.: WSCT-A2LA-R&E240600028A-BT
Vertical:

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	37.9450	34.45	-1.72	32.73	40.00	-7.27	QP
2		190.4050	37.29	-5.39	31.90	43.50	-11.60	QP
3		229.2931	36.18	-4.40	31.78	46.00	-14.22	QP
4		273.2341	34.43	-3.23	31.20	46.00	-14.80	QP
5		327.8873	35.18	-1.79	33.39	46.00	-12.61	QP
6		996.4996	25.72	8.53	34.25	54.00	-19.75	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) - Limits (dBuV)

e 150 kHz to 30MHz.





Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Above 1GHz


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

GFSK

Low channel: 2402MHz

Horizontal:

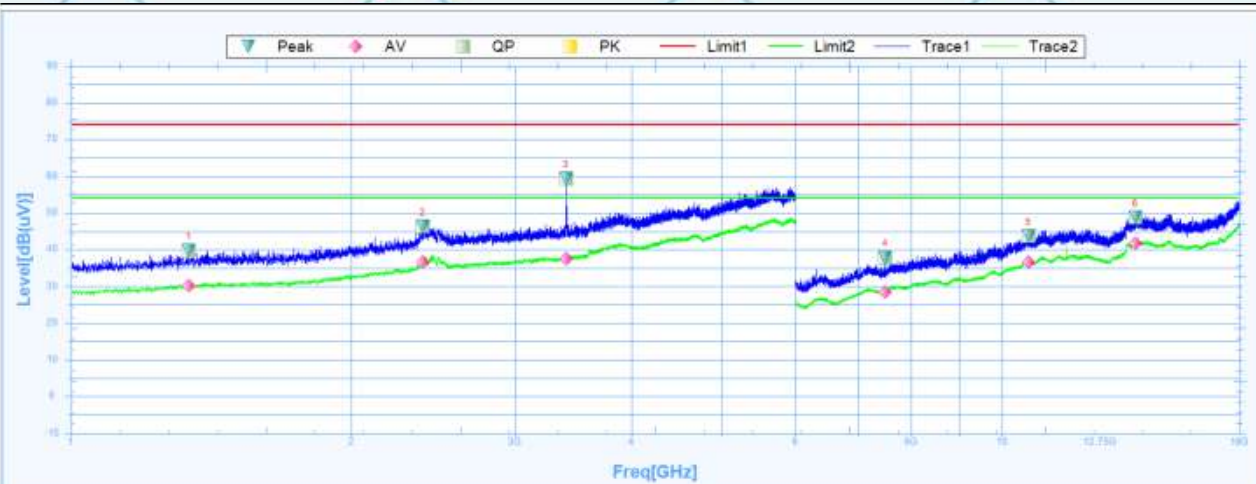**Suspected Data List**


NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1337.5000	39.7	-0.84	40.54	74	-34.3	331.7	Horizontal	PK	Pass
1	1337.5000	30.2	-0.84	31.04	54	-23.8	331.7	Horizontal	AV	Pass
2	2388.7500	46.38	7.46	38.92	74	-27.62	1.7	Horizontal	PK	Pass
2	2388.7500	36.68	7.46	29.22	54	-17.32	1.7	Horizontal	AV	Pass
3	3403.1250	59.44	9.36	50.08	74	-14.56	252.8	Horizontal	PK	Pass
3	3403.1250	37.58	9.36	28.22	54	-16.42	252.8	Horizontal	AV	Pass
4	7492.5000	37.83	36.24	1.59	74	-36.17	146.7	Horizontal	PK	Pass
4	7492.5000	28.45	36.24	-7.79	54	-25.55	146.7	Horizontal	AV	Pass
5	10677.0000	43.68	39.05	4.63	74	-30.32	36.8	Horizontal	PK	Pass
5	10677.0000	36.57	39.05	-2.48	54	-17.43	36.8	Horizontal	AV	Pass
6	13909.5000	48.81	41.26	7.55	74	-25.19	222.1	Horizontal	PK	Pass
6	13909.5000	41.61	41.26	0.35	54	-12.39	222.1	Horizontal	AV	Pass



Report No.: WSCT-A2LA-R&E240600028A-BT
Vertical:

Certificate #5768.01

For Question,
Please Contact with WSCT
ct-cert.com

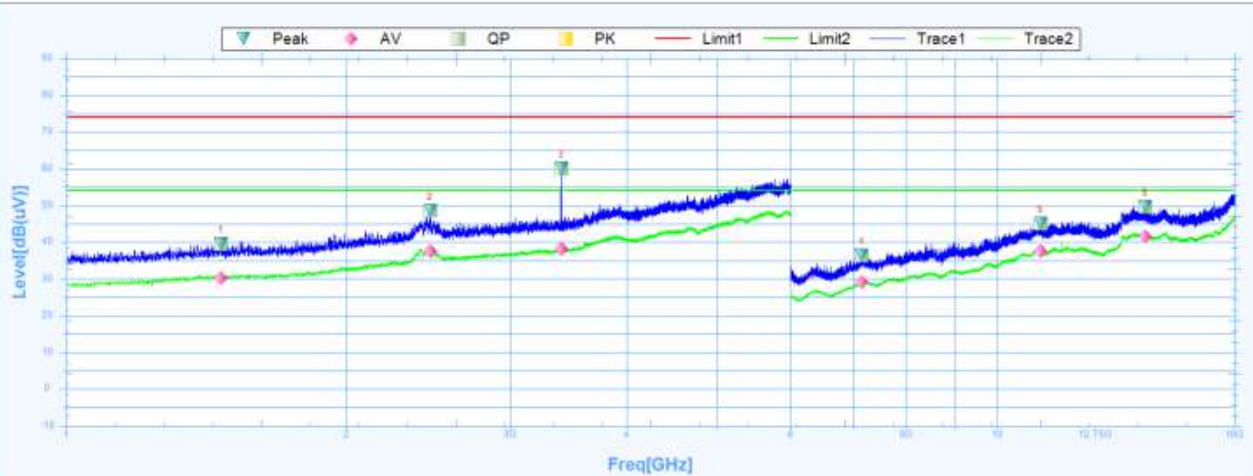

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1466.2500	39.42	-0.3	39.72	74	-34.58	197.8	Vertical	PK	Pass
1	1466.2500	30.26	-0.3	30.56	54	-23.74	197.8	Vertical	AV	Pass
2	2458.7500	48.48	7.77	40.71	74	-25.52	0.4	Vertical	PK	Pass
2	2458.7500	37.43	7.77	29.66	54	-16.57	0.4	Vertical	AV	Pass
3	3401.8750	59.99	9.35	50.64	74	-14.01	0.4	Vertical	PK	Pass
3	3401.8750	38.12	9.35	28.77	54	-15.88	0.4	Vertical	AV	Pass
4	7152.0000	36.4	35.73	0.67	74	-37.6	252	Vertical	PK	Pass
4	7152.0000	29.05	35.73	-6.68	54	-24.95	252	Vertical	AV	Pass
5	11133.0000	45.01	39.38	5.63	74	-28.99	292.6	Vertical	PK	Pass
5	11133.0000	37.53	39.38	-1.85	54	-16.47	292.6	Vertical	AV	Pass
6	14434.5000	49.74	40.94	8.8	74	-24.26	314.2	Vertical	PK	Pass
6	14434.5000	41.46	40.94	0.52	54	-12.54	314.2	Vertical	AV	Pass





Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Middle channel: 2441MHz

Horizontal:



Suspected Data List


NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1359.3750	38.27	-0.69	38.96	74	-35.73	360	Vertical	PK	Pass
1	1359.3750	29.63	-0.69	30.32	54	-24.37	360	Vertical	AV	Pass
2	2397.5000	46.71	7.56	39.15	74	-27.29	10.6	Vertical	PK	Pass
2	2397.5000	37.44	7.56	29.88	54	-16.56	10.6	Vertical	AV	Pass
3	4508.1250	51.27	14.11	37.16	74	-22.73	130.7	Vertical	PK	Pass
3	4508.1250	42.55	14.11	28.44	54	-11.45	130.7	Vertical	AV	Pass
4	7191.0000	36.09	35.79	0.3	74	-37.91	232.4	Horizontal	PK	Pass
4	7191.0000	29.21	35.79	-6.58	54	-24.79	232.4	Horizontal	AV	Pass
5	10123.5000	41.71	38.27	3.44	74	-32.29	5.8	Horizontal	PK	Pass
5	10123.5000	34.34	38.27	-3.93	54	-19.66	5.8	Horizontal	AV	Pass
6	13687.5000	49.2	40.69	8.51	74	-24.8	289.8	Horizontal	PK	Pass
6	13687.5000	40.72	40.69	0.03	54	-13.28	289.8	Horizontal	AV	Pass





Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

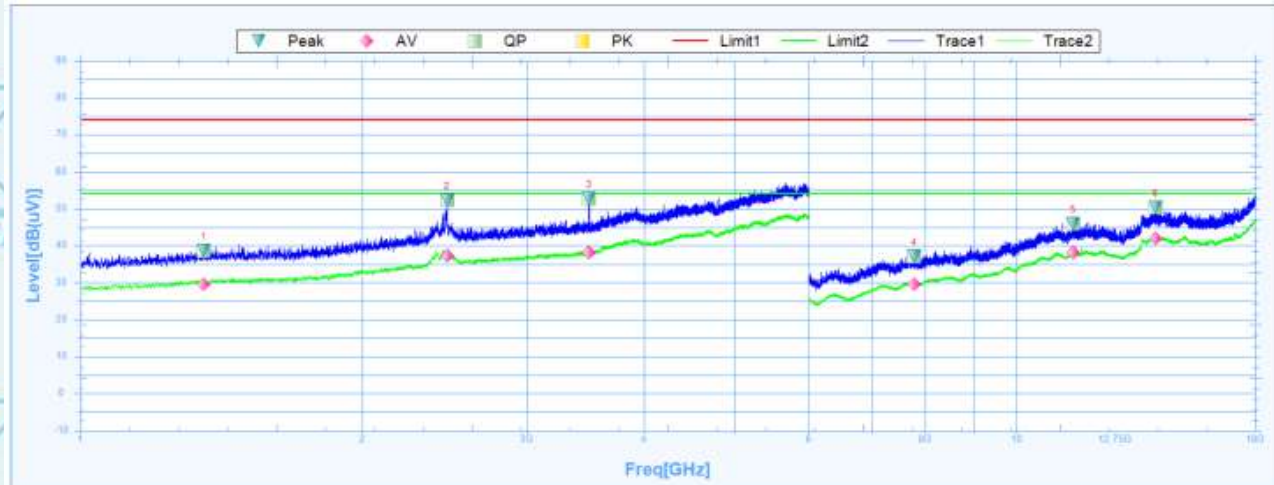For Question,
Please Contact with WSCT
ct-cert.com

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1353.1250	38.57	-0.7	39.27	74	-35.43	-0.1	Vertical	PK	Pass
1	1353.1250	29.57	-0.7	30.27	54	-24.43	-0.1	Vertical	AV	Pass
2	2463.7500	52.2	7.79	44.41	74	-21.8	-0.1	Vertical	PK	Pass
2	2463.7500	37.36	7.79	29.57	54	-16.64	-0.1	Vertical	AV	Pass
3	3497.5000	52.69	9.64	43.05	74	-21.31	91.8	Vertical	PK	Pass
3	3497.5000	38.23	9.64	28.59	54	-15.77	91.8	Vertical	AV	Pass
4	7777.5000	36.98	36.67	0.31	74	-37.02	257.5	Vertical	PK	Pass
4	7777.5000	29.53	36.67	-7.14	54	-24.47	257.5	Vertical	AV	Pass
5	11506.5000	45.88	39.04	6.84	74	-28.12	112.9	Vertical	PK	Pass
5	11506.5000	38.11	39.04	-0.93	54	-15.89	112.9	Vertical	AV	Pass
6	14086.5000	50.25	41.39	8.86	74	-23.75	141.5	Vertical	PK	Pass
6	14086.5000	41.91	41.39	0.52	54	-12.09	141.5	Vertical	AV	Pass




Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

High channel: 2480MHz

Horizontal:

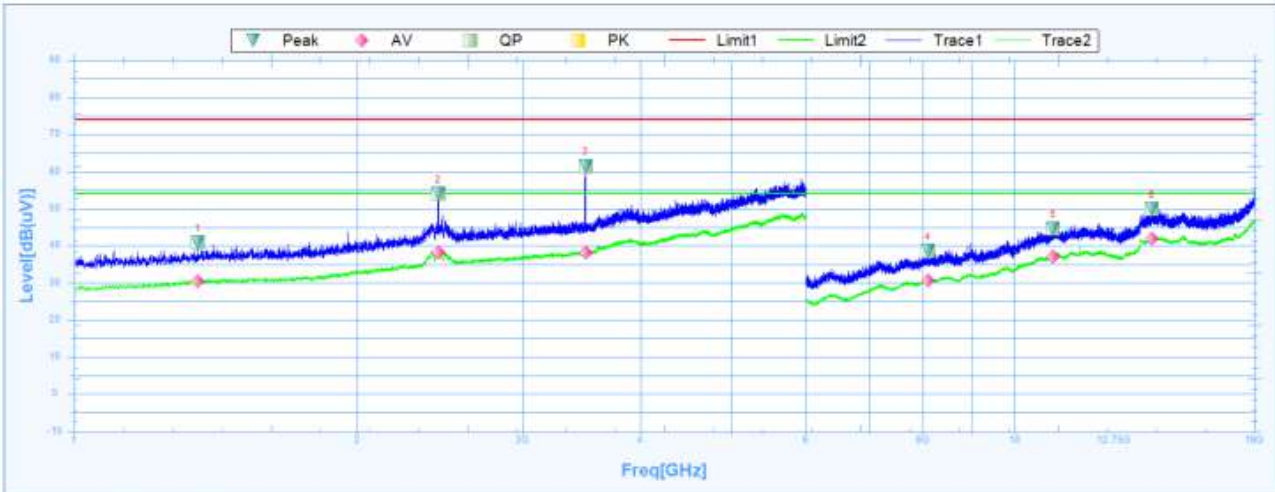

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1353.7500	40.73	-0.7	41.43	74	-33.27	322.7	Horizontal	PK	Pass
1	1353.7500	30.4	-0.7	31.1	54	-23.6	322.7	Horizontal	AV	Pass
2	2438.1250	54.01	7.7	46.31	74	-19.99	57.4	Horizontal	PK	Pass
2	2438.1250	38.21	7.7	30.51	54	-15.79	57.4	Horizontal	AV	Pass
3	3498.1250	61.47	9.64	51.83	74	-12.53	22.7	Horizontal	PK	Pass
3	3498.1250	38.07	9.64	28.43	54	-15.93	22.7	Horizontal	AV	Pass
4	8092.5000	38.51	37.04	1.47	74	-35.49	360.1	Horizontal	PK	Pass
4	8092.5000	30.59	37.04	-6.45	54	-23.41	360.1	Horizontal	AV	Pass
5	10989.0000	44.62	39.48	5.14	74	-29.38	269.5	Horizontal	PK	Pass
5	10989.0000	37.16	39.48	-2.32	54	-16.84	269.5	Horizontal	AV	Pass
6	14001.0000	49.8	41.5	8.3	74	-24.2	60.3	Horizontal	PK	Pass
6	14001.0000	41.98	41.5	0.48	54	-12.02	60.3	Horizontal	AV	Pass





Report No.: WSCT-A2LA-R&E240600028A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
ct-cert.com

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1778.1250	41.45	24.99	16.46	74	-32.55	143.2	Vertical	PK	Pass
1	1778.1250	31.24	24.99	6.25	54	-22.76	143.2	Vertical	AV	Pass
2	2437.5000	52.34	27.39	24.95	74	-21.66	49.9	Vertical	PK	Pass
2	2437.5000	38.13	27.39	10.74	54	-15.87	49.9	Vertical	AV	Pass
3	3402.5000	52.21	28.44	23.77	74	-21.79	0	Vertical	PK	Pass
3	3402.5000	38.08	28.44	9.64	54	-15.92	0	Vertical	AV	Pass
4	8457.0000	39.77	9.16	30.61	74	-34.23	359.9	Vertical	PK	Pass
4	8457.0000	31.49	9.16	22.33	54	-22.51	359.9	Vertical	AV	Pass
5	11047.5000	46.04	15.77	30.27	74	-27.96	205.9	Vertical	PK	Pass
5	11047.5000	37.65	15.77	21.88	54	-16.35	205.9	Vertical	AV	Pass
6	15091.5000	50.54	19.56	30.98	74	-23.46	36.2	Vertical	PK	Pass
6	15091.5000	41.8	19.56	22.24	54	-12.2	36.2	Vertical	AV	Pass

Note:

1. The emission levels of other frequencies are very lower than the limit and not show in test report.
2. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
3. Data of measurement shown "----" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
4. Measurements were conducted in all three modulation (GFSK, PI/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.

*****END OF REPORT*****

