

ANTENNA INFORMATION

OEM	DELL
ODM	WISTRON
Platform model name	P197G
Intel platform (ex: Yes, No or NA)	Yes
Platform type (ex: regular NB, convertible PC, AIO...etc)	Regular NB
SAR minimum separation (mm)	FCC (1g) 1.8
	ISED (1g) 15.05
	ISED (10g) 2.1

Antenna manufacturer	Company name	Speed
	Address	25F, No.95, Xipu 6th St., Taoyuan Dist., Taoyuan City 33044, Taiwan.
Test location	Company name	Speed
	Address	25F, No.95, Xipu 6th St., Taoyuan Dist., Taoyuan City 33044, Taiwan.
Test Personnel	Name(Full name)	John Liu
	E-mail	John_liu@speed-hz.com
	Tel/Mobile	+886-3-3253361#243
Testing date		2024/10/16

Antenna Part number	Main	F-OG-FS-6194-001-00
	Aux	F-OG-FS-6194-002-00
Antenna type (ex: PIFA, Dipole...etc)		PIFA


Antenna Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	1.95	2.65	2.10	4.10	3.17	2.64	2.93	2.32	3.13	3.51
Aux	2.67	2.33	2.37	2.68	2.55	2.30	3.52	3.66	3.96	3.85

Cable Assembly Part Number and Information					
	Cable PN	Cable length(mm)	Cable diameter(mm)	Impedance(ohm)	Connector type
Main	SY113L/50-143	211	1.13	50	IPEX,20565-001R-13
Aux	SY113L/50-118	236.5	1.13	50	IPEX,20565-001R-13


* 3D Antenna Peak Gain required being test in system basis.

Annex A. Photographs

A.1 Setup Photo

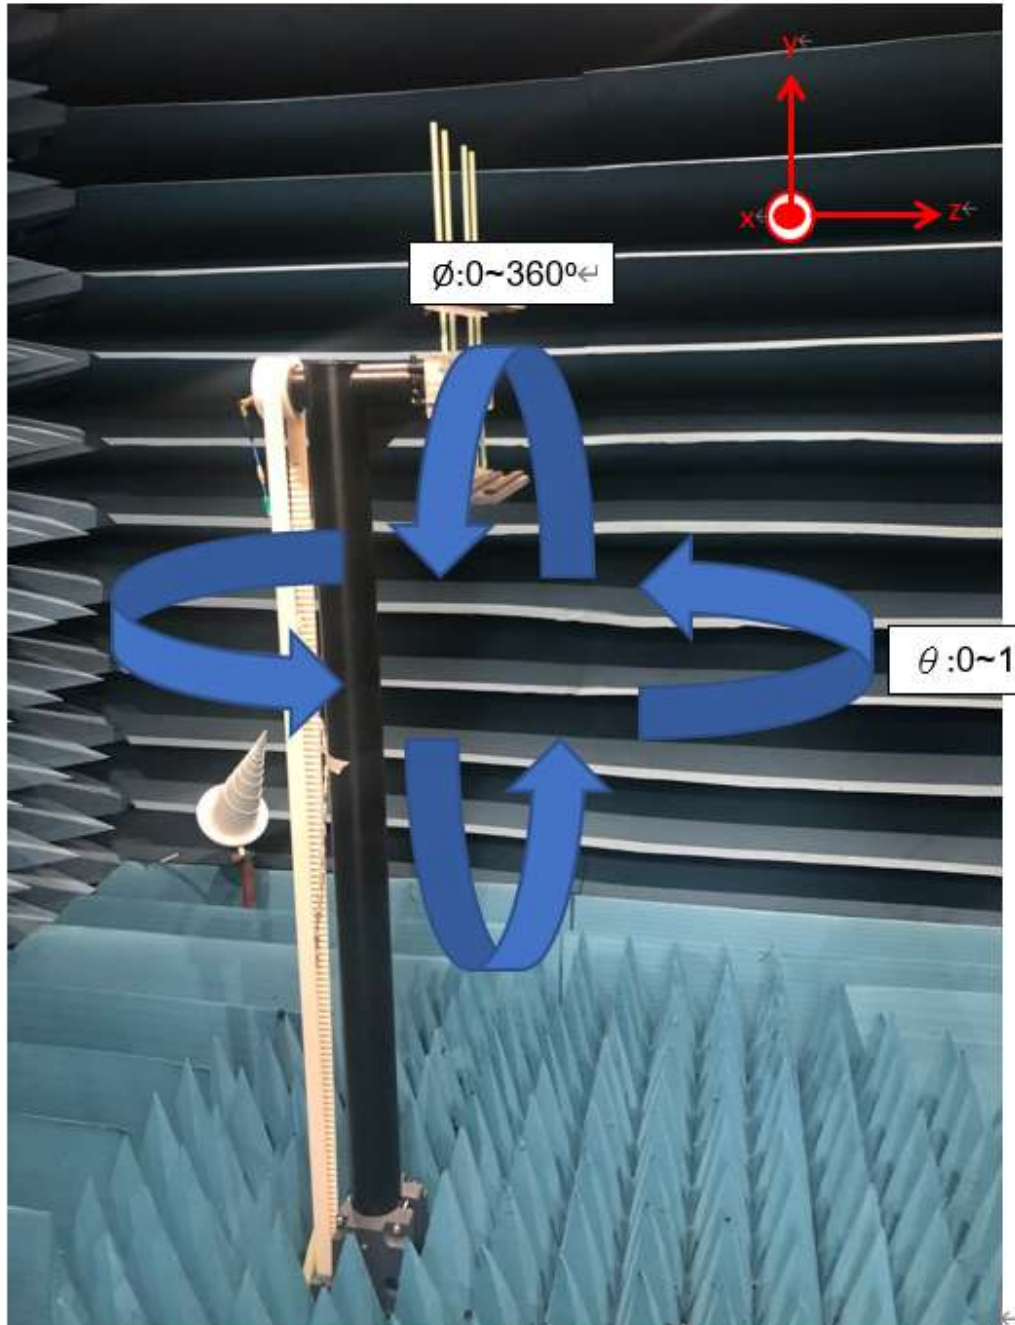

Antenna Drawing




[Back](#)



17


Aux Antenna

Antenna Drawing

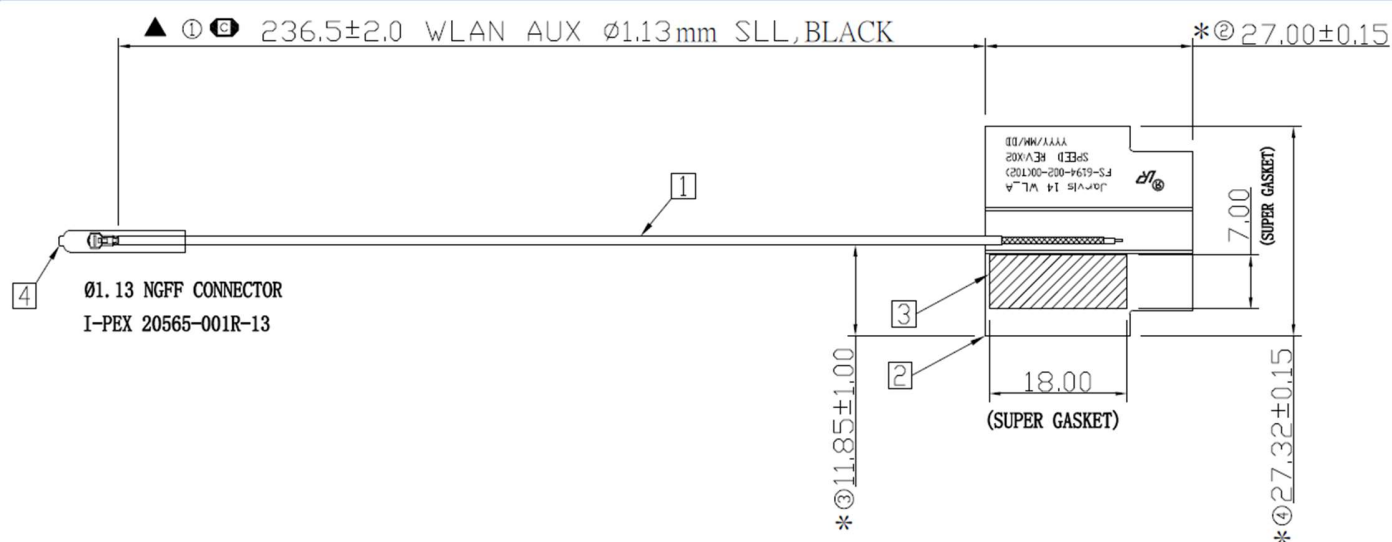


Antenna Photo

Front

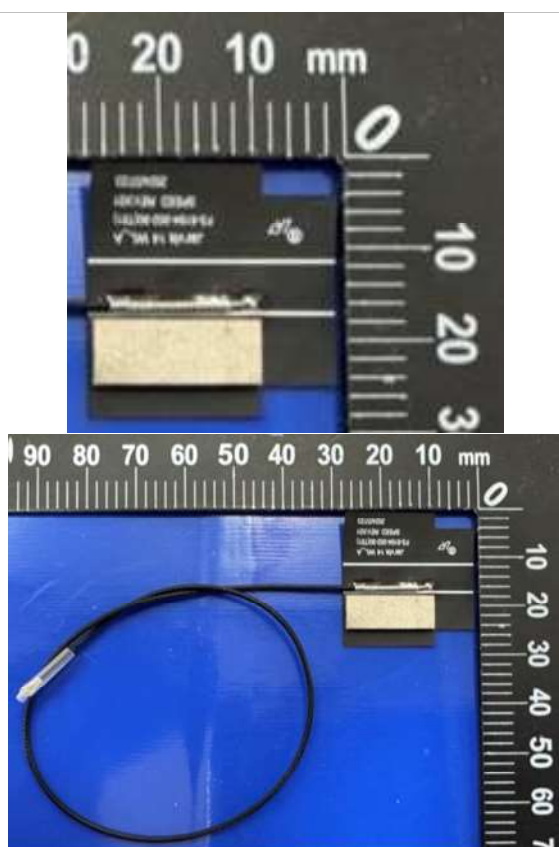

Back

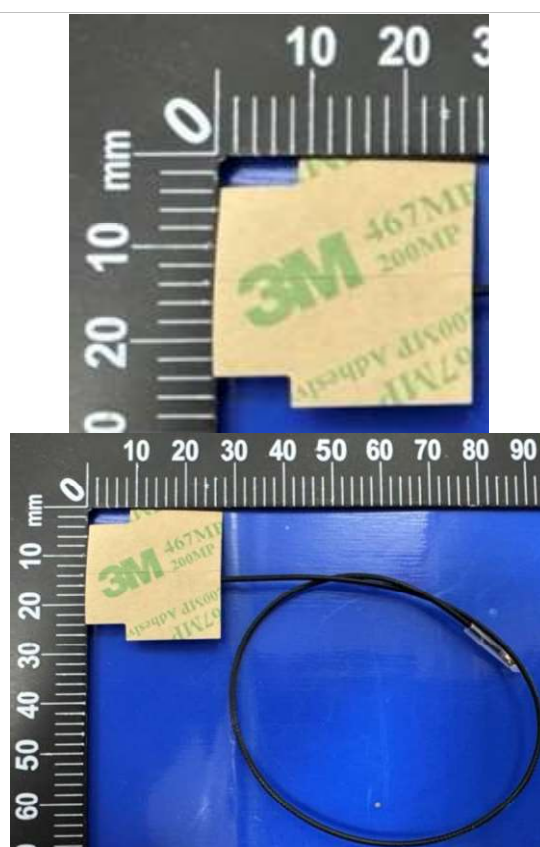


Note: antenna photo should include L type ruler

Annex B. Antenna Location

B.1 Antenna Host Platform Location Information

Include a dimensioned photo(s) or dimensioned drawing(s) of Main and Aux antenna placements (measurements are not required for receive-only antenna).

Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

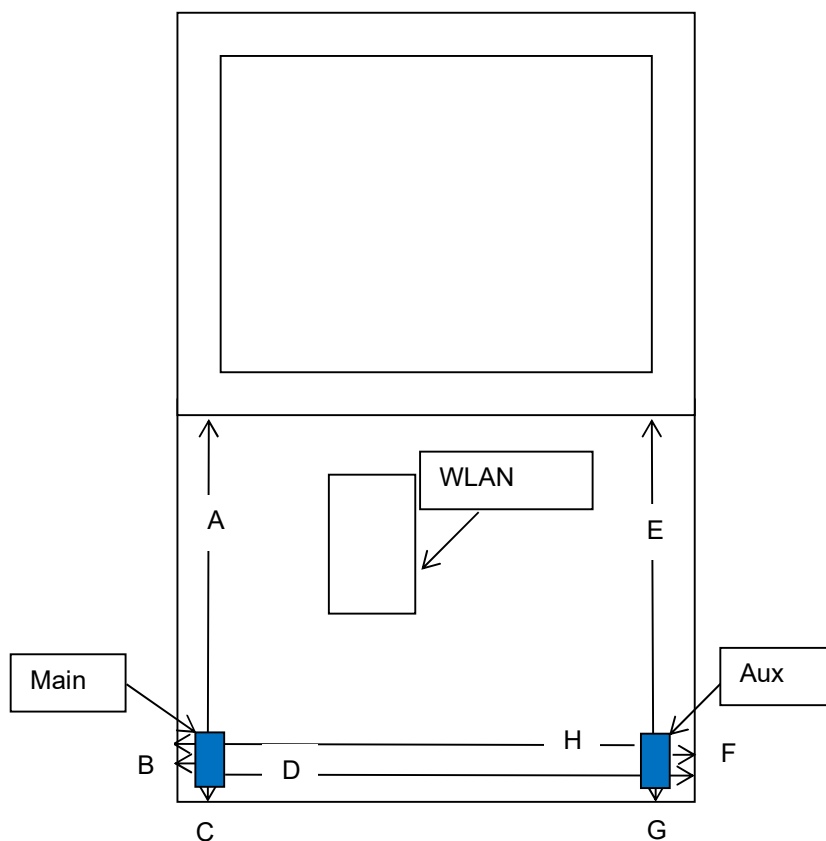


Distance	A	B	C	D	E	F	G	H
(mm)	184	7.15	15.05	295.85	184	7.15	15.05	295.85

B.2 Antenna dimensional information for SAR evaluation


Include a dimensioned photo(s) or dimensioned drawing(s) showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

Antennas on the panel section

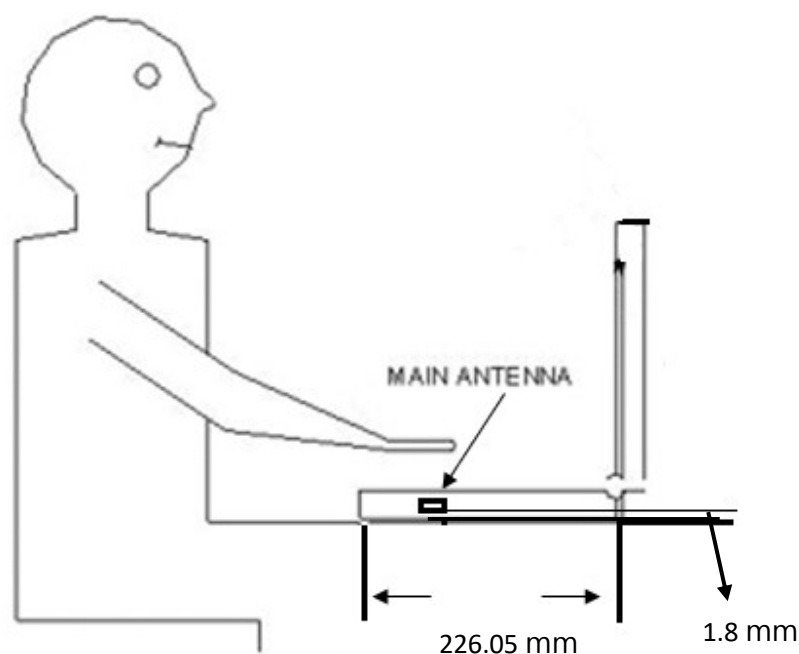

Measuring Surface	Antenna	Separation Distance(antenna-to- Surface)(mm)	1g SAR
Bottom Side	Main	1.8	FCC/ISED
	Aux	1.8	FCC/ISED

Antennas on the keyboard section

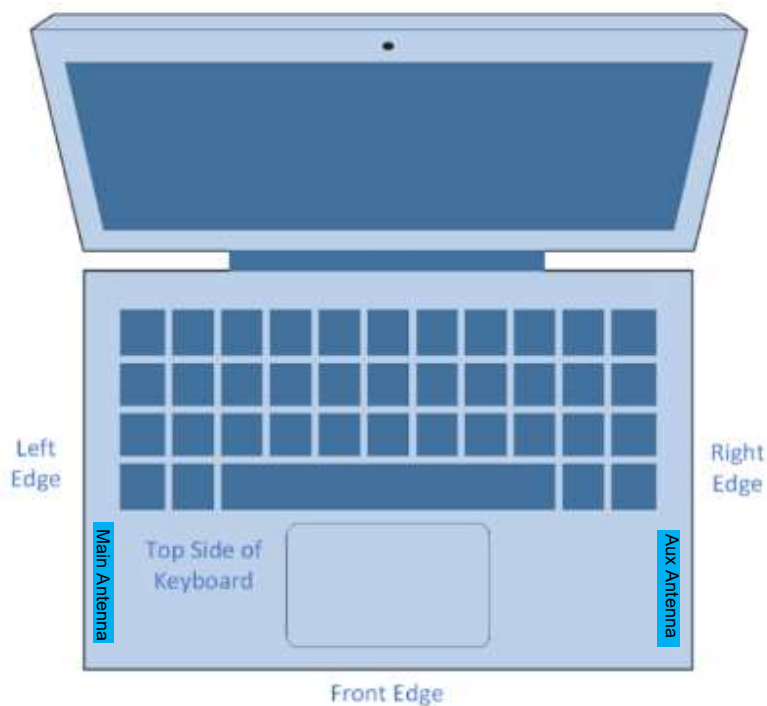

Measuring Surface	Antenna	Separation Distance(antenna-to-Surface)(mm)	1g or 10g SAR
Bottom Side	Main	1.8	1g (FCC/ISED)
	Aux	1.8	1g (FCC/ISED)
Front Edge	Main	15.05	1g (ISED)
	Aux	15.05	1g (ISED)
Left Edge	Main	7.15	10g (ISED)
	Aux	295.85	10g (ISED)
Right Edge	Main	295.85	10g (ISED)
	Aux	7.15	10g (ISED)
Top side of Keyboard	Main	2.1	10g (ISED)
	Aux	2.1	10g (ISED)