

TEST REPORT

EUT Description	2x2 PCIe M.2 1216 adapter card
Brand Name	Intel® BE211D2W
Model Name	BE211D2W, BE211D2W M
FCC ID / IC ID	PD9BE211D2 ; 1000M-BE211D2
Date of Test Start/End	2025-06-27 / 2025-07-28
Features	2x2 Wi-Fi - Bluetooth® (see section 5)

Applicant	Intel Corporation SAS
Address	425 Rue de Goa – Le Cargo B6 – 06600 Antibes, FRANCE
Contact Person	Benjamin Lavenant
Telephone/Fax/ Email	Benjamin.lavenant@intel.com

Reference Standards	FCC CFR Title 47 Part 15 E RSS-248 issue 3, RSS-Gen issue 5 - A1 (see section 1)
---------------------	--

Test Report identification	250519-02.TR33
Revision Control	Rev.00 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.
Reference to accreditation shall be used only by full reproduction of test report.

Issued by _____ Reviewed by _____

Zayd OUACHICHA
(Technical Manager)

Ines KHARRAT
(Technical Officer)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	3
2. General conditions, competences and guarantees.	3
3. Environmental Conditions	3
4. Test samples	4
5. EUT Features.....	4
6. Remarks and comments	4
7. Test Verdicts summary	5
7.1. 802.11 BE – U-NII-5 TO U-NII-7	5
8. Document Revision History	5
Annex A. Test & System Description	6
A.1 MEASUREMENT SYSTEM.....	6
A.2 TEST EQUIPMENT LIST	7
A.3 MEASUREMENT UNCERTAINTY EVALUATION	8
Annex B. Test Results	9
B.1 TEST CONDITIONS.....	9
B.2 TEST RESULTS TABLES	10
B.2.1 26dB & 99% Bandwidth	10
B.2.2 Maximum Output power & Maximum power spectral Density.....	14
B.2.3 Emissions mask.....	28
B.2.4 Frequency stability.....	29
B.2.5 Contention-based protocol.....	30
B.2.6 Undesirable emission limits : Conducted	33
B.2.7 Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	34
B.2.8 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	35
Annex C. System Plots	36
C.1.1 26dB & 99% bandwidth	36
C.1.2 Maximum Output Power & Maximum power spectral Density	38
C.1.3 In-Band Emissions (Mask).....	40
C.1.4 Undesirable emission limits : out of band (Conducted).....	51
C.1.5 Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	58
C.1.6 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	59
Annex D. Photographs	61
D.1 TEST SETUP	61
D.2 TEST SAMPLE	62

1. Standards, reference documents and applicable test methods

FCC	1. FCC Title 47 eCFR part 15 – Subpart E - Unlicensed National Information Infrastructure Devices. 2024-10-01 edition 2. FCC OET KDB 987594 D01 U-NII 6GHz General Requirements v03r01 3. FCC OET KDB 987594 D02 U-NII 6 GHz EMC Measurement v03 4. FCC OET KDB 987594 D03 U-NII 6 GHz QA v03r04 5. FCC OET KDB 987594 D04 UN6GHZ Pre-Approval Guidance Checklist v03 6. FCC OET KDB 789033 D02 v02r01 - General U-NII Test Procedures New Rules – Guidelines for compliance testing of Unlicensed National Information Infrastructure (U-NII) Devices. 7. FCC OET KDB 662911 D01 v02r01 - Emissions Testing of Transmitters with Multiple Outputs in the Same Band. 8. ANSI C63.10-2020 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
ISED	1. RSS-248 Issue 3 - Radio Local Area Network (RLAN) Devices operating in the 5925-7125 MHz band. 2. RSS-Gen Issue 5 Amendment 1 - General Requirements for Compliance of Radio Apparatus. 3. FCC OET KDB 987594 D01 U-NII 6GHz General Requirements v03r01 4. FCC OET KDB 987594 D02 U-NII 6 GHz EMC Measurement v03 5. FCC OET KDB 987594 D03 U-NII 6 GHz QA v03r04 6. FCC OET KDB 987594 D04 UN6GHZ Pre-Approval Guidance Checklist v03 7. ANSI C63.10-2020+Cor 2023+Amd 2024 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

2. General conditions, competences and guarantees.

- ✓ Tests performed under FCC standards identified in section 1 are covered by A2LA accreditation.
- ✓ Tests performed under ISED standards identified in section 1 are covered by Cofrac accreditation.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 testing laboratory accredited by the French Committee for Accreditation (Cofrac) with the certificate number 1-6736.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is a Registered Test Site listed by ISED, with ISED #1000Y and CAB identifier FR0005.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	Min: 21.75 °C Max: 24.97 °C Average: 22.97 °C
Humidity	Min: 25.87 % Max: 64.06 % Average: 44.01 %

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Tests Performed
#01	250528-01.S18	WiFi 6E Module	BE211D2W	WFM: FC6D77CAADB4	2025-06-25	RF Tests
	231109-03.S50	CRF xVT DB 2230 BNJ V3 C0 ASS00887-00	PCB00862_00_A	-	-	
	200904-01.S11	Laptop	HP (HSN-I42C)	000075059H	2020-09-21	
#02	250528-01.S02	WiFi 6E Module	BE211D2W	289200F964B5	2025-05-28	Used for Dual Client and Proper Power Adjustment test cases
	240000-01.S06	CRF xVT DB 2230 BNJ V3 C0	PCB00862_00_A	2305108166	2024-01-01	
	230824-01.S05	Laptop	TPN-Q292	A5CD32257RH	2023-08-28	

5. EUT Features

The herein information is provided by the customer.

Intel WRF Lab declines any responsibility for the accuracy of the stated customer provided information, especially if it has any impact on the correctness of test results presented in this report.

Brand Name	Intel® BE211D2W		
Model Name	BE211D2W, BE211D2W M		
Software Version	DRTU.08798.99.0.99		
Driver Version	99.0.99.2		
Supported Radios	802.11b/g/n/ax/be 2.4GHz 802.11a/n/ac/ax/be 5.2GHz 5.6GHz 5.8GHz 802.11ax/be 6.0GHz Bluetooth 2.4GHz		
Antenna Information	Transmitter	Chain A (1)	Chain B (2)
	Manufacturer	Intel WRF Lab	Intel WRF Lab
	Antenna type	PIFA	PIFA
	Part number	WRF-Tri Band-Antenna	WRF-Tri Band-Antenna
	Declared Antenna peak gain (dBi)	5.02	5.02
Channel puncturing and bandwidth reduction	The EUT does not support channel puncturing and bandwidth reduction for incumbent avoidance		

6. Remarks and comments

- No deviations were made from the test methods listed in section 1 of this report.
- Only the worst-case plots per channel bandwidth have been reported except for band edge measurements where all plots are reported.
- This report only presents conducted measurements, for radiated spurious measurements refer to report: **250519-02.TR11**
- Full and Partial RU's are supported. Full RU was completely tested as this was considered a worse case. Target powers for Full are higher than partial RU. Spot checking was done to confirm this during testing for power and PSD. Complete partial RU testing is provided as part of the emissions mask.

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without considering the measurement uncertainties.

7.1. 802.11 ax/be – U-NII-5 to U-NII-7

FCC part	RSS clause	Test name	Verdict
15.407 (a) (10)	RSS-248 Clause 4.4	Occupied Bandwidth	P
15.407 (a) (8)	RSS-248 Clause 4.5	Maximum output power	P
15.407 (a) (8)	RSS-248 Clause 4.5	Power spectral density	P
15.407 (b) (5)	RSS-248 Clause 4.6	Undesirable emissions limits: out of band (conducted)	P
15.407 (b) (6)	RSS-248 Clause 4.6	In-Band Emissions (Mask)	P
15.407 (d) (6)	RSS-248 Clause 4.7	Contention based protocol	P
15.407(g)	RSS-Gen Issue 5 Amendment 1 – clause 6.11	Frequency Stability	P
15.407(d)	RSS-248 Clause 4.8	Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	P
15.407(d)	RSS-248 Clause 4.8.3	Proper Power Adjustment	P

P: Pass

F: Fail

NM: Not Measured

NA: Not Applicable

8. Document Revision History


Revision #	Modified by	Revision Details
Rev. 00	T.MATHIEU	First Issue


Annex A. Test & System Description

A.1 Measurement System

Measurements were performed using the following setups.

The DUT was installed in a test fixture and this test fixture is connected to a laptop computer and AC/DC power adapter. The laptop computer was used to configure the EUT to continuously transmit at a specified output power using all different modes and modulation schemes, using the Intel proprietary tool DRTU.

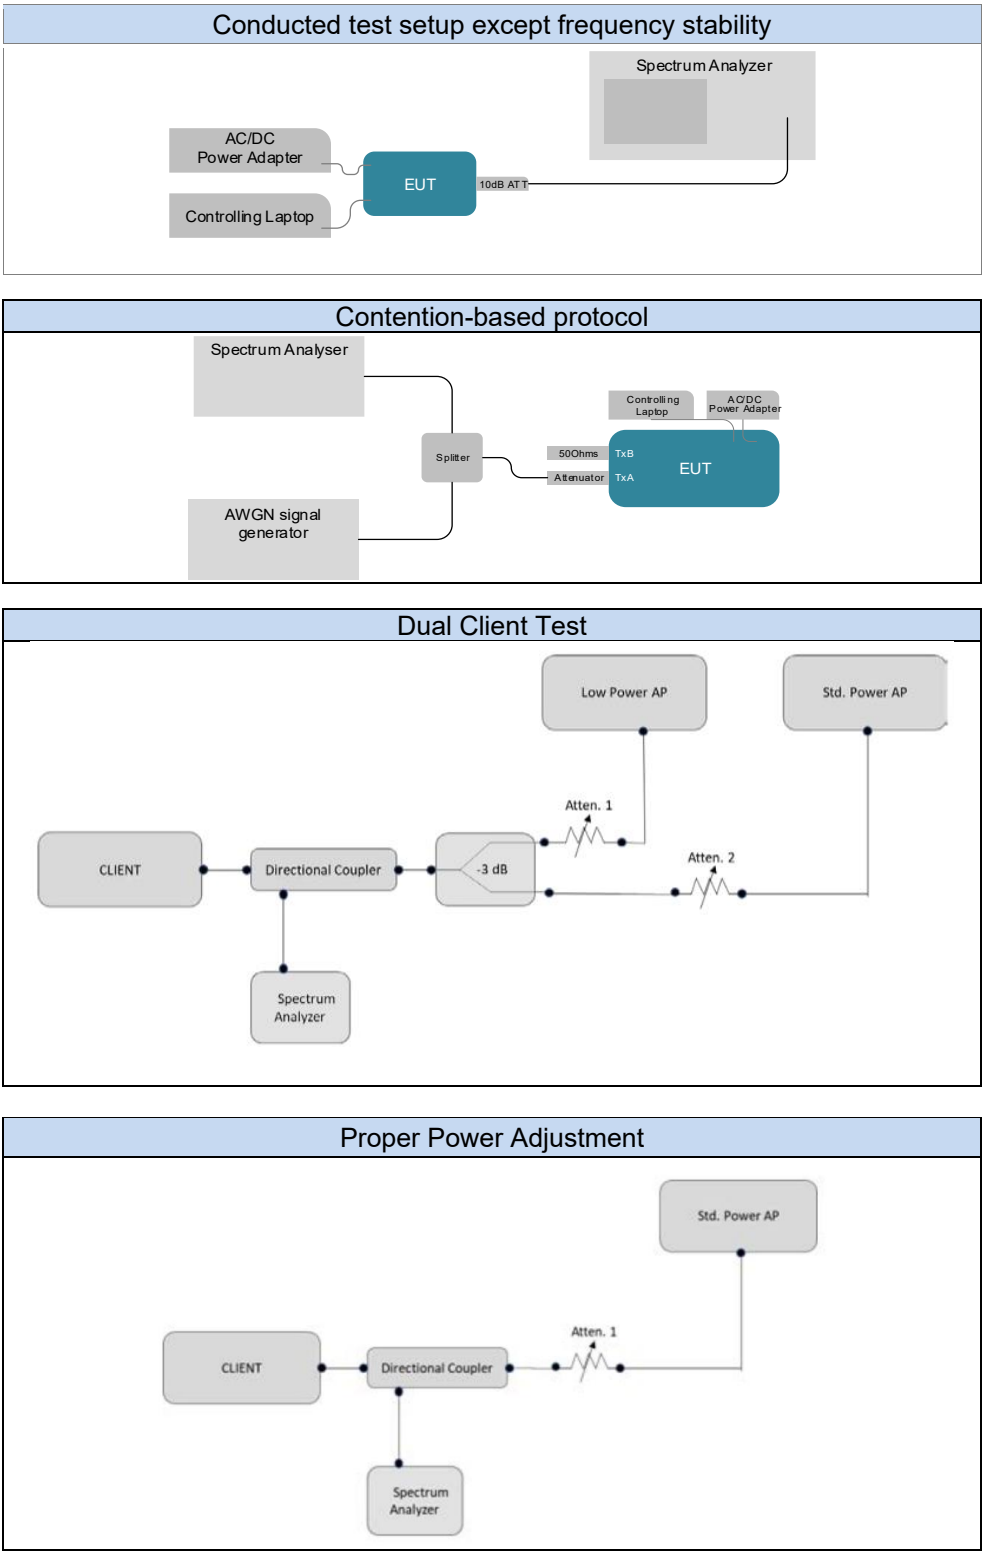

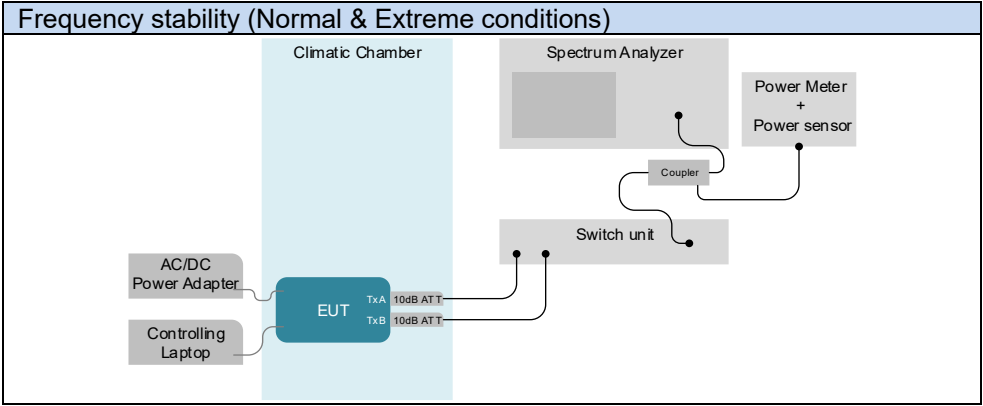

A.2 Test Equipment List

Conducted setup

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
134-000	Spectrum Analyzer	FSV30	103308	Rohde & Schwarz	2023-07-26	2025-07-26*
017-003	Power supply	E3640A	MY40006885	Agilent	NA	NA
017-002	Multimeter	34401A	US36065790	HP	2024-03-07	2026-03-07
018-000	RF cable 50cm	PE360-50	N/A	PASTERNAK	2025-02-24	2026-02-24
018-001	10dB Attenuator + MH4	N/A	N/A	N/A	2025-02-24	2026-02-24
094-004	Temp & Humidity Logger	RMS-HCD-S	24050483	ROTRONIC	2024-09-02	2026-09-02
413-000	Measurement SW v1.5.4.2	Octopi	N/A	Step AT	N/A	N/A
281-000	Thermometer	t3000FC	46320036	Fluke	2024-04-17	2026-04-17
311-000	Climatic chamber	SLT34/40	56746020930010	Secasi	2023-12-20	2025-12-20

* Within a grace period of 30 days
Contention-based protocol

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
098-000	Vector Signal generator	SMW200A	103732	Rohde & Schwarz	2024-10-08	2026-10-08
131-000	Spectrum Analyzer	FSV40	101425	Rohde & Schwarz	2023-07-26	2025-07-26*
018-004	50 Ohm Load	-	-	-	2025-02-21	2026-02-21
018-000	2 Way SMA Power Divider	PE2084	-	Pasternack	2025-02-21	2026-02-21
407-000	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-E16EDA	AVITECH	2024-09-02	2026-09-02
018-005	Cable SMA Male to SMA Male 45CM	FMC0202085-18	-	Fairview Microwave	2025-02-21	2026-02-21
018-006	Cable SMA Male to SMA Male 45CM	FMC0202085-18	-	Fairview Microwave	2025-02-21	2026-02-21
016-003	Cable SMA Male to SMA Male 45CM	FMC0202085-18	-	Fairview Microwave	2025-02-21	2026-02-21

* Within a grace period of 30 days
Dual Client and Proper Power Adjustment

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
503-000	Spectrum Analyzer	FSVA	102318	Rohde & Schwarz	2023-08-09	2025-08-09
200904-01.S01	Laptop	Opel	0000750594	HP	NA	NA
499-000	Directional Coupler	PE2CP000-10-	2139	Pasternack	2025-02-21	2026-02-21
499-001	Power Divider	PE2028	1640	Pasternack	2025-02-21	2026-02-21
499-002	Power Divider	PE2028	1609	Pasternack	2025-02-21	2026-02-21
499-003	Cable 1.80m K-K	E40-6FT-KMKM+	21101338	Mini-Circuits	2025-02-21	2026-02-21
499-004	Cable 1.80m K-K	E40-6FT-KMKM+	21101364	Mini-Circuits	2025-02-21	2026-02-21
499-005	Cable 1.80m K-K	E40-6FT-KMKM+	21101350	Mini-Circuits	2025-02-21	2026-02-21
018-007	Programmable Attenuator	RCDAT-8000-90	12111080069	Mini-Circuits	NA	NA
462-000	Attenuator	8495D	MY2144103	Agilent	NA	NA

N/A: not applicable

A.3 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

Measurement type	Uncertainty	Unit
Timing	± 0.12	%
Power Spectral density	± 1.47	dB
Frequency stability	± 53.0	ppm
Occupied bandwidth	± 2.07	%
Conducted Power	± 1.03	dB
Temperature	± 0.23	°C
Supply voltages	$< \pm 0.01$	%
Conducted Spurious Emission <26.5 GHz	± 2.93	dB
Contention Based Protocol	± 1.36	dB

Annex B. Test Results

The herein test results were performed by:

Test case measurement	Test Personnel
Maximum output power	T.MATHIEU
26dB and 99% Bandwidth measurement	T.MATHIEU
Maximum power spectral density	T.MATHIEU
Frequency stability	T.MATHIEU
Undesirable emissions limits: out of band (conducted)	T.MATHIEU
In-Band Emissions Mask	T.MATHIEU
Contention-based Protocol	T.MATHIEU
Dual client test	T.MATHIEU
Proper power adjustment	T.MATHIEU

B.1 Test Conditions

For 802.11ax/be20 (20 MHz channel bandwidth), 802.11ax/be40 (40MHz channel bandwidth), 802.11ax/be80 (80MHz channel bandwidth), 802.11ax/be160 (160MHz channel bandwidth) and 802.11be320 (320MHz channel bandwidth) modes the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, and also simultaneously.

The following data rates were selected based on preliminary testing that identified those rates as the worst cases for output power and spurious levels at the band edges:

Transmission	Mode	Bandwidth (MHz)	Worst Case Data Rate
SISO/MIMO	802.11ax/be	20/40/80/160	MCS0
SISO/MIMO	802.11be	320	MCS0

B.2 Test Results Tables

B.2.1 26dB & 99% Bandwidth

Test limits

FCC part	RSS part	Limits
15.407 (a) (10)	RSS-248 Clause 4.4	The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure the 26dB & 99% bandwidth. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

See Annex C.1.1 for the screenshot results¹

Results tables

According to FCC guidance, the 26 dB bandwidth has been applied for all channels below 320MHz. For 320MHz, the 99% bandwidth is applicable. The 26 dB bandwidth test method for 320MHz bandwidths is only provided for information.

Max value	Maximum bandwidth value highlighted per BW and channel bandwidth over uninterrupted UNII-5 – 7 bands
-----------	--

¹ Only the worst-case plots per BW and channel bandwidth were reported over uninterrupted UNII-5 – 7 bands

Band	Mode & BW[MHz]	Channel	Frequency [MHz]	Rate	RU config.	Antenna	26dB BW [MHz]	99% BW [MHz]
UNII5	802.11ax/be20	1	5955	MCS0	FullBW	SISO A	26.88	19.04
UNII5	802.11ax/be20	1	5955	MCS0	FullBW	SISO B	24.32	18.96
UNII5	802.11ax/be20	1	5955	MCS0	FullBW	MIMO A	25.12	18.96
UNII5	802.11ax/be20	1	5955	MCS0	FullBW	MIMO B	24.56	18.96
UNII5	802.11ax/be20	45	6175	MCS0	FullBW	SISO A	24.40	18.96
UNII5	802.11ax/be20	45	6175	MCS0	FullBW	SISO B	23.92	19.04
UNII5	802.11ax/be20	45	6175	MCS0	FullBW	MIMO A	24.56	18.96
UNII5	802.11ax/be20	45	6175	MCS0	FullBW	MIMO B	24.48	18.96
UNII5	802.11ax/be20	93	6415	MCS0	FullBW	SISO A	26.00	18.96
UNII5	802.11ax/be20	93	6415	MCS0	FullBW	SISO B	24.24	18.96
UNII5	802.11ax/be20	93	6415	MCS0	FullBW	MIMO A	25.12	18.96
UNII5	802.11ax/be20	93	6415	MCS0	FullBW	MIMO B	24.24	18.96
UNII5	802.11ax/be40	3	5965	MCS0	FullBW	SISO A	46.08	37.60
UNII5	802.11ax/be40	3	5965	MCS0	FullBW	SISO B	44.32	37.76
UNII5	802.11ax/be40	3	5965	MCS0	FullBW	MIMO A	42.72	37.76
UNII5	802.11ax/be40	3	5965	MCS0	FullBW	MIMO B	42.72	37.60
UNII5	802.11ax/be40	43	6165	MCS0	FullBW	SISO A	49.28	37.76
UNII5	802.11ax/be40	43	6165	MCS0	FullBW	SISO B	46.56	37.60
UNII5	802.11ax/be40	43	6165	MCS0	FullBW	MIMO A	44.16	37.76
UNII5	802.11ax/be40	43	6165	MCS0	FullBW	MIMO B	42.40	37.60
UNII5	802.11ax/be40	91	6405	MCS0	FullBW	SISO A	45.92	37.76
UNII5	802.11ax/be40	91	6405	MCS0	FullBW	SISO B	46.24	37.60
UNII5	802.11ax/be40	91	6405	MCS0	FullBW	MIMO A	43.20	37.76
UNII5	802.11ax/be40	91	6405	MCS0	FullBW	MIMO B	43.52	37.60
UNII5	802.11ax/be80	7	5985	MCS0	FullBW	SISO A	86.72	76.80
UNII5	802.11ax/be80	7	5985	MCS0	FullBW	SISO B	90.24	77.12
UNII5	802.11ax/be80	7	5985	MCS0	FullBW	MIMO A	85.12	76.80
UNII5	802.11ax/be80	7	5985	MCS0	FullBW	MIMO B	83.84	77.12
UNII5	802.11ax/be80	39	6145	MCS0	FullBW	SISO A	89.92	77.12
UNII5	802.11ax/be80	39	6145	MCS0	FullBW	SISO B	89.60	77.12
UNII5	802.11ax/be80	39	6145	MCS0	FullBW	MIMO A	84.48	76.80
UNII5	802.11ax/be80	39	6145	MCS0	FullBW	MIMO B	83.84	77.12
UNII5	802.11ax/be80	87	6385	MCS0	FullBW	SISO A	88.32	77.12
UNII5	802.11ax/be80	87	6385	MCS0	FullBW	SISO B	86.40	77.12
UNII5	802.11ax/be80	87	6385	MCS0	FullBW	MIMO A	83.84	76.80
UNII5	802.11ax/be80	87	6385	MCS0	FullBW	MIMO B	85.12	76.80
UNII5	802.11ax/be160	15	6025	MCS0	FullBW	SISO A	166.08	155.52
UNII5	802.11ax/be160	15	6025	MCS0	FullBW	SISO B	165.44	155.52
UNII5	802.11ax/be160	15	6025	MCS0	FullBW	MIMO A	168.00	156.80
UNII5	802.11ax/be160	15	6025	MCS0	FullBW	MIMO B	165.44	155.20
UNII5	802.11ax/be160	79	6345	MCS0	FullBW	SISO A	165.44	155.20
UNII5	802.11ax/be160	79	6345	MCS0	FullBW	SISO B	163.44	155.84
UNII5	802.11ax/be160	79	6345	MCS0	FullBW	MIMO A	165.76	155.20
UNII5	802.11ax/be160	79	6345	MCS0	FullBW	MIMO B	165.12	154.88
UNII5	802.11be320	31	6105	MCS0	FullBW	SISO A	335.36	312.96
UNII5	802.11be320	31	6105	MCS0	FullBW	SISO B	334.08	312.96
UNII5	802.11be320	31	6105	MCS0	FullBW	MIMO A	334.72	312.32
UNII5	802.11be320	31	6105	MCS0	FullBW	MIMO B	333.44	312.96
UNII5	802.11be320	63	6265	MCS0	FullBW	SISO A	334.08	312.96
UNII5	802.11be320	63	6265	MCS0	FullBW	SISO B	332.80	312.32
UNII5	802.11be320	63	6265	MCS0	FullBW	MIMO A	333.44	312.96
UNII5	802.11be320	63	6265	MCS0	FullBW	MIMO B	334.08	312.32

Band	Mode & BW[MHz]	Channel	Frequency [MHz]	Rate	RU config.	Antenna	26dB BW [MHz]	99% BW [MHz]
UNII6	802.11ax/be20	97	6435	MCS0	FullBW	SISO A	25.60	18.96
UNII6	802.11ax/be20	97	6435	MCS0	FullBW	SISO B	23.52	18.96
UNII6	802.11ax/be20	97	6435	MCS0	FullBW	MIMO A	24.16	18.96
UNII6	802.11ax/be20	97	6435	MCS0	FullBW	MIMO B	23.68	18.96
UNII6	802.11ax/be20	105	6475	MCS0	FullBW	SISO A	27.20	19.36
UNII6	802.11ax/be20	105	6475	MCS0	FullBW	SISO B	24.40	18.96
UNII6	802.11ax/be20	105	6475	MCS0	FullBW	MIMO A	24.72	18.96
UNII6	802.11ax/be20	105	6475	MCS0	FullBW	MIMO B	24.80	19.04
UNII6	802.11ax/be20	113	6515	MCS0	FullBW	SISO A	27.28	19.12
UNII6	802.11ax/be20	113	6515	MCS0	FullBW	SISO B	24.24	19.12
UNII6	802.11ax/be20	113	6515	MCS0	FullBW	MIMO A	25.52	19.20
UNII6	802.11ax/be20	113	6515	MCS0	FullBW	MIMO B	24.96	19.12
UNII6	802.11ax/be40	99	6445	MCS0	FullBW	SISO A	45.28	37.76
UNII6	802.11ax/be40	99	6445	MCS0	FullBW	SISO B	46.88	37.60
UNII6	802.11ax/be40	99	6445	MCS0	FullBW	MIMO A	43.84	37.92
UNII6	802.11ax/be40	99	6445	MCS0	FullBW	MIMO B	42.72	37.60
UNII6	802.11ax/be40	107	6485	MCS0	FullBW	SISO A	44.96	37.60
UNII6	802.11ax/be40	107	6485	MCS0	FullBW	SISO B	46.40	37.76
UNII6	802.11ax/be40	107	6485	MCS0	FullBW	MIMO A	44.80	37.92
UNII6	802.11ax/be40	107	6485	MCS0	FullBW	MIMO B	44.32	37.92
UNII6	802.11ax/be40	115	6525	MCS0	FullBW	SISO A	45.60	37.76
UNII6	802.11ax/be40	115	6525	MCS0	FullBW	SISO B	45.80	37.60
UNII6	802.11ax/be40	115	6525	MCS0	FullBW	MIMO A	44.40	37.92
UNII6	802.11ax/be40	115	6525	MCS0	FullBW	MIMO B	44.20	37.92
UNII6	802.11ax/be80	103	6465	MCS0	FullBW	SISO A	88.32	77.12
UNII6	802.11ax/be80	103	6465	MCS0	FullBW	SISO B	85.76	77.12
UNII6	802.11ax/be80	103	6465	MCS0	FullBW	MIMO A	86.40	77.76
UNII6	802.11ax/be80	103	6465	MCS0	FullBW	MIMO B	86.72	77.76
UNII6	802.11ax/be80	119	6545	MCS0	FullBW	SISO A	90.24	77.12
UNII6	802.11ax/be80	119	6545	MCS0	FullBW	SISO B	87.04	77.12
UNII6	802.11ax/be80	119	6545	MCS0	FullBW	MIMO A	85.76	77.76
UNII6	802.11ax/be80	119	6545	MCS0	FullBW	MIMO B	86.08	77.76
UNII6	802.11ax/be160	111	6505	MCS0	FullBW	SISO A	165.76	155.84
UNII6	802.11ax/be160	111	6505	MCS0	FullBW	SISO B	166.08	156.48
UNII6	802.11ax/be160	111	6505	MCS0	FullBW	MIMO A	169.28	156.80
UNII6	802.11ax/be160	111	6505	MCS0	FullBW	MIMO B	167.68	156.80
UNII6	802.11be320	95	6425	MCS0	FullBW	SISO A	334.72	312.32
UNII6	802.11be320	95	6425	MCS0	FullBW	SISO B	334.08	312.32
UNII6	802.11be320	95	6425	MCS0	FullBW	MIMO A	334.08	312.32
UNII6	802.11be320	95	6425	MCS0	FullBW	MIMO B	333.44	312.96
UNII6	802.11be320	127	6585	MCS0	FullBW	SISO A	333.44	311.68
UNII6	802.11be320	127	6585	MCS0	FullBW	SISO B	333.44	312.32
UNII6	802.11be320	127	6585	MCS0	FullBW	MIMO A	334.08	312.32
UNII6	802.11be320	127	6585	MCS0	FullBW	MIMO B	334.08	311.68

Band	Mode & BW[MHz]	Channel	Frequency [MHz]	Rate	RU config.	Antenna	26dB BW [MHz]	99% BW [MHz]
UNII7	802.11ax/be20	117	6535	MCS0	FullBW	SISO A	25.44	18.96
UNII7	802.11ax/be20	117	6535	MCS0	FullBW	SISO B	24.64	18.96
UNII7	802.11ax/be20	117	6535	MCS0	FullBW	MIMO A	24.24	19.04
UNII7	802.11ax/be20	117	6535	MCS0	FullBW	MIMO B	23.68	18.96
UNII7	802.11ax/be20	149	6695	MCS0	FullBW	SISO A	24.64	18.96
UNII7	802.11ax/be20	149	6695	MCS0	FullBW	SISO B	24.72	18.96
UNII7	802.11ax/be20	149	6695	MCS0	FullBW	MIMO A	25.04	18.60
UNII7	802.11ax/be20	149	6695	MCS0	FullBW	MIMO B	24.24	19.04
UNII7	802.11ax/be20	181	6855	MCS0	FullBW	SISO A	24.24	18.96
UNII7	802.11ax/be20	181	6855	MCS0	FullBW	SISO B	24.24	19.04
UNII7	802.11ax/be20	181	6855	MCS0	FullBW	MIMO A	24.32	18.88
UNII7	802.11ax/be20	181	6855	MCS0	FullBW	MIMO B	24.80	18.88
UNII7	802.11ax/be40	123	6565	MCS0	FullBW	SISO A	45.12	37.44
UNII7	802.11ax/be40	123	6565	MCS0	FullBW	SISO B	46.08	37.60
UNII7	802.11ax/be40	123	6565	MCS0	FullBW	MIMO A	43.84	37.60
UNII7	802.11ax/be40	123	6565	MCS0	FullBW	MIMO B	43.68	37.76
UNII7	802.11ax/be40	147	6685	MCS0	FullBW	SISO A	45.28	37.60
UNII7	802.11ax/be40	147	6685	MCS0	FullBW	SISO B	44.96	37.76
UNII7	802.11ax/be40	147	6685	MCS0	FullBW	MIMO A	42.56	37.04
UNII7	802.11ax/be40	147	6685	MCS0	FullBW	MIMO B	44.16	37.60
UNII7	802.11ax/be40	179	6845	MCS0	FullBW	SISO A	48.00	37.76
UNII7	802.11ax/be40	179	6845	MCS0	FullBW	SISO B	46.88	37.92
UNII7	802.11ax/be40	179	6845	MCS0	FullBW	MIMO A	42.72	37.04
UNII7	802.11ax/be40	179	6845	MCS0	FullBW	MIMO B	42.56	37.76
UNII7	802.11ax/be80	135	6625	MCS0	FullBW	SISO A	90.56	77.12
UNII7	802.11ax/be80	135	6625	MCS0	FullBW	SISO B	87.68	77.12
UNII7	802.11ax/be80	135	6625	MCS0	FullBW	MIMO A	85.12	77.12
UNII7	802.11ax/be80	135	6625	MCS0	FullBW	MIMO B	84.16	76.80
UNII7	802.11ax/be80	151	6705	MCS0	FullBW	SISO A	88.96	77.12
UNII7	802.11ax/be80	151	6705	MCS0	FullBW	SISO B	110.40	77.12
UNII7	802.11ax/be80	151	6705	MCS0	FullBW	MIMO A	85.12	76.40
UNII7	802.11ax/be80	151	6705	MCS0	FullBW	MIMO B	85.12	77.12
UNII7	802.11ax/be80	167	6785	MCS0	FullBW	SISO A	87.68	77.12
UNII7	802.11ax/be80	167	6785	MCS0	FullBW	SISO B	85.76	77.12
UNII7	802.11ax/be80	167	6785	MCS0	FullBW	MIMO A	86.08	76.80
UNII7	802.11ax/be80	167	6785	MCS0	FullBW	MIMO B	84.48	77.12
UNII7	802.11ax/be160	143	6665	MCS0	FullBW	SISO A	166.08	155.84
UNII7	802.11ax/be160	143	6665	MCS0	FullBW	SISO B	162.32	155.84
UNII7	802.11ax/be160	143	6665	MCS0	FullBW	MIMO A	166.40	154.88
UNII7	802.11ax/be160	143	6665	MCS0	FullBW	MIMO B	165.44	155.20

NA: Not Applicable

B.2.2 Maximum Output power & Maximum power spectral Density

Test limits

FCC part	RSS part	Limits
15.407 (a) (7)	-	For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925– 6.425 GHz and 6.525–6.875 GHz bands: - the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1- megahertz band, - the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm
-	RSS-248 Clause 4.5.5	The following limits shall apply to standard client devices: a. the maximum e.i.r.p. spectral density shall not exceed 17 dBm/MHz b. the maximum e.i.r.p. over the 5925-6875 MHz frequency band shall not exceed 30 dBm

Test procedure

The Maximum Conducted Output Power was measured using the channel integration method over the entire 99% occupied bandwidth according to section E) 2) d) (Method SA-2) of KDB 789033

The maximum power spectral density (PSD) was measured using the method according to section F) (Method SA-2) of KDB 789033

In the *measure-and-sum* approach for MIMO mode, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically in linear power units to determine the total emission level from the device. When MIMO mode is running each single antenna conducted output power is reduced by 3dBi such that MIMO mode does not exceed the output of a single chain in SISO mode. $SISO\ A\ pwr = SISO\ B\ pwr = MIMO\ pwr\ (1/2\ A\ pwr + 1/2\ B\ pwr)$.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain (+5.02dBi) to the measured conducted power in accordance with KDB 662911 D01 v02r01. All transmit signals are completely uncorrelated with each other. Therefore, Directional gain = GANT = +5.02 dBi.

Per KDB 662911 D01 v02r01: MIMO Spacial diversity applies as completely uncorrelated, neither beamforming, whether fixed or adaptative, nor Cyclic Delay Diversity (CDD) technique are used. For further details, refer to 'MIMO Theory of Operation' document.

The conducted setup shown in section *Test & System Description* was used to measure the maximum conducted output power and power spectral density. The antenna terminal of the EUT is connected to the spectrum analyser through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

See Annex C.1.2 for the screenshot results.

Results tablesDuty cycle

Mode	Rate	Antenna	Duty Cycle [%]
802.11ax/be20	MCS0	SISO A	98.42
		SISO B	98.42
		MIMO A	98.15
		MIMO B	98.15
802.11ax/be40	MCS0	SISO A	98.42
		SISO B	98.42
		MIMO A	98.49
		MIMO B	98.49
802.11ax/be80	MCS0	SISO A	98.25
		SISO B	98.25
		MIMO A	98.32
		MIMO B	98.32
802.11ax/be160	MCS0	SISO A	98.59
		SISO B	98.59
		MIMO A	98.49
		MIMO B	98.49
802.11be320	MCS0	SISO A	97.41
		SISO B	97.41
		MIMO A	97.41
		MIMO B	97.41

UNII5 (FCC & ISD)

UNII	Mode	BW [MHz]	Rate	Ch#	Freq [MHz]	RU config	Chain	Ouput Power [dBm]	Max ⁽¹⁾ Ouput Power [dBm]	Antenn a Gain (dBi)	Max ⁽¹⁾ EIRP [dBm]	Max ⁽¹⁾ Outpu t Power [mW]	Max ⁽¹⁾ . EIRP [mW]
UNII5	802.11ax/be	20	MCS0	1	5955	Full BW	SISO A	21.57	21.57	5.02	26.59	143.55	456.04
							SISO B	22.40	22.40		27.42	173.78	552.08
							MIMO A	19.11	19.11		24.13	81.47	258.82
							MIMO B	19.33	19.33		24.35	85.70	272.27
							Combined A+B	22.23	22.23		27.25	167.17	531.09
				SISO A	21.80		21.80	26.82	151.36		480.84		
				SISO B	22.17		22.17	27.19	164.82		523.60		
				MIMO A	19.88		19.88	24.90	97.27		309.03		
				MIMO B	19.44		19.44	24.46	87.90		279.25		
				Combined A+B	22.68		22.68	27.70	185.18		588.28		
				SISO A	21.32		21.32	26.34	135.52		430.53		
				SISO B	22.16		22.16	27.18	164.44		522.40		
				MIMO A	19.22		19.22	24.24	83.56		265.46		
				MIMO B	19.34		19.34	24.36	85.90		272.90		
				Combined A+B	22.29		22.29	27.31	169.46		538.36		
	802.11ax/be	40	MCS0	3	5965	Full BW	SISO A	21.28	21.28		26.30	134.28	426.58
							SISO B	20.74	20.74		25.76	118.58	376.70
							MIMO A	20.89	20.89		25.91	122.74	389.94
							MIMO B	21.14	21.14		26.16	130.02	413.05
							Combined A+B	24.03	24.03		29.05	252.76	802.99
				SISO A	21.25		21.25	26.27	133.35		423.64		
				SISO B	22.26		22.26	27.28	168.27		534.56		
				MIMO A	21.63		21.63	26.65	145.55		462.38		
				MIMO B	21.27		21.27	26.29	133.97		425.60		
				Combined A+B	24.46		24.46	29.48	279.51		887.98		
				SISO A	21.09		21.09	26.11	128.53		408.32		
				SISO B	21.92		21.92	26.94	155.60		494.31		
				MIMO A	21.56		21.56	26.58	143.22		454.99		
				MIMO B	21.38		21.38	26.40	137.40		436.52		
				Combined A+B	24.48		24.48	29.50	280.62		891.50		
	802.11ax/be	80	MCS0	7	5985	Full BW	SISO A	21.12	21.12		26.14	129.42	411.15
							SISO B	19.72	19.72		24.74	93.76	297.85
							MIMO A	21.11	21.11		26.13	129.12	410.20
							MIMO B	20.86	20.86		25.88	121.90	387.26
							Combined A+B	24.28	24.28		29.30	267.80	850.76
				SISO A	21.20		21.20	26.22	131.83		418.79		
				SISO B	22.43		22.43	27.45	174.98		555.90		
				MIMO A	21.53		21.53	26.55	142.23		451.86		
				MIMO B	21.15		21.15	26.17	130.32		414.00		
				Combined A+B	24.35		24.35	29.37	272.55		865.86		
				SISO A	21.32		21.32	26.34	135.52		430.53		
				SISO B	21.66		21.66	26.68	146.55		465.59		
				MIMO A	21.63		21.63	26.65	145.55		462.38		
				MIMO B	21.22		21.22	26.24	132.43		420.73		
				Combined A+B	24.44		24.44	29.46	277.98		883.11		

UNII	Mode	BW [MHz]	Rate	Ch#	Freq [MHz]	RU config	Chain	Ouput Power [dBm]	Max ⁽¹⁾ Ouput Power [dBm]	Antenn a Gain (dBi)	Max ⁽¹⁾ EIRP [dBm]	Max ⁽¹⁾ Outpu t Power [mW]	Max ⁽¹⁾ . EIRP [mW]
	802.11ax/be	160	MCS0	15	6025	Full BW	SISO A	20.34	20.34		25.36	108.14	343.56
							SISO B	18.76	18.76		23.78	75.16	238.78
							MIMO A	19.40	19.40		24.42	87.10	276.69
							MIMO B	19.35	19.35		24.37	86.10	273.53
							Combined A+B	22.39	22.39		27.41	173.20	550.22
				79	6345		SISO A	20.58	20.58		25.60	114.29	363.08
							SISO B	20.42	20.42		25.44	110.15	349.95
							MIMO A	19.34	19.34		24.36	85.90	272.90
							MIMO B	19.25	19.25		24.27	84.14	267.30
							Combined A+B	22.31	22.31		27.33	170.04	540.20
	802.11be	320	MCS0	31	6105	Full BW	SISO A	20.46	20.57		25.59	114.13	362.57
							SISO B	22.20	22.31		27.33	170.37	541.25
							MIMO A	19.37	19.48		24.50	88.80	282.10
							MIMO B	19.44	19.55		24.57	90.24	286.68
							Combined A+B	22.42	22.53		27.55	179.04	568.78
				63	6265		SISO A	19.70	19.81		24.83	95.81	304.37
							SISO B	22.23	22.34		27.36	171.55	545.00
							MIMO A	19.30	19.41		24.43	87.38	277.59
							MIMO B	19.50	19.61		24.63	91.49	290.67
							Combined A+B	22.41	22.53		27.55	178.87	568.25

(1) Value compensated with the duty cycle

(2) Max/Min value highlighted per bandwidth

UNII6 (Only ISED)

UNII	Mode	BW [MHz]	Rate	Ch#	Freq [MHz]	RU config	Chain	Ouput Power [dBm]	Max ⁽¹⁾ Ouput Power [dBm]	Antenn a Gain (dBi)	Max ⁽¹⁾ EIRP [dBm]	Max ⁽¹⁾ Output Power [mW]	Max ⁽¹⁾ EIRP [mW]
UNII6	802.11ax/be	20	MCS0	97	6435	Full BW	SISO A	21.20	21.20	5.02	26.22	131.83	418.79
							SISO B	22.06	22.06		27.08	160.69	510.50
							MIMO A	19.41	19.41		24.43	87.30	277.33
							MIMO B	19.50	19.50		24.52	89.13	283.14
							Combined A+B	22.47	22.47		27.49	176.42	560.47
				SISO A	21.20		21.20	26.22	131.83		418.79		
				SISO B	22.33		22.33	27.35	171.00		543.25		
				MIMO A	19.46		19.46	24.48	88.31		280.54		
				MIMO B	19.44		19.44	24.46	87.90		279.25		
				Combined A+B	22.46		22.46	27.48	176.21		559.80		
				SISO A	21.22		21.22	26.24	132.43		420.73		
				SISO B	22.43		22.43	27.45	174.98		555.90		
				MIMO A	19.30		19.30	24.32	85.11		270.40		
				MIMO B	19.40		19.40	24.42	87.10		276.69		
				Combined A+B	22.36		22.36	27.38	172.21		547.09		
	SISO A	21.00	21.00	26.02	125.89	399.94							
	SISO B	21.97	21.97	26.99	157.40	500.03							
	MIMO A	21.53	21.53	26.55	142.23	451.86							
	MIMO B	21.33	21.33	26.35	135.83	431.52							
	Combined A+B	24.44	24.44	29.46	278.06	883.38							
	SISO A	20.86	20.86	25.88	121.90	387.26							
	SISO B	22.24	22.24	27.26	167.49	532.11							
	MIMO A	21.68	21.68	26.70	147.23	467.74							
	MIMO B	21.20	21.20	26.22	131.83	418.79							
	Combined A+B	24.46	24.46	29.48	279.06	886.53							
	SISO A	22.08	22.08	27.10	161.44	512.86							
	SISO B	22.24	22.24	27.26	167.49	532.11							
	MIMO A	21.31	21.31	26.33	135.21	429.54							
	MIMO B	21.20	21.20	26.22	131.83	418.79							
	Combined A+B	24.27	24.27	29.29	267.03	848.33							
	SISO A	21.41	21.41	26.43	138.36	439.54							
	SISO B	20.91	20.91	25.93	123.31	391.74							
	MIMO A	21.18	21.18	26.20	131.22	416.87							
	MIMO B	21.18	21.18	26.20	131.22	416.87							
	Combined A+B	24.19	24.19	29.21	262.44	833.74							
	SISO A	21.70	21.70	26.72	147.91	469.89							
	SISO B	22.35	22.35	27.37	171.79	545.76							
	MIMO A	21.37	21.37	26.39	137.09	435.51							
	MIMO B	21.59	21.59	26.61	144.21	458.14							
	Combined A+B	24.49	24.49	29.51	281.30	893.65							
	SISO A	20.46	20.46	25.48	111.17	353.18							
	SISO B	19.83	19.83	24.85	96.16	305.49							
	MIMO A	19.49	19.49	24.51	88.92	282.49							
	MIMO B	19.29	19.29	24.31	84.92	269.77							
	Combined A+B	22.40	22.40	27.42	173.84	552.26							

UNI	Mode	BW [MHz]	Rate	Ch#	Freq [MHz]	RU config	Chain	Ouput Power [dBm]	Max ⁽¹⁾ Ouput Power [dBm]	Antenn a Gain (dBi)	Max ⁽¹⁾ EIRP [dBm]	Max ⁽¹⁾ Output Power [mW]	Max ⁽¹⁾ EIRP [mW]
	802.11be	320	MCS0	95	6425	Full BW	SISO A	20.31	20.42	5.02	25.44	110.25	350.26
							SISO B	22.28	22.39		27.41	173.54	551.31
							MIMO A	19.41	19.52		24.54	89.62	284.71
							MIMO B	19.49	19.60		24.62	91.28	290.00
							Combined A+B	22.46	22.57		27.59	180.90	574.70
				127	6585	Full BW	SISO A	20.64	20.75		25.77	118.96	377.92
							SISO B	22.30	22.41		27.43	174.34	553.86
							MIMO A	20.62	20.73		25.75	118.41	376.18
							MIMO B	20.97	21.08		26.10	128.35	407.75
							Combined A+B	23.81	23.92		28.94	246.76	783.93

(1) Value compensated with the duty cycle
(2) Max/Min value highlighted per bandwidth

UNII7 (FCC & ISD)

UNII	Mode	BW [MHz]	Rate	Ch#	Freq [MHz]	RU config	Chain	Output Power [dBm]	Max ⁽¹⁾ Output Power [dBm]	Antenn a Gain (dBi)	Max ⁽¹⁾ EIRP [dBm]	Max ⁽¹⁾ Output Power [mW]	Max ⁽¹⁾ . EIRP [mW]
UNII7	802.11ax/be	20	MCS0	117	6535	Full BW	SISO A	21.66	21.66	5.02	26.68	146.55	465.59
							SISO B	22.34	22.34		27.36	171.40	544.50
							MIMO A	19.28	19.28		24.30	84.72	269.15
							MIMO B	19.48	19.48		24.50	88.72	281.84
							Combined A+B	22.39	22.39		27.41	173.44	550.99
				SISO A	22.06		22.06	27.08	160.69		510.50		
				SISO B	22.24		22.24	27.26	167.49		532.11		
				MIMO A	19.53		19.53	24.55	89.74		285.10		
				MIMO B	19.42		19.42	24.44	87.50		277.97		
				Combined A+B	22.49		22.49	27.51	177.24		563.07		
				SISO A	22.32		22.32	27.34	170.61		542.00		
				SISO B	22.26		22.26	27.28	168.27		534.56		
				MIMO A	19.48		19.48	24.50	88.72		281.84		
				MIMO B	19.49		19.49	24.51	88.92		282.49		
				Combined A+B	22.50		22.50	27.52	177.64		564.33		
		40	MCS0	123	6565	Full BW	SISO A	22.06	22.06		27.08	160.69	510.50
							SISO B	22.27	22.27		27.29	168.66	535.80
							MIMO A	21.34	21.34		26.36	136.14	432.51
							MIMO B	21.72	21.72		26.74	148.59	472.06
							Combined A+B	24.54	24.54		29.56	284.74	904.58
				SISO A	22.28		22.28	27.30	169.04		537.03		
				SISO B	22.46		22.46	27.48	176.20		559.76		
				MIMO A	21.44		21.44	26.46	139.32		442.59		
				MIMO B	21.74		21.74	26.76	149.28		474.24		
				Combined A+B	24.60		24.60	29.62	288.60		916.83		
				SISO A	22.39		22.39	27.41	173.38		550.81		
				SISO B	22.48		22.48	27.50	177.01		562.34		
				MIMO A	21.59		21.59	26.61	144.21		458.14		
				MIMO B	22.09		22.09	27.11	161.81		514.04		
				Combined A+B	24.86		24.86	29.88	306.02		972.19		
		80	MCS0	135	6625	Full BW	SISO A	22.14	22.14		27.16	163.68	520.00
							SISO B	22.44	22.44		27.46	175.39	557.19
							MIMO A	22.29	22.29		27.31	169.43	538.27
							MIMO B	21.18	21.18		26.20	131.22	416.87
							Combined A+B	24.78	24.78		29.80	300.65	955.14
				SISO A	22.02		22.02	27.04	159.22		505.82		
				SISO B	22.13		22.13	27.15	163.31		518.80		
				MIMO A	22.36		22.36	27.38	172.19		547.02		
				MIMO B	21.12		21.12	26.14	129.42		411.15		
				Combined A+B	24.79		24.79	29.81	301.61		958.17		
				SISO A	22.26		22.26	27.28	168.27		534.56		
				SISO B	22.29		22.29	27.31	169.43		538.27		
				MIMO A	22.40		22.40	27.42	173.78		552.08		
				MIMO B	21.09		21.09	26.11	128.53		408.32		
				Combined A+B	24.80		24.80	29.82	302.31		960.40		

UNI	Mode	BW [MHz]	Rate	Ch#	Freq [MHz]	RU config	Chain	Output Power [dBm]	Max ⁽¹⁾ Output Power [dBm]	Antenna Gain (dBi)	Max ⁽¹⁾ EIRP [dBm]	Max ⁽¹⁾ Output Power [mW]	Max ⁽¹⁾ EIRP [mW]
		160	MCS0	143	6665	Full BW	SISO A	20.86	20.86		25.88	121.90	387.26
							SISO B	21.17	21.17		26.19	130.92	415.91
							MIMO A	20.94	20.94		25.96	124.17	394.46
							MIMO B	20.85	20.85		25.87	121.62	386.37
							Combined A+B	23.91	23.91		28.93	245.78	780.82

(1) Value compensated with the duty cycle

(2) Max/Min value highlighted per bandwidth

Maximum Power Spectral Density (PSD)

UNII5 (FCC & ISED)

UNII	Mode_BW	Rate	Channel	Freq. [MHz]	RU config.	Antenna	PSD [dBm/MHz]	Max ⁽¹⁾ PSD [dBm/MHz]	Antenna Gain (dBi)	Max ⁽¹⁾ PSD EIRP [dBm/MHz]
UNII5	802.11ax/be20	MCS0	1	5955	FullBW	SISO A	10.75	10.75	5.02	15.77
UNII5	802.11ax/be20	MCS0	1	5955	FullBW	SISO B	11.60	11.60		16.62
UNII5	802.11ax/be20	MCS0	1	5955	FullBW	MIMO A	8.33	8.33		13.35
UNII5	802.11ax/be20	MCS0	1	5955	FullBW	MIMO B	8.48	8.48		13.50
UNII5	802.11ax/be20	MCS0	1	5955	FullBW	Combined A+B	11.42	11.42		16.44
UNII5	802.11ax/be20	MCS0	45	6175	FullBW	SISO A	10.98	10.98		16.00
UNII5	802.11ax/be20	MCS0	45	6175	FullBW	SISO B	11.50	11.50		16.52
UNII5	802.11ax/be20	MCS0	45	6175	FullBW	MIMO A	8.93	8.93		13.95
UNII5	802.11ax/be20	MCS0	45	6175	FullBW	MIMO B	8.73	8.73		13.75
UNII5	802.11ax/be20	MCS0	45	6175	FullBW	Combined A+B	11.84	11.84		16.86
UNII5	802.11ax/be20	MCS0	93	6415	FullBW	SISO A	10.48	10.48		15.50
UNII5	802.11ax/be20	MCS0	93	6415	FullBW	SISO B	11.43	11.43		16.45
UNII5	802.11ax/be20	MCS0	93	6415	FullBW	MIMO A	8.39	8.39		13.41
UNII5	802.11ax/be20	MCS0	93	6415	FullBW	MIMO B	8.48	8.48		13.50
UNII5	802.11ax/be20	MCS0	93	6415	FullBW	Combined A+B	11.45	11.45		16.47
UNII5	802.11ax/be40	MCS0	3	5965	FullBW	SISO A	7.05	7.05		12.07
UNII5	802.11ax/be40	MCS0	3	5965	FullBW	SISO B	6.62	6.62		11.64
UNII5	802.11ax/be40	MCS0	3	5965	FullBW	MIMO A	6.74	6.74		11.76
UNII5	802.11ax/be40	MCS0	3	5965	FullBW	MIMO B	6.89	6.89		11.91
UNII5	802.11ax/be40	MCS0	3	5965	FullBW	Combined A+B	9.83	9.83		14.85
UNII5	802.11ax/be40	MCS0	43	6165	FullBW	SISO A	7.05	7.05		12.07
UNII5	802.11ax/be40	MCS0	43	6165	FullBW	SISO B	8.20	8.20		13.22
UNII5	802.11ax/be40	MCS0	43	6165	FullBW	MIMO A	7.49	7.49		12.51
UNII5	802.11ax/be40	MCS0	43	6165	FullBW	MIMO B	7.09	7.09		12.11
UNII5	802.11ax/be40	MCS0	43	6165	FullBW	Combined A+B	10.30	10.30		15.32
UNII5	802.11ax/be40	MCS0	91	6405	FullBW	SISO A	6.99	6.99		12.01
UNII5	802.11ax/be40	MCS0	91	6405	FullBW	SISO B	7.73	7.73		12.75
UNII5	802.11ax/be40	MCS0	91	6405	FullBW	MIMO A	7.35	7.35		12.37
UNII5	802.11ax/be40	MCS0	91	6405	FullBW	MIMO B	7.15	7.15		12.17
UNII5	802.11ax/be40	MCS0	91	6405	FullBW	Combined A+B	10.26	10.26		15.28
UNII5	802.11ax/be80	MCS0	7	5985	FullBW	SISO A	4.10	4.10		9.12
UNII5	802.11ax/be80	MCS0	7	5985	FullBW	SISO B	2.67	2.67		7.69
UNII5	802.11ax/be80	MCS0	7	5985	FullBW	MIMO A	3.96	3.96		8.98
UNII5	802.11ax/be80	MCS0	7	5985	FullBW	MIMO B	-3.74	-3.74		1.28
UNII5	802.11ax/be80	MCS0	7	5985	FullBW	Combined A+B	7.14	7.14		12.16
UNII5	802.11ax/be80	MCS0	39	6145	FullBW	SISO A	4.09	4.09		9.11
UNII5	802.11ax/be80	MCS0	39	6145	FullBW	SISO B	5.50	5.50		10.52
UNII5	802.11ax/be80	MCS0	39	6145	FullBW	MIMO A	4.44	4.44		9.46
UNII5	802.11ax/be80	MCS0	39	6145	FullBW	MIMO B	4.12	4.12		9.14
UNII5	802.11ax/be80	MCS0	39	6145	FullBW	Combined A+B	7.29	7.29		12.31
UNII5	802.11ax/be80	MCS0	87	6385	FullBW	SISO A	4.39	4.39		9.41
UNII5	802.11ax/be80	MCS0	87	6385	FullBW	SISO B	4.48	4.48		9.50
UNII5	802.11ax/be80	MCS0	87	6385	FullBW	MIMO A	4.64	4.64		9.66
UNII5	802.11ax/be80	MCS0	87	6385	FullBW	MIMO B	4.12	4.12		9.14
UNII5	802.11ax/be80	MCS0	87	6385	FullBW	Combined A+B	7.40	7.40		12.42

UNII	Mode_BW	Rate	Channel	Freq. [MHz]	RU config.	Antenna	PSD [dBm/MHz]	Max ⁽¹⁾ PSD [dBm/MHz]	Antenna Gain (dBi)	Max ⁽¹⁾ PSD EIRP [dBm/MHz]
UNII5	802.11ax/be160	MCS0	15	6025	FullBW	SISO A	0.51	0.51		5.53
UNII5	802.11ax/be160	MCS0	15	6025	FullBW	SISO B	-1.05	-1.05		3.97
UNII5	802.11ax/be160	MCS0	15	6025	FullBW	MIMO A	-0.14	-0.14		4.88
UNII5	802.11ax/be160	MCS0	15	6025	FullBW	MIMO B	-0.63	-0.63		4.39
UNII5	802.11ax/be160	MCS0	15	6025	FullBW	Combined A+B	2.63	2.63		7.65
UNII5	802.11ax/be160	MCS0	79	6345	FullBW	SISO A	0.55	0.55		5.57
UNII5	802.11ax/be160	MCS0	79	6345	FullBW	SISO B	0.40	0.40		5.42
UNII5	802.11ax/be160	MCS0	79	6345	FullBW	MIMO A	-0.54	-0.54		4.48
UNII5	802.11ax/be160	MCS0	79	6345	FullBW	MIMO B	-0.67	-0.67		4.35
UNII5	802.11ax/be160	MCS0	79	6345	FullBW	Combined A+B	2.41	2.41		7.43
UNII5	802.11be320	MCS0	31	6105	FullBW	SISO A	-2.36	-2.25		2.77
UNII5	802.11be320	MCS0	31	6105	FullBW	SISO B	-0.59	-0.48		4.54
UNII5	802.11be320	MCS0	31	6105	FullBW	MIMO A	-3.64	-3.53		1.49
UNII5	802.11be320	MCS0	31	6105	FullBW	MIMO B	-3.56	-3.45		1.57
UNII5	802.11be320	MCS0	31	6105	FullBW	Combined A+B	-0.59	-0.48		4.54
UNII5	802.11be320	MCS0	63	6265	FullBW	SISO A	-2.97	-2.86		2.16
UNII5	802.11be320	MCS0	63	6265	FullBW	SISO B	-0.66	-0.55		4.47
UNII5	802.11be320	MCS0	63	6265	FullBW	MIMO A	-3.60	-3.49		1.53
UNII5	802.11be320	MCS0	63	6265	FullBW	MIMO B	-3.39	-3.28		1.74
UNII5	802.11be320	MCS0	63	6265	FullBW	Combined A+B	-0.48	-0.37		4.65

⁽¹⁾ Value compensated with the duty cycle

UNII6 (Only ISED)

UNII	Mode_BW	Rate	Channel	Freq. [MHz]	RU config.	Antenna	PSD [dBm/MHz]	Max ⁽¹⁾ PSD [dBm/MHz]	Antenna Gain (dBi)	Max ⁽¹⁾ PSD EIRP [dBm/MHz]
UNII6	802.11ax/be20	MCS0	97	6435	FullBW	SISO A	9.53	9.53	5.02	14.55
UNII6	802.11ax/be20	MCS0	97	6435	FullBW	SISO B	10.30	10.30		15.32
UNII6	802.11ax/be20	MCS0	97	6435	FullBW	MIMO A	7.60	7.60		12.62
UNII6	802.11ax/be20	MCS0	97	6435	FullBW	MIMO B	8.83	8.83		13.85
UNII6	802.11ax/be20	MCS0	97	6435	FullBW	Combined A+B	11.27	11.27		16.29
UNII6	802.11ax/be20	MCS0	105	6475	FullBW	SISO A	9.32	9.32		14.34
UNII6	802.11ax/be20	MCS0	105	6475	FullBW	SISO B	10.43	10.43		15.45
UNII6	802.11ax/be20	MCS0	105	6475	FullBW	MIMO A	7.63	7.63		12.65
UNII6	802.11ax/be20	MCS0	105	6475	FullBW	MIMO B	8.63	8.63		13.65
UNII6	802.11ax/be20	MCS0	105	6475	FullBW	Combined A+B	11.17	11.17		16.19
UNII6	802.11ax/be20	MCS0	113	6515	FullBW	SISO A	9.50	9.50		14.52
UNII6	802.11ax/be20	MCS0	113	6515	FullBW	SISO B	10.58	10.58		15.60
UNII6	802.11ax/be20	MCS0	113	6515	FullBW	MIMO A	7.40	7.40		12.42
UNII6	802.11ax/be20	MCS0	113	6515	FullBW	MIMO B	8.62	8.62		13.64
UNII6	802.11ax/be20	MCS0	113	6515	FullBW	Combined A+B	11.06	11.06		16.08
UNII6	802.11ax/be40	MCS0	99	6445	FullBW	SISO A	6.78	6.78		11.80
UNII6	802.11ax/be40	MCS0	99	6445	FullBW	SISO B	7.27	7.27		12.29
UNII6	802.11ax/be40	MCS0	99	6445	FullBW	MIMO A	7.47	7.47		12.49
UNII6	802.11ax/be40	MCS0	99	6445	FullBW	MIMO B	6.58	6.58		11.60
UNII6	802.11ax/be40	MCS0	99	6445	FullBW	Combined A+B	10.06	10.06		15.08
UNII6	802.11ax/be40	MCS0	107	6485	FullBW	SISO A	6.65	6.65		11.67
UNII6	802.11ax/be40	MCS0	107	6485	FullBW	SISO B	7.31	7.31		12.33
UNII6	802.11ax/be40	MCS0	107	6485	FullBW	MIMO A	7.62	7.62		12.64
UNII6	802.11ax/be40	MCS0	107	6485	FullBW	MIMO B	6.30	6.30		11.32
UNII6	802.11ax/be40	MCS0	107	6485	FullBW	Combined A+B	10.02	10.02		15.04
UNII6	802.11ax/be40	MCS0	115	6525	FullBW	SISO A	8.02	8.02		13.04
UNII6	802.11ax/be40	MCS0	115	6525	FullBW	SISO B	7.49	7.49		12.51
UNII6	802.11ax/be40	MCS0	115	6525	FullBW	MIMO A	6.65	6.65		11.67
UNII6	802.11ax/be40	MCS0	115	6525	FullBW	MIMO B	6.41	6.41		11.43
UNII6	802.11ax/be40	MCS0	115	6525	FullBW	Combined A+B	9.54	9.54		14.56
UNII6	802.11ax/be80	MCS0	103	6465	FullBW	SISO A	4.27	4.27		9.29
UNII6	802.11ax/be80	MCS0	103	6465	FullBW	SISO B	3.01	3.01		8.03
UNII6	802.11ax/be80	MCS0	103	6465	FullBW	MIMO A	3.23	3.23		8.25
UNII6	802.11ax/be80	MCS0	103	6465	FullBW	MIMO B	3.89	3.89		8.91
UNII6	802.11ax/be80	MCS0	103	6465	FullBW	Combined A+B	6.58	6.58		11.60
UNII6	802.11ax/be80	MCS0	119	6545	FullBW	SISO A	4.46	4.46		9.48
UNII6	802.11ax/be80	MCS0	119	6545	FullBW	SISO B	5.08	5.08		10.10
UNII6	802.11ax/be80	MCS0	119	6545	FullBW	MIMO A	3.35	3.35		8.37
UNII6	802.11ax/be80	MCS0	119	6545	FullBW	MIMO B	4.42	4.42		9.44
UNII6	802.11ax/be80	MCS0	119	6545	FullBW	Combined A+B	6.93	6.93		11.95
UNII6	802.11ax/be160	MCS0	111	6505	FullBW	SISO A	0.53	0.53		5.55
UNII6	802.11ax/be160	MCS0	111	6505	FullBW	SISO B	-0.97	-0.97		4.05
UNII6	802.11ax/be160	MCS0	111	6505	FullBW	MIMO A	-0.35	-0.35		4.67
UNII6	802.11ax/be160	MCS0	111	6505	FullBW	MIMO B	-1.42	-1.42		3.60
UNII6	802.11ax/be160	MCS0	111	6505	FullBW	Combined A+B	2.16	2.16		7.18
UNII6	802.11be320	MCS0	95	6425	FullBW	SISO A	-2.46	-2.35		2.67

UNII	Mode_BW	Rate	Channel	Freq. [MHz]	RU config.	Antenna	PSD [dBm/MHz]	Max ⁽¹⁾ PSD [dBm/MHz]	Antenna Gain (dBi)	Max ⁽¹⁾ PSD EIRP [dBm/MHz]
UNII6	802.11be320	MCS0	95	6425	FullBW	SISO B	-0.62	-0.51		4.51
UNII6	802.11be320	MCS0	95	6425	FullBW	MIMO A	-3.67	-3.56		1.46
UNII6	802.11be320	MCS0	95	6425	FullBW	MIMO B	-3.40	-3.29		1.73
UNII6	802.11be320	MCS0	95	6425	FullBW	Combined A+B	-0.52	-0.41		4.61
UNII6	802.11be320	MCS0	127	6585	FullBW	SISO A	-2.09	-1.98		3.04
UNII6	802.11be320	MCS0	127	6585	FullBW	SISO B	-0.48	-0.37		4.65
UNII6	802.11be320	MCS0	127	6585	FullBW	MIMO A	-2.07	-1.96		3.06
UNII6	802.11be320	MCS0	127	6585	FullBW	MIMO B	-1.79	-1.68		3.34
UNII6	802.11be320	MCS0	127	6585	FullBW	Combined A+B	1.08	1.20		6.22

⁽¹⁾ Value compensated with the duty cycle.

UNII7 (FCC & ISD)

UNII	Mode_BW	Rate	Channel	Freq. [MHz]	RU config.	Antenna	PSD [dBm/MHz]	Max ⁽¹⁾ PSD [dBm/MHz]	Antenna Gain (dBi)	Max ⁽¹⁾ PSD EIRP [dBm/MHz]
UNII7	802.11ax/be20	MCS0	117	6535	FullBW	SISO A	10.92	10.92	5.02	15.94
UNII7	802.11ax/be20	MCS0	117	6535	FullBW	SISO B	11.49	11.49		16.51
UNII7	802.11ax/be20	MCS0	117	6535	FullBW	MIMO A	8.46	8.46		13.48
UNII7	802.11ax/be20	MCS0	117	6535	FullBW	MIMO B	8.72	8.72		13.74
UNII7	802.11ax/be20	MCS0	117	6535	FullBW	Combined A+B	11.60	11.60		16.62
UNII7	802.11ax/be20	MCS0	149	6695	FullBW	SISO A	11.20	11.20		16.22
UNII7	802.11ax/be20	MCS0	149	6695	FullBW	SISO B	11.43	11.43		16.45
UNII7	802.11ax/be20	MCS0	149	6695	FullBW	MIMO A	8.62	8.62		13.64
UNII7	802.11ax/be20	MCS0	149	6695	FullBW	MIMO B	8.58	8.58		13.60
UNII7	802.11ax/be20	MCS0	149	6695	FullBW	Combined A+B	11.61	11.61		16.63
UNII7	802.11ax/be20	MCS0	181	6855	FullBW	SISO A	11.53	11.53		16.55
UNII7	802.11ax/be20	MCS0	181	6855	FullBW	SISO B	11.40	11.40		16.42
UNII7	802.11ax/be20	MCS0	181	6855	FullBW	MIMO A	8.58	8.58		13.60
UNII7	802.11ax/be20	MCS0	181	6855	FullBW	MIMO B	8.78	8.78		13.80
UNII7	802.11ax/be20	MCS0	181	6855	FullBW	Combined A+B	11.69	11.69		16.71
UNII7	802.11ax/be40	MCS0	123	6565	FullBW	SISO A	7.92	7.92		12.94
UNII7	802.11ax/be40	MCS0	123	6565	FullBW	SISO B	8.04	8.04		13.06
UNII7	802.11ax/be40	MCS0	123	6565	FullBW	MIMO A	7.17	7.17		12.19
UNII7	802.11ax/be40	MCS0	123	6565	FullBW	MIMO B	7.52	7.52		12.54
UNII7	802.11ax/be40	MCS0	123	6565	FullBW	Combined A+B	10.36	10.36		15.38
UNII7	802.11ax/be40	MCS0	147	6685	FullBW	SISO A	8.08	8.08		13.10
UNII7	802.11ax/be40	MCS0	147	6685	FullBW	SISO B	8.39	8.39		13.41
UNII7	802.11ax/be40	MCS0	147	6685	FullBW	MIMO A	7.24	7.24		12.26
UNII7	802.11ax/be40	MCS0	147	6685	FullBW	MIMO B	7.53	7.53		12.55
UNII7	802.11ax/be40	MCS0	147	6685	FullBW	Combined A+B	10.40	10.40		15.42
UNII7	802.11ax/be40	MCS0	179	6845	FullBW	SISO A	8.28	8.28		13.30
UNII7	802.11ax/be40	MCS0	179	6845	FullBW	SISO B	8.36	8.36		13.38
UNII7	802.11ax/be40	MCS0	179	6845	FullBW	MIMO A	7.28	7.28		12.30
UNII7	802.11ax/be40	MCS0	179	6845	FullBW	MIMO B	8.00	8.00		13.02
UNII7	802.11ax/be40	MCS0	179	6845	FullBW	Combined A+B	10.67	10.67		15.69
UNII7	802.11ax/be80	MCS0	135	6625	FullBW	SISO A	4.86	4.86		9.88
UNII7	802.11ax/be80	MCS0	135	6625	FullBW	SISO B	5.18	5.18		10.20
UNII7	802.11ax/be80	MCS0	135	6625	FullBW	MIMO A	5.10	5.10		10.12
UNII7	802.11ax/be80	MCS0	135	6625	FullBW	MIMO B	4.24	4.24		9.26
UNII7	802.11ax/be80	MCS0	135	6625	FullBW	Combined A+B	7.70	7.70		12.72
UNII7	802.11ax/be80	MCS0	151	6705	FullBW	SISO A	4.91	4.91		9.93
UNII7	802.11ax/be80	MCS0	151	6705	FullBW	SISO B	4.93	4.93		9.95
UNII7	802.11ax/be80	MCS0	151	6705	FullBW	MIMO A	5.05	5.05		10.07
UNII7	802.11ax/be80	MCS0	151	6705	FullBW	MIMO B	4.14	4.14		9.16
UNII7	802.11ax/be80	MCS0	151	6705	FullBW	Combined A+B	7.63	7.63		12.65
UNII7	802.11ax/be80	MCS0	167	6785	FullBW	SISO A	5.06	5.06		10.08
UNII7	802.11ax/be80	MCS0	167	6785	FullBW	SISO B	5.11	5.11		10.13
UNII7	802.11ax/be80	MCS0	167	6785	FullBW	MIMO A	5.29	5.29		10.31
UNII7	802.11ax/be80	MCS0	167	6785	FullBW	MIMO B	4.02	4.02		9.04
UNII7	802.11ax/be80	MCS0	167	6785	FullBW	Combined A+B	7.71	7.71		12.73

UNII	Mode_BW	Rate	Channel	Freq. [MHz]	RU config.	Antenna	PSD [dBm/MHz]	Max ⁽¹⁾ PSD [dBm/MHz]	Antenna Gain (dBi)	Max ⁽¹⁾ PSD EIRP [dBm/MHz]
UNII7	802.11ax/be160	MCS0	143	6665	FullBW	SISO A	0.83	0.83		5.85
UNII7	802.11ax/be160	MCS0	143	6665	FullBW	SISO B	1.33	1.33		6.35
UNII7	802.11ax/be160	MCS0	143	6665	FullBW	MIMO A	0.96	0.96		5.98
UNII7	802.11ax/be160	MCS0	143	6665	FullBW	MIMO B	1.01	1.01		6.03
UNII7	802.11ax/be160	MCS0	143	6665	FullBW	Combined A+B	4.00	4.00		9.02

⁽¹⁾ Value compensated with the duty cycle

B.2.3 Emissions mask

Test limits

FCC part	RSS part	Limits
15.407 (b) (7)	RSS-248 Clause 4.6.2b	▪ For transmitters operating within the 5.925–7.125 GHz bands: Power spectral density must be suppressed: ○ by 20 dB at 1 MHz outside of channel edge, ○ by 28 dB at one channel bandwidth from the channel center, and ○ by 40 dB at one- and one-half times the channel bandwidth away from channel center. ▪ At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and ▪ at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. ▪ Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure the unwanted mask emissions. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared antenna gain.

The nominal bandwidth was used to construct the mask according to KDB 987594 D02.

See Section C.1.3 for the screenshot results.

B.2.4 Frequency stability

Test limits

FCC part	RSS part	Limits
15.407 (g)	RSS-Gen issue 5 - A1- clause 6.11	The frequency stability shall be sufficient to ensure that the occupied bandwidth of the device stays within frequency band when the stability is tested at the temperature and supply voltage variation.

Test procedure

The conducted setups shown in section *Test & System Description* were used to verify that the occupied bandwidth 99% of the device stays within the 5925-7125MHz frequency band.

For test results, please refer to **250519-02.TR12_FCC-IC_RFC_WLAN_6GHz_LPI_BE211D2W**

B.2.5 Contention-based protocol

Test limits

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed indoor low-power devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm).

Test procedure

The contention-based protocol setup shown in section *Test & System Description* was used to measure the contention-based protocol. The EUT ceased transmission when the AWGN source signal level described in table result below is set to transmit.

Incumbent signal is emulated by using a 10MHz bandwidth AWGN source generated by the vector signal generator. The EUT is transmitting at the maximum possible payload, and the spectrum analyzer monitors the transmissions in response to the AWGN signal. Insertion loss of the test setup was considered on the spectrum analyzer reading.

Result Tables

Contention-based Protocol Threshold minimum level

UNII	Channel	Bandwidth [MHz]	EUT Freq [MHz] f_{c1}	Incumbent Placement/Freque ncy [MHz] f_{c2}	Injected (AWGN) Power (dBm)*	Antenna Gain (dBi)**	Adjusted Power (dBm)	Status of EUT transmission	
5	45	20	6175	$f_{c1} = f_{c2}$	6175	-6.83	-69.25	-62.42	Ceased
							-72.25	-65.42	Minimal
							-74.25	-67.42	Minimal
							-76.25	-69.42	Normal
6	105		6475	$f_{c1} = f_{c2}$	6475		-69.50	-62.67	Ceased
							-70.50	-63.67	Minimal
							-73.50	-66.67	Minimal
							-74.50	-67.67	Normal
7	149		6695	$f_{c1} = f_{c2}$	6695		-69.50	-62.67	Ceased
							-70.50	-63.67	Minimal
							-73.50	-66.67	Minimal
							-75.50	-68.67	Normal
8	209		6995	$f_{c1} = f_{c2}$	6995		-68.83	-62.00	Ceased
							-70.33	-63.50	Minimal
							-72.33	-65.50	Minimal
							-85.33	-78.50	Normal
5	63	320	6265	Lower Edge	6110		-69.71	-62.88	Ceased
							-70.71	-63.88	Minimal
							-73.71	-66.88	Minimal
							-92.71	-85.88	Normal
			$f_{c1} = f_{c2}$		6265		-69.09	-62.26	Ceased
							-69.59	-62.76	Minimal
							-72.59	-65.76	Minimal
							-75.59	-68.76	Normal
			Upper edge		6420		-70.02	-63.19	Ceased
							-70.27	-63.44	Minimal
							-72.27	-65.44	Minimal
							-73.77	-66.94	Normal
5-6-7	95		6425	Lower Edge	6270		-69.74	-62.91	Ceased
							-71.24	-64.41	Minimal
							-74.24	-67.41	Minimal
							-93.24	-86.41	Normal
			$f_{c1} = f_{c2}$		6425		-69.50	-62.67	Ceased
							-69.75	-62.92	Minimal
							-72.75	-65.92	Minimal
							-74.75	-67.92	Normal
			Upper edge		6580		-69.82	-62.99	Ceased
							-70.32	-63.49	Minimal
							-72.32	-65.49	Minimal
							-73.32	-66.49	Normal
6-7	127		6585	Lower Edge	6430		-70.07	-63.24	Ceased
							-73.07	-66.24	Minimal
							-83.07	-76.24	Minimal
							-93.07	-86.24	Normal
			$f_{c1} = f_{c2}$		6585		-69.34	-62.51	Ceased
							-69.59	-62.76	Minimal
							-72.59	-65.76	Minimal
							-74.59	-67.76	Normal
			Upper edge		6740		-69.52	-62.69	Ceased
							-70.02	-63.19	Minimal
							-72.02	-65.19	Minimal
							-74.02	-67.19	Normal
7-8	191		6905	Lower Edge	6750		-69.93	-63.10	Ceased
							-71.93	-65.10	Minimal
							-74.43	-67.60	Minimal
							-94.43	-87.60	Normal
			$f_{c1} = f_{c2}$		6905		-69.20	-62.37	Ceased
							-69.70	-62.87	Minimal
							-72.70	-65.87	Minimal
							-74.70	-67.87	Normal
			Upper edge		7060		-70.50	-63.67	Ceased
							-71.00	-64.17	Minimal
							-72.50	-65.67	Minimal
							-74.50	-67.67	Normal

* Path losses integrated. **Antenna gain used is the lowest supported gain of -6.83 dBi.

Summary table

Bandwidth [MHz]	UNII Sub- band	Channel	EUT Freq [MHz] f_{c1}	Incumbent Placement/Frequency [MHz] f_{c2}		Adjusted Power (dBm)	Number of iterations	Detection Probability (%)	Limit (%)	Verdict
20	5	45	6175	$f_{c1} = f_{c2}$	6175	-62.42	10	100	90	PASS
	6	105	6475	$f_{c1} = f_{c2}$	6475	-62.67	10	100	90	PASS
	7	149	6695	$f_{c1} = f_{c2}$	6695	-62.67	10	100	90	PASS
	8	209	6995	$f_{c1} = f_{c2}$	6995	-62.00	10	100	90	PASS
320	5	63	6265	Lower Edge	6110	-62.88	10	100	90	PASS
				$f_{c1} = f_{c2}$	6265	-62.26	10	100	90	PASS
				Upper edge	6420	-63.19	10	100	90	PASS
	5-6-7	95	6425	Lower Edge	6270	-62.91	10	100	90	PASS
				$f_{c1} = f_{c2}$	6425	-62.67	10	100	90	PASS
				Upper edge	6580	-62.99	10	100	90	PASS
	6-7	127	6585	Lower Edge	6430	-63.24	10	100	90	PASS
				$f_{c1} = f_{c2}$	6585	-62.51	10	100	90	PASS
				Upper edge	6740	-62.69	10	100	90	PASS
	7-8	191	6905	Lower Edge	6750	-63.10	10	100	90	PASS
				$f_{c1} = f_{c2}$	6905	-62.37	10	100	90	PASS
				Upper edge	7060	-63.67	10	100	90	PASS

See Section C.1.4 for the screenshot results.

B.2.6 Undesirable emission limits : Conducted

Test limits

FCC part	RSS Part	Limits
15.407 (b)(6)	RSS-248 Clause 4.6.2a	For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.
15.35 (b)	-	Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz. When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device, e.g., the total peak power level

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure undesirable emissions on the out of band domain. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared antenna gain.

For the lower and upper side of the out of band, the integration method was used as defined in the out of band measurements section II.G.3.d of KDB 789033. Tests were performed using both RMS and peak detectors.

For out of band emission measurements in MIMO mode the emission level of individual output is adjusted by $10 \log(N_{\text{ant}}) = 3\text{dB}$ for $N_{\text{ant}} = 2$ which is equivalent to compare the individual output emission level to the limit minus 3dB. The same approach is applied for peak and RMS detectors.

See Section C.1.5 for the screenshot results.

B.2.7 Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

Test limits

A client device may connect to a Standard Power AP with a maximum power level of 30 dBm EIRP. A client may also connect to a Low Power indoor AP, but the power level is limited to a maximum of 24 dBm EIRP. If a client has the flexibility to connect to both APs, verification is needed to show that it can distinguish between the two configurations, and then control the power levels accordingly.

Test procedure

The dual client test setup shown in section **Test & System Description**.

Client and APs are prepared so they associate and start sending data (stream data) to each other. Client is configured to transmit at its highest power level.

Initially, attenuation on Atten 1 is set high, so the Client will only associate with the Std Power AP. Transmission between Client and Std Power AP is verified by measuring Client Tx power using SA-2 method from C63.10. Atten 2 is gradually increased while Atten 1 is decreased. This simulates the Client moving from outdoors to indoors. At some level of attenuation, the Client should associate with the Low Power indoor AP. Transmission between Client and Low Power AP is verified by measuring Client Tx power using the same method mentioned in this paragraph. It must not be greater than 24 dBm EIRP.

Connected AP type	Channel	Freq.	BW	Rate	Chain	Duty cycle (%)	Measured Client Tx Power	Compensated Client Tx Power	Antenna Gain	Client Tx Power EIRP
		[MHz]	[MHz]				[dBm]	[dBm]	[dBi]	[dBm]
Standard Power	37	6135	20	MCS0	SISO B	94.4	14.11	14.36	5.02	19.38
Low Power	37	6135	20	MCS0	SISO B	94.4	2.29	2.54	5.02	7.56

See Section C.1.6 for the screenshot results.

B.2.8 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point

Test limits

A client device that connects to a Standard Power AP must limit its EIRP to a minimum of 6 dB lower than its associated Standard Power access point's authorized transmit power.

Test procedure

The proper power adjustment test setup shown in section **Test & System Description**.

Client and AP are prepared so they associate and start sending data (stream data) to each other.

Client is configured to transmit at following power levels:

- Highest power level
- Mid power level
- Lowest power level, as declared by the manufacturer.


For each configuration, Client Tx power is measured using SA-2 method from C63.10 for U-NII devices.

See Section C.1.7 for the screenshot results.


AFC access point EIRP limitation [dBm]	AFC Max client EIRP limitation [dBm]	AFC Max client conducted. [dBm]	Channel	Freq. [MHz]	BW [MHz]	Rate	Chain	Duty Cycle [%]	Measured Client Tx Power [dBm]	Compensated Client Tx Power [dBm]	Antenna Gain [dBi]	Client Tx Power EIRP [dBm]
34	28	22.98	37	6135	20	MCS0	SISO B	94.4	14.11	14.36	5.02	19.38
23	17	11.98							11.49	11.74		16.76
14	8	2.98							2.48	2.73		7.75

Annex C. System Plots


C.1.1 26dB & 99% bandwidth

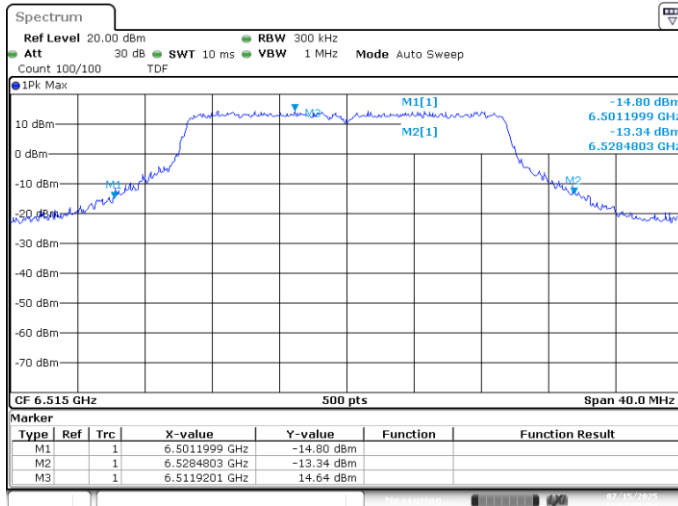


UNII6 SISO A 802.11ax20 ch113 6515MHz 26dB

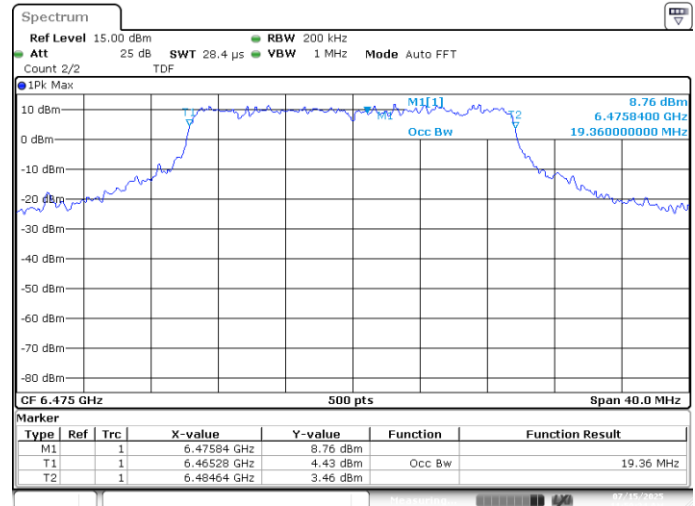


UNII6 SISO A 802.11ax20 ch105 6475MHz 99%

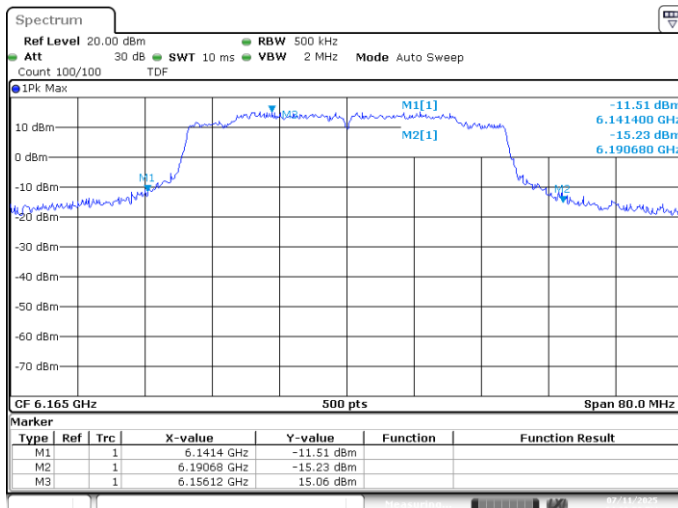


UNII5 SISO A 802.11ax40 ch43 6165MHz 26dB

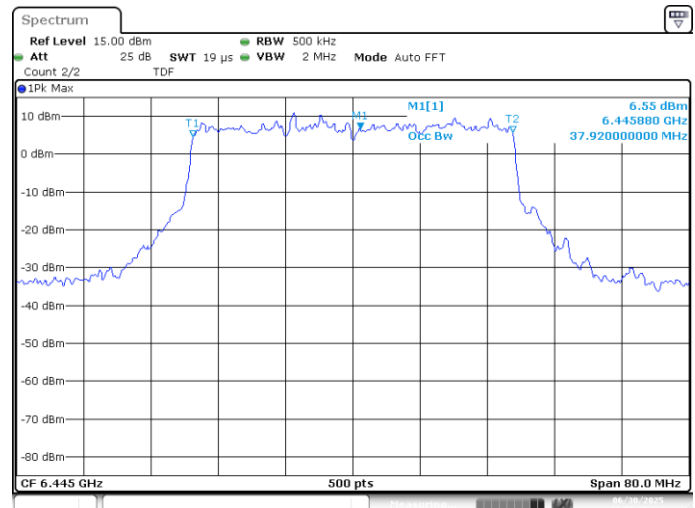


UNII6 MIMO A 802.11ax40 ch99 6445MHz 99%

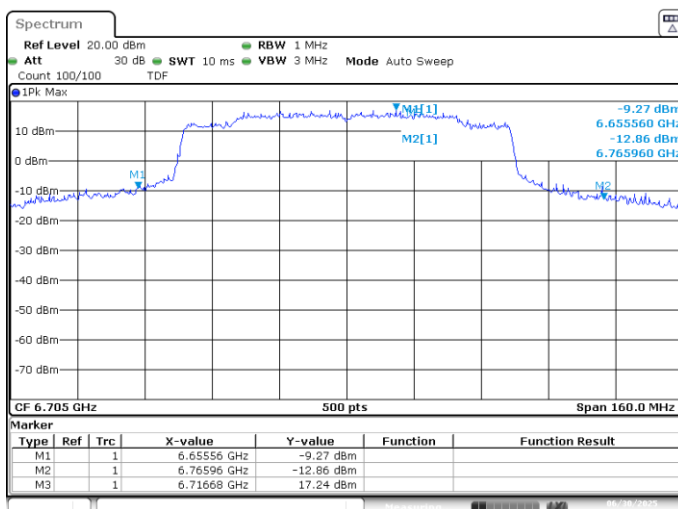


UNII7 SISO B 802.11ax80 ch151 6705MHz 26dB

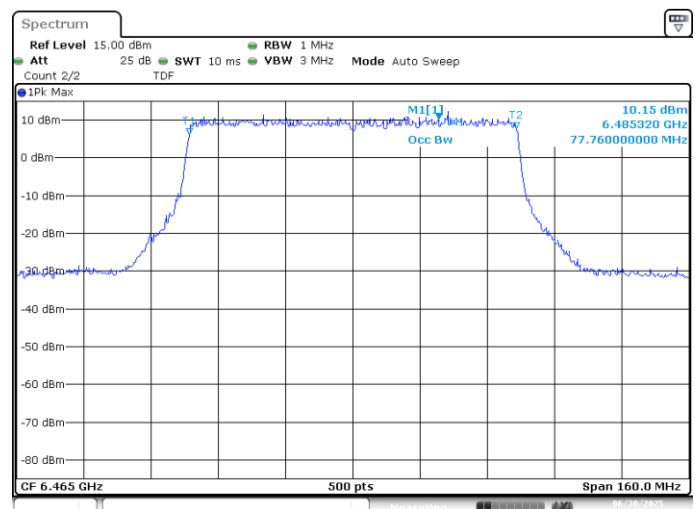


UNII6 MIMO A 802.11ax80 ch103 6465MHz 99%

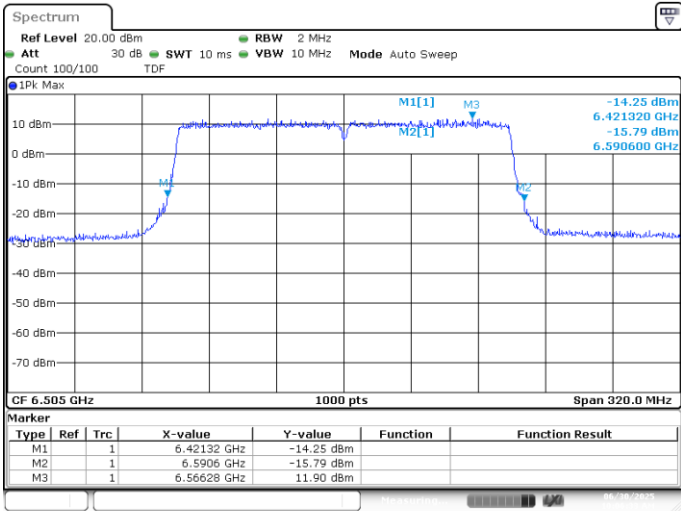

UNII6 MIMO A 802.11ax160 ch111 6505MHz 26dB

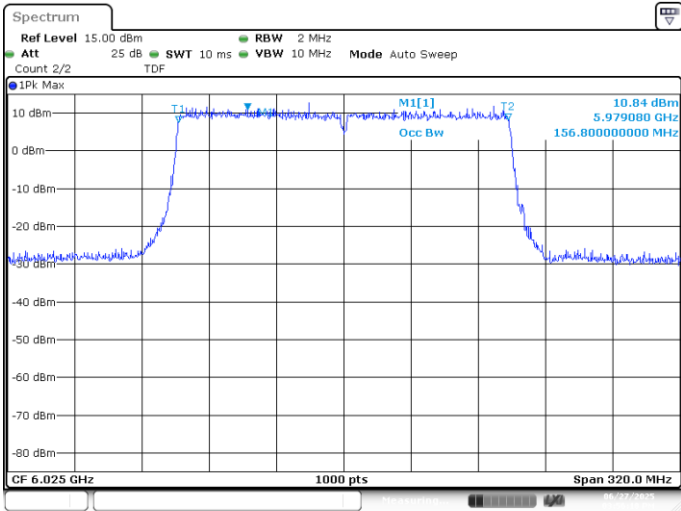


UNII5 MIMO A 802.11ax160 ch15 6025MHz 99%

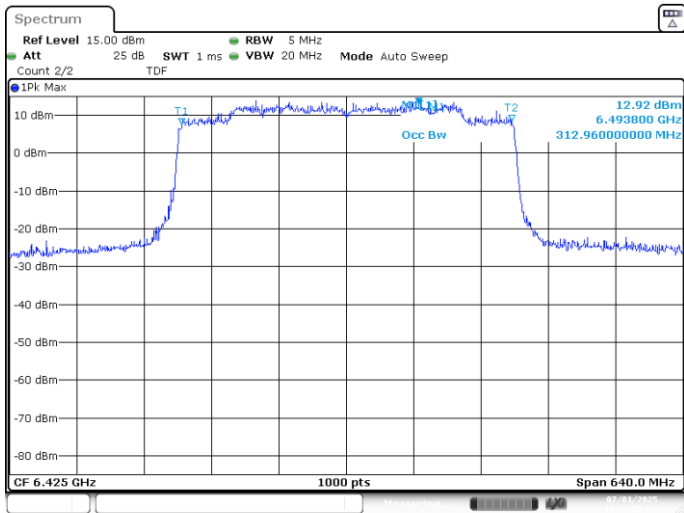


UNII6 MIMO B 802.11ax320 ch95 6425MHz 99%


C.1.2 Maximum Output Power & Maximum power spectral Density

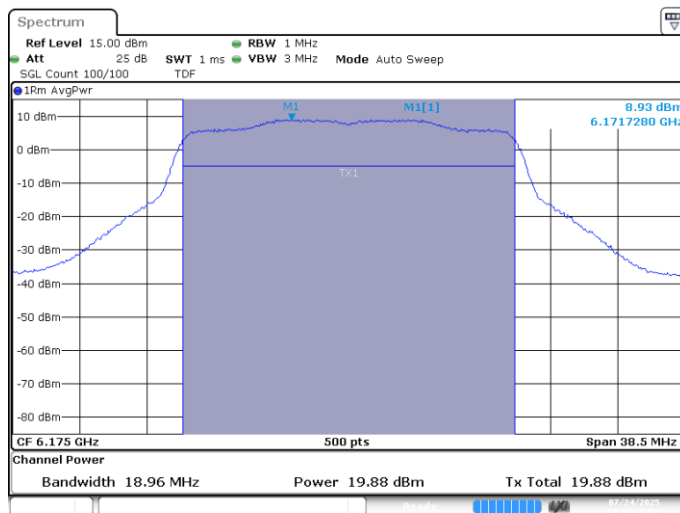


UNII5 MIMO A 802.11ax20 ch45 6175MHz

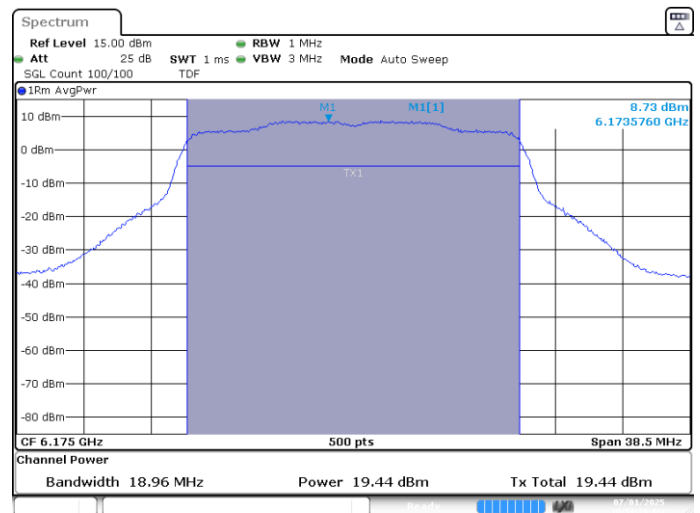


UNII5 MIMO B 802.11ax20 ch45 6175MHz

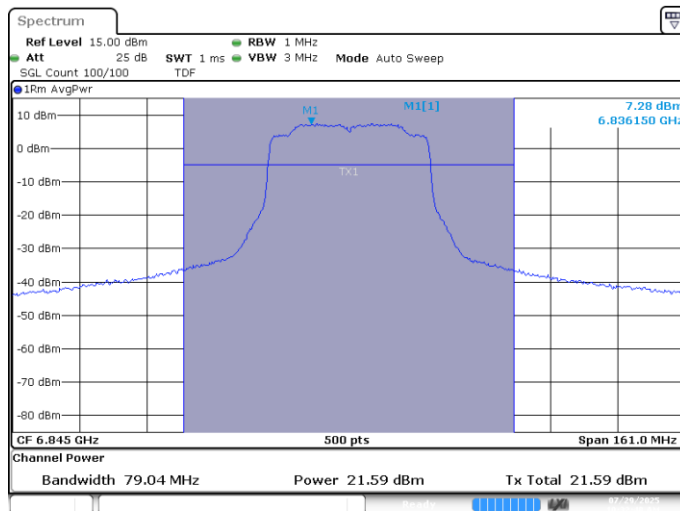


UNII7 MIMO A 802.11ax40 ch179 6845MHz

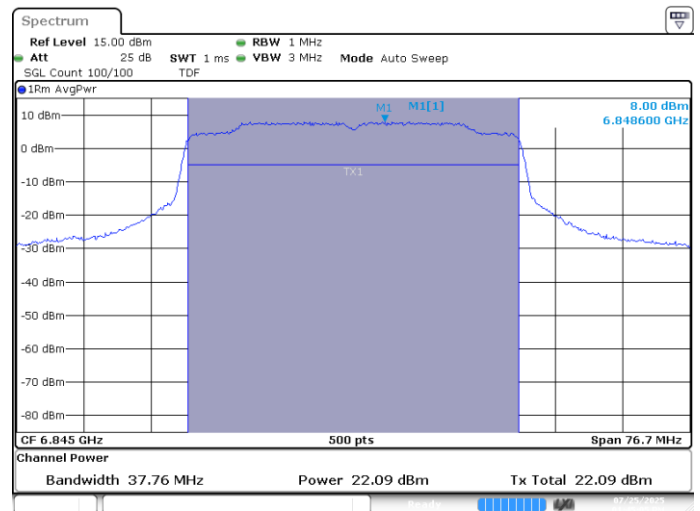


UNII7 MIMO B 802.11ax40 ch179 6845MHz

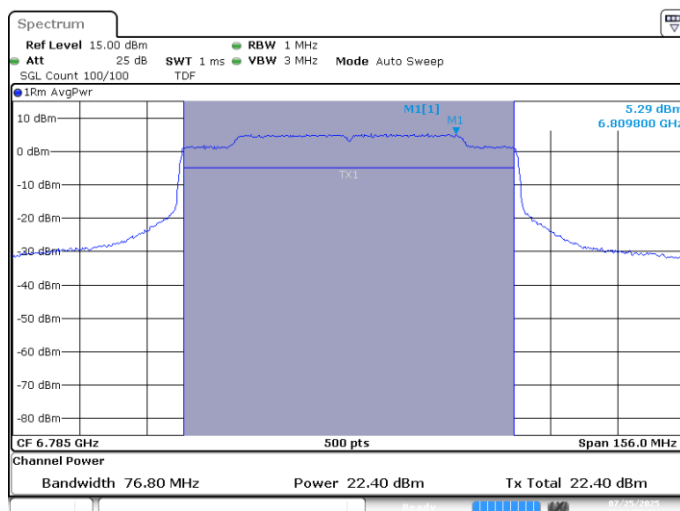


UNII7 MIMO A 802.11ax80 ch167 6785MHz

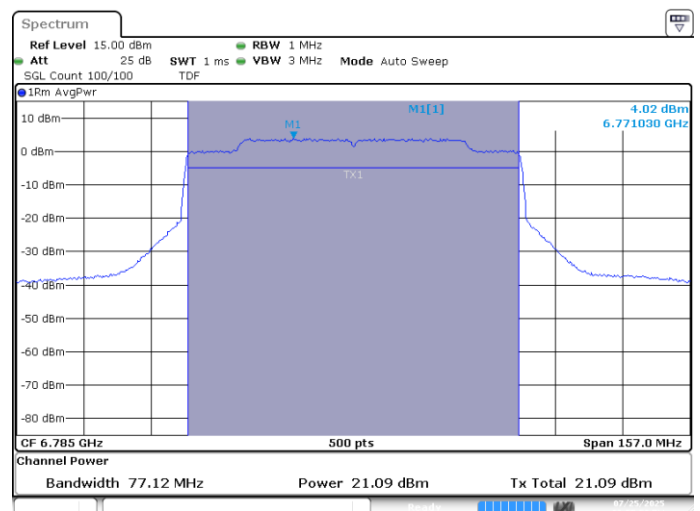


UNII7 MIMO B 802.11ax80 ch167 6785MHz

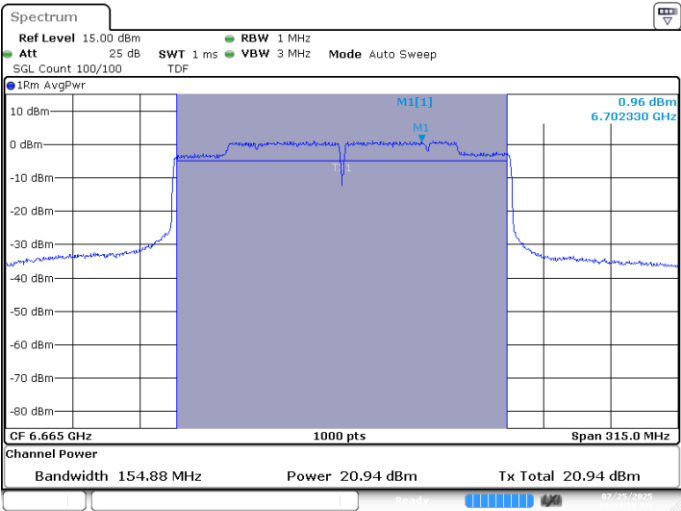


UNII7 MIMO A 802.11ax160 ch143 6665MHz

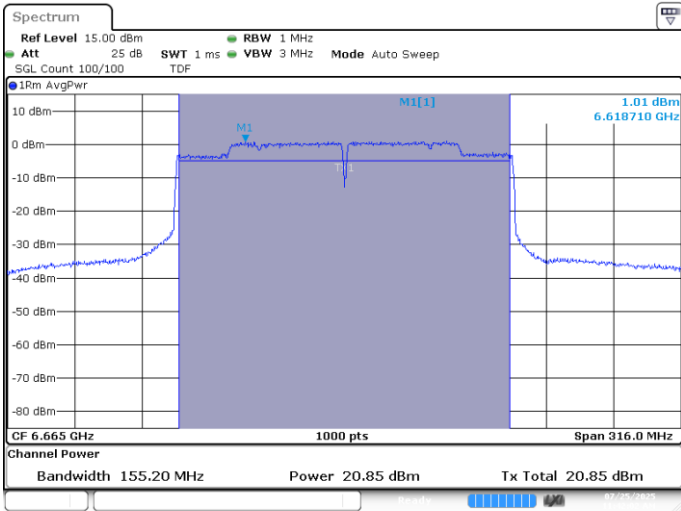

UNII7 MIMO B 802.11ax160 ch143 6665MHz

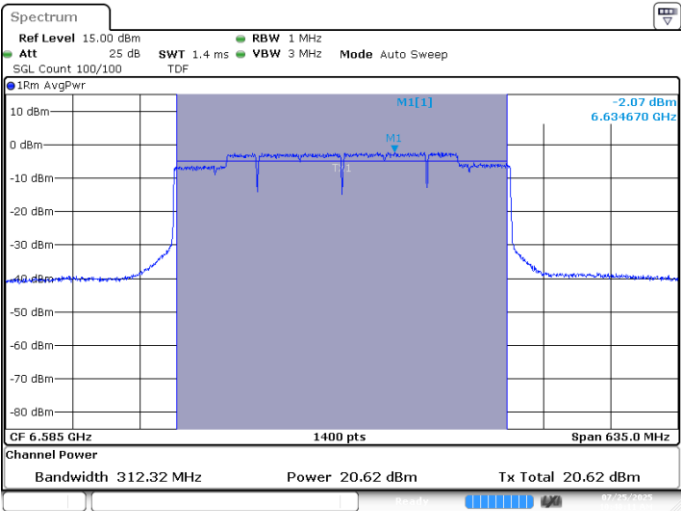


UNII6 MIMO A 802.11ax320 ch127 6585MHz

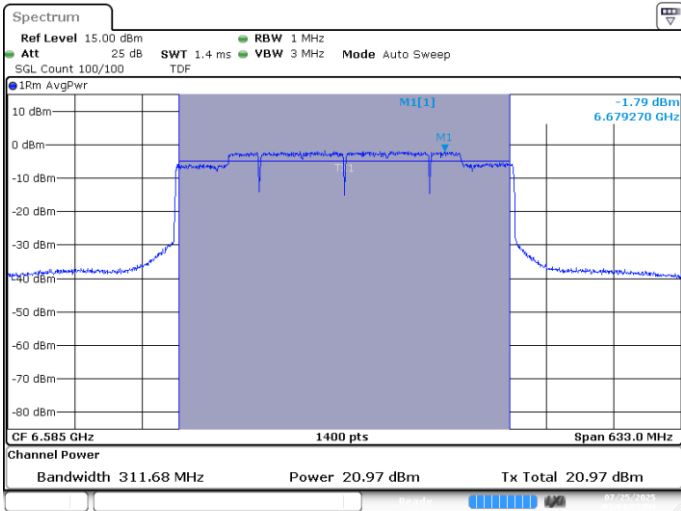


UNII6 MIMO B 802.11ax320 ch127 6585MHz


C.1.3 In-Band Emissions (Mask)

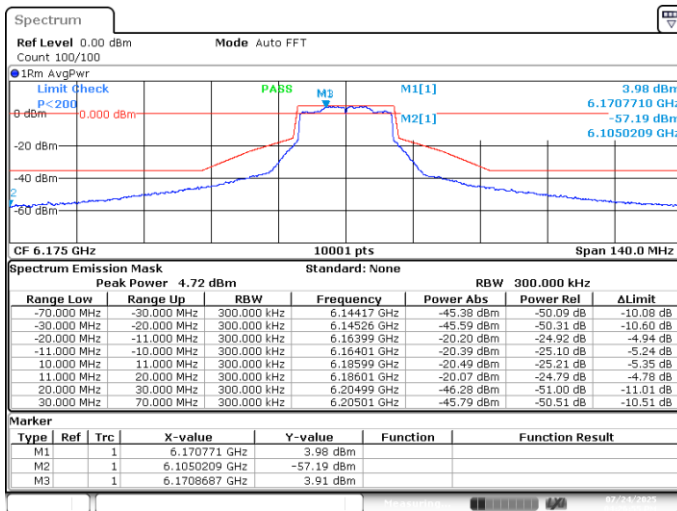


UNI5 MIMO A 802.11ax20 ch45 6175MHz

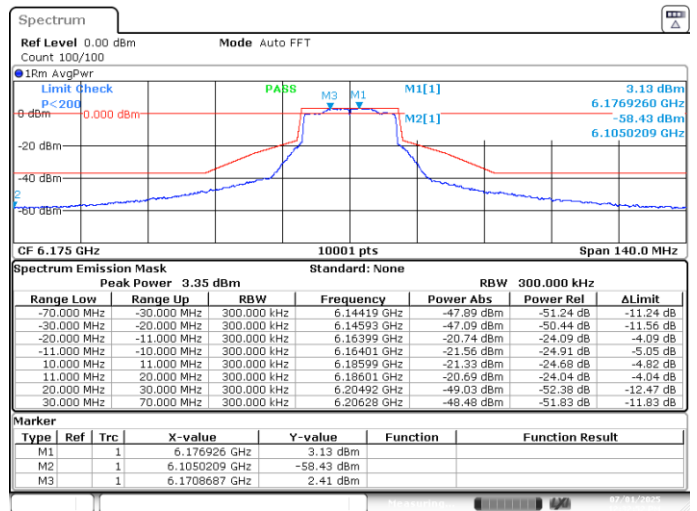


UNI5 MIMO B 802.11ax20 ch45 6175MHz

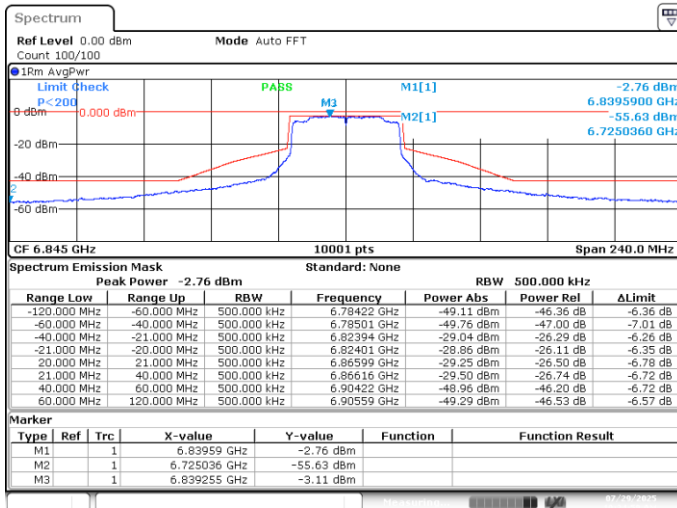


UNI7 MIMO A 802.11ax40 ch179 6845MHz

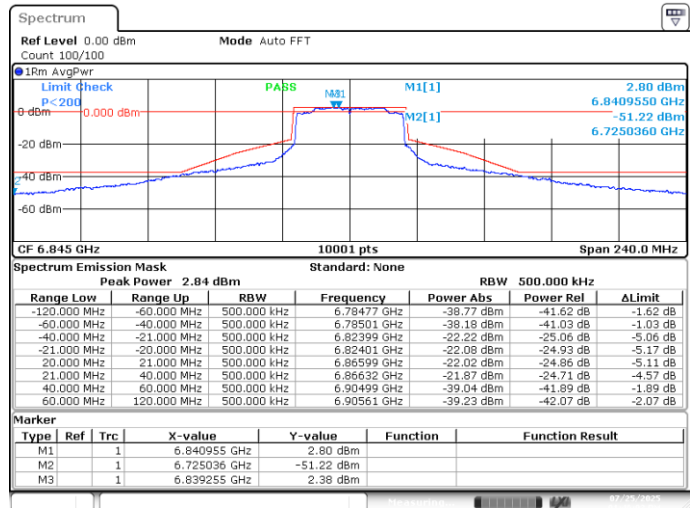


UNI7 MIMO B 802.11ax40 ch179 6845MHz

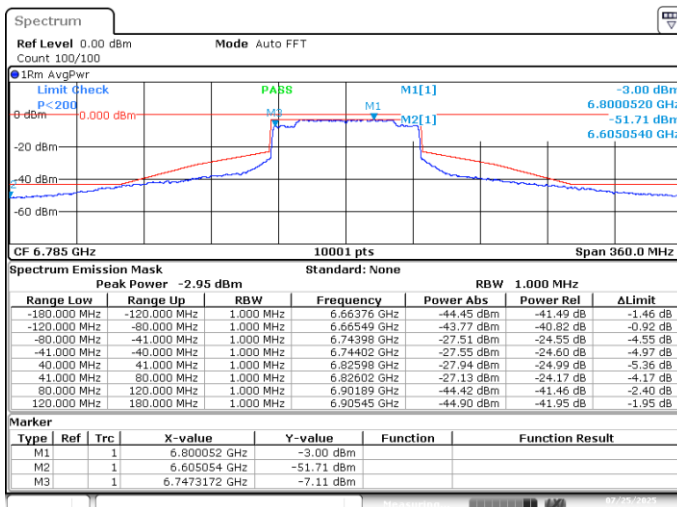


UNI7 MIMO A 802.11ax80 ch167 6785MHz

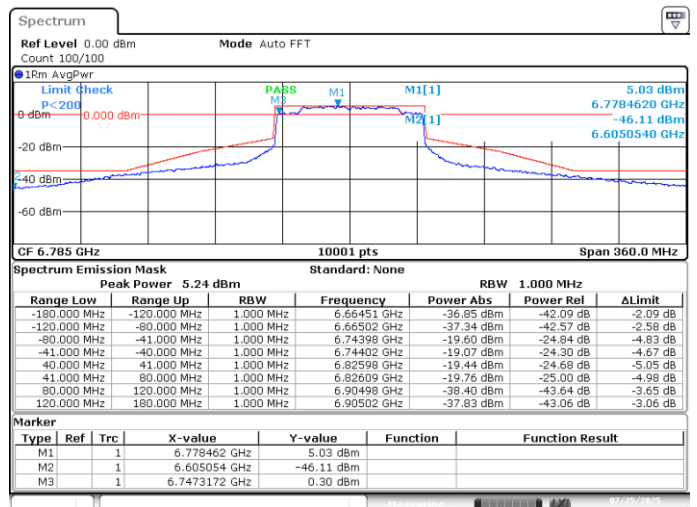


UNI7 MIMO B 802.11ax80 ch167 6785MHz

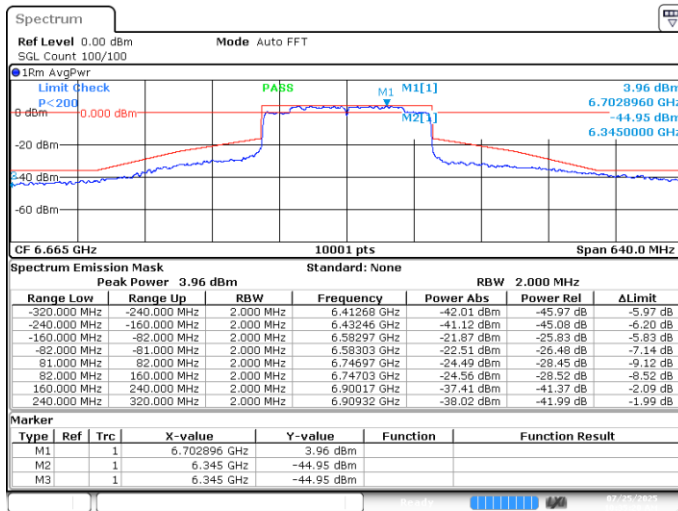


UNI7 MIMO A 802.11ax160 ch143 6665MHz

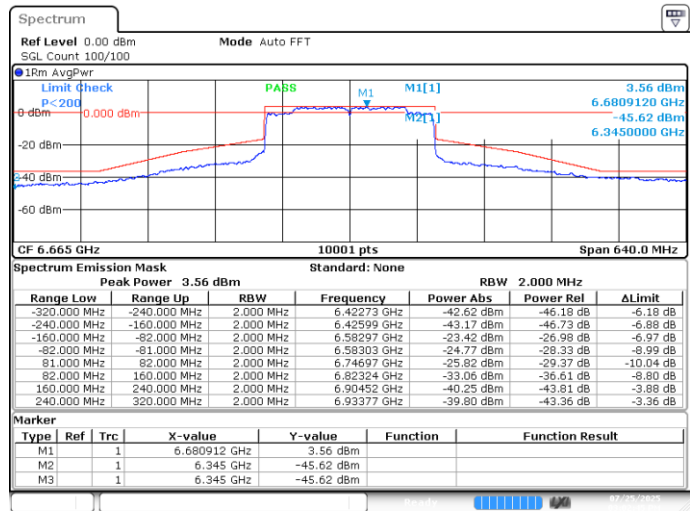

UNI7 MIMO B 802.11ax160 ch143 6665MHz


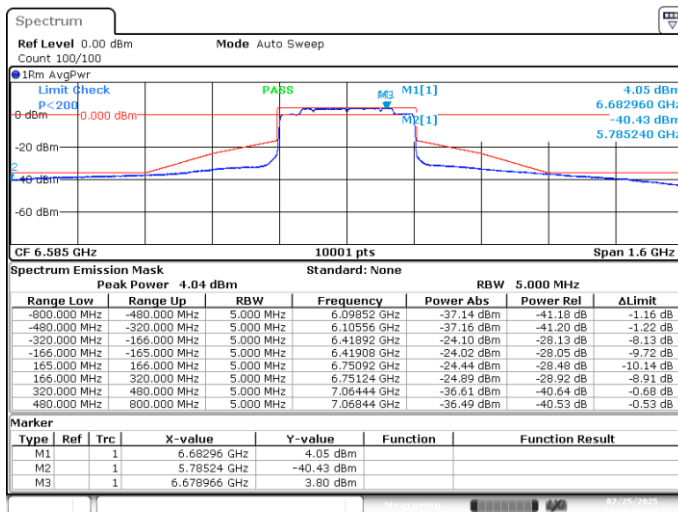


UNI6 MIMO A 802.11ax320 ch127 6585MHz

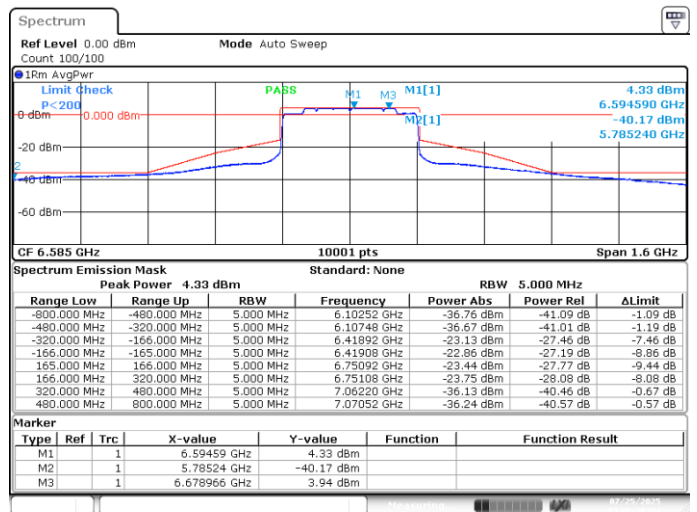


UNI6 MIMO B 802.11ax320 ch127 6585MHz

C.1.4 Contention-based protocol

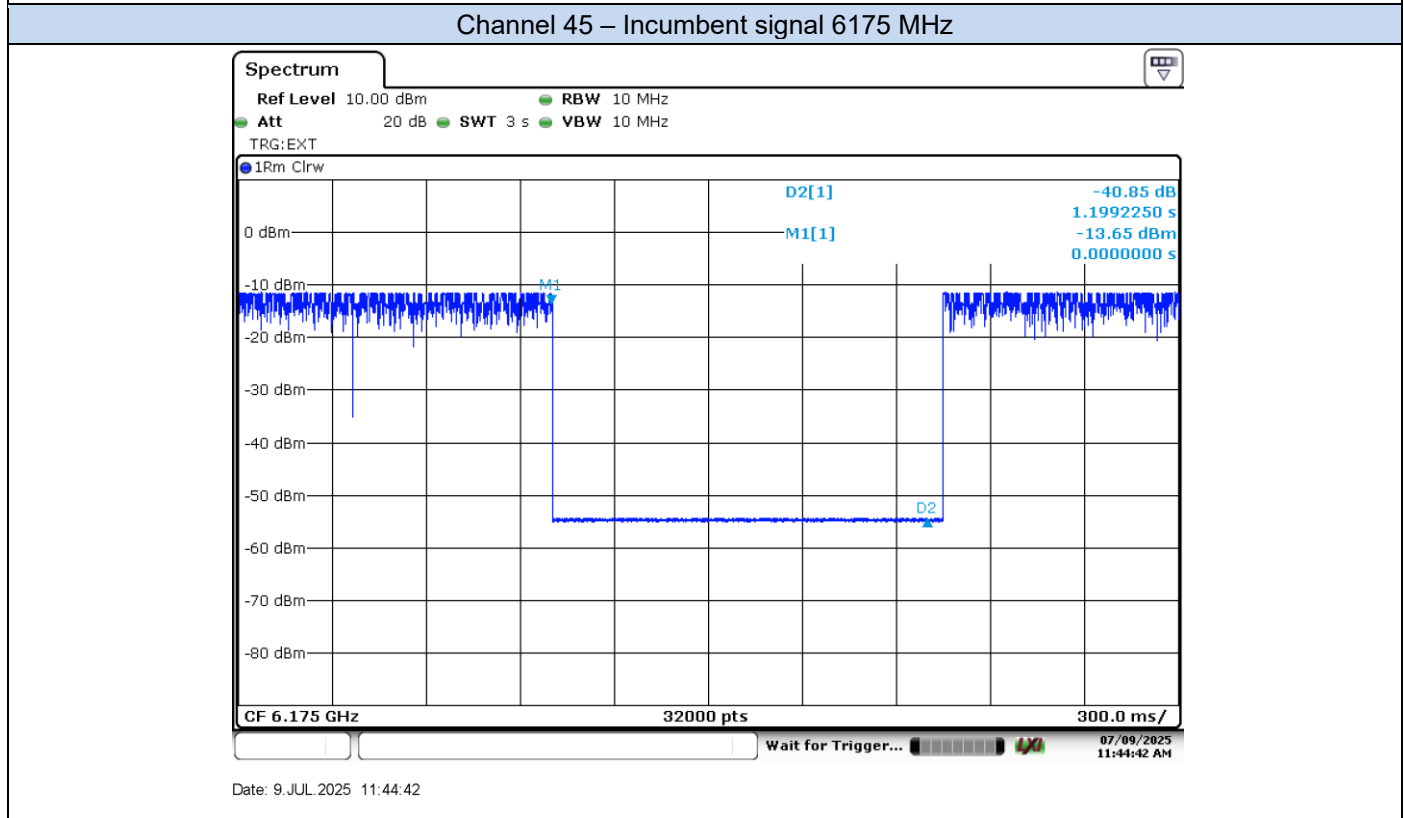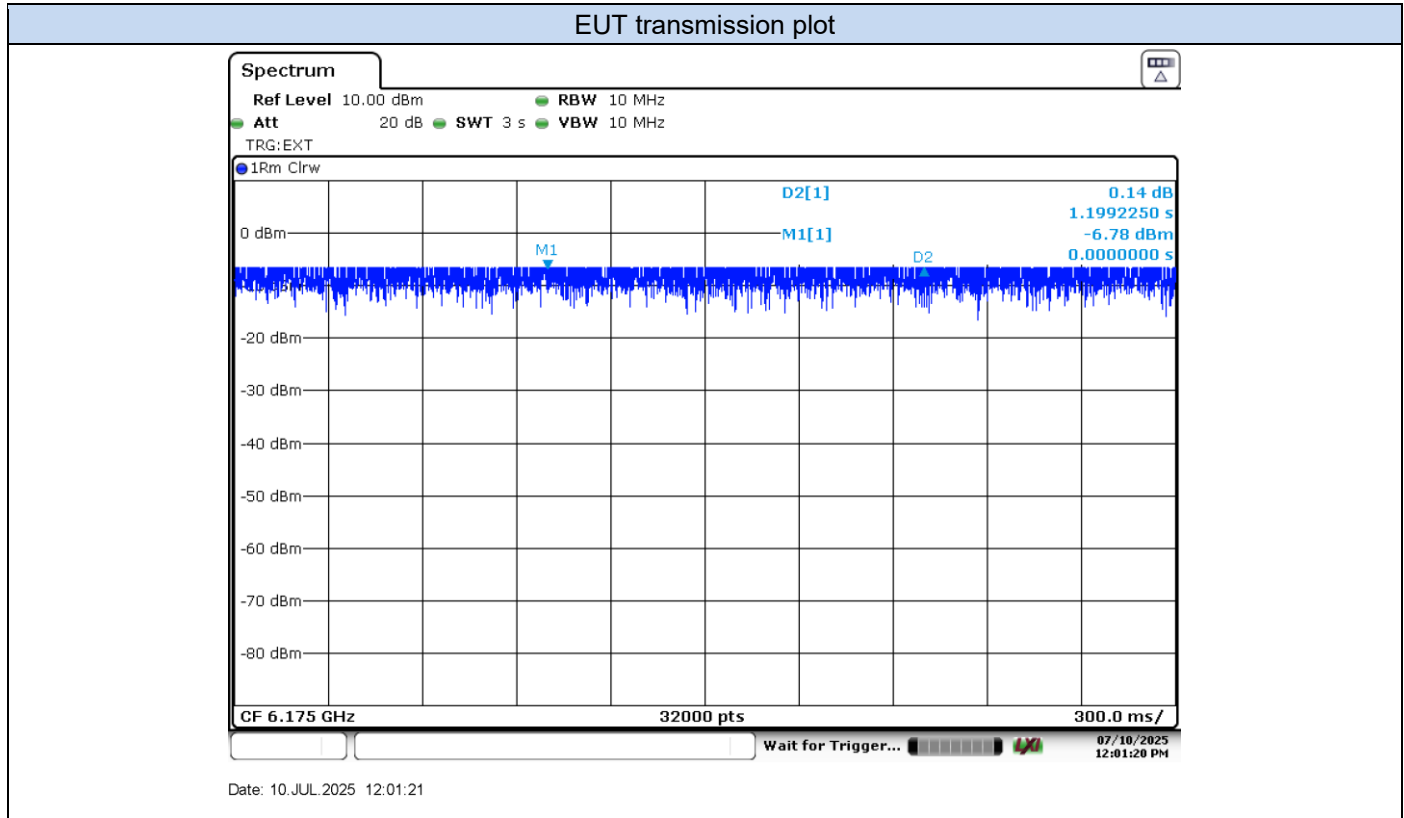

Note - M1: Injection of AWGN signal, D2: Removal of AWGN signal


Channel 105 - Incumbent signal 6475 MHz

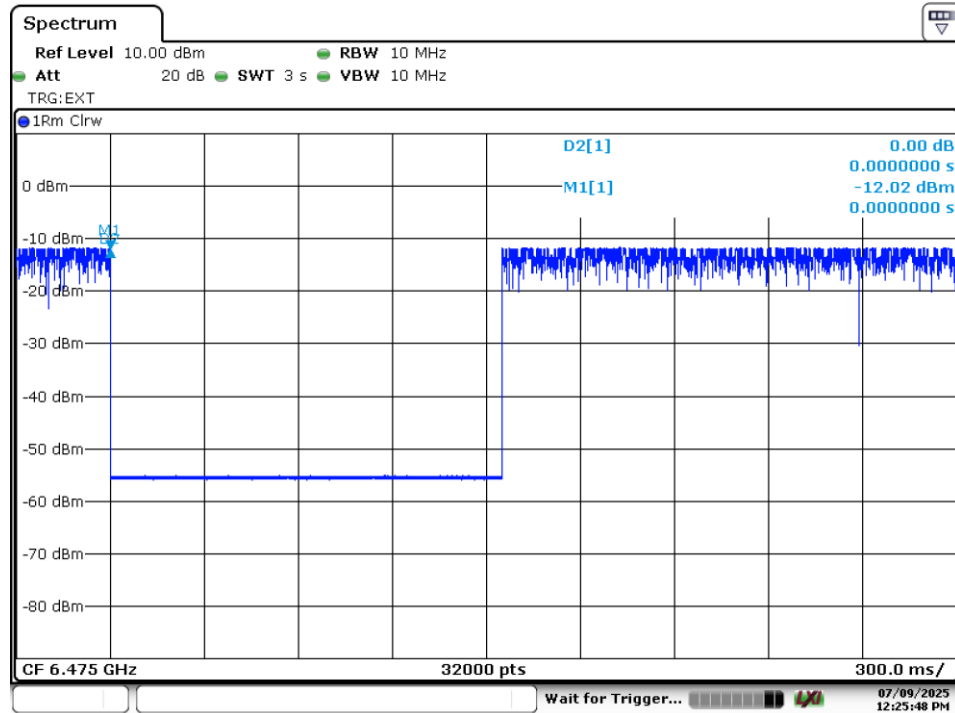

Date: 9 JUL 2025 12:25:48

Note - M1: Injection of AWGN signal, D2: Removal of AWGN signal


Channel 149 - Incumbent signal 6695 MHz

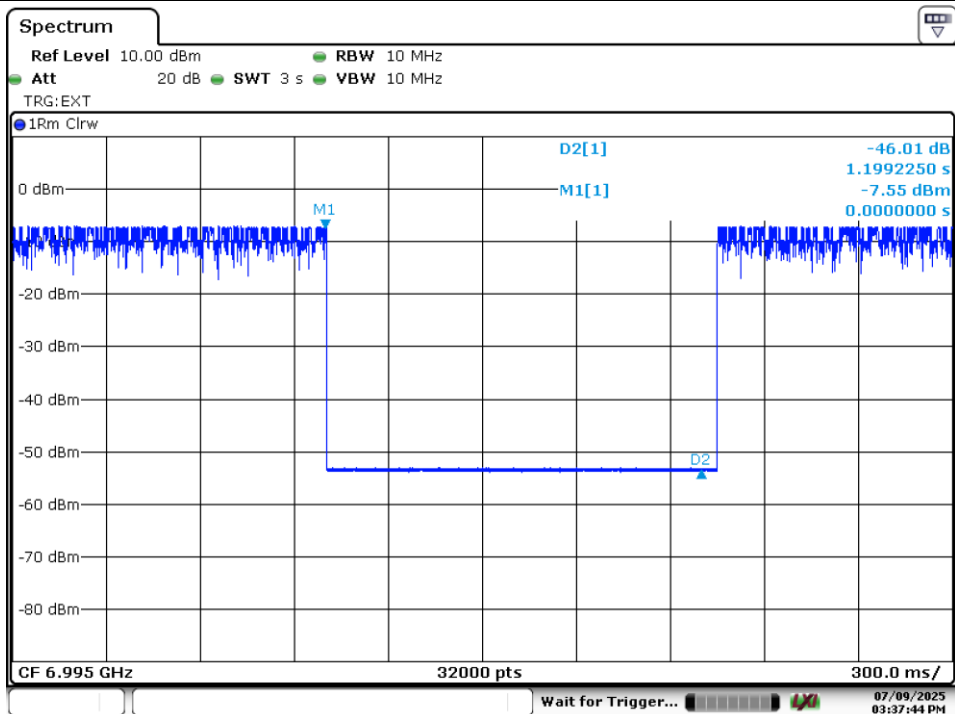

Date: 9 JUL 2025 15:37:44

Note - M1: Injection of AWGN signal, D2: Removal of AWGN signal


Channel 209 - Incumbent signal 6995 MHz

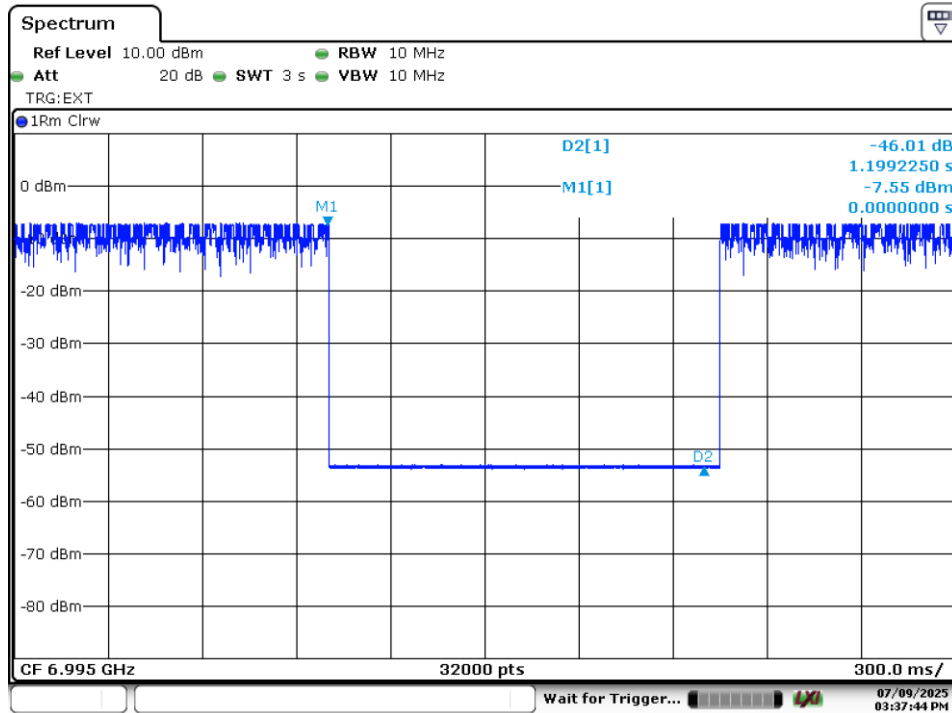

Date: 9 JUL 2025 15:37:44


Note - M1: Injection of AWGN signal, D2: Removal of AWGN signal

Channel 63 - Incumbent signal 6110 MHz

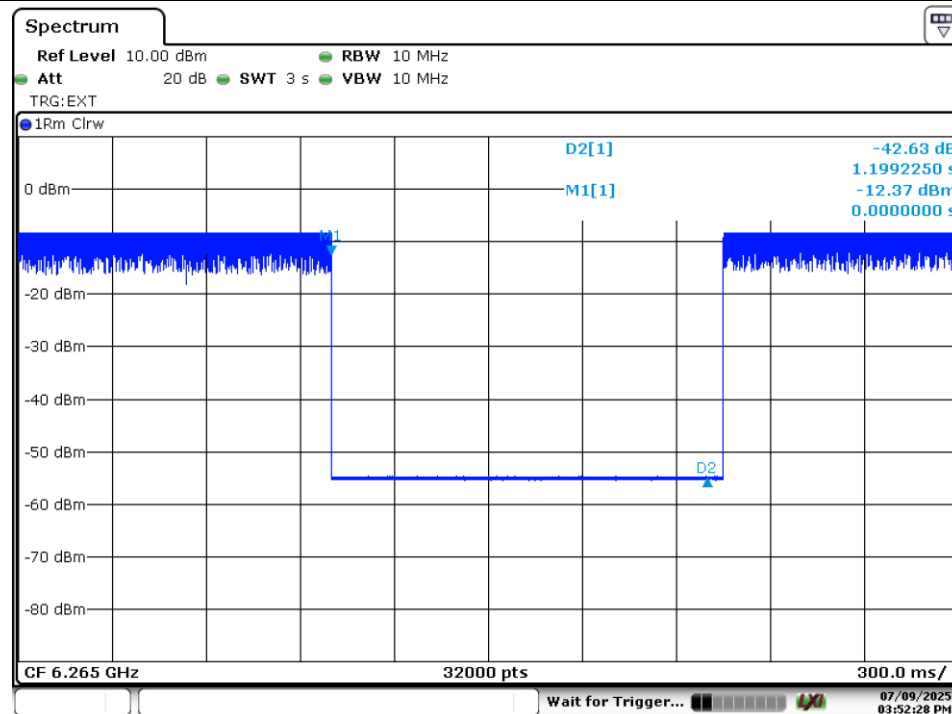


Date: 9 JUL 2025 15:52:28


Note - M1: Injection of AWGN signal, D2: Removal of AWGN signal

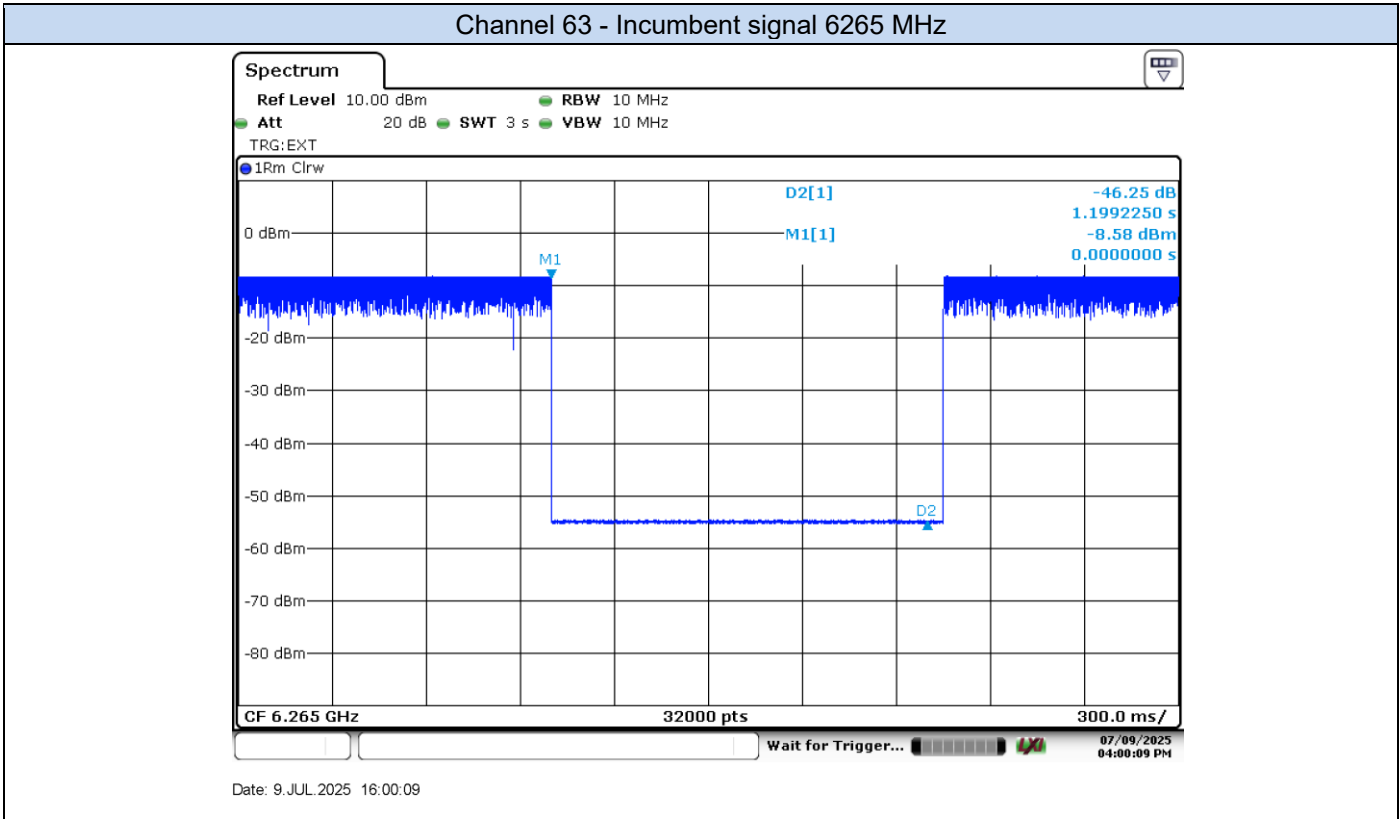


Note - M1: Injection of AWGN signal, D2: Removal of AWGN signal

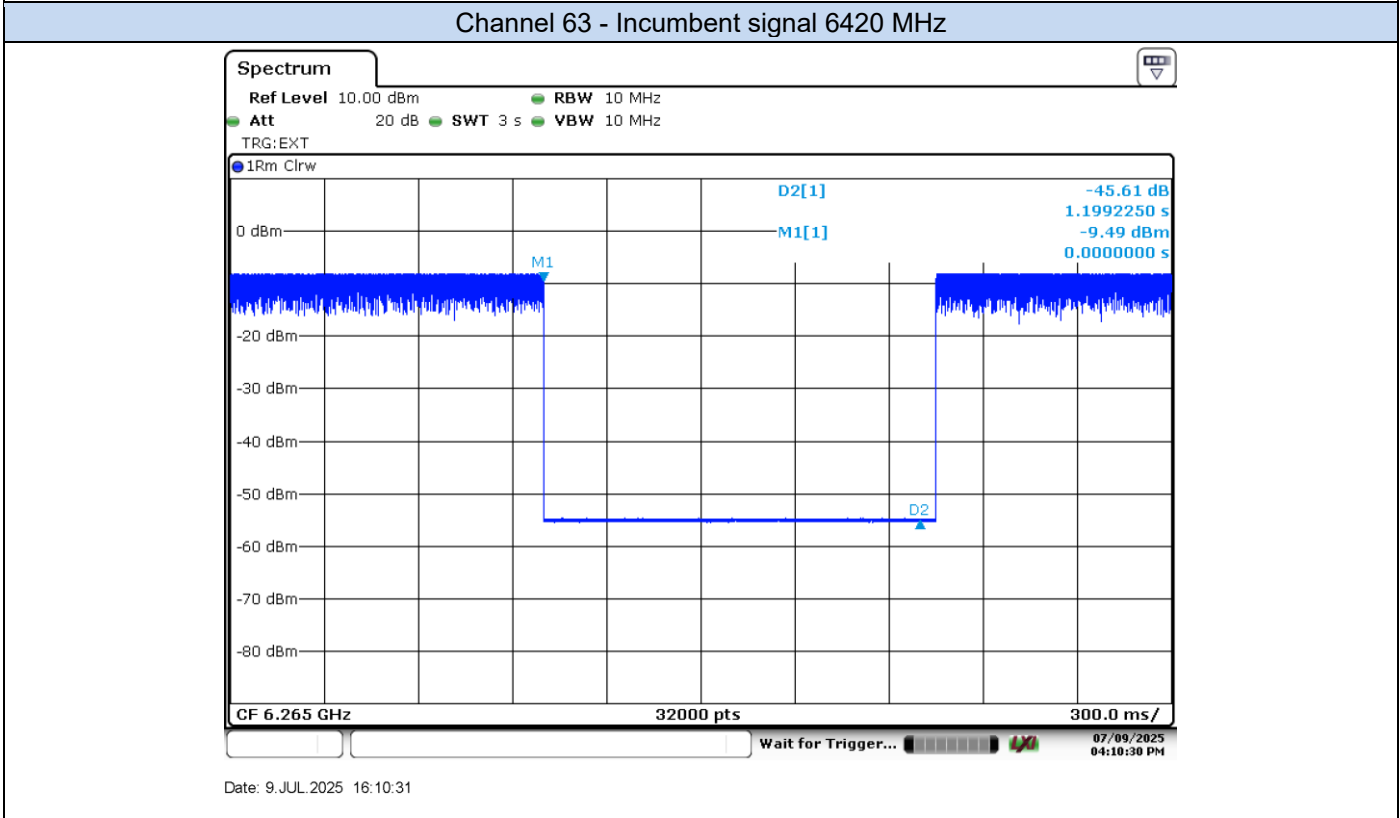


Note - M1: Injection of AWGN signal, D2: Removal of AWGN signal

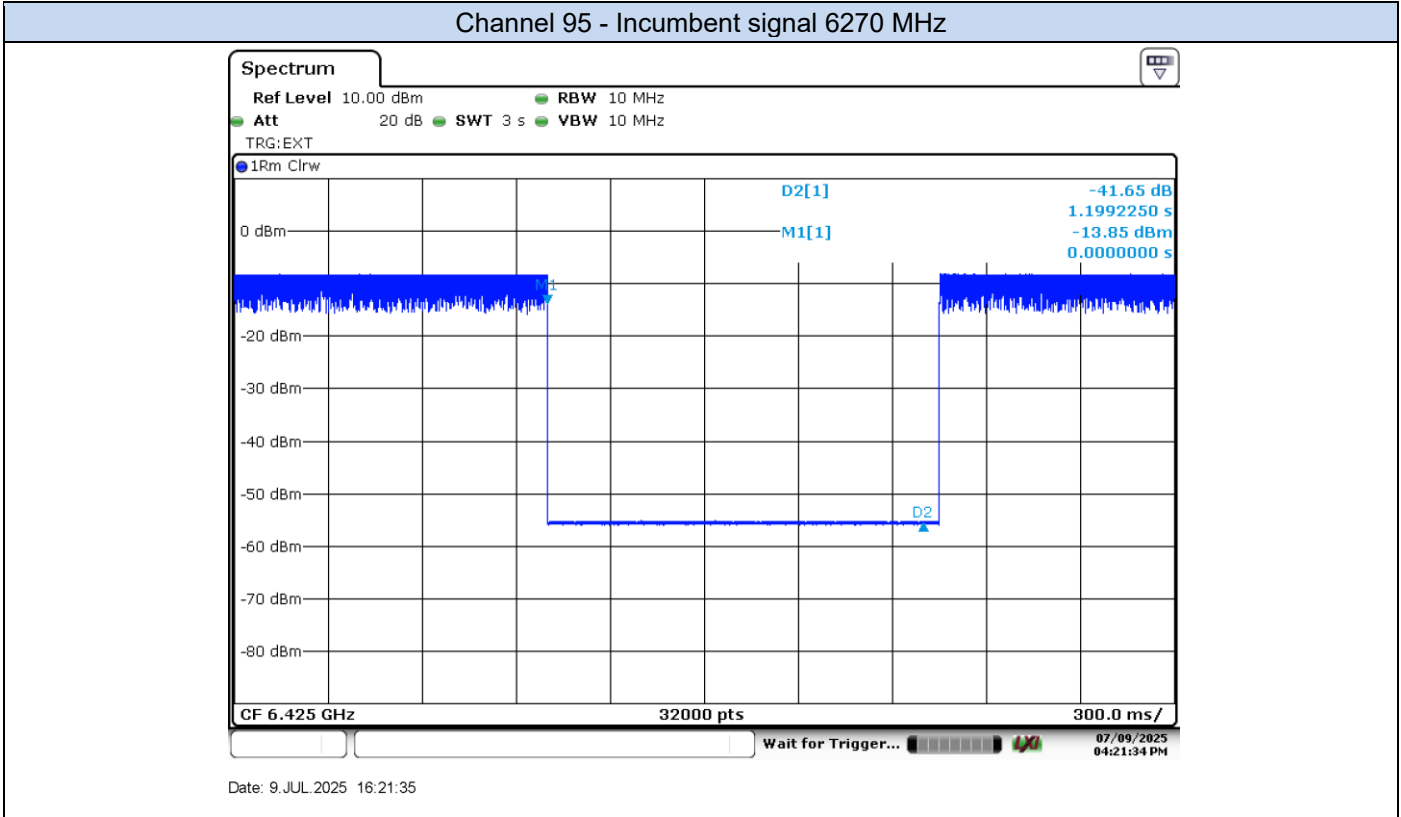


Note - M1: Injection of AWGN signal, D2: Removal of AWGN signal

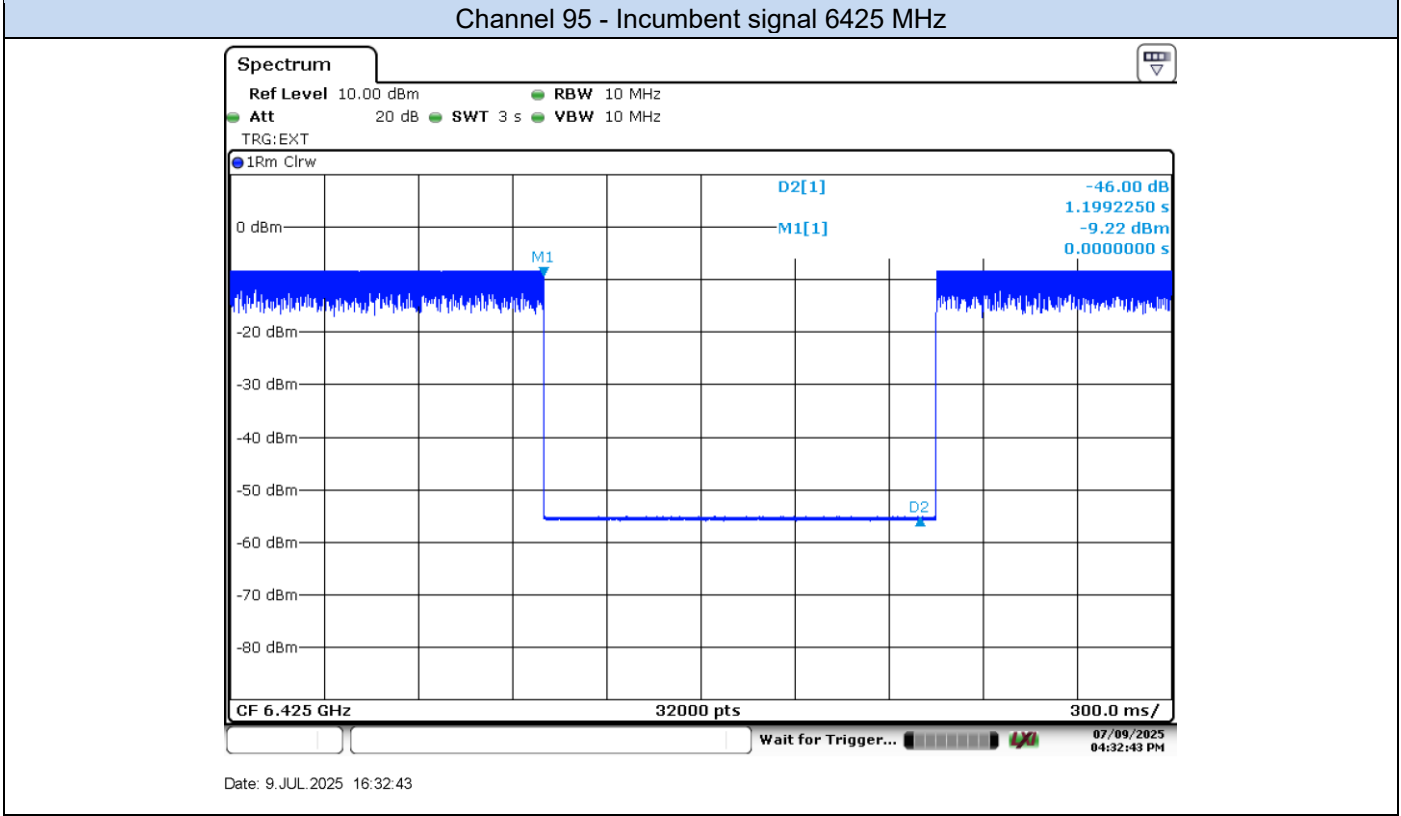

Note - M1: Injection of AWGN signal, D2: Removal of AWGN signal

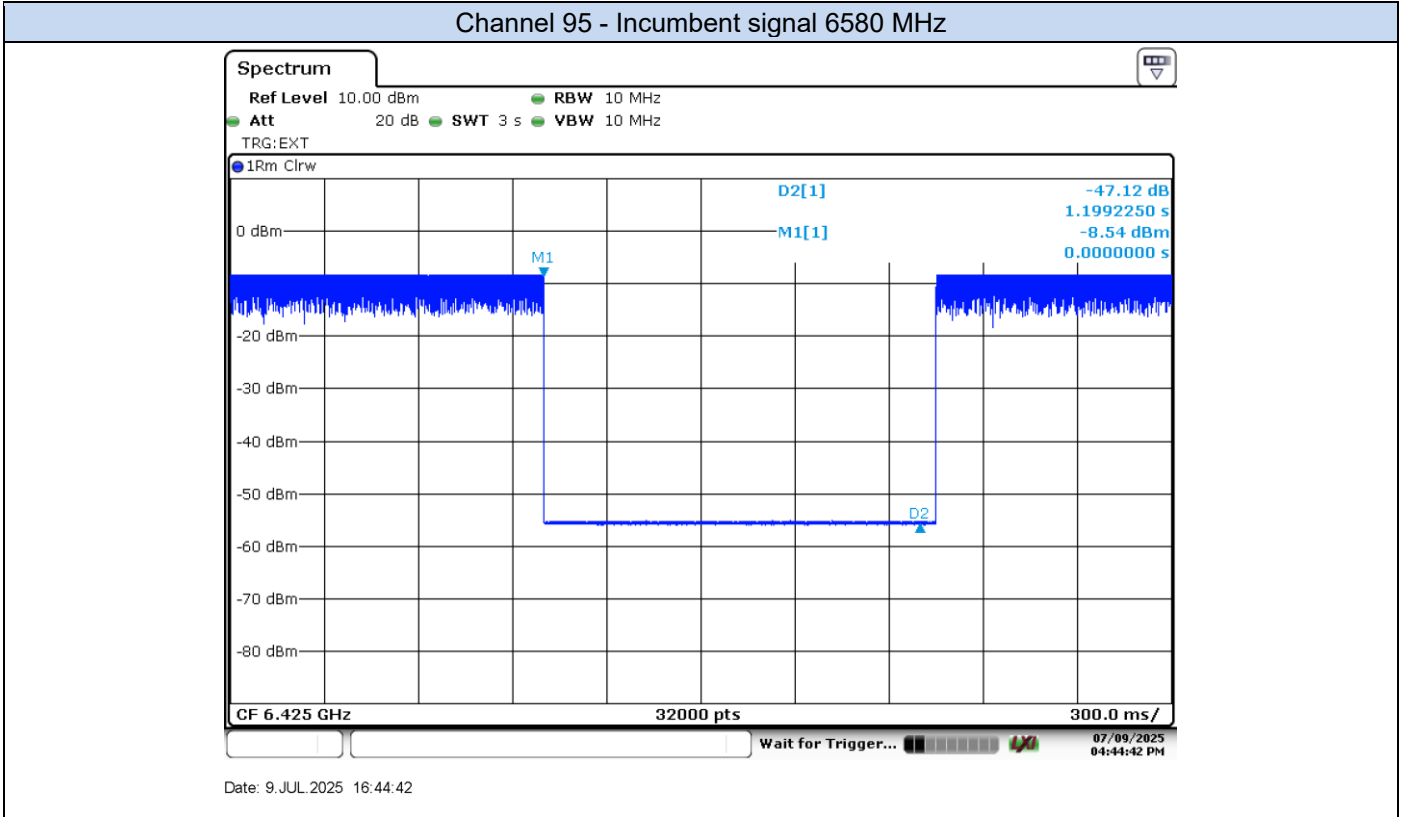


Note - M1: Injection of AWGN signal, D2: Removal of AWGN signal

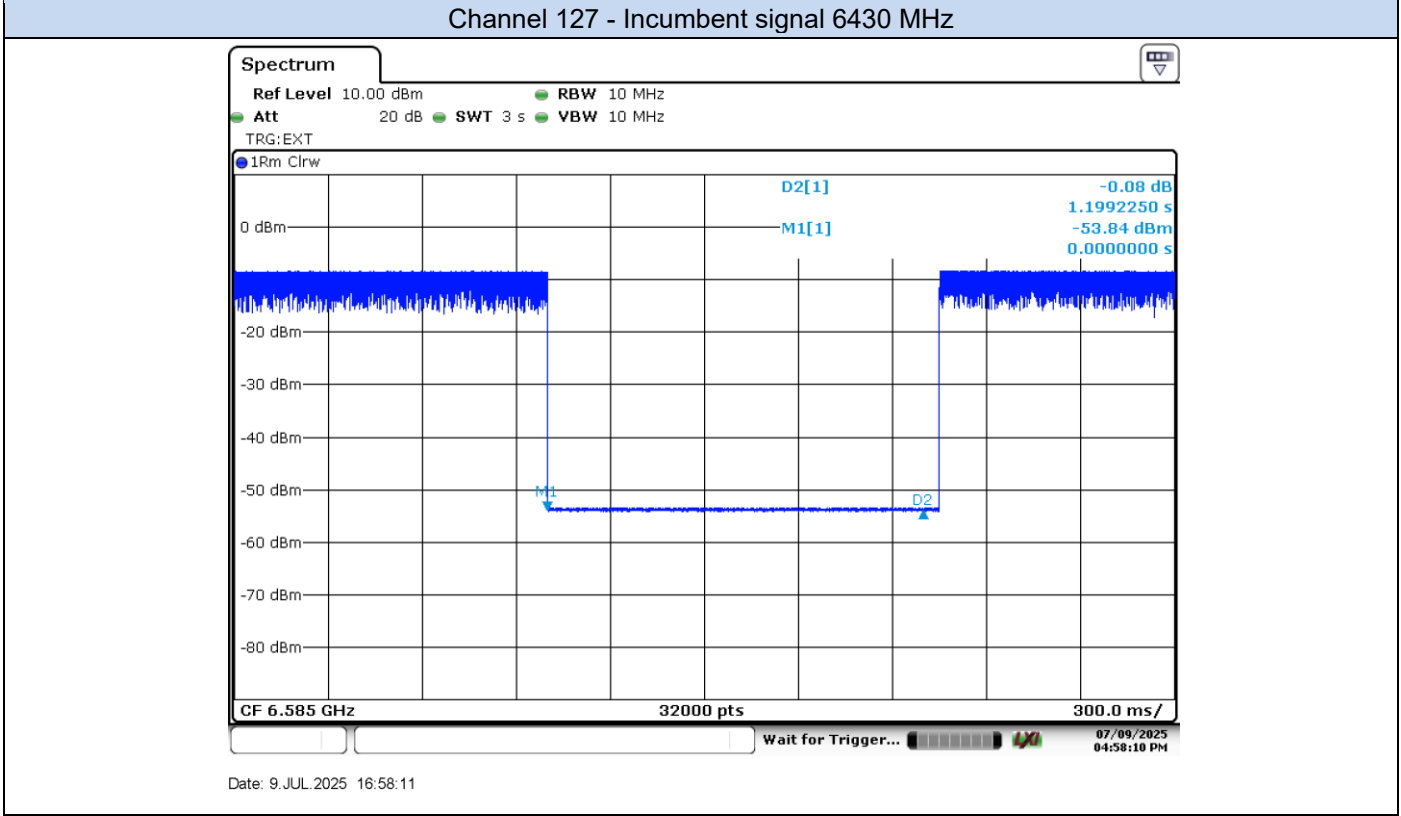

Note - M1: Injection of AWGN signal, D2: Removal of AWGN signal


Channel 127 - Incumbent signal 6585 MHz

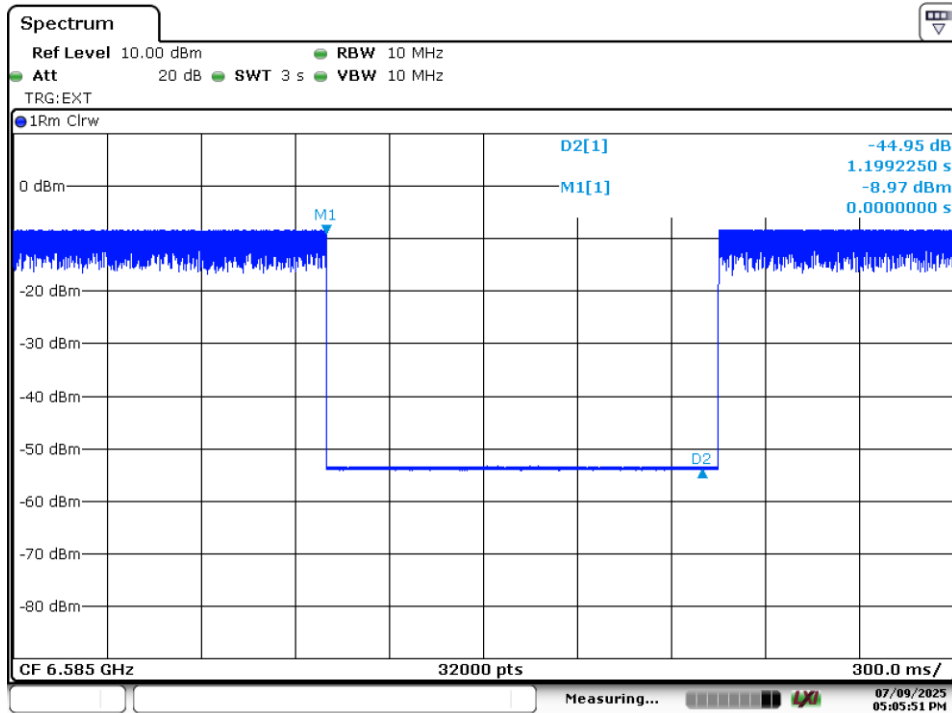

Date: 9 JUL 2025 17:05:51

Note - M1: Injection of AWGN signal, D2: Removal of AWGN signal


Channel 127 - Incumbent signal 6740 MHz

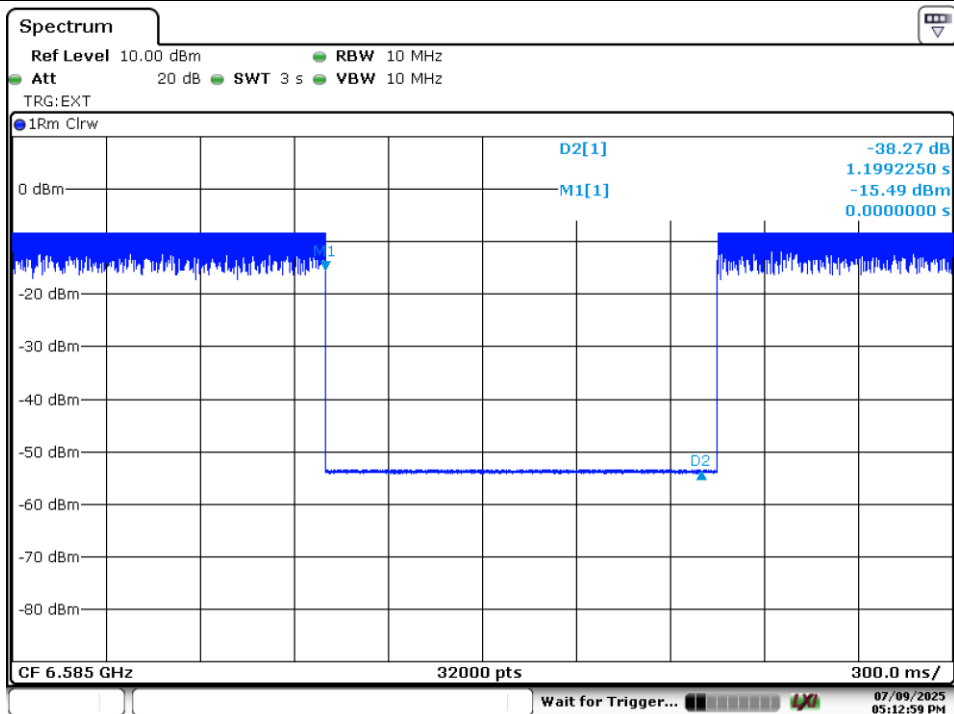

Date: 9 JUL 2025 17:13:00

Note - M1: Injection of AWGN signal, D2: Removal of AWGN signal


Channel 191 - Incumbent signal 6750 MHz

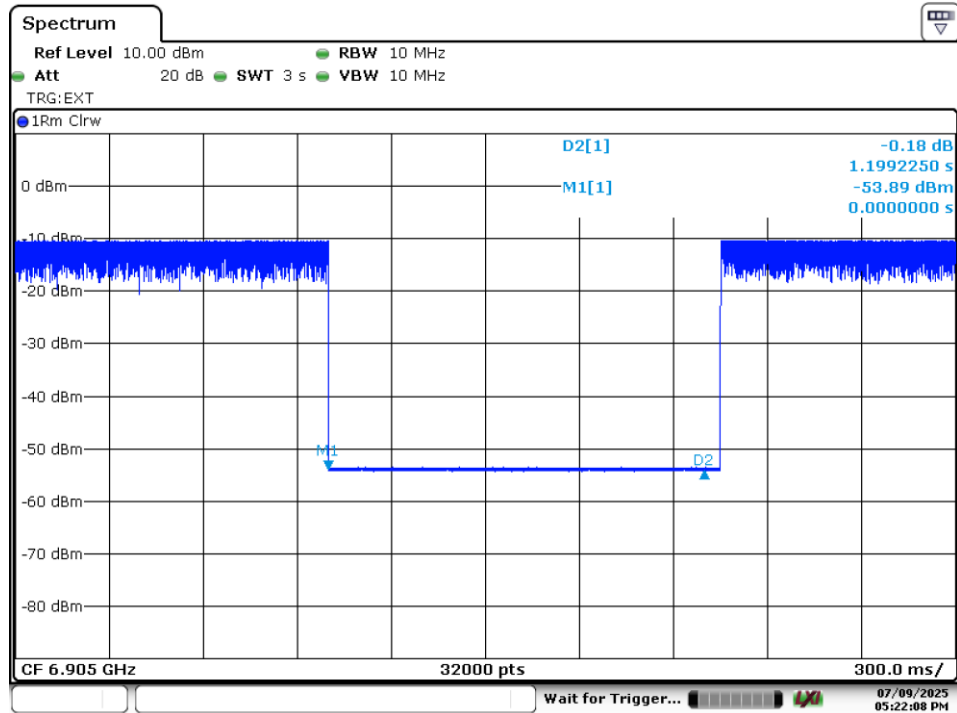

Date: 9 JUL 2025 17:22:08


Note - M1: Injection of AWGN signal, D2: Removal of AWGN signal

Channel 191 - Incumbent signal 6905 MHz

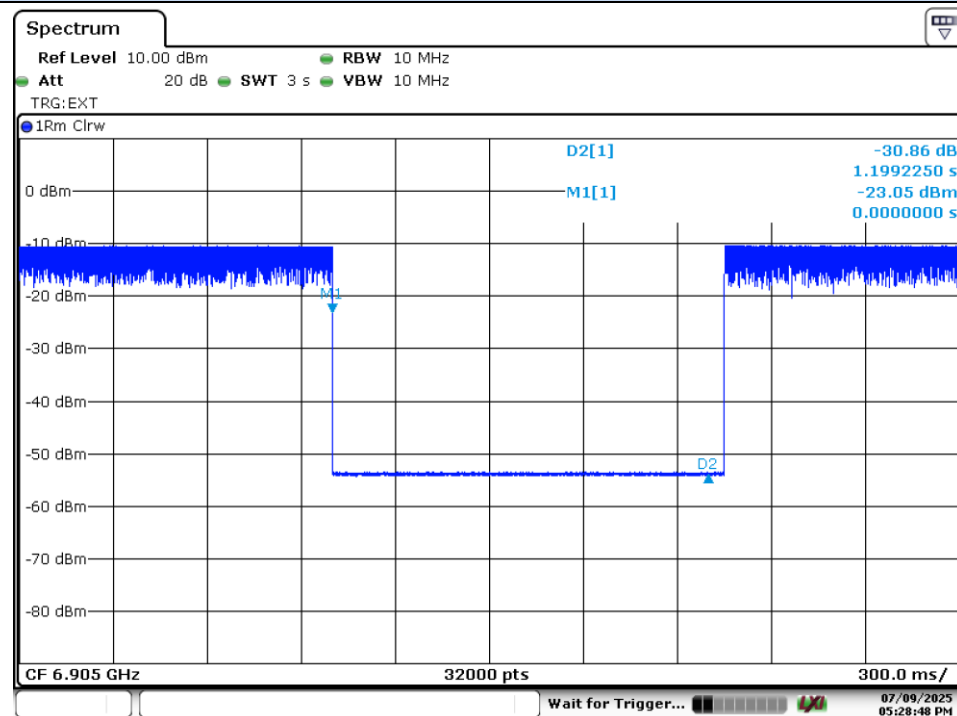


Date: 9 JUL 2025 17:28:48


Note - M1: Injection of AWGN signal, D2: Removal of AWGN signal

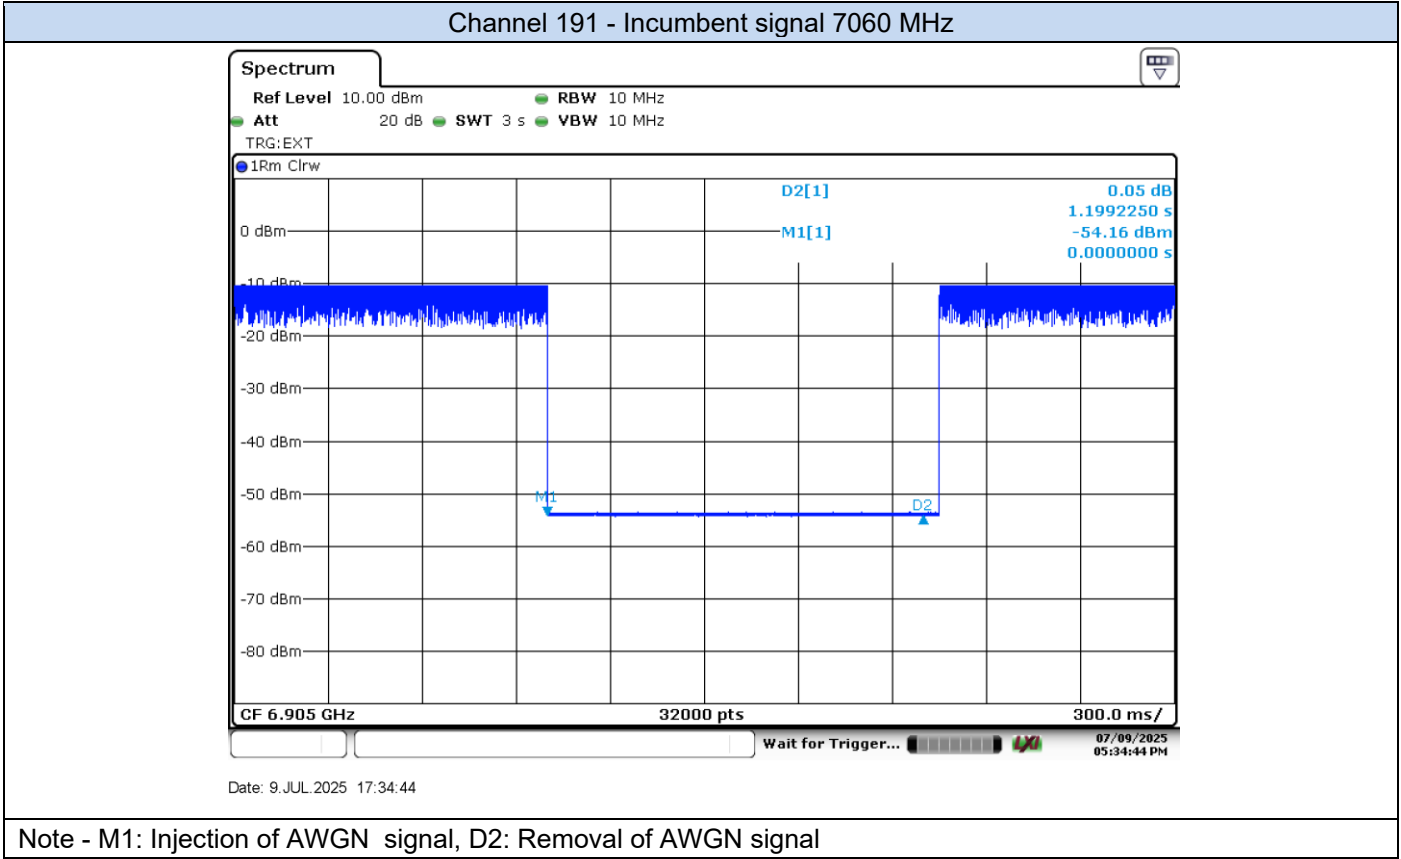


C.1.5 Undesirable emission limits : out of band (Conducted)

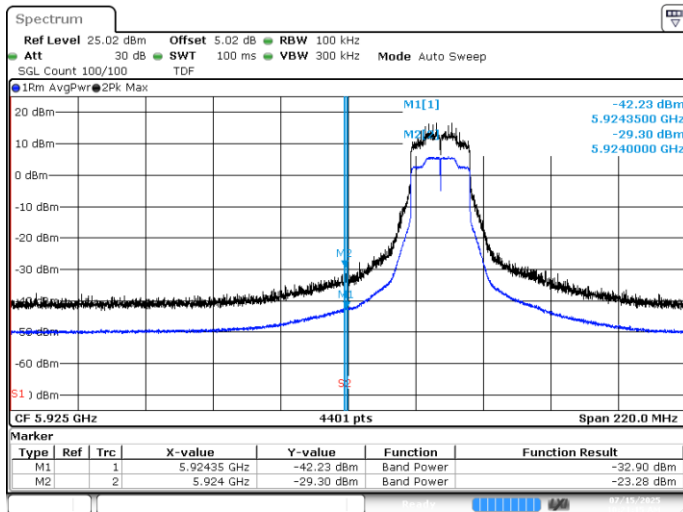


BE-NR-LOW, SISO-A, 802.11ax/be20-MCS0, Ch1

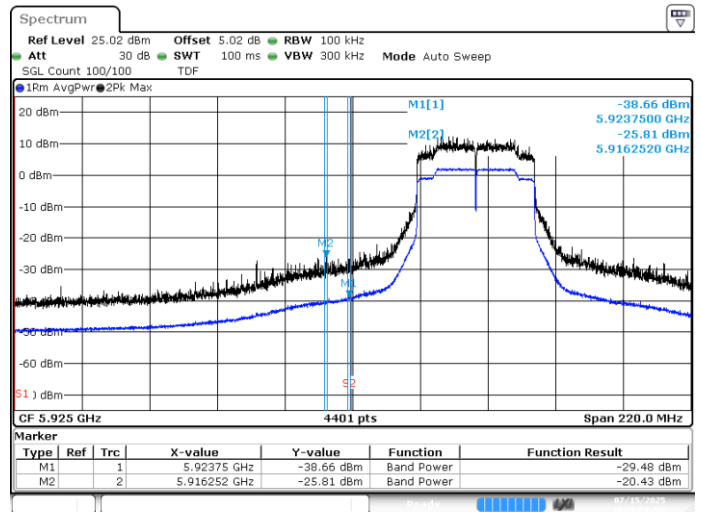


BE-NR-LOW, SISO-A, 802.11ax/be40-MCS0, Ch3

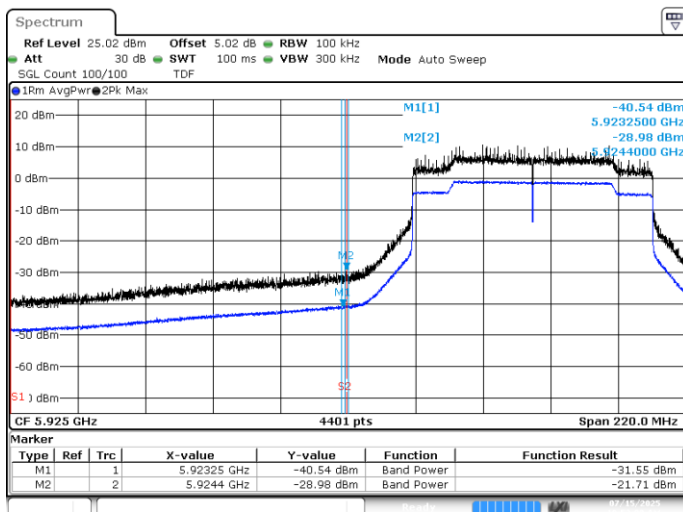


BE-NR-LOW, SISO-A, 802.11ax/be80-MCS0, Ch7

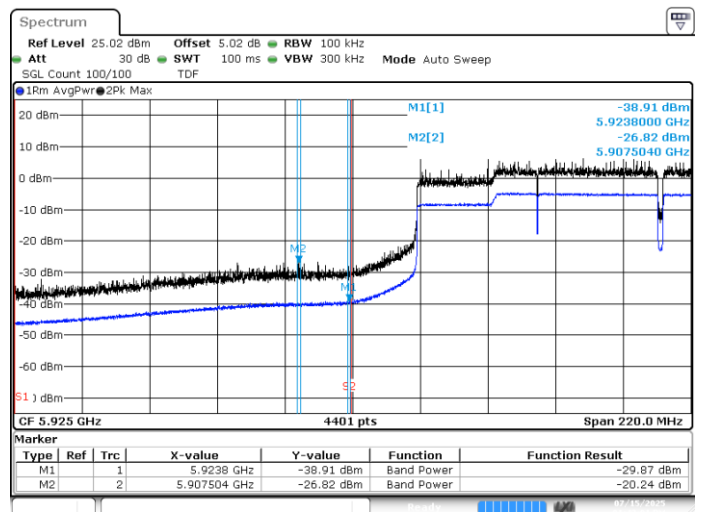

BE-NR-LOW, SISO-A, 802.11ax/be160-MCS0, Ch15

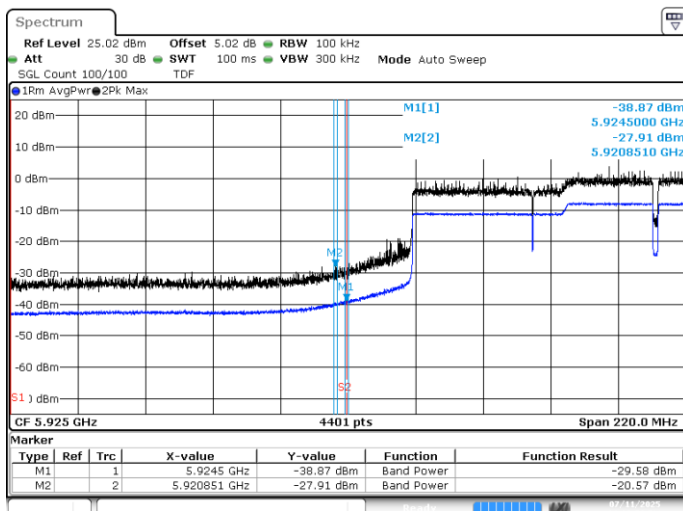

BE-NR-LOW, SISO-A, 802.11be320-MCS0, Ch31

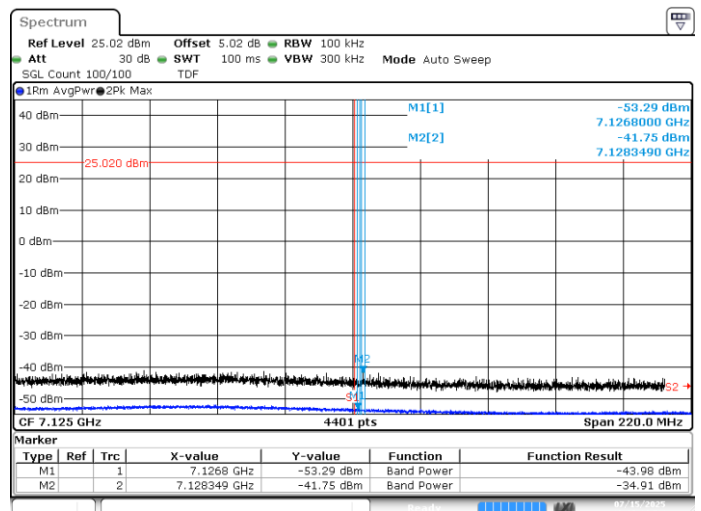

BE-NR-HIGH, SISO-A, 802.11ax/be20-MCS0, Ch181