

Mode: Mode 1/ IEEE 802.11ac VHT40

Temp. /Hum.:25℃/60%RH

Test Engineer: Chen Xiacong

Frequency :5795MHz

Power supply:AC120V/60Hz

Test Date: 2022-01-18

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1373.8000	67.05	43.43	-23.62	74.00	30.57	100	193	Horizontal
2	1757.2000	65.76	43.37	-22.39	68.30	24.93	200	353	Horizontal
3	2275.0000	65.71	45.42	-20.29	74.00	28.58	200	178	Horizontal
4	3192.4000	60.37	43.55	-16.82	68.30	24.75	200	123	Horizontal
5	4747.6000	52.07	43.30	-8.77	74.00	30.70	200	357	Horizontal
6	7184.8000	49.73	46.05	-3.68	68.30	22.25	200	277	Horizontal

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1368.4000	70.78	47.13	-23.65	74.00	26.87	100	8	Vertical
2	1700.8000	64.07	41.71	-22.36	74.00	32.29	100	342	Vertical
3	2285.8000	70.40	50.20	-20.20	74.00	23.80	200	337	Vertical
4	3192.4000	62.39	45.57	-16.82	68.30	22.73	200	41	Vertical
5	4111.6000	56.02	43.30	-12.72	74.00	30.70	200	165	Vertical
6	7152.9000	49.20	45.84	-3.36	68.30	22.46	200	31	Vertical

----- The following blanks -----

Mode: Mode 1/ IEEE 802.11ac VHT80

Temp. /Hum.:25℃/60%RH

Test Engineer: Chen Xiacong

Frequency :5210MHz

Power supply:AC120V/60Hz

Test Date: 2022-01-18

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1020.4	63.34	38.22	-25.12	74.00	35.78	200	214	Horizontal
2	1363	67.20	43.52	-23.68	74.00	30.48	200	228	Horizontal
3	1747.6	63.24	40.80	-22.44	68.30	27.50	200	344	Horizontal
4	2275	65.61	45.32	-20.29	74.00	28.68	200	173	Horizontal
5	3196	60.95	44.21	-16.74	68.30	24.09	200	166	Horizontal
6	7925.1	49.26	46.99	-2.27	68.30	21.31	100	243	Horizontal

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1368.4	70.06	46.41	-23.65	74.00	27.59	100	8	Vertical
2	1746.4	65.11	42.68	-22.43	68.30	25.62	100	171	Vertical
3	2275	70.12	49.83	-20.29	74.00	24.17	200	8	Vertical
4	3193.6	62.44	45.65	-16.79	68.30	22.65	200	321	Vertical
5	4101.4	56.04	43.36	-12.68	74.00	30.64	200	328	Vertical
6	7158.4	50.16	46.75	-3.41	68.30	21.55	100	146	Vertical

AV Final Data List

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2275.0148	-20.28	48.11	27.83	54.00	26.17	100	336	Vertical

Mode: Mode 1/ IEEE 802.11ac VHT80

Temp. /Hum.:25℃/60%RH

Test Engineer: Chen Xiacong

Frequency :5775MHz

Power supply:AC120V/60Hz

Test Date: 2022-01-18

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1020.4	62.28	37.16	-25.12	74.00	36.84	100	187	Horizontal
2	1363	67.35	43.67	-23.68	74.00	30.33	200	191	Horizontal
3	1754.8	68.51	46.11	-22.40	68.30	22.19	200	261	Horizontal
4	2275	65.72	45.43	-20.29	74.00	28.57	100	125	Horizontal
5	3192.4	59.58	42.76	-16.82	68.30	25.54	200	205	Horizontal
6	7720.5	48.57	46.24	-2.33	74.00	27.76	100	57	Horizontal

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1368.4	70.65	47.00	-23.65	74.00	27.00	100	14	Vertical
2	1754.8	67.80	45.40	-22.40	68.30	22.90	100	8	Vertical
3	2275	69.90	49.61	-20.29	74.00	24.39	200	343	Vertical
4	3192.4	63.35	46.53	-16.82	68.30	21.77	200	322	Vertical
5	7162.8	49.37	45.91	-3.46	68.30	22.39	200	16	Vertical
6	8920.6	48.71	48.38	-0.33	68.30	19.92	100	15	Vertical

AV Final Data List

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2274.9431	-20.29	48.52	28.23	54.00	25.77	186	15	Vertical

18GHz -40GHz

Pre-scan all modes and recorded the worst case (IEEE 802.11a) results in this report.

Mode: Mode 1/ IEEE 802.11 a

Temp. /Hum.:25°C/60%RH

Test Engineer: Lu Qiang

Frequency :5180MHz

Power supply:AC120V/60Hz

Test Date: 2022-01-19

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	19008.7000	58.54	47.45	-11.09	83.54	36.09	150	359	Horizontal
2	21293.4000	56.95	46.75	-10.20	83.54	36.79	150	284	Horizontal
3	23824.5000	56.42	47.98	-8.44	83.54	35.56	150	140	Horizontal
4	30195.7000	58.97	50.49	-8.48	77.84	27.35	150	98	Horizontal
5	34036.9000	61.32	52.27	-9.05	77.84	25.57	150	7	Horizontal
6	38956.1000	55.88	53.60	-2.28	77.84	24.24	150	212	Horizontal

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18972.4000	58.44	47.32	-11.12	83.54	36.22	150	345	Vertical
2	25056.5000	55.78	47.96	-7.82	77.84	29.88	150	14	Vertical
3	28914.2000	57.55	49.46	-8.09	77.84	28.38	150	1	Vertical
4	31171.4000	59.54	51.18	-8.36	77.84	26.66	150	170	Vertical
5	34172.2000	60.89	51.89	-9.00	77.84	25.95	150	304	Vertical
6	38124.5000	56.27	53.26	-3.01	77.84	24.58	150	252	Vertical

----- The following blanks -----

Mode: Mode 1/ IEEE 802.11 a

Temp. /Hum.:25℃/60%RH

Test Engineer: Lu Qiang

Frequency :5200MHz

Power supply:AC120V/60Hz

Test Date: 2022-01-19

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18898.7000	58.57	47.38	-11.19	83.54	36.16	150	335	Horizontal
2	21714.7000	56.98	47.05	-9.93	77.84	30.79	150	242	Horizontal
3	23847.6000	57.50	49.08	-8.42	83.54	34.46	150	273	Horizontal
4	28437.9000	57.13	49.09	-8.04	77.84	28.75	150	169	Horizontal
5	32482.6000	60.20	51.53	-8.67	77.84	26.31	150	138	Horizontal
6	39736.0000	54.67	53.44	-1.23	77.84	24.40	150	242	Horizontal

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18529.1000	58.49	47.04	-11.45	83.54	36.50	150	253	Vertical
2	21206.5000	57.05	46.78	-10.27	83.54	36.76	150	160	Vertical
3	24427.3000	55.97	47.82	-8.15	77.84	30.02	150	13	Vertical
4	27394.0000	56.94	48.89	-8.05	77.84	28.95	150	109	Vertical
5	31047.1000	60.16	51.76	-8.40	77.84	26.08	150	34	Vertical
6	38617.3000	56.44	53.99	-2.45	77.84	23.85	150	305	Vertical

----- The following blanks -----

Mode: Mode 1/ IEEE 802.11 a

Temp. /Hum.:25℃/60%RH

Test Engineer: Lu Qiang

Frequency :5240MHz

Power supply:AC120V/60Hz

Test Date: 2022-01-19

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18429.0000	58.60	47.09	-11.51	83.54	36.45	150	274	Horizontal
2	21089.9000	58.02	47.73	-10.29	83.54	35.81	150	140	Horizontal
3	23841.0000	55.52	47.10	-8.42	83.54	36.44	150	129	Horizontal
4	31198.9000	59.45	51.10	-8.35	77.84	26.74	150	207	Horizontal
5	34178.8000	61.81	52.82	-8.99	77.84	25.02	150	298	Horizontal
6	39994.5000	54.44	53.46	-0.98	77.84	24.38	150	129	Horizontal

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18886.6000	58.24	47.03	-11.21	83.54	36.51	150	263	Vertical
2	22786.1000	56.12	47.04	-9.08	83.54	36.50	150	14	Vertical
3	25623.0000	55.94	48.02	-7.92	77.84	29.82	150	87	Vertical
4	29107.8000	58.06	50.03	-8.03	77.84	27.81	150	200	Vertical
5	32491.4000	60.40	51.72	-8.68	77.84	26.12	150	45	Vertical
6	39530.3000	55.10	53.61	-1.49	77.84	24.23	150	107	Vertical

----- The following blanks -----

Mode: Mode 1/ IEEE 802.11 a

Temp. /Hum.:25℃/60%RH

Test Engineer: Lu Qiang

Frequency :5745MHz

Power supply:AC120V/60Hz

Test Date: 2022-01-19

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18423.5000	58.82	47.30	-11.52	83.54	36.24	150	327	Horizontal
2	19428.9000	57.93	46.97	-10.96	83.54	36.57	150	223	Horizontal
3	24991.6000	56.07	48.17	-7.90	77.84	29.67	150	36	Horizontal
4	29877.8000	58.44	50.37	-8.07	77.84	27.47	150	140	Horizontal
5	34156.8000	60.47	51.47	-9.00	77.84	26.37	150	355	Horizontal
6	39992.3000	54.47	53.49	-0.98	77.84	24.35	150	317	Horizontal

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18458.7000	59.20	47.71	-11.49	83.54	35.83	150	263	Vertical
2	20521.2000	57.52	47.04	-10.48	83.54	36.50	150	54	Vertical
3	22829.0000	56.27	47.22	-9.05	83.54	36.32	150	23	Vertical
4	26784.6000	55.93	48.24	-7.69	77.84	29.60	150	5	Vertical
5	31786.3000	61.16	51.89	-9.27	83.54	31.65	150	211	Vertical
6	39622.7000	55.91	54.56	-1.35	77.84	23.28	150	222	Vertical

----- The following blanks -----

Mode: Mode 1/ IEEE 802.11 a

Temp. /Hum.:25℃/60%RH

Test Engineer: Lu Qiang

Frequency :5785MHz

Power supply:AC120V/60Hz

Test Date: 2022-01-19

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18435.6000	58.55	47.04	-11.51	83.54	36.50	150	170	Horizontal
2	22397.8000	56.34	46.86	-9.48	83.54	36.68	150	305	Horizontal
3	26723.0000	55.72	48.06	-7.66	77.84	29.78	150	305	Horizontal
4	30911.8000	60.28	51.85	-8.43	77.84	25.99	150	284	Horizontal
5	37413.9000	57.27	51.93	-5.34	77.84	25.91	150	109	Horizontal
6	39695.3000	55.21	53.94	-1.27	77.84	23.90	150	315	Horizontal

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18320.1000	59.08	47.52	-11.56	83.54	36.02	150	138	Vertical
2	20147.2000	57.28	46.53	-10.75	83.54	37.01	150	149	Vertical
3	24406.4000	55.49	47.33	-8.16	77.84	30.51	150	354	Vertical
4	25662.6000	55.90	47.93	-7.97	77.84	29.91	150	335	Vertical
5	31060.3000	59.71	51.31	-8.40	77.84	26.53	150	55	Vertical
6	38056.3000	56.10	53.00	-3.10	77.84	24.84	150	190	Vertical

----- The following blanks -----

Mode: Mode 1/ IEEE 802.11 a

Temp. /Hum.:25℃/60%RH

Test Engineer: Lu Qiang

Frequency :5825MHz

Power supply:AC120V/60Hz

Test Date: 2022-01-19

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18499.4000	58.75	47.28	-11.47	83.54	36.26	150	220	Horizontal
2	21122.9000	57.00	46.71	-10.29	83.54	36.83	150	282	Horizontal
3	23193.1000	55.64	46.80	-8.84	77.84	31.04	150	159	Horizontal
4	26617.4000	56.42	48.82	-7.60	77.84	29.02	150	117	Horizontal
5	32274.7000	60.73	52.02	-8.71	77.84	25.82	150	251	Horizontal
6	39725.0000	55.33	54.08	-1.25	77.84	23.76	150	138	Horizontal

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18330.0000	58.88	47.33	-11.55	83.54	36.21	150	36	Vertical
2	20699.4000	56.84	46.47	-10.37	83.54	37.07	150	284	Vertical
3	24422.9000	55.58	47.42	-8.16	77.84	30.42	150	0	Vertical
4	31251.7000	59.54	51.05	-8.49	83.54	32.49	150	315	Vertical
5	34179.9000	60.54	51.55	-8.99	77.84	26.29	150	15	Vertical
6	38339.0000	56.05	53.31	-2.74	77.84	24.53	150	211	Vertical

----- The following blanks -----

7. RESTRICTED BANDS OF OPERATION

7.1. LIMITS


Section 15.407(b)(10) The provisions of §15.205 apply to intentional radiators operating under this section. 15.205(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

7.2. TEST PROCEDURES

- 1) The EUT is placed on a turntable, which is 1.5m above the ground plane.
- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4) Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - a) The frequency above 1GHz, for Peak detector: Set RBW=1MHz, RBW=3MHz.
 - b) The frequency above 1GHz, for Avg detector: Set RBW=1MHz, if the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10Hz) but not less than 10 Hz, Where duty cycle is defined in section 2.8. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$, Where T is defined in section 2.8.
- 5) Repeat the procedures until all the PEAK and AVERAGE versus polarization are measured.

7.3. TEST SETUP

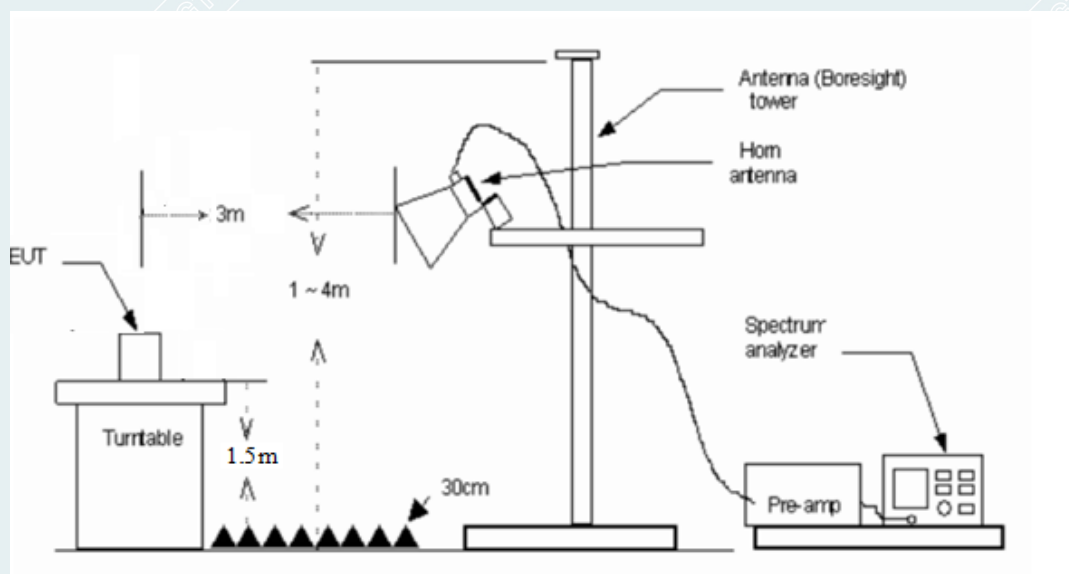

----- The following blanks -----


7.4. TEST RESULTS

Temp: 25°C; Humi:60%RH	Power supply: AC120V/60Hz
Test Engineer: Lu Qiang	Test Date: 2021-12-31 to 2022-04-21

IEEE 802.11a mode/5180MHz


Detector mode: Peak

Polarity: Horizontal

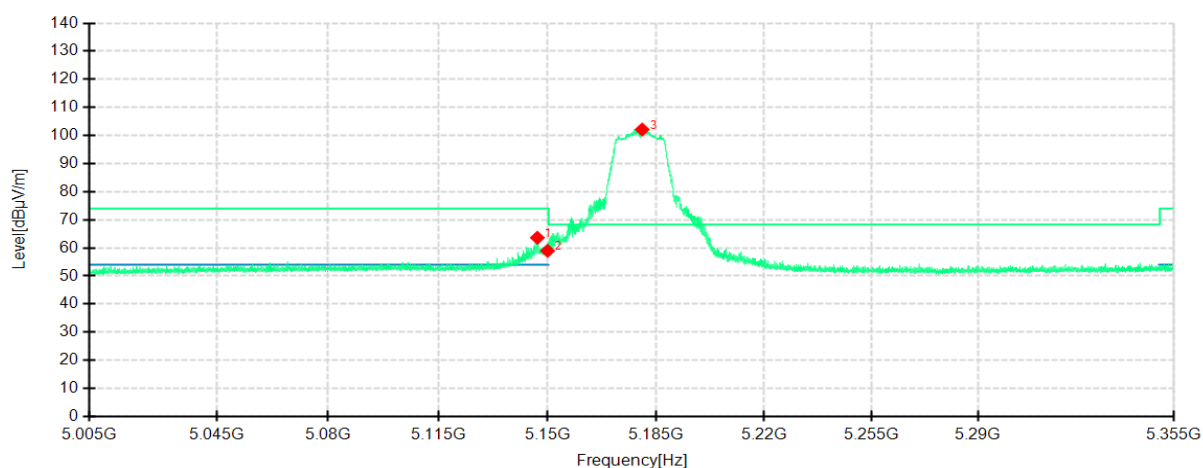

Detector mode: Peak

Polarity: Vertical

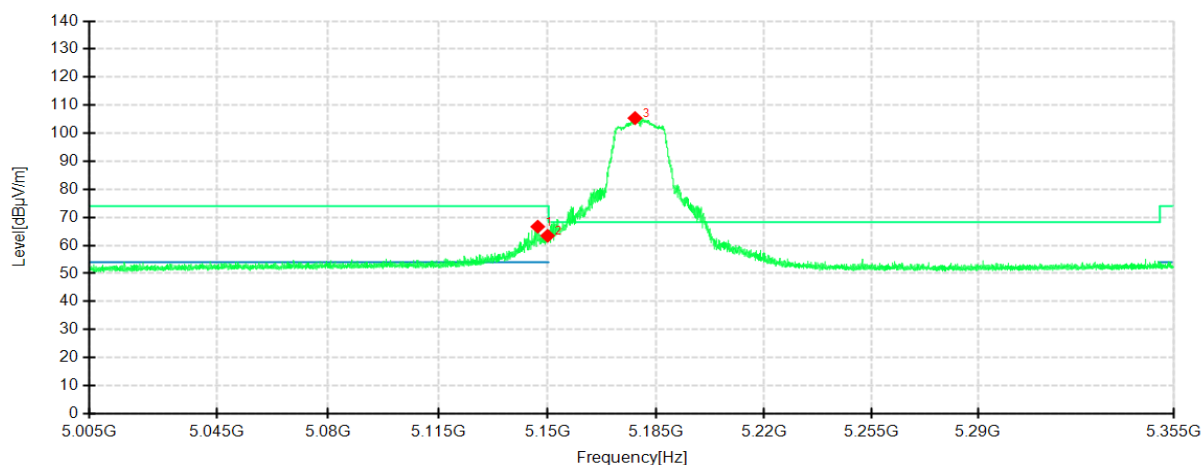


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5146.7150	49.78	63.62	13.84	74.00	10.38	200	142	Horizontal	/
2	5150.0000	45.18	58.95	13.77	74.00	15.05	200	142	Horizontal	/
3	5180.4550	87.62	102.13	14.51	68.30	-33.83	200	353	Horizontal	No limit
1	5146.8550	52.83	66.67	13.84	74.00	7.33	100	142	Vertical	/
2	5150.0000	49.66	63.43	13.77	74.00	10.57	200	218	Vertical	/
3	5178.1450	90.92	105.38	14.46	68.30	-37.08	200	1	Vertical	No limit

IEEE 802.11a mode/5180MHz


Detector mode: Average

Polarity: Horizontal

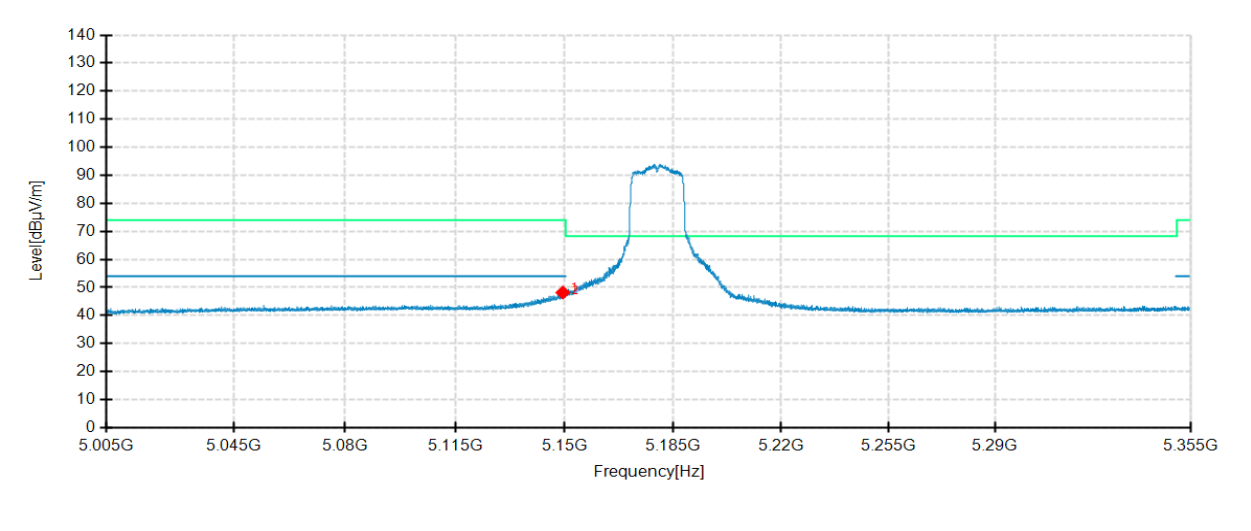

Detector mode: Average

Polarity: Vertical

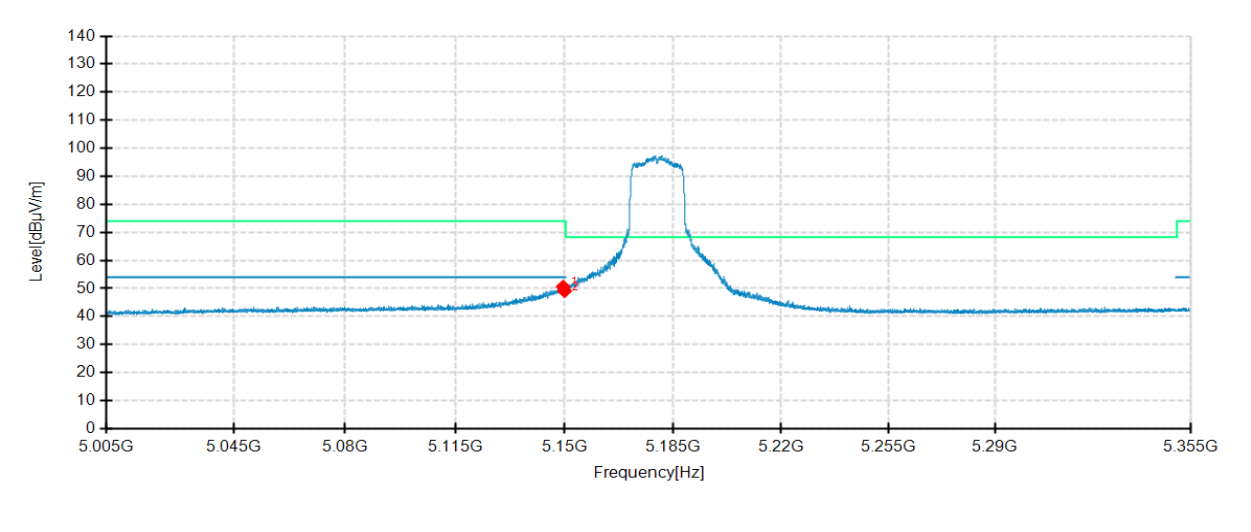


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5149.4450	34.41	48.19	13.78	54.00	5.81	200	353	Horizontal	/
2	5150.0000	33.63	47.40	13.77	54.00	6.60	200	142	Horizontal	/
1	5149.5150	36.86	50.64	13.78	54.00	3.36	200	3	Vertical	/
2	5150.0000	35.28	49.05	13.77	54.00	4.95	200	0	Vertical	/

IEEE 802.11a mode/5200MHz


Detector mode: Peak

Polarity: Horizontal

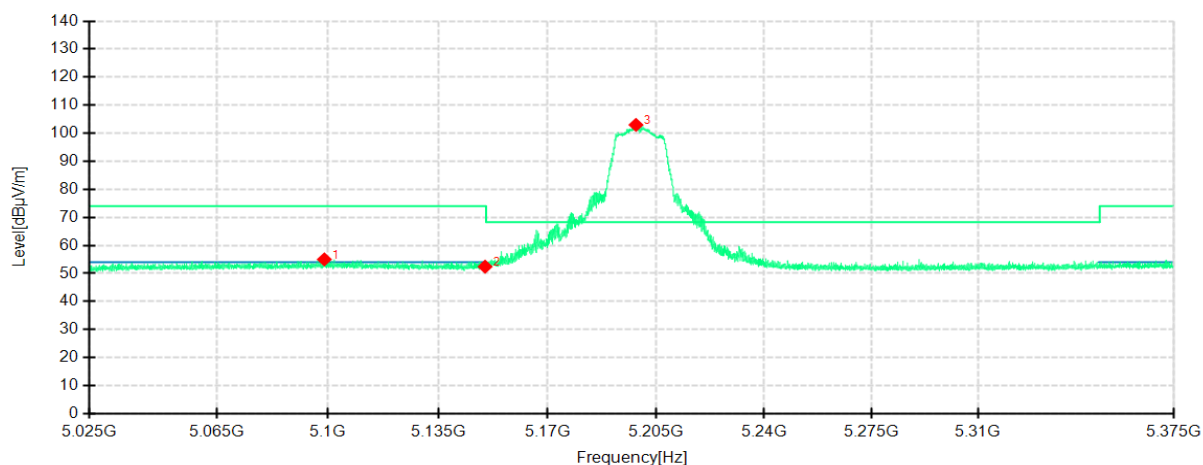

Detector mode: Peak

Polarity: Vertical

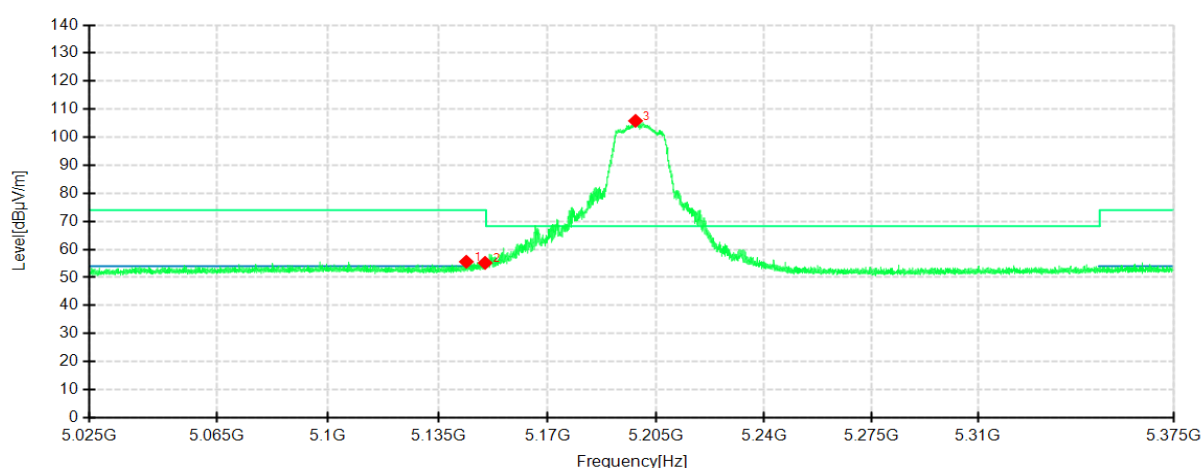


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5098.8500	40.17	55.01	14.84	74.00	18.99	200	327	Horizontal	/
2	5150.0000	38.65	52.42	13.77	74.00	21.58	100	26	Horizontal	/
3	5198.4600	88.03	102.98	14.95	68.30	-34.68	200	142	Horizontal	No limit
1	5144.0000	41.70	55.60	13.90	74.00	18.40	100	142	Vertical	/
2	5150.0000	41.42	55.19	13.77	74.00	18.81	100	142	Vertical	/
3	5198.3200	90.89	105.84	14.95	68.30	-37.54	200	3	Vertical	No limit

IEEE 802.11a mode/5200MHz


Detector mode: Average

Polarity: Horizontal

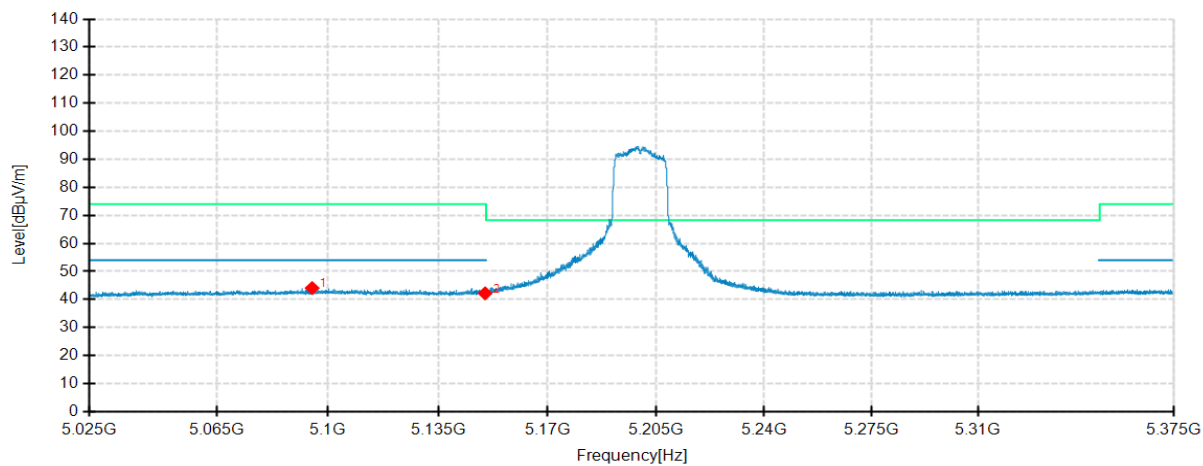

Detector mode: Average

Polarity: Vertical

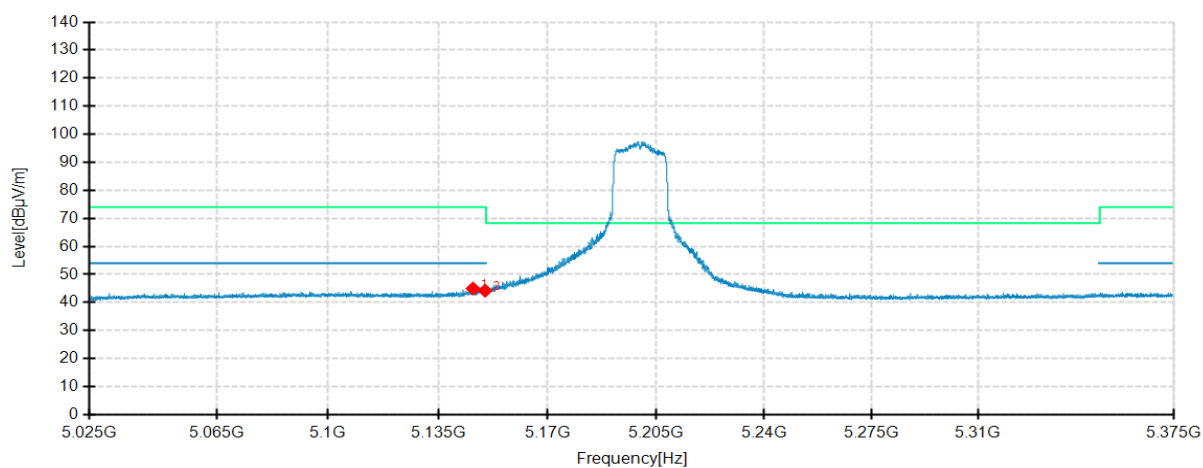


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5095.0000	29.27	44.07	14.80	54.00	9.93	200	142	Horizontal	/
2	5150.0000	28.42	42.19	13.77	54.00	11.81	100	218	Horizontal	/
1	5146.1350	31.11	44.96	13.85	54.00	9.04	100	360	Vertical	/
2	5150.0000	30.44	44.21	13.77	54.00	9.79	100	142	Vertical	/

IEEE 802.11a mode/5240MHz


Detector mode: Peak

Polarity: Horizontal

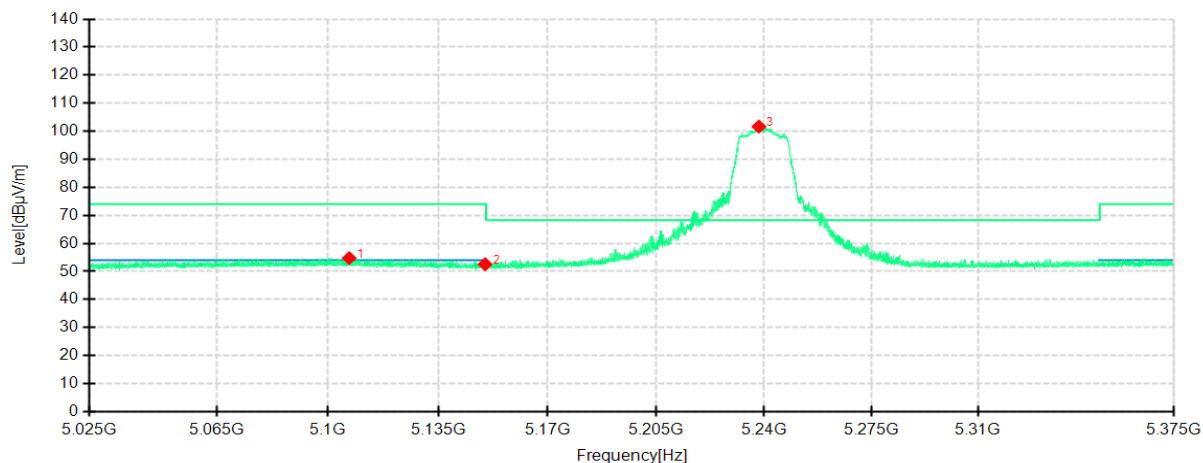

Detector mode: Peak

Polarity: Vertical

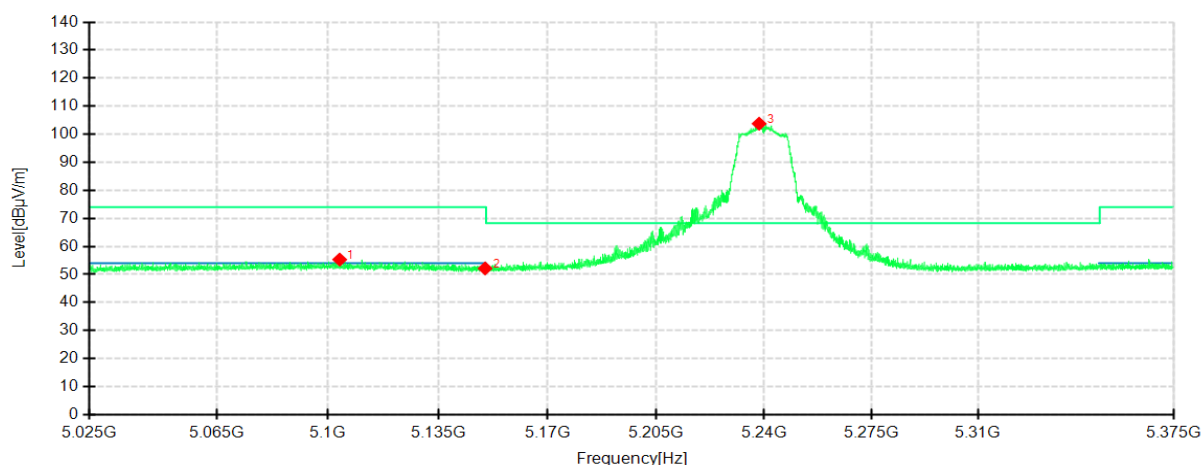


No.	Frequency MHz	Reading dB μ V/m	Level dB μ V/m	Factor dB	Limit dB μ V/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5106.7250	40.06	54.76	14.70	74.00	19.24	200	300	Horizontal	/
2	5150.0000	38.80	52.57	13.77	74.00	21.43	200	279	Horizontal	/
3	5238.2900	87.28	101.65	14.37	68.30	-33.35	200	360	Horizontal	No limit
1	5103.7150	40.53	55.30	14.77	74.00	18.70	200	218	Vertical	/
2	5150.0000	38.38	52.15	13.77	74.00	21.85	100	326	Vertical	/
3	5238.3600	89.39	103.76	14.37	68.30	-35.46	200	2	Vertical	No limit

IEEE 802.11a mode/5240MHz


Detector mode: Average

Polarity: Horizontal

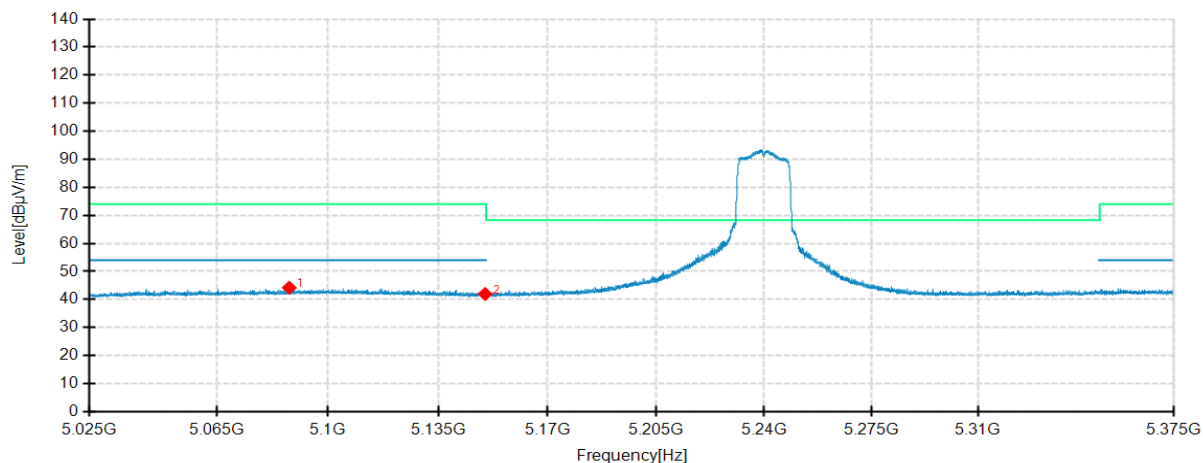

Detector mode: Average

Polarity: Vertical

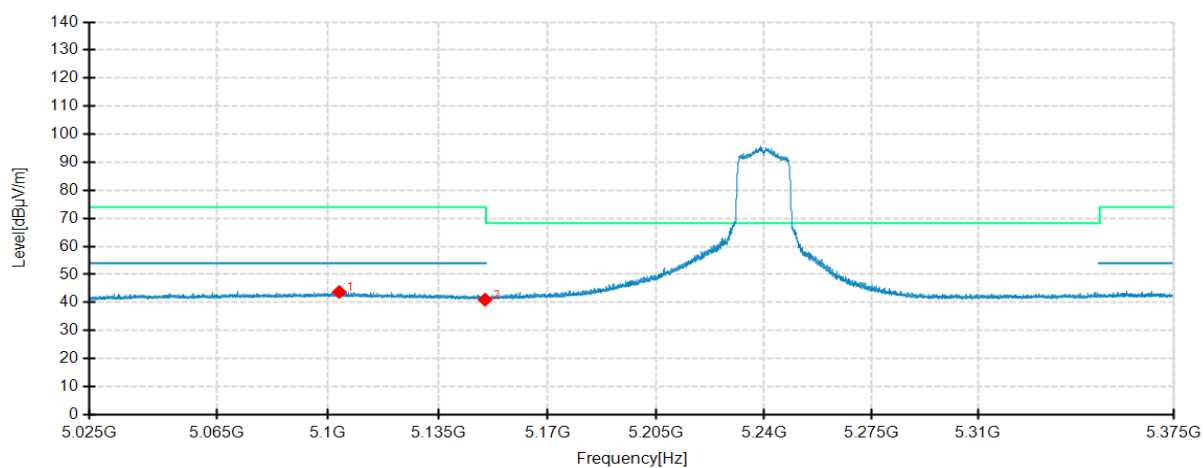


No.	Frequency MHz	Reading dB μ V/m	Level dB μ V/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5087.7550	29.45	44.18	14.73	54.00	9.82	200	258	Horizontal	/
2	5150.0000	28.18	41.95	13.77	54.00	12.05	200	245	Horizontal	/
1	5103.5750	28.97	43.74	14.77	54.00	10.26	200	197	Vertical	/
2	5150.0000	27.22	40.99	13.77	54.00	13.01	100	142	Vertical	/

IEEE 802.11a mode/5745MHz


Detector mode: Peak

Polarity: Horizontal

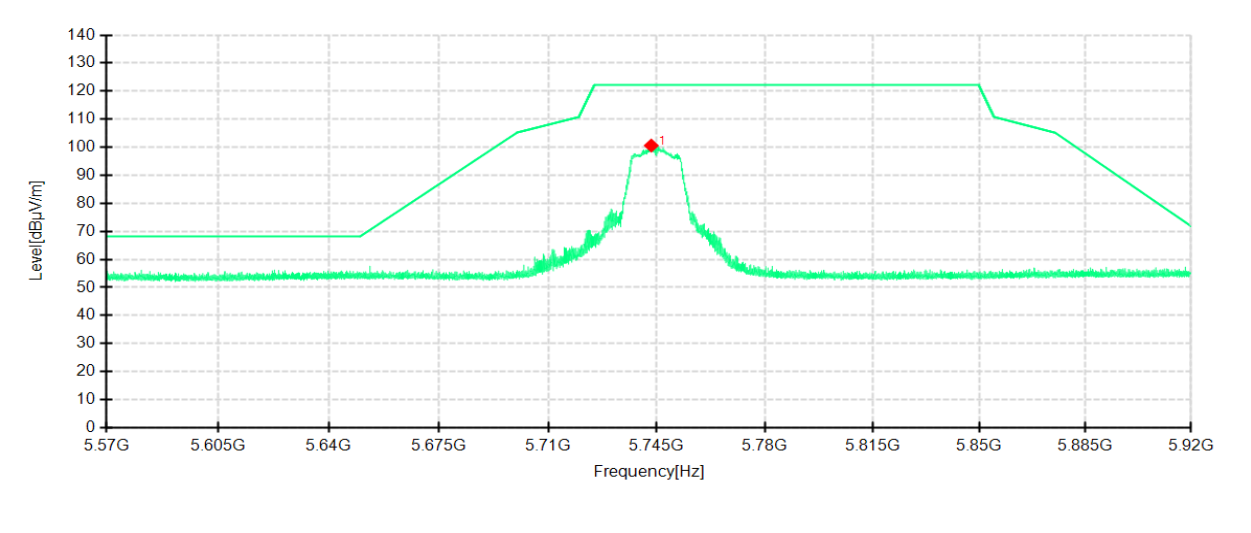

Detector mode: Peak

Polarity: Vertical

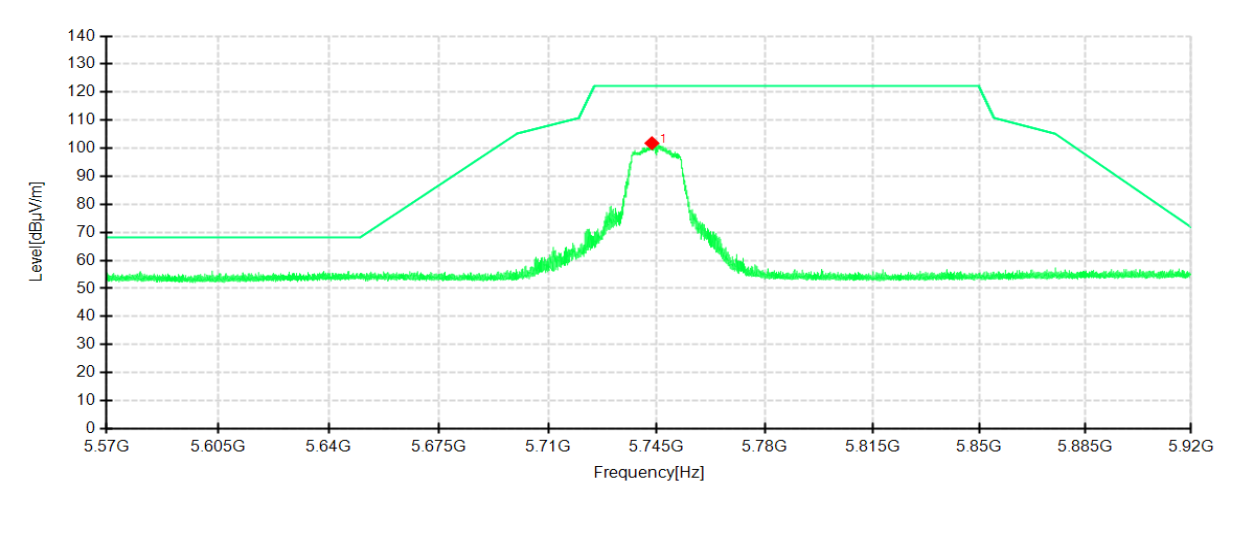


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5743.1975	83.47	100.59	17.12	122.20	21.61	200	359	Horizontal	/
1	5743.4075	84.67	101.80	17.13	122.20	20.40	200	9	Vertical	/

IEEE 802.11a mode/5785MHz


Detector mode: Peak

Polarity: Horizontal

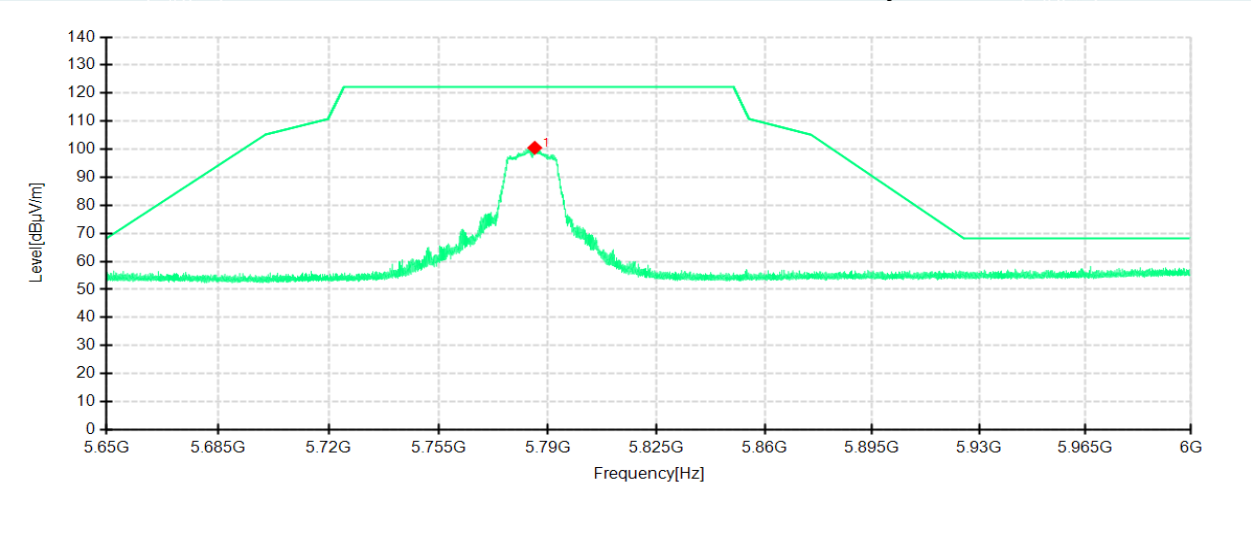

Detector mode: Peak

Polarity: Vertical

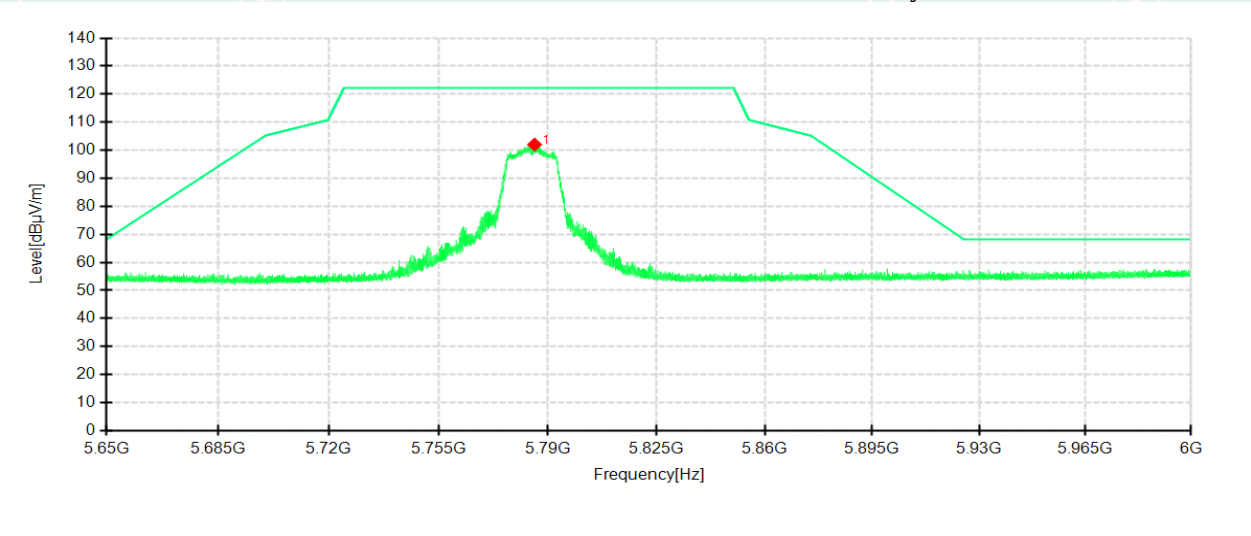


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5785.7475	83.39	100.50	17.11	122.20	21.70	200	356	Horizontal	/
1	5785.6775	84.89	102.00	17.11	122.20	20.20	200	10	Vertical	/

IEEE 802.11a mode/5825MHz


Detector mode: Peak

Polarity: Horizontal

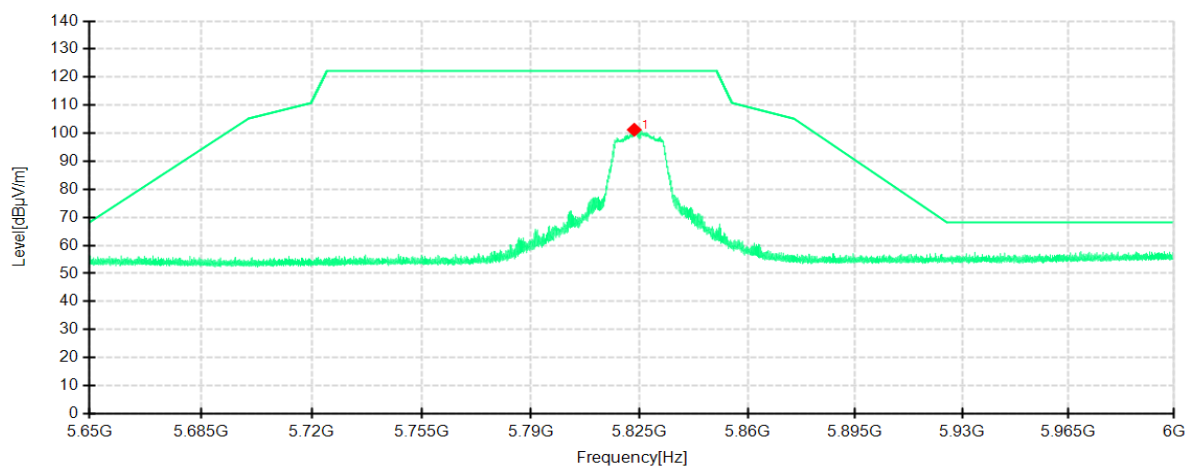

Detector mode: Peak

Polarity: Vertical

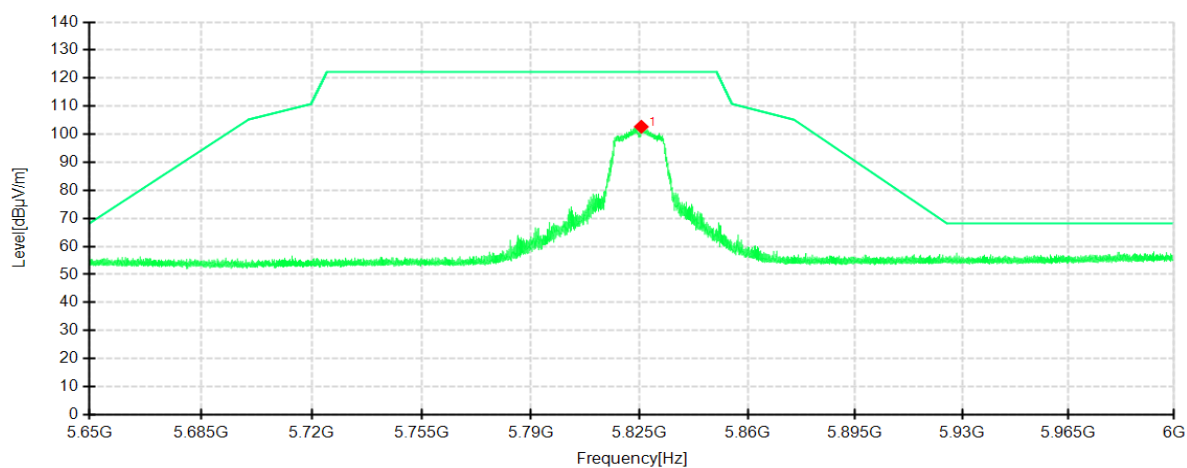


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5823.2150	84.16	101.23	17.07	122.20	20.97	200	358	Horizontal	/
1	5825.5075	85.59	102.67	17.08	122.20	19.53	200	9	Vertical	/

IEEE 802.11n HT20 mode/5180MHz


Detector mode: Peak

Polarity: Horizontal

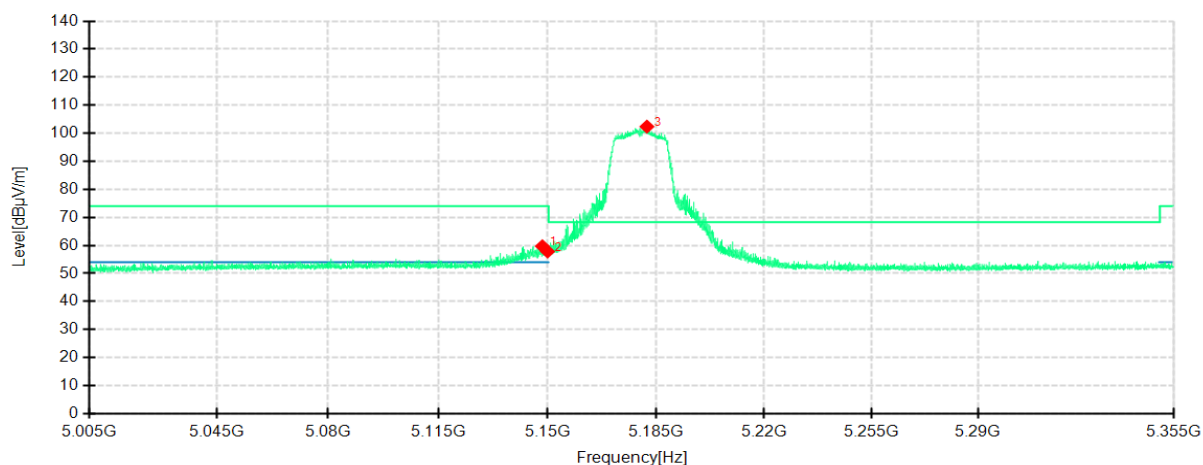

Detector mode: Peak

Polarity: Vertical

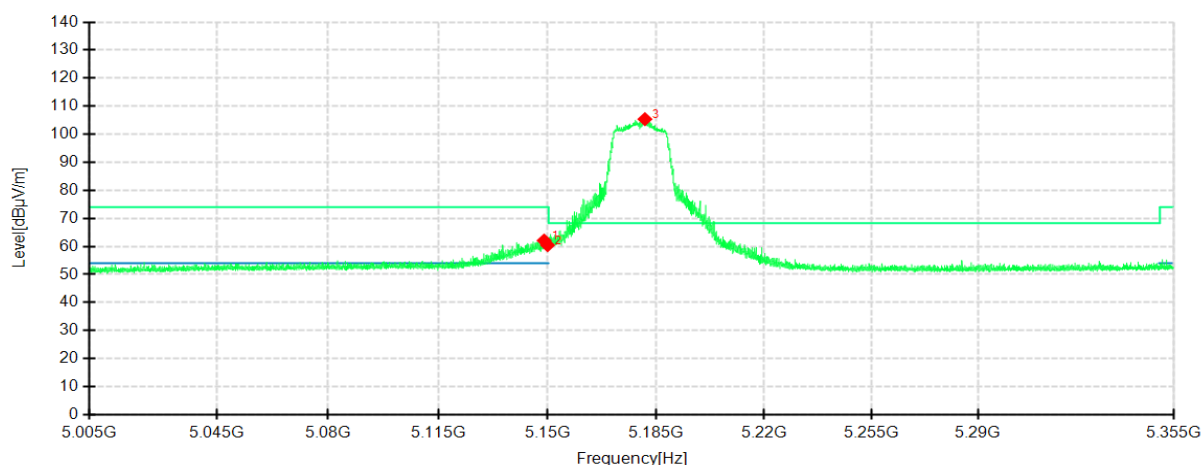


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5148.3250	45.89	59.70	13.81	74.00	14.30	200	142	Horizontal	/
2	5150.0000	44.05	57.82	13.77	74.00	16.18	200	142	Horizontal	/
3	5181.9950	87.81	102.36	14.55	68.30	-34.06	200	142	Horizontal	No limit
1	5148.8850	48.31	62.10	13.79	74.00	11.90	200	1	Vertical	/
2	5150.0000	46.66	60.43	13.77	74.00	13.57	200	0	Vertical	/
3	5181.3300	90.83	105.36	14.53	68.30	-37.06	200	0	Vertical	No limit

IEEE 802.11n HT20 mode/5180MHz


Detector mode: Average

Polarity: Horizontal

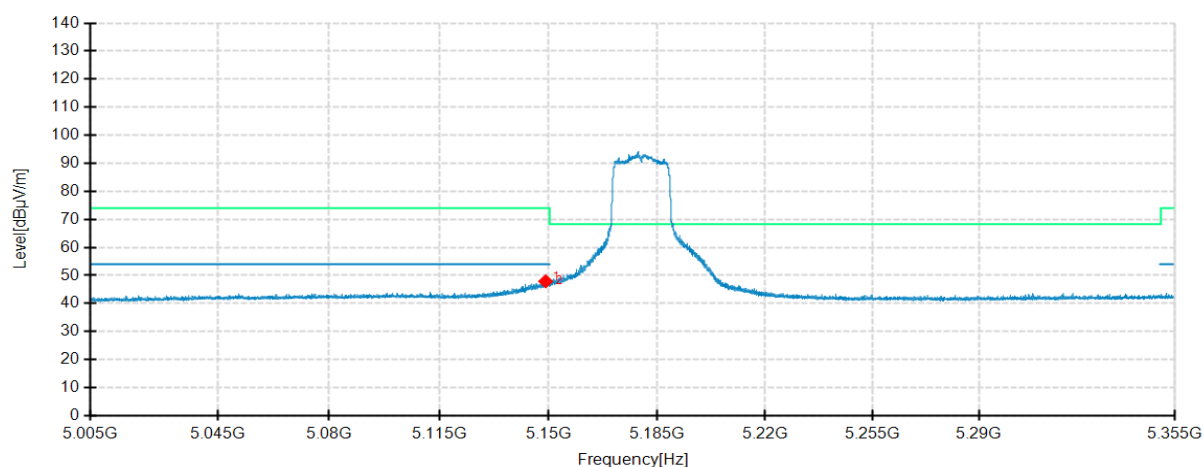

Detector mode: Average

Polarity: Vertical

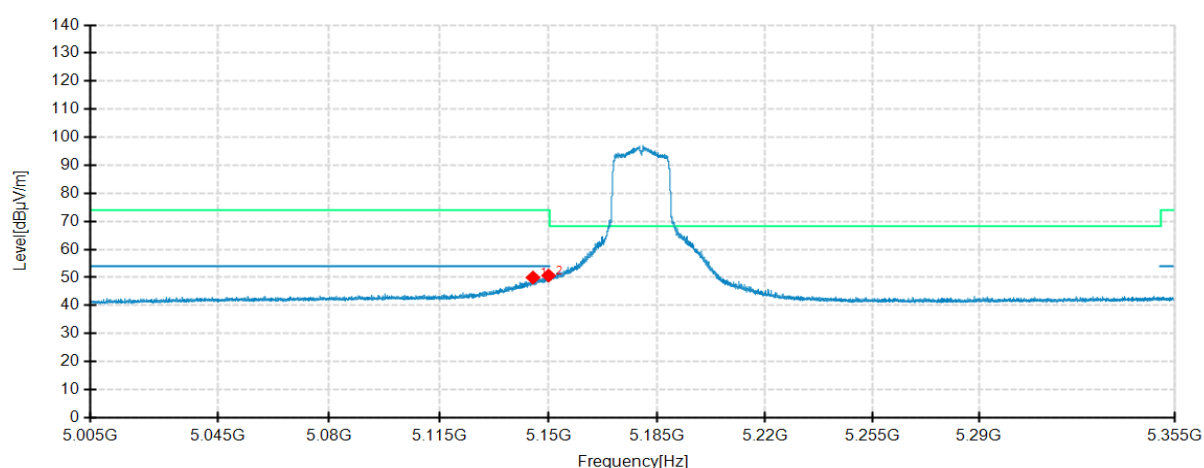


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5149.0600	34.10	47.89	13.79	54.00	6.11	200	353	Horizontal	/
2	5150.0000	32.84	46.61	13.77	54.00	7.39	200	142	Horizontal	/
1	5145.0000	36.09	49.97	13.88	54.00	4.03	200	3	Vertical	/
2	5150.0000	36.90	50.67	13.77	54.00	3.33	200	218	Vertical	/

IEEE 802.11n HT20 mode/5200MHz


Detector mode: Peak

Polarity: Horizontal

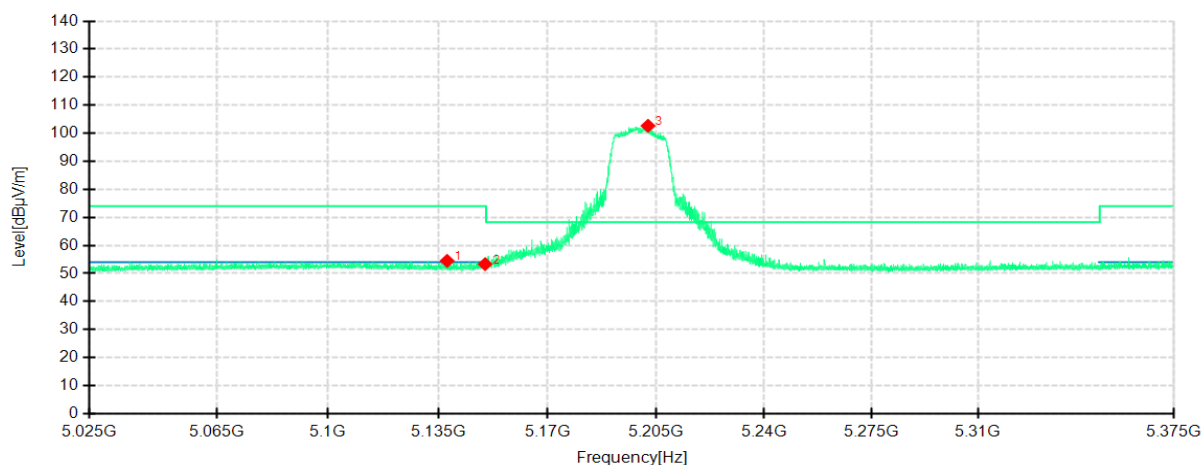

Detector mode: Peak

Polarity: Vertical

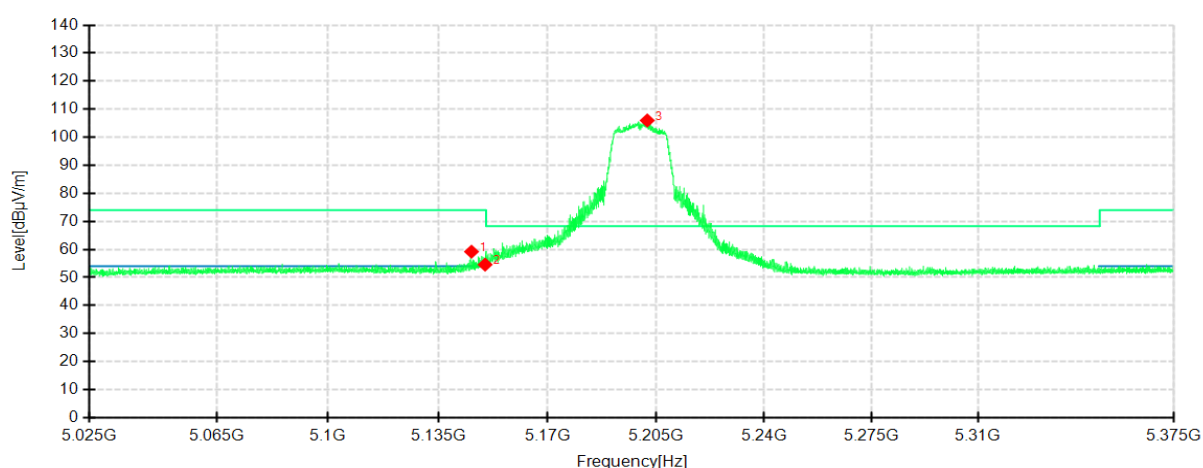


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5137.8750	40.46	54.49	14.03	74.00	19.51	200	61	Horizontal	/
2	5150.0000	39.55	53.32	13.77	74.00	20.68	200	218	Horizontal	/
3	5202.3450	87.69	102.64	14.95	68.30	-34.34	200	0	Horizontal	No limit
1	5145.6450	45.33	59.19	13.86	74.00	14.81	200	354	Vertical	/
2	5150.0000	40.80	54.57	13.77	74.00	19.43	200	142	Vertical	/
3	5202.1000	91.02	105.98	14.96	68.30	-37.68	100	3	Vertical	No limit

IEEE 802.11n HT20 mode/5200MHz


Detector mode: Average

Polarity: Horizontal

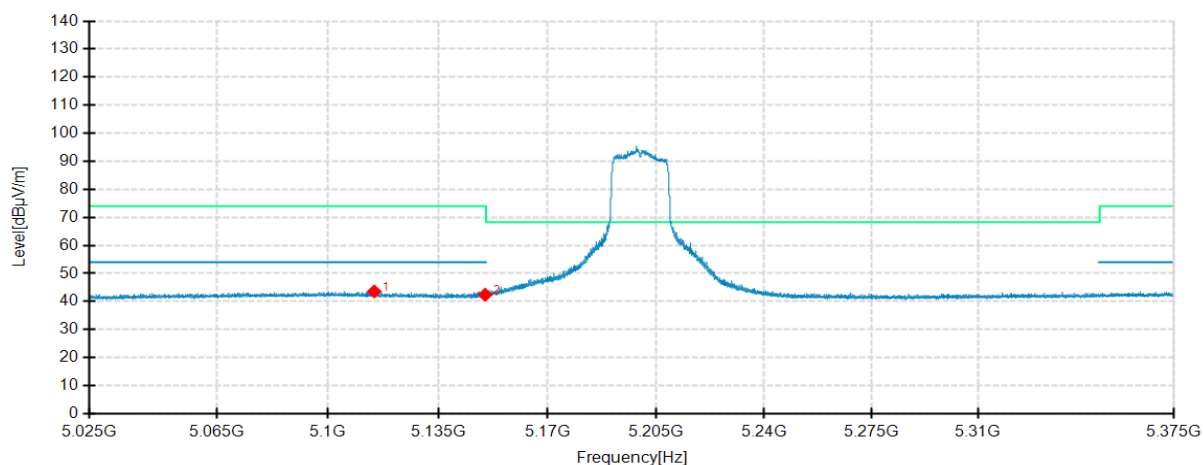

Detector mode: Average

Polarity: Vertical

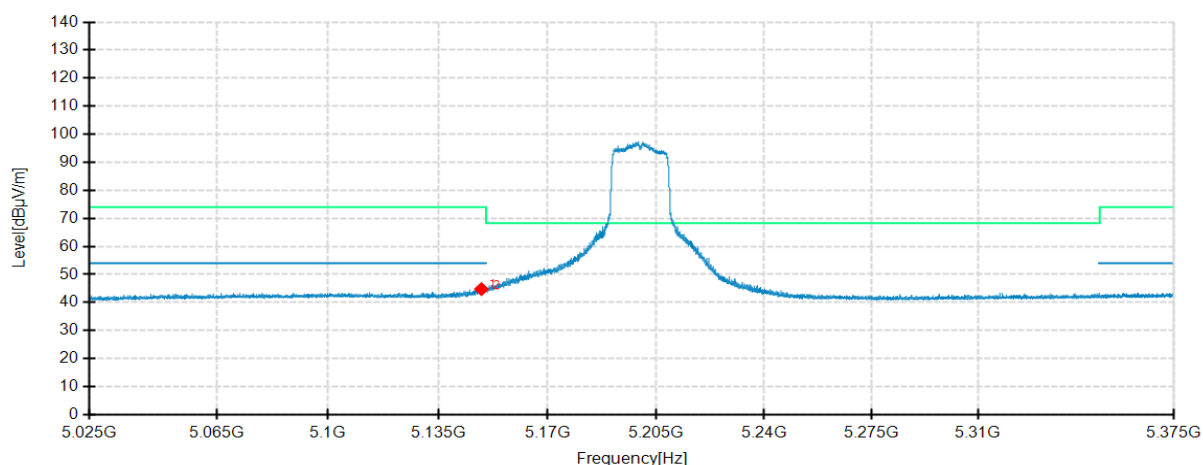


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5114.6700	29.04	43.57	14.53	54.00	10.43	200	218	Horizontal	/
2	5150.0000	28.63	42.40	13.77	54.00	11.60	200	218	Horizontal	/
1	5148.8300	30.97	44.77	13.80	54.00	9.23	200	142	Vertical	/
2	5150.0000	30.89	44.66	13.77	54.00	9.34	100	3	Vertical	/

IEEE 802.11n HT20 mode/5240MHz


Detector mode: Peak

Polarity: Horizontal

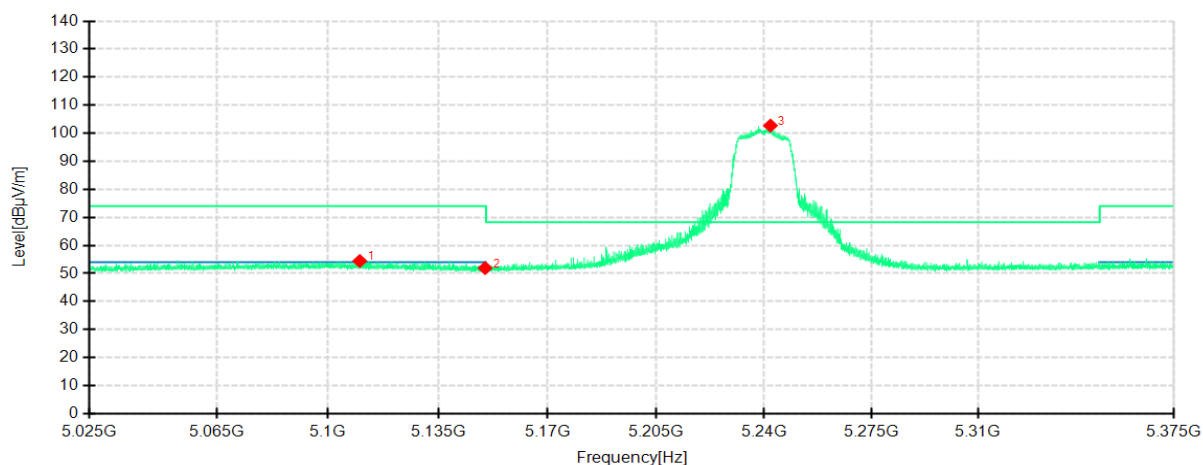

Detector mode: Peak

Polarity: Vertical

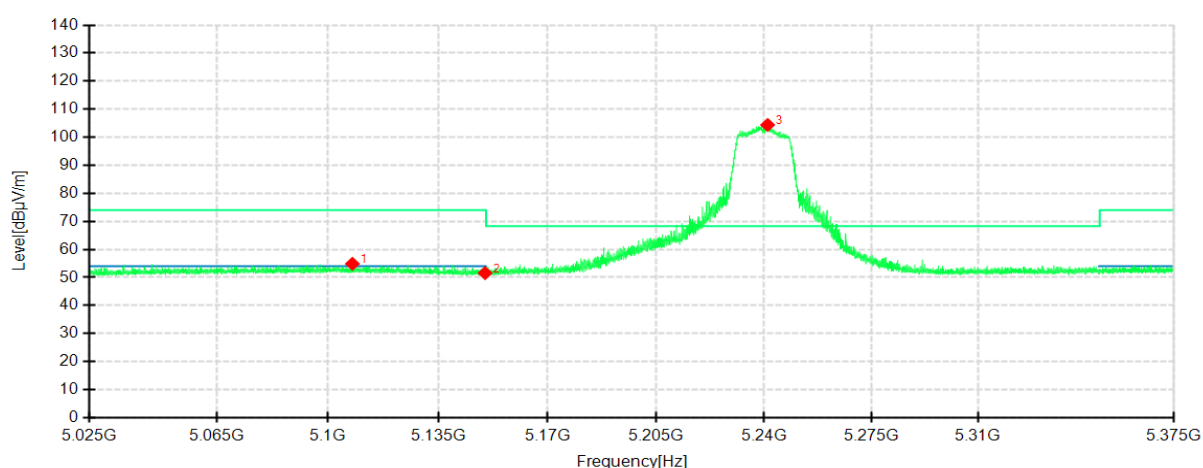


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5110.0850	39.81	54.44	14.63	74.00	19.56	200	60	Horizontal	/
2	5150.0000	38.15	51.92	13.77	74.00	22.08	100	142	Horizontal	/
3	5242.0350	88.41	102.72	14.31	68.30	-34.42	200	33	Horizontal	No limit
1	5107.7400	40.19	54.87	14.68	74.00	19.13	100	115	Vertical	/
2	5150.0000	37.78	51.55	13.77	74.00	22.45	100	135	Vertical	/
3	5241.1250	90.07	104.39	14.32	68.30	-36.09	200	348	Vertical	No limit

IEEE 802.11n HT20 mode/5240MHz


Detector mode: Average

Polarity: Horizontal

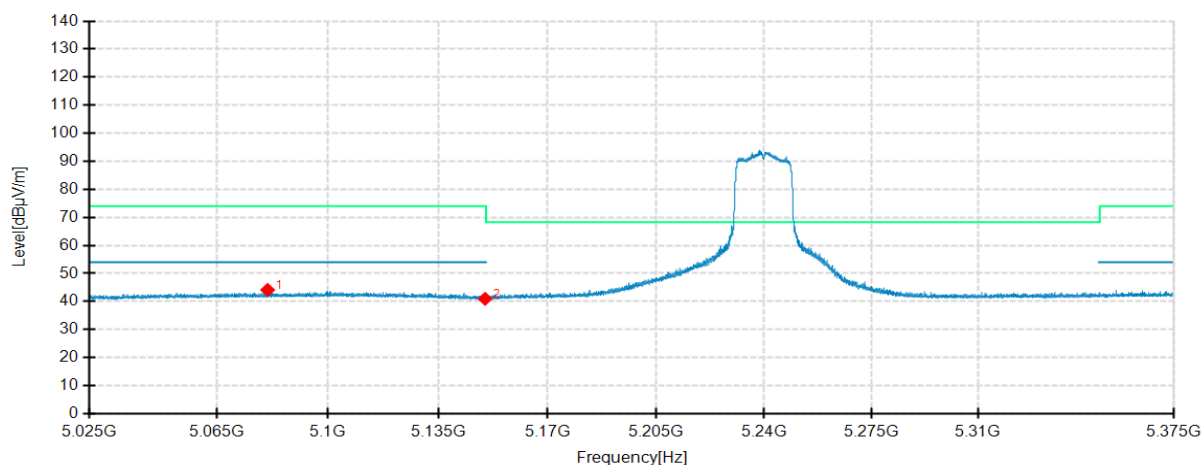

Detector mode: Average

Polarity: Vertical

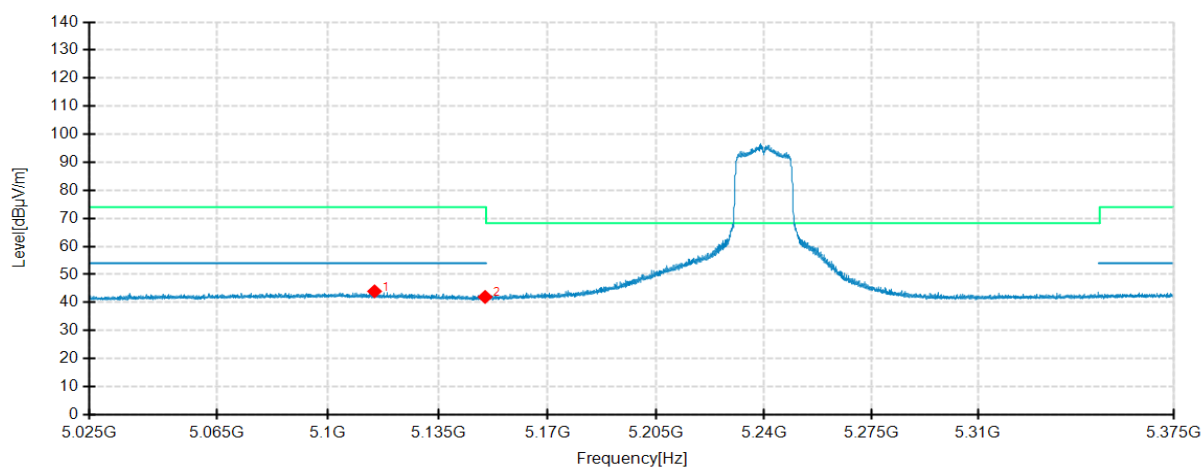


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5080.9300	29.46	44.13	14.67	54.00	9.87	100	231	Horizontal	/
2	5150.0000	27.17	40.94	13.77	54.00	13.06	100	142	Horizontal	/
1	5114.7750	29.44	43.97	14.53	54.00	10.03	200	142	Vertical	/
2	5150.0000	28.21	41.98	13.77	54.00	12.02	100	211	Vertical	/

IEEE 802.11n HT20 mode/5745MHz


Detector mode: Peak

Polarity: Horizontal

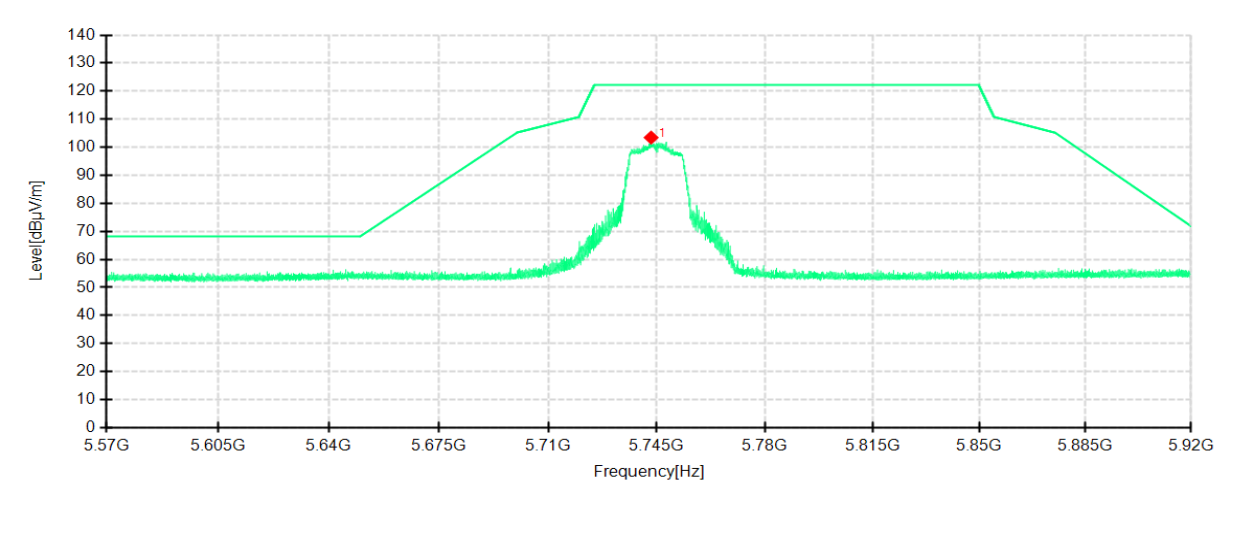

Detector mode: Peak

Polarity: Vertical

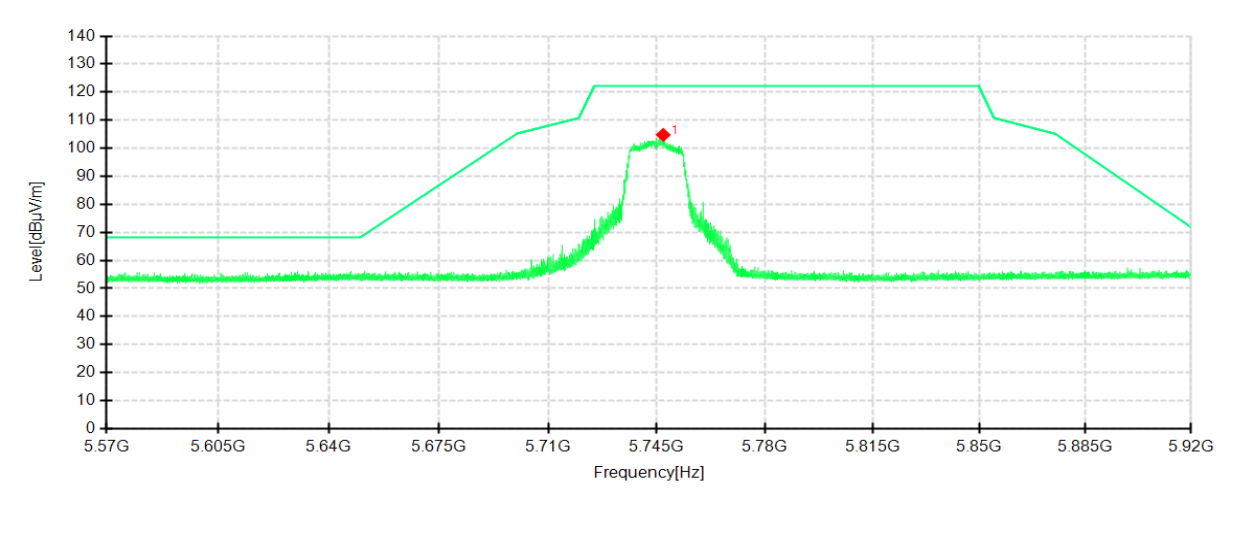


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5743.1450	86.33	103.45	17.12	122.20	18.75	200	350	Horizontal	/
1	5747.0650	87.57	104.77	17.20	122.20	17.43	200	9	Vertical	/

IEEE 802.11n HT20 mode/5785MHz


Detector mode: Peak

Polarity: Horizontal

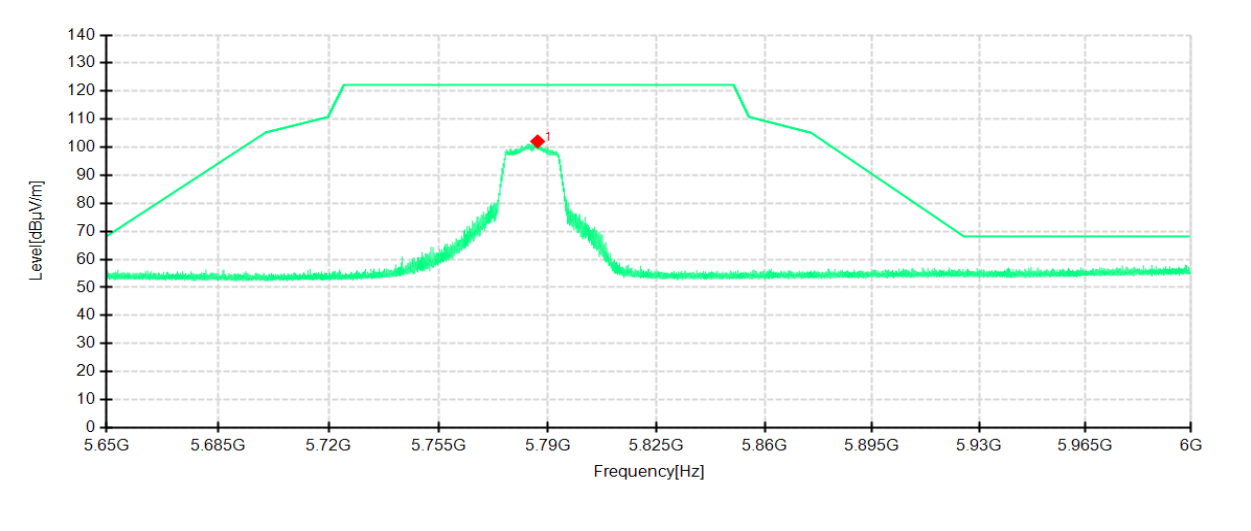

Detector mode: Peak

Polarity: Vertical

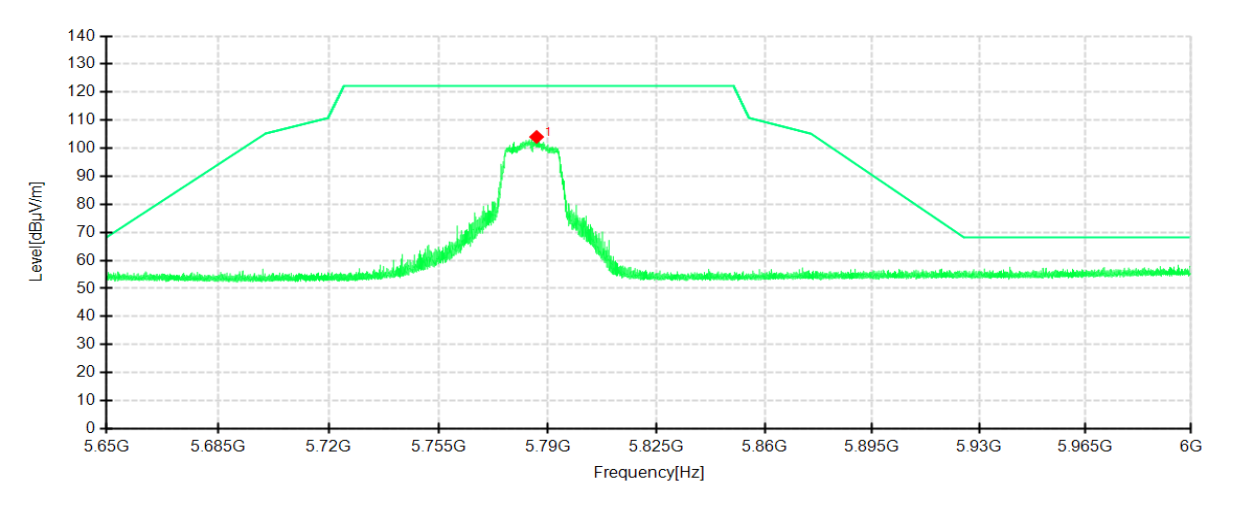


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5786.6575	84.97	102.08	17.11	122.20	20.12	200	350	Horizontal	/
1	5786.3425	86.91	104.02	17.11	122.20	18.18	200	9	Vertical	/

IEEE 802.11n HT20 mode/5825MHz


Detector mode: Peak

Polarity: Horizontal

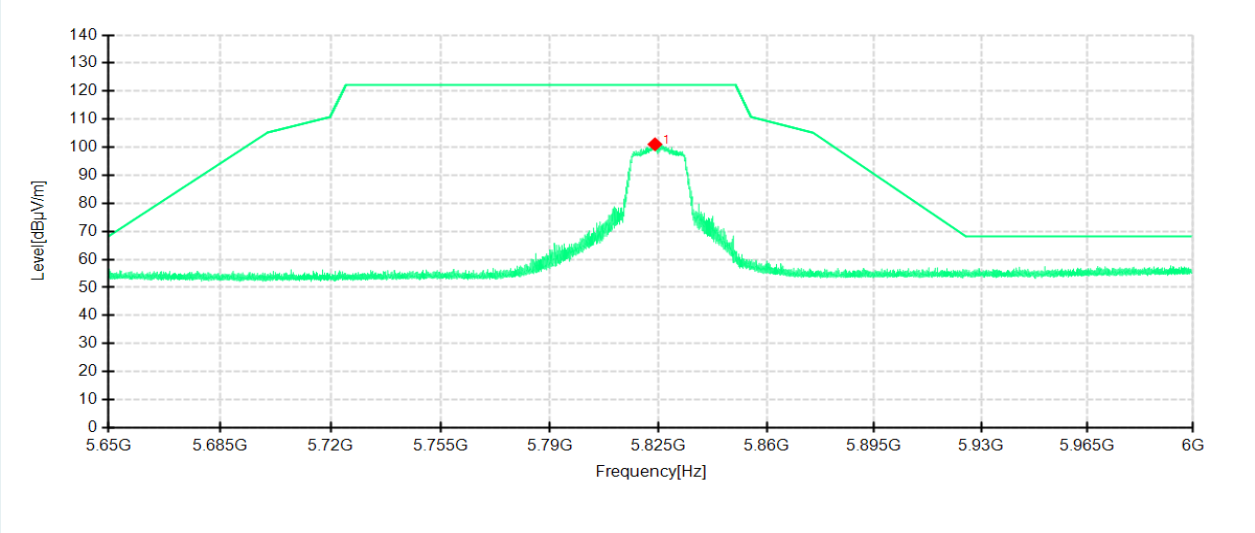

Detector mode: Peak

Polarity: Vertical

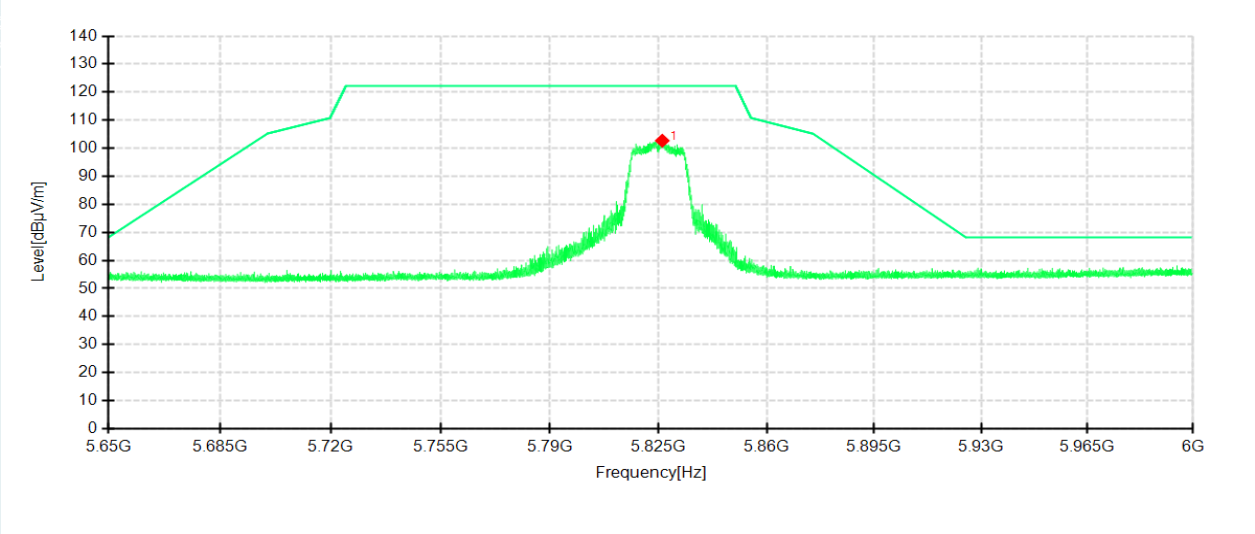


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5823.7750	83.97	101.04	17.07	122.20	21.16	200	3	Horizontal	/
1	5826.1375	85.60	102.68	17.08	122.20	19.52	200	9	Vertical	/

IEEE 802.11n HT40 mode/5190MHz


Detector mode: Peak

Polarity: Horizontal

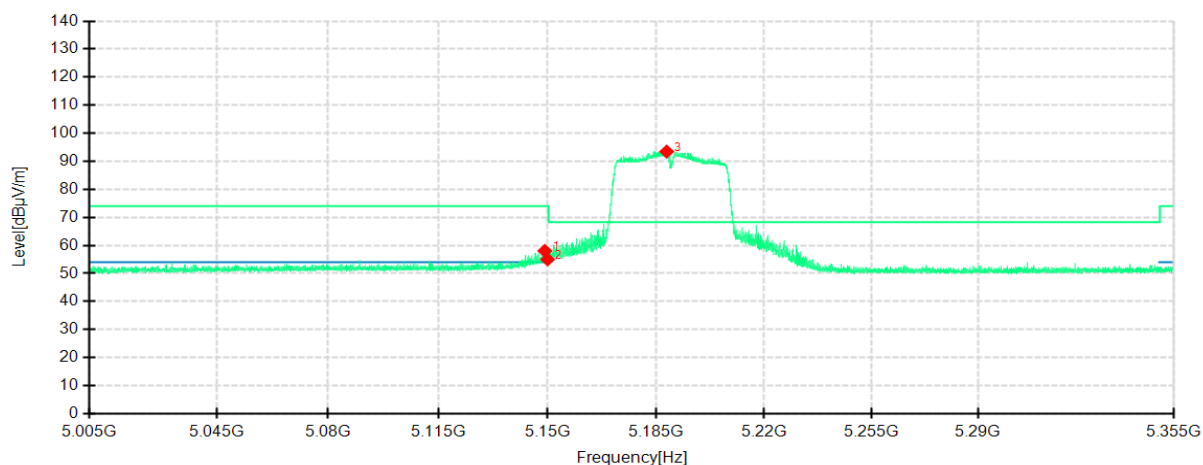

Detector mode: Peak

Polarity: Vertical

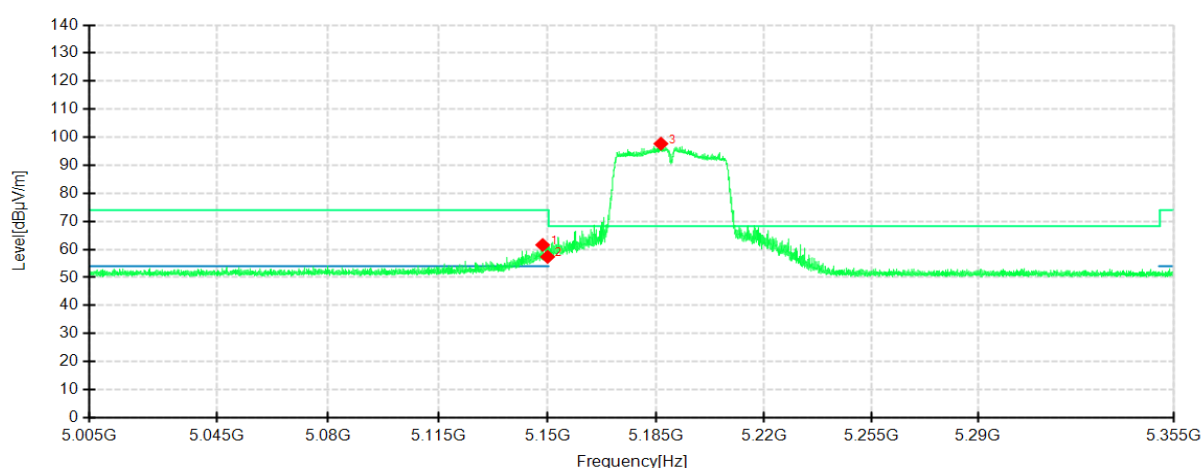


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5149.1300	43.87	58.05	14.18	74.00	15.95	100	265	Horizontal	/
2	5150.0000	40.82	55.00	14.18	74.00	19.00	100	16	Horizontal	/
3	5188.3650	79.46	93.44	13.98	68.30	-25.14	100	2	Horizontal	No limit
1	5148.4300	47.51	61.59	14.08	74.00	12.41	100	351	Vertical	/
2	5150.0000	43.27	57.35	14.08	74.00	16.65	100	358	Vertical	/
3	5186.5100	83.64	97.68	14.04	68.30	-29.38	100	360	Vertical	No limit

IEEE 802.11n HT40 mode/5190MHz


Detector mode: Average

Polarity: Horizontal

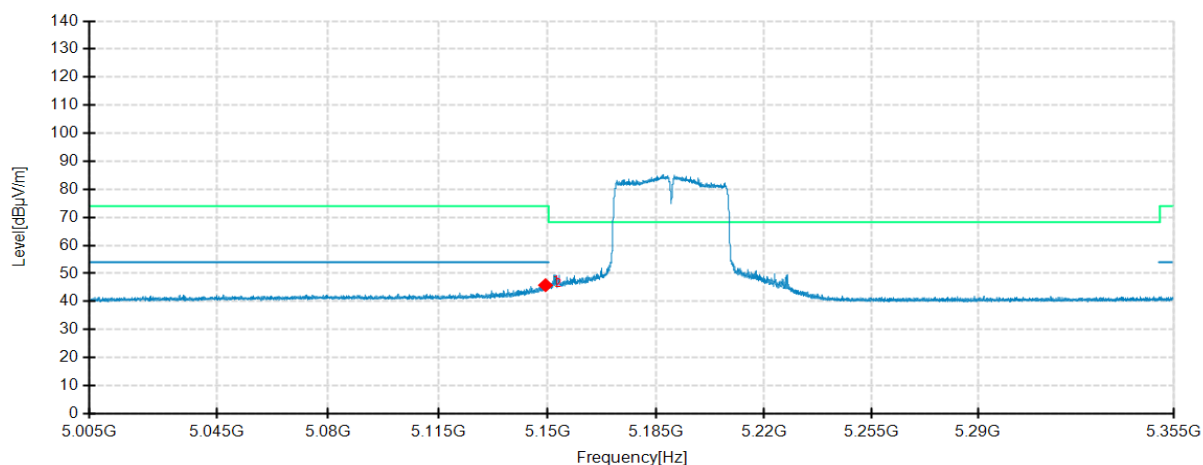

Detector mode: Average

Polarity: Vertical

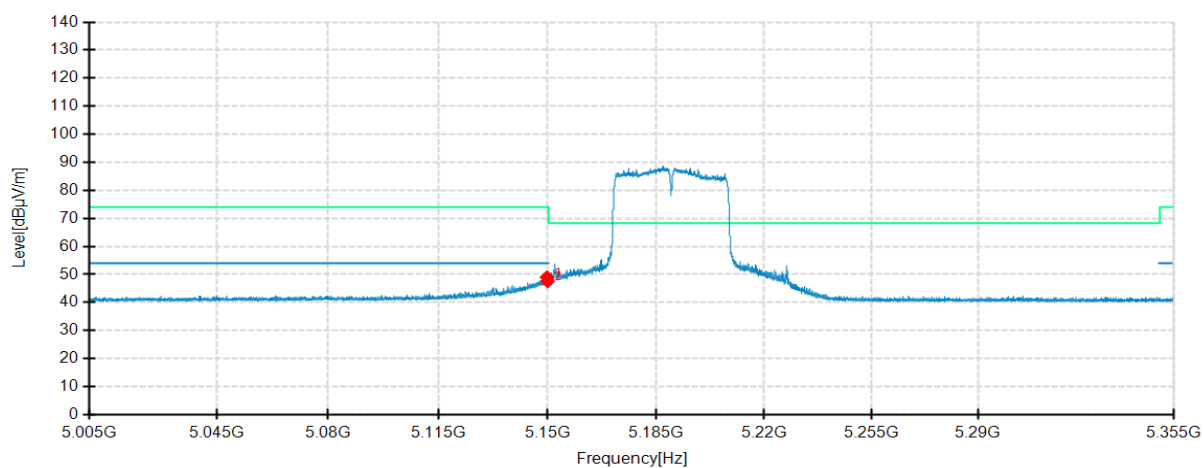


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5149.3400	31.63	45.81	14.18	54.00	8.19	100	41	Horizontal	/
2	5150.0000	30.76	44.94	14.18	54.00	9.06	100	1	Horizontal	/
1	5149.8300	34.95	49.03	14.08	54.00	4.97	100	94	Vertical	/
2	5150.0000	33.46	47.54	14.08	54.00	6.46	100	94	Vertical	/

IEEE 802.11n HT40 mode/5230MHz


Detector mode: Peak

Polarity: Horizontal

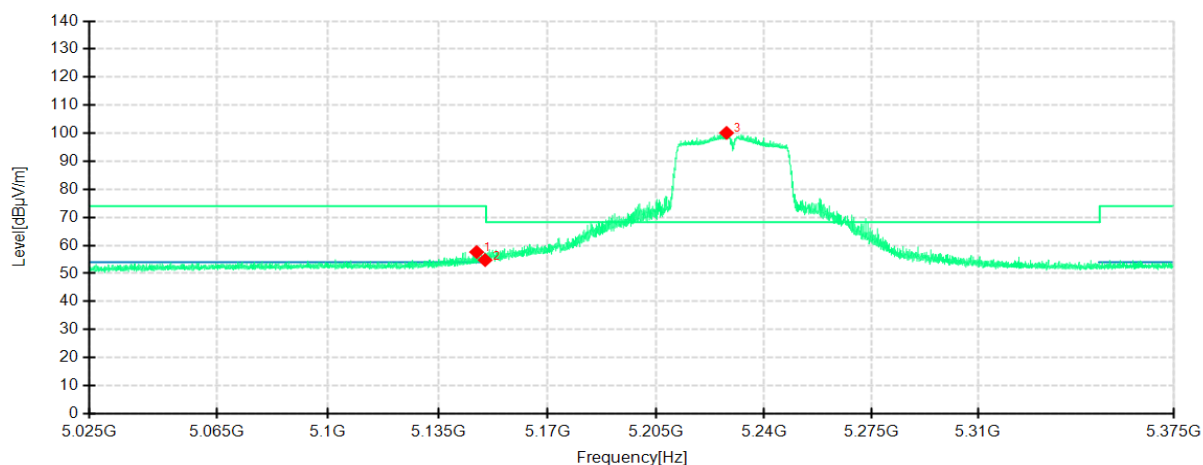

Detector mode: Peak

Polarity: Vertical

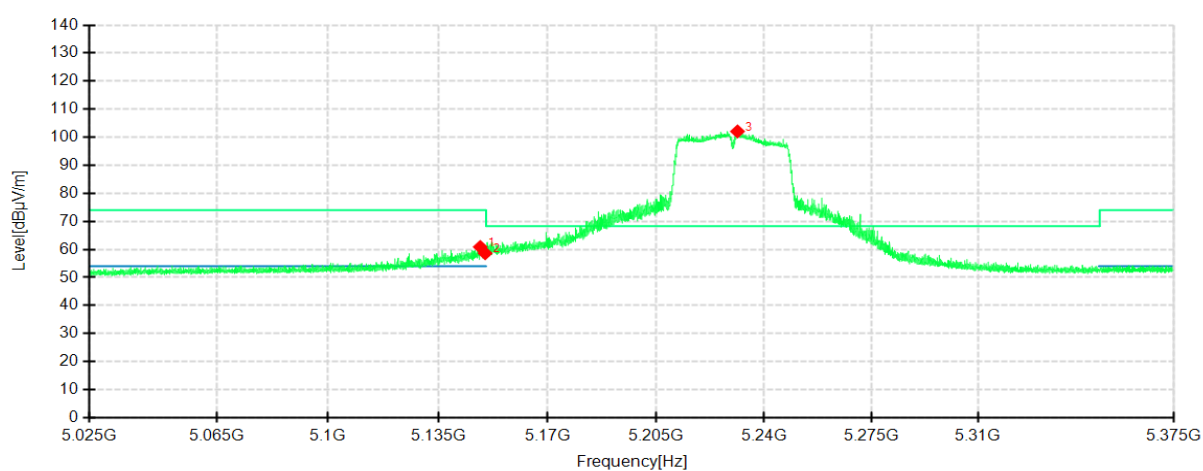


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5147.2900	43.79	57.62	13.83	74.00	16.38	200	353	Horizontal	/
2	5150.0000	40.99	54.76	13.77	74.00	19.24	200	353	Horizontal	/
3	5227.7900	85.58	100.12	14.54	68.30	-31.82	200	142	Horizontal	No limit
1	5148.4450	47.07	60.87	13.80	74.00	13.13	200	218	Vertical	/
2	5150.0000	44.84	58.61	13.77	74.00	15.39	200	0	Vertical	/
3	5231.3250	87.59	102.07	14.48	68.30	-33.77	200	218	Vertical	No limit

IEEE 802.11n HT40 mode/5230MHz


Detector mode: Average

Polarity: Horizontal

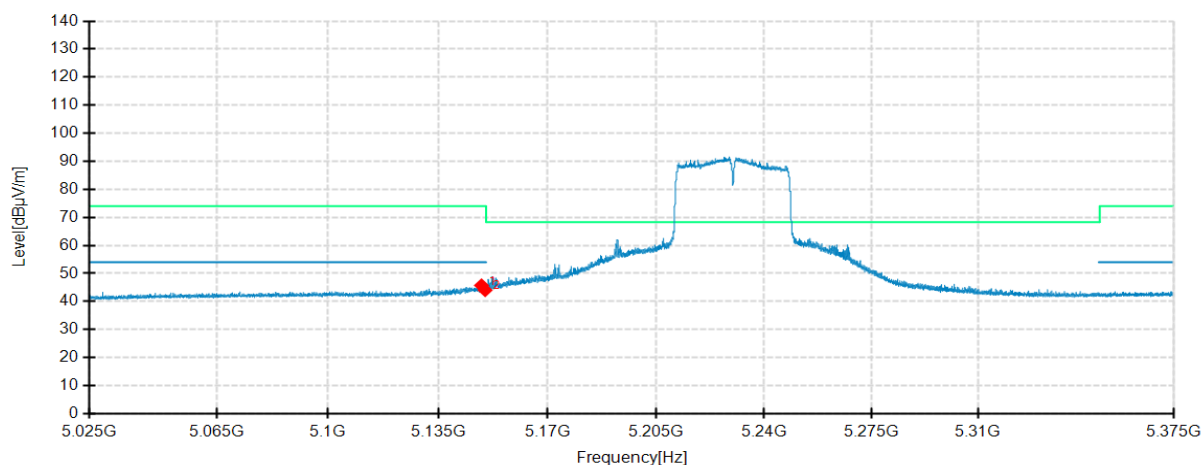

Detector mode: Average

Polarity: Vertical

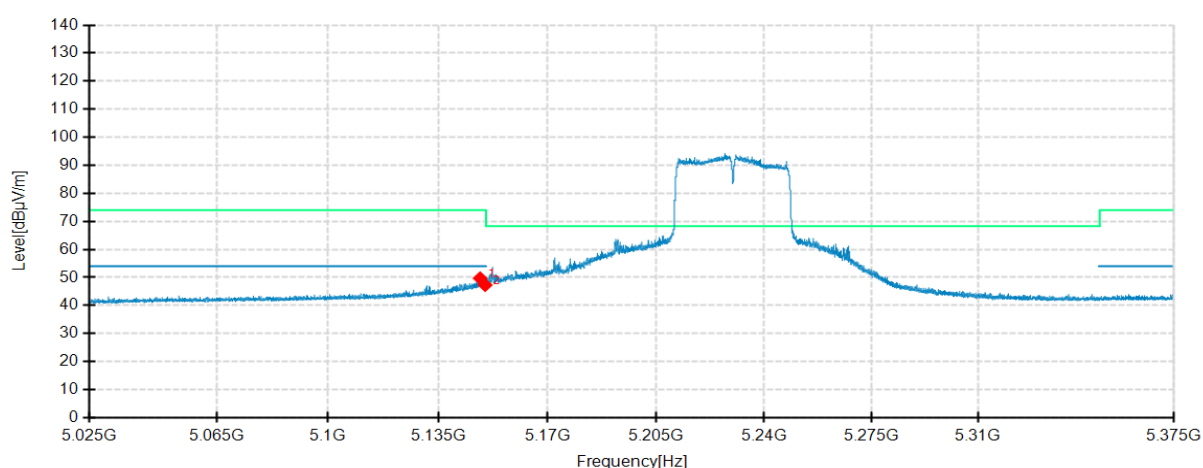


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5148.8300	31.93	45.73	13.80	54.00	8.27	200	142	Horizontal	/
2	5150.0000	30.26	44.03	13.77	54.00	9.97	200	142	Horizontal	/
1	5148.4100	35.90	49.70	13.80	54.00	4.30	200	218	Vertical	/
2	5150.0000	33.52	47.29	13.77	54.00	6.71	200	0	Vertical	/

IEEE 802.11n HT40 mode/5755MHz


Detector mode: Peak

Polarity: Horizontal

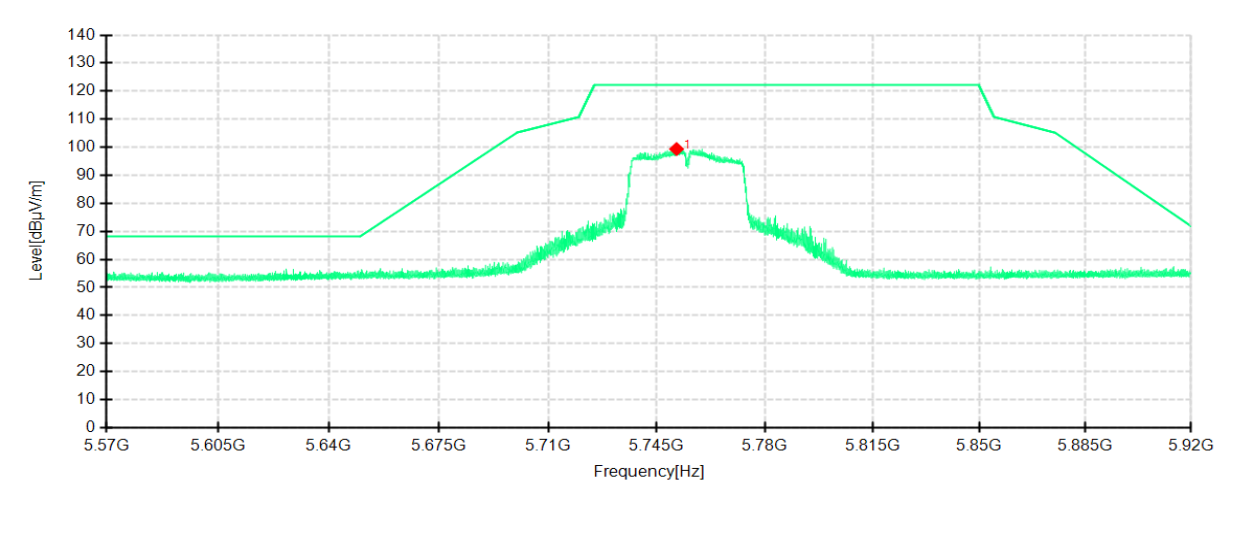

Detector mode: Peak

Polarity: Vertical

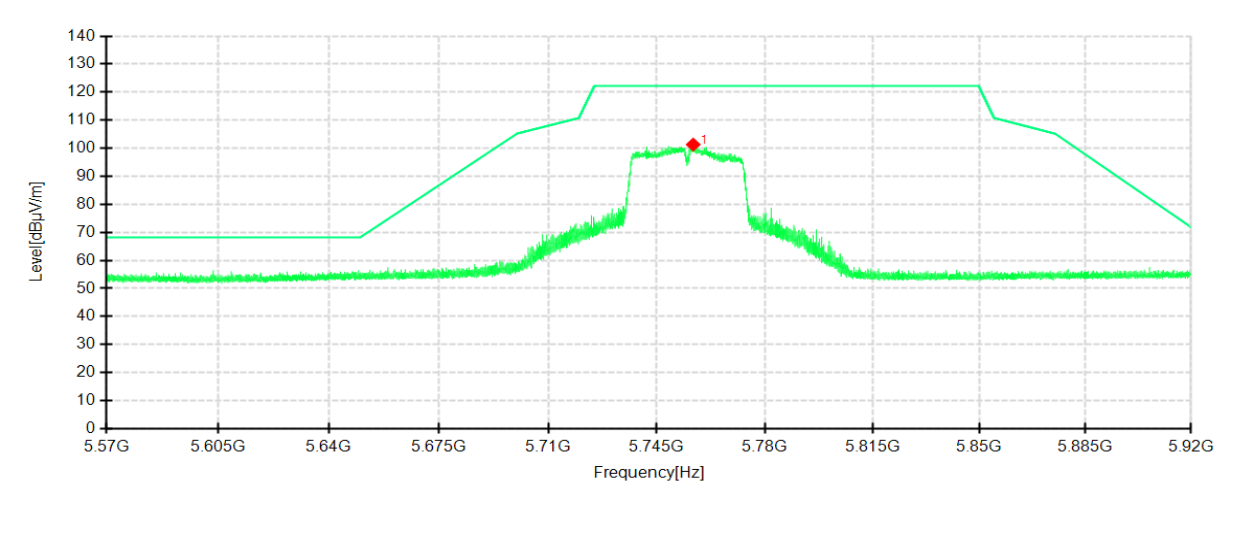


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5751.3525	82.12	99.36	17.24	122.20	22.84	200	359	Horizontal	/
1	5756.7425	84.07	101.29	17.22	122.20	20.91	200	8	Vertical	/

IEEE 802.11n HT40 mode/5795MHz


Detector mode: Peak

Polarity: Horizontal

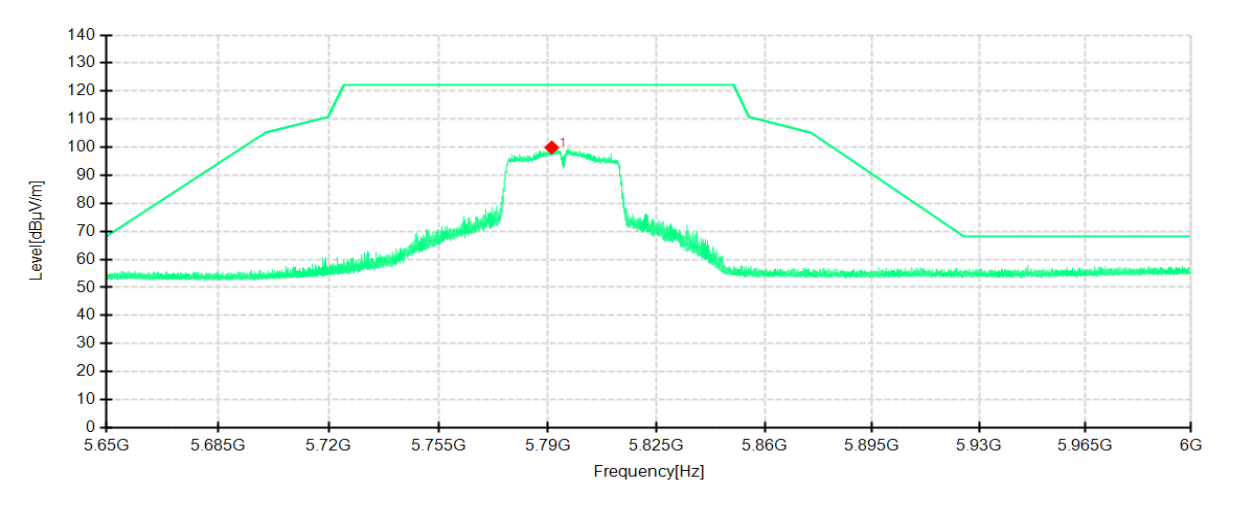

Detector mode: Peak

Polarity: Vertical

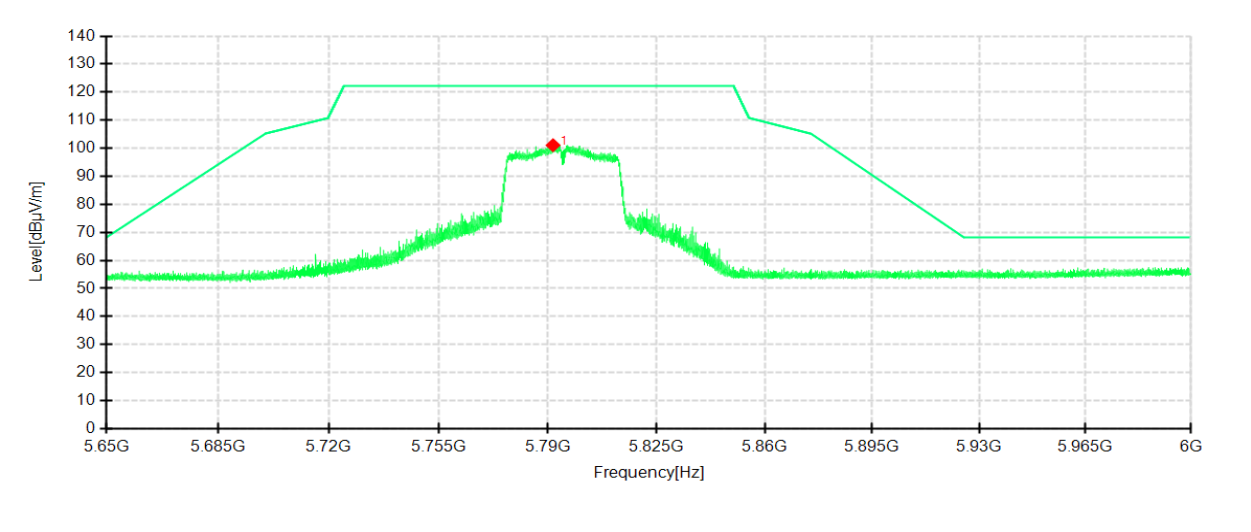


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5791.2075	82.80	99.89	17.09	122.20	22.31	200	351	Horizontal	/
1	5791.6100	83.99	101.08	17.09	122.20	21.12	200	10	Vertical	/

IEEE 802.11ac VHT20 mode/5180MHz


Detector mode: Peak

Polarity: Horizontal

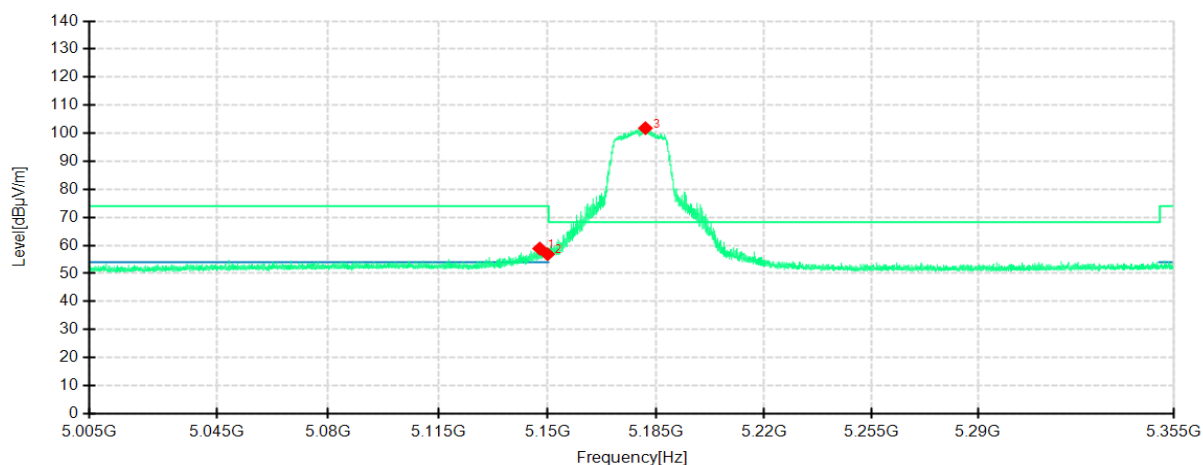

Detector mode: Peak

Polarity: Vertical

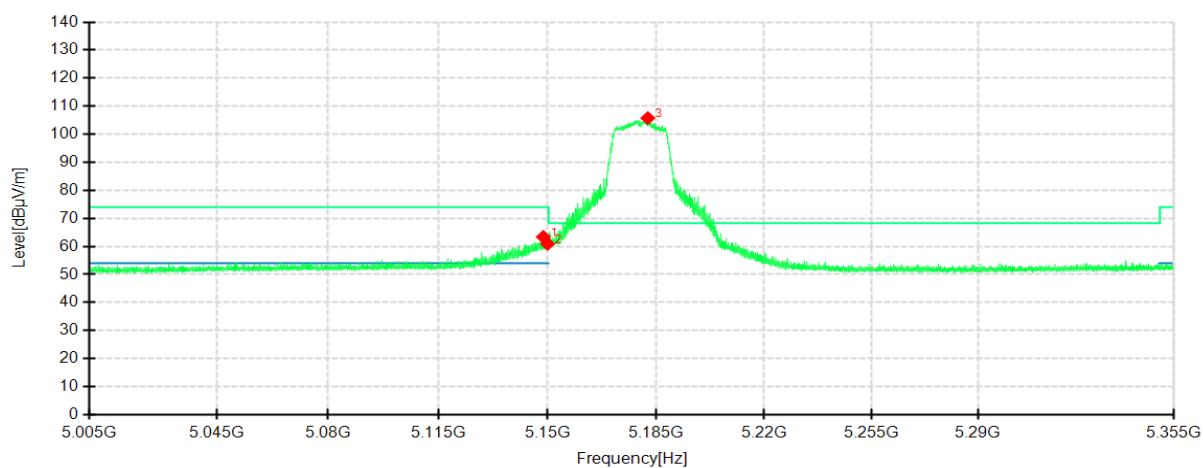


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5147.4850	45.05	58.87	13.82	74.00	15.13	200	218	Horizontal	/
2	5150.0000	43.09	56.86	13.77	74.00	17.14	200	19	Horizontal	/
3	5181.5050	87.25	101.79	14.54	68.30	-33.49	200	26	Horizontal	No limit
1	5148.6400	49.59	63.39	13.80	74.00	10.61	100	0	Vertical	/
2	5150.0000	47.14	60.91	13.77	74.00	13.09	100	218	Vertical	/
3	5182.2750	91.19	105.75	14.56	68.30	-37.45	200	357	Vertical	No limit

IEEE 802.11ac VHT20 mode/5180MHz


Detector mode: Average

Polarity: Horizontal

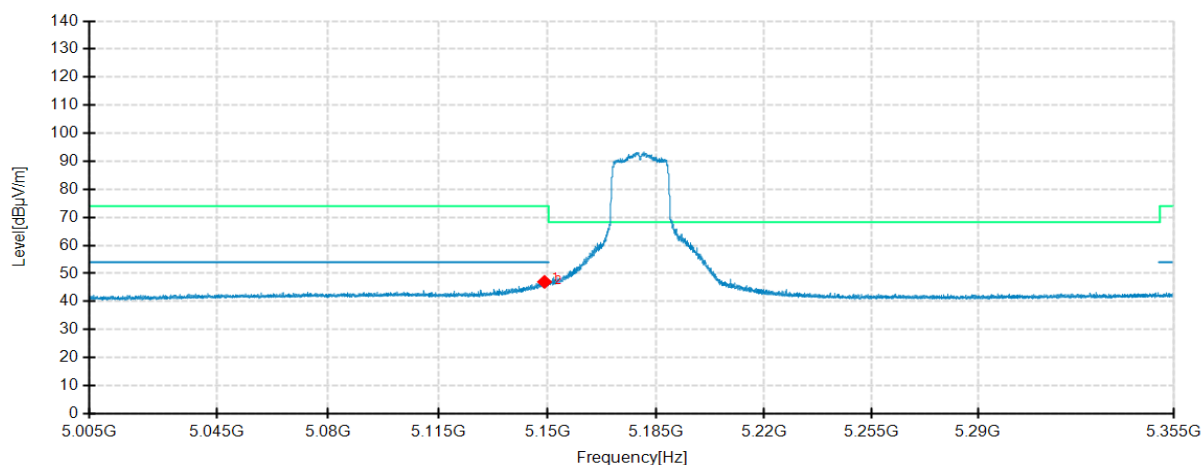

Detector mode: Average

Polarity: Vertical

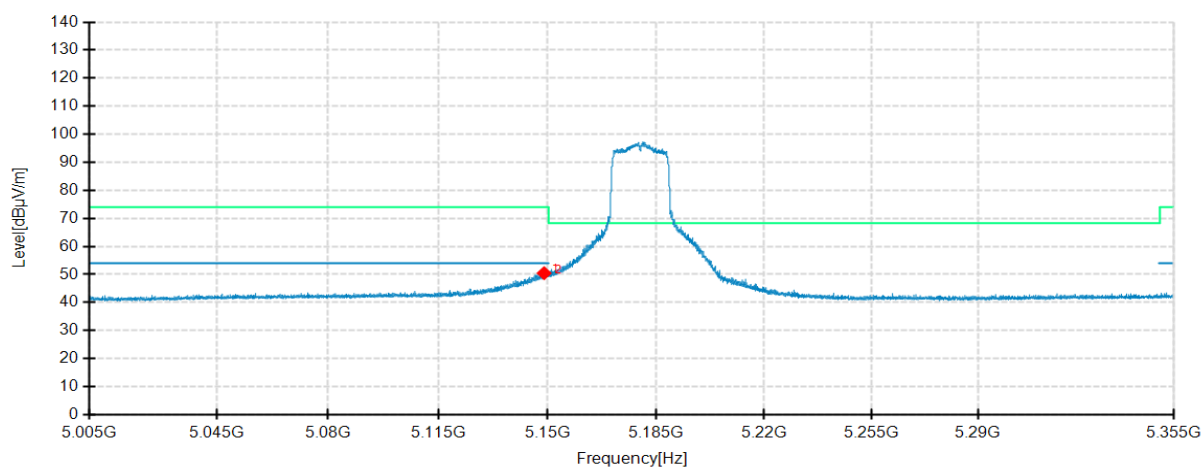


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5149.0250	33.20	46.99	13.79	54.00	7.01	200	218	Horizontal	/
2	5150.0000	32.29	46.06	13.77	54.00	7.94	200	218	Horizontal	/
1	5148.8850	36.65	50.44	13.79	54.00	3.56	200	359	Vertical	/
2	5150.0000	36.35	50.12	13.77	54.00	3.88	200	142	Vertical	/

IEEE 802.11ac VHT20 mode/5200MHz


Detector mode: Peak

Polarity: Horizontal

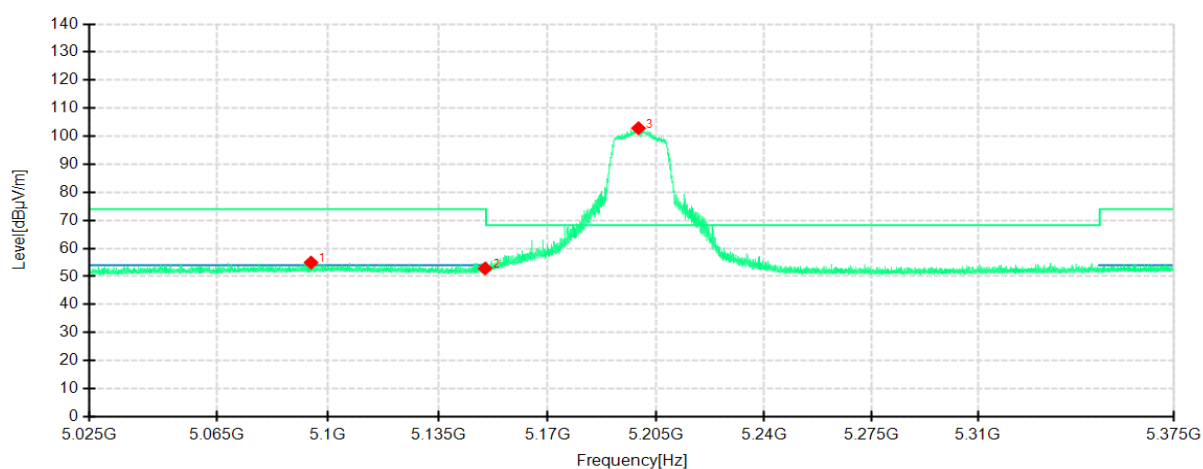

Detector mode: Peak

Polarity: Vertical

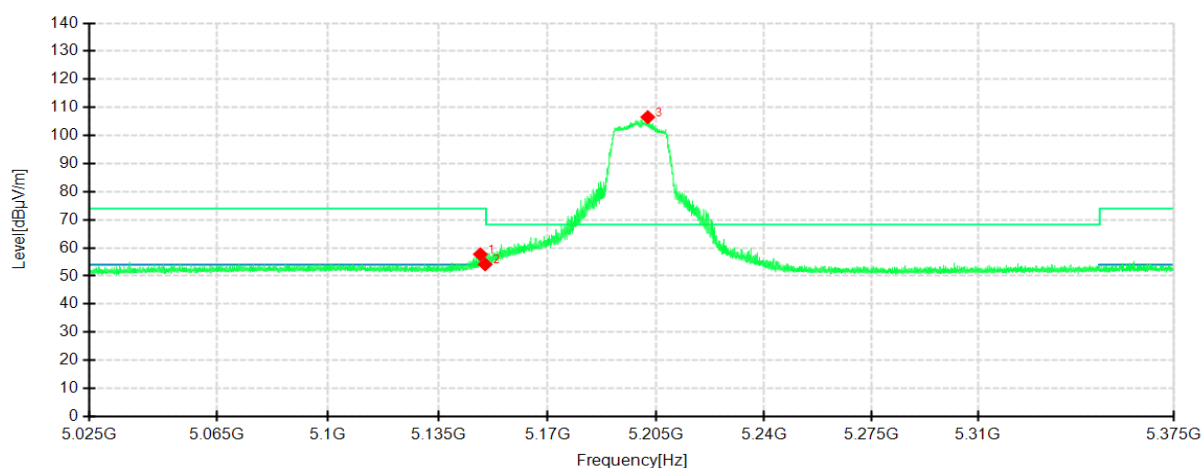


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5094.6500	40.16	54.96	14.80	74.00	19.04	100	217	Horizontal	/
2	5150.0000	39.07	52.84	13.77	74.00	21.16	100	340	Horizontal	/
3	5199.2650	87.89	102.86	14.97	68.30	-34.56	200	0	Horizontal	No limit
1	5148.4800	43.93	57.73	13.80	74.00	16.27	200	142	Vertical	/
2	5150.0000	40.36	54.13	13.77	74.00	19.87	100	6	Vertical	/
3	5202.2750	91.59	106.54	14.95	68.30	-38.24	200	351	Vertical	No limit

IEEE 802.11ac VHT20 mode/5200MHz


Detector mode: Average

Polarity: Horizontal

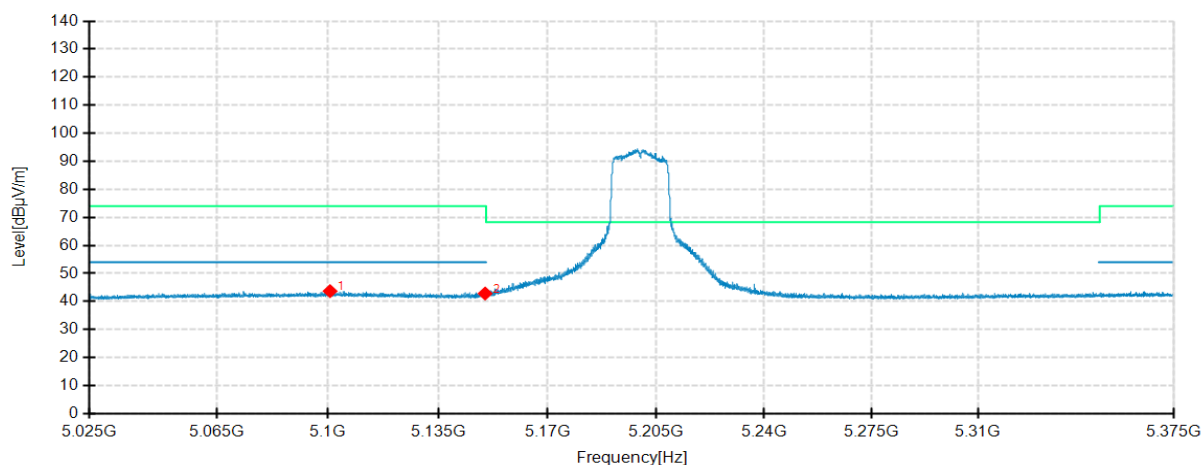

Detector mode: Average

Polarity: Vertical

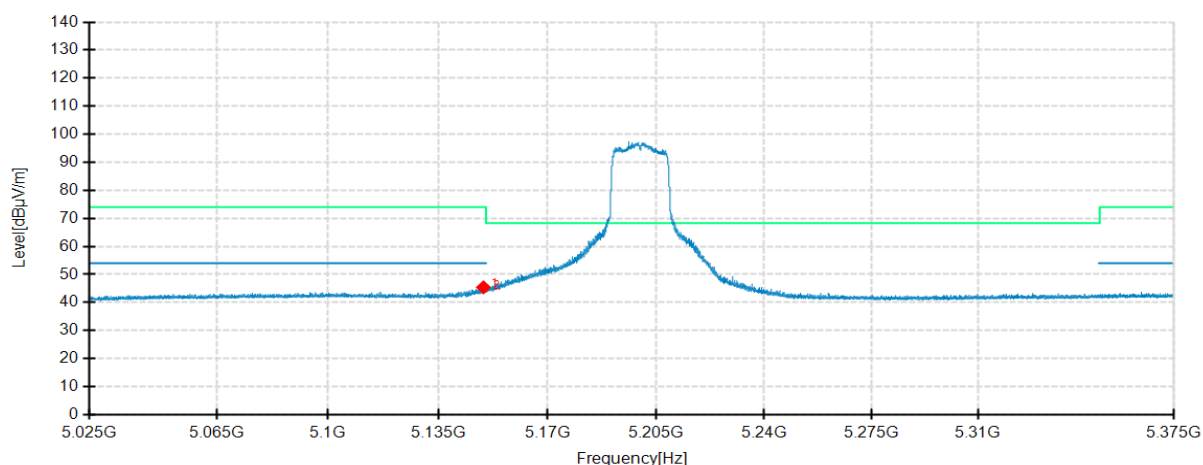


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5100.6700	28.85	43.69	14.84	54.00	10.31	100	239	Horizontal	/
2	5150.0000	29.07	42.84	13.77	54.00	11.16	200	1	Horizontal	/
1	5149.4600	31.62	45.40	13.78	54.00	8.60	200	142	Vertical	/
2	5150.0000	30.71	44.48	13.77	54.00	9.52	200	142	Vertical	/

IEEE 802.11ac VHT20 mode/5240MHz


Detector mode: Peak

Polarity: Horizontal

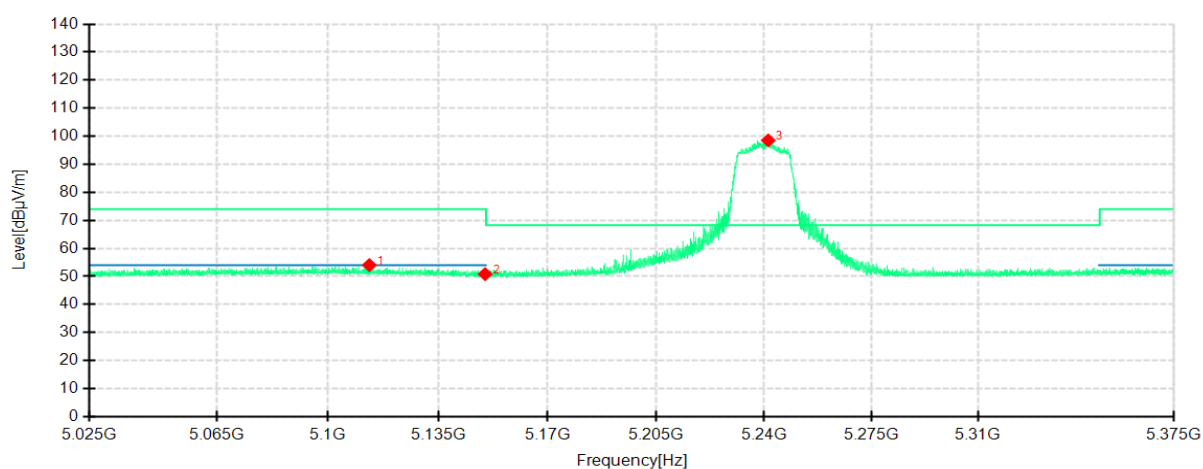

Detector mode: Peak

Polarity: Vertical

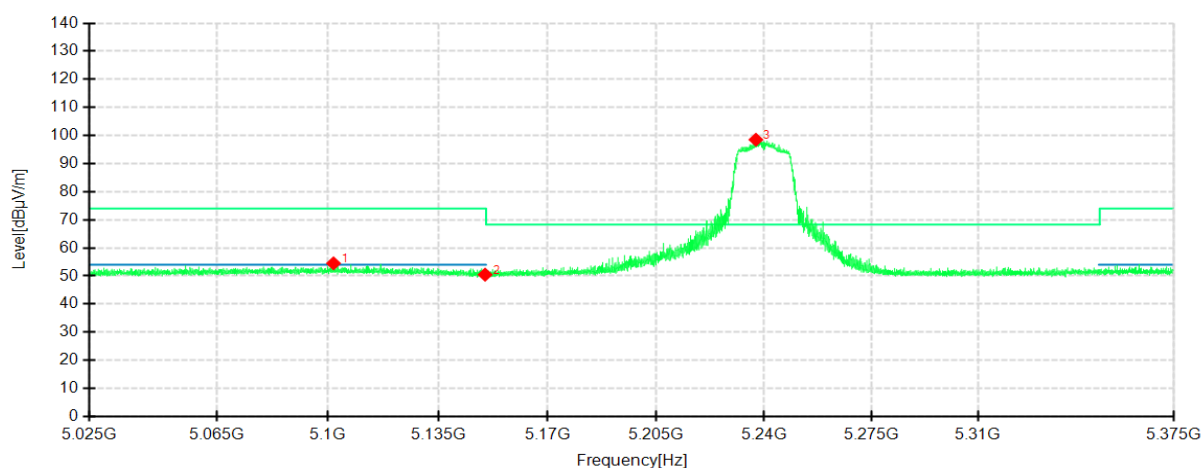


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5113.1300	39.47	54.04	14.57	74.00	19.96	100	183	Horizontal	/
2	5150.0000	37.06	50.83	13.77	74.00	23.17	200	116	Horizontal	/
3	5241.3350	84.20	98.52	14.32	68.30	-30.22	200	3	Horizontal	No limit
1	5101.7550	39.69	54.50	14.81	74.00	19.50	100	2	Vertical	/
2	5150.0000	36.70	50.47	13.77	74.00	23.53	200	359	Vertical	/
3	5237.3100	84.13	98.52	14.39	68.30	-30.22	200	142	Vertical	No limit

IEEE 802.11ac VHT20 mode/5240MHz


Detector mode: Average

Polarity: Horizontal

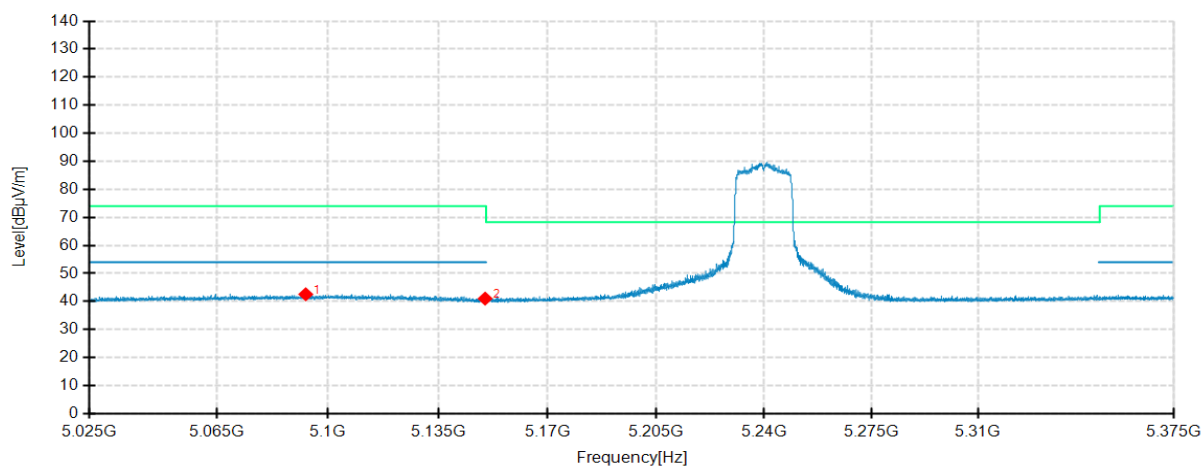

Detector mode: Average

Polarity: Vertical

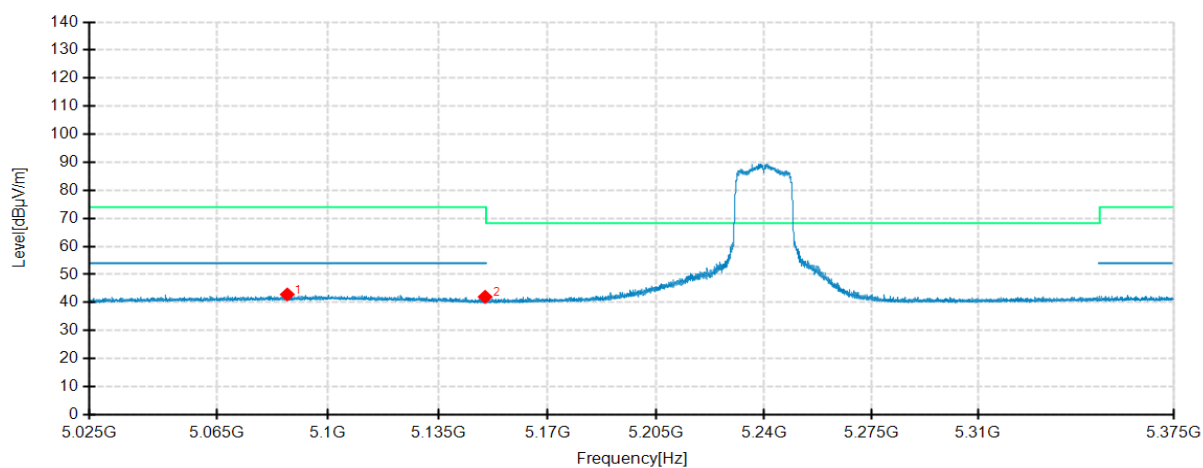


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5092.9700	27.78	42.56	14.78	54.00	11.44	200	81	Horizontal	/
2	5150.0000	27.26	41.03	13.77	54.00	12.97	200	3	Horizontal	/
1	5087.1250	28.13	42.86	14.73	54.00	11.14	100	218	Vertical	/
2	5150.0000	28.24	42.01	13.77	54.00	11.99	100	142	Vertical	/

IEEE 802.11ac VHT20 mode/5745MHz


Detector mode: Peak

Polarity: Horizontal

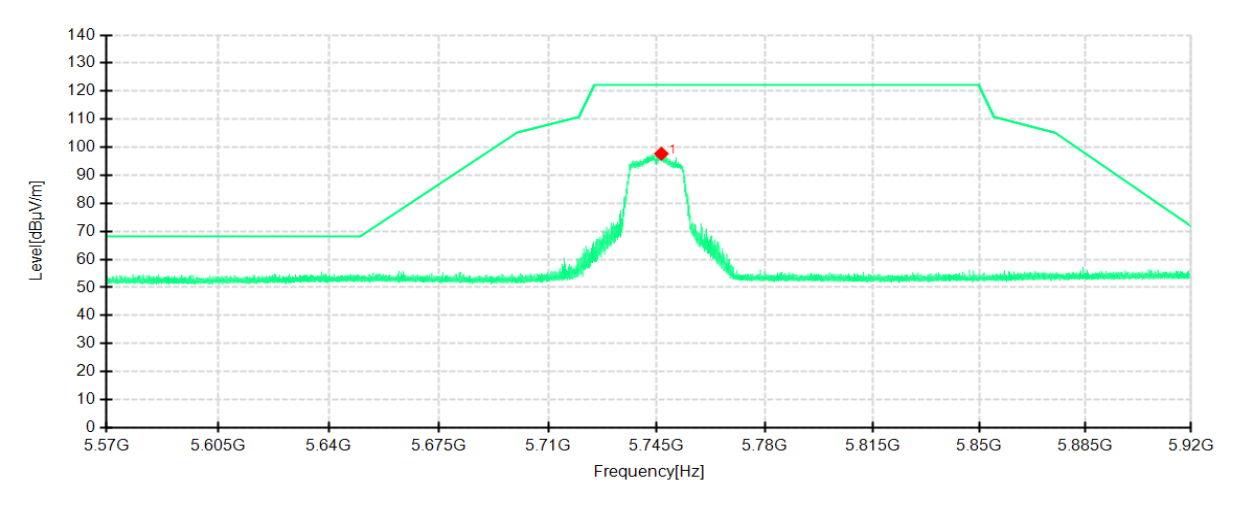

Detector mode: Peak

Polarity: Vertical

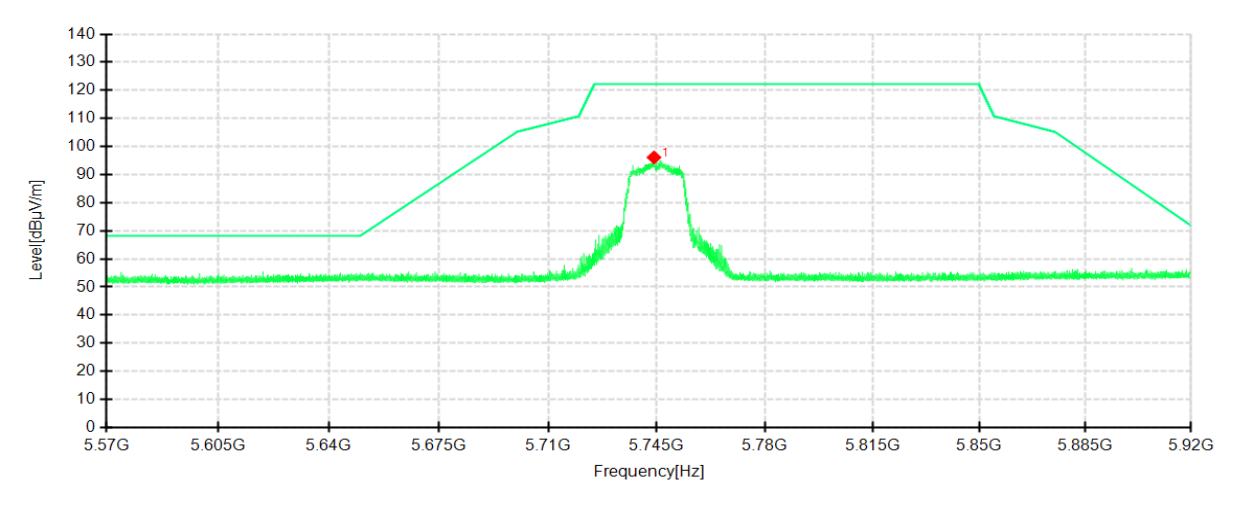


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5746.4525	80.50	97.68	17.18	122.20	24.52	200	350	Horizontal	/
1	5744.0725	78.97	96.11	17.14	122.20	26.09	200	338	Vertical	/

IEEE 802.11ac VHT20 mode/5785MHz


Detector mode: Peak

Polarity: Horizontal

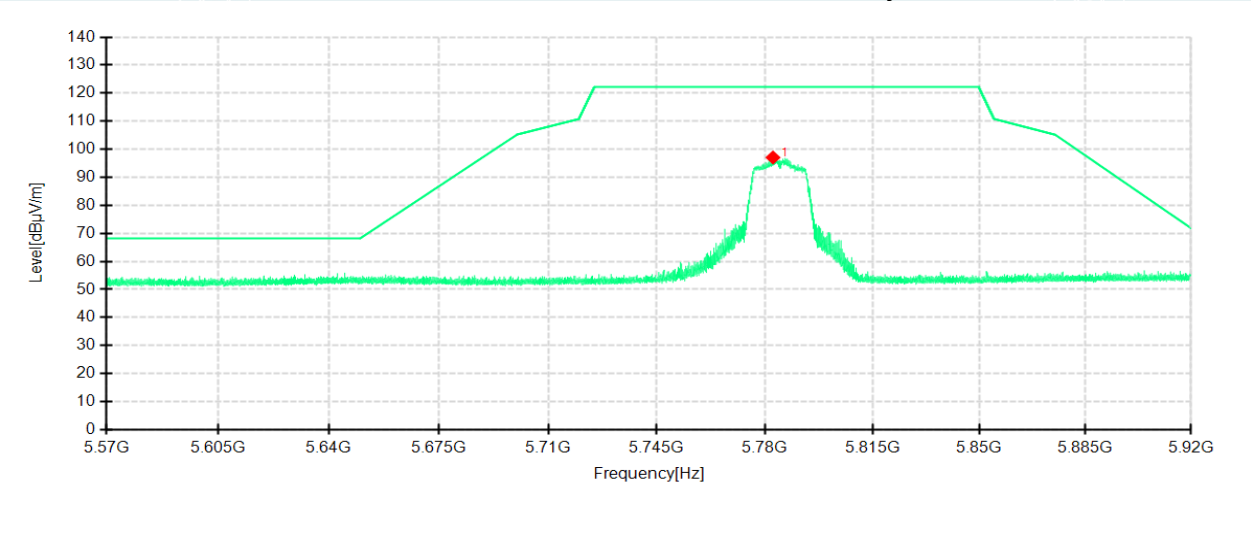

Detector mode: Peak

Polarity: Vertical

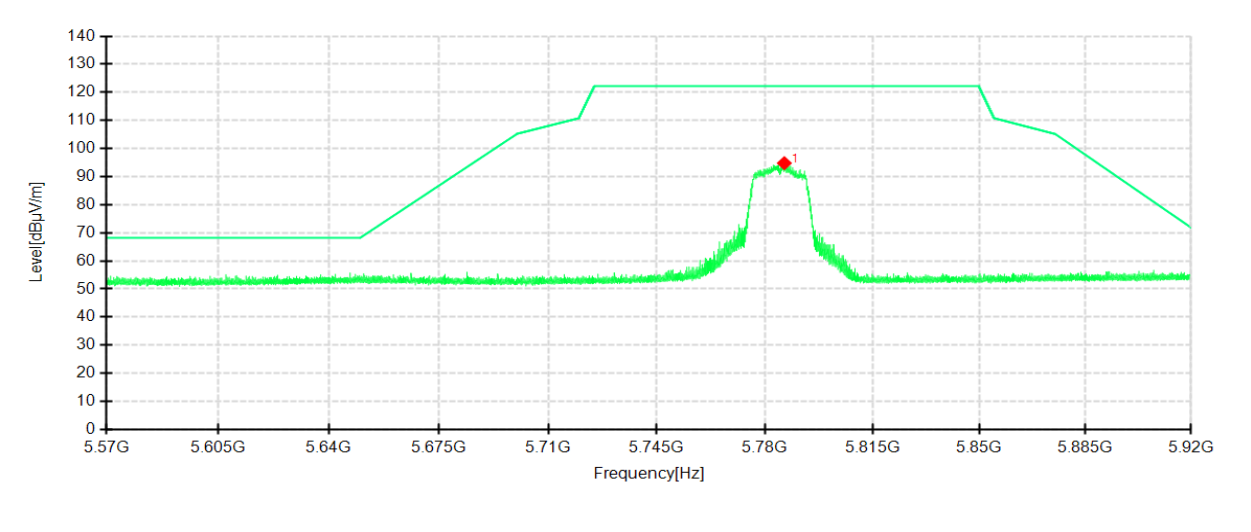


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5782.6075	79.92	97.05	17.13	122.20	25.15	200	350	Horizontal	/
1	5786.2825	77.68	94.79	17.11	122.20	27.41	100	15	Vertical	/

IEEE 802.11ac VHT20 mode/5825MHz


Detector mode: Peak

Polarity: Horizontal

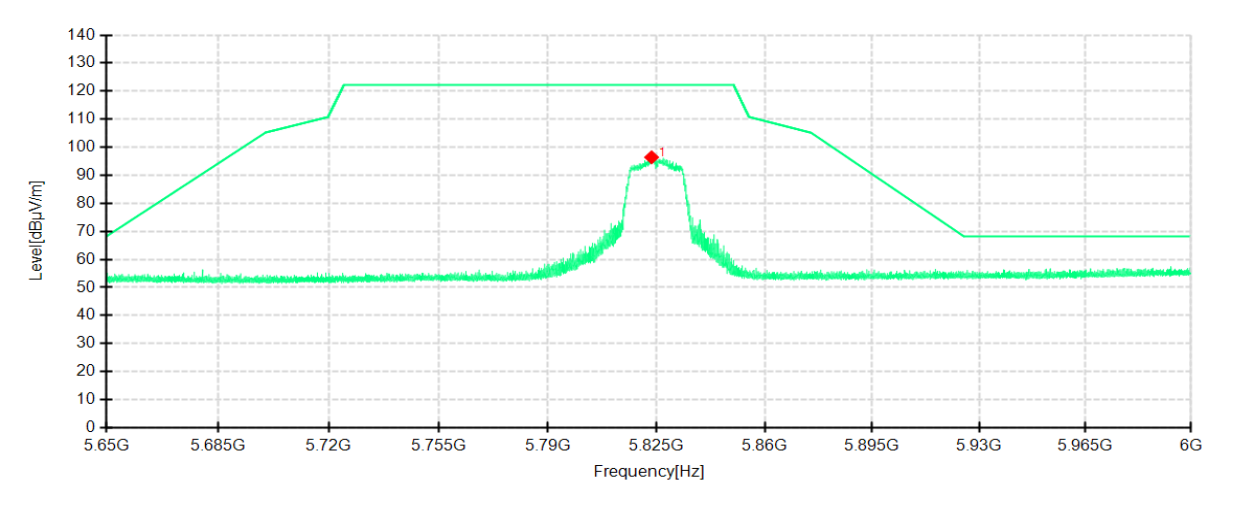

Detector mode: Peak

Polarity: Vertical

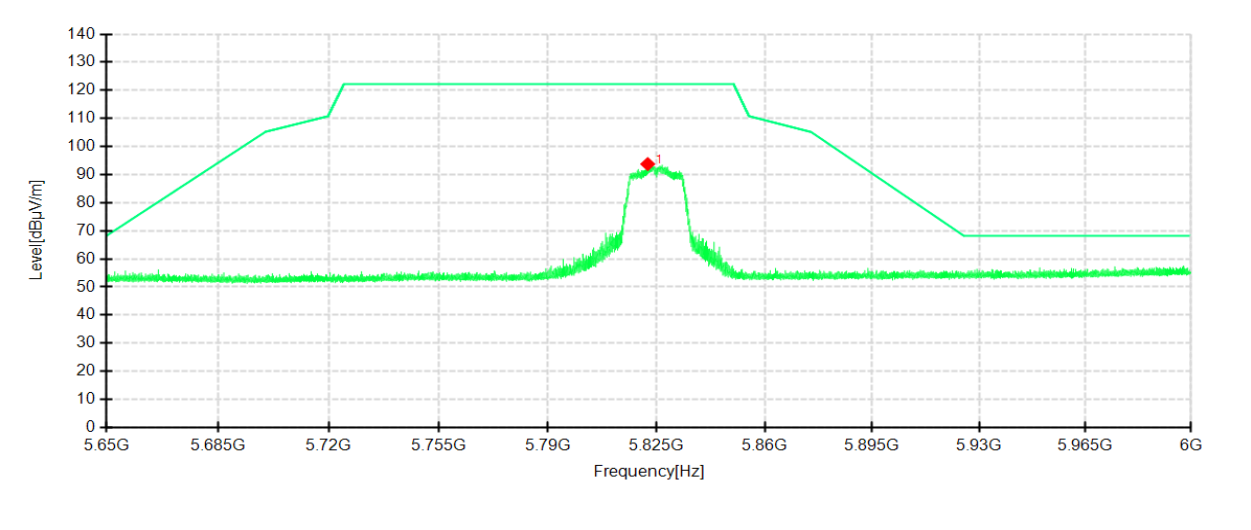


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5823.3200	79.35	96.42	17.07	122.20	25.78	200	356	Horizontal	/
1	5822.0775	76.67	93.74	17.07	122.20	28.46	100	15	Vertical	/

IEEE 802.11ac VHT40 mode/5190MHz


Detector mode: Peak

Polarity: Horizontal

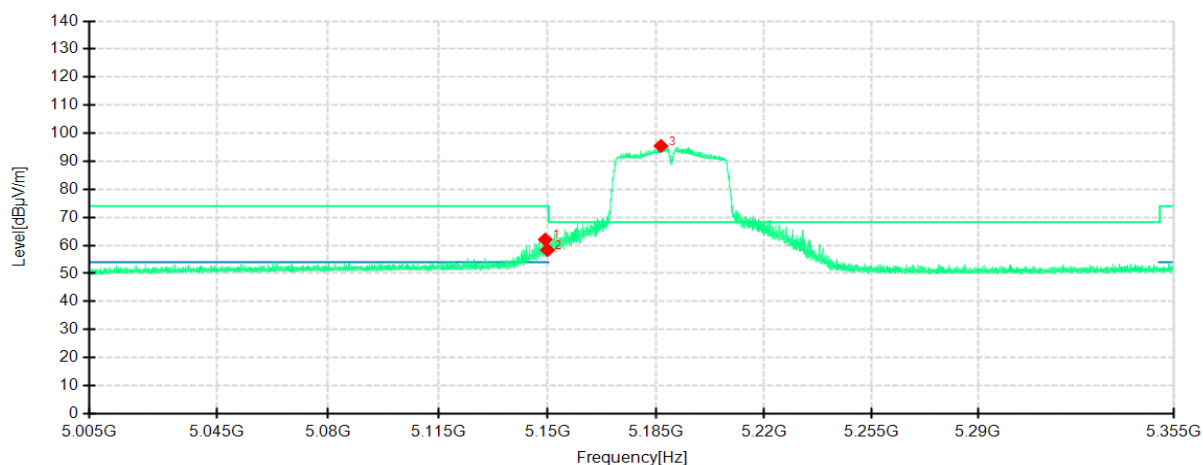

Detector mode: Peak

Polarity: Vertical

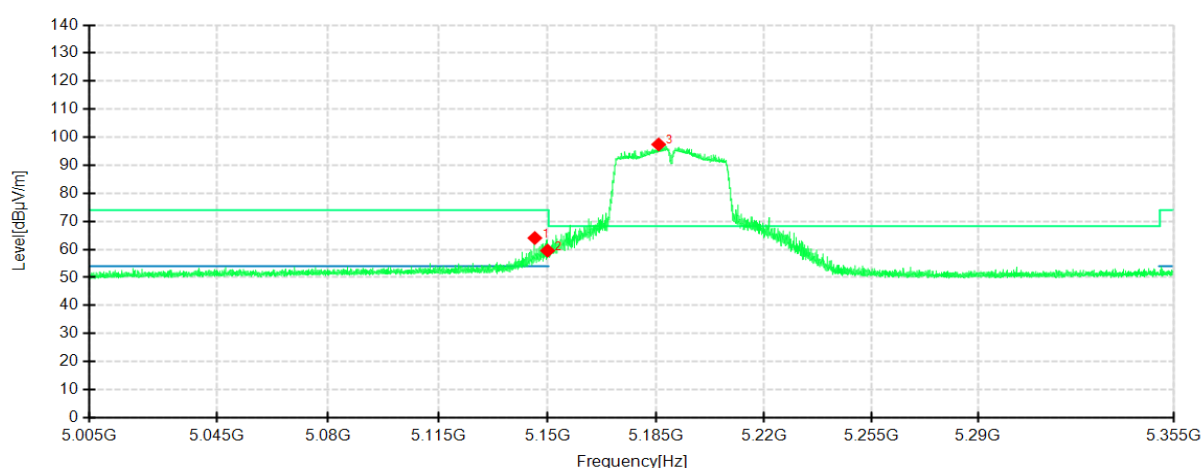


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5149.2700	48.30	62.09	13.79	74.00	11.91	200	218	Horizontal	/
2	5150.0000	44.58	58.35	13.77	74.00	15.65	200	1	Horizontal	/
3	5186.5100	80.83	95.49	14.66	68.30	-27.19	200	218	Horizontal	No limit
1	5145.9100	50.21	64.07	13.86	74.00	9.93	200	353	Vertical	/
2	5150.0000	45.79	59.56	13.77	74.00	14.44	200	359	Vertical	/
3	5185.7750	82.78	97.42	14.64	68.30	-29.12	200	142	Vertical	No limit

IEEE 802.11ac VHT40 mode/5190MHz


Detector mode: Average

Polarity: Horizontal

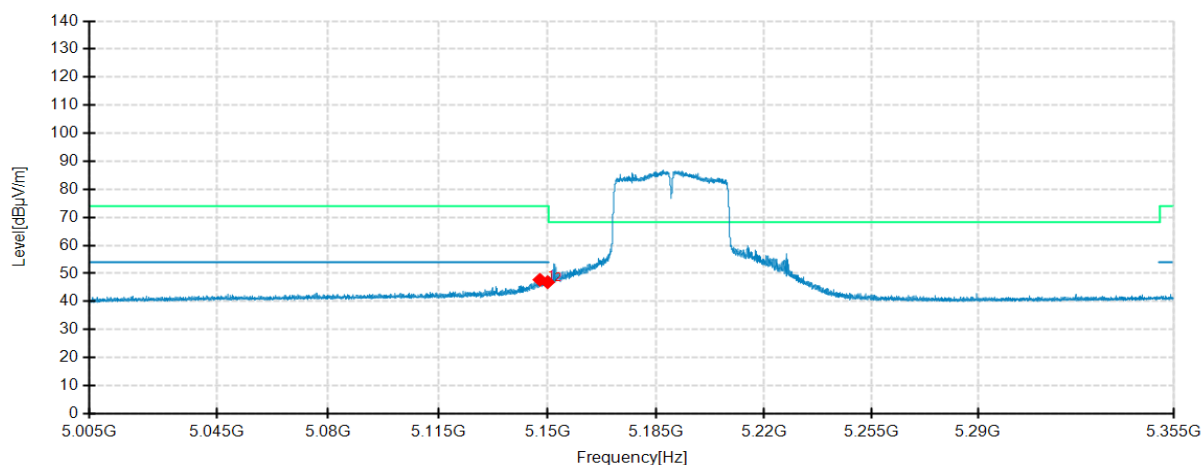

Detector mode: Average

Polarity: Vertical

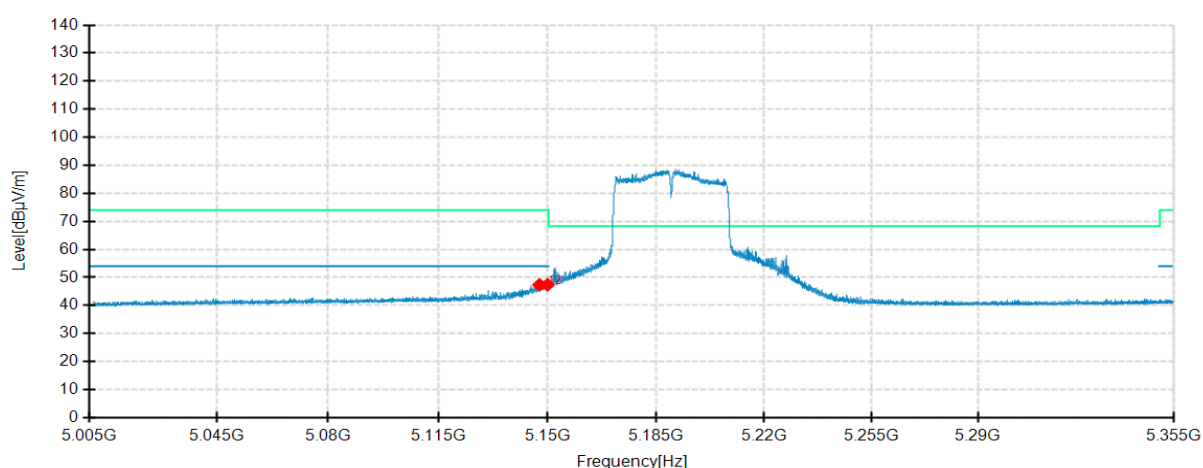


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5147.5550	33.91	47.73	13.82	54.00	6.27	200	218	Horizontal	/
2	5150.0000	33.11	46.88	13.77	54.00	7.12	200	218	Horizontal	/
1	5147.4150	33.55	47.38	13.83	54.00	6.62	200	360	Vertical	/
2	5150.0000	33.62	47.39	13.77	54.00	6.61	200	142	Vertical	/

IEEE 802.11ac VHT40 mode/5230MHz


Detector mode: Peak

Polarity: Horizontal

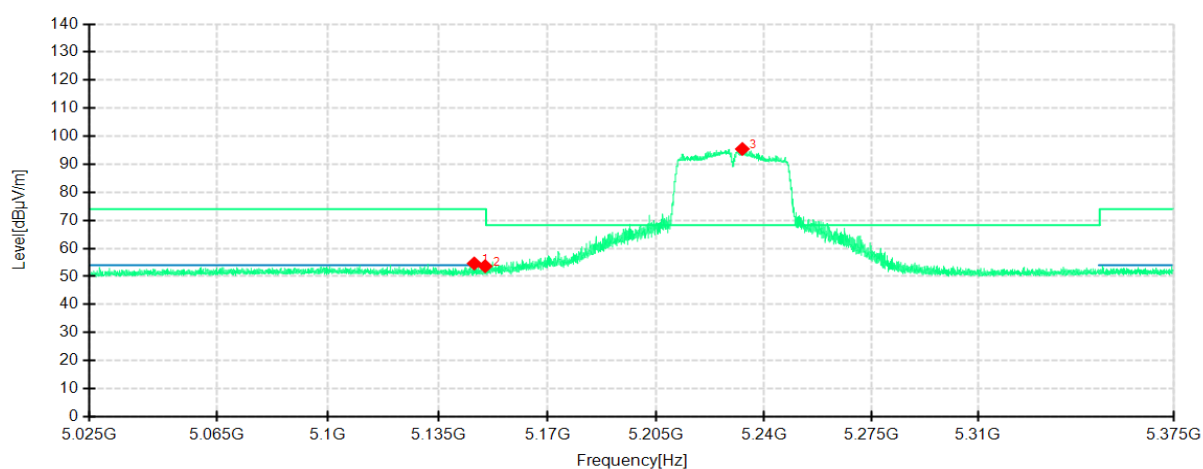

Detector mode: Peak

Polarity: Vertical

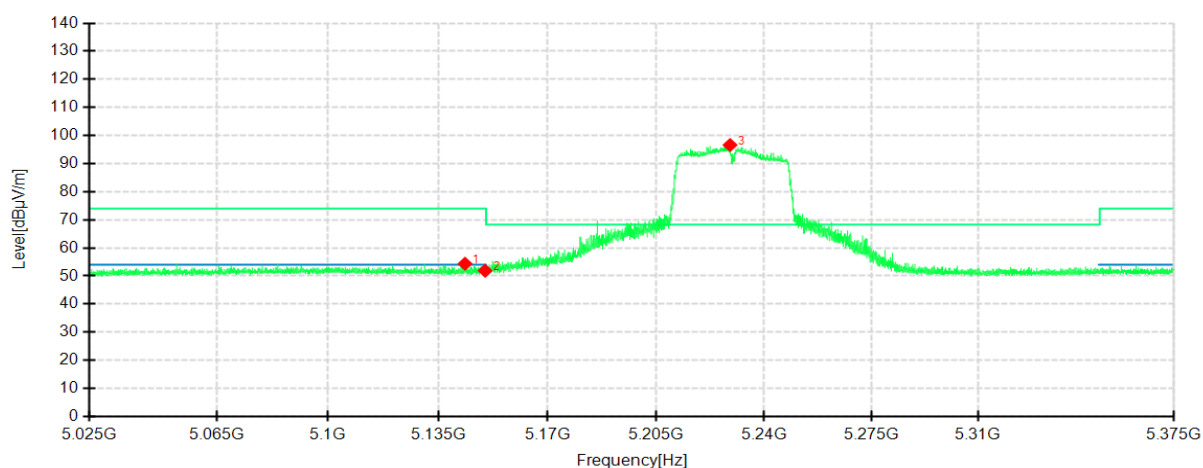


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5146.5200	40.77	54.62	13.85	74.00	19.38	200	218	Horizontal	/
2	5150.0000	39.88	53.65	13.77	74.00	20.35	200	1	Horizontal	/
3	5232.9000	80.99	95.45	14.46	68.30	-27.15	200	0	Horizontal	No limit
1	5143.5800	40.45	54.36	13.91	74.00	19.64	200	142	Vertical	/
2	5150.0000	38.09	51.86	13.77	74.00	22.14	200	142	Vertical	/
3	5228.9100	82.09	96.61	14.52	68.30	-28.31	200	142	Vertical	No limit

IEEE 802.11ac VHT40 mode/5230MHz


Detector mode: Average

Polarity: Horizontal

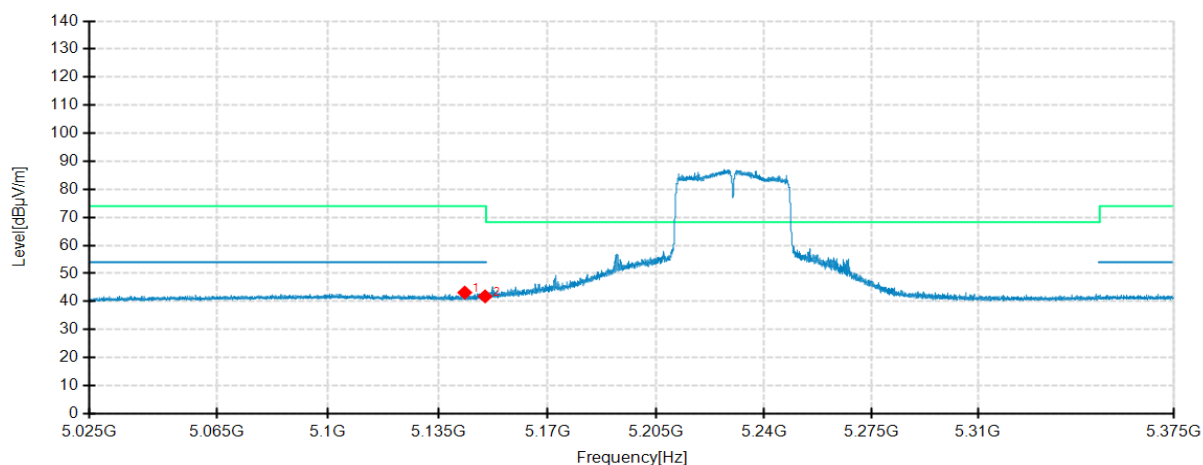

Detector mode: Average

Polarity: Vertical

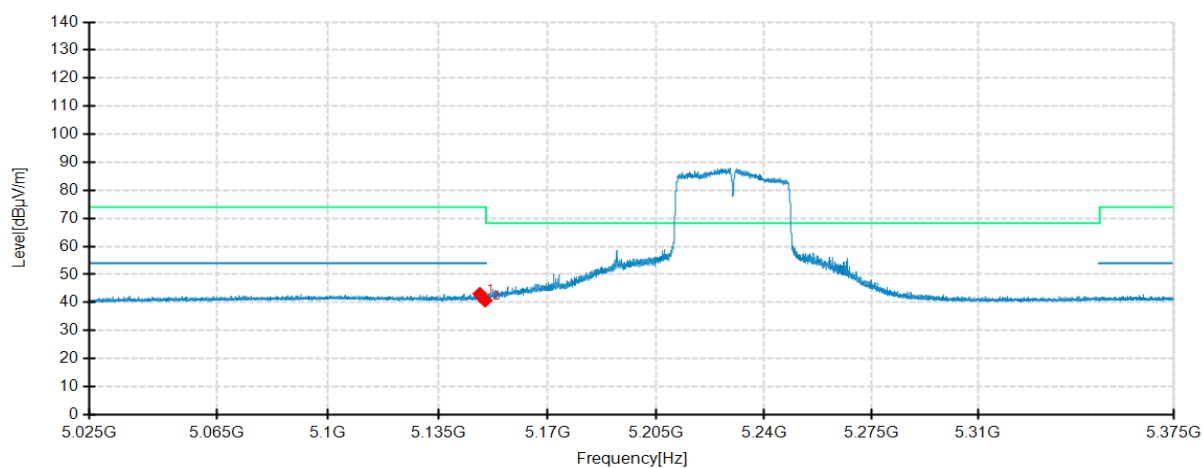


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5143.5100	29.27	43.18	13.91	54.00	10.82	200	218	Horizontal	/
2	5150.0000	28.05	41.82	13.77	54.00	12.18	200	7	Horizontal	/
1	5148.3050	29.29	43.10	13.81	54.00	10.90	200	142	Vertical	/
2	5150.0000	26.90	40.67	13.77	54.00	13.33	200	357	Vertical	/

IEEE 802.11ac VHT40 mode/5755MHz


Detector mode: Peak

Polarity: Horizontal

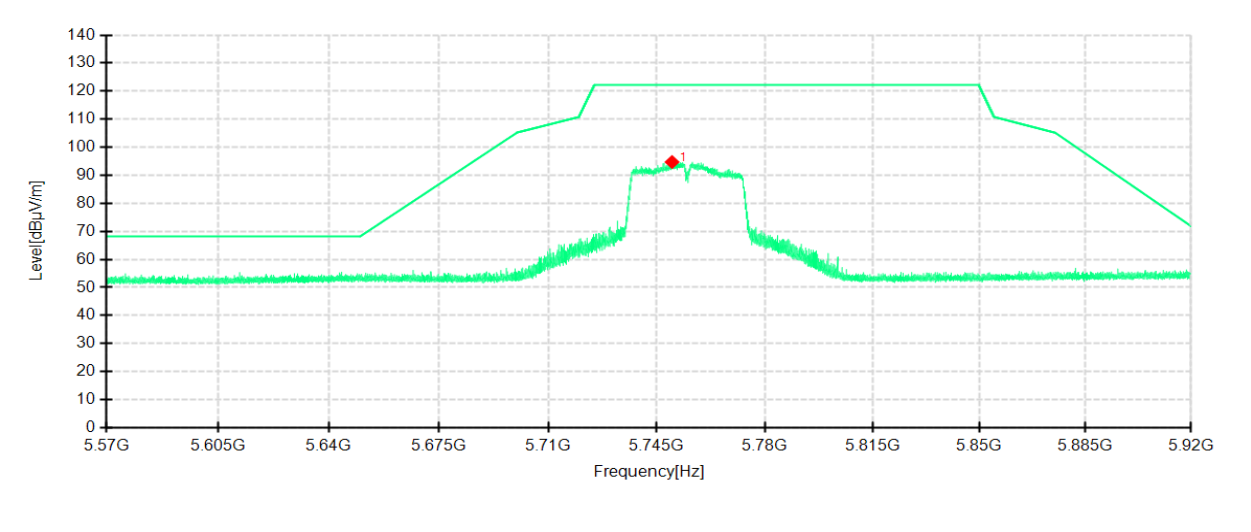

Detector mode: Peak

Polarity: Vertical

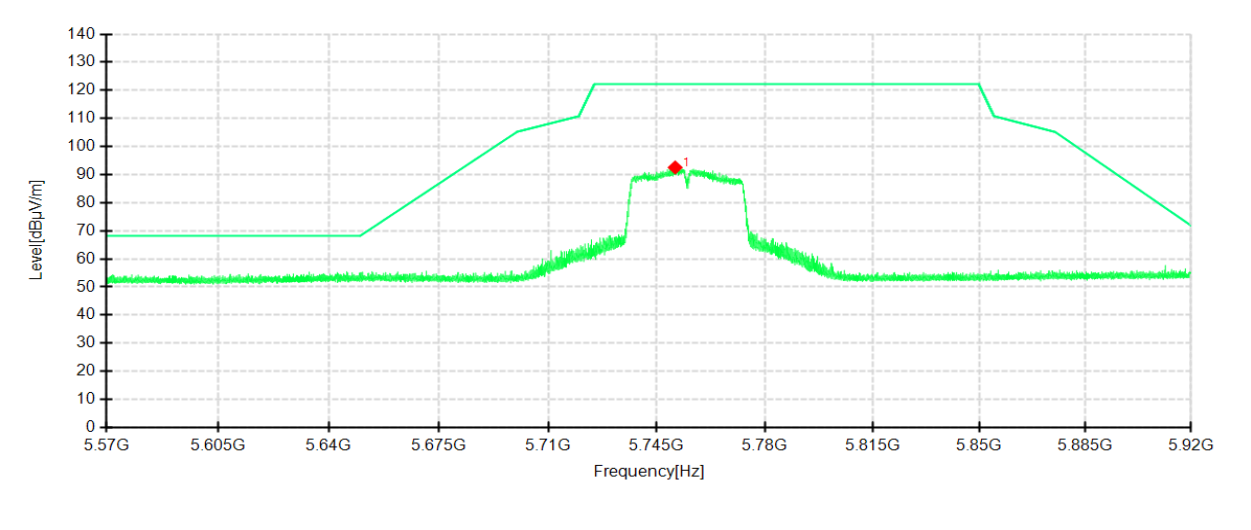


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5749.9000	77.47	94.72	17.25	122.20	27.48	200	15	Horizontal	/
1	5750.9150	75.29	92.54	17.25	122.20	29.66	100	7	Vertical	/

IEEE 802.11ac VHT40 mode/5795MHz


Detector mode: Peak

Polarity: Horizontal

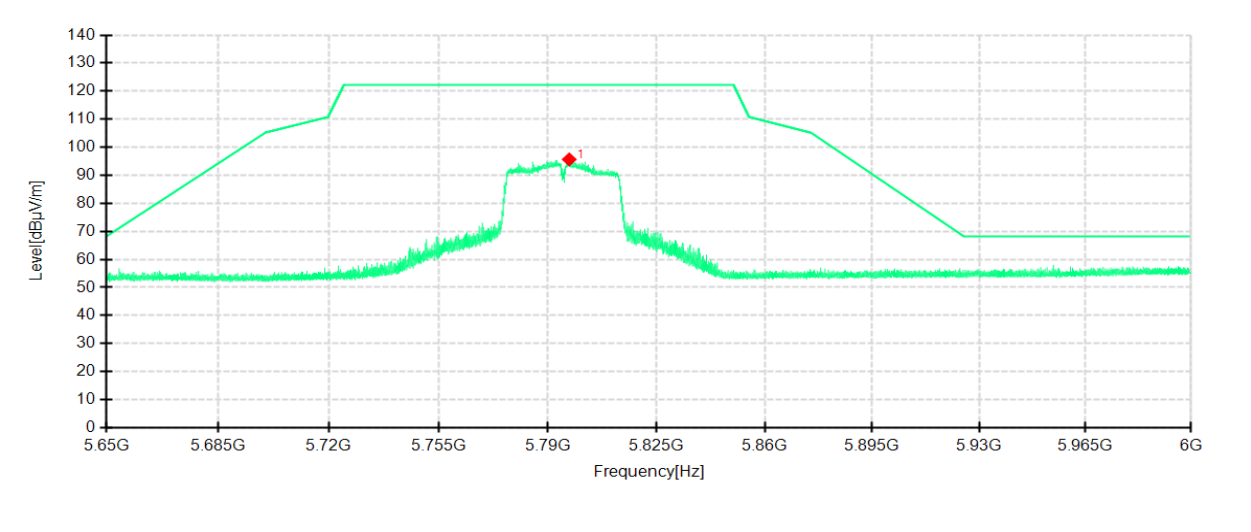

Detector mode: Peak

Polarity: Vertical

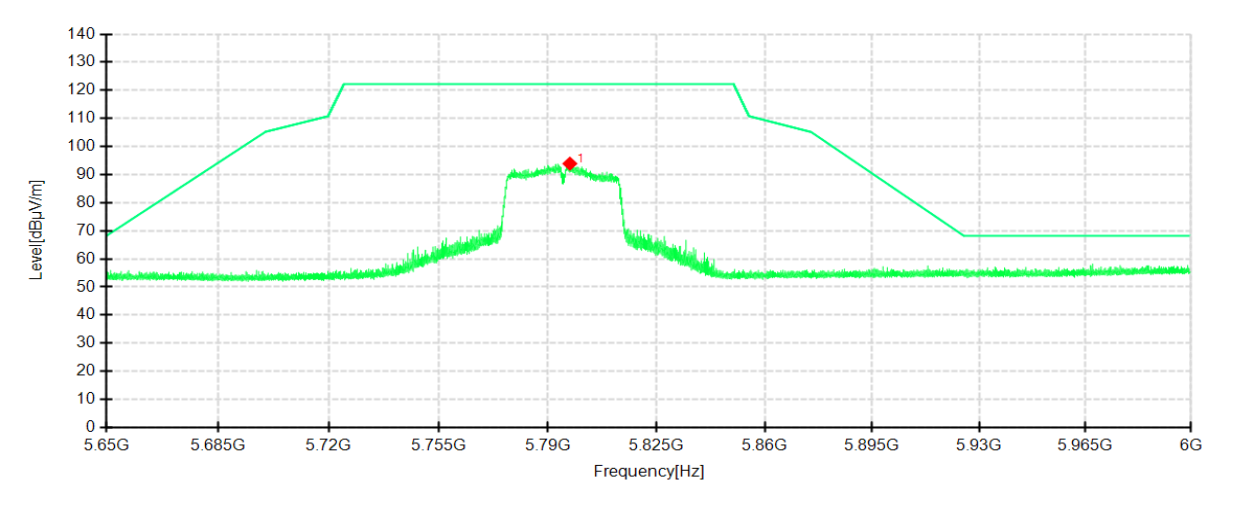

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5796.8075	78.58	95.65	17.07	122.20	26.55	200	350	Horizontal	/
1	5797.0175	76.84	93.91	17.07	122.20	28.29	100	14	Vertical	/