


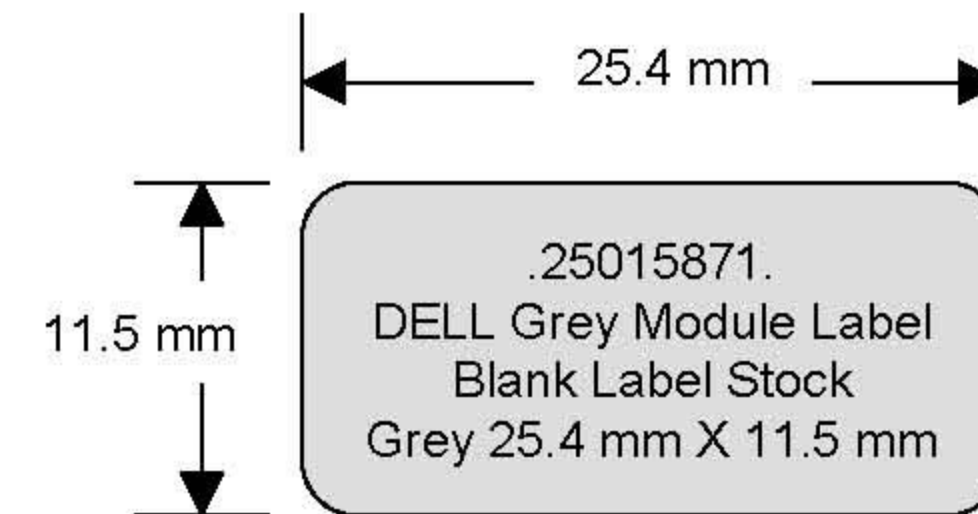

Dell Country Code and Dell Part Number
Verdana 5 Pt Bold
"CC-NNNNNN"
For CC, Use table 2
For NNNNNN, Use Table 1

Dell Revision Code
Verdana 5 pt Bold
TEXT: "REV:" NNN
For NNN Use Table 1

ESN Readable
TEXT: "ESN"
Verdana 5 pt Bold
TEXT: "NNNNNNNNN"
Verdana 5 pt Bold
ESN of the modem

FCC
TEXT: "FCC ID: NNNNNNNNNNN"
Verdana 5 pt Bold
For NNNNNNNNNNN Use Table 1



Dell PPID Barcode
Barcode Type: Datamatrix
18 X 18 – 15 mils- Ratio 1:3
Data:CCPPPPPPSSSSSYMDNNNNNAAA-EEEEEEEE
CC Country Code, Use **Table 2**
PPPPPP Dell Product SKU, Use **Table 1**
SSSSS Dell Ship To Location, Use **Table 3**
Y Year (2007 = 7), Use **Table 4**
M Month (5 = 5, 12 = C), Use **Table 4**
D Day (1 = 1, 15 = F, 31 = V), Use **Table 4**
NNNN Serial Number
AAA Dell Revision Number, Use **Table 1**
"-" Dash
EEEEEEEE ESN in Hex

DATA ITEMS SHOWN ARE FOR REFERENCE ONLY. ALWAYS USE CORRECT VALUES FOR ORDERS BEING PROCESSED.

Table 4 – Date Code

Table 1 - EVDO PRODUCTS

FCC ID:	IC ID:	Novatel SKU	Product	Network	Dell PN	Rev	Master Pack Descriptions
PKRNVWE760D	3229B-E760	649496 01392 9	E760	SPRINT	0K682N	A00	MDM,WRLES,DW5730,SPRNT,MCRD
PKRNVWE760D	3229B-E760	649496 01358 5	E760	VERIZON	0J630N	A00	MDM,WRLES,DW5730,VRZN,MCRD

Table 2 - Country Codes

Code	Country
KR	KOREA, REPUBLIC OF
CN	CHINA
CA	CANADA

Dell's PPID Specification can be found in Document
"Dell PPID and Master Pack Label 13190A18-00.doc"

Dell's PPID Should be generated at the file of Fulfillment
 programming.

Table 3 - DELL MFG ID Codes

CODE	Ship To Location
00911	When shipped to MDS (Penang, Malaysia)
E2701	When shipped to EMEA (Limerick, Ireland) Europe Middle East & Africa

1 = 1
 2 = 2
 3 = 3
 4 = 4
 5 = 5
 6 = 6
 7 = 7
 8 = 8
 9 = 9
 10 = A
 11 = B
 12 = C
 13 = D
 14 = E
 15 = F
 16 = G
 17 = H
 18 = I
 19 = J
 20 = K
 21 = L
 22 = M
 23 = N
 24 = O
 25 = P
 26 = Q
 27 = R
 28 = S
 29 = T
 30 = U
 31 = V

DATA ITEMS SHOWN ARE FOR REFERENCE ONLY. ALWAYS USE CORRECT VALUES FOR ORDER BEING PROCESSED.

Antenna Type
Model # : E760

