

TEST REPORT

PINEAPPLE TECHNOLOGY INC. UTX2KW ULTRA TV TRANSMITTER TECHNICAL REPORT

INTRODUCTION

The following information is provided to support the technical performance of the Pineapple Technology UTX2KW ULTRA TV Transmitter. The information is supplied for broadcast TV service according to applicable portions of FCC rules contained in Part 2, Part 73, and 74.

1. Power Output Measurements as indicated by FCC Rule Part 2.1046.
2. Frequency Measurements as identified by FCC Rule Part 2.1055.
3. Visual Frequency response measurements of the transmitter to be within the window specified by FCC Rule Part 74.750.
4. Occupied BW of aural signal specified by FCC Rule Part 2.1079.
5. Aural frequency response as identified by FCC Rule Part 73.687
6. Measurement of conducted harmonics and spurs +/- 3 MHz outside of channel as specified by FCC Rule Part 74.750 and Part 2 Rule 2.1051.
7. Measurement of cabinet radiation of spurs and harmonics as specified in FCC Rule 2.1053 and 2.1057.
8. Measurements of voltage and current to final amp stage as outlined in FCC Rule 2.1033.

Measurements were conducted at a transmitter visual power output level of 2000 watts peak of sync and an aural power level of 100 watts. Some measurements were also carried out at 500 watts peak of sync to indicate that the performance was consistent over that power range. Measurements were taken on a unit with visual carrier frequency of 573.25 MHz and an aural carrier frequency of 577.75 MHz.

The test equipment used for the measurements in this test report is listed at the back of this exhibit. All test equipment was calibrated prior to the use of the equipment by the supplier of the test equipment.

RF POWER OUTPUT

The equipment was configured as below shown in Figure 1. The loss through the RF output cable, directional coupler and attenuator was calibrated at the frequency of 573 MHz. The TSG-90 video generator was configured to produce a signal with 0 IRE video and sync. The audio generator and aural carrier were not energized. The visual portion of the transmitter was energized and the power was increased to the desired output power. The power was read on the HP-435 Power Meter and a reference level was established on the HP8590B Spectrum Analyzer. The TV demodulator and VM-700 were used to verify that sync compression was not causing distortion of the measurement. The aural carrier was energized and its output level was then raised to meet the precise 13 dB Visual/aural power ratio as observed on the spectrum analyzer. Pictures were also taken of demodulated video with 2 lines of a modulated staircase (or reference white level) , and 2 fields of video to verify no signal distortions were present.



POWER OUTPUT

HP 435 Power Meter reading at high power= 10.8 mwatts


Average Power = Meter reading + attenuator+ directional coupler loss + cable loss

Average Power = 10.8 mwatts + 50.5 dB = 1211 watts

Peak of sync power = 1.68 times average power = 1.68 x 1211 = 2035 watts

Figure 1


Test Equipment Configuration

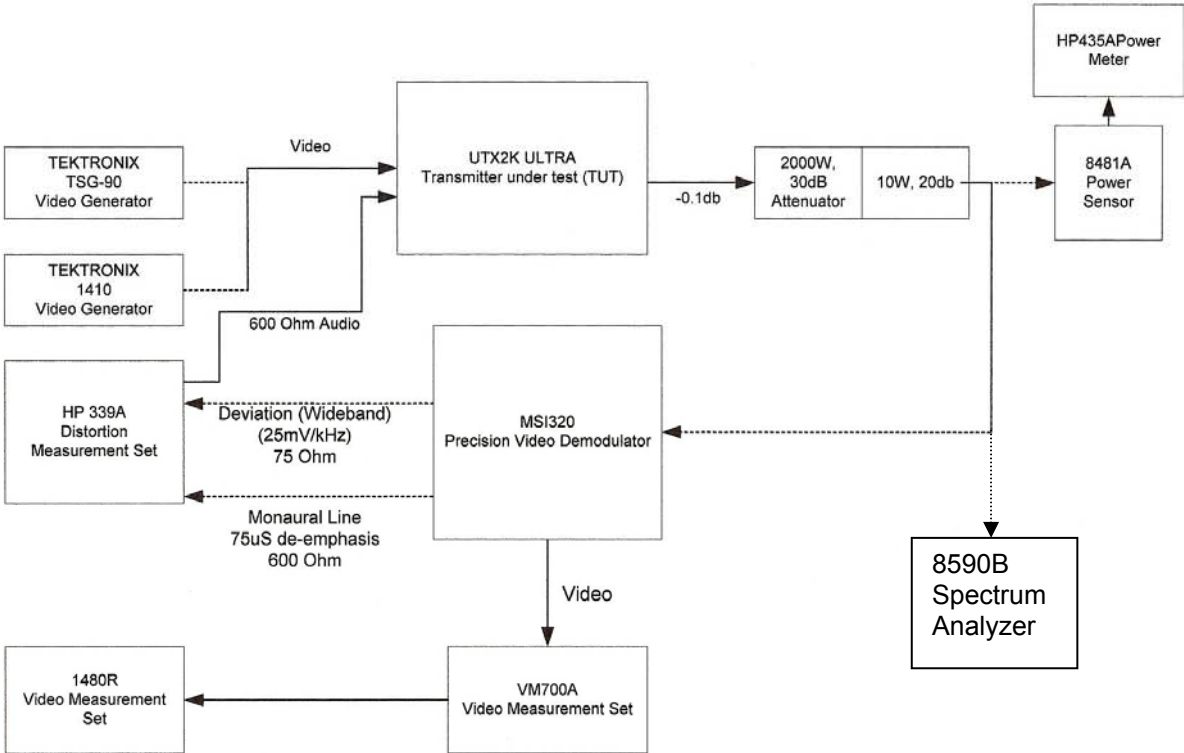


Dashed line indicates only one instrument connected at a time

Ed Wood 09 FEB 06

**TWO HORIZONTAL LINES AND TWO FIELDS SHOWING
CORRECT MODULATION DEPTH FOR REFERENCE WHITE
AND SYNC LEVELS AT 2.0 KW**

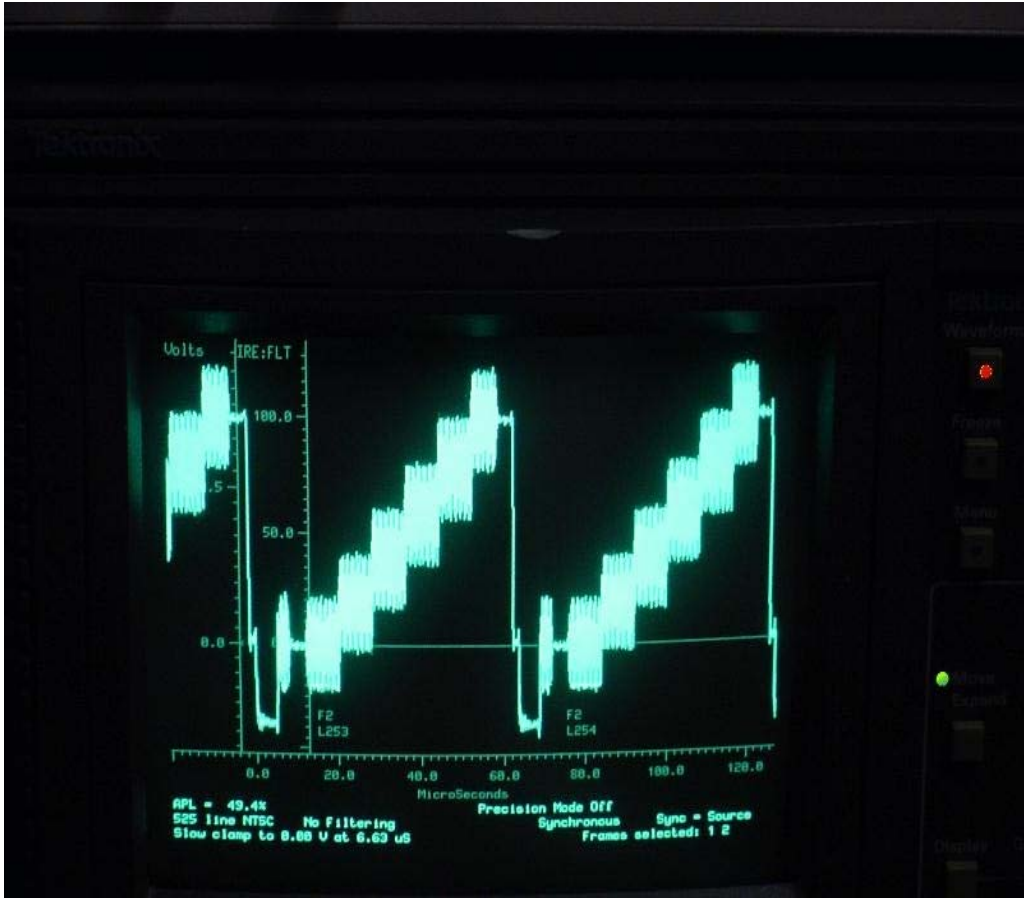

Power Output = 2.0 kwatts

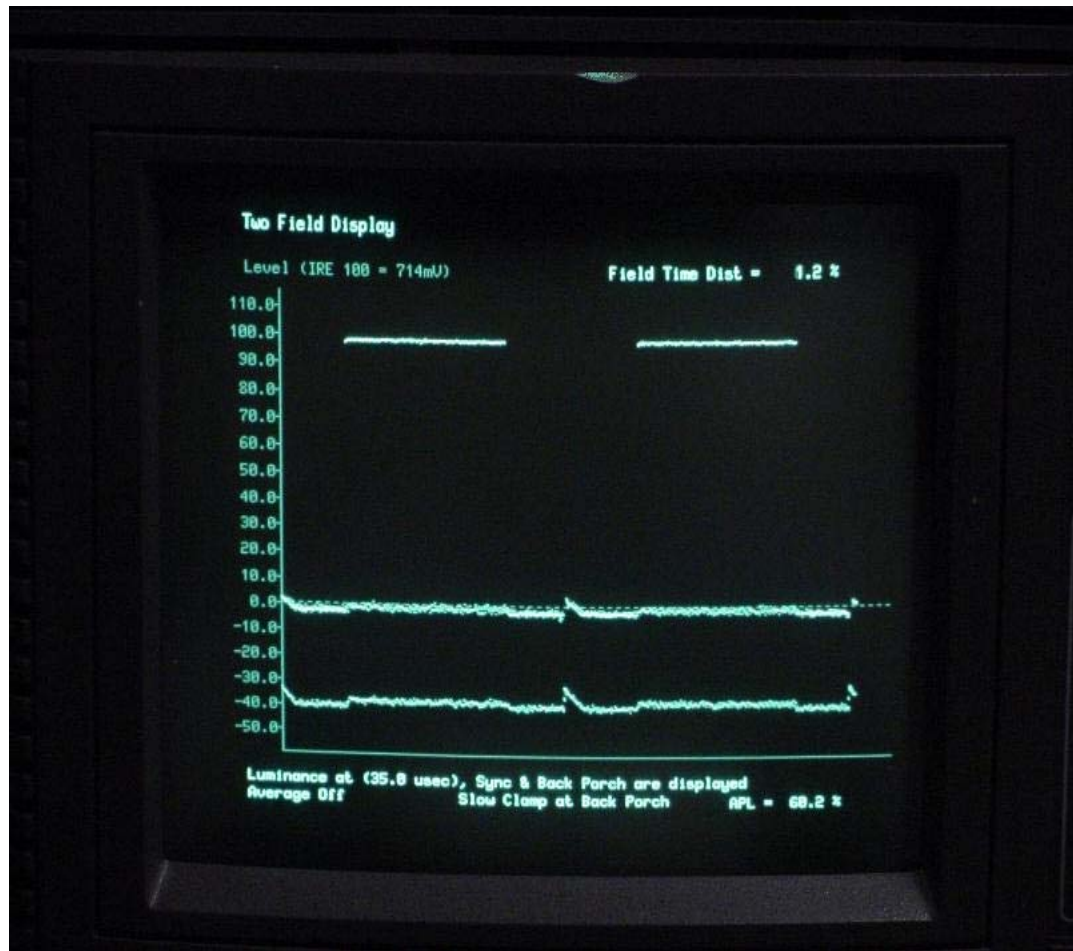

Power Output = 2.0 kwatts