

Prüfbericht-Nr.: <i>Test report no.:</i>	CN2446W2 002	Auftrags-Nr.: <i>Order no.:</i>	168485194	Seite 1 von 25 <i>Page 1 of 25</i>
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2024-05-22	
Auftraggeber: <i>Client:</i>	Shenzhen Eartech Company Ltd. 4-516, Tusincere Science Park, Qingchun Road, Longcheng Street, Shenzhen, Guangdong, China			
Prüfgegenstand: <i>Test item:</i>	RIC Behind-the-ear Hearing Aids			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	ZTQ01ZT, ZTQ01ZT Pro, ZTQ02ZT, ZTQ02ZT Pro, ZTQ03ZT, ZTQ03ZT Pro, ZTQ04ZT, ZTQ04ZT Pro, ZTQ05ZT, ZTQ05ZT Pro (Trademark: TUITUI)			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2024-09-06	Please refer to Photo Document		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003797781-001~004			
Prüfzeitraum: <i>Testing period:</i>	2024-09-10 - 2024-10-11			
Ort der Prüfung: <i>Place of testing:</i>	Refer to section 2.1			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>			genehmigt von: <i>authorized by:</i>	
Datum: <i>Date:</i>	2025-04-22	Signed by: Breeze Jiang	Ausstellungsdatum: <i>Issue date:</i>	2025-04-22
			Signed by: Lin Lin	
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / <i>Other:</i>	FCC ID: 2A5WV-ZTQ-EARTECH			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet				
* Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN2446W2 002
Test report no.:

Seite 2 von 25
Page 2 of 25

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN2446W2 002
Test Report No.:

Seite 3 von 25
Page 3 of 25

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 6dB BANDWIDTH

RESULT: Pass

5.1.5 99% BANDWIDTH

RESULT: Pass

5.1.6 20dB BANDWIDTH

RESULT: Pass

5.1.7 CARRIER FREQUENCY SEPARATION

RESULT: Pass

5.1.8 NUMBER OF HOPPING FREQUENCY

RESULT: Pass

5.1.9 TIME OF OCCUPANCY

RESULT: Pass

5.1.10 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH

RESULT: Pass

5.1.11 RADIATED SPURIOUS EMISSION

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS.....	5
2	TEST SITES.....	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	TRACEABILITY	7
2.4	CALIBRATION.....	7
2.5	MEASUREMENT UNCERTAINTY	7
2.6	LOCATION OF ORIGINAL DATA	7
2.7	STATUS OF FACILITY USED FOR TESTING	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	RATINGS AND SYSTEM DETAILS.....	8
3.3	INDEPENDENT OPERATION MODES.....	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS.....	10
4	TEST SET-UP AND OPERATION MODES.....	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION	11
4.2	TEST OPERATION AND TEST SOFTWARE	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	11
4.5	TEST SETUP DIAGRAM	12
5	TEST RESULTS	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	13
5.1.1	<i>Antenna Requirement.....</i>	<i>13</i>
5.1.2	<i>Maximum Peak Conducted Output Power</i>	<i>14</i>
5.1.3	<i>Conducted Power Spectral Density.....</i>	<i>16</i>
5.1.4	<i>6dB Bandwidth</i>	<i>17</i>
5.1.5	<i>99% Bandwidth.....</i>	<i>18</i>
5.1.6	<i>20dB Bandwidth</i>	<i>19</i>
5.1.7	<i>Carrier Frequency Separation</i>	<i>20</i>
5.1.8	<i>Number of Hopping Frequency</i>	<i>21</i>
5.1.9	<i>Time of Occupancy.....</i>	<i>22</i>
5.1.10	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth</i>	<i>23</i>
5.1.11	<i>Radiated Spurious Emission</i>	<i>24</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	25
7	LIST OF TABLES.....	25

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of Bluetooth BR & EDR

Appendix B: Test Results of Bluetooth LE

Appendix C: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

Shenzhen PSI Testing Co., Ltd.

1-2F, Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Registration number: CNAS L19010

A2LA CAB identifier: CN0158

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2023.12.20	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2023.12.19	1 Year
3.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2023.04.03	2 Year
4.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2022.12.26	2 Year
5.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2023.12.19	1 Year
6.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2022.12.26	2 Year
7.	Amplifier	SKET	LAPA_01G1 8G-45dB	SK2022032901	/	2023.12.19	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2022.12.26	2 Year
9.	Amplifier	SKET	LNPA_0118 G-45	SK2020010801	/	2023.12.19	1 Year
10.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02-117725-vh	/	2023.12.19	1 Year
11.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02-1111533-Fz	/	2023.12.19	1 Year
12.	Vector Signal Generator	Agilent	N5182A	MY47420724	/	2023.12.19	1 Year
13.	Analog signal generator	Agilent	N5181A	MY50145363	/	2023.12.19	1 Year
14.	Comprehensive Test Instrument	Rohde&Schwarz	CMW 500	145266	/	2023.12.19	1 Year
15.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2023.12.19	1 Year
16.	Temp. & Humid Chamber	Auchno	9606	/	/	2023.12.19	1 Year
17.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	202211251638	/	2023.12.19	1 Year

For Test Software Information

Item	Software Name	Manufacturer	Version
RE	EZ_EMG	Farad	PSI-3A1
RF	RTS	TACHOY	V1.0.0

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Table 2: Measurement Uncertainty

Item	Uncertainty
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5 dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	2.74dB (Polarize: V)
	2.76dB (Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 18GHz)	4.29dB (Polarize: V)
	4.82dB (Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31dB (Polarize: V)
	4.30dB (Polarize: H)
Uncertainty for Radio Frequency	48.24 kHz
Uncertainty for Conducted RF Power	0.41dB
Uncertainty for Power Spectral Density	0.39 dB
Occupied-Bandwidth	968 Hz
Conducted-Spurious Emission	1.26 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B & C of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The Shenzhen PSI Testing Co., Ltd. Test facility located at 1-2F, Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104 is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUTs are RIC Behind-the-ear Hearing Aids, which consist of a left hearing aid, a right hearing aid and a charging case. The hearing aid supports Bluetooth dual mode wireless technology.

Note: When the EUT is charged, other functions cannot be used.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	RIC Behind-the-ear Hearing Aids
Type Designation:	ZTQ01ZT, ZTQ01ZT Pro, ZTQ02ZT, ZTQ02ZT Pro, ZTQ03ZT, ZTQ03ZT Pro, ZTQ04ZT, ZTQ04ZT Pro, ZTQ05ZT, ZTQ05ZT Pro (Note: The product only different appearance color for marketing purpose.)
Trademark:	TUITUI
FCC ID:	2A5WV-ZTQ-EARTECH
Operating Voltage (hearing aid):	Internal battery operated (3.7Vdc) or Charge by charging case (5Vdc)
Operating Voltage (charging case):	USB operated (PC input voltage 5Vdc)
Operating Temperature Range:	-20 °C ~ +60 °C
Technical Specification of Bluetooth BR & EDR	
Operating Frequency:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Channel Number:	79 channels
Channel Separation:	1MHz
Antenna Type:	Laser-Direct-structuring
Antenna Gain:	1.58 dBi (Provided by the Client)
Technical Specification of Bluetooth LE	
Operating Frequency:	Bluetooth LE(1Mbps): 2402 MHz to 2480 MHz Bluetooth LE(2Mbps): 2404 MHz to 2478 MHz
Type of Modulation:	GFSK
Channel Number:	Bluetooth LE(1Mbps): 40 channels Bluetooth LE(2Mbps): 38 channels
Channel Separation:	2MHz
Data Rate:	1Mbps, 2Mbps
Antenna Type:	Laser-Direct-structuring
Antenna Gain:	1.58 dBi (Provided by the Client)

Table 4: RF Channel and Frequency of Bluetooth BR & EDR

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	20	2422.00	40	2442.00	60	2462.00
1	2403.00	21	2423.00	41	2443.00	61	2463.00
2	2404.00	22	2424.00	42	2444.00	62	2464.00
3	2405.00	23	2425.00	43	2445.00	63	2465.00
4	2406.00	24	2426.00	44	2446.00	64	2466.00
5	2407.00	25	2427.00	45	2447.00	65	2467.00
6	2408.00	26	2428.00	46	2448.00	66	2468.00
7	2409.00	27	2429.00	47	2449.00	67	2469.00
8	2410.00	28	2430.00	48	2450.00	68	2470.00
9	2411.00	29	2431.00	49	2451.00	69	2471.00
10	2412.00	30	2432.00	50	2452.00	70	2472.00
11	2413.00	31	2433.00	51	2453.00	71	2473.00
12	2414.00	32	2434.00	52	2454.00	72	2474.00
13	2415.00	33	2435.00	53	2455.00	73	2475.00
14	2416.00	34	2436.00	54	2456.00	74	2476.00
15	2417.00	35	2437.00	55	2457.00	75	2477.00
16	2418.00	36	2438.00	56	2458.00	76	2478.00
17	2419.00	37	2439.00	57	2459.00	77	2479.00
18	2420.00	38	2440.00	58	2460.00	78	2480.00
19	2421.00	39	2441.00	59	2461.00		

Test frequencies are lowest channel: 2402 MHz, middle channel: 2441 MHz and highest channel: 2480 MHz for Bluetooth BR & EDR

Table 5: RF Channel and Frequency of Bluetooth LE

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Test frequencies are lowest channel: 2402 MHz, middle channel: 2440 MHz and highest channel: 2480 MHz for Bluetooth LE(1Mbps)

Test frequencies are lowest channel: 2404 MHz, middle channel: 2440 MHz and highest channel: 2478 MHz for Bluetooth LE(2Mbps)

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Bluetooth transmitting mode (BR & EDR mode)
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, Bluetooth transmitting mode (Bluetooth LE mode)
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- C. On, Transmitting on Hopping channel
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- ID Label and Location Info
- User Manual

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model ZTQ01ZT in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 6: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N
Cellphone	Remi	Note10	N/A
Notebook PC	Dell	Latitude 3490	2TJSXR2
Type-C cable	UGREEN	1M	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

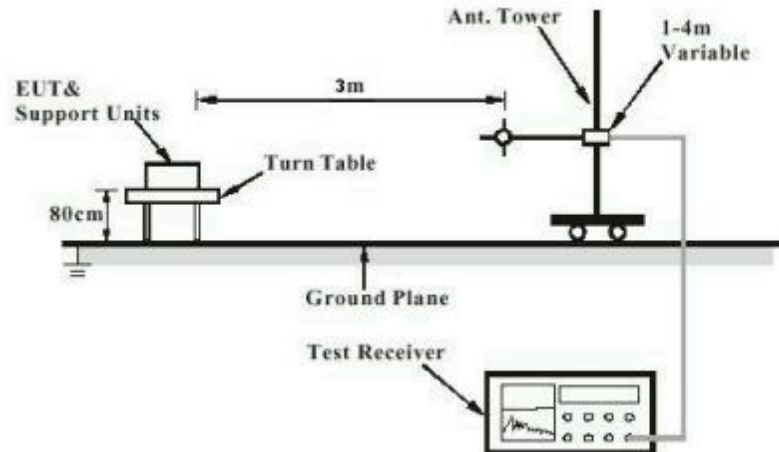


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)


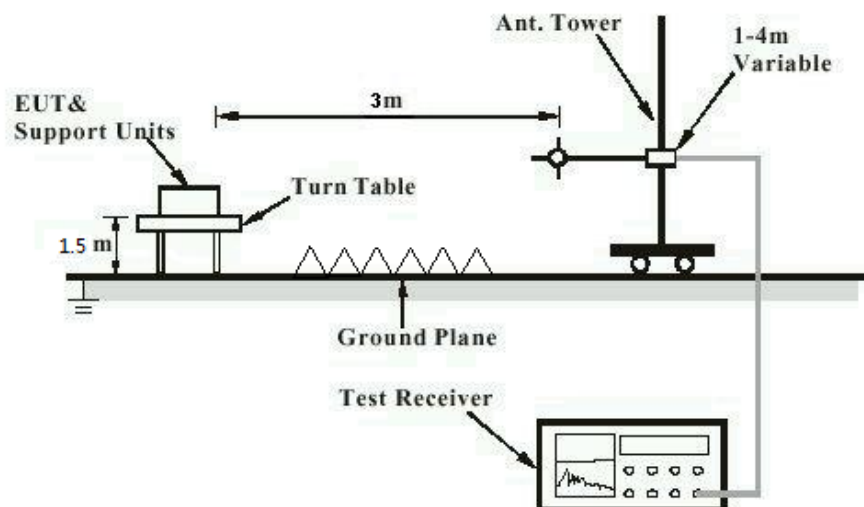


Diagram of Measurement Configuration for Conducted Transmitter Measurement

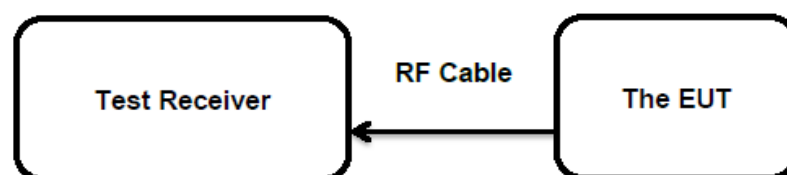

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203

According to the manufacturer declared, the EUT has an Laser-Direct-structuring, the directional gain of antenna is 1.58 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement.

Therefore, the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN2446W2 002
Test Report No.:

Seite 14 von 25
Page 14 of 25

5.1.2 Maximum Peak Conducted Output Power

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(b)(1)&(3)
Basic standard	: ANSI C63.10: 2013
Limits	: FHSS < 0.125 Watts, DSSS < 1.0 Watts
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-09-09 to 2024-09-18
Input voltage	: Internal battery operated (3.7Vdc)
Operation mode	: A, B
Test channel	: Low / Middle / High
Ambient temperature	: 24 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101.3 kPa

For details refer to following test result.

Table 7: Test Result of Maximum Peak Conducted Output Power, Bluetooth BR & EDR

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
GFSK (BR)	2402.0	6.79	0.0048	< 0.125
	2441.0	6.88	0.0049	
	2480.0	7.89	0.0062	
Maximum Measured Value		7.89	0.0062	
Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
8DPSK (EDR)	2402.0	6.77	0.0048	< 0.125
	2441.0	6.89	0.0049	
	2480.0	7.90	0.0062	
Maximum Measured Value		7.90	0.0062	

Table 8: Test Result of Maximum Peak Conducted Output Power, Bluetooth LE

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
Bluetooth LE (1 Mbps)	2402	4.41	0.0028	< 1.0
	2440	4.28	0.0027	
	2480	4.36	0.0027	
Max. Measured Value		4.41	0.0028	
Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
Bluetooth LE (2 Mbps)	2402	4.45	0.0028	< 1.0
	2440	4.99	0.0032	
	2480	3.67	0.0023	
Max. Measured Value		4.99	0.0032	

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G): 1.58dBi

Prüfbericht - Nr.: CN2446W2 002
Test Report No.:Seite 16 von 25
Page 16 of 25

5.1.3 Conducted Power Spectral Density

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(e)
Basic standard	: ANSI C63.10: 2013
Limits	: < 8 dBm / 3kHz
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-09-09 to 2024-09-18
Input voltage	: Internal battery operated (3.7Vdc)
Operation mode	: B
Test channel	: Low / Middle / High
Ambient temperature	: 24 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101.3 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN2446W2 002
Test Report No.:

Seite 17 von 25
Page 17 of 25

5.1.4 6dB Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(a)(2)
Basic standard : ANSI C63.10: 2013
Limits : > 500 kHz
Kind of test site : Shielded Room

Test Setup

Date of testing : 2024-09-09 to 2024-09-18
Input voltage : Internal battery operated (3.7Vdc)
Operation mode : B
Test channel : Low / Middle / High
Ambient temperature : 24 °C
Relative humidity : 56 %
Atmospheric pressure : 101.3 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN2446W2 002
Test Report No.:

Seite 18 von 25
Page 18 of 25

5.1.5 99% Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(a)
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 2024-09-09 to 2024-09-18
Input voltage : Internal battery operated (3.7Vdc)
Operation mode : A, B
Test channel : Low / Middle / High
Ambient temperature : 24 °C
Relative humidity : 56 %
Atmospheric pressure : 101.3 kPa

For the measurement records, refer to the appendix A & B.

Prüfbericht - Nr.: CN2446W2 002
Test Report No.:

Seite 19 von 25
Page 19 of 25

5.1.6 20dB Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(a)(1)
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 2024-09-09 to 2024-09-18
Input voltage : Internal battery operated (3.7Vdc)
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 24 °C
Relative humidity : 56 %
Atmospheric pressure : 101.3 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN2446W2 002
Test Report No.:Seite 20 von 25
Page 20 of 25

5.1.7 Carrier Frequency Separation

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(a)(1)
Basic standard	: ANSI C63.10: 2013
Limits	: $\geq 25\text{kHz}$ or 2/3 of 20dB bandwidth, whichever is greater
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-09-09 to 2024-09-18
Input voltage	: Internal battery operated (3.7Vdc)
Operation mode	: C
Test channel	: Low / Middle / High
Ambient temperature	: 24 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101.3 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN2446W2 002
Test Report No.:

Seite 21 von 25
Page 21 of 25

5.1.8 Number of Hopping Frequency

RESULT:

Pass

Test Specification

Test standard	: FCC part 15.247(a)(1)(iii)
Basic standard	: ANSI C63.10: 2013
Limits	: ≥ 15 non-overlapping channels
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-09-09 to 2024-09-18
Input voltage	: Internal battery operated (3.7Vdc)
Operation mode	: C
Ambient temperature	: 24 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101.3 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN2446W2 002
Test Report No.:

Seite 22 von 25
Page 22 of 25

5.1.9 Time of Occupancy

RESULT:

Pass

Test Specification

Test standard : FCC part 15.247(a)(1)(iii)
Basic standard : ANSI C63.10: 2013
Limits : < 0.4s
Kind of test site : Shielded Room

Test Setup

Date of testing : 2024-09-09 to 2024-09-18
Input voltage : Internal battery operated (3.7Vdc)
Operation mode : C
Test channel : Low / Middle / High
Ambient temperature : 24 °C
Relative humidity : 56 %
Atmospheric pressure : 101.3 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN2446W2 002

Test Report No.:

Seite 23 von 25

Page 23 of 25

5.1.10 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d)
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-09-09 to 2024-09-18
Input voltage	: Internal battery operated (3.7Vdc)
Operation mode	: A, B
Test channel	: Low / Middle / High
Ambient temperature	: 24 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101.3 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix A & B.

Prüfbericht - Nr.: CN2446W2 002
Test Report No.:Seite 24 von 25
Page 24 of 25

5.1.11 Radiated Spurious Emission

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(d) & FCC Part 15.205
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to 15.209(a) of FCC part 15.247(d)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2024-10-10 to 2024-10-11
Input voltage	: Internal battery operated (3.7Vdc)
Operation mode	: A, B
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101.3.3 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix A & B.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix C.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty	7
Table 3: Technical Specification of EUT.....	8
Table 4: RF Channel and Frequency of Bluetooth BR & EDR	9
Table 5: RF Channel and Frequency of Bluetooth LE	9
Table 6: List of Accessories and Auxiliary Equipment.....	11
Table 7: Test Result of Maximum Peak Conducted Output Power, Bluetooth BR & EDR	15
Table 8: Test Result of Maximum Peak Conducted Output Power, Bluetooth LE.....	15