


Hearing Aid Compatibility (HAC) RF Emissions Test Report

APPLICANT : Sony Mobile Communications AB
EQUIPMENT : Smart phone
BRAND NAME : Sony
MODEL NAME : PM-0261-BV
MARKETING NAME : C1604
FCC ID : PY7PM-0261
STANDARD : FCC 47 CFR §20.19
ANSI C63.19-2007
M CATEGORY : M3

The product was completely tested on Oct. 17, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

Revision History.....	3
1. Statement of Compliance	4
2. Administration Data.....	5
2.1 Testing Laboratory	5
2.2 Applicant.....	5
2.3 Manufacturer	5
2.4 Application Details	5
3. General Information	6
3.1 Description of Equipment Under Test (EUT).....	6
3.2 Product Photos	7
3.3 Applied Standards	8
3.4 Test Conditions	9
3.4.1 Ambient Condition	9
3.4.2 Test Configuration.....	9
4. Hearing Aid Compliance (HAC).....	9
4.1 Introduction.....	9
5. HAC RF Emission Measurement Setup.....	10
5.1 E-Field and H-Field Probe System	11
5.1.1 E-Field Probe Specification	11
5.1.2 H-Field Probe Description.....	11
5.1.3 Probe Tip Description	12
5.2 DATA Acquisition Electronics (DAE)	13
5.3 Robot.....	14
5.4 Measurement Server	14
5.5 Phone Positioner	15
5.6 Test Arch Phantom	15
5.7 Data Storage and Evaluation.....	16
5.7.1 Data Storage	16
5.7.2 Data Evaluation	16
5.8 Test Equipment List	18
6. Uncertainty Assessment	19
7. HAC RF Emission Measurement Evaluation	21
7.1 Purpose of System Performance Check.....	21
7.2 System Setup	21
7.3 Validation Results	22
8. RF Field Probe Modulation Factor	23
9. Description for EUT Testing Position.....	27
10. RF Emissions Test Procedure.....	29
11. HAC RF Emission Test Results.....	30
11.1 Conducted Power (Unit: dBm).....	30
11.2 E-Field Emission.....	30
11.3 H-Field Emission	31
12. References.....	32
 Appendix A. Plots of System Performance Check	
Appendix B. Plots of RF Emission Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Product Photos	
Appendix E. Test Setup Photos	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
HA290405A	Rev. 01	Initial issue of report	Nov. 09, 2012
HA290405A	Rev. 02	Remove Battery picture	Nov. 26, 2012
HA290405A	Rev. 03	Add WLAN and BT functionality and Revise rule of KDB 285076	Nov. 30, 2012

1. Statement of Compliance

The maximum results of RF Emission of Hearing Aid Compliance (HAC) found during testing for the **Sony Mobile Communications AB Smart phone Sony PM-0261-BV C1604** are follows (with expanded uncertainty $\pm 30.5\%$ for E-field and $\pm 21.7\%$ for H-field):

Band	HAC RF Emission Test Result		M Rating
GSM850	E-Field (V/m)	222.6	M3
	H-Field (A/m)	0.326	M4
GSM1900	E-Field (V/m)	78.8	M3
	H-Field (A/m)	0.217	M3
WCDMA Band V	E-Field (V/m)	82.4	M4
	H-Field (A/m)	0.103	M4
WCDMA Band II	E-Field (V/m)	34.2	M4
	H-Field (A/m)	0.086	M4

They are in compliance with HAC limits (HAC Rated category M3) specified in guidelines FCC 47 CFR §20.19 and ANSI Standard ANSI C63.19.

Results Summary : M Category = M3 (ANSI C63.19-2007)

2. Administration Data

2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. : SAR01-HY

2.2 Applicant

Company Name	Sony Mobile Communications AB
Address	Nya Vattentornet, 22188 Lund, Sweden

2.3 Manufacturer

Company Name	Arima Communications Corp.
Address	6F., No. 866, Jhongjheng Rd., Jhonghe Dist., New Taipei City 23586, Taiwan

2.4 Application Details

Date of Start during the Test	Oct. 17, 2012
Date of End during the Test	Oct. 17, 2012

3. General Information

3.1 Description of Equipment Under Test (EUT)

Product Feature & Specification	
EUT Type	Smart phone
Brand Name	Sony
Model Name / Marketing Name	PM-0261-BV
FCC ID	PY7PM-0261
EUT Serial No	WUJ012D9H4
IMEI Code	004402146214212
Tx Frequency	GSM850 : 824.2 MHz ~ 848.8 MHz GSM1900 : 1850.2 MHz ~ 1909.8 MHz WCDMA Band V : 826.4 MHz ~ 846.6 MHz WCDMA Band II : 1852.4 MHz ~ 1907.6 MHz WLAN2.4G: 2412 MHz ~ 2462 MHz Bluetooth : 2402 MHz ~ 2480 MHz
Rx Frequency	GSM850 : 869.2 MHz ~ 893.8 MHz GSM1900 : 1930.2 MHz ~ 1989.8 MHz WCDMA Band V : 869.2 MHz ~ 893.8 MHz WCDMA Band II : 1932.4 MHz ~ 1987.6 MHz WLAN2.4G: 2412 MHz ~ 2462 MHz Bluetooth : 2402 MHz ~ 2480 MHz
Measure Maximum Average Output Power to Antenna	GSM850 : 33.82 dBm GSM1900 : 30.90 dBm WCDMA Band V : 24.85 dBm WCDMA Band II : 23.38 dBm 802.11b : 15.59 dBm 802.11g : 15.10 dBm 802.11n-HT20 (2.4GHz) : 12.71 dBm Bluetooth: 5.65 dBm
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna
HW Version	5857MB-004
SW Version	11.1.A.0.21
Type of Modulation	GSM : GMSK WCDMA : QPSK (Uplink) 802.11b : DSSS (BPSK / QPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth : GFSK Bluetooth EDR : $\pi/4$ -DQPSK, 8-DPSK
EUT Stage	Production Unit

**List of air interfaces / frequency bands**

Air Interface	Band (MHz)	Voice/Data	C 63.19-2007 Tested	Concurrent connections	Reduced Power 20.19 (c)(1)
GSM	850,1900	Voice	Yes	WLAN/BT	No
WCDMA	850,1900	Voice	Yes	WLAN/BT	No
WLAN	2450	Data (*)	No	GSM/WCDMA	No
BT	2450	Data (*)	No	GSM/WCDMA	No

Note:

1. (*): The voice function maybe be activated via 3rd party software application.
2. Per KDB 285076 D01 v03)10)a), during RF test, concurrent transmission is disabled.

3.2 Product Photos

Refer to Appendix D.

3.3 Applied Standards

The ANSI Standard ANSI C63.19-2007 represents performance requirements for acceptable interoperability of hearing aids with wireless communications devices. When these parameters are met, a hearing aid operates acceptably in close proximity to a wireless communications device.

The following AWF factors shall be used for the standard transmission protocols:

Standard	Technology	AWF (dB)
TIA/EIA/IS-2000	CDMA	0
TIA/EIA-136	TDMA (50 Hz)	0
J-STD-007	GSM (217)	-5
T1/T1P1/3GPP	UMTS (WCDMA)	0
iDENTM	TDMA (22 and 11 Hz)	0

Table 3.1 Articulation Weighting Factor (AWF)

Category	Telephone RF Parameters		
Near Field	AWF	E-Field Emissions	H-Field Emissions
< 960 MHz			
Category M1	0	631.0 – 1122.0 V/m	1.91 – 3.39 A/m
	-5	473.2 – 841.4 V/m	1.43 – 2.54 A/m
Category M2	0	354.8 – 631.0 V/m	1.07 – 1.91 A/m
	-5	266.1 – 473.2 V/m	0.80 – 1.43 A/m
Category M3	0	199.5 – 354.8 V/m	0.6 – 1.07 A/m
	-5	149.6 – 266.1 V/m	0.45 – 0.80 A/m
Category M4	0	< 199.5 V/m	< 0.60 A/m
	-5	< 149.6 V/m	< 0.45 A/m
> 960 MHz			
Category M1	0	199.5 – 354.8 V/m	0.60 – 1.07 A/m
	-5	149.6 – 266.1 V/m	0.45 – 0.80 A/m
Category M2	0	112.2 – 199.5 V/m	0.34 – 0.60 A/m
	-5	84.1 – 149.6 V/m	0.25 – 0.45 A/m
Category M3	0	63.1 – 112.2 V/m	0.19 – 0.34 A/m
	-5	47.3 – 84.1 V/m	0.14 – 0.25 A/m
Category M4	0	< 63.1 V/m	< 0.19 A/m
	-5	< 47.3 V/m	< 0.14 A/m

Table 3.2 Telephone near-field categories in linear units

3.4 Test Conditions

3.4.1 Ambient Condition

Ambient Temperature	20 to 24 °C
Humidity	< 60 %

3.4.2 Test Configuration

The device was controlled by using a base station emulator R&S CMU200. Communication between the device and the emulator was established by air link. Measurements were performed on the low, middle and high channels of both bands. The EUT was set from the emulator to radiate maximum output power during all tests.

4. Hearing Aid Compliance (HAC)

4.1 Introduction

The federal communication commission (FCC) adopted ANSI C63.19 as HAC test standard.

5. HAC RF Emission Measurement Setup

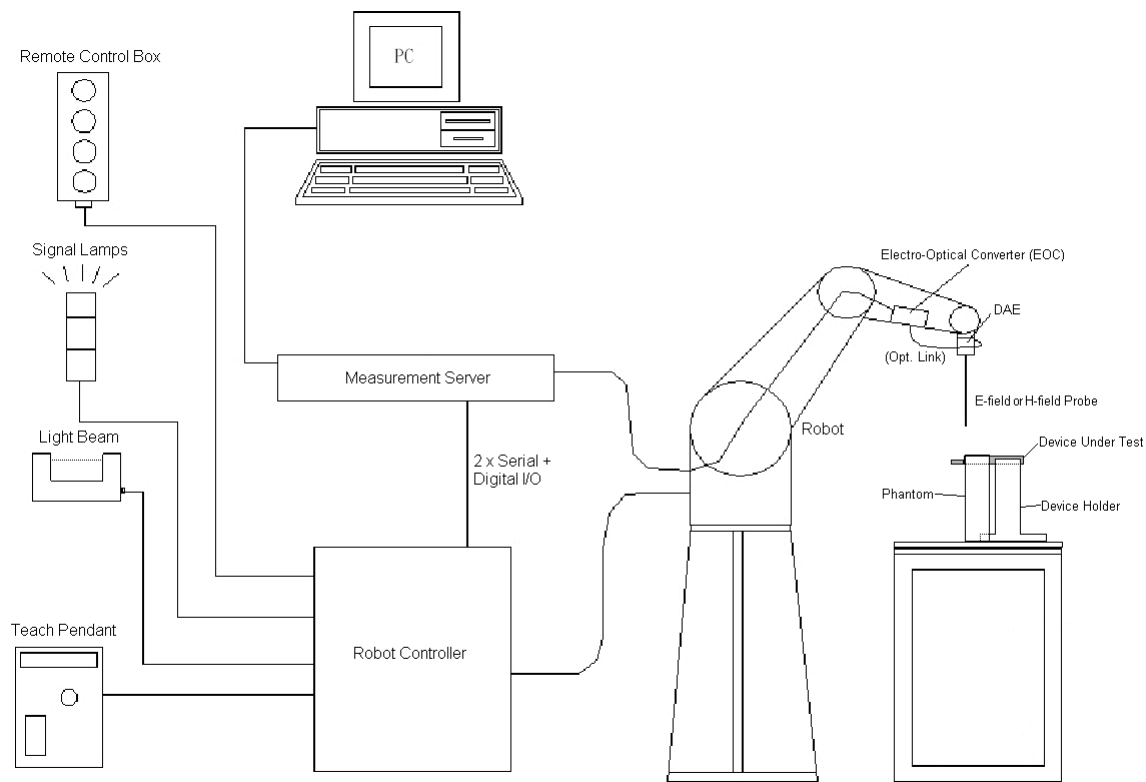


Fig 5.1 SPEAG DASY4 or DASY5 System Configurations

The DASY4 or DASY5 system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY4 or DASY5 software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Some of the components are described in details in the following sub-sections.

5.1 E-Field and H-Field Probe System

The HAC measurement is conducted with the dosimetric probe ER3DV6 and H3DV6 (manufactured by SPEAG). The probe is specially designed and calibrated. This probe has a built in optical surface detection system to prevent from collision with EUT.

5.1.1 E-Field Probe Specification

<ER3DV6>

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges
Calibration	In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$, $k=2$)
Frequency	100 MHz to 6 GHz; Linearity: ± 2.0 dB (100 MHz to 3 GHz)
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)
Dynamic Range	2 V/m to 1000 V/m (M3 or better device readings fall well below diode compression point)
Linearity	± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm



Fig 5.2 Photo of E-field Probe

5.1.2 H-Field Probe Description

<H3DV6>

Construction	Three concentric loop sensors with 3.8 mm loop diameters Resistively loaded detector diodes for linear response Built-in shielding against static charges
Frequency	200 MHz to 3 GHz (absolute accuracy $\pm 6.0\%$, $k=2$); Output linearized
Directivity	± 0.25 dB (spherical isotropy error)
Dynamic Range	10 m A/m to 2 A/m at 1 GHz (M3 or better device readings fall well below diode compression point)
Dimensions	Overall length: 330 mm (Tip: 40 mm) Tip diameter: 6 mm (Body: 12 mm) Distance from probe tip to dipole centers: 3 mm
E-Field Interference	$< 10\%$ at 3 GHz (for plane wave)

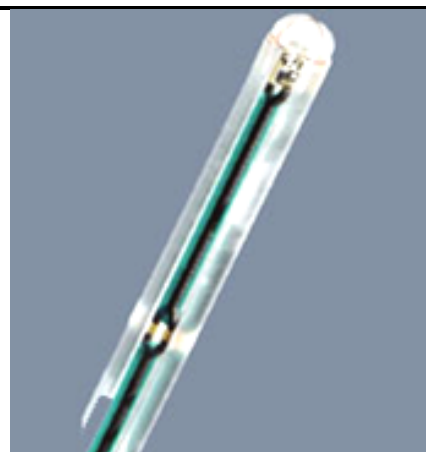


Fig 5.3 Photo of H-field Probe

5.1.3 Probe Tip Description

HAC field measurements take place in the close near field with high gradients. Increasing the measuring distance from the source will generally decrease the measured field values (in case of the validation dipole approx. 10%/per mm).

Magnetic field sensors are measuring the integral of the H-field across their sensor area surrounded by the loop. They are calibrated in a precise, homogeneous field. When measuring a gradient field, the result will be very close to the field in the center of the loop which is equivalent to the value of a homogeneous field equivalent to the center value. But it will be different from the field at the field at the border of the loop.

Consequently, two sensors with different loop diameters – both calibrated ideally – would give different results when measuring from the edge of the probe sensor elements. The behavior for electrically small E-field sensors is equivalent. See below for distance plots from a WD which show the conservative nature of field readings at the probe element center vs. measurements at the sensor end:

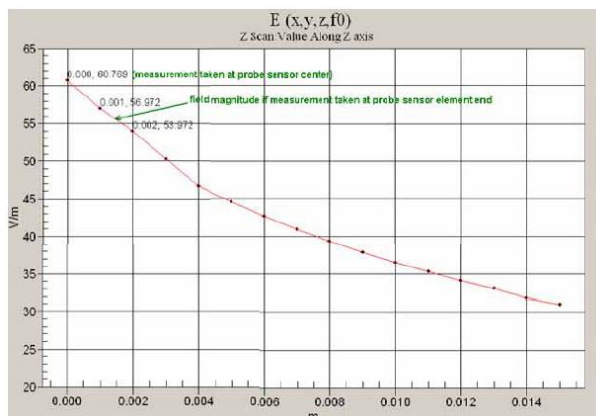


Fig 5.4 Z-Axis Scan at maximum point above a typical wireless device for E-field

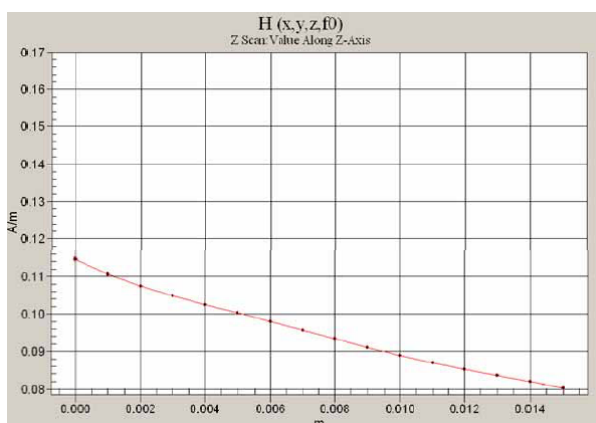


Fig 5.5 Z-Axis Scan at maximum point above a typical wireless device for H-field

The magnetic field loops of the H3D probes are concentric, with the center 3mm from the tip for H3DV6. Their radius is 1.9 mm.

The electric field probes have a more irregular internal geometry because it is physically not possible to have the 3 orthogonal sensors situated with the same center. The effect of the different sensor centers is accounted for in the HAC uncertainty budget ("sensor displacement"). Their geometric center is at 2.5 mm from the tip, and the element ends are 1.1 mm closer to the tip.

Where:

Peak Field = Peak field (in dB V/m or dB A/m)

Raw = Raw field measurement from the measurement system (in V/m or A/m).

PMF = Probe Modulation Factor (in Linear units). See Chapter 8 of test report.

5.2 DATA Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.6 Photo of DAE

5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller

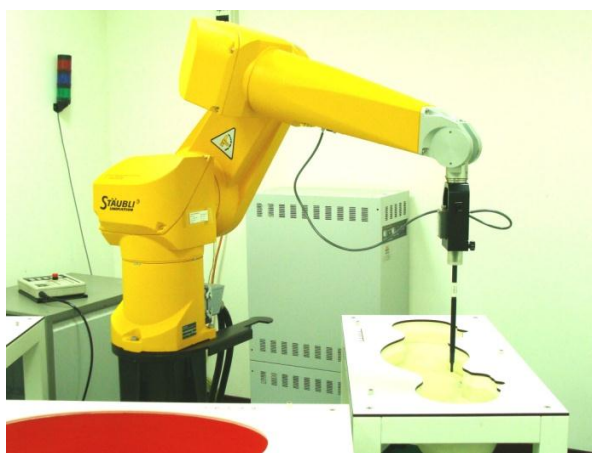


Fig 5.7 Photo of DASY4



Fig 5.8 Photo of DASY5

5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.9 Photo of Server for DASY4



Fig 5.10 Photo of Server for DASY5

5.5 Phone Positioner

The phone positioner shown in Fig. 5.11 is used to adjust EUT to the suitable position.



Fig 5.11 Phone Positioner

5.6 Test Arch Phantom

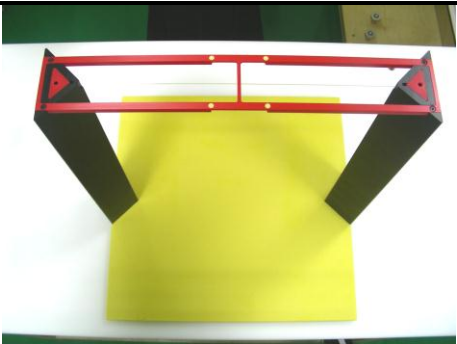
Construction :	Enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot.	
Dimensions :	370 x 370 x 370 mm	

Fig 5.12 Photo of Arch Phantom

5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings.

5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)
 U_i = input signal of channel i , ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } \mathbf{E}_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } \mathbf{H}_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)
 Norm_i = sensor sensitivity of channel i , ($i = x, y, z$), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$\mathbf{E}_{\text{tot}} = \sqrt{\mathbf{E}_x^2 + \mathbf{E}_y^2 + \mathbf{E}_z^2}$$

The primary field data are used to calculate the derived field units.

The measurement/integration time per point, as specified by the system manufacturer is > 500 ms. The signal response time is evaluated as the time required by the system to reach 90% of the expected final value after an on/off switch of the power source with an integration time of 500 ms and a probe response time of < 5 ms. In the current implementation, DASY waits longer than 100 ms after having reached the grid point before starting a measurement, i.e., the response time uncertainty is negligible.

If the Equipment Under Test does not emit a CW signal, the integration time applied to measure the electric field at a specific point may introduce additional uncertainties due to the discretization. The tolerances for the different systems had the worst-case of 2.6%.

5.8 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Isotropic E-Field Probe	ER3DV6	2358	Jun. 21, 2012	Jun. 20, 2013
SPEAG	Isotropic H-Field Probe	H3DV6	6184	Jan. 26, 2012	Jan. 25, 2013
SPEAG	835MHz Calibration Dipole	CD835V3	1045	Jun. 14, 2012	Jun. 13, 2015
SPEAG	1880MHz Calibration Dipole	CD1880V3	1038	Jun. 14, 2012	Jun. 13, 2015
SPEAG	Data Acquisition Electronics	DAE4	778	Aug. 27, 2012	Aug. 26, 2013
Wisewind	Thermometer	ETP-101	N/A	Nov. 16, 2011	Nov. 15, 2012
SPEAG	Test Arch Phantom	N/A	N/A	NCR	NCR
SPEAG	Phone Positoiner	N/A	N/A	NCR	NCR
Agilent	Network Analyzer	E5071C	MY46101588	May 11, 2012	May 10, 2013
Agilent	ESG Vector Series Signal Generator	E4438C	MY49070755	Oct. 02, 2012	Oct. 01, 2013
Anritsu	Radio Communication Analyzer	MT8820C	6201074414	Dec. 21, 2011	Dec. 20, 2012
Agilent	Wireless Communication Test Set	E5515C	MY48360820	Jan. 05, 2012	Jan. 04, 2014
R&S	Universal Digital Radio communication Tester	CMU200	106656	Jun. 28, 2012	Jun. 27, 2013

Table 5.1 Test Equipment List

6. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 6.1.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 6.1 Multiplying Factors for Various Distributions

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is showed in Table 6.2.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (E)	Ci (H)	Standard Uncertainty (E)	Standard Uncertainty (H)
Measurement System							
Probe Calibration	5.1	Normal	1	1	1	± 5.1 %	± 5.1 %
Axial Isotropy	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
Sensor Displacement	16.5	Rectangular	√3	1	0.145	± 9.5 %	± 1.4 %
Test Arch	7.2	Rectangular	√3	1	0	± 4.1 %	± 0.0 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
Scaling to Peak Envelope Power	2.0	Rectangular	√3	1	1	± 1.2 %	± 1.2 %
System Detection Limit	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Conditions	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Reflections	12.0	Rectangular	√3	1	1	± 6.9 %	± 6.9 %
Probe Positioner	1.2	Rectangular	√3	1	0.67	± 0.7 %	± 0.5 %
Probe Positioning	4.7	Rectangular	√3	1	0.67	± 2.7 %	± 1.8 %
Extrap. and Interpolation	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning Vertical	4.7	Rectangular	√3	1	0.67	± 2.7 %	± 1.8 %
Device Positioning Lateral	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Device Holder and Phantom	2.4	Rectangular	√3	1	1	± 1.4 %	± 1.4 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup Related							
Phantom Thickness	2.4	Rectangular	√3	1	0.67	± 1.4 %	± 0.9 %
Combined Standard Uncertainty						± 15.2 %	± 10.8 %
Coverage Factor for 95 %						K = 2	
Expanded Uncertainty						± 30.5 %	± 21.7 %

Table 6.2 Uncertainty Budget of DASY

7. HAC RF Emission Measurement Evaluation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the test Arch and a corresponding distance holder.

7.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal HAC measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the arch phantom. The equipment setup is shown below:

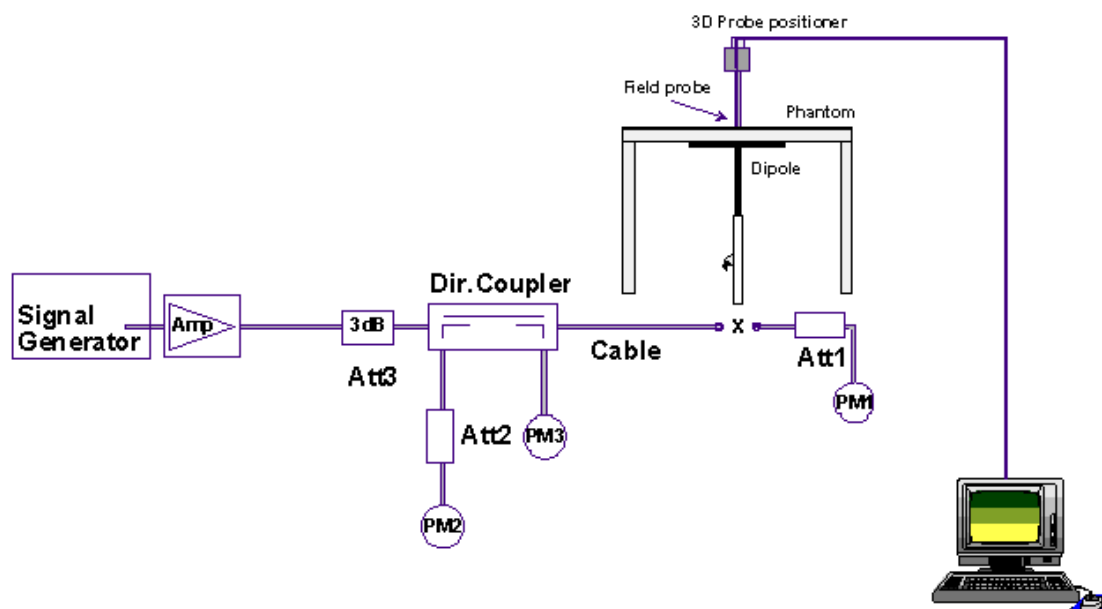


Fig. 7.1 System Setup of System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 20dBm (100mW) before dipole is connected.

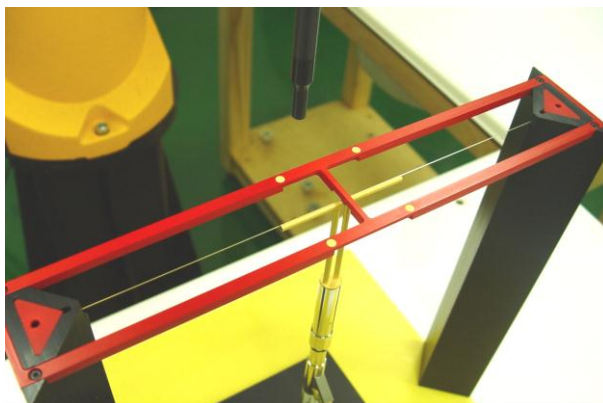


Fig 7.2 Dipole Setup

7.3 Validation Results

Comparing to the original E-field or H-field value provided by SPEAG, the validation data should be within its specification of 25 %. Table 7.1 shows the target value and measured value. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to appendix A of this report.

Frequency (MHz)	Input Power (dBm)	Target Value (V/m)	E-Field 1 (V/m)	E-Field 2 (V/m)	Average Value (V/m)	Deviation (%)	Date
835	20	165.1	165.9	166.2	166.05	0.58	Oct 17, 2012
1880	20	137.9	130.5	130.5	130.5	-5.37	Oct 17, 2012
Frequency (MHz)	Input Power (dBm)	Target Value (A/m)	H-Field (A/m)			Deviation (%)	Date
835	20	0.461	0.468			1.52	Oct 17, 2012
1880	20	0.465	0.491			5.59	Oct 17, 2012

Table 7.1 Test Results of System Validation

Note: Deviation = ((E or H-field Result) - (Target field)) / (Target field) * 100%

8. RF Field Probe Modulation Factor

A calibration shall be made of the modulation response of the probe and its instrumentation chain. This calibration shall be performed with the field probe, attached to the instrumentation that is to be used with it during the measurement. The response of the probe system to a CW field at the frequency(s) of interest is compared to its response to a modulated signal with equal peak amplitude. The field level of the test signals shall be more than 10 dB above the ambient level and the noise floor of the instrumentation being used. The ratio of the CW reading to that taken with a modulated field shall be applied to the readings taken of modulated fields of the specified type.

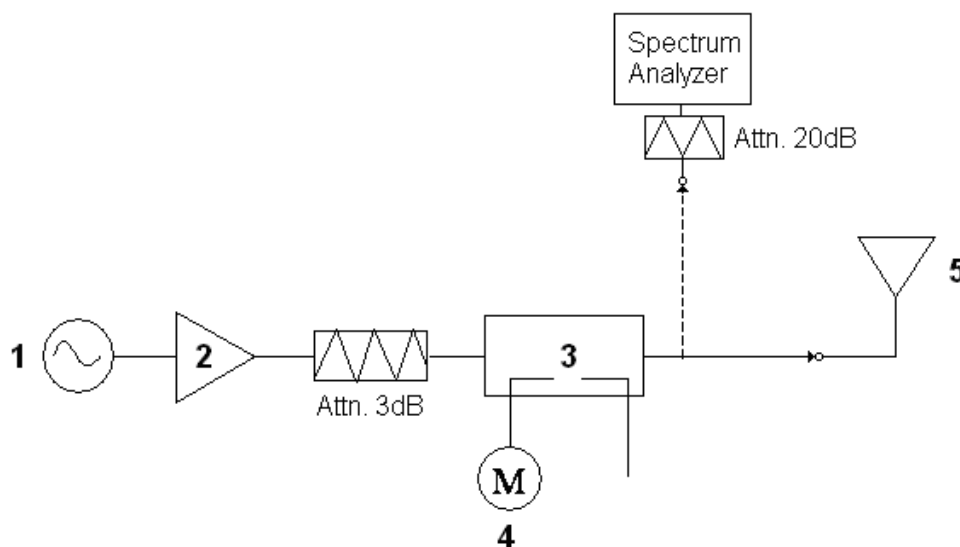


Fig. 8.1 System Calibration

This was done using the following procedure:

1. Fixing the probe in a set location relative to a field generating device.
2. Illuminate the probe with a CW signal at the intended measurement frequency.
3. Record the reading of the probe measurement system of the CW signal.
4. Determine the level of the CW signal being used to drive the field generating device.
5. Substitute a signal using the same modulation as that used by the intended WD for the CW signal.
6. Set the peak amplitude during transmission of the modulated signal to equal the amplitude of the CW signal.
7. Record the reading of the probe measurement system of the modulated signal.
8. The ratio of the CW to modulated signal reading is the modulation factor.
9. Repeat 2~8 steps at intended measurement frequency for both E and H field probe.


PMF Measurement Summary:

Frequency (MHz)	Functions	E-field	H-field	PMF	
		V/m	A/m	E-field	H-field
835	CW	802.0	4.404	-	-
835	AM 80%	529.0	1.892	1.61	2.33
835	GSM	331.0	1.776	2.58	2.48
1880	CW	567.2	3.982	-	-
1880	AM 80%	354.2	1.593	1.60	2.50
1880	GSM	213.3	1.632	2.66	2.44


Frequency (MHz)	Functions	E-field	H-field	PMF	
		V/m	A/m	E-field	H-field
835	CW	358.1	0.816	-	-
835	AM 80%	232.9	0.528	1.54	1.55
835	WCDMA	366.9	0.983	0.98	0.83
1880	CW	228.5	1.299	-	-
1880	AM 80%	155.7	0.628	1.47	2.07
1880	WCDMA	233.9	1.459	0.98	0.89




Zero span Spectrum Plots for RF Field Probe Modulation Factor

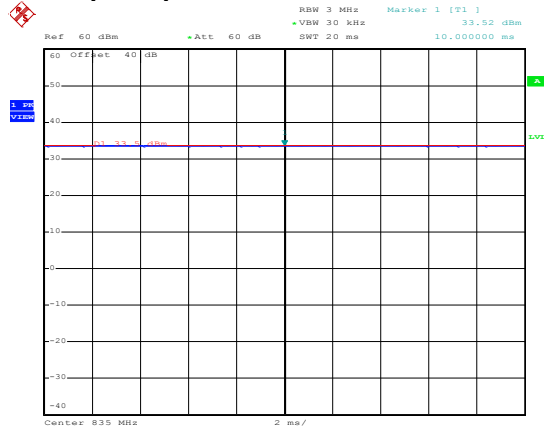


835MHz - CW

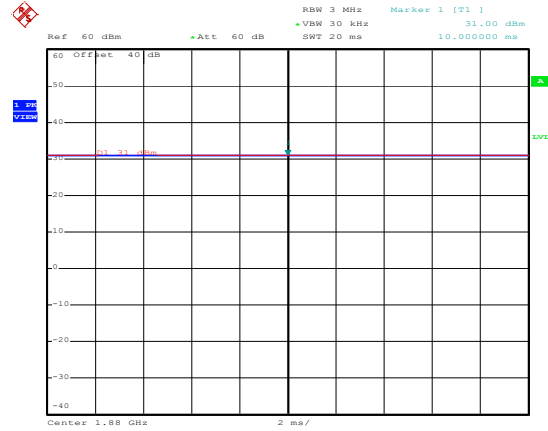


1880MHz - CW

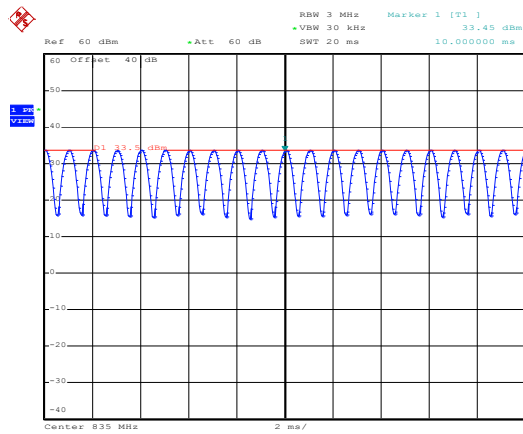


835MHz - 80% AM

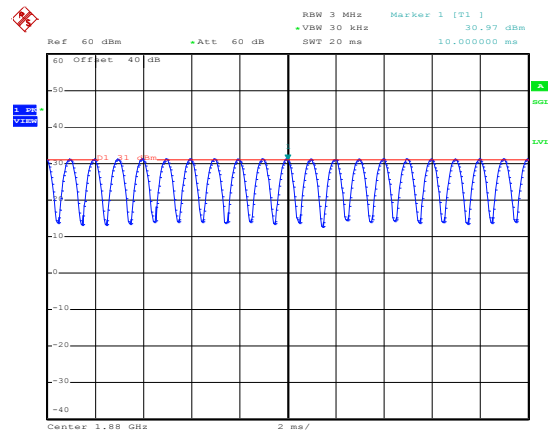


1880MHz - 80% AM

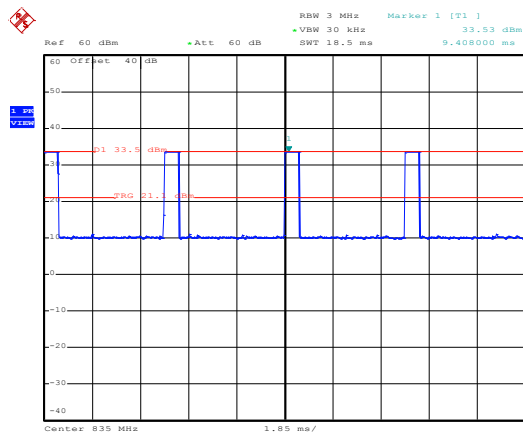


835MHz - GSM

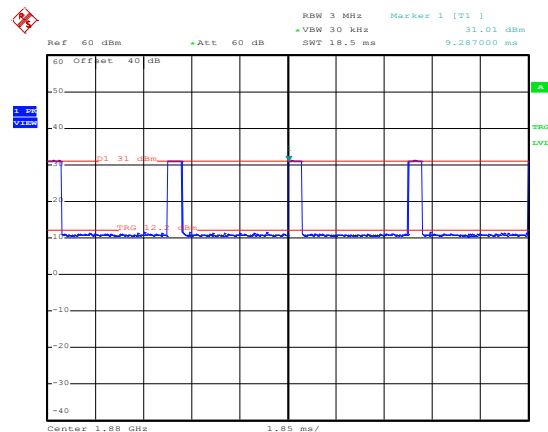


1880MHz - GSM

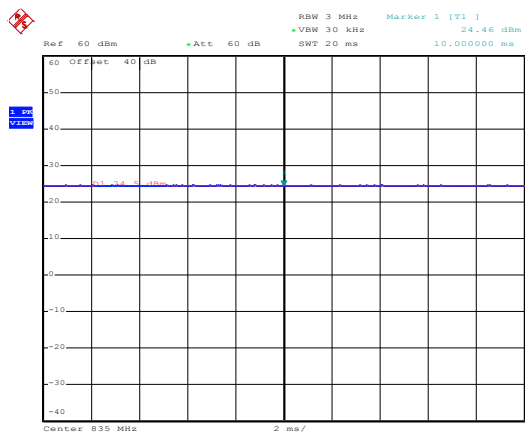


835MHz - CW

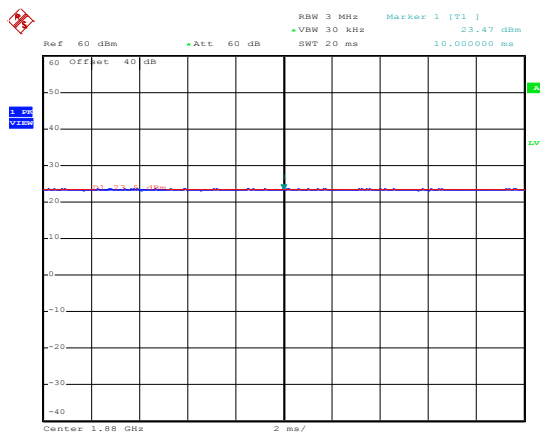


1880MHz - CW

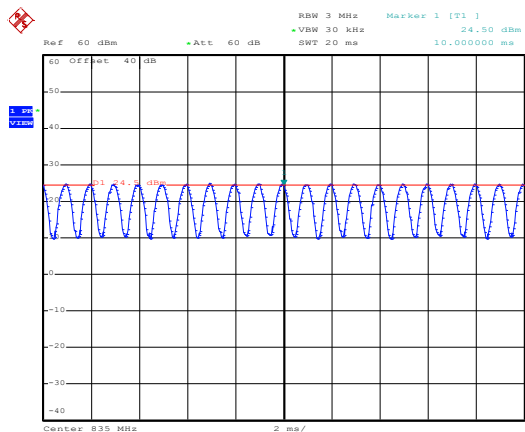


835MHz - 80% AM

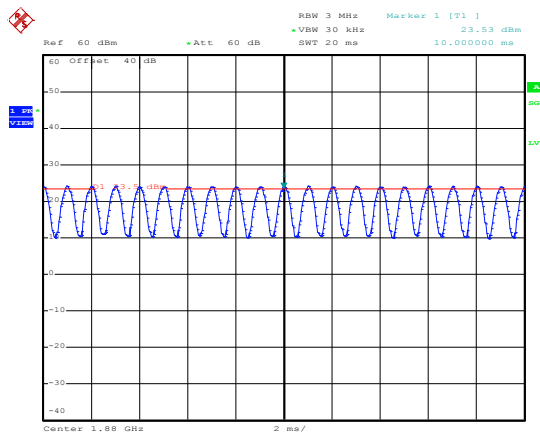

1880MHz - 80% AM

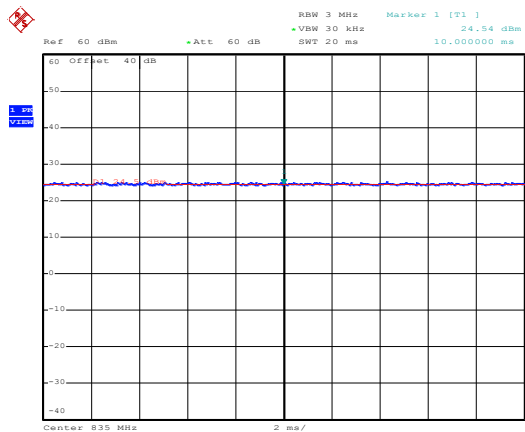

835MHz - WCDMA

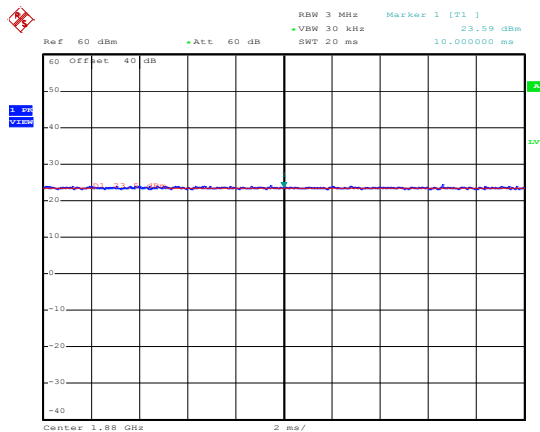

1880MHz - WCDMA

9. Description for EUT Testing Position

The EUT was put on device holder and adjusted to the accurate and reliable position. Please refer to Appendix E for the Setup photographs.

Fig. 9.1 illustrate the references and reference plane that shall be used in a typical EUT emissions measurement. The principle of this section is applied to EUT with similar geometry.

- The grid is 5 cm by 5 cm area that is divided into 9 evenly sized blocks or sub-grids.
- The grid is centered on the audio frequency output transducer of the EUT.
- The grid is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.
- The measurement plane is parallel to, and 15 mm in front of, the reference plane.



Fig 9.1 A typical EUT reference and plane for HAC measurements

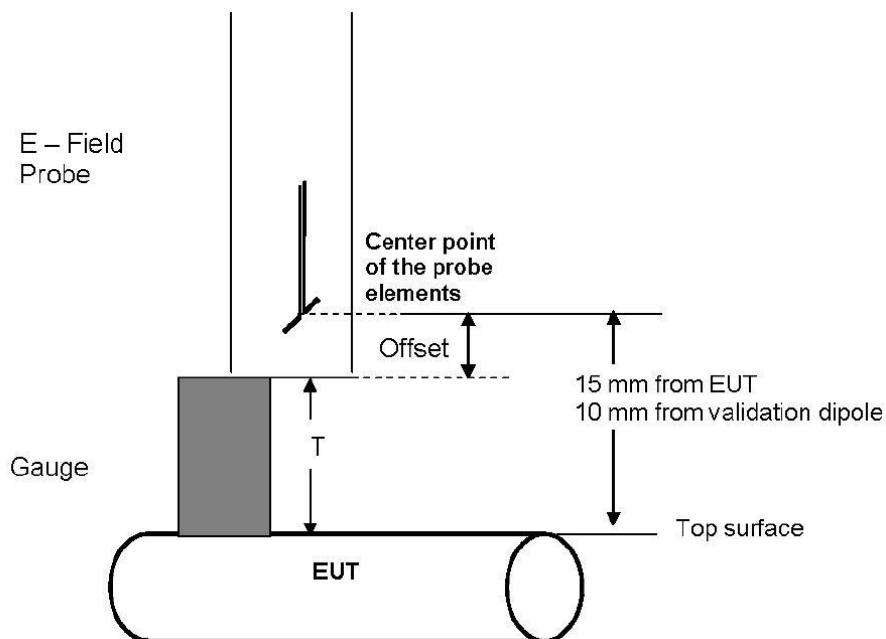


Fig. 9.2 Gauge block with E-field probe

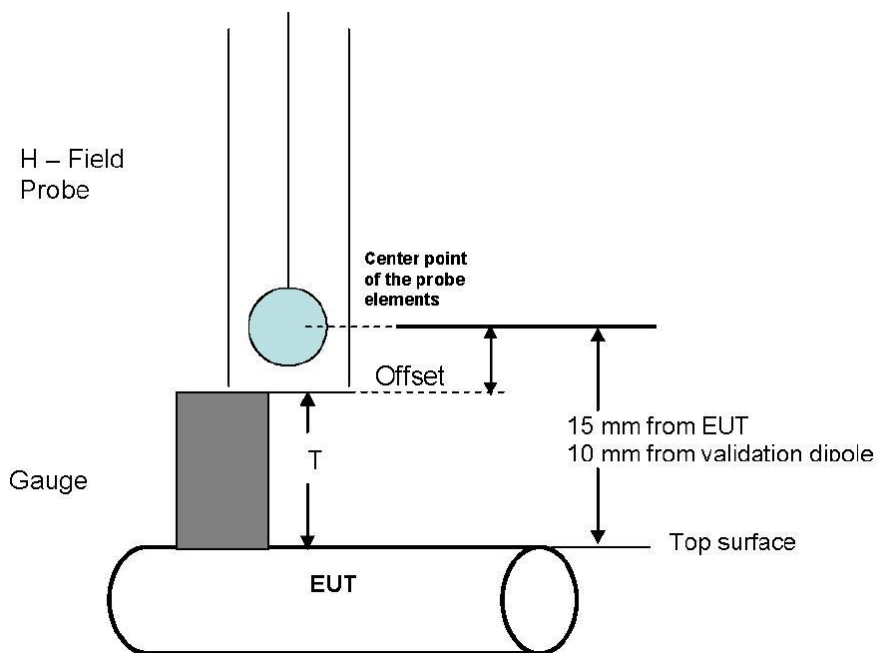


Fig. 9.3 Gauge block with H-field probe



10. RF Emissions Test Procedure

The following illustrate a typical RF emissions test scan over a wireless communications device:

1. Proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed.
2. EUT is positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
3. The EUT operation for maximum rated RF output power was configured and confirmed with the base station simulator, at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test.
4. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The EUT audio output was positioned tangent (as physically possible) to the measurement plane.
5. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the test Arch.
6. The measurement system measured the field strength at the reference location.
7. Measurements at 5 mm increments in the 5 x 5 cm region in equally spaced increments and record the reading at each measurement point. The distance between measurement points shall be sufficient to assure the identification of the peak reading.
8. The system performed a drift evaluation by measuring the field at the reference location.
9. Steps 1 ~ 8 were done for both the E and H-Field measurements.

11. HAC RF Emission Test Results

11.1 Conducted Power (Unit: dBm)

Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	33.82	33.75	33.60	30.90	30.75	30.63

Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency (MHz)	826.4	836.4	846.6	1852.4	1880.0	1907.6
RMC 12.2K	24.85	24.60	24.72	23.35	23.38	23.20

11.2 E-Field Emission

Plot No.	Band	Mode	Channel	Peak E-Field (V/m)	M-Rating
1	GSM850	GSM	128	183.1	M3
2	GSM850	GSM	189	209.3	M3
3	GSM850	GSM	251	222.6	M3
4	GSM1900	GSM	512	66	M3
5	GSM1900	GSM	661	73.9	M3
6	GSM1900	GSM	810	78.8	M3
7	WCDMA V	RMC12.2K	4132	71.7	M4
8	WCDMA V	RMC12.2K	4182	81.2	M4
9	WCDMA V	RMC12.2K	4233	82.4	M4
10	WCDMA II	RMC12.2K	9262	31	M4
11	WCDMA II	RMC12.2K	9400	30.9	M4
12	WCDMA II	RMC12.2K	9538	34.2	M4

11.3 H-Field Emission

Plot No.	Band	Mode	Channel	Peak H-Field (A/m)	M-Rating
13	GSM850	GSM	128	0.262	M4
14	GSM850	GSM	189	0.302	M4
15	GSM850	GSM	251	0.326	M4
16	GSM1900	GSM	512	0.185	M3
17	GSM1900	GSM	661	0.197	M3
18	GSM1900	GSM	810	0.217	M3
19	WCDMA V	RMC12.2K	4132	0.089	M4
20	WCDMA V	RMC12.2K	4182	0.102	M4
21	WCDMA V	RMC12.2K	4233	0.103	M4
22	WCDMA II	RMC12.2K	9262	0.078	M4
23	WCDMA II	RMC12.2K	9400	0.081	M4
24	WCDMA II	RMC12.2K	9538	0.086	M4

Remark:

1. The volume was adjusted to maximum level and the backlight turned off during RF Emission testing.
2. There is no special HAC mode software on this EUT.
3. Test Engineer : Aaron Chen



12. References

- [1] ANSI C63.19-2007, "American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids", 8 June 2007
- [2] SPEAG DASY System Handbook



Appendix A. Plots of System Performance Check

The plots are shown as follows.

HAC_E_Dipole_835_121017**DUT: Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2012/1/26

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn778; Calibrated: 2011/11/22

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

E Scan - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 166.2 V/m

Probe Modulation Factor = 1

Reference Value = 121.5 V/m; Power Drift = 0.00782 dB

Average value of Total=(165.9+166.2) / 2 = 166.05 V/m

Peak E-field in V/m


Grid 1 160.5 M4	Grid 2 165.9 M4	Grid 3 158.9 M4
Grid 4 84.1 M4	Grid 5 87.7 M4	Grid 6 85.5 M4
Grid 7 158.8 M4	Grid 8 166.2 M4	Grid 9 163.1 M4

Cursor:

Total = 166.2 V/m

E Category: M4

Location: -0.5, 73.5, 4.7 mm

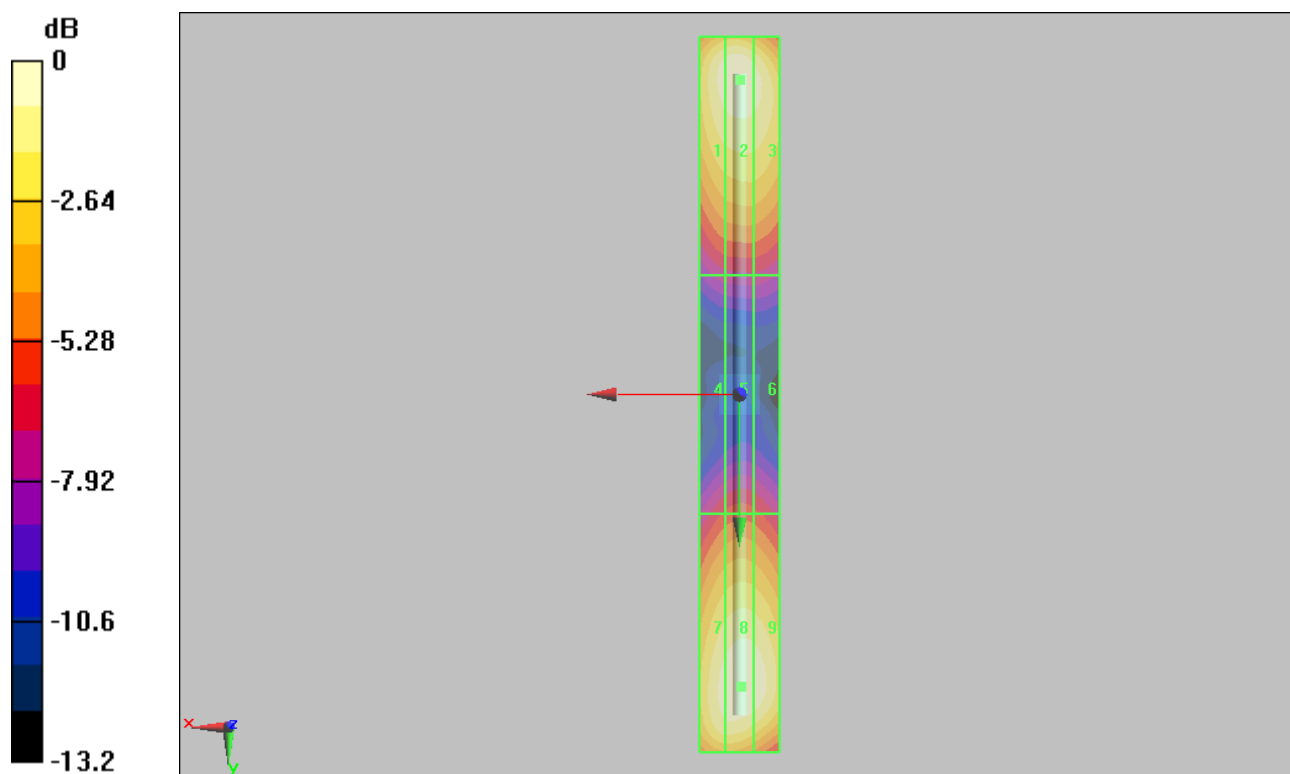

0 dB = 166.2V/m

HAC_H_Dipole_835_121017**DUT: HAC-Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

H Scan - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Probe Modulation Factor = 1

Reference Value = 0.522 A/m; Power Drift = -0.052 dB

Maximum value of peak Total field = 0.468 A/m

Peak H-field in A/m


Grid 1 0.407 M4	Grid 2 0.425 M4	Grid 3 0.400 M4
Grid 4 0.450 M4	Grid 5 0.468 M4	Grid 6 0.444 M4
Grid 7 0.401 M4	Grid 8 0.422 M4	Grid 9 0.401 M4

Cursor:

Total = 0.468 A/m

H Category: M4

Location: 0.5, -4.5, 5.2 mm

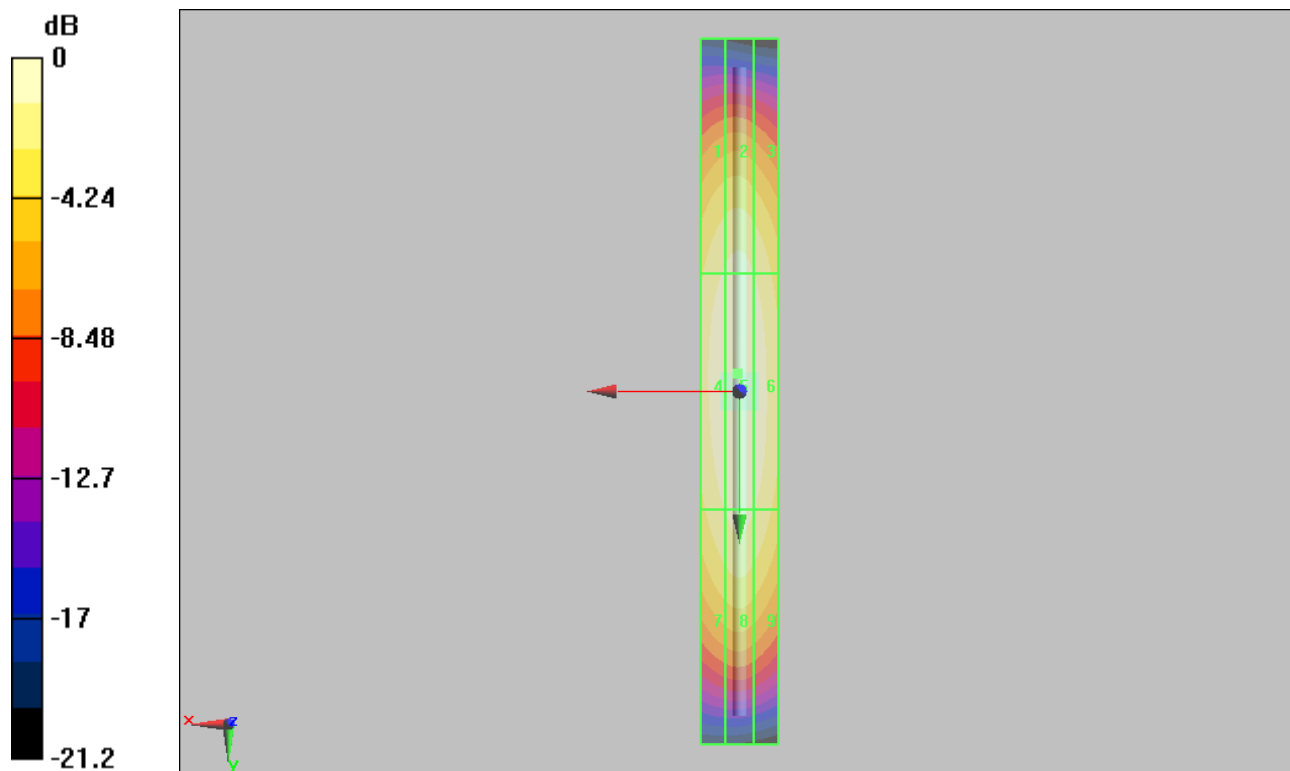

0 dB = 0.468A/m

HAC_E_Dipole_1880_121017**DUT: HAC Dipole 1880 MHz**

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

E Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 130.5 V/m

Probe Modulation Factor = 1

Reference Value = 132.5 V/m; Power Drift = 0.00473 dB

Average value of Total=(130.5+130.5) / 2 = 130.5 V/m

Peak E-field in V/m


Grid 1 126.8 M2	Grid 2 130.5 M2	Grid 3 124.3 M2
Grid 4 81.5 M3	Grid 5 86.7 M3	Grid 6 85 M3
Grid 7 126.1 M2	Grid 8 130.5 M2	Grid 9 127.4 M2

Cursor:

Total = 130.5 V/m

E Category: M2

Location: 0.5, -38.5, 4.7 mm

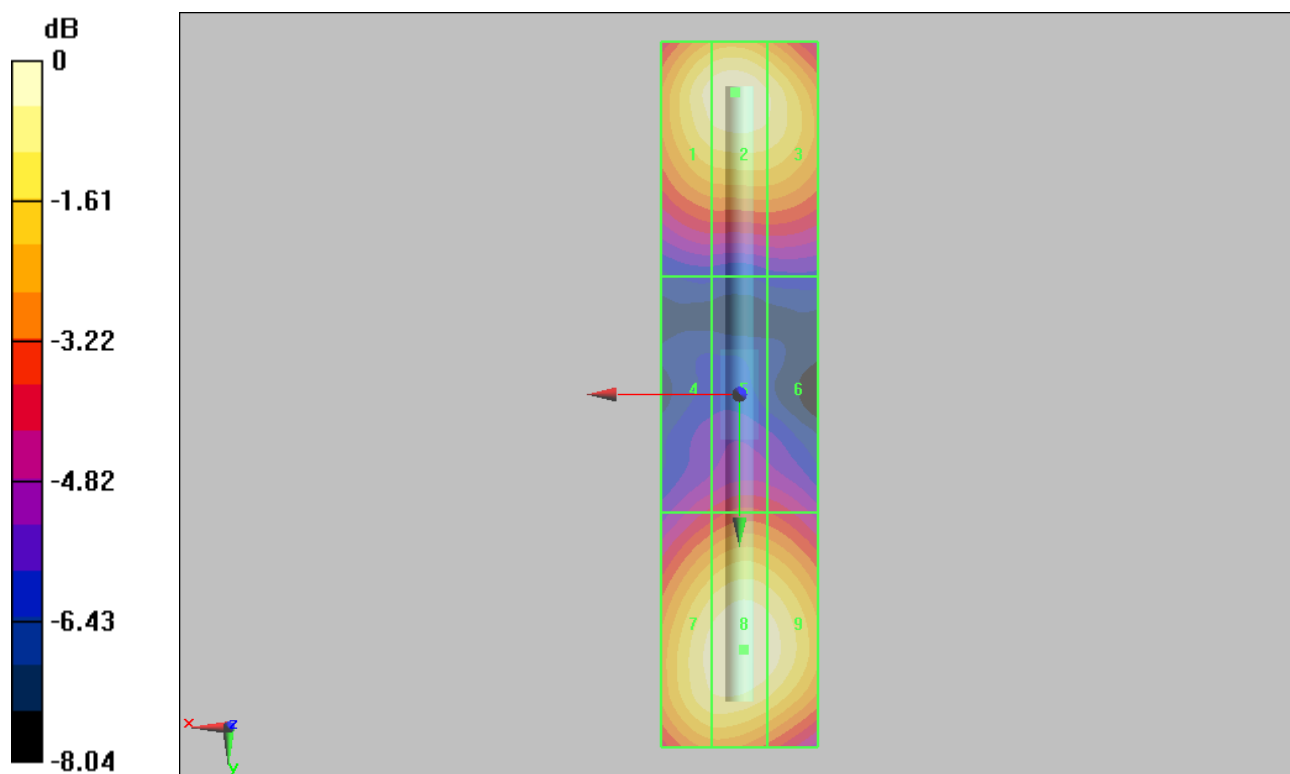

HAC_H_Dipole_1880_121017**DUT: HAC Dipole 1880 MHz**

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

H Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Probe Modulation Factor = 1

Reference Value = 0.543 A/m; Power Drift = 0.00105 dB

Maximum value of peak Total field = 0.491 A/m

Peak H-field in A/m



Grid 1 0.435 M2	Grid 2 0.451 M2	Grid 3 0.430 M2
Grid 4 0.475 M2	Grid 5 0.491 M2	Grid 6 0.468 M2
Grid 7 0.439 M2	Grid 8 0.454 M2	Grid 9 0.426 M2

Cursor:

Total = 0.491 A/m

H Category: M2

Location: 0.5, 0.5, 5.2 mm

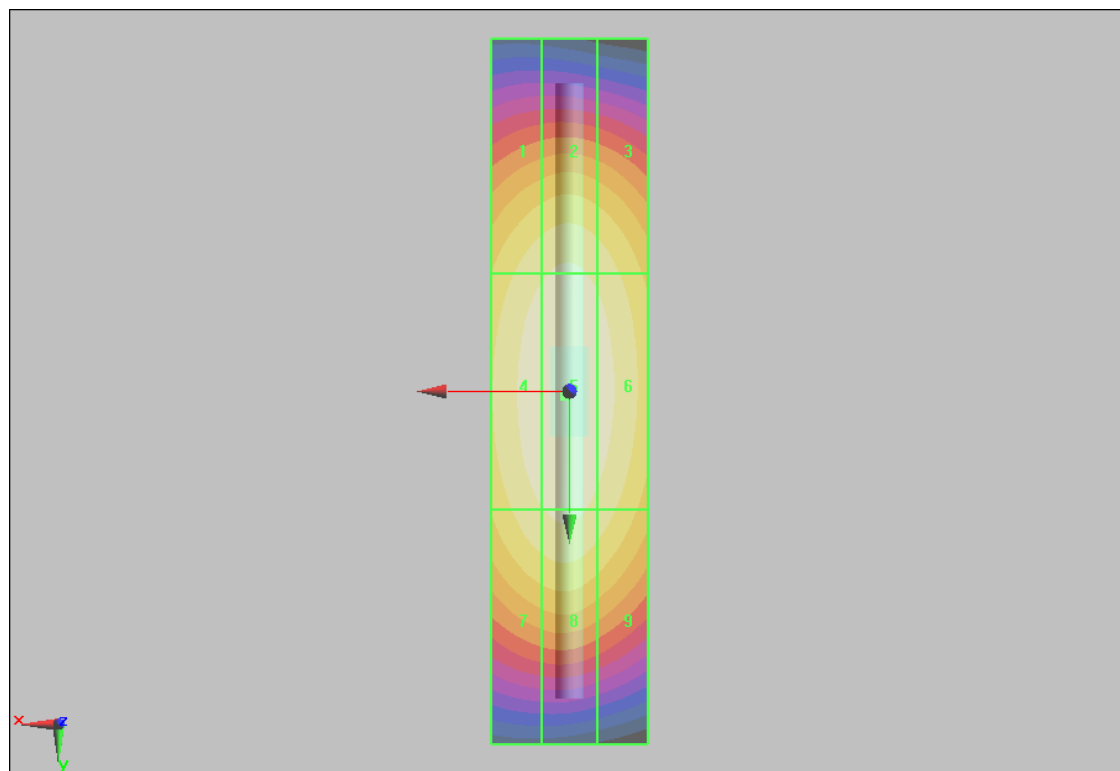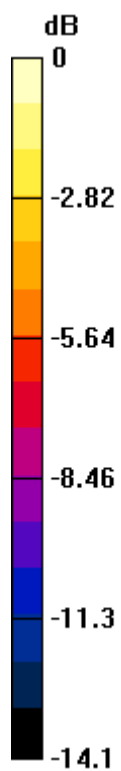

0 dB = 0.491 A/m



Appendix B. Plots of RF Emission Measurement

The plots are shown as follows.

#01 HAC_E_GSM850_GSM_Ch128**DUT: 290405**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2012/1/26

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn778; Calibrated: 2011/11/22

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch128/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 183.1 V/m

Probe Modulation Factor = 2.58

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 93.4 V/m; Power Drift = -0.031 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak E-field in V/m


Grid 1 170.7 M3	Grid 2 177.0 M3	Grid 3 169.1 M3
Grid 4 175.3 M3	Grid 5 183.1 M3	Grid 6 173.7 M3
Grid 7 174.7 M3	Grid 8 181.5 M3	Grid 9 171.5 M3

Cursor:

Total = 183.1 V/m

E Category: M3

Location: 1.5, 2.5, 8.7 mm

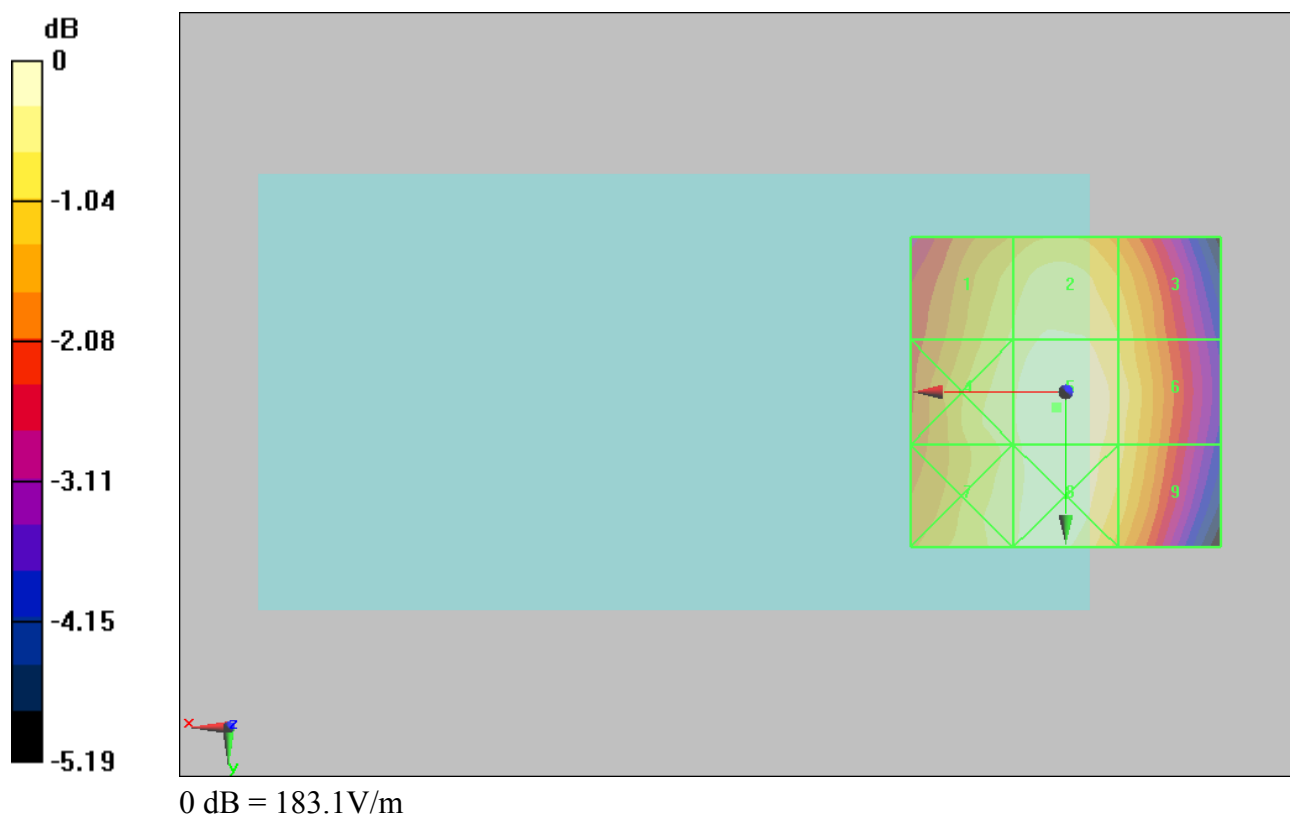

#02 HAC_E_GSM850_GSM_Ch189**DUT: 290405**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2012/1/26

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn778; Calibrated: 2011/11/22

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch189/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 209.3 V/m

Probe Modulation Factor = 2.58

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 107.6 V/m; Power Drift = 0.00385 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak E-field in V/m


Grid 1 194.1 M3	Grid 2 200.4 M3	Grid 3 192.7 M3
Grid 4 202.9 M3	Grid 5 209.3 M3	Grid 6 199.4 M3
Grid 7 204.4 M3	Grid 8 210.0 M3	Grid 9 197.0 M3

Cursor:

Total = 210.0 V/m

E Category: M3

Location: 1, 15, 8.7 mm

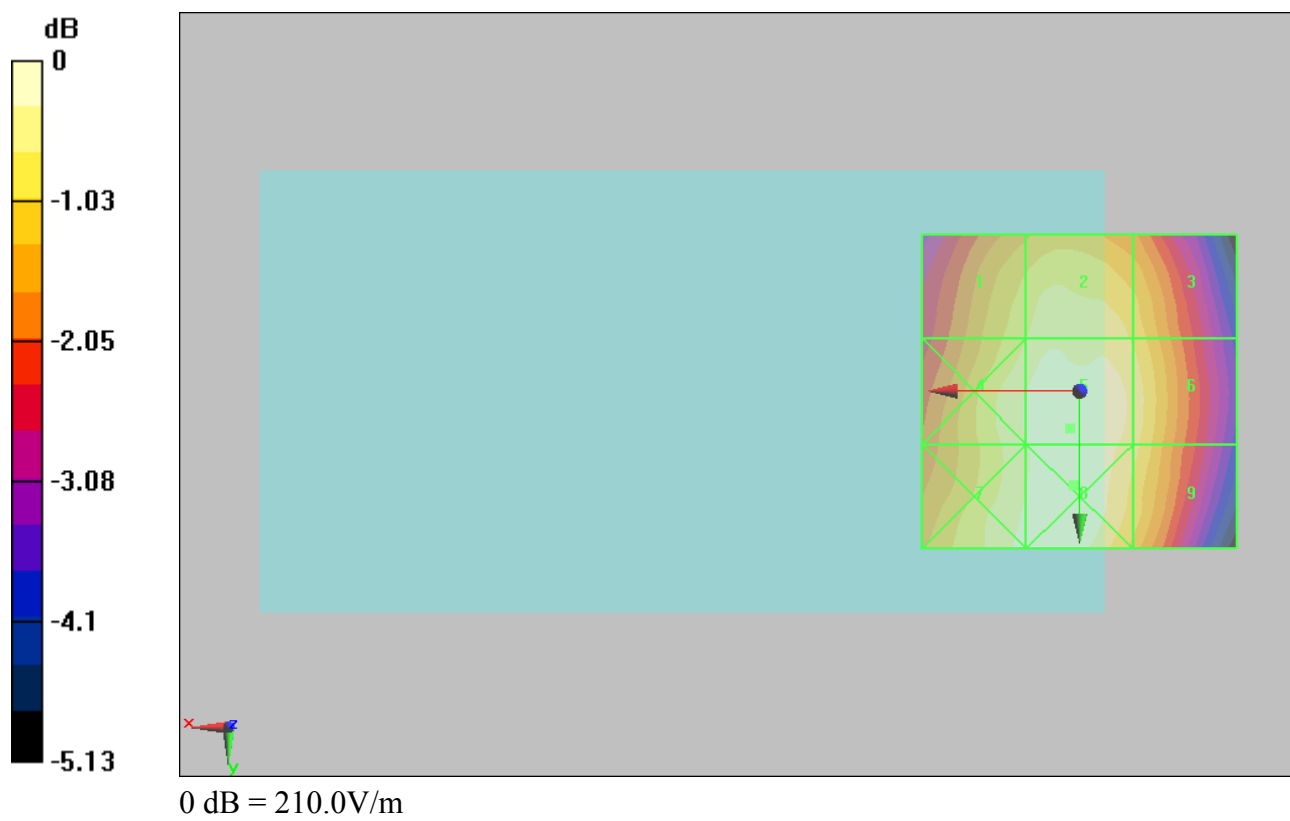

#03 HAC_E_GSM850_GSM_Ch251**DUT: 290405**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch251/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 222.6 V/m

Probe Modulation Factor = 2.58

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 113.3 V/m; Power Drift = 0.061 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak E-field in V/m


Grid 1 205.1 M3	Grid 2 215.8 M3	Grid 3 206.1 M3
Grid 4 213.6 M3	Grid 5 222.6 M3	Grid 6 212.1 M3
Grid 7 212.9 M3	Grid 8 220.9 M3	Grid 9 210.0 M3

Cursor:

Total = 222.6 V/m

E Category: M3

Location: 0, 2, 8.7 mm

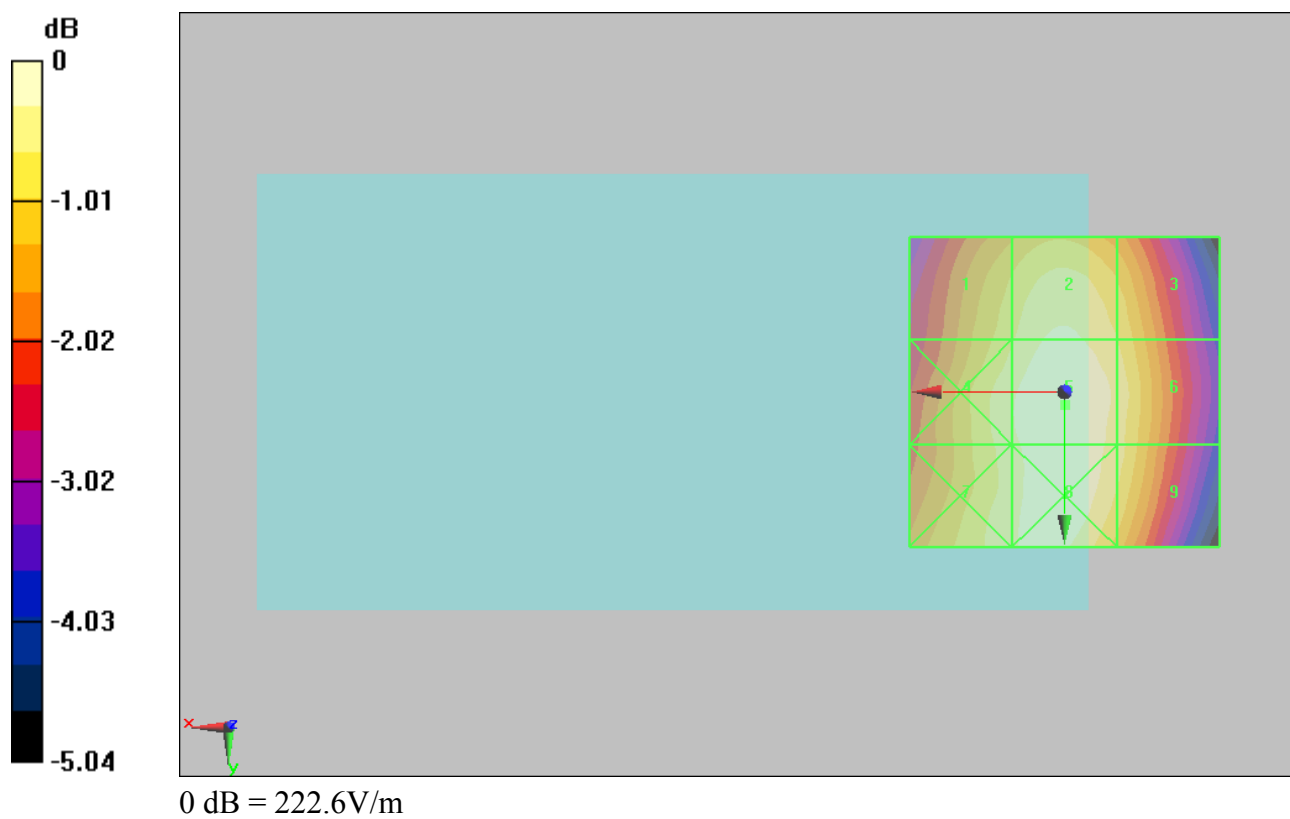

#04 HAC_E_GSM1900_GSM_Ch512**DUT: 290405**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch512/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 66 V/m

Probe Modulation Factor = 2.66

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 18.3 V/m; Power Drift = -0.057 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak E-field in V/m



Grid 1 66 M3	Grid 2 60.5 M3	Grid 3 50.1 M3
Grid 4 42.1 M4	Grid 5 58.1 M3	Grid 6 58.1 M3
Grid 7 67 M3	Grid 8 76.3 M3	Grid 9 73.2 M3

Cursor:

Total = 76.3 V/m

E Category: M3

Location: -2.5, 25, 8.7 mm

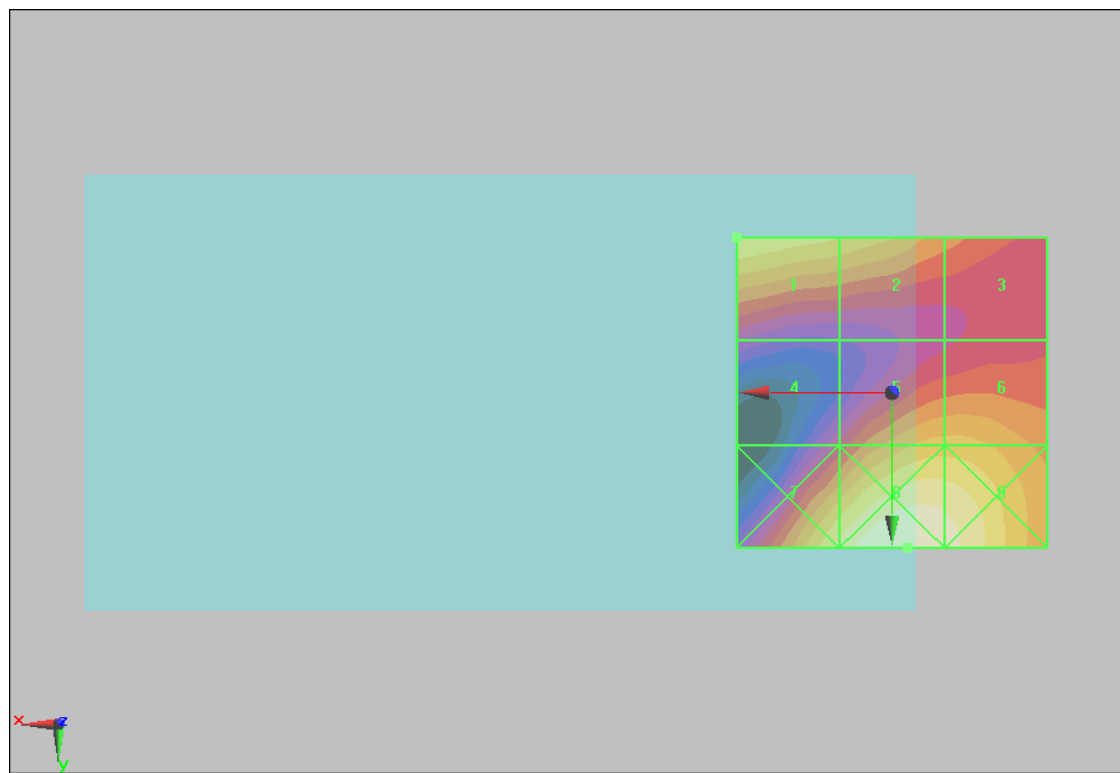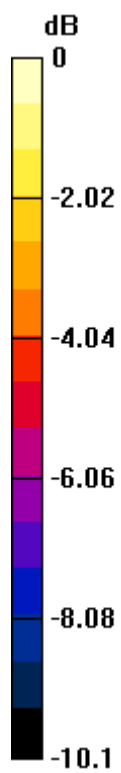

0 dB = 76.3V/m

#05 HAC_E_GSM1900_GSM_Ch661**DUT: 290405**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch661/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 73.9 V/m

Probe Modulation Factor = 2.66

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 21 V/m; Power Drift = -0.129 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak E-field in V/m


Grid 1 73.9 M3	Grid 2 64.6 M3	Grid 3 56.2 M3
Grid 4 44 M4	Grid 5 61.1 M3	Grid 6 60.8 M3
Grid 7 71.3 M3	Grid 8 82.4 M3	Grid 9 79 M3

Cursor:

Total = 82.4 V/m

E Category: M3

Location: -2.5, 25, 8.7 mm

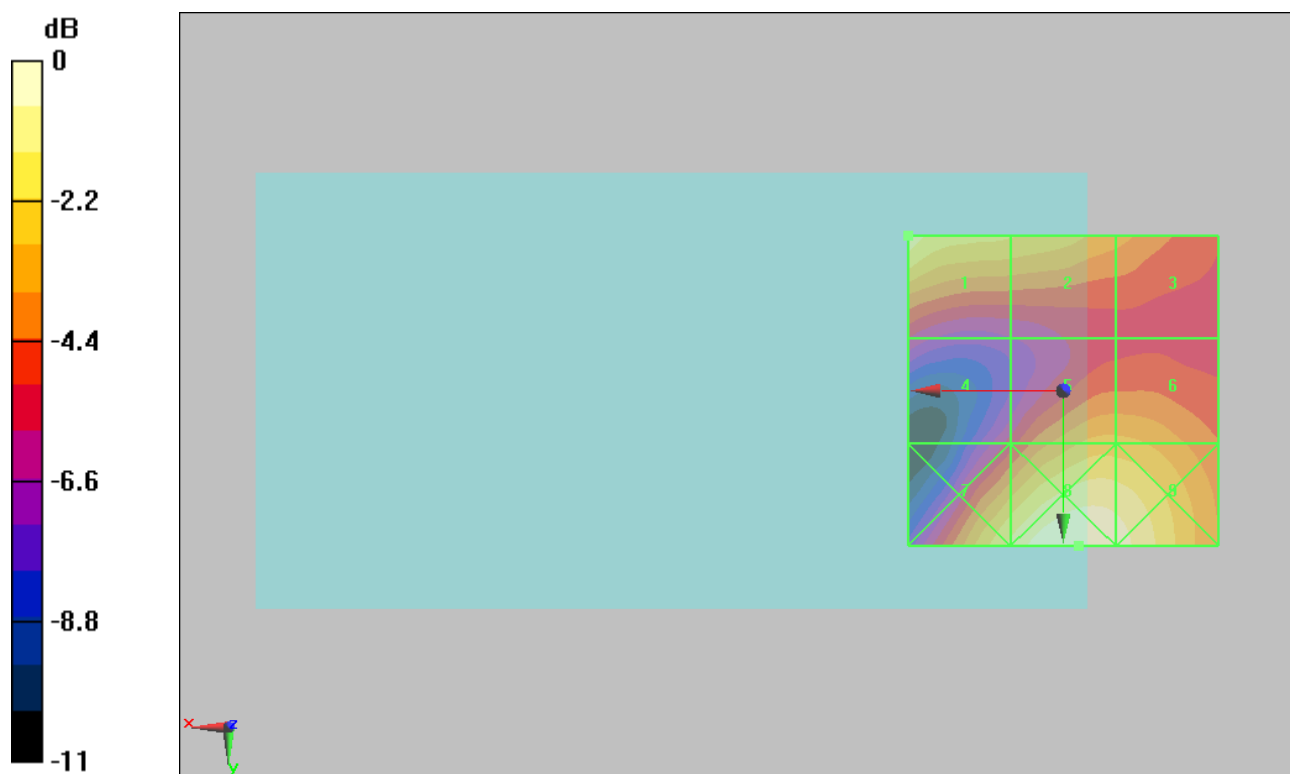

#06 HAC_E_GSM1900_GSM_Ch810**DUT: 290405**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch810/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 78.8 V/m

Probe Modulation Factor = 2.66

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 19.6 V/m; Power Drift = -0.012 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak E-field in V/m


Grid 1	Grid 2	Grid 3
78.8 M3	73.5 M3	62.1 M3
Grid 4	Grid 5	Grid 6
47.6 M3	64.8 M3	65.1 M3
Grid 7	Grid 8	Grid 9
72.1 M3	85.4 M2	82.9 M3

Cursor:

Total = 85.4 V/m

E Category: M2

Location: -3.5, 25, 8.7 mm

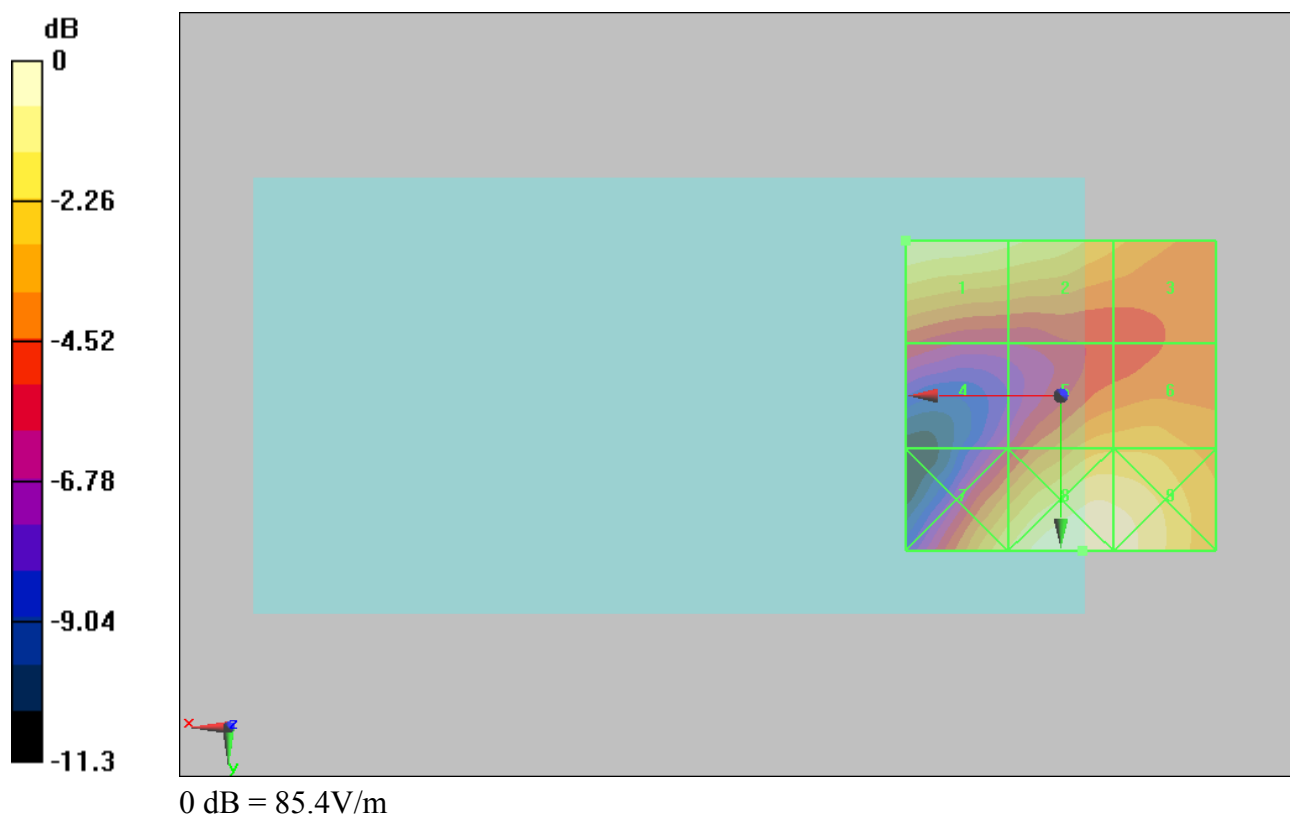

#07 HAC_E_WCDMA V_RMC12.2K_Ch4132**DUT: 290405**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2012/1/26

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn778; Calibrated: 2011/11/22

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch4132/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 71.7 V/m

Probe Modulation Factor = 0.980

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 95.1 V/m; Power Drift = 0.012 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m


Grid 1 66.4 M4	Grid 2 69.4 M4	Grid 3 65.7 M4
Grid 4 69 M4	Grid 5 71.7 M4	Grid 6 67.7 M4
Grid 7 68.8 M4	Grid 8 71 M4	Grid 9 66.8 M4

Cursor:

Total = 71.7 V/m

E Category: M4

Location: 1.5, 2, 8.7 mm

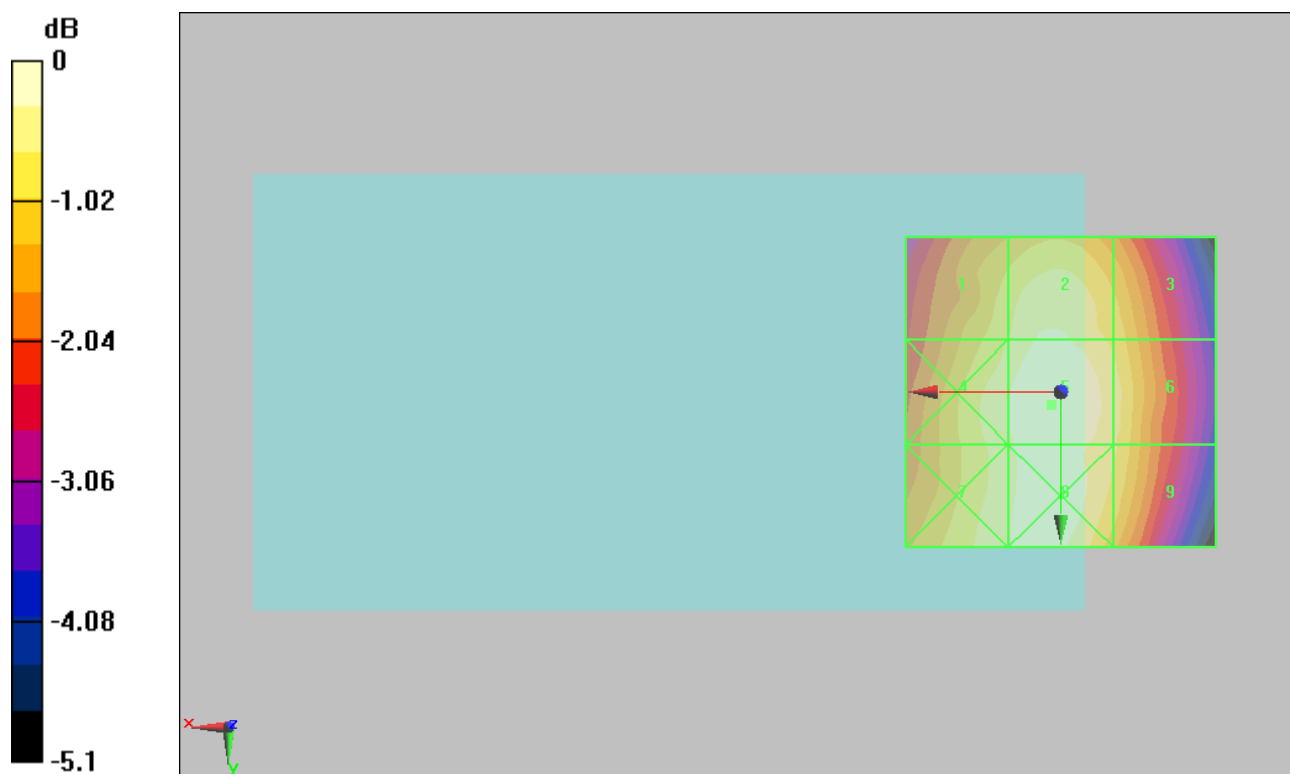

0 dB = 71.7V/m

#08 HAC_E_WCDMA V_RMC12.2K_Ch4182**DUT: 290405**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2012/1/26

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn778; Calibrated: 2011/11/22

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch4182/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 81.2 V/m

Probe Modulation Factor = 0.980

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 108.4 V/m; Power Drift = -0.013 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m


Grid 1 74.6 M4	Grid 2 78.3 M4	Grid 3 75 M4
Grid 4 78.1 M4	Grid 5 81.2 M4	Grid 6 77.3 M4
Grid 7 78.6 M4	Grid 8 80.8 M4	Grid 9 76.6 M4

Cursor:

Total = 81.2 V/m

E Category: M4

Location: 0, 1, 8.7 mm

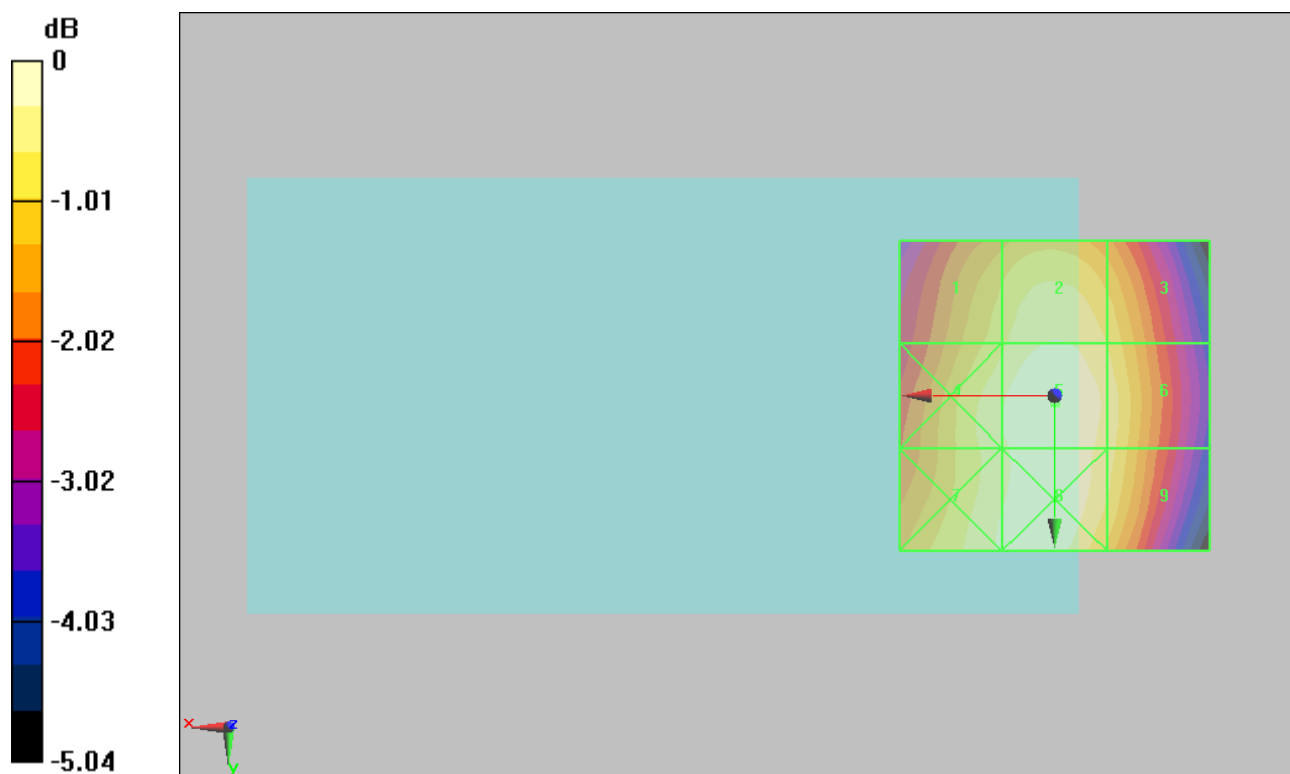

#09 HAC_E_WCDMA V_RMC12.2K_Ch4233**DUT: 290405**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch4233/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 82.4 V/m

Probe Modulation Factor = 0.980

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 110.2 V/m; Power Drift = 0.0046 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m


Grid 1	Grid 2	Grid 3
76 M4	79.8 M4	76.4 M4
Grid 4	Grid 5	Grid 6
79.2 M4	82.4 M4	78.7 M4
Grid 7	Grid 8	Grid 9
79.3 M4	81.8 M4	78.1 M4

Cursor:

Total = 82.4 V/m

E Category: M4

Location: 0, 2, 8.7 mm

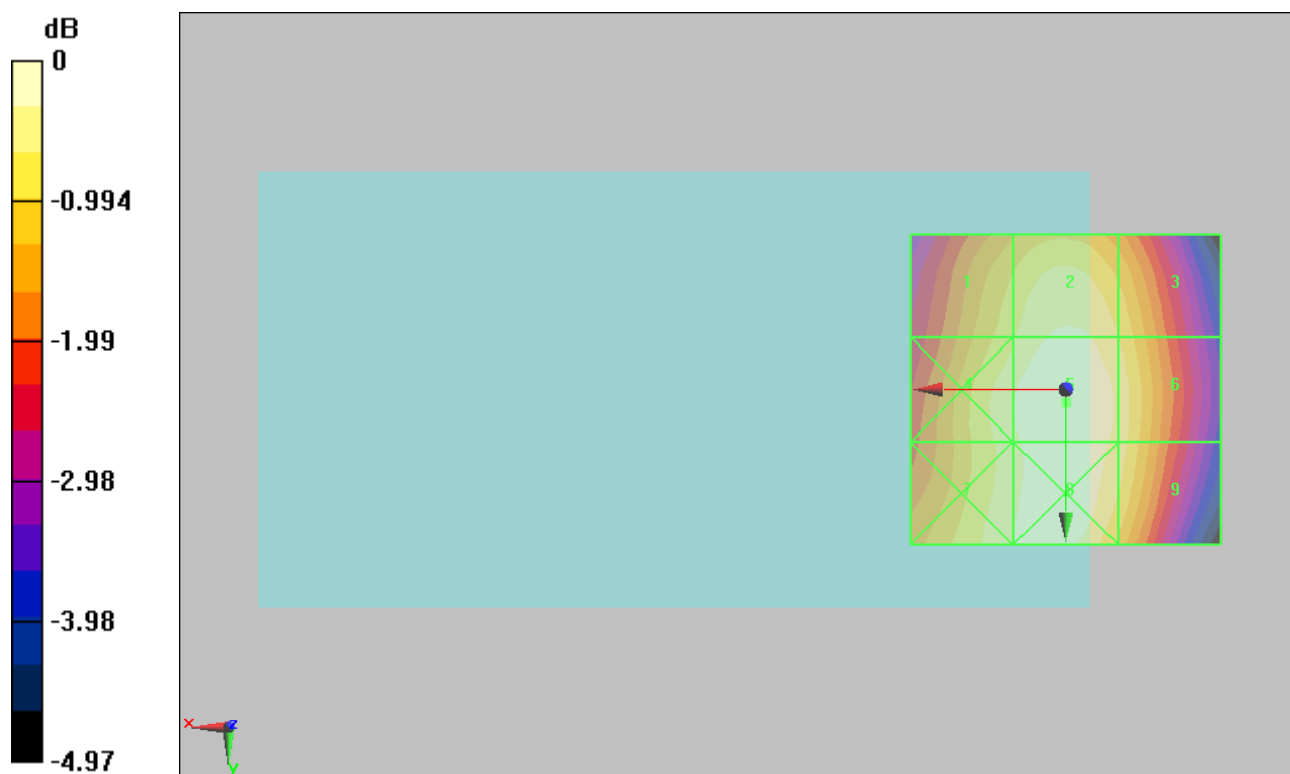

0 dB = 82.4V/m

#10 HAC_E_WCDMA II_RMC12.2K_Ch9262**DUT: 290405**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2012/1/26

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn778; Calibrated: 2011/11/22

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch9262/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 31 V/m

Probe Modulation Factor = 0.980

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 23 V/m; Power Drift = 0.074 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m


Grid 1 31 M4	Grid 2 29.7 M4	Grid 3 24.4 M4
Grid 4 19.9 M4	Grid 5 26.9 M4	Grid 6 26.9 M4
Grid 7 31.5 M4	Grid 8 35.7 M4	Grid 9 33.9 M4

Cursor:

Total = 35.7 V/m

E Category: M4

Location: -1.5, 25, 8.7 mm

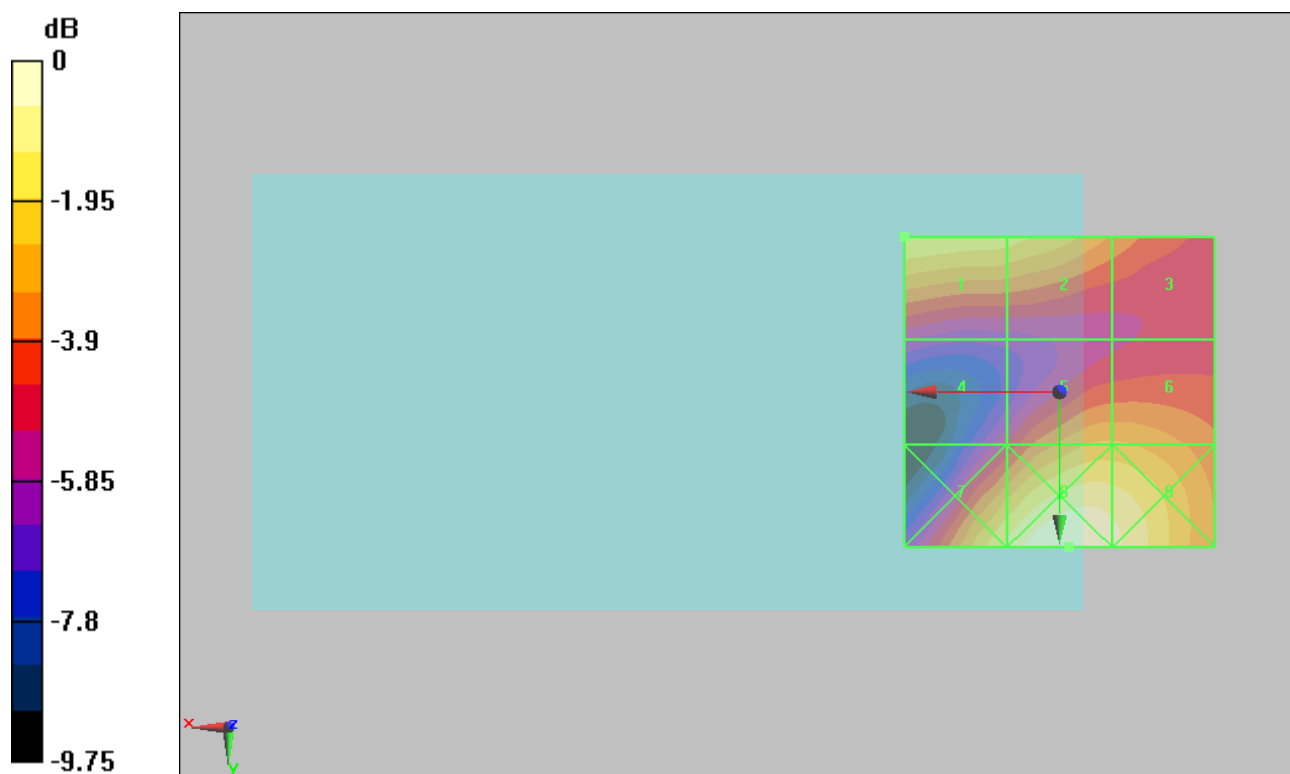

0 dB = 35.7V/m

#11 HAC_E_WCDMA II_RMC12.2K_Ch9400**DUT: 290405**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch9400/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 30.9 V/m

Probe Modulation Factor = 0.980

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 25.6 V/m; Power Drift = -0.058 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m


Grid 1 30.9 M4	Grid 2 29.8 M4	Grid 3 26 M4
Grid 4 20.4 M4	Grid 5 27.4 M4	Grid 6 27.3 M4
Grid 7 32.5 M4	Grid 8 37 M4	Grid 9 35.2 M4

Cursor:

Total = 37 V/m

E Category: M4

Location: -1.5, 25, 8.7 mm

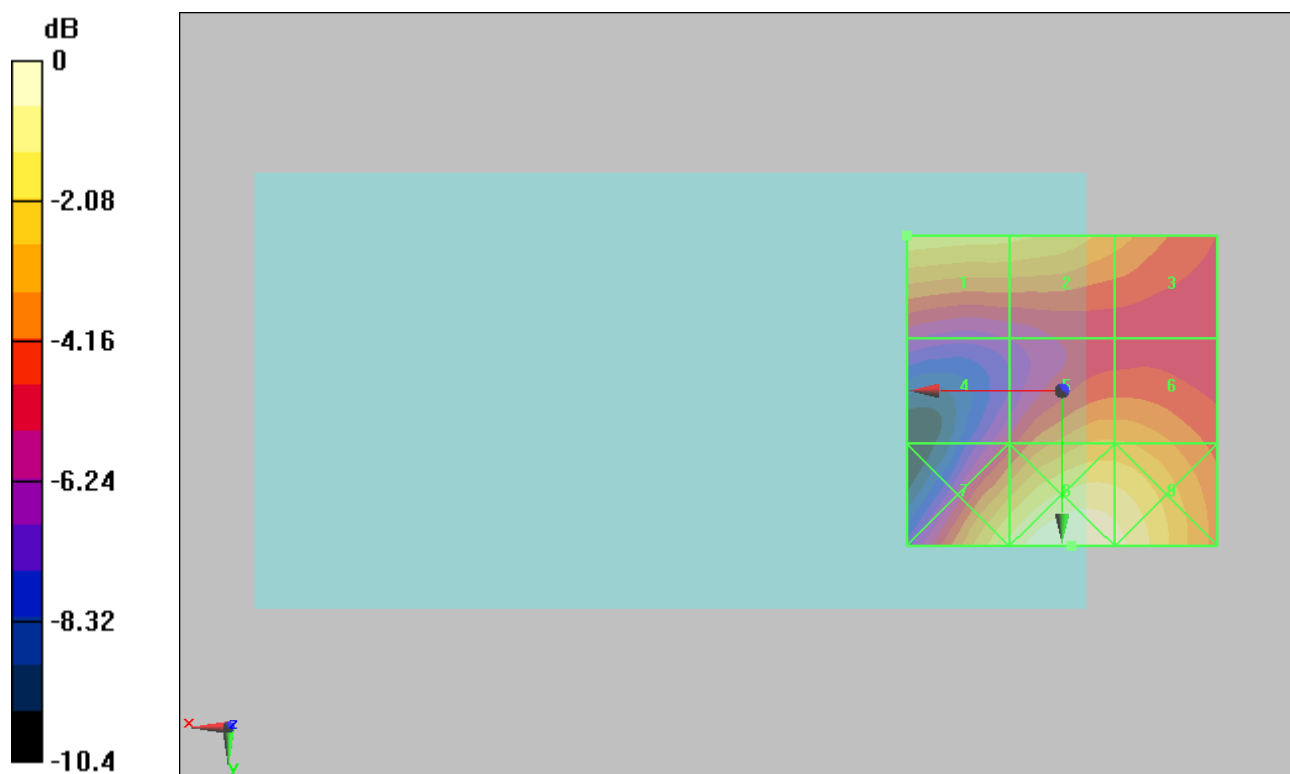

0 dB = 37V/m

#12 HAC_E_WCDMA II_RMC12.2K_Ch9538**DUT: 290405**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2012/1/26

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn778; Calibrated: 2011/11/22

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA

- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch9538/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 34.2 V/m

Probe Modulation Factor = 0.980

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 24.2 V/m; Power Drift = 0.146 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m


Grid 1	Grid 2	Grid 3
34.2 M4	31.8 M4	27.1 M4
Grid 4	Grid 5	Grid 6
20.5 M4	28.3 M4	28.4 M4
Grid 7	Grid 8	Grid 9
31.8 M4	37.2 M4	35.9 M4

Cursor:

Total = 37.2 V/m

E Category: M4

Location: -2.5, 25, 8.7 mm

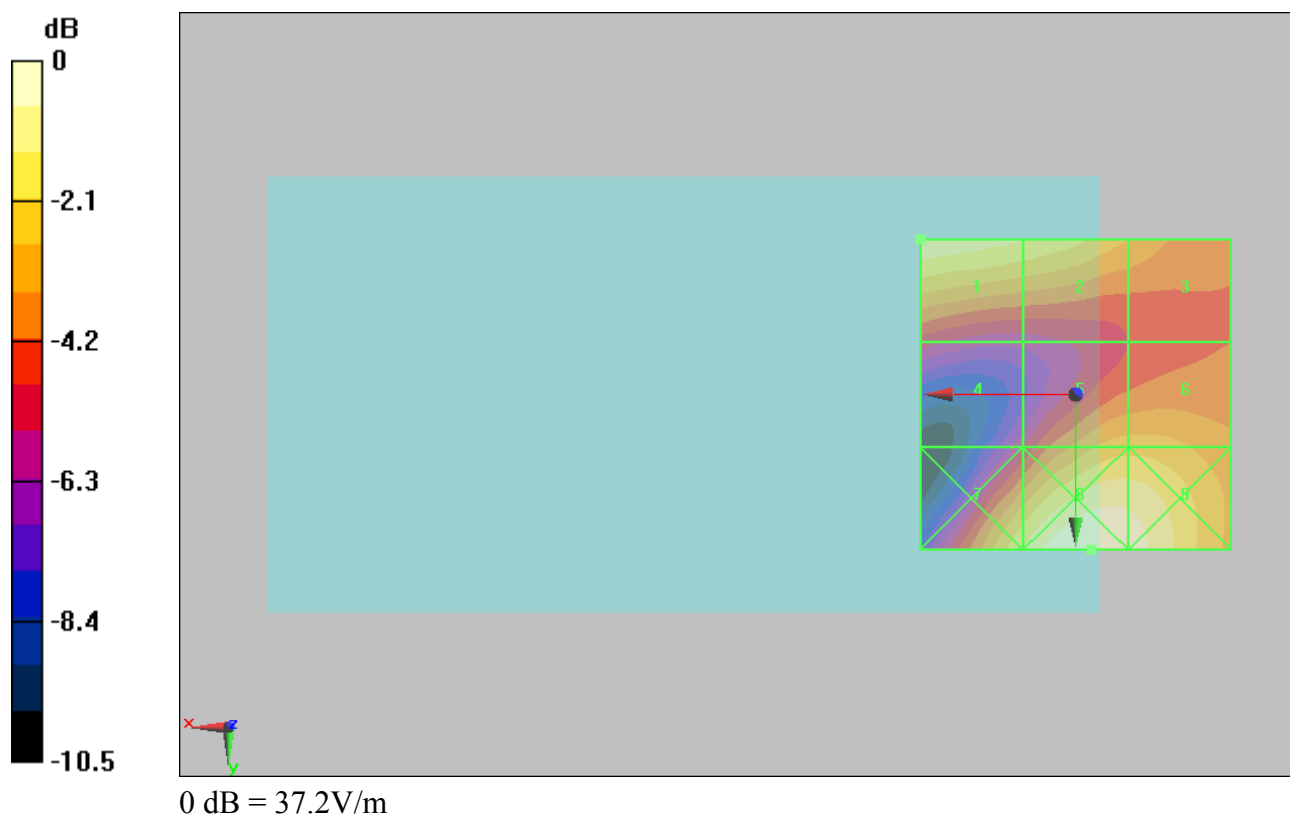

#13 HAC_H_GSM850_GSM_Ch128**DUT: 290405**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch128/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.262 A/m

Probe Modulation Factor = 2.48

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.085 A/m; Power Drift = -0.00899 dB

Hearing Aid Near-Field Category: M4 (AWF -5 dB)

Peak H-field in A/m



Grid 1	Grid 2	Grid 3
0.384 M4	0.262 M4	0.153 M4
Grid 4	Grid 5	Grid 6
0.366 M4	0.256 M4	0.152 M4
Grid 7	Grid 8	Grid 9
0.377 M4	0.261 M4	0.157 M4

Cursor:

Total = 0.384 A/m

H Category: M4

Location: 25, -22, 8.7 mm

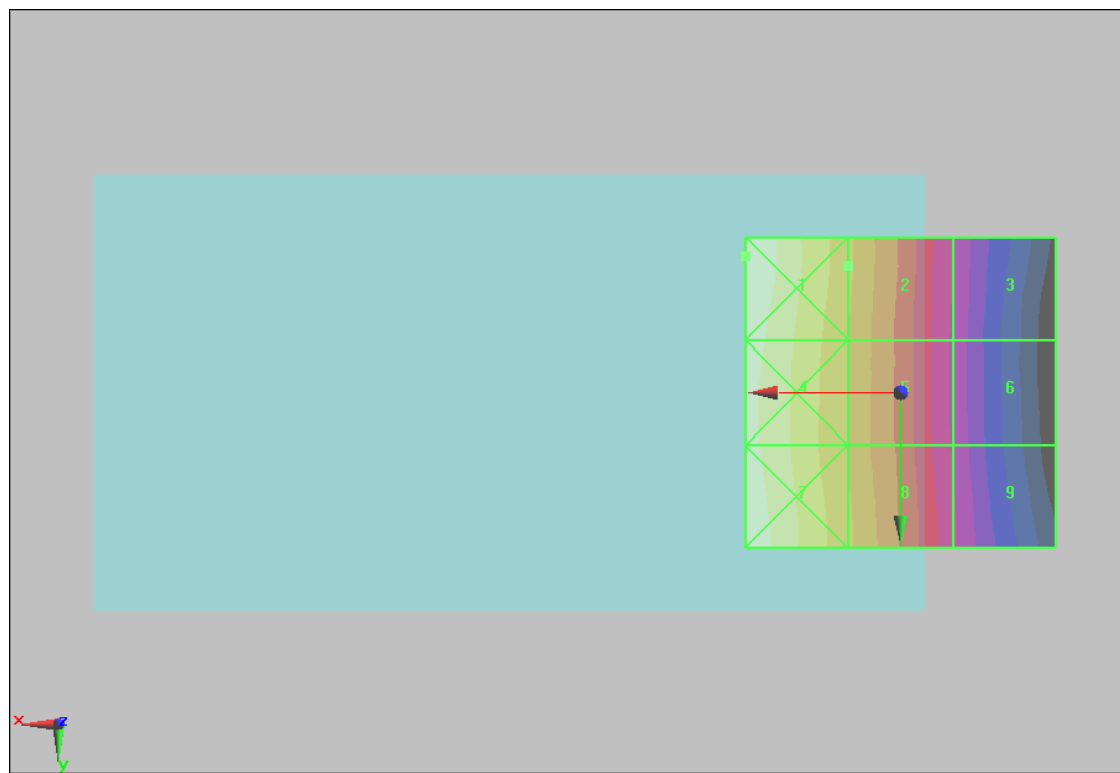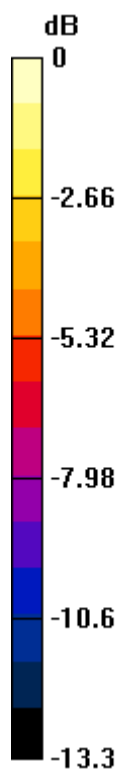

0 dB = 0.384A/m

#14 HAC_H_GSM850_GSM_Ch189**DUT: 290405**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch189/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.302 A/m

Probe Modulation Factor = 2.48

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.098 A/m; Power Drift = -0.012 dB

Hearing Aid Near-Field Category: M4 (AWF -5 dB)

Peak H-field in A/m



Grid 1 0.442 M4	Grid 2 0.302 M4	Grid 3 0.177 M4
Grid 4 0.423 M4	Grid 5 0.296 M4	Grid 6 0.172 M4
Grid 7 0.438 M4	Grid 8 0.300 M4	Grid 9 0.178 M4

Cursor:

Total = 0.442 A/m

H Category: M4

Location: 25, -22, 8.7 mm

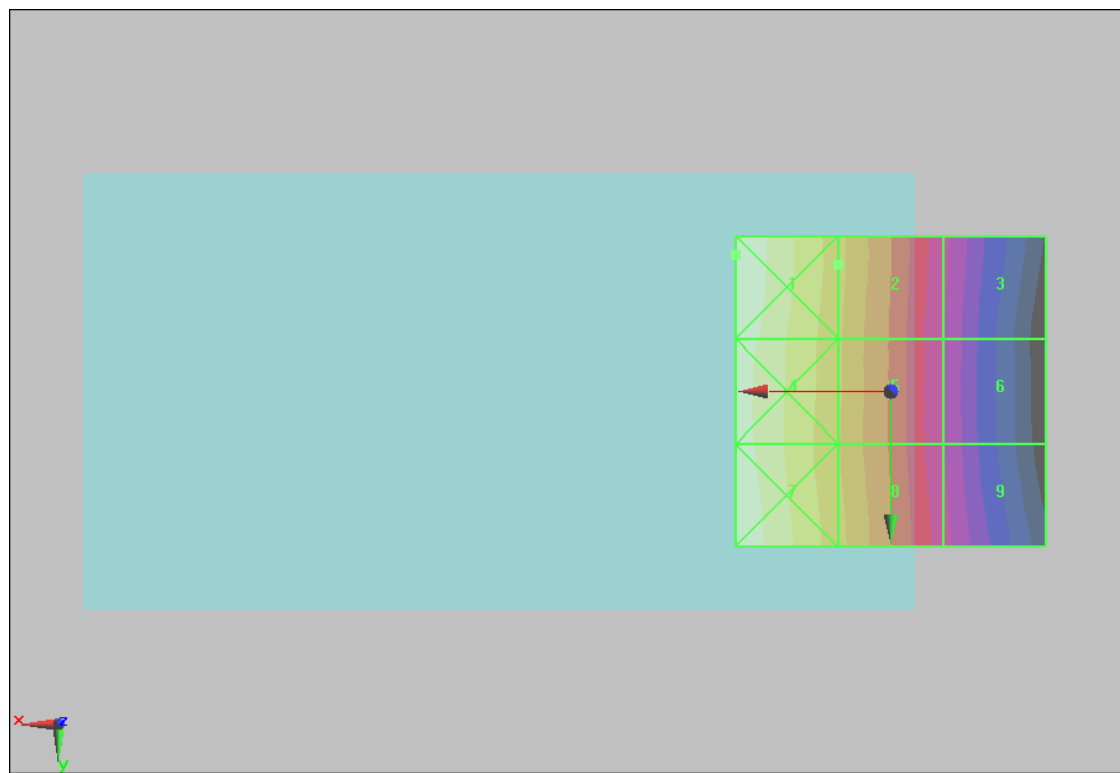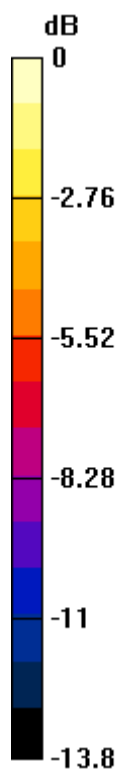

0 dB = 0.442A/m

#15 HAC_H_GSM850_GSM_Ch251**DUT: 290405**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch251/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.326 A/m

Probe Modulation Factor = 2.48

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.103 A/m; Power Drift = 0.023 dB

Hearing Aid Near-Field Category: M4 (AWF -5 dB)

Peak H-field in A/m


Grid 1 0.479 M3	Grid 2 0.326 M4	Grid 3 0.190 M4
Grid 4 0.456 M3	Grid 5 0.318 M4	Grid 6 0.183 M4
Grid 7 0.459 M3	Grid 8 0.312 M4	Grid 9 0.181 M4

Cursor:

Total = 0.479 A/m

H Category: M3

Location: 25, -22, 8.7 mm

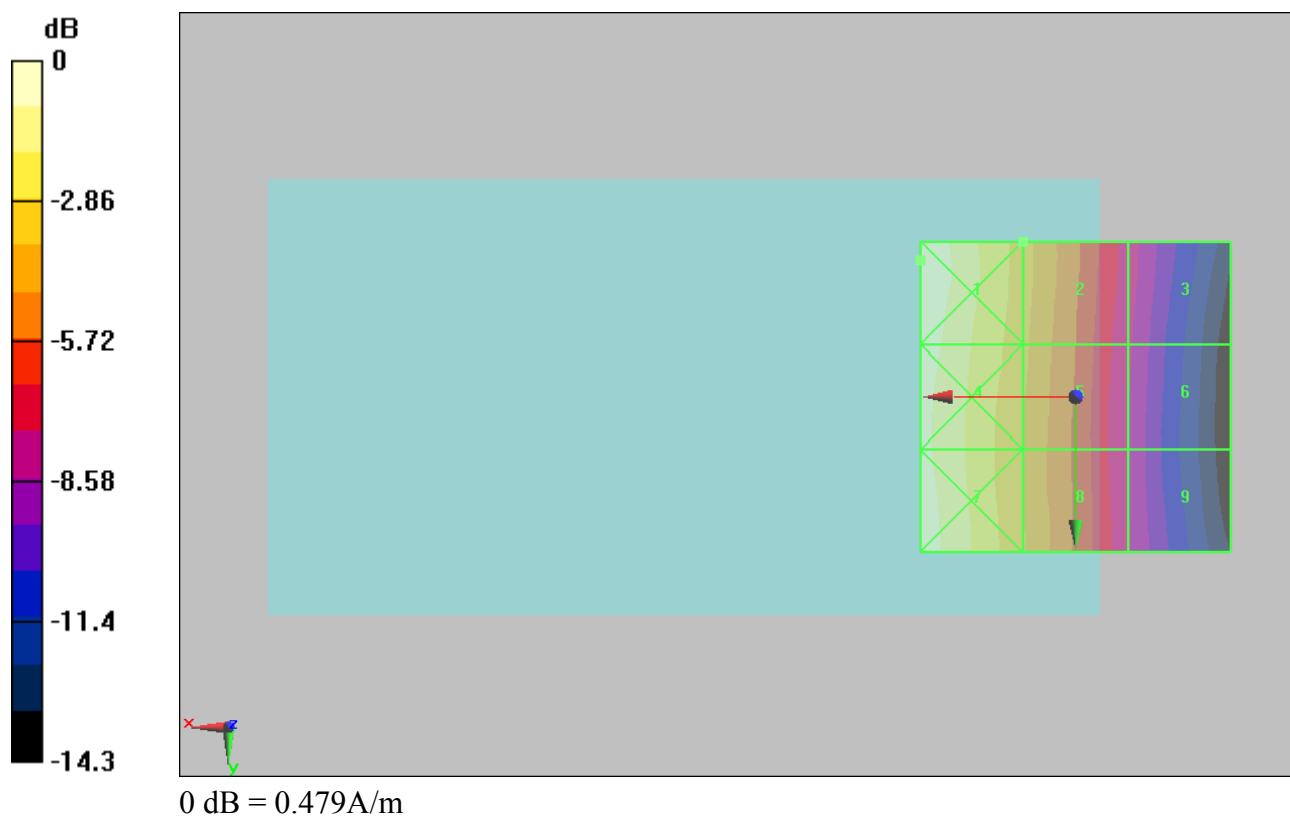

#16 HAC_H_GSM1900_GSM_Ch512**DUT: 290405**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch512/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.185 A/m

Probe Modulation Factor = 2.44

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.085 A/m; Power Drift = 0.154 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak H-field in A/m


Grid 1 0.174 M3	Grid 2 0.185 M3	Grid 3 0.181 M3
Grid 4 0.175 M3	Grid 5 0.185 M3	Grid 6 0.181 M3
Grid 7 0.194 M3	Grid 8 0.175 M3	Grid 9 0.162 M3

Cursor:

Total = 0.194 A/m

H Category: M3

Location: 25, 25, 8.7 mm

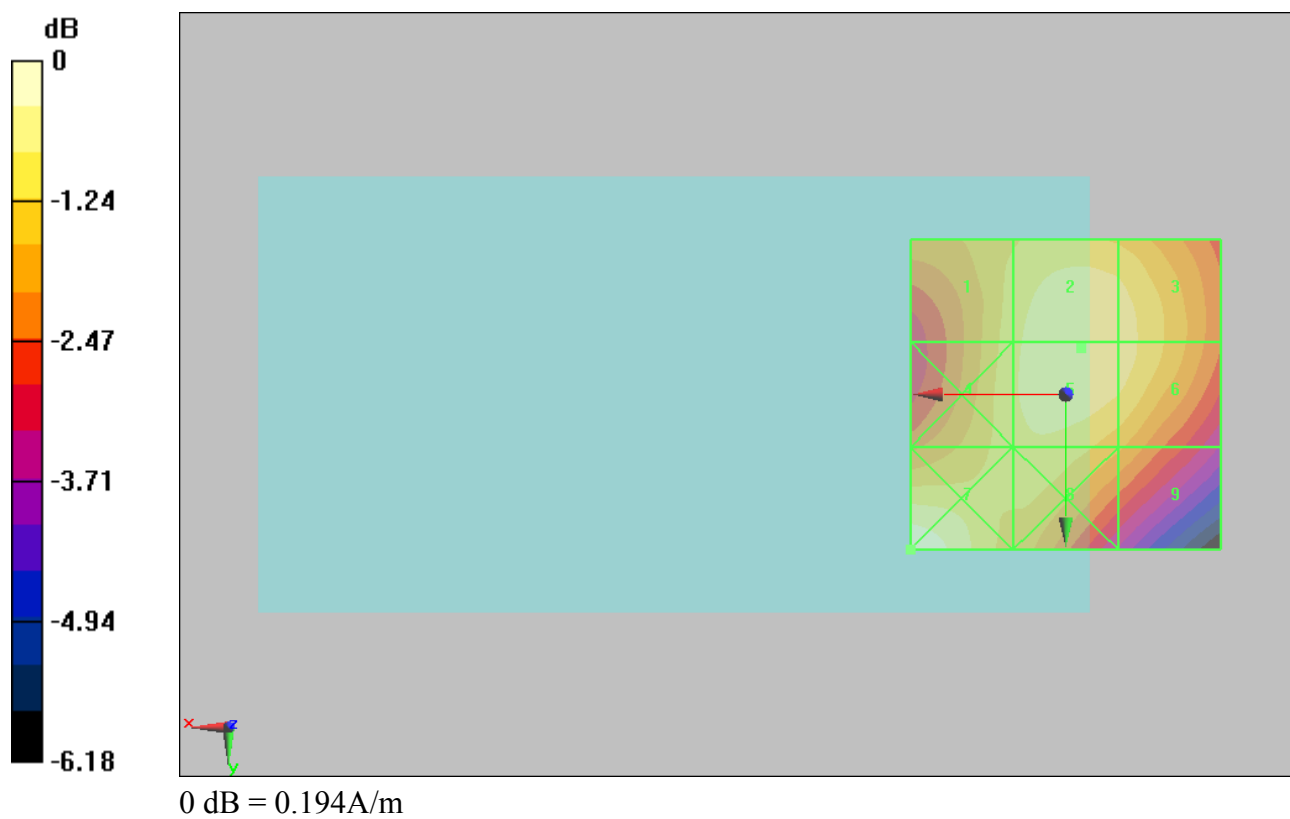

#17 HAC_H_GSM1900_GSM_Ch661**DUT: 290405**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch661/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.197 A/m

Probe Modulation Factor = 2.44

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.092 A/m; Power Drift = -0.010 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak H-field in A/m


Grid 1 0.185 M3	Grid 2 0.197 M3	Grid 3 0.197 M3
Grid 4 0.182 M3	Grid 5 0.197 M3	Grid 6 0.197 M3
Grid 7 0.210 M3	Grid 8 0.184 M3	Grid 9 0.175 M3

Cursor:

Total = 0.210 A/m

H Category: M3

Location: 25, 25, 8.7 mm

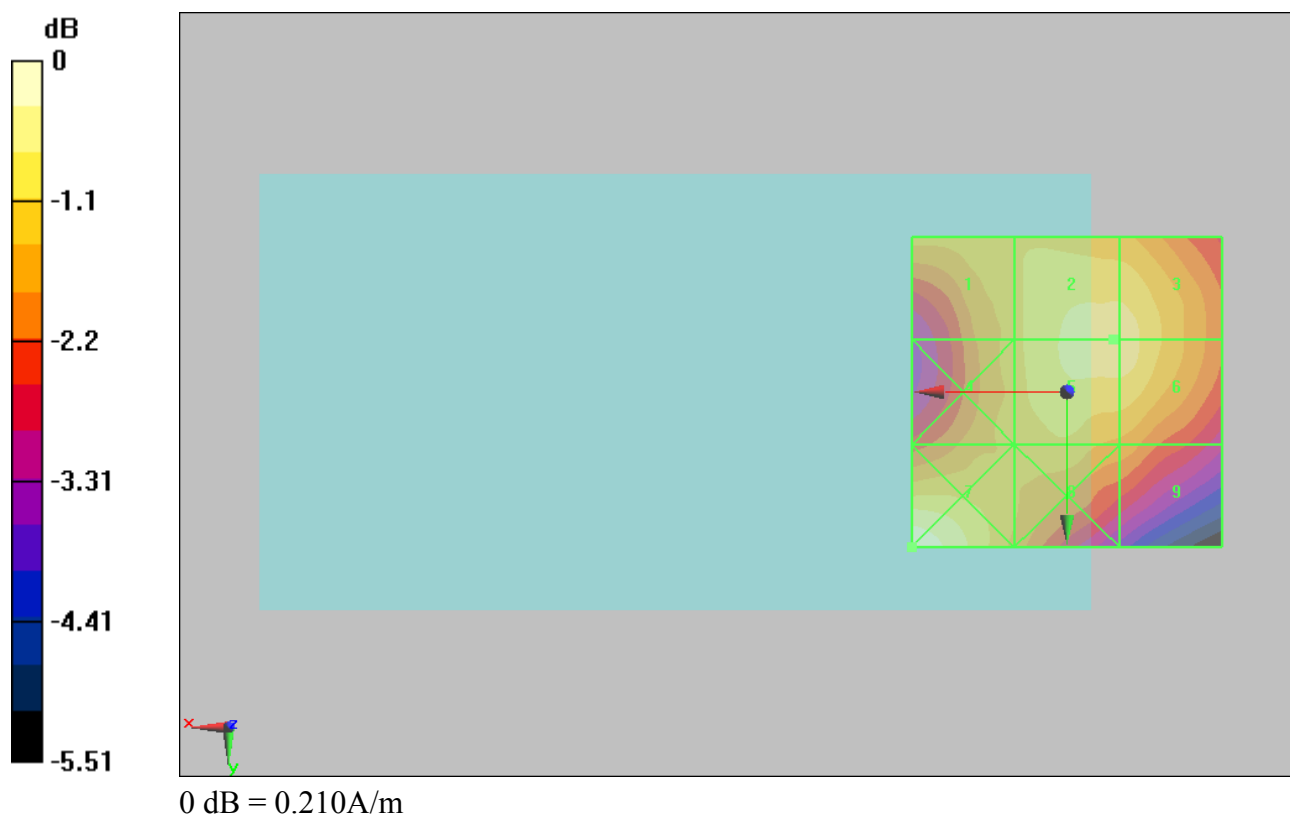

#18 HAC_H_GSM1900_GSM_Ch810**DUT: 290405**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch810/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.217 A/m

Probe Modulation Factor = 2.44

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.100 A/m; Power Drift = 0.053 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak H-field in A/m


Grid 1 0.200 M3	Grid 2 0.217 M3	Grid 3 0.214 M3
Grid 4 0.201 M3	Grid 5 0.217 M3	Grid 6 0.214 M3
Grid 7 0.200 M3	Grid 8 0.201 M3	Grid 9 0.191 M3

Cursor:

Total = 0.217 A/m

H Category: M3

Location: -1.5, -9.5, 8.7 mm

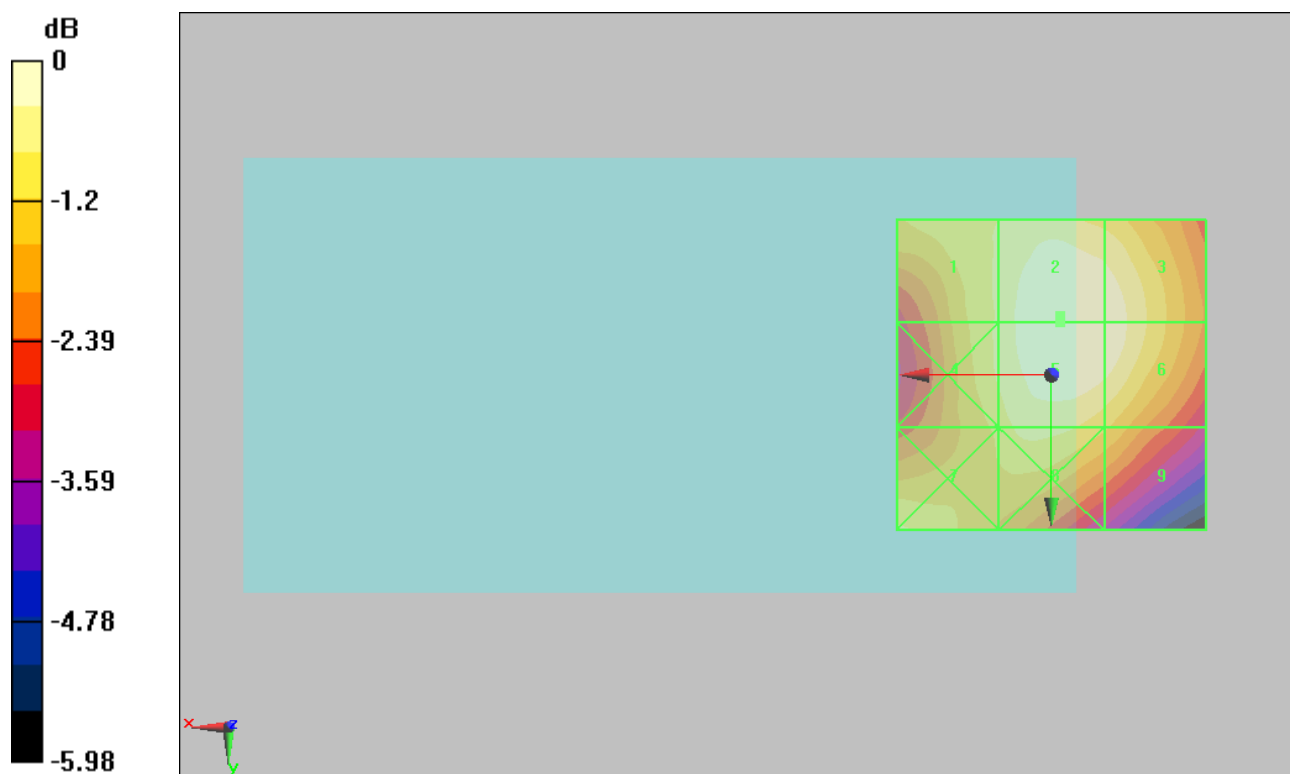

0 dB = 0.217A/m

#19 HAC_H_WCDMA V_RMC12.2K_Ch4132**DUT: 290405**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch4132/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.089 A/m

Probe Modulation Factor = 0.830

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.086 A/m; Power Drift = -0.00408 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m


Grid 1	Grid 2	Grid 3
0.127 M4	0.089 M4	0.054 M4
Grid 4	Grid 5	Grid 6
0.119 M4	0.086 M4	0.052 M4
Grid 7	Grid 8	Grid 9
0.125 M4	0.089 M4	0.054 M4

Cursor:

Total = 0.127 A/m

H Category: M4

Location: 25, -25, 8.7 mm

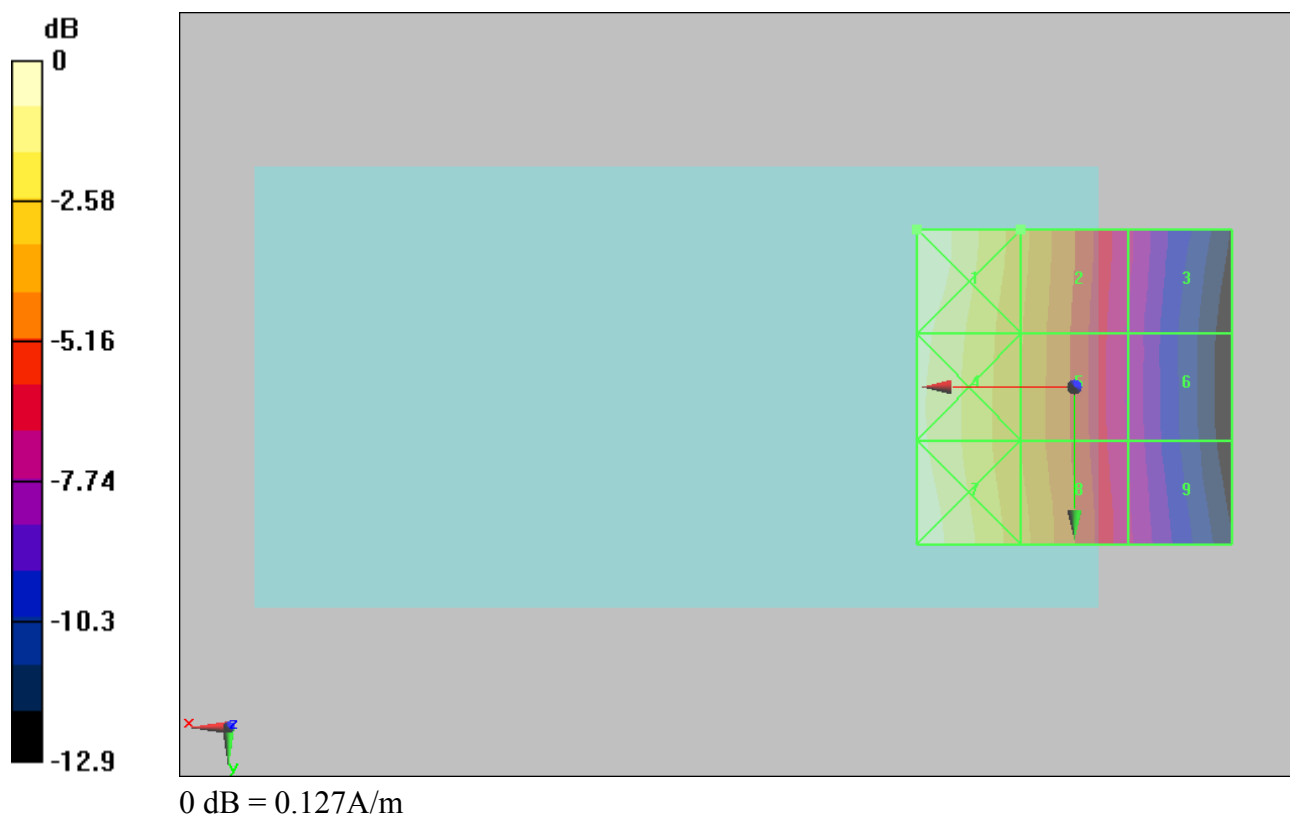

#20 HAC_H_WCDMA V_RMC12.2K_Ch4182**DUT: 290405**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch4182/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.102 A/m

Probe Modulation Factor = 0.830

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.098 A/m; Power Drift = 0.051 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m


Grid 1 0.145 M4	Grid 2 0.102 M4	Grid 3 0.061 M4
Grid 4 0.137 M4	Grid 5 0.100 M4	Grid 6 0.060 M4
Grid 7 0.144 M4	Grid 8 0.101 M4	Grid 9 0.062 M4

Cursor:

Total = 0.145 A/m

H Category: M4

Location: 25, -25, 8.7 mm

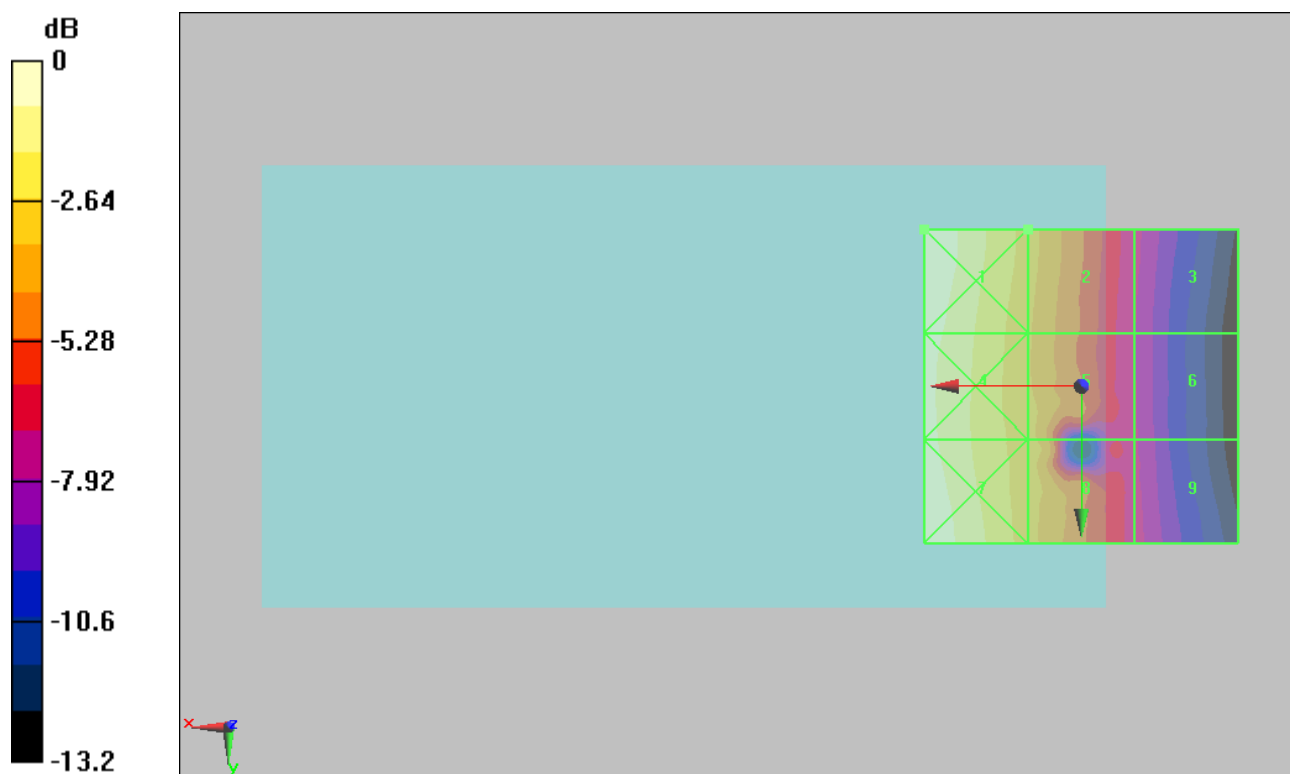

0 dB = 0.145A/m

#21 HAC_H_WCDMA V_RMC12.2K_Ch4233**DUT: 290405**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch4233/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.103 A/m

Probe Modulation Factor = 0.830

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.098 A/m; Power Drift = 0.051 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m


Grid 1 0.148 M4	Grid 2 0.103 M4	Grid 3 0.062 M4
Grid 4 0.137 M4	Grid 5 0.099 M4	Grid 6 0.059 M4
Grid 7 0.142 M4	Grid 8 0.099 M4	Grid 9 0.059 M4

Cursor:

Total = 0.148 A/m

H Category: M4

Location: 25, -25, 8.7 mm

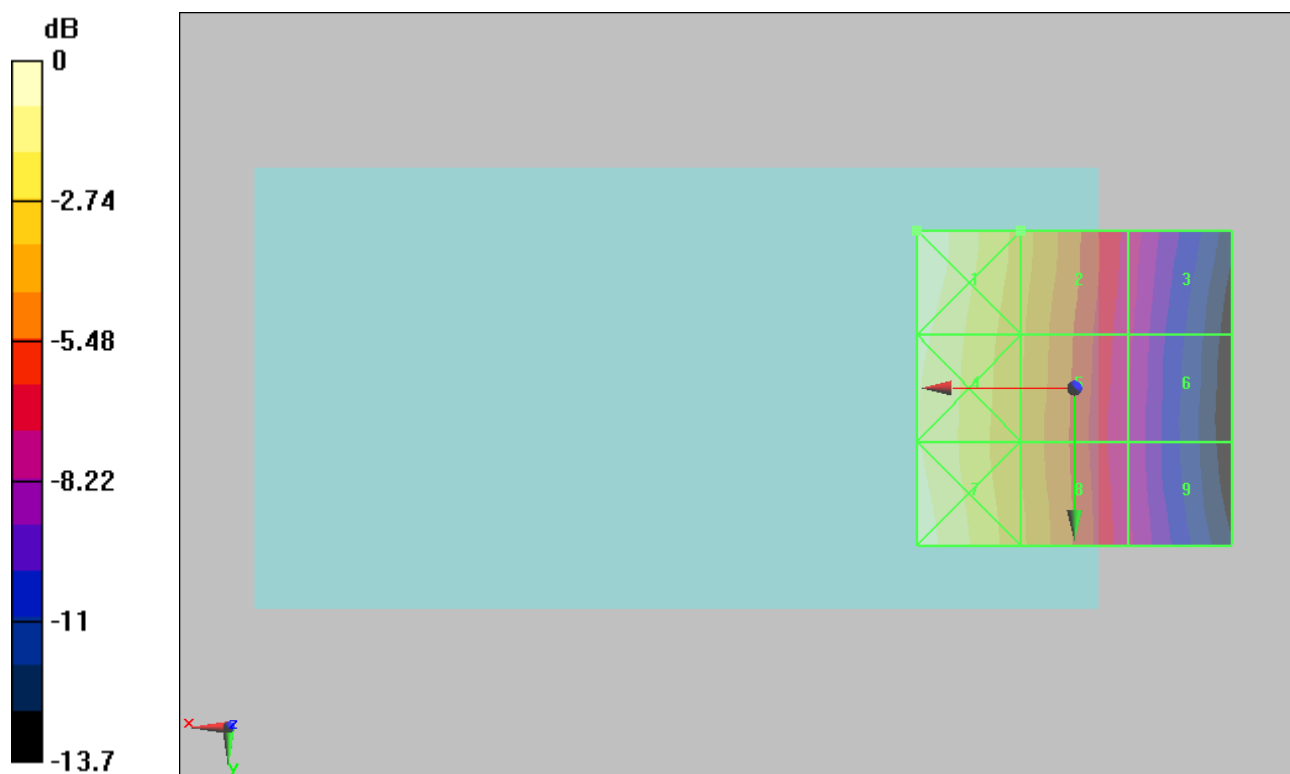

0 dB = 0.148A/m

#22 HAC_H_WCDMA II_RMC12.2K_Ch9262**DUT: 290405**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch9262/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.078 A/m

Probe Modulation Factor = 0.850

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.103 A/m; Power Drift = -0.013 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m



Grid 1 0.071 M4	Grid 2 0.078 M4	Grid 3 0.078 M4
Grid 4 0.072 M4	Grid 5 0.078 M4	Grid 6 0.078 M4
Grid 7 0.080 M4	Grid 8 0.073 M4	Grid 9 0.070 M4

Cursor:

Total = 0.080 A/m

H Category: M4

Location: 25, 25, 8.7 mm

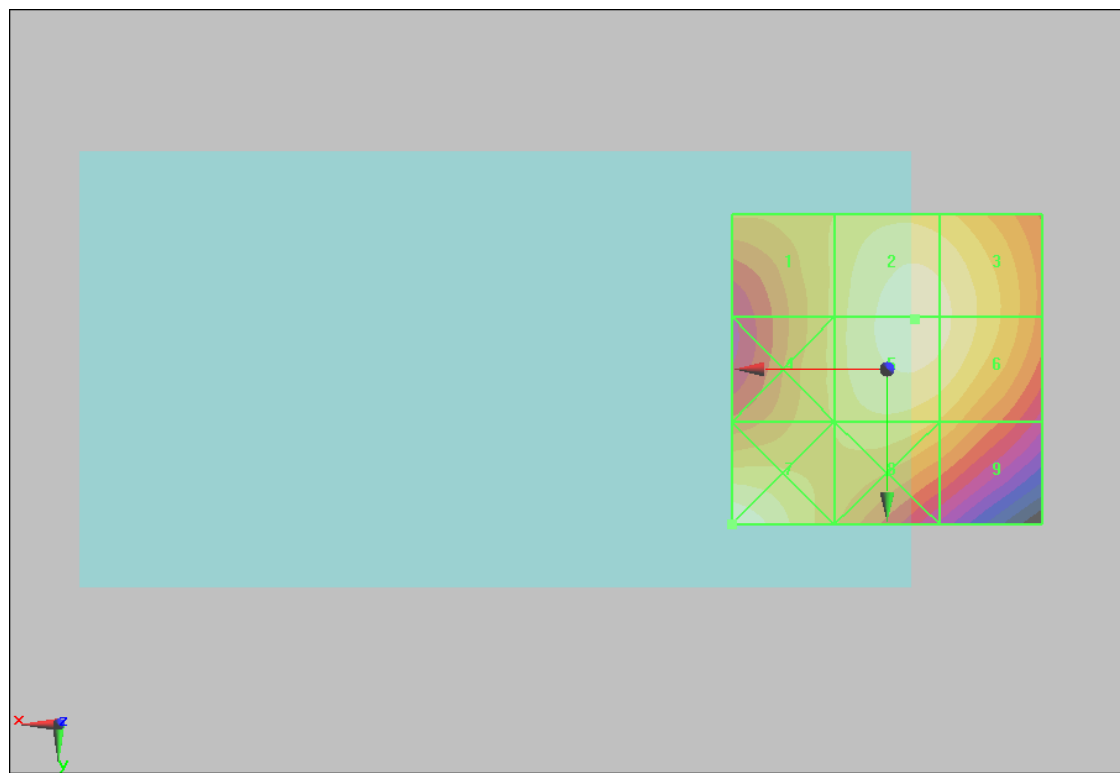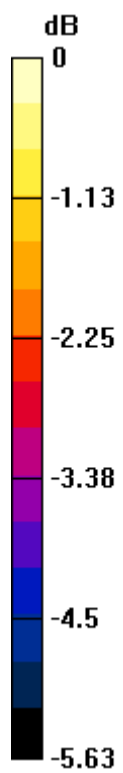

0 dB = 0.080A/m

#23 HAC_H_WCDMA II_RMC12.2K_Ch9400**DUT: 290405**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch9400/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.081 A/m

Probe Modulation Factor = 0.850

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.105 A/m; Power Drift = 0.061 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m



Grid 1 0.075 M4	Grid 2 0.081 M4	Grid 3 0.080 M4
Grid 4 0.074 M4	Grid 5 0.081 M4	Grid 6 0.080 M4
Grid 7 0.085 M4	Grid 8 0.074 M4	Grid 9 0.072 M4

Cursor:

Total = 0.085 A/m

H Category: M4

Location: 25, 25, 8.7 mm

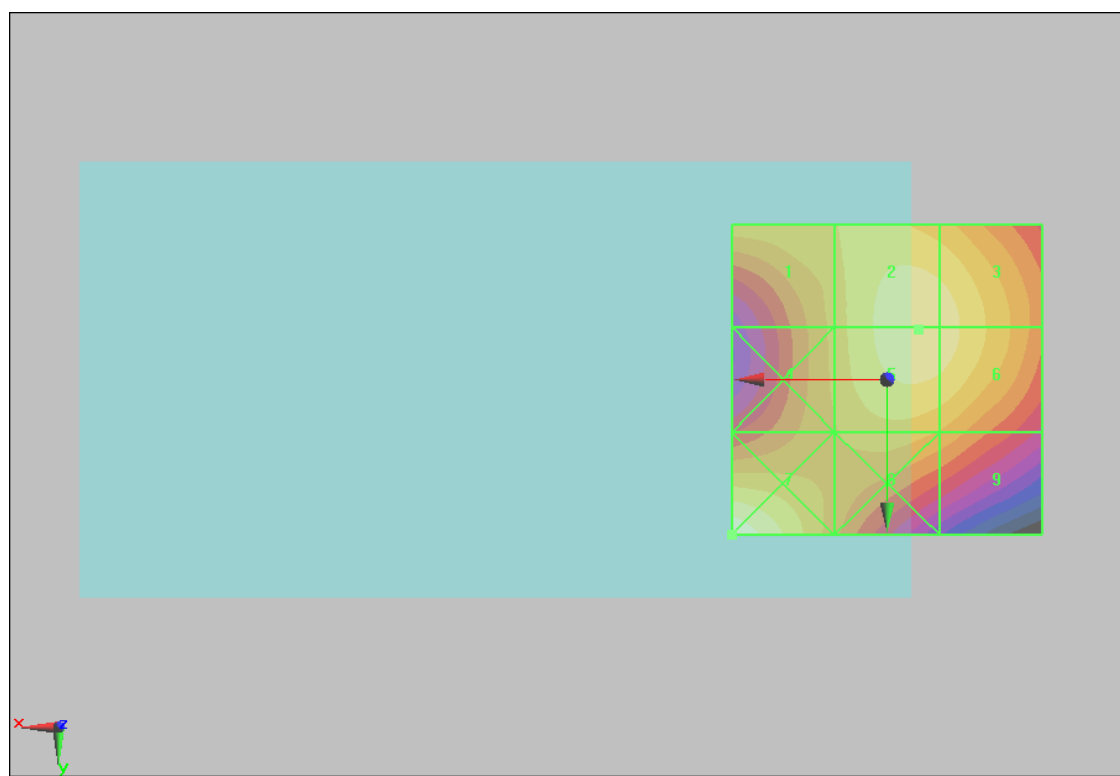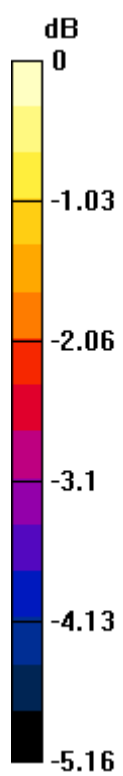

0 dB = 0.085A/m

#24 HAC_H_WCDMA II_RMC12.2K_Ch9538**DUT: 290405**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Ambient Temperature : 22.5 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2012/1/26
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch9538/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.086 A/m

Probe Modulation Factor = 0.850

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.110 A/m; Power Drift = 0.075 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m


Grid 1 0.079 M4	Grid 2 0.086 M4	Grid 3 0.083 M4
Grid 4 0.078 M4	Grid 5 0.086 M4	Grid 6 0.083 M4
Grid 7 0.079 M4	Grid 8 0.078 M4	Grid 9 0.074 M4

Cursor:

Total = 0.086 A/m

H Category: M4

Location: -4, -6.5, 8.7 mm

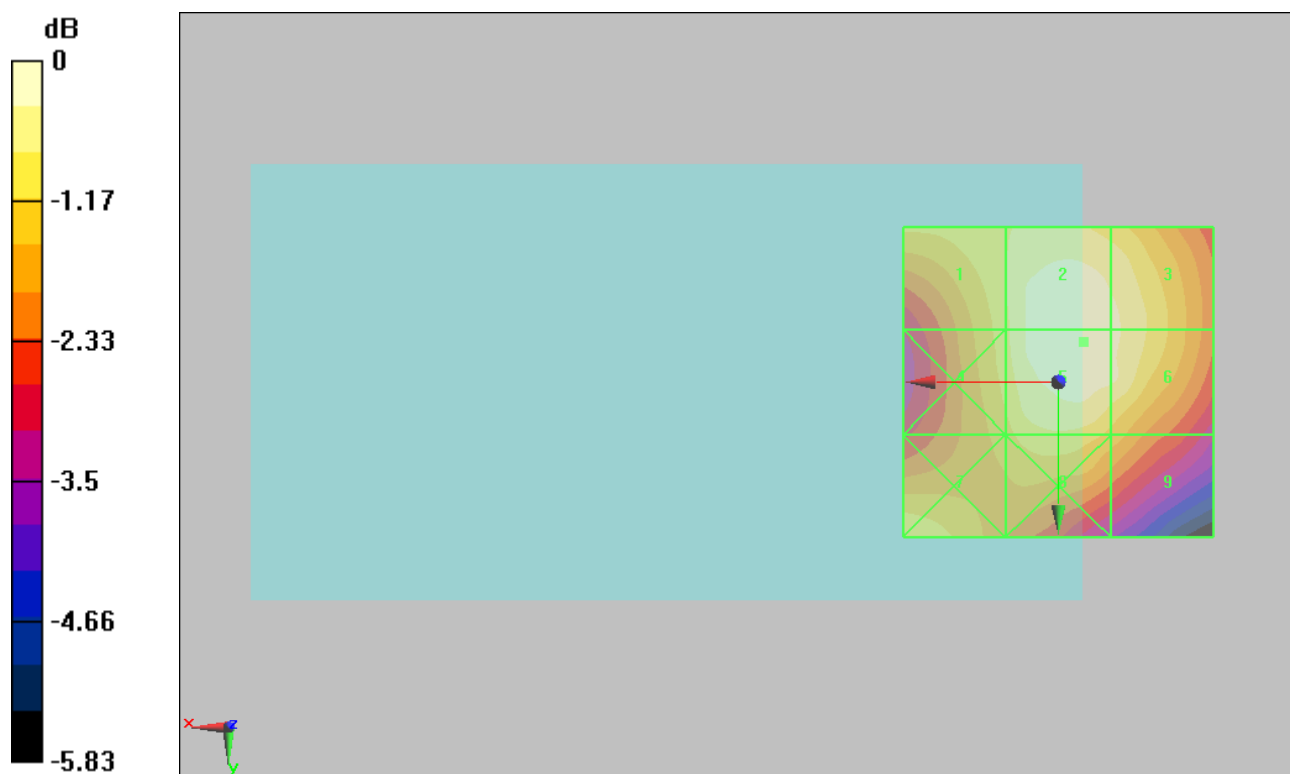

0 dB = 0.086A/m



Appendix C. DASY Calibration Certificate

The DASY calibration certificates are shown as follows.