


Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX A Mode 5300MHz_Without Pistol

Vertical


120 dBuV/m

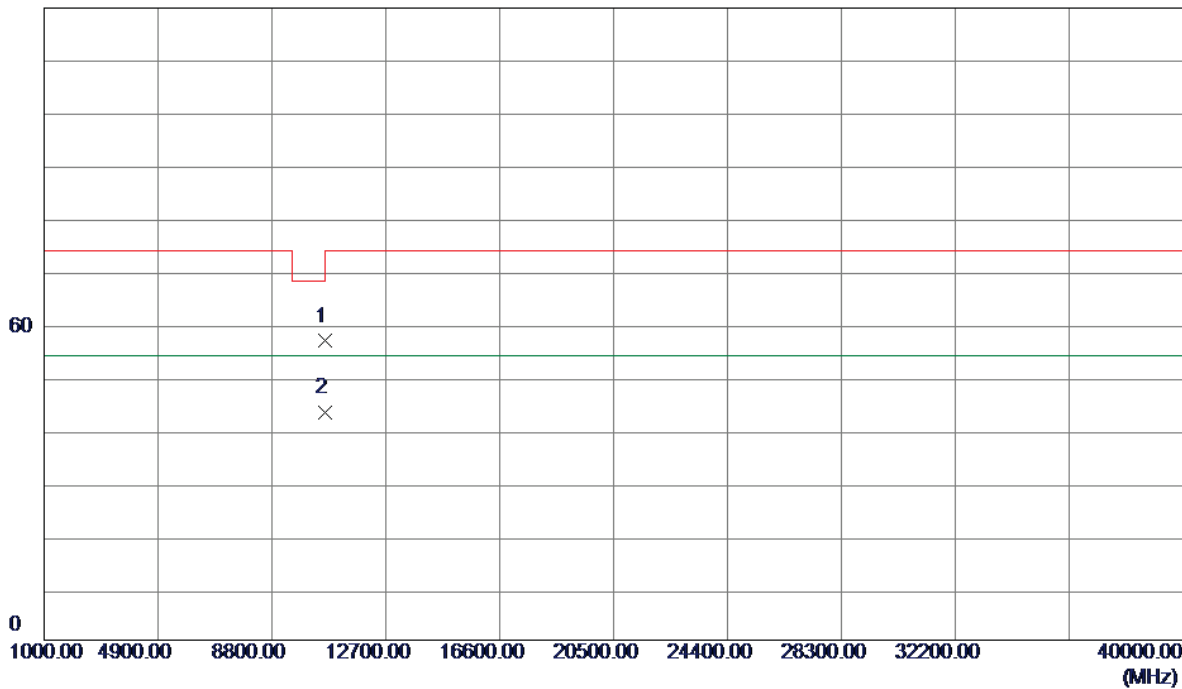

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10600.1000	54.69	2.07	56.76	74.00	-17.24	Peak	
2 *	10600.1000	41.17	2.07	43.24	54.00	-10.76	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX A Mode 5300MHz_Without Pistol


Horizontal

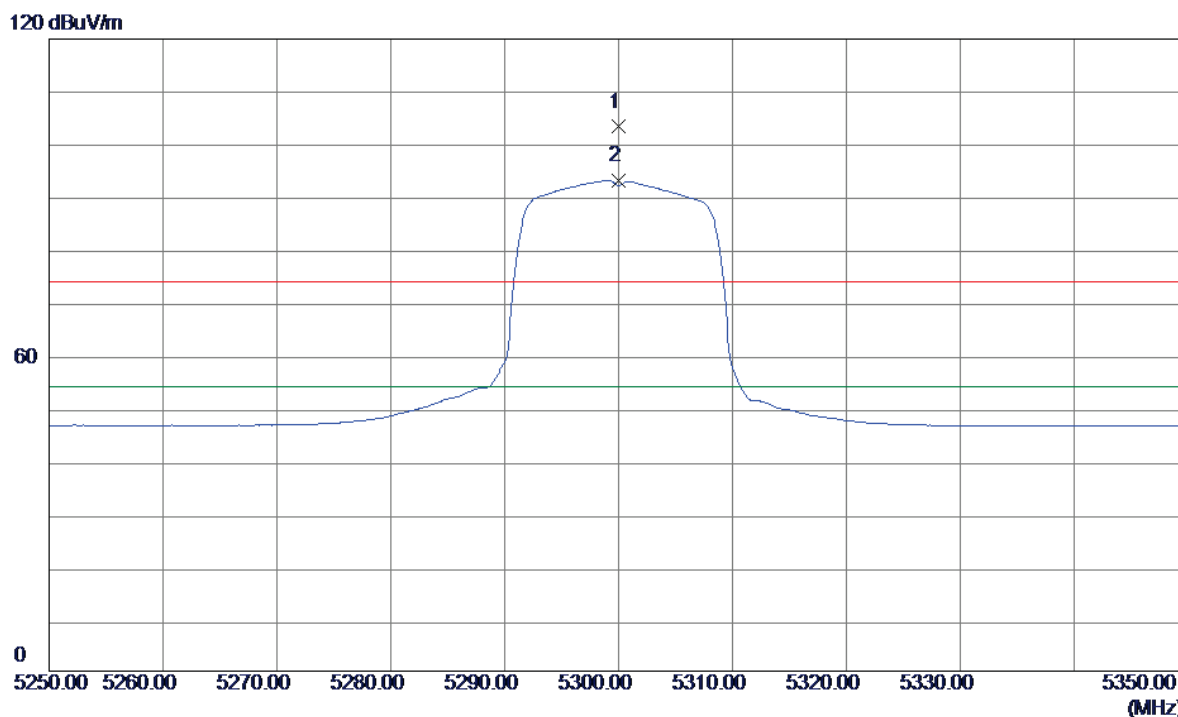

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5300.0000	65.66	37.66	103.32	74.00	29.32	Peak	No Limit
2 *	5300.0000	55.45	37.66	93.11	54.00	39.11	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX A Mode 5300MHz_Without Pistol


Horizontal

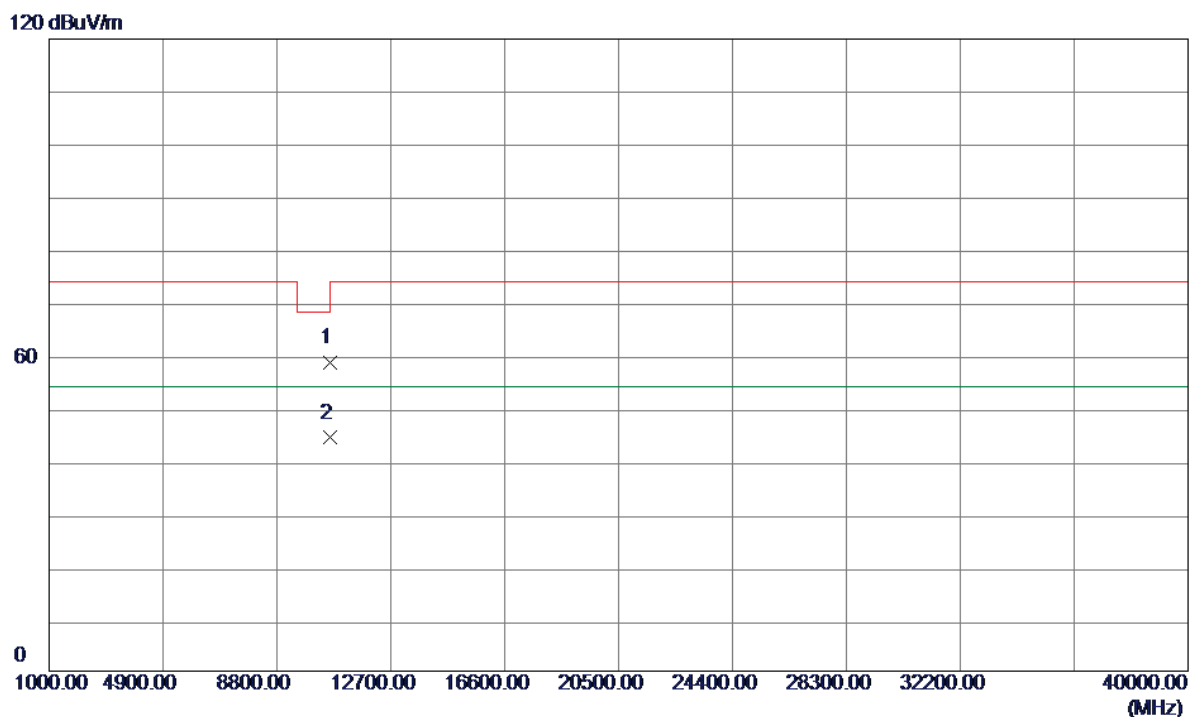

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10600.1000	56.40	2.07	58.47	74.00	-15.53	Peak	
2 *	10600.1000	42.21	2.07	44.28	54.00	-9.72	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX A Mode 5320MHz_Without Pistol

Vertical

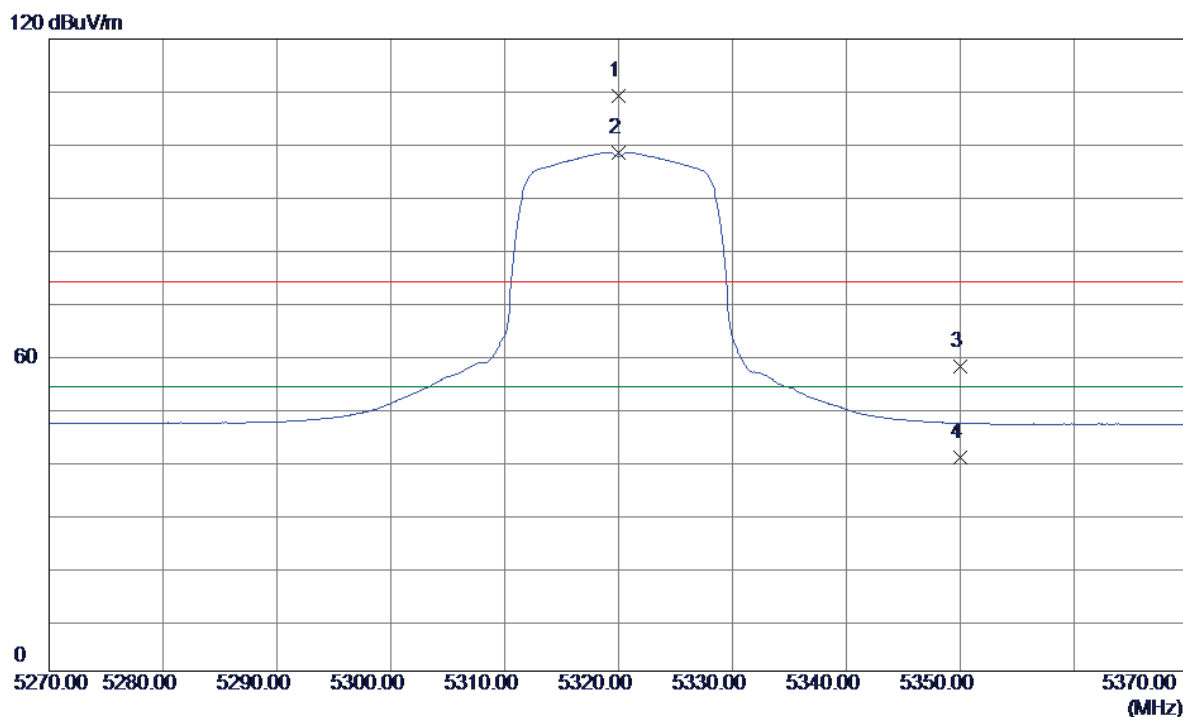


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5320.0000	71.42	37.69	109.11	74.00	35.11	Peak	No Limit
2 *	5320.0000	60.81	37.69	98.50	54.00	44.50	AVG	No Limit
3	5350.0000	20.07	37.73	57.80	74.00	-16.20	Peak	
4	5350.0000	2.84	37.73	40.57	54.00	-13.43	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX A Mode 5320MHz_Without Pistol

Vertical


120 dBuV/m

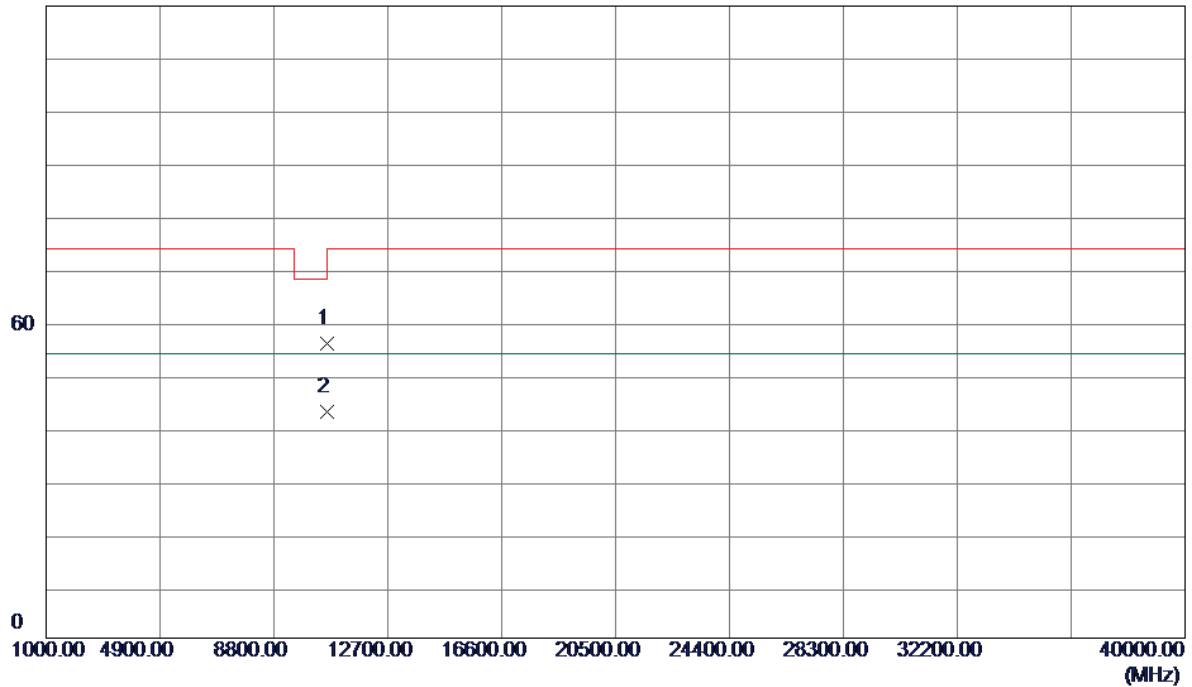

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	53.89	2.14	56.03	74.00	-17.97	Peak	
2 *	10640.0000	40.75	2.14	42.89	54.00	-11.11	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX A Mode 5320MHz_Without Pistol

Horizontal

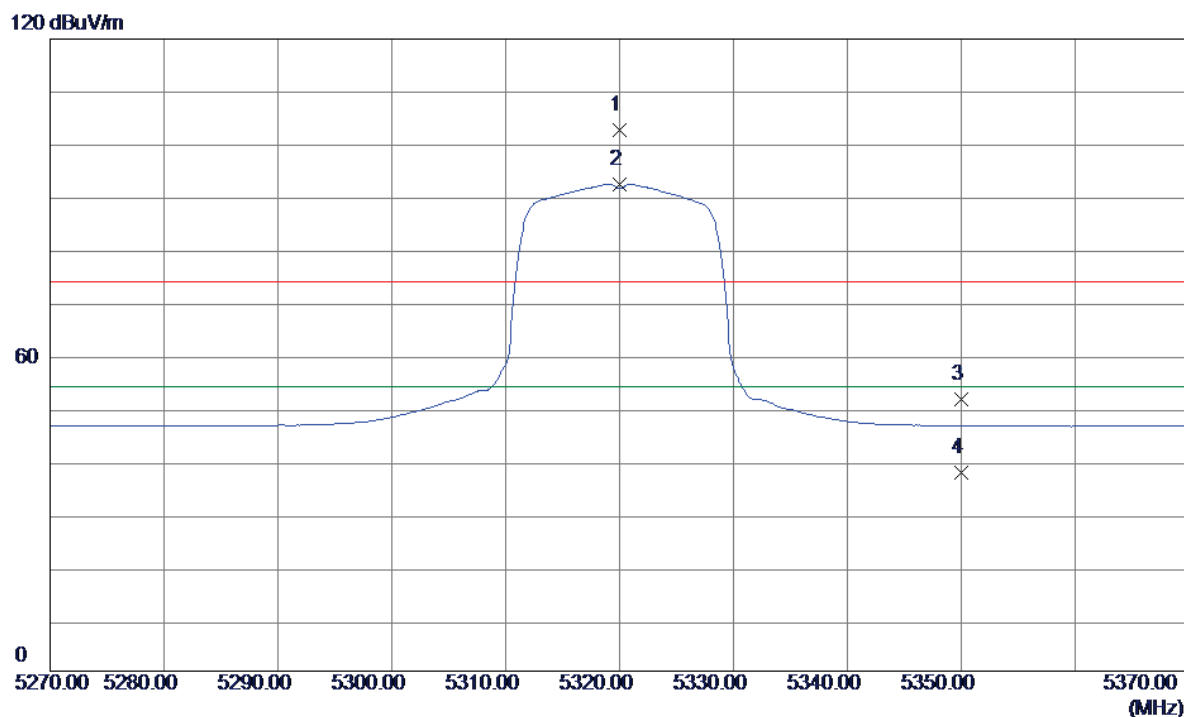


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5320.0000	65.05	37.69	102.74	74.00	28.74	Peak	No Limit
2 *	5320.0000	54.75	37.69	92.44	54.00	38.44	AVG	No Limit
3	5350.0400	13.90	37.73	51.63	74.00	-22.37	Peak	
4	5350.0400	-0.05	37.73	37.68	54.00	-16.32	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX A Mode 5320MHz_Without Pistol

Horizontal


120 dBuV/m

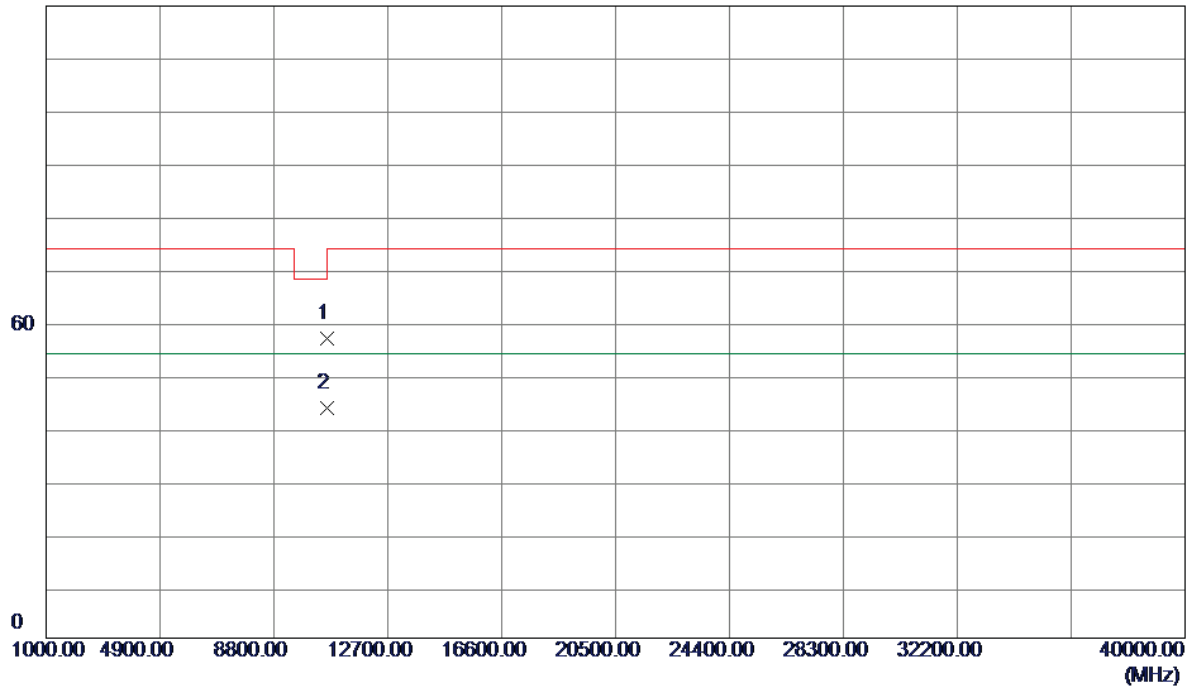

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	54.72	2.14	56.86	74.00	-17.14	Peak	
2 *	10640.0000	41.59	2.14	43.73	54.00	-10.27	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz_Without Pistol


Vertical

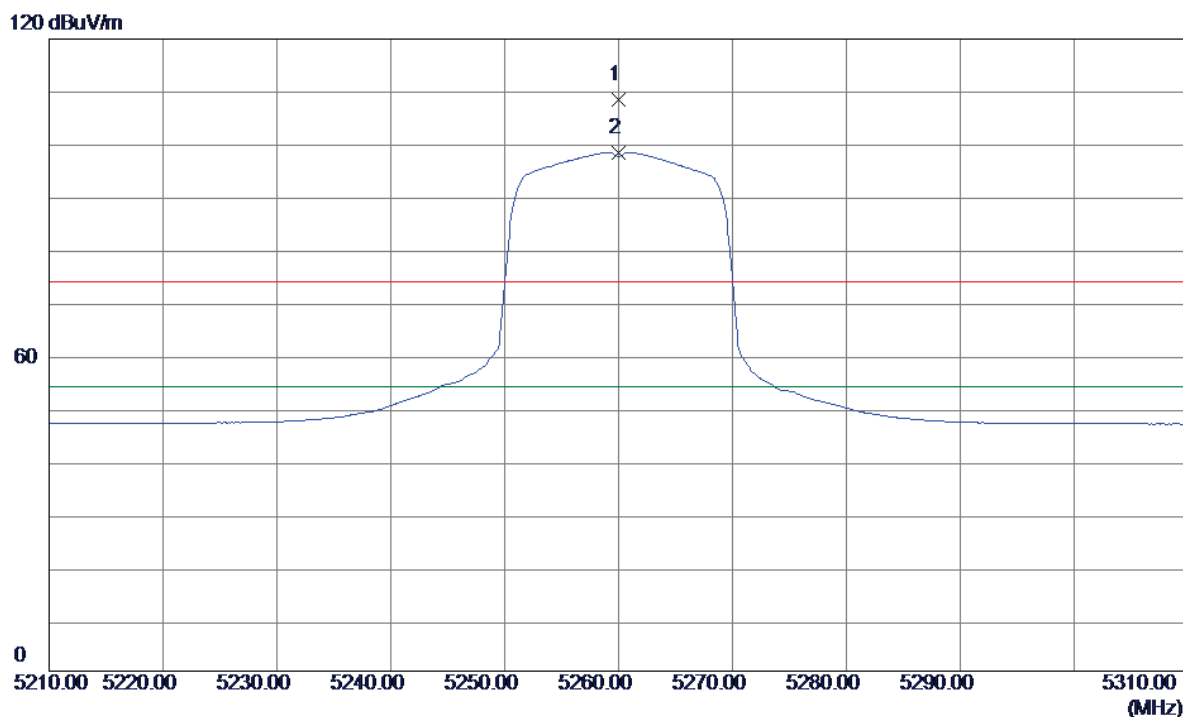

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5260.0000	70.87	37.61	108.48	74.00	34.48	Peak	No Limit
2 *	5260.0000	60.86	37.61	98.47	54.00	44.47	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz_Without Pistol


Vertical

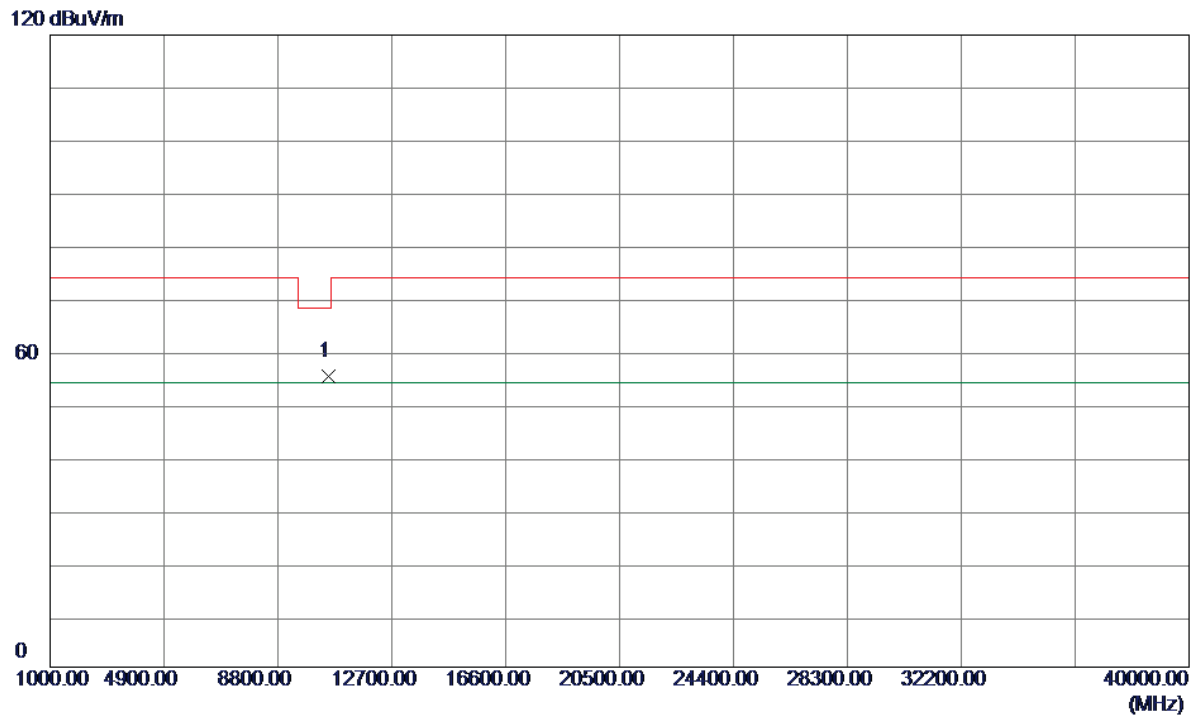

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10520.0000	53.31	1.91	55.22	68.20	-12.98	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz_Without Pistol


Horizontal

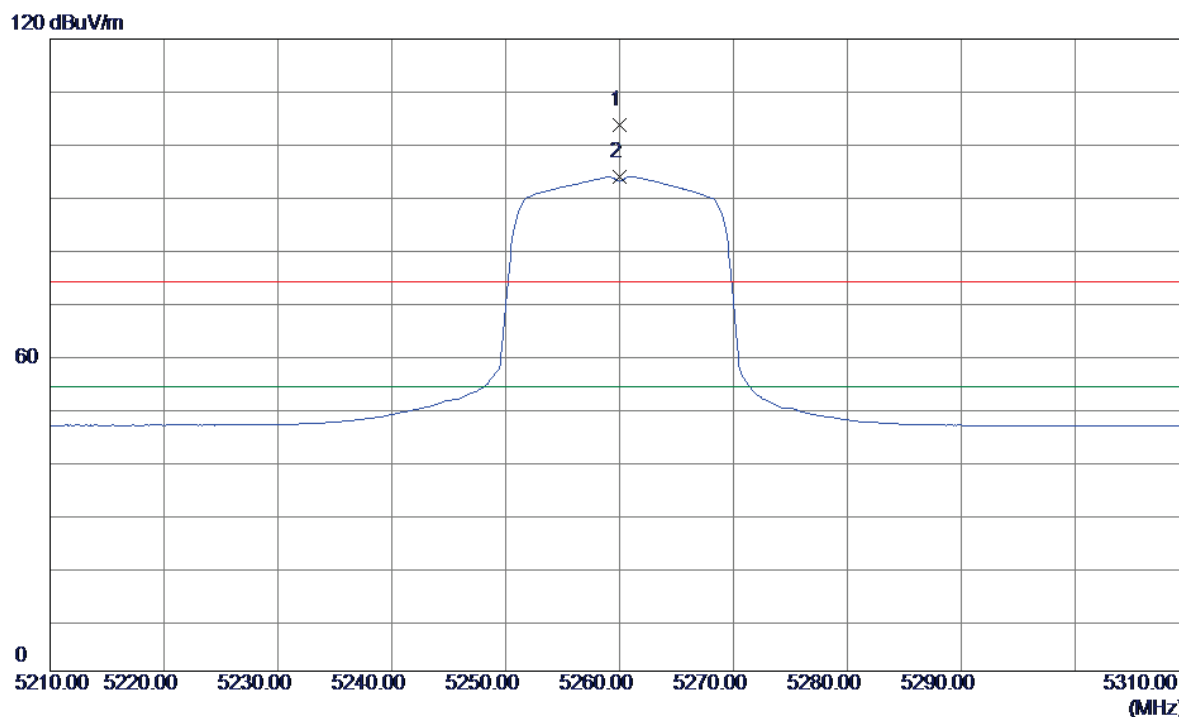

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5260.0000	66.13	37.61	103.74	74.00	29.74	Peak	No Limit
2 *	5260.0000	56.23	37.61	93.84	54.00	39.84	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz_Without Pistol


Horizontal

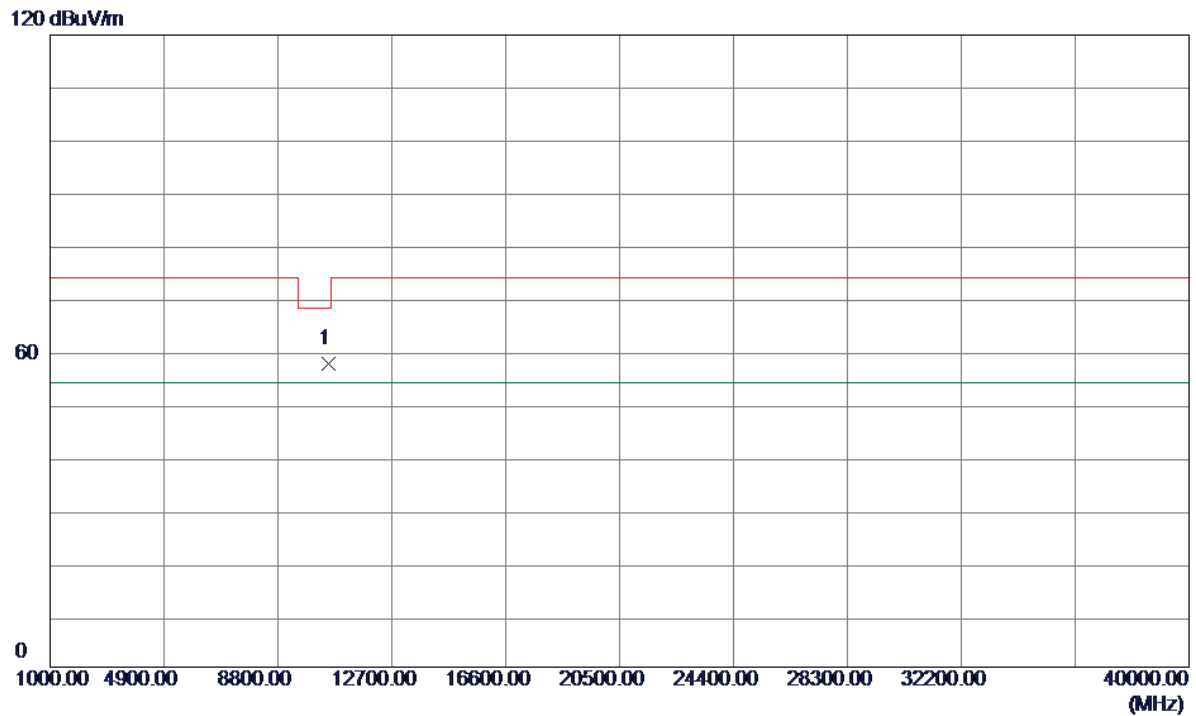

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10520.0000	55.64	1.91	57.55	68.20	-10.65	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz_Without Pistol

Vertical

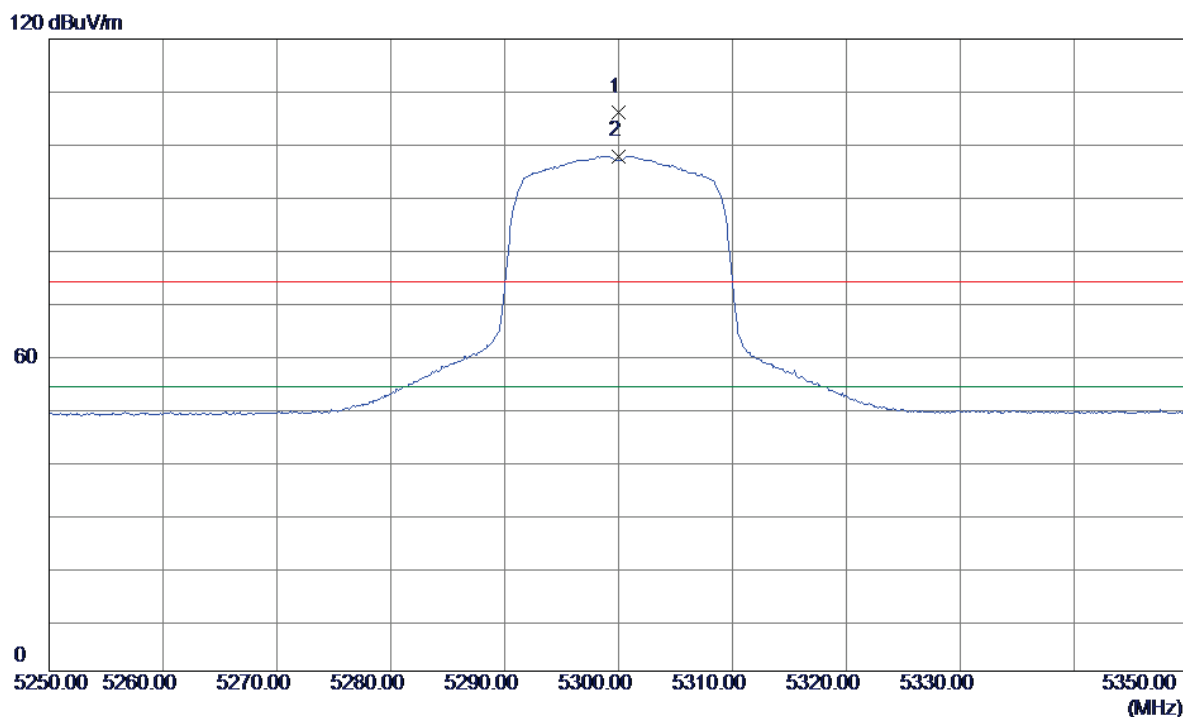


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5300.0000	68.51	37.66	106.17	74.00	32.17	Peak	No Limit
2 *	5300.0000	60.14	37.66	97.80	54.00	43.80	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz_Without Pistol

Vertical


120 dBuV/m

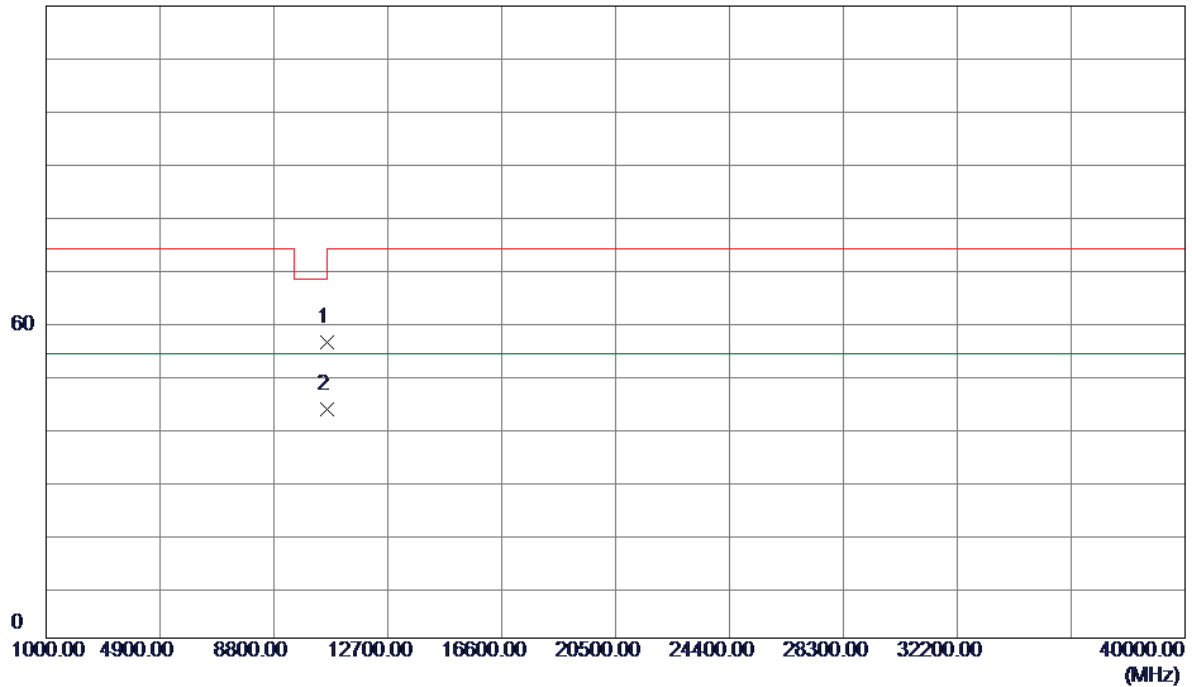

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10600.1000	54.01	2.07	56.08	74.00	-17.92	Peak	
2 *	10600.1000	41.32	2.07	43.39	54.00	-10.61	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz_Without Pistol

Horizontal

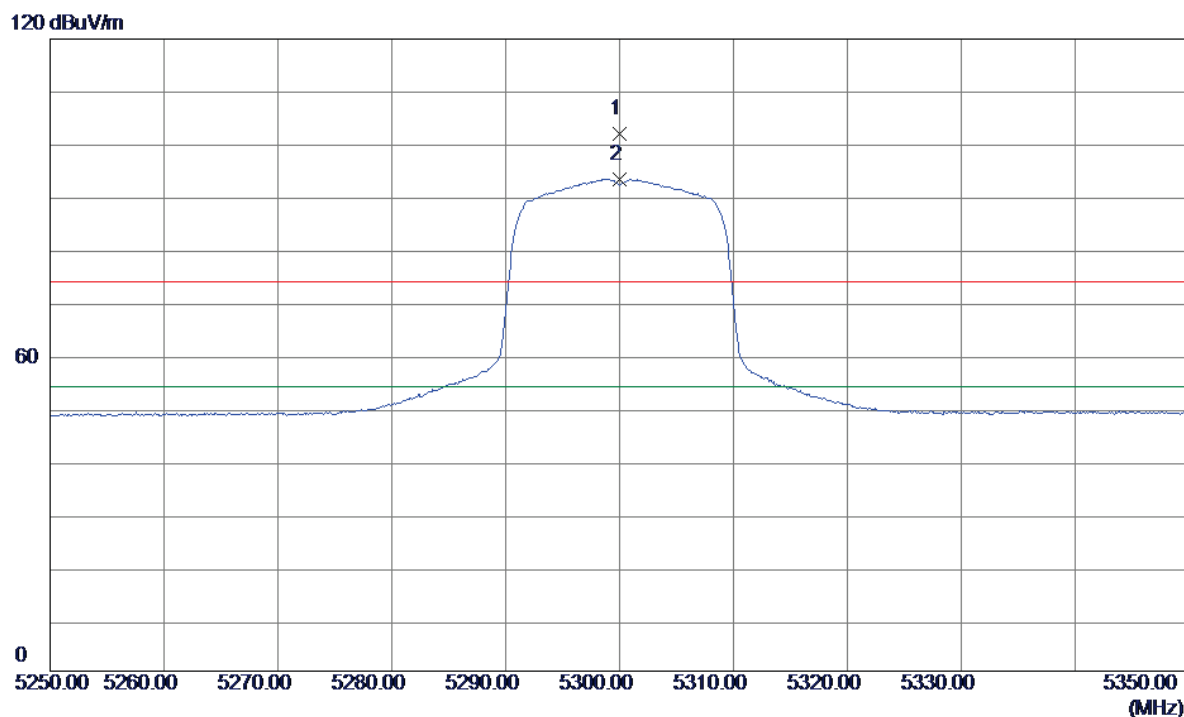


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5300.0000	64.22	37.66	101.88	74.00	27.88	Peak	No Limit
2 *	5300.0000	55.68	37.66	93.34	54.00	39.34	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz_Without Pistol

Horizontal


120 dBuV/m

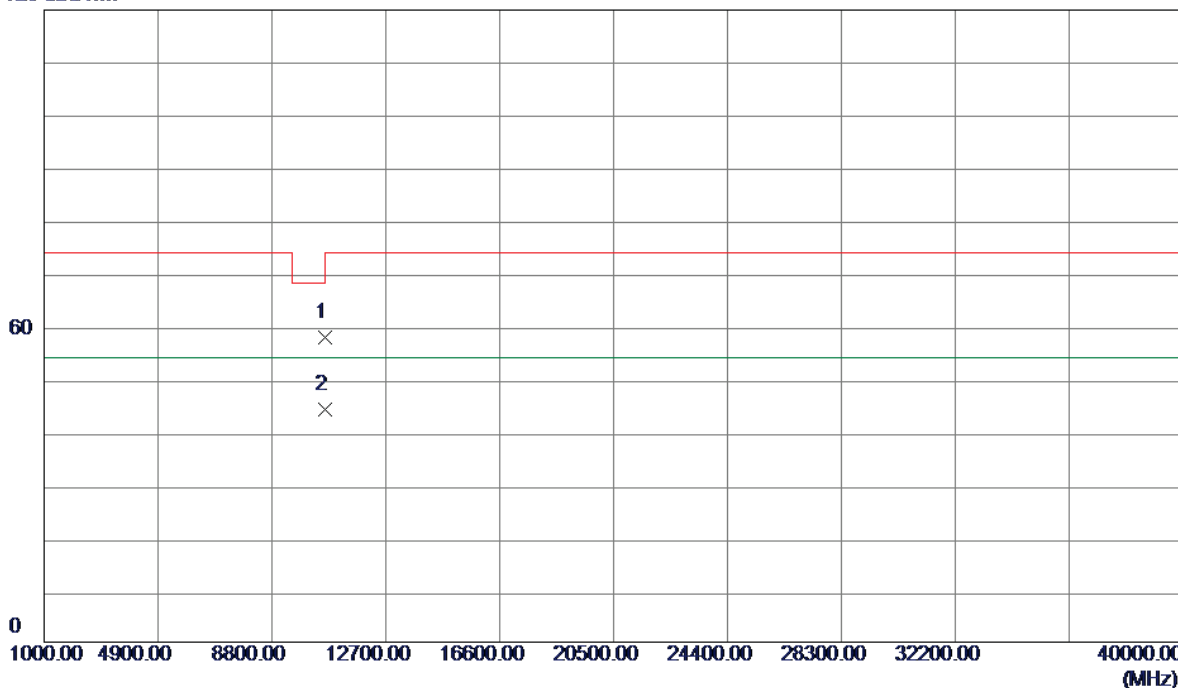

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10600.1000	55.69	2.07	57.76	74.00	-16.24	Peak	
2 *	10600.1000	42.02	2.07	44.09	54.00	-9.91	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz_Without Pistol

Vertical

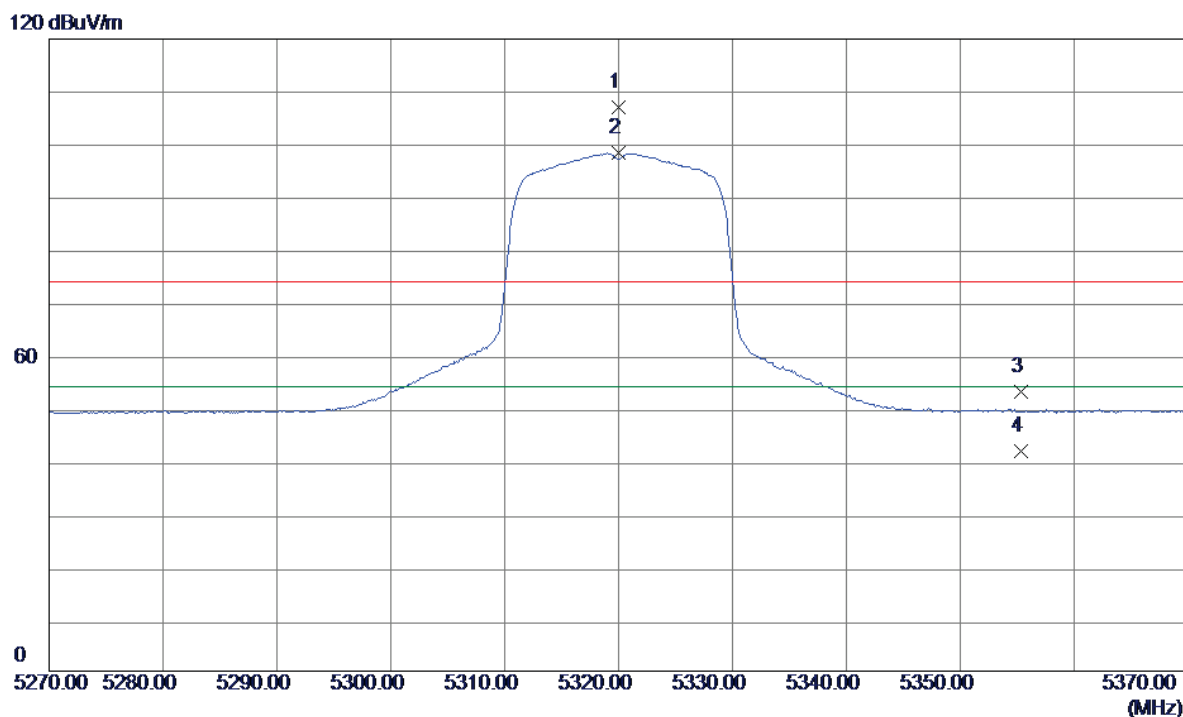


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5320.0000	69.31	37.69	107.00	74.00	33.00	Peak	No Limit
2 *	5320.0000	60.59	37.69	98.28	54.00	44.28	AVG	No Limit
3	5355.3400	15.40	37.73	53.13	74.00	-20.87	Peak	
4	5355.3400	4.02	37.73	41.75	54.00	-12.25	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz_Without Pistol

Vertical


120 dBuV/m

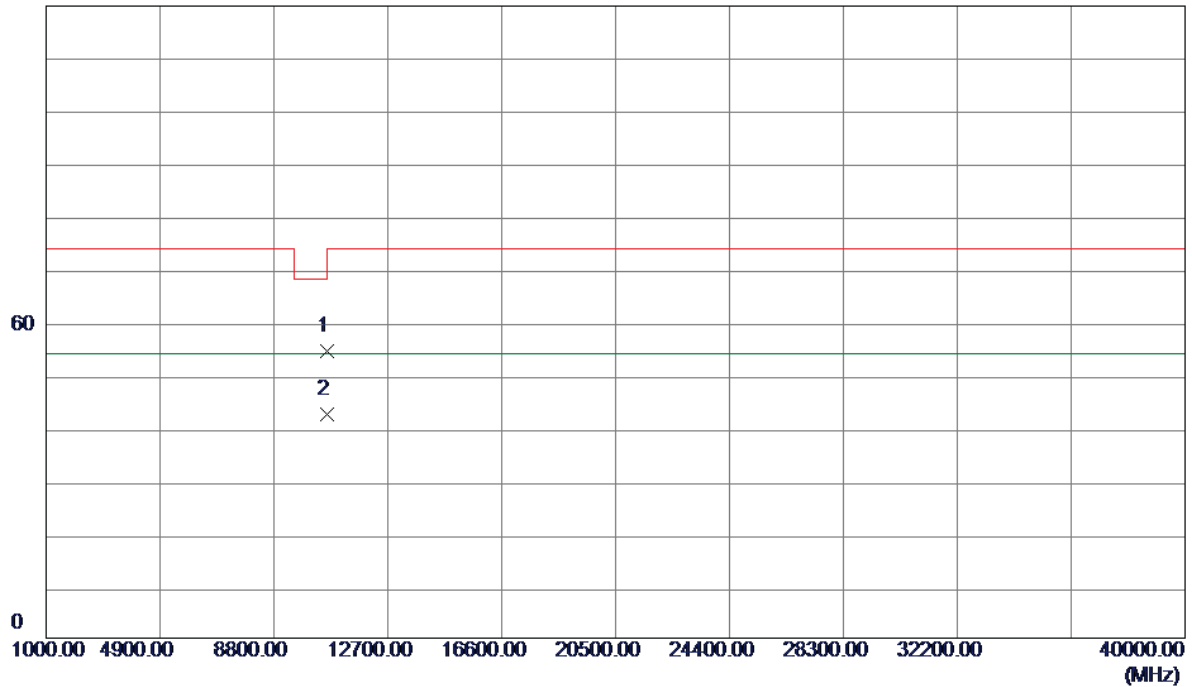

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	52.41	2.14	54.55	74.00	-19.45	Peak	
2 *	10640.0000	40.31	2.14	42.45	54.00	-11.55	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz_Without Pistol


Horizontal

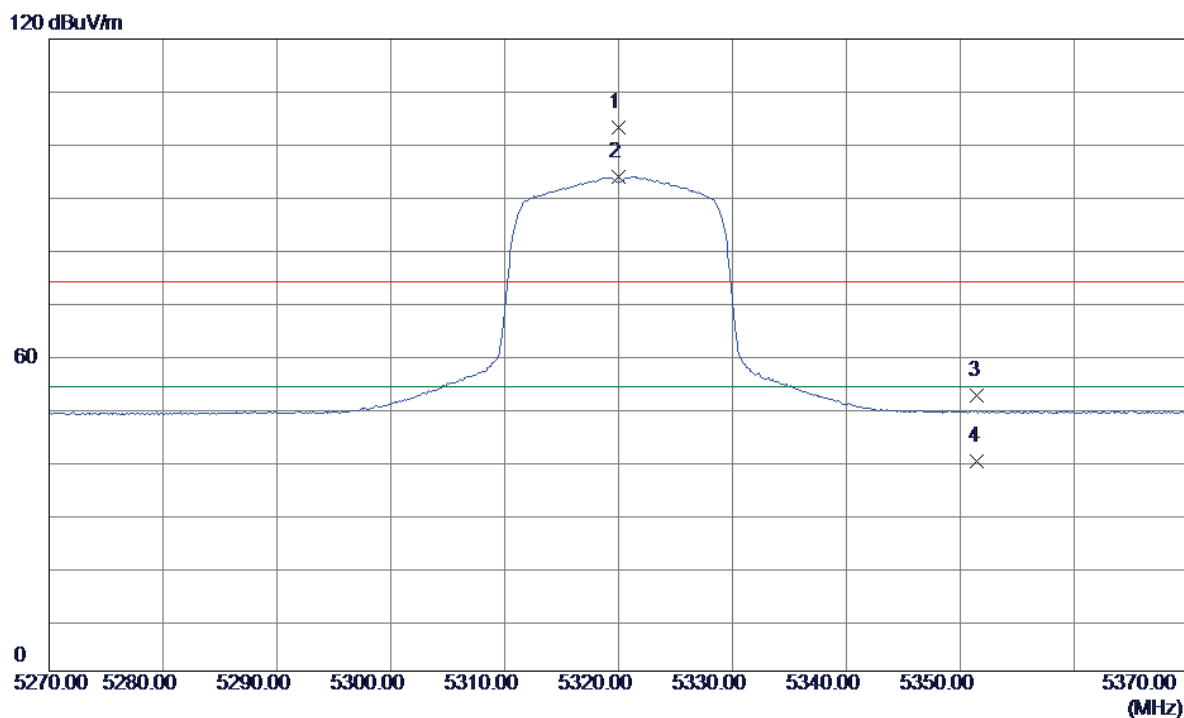

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5320.0000	65.40	37.69	103.09	74.00	29.09	Peak	No Limit
2 *	5320.0000	56.20	37.69	93.89	54.00	39.89	AVG	No Limit
3	5351.5000	14.49	37.73	52.22	74.00	-21.78	Peak	
4	5351.5000	2.03	37.73	39.76	54.00	-14.24	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz_Without Pistol


Horizontal

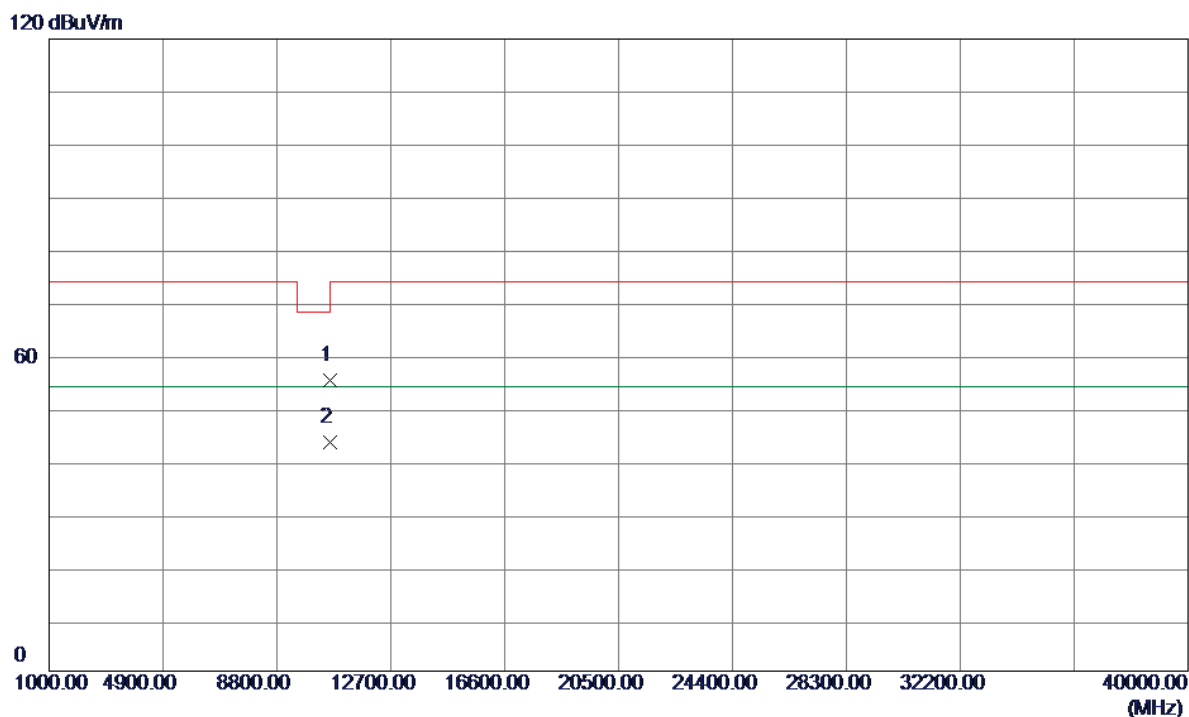

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	53.04	2.14	55.18	74.00	-18.82	Peak	
2 *	10640.0000	41.37	2.14	43.51	54.00	-10.49	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz_Without Pistol


Vertical

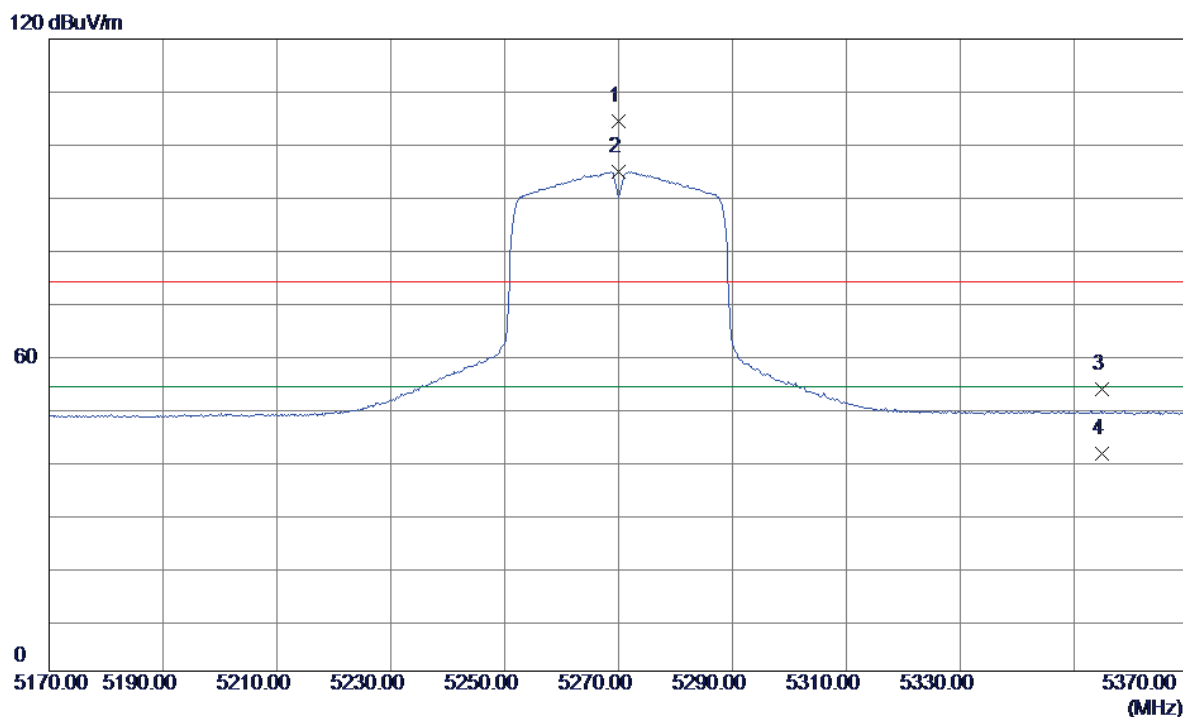

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5270.0000	66.76	37.63	104.39	74.00	30.39	Peak	No Limit
2 *	5270.0000	57.17	37.63	94.80	54.00	40.80	AVG	No Limit
3	5354.8200	15.78	37.73	53.51	74.00	-20.49	Peak	
4	5354.8200	3.53	37.73	41.26	54.00	-12.74	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz_Without Pistol


Vertical

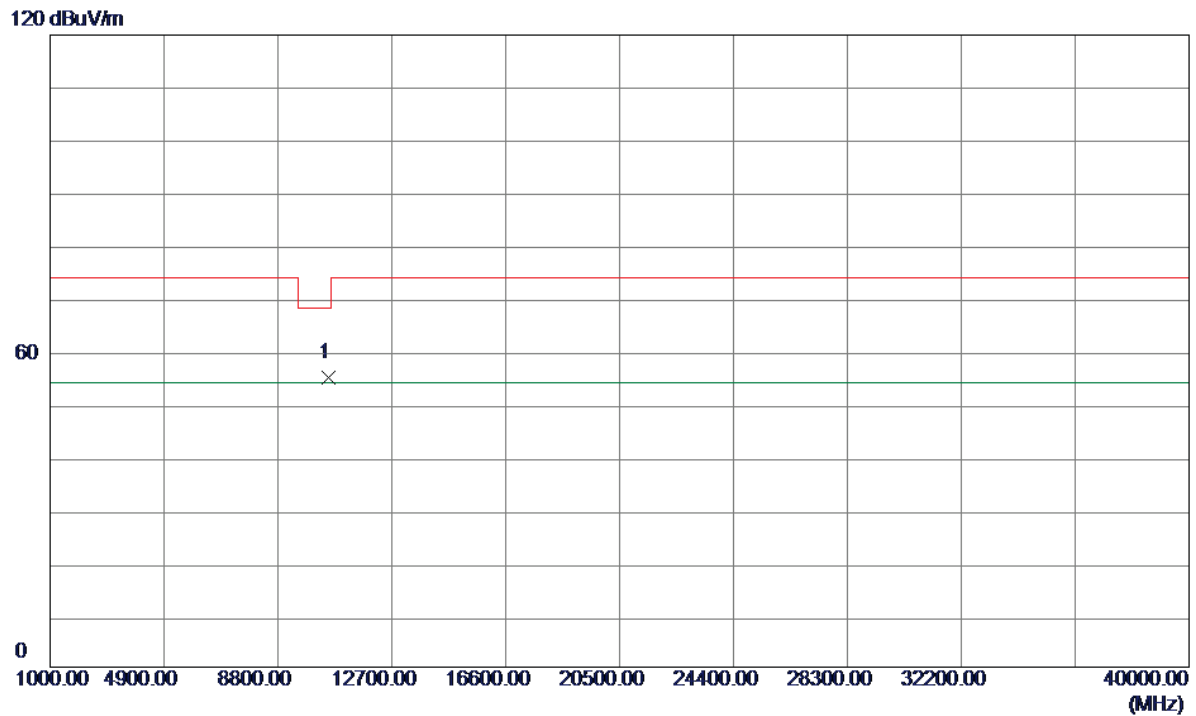

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10540.0000	53.00	1.95	54.95	68.20	-13.25	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz_Without Pistol


Horizontal

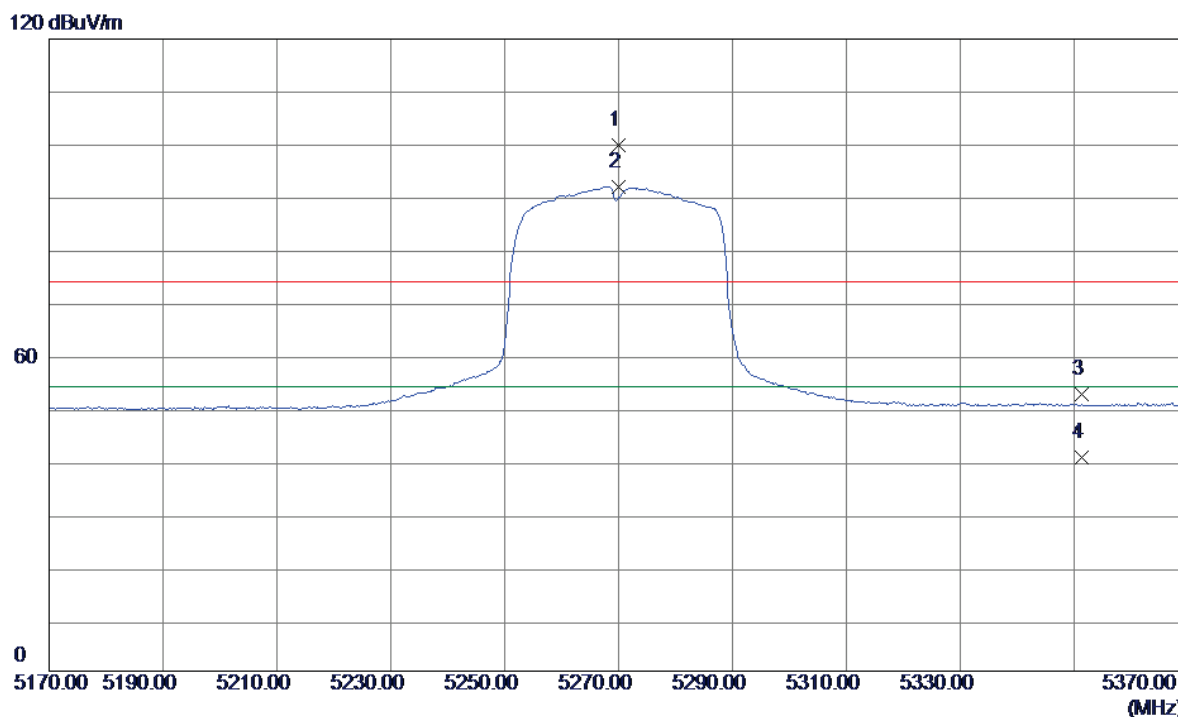

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5270.0000	62.19	37.63	99.82	74.00	25.82	Peak	No Limit
2 *	5270.0000	54.37	37.63	92.00	54.00	38.00	AVG	No Limit
3	5351.3400	14.75	37.73	52.48	74.00	-21.52	Peak	
4	5351.3400	2.79	37.73	40.52	54.00	-13.48	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz_Without Pistol


Horizontal

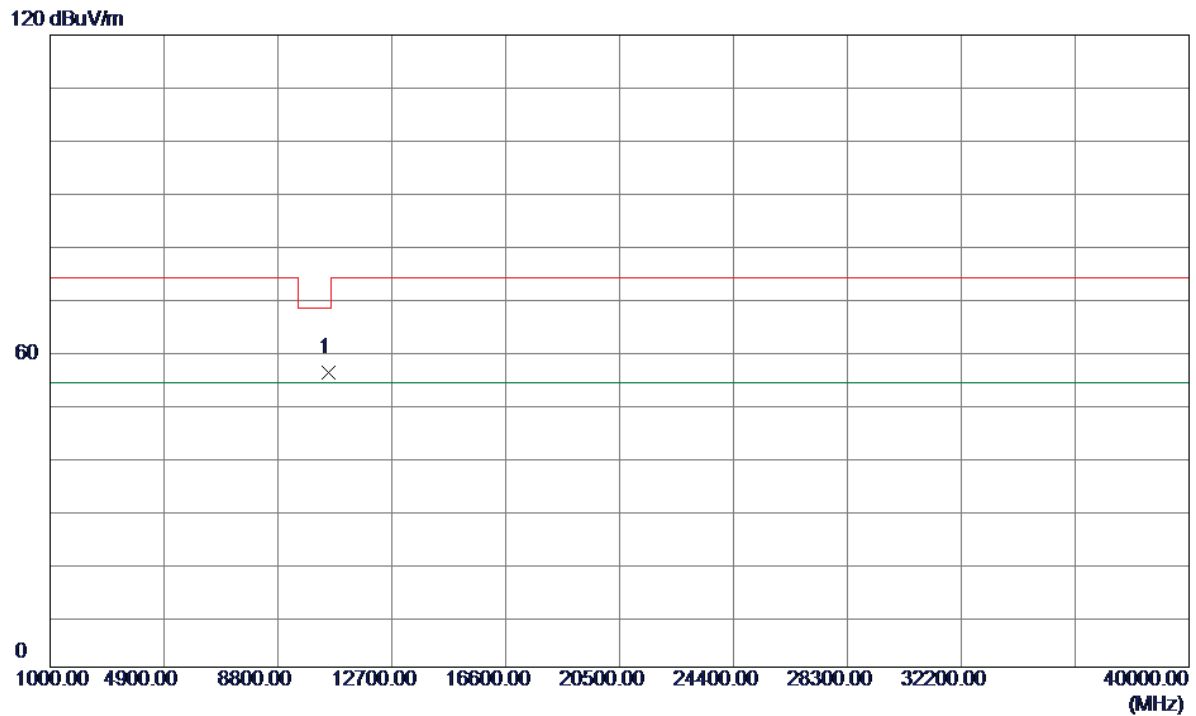

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10540.0000	53.89	1.95	55.84	68.20	-12.36	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz_Without Pistol

Vertical

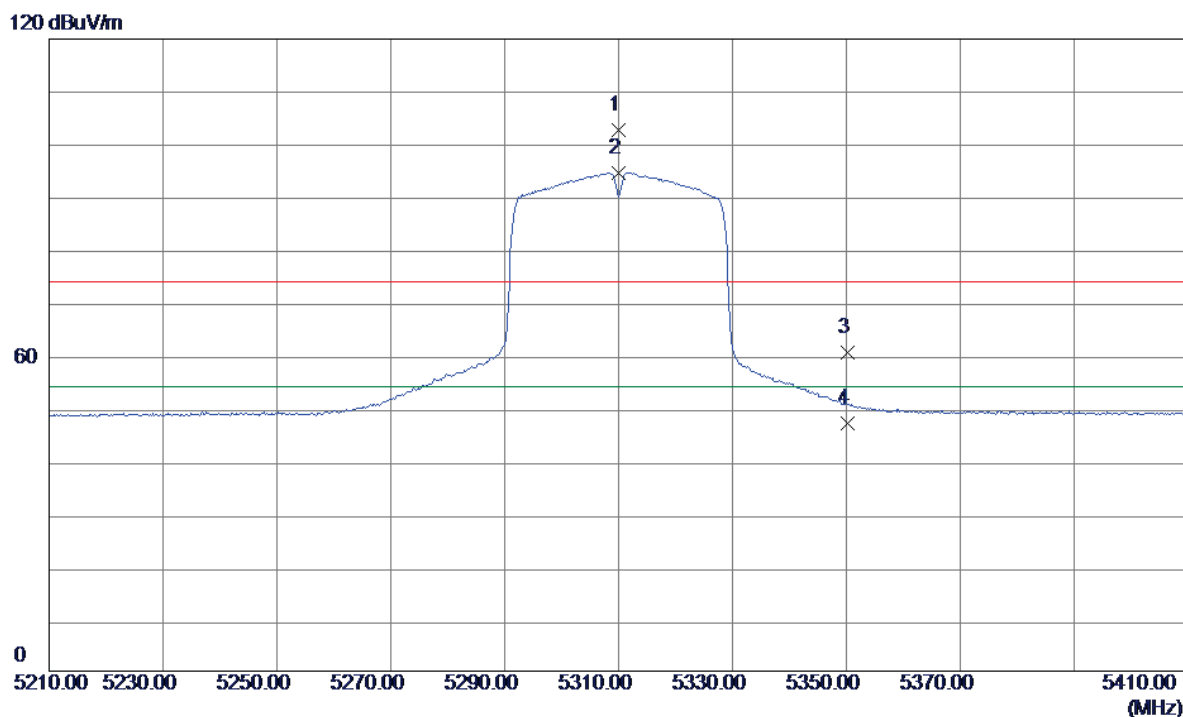


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5310.0000	64.99	37.68	102.67	74.00	28.67	Peak	No Limit
2 *	5310.0000	56.95	37.68	94.63	54.00	40.63	AVG	No Limit
3	5350.1800	22.85	37.73	60.58	74.00	-13.42	Peak	
4	5350.1800	9.20	37.73	46.93	54.00	-7.07	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz_Without Pistol

Vertical


120 dBuV/m

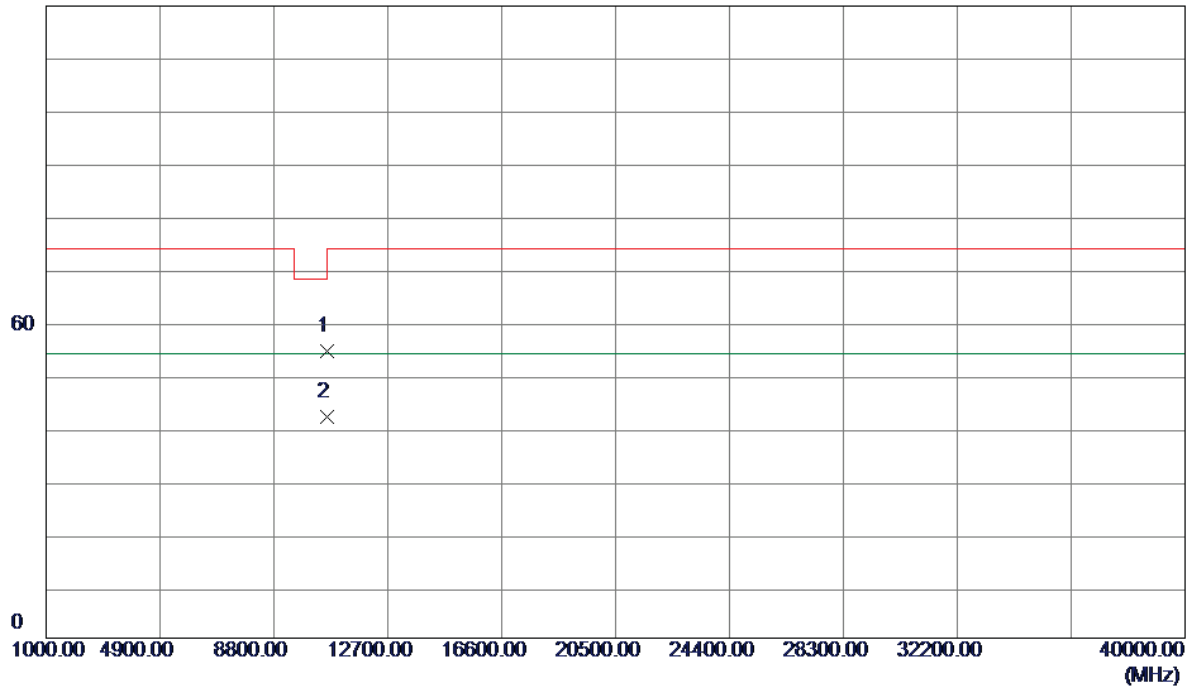

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.0000	52.26	2.11	54.37	74.00	-19.63	Peak	
2 *	10620.0000	39.98	2.11	42.09	54.00	-11.91	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz_Without Pistol

Horizontal

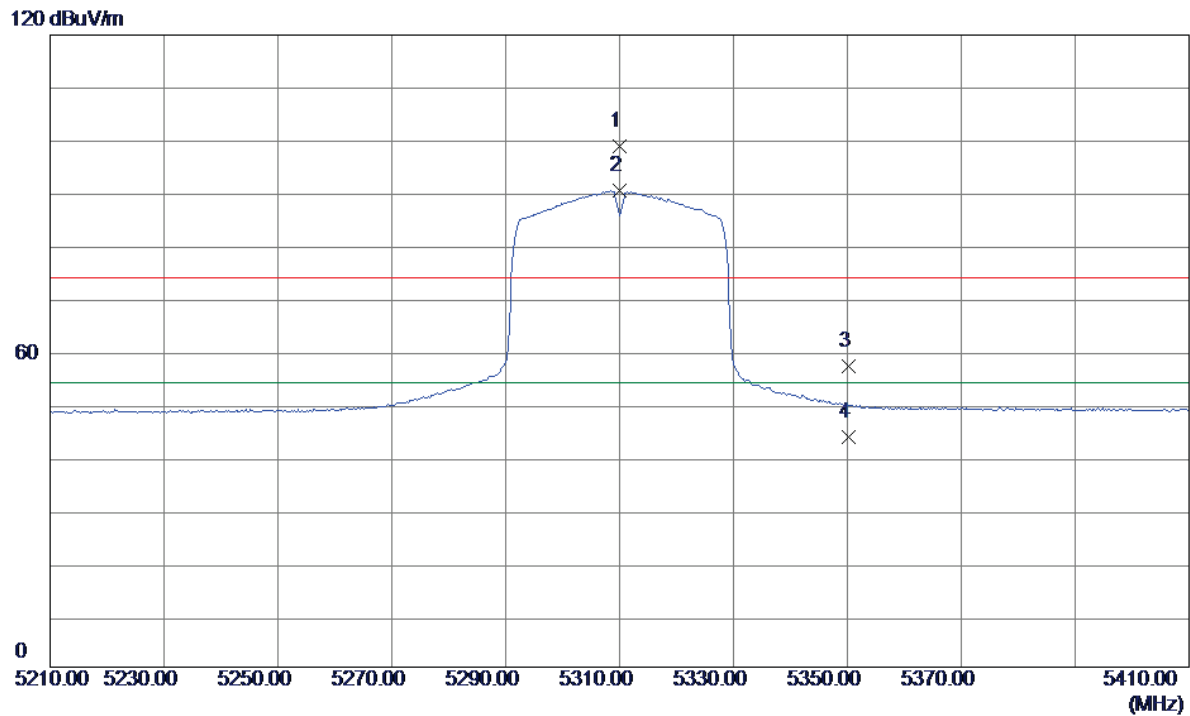


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5310.0000	61.17	37.68	98.85	74.00	24.85	Peak	No Limit
2 *	5310.0000	52.83	37.68	90.51	54.00	36.51	AVG	No Limit
3	5350.1800	19.33	37.73	57.06	74.00	-16.94	Peak	
4	5350.1800	5.86	37.73	43.59	54.00	-10.41	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz_Without Pistol

Horizontal


120 dBuV/m

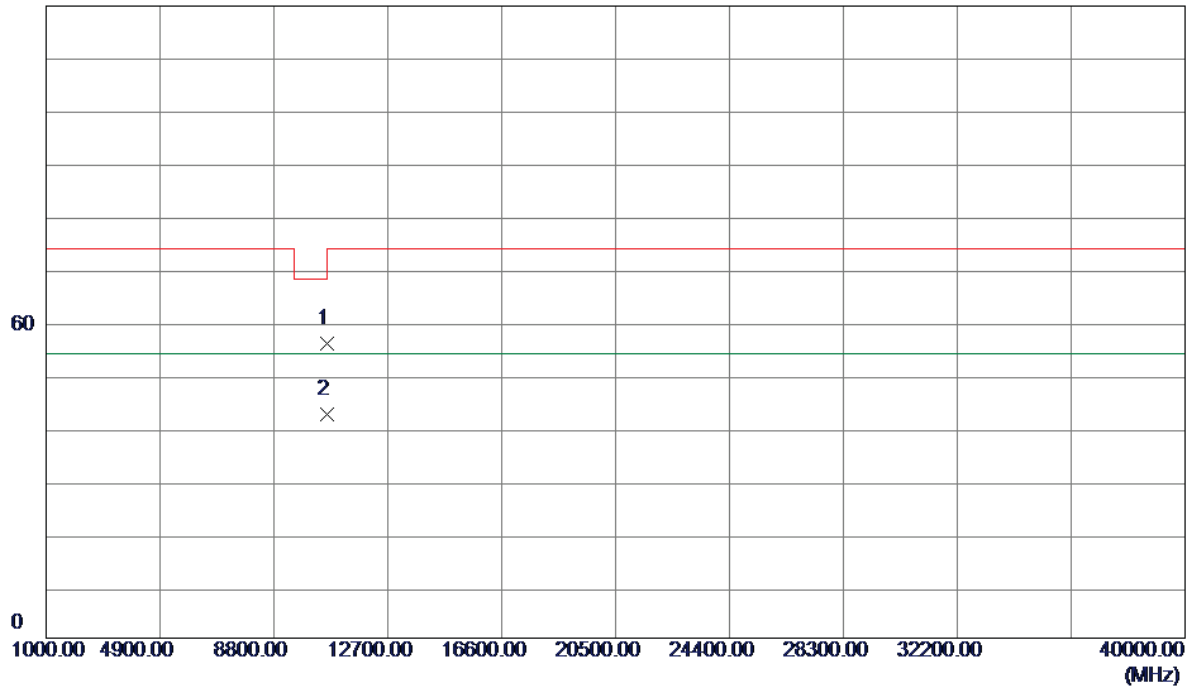

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.0000	53.74	2.11	55.85	74.00	-18.15	Peak	
2 *	10620.0000	40.33	2.11	42.44	54.00	-11.56	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX A Mode 5500MHz_Without Pistol

Vertical

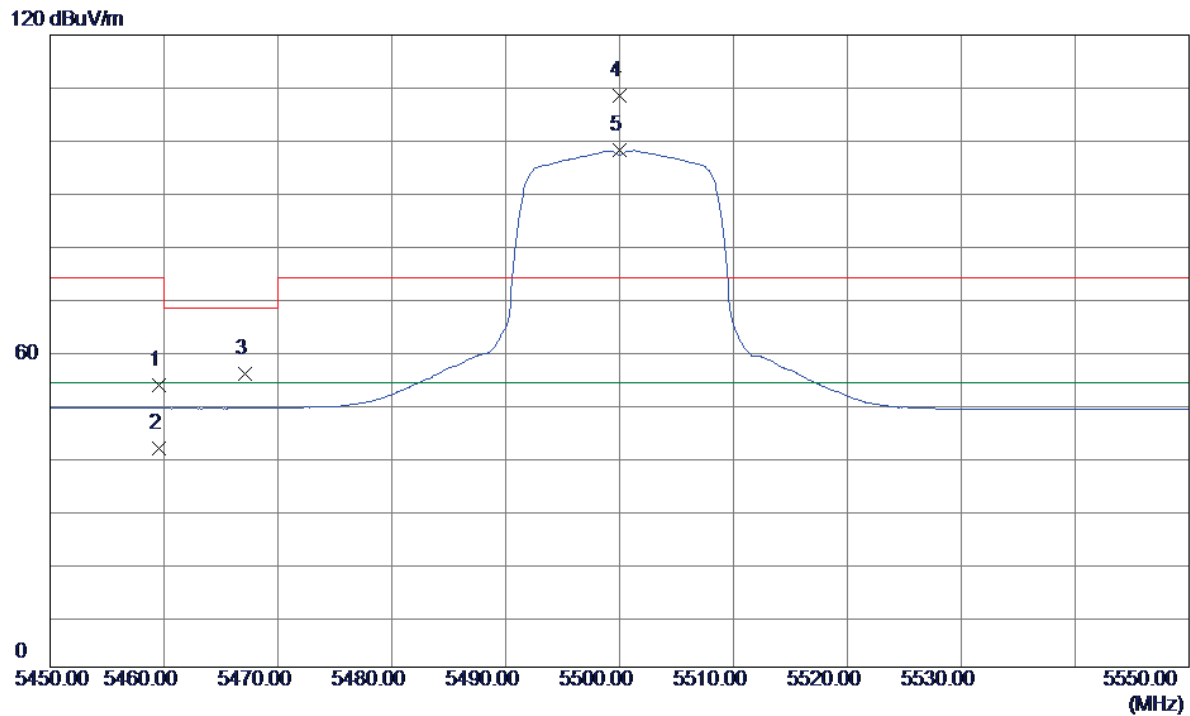


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.5400	15.65	37.87	53.52	74.00	-20.48	Peak	
2	5459.5400	3.67	37.87	41.54	54.00	-12.46	AVG	
3	5467.1500	17.79	37.88	55.67	68.20	-12.53	Peak	
4	5500.0000	70.48	37.92	108.40	74.00	34.40	Peak	No Limit
5 *	5500.0000	60.13	37.92	98.05	54.00	44.05	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX A Mode 5500MHz_Without Pistol

Vertical


120 dBuV/m

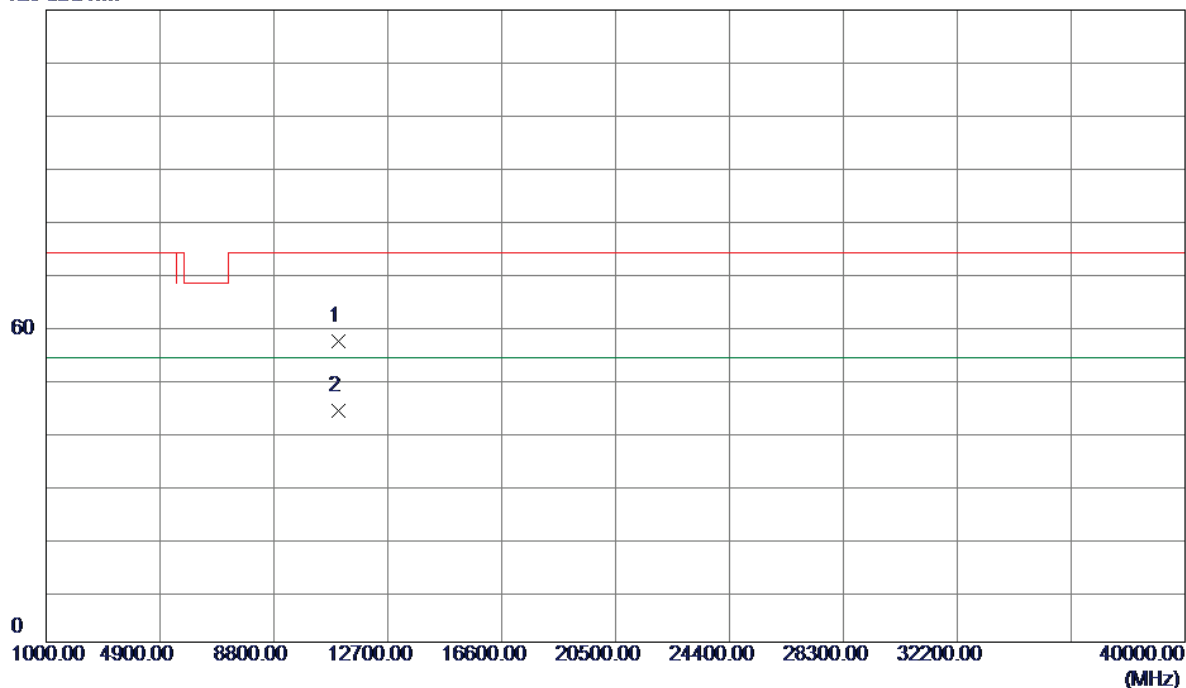

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	54.18	2.85	57.03	74.00	-16.97	Peak	
2 *	11000.0000	41.02	2.85	43.87	54.00	-10.13	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX A Mode 5500MHz_Without Pistol


Horizontal

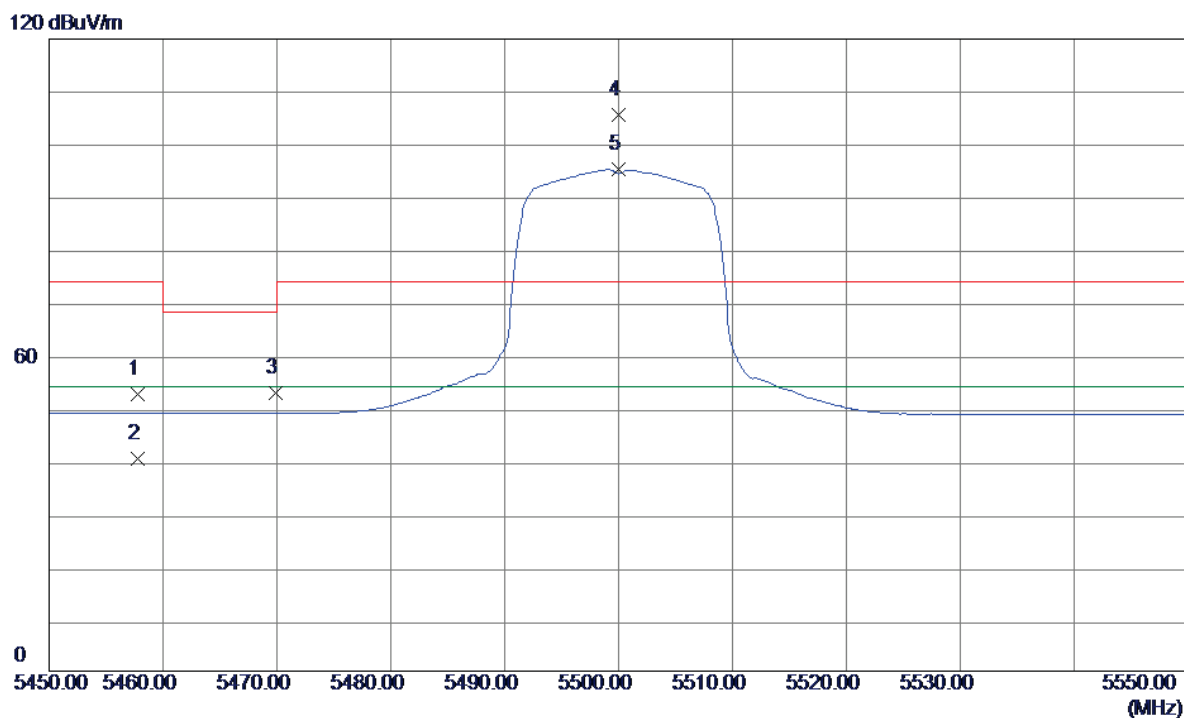

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.7799	14.78	37.87	52.65	74.00	-21.35	Peak	
2	5457.7799	2.39	37.87	40.26	54.00	-13.74	AVG	
3	5469.8900	14.83	37.88	52.71	68.20	-15.49	Peak	
4	5500.0000	67.60	37.92	105.52	74.00	31.52	Peak	No Limit
5 *	5500.0000	57.28	37.92	95.20	54.00	41.20	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX A Mode 5500MHz_Without Pistol


Horizontal

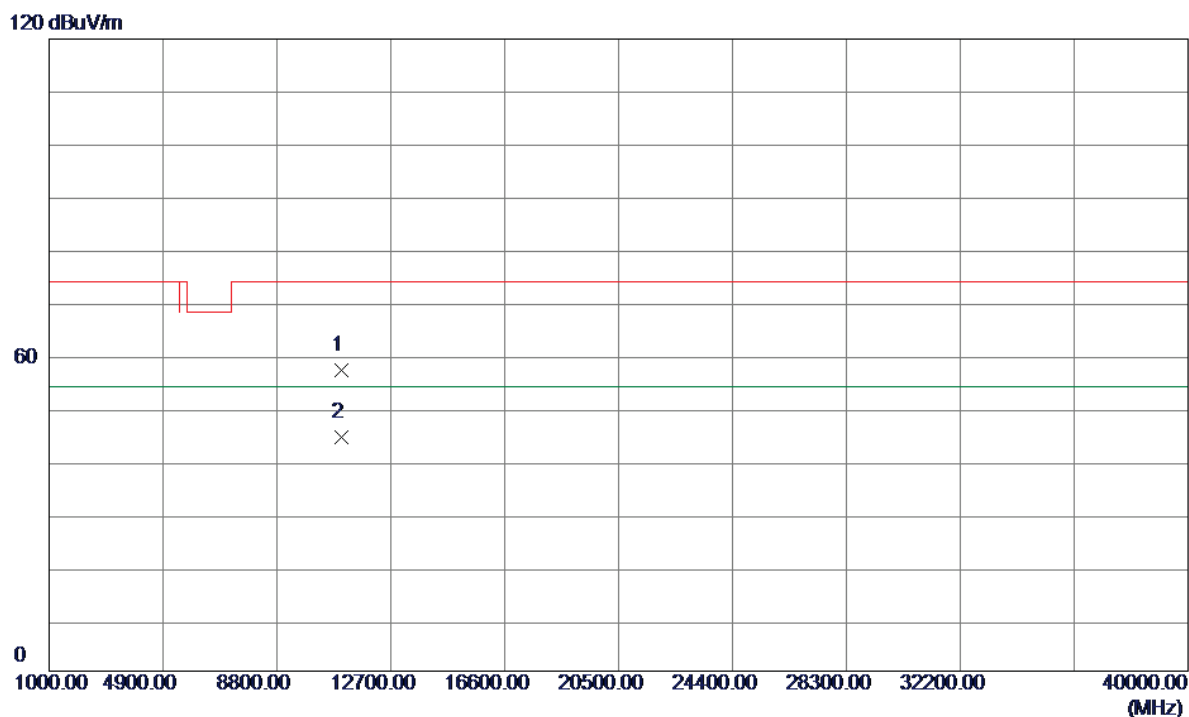

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	54.23	2.85	57.08	74.00	-16.92	Peak	
2 *	11000.0000	41.51	2.85	44.36	54.00	-9.64	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX A Mode 5580MHz_Without Pistol

Vertical

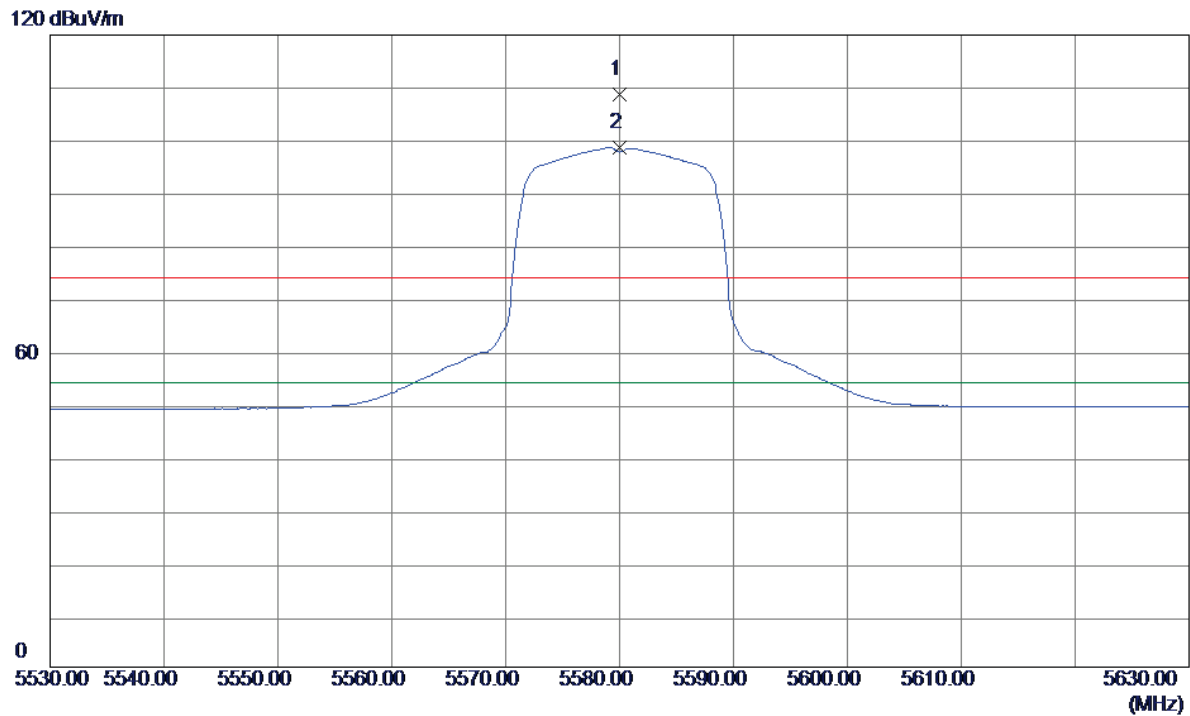


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5580.0000	70.64	38.12	108.76	74.00	34.76	Peak	No Limit
2 *	5580.0000	60.48	38.12	98.60	54.00	44.60	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX A Mode 5580MHz_Without Pistol

Vertical


120 dBuV/m

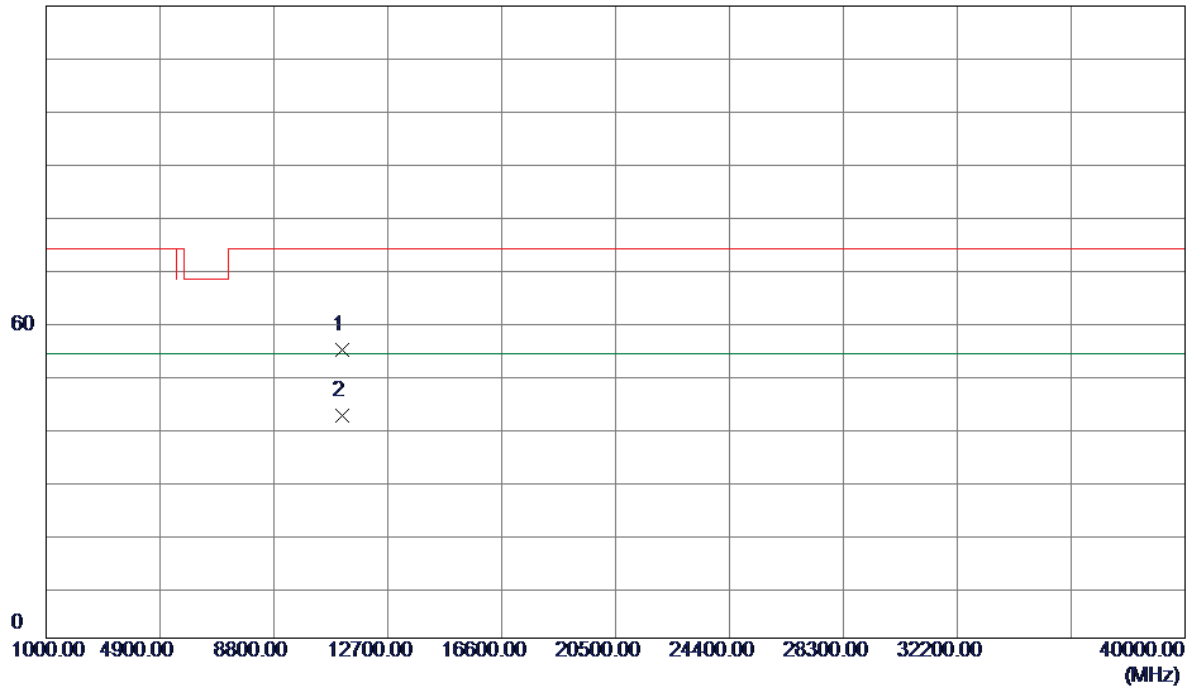

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0000	51.56	3.10	54.66	74.00	-19.34	Peak	
2 *	11160.0000	39.12	3.10	42.22	54.00	-11.78	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX A Mode 5580MHz_Without Pistol


Horizontal

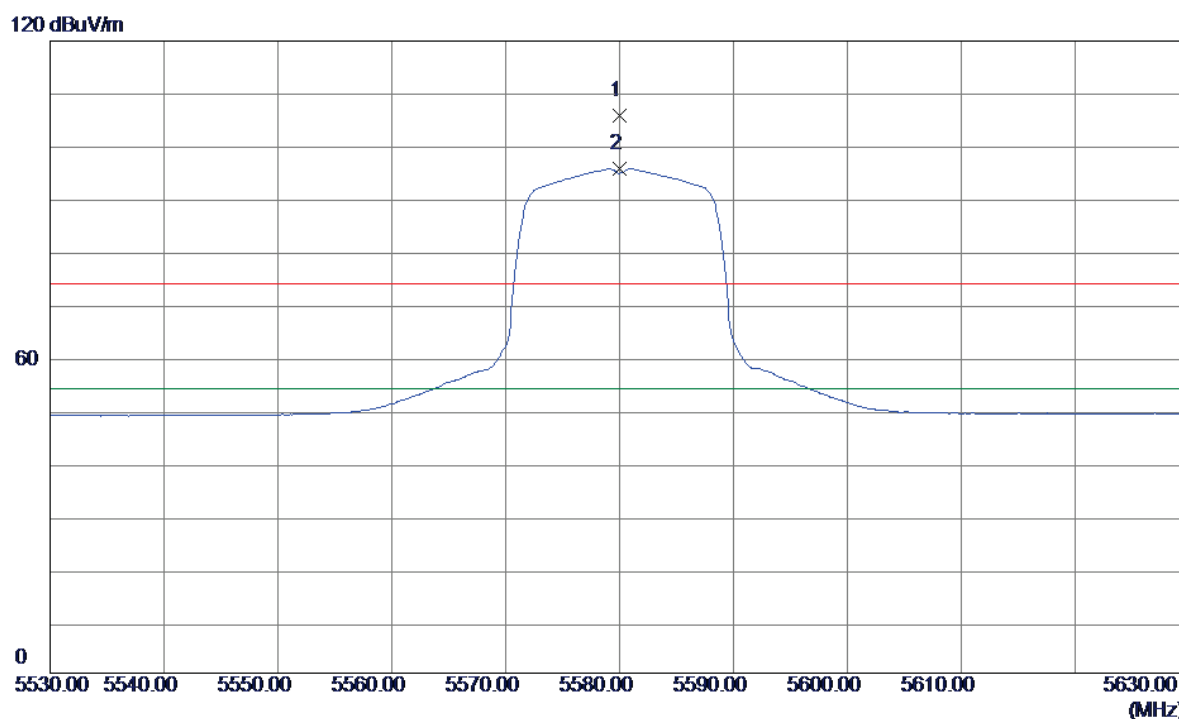

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5580.0000	67.69	38.12	105.81	74.00	31.81	Peak	No Limit
2 *	5580.0000	57.58	38.12	95.70	54.00	41.70	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX A Mode 5580MHz_Without Pistol


Horizontal

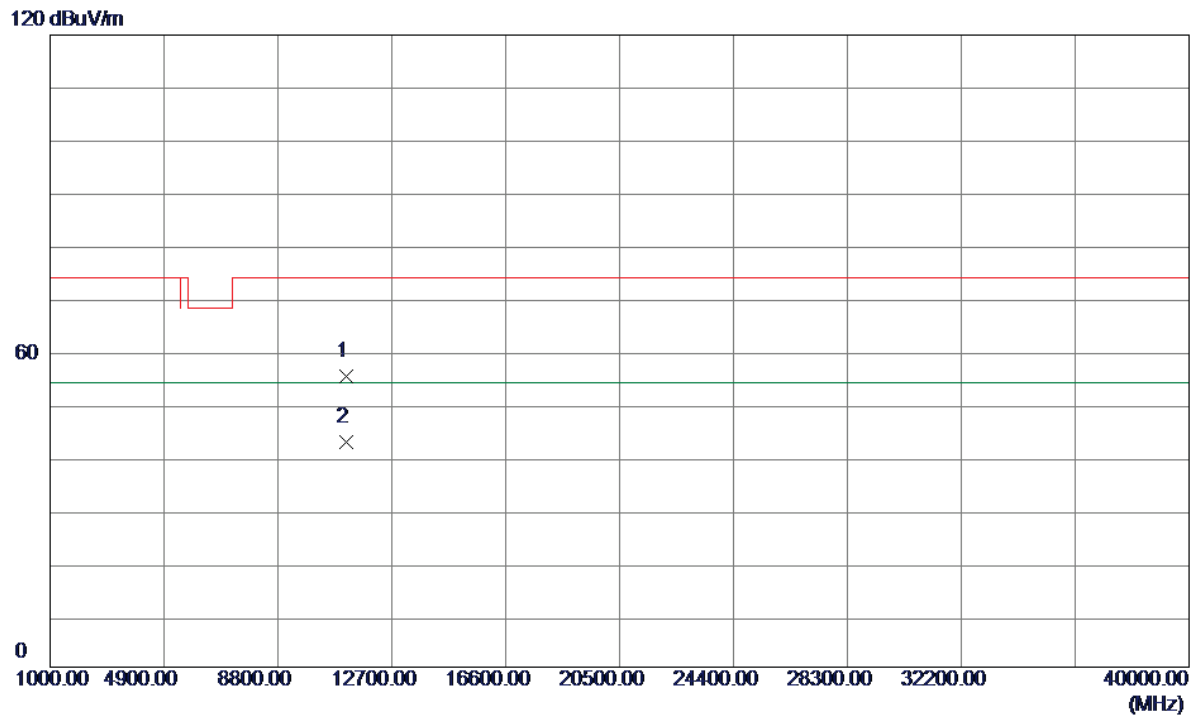

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0000	51.99	3.10	55.09	74.00	-18.91	Peak	
2 *	11160.0000	39.60	3.10	42.70	54.00	-11.30	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX A Mode 5700MHz_Without Pistol

Vertical

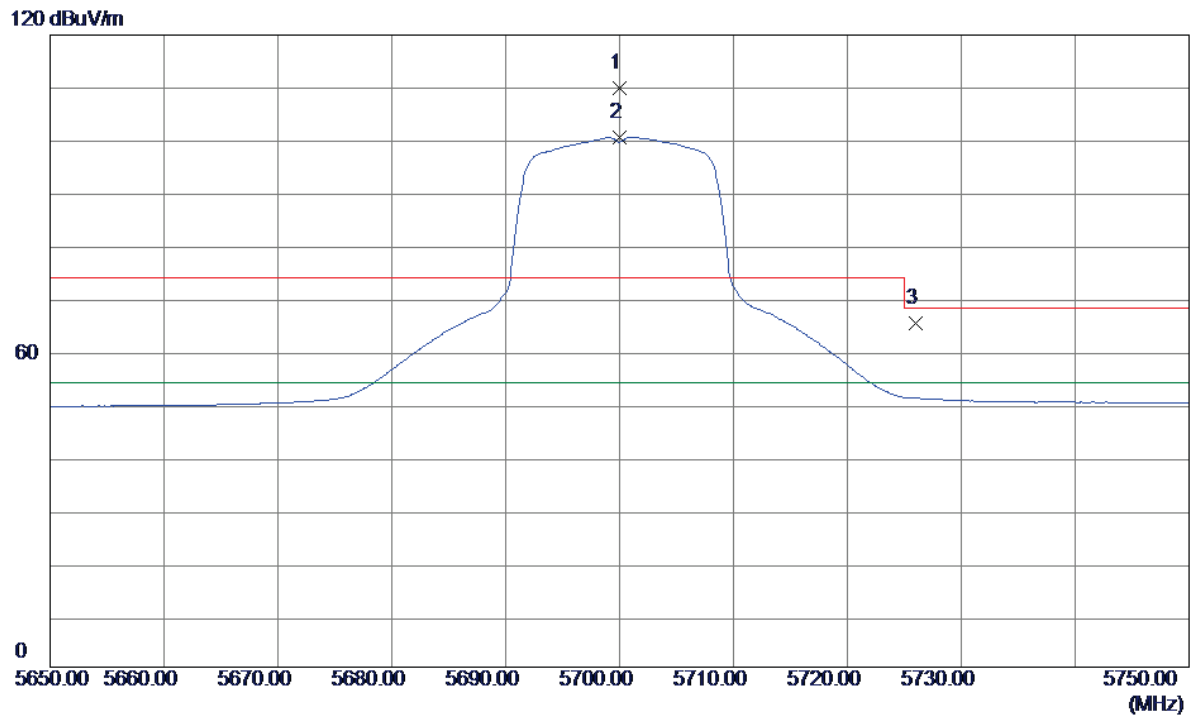


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5700.0000	71.54	38.42	109.96	74.00	35.96	Peak	No Limit
2 *	5700.0000	62.19	38.42	100.61	54.00	46.61	AVG	No Limit
3	5725.9500	26.81	38.49	65.30	68.20	-2.90	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX A Mode 5700MHz_Without Pistol

Vertical


120 dBuV/m

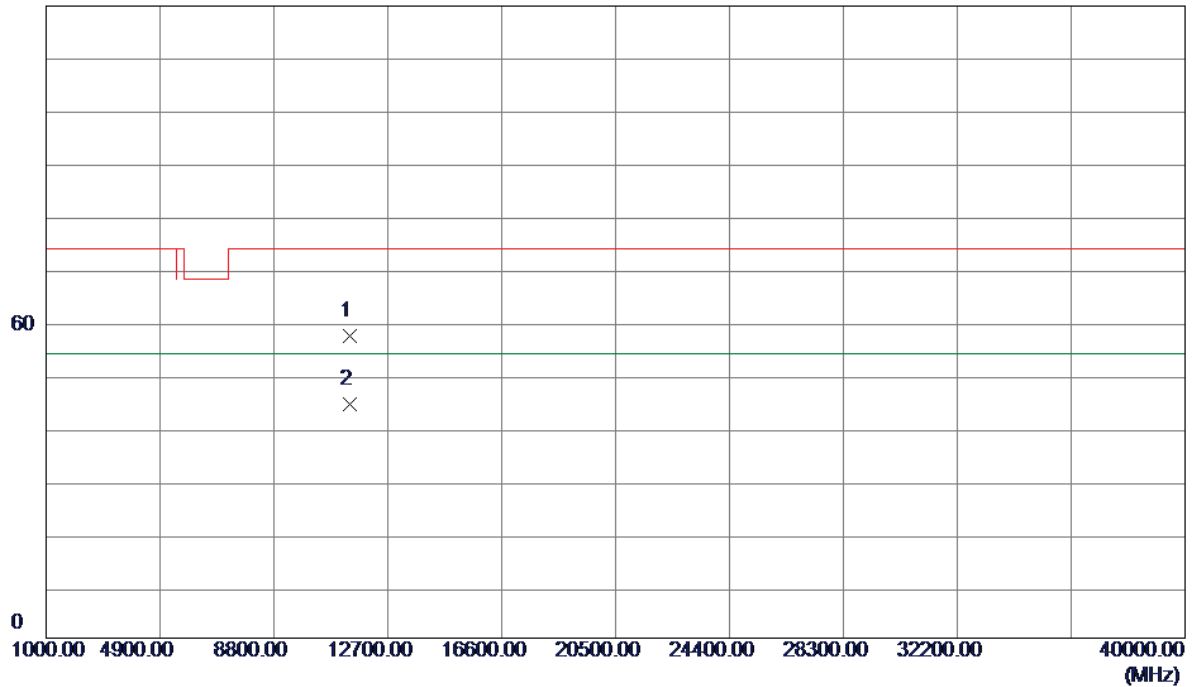

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	53.85	3.47	57.32	74.00	-16.68	Peak	
2 *	11400.0000	40.82	3.47	44.29	54.00	-9.71	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX A Mode 5700MHz_Without Pistol


Horizontal

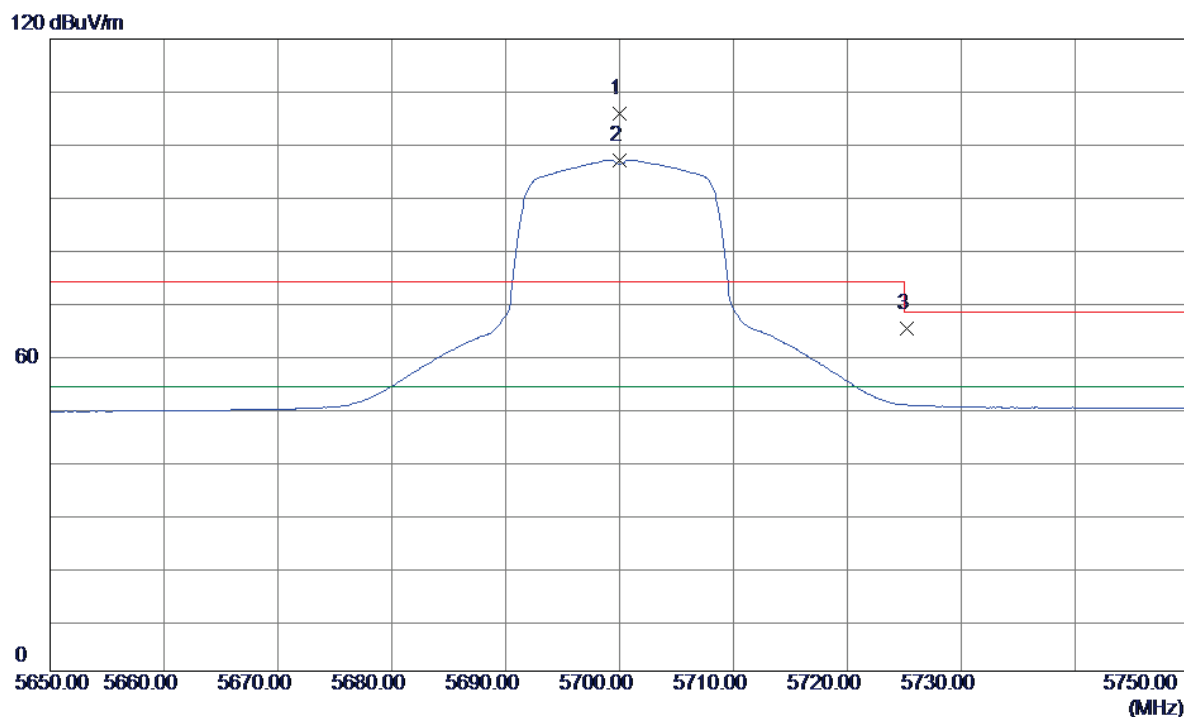

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5700.0000	67.37	38.42	105.79	74.00	31.79	Peak	No Limit
2 *	5700.0000	58.63	38.42	97.05	54.00	43.05	AVG	No Limit
3	5725.2000	26.65	38.49	65.14	68.20	-3.06	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX A Mode 5700MHz_Without Pistol


Horizontal

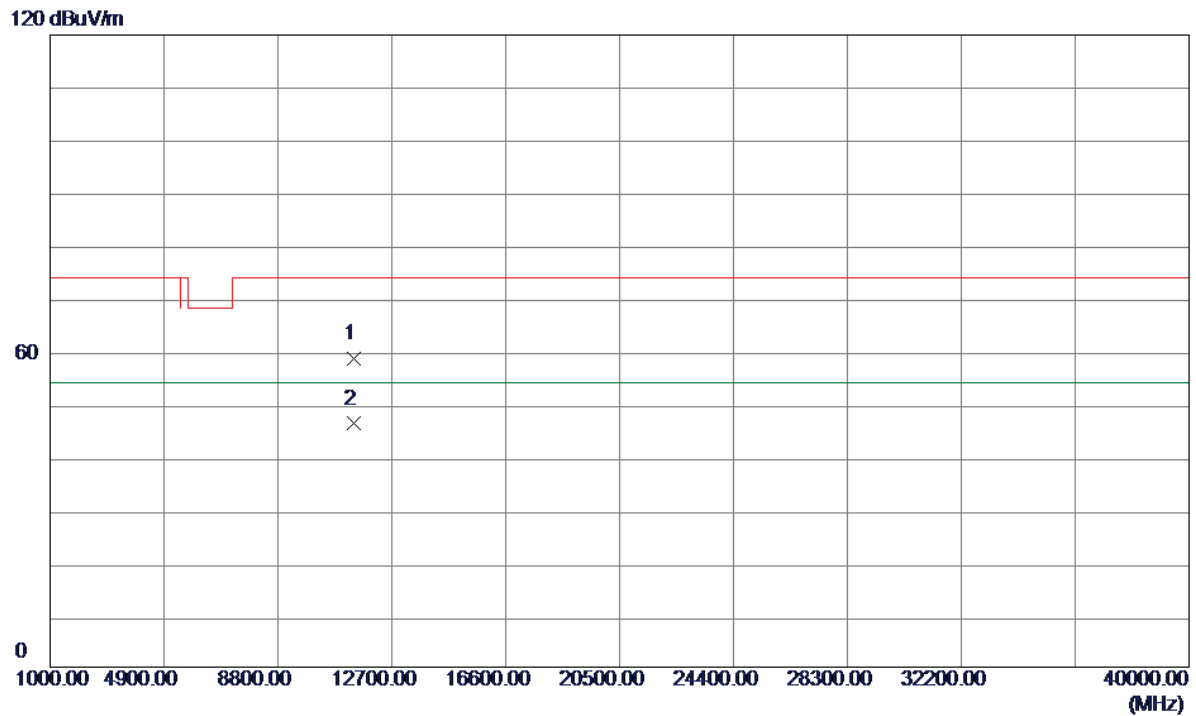

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	55.06	3.47	58.53	74.00	-15.47	Peak	
2 *	11400.0000	42.73	3.47	46.20	54.00	-7.80	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz_Without Pistol


Vertical

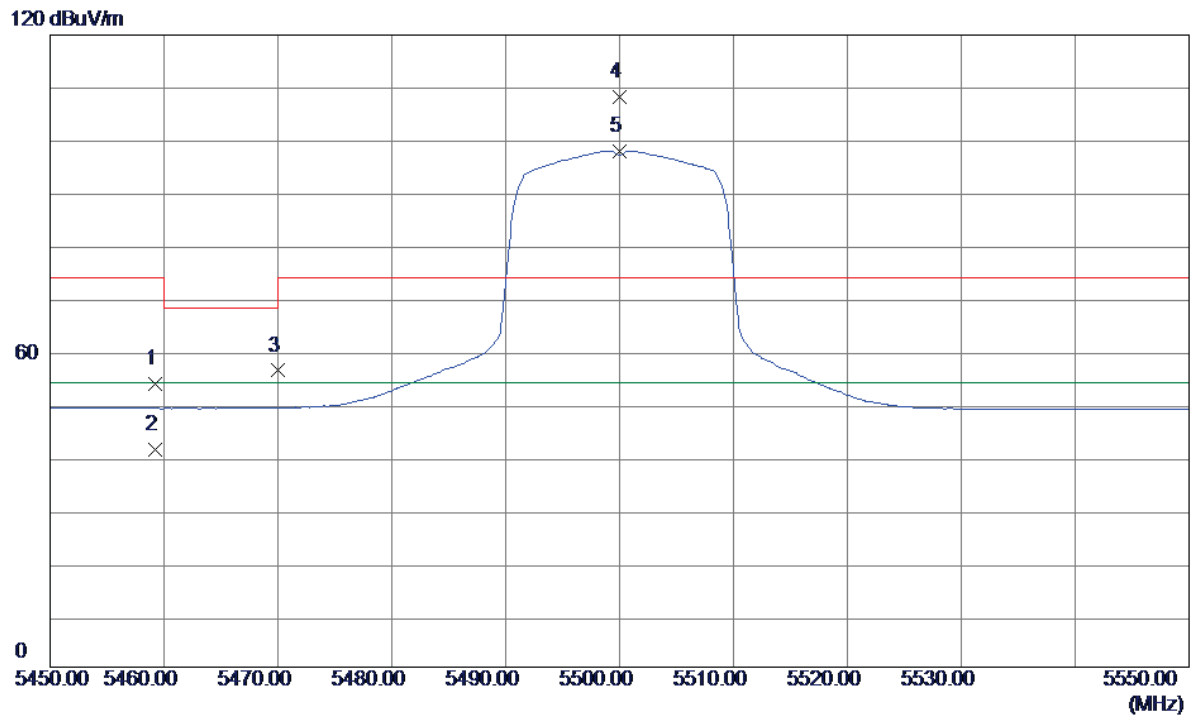

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.2599	15.89	37.87	53.76	74.00	-20.24	Peak	
2	5459.2599	3.48	37.87	41.35	54.00	-12.65	AVG	
3	5469.9700	18.40	37.88	56.28	68.20	-11.92	Peak	
4	5500.0000	70.39	37.92	108.31	74.00	34.31	Peak	No Limit
5 *	5500.0000	60.11	37.92	98.03	54.00	44.03	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz_Without Pistol


Vertical

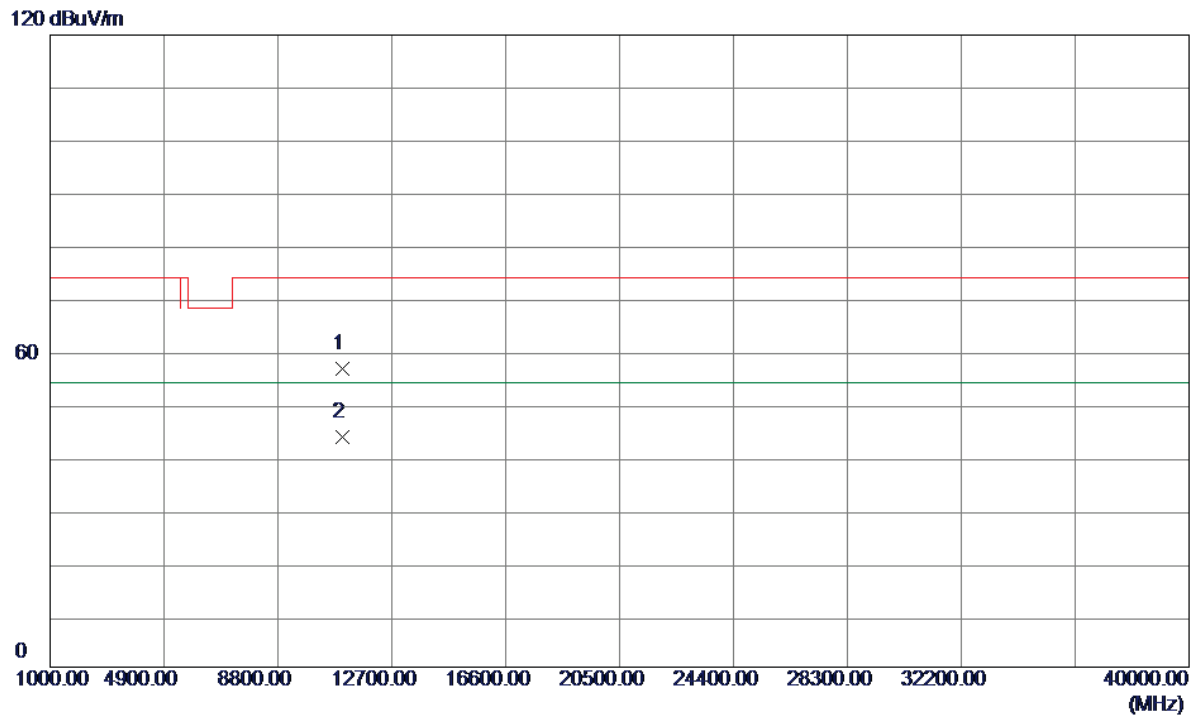

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	53.73	2.85	56.58	74.00	-17.42	Peak	
2 *	11000.0000	40.89	2.85	43.74	54.00	-10.26	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz_Without Pistol


Horizontal

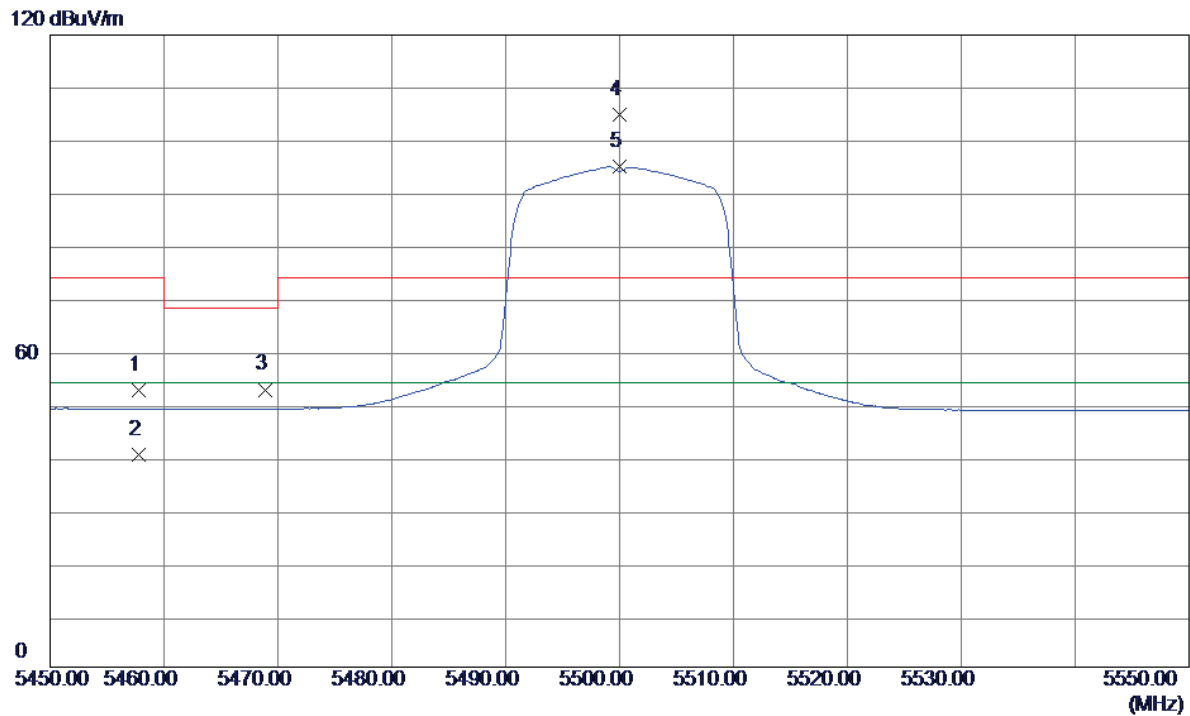

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.8200	14.74	37.87	52.61	74.00	-21.39	Peak	
2	5457.8200	2.38	37.87	40.25	54.00	-13.75	AVG	
3	5468.8400	14.80	37.88	52.68	68.20	-15.52	Peak	
4	5500.0000	67.07	37.92	104.99	74.00	30.99	Peak	No Limit
5 *	5500.0000	57.05	37.92	94.97	54.00	40.97	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz_Without Pistol


Horizontal

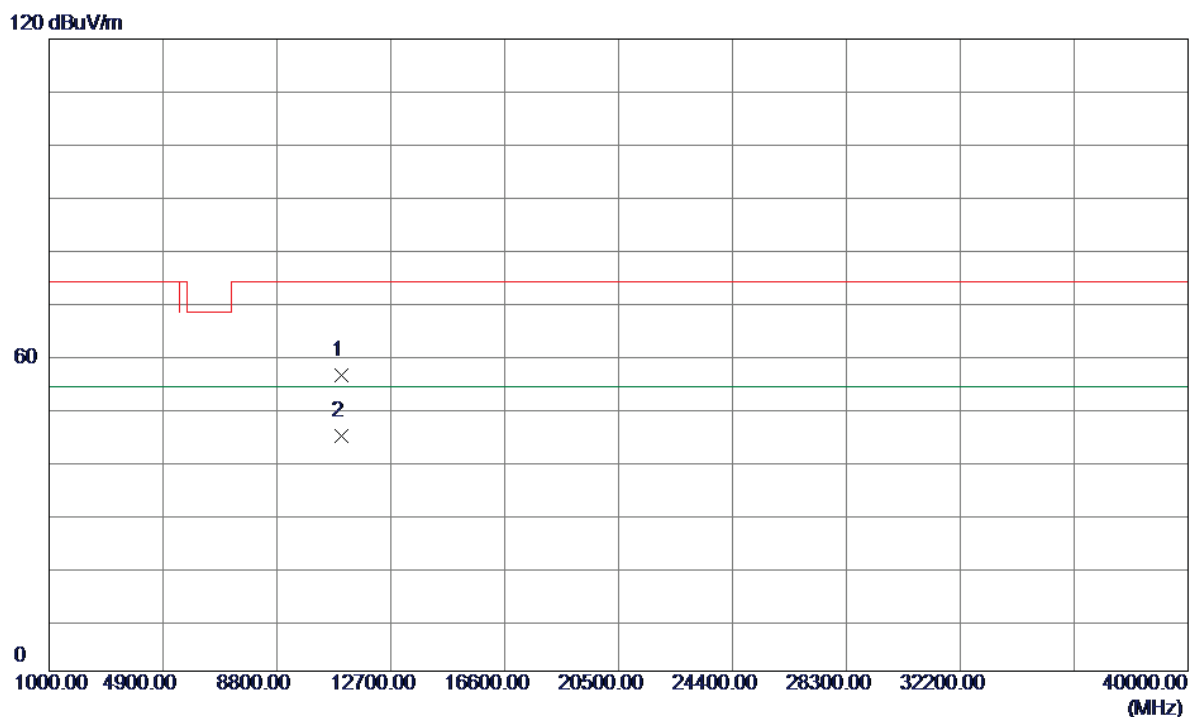

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	53.21	2.85	56.06	74.00	-17.94	Peak	
2 *	11000.0000	41.72	2.85	44.57	54.00	-9.43	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz_Without Pistol

Vertical

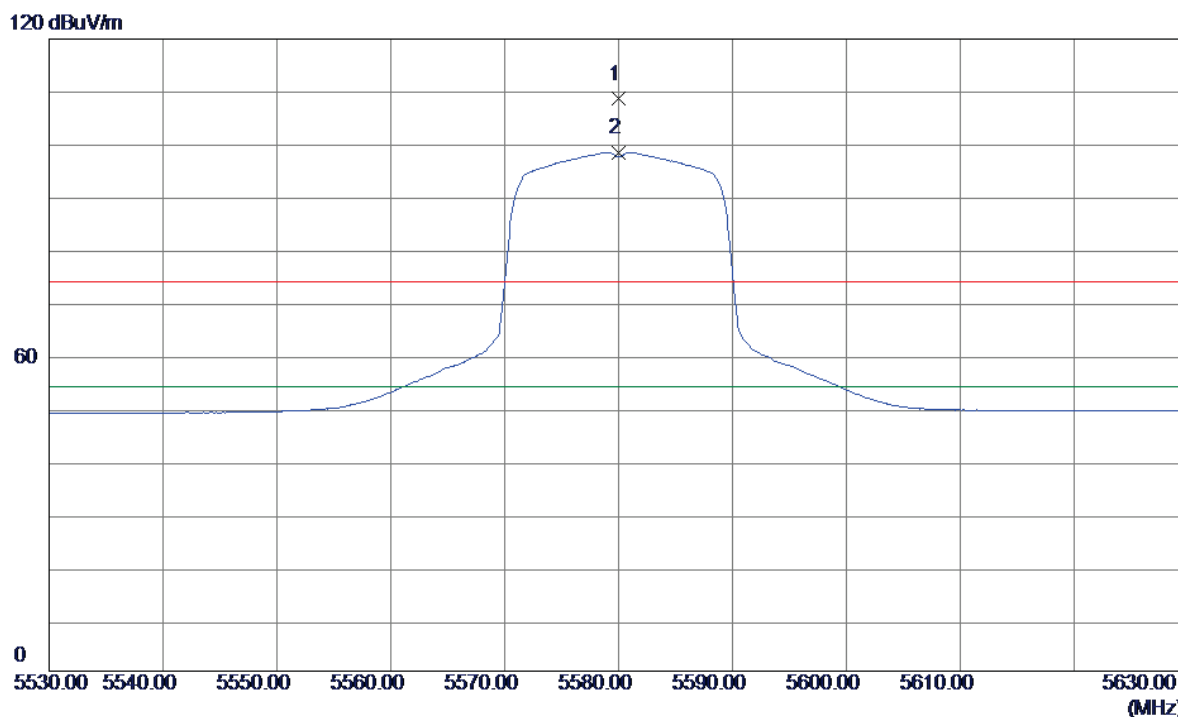


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5580.0000	70.48	38.12	108.60	74.00	34.60	Peak	No Limit
2 *	5580.0000	60.34	38.12	98.46	54.00	44.46	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz_Without Pistol

Vertical


120 dBuV/m

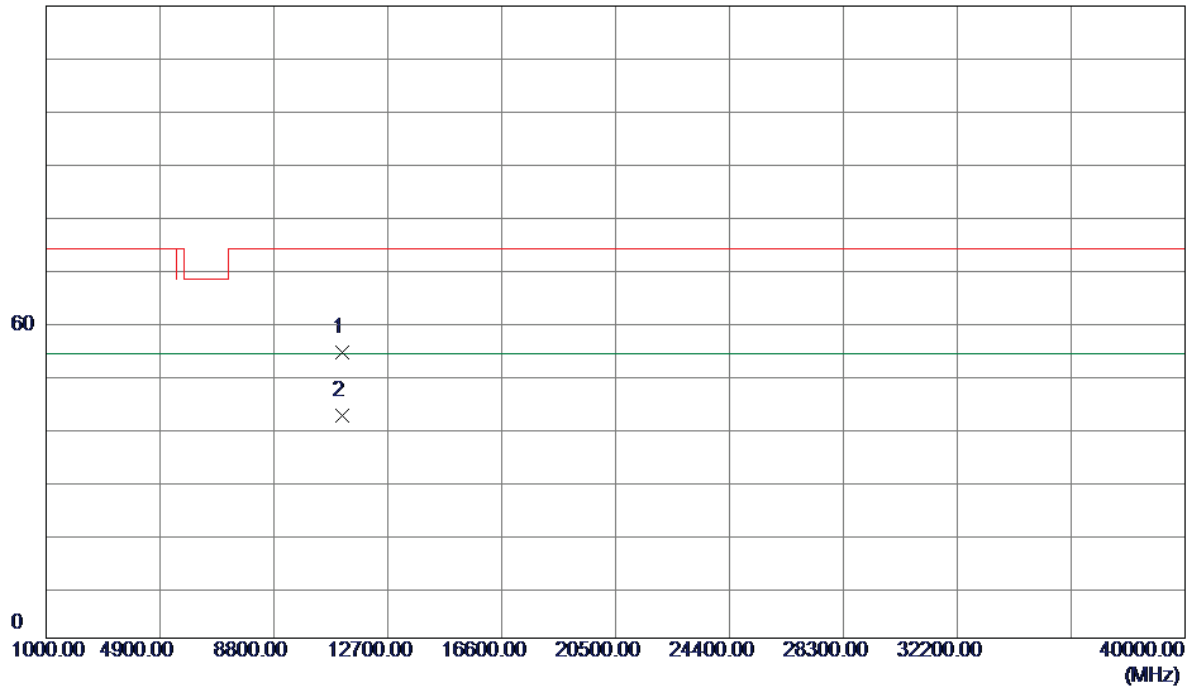

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0000	51.04	3.10	54.14	74.00	-19.86	Peak	
2 *	11160.0000	39.11	3.10	42.21	54.00	-11.79	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz_Without Pistol


Horizontal

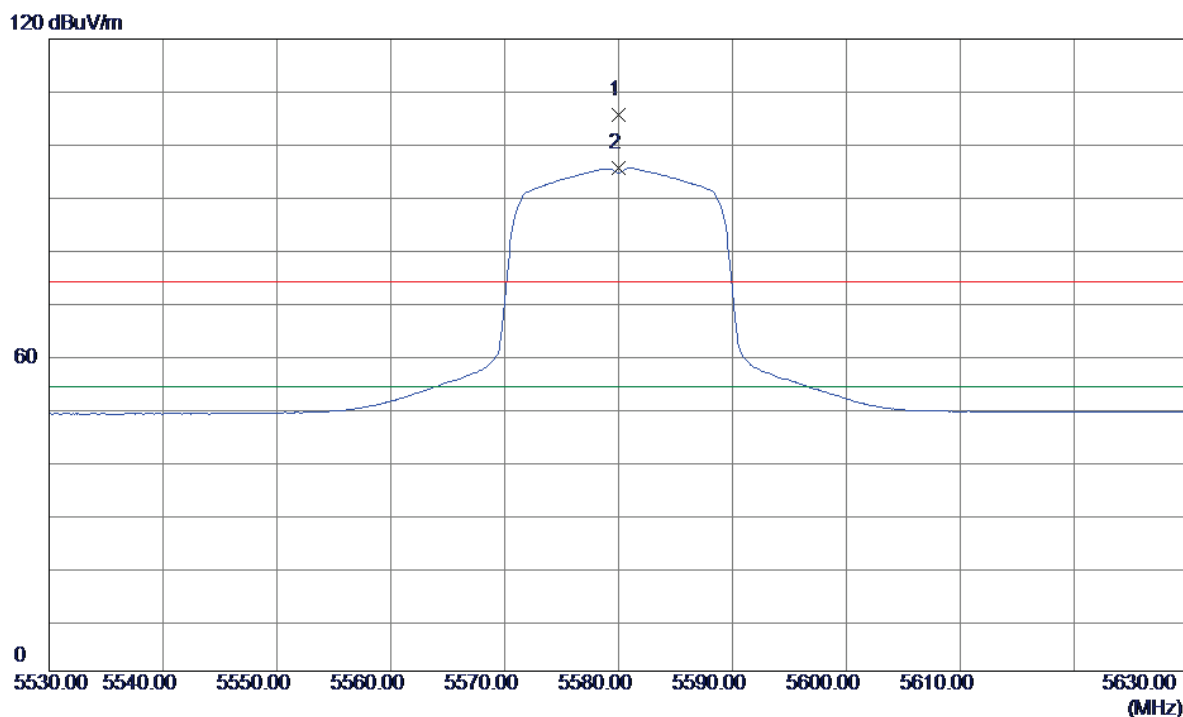

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5580.0000	67.39	38.12	105.51	74.00	31.51	Peak	No Limit
2 *	5580.0000	57.33	38.12	95.45	54.00	41.45	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz_Without Pistol


Horizontal

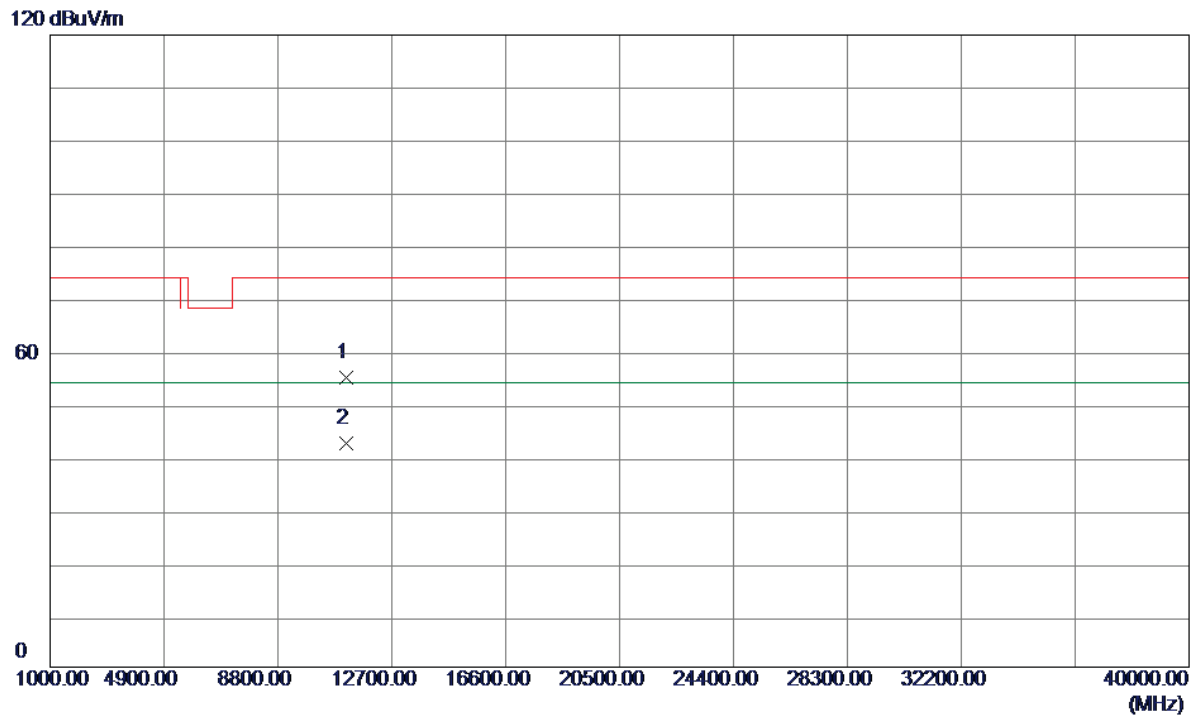

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0000	51.89	3.10	54.99	74.00	-19.01	Peak	
2 *	11160.0000	39.34	3.10	42.44	54.00	-11.56	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz_Without Pistol

Vertical

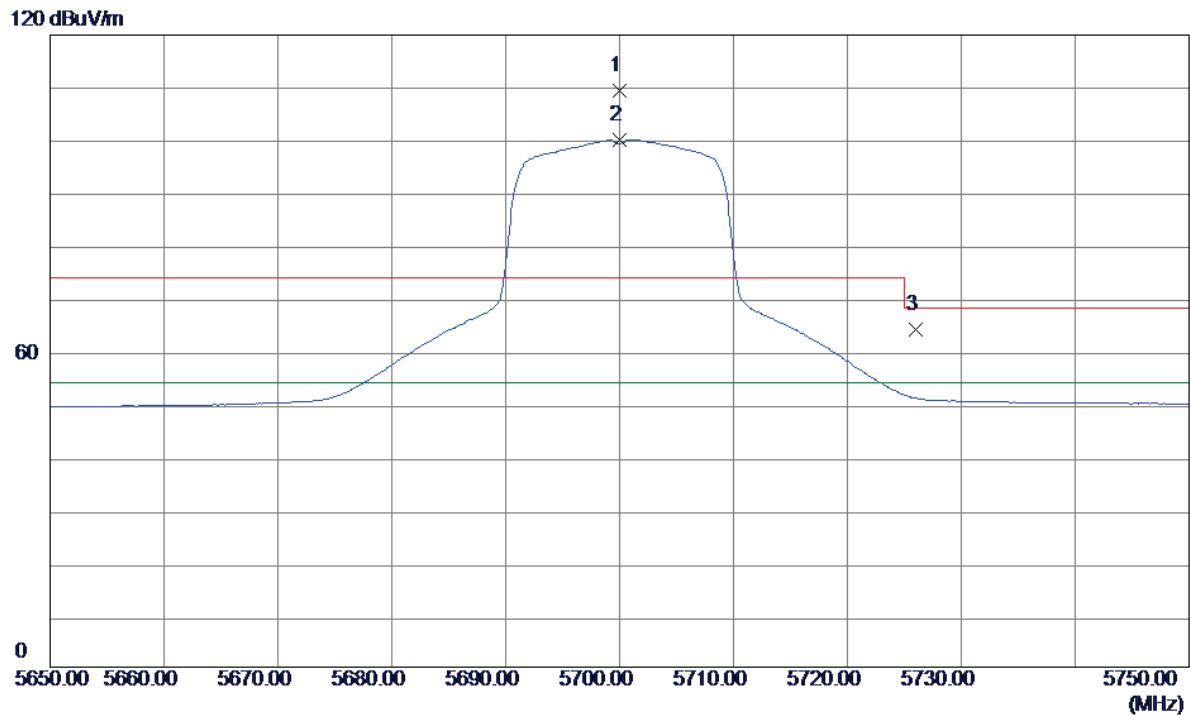


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5700.0000	70.96	38.42	109.38	74.00	35.38	Peak	No Limit
2 *	5700.0000	61.76	38.42	100.18	54.00	46.18	AVG	No Limit
3	5726.0000	25.60	38.49	64.09	68.20	-4.11	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz_Without Pistol

Vertical


120 dBuV/m

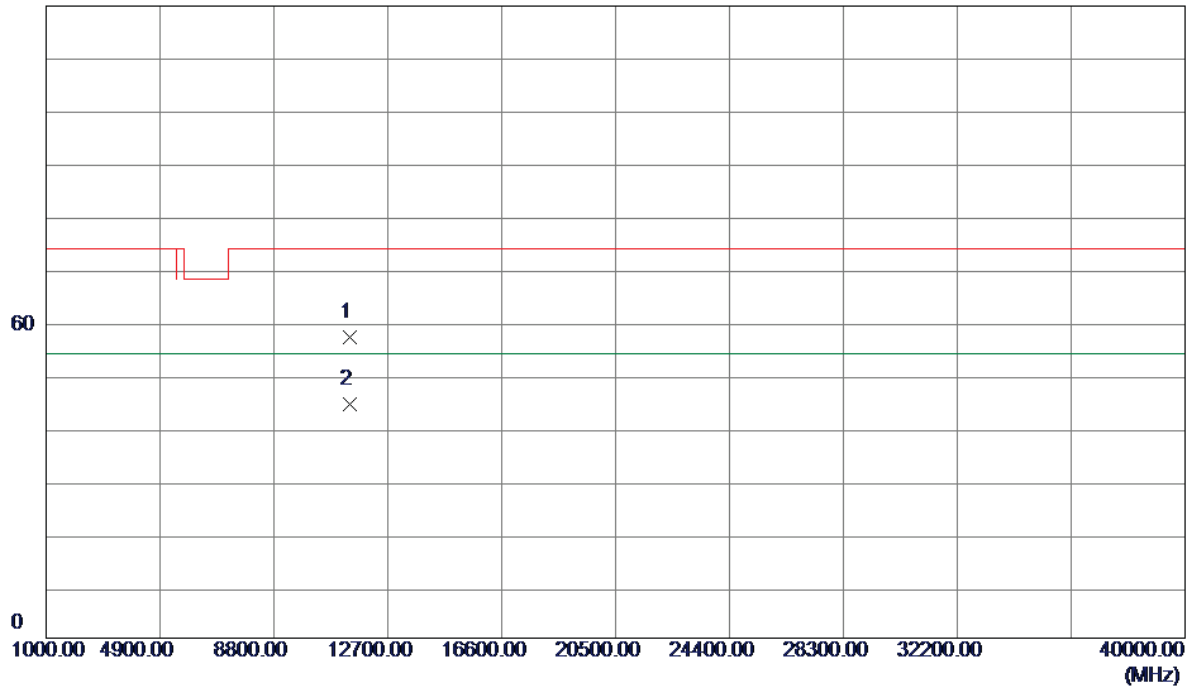

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	53.75	3.47	57.22	74.00	-16.78	Peak	
2 *	11400.0000	40.98	3.47	44.45	54.00	-9.55	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz_Without Pistol


Horizontal

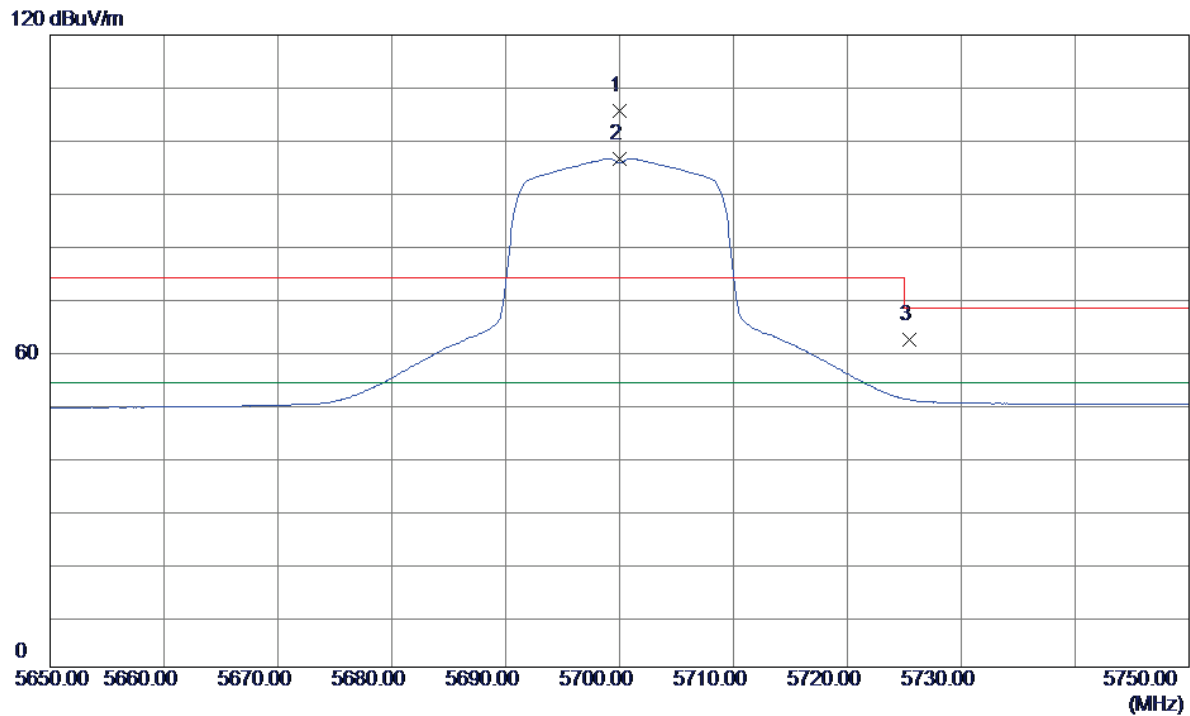

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5700.0000	67.09	38.42	105.51	74.00	31.51	Peak	No Limit
2 *	5700.0000	58.13	38.42	96.55	54.00	42.55	AVG	No Limit
3	5725.4000	23.68	38.49	62.17	68.20	-6.03	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz_Without Pistol


Horizontal

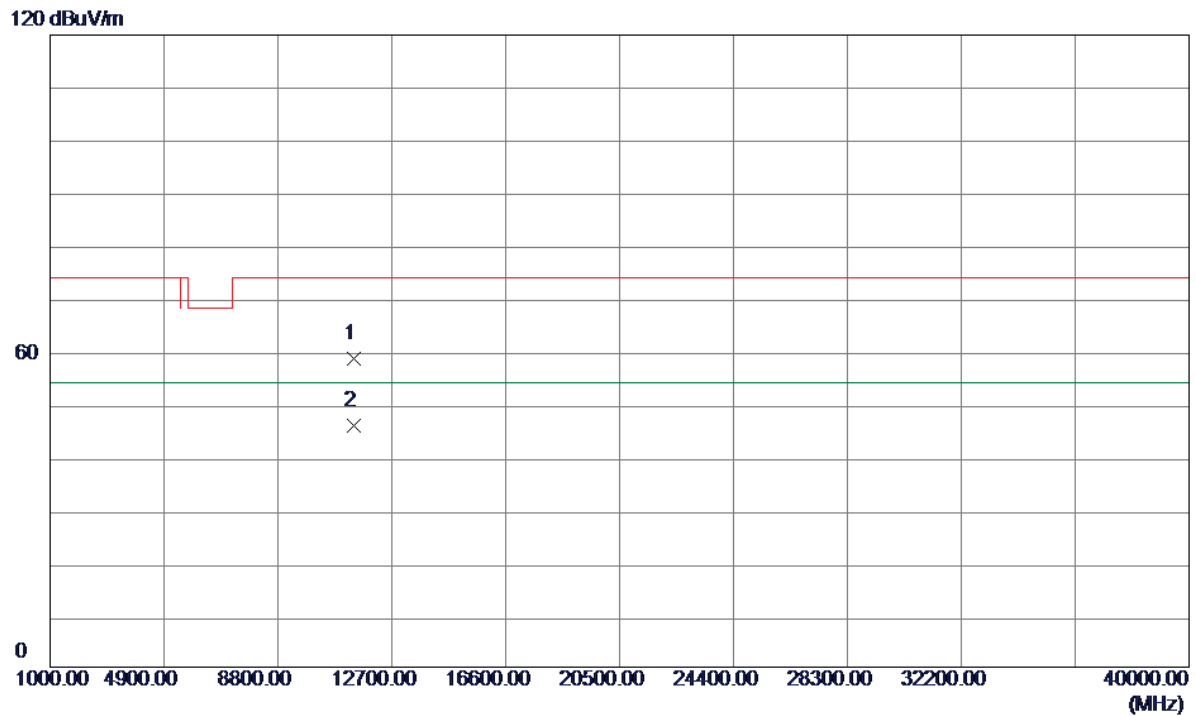

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	55.12	3.47	58.59	74.00	-15.41	Peak	
2 *	11400.0000	42.34	3.47	45.81	54.00	-8.19	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz_Without Pistol

Vertical

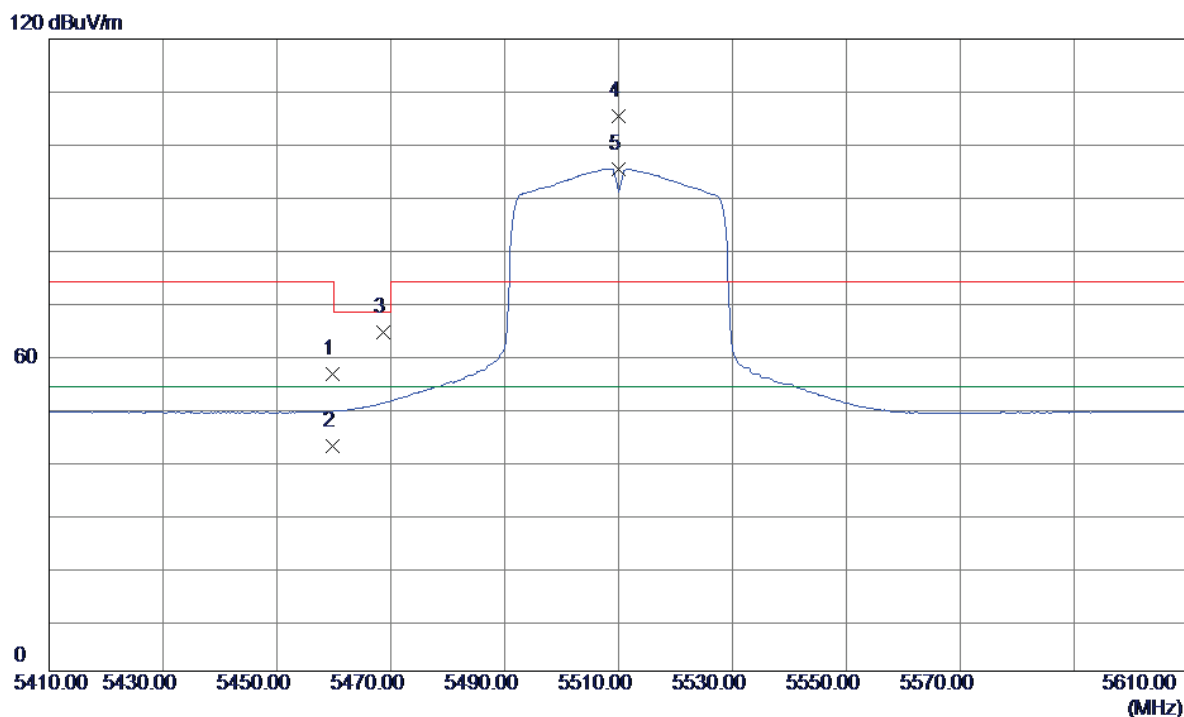


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.8500	18.59	37.87	56.46	74.00	-17.54	Peak	
2	5459.8500	4.91	37.87	42.78	54.00	-11.22	AVG	
3	5468.6900	26.51	37.88	64.39	68.20	-3.81	Peak	
4	5510.0000	67.48	37.95	105.43	74.00	31.43	Peak	No Limit
5 *	5510.0000	57.43	37.95	95.38	54.00	41.38	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz_Without Pistol

Vertical


120 dBuV/m

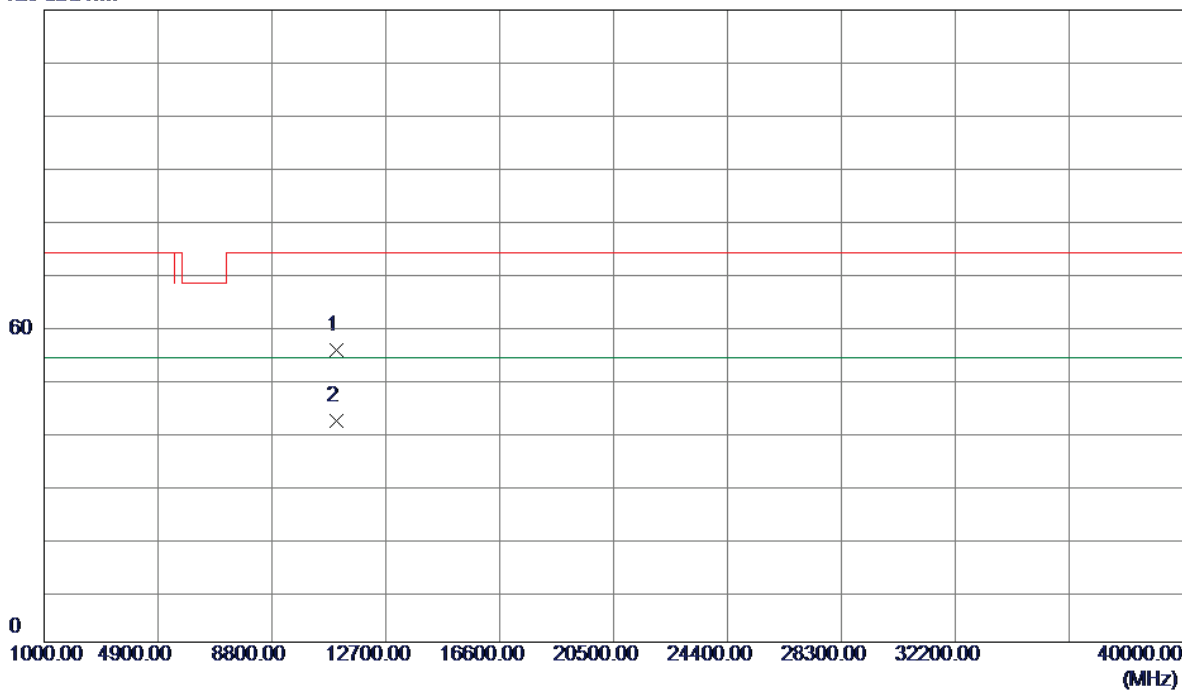

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0000	52.60	2.88	55.48	74.00	-18.52	Peak	
2 *	11020.0000	39.15	2.88	42.03	54.00	-11.97	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz_Without Pistol

Horizontal

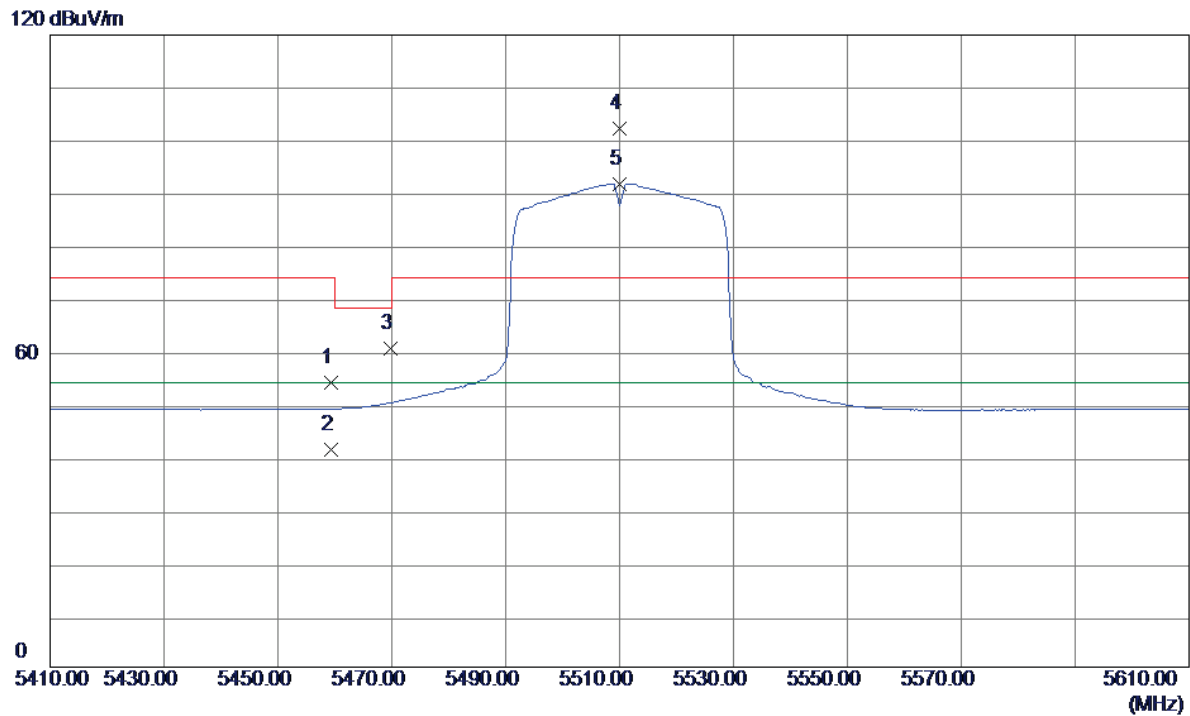


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.4000	16.13	37.87	54.00	74.00	-20.00	Peak	
2	5459.4000	3.37	37.87	41.24	54.00	-12.76	AVG	
3	5469.6800	22.57	37.88	60.45	68.20	-7.75	Peak	
4	5510.0000	64.24	37.95	102.19	74.00	28.19	Peak	No Limit
5 *	5510.0000	53.84	37.95	91.79	54.00	37.79	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz_Without Pistol

Horizontal


120 dBuV/m

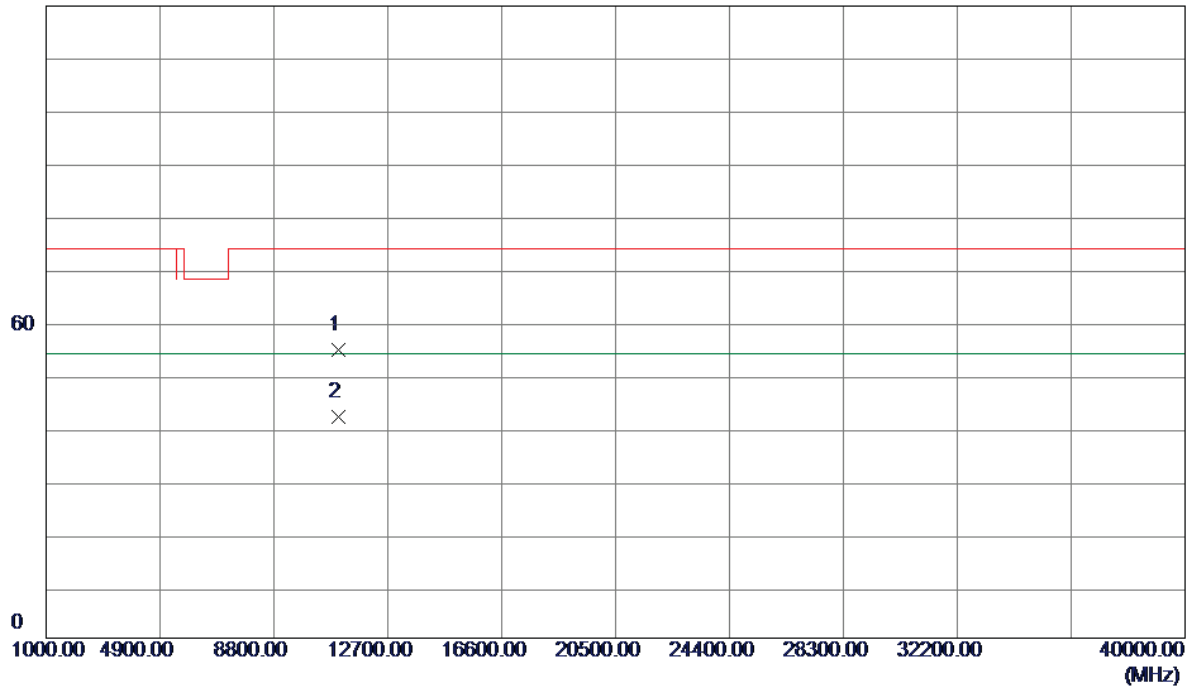

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0000	51.82	2.88	54.70	74.00	-19.30	Peak	
2 *	11020.0000	39.14	2.88	42.02	54.00	-11.98	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5550MHz_Without Pistol

Vertical

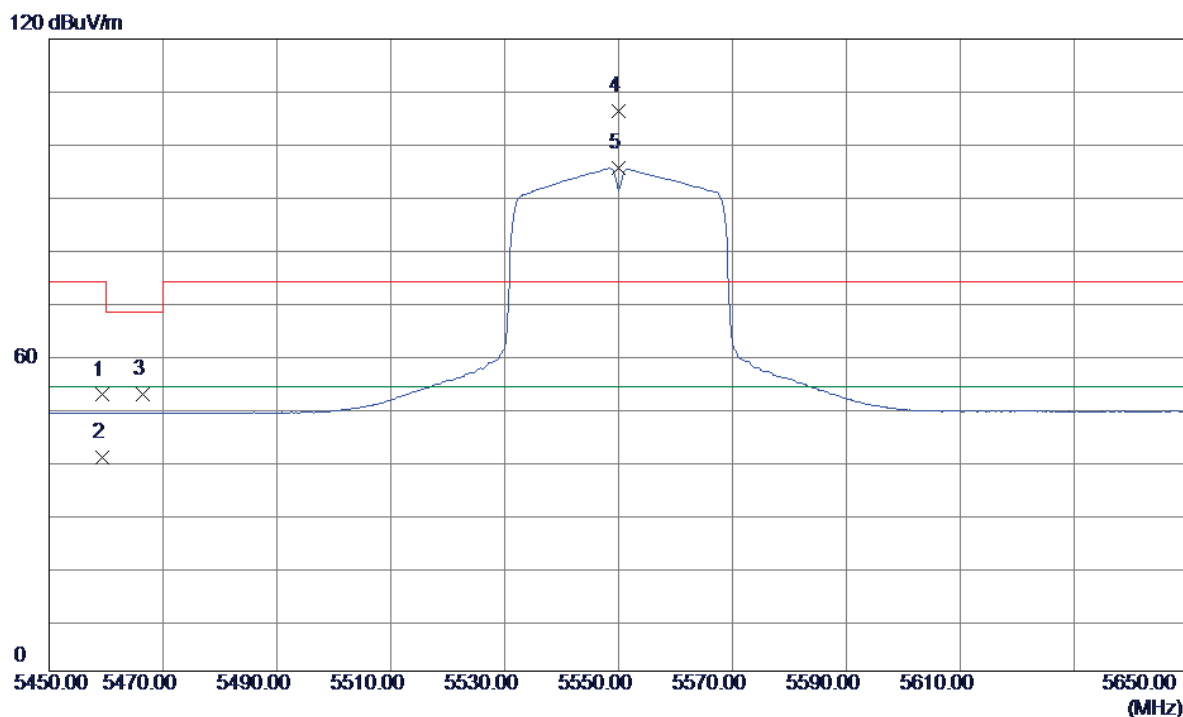


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.3000	14.57	37.87	52.44	74.00	-21.56	Peak	
2	5459.3000	2.79	37.87	40.66	54.00	-13.34	AVG	
3	5466.4000	14.70	37.88	52.58	68.20	-15.62	Peak	
4	5550.0000	68.17	38.05	106.22	74.00	32.22	Peak	No Limit
5 *	5550.0000	57.37	38.05	95.42	54.00	41.42	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5550MHz_Without Pistol

Vertical


120 dBuV/m

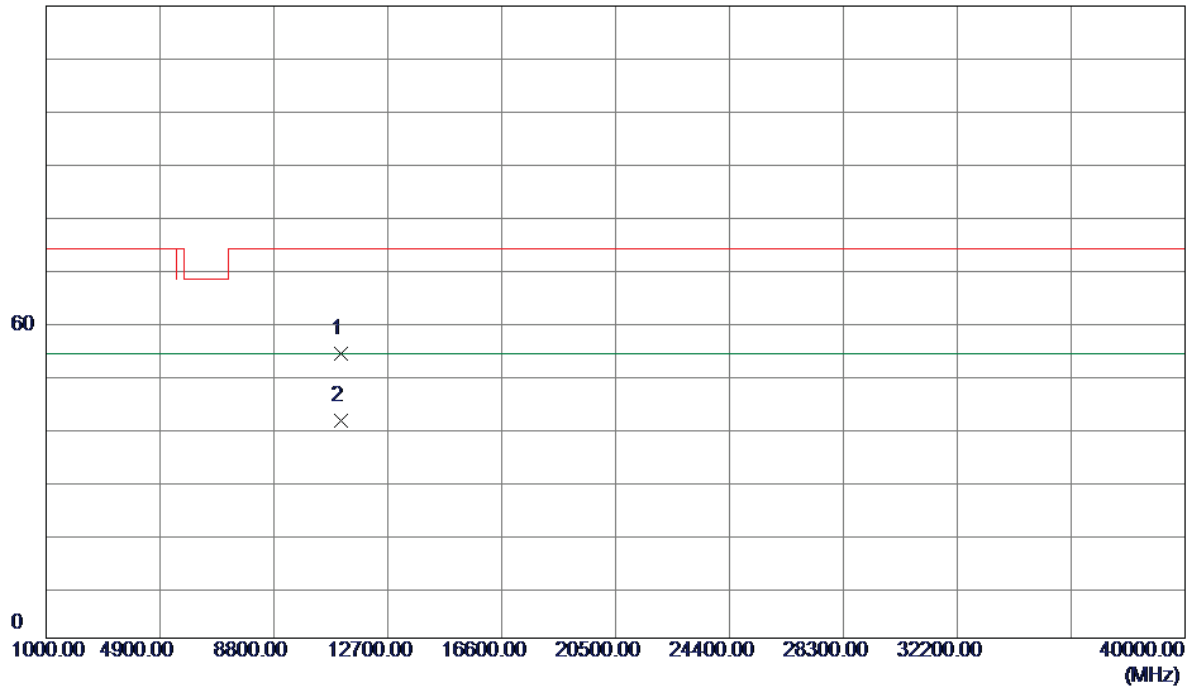

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.0000	51.10	3.00	54.10	74.00	-19.90	Peak	
2 *	11100.0000	38.29	3.00	41.29	54.00	-12.71	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5550MHz_Without Pistol

Horizontal

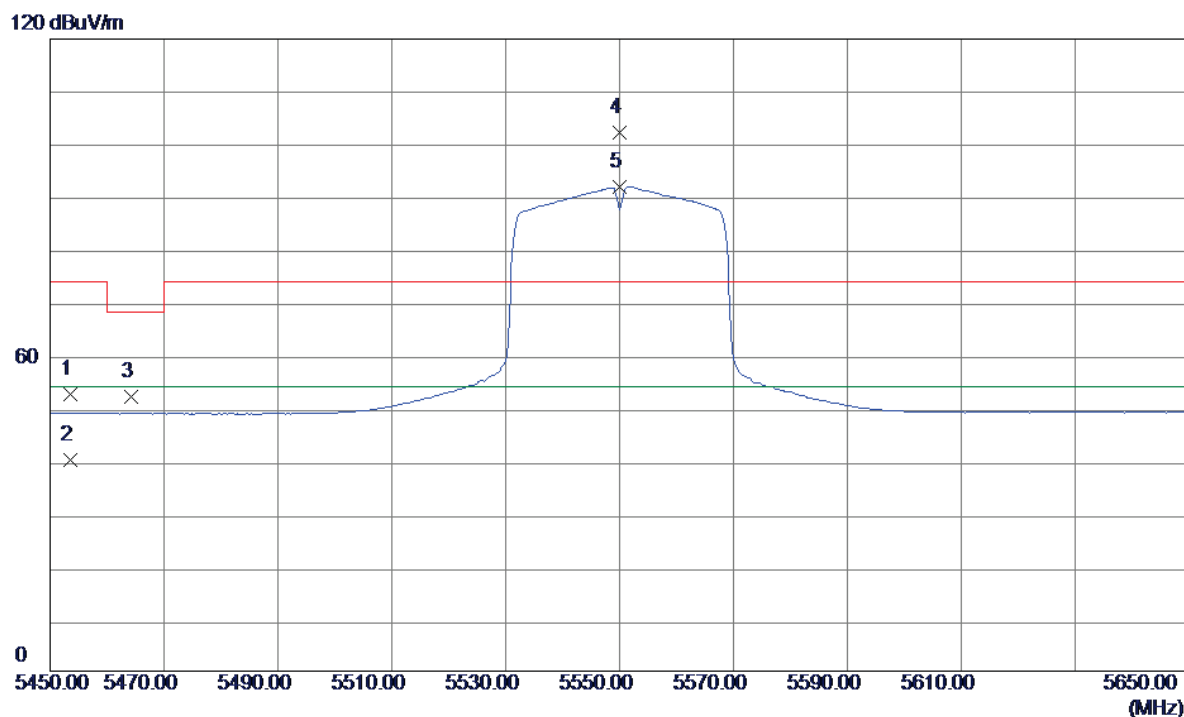


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5453.5500	14.71	37.86	52.57	74.00	-21.43	Peak	
2	5453.5500	2.14	37.86	40.00	54.00	-14.00	AVG	
3	5464.1400	14.32	37.87	52.19	68.20	-16.01	Peak	
4	5550.0000	64.24	38.05	102.29	74.00	28.29	Peak	No Limit
5 *	5550.0000	53.89	38.05	91.94	54.00	37.94	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5550MHz_Without Pistol

Horizontal


120 dBuV/m

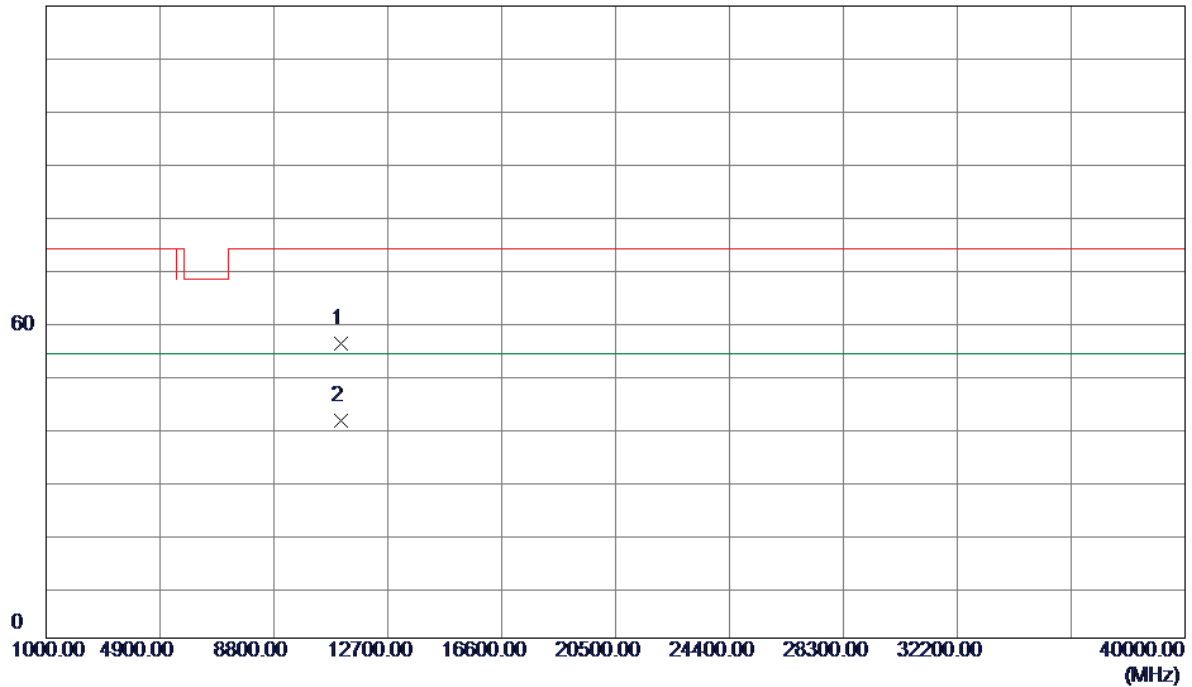

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.0000	52.92	3.00	55.92	74.00	-18.08	Peak	
2 *	11100.0000	38.30	3.00	41.30	54.00	-12.70	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz_Without Pistol

Vertical

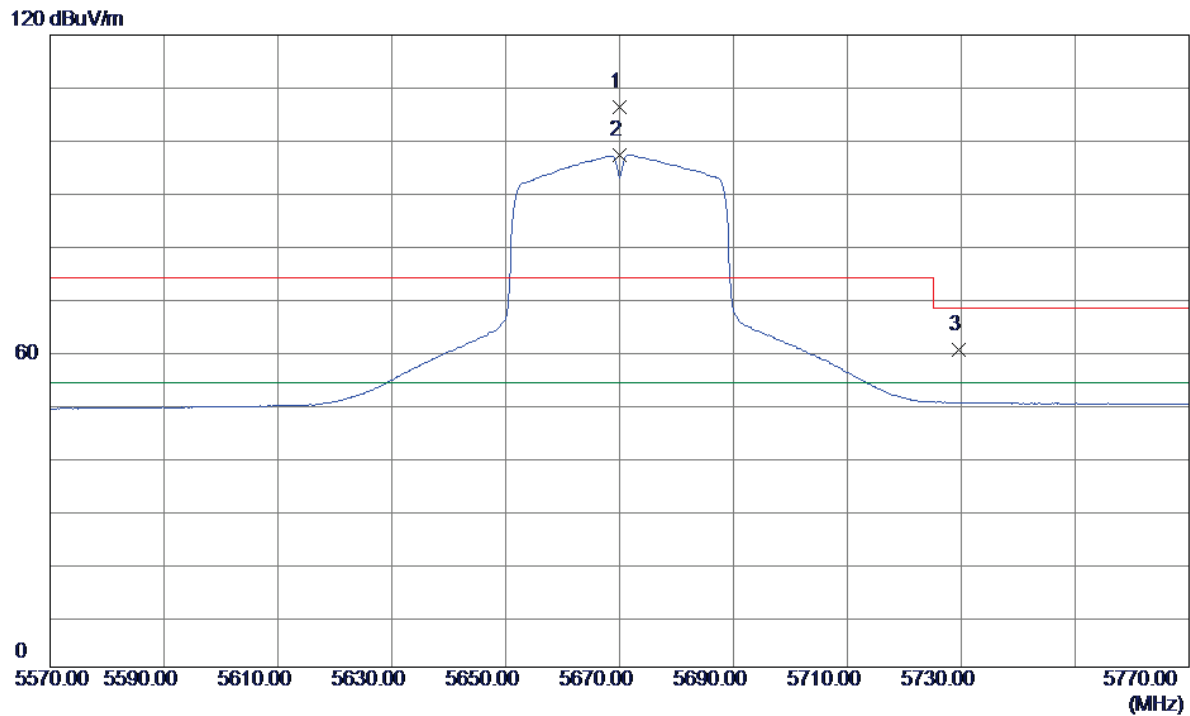


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5670.0000	68.04	38.35	106.39	74.00	32.39	Peak	No Limit
2 *	5670.0000	58.79	38.35	97.14	54.00	43.14	AVG	No Limit
3	5729.5900	21.69	38.50	60.19	68.20	-8.01	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz_Without Pistol

Vertical


120 dBuV/m

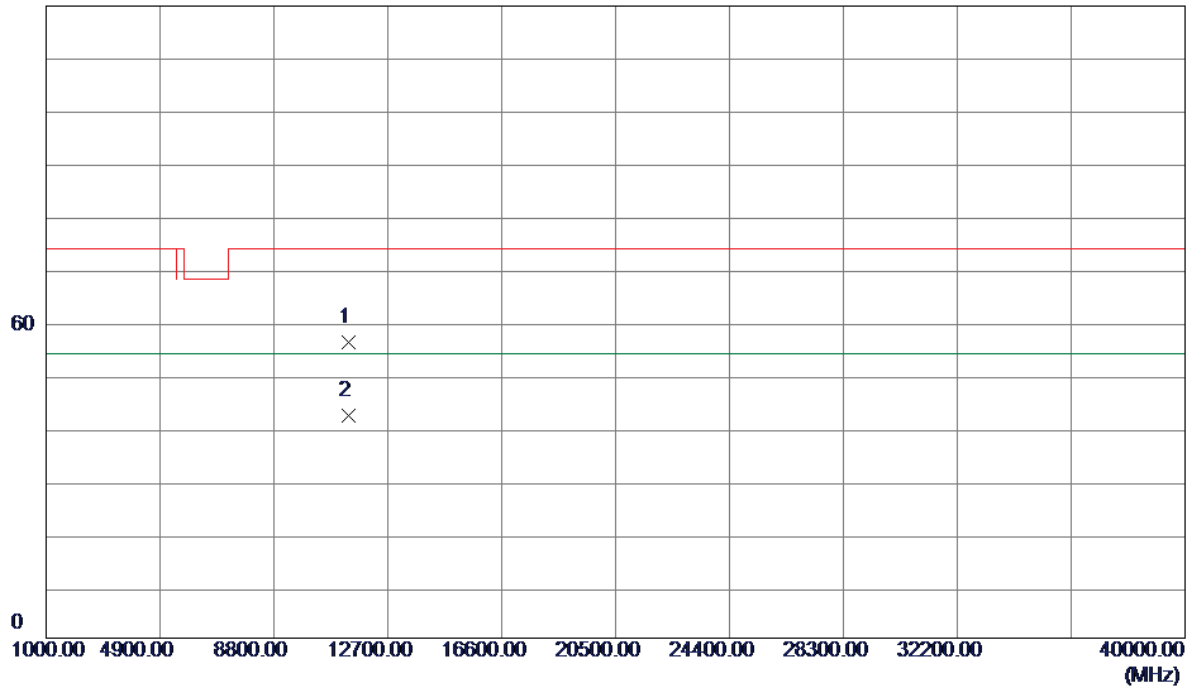

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.0000	52.76	3.37	56.13	74.00	-17.87	Peak	
2 *	11340.0000	38.83	3.37	42.20	54.00	-11.80	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz_Without Pistol

Horizontal

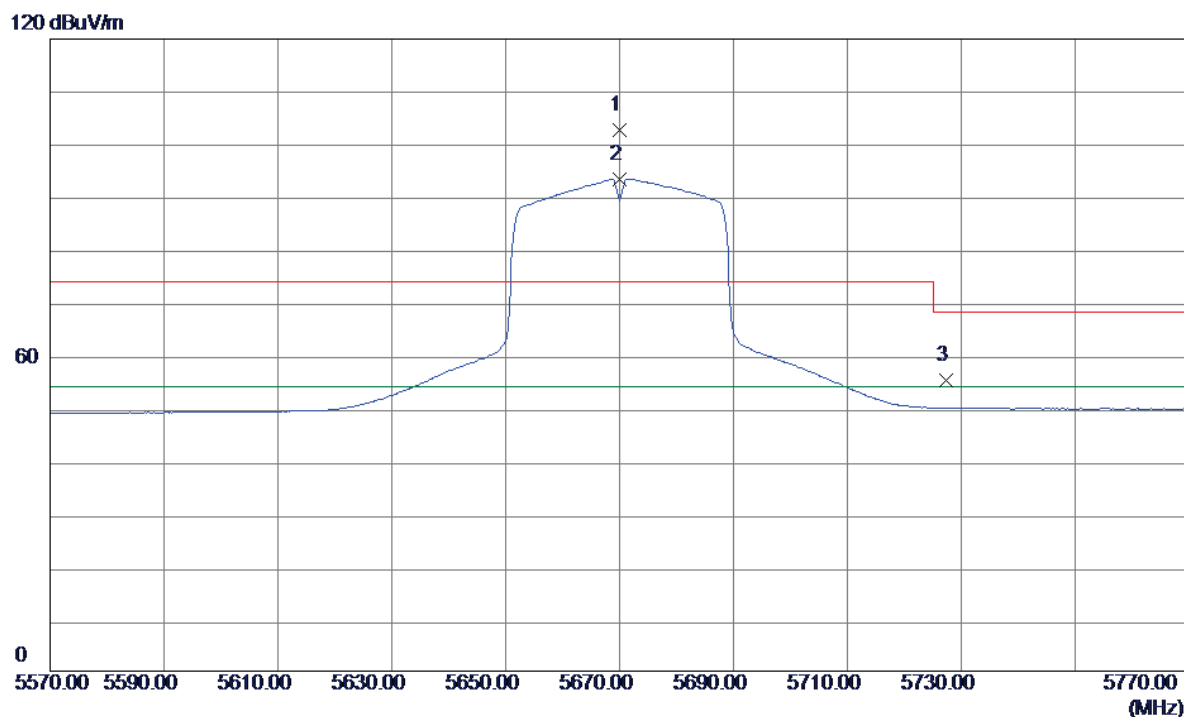


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5670.0000	64.32	38.35	102.67	74.00	28.67	Peak	No Limit
2 *	5670.0000	55.08	38.35	93.43	54.00	39.43	AVG	No Limit
3	5727.2500	16.82	38.49	55.31	68.20	-12.89	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz_Without Pistol

Horizontal


120 dBuV/m

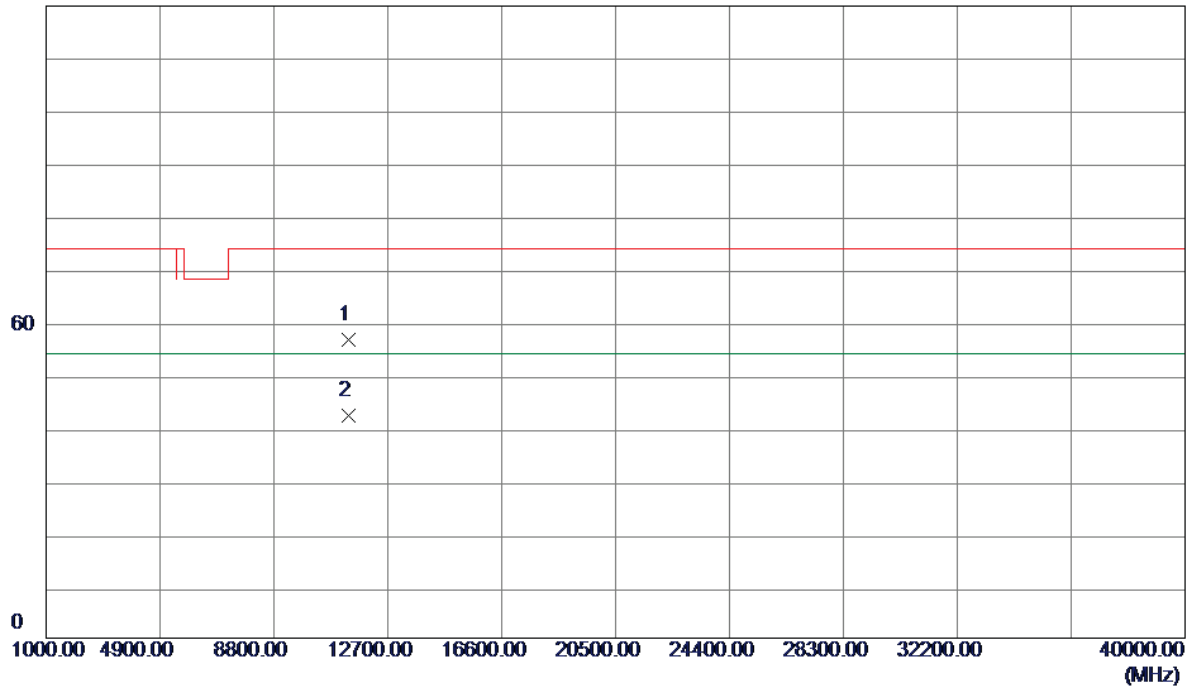

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.0000	53.37	3.37	56.74	74.00	-17.26	Peak	
2 *	11340.0000	38.82	3.37	42.19	54.00	-11.81	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX A Mode 5745MHz_Without Pistol


Vertical

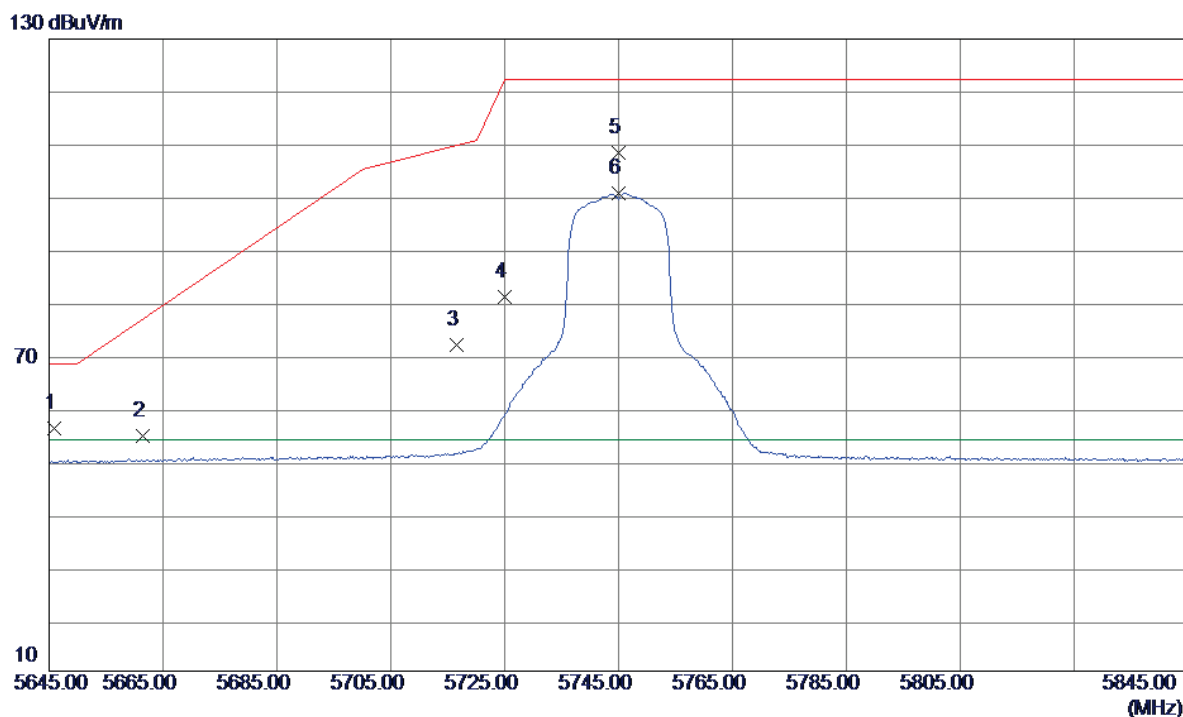

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5645.9300	17.69	38.29	55.98	68.20	-12.22	Peak	
2	5661.5000	16.39	38.33	54.72	76.71	-21.99	Peak	
3	5716.5600	33.52	38.47	71.99	109.84	-37.85	Peak	
4	5724.9750	42.47	38.49	80.96	122.14	-41.18	Peak	
5	5745.0000	69.79	38.54	108.33	122.20	-13.87	Peak	No Limit
6 *	5745.0000	62.28	38.54	100.82	54.00	46.82	AVG	No Limit

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX A Mode 5745MHz_Without Pistol


Vertical

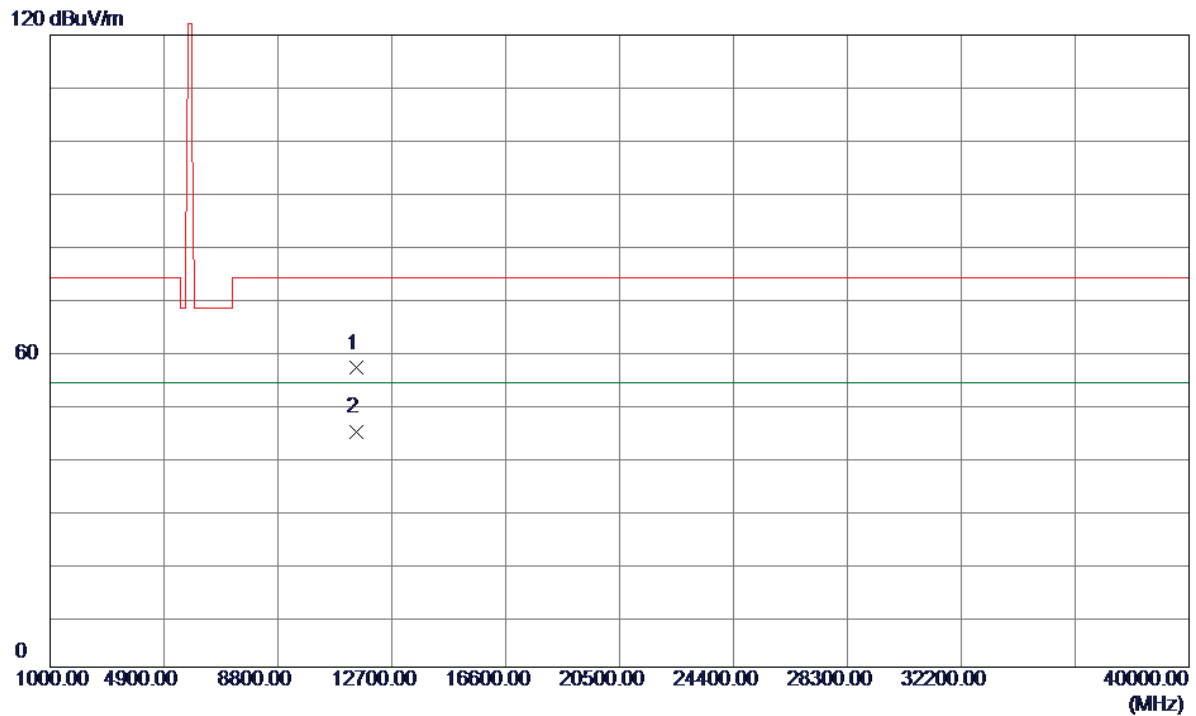

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	53.16	3.60	56.76	74.00	-17.24	Peak	
2 *	11490.0000	41.11	3.60	44.71	54.00	-9.29	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX A Mode 5745MHz_Without Pistol


Horizontal

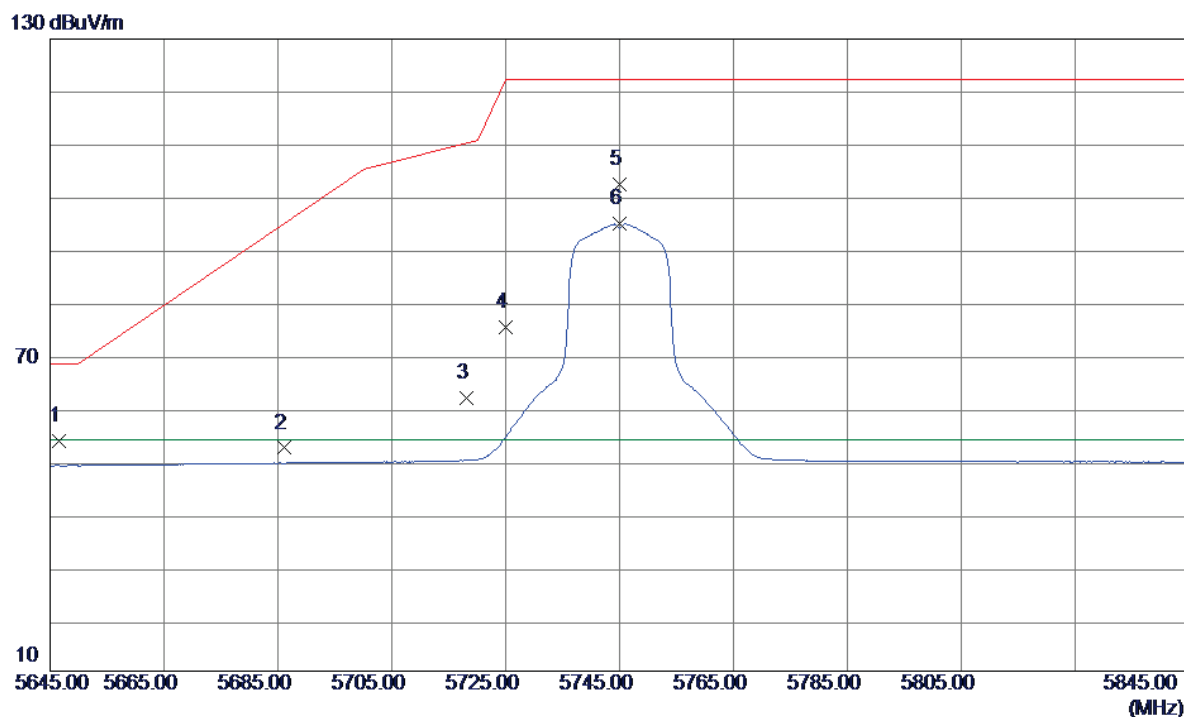

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5646.6000	15.45	38.29	53.74	68.20	-14.46	Peak	
2	5686.0500	13.97	38.39	52.36	94.88	-42.52	Peak	
3	5718.0600	23.44	38.47	61.91	110.26	-48.35	Peak	
4	5724.9900	36.73	38.49	75.22	122.18	-46.96	Peak	
5	5745.0000	63.87	38.54	102.41	122.20	-19.79	Peak	No Limit
6 *	5745.0000	56.33	38.54	94.87	54.00	40.87	AVG	No Limit

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX A Mode 5745MHz_Without Pistol


Horizontal

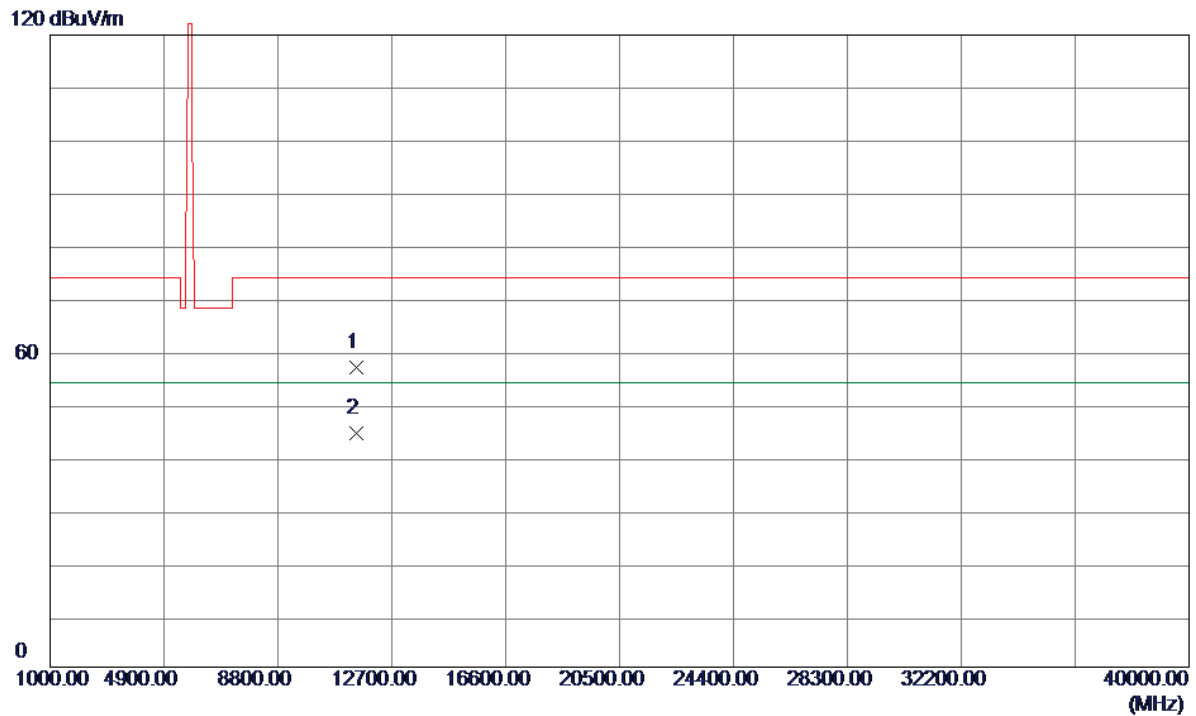

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	53.34	3.60	56.94	74.00	-17.06	Peak	
2 *	11490.0000	40.90	3.60	44.50	54.00	-9.50	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX A Mode 5785MHz_Without Pistol


Vertical

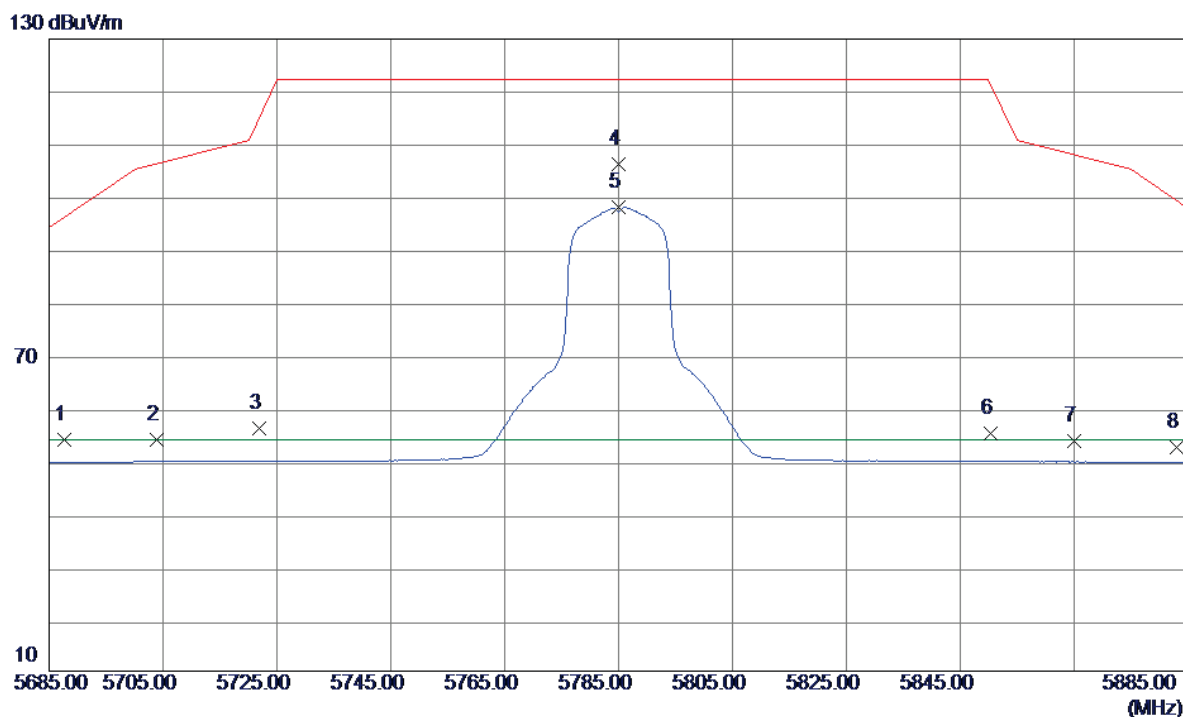

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5687.7150	15.52	38.39	53.91	96.11	-42.20	Peak	
2	5703.8000	15.47	38.43	53.90	106.26	-52.36	Peak	
3	5721.8400	17.50	38.48	55.98	115.00	-59.02	Peak	
4	5785.0000	67.68	38.64	106.32	122.20	-15.88	Peak	No Limit
5 *	5785.0000	59.47	38.64	98.11	54.00	44.11	AVG	No Limit
6	5850.2250	16.33	38.80	55.13	121.69	-66.56	Peak	
7	5865.0200	14.83	38.84	53.67	107.99	-54.32	Peak	
8	5883.0099	13.69	38.89	52.58	99.27	-46.69	Peak	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX A Mode 5785MHz_Without Pistol


Vertical

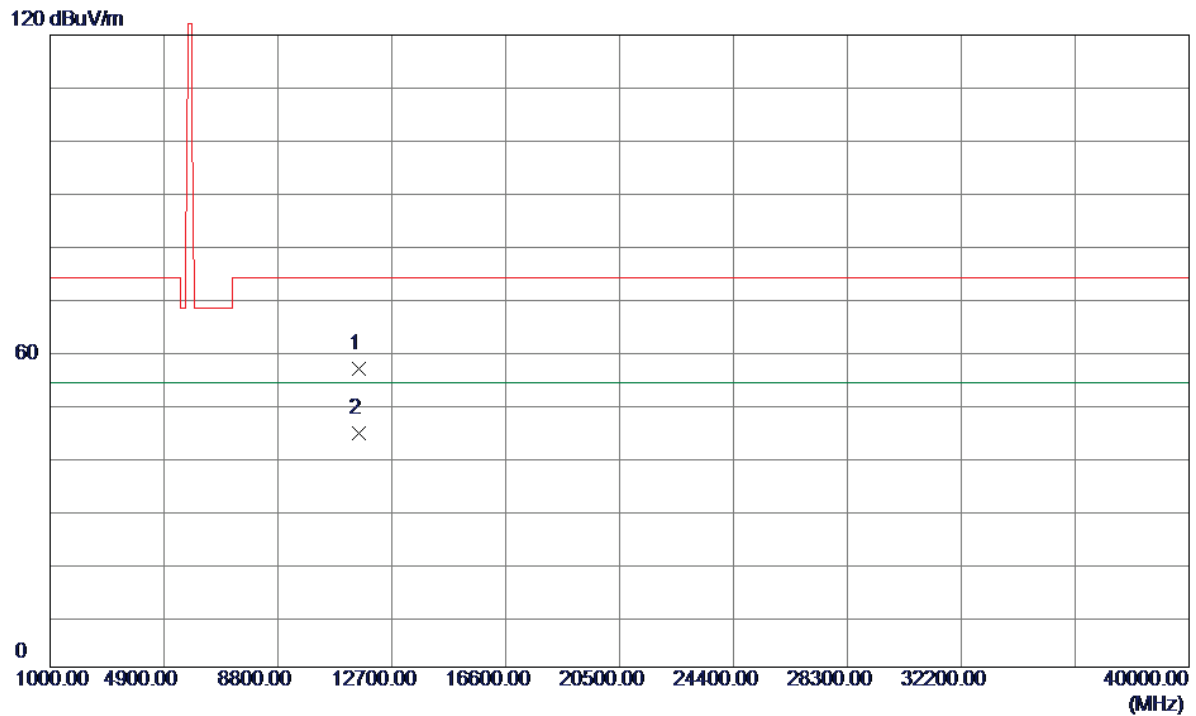

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.0000	53.25	3.48	56.73	74.00	-17.27	Peak	
2 *	11570.0000	40.89	3.48	44.37	54.00	-9.63	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX A Mode 5785MHz_Without Pistol


Horizontal

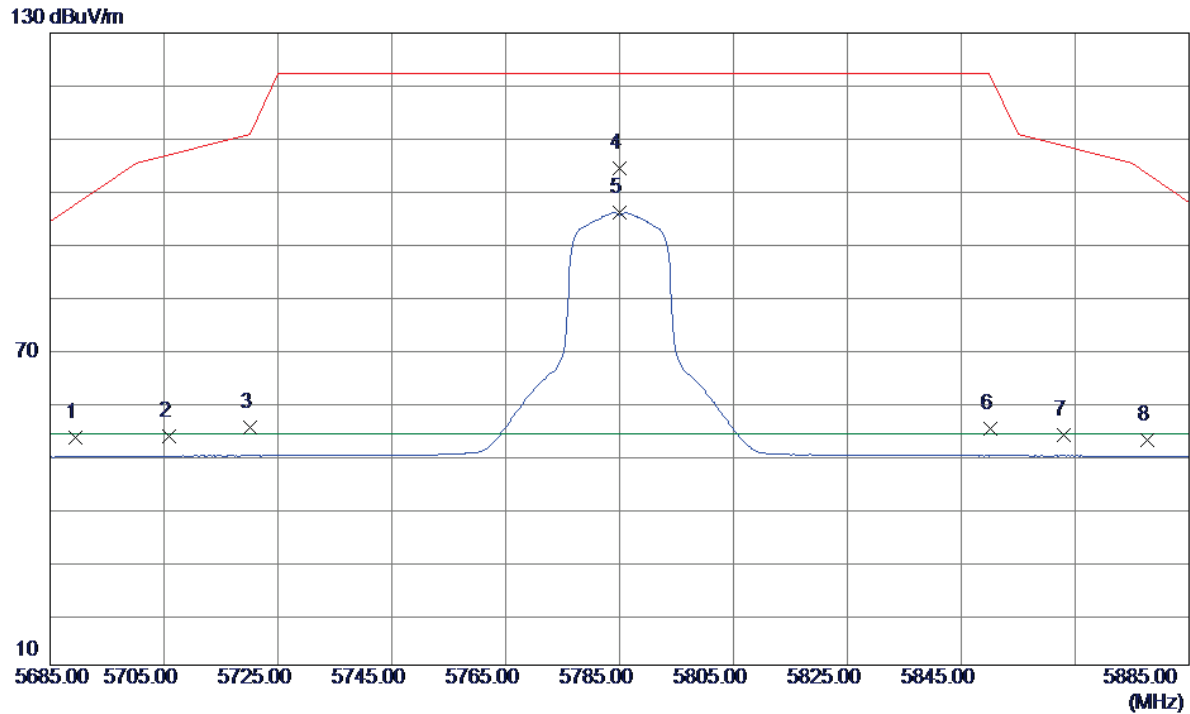

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5689.3800	14.70	38.40	53.10	97.34	-44.24	Peak	
2	5705.9000	15.09	38.44	53.53	106.85	-53.32	Peak	
3	5720.1549	16.56	38.47	55.03	111.15	-56.12	Peak	
4	5785.0000	65.57	38.64	104.21	122.20	-17.99	Peak	No Limit
5 *	5785.0000	57.33	38.64	95.97	54.00	41.97	AVG	No Limit
6	5850.0500	15.99	38.80	54.79	122.09	-67.30	Peak	
7	5862.9400	14.74	38.83	53.57	108.58	-55.01	Peak	
8	5877.5800	13.93	38.87	52.80	103.29	-50.49	Peak	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX A Mode 5785MHz_Without Pistol


Horizontal

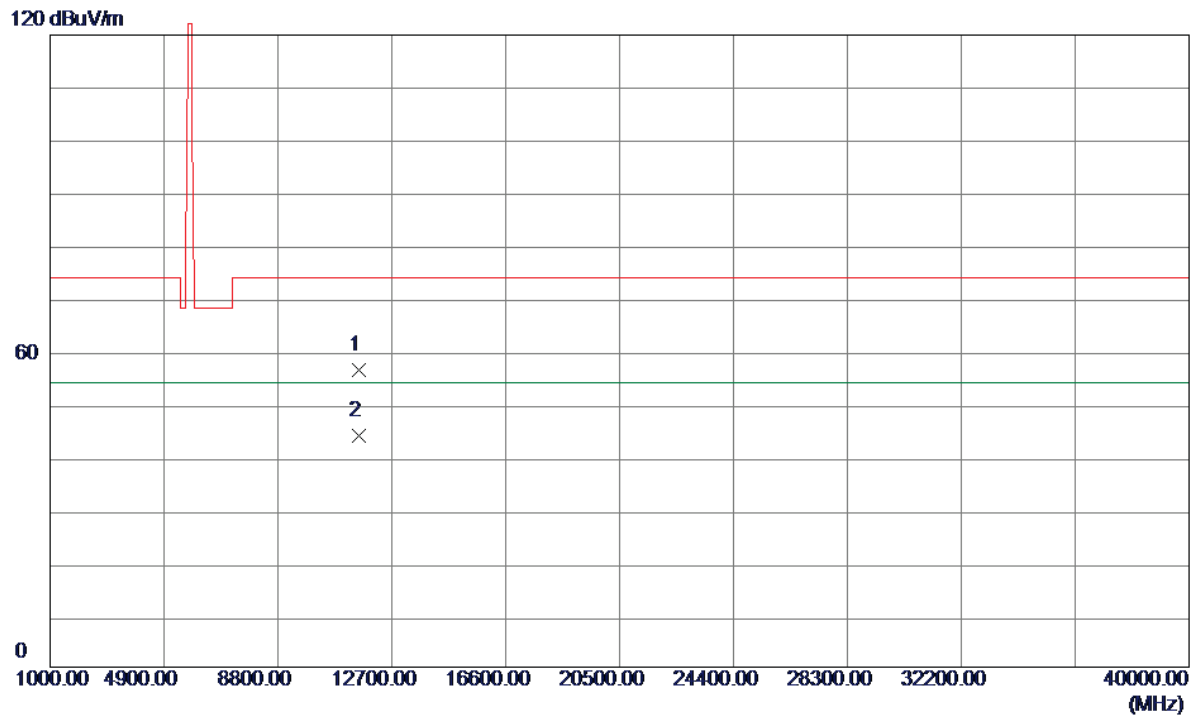

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.0000	52.92	3.48	56.40	74.00	-17.60	Peak	
2 *	11570.0000	40.55	3.48	44.03	54.00	-9.97	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX A Mode 5825MHz_Without Pistol


Vertical

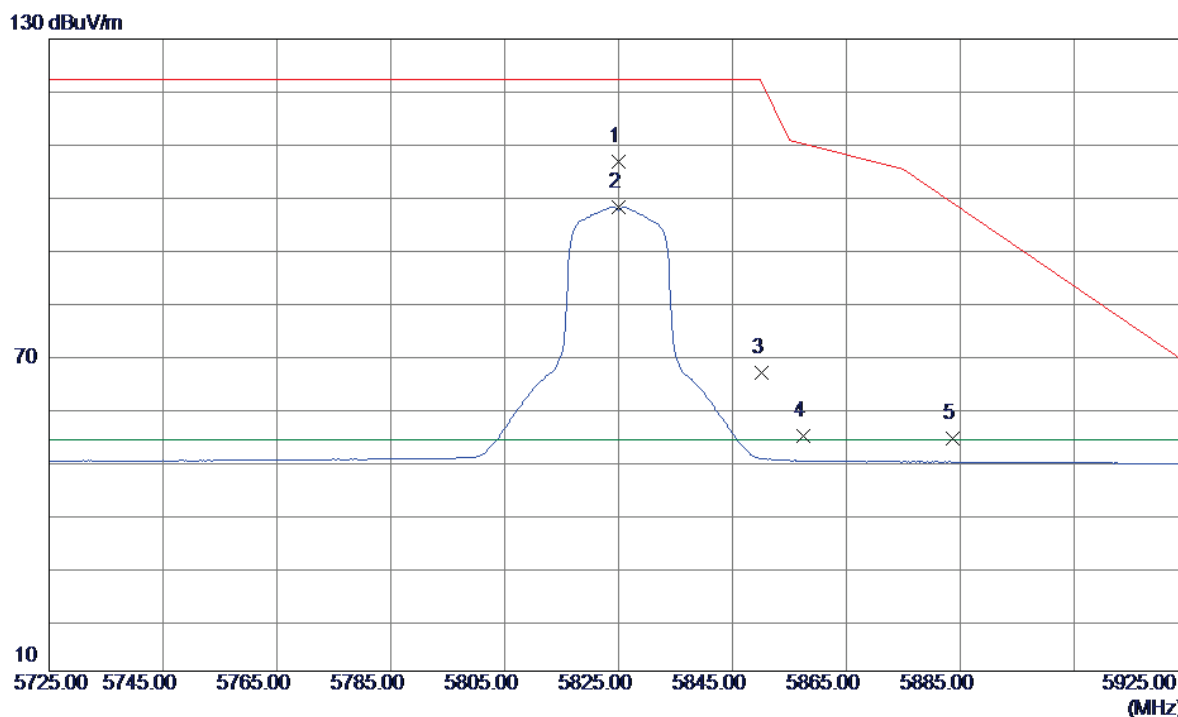

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5825.0000	67.89	38.74	106.63	122.20	-15.57	Peak	No Limit
2 *	5825.0000	59.42	38.74	98.16	54.00	44.16	AVG	No Limit
3	5850.0450	27.92	38.80	66.72	122.10	-55.38	Peak	
4	5857.3800	15.77	38.82	54.59	110.13	-55.54	Peak	
5	5883.7000	15.30	38.89	54.19	98.76	-44.57	Peak	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX A Mode 5825MHz_Without Pistol


Vertical

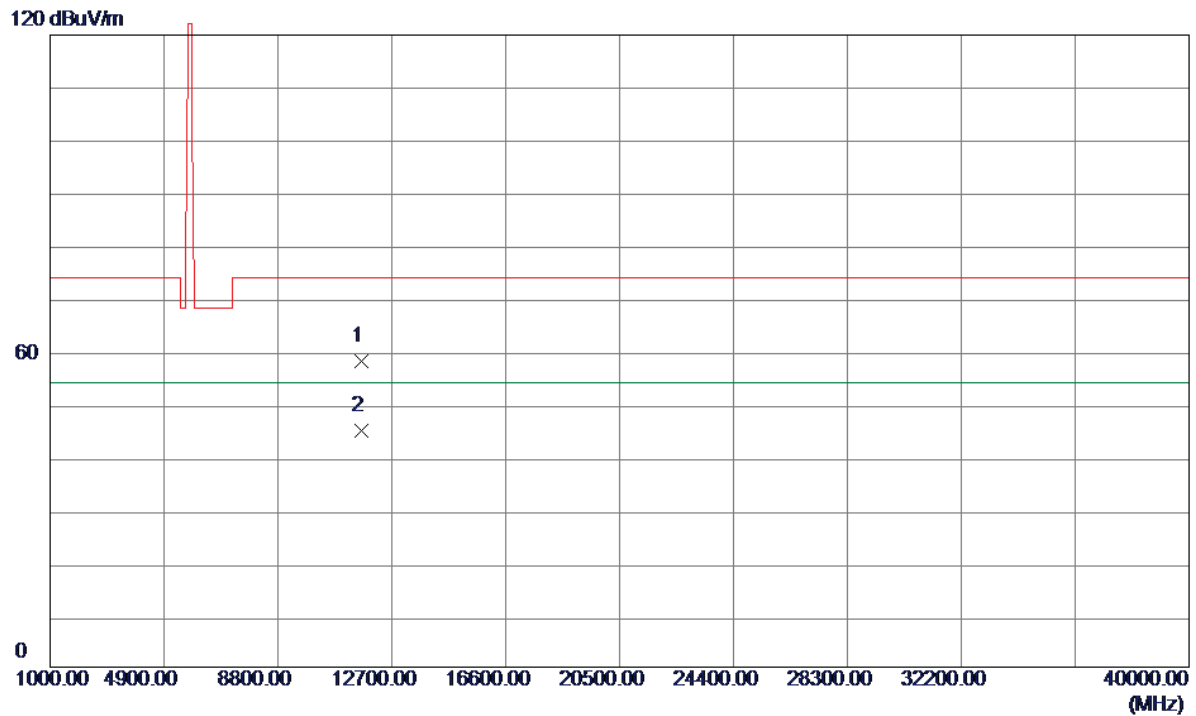

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	54.70	3.33	58.03	74.00	-15.97	Peak	
2 *	11650.0000	41.44	3.33	44.77	54.00	-9.23	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX A Mode 5825MHz_Without Pistol


Horizontal

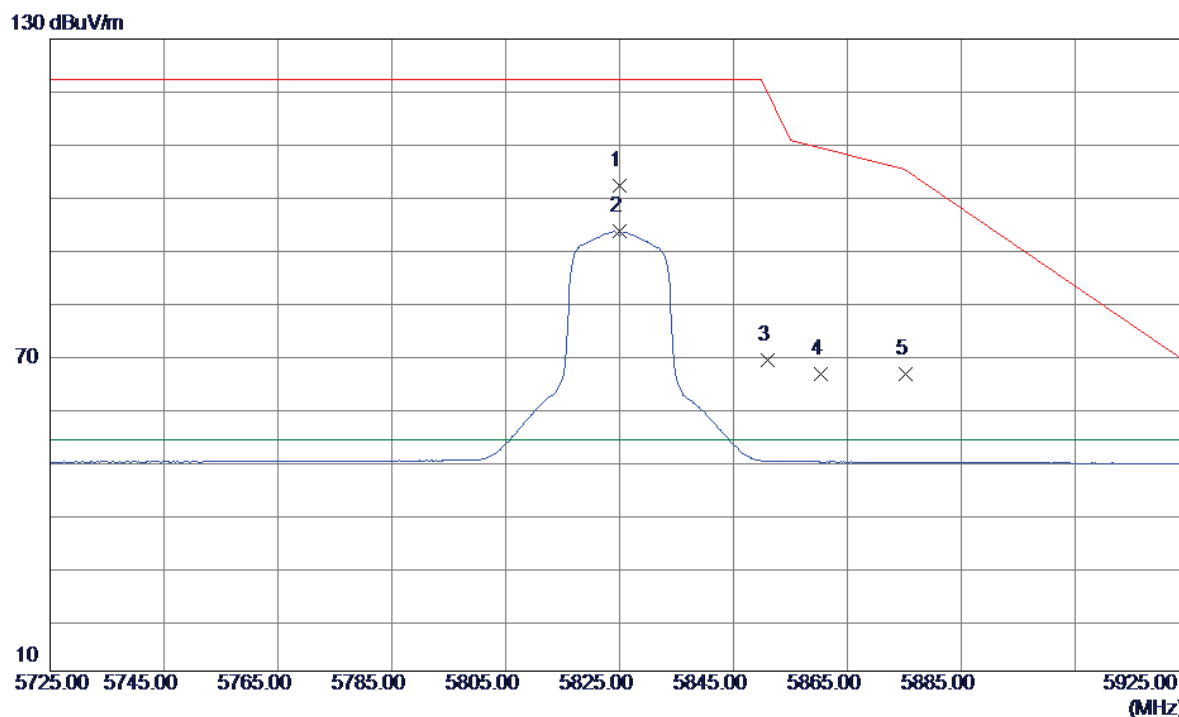

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5825.0000	63.45	38.74	102.19	122.20	-20.01	Peak	No Limit
2 *	5825.0000	54.73	38.74	93.47	54.00	39.47	AVG	No Limit
3	5851.0350	30.19	38.80	68.99	119.84	-50.85	Peak	
4	5860.4400	27.61	38.83	66.44	109.28	-42.84	Peak	
5	5875.2500	27.55	38.87	66.42	105.02	-38.60	Peak	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX A Mode 5825MHz_Without Pistol


Horizontal

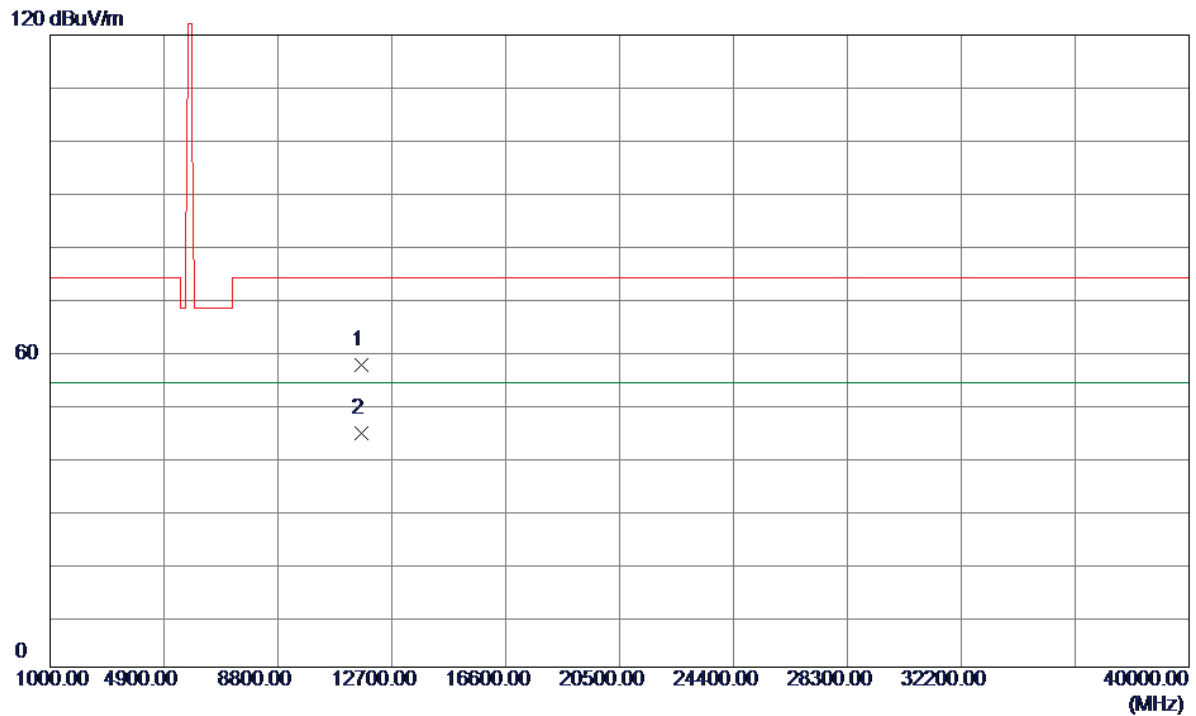

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	54.01	3.33	57.34	74.00	-16.66	Peak	
2 *	11650.0000	40.97	3.33	44.30	54.00	-9.70	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N20 Mode 5745MHz_Without Pistol


Vertical

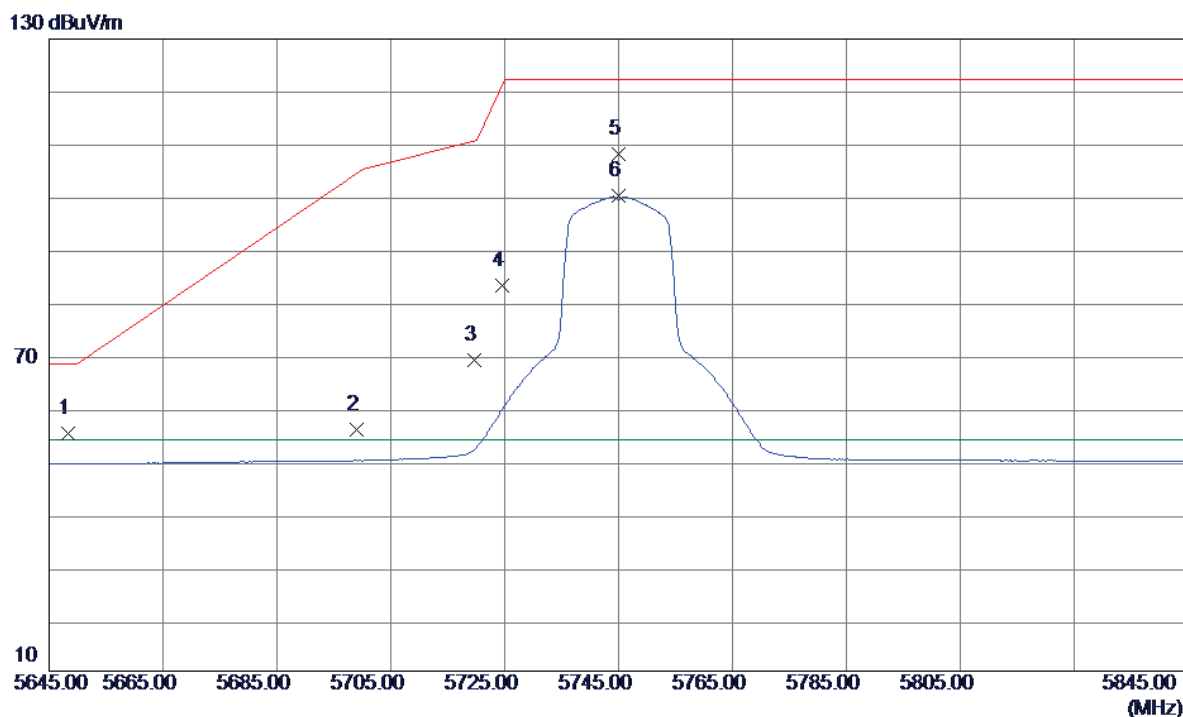

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5648.2400	16.78	38.29	55.07	68.20	-13.13	Peak	
2	5699.1000	17.32	38.42	55.74	104.53	-48.79	Peak	
3	5719.6000	30.56	38.47	69.03	110.69	-41.66	Peak	
4	5724.4550	44.64	38.49	83.13	120.96	-37.83	Peak	
5	5745.0000	69.71	38.54	108.25	122.20	-13.95	Peak	No Limit
6 *	5745.0000	61.59	38.54	100.13	54.00	46.13	AVG	No Limit

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N20 Mode 5745MHz_Without Pistol


Vertical

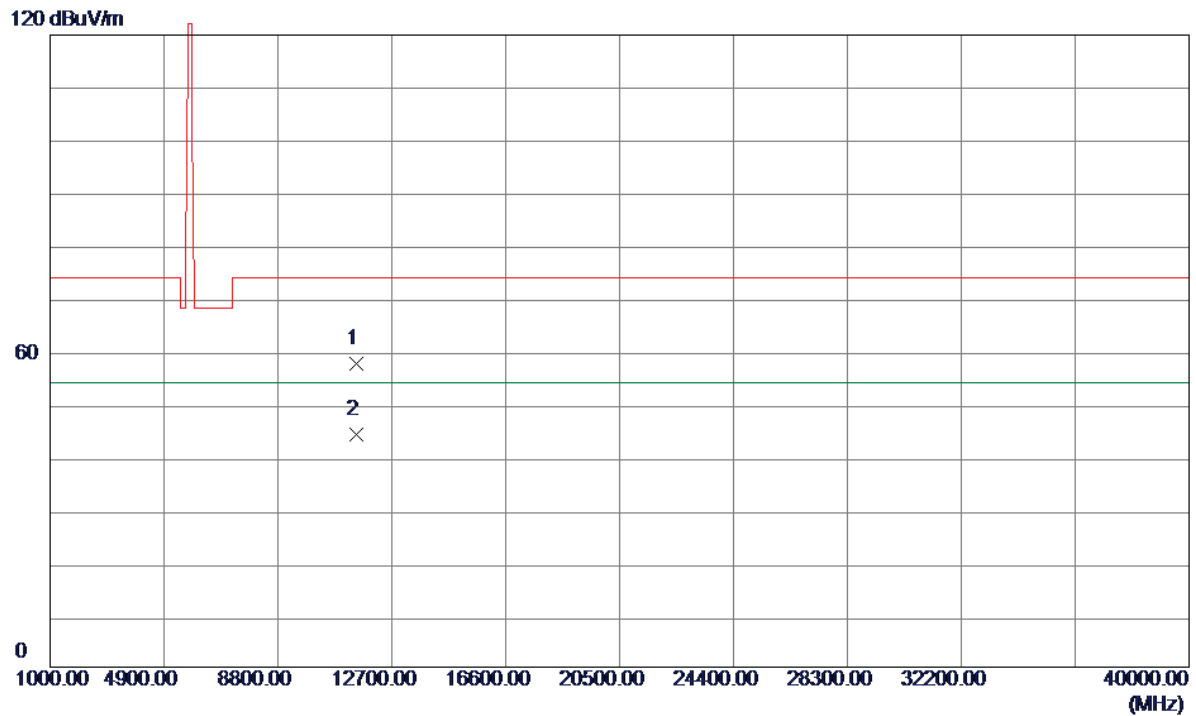

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	53.97	3.60	57.57	74.00	-16.43	Peak	
2 *	11490.0000	40.67	3.60	44.27	54.00	-9.73	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N20 Mode 5745MHz_Without Pistol


Horizontal

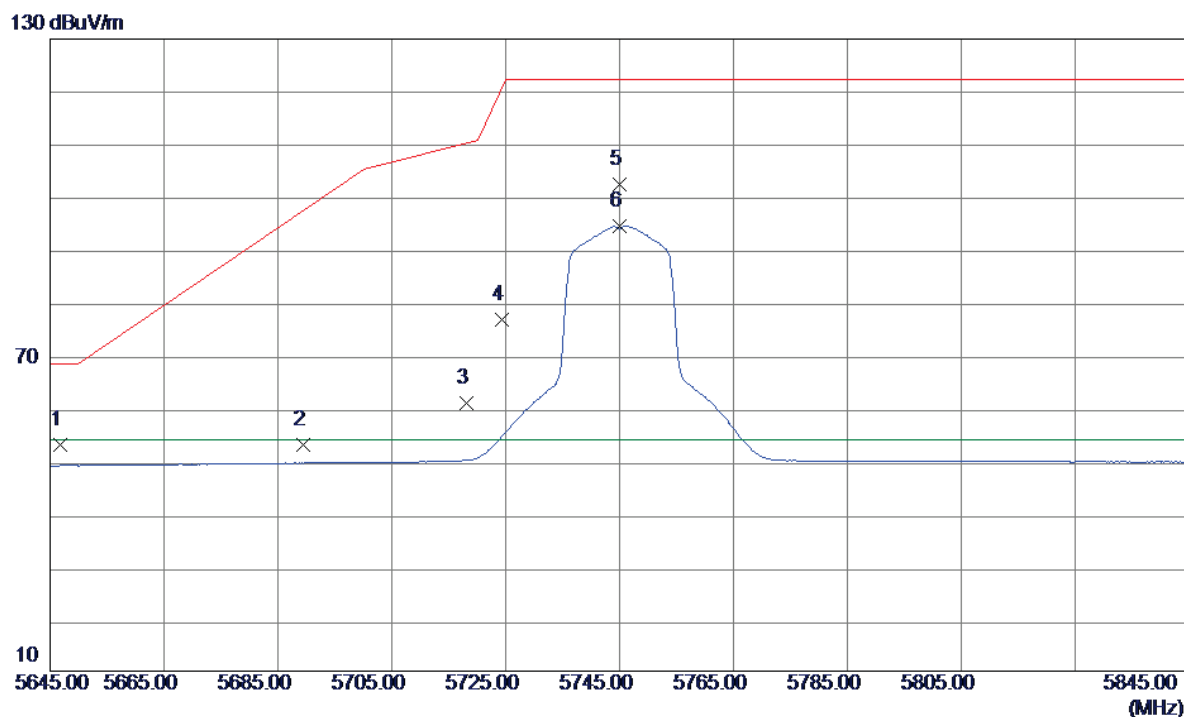

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5646.7050	14.61	38.29	52.90	68.20	-15.30	Peak	
2	5689.5000	14.60	38.40	53.00	97.43	-44.43	Peak	
3	5718.2200	22.34	38.47	60.81	110.30	-49.49	Peak	
4	5724.2400	38.19	38.48	76.67	120.47	-43.80	Peak	
5	5745.0000	63.90	38.54	102.44	122.20	-19.76	Peak	No Limit
6 *	5745.0000	56.03	38.54	94.57	54.00	40.57	AVG	No Limit

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N20 Mode 5745MHz_Without Pistol


Horizontal

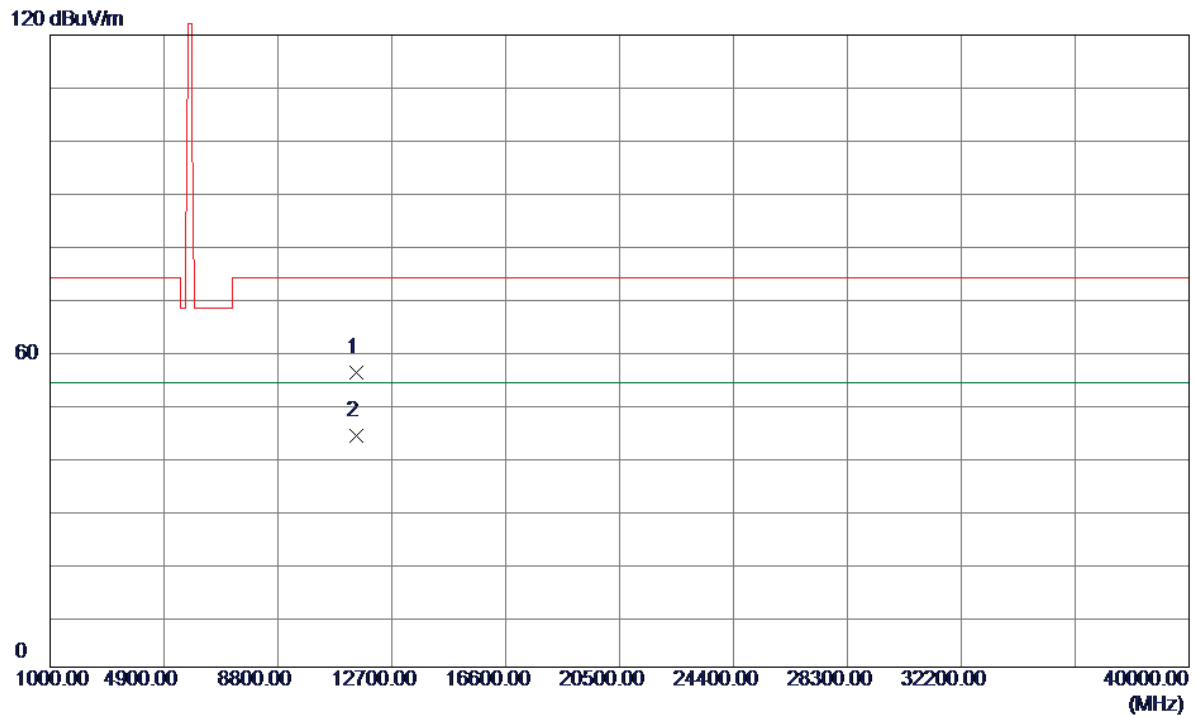

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	52.34	3.60	55.94	74.00	-18.06	Peak	
2 *	11490.0000	40.24	3.60	43.84	54.00	-10.16	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N20 Mode 5785MHz_Without Pistol


Vertical

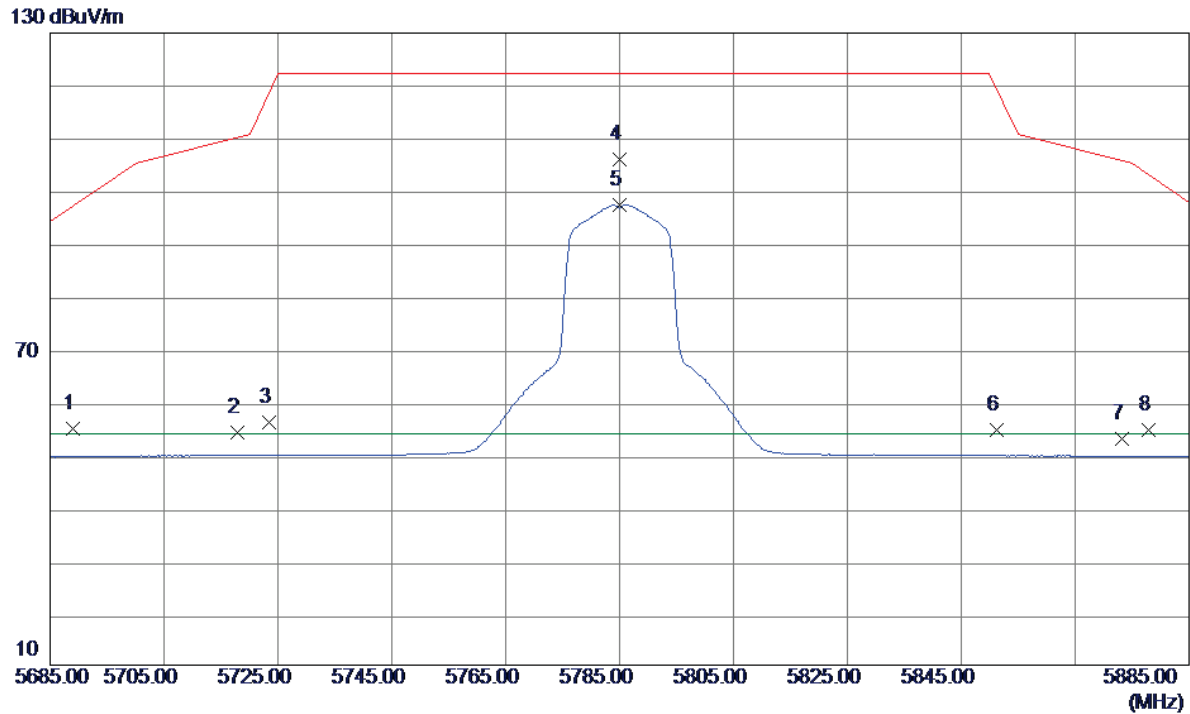

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5689.0500	16.57	38.40	54.97	97.10	-42.13	Peak	
2	5717.9000	15.62	38.47	54.09	110.21	-56.12	Peak	
3	5723.3450	17.50	38.48	55.98	118.43	-62.45	Peak	
4	5785.0000	67.32	38.64	105.96	122.20	-16.24	Peak	No Limit
5 *	5785.0000	58.76	38.64	97.40	54.00	43.40	AVG	No Limit
6	5851.3100	15.88	38.81	54.69	119.21	-64.52	Peak	
7	5873.2599	14.12	38.86	52.98	105.69	-52.71	Peak	
8	5877.9900	15.71	38.87	54.58	102.99	-48.41	Peak	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N20 Mode 5785MHz_Without Pistol


Vertical

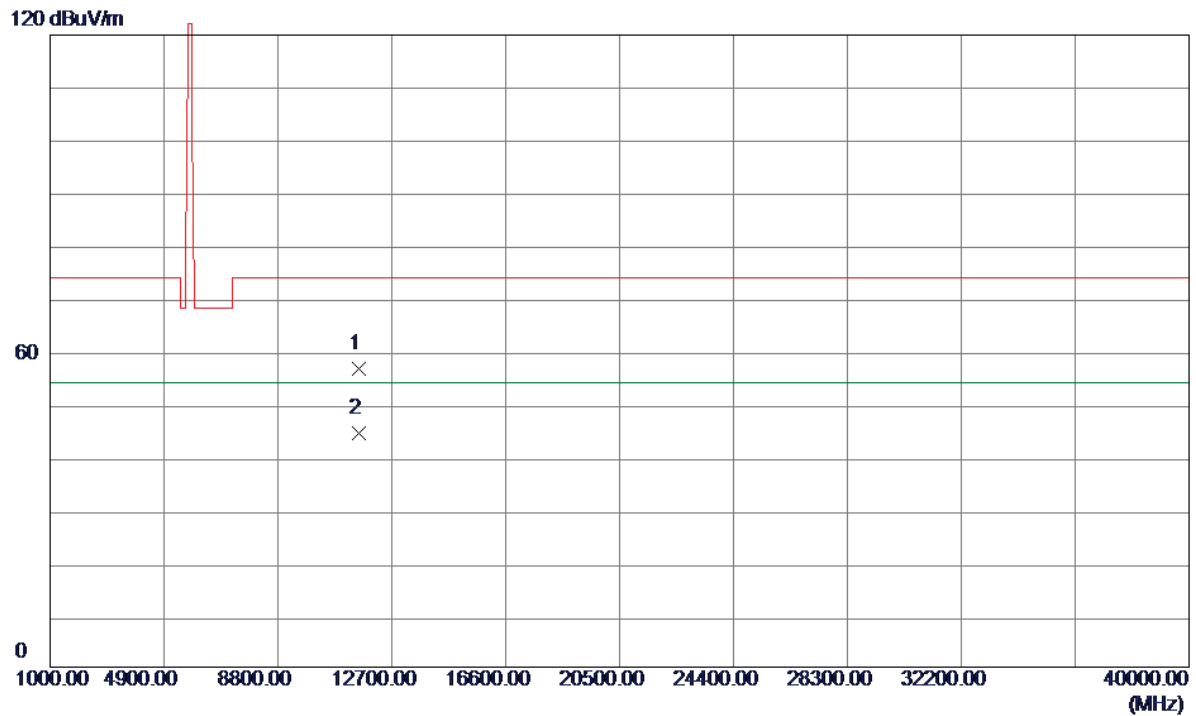

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.0000	53.16	3.48	56.64	74.00	-17.36	Peak	
2 *	11570.0000	40.93	3.48	44.41	54.00	-9.59	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N20 Mode 5785MHz_Without Pistol


Horizontal

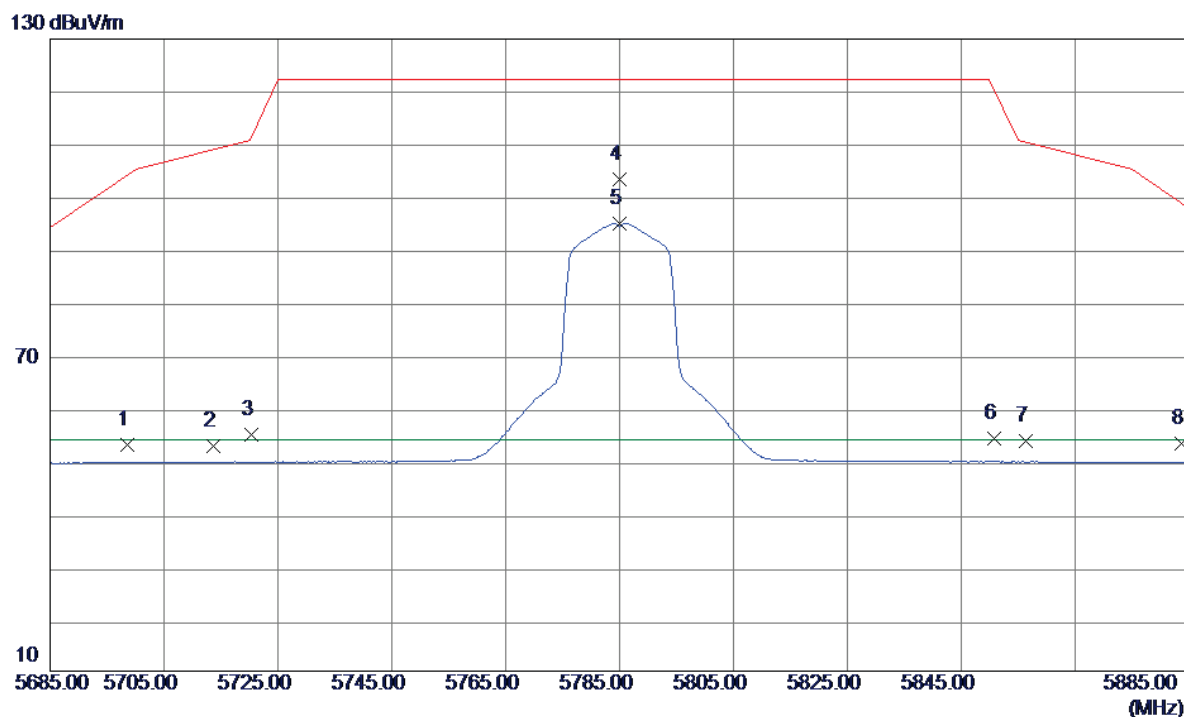

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5698.6050	14.57	38.42	52.99	104.17	-51.18	Peak	
2	5713.7200	14.33	38.46	52.79	109.04	-56.25	Peak	
3	5720.2550	16.37	38.47	54.84	111.38	-56.54	Peak	
4	5785.0000	64.74	38.64	103.38	122.20	-18.82	Peak	No Limit
5 *	5785.0000	56.39	38.64	95.03	54.00	41.03	AVG	No Limit
6	5850.7900	15.34	38.80	54.14	120.40	-66.26	Peak	
7	5856.2400	14.91	38.82	53.73	110.45	-56.72	Peak	
8	5883.7700	14.25	38.89	53.14	98.71	-45.57	Peak	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N20 Mode 5785MHz_Without Pistol


Horizontal

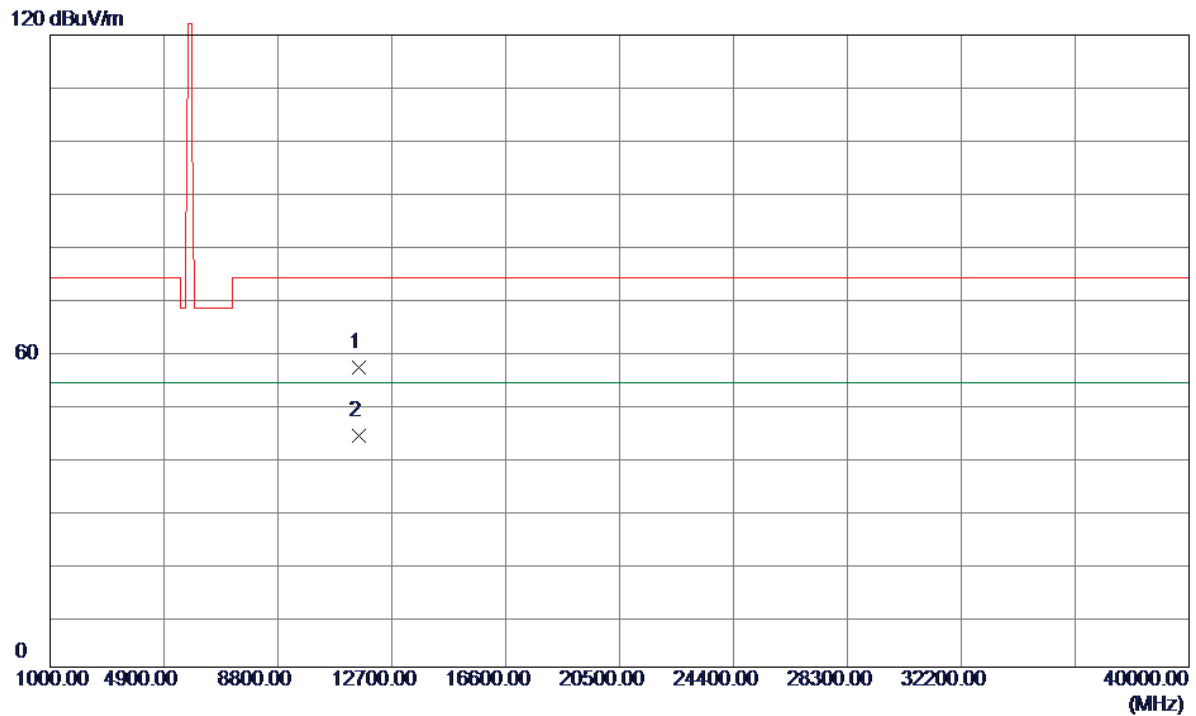

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.0000	53.31	3.48	56.79	74.00	-17.21	Peak	
2 *	11570.0000	40.38	3.48	43.86	54.00	-10.14	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N20 Mode 5825MHz_Without Pistol


Vertical

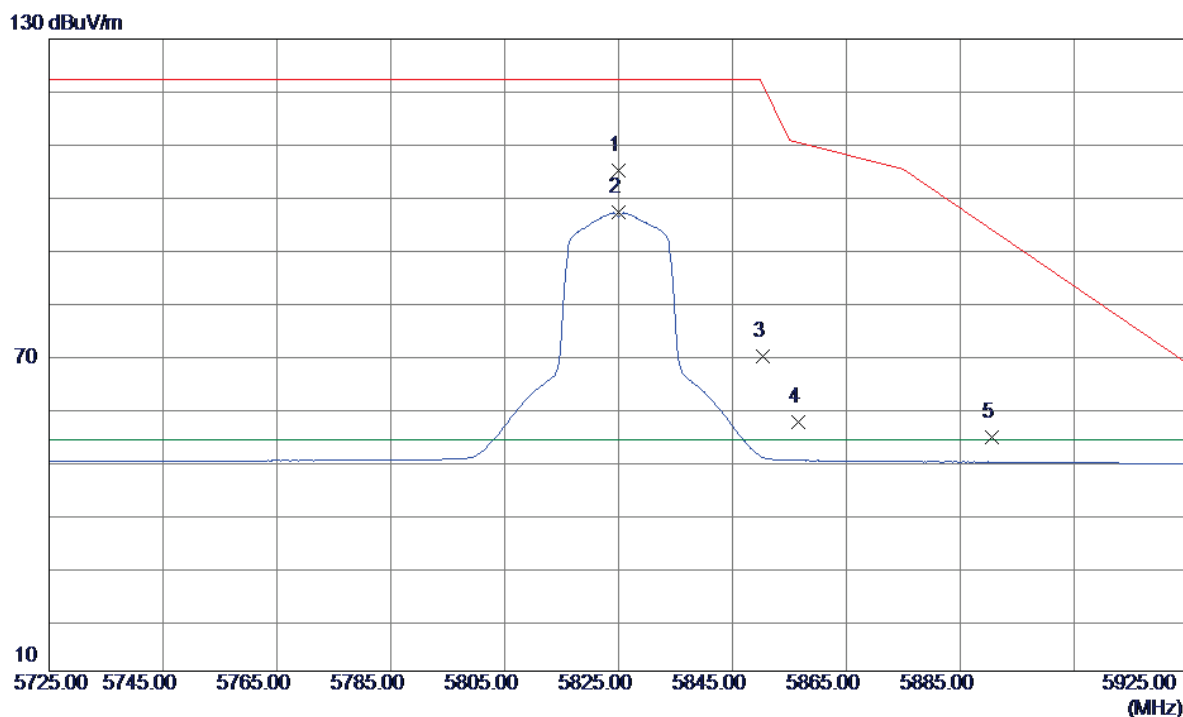

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5825.0000	66.28	38.74	105.02	122.20	-17.18	Peak	No Limit
2 *	5825.0000	58.26	38.74	97.00	54.00	43.00	AVG	No Limit
3	5850.3450	30.88	38.80	69.68	121.41	-51.73	Peak	
4	5856.5600	18.44	38.82	57.26	110.36	-53.10	Peak	
5	5890.6500	15.54	38.90	54.44	93.62	-39.18	Peak	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N20 Mode 5825MHz_Without Pistol


Vertical

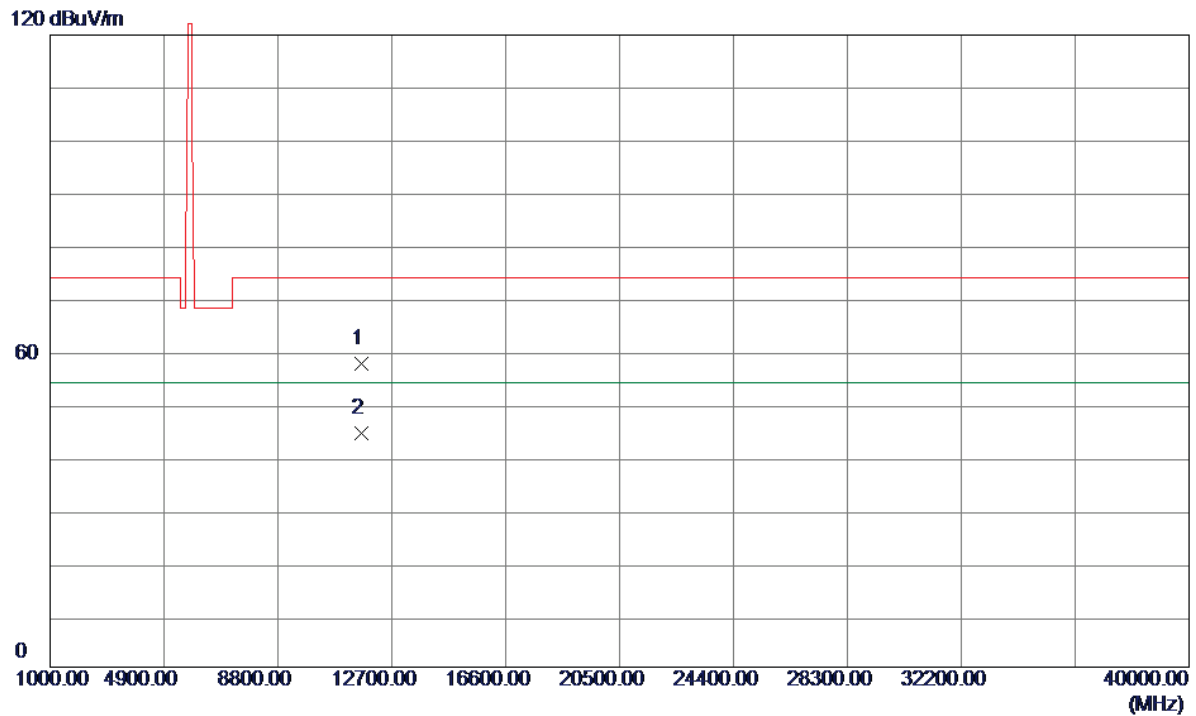

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	54.37	3.33	57.70	74.00	-16.30	Peak	
2 *	11650.0000	41.15	3.33	44.48	54.00	-9.52	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N20 Mode 5825MHz_Without Pistol


Horizontal

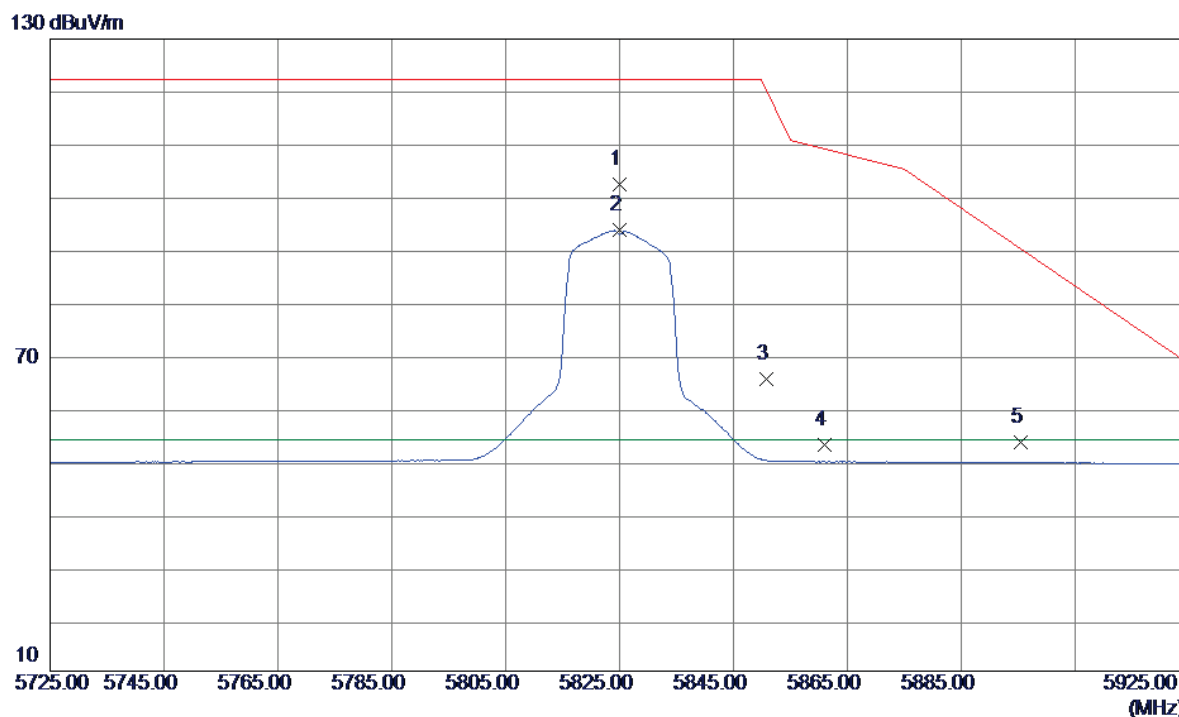

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5825.0000	63.54	38.74	102.28	122.20	-19.92	Peak	No Limit
2 *	5825.0000	54.91	38.74	93.65	54.00	39.65	AVG	No Limit
3	5850.8800	26.53	38.80	65.33	120.19	-54.86	Peak	
4	5861.0400	14.06	38.83	52.89	109.11	-56.22	Peak	
5	5895.4500	14.50	38.92	53.42	90.07	-36.65	Peak	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N20 Mode 5825MHz_Without Pistol


Horizontal

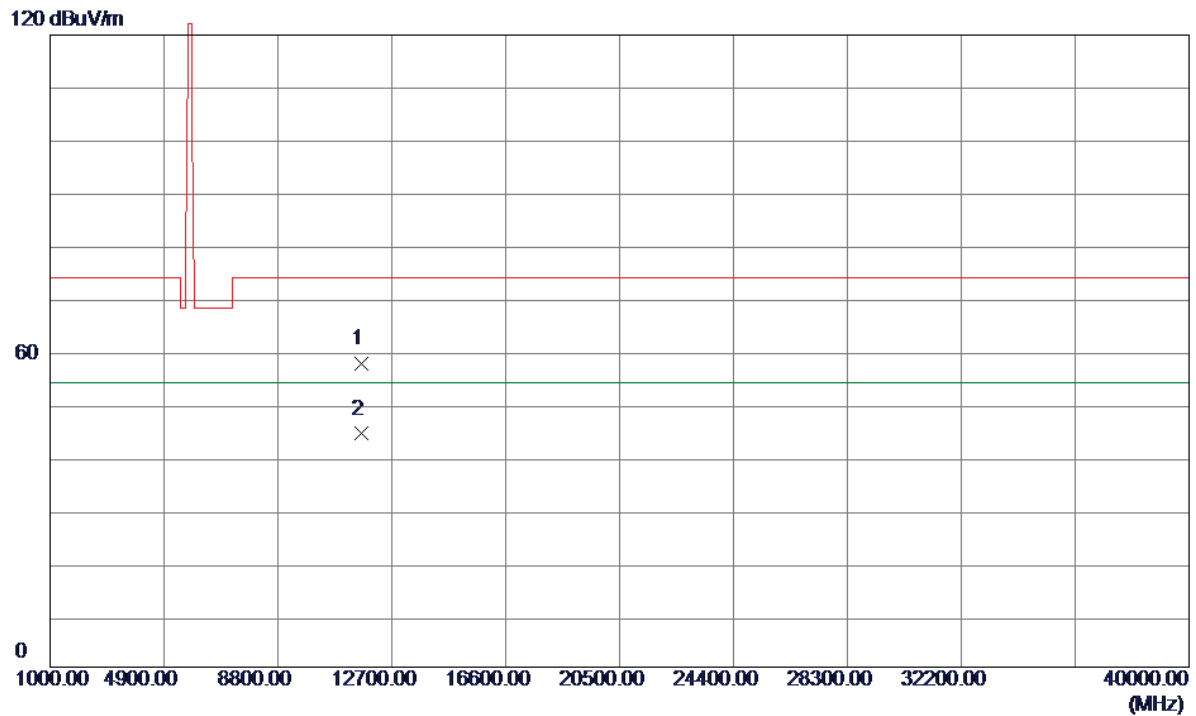

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	54.27	3.33	57.60	74.00	-16.40	Peak	
2 *	11650.0000	40.95	3.33	44.28	54.00	-9.72	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N40 Mode 5755MHz_Without Pistol


Vertical

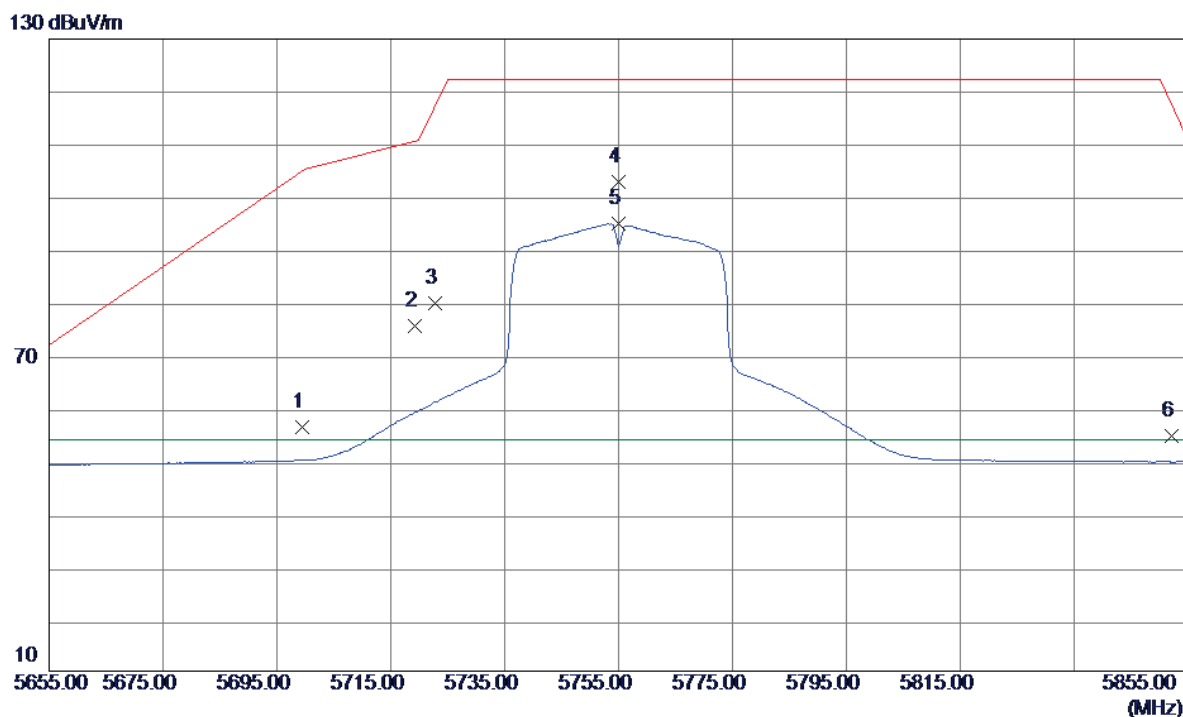

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5699.5050	17.85	38.42	56.27	104.83	-48.56	Peak	
2	5719.1800	36.94	38.47	75.41	110.57	-35.16	Peak	
3	5722.7350	41.44	38.48	79.92	117.04	-37.12	Peak	
4	5755.0000	64.35	38.56	102.91	122.20	-19.29	Peak	No Limit
5 *	5755.0000	56.29	38.56	94.85	54.00	40.85	AVG	No Limit
6	5852.0250	15.83	38.81	54.64	117.58	-62.94	Peak	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N40 Mode 5755MHz_Without Pistol


Vertical

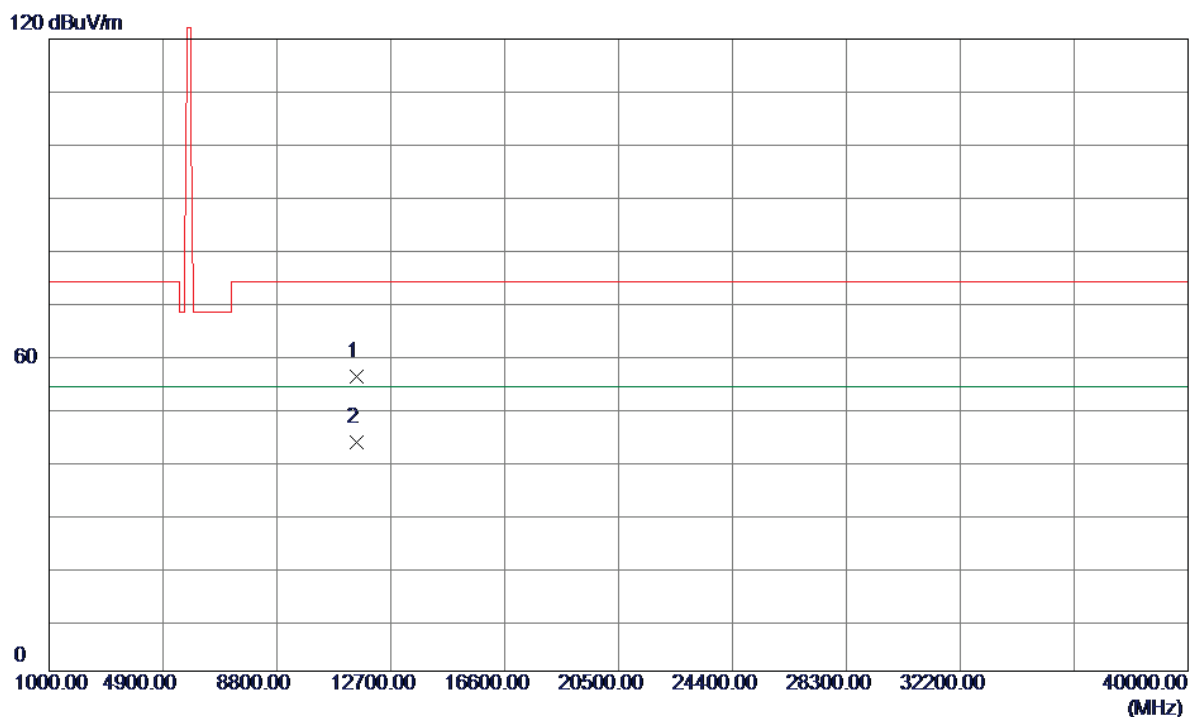

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.0000	52.36	3.60	55.96	74.00	-18.04	Peak	
2 *	11510.0000	39.75	3.60	43.35	54.00	-10.65	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N40 Mode 5755MHz_Without Pistol


Horizontal

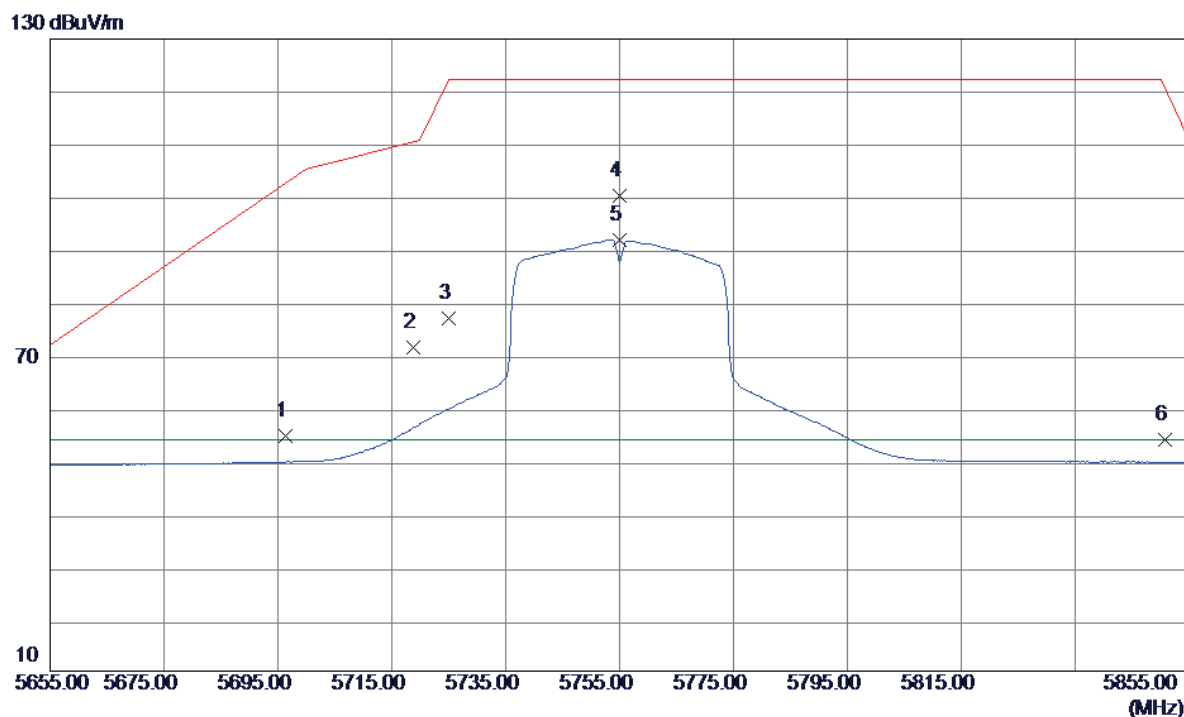

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5696.3100	16.17	38.41	54.58	102.47	-47.89	Peak	
2	5718.8000	33.00	38.47	71.47	110.46	-38.99	Peak	
3	5724.9700	38.49	38.49	76.98	122.13	-45.15	Peak	
4	5755.0000	61.57	38.56	100.13	122.20	-22.07	Peak	No Limit
5 *	5755.0000	53.27	38.56	91.83	54.00	37.83	AVG	No Limit
6	5850.7750	15.18	38.80	53.98	120.43	-66.45	Peak	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N40 Mode 5755MHz_Without Pistol


Horizontal

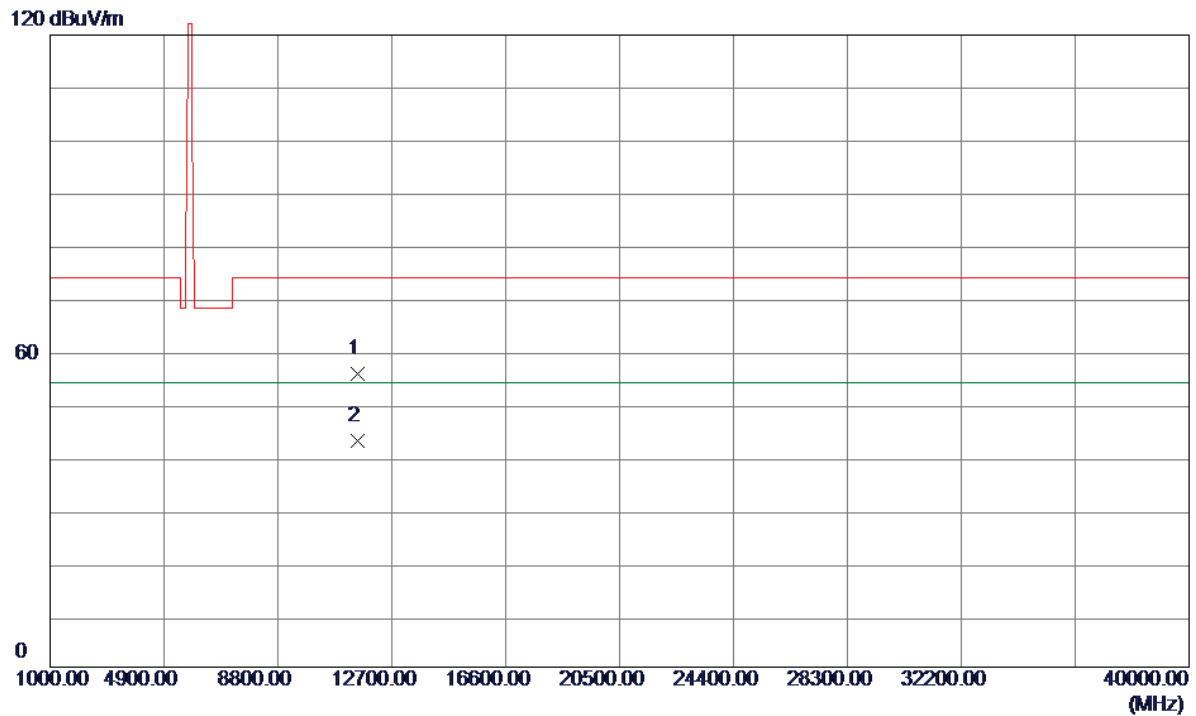

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.0000	52.02	3.60	55.62	74.00	-18.38	Peak	
2 *	11510.0000	39.47	3.60	43.07	54.00	-10.93	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N40 Mode 5795MHz_Without Pistol


Vertical

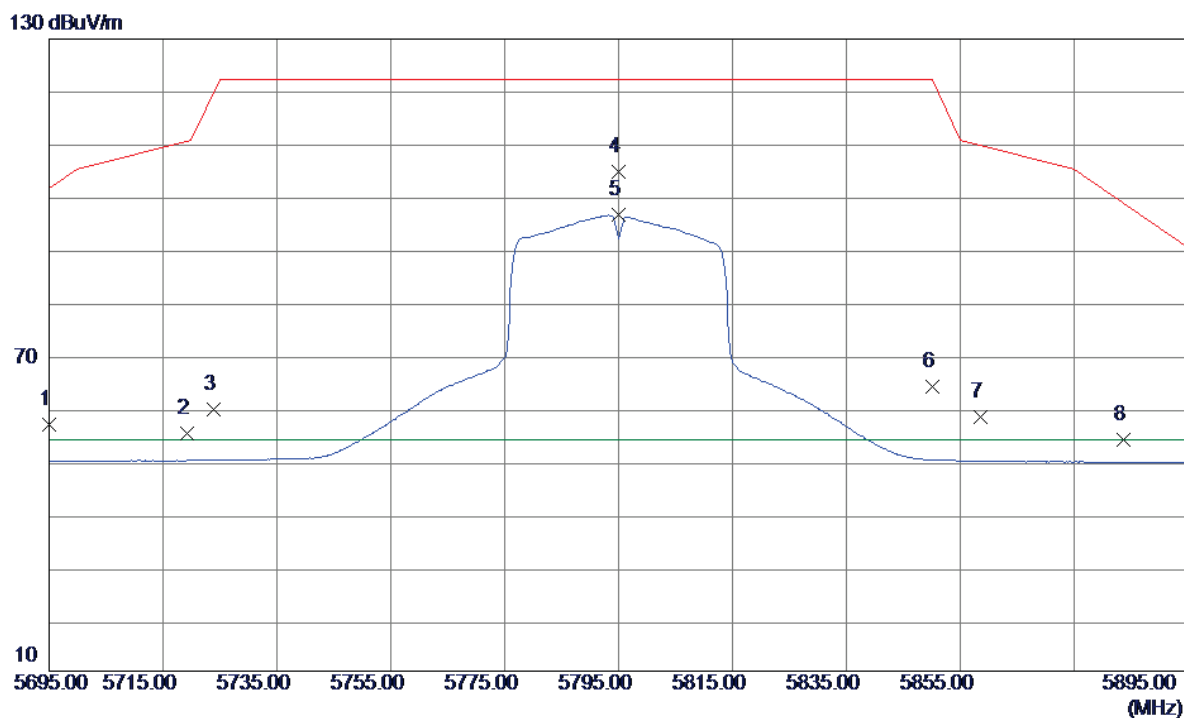

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5695.0750	18.44	38.41	56.85	101.56	-44.71	Peak	
2	5719.2599	16.64	38.47	55.11	110.59	-55.48	Peak	
3	5723.8350	21.13	38.48	59.61	119.54	-59.93	Peak	
4	5795.0000	66.20	38.66	104.86	122.20	-17.34	Peak	No Limit
5 *	5795.0000	57.88	38.66	96.54	54.00	42.54	AVG	No Limit
6	5850.1650	25.24	38.80	64.04	121.82	-57.78	Peak	
7	5858.4800	19.50	38.82	58.32	109.83	-51.51	Peak	
8	5883.6000	15.03	38.89	53.92	98.84	-44.92	Peak	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N40 Mode 5795MHz_Without Pistol


Vertical

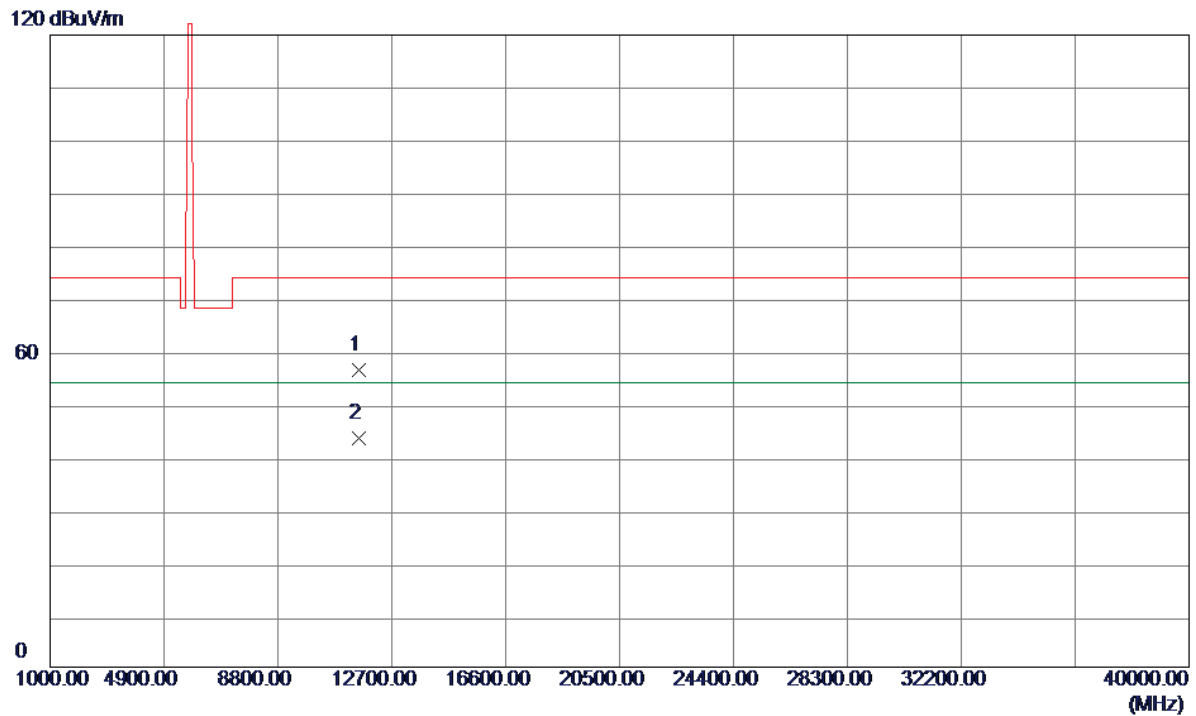

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.0000	52.98	3.44	56.42	74.00	-17.58	Peak	
2 *	11590.0000	39.91	3.44	43.35	54.00	-10.65	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N40 Mode 5795MHz_Without Pistol


Horizontal

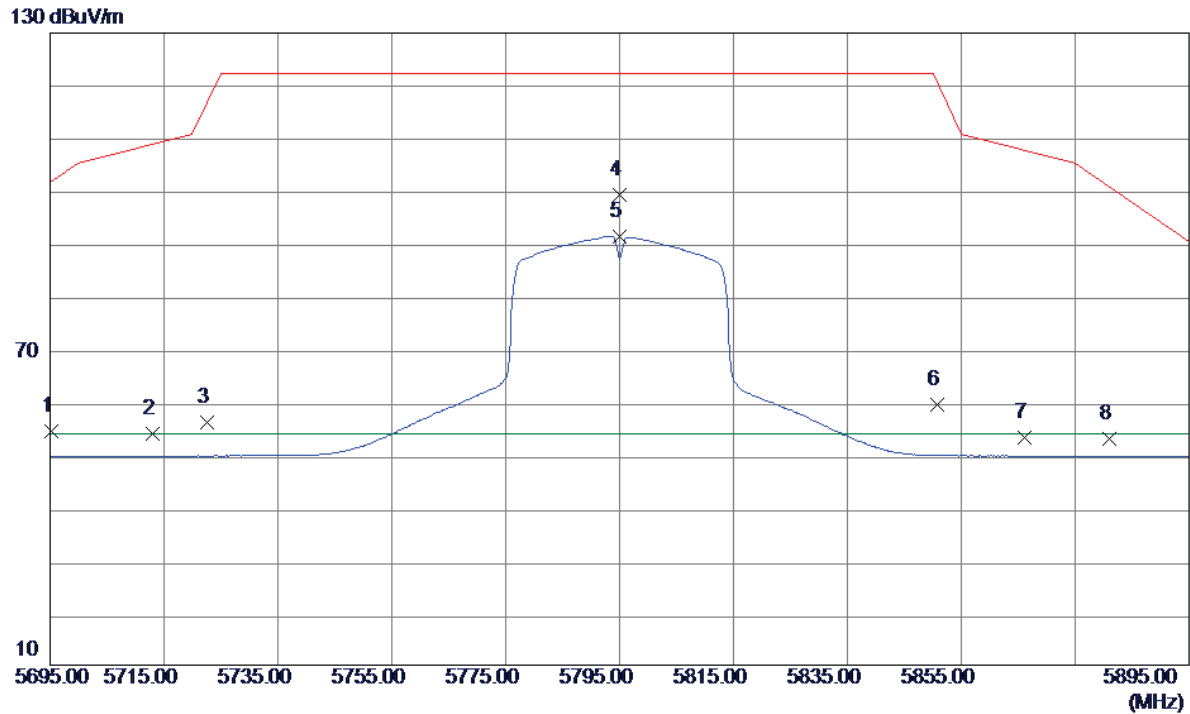

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5695.1650	16.10	38.41	54.51	101.62	-47.11	Peak	
2	5713.0600	15.48	38.46	53.94	108.86	-54.92	Peak	
3	5722.6200	17.50	38.48	55.98	116.77	-60.79	Peak	
4	5795.0000	60.61	38.66	99.27	122.20	-22.93	Peak	No Limit
5 *	5795.0000	52.77	38.66	91.43	54.00	37.43	AVG	No Limit
6	5850.8500	20.68	38.80	59.48	120.26	-60.78	Peak	
7	5866.2200	14.43	38.84	53.27	107.66	-54.39	Peak	
8	5880.9200	14.03	38.88	52.91	100.82	-47.91	Peak	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX N40 Mode 5795MHz_Without Pistol


Horizontal

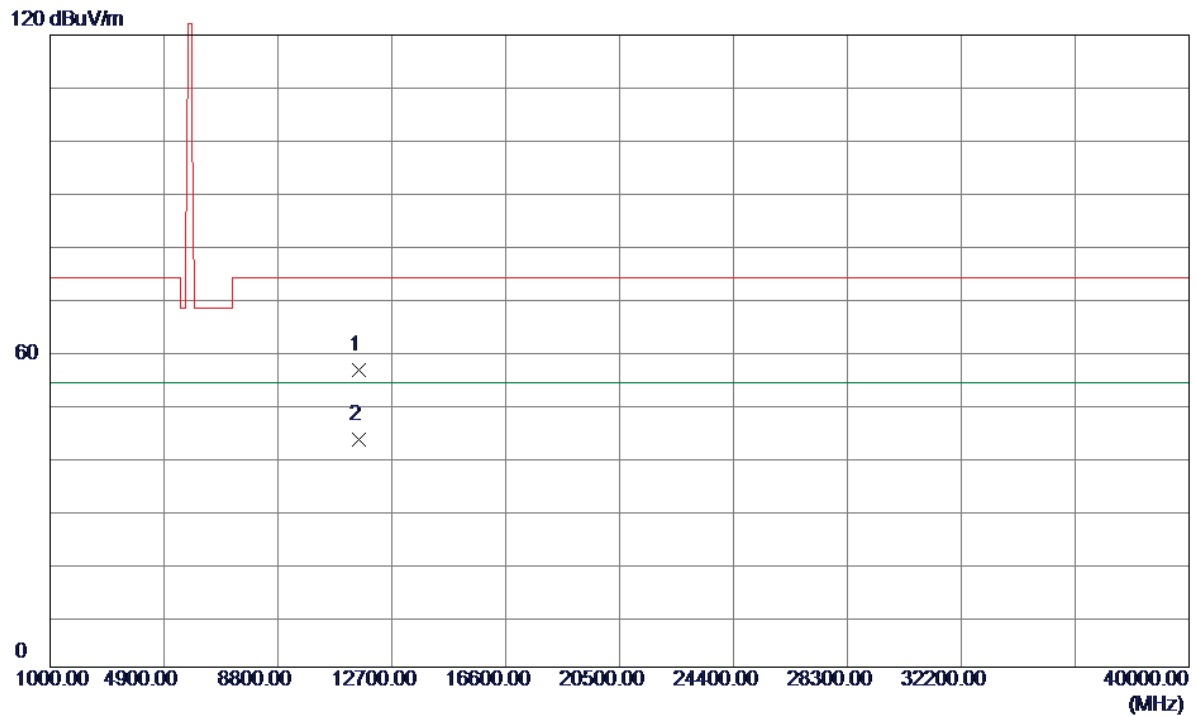

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.0000	52.92	3.44	56.36	74.00	-17.64	Peak	
2 *	11590.0000	39.79	3.44	43.23	54.00	-10.77	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz_Without Pistol


Vertical

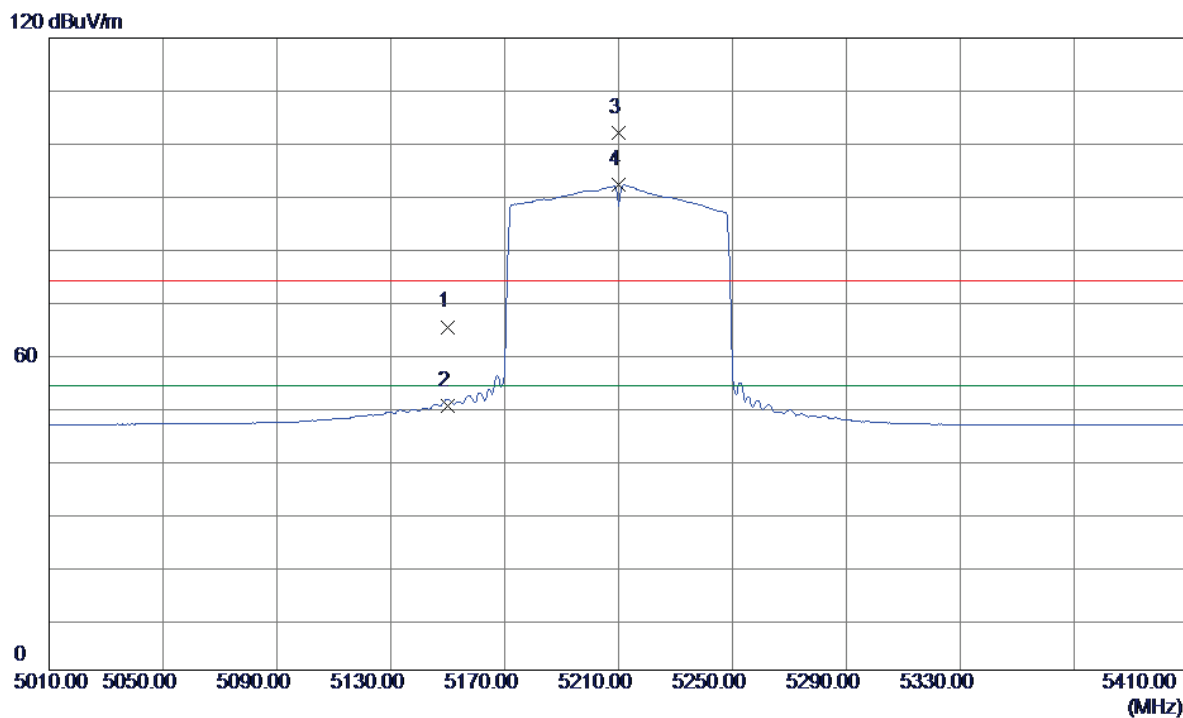

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.8600	27.69	37.47	65.16	74.00	-8.84	Peak	
2	5149.8600	12.72	37.47	50.19	54.00	-3.81	AVG	
3	5210.0000	64.38	37.55	101.93	74.00	27.93	Peak	No Limit
4 *	5210.0000	54.54	37.55	92.09	54.00	38.09	AVG	No Limit

Orthogonal Axis :	Z
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz_Without Pistol


Vertical

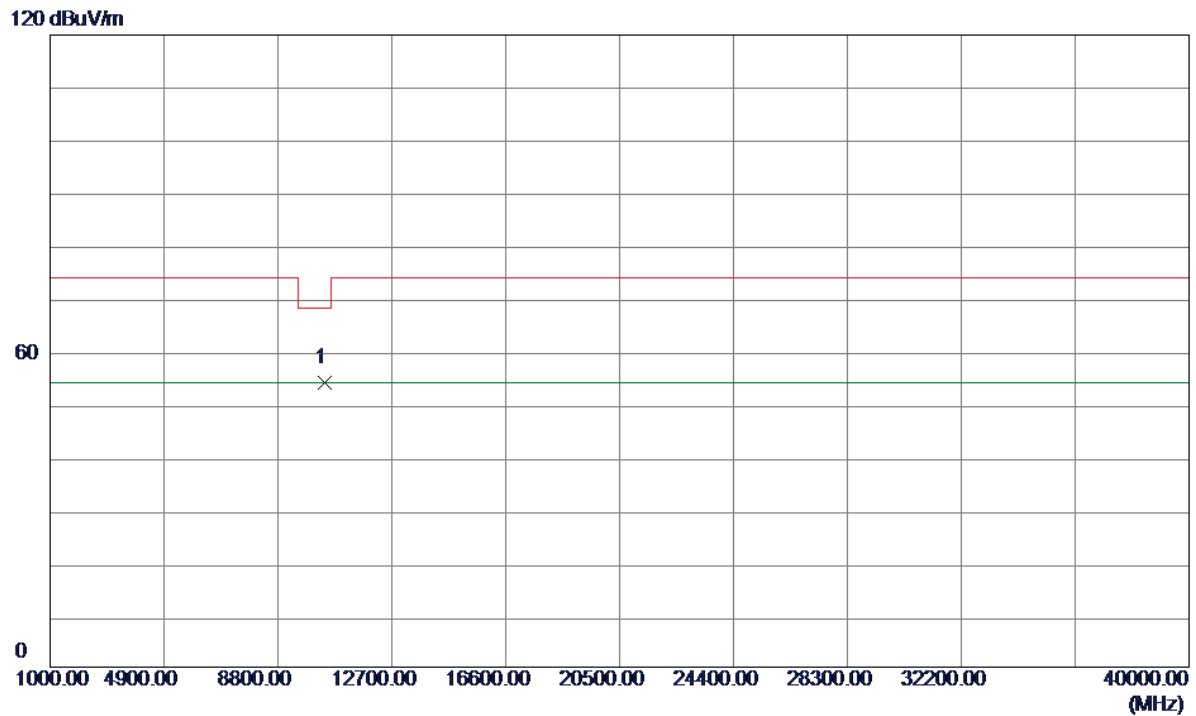

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10420.0000	52.13	1.86	53.99	68.20	-14.21	Peak	

Orthogonal Axis :	Z
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz_Without Pistol


Horizontal

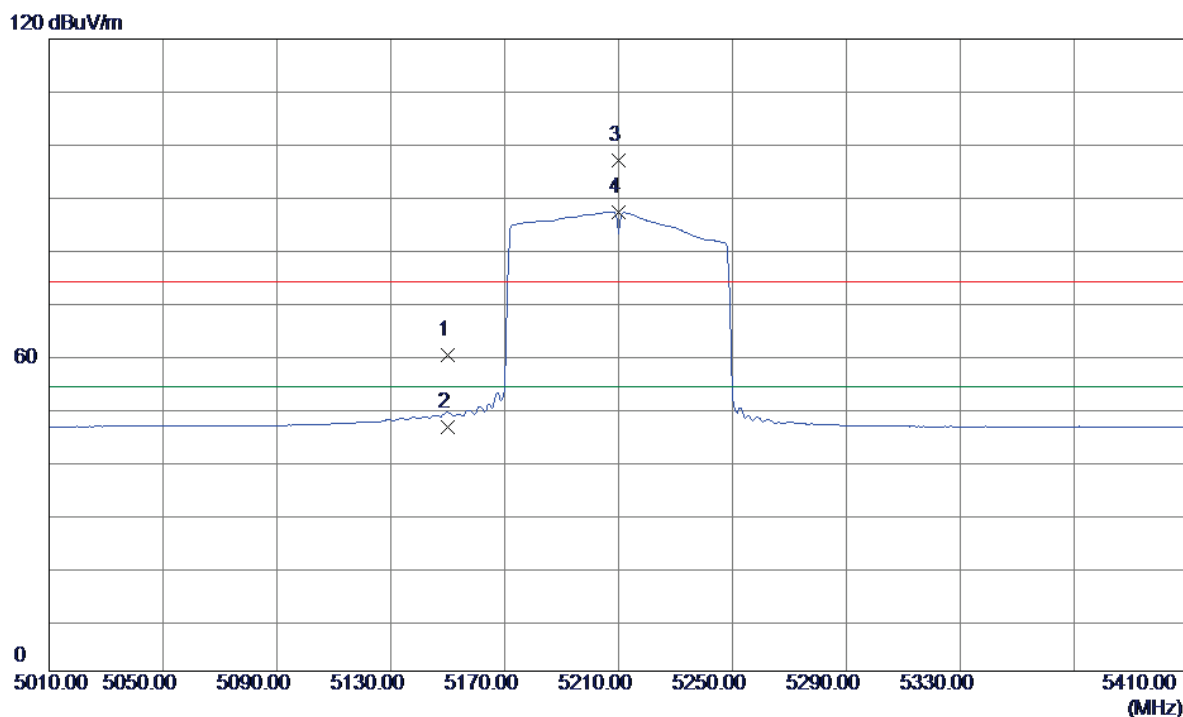

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	22.60	37.47	60.07	74.00	-13.93	Peak	
2	5150.0000	8.93	37.47	46.40	54.00	-7.60	AVG	
3	5210.0000	59.46	37.55	97.01	74.00	23.01	Peak	No Limit
4 *	5210.0000	49.64	37.55	87.19	54.00	33.19	AVG	No Limit

Orthogonal Axis :	Z
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz_Without Pistol


Horizontal

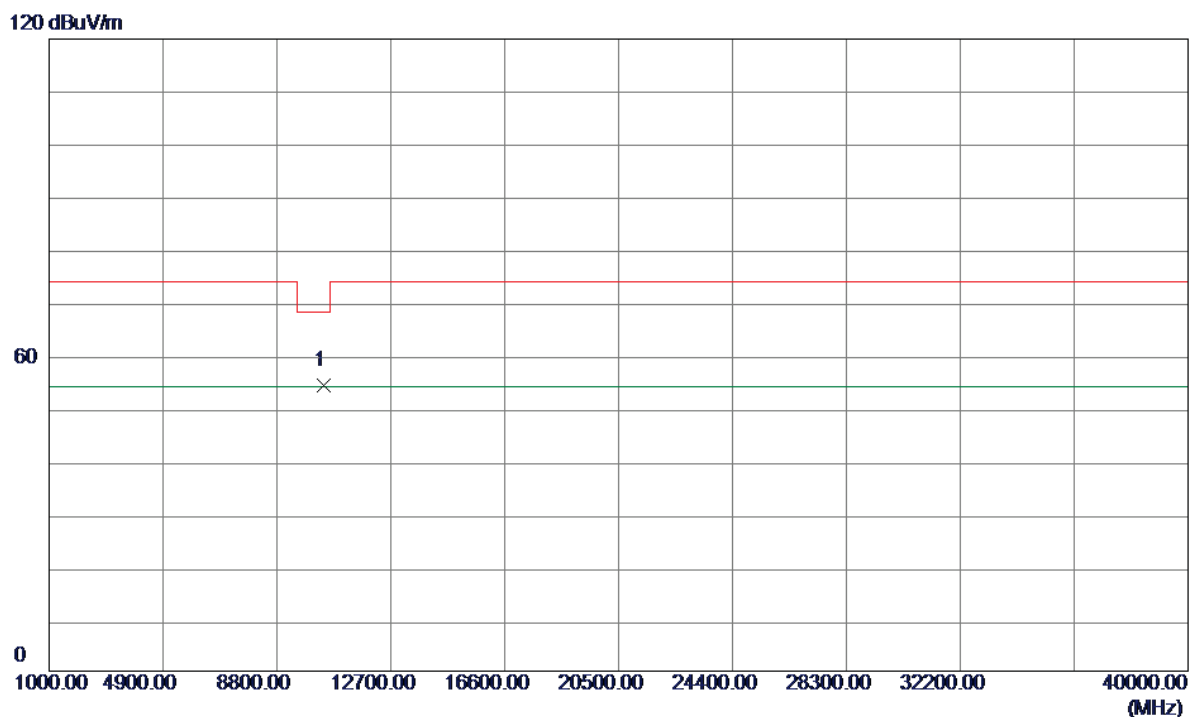

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10420.0000	52.43	1.86	54.29	68.20	-13.91	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz_Without Pistol

Vertical

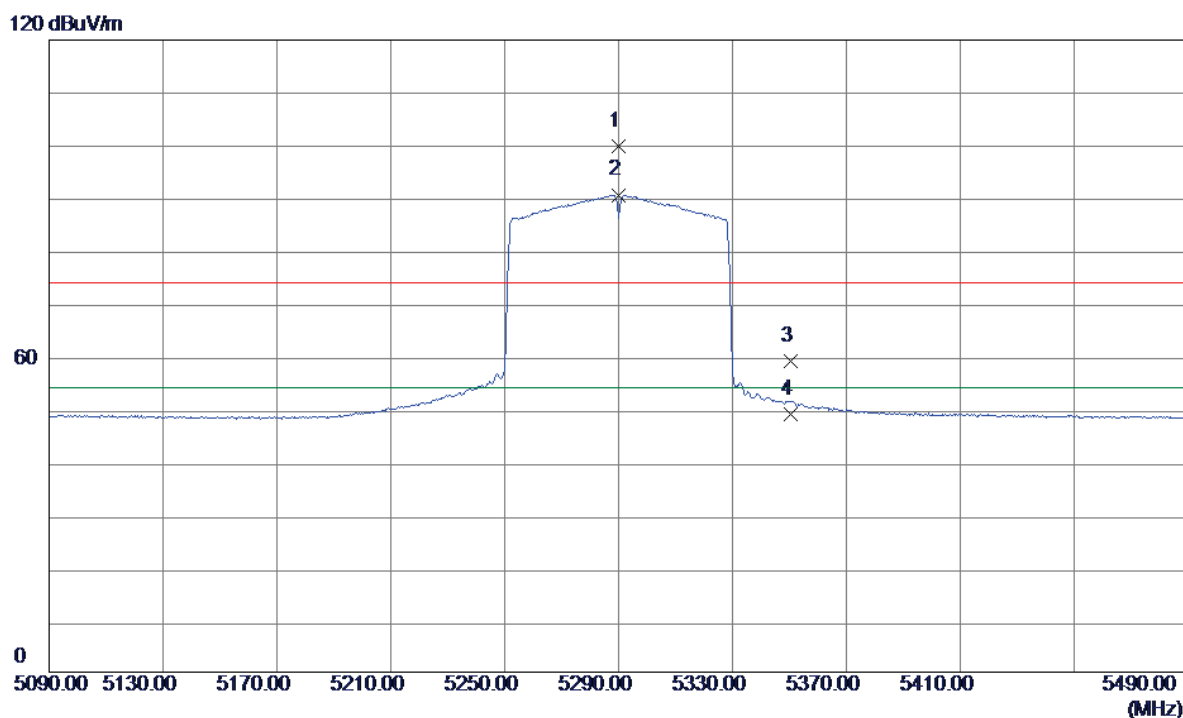


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5290.0000	62.21	37.65	99.86	74.00	25.86	Peak	No Limit
2 *	5290.0000	52.95	37.65	90.60	54.00	36.60	AVG	No Limit
3	5350.5600	21.32	37.73	59.05	74.00	-14.95	Peak	
4	5350.5600	11.11	37.73	48.84	54.00	-5.16	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz_Without Pistol

Vertical


120 dBuV/m

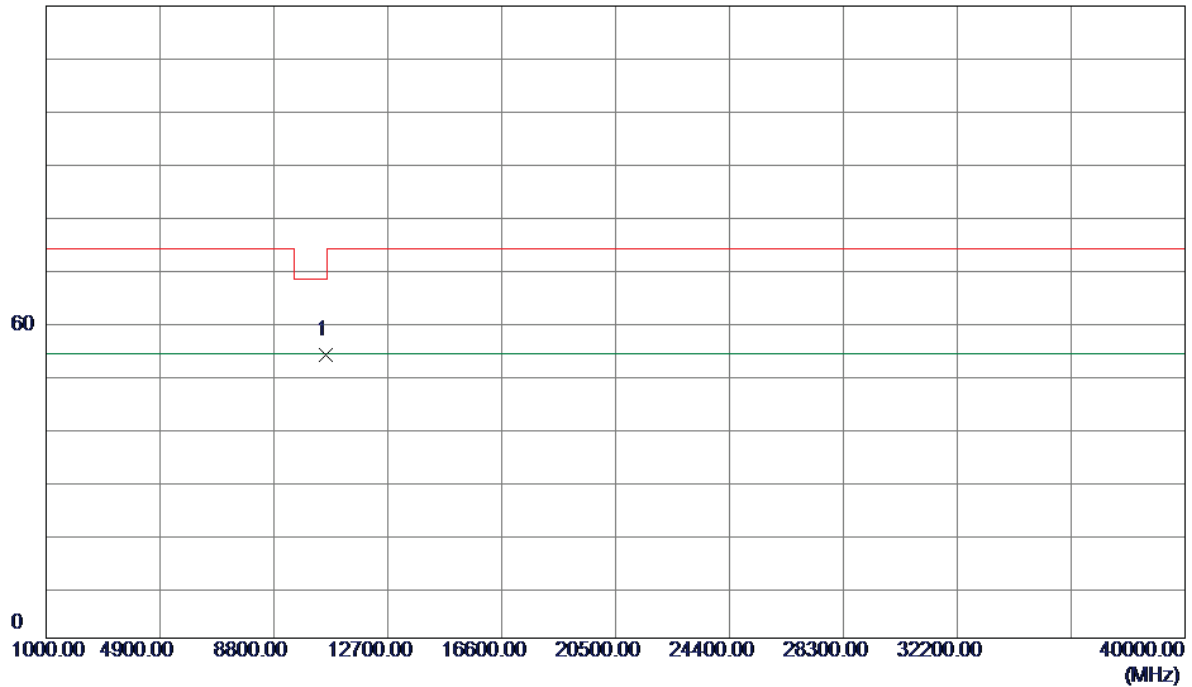

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10580.0000	51.67	2.03	53.70	68.20	-14.50	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz_Without Pistol


Horizontal

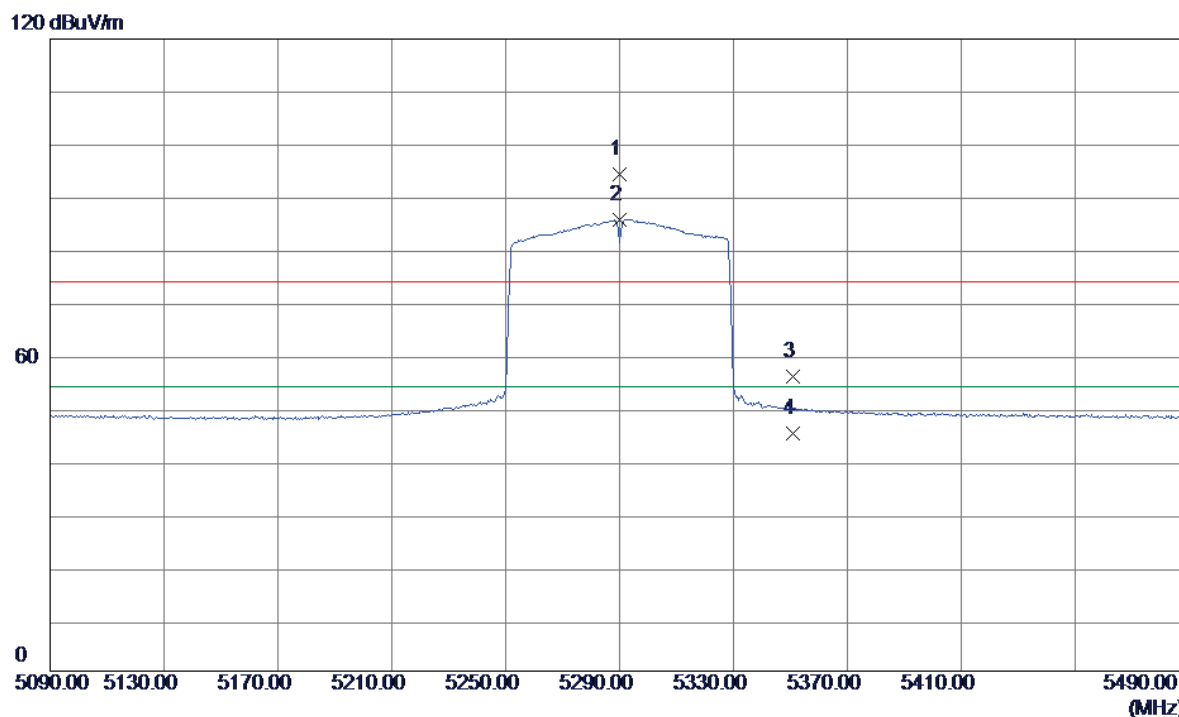

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5290.0000	56.60	37.65	94.25	74.00	20.25	Peak	No Limit
2 *	5290.0000	48.08	37.65	85.73	54.00	31.73	AVG	No Limit
3	5350.7000	18.13	37.73	55.86	74.00	-18.14	Peak	
4	5350.7000	7.37	37.73	45.10	54.00	-8.90	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz_Without Pistol


Horizontal

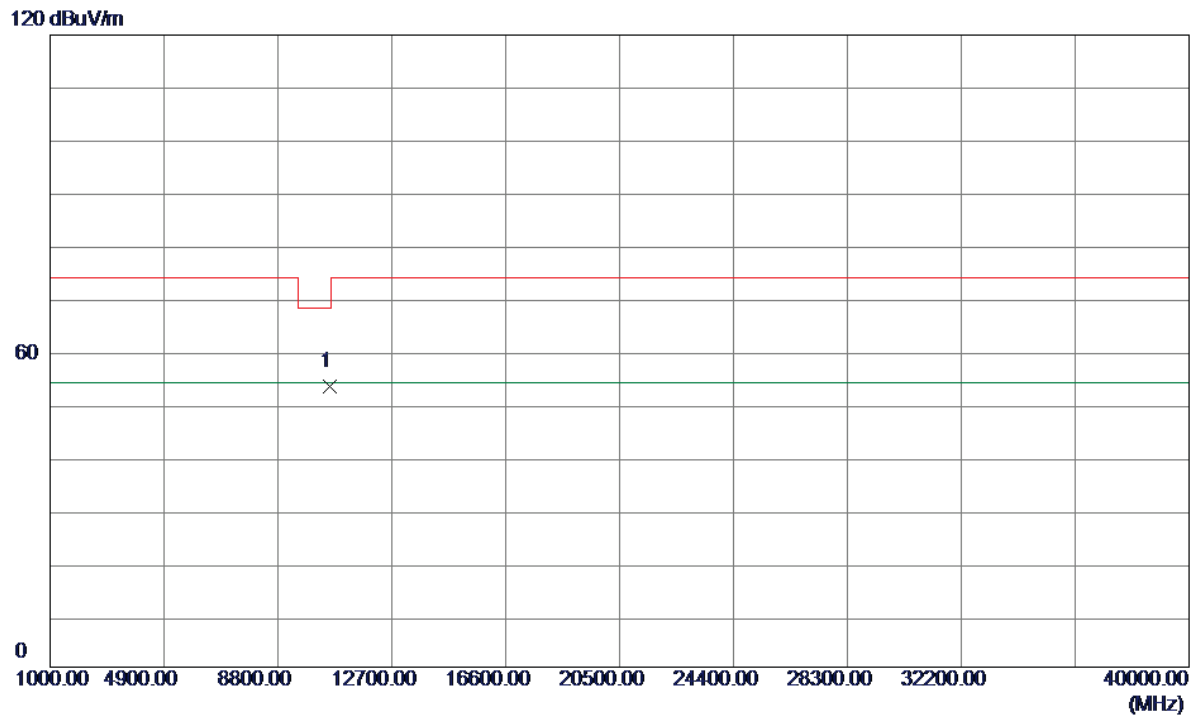

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10580.0000	51.33	2.03	53.36	68.20	-14.84	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz_Without Pistol

Vertical

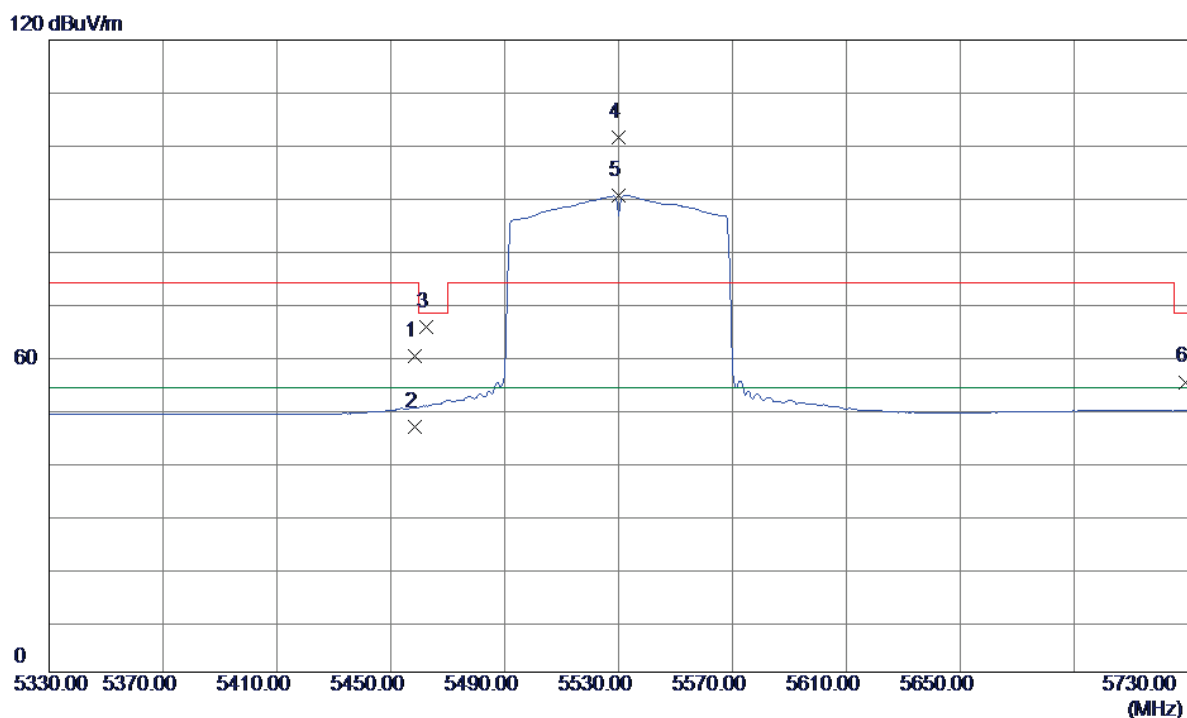


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5458.5700	22.12	37.87	59.99	74.00	-14.01	Peak	
2	5458.5700	8.61	37.87	46.48	54.00	-7.52	AVG	
3	5462.5600	27.65	37.87	65.52	68.20	-2.68	Peak	
4	5530.0000	63.52	38.00	101.52	74.00	27.52	Peak	No Limit
5 *	5530.0000	52.55	38.00	90.55	54.00	36.55	AVG	No Limit
6	5729.1850	16.58	38.50	55.08	68.20	-13.12	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz_Without Pistol

Vertical


120 dBuV/m

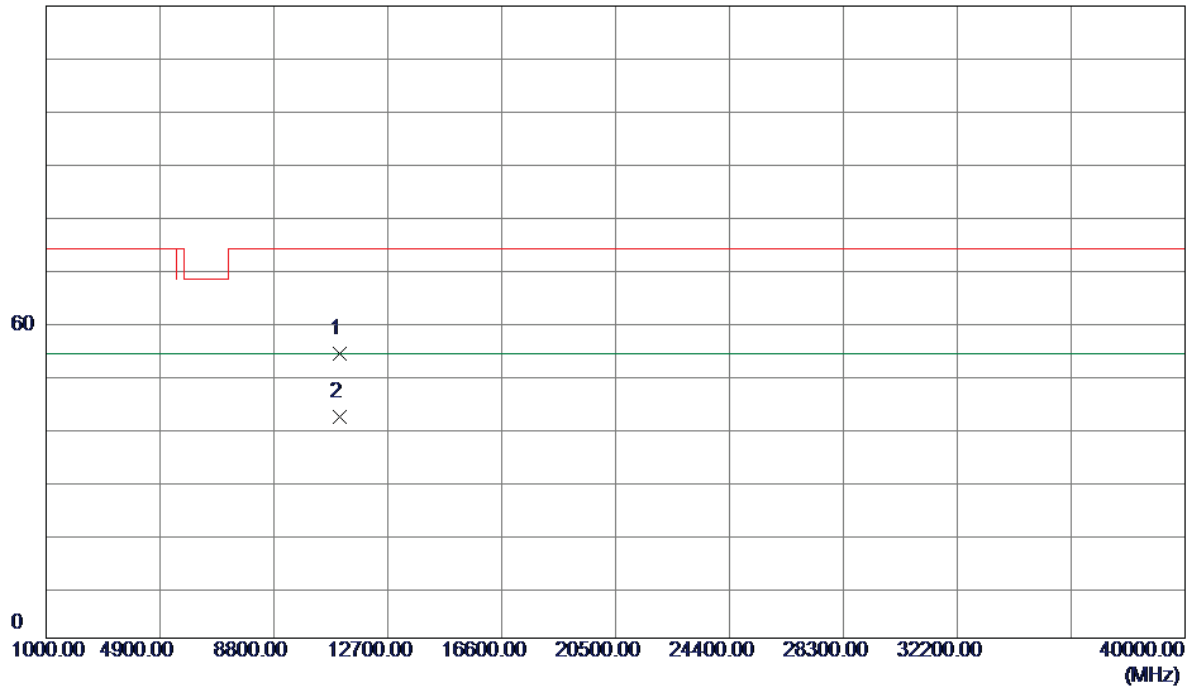

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.0000	51.07	2.94	54.01	74.00	-19.99	Peak	
2 *	11060.0000	38.98	2.94	41.92	54.00	-12.08	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz_Without Pistol

Horizontal

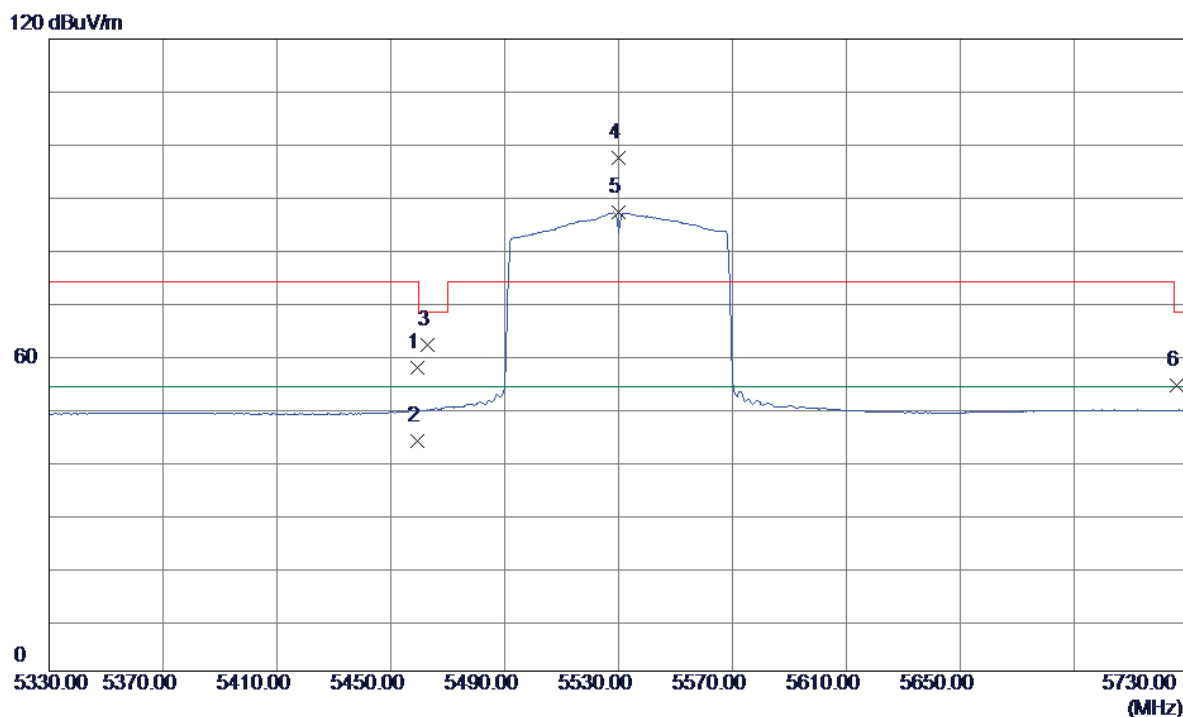


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.3500	19.76	37.87	57.63	74.00	-16.37	Peak	
2	5459.3500	5.89	37.87	43.76	54.00	-10.24	AVG	
3	5462.9500	23.99	37.87	61.86	68.20	-6.34	Peak	
4	5530.0000	59.33	38.00	97.33	74.00	23.33	Peak	No Limit
5 *	5530.0000	49.03	38.00	87.03	54.00	33.03	AVG	No Limit
6	5726.1250	15.66	38.49	54.15	68.20	-14.05	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz _Without Pistol

Horizontal


120 dBuV/m

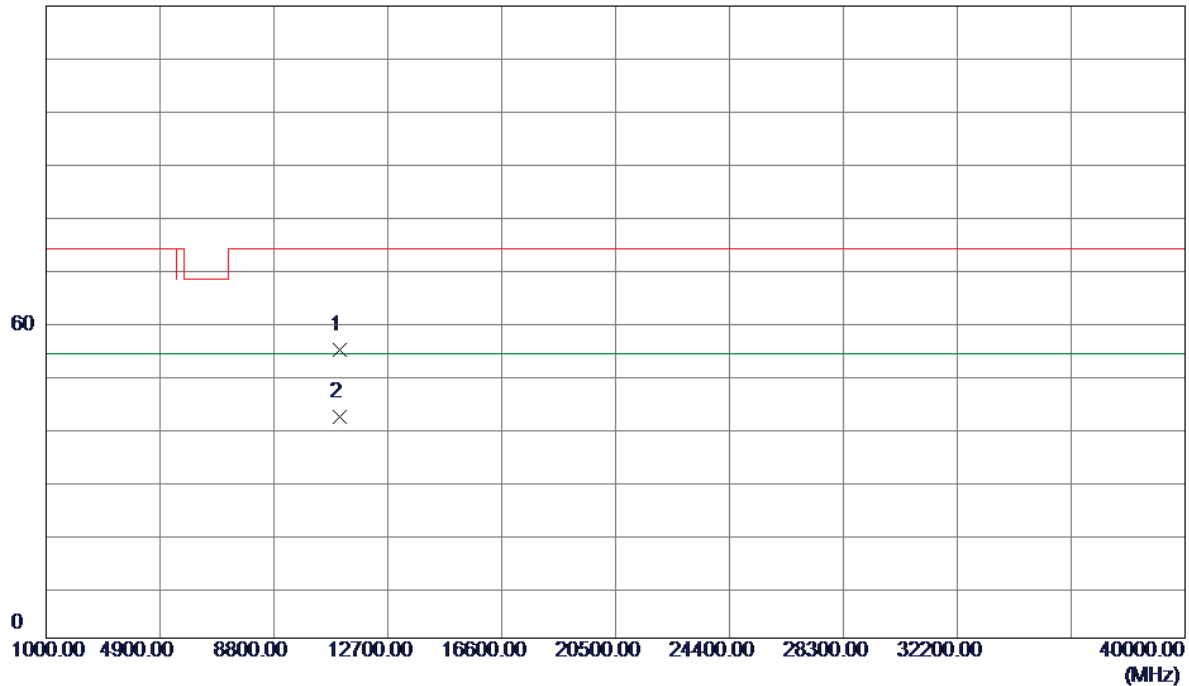

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.0000	51.69	2.94	54.63	74.00	-19.37	Peak	
2 *	11060.0000	38.98	2.94	41.92	54.00	-12.08	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz_Without Pistol

Vertical

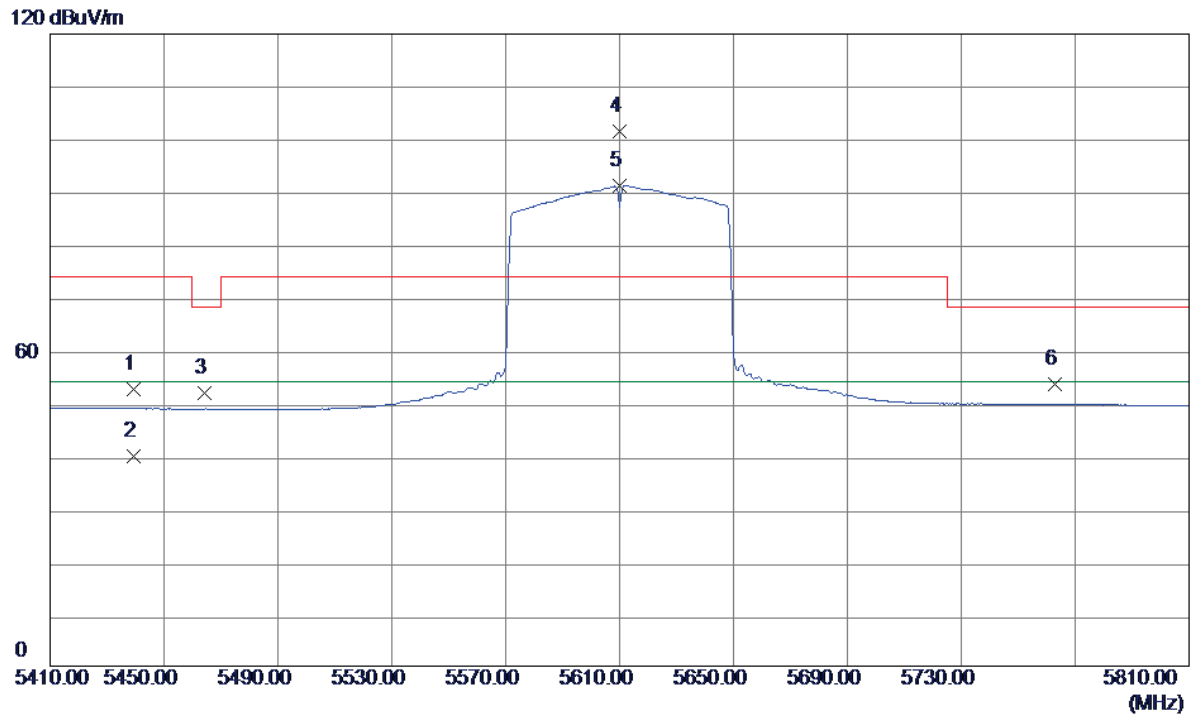


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5439.2000	14.67	37.84	52.51	74.00	-21.49	Peak	
2	5439.2000	1.93	37.84	39.77	54.00	-14.23	AVG	
3	5464.2599	13.93	37.87	51.80	68.20	-16.40	Peak	
4	5610.0000	63.29	38.20	101.49	74.00	27.49	Peak	No Limit
5 *	5610.0000	53.05	38.20	91.25	54.00	37.25	AVG	No Limit
6	5763.0800	14.88	38.58	53.46	68.20	-14.74	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz_Without Pistol

Vertical


120 dBuV/m

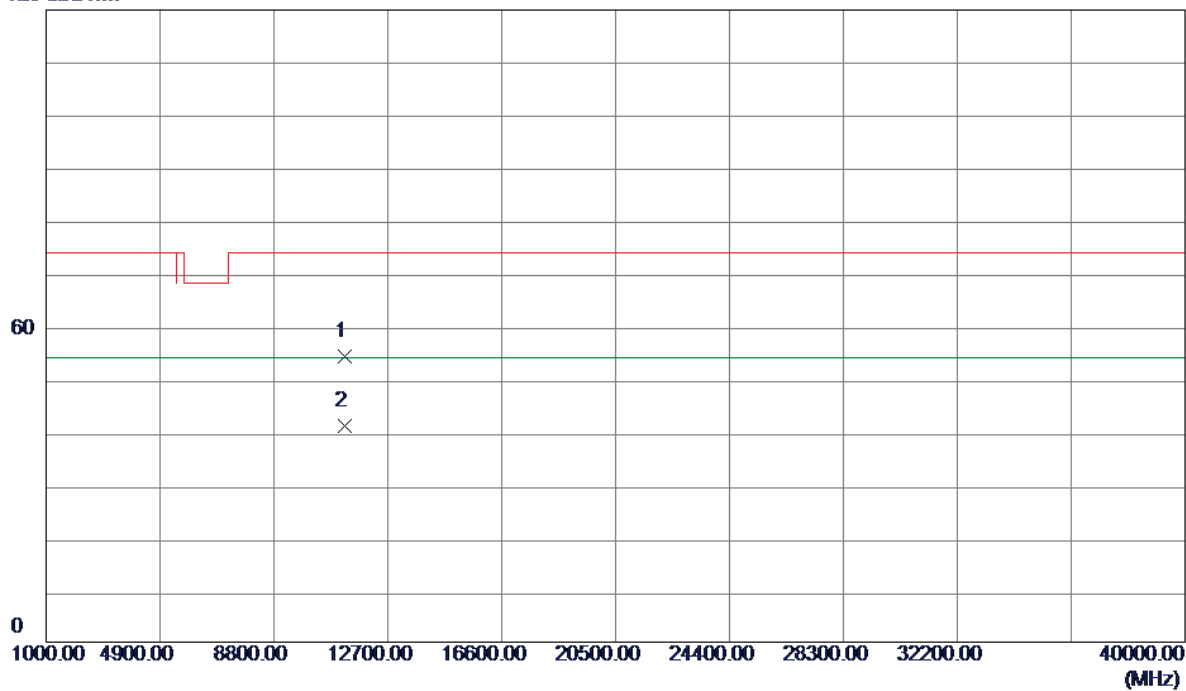

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.0000	51.14	3.19	54.33	74.00	-19.67	Peak	
2 *	11220.0000	37.84	3.19	41.03	54.00	-12.97	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz_Without Pistol

Horizontal

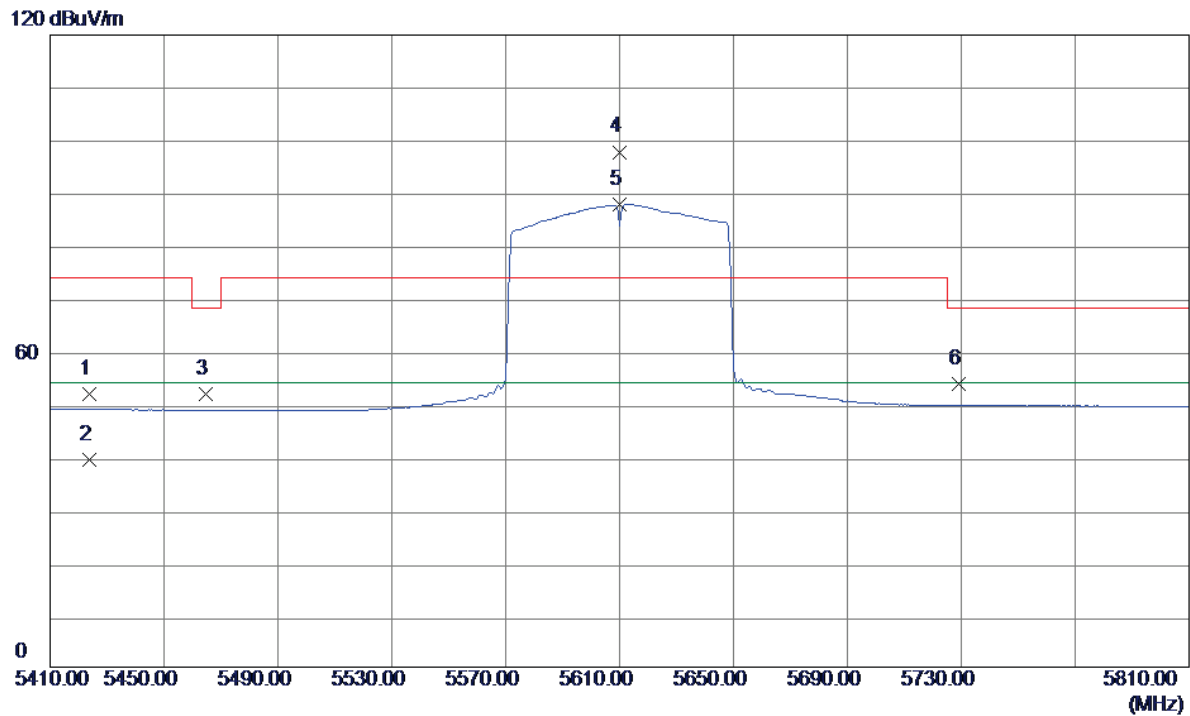


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5423.6000	14.02	37.82	51.84	74.00	-22.16	Peak	
2	5423.6000	1.43	37.82	39.25	54.00	-14.75	AVG	
3	5464.8300	14.00	37.87	51.87	68.20	-16.33	Peak	
4	5610.0000	59.60	38.20	97.80	74.00	23.80	Peak	No Limit
5 *	5610.0000	49.66	38.20	87.86	54.00	33.86	AVG	No Limit
6	5728.9950	15.20	38.50	53.70	68.20	-14.50	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz_Without Pistol

Horizontal


120 dBuV/m

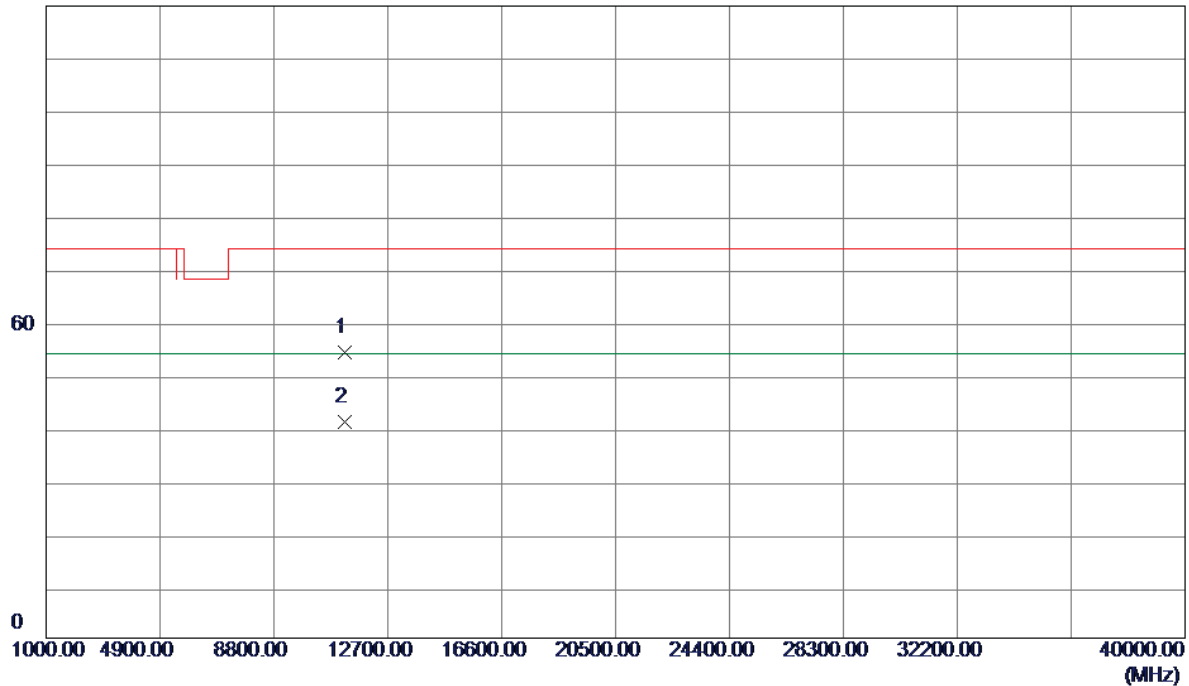

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.0000	50.98	3.19	54.17	74.00	-19.83	Peak	
2 *	11220.0000	37.91	3.19	41.10	54.00	-12.90	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX AC80 Mode 5775MHz_Without Pistol


Vertical

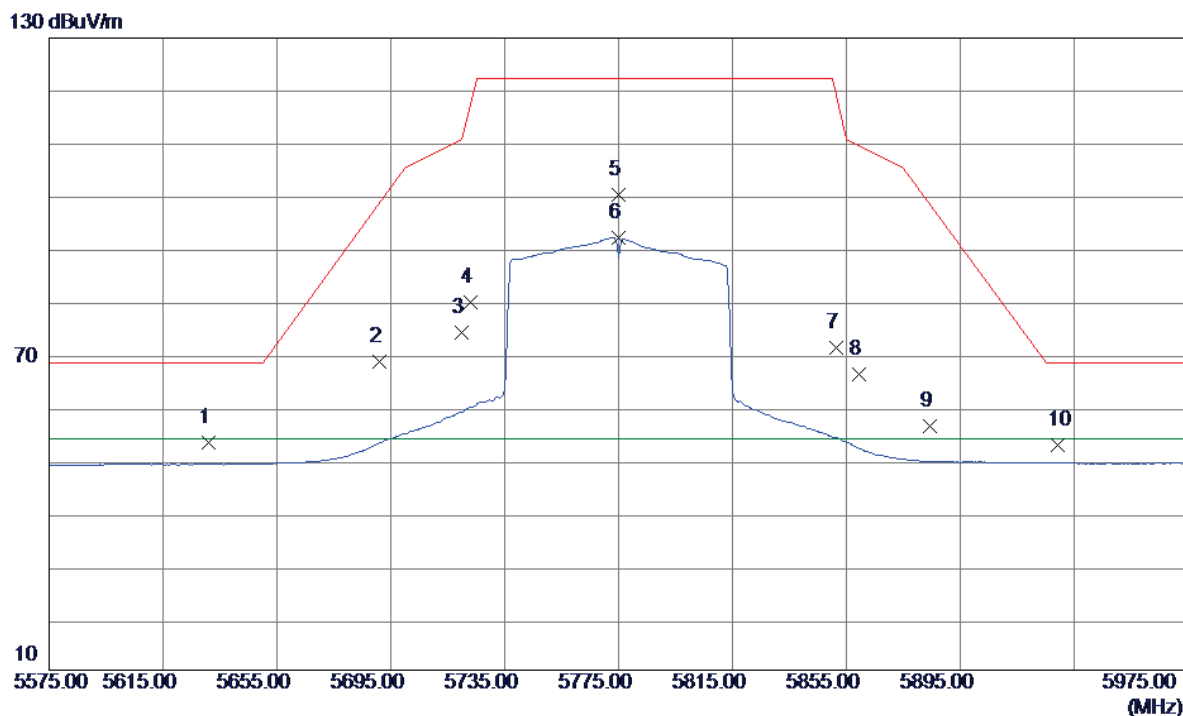

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5630.8750	14.88	38.25	53.13	68.20	-15.07	Peak	
2	5691.2000	30.14	38.40	68.54	98.69	-30.15	Peak	
3	5720.0000	35.54	38.47	74.01	110.80	-36.79	Peak	
4	5722.8050	41.39	38.48	79.87	117.20	-37.33	Peak	
5	5775.0000	61.71	38.61	100.32	122.20	-21.88	Peak	No Limit
6 *	5775.0000	53.51	38.61	92.12	54.00	38.12	AVG	No Limit
7	5851.3900	32.37	38.81	71.18	119.03	-47.85	Peak	
8	5859.3200	27.26	38.83	66.09	109.59	-43.50	Peak	
9	5884.5500	17.44	38.89	56.33	98.13	-41.80	Peak	
10	5929.1750	13.74	39.00	52.74	68.20	-15.46	Peak	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX AC80 Mode 5775MHz_Without Pistol


Vertical

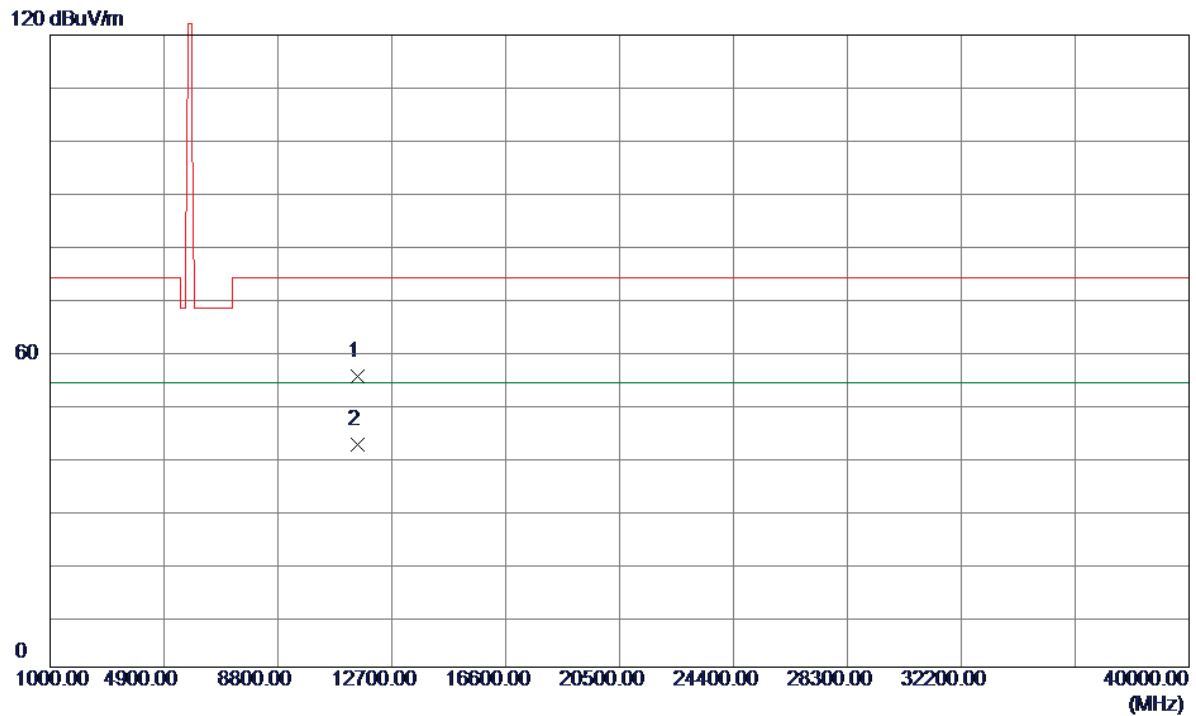

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.0000	51.66	3.52	55.18	74.00	-18.82	Peak	
2 *	11550.0000	38.64	3.52	42.16	54.00	-11.84	AVG	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX AC80 Mode 5775MHz_Without Pistol


Horizontal

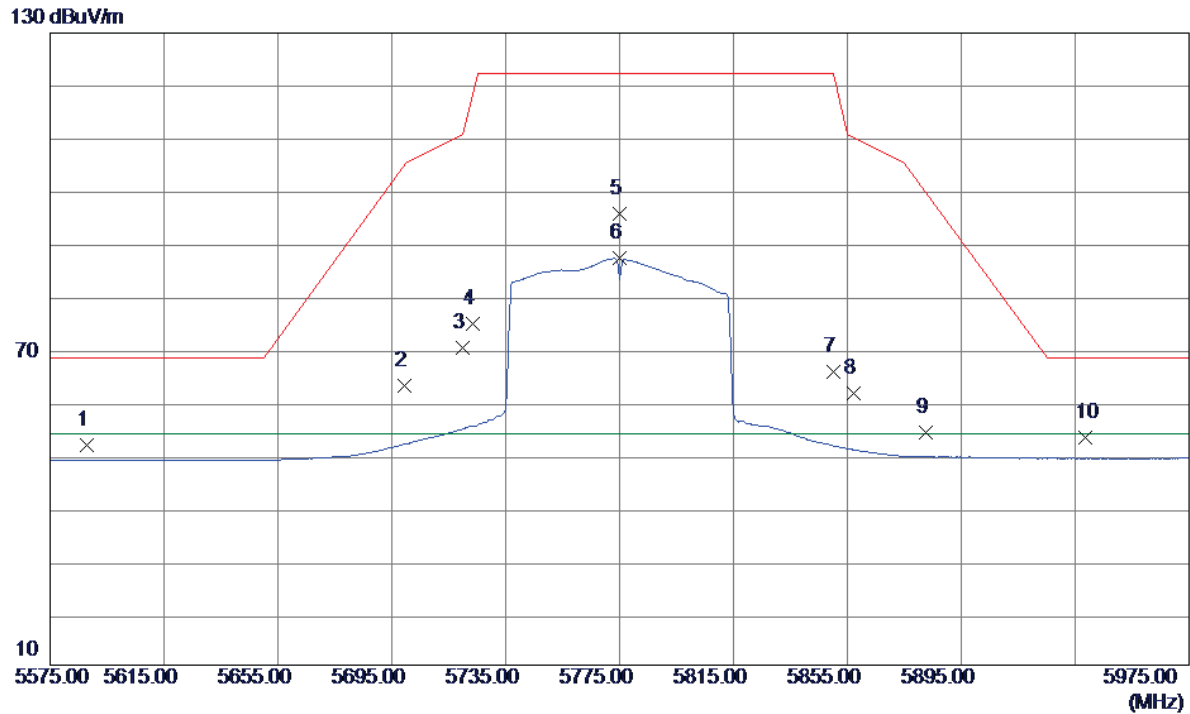

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5587.9750	13.66	38.14	51.80	68.20	-16.40	Peak	
2	5699.6500	24.70	38.42	63.12	104.94	-41.82	Peak	
3	5719.7400	31.80	38.47	70.27	110.73	-40.46	Peak	
4	5723.2650	36.37	38.48	74.85	118.24	-43.39	Peak	
5	5775.0000	57.03	38.61	95.64	122.20	-26.56	Peak	No Limit
6 *	5775.0000	48.62	38.61	87.23	54.00	33.23	AVG	No Limit
7	5850.0950	26.89	38.80	65.69	121.98	-56.29	Peak	
8	5857.3600	22.67	38.82	61.49	110.14	-48.65	Peak	
9	5882.7000	15.24	38.88	54.12	99.50	-45.38	Peak	
10	5938.7250	14.22	39.03	53.25	68.20	-14.95	Peak	

Orthogonal Axis :	Z
Test Mode:	UNII-3/TX AC80 Mode 5775MHz_Without Pistol

Horizontal

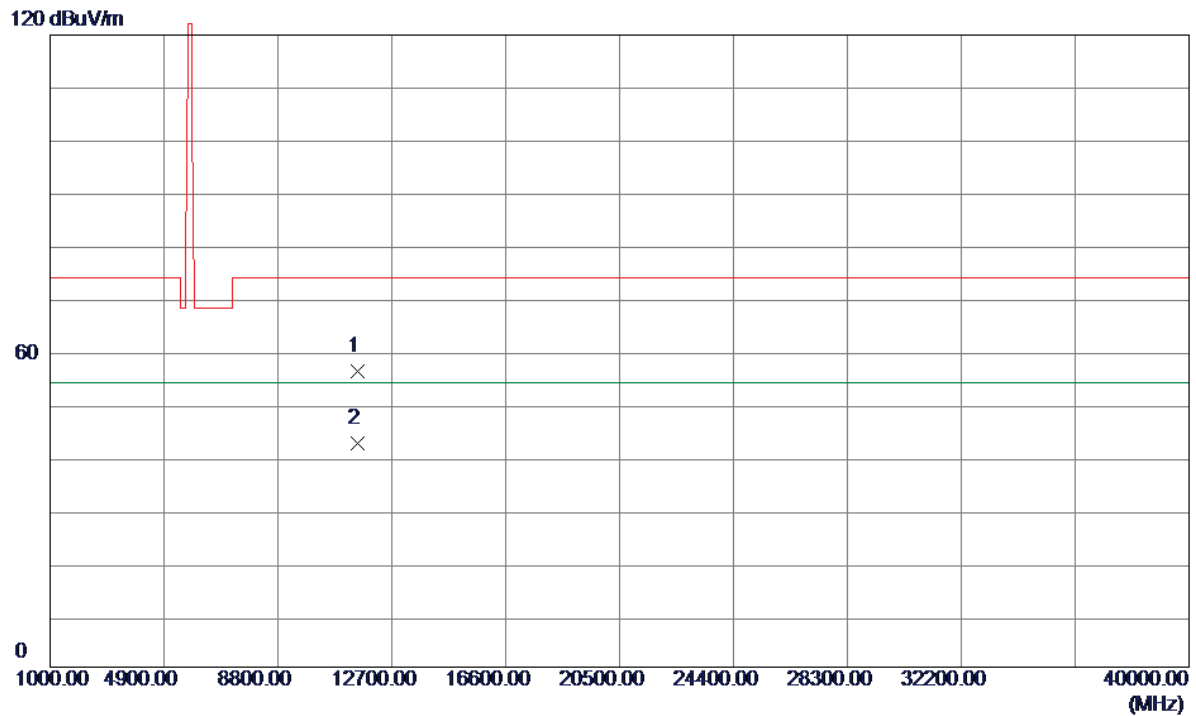

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.0000	52.65	3.52	56.17	74.00	-17.83	Peak	
2 *	11550.0000	38.87	3.52	42.39	54.00	-11.61	AVG	

TX A Mode_DUTY CYCLE

Duty cycle: 5180 MHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

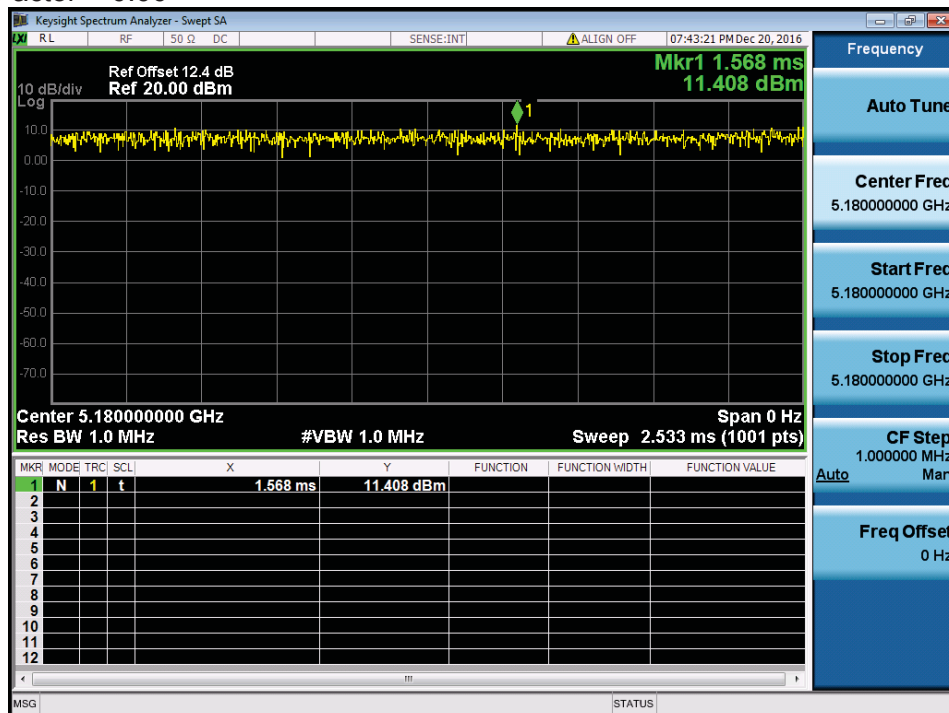

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

Duty cycle: 5180 MHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

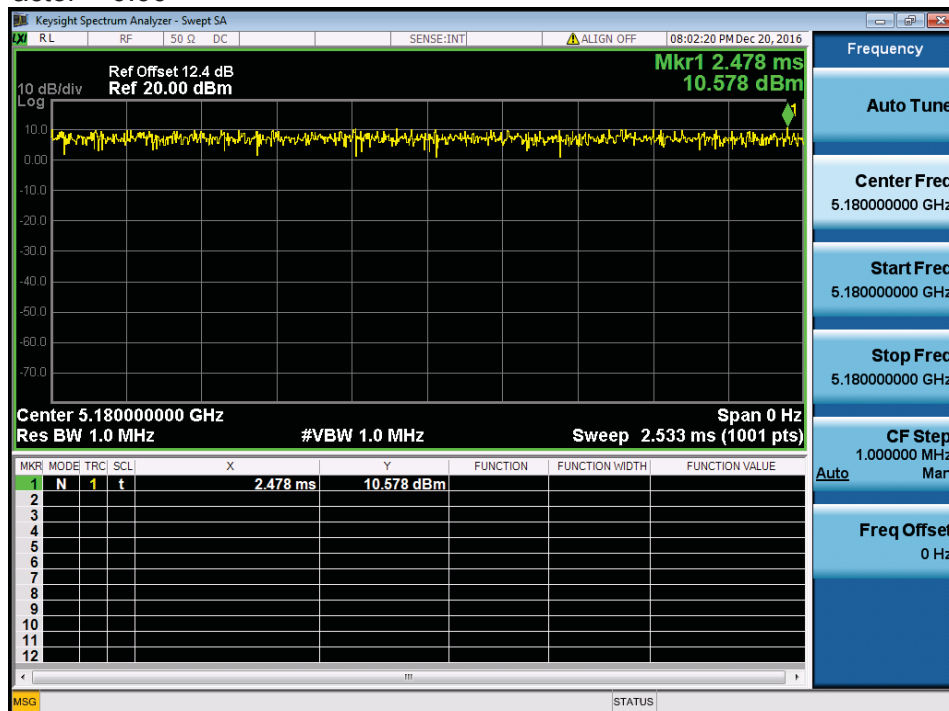

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

Duty cycle: 5190 MHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

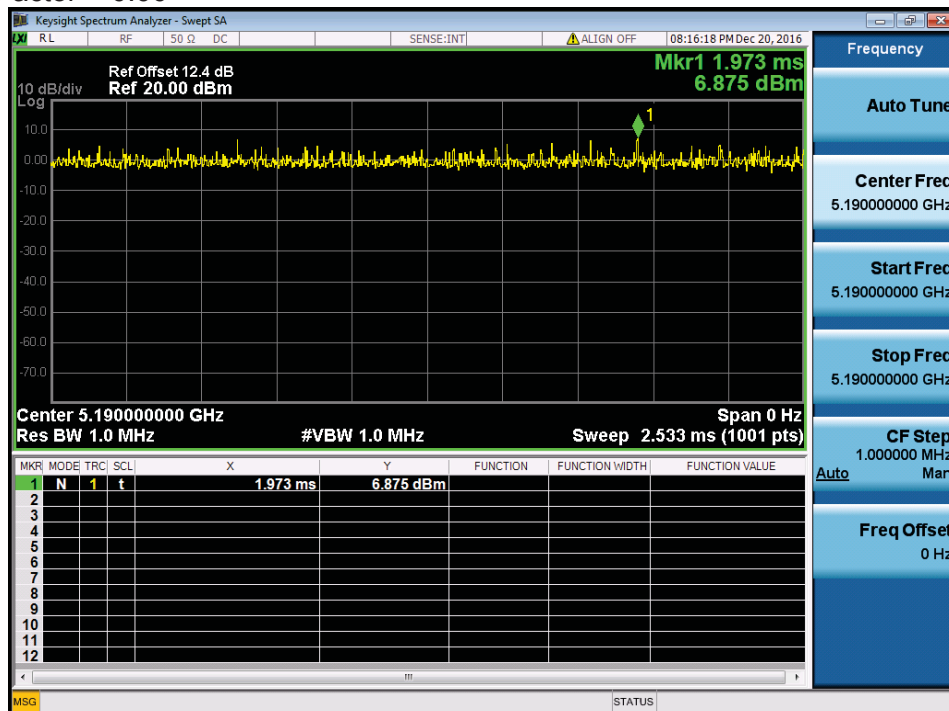

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

Duty cycle: 5210 MHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

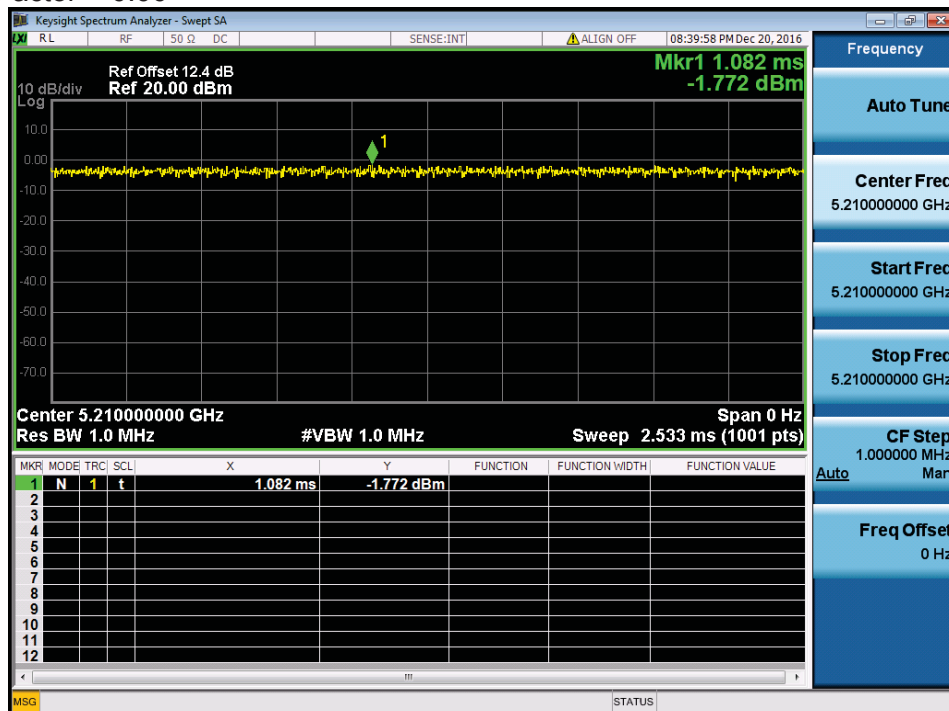

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor


Power Spectral Density = Measured density + Duty factor

ATTACHMENT E - BANDWIDTH


Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.48	16.58
CH40	5200	24.47	16.66
CH48	5240	20.05	16.61


TX CH36

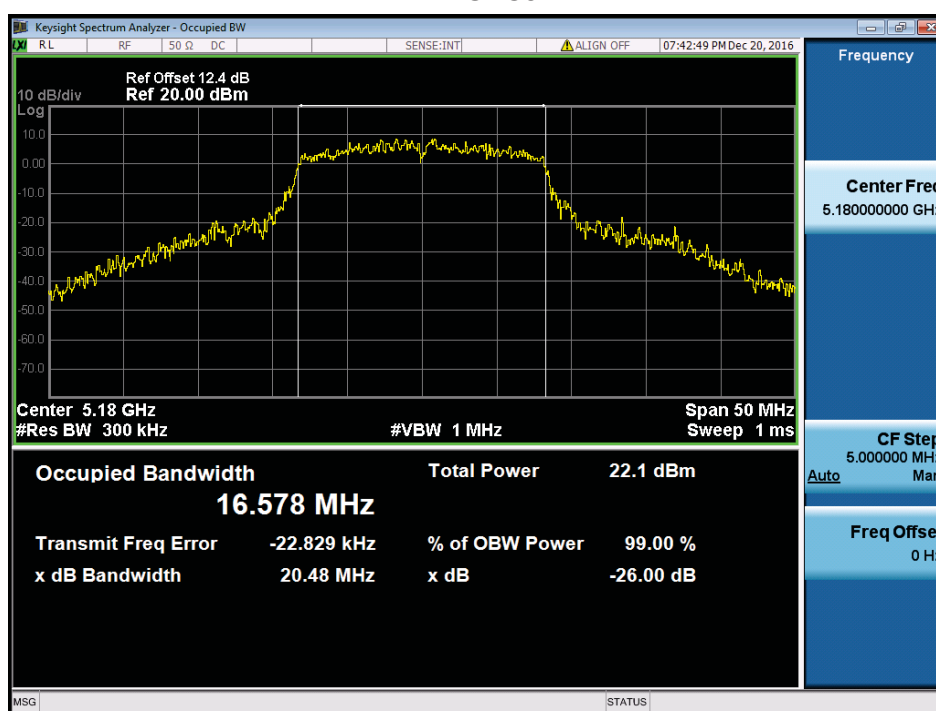

TX CH40

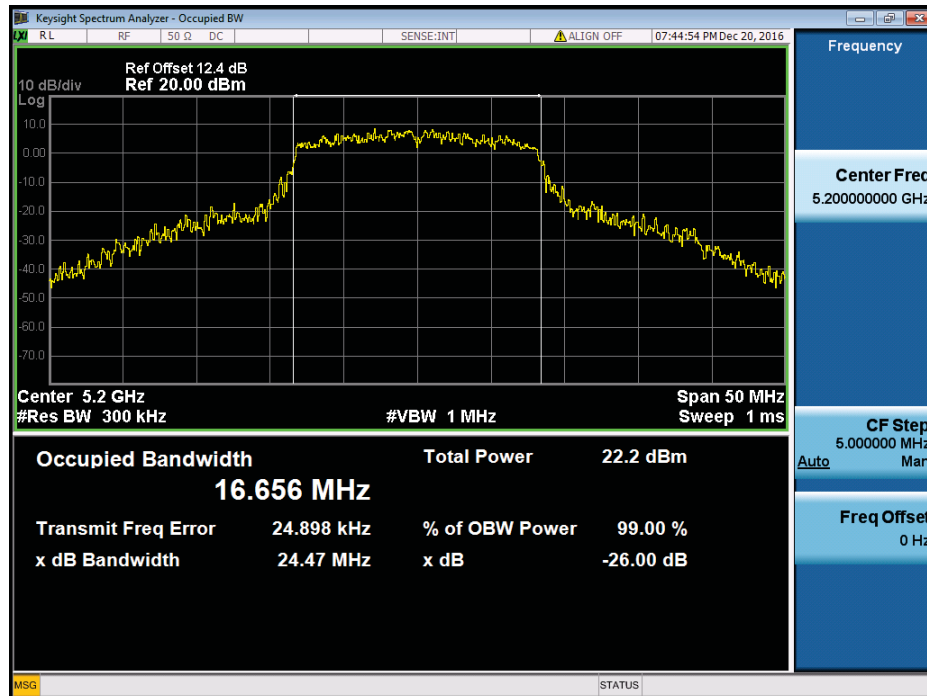


TX CH48

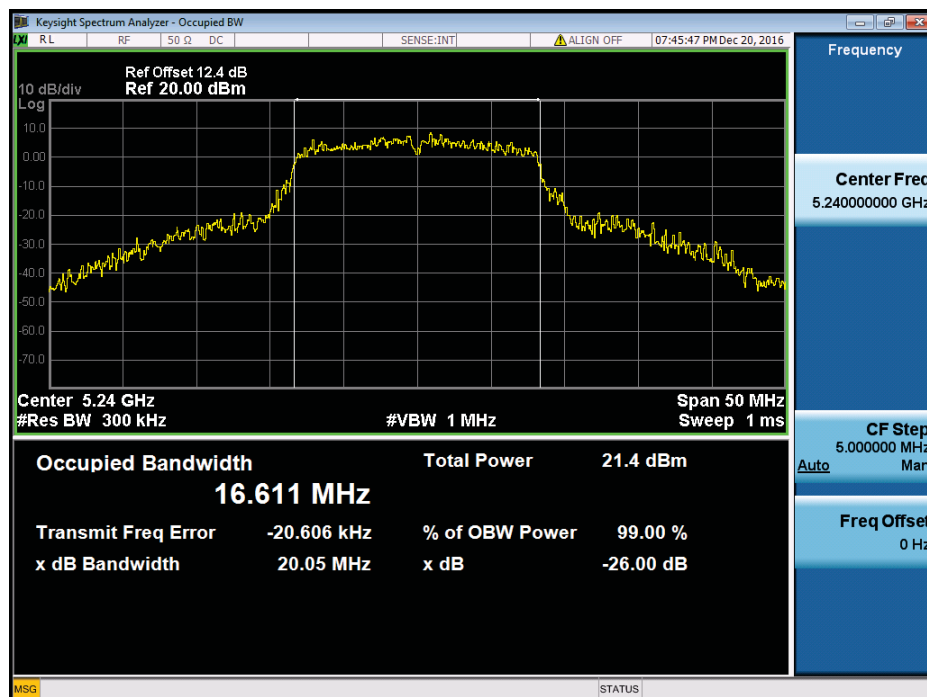


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	23.91	17.68
CH40	5200	20.79	17.70
CH48	5240	20.28	17.72


TX CH36

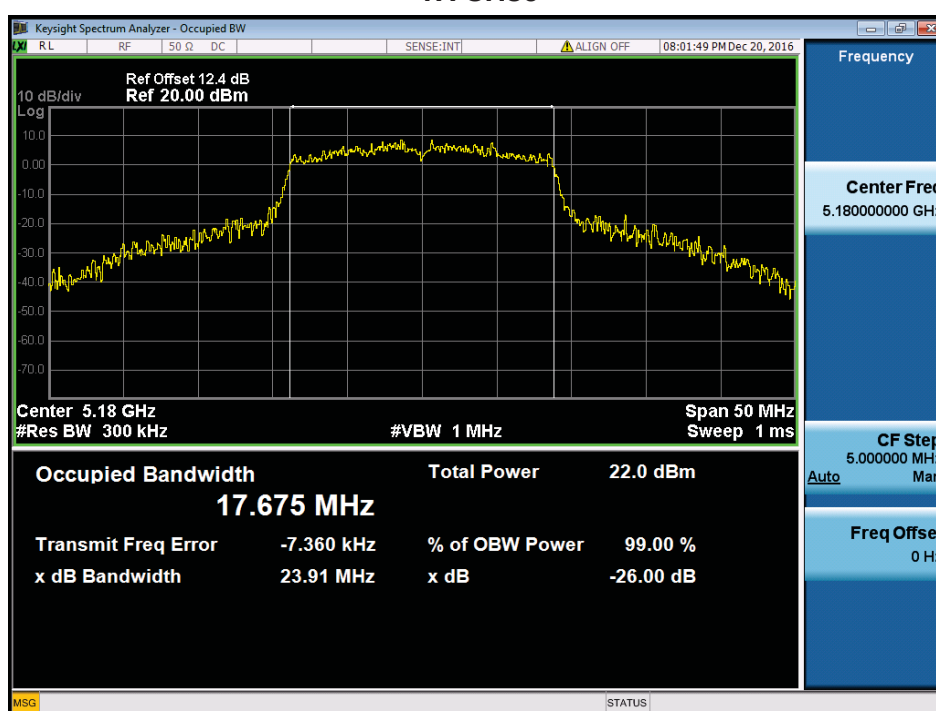

TX CH40

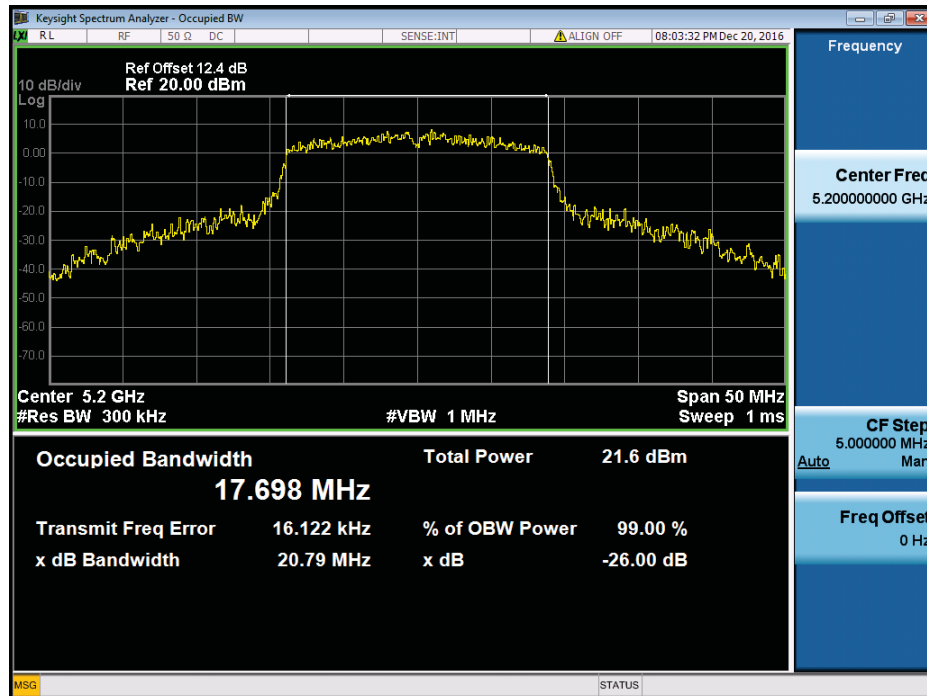


TX CH48

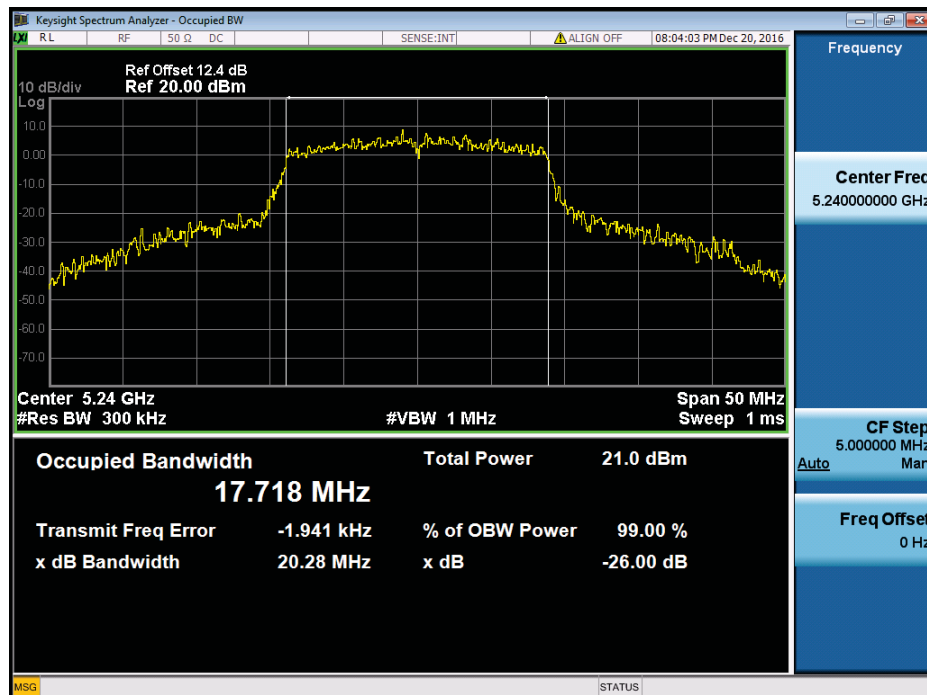


Test Mode: UNII-1/TX N40 Mode_CH38/CH46

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	45.71	36.22
CH46	5230	46.08	36.13

TX CH38

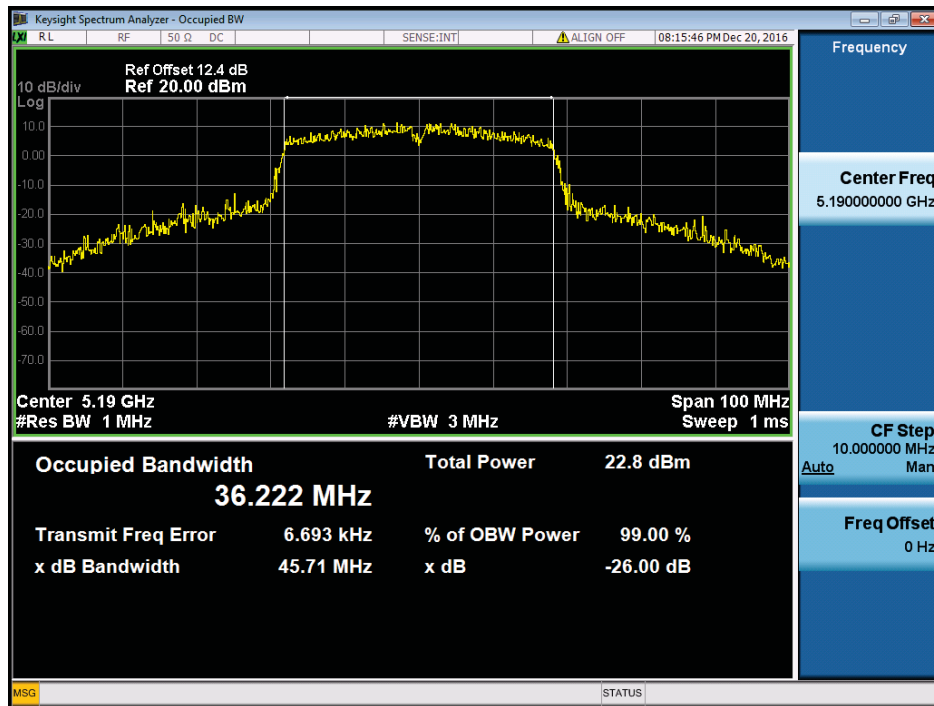


TX CH46

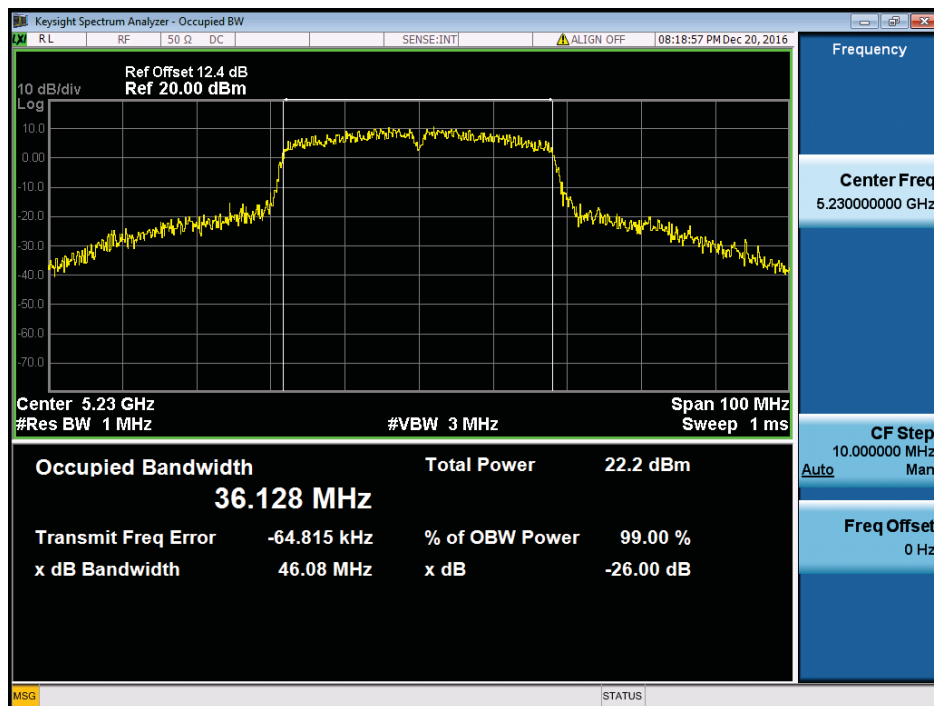


Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.90	16.52
CH60	5300	21.32	16.67
CH64	5320	19.94	16.58


TX CH52

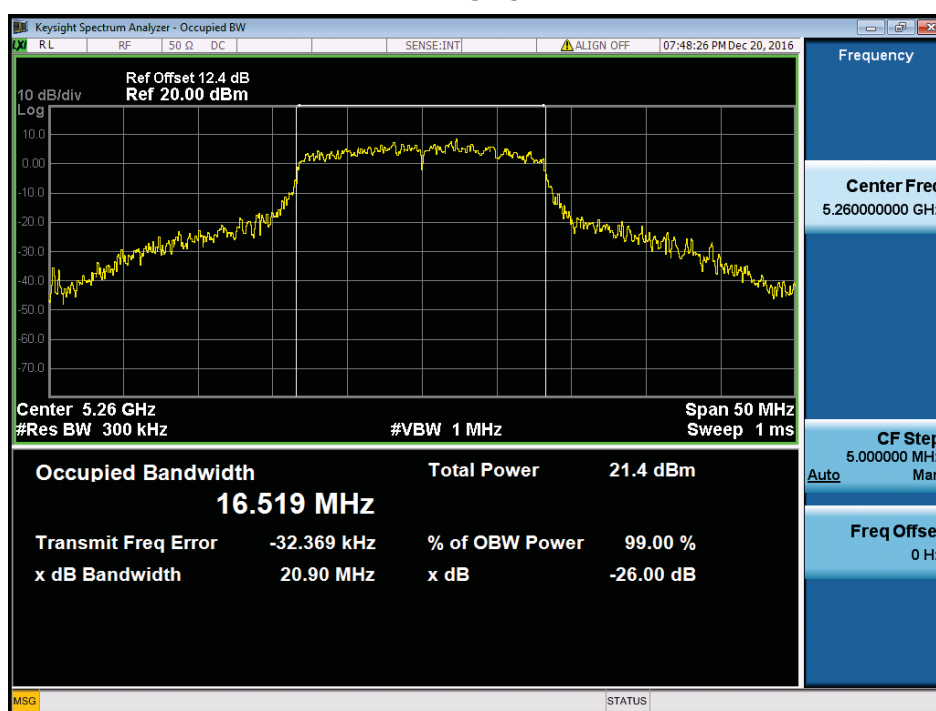

TX CH60

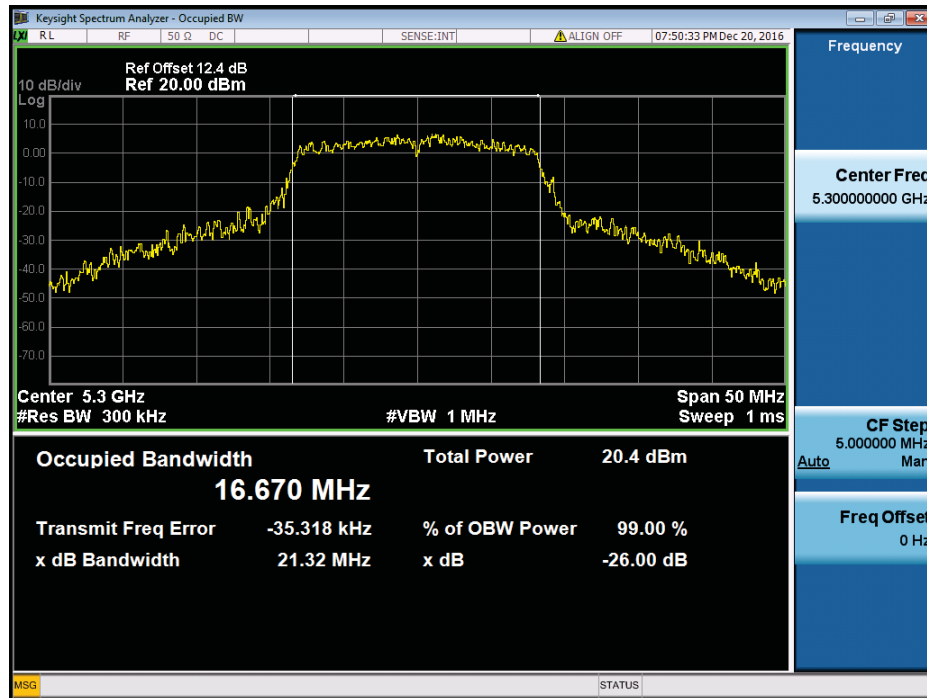


TX CH64

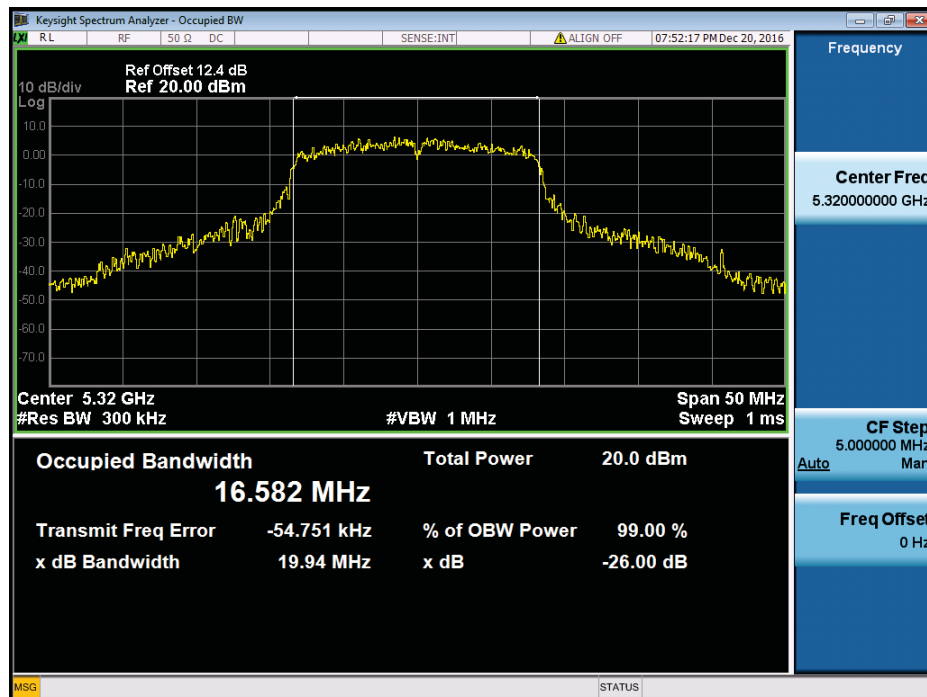


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	24.06	17.68
CH60	5300	20.86	17.68
CH64	5320	20.56	17.62


TX CH52

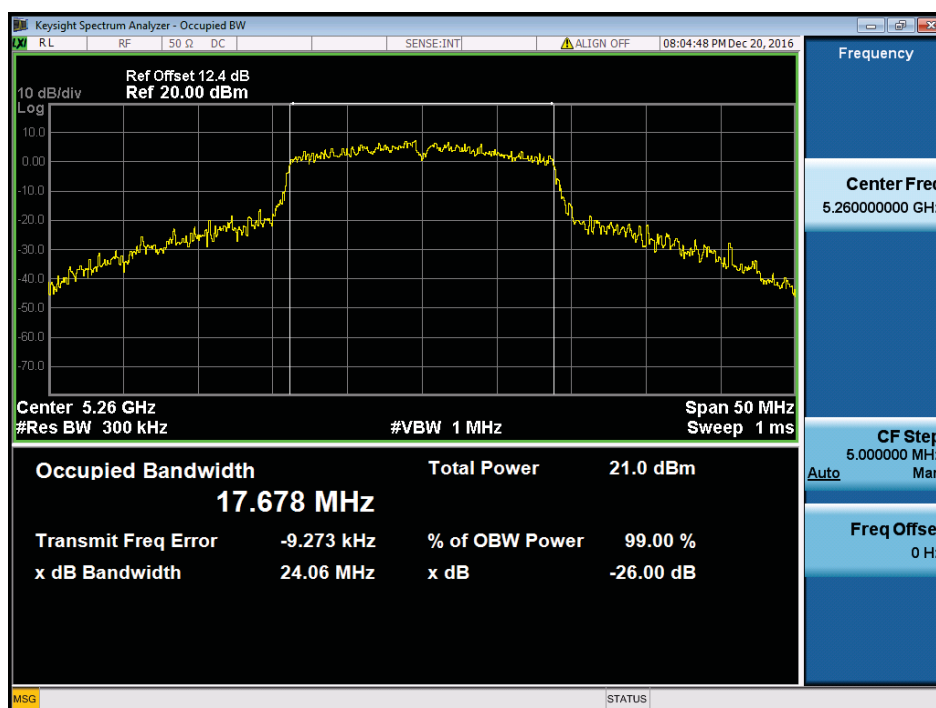

TX CH60

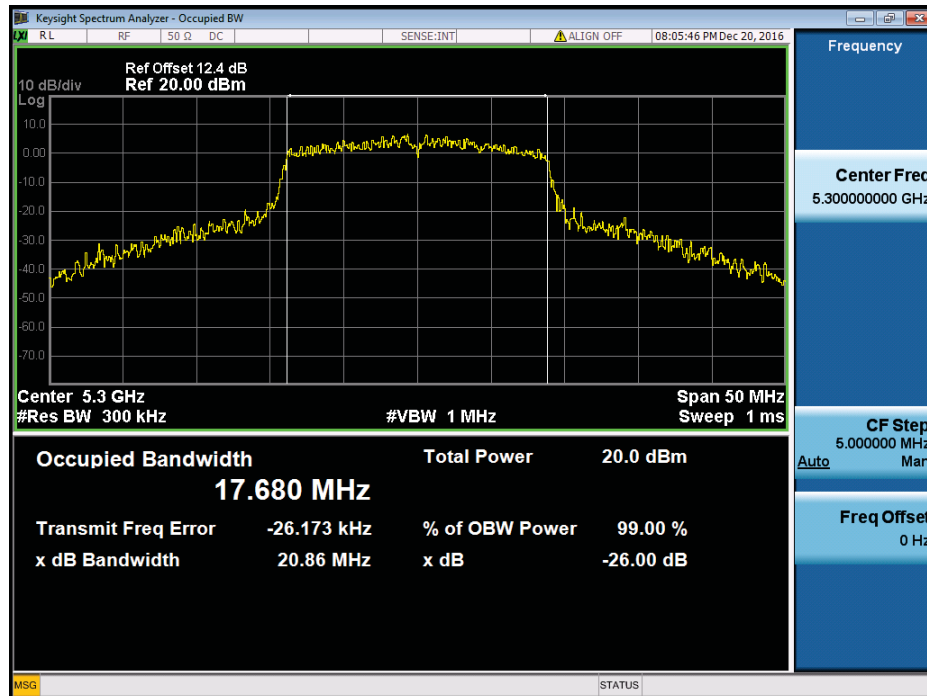


TX CH64

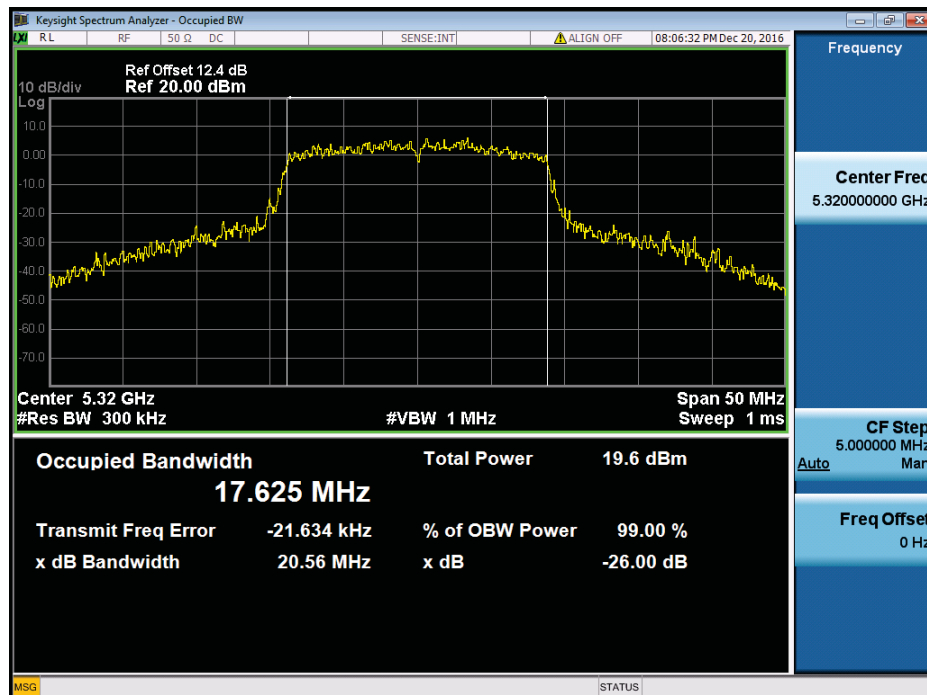


Test Mode: UNII-2A/TX N40 Mode_CH54/CH62

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	47.54	36.25
CH62	5310	40.91	36.15

TX CH54

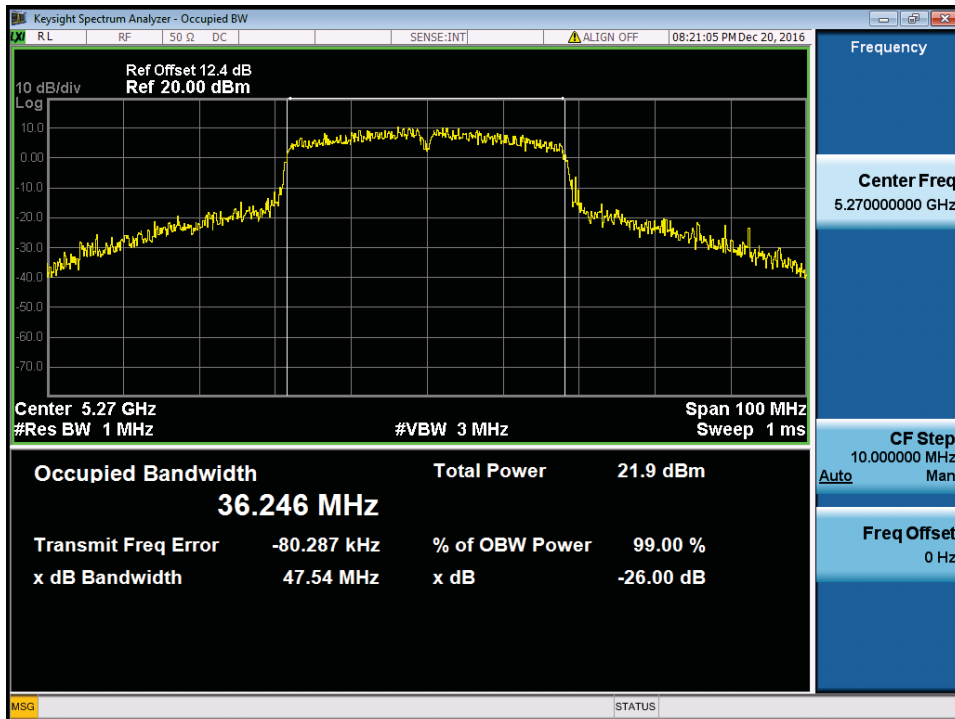


TX CH62

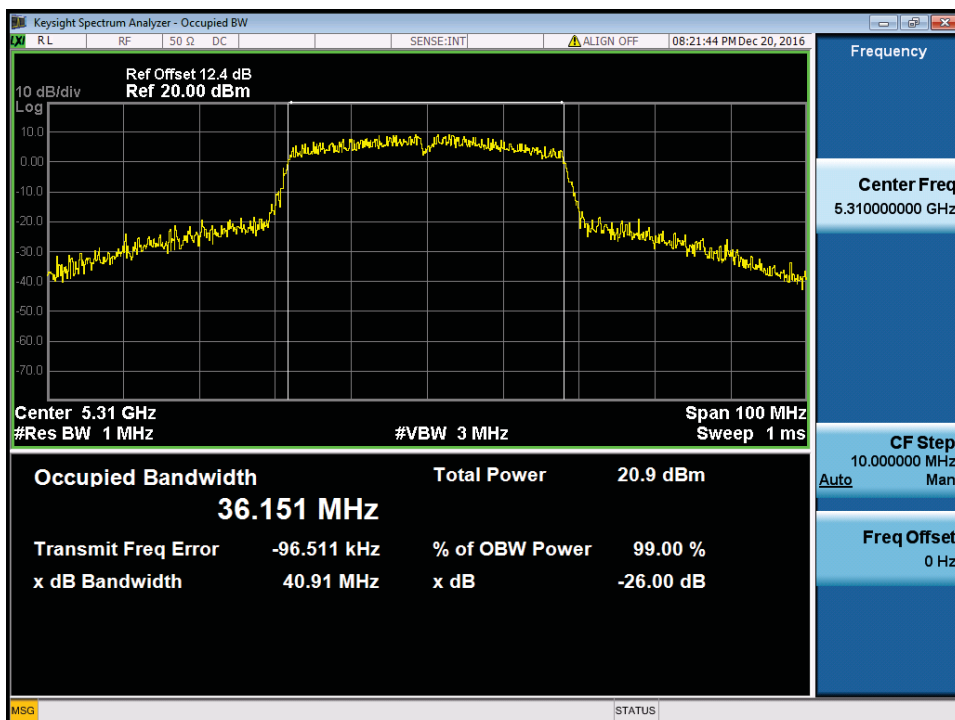


Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.11	16.48
CH116	5580	19.71	16.50
CH140	5700	19.30	16.50


TX CH100

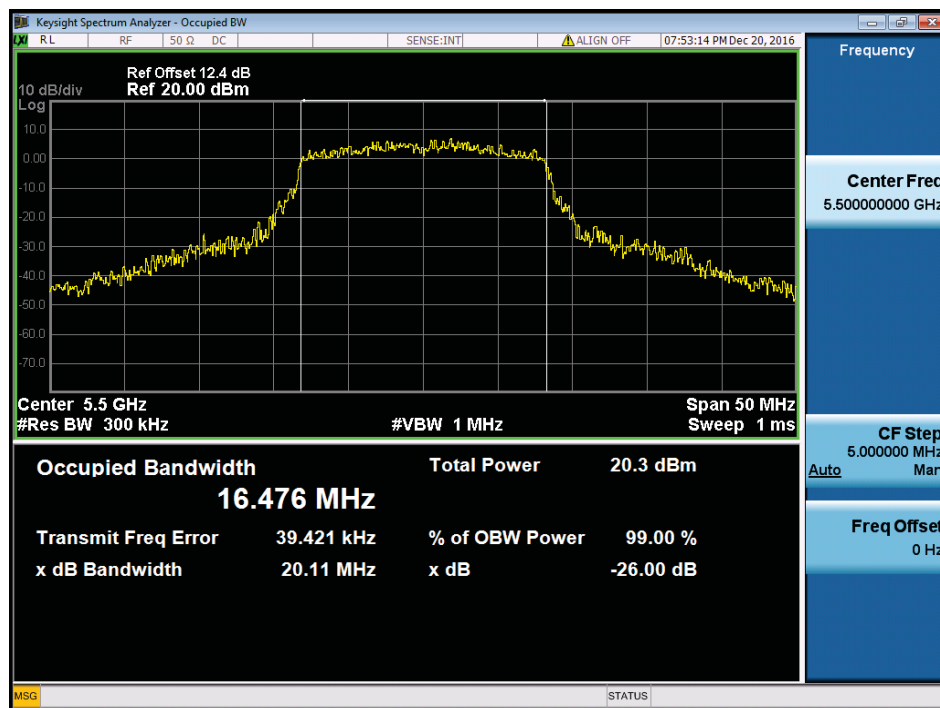

TX CH116

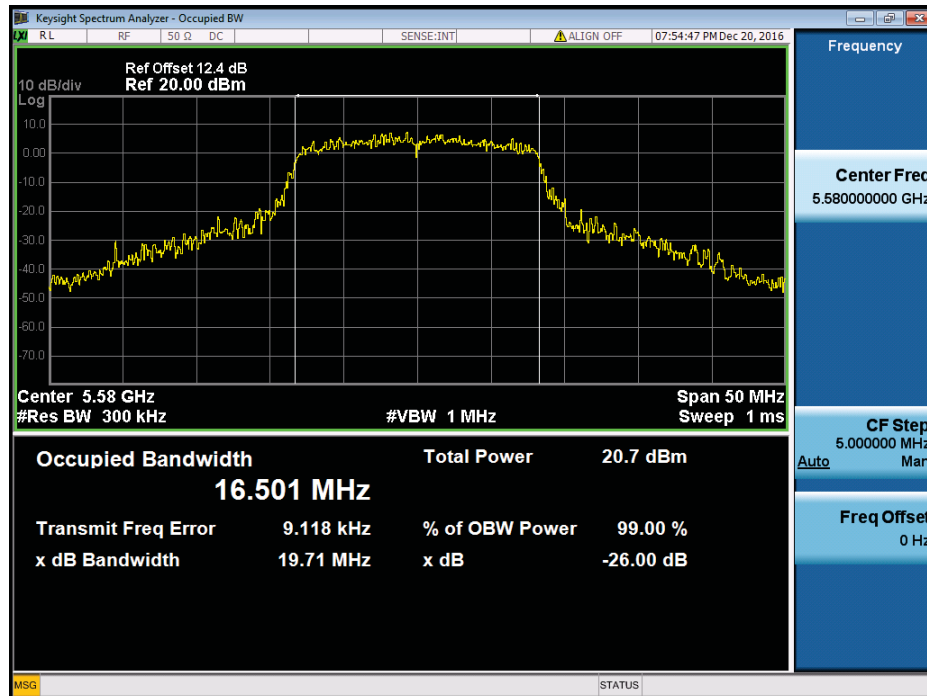


TX CH140

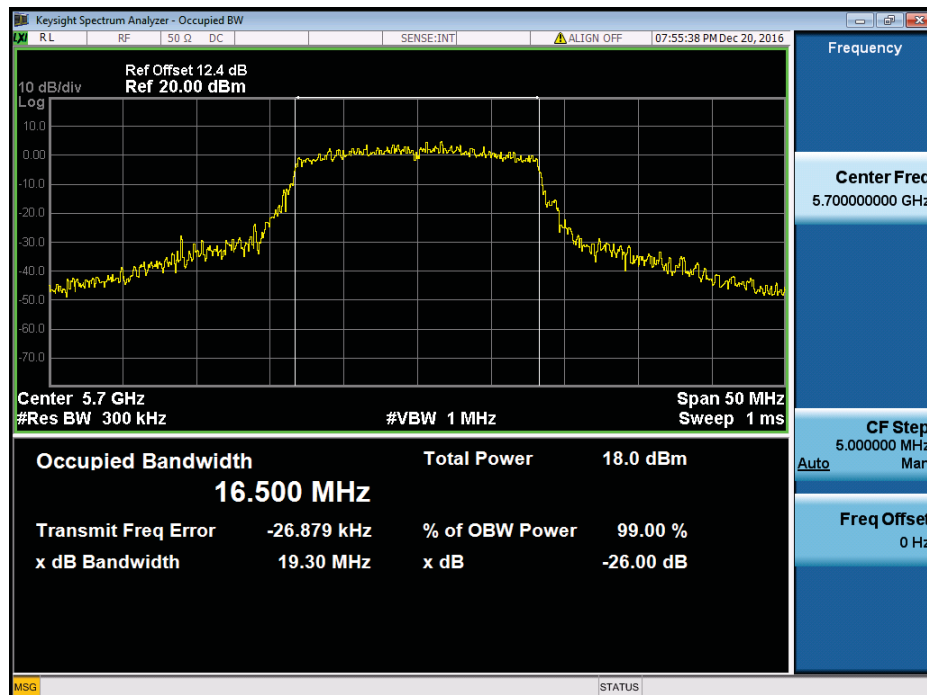


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.18	17.57
CH116	5580	20.16	17.68
CH140	5700	19.97	17.57


TX CH100

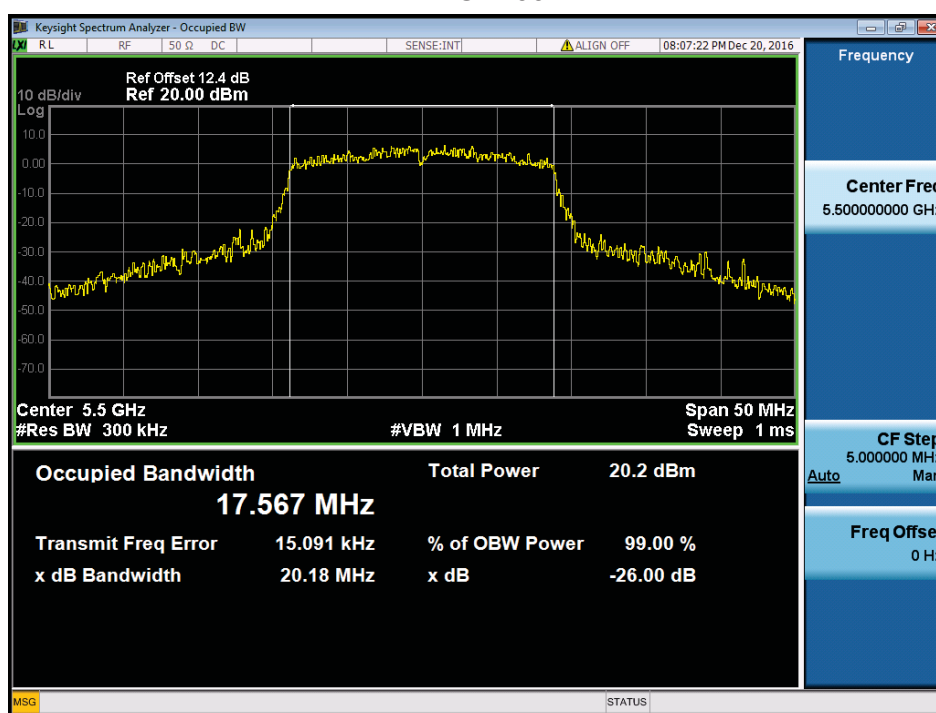

TX CH116

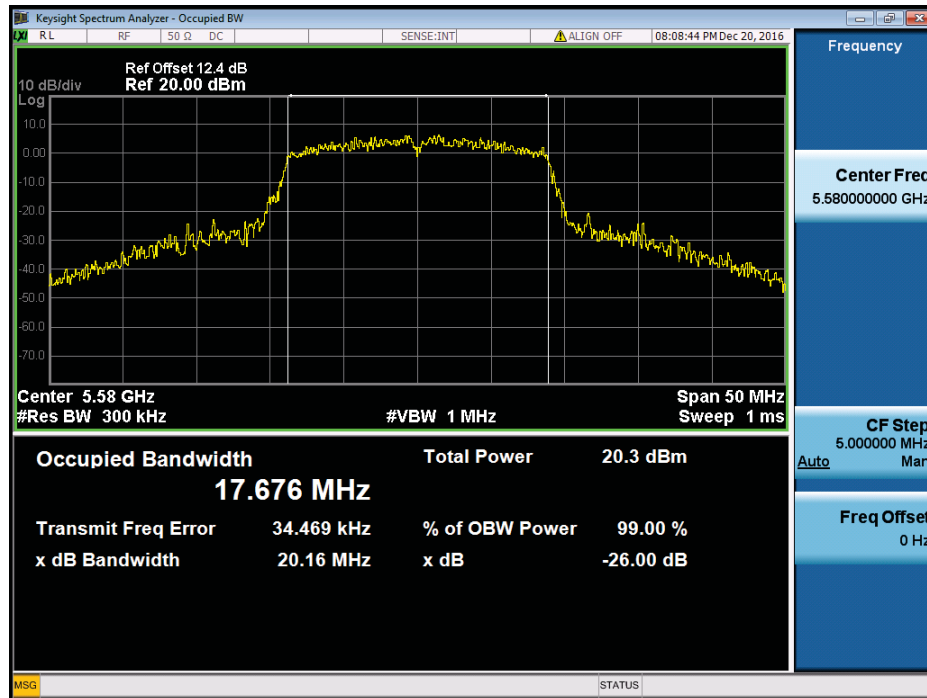


TX CH140

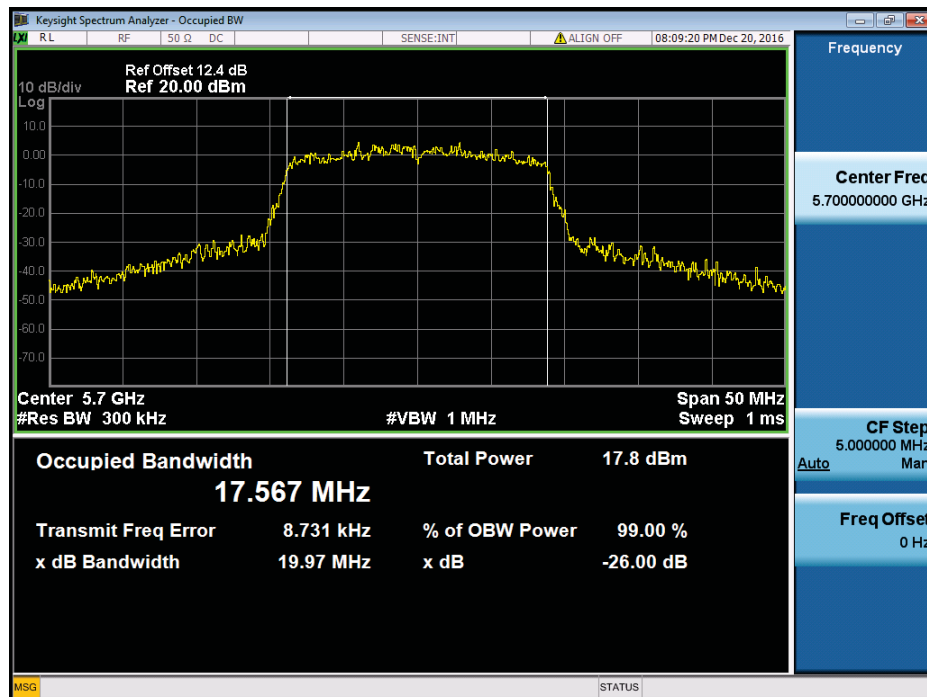


Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	40.91	36.21
CH110	5550	41.09	36.02
CH134	5670	40.13	35.99


TX CH102

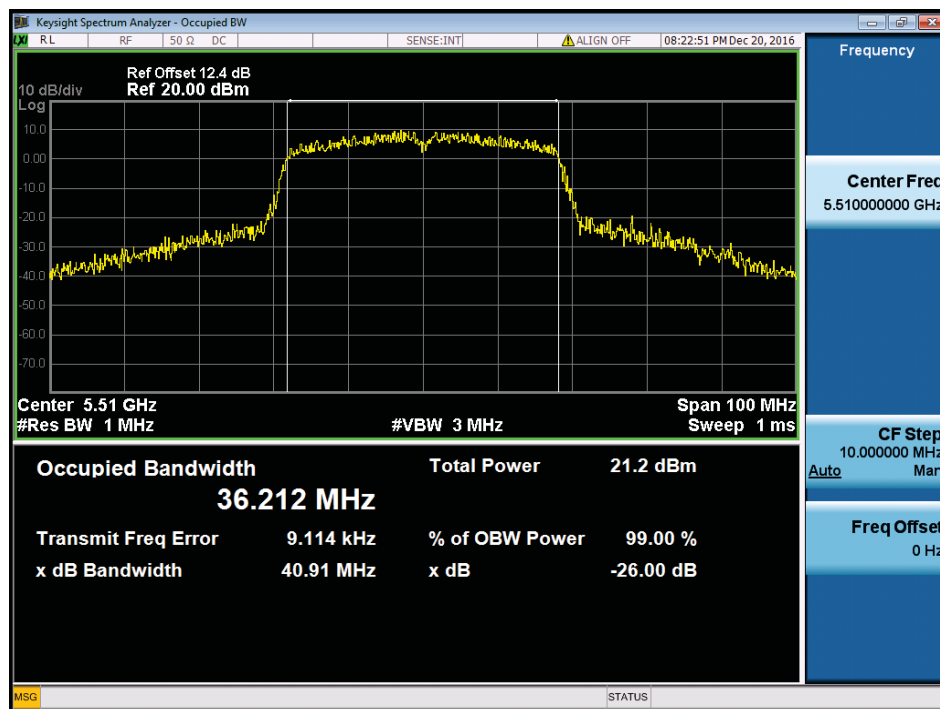

TX CH110

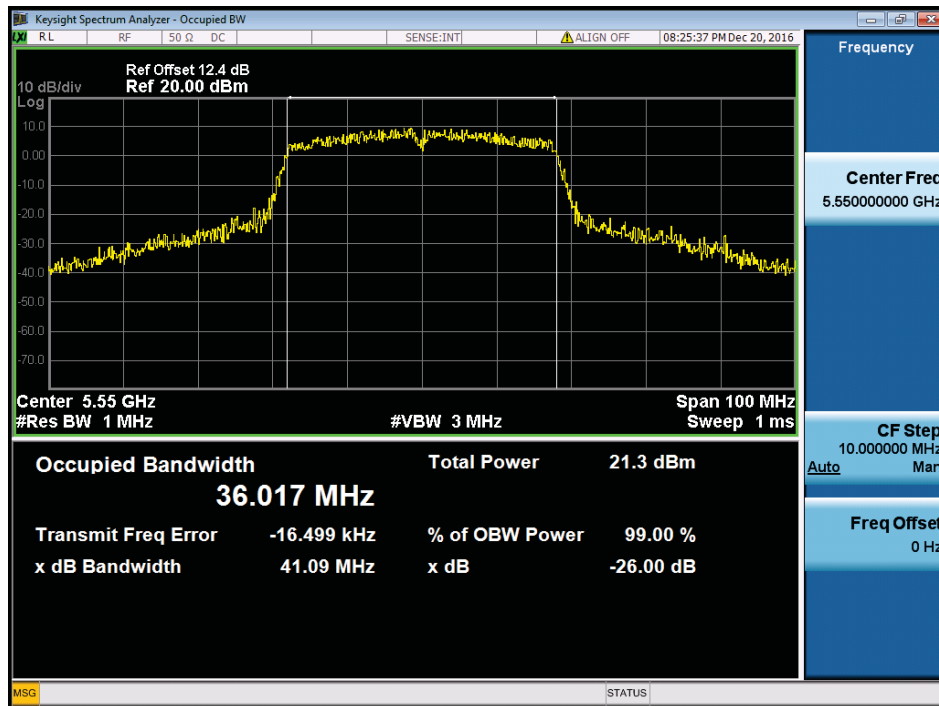


TX CH134

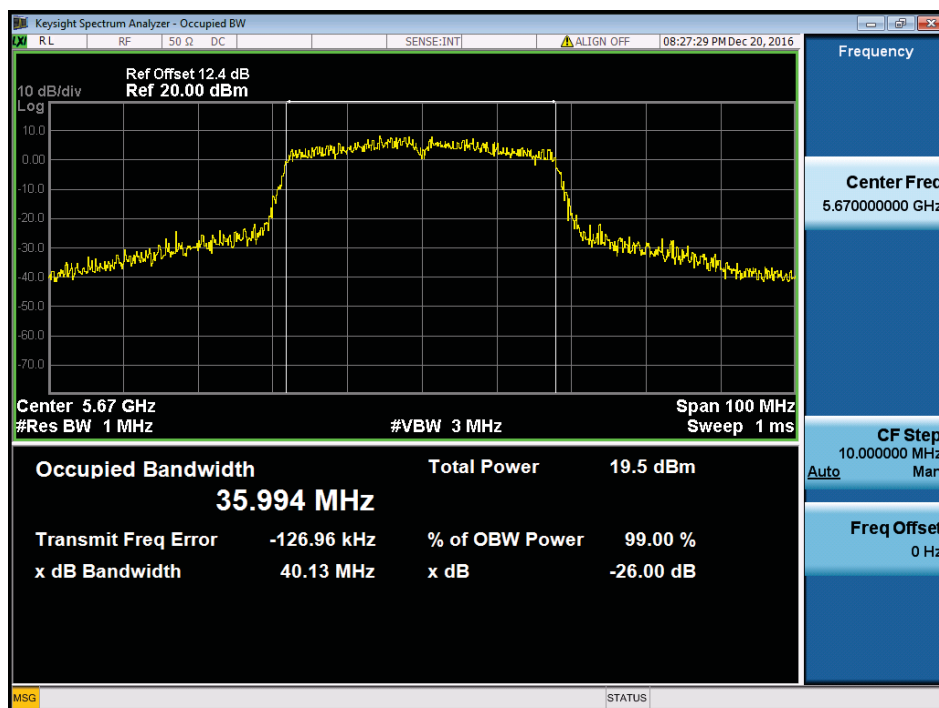


Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.36	16.34	>=500
CH157	5785	16.33	16.32	>=500
CH165	5825	16.38	16.34	>=500


TX CH 149

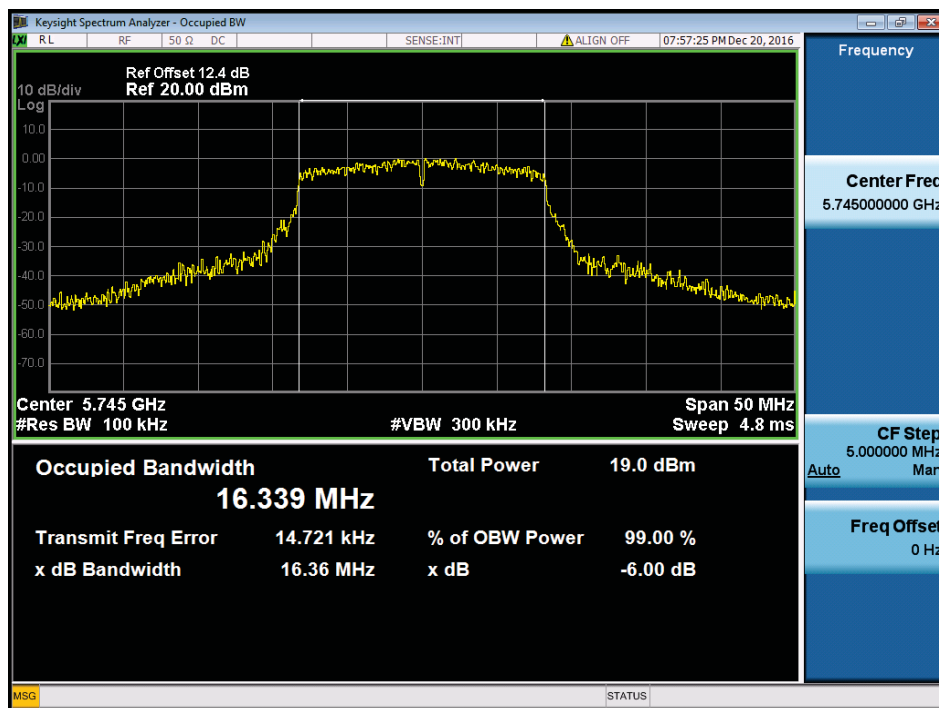

TX CH 157

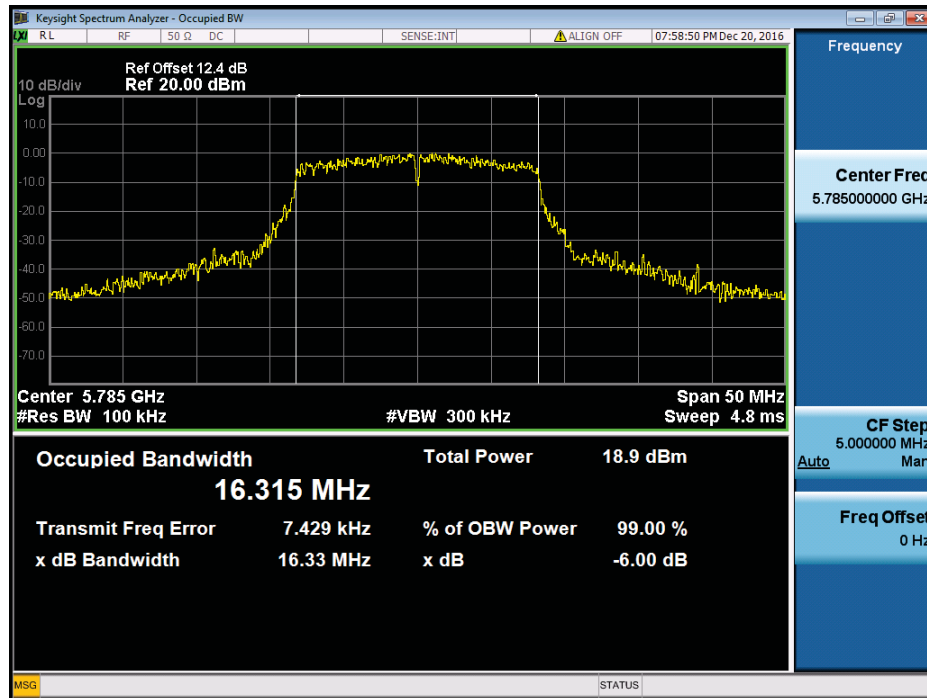


TX CH 165

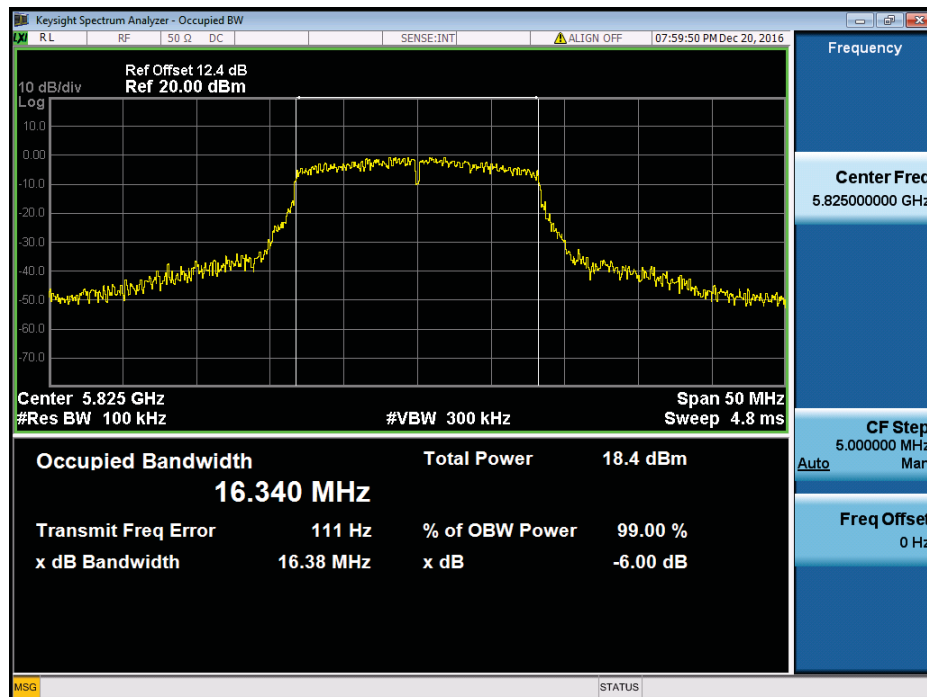


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.63	17.57	>=500
CH157	5785	17.59	17.53	>=500
CH165	5825	17.55	17.55	>=500


TX CH 149

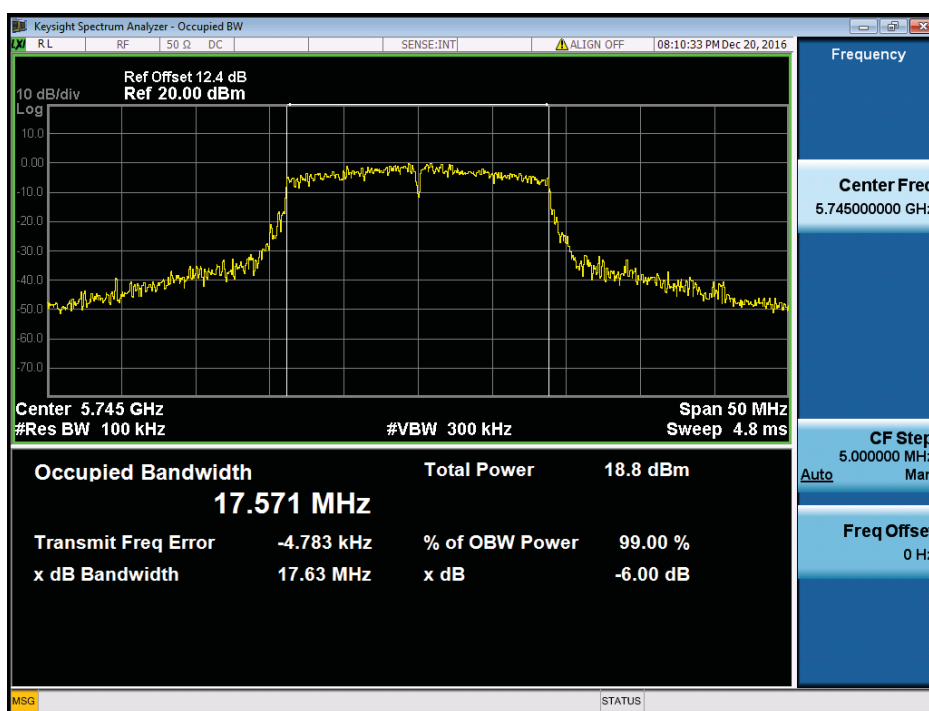

TX CH 157

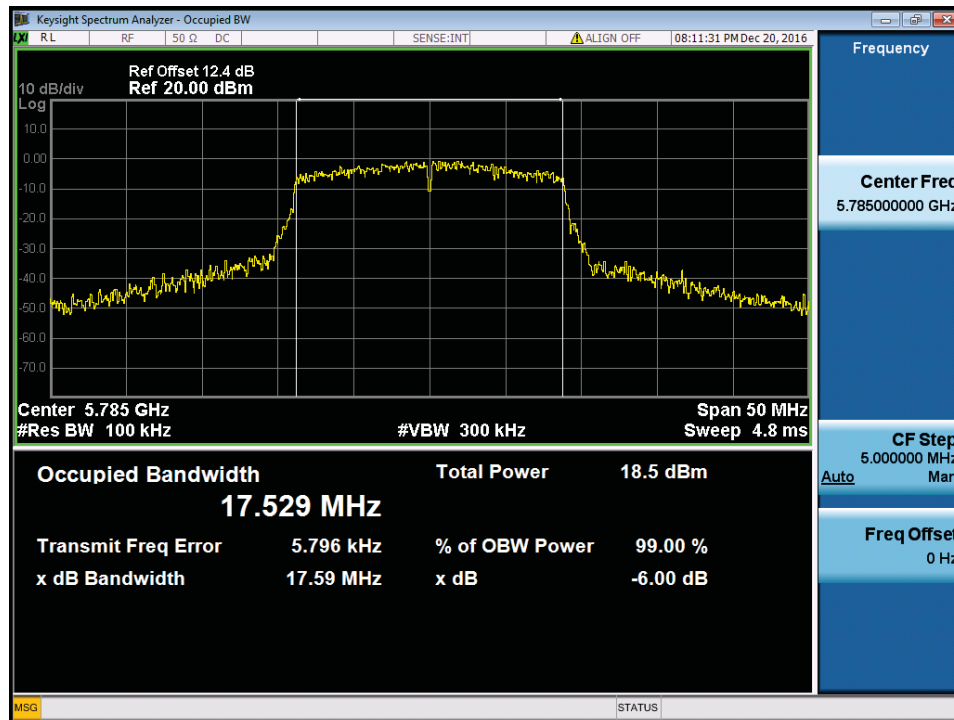


TX CH 165

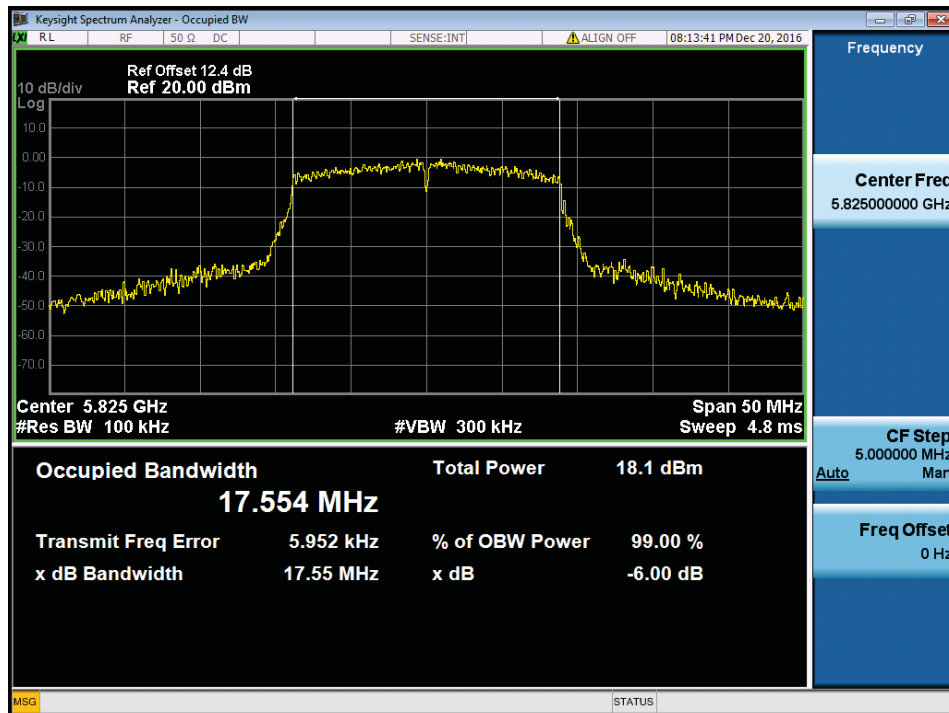


Test Mode: UNII-3/ TX N40 Mode_CH151/CH159

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	35.46	36.00	≥ 500
CH159	5795	33.58	35.84	≥ 500

TX CH 151

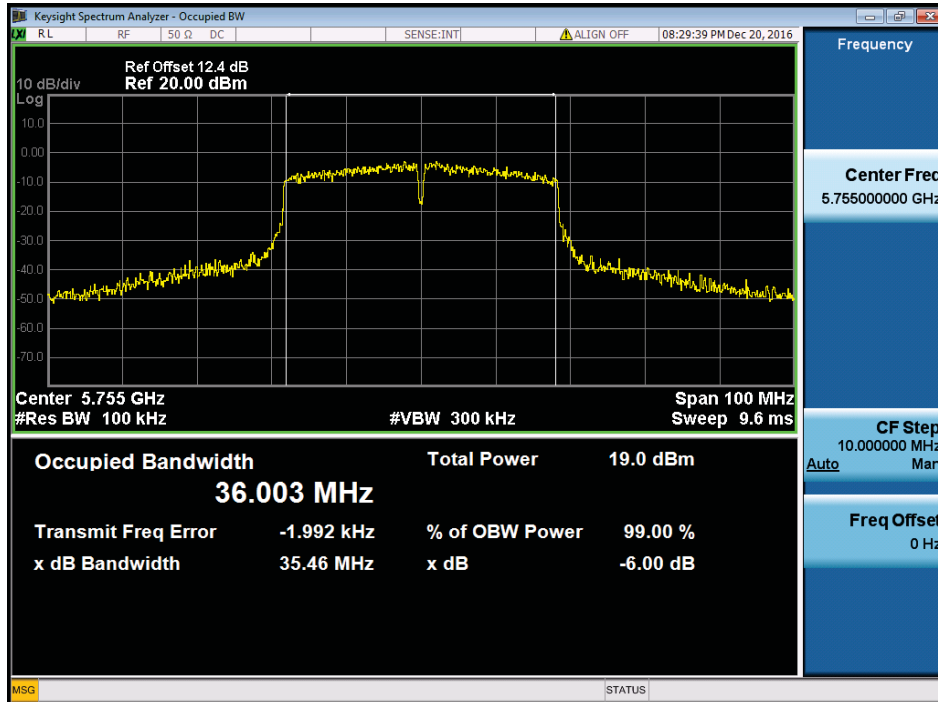


TX CH 159

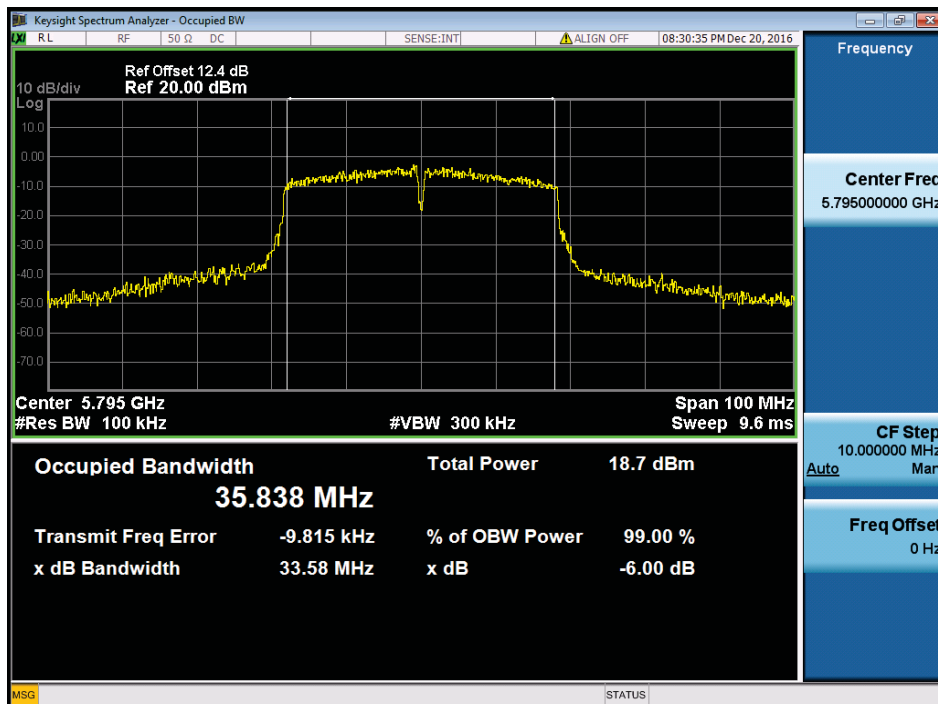

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	82.30	75.44


TX CH42

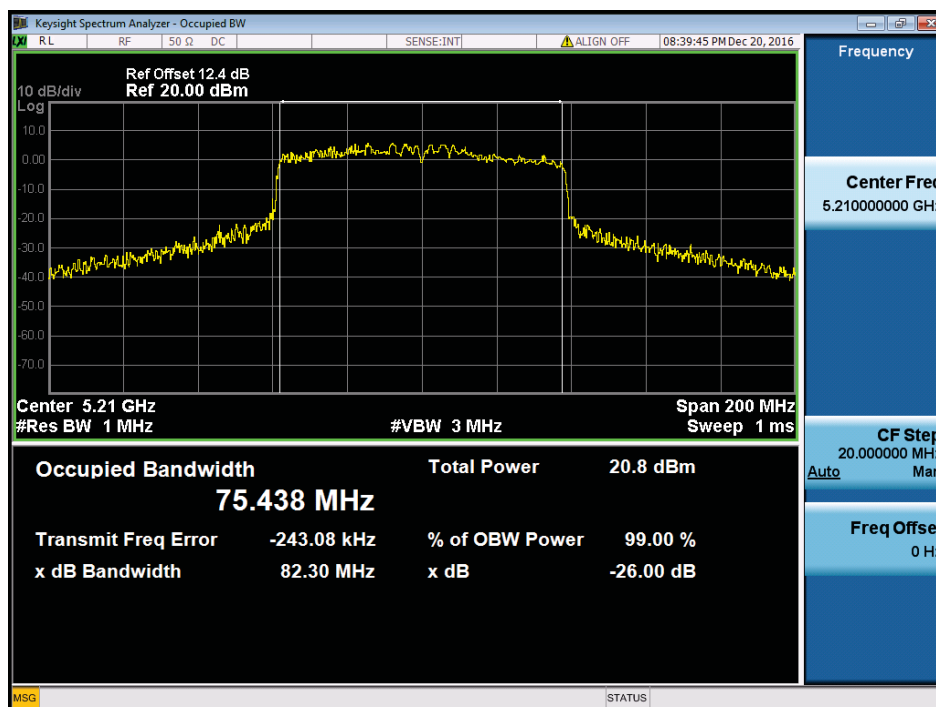

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	83.45	75.32


TX CH58

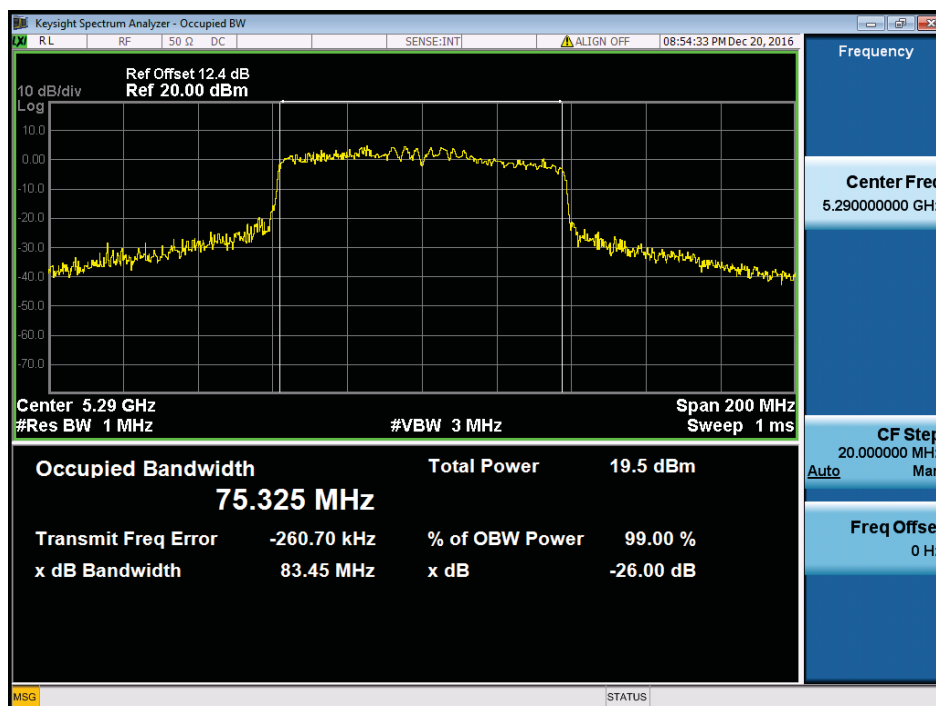


Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	81.69	75.34
CH122	5610	80.89	75.22

TX CH106

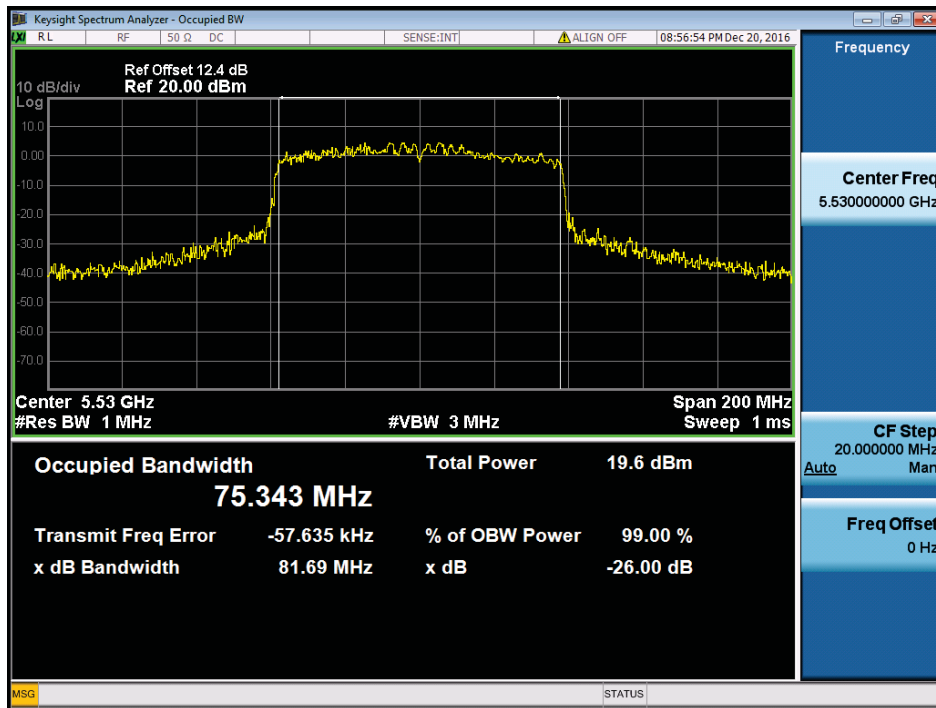


TX CH122

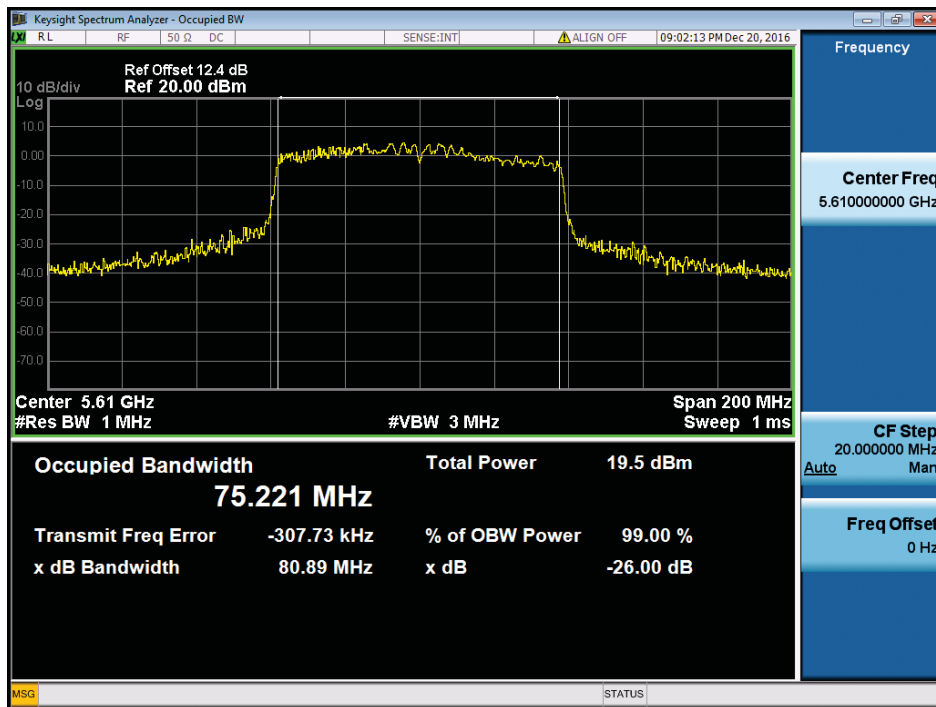

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	76.28	75.60	>=500

TX CH 155

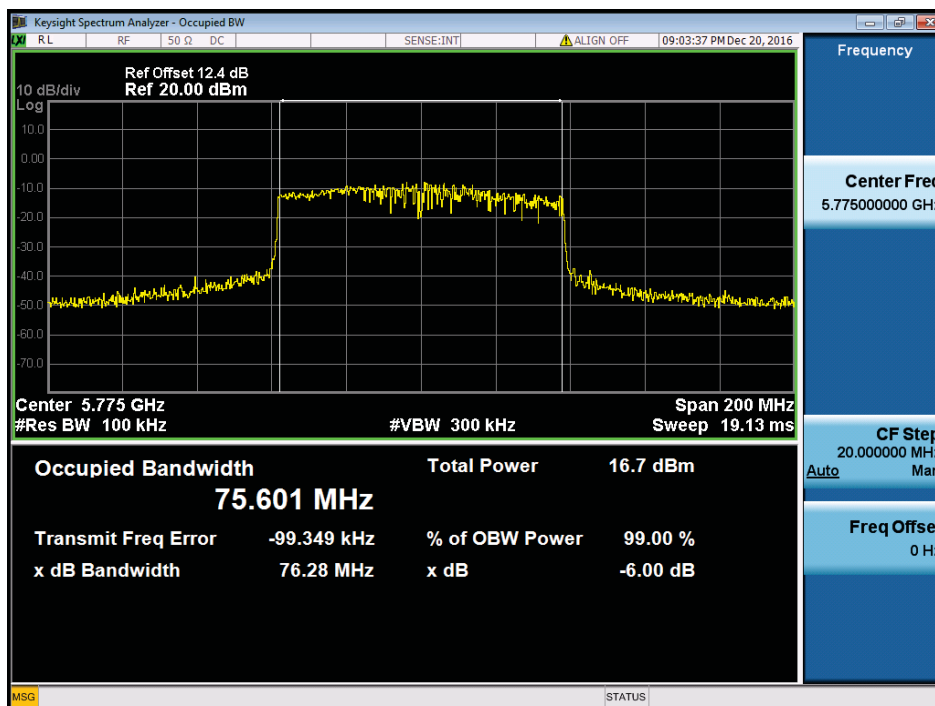

ATTACHMENT F - MAXIMUM OUTPUT POWER

Test Mode: UNII-1/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.41	0.00	15.41	30.00	1.00
CH40	5200	15.91	0.00	15.91	30.00	1.00
CH48	5240	15.86	0.00	15.86	30.00	1.00

Test Mode: UNII-1/TX N20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.48	0.00	15.48	30.00	1.00
CH40	5200	15.86	0.00	15.86	30.00	1.00
CH48	5240	15.84	0.00	15.84	30.00	1.00

Test Mode: UNII-1/TX N40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	15.43	0.00	15.43	30.00	1.00
CH46	5230	15.53	0.00	15.53	30.00	1.00

Test Mode: UNII-2A/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	16.20	0.00	16.20	24.00	0.25
CH60	5300	16.42	0.00	16.42	24.00	0.25
CH64	5320	16.23	0.00	16.23	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.96	0.00	15.96	24.00	0.25
CH60	5300	16.29	0.00	16.29	24.00	0.25
CH64	5320	16.03	0.00	16.03	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.76	0.00	15.76	24.00	0.25
CH62	5310	15.91	0.00	15.91	24.00	0.25

Test Mode: UNII-2C/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.75	0.00	15.75	24.00	0.25
CH116	5580	15.88	0.00	15.88	24.00	0.25
CH140	5700	14.92	0.00	14.92	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.64	0.00	15.64	24.00	0.25
CH116	5580	15.76	0.00	15.76	24.00	0.25
CH140	5700	14.86	0.00	14.86	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.46	0.00	15.46	24.00	0.25
CH110	5550	15.40	0.00	15.40	24.00	0.25
CH134	5670	14.59	0.00	14.59	24.00	0.25

Test Mode: UNII-3/ TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.46	0.00	15.46	30.00	1.00
CH157	5785	14.98	0.00	14.98	30.00	1.00
CH165	5825	14.66	0.00	14.66	30.00	1.00

Test Mode: UNII-3/TX N20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.12	0.00	15.12	30.00	1.00
CH157	5785	14.80	0.00	14.80	30.00	1.00
CH165	5825	14.53	0.00	14.53	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.99	0.00	14.99	30.00	1.00
CH159	5795	14.72	0.00	14.72	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	14.11	0.00	14.11	30.00	1.00

Test Mode: UNII-2A/TX AC80 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	14.47	0.00	14.47	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	14.36	0.00	14.36	24.00	0.25
CH122	5610	14.14	0.00	14.14	24.00	0.25

Test Mode: UNII-3/TX AC80 Mode


Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	13.71	0.00	13.71	30.00	1.00

ATTACHMENT H - POWER SPECTRAL DENSITY


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	7.51	0.00	7.51	17.00
CH40	5200	7.76	0.00	7.76	17.00
CH48	5240	7.21	0.00	7.21	17.00


CH36

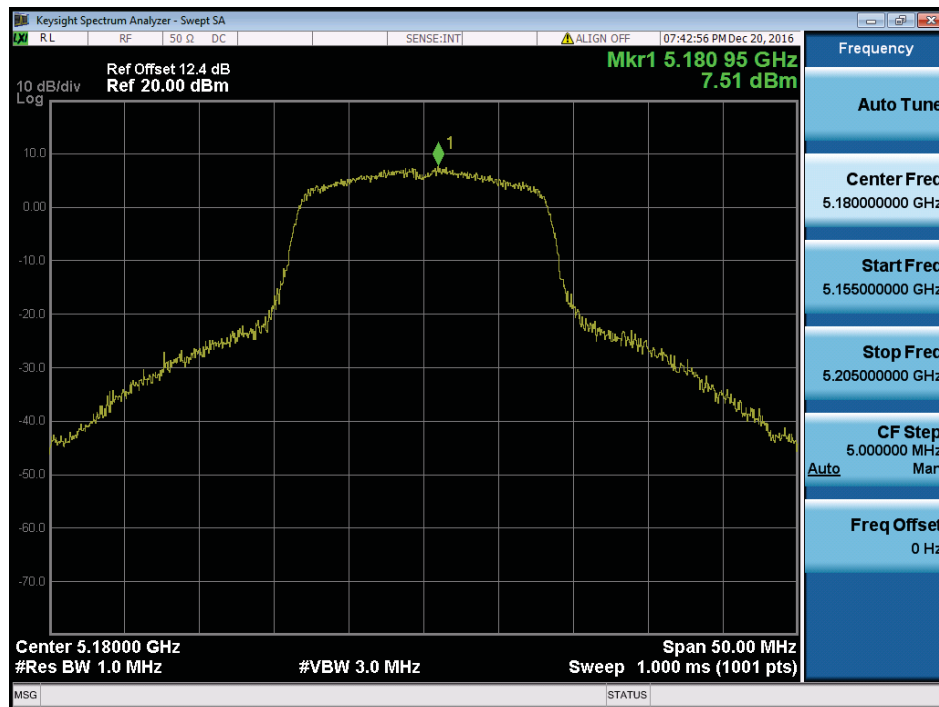

CH40

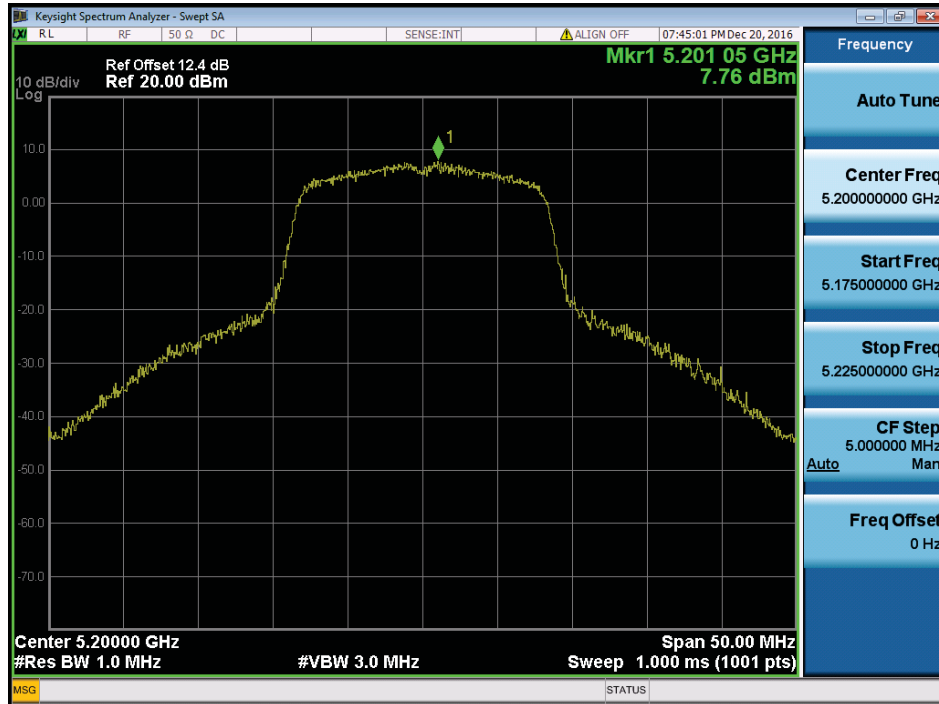


CH48

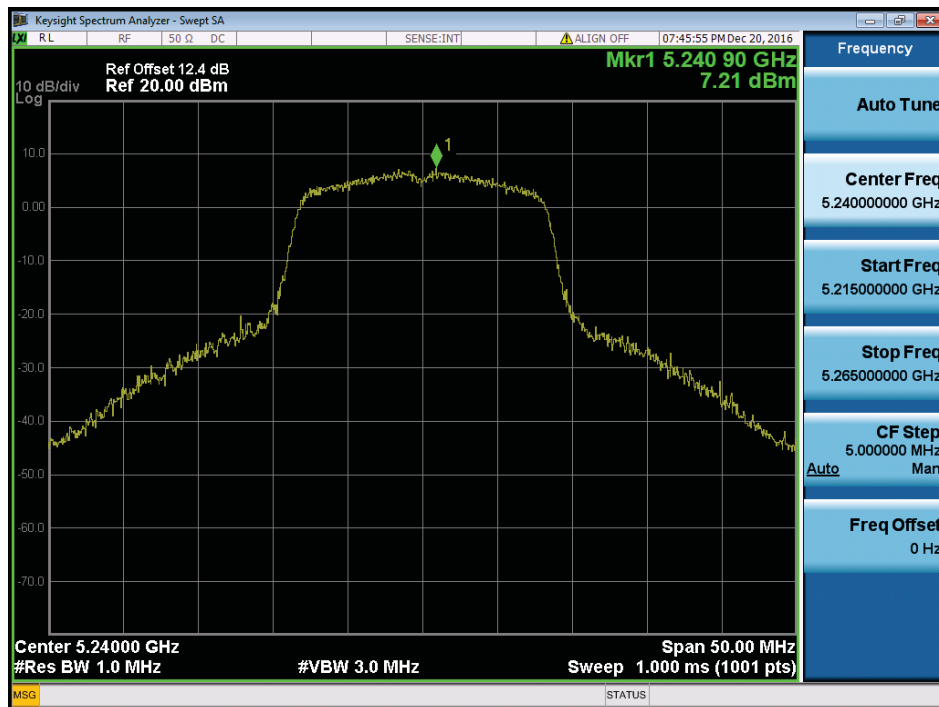


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	7.28	0.00	7.28	17.00
CH40	5200	7.20	0.00	7.20	17.00
CH48	5240	6.46	0.00	6.46	17.00


CH36

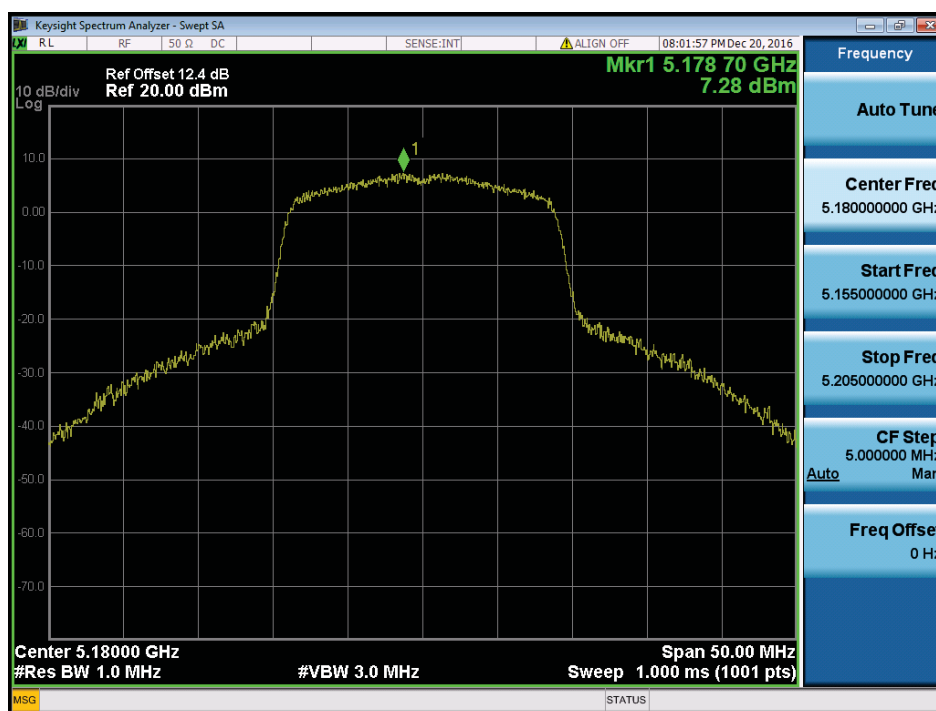

CH40

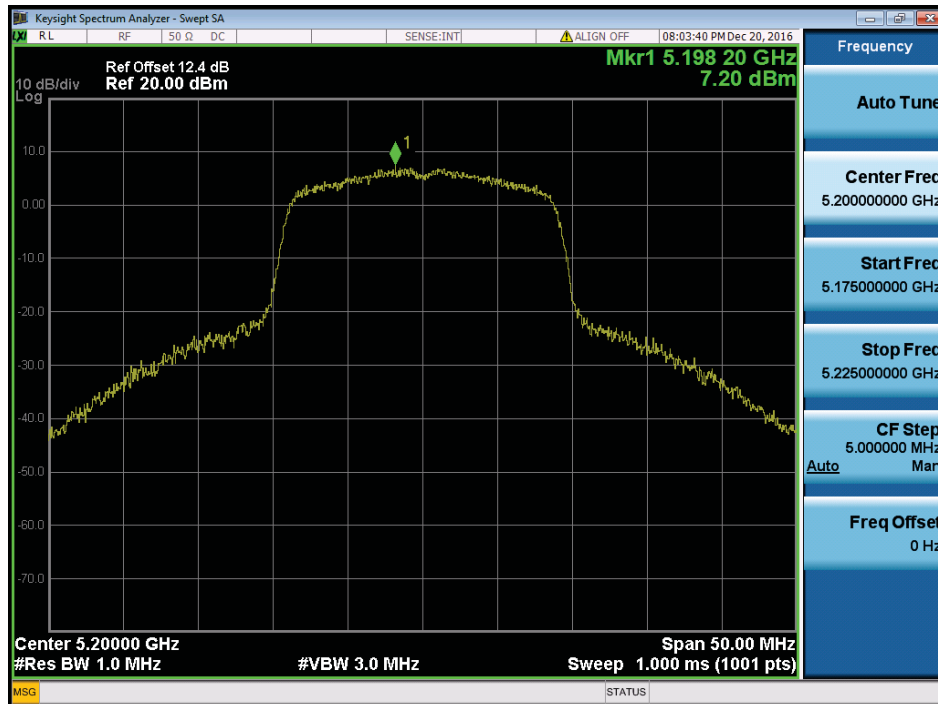


CH48

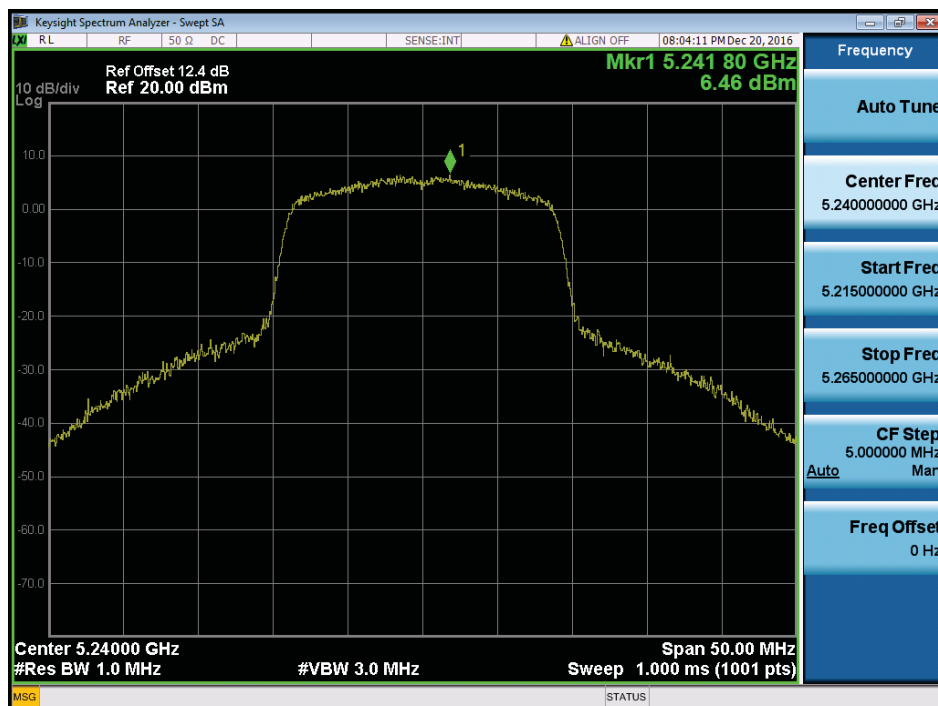


Test Mode: UNII-1/TX N40 Mode_CH38/CH46

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	4.02	0.00	4.02	17.00
CH46	5230	3.32	0.00	3.32	17.00

CH38

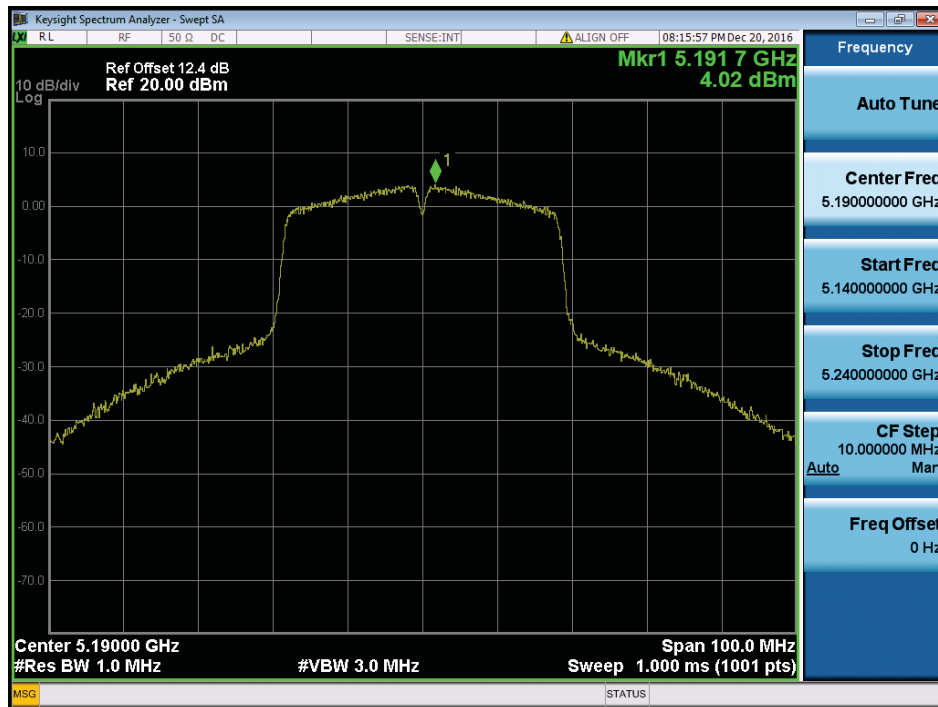


CH46

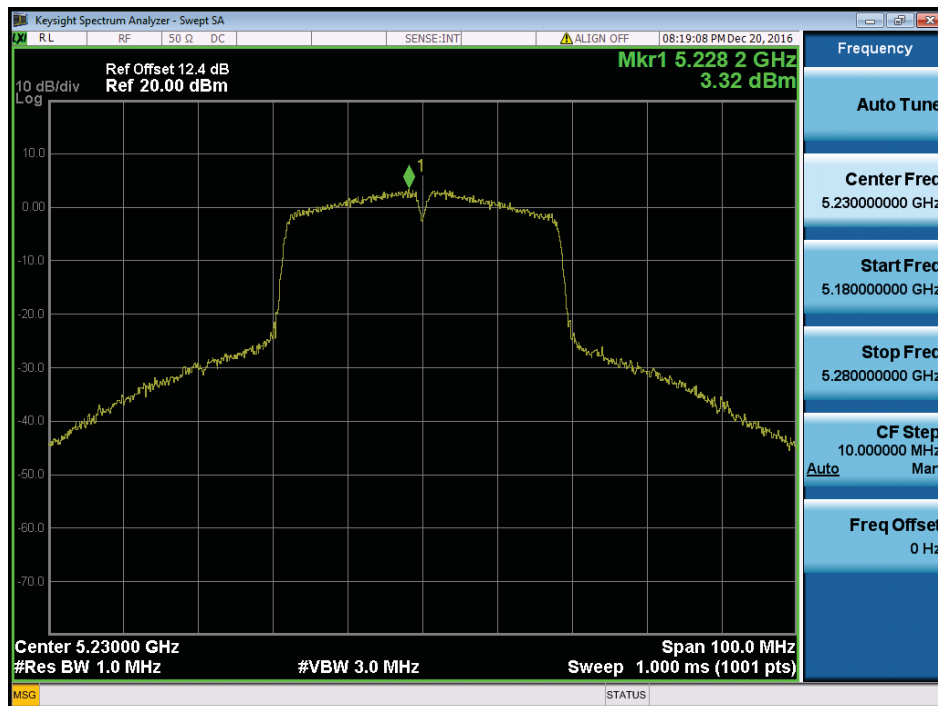


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	6.70	0.00	6.70	11.00
CH60	5300	5.75	0.00	5.75	11.00
CH64	5320	5.24	0.00	5.24	11.00


CH52

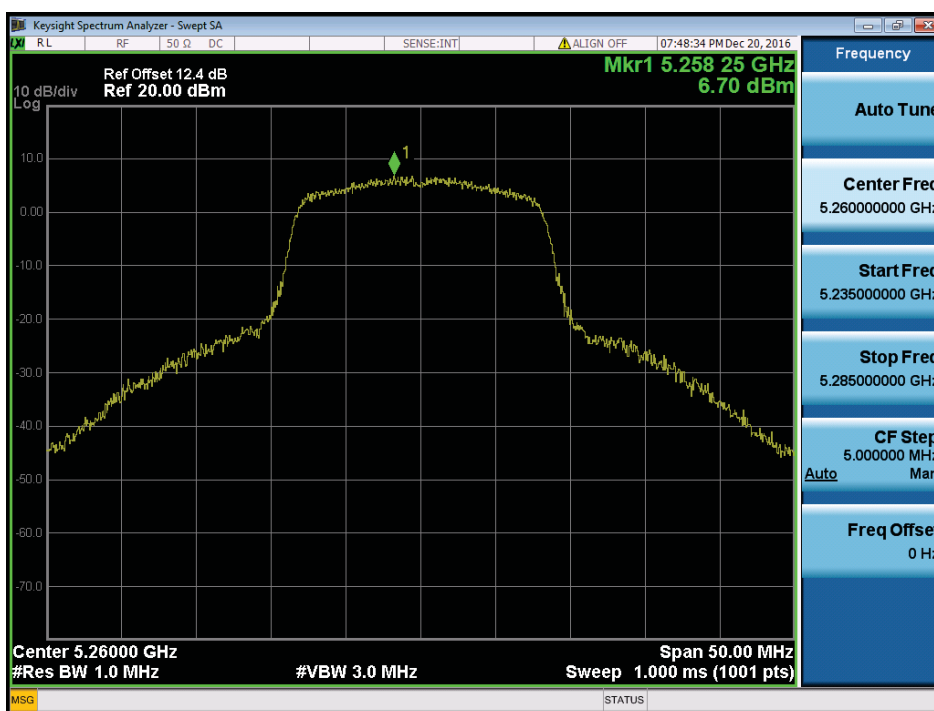

CH60

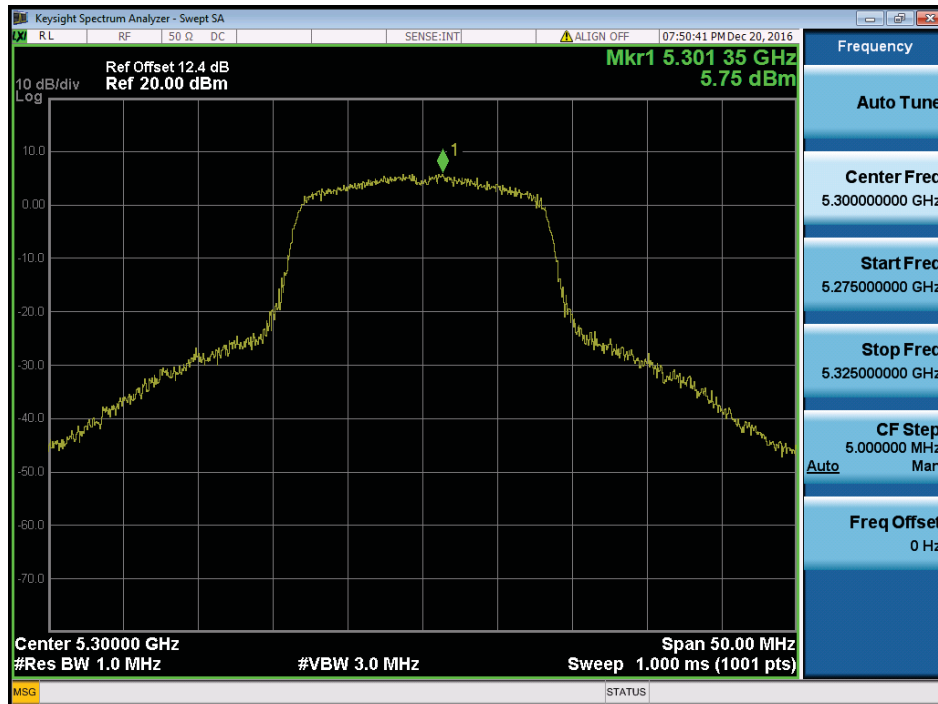


CH64

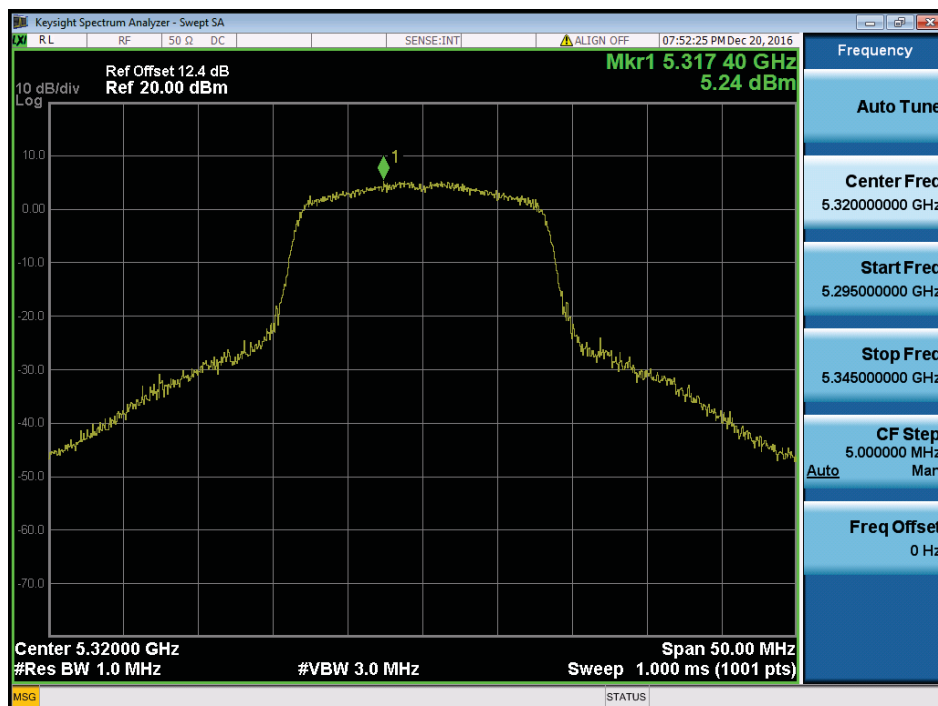


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	6.38	0.00	6.38	11.00
CH60	5300	5.19	0.00	5.19	11.00
CH64	5320	4.93	0.00	4.93	11.00


CH52

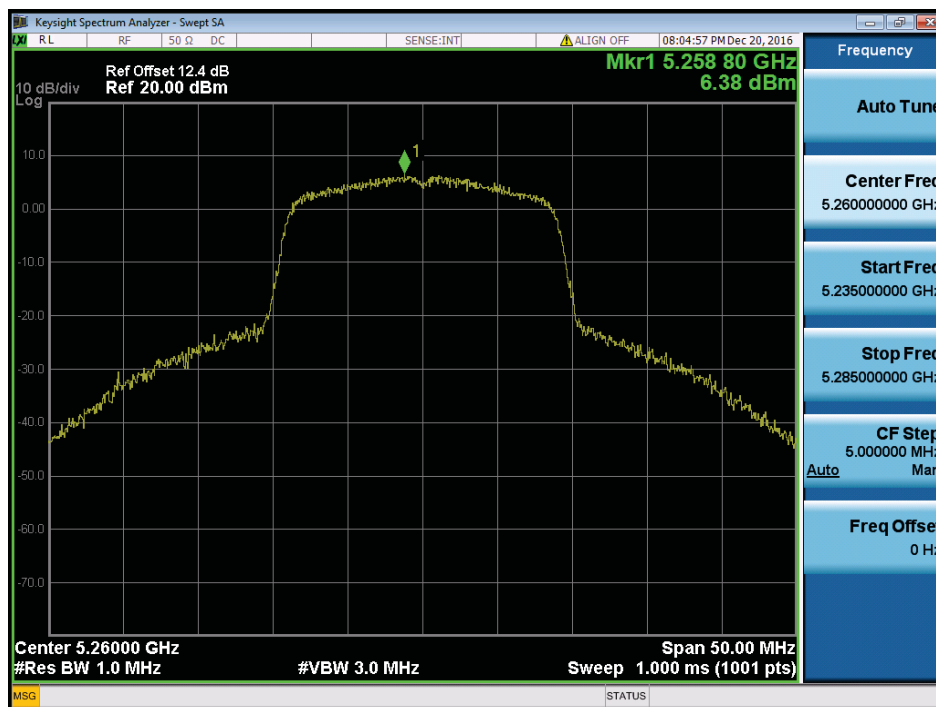

CH60

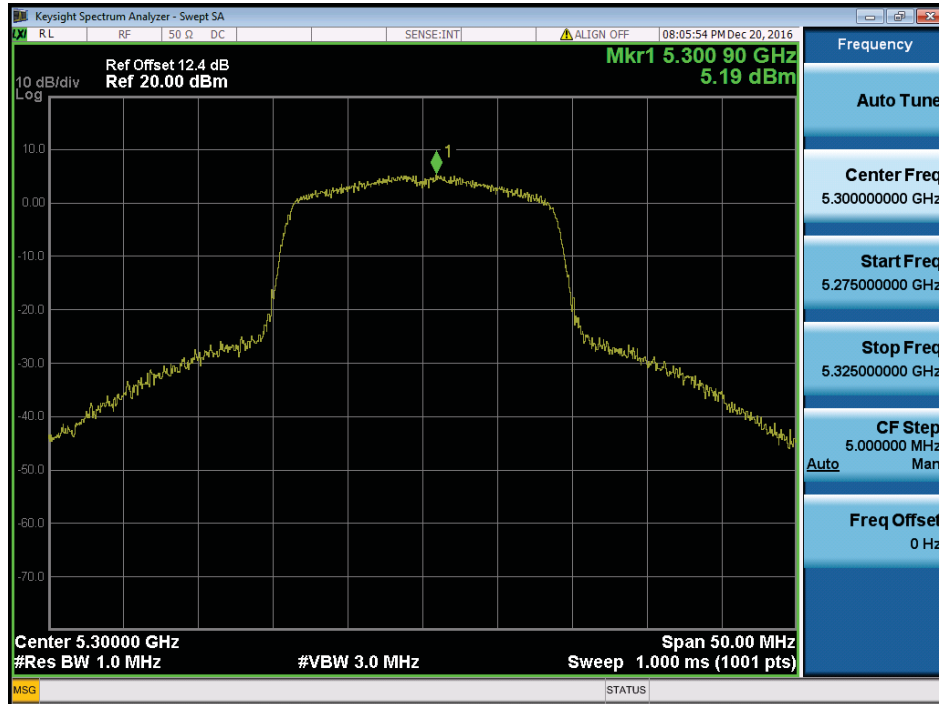


CH64

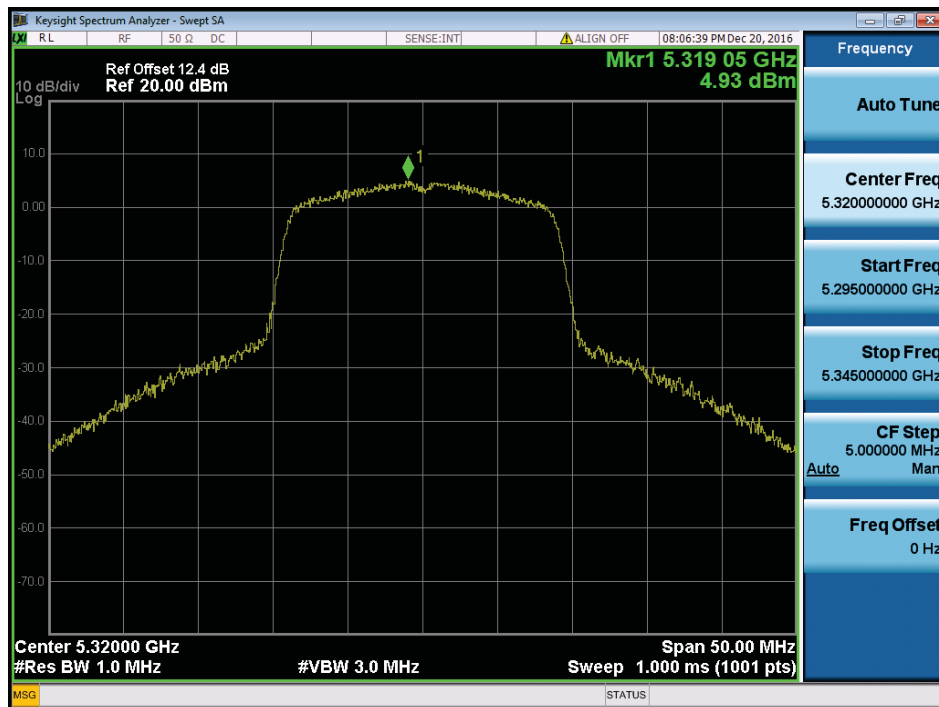


Test Mode: UNII-2A/TX N40 Mode_CH54/CH62

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	3.02	0.00	3.02	11.00
CH62	5310	2.11	0.00	2.11	11.00

CH54

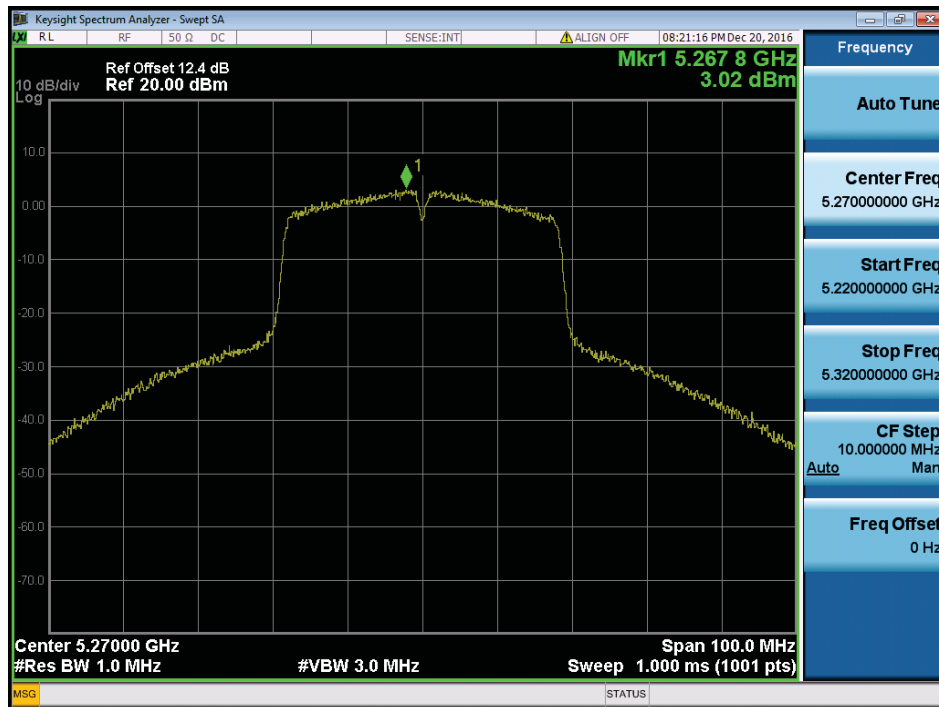


CH62

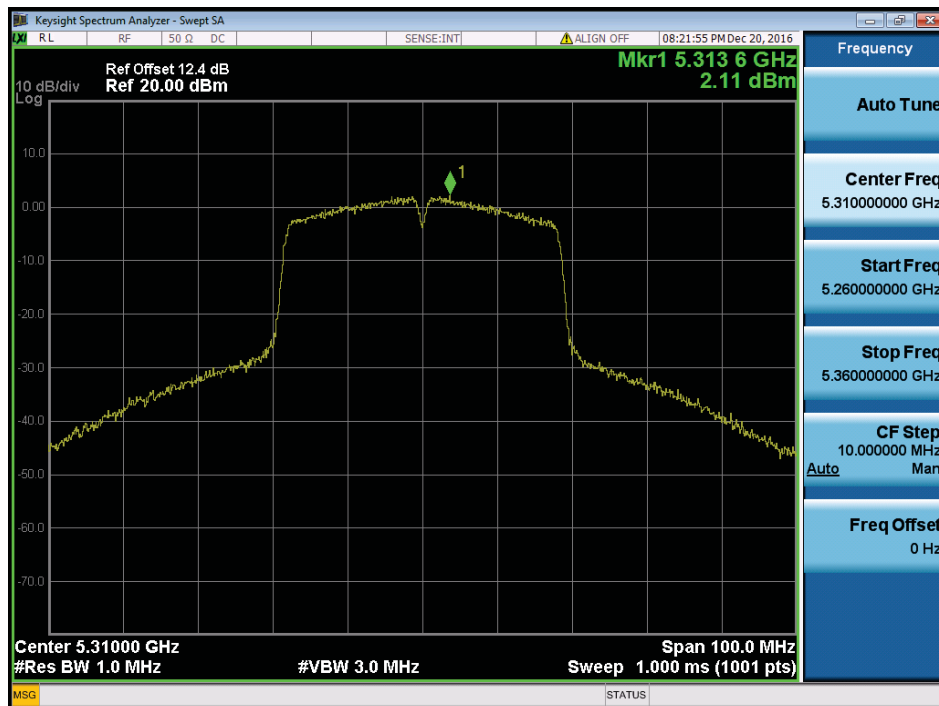


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	6.06	0.00	6.06	11.00
CH116	5580	5.96	0.00	5.96	11.00
CH140	5700	3.46	0.00	3.46	11.00


CH100

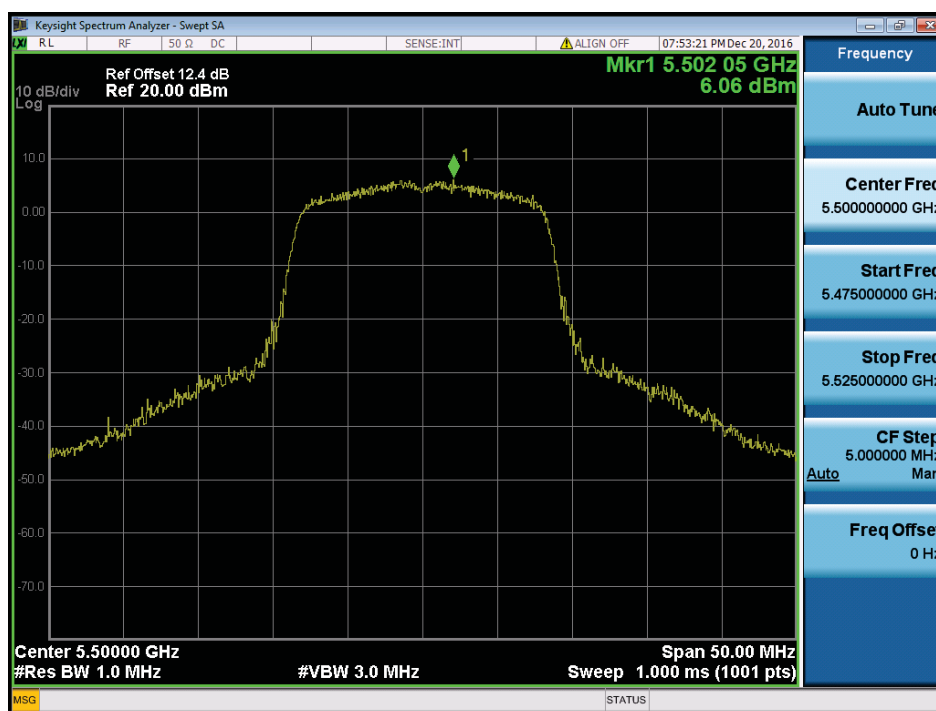

CH116

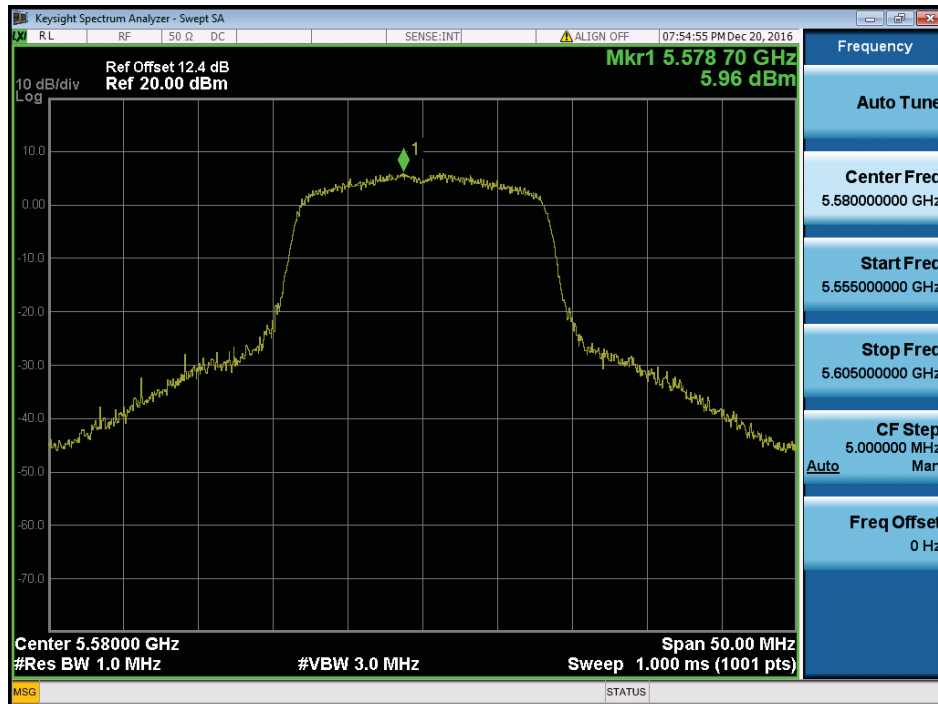


CH140

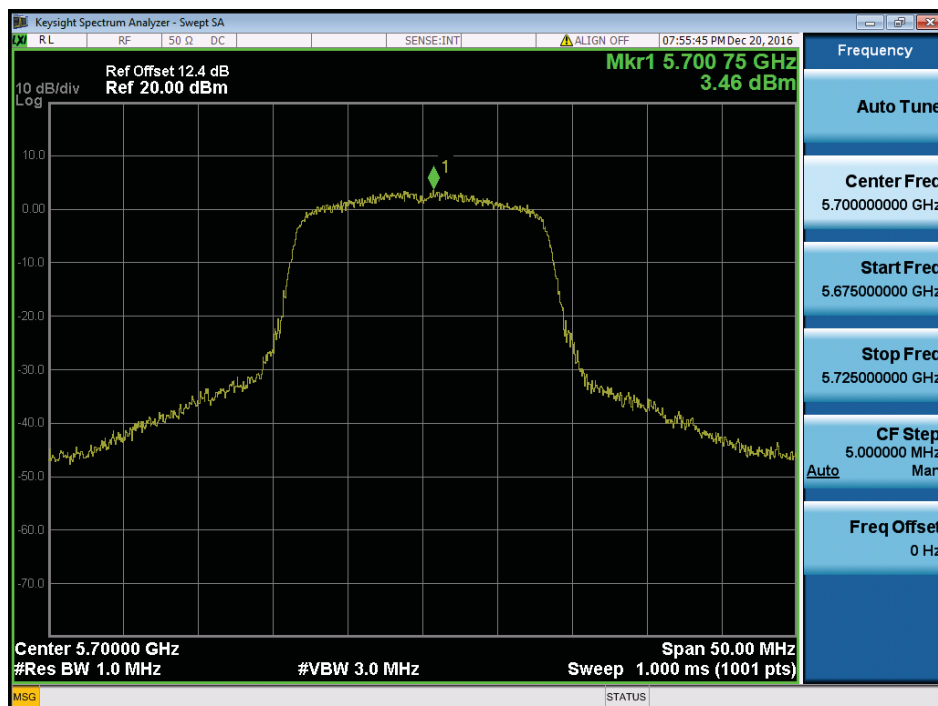


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	5.46	0.00	5.46	11.00
CH116	5580	5.82	0.00	5.82	11.00
CH140	5700	3.15	0.00	3.15	11.00


CH100

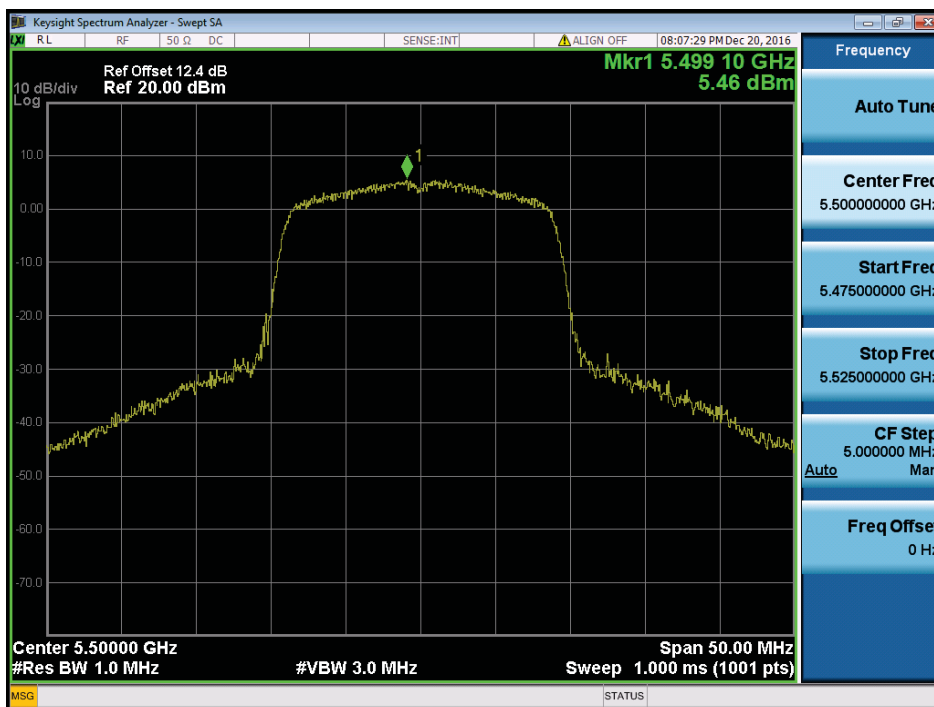

CH116

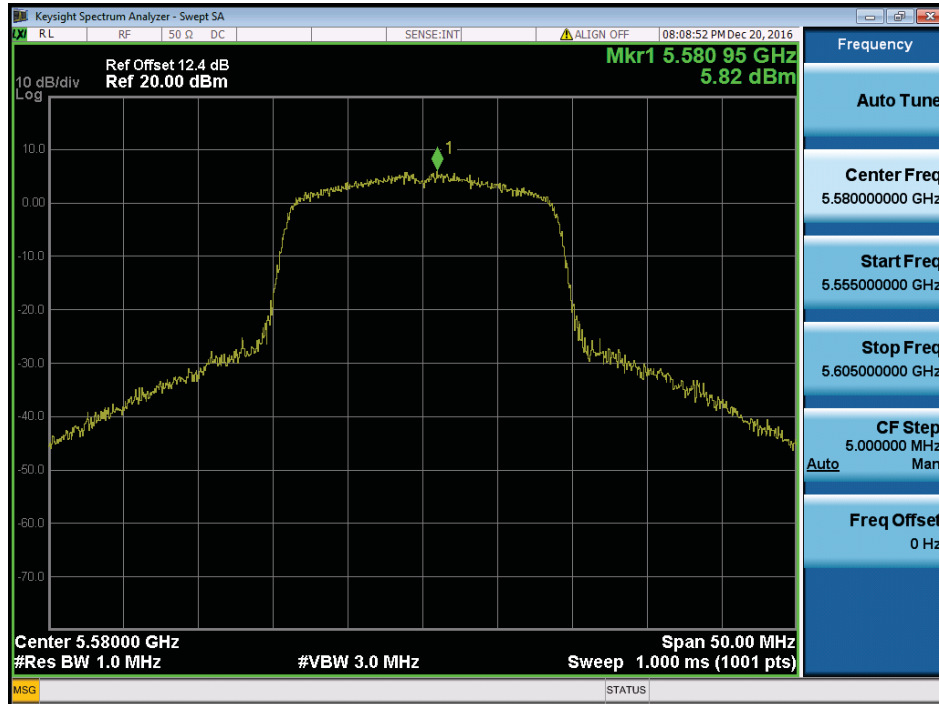


CH140

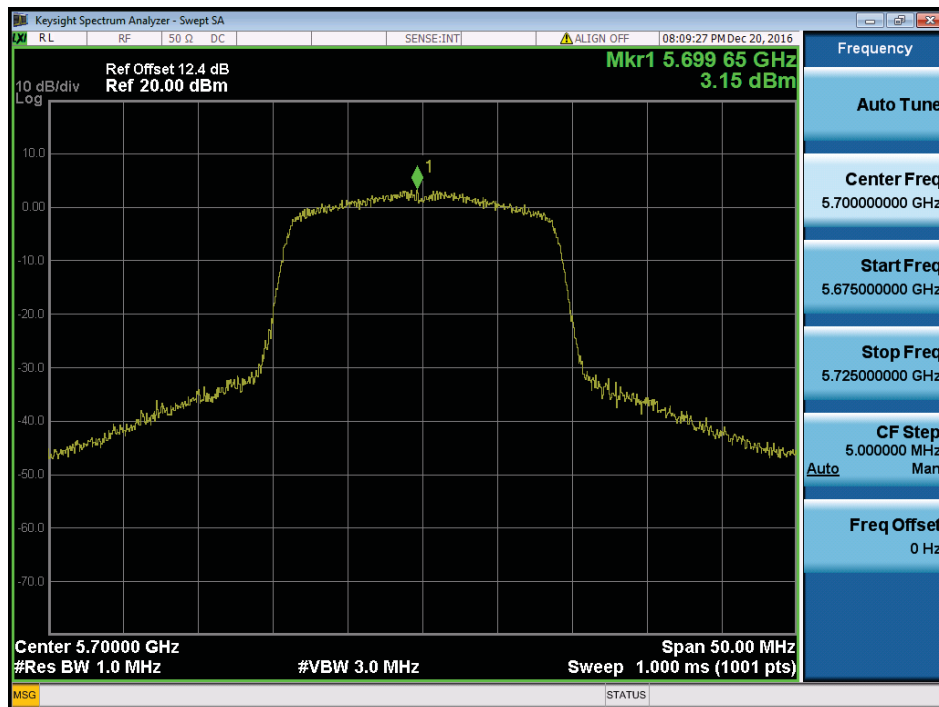


Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	2.54	0.00	2.54	11.00
CH110	5550	2.72	0.00	2.72	11.00
CH134	5670	0.63	0.00	0.63	11.00


CH102

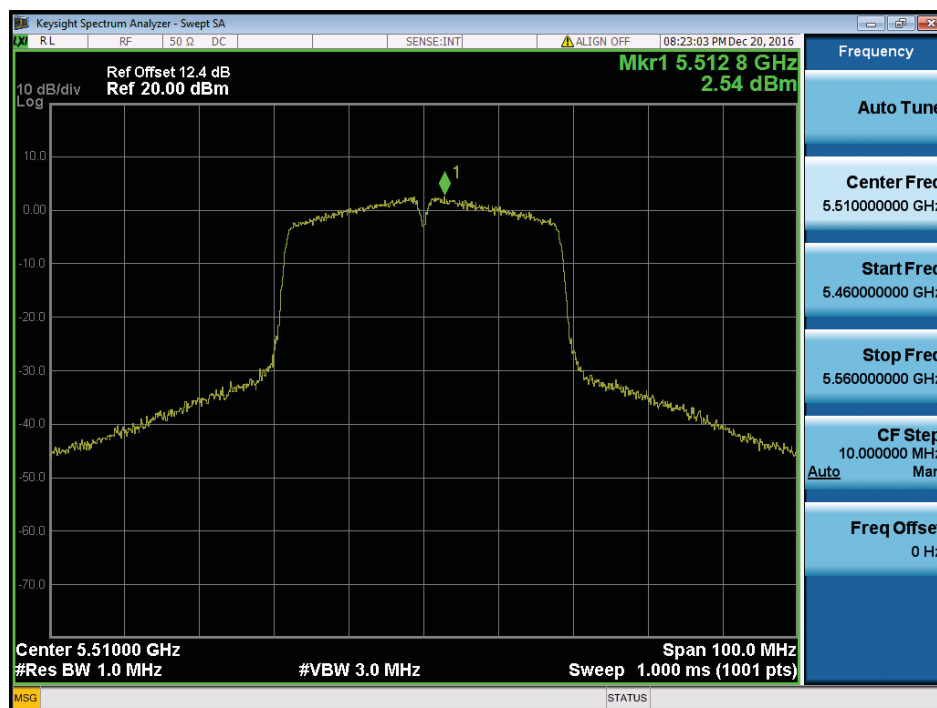

CH110

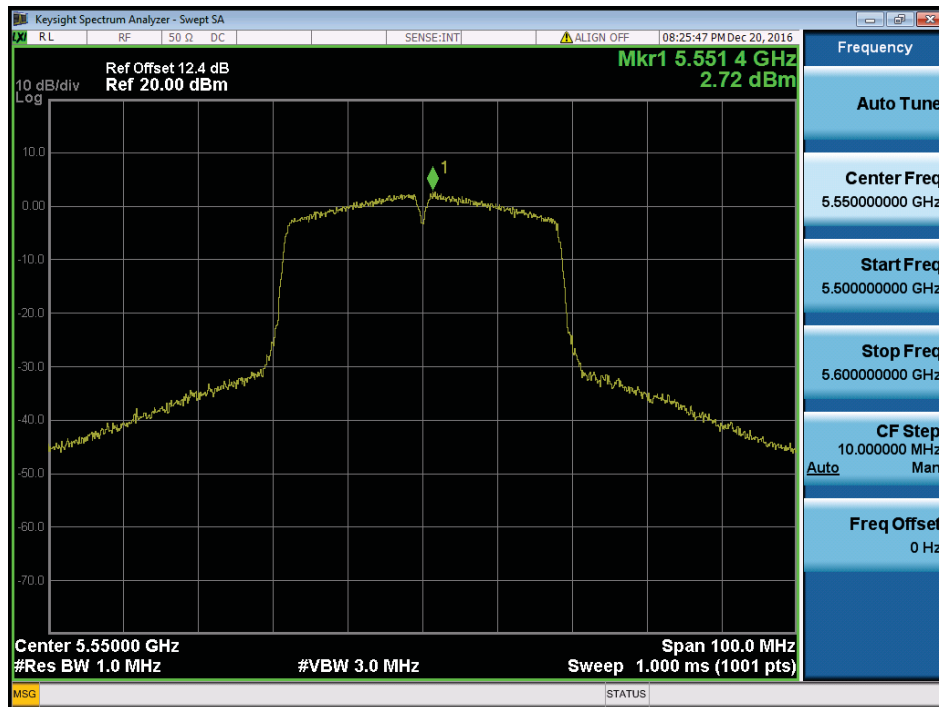


CH134

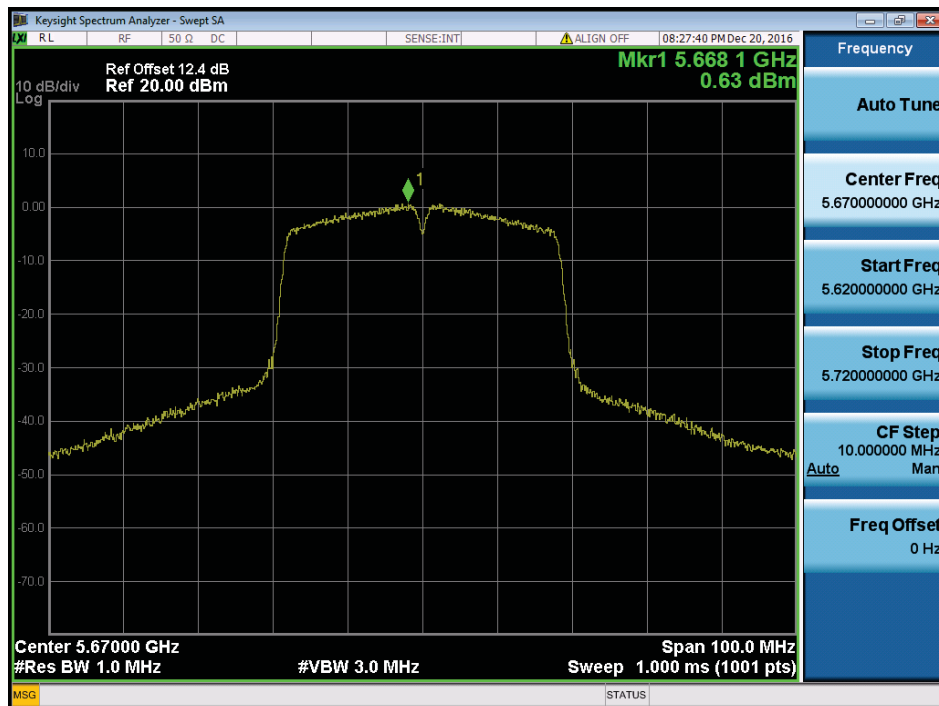


Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	0.52	0.00	0.52	30.00
CH157	5785	0.20	0.00	0.20	30.00
CH165	5825	0.44	0.00	0.44	30.00


TX CH149

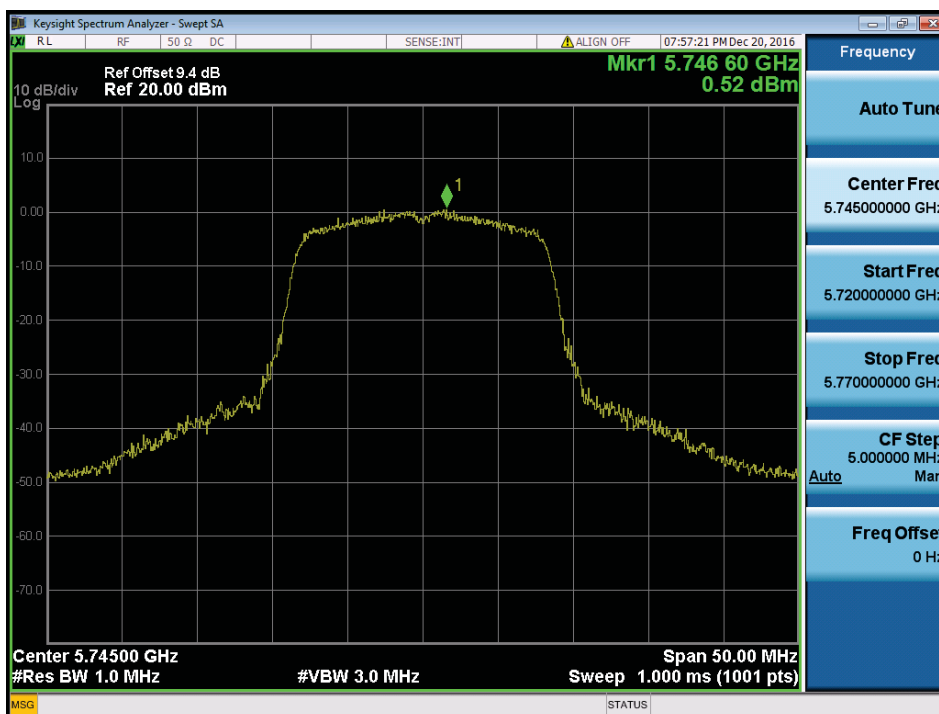

TX CH157

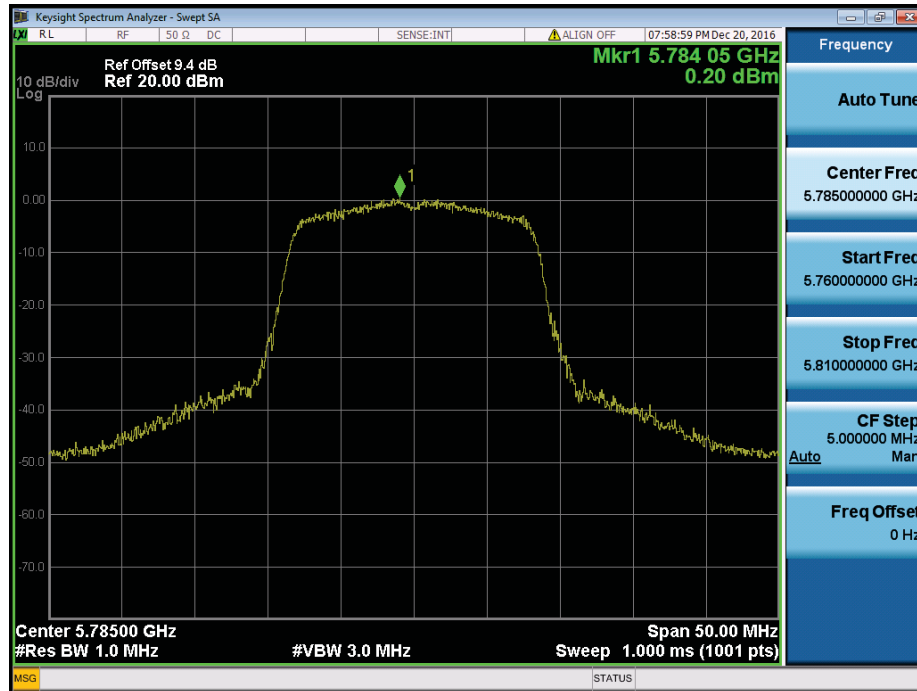


TX CH165

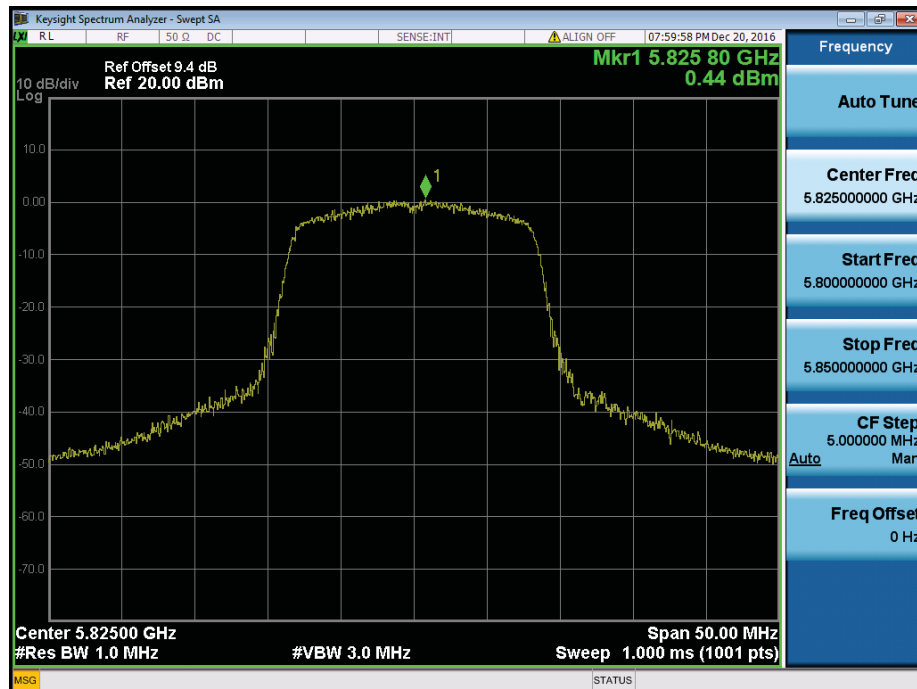


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-0.12	0.00	-0.12	30.00
CH157	5785	-0.02	0.00	-0.02	30.00
CH165	5825	-0.01	0.00	0.00	30.00


TX CH149

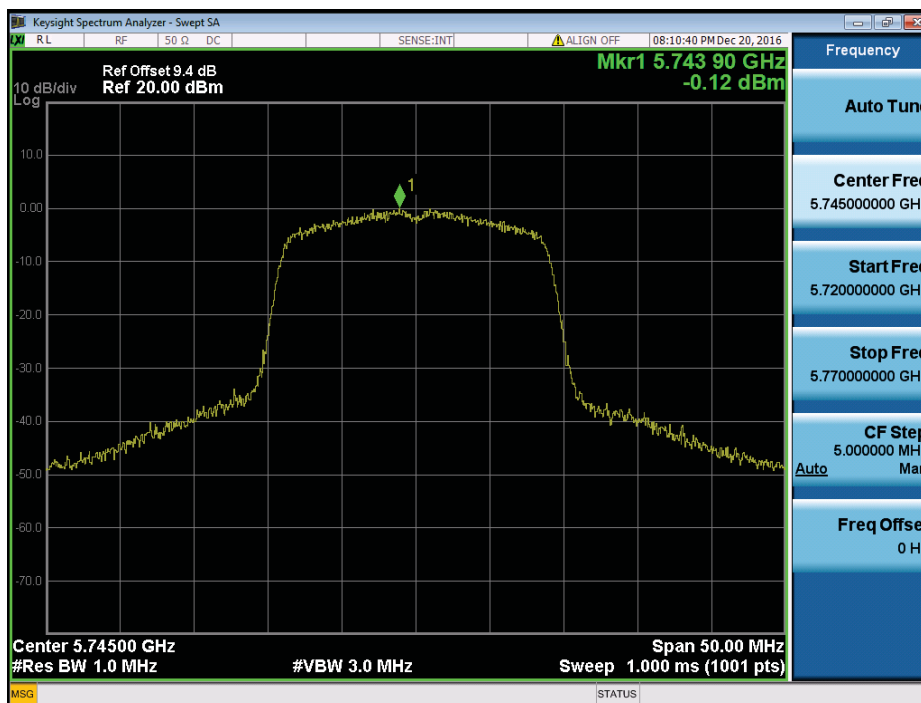

TX CH157

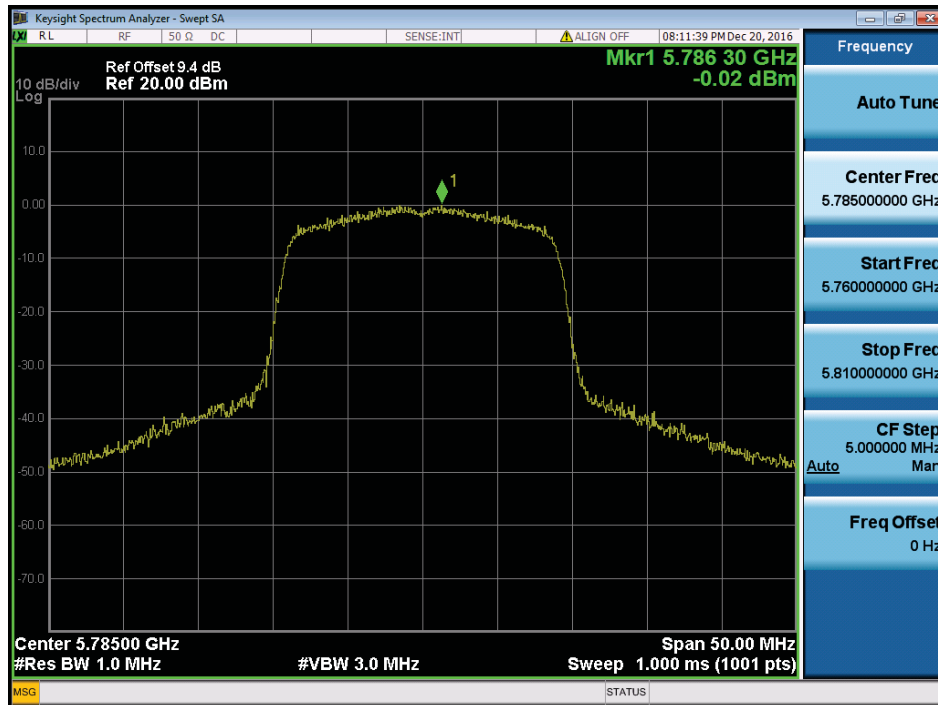


TX CH165

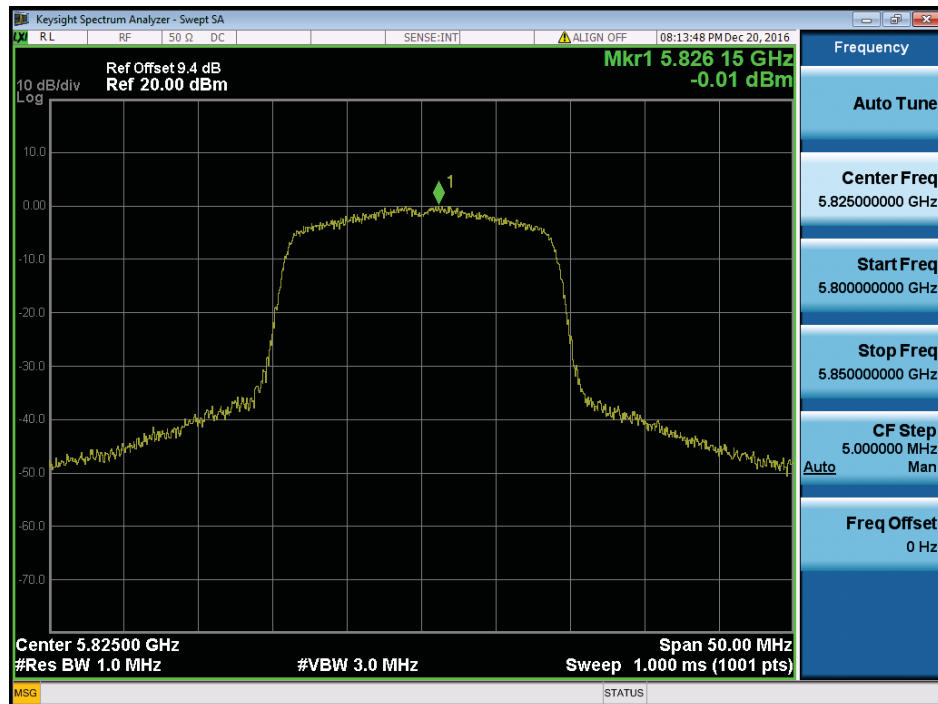


Test Mode: UNII-3/ TX N40 Mode_CH151/CH159

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-3.12	0.00	-3.12	30.00
CH159	5795	-3.27	0.00	-3.27	30.00

TX CH151

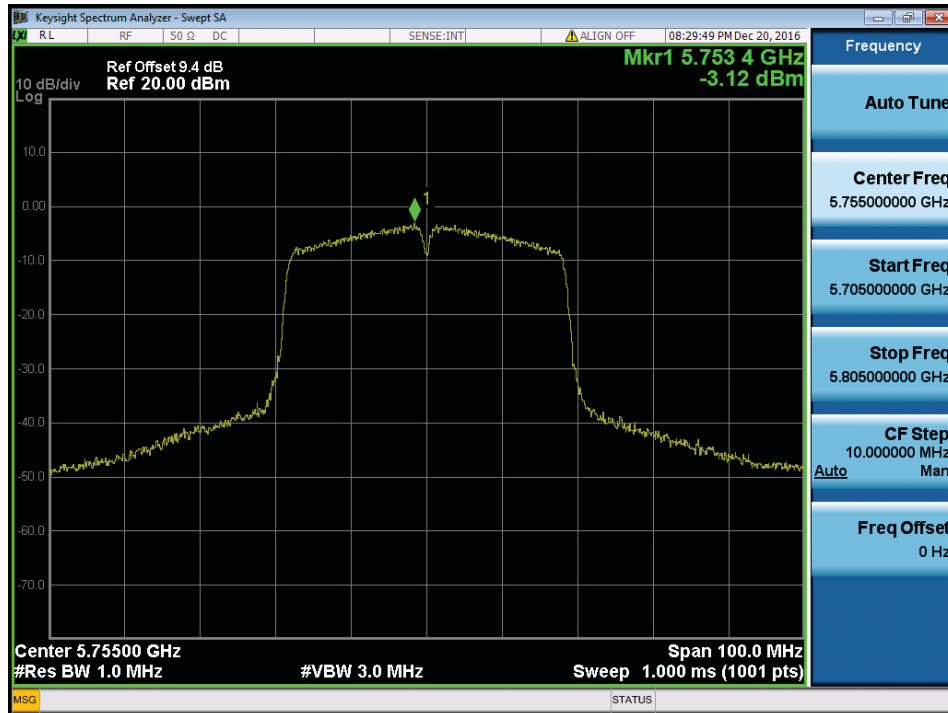


TX CH159

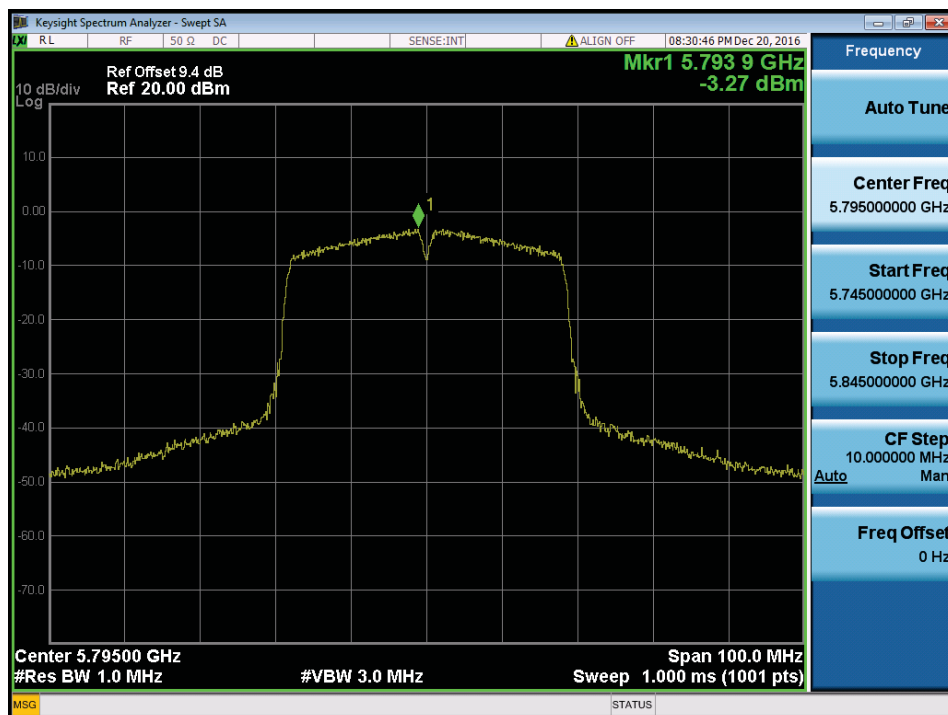

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-0.43	0.00	-0.43	17.00


CH42

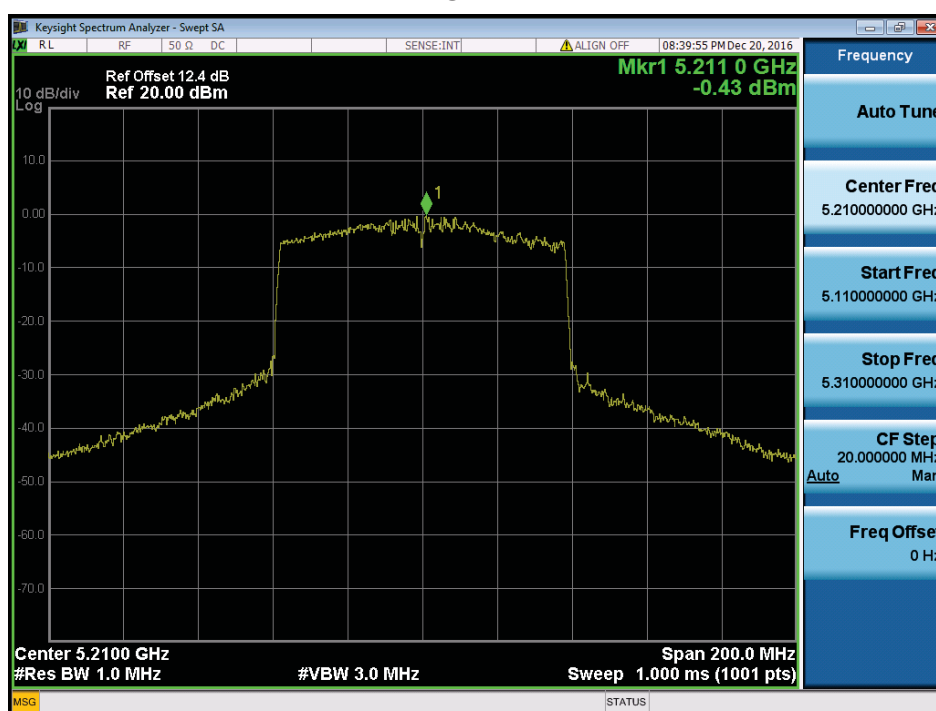

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-1.75	0.00	-1.75	11.00


CH58

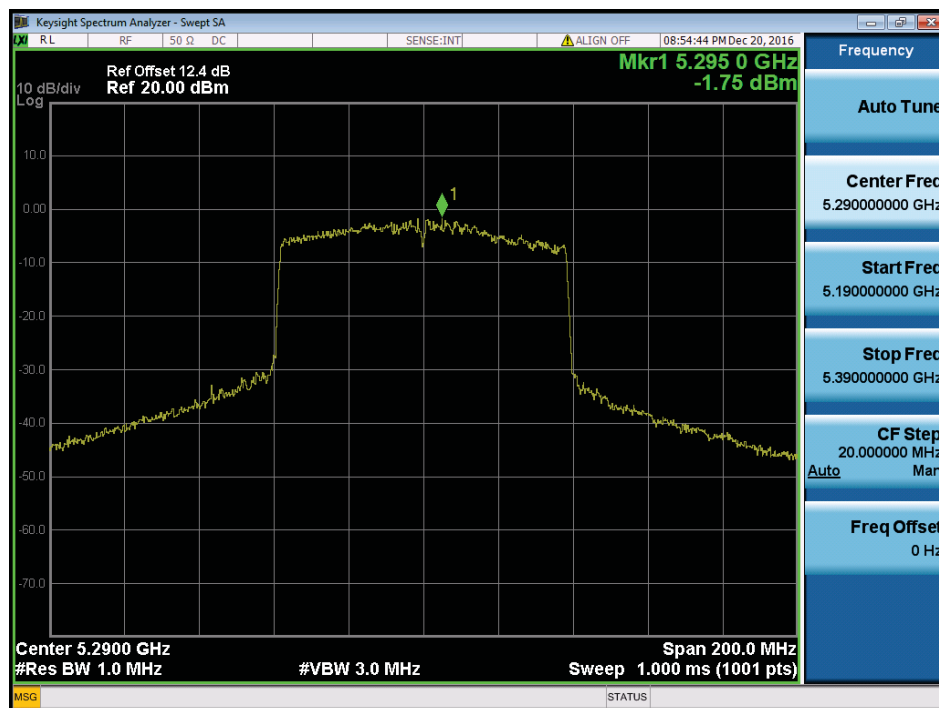


Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-1.50	0.00	-1.50	11.00
CH122	5610	-1.85	0.00	-1.85	11.00

CH106

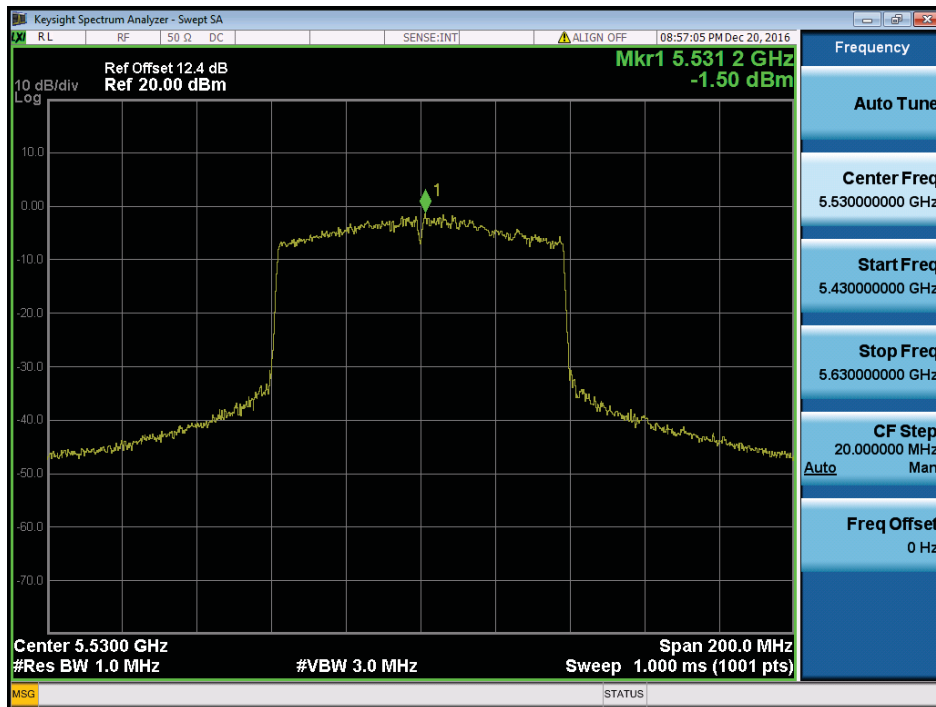


CH122

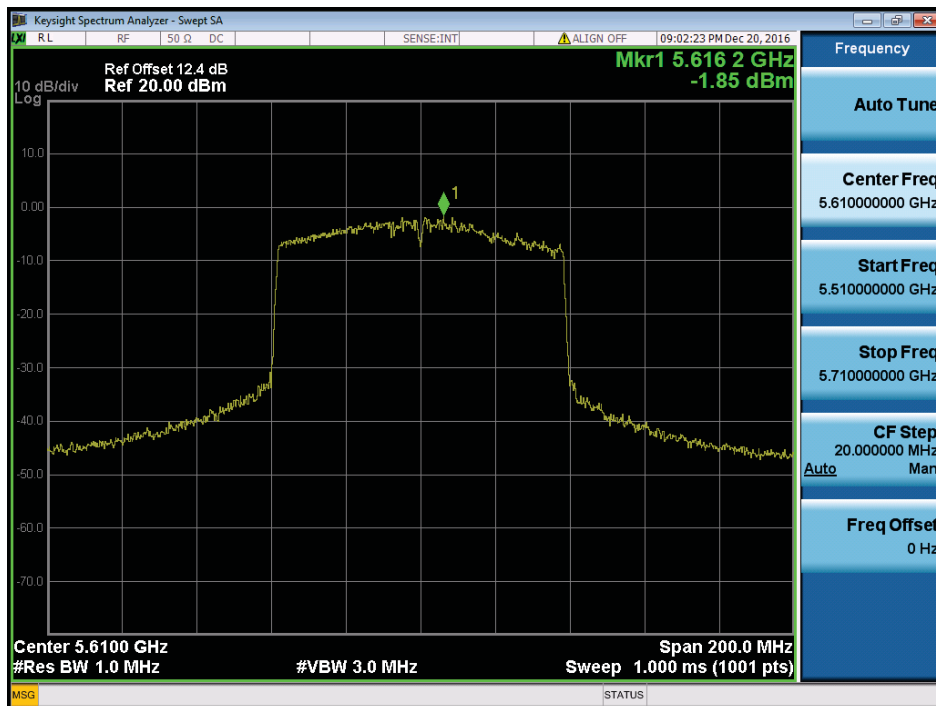

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-6.97	0.00	-6.97	30.00

TX CH155

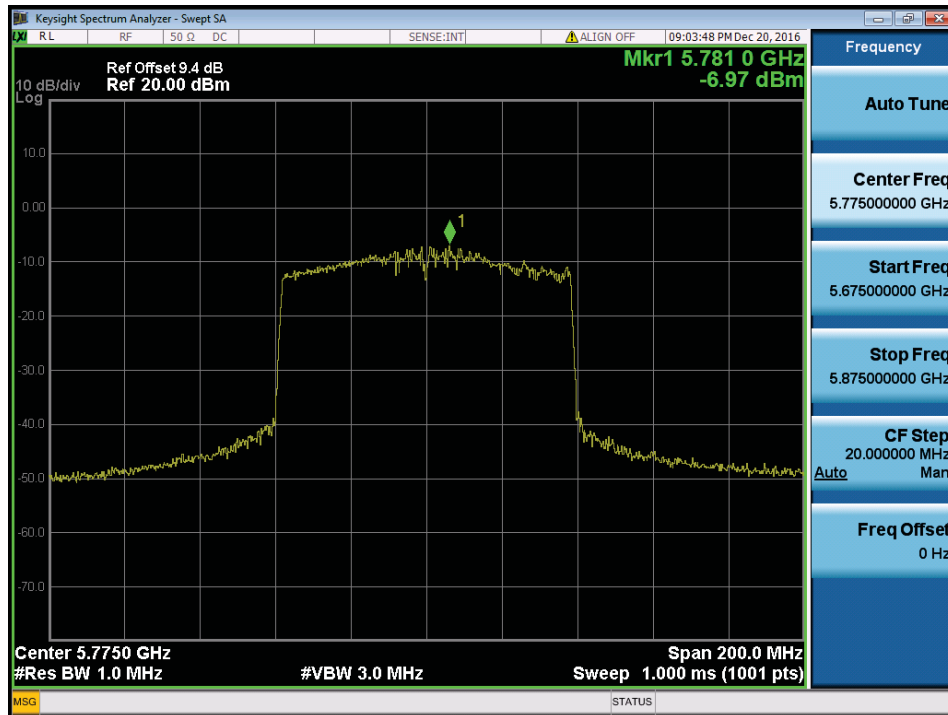

ATTACHMENT H - FREQUENCY STABILITY

Test Mode:	UNII-1
------------	--------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180.0000
4.18	5180.0016
3.8	5180.0018
3.42	5180.0018
Max. Deviation (MHz)	0.0018
Max. Deviation (ppm)	0.3475

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5180.0000
-20	5180.0018
-10	5180.0018
0	5180.0018
10	5180.0018
20	5180.0018
30	5180.0020
40	5180.0018
50	5180.0016
Max. Deviation (MHz)	0.0020
Max. Deviation (ppm)	0.3861

Test Mode:	UNII-2A
------------	---------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5260.0000
4.18	5260.0018
3.8	5260.0018
3.42	5260.0018
Max. Deviation (MHz)	0.0018
Max. Deviation (ppm)	0.3422

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5260.0000
-20	5260.0016
-10	5260.0018
0	5260.0018
10	5260.0018
20	5260.0016
30	5260.0018
40	5260.0018
50	5260.0018
Max. Deviation (MHz)	0.0018
Max. Deviation (ppm)	0.3422

Test Mode:	UNII-2C
------------	---------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5500.0000
4.18	5500.0016
3.8	5500.0018
3.42	5500.0020
Max. Deviation (MHz)	0.0020
Max. Deviation (ppm)	0.3636

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5500.0000
-20	5500.0020
-10	5500.0020
0	5500.0018
10	5500.0020
20	5500.0018
30	5500.0018
40	5500.0016
50	5500.0016
Max. Deviation (MHz)	0.0020
Max. Deviation (ppm)	0.3636

Test Mode:	UNII-3
------------	--------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5745.0000
4.18	5745.0018
3.8	5745.0018
3.42	5745.0018
Max. Deviation (MHz)	0.0018
Max. Deviation (ppm)	0.3133

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5745.0000
-20	5745.0018
-10	5745.0018
0	5745.0018
10	5745.0020
20	5745.0020
30	5745.0020
40	5745.0020
50	5745.0018
Max. Deviation (MHz)	0.0020
Max. Deviation (ppm)	0.3481