



FCC TEST REPORT

FCC ID:2A5YG-Z10

Report Number..... : ZKT-220816L5742E

Date of Test..... Aug. 09, 2022 to Aug. 22, 2022

Date of issue : Aug. 22, 2022

Total number of pages 22

Test Result : PASS

Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.

Address 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Shenzhen Midason Technology Co., Ltd

Address Floor 2, Building A, NO.10, Alley 4, Rd., Shaxin, St. Maluan, District Pingshan, Shenzhen China

Manufacturer's name : Shenzhen Midason Technology Co., Ltd

Address Floor 2, Building A, NO.10, Alley 4, Rd., Shaxin, St. Maluan, District Pingshan, Shenzhen China

Test specification:

Standard..... : FCC CFR Title 47 Part 15 Subpart C

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No. : TRF-EL-107_V0

Test Report Form(s) Originator : ZKT Testing

Master TRF : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : 3 in 1 Wireless Charger

Trademark : YFZN

Model/Type reference : Z10

Ratings..... : Input: DC 9V-2A, 5V-3A
Wireless Output: Phone: 15W/10W/7.5W/5W;
Watch: 2.5W Max
Headphone:3W Max



Testing procedure and testing location:

Testing Laboratory.....: **Shenzhen ZKT Technology Co., Ltd.**

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature): **Tom Zou**

Jim Liu

Reviewer (name + signature).....: **Jackson Fang**

Jackson Fang

Approved (name + signature): **Lake Xie**





TABLE OF CONTENTS

1. VERSION	4
2. TEST SUMMARY	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 Test mode.....	8
3.3 Block Diagram of EUT Configuration	9
3.4 Test Conditions.....	9
3.5 Description Of Support Units (Conducted Mode).....	9
3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
4. CONDUCTED EMISSION TEST.....	11
4.1 CONDUCTED EMISSION MEASUREMENT	11
4.1.1 POWER LINE CONDUCTED EMISSION Limits.....	11
4.1.2 TEST PROCEDURE	11
4.1.3 DEVIATION FROM TEST STANDARD.....	12
4.1.4 TEST SETUP.....	12
4.1.5 EUT OPERATING CONDITIONS.....	12
4.1.6 Test Result	13
5. RADIATED EMISSION MEASUREMENT	15
5.1 Radiated Emission Limits.....	15
5.2 Anechoic Chamber Test Setup Diagram	16
5.3 Test Procedure	16
5.4 DEVIATION FROM TEST STANDARD	16
5.5 Test Result	17
6. BANDWIDTH TEST	21
7. ANTENNA REQUIREMENT	23
8. TEST SETUP PHOTO	24
9. EUT CONSTRUCTIONAL DETAILS	24



1. VERSION

Report No.	Version	Description	Approved
ZKT-220816L5742E	Rev.01	Initial issue of report	Aug. 22, 2022



2. TEST SUMMARY

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass
20dB Bandwidth	15.215	Pass

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street,
Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225
Designation Number: CN1299
IC Registered No.: 27033

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8dB
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59℃



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	3 in 1 Wireless Charger
Model No.:	Z10
Model Difference:	N/A
Serial No.:	N/A
Hardware version:	H1.0
Software version:	S1.0
Operation Frequency:	115kHz ~ 205KHz,
Modulation type:	MSK
Antenna Type:	Inductive loop coil Antenna
Antenna gain:	0dBi
Power supply:	Input: DC 5V 3A/DC 9V 2A Wireless Output Phone: 15W/10W/7.5W/5W; Watch: 2.5W Max Headphone:3W Max




3.2 Test mode

Test Modes:		
Mode 1	AC/DC Adapter (5V/3A) + EUT + Phone XIAOMI (15W)+Headphone:3W+Watch: 2.5W	
Mode 2	AC/DC Adapter (5V/3A) + EUT + Phone XIAOMI (10W)+Headphone:3W+Watch: 2.5W	
Mode 3	AC/DC Adapter (5V/3A) + EUT + Phone XIAOMI (7.5W)+Headphone:3W+Watch: 2.5W	
Mode 4	AC/DC Adapter (5V/3A) + EUT + Phone XIAOMI (5W)+Headphone:3W+Watch: 2.5W	
Mode 5	AC/DC Adapter (9V/2A) + EUT + Phone XIAOMI (15W)+Headphone:3W+Watch: 2.5W	Record
Mode 6	AC/DC Adapter (9V/2A) + EUT + Phone XIAOMI (10W)+Headphone:3W+Watch: 2.5W	
Mode 7	AC/DC Adapter (9V/2A) + EUT + Phone XIAOMI (7.5W)+Headphone:3W+Watch: 2.5W	
Mode 8	AC/DC Adapter (9V/2A) + EUT + Phone XIAOMI (5W)+Headphone:3W+Watch: 2.5W	
Mode 9	AC/DC Adapter (5V/3A) + EUT + Phone XIAOMI (15W)+Headphone:3W	
Mode 10	AC/DC Adapter (5V/3A) + EUT + Phone XIAOMI (10W)+Headphone:3W	
Mode 11	AC/DC Adapter (5V/3A) + EUT + Phone XIAOMI (7.5W)+Headphone:3W	
Mode 12	AC/DC Adapter (5V/3A) + EUT + Phone XIAOMI (5W)+Headphone:3W	
Mode 13	AC/DC Adapter (9V/2A) + EUT + Phone XIAOMI (15W)+Watch: 2.5W	
Mode 14	AC/DC Adapter (9V/2A) + EUT + Phone XIAOMI (10W)+Watch: 2.5W	
Mode 15	AC/DC Adapter (9V/2A) + EUT + Phone XIAOMI (7.5W)+Watch: 2.5W	
Mode 16	AC/DC Adapter (9V/2A) + EUT + Phone XIAOMI (5W)+Watch: 2.5W	
Mode 17	AC/DC Adapter (5V/3A) + EUT + Phone XIAOMI (15W)	
Mode 18	AC/DC Adapter (5V/3A) + EUT + Phone XIAOMI (10W)	
Mode 19	AC/DC Adapter (5V/3A) + EUT + Phone XIAOMI (7.5W)	
Mode 20	AC/DC Adapter (5V/3A) + EUT + Phone XIAOMI (5W)	
Mode 21	AC/DC Adapter (9V/2A) + EUT + Phone XIAOMI (15W)	
Mode 22	AC/DC Adapter (9V/2A) + EUT + Phone XIAOMI (10W)	
Mode 24	AC/DC Adapter (9V/2A) + EUT + Phone XIAOMI (7.5W)	
Mode 25	AC/DC Adapter (9V/2A) + EUT + Phone XIAOMI (5W)	
Note: All test modes were pre-tested, but we only recorded the worst case in this report.		



3.3 Block Diagram of EUT Configuration

Radiated Emission

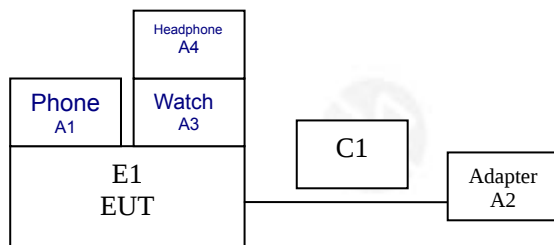

3.4 Test Conditions

Temperature: 23~26℃

Relative Humidity: 54~63 %

3.5 Description Of Support Units (Conducted Mode)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E1	3 in 1 Wireless Charger	YFZN	Z10	N/A	EUT
A1	Phone	XIAOMI	DL01	N/A	Auxiliary
A2	Headphone	Apple	AirPods	N/A	Auxiliary
A3	Watch	HUAQ	WatchS8	N/A	Auxiliary
A4	Adapter	HUWWEI	HW-050450C00	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	1.0M	DC cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	Oct. 18, 2021	Oct. 17, 2022
2	Spectrum Analyzer (1GHz-40GHz)	R&S	FSQ	100363	Oct. 17, 2021	Oct. 16, 2022
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Oct. 18, 2021	Oct. 17, 2022
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	Oct. 17, 2021	Oct. 16, 2022
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	Oct. 17, 2021	Oct. 16, 2022
6	Loop Antenna	TESEQ	HLA6121	58357	Oct. 17, 2021	Oct. 16, 2022
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	Oct. 18, 2021	Oct. 17, 2022
8	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	Oct. 18, 2021	Oct. 17, 2022
9	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Oct. 18, 2021	Oct. 17, 2022
10	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Oct. 18, 2021	Oct. 17, 2022
11	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Oct. 18, 2021	Oct. 17, 2022
12	ESG Signal Generator	Agilent	E4421B	N/A	Oct. 22, 2021	Oct. 21, 2022
13	Signal Generator	Agilent	N5182A	N/A	Oct. 22, 2021	Oct. 21, 2022
14	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	Oct. 17, 2021	Oct. 16, 2022
15	MWRF Power Meter Test system	MW	MW100-RPCB	N/A	Oct. 22, 2021	Oct. 21, 2022
16	D.C. Power Supply	LongWei	TPR-6405D	N/A	\	\
17	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
18	RF Software	MW	MTS8310	V2.0.0.0	\	\
19	Turntable	MF	MF-7802BS	N/A	\	\
20	Antenna tower	MF	MF-7802BS	N/A	\	\



Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Oct. 22, 2021	Oct. 21, 2022
2	LISN	CYBERTEK	EM5040A	E1850400149	Oct. 22, 2021	Oct. 21, 2022
3	Test Cable	N/A	C01	N/A	Oct. 18, 2021	Oct. 17, 2022
4	Test Cable	N/A	C02	N/A	Oct. 18, 2021	Oct. 17, 2022
5	EMI Test Receiver	R&S	ESCI3	101393	Oct. 17, 2021	Oct. 16, 2022
6	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	\	\

4. CONDUCTED EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quas -peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.



4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

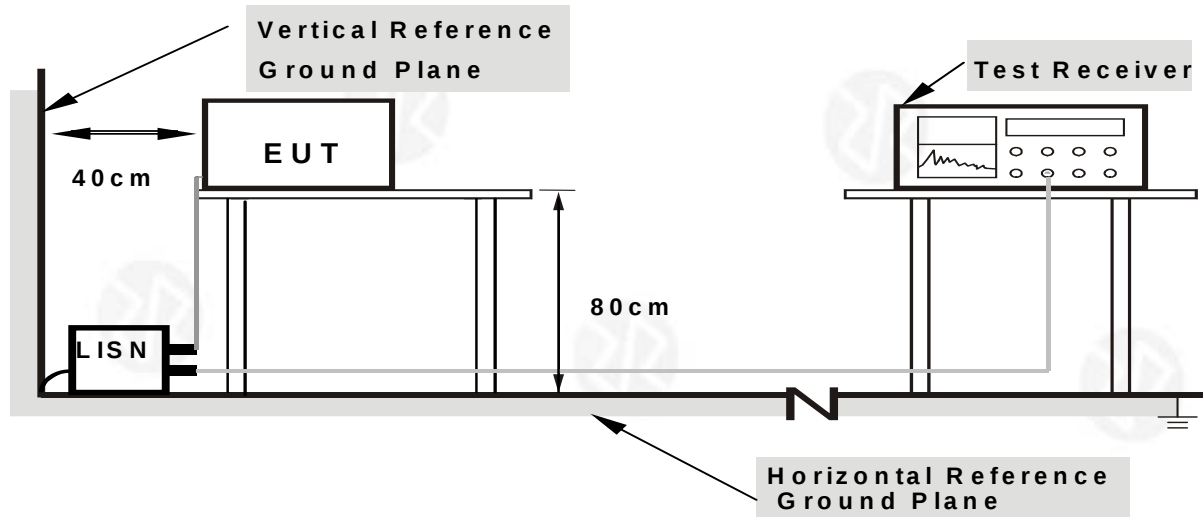

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80
from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 Test Result

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

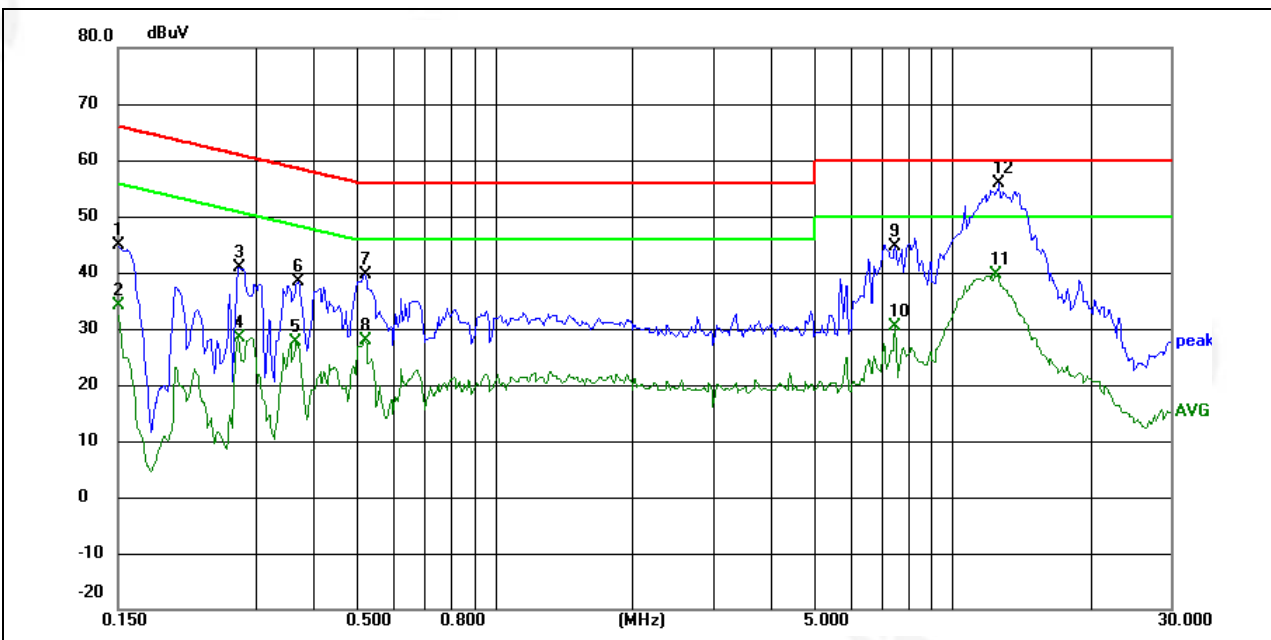


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1500	35.11	9.79	44.90	66.00	-21.10	peak	P
2	0.1500	24.41	9.79	34.20	56.00	-21.80	AVG	P
3	0.2747	31.05	9.75	40.80	60.97	-20.17	peak	P
4	0.2747	18.56	9.75	28.31	50.97	-22.66	AVG	P
5	0.3684	17.83	9.76	27.59	48.54	-20.95	AVG	P
6	0.3723	28.64	9.76	38.40	58.45	-20.05	peak	P
7	0.5204	29.85	9.77	39.62	56.00	-16.38	peak	P
8	0.5204	17.99	9.77	27.76	46.00	-18.24	AVG	P
9	7.4927	27.11	17.52	44.63	60.00	-15.37	peak	P
10	7.4927	12.74	17.52	30.26	50.00	-19.74	AVG	P
11	12.3911	16.85	22.66	39.51	50.00	-10.49	AVG	P
12 *	12.6798	32.99	22.96	55.95	60.00	-4.05	peak	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

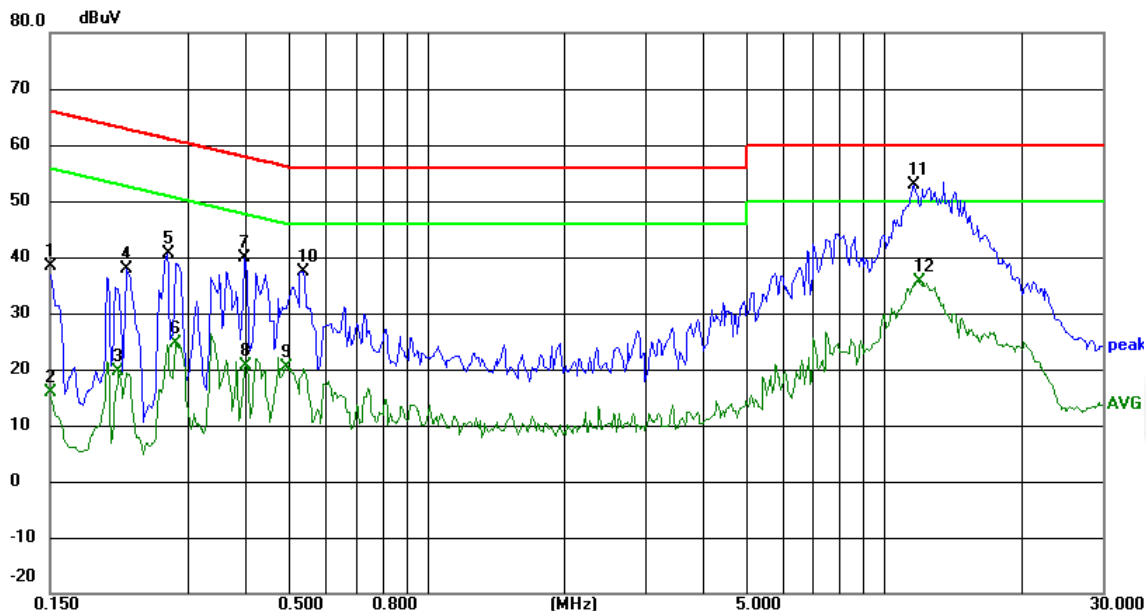

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1500	28.51	9.79	38.30	66.00	-27.70	peak	P
2	0.1500	6.03	9.79	15.82	56.00	-40.18	AVG	P
3	0.2124	9.87	9.75	19.62	53.11	-33.49	AVG	P
4	0.2202	28.01	9.75	37.76	62.81	-25.05	peak	P
5	0.2708	30.91	9.75	40.66	61.09	-20.43	peak	P
6	0.2826	14.79	9.76	24.55	50.74	-26.19	AVG	P
7	0.3996	30.23	9.76	39.99	57.86	-17.87	peak	P
8	0.4035	10.84	9.76	20.60	47.78	-27.18	AVG	P
9	0.4932	10.50	9.77	20.27	46.11	-25.84	AVG	P
10	0.5400	27.56	9.77	37.33	56.00	-18.67	peak	P
11 *	11.5955	30.94	21.83	52.77	60.00	-7.23	peak	P
12	11.9778	13.50	22.23	35.73	50.00	-14.27	AVG	P

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Mesurement Level = Reading level + Correct Factor



5. RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

5.1 Radiated Emission Limits

Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value


Limits for frequency Above 30MHz

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value




5.2 Anechoic Chamber Test Setup Diagram

(A) Radiated Emission Test-Up Frequency Below 30MHz

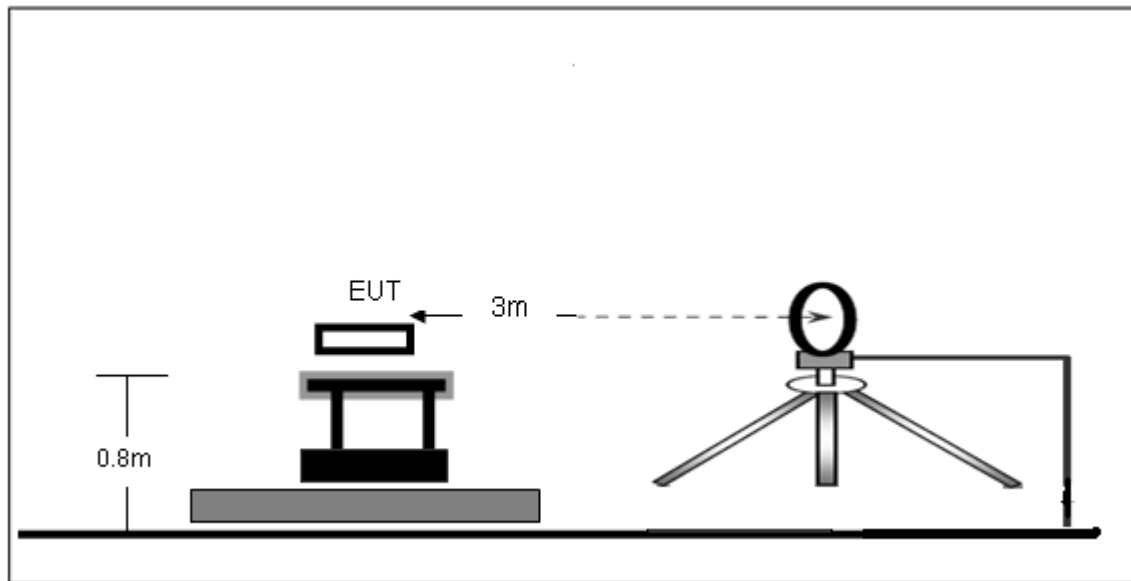

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

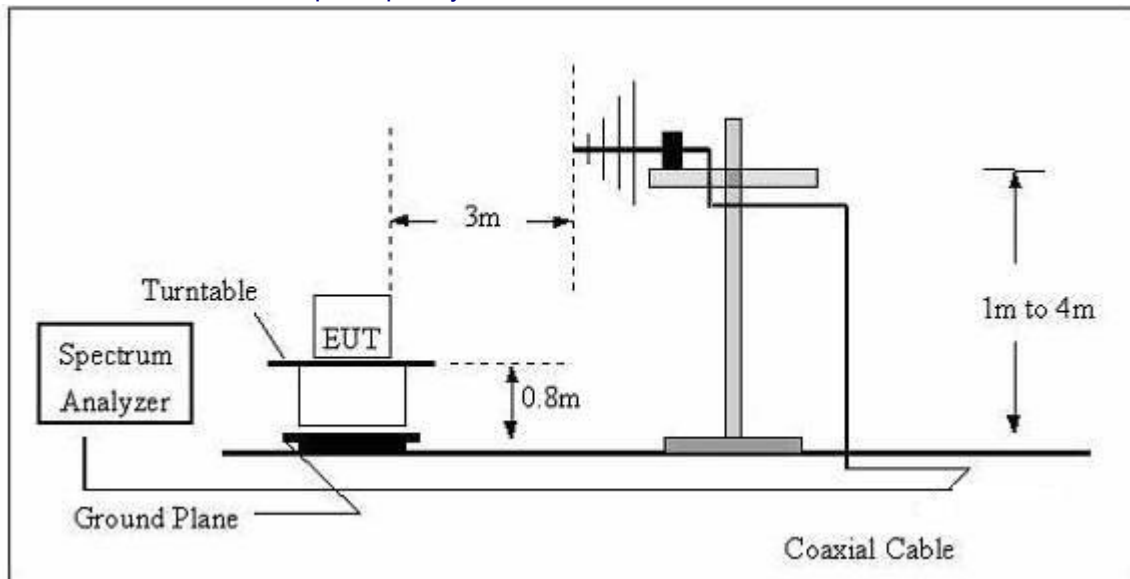

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.

5.3 Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

5.4 DEVIATION FROM TEST STANDARD

No deviation



5.5 Test Result

Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m+ 80
Limit dBuV/m @3m = Limit dBuV/m @30m + 40


9 kHz~30 MHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	--
Test Voltage:	AC 120V/60Hz		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	0.1152	52.23	21.59	73.82	106.94	-33.12	peak
2 X	0.1152	42.02	21.59	63.61	106.94	-43.33	AVG

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

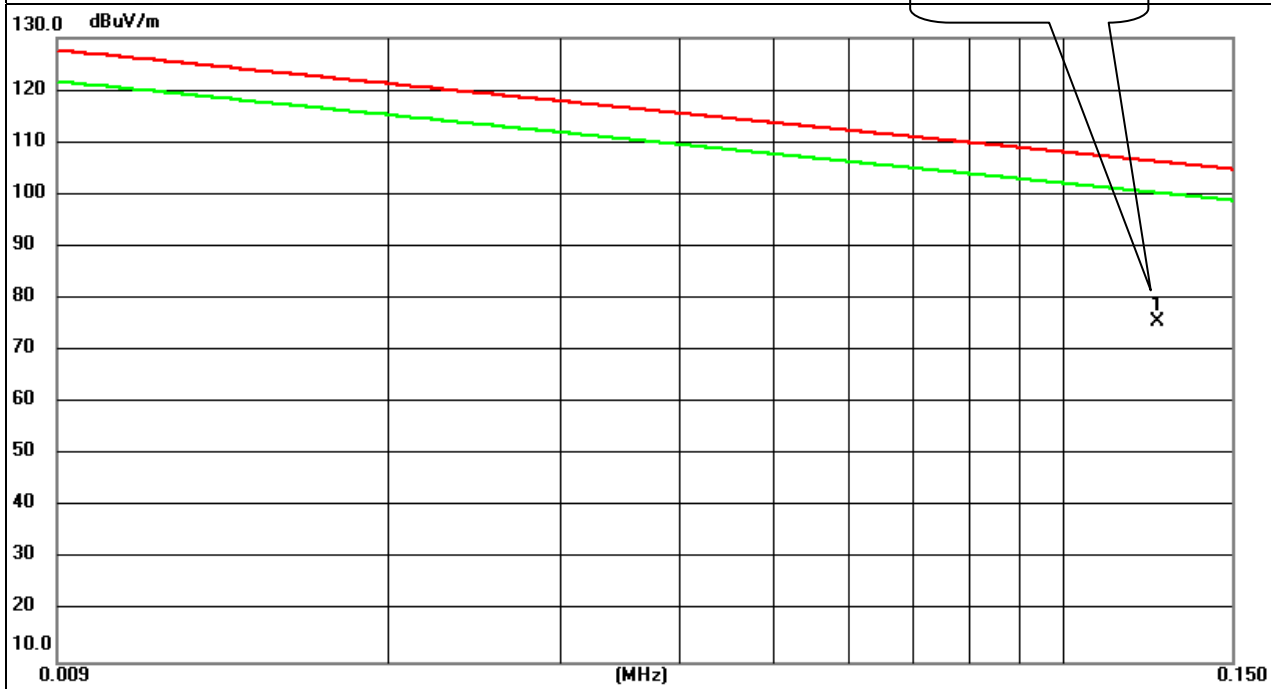

Note:

Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.


Margin = Emission Level- Limit.



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	0.8861	17.46	21.20	38.66	68.65	-29.99	QP
2	3.1498	8.48	22.46	30.94	69.54	-38.60	QP
3	6.4952	6.13	23.43	29.56	69.54	-39.98	QP
4	11.2400	13.65	24.47	38.12	69.54	-31.42	QP
5	27.1650	7.46	24.39	31.85	69.54	-37.69	QP

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

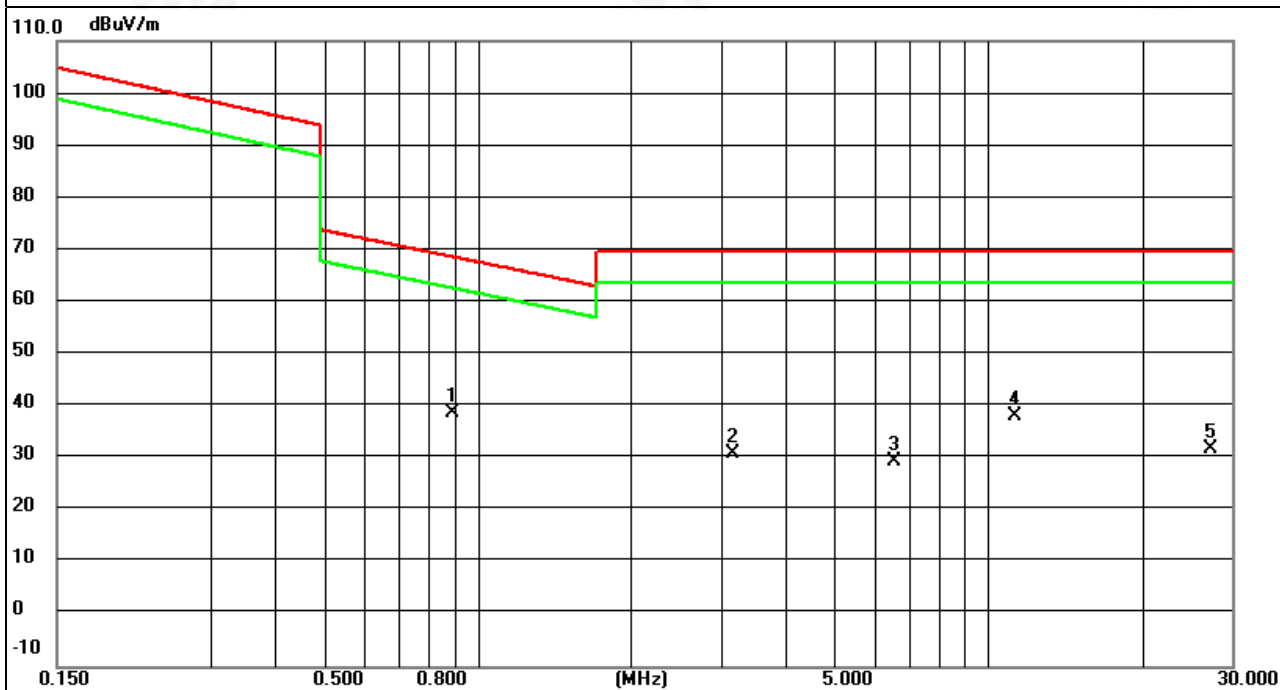



30MHz-1GHz


Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

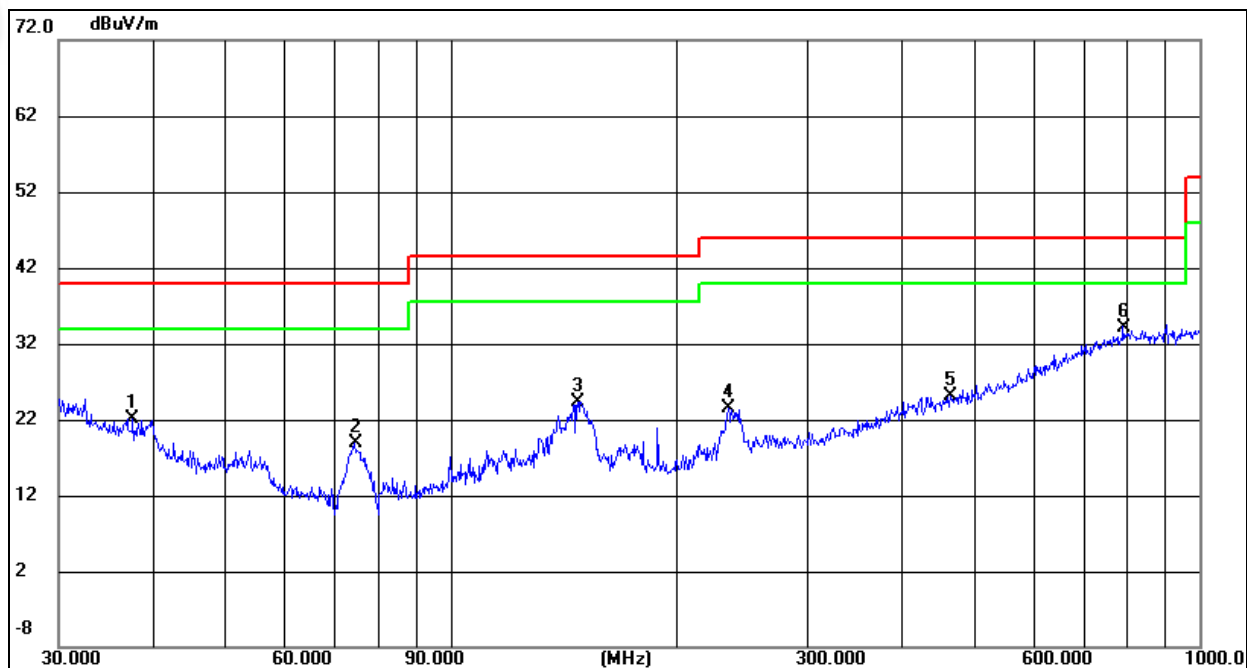

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.6798	7.15	15.00	22.15	40.00	-17.85	peak
2	74.3955	13.17	5.69	18.86	40.00	-21.14	peak
3	147.9214	13.71	10.63	24.34	43.50	-19.16	peak
4	234.9909	10.38	13.14	23.52	46.00	-22.48	peak
5	465.5994	5.41	19.61	25.02	46.00	-20.98	peak
6 *	790.6187	7.04	27.16	34.20	46.00	-11.80	peak



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

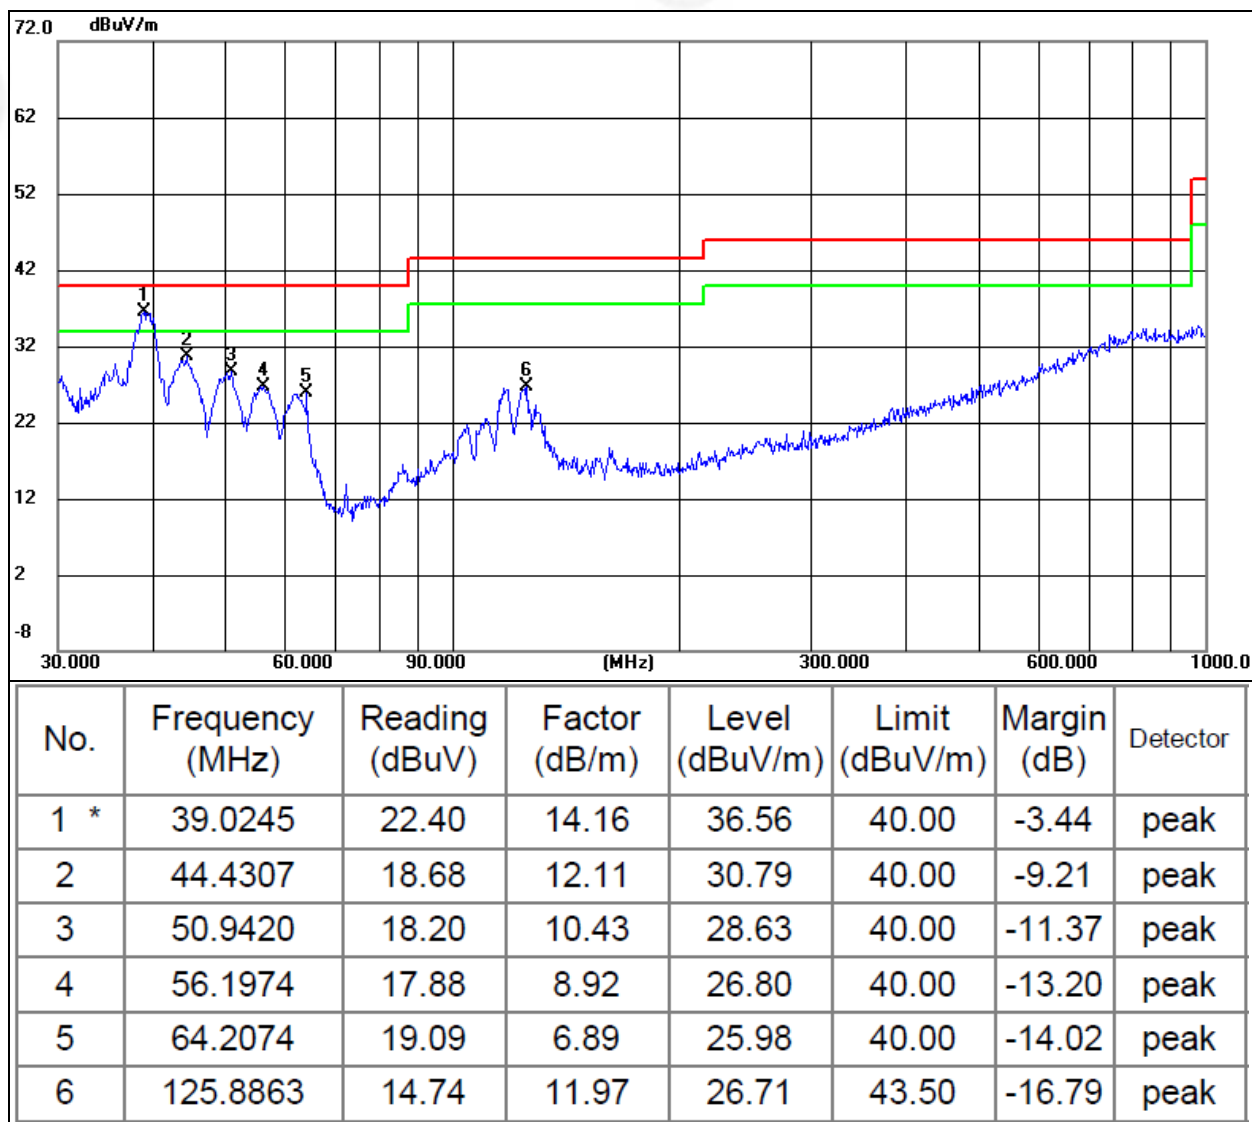

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.



6. BANDWIDTH TEST

1. Set RBW = 3KHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.


TEST SETUP





Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa		

Frequency (KHz)	20dB bandwidth (Hz)	99% bandwidth (Hz)	Result
125.2	958	835	Pass

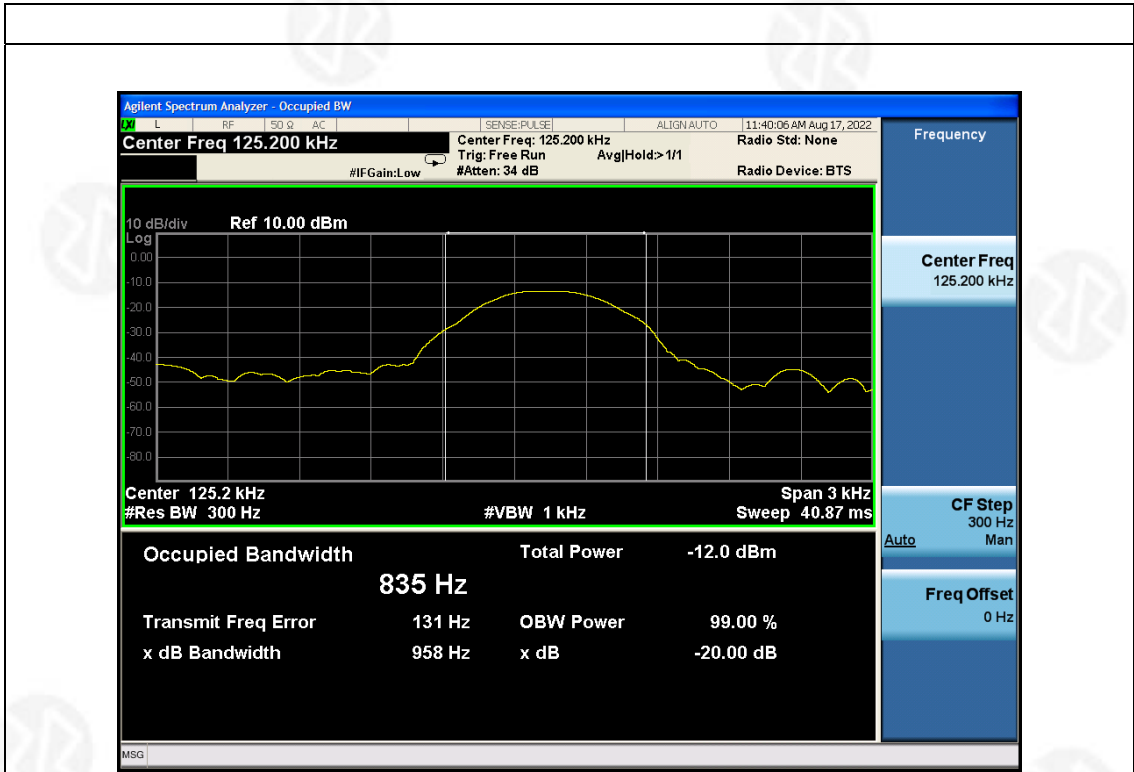



7. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is Coil ANT, the best case gain of the antennas is 0dBi, reference to the appendix II for details	



8. TEST SETUP PHOTO

Reference to the appendix I for details.

9. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****