

TEST REPORT

Reference No...... : WTX22X03053166W
FCC ID : 2A5YS-LL-200271-ART
Applicant : Lucie Labs S.A.S.
Address : 1681 Route des Dolines, Les Taissounières, Le BELEM 06560 Valbonne
France
Manufacturer : Staymatel
Address : Pôle Production Lot 23 1108 Avenue des Lions 83600 Fréjus France
Product Name : MetalScan V1.5
Model No...... : LL-200271-ART
Standards : FCC Part 18
Date of Receipt sample : 2022-03-25
Date of Test..... : 2022-03-25 to 2022-04-06
Date of Issue : 2022-04-06
Test Report Form No. : WTX_Part 18W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Jack Huang

Jack Huang

Approved by:

Silin Chen

Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION.....4

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4

1.2 TEST STANDARDS.....5

1.3 TEST METHODOLOGY.....5

1.4 TEST FACILITY5

1.5 EUT SETUP AND OPERATION MODE6

1.6 MEASUREMENT UNCERTAINTY7

1.7 TEST EQUIPMENT LIST AND DETAILS8

2. SUMMARY OF TEST RESULTS9

3. RADIATED EMISSIONS.....10

3.1 TEST PROCEDURE.....10

3.2 TEST RECEIVER SETUP12

3.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....12

3.4 ENVIRONMENTAL CONDITIONS12

3.5 SUMMARY OF TEST RESULTS/PLOTS12

APPENDIX PHOTOGRAPHS.....16

Report version

Version No.	Date of issue	Description
Rev.00	2022-04-06	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	MetalScan V1.5
Trade Name:	Thieren
Model No.:	LL-200271-ART
Adding Model(s):	/
Note: The test data is gathered from a production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
Antenna Type:	Coil Antenna
Antenna Gain:	0dBi
Rated Voltage:	Battery DC 9V
Equipment Type:	Any type
Any non-ISM frequency:	1kHz-148.5kHz

1.2 Test Standards

The tests were performed according to following standards:

FCC Part 18 Subpart C: Industrial, Scientific, and medical medical equipment.

ANSI C63.4-2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Normal Working	DC Battery Powered	Battery DC 9V

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Metal	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Radiated Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2022-03-22	2023-03-21
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 18.307 (b)	Conducted Emission	N/A
§ 18.305 (b)	Radiated Emission	Compliant

N/A: Not applicable.

3. Radiated Emissions


3.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.305 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The test setup for emission measurement below 30MHz..

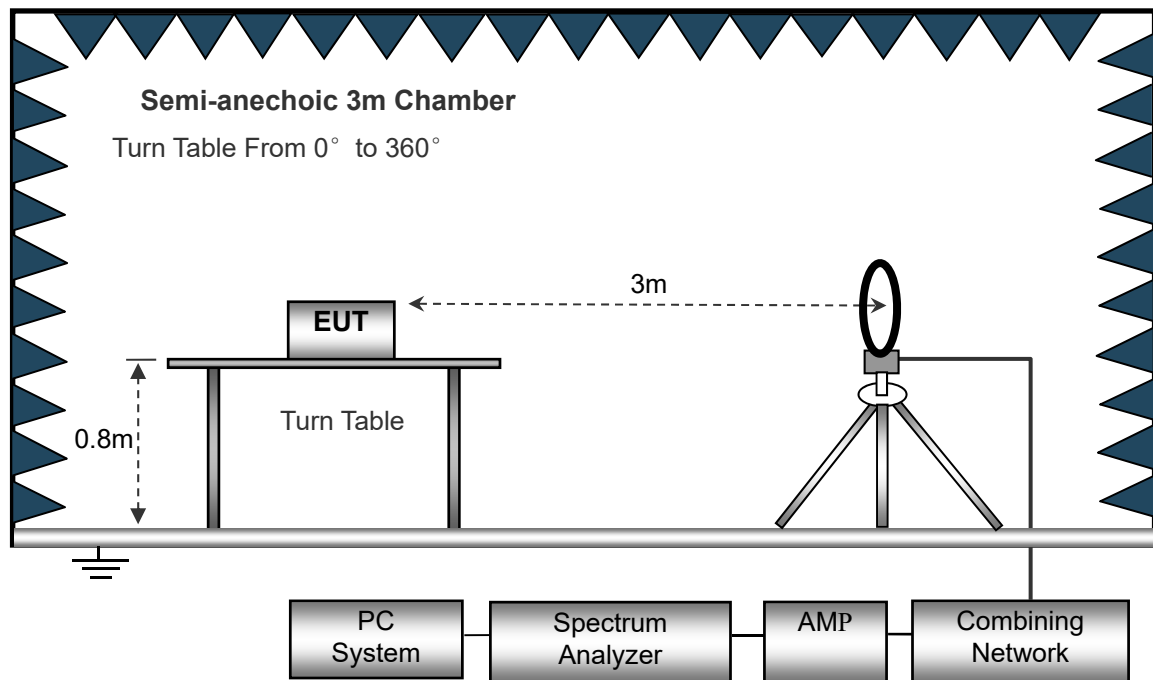

The test setup for emission measurement from 30 MHz to 1 GHz..

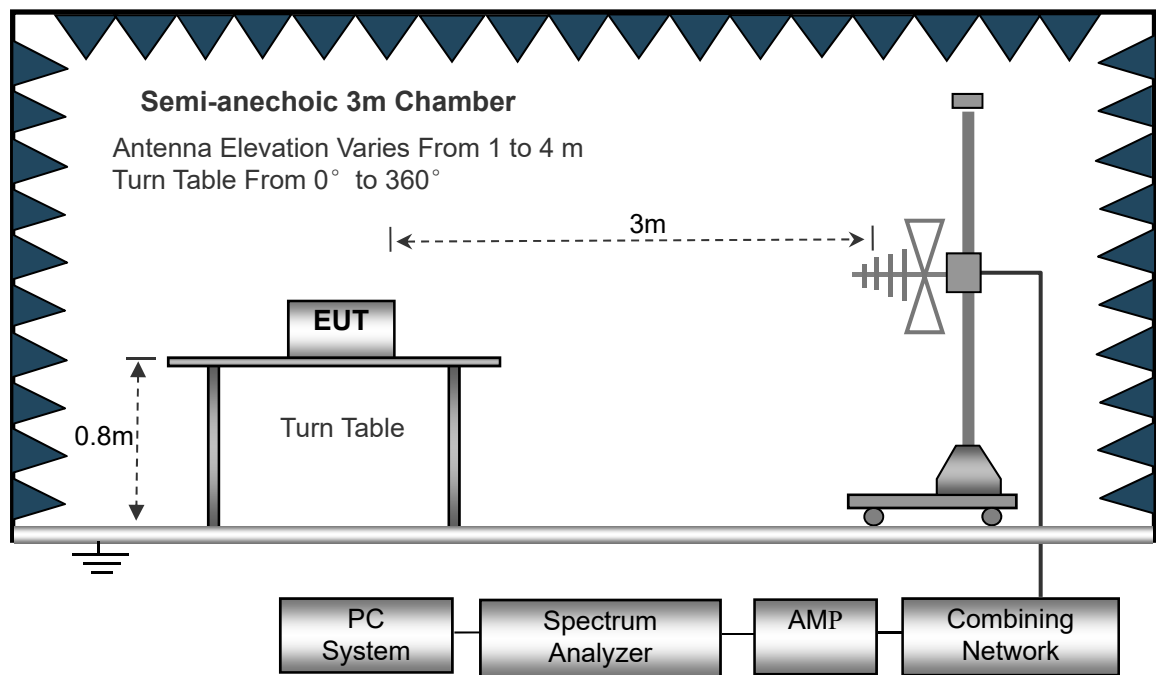

3.2 Test Receiver Setup

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz
RBW=10KHz,	RBW=120KHz,
VBW =30KHz	VBW=300KHz
Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP

3.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Any non-ISM frequency device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 18.305 Limit}$$


3.4 Environmental Conditions

Temperature:	22.5 °C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar

3.5 Summary of Test Results/Plots

Plot of Radiated Emissions Test Data (Below 30MHz)


Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

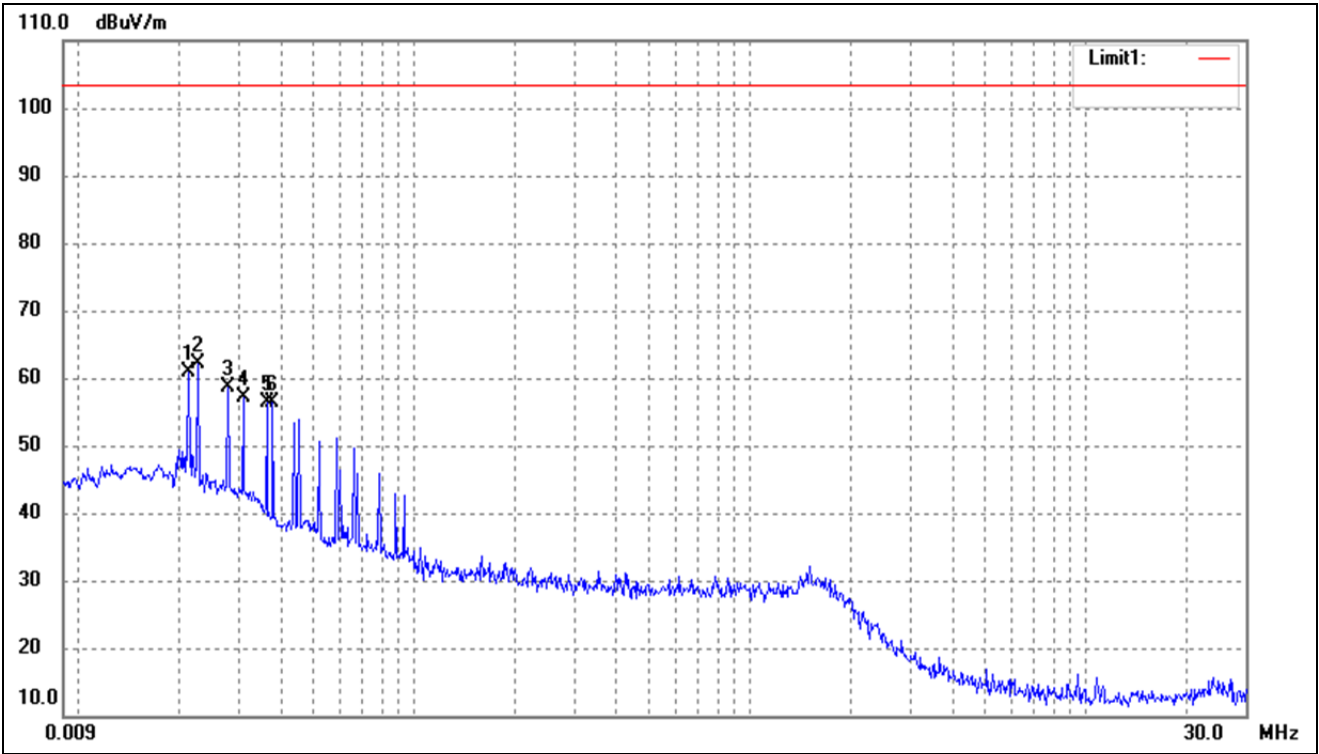

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0213	87.03	-26.08	60.95	103.50	-42.55	-	-	peak
2	0.0227	88.24	-26.08	62.16	103.50	-41.34	-	-	peak
3	0.0278	84.69	-26.07	58.62	103.50	-44.88	-	-	peak
4	0.0309	83.29	-26.07	57.22	103.50	-46.28	-	-	peak
5	0.0363	82.39	-26.07	56.32	103.50	-47.18	-	-	peak
6	0.0378	82.55	-26.06	56.49	103.50	-47.01	-	-	peak


Plot of Radiated Emissions Test Data (Above 30MHz)

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

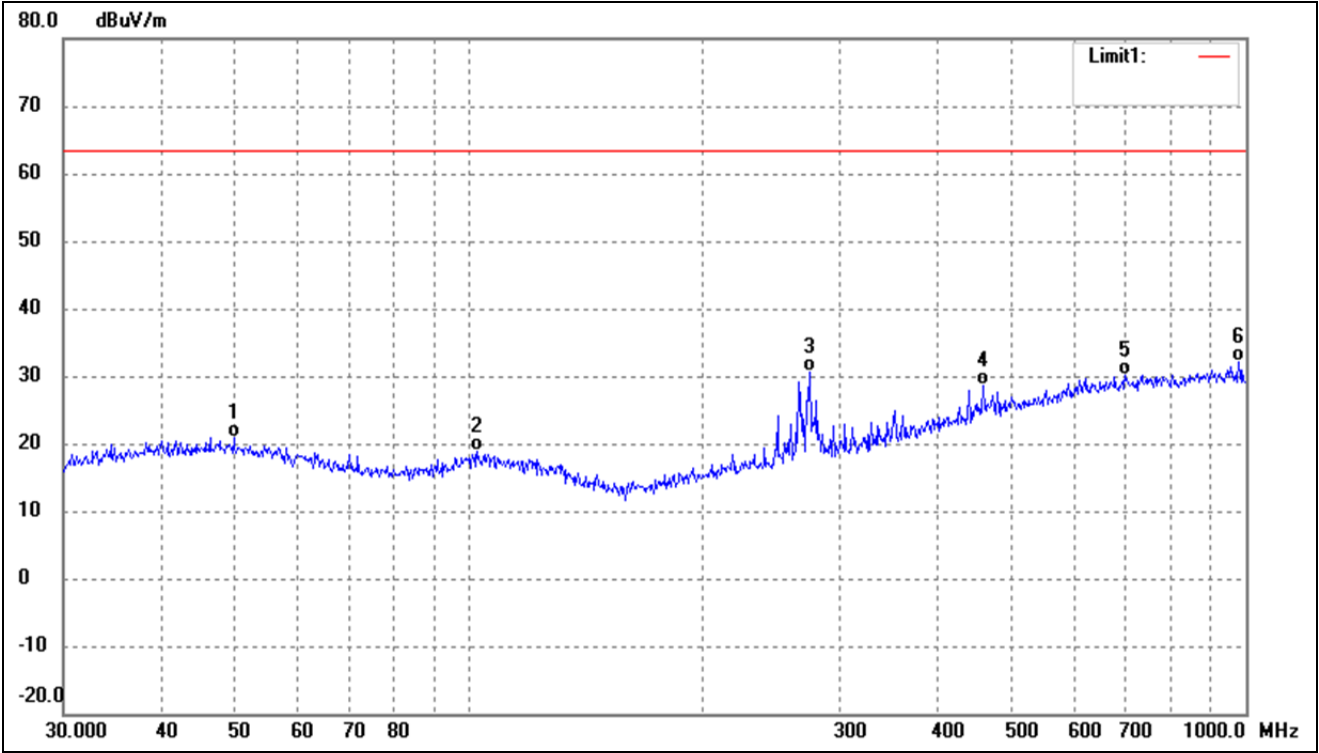

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.7068	27.92	-6.96	20.96	63.50	-42.54	-	-	QP
2	102.3597	27.71	-8.77	18.94	63.50	-44.56	-	-	QP
3	274.1939	38.39	-7.65	30.74	63.50	-32.76	-	-	QP
4	459.1144	30.92	-2.33	28.59	63.50	-34.91	-	-	QP
5	699.3046	28.69	1.42	30.11	63.50	-33.39	-	-	QP
6	979.1804	29.55	2.49	32.04	63.50	-31.46	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

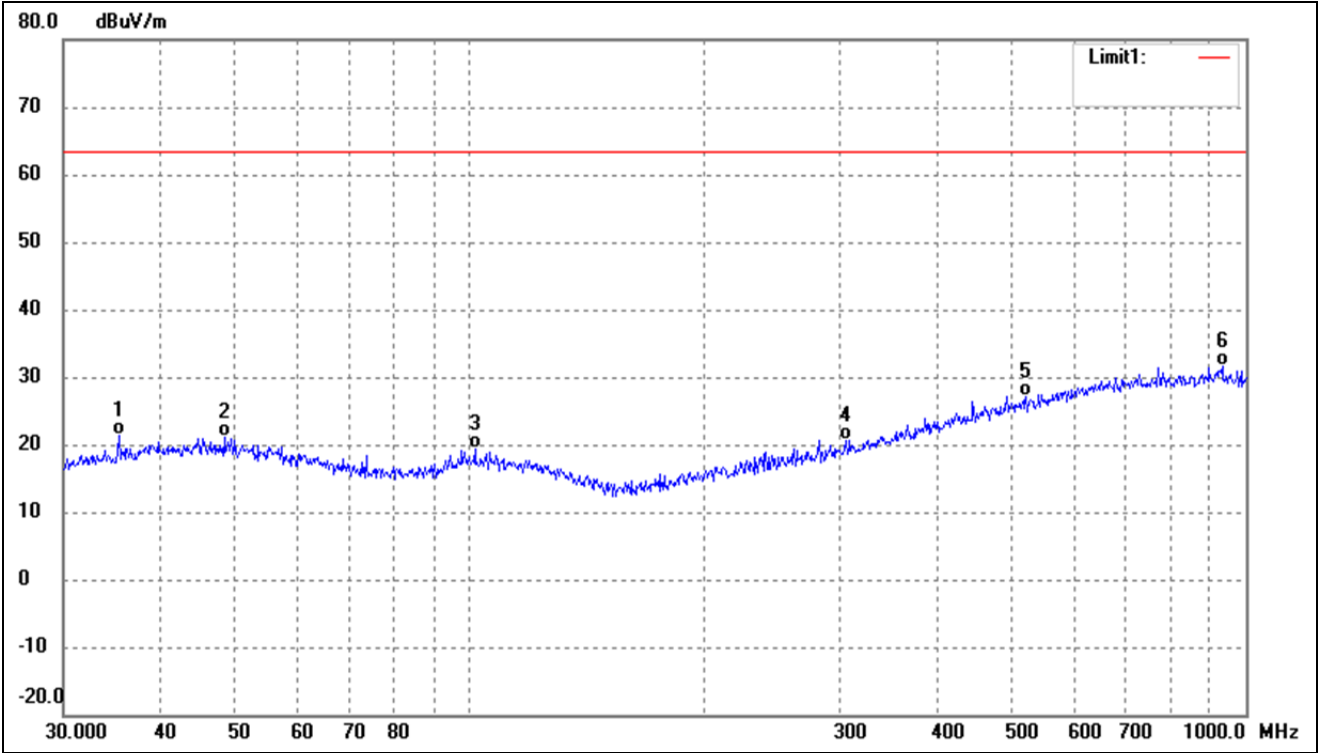

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	35.3750	29.63	-8.13	21.50	63.50	-42.00	-	-	QP
2	48.3318	28.10	-6.96	21.14	63.50	-42.36	-	-	QP
3	101.6443	28.11	-8.75	19.36	63.50	-44.14	-	-	QP
4	305.6800	27.48	-6.79	20.69	63.50	-42.81	-	-	QP
5	520.8882	28.08	-0.94	27.14	63.50	-36.36	-	-	QP
6	932.2715	29.09	2.64	31.73	63.50	-31.77	-	-	QP

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****