


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz


Horizontal

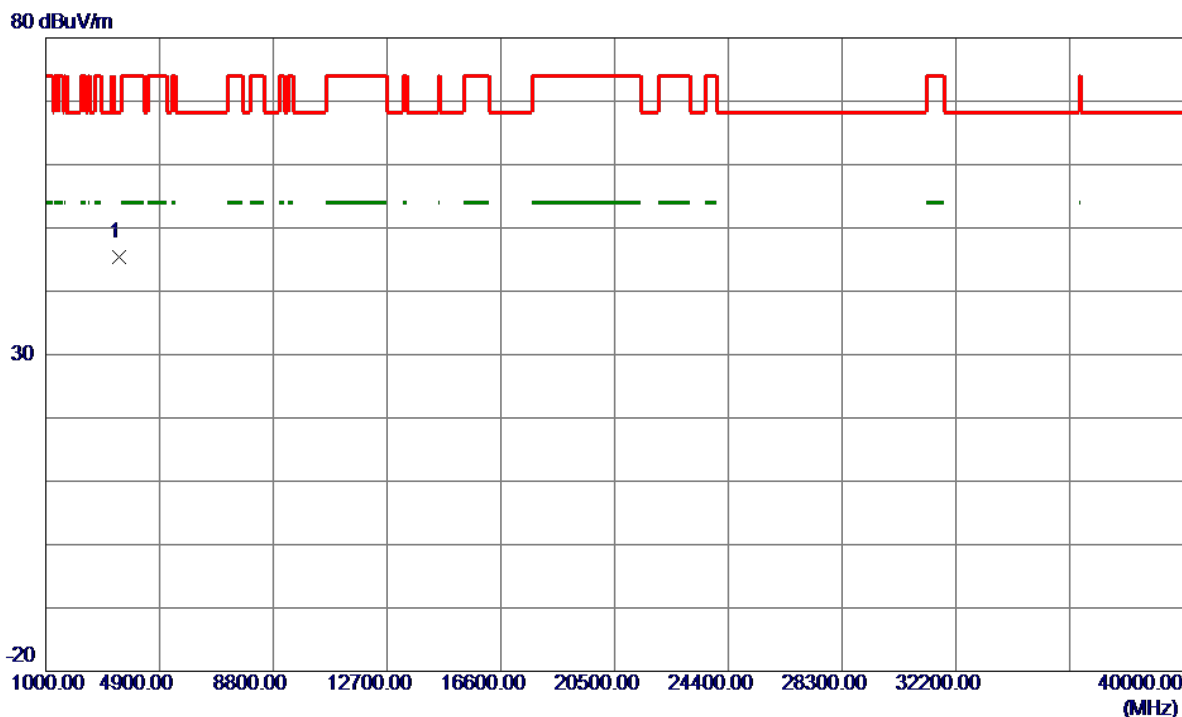

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	3533.4650	42.64	2.80	45.44	68.30	-22.86	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Vertical

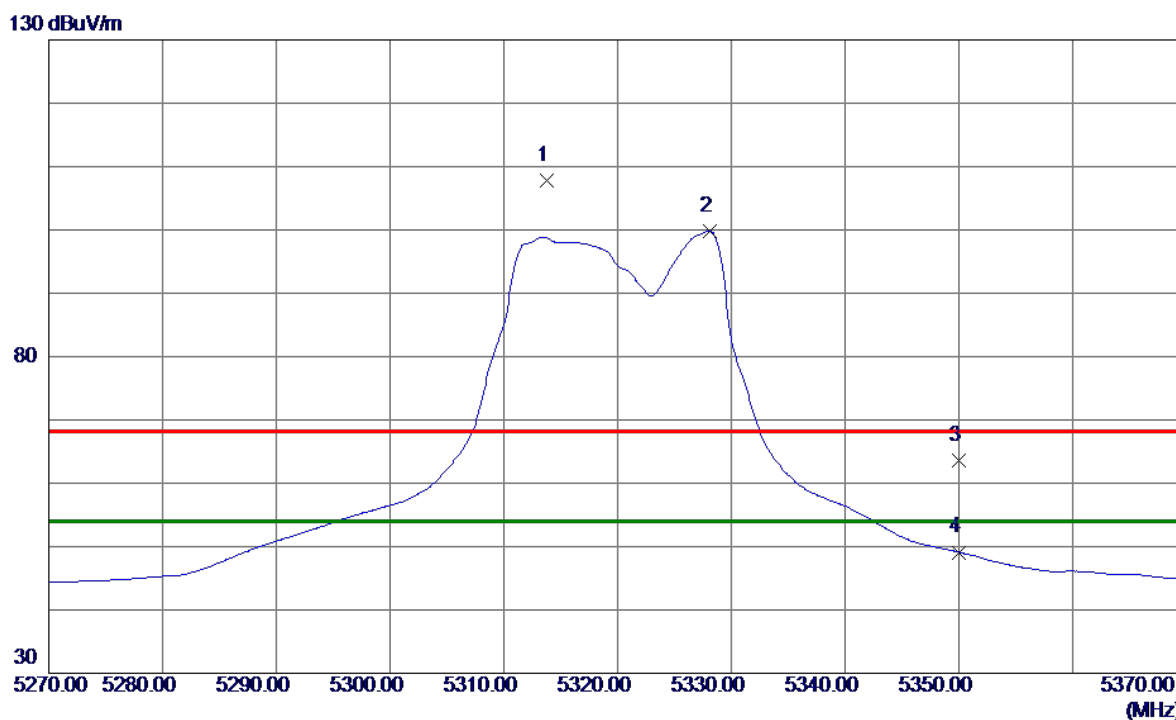

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5313.8000	65.82	41.93	107.75	68.30	39.45	Peak	No Limit
2 *	5328.1000	57.79	42.01	99.80	54.00	45.80	AVG	No Limit
3	5350.0000	21.47	42.12	63.59	68.30	-4.71	Peak	
4	5350.0000	6.98	42.12	49.10	54.00	-4.90	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Vertical

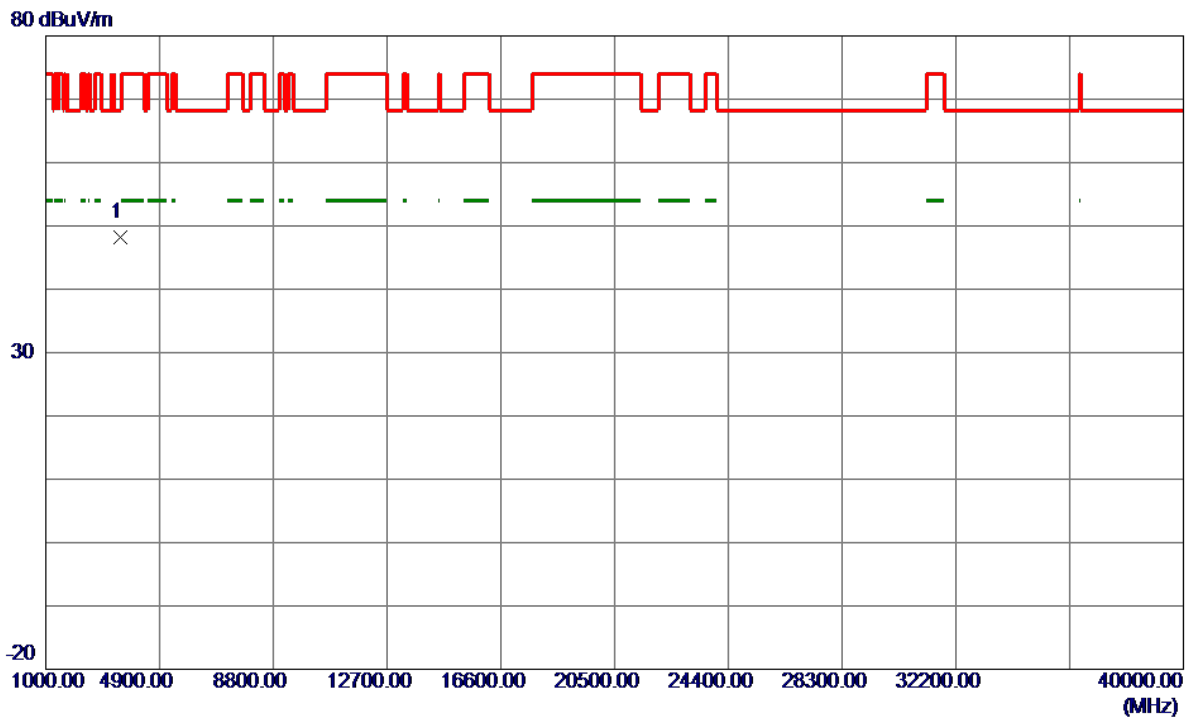

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3546.5400	45.46	2.83	48.29	68.30	-20.01	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Horizontal

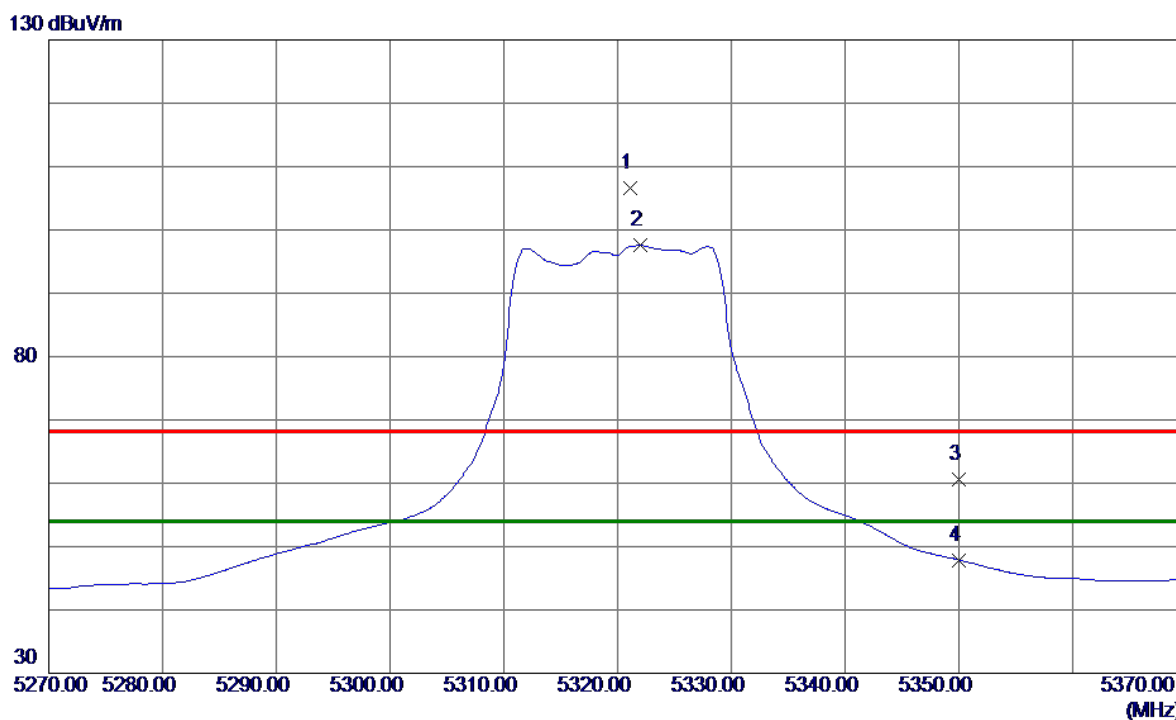

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5321.1000	64.59	41.97	106.56	68.30	38.26	Peak	No Limit
2 *	5322.0000	55.55	41.98	97.53	54.00	43.53	AVG	No Limit
3	5350.0000	18.43	42.12	60.55	68.30	-7.75	Peak	
4	5350.0000	5.77	42.12	47.89	54.00	-6.11	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Horizontal

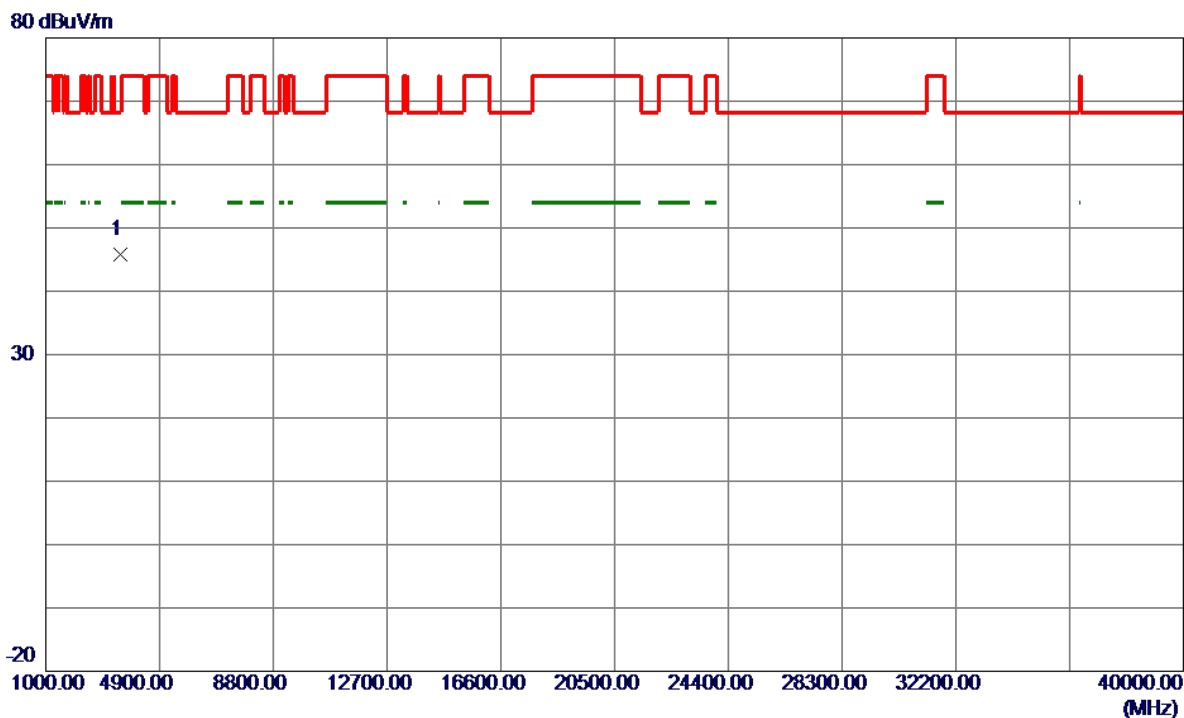

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3546.5300	42.99	2.83	45.82	68.30	-22.48	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Vertical

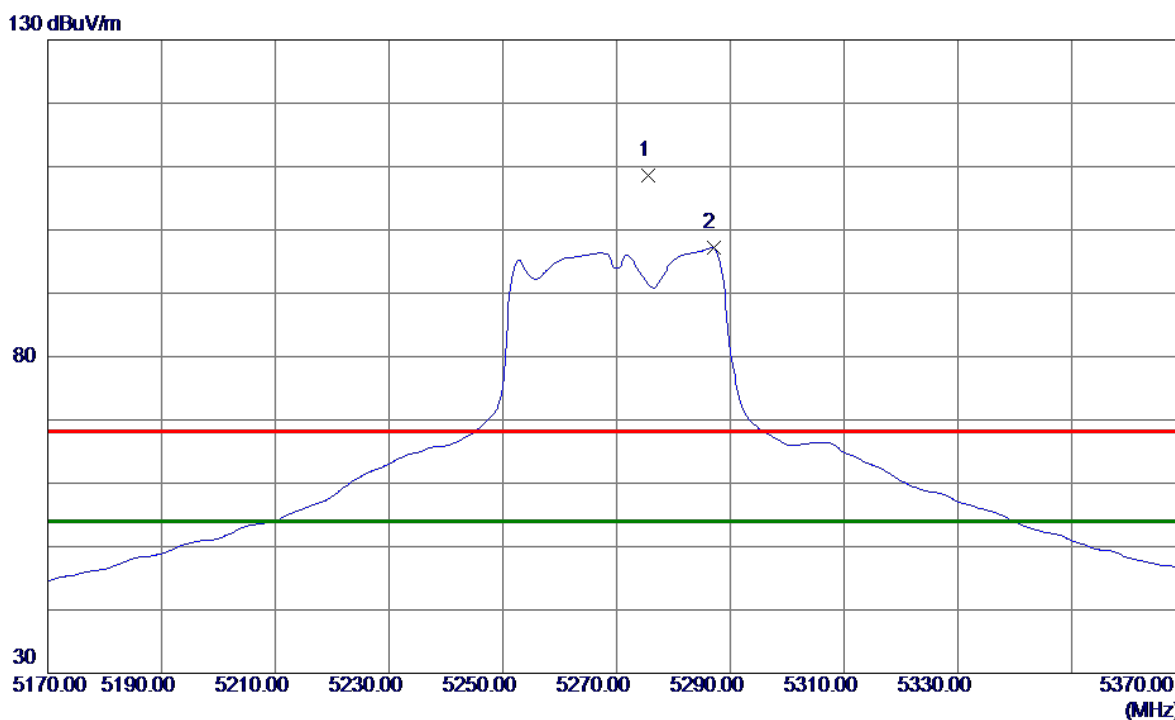

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5275.6000	66.84	41.74	108.58	68.30	40.28	Peak	No Limit
2 *	5287.0000	55.40	41.80	97.20	54.00	43.20	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Vertical



No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3513.3600	45.95	2.75	48.70	68.30	-19.60	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Horizontal

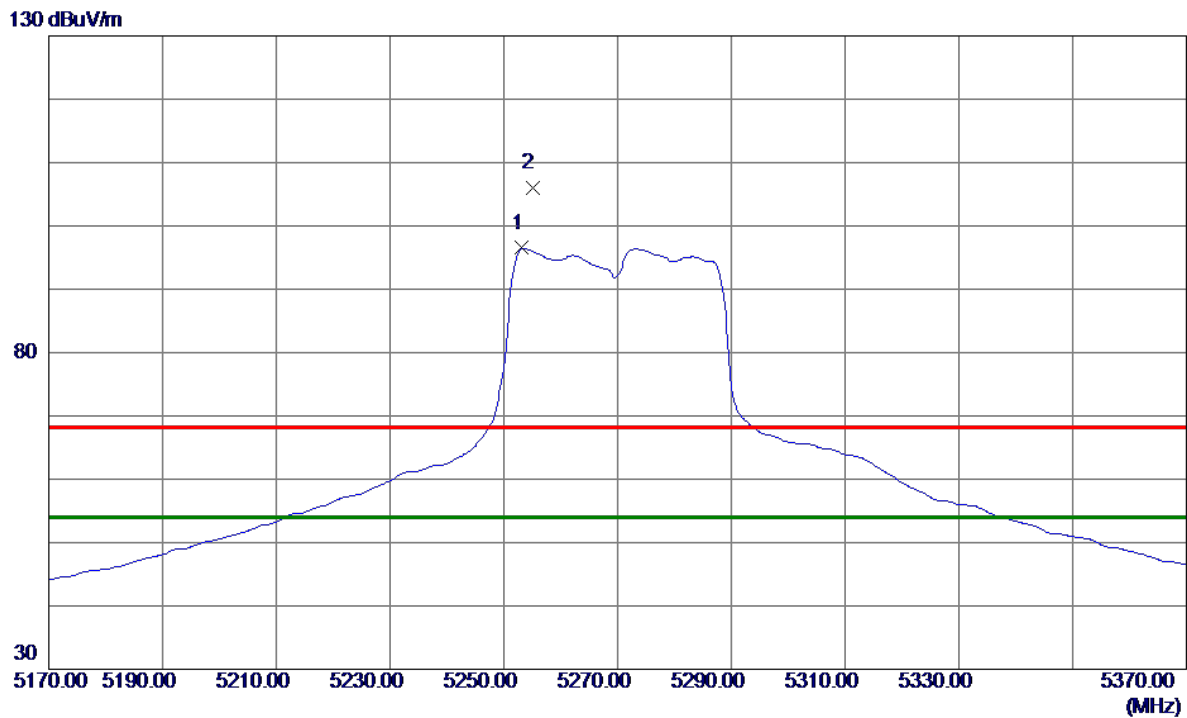

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5253.2000	54.87	41.63	96.50	54.00	42.50	AVG	No Limit
2	5255.0000	64.44	41.64	106.08	68.30	37.78	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal

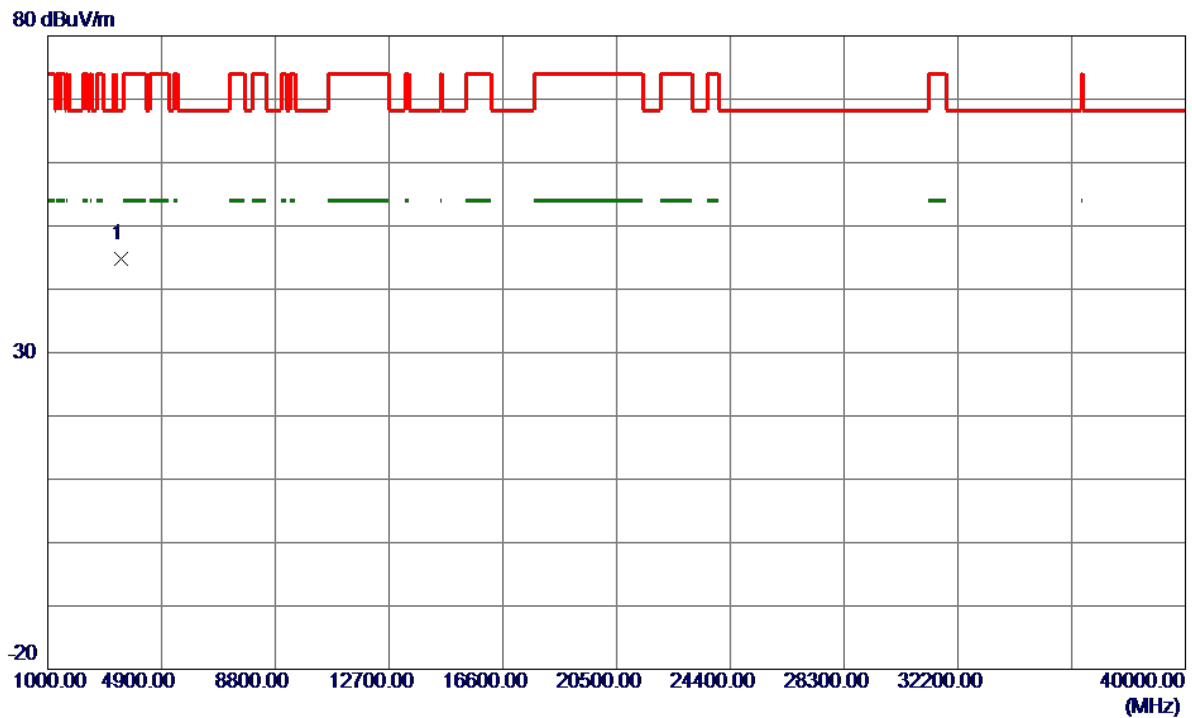


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3513.3300	42.12	2.75	44.87	68.30	-23.43	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Vertical


130 dBuV/m

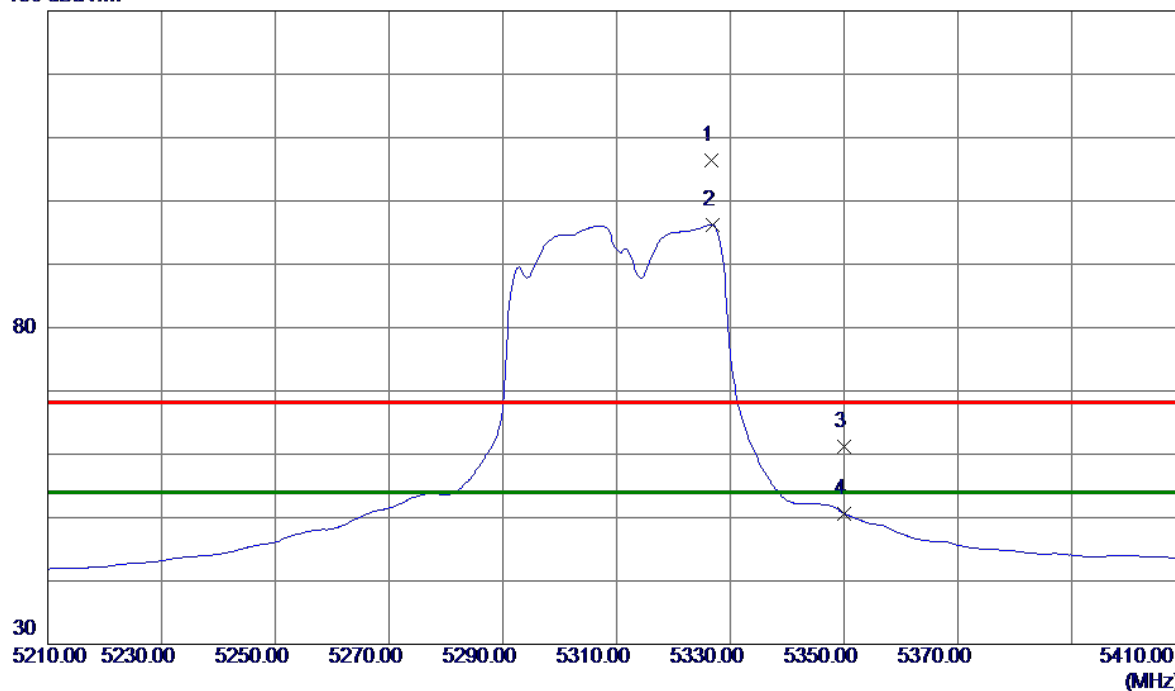

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5326.6000	64.33	42.00	106.33	68.30	38.03	Peak	No Limit
2 *	5326.8000	54.28	42.00	96.28	54.00	42.28	AVG	No Limit
3	5350.0000	19.11	42.12	61.23	68.30	-7.07	Peak	
4	5350.0000	8.52	42.12	50.64	54.00	-3.36	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Vertical

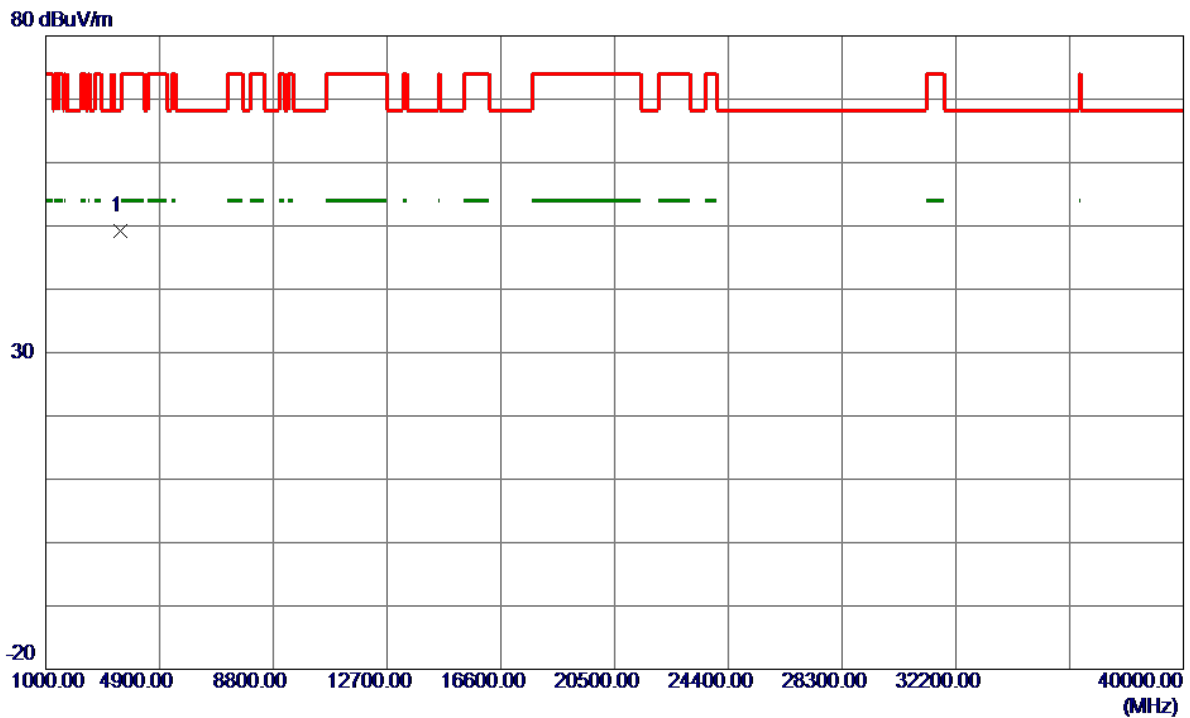


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3539.9550	46.34	2.81	49.15	68.30	-19.15	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Horizontal

130 dBuV/m

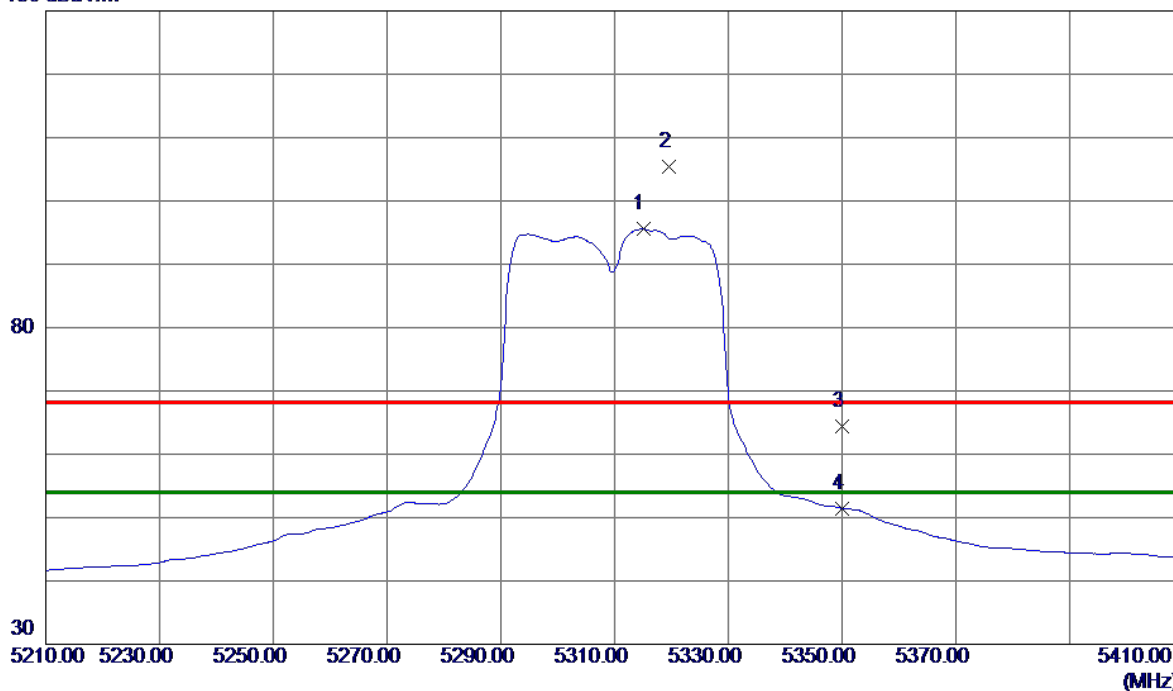

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5315.0000	53.64	41.94	95.58	54.00	41.58	AVG	No Limit
2	5319.6000	63.42	41.96	105.38	68.30	37.08	Peak	No Limit
3	5350.0000	22.35	42.12	64.47	68.30	-3.83	Peak	
4	5350.0000	9.33	42.12	51.45	54.00	-2.55	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Horizontal




No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3540.1500	47.24	2.81	50.05	68.30	-18.25	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Vertical


130 dBuV/m

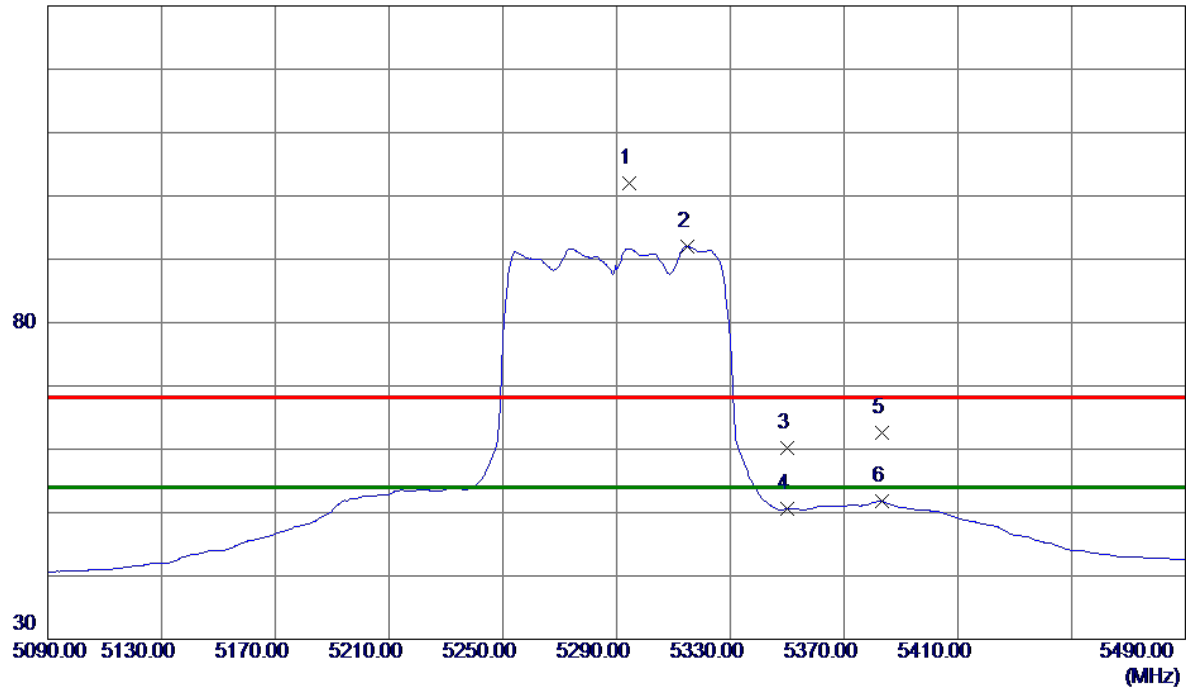

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5294.4000	60.15	41.84	101.99	68.30	33.69	Peak	No Limit
2 *	5314.8000	50.07	41.94	92.01	54.00	38.01	AVG	No Limit
3	5350.0000	18.11	42.12	60.23	68.30	-8.07	Peak	
4	5350.0000	8.43	42.12	50.55	54.00	-3.45	AVG	
5	5383.2000	20.36	42.29	62.65	68.30	-5.65	Peak	
6	5383.2000	9.49	42.29	51.78	54.00	-2.22	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Vertical

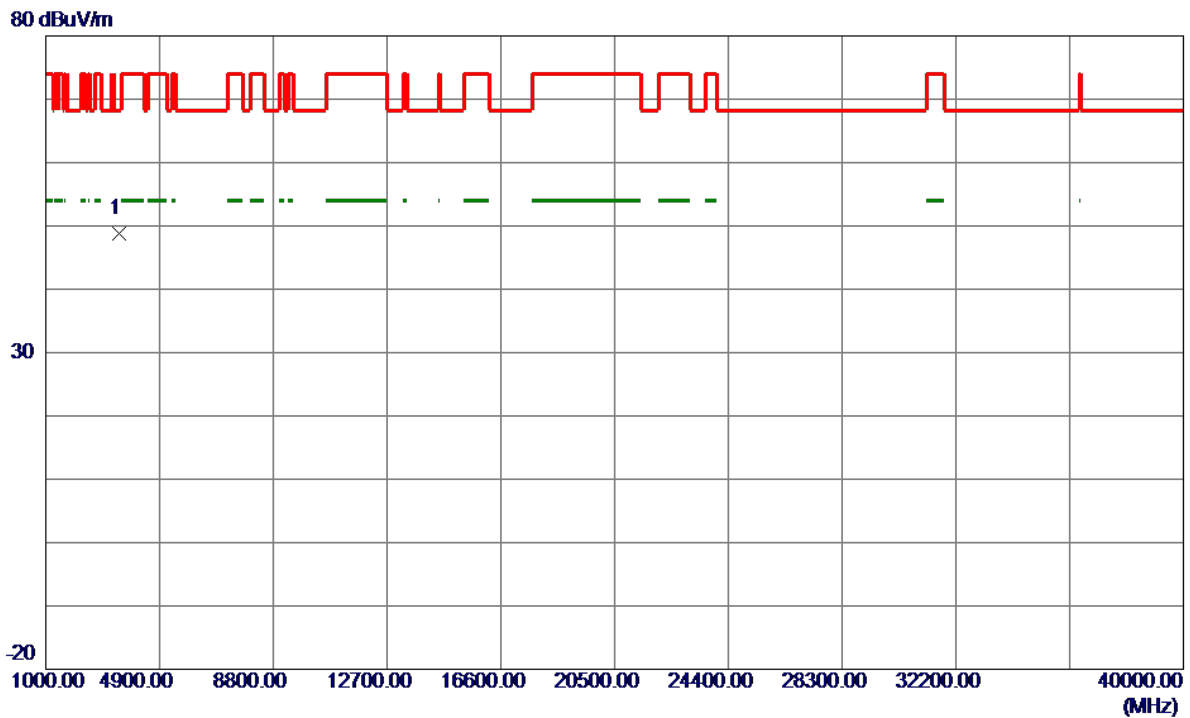


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3526.6500	45.97	2.78	48.75	68.30	-19.55	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal


130 dBuV/m

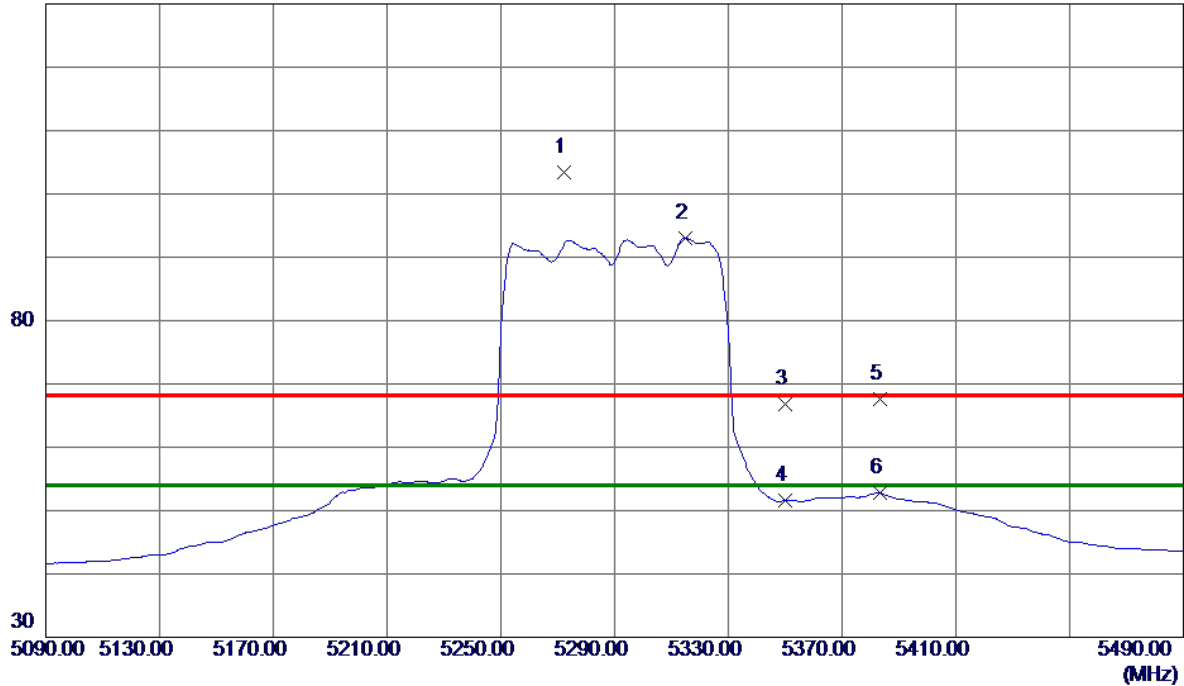

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5272.4000	61.74	41.72	103.46	68.30	35.16	Peak	No Limit
2 *	5314.8000	51.07	41.94	93.01	54.00	39.01	AVG	No Limit
3	5350.0000	24.62	42.12	66.74	68.30	-1.56	Peak	
4	5350.0000	9.43	42.12	51.55	54.00	-2.45	AVG	
5	5383.2000	25.35	42.29	67.64	68.30	-0.66	Peak	
6	5383.2000	10.49	42.29	52.78	54.00	-1.22	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal

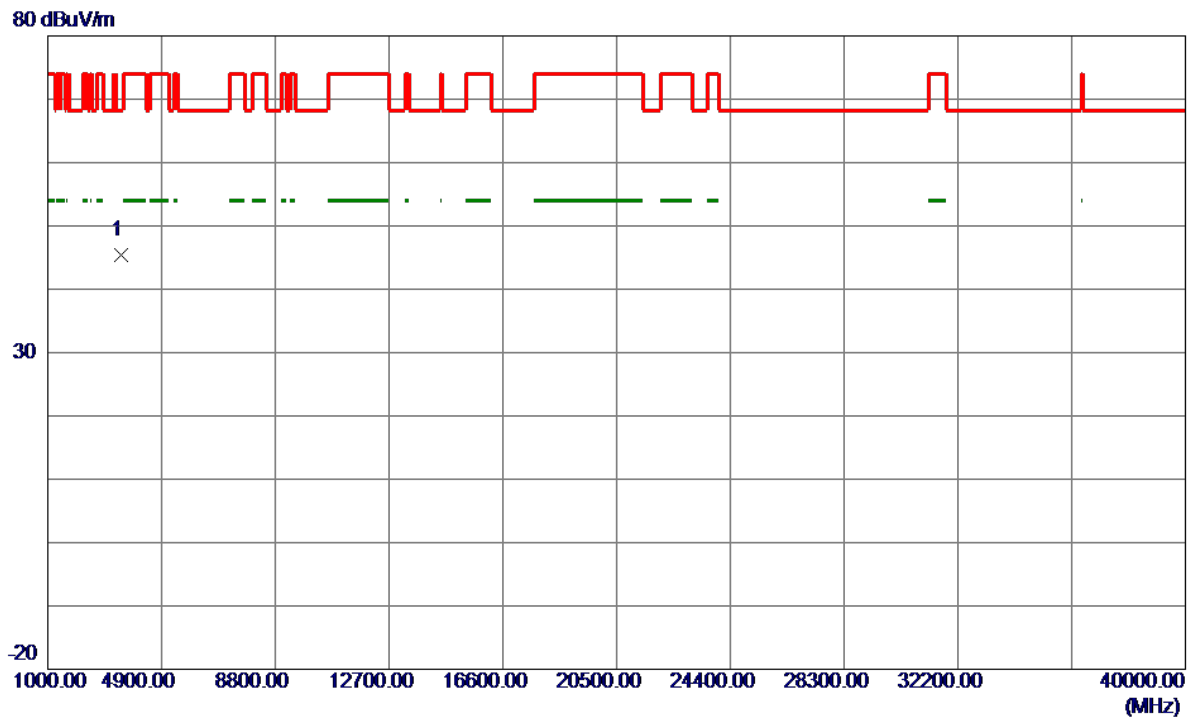


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	3526.6350	42.70	2.78	45.48	68.30	-22.82	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Vertical


130 dBuV/m

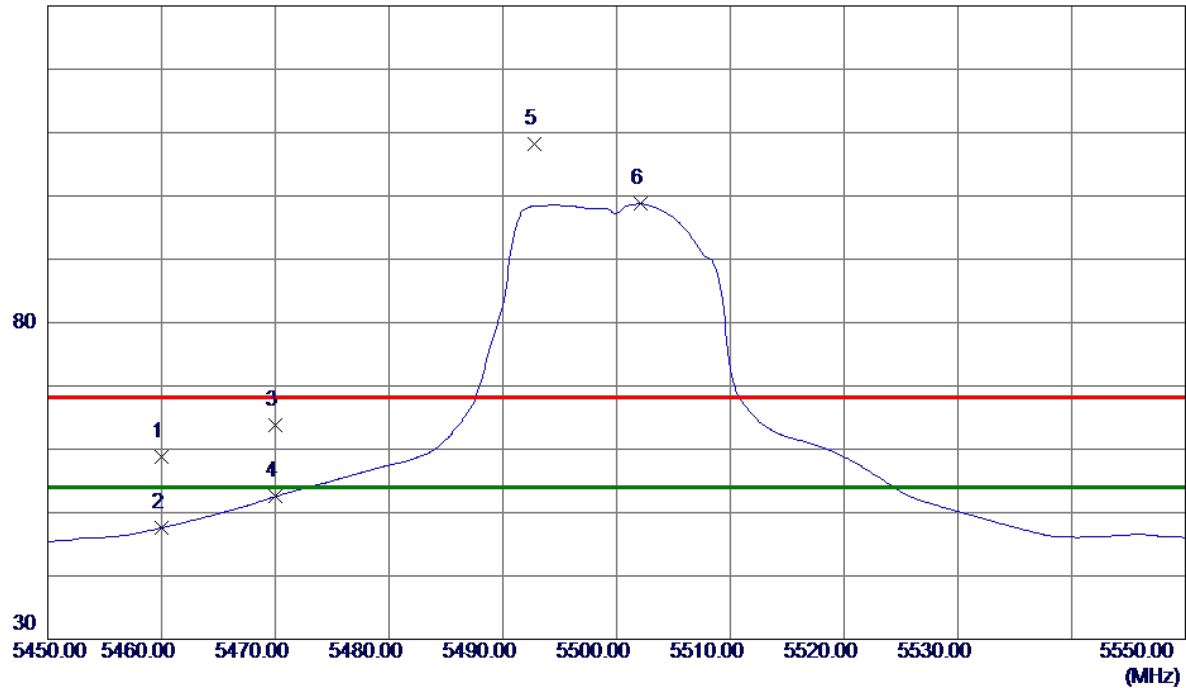

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	16.09	42.68	58.77	68.30	-9.53	Peak	
2	5460.0000	4.91	42.68	47.59	54.00	-6.41	AVG	
3	5470.0000	21.15	42.73	63.88	68.30	-4.42	Peak	
4	5470.0000	9.81	42.73	52.54	54.00	-1.46	AVG	
5	5492.8000	65.32	42.84	108.16	68.30	39.86	Peak	No Limit
6 *	5502.1000	55.82	42.89	98.71	54.00	44.71	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Vertical

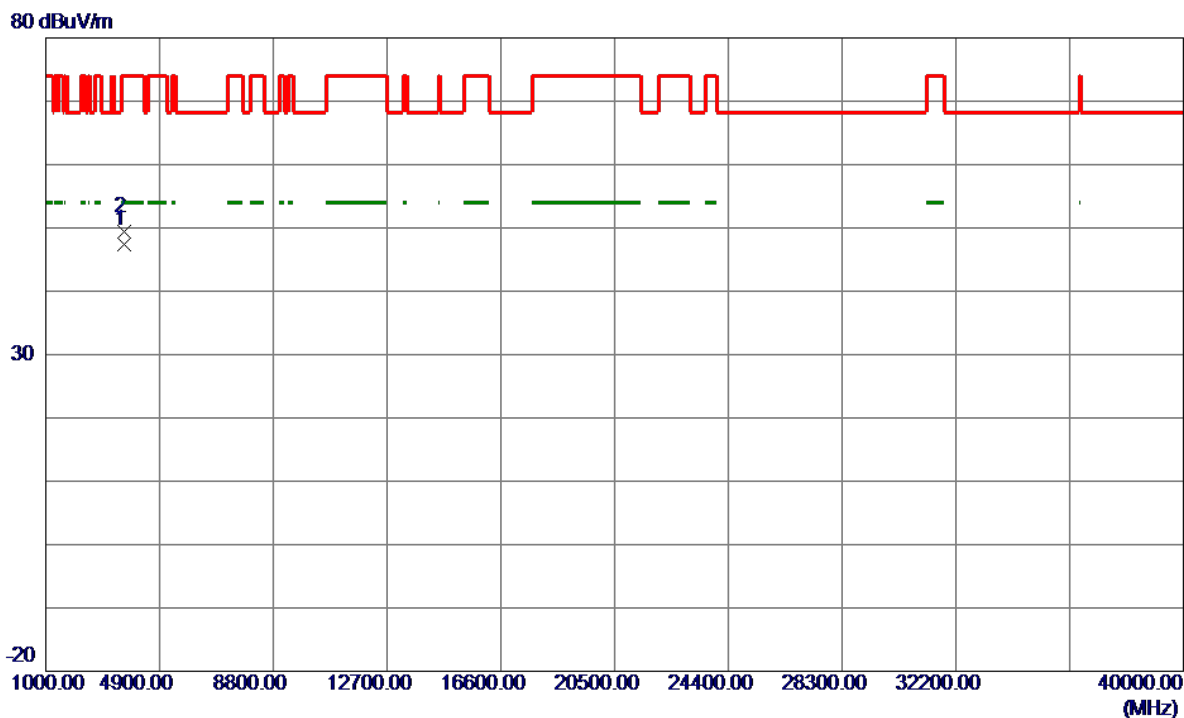


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	3666.6300	44.27	3.09	47.36	54.00	-6.64	AVG	
2	3666.7150	46.29	3.09	49.38	74.00	-24.62	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Horizontal


130 dBuV/m

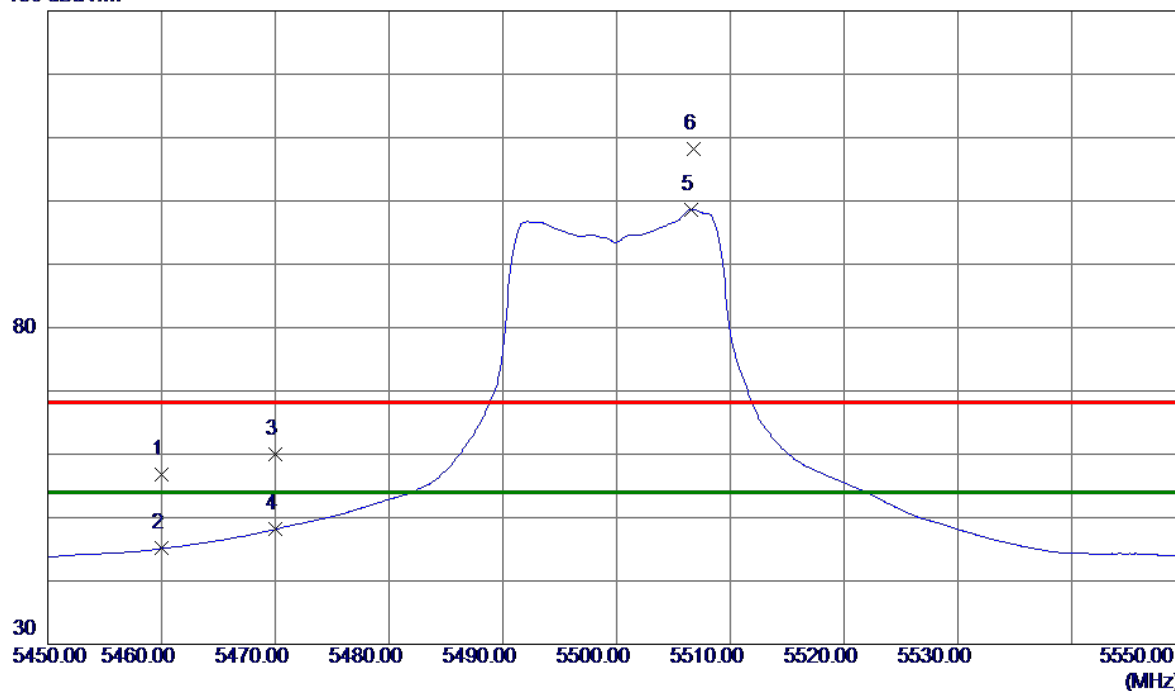

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	14.21	42.68	56.89	68.30	-11.41	Peak	
2	5460.0000	2.46	42.68	45.14	54.00	-8.86	AVG	
3	5470.0000	17.28	42.73	60.01	68.30	-8.29	Peak	
4	5470.0000	5.41	42.73	48.14	54.00	-5.86	AVG	
5 *	5506.6000	55.79	42.90	98.69	54.00	44.69	AVG	No Limit
6	5506.8000	65.29	42.90	108.19	68.30	39.89	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz


Horizontal

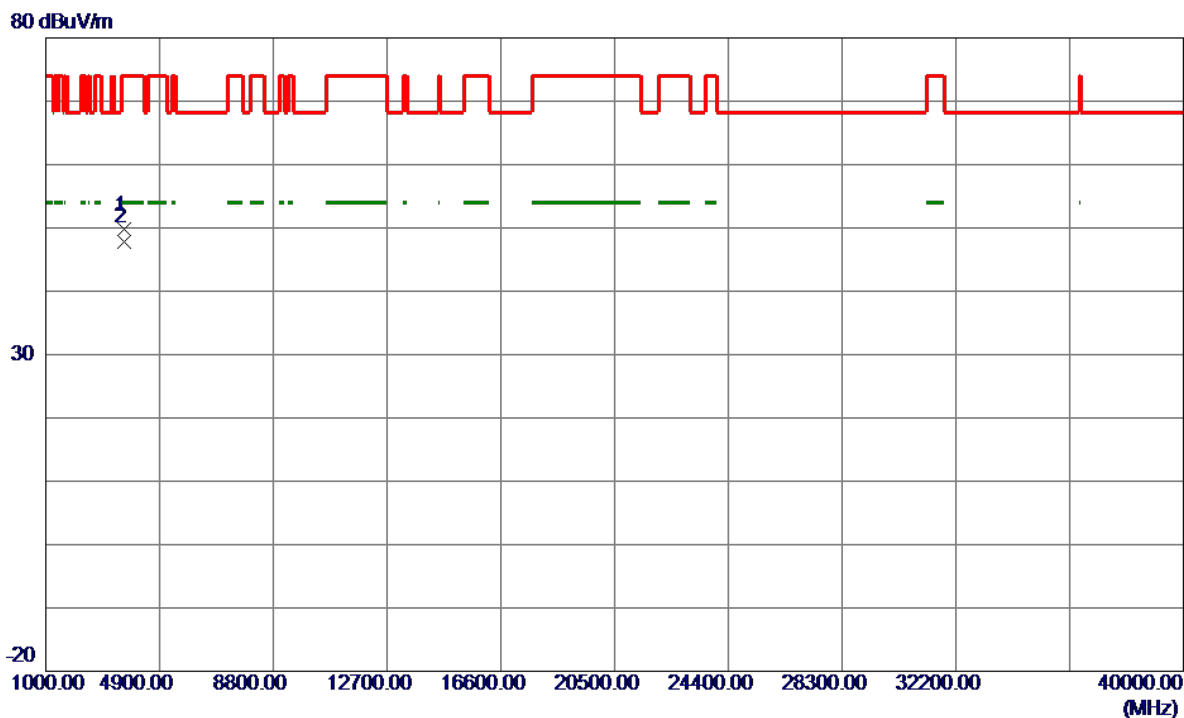

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	3666.6050	46.61	3.09	49.70	74.00	-24.30	Peak	
2 *	3666.6250	44.65	3.09	47.74	54.00	-6.26	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Vertical

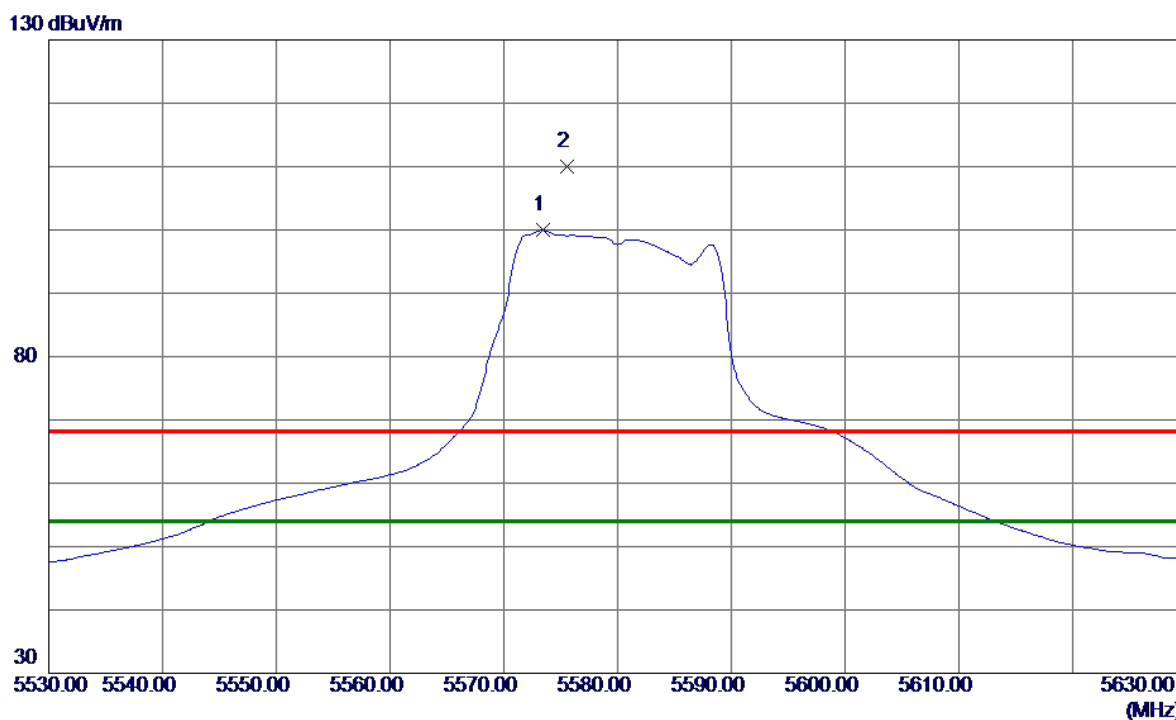

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5573.4000	56.84	43.10	99.94	54.00	45.94	AVG	No Limit
2	5575.6000	66.93	43.11	110.04	68.30	41.74	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz


Vertical



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	3719.9200	43.57	3.21	46.78	54.00	-7.22	AVG	
2	3719.9400	45.87	3.21	49.08	74.00	-24.92	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz


Horizontal

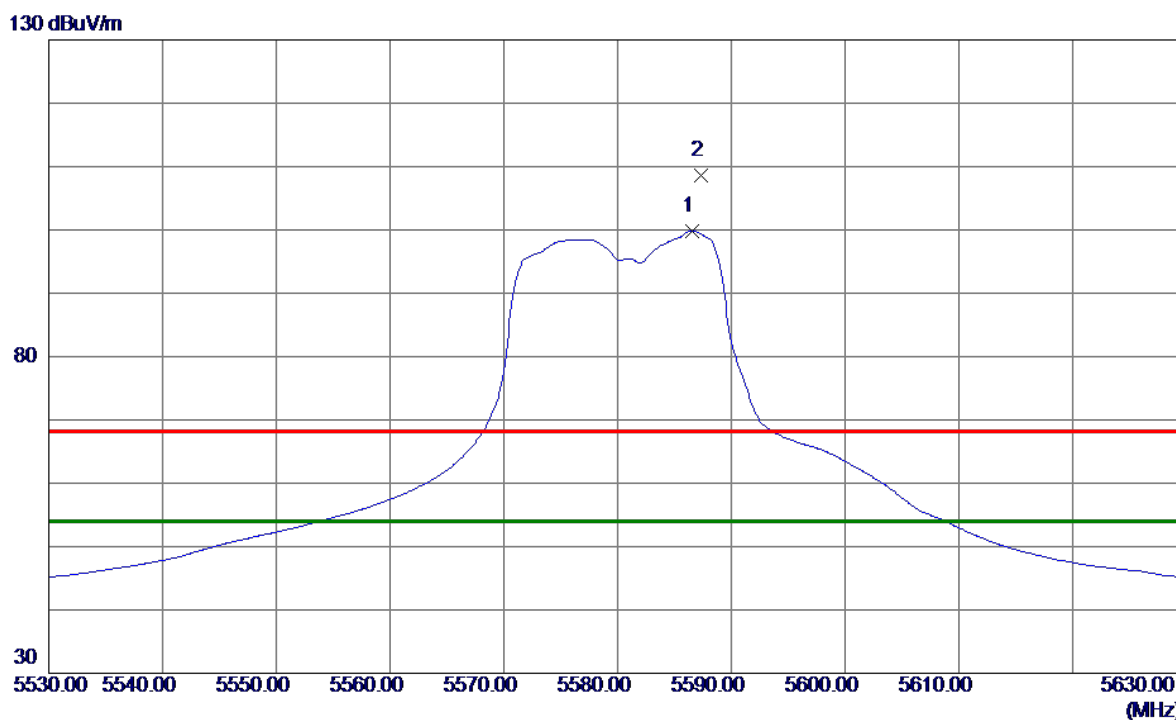

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	5586.6000	56.75	43.14	99.89	54.00	45.89	AVG	No Limit
2	5587.3000	65.44	43.14	108.58	68.30	40.28	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Horizontal

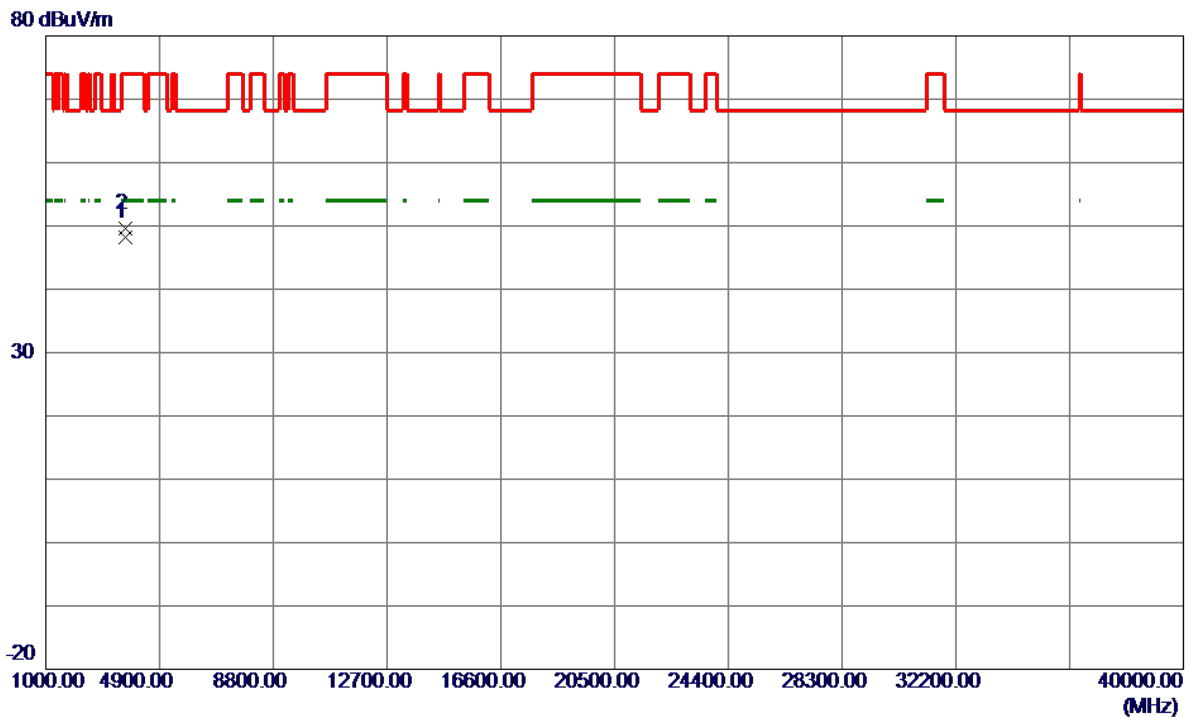


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3719.9600	44.99	3.21	48.20	54.00	-5.80	AVG	
2	3720.0000	46.47	3.21	49.68	74.00	-24.32	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Vertical


130 dBuV/m

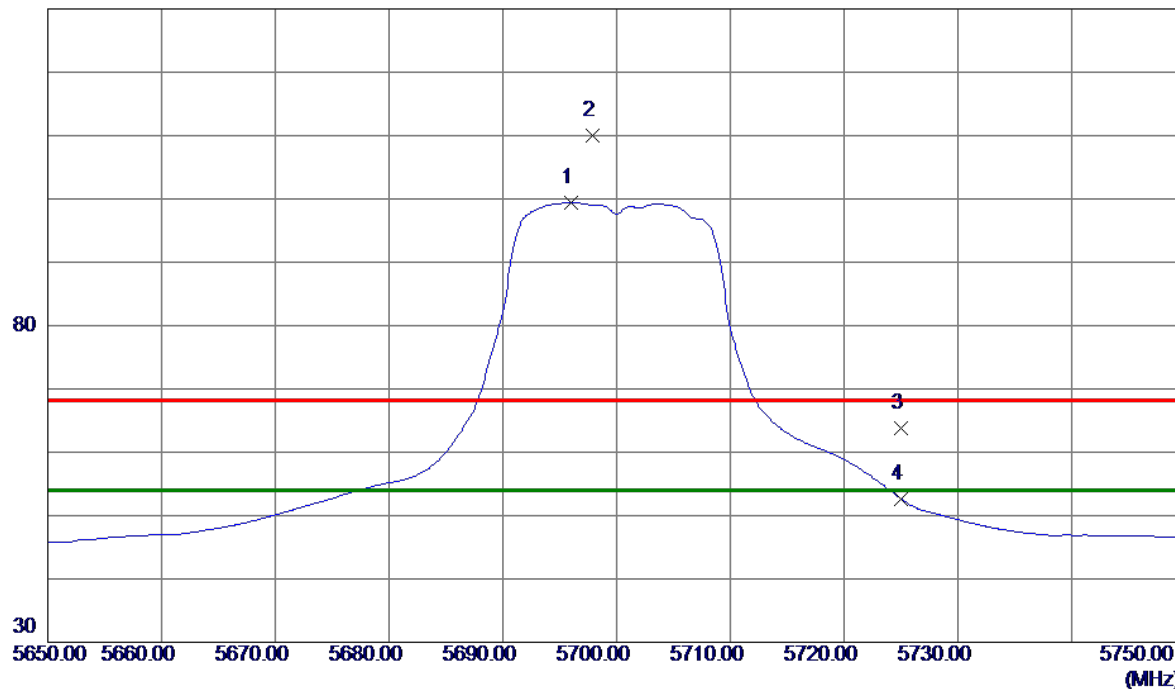

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5696.0000	55.95	43.47	99.42	54.00	45.42	AVG	No Limit
2	5697.9000	66.55	43.48	110.03	68.30	41.73	Peak	No Limit
3	5725.0000	20.21	43.56	63.77	68.30	-4.53	Peak	
4	5725.0000	9.07	43.56	52.63	54.00	-1.37	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Vertical

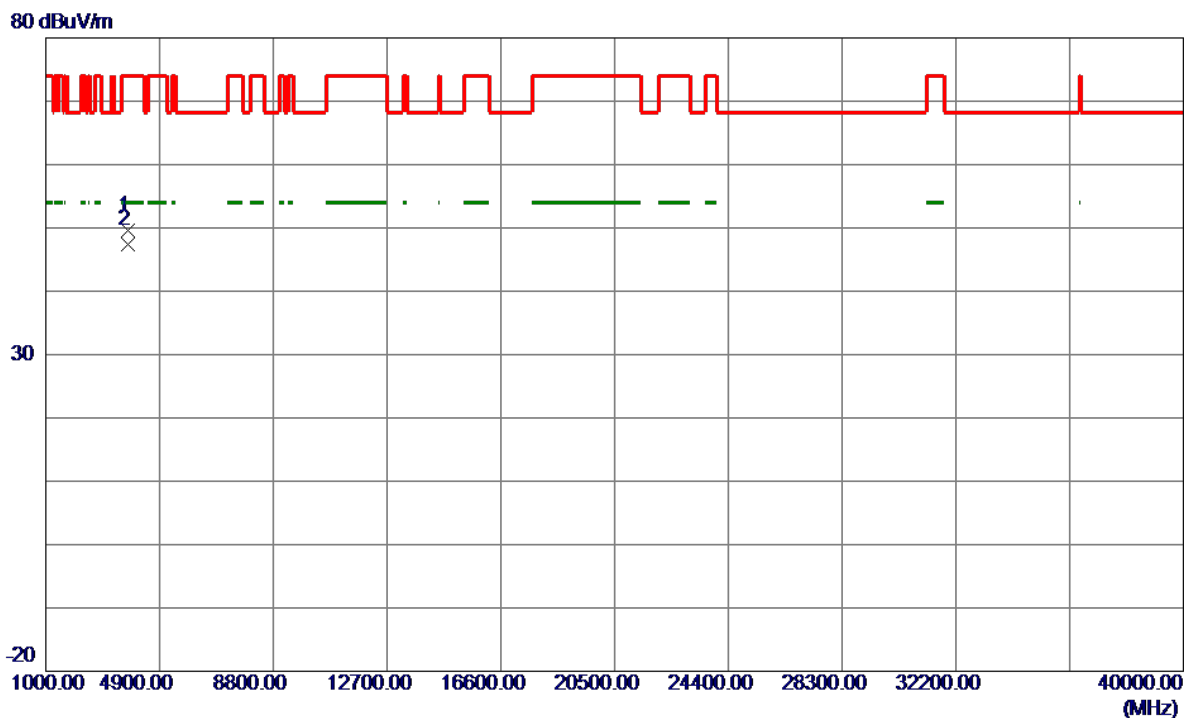


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	3799.8100	46.12	3.39	49.51	74.00	-24.49	Peak	
2 *	3799.9900	44.10	3.39	47.49	54.00	-6.51	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Horizontal

130 dBuV/m

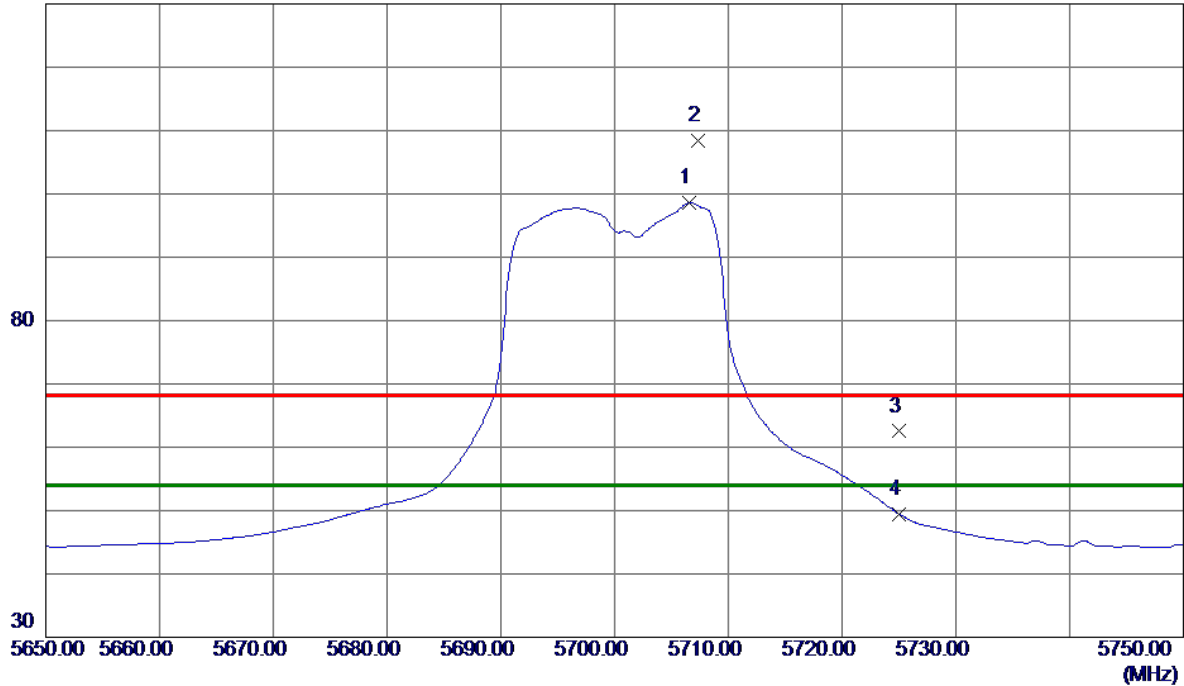

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5706.6000	55.13	43.50	98.63	54.00	44.63	AVG	No Limit
2	5707.3000	64.84	43.51	108.35	68.30	40.05	Peak	No Limit
3	5725.0000	18.94	43.56	62.50	68.30	-5.80	Peak	
4	5725.0000	5.87	43.56	49.43	54.00	-4.57	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Horizontal




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	3799.9100	45.18	3.39	48.57	54.00	-5.43	AVG	
2	3799.9650	46.68	3.39	50.07	74.00	-23.93	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical

130 dBuV/m

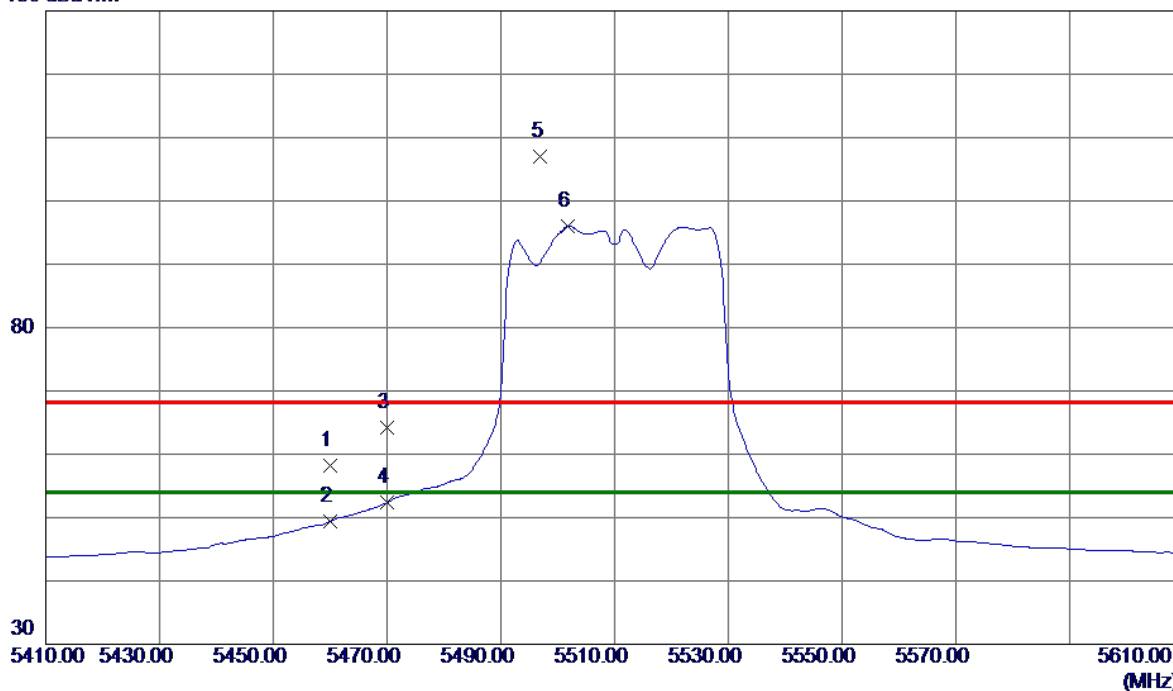

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	15.47	42.68	58.15	68.30	-10.15	Peak	
2	5460.0000	6.74	42.68	49.42	54.00	-4.58	AVG	
3	5470.0000	21.41	42.73	64.14	68.30	-4.16	Peak	
4	5470.0000	9.64	42.73	52.37	54.00	-1.63	AVG	
5	5497.0000	64.04	42.86	106.90	68.30	38.60	Peak	No Limit
6 *	5501.8000	53.08	42.89	95.97	54.00	41.97	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical




No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	3673.2450	46.31	3.11	49.42	74.00	-24.58	Peak	
2 *	3673.2800	44.02	3.11	47.13	54.00	-6.87	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Horizontal


130 dBuV/m

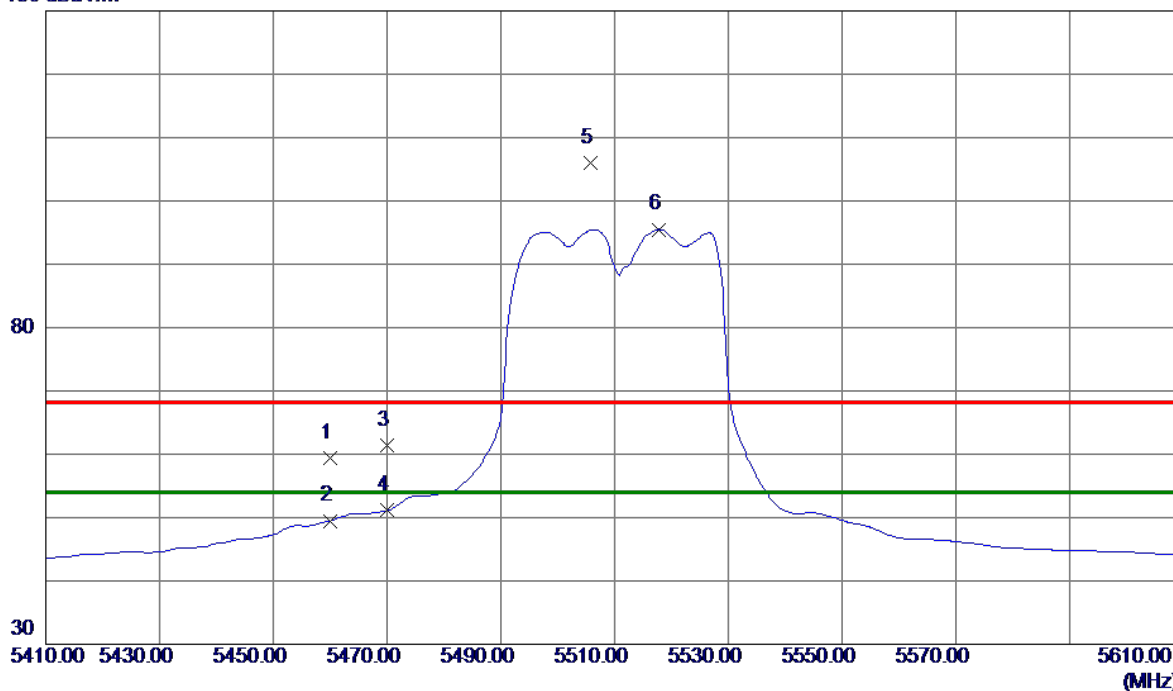

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	16.80	42.68	59.48	68.30	-8.82	Peak	
2	5460.0000	6.82	42.68	49.50	54.00	-4.50	AVG	
3	5470.0000	18.63	42.73	61.36	68.30	-6.94	Peak	
4	5470.0000	8.40	42.73	51.13	54.00	-2.87	AVG	
5	5505.8000	63.02	42.90	105.92	68.30	37.62	Peak	No Limit
6 *	5517.8000	52.57	42.93	95.50	54.00	41.50	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Horizontal

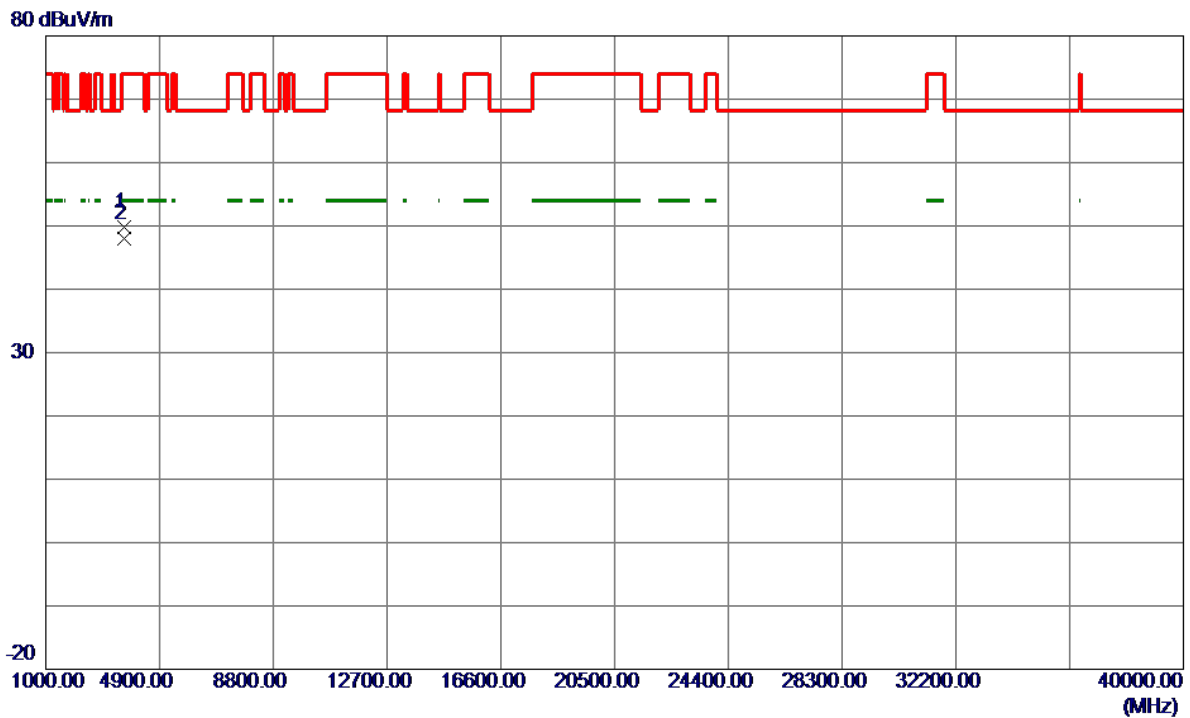


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	3673.2400	46.69	3.11	49.80	74.00	-24.20	Peak	
2 *	3673.2950	44.83	3.11	47.94	54.00	-6.06	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Vertical


130 dBuV/m

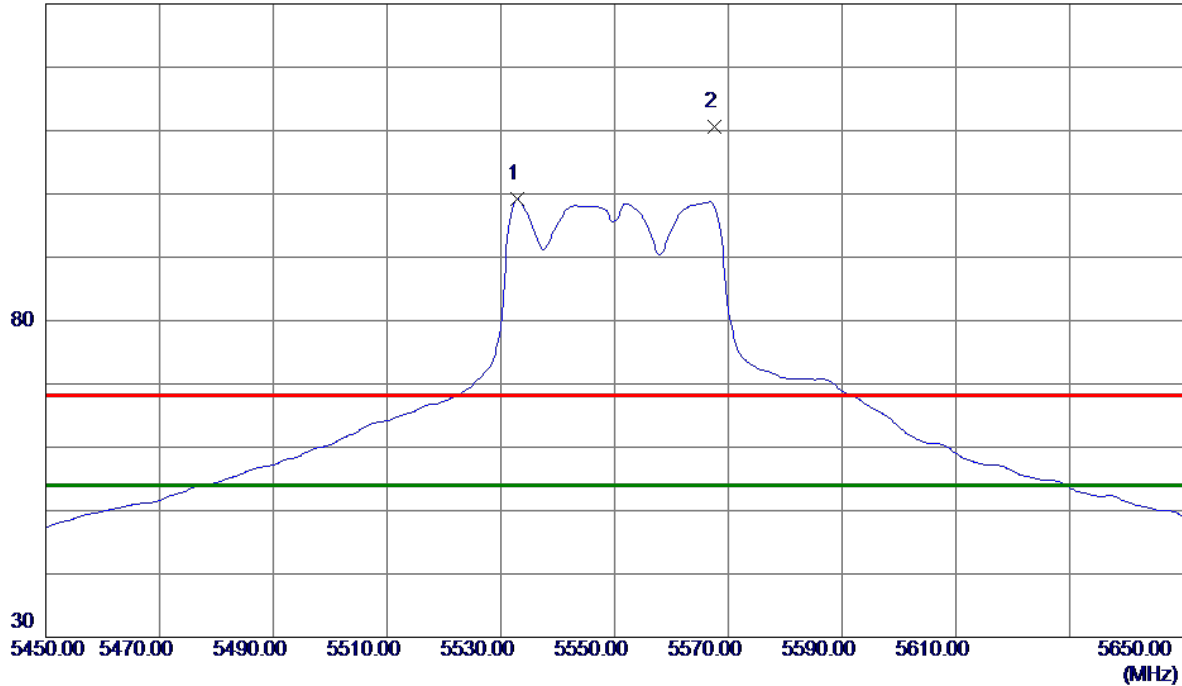

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5532.8000	56.14	42.98	99.12	54.00	45.12	AVG	No Limit
2	5567.6000	67.49	43.08	110.57	68.30	42.27	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Vertical

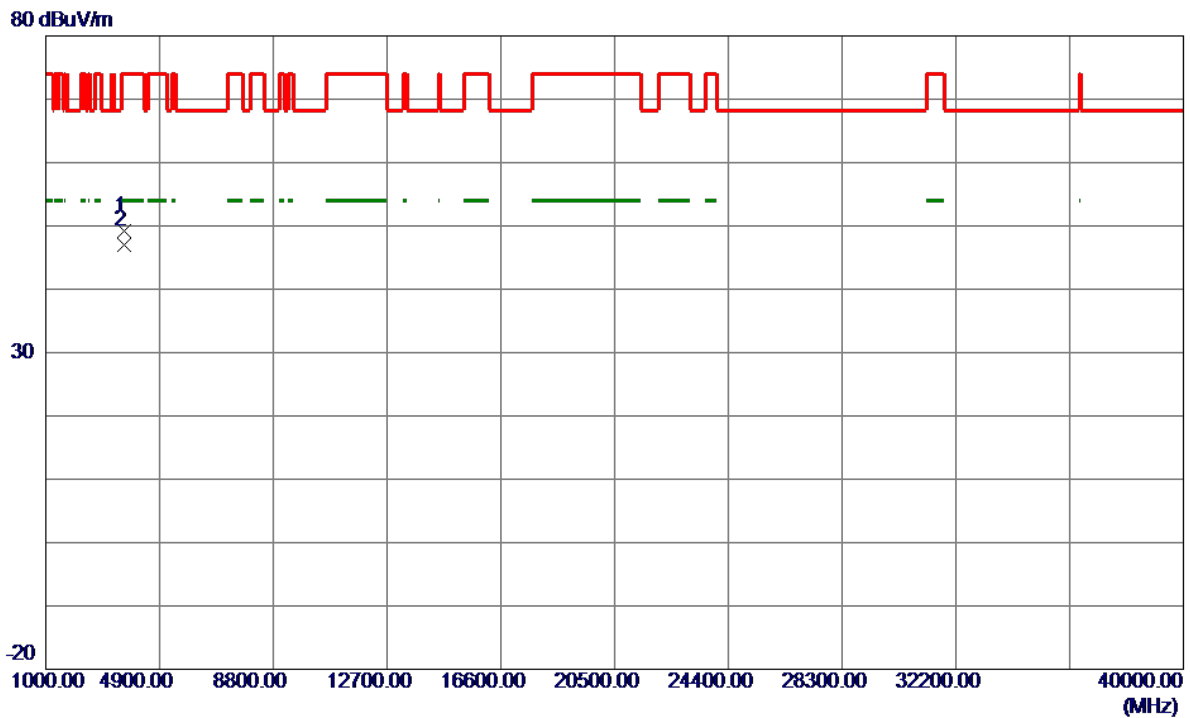

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	3699.9550	45.98	3.17	49.15	74.00	-24.85	Peak	
2 *	3699.9750	43.92	3.17	47.09	54.00	-6.91	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Horizontal

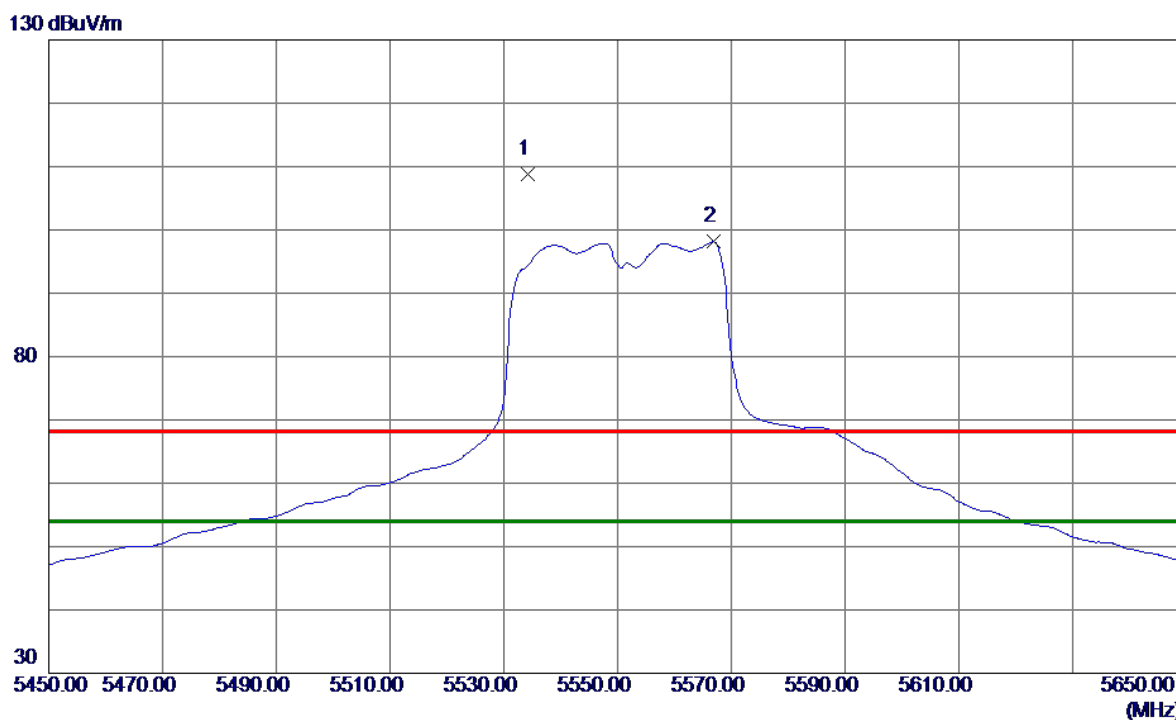

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5534.2000	65.81	42.98	108.79	68.30	40.49	Peak	No Limit
2 *	5566.8000	55.07	43.08	98.15	54.00	44.15	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Horizontal




No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	3699.9050	46.88	3.17	50.05	74.00	-23.95	Peak	
2 *	3699.9400	45.43	3.17	48.60	54.00	-5.40	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Vertical


130 dBuV/m

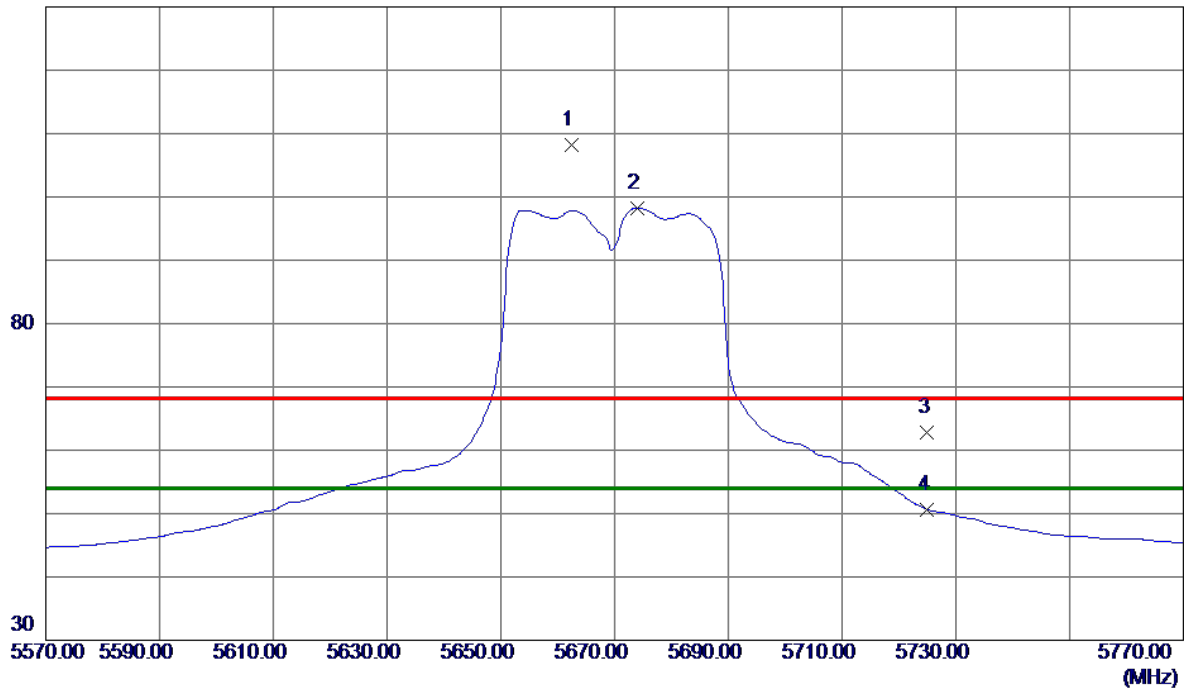

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5662.4000	64.84	43.37	108.21	68.30	39.91	Peak	No Limit
2 *	5674.0000	54.83	43.41	98.24	54.00	44.24	AVG	No Limit
3	5725.0000	19.28	43.56	62.84	68.30	-5.46	Peak	
4	5725.0000	7.07	43.56	50.63	54.00	-3.37	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Vertical

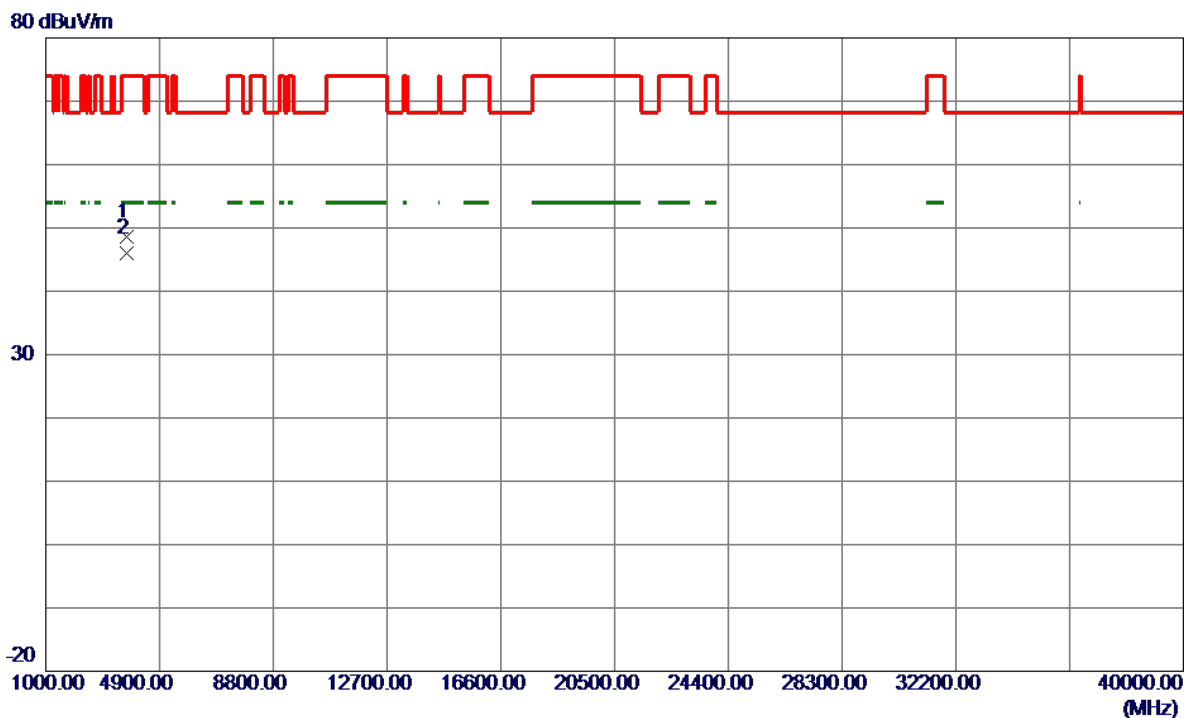


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	3779.8800	45.31	3.34	48.65	74.00	-25.35	Peak	
2 *	3779.9350	42.68	3.34	46.02	54.00	-7.98	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Horizontal

130 dBuV/m

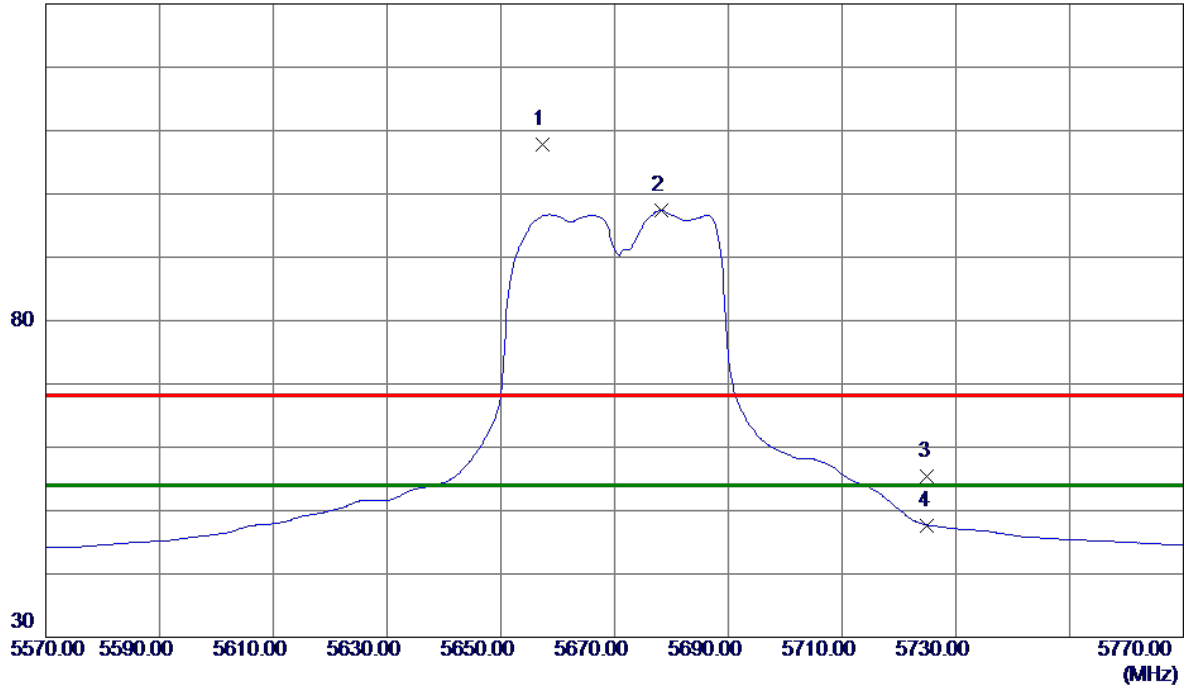

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5657.4000	64.39	43.36	107.75	68.30	39.45	Peak	No Limit
2 *	5678.2000	53.94	43.42	97.36	54.00	43.36	AVG	No Limit
3	5725.0000	11.83	43.56	55.39	68.30	-12.91	Peak	
4	5725.0000	4.12	43.56	47.68	54.00	-6.32	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Horizontal




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	3779.9400	45.59	3.34	48.93	54.00	-5.07	AVG	
2	3780.0400	47.36	3.34	50.70	74.00	-23.30	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical

130 dBuV/m

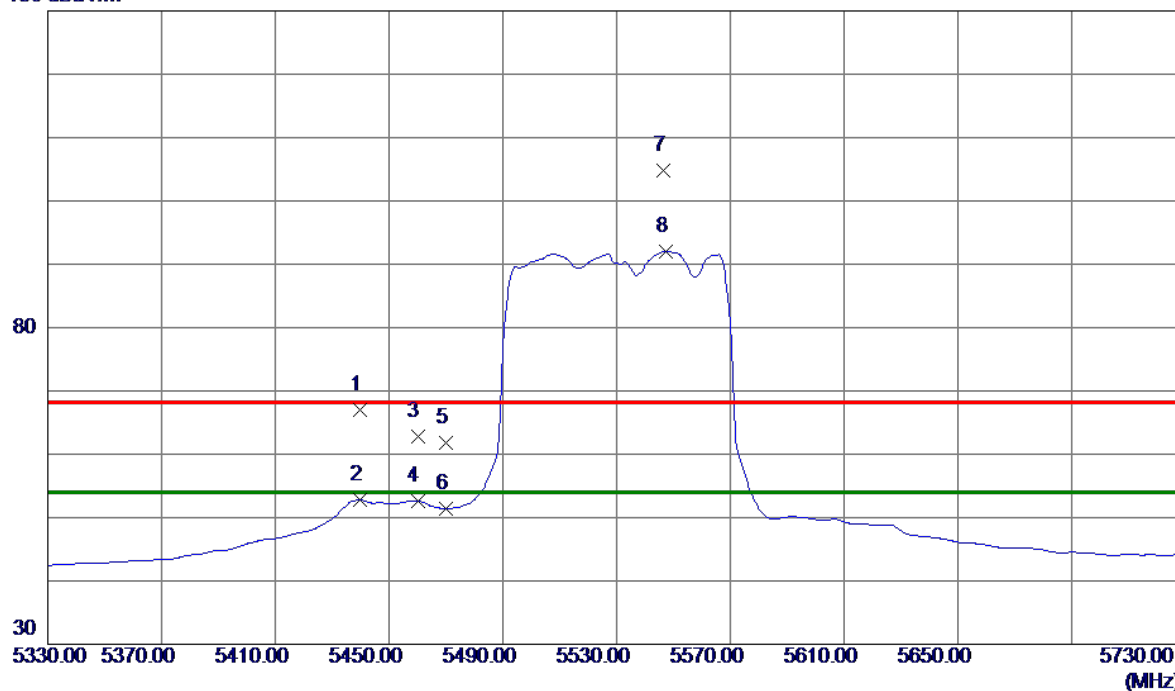


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5439.6000	24.35	42.57	66.92	68.30	-1.38	Peak	
2	5439.6000	10.19	42.57	52.76	54.00	-1.24	AVG	
3	5460.0000	20.09	42.68	62.77	68.30	-5.53	Peak	
4	5460.0000	9.97	42.68	52.65	54.00	-1.35	AVG	
5	5470.0000	19.09	42.73	61.82	68.30	-6.48	Peak	
6	5470.0000	8.67	42.73	51.40	54.00	-2.60	AVG	
7	5546.4000	61.84	43.02	104.86	68.30	36.56	Peak	No Limit
8 *	5547.2000	48.98	43.02	92.00	54.00	38.00	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical

80 dBuV/m

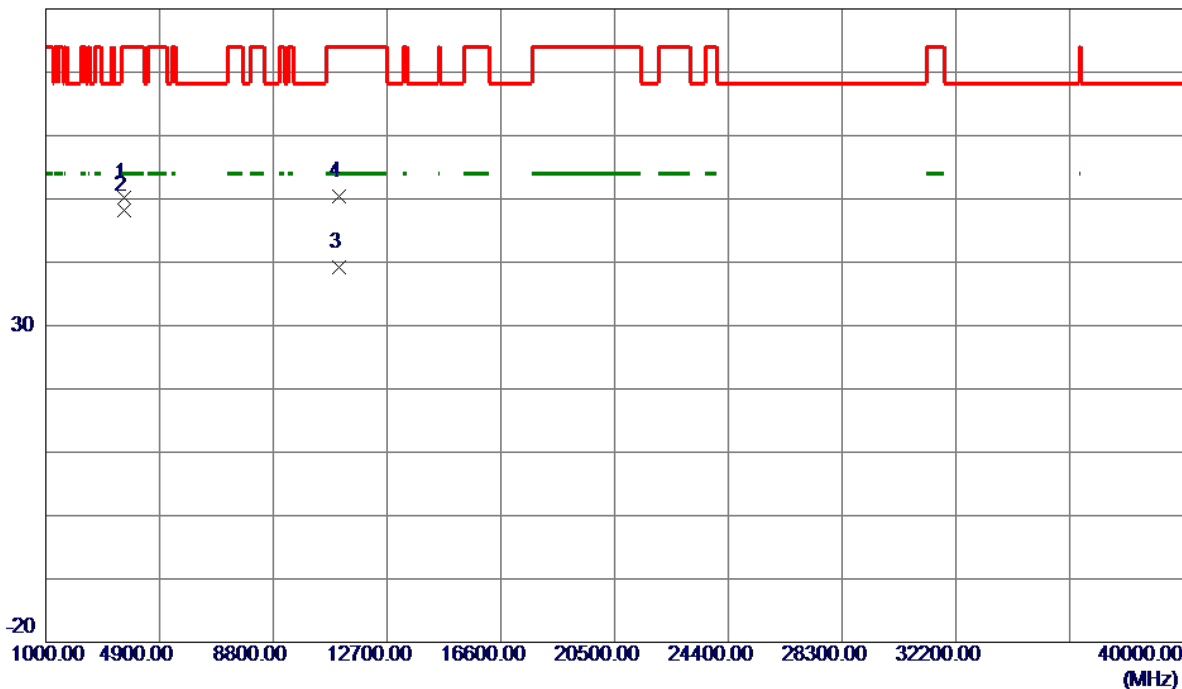


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	3686.5450	47.00	3.14	50.14	74.00	-23.86	Peak	
2 *	3686.6200	45.02	3.14	48.16	54.00	-5.84	AVG	
3	11059.9349	23.00	16.24	39.24	54.00	-14.76	AVG	
4	11060.0100	34.11	16.24	50.35	74.00	-23.65	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal


130 dBuV/m

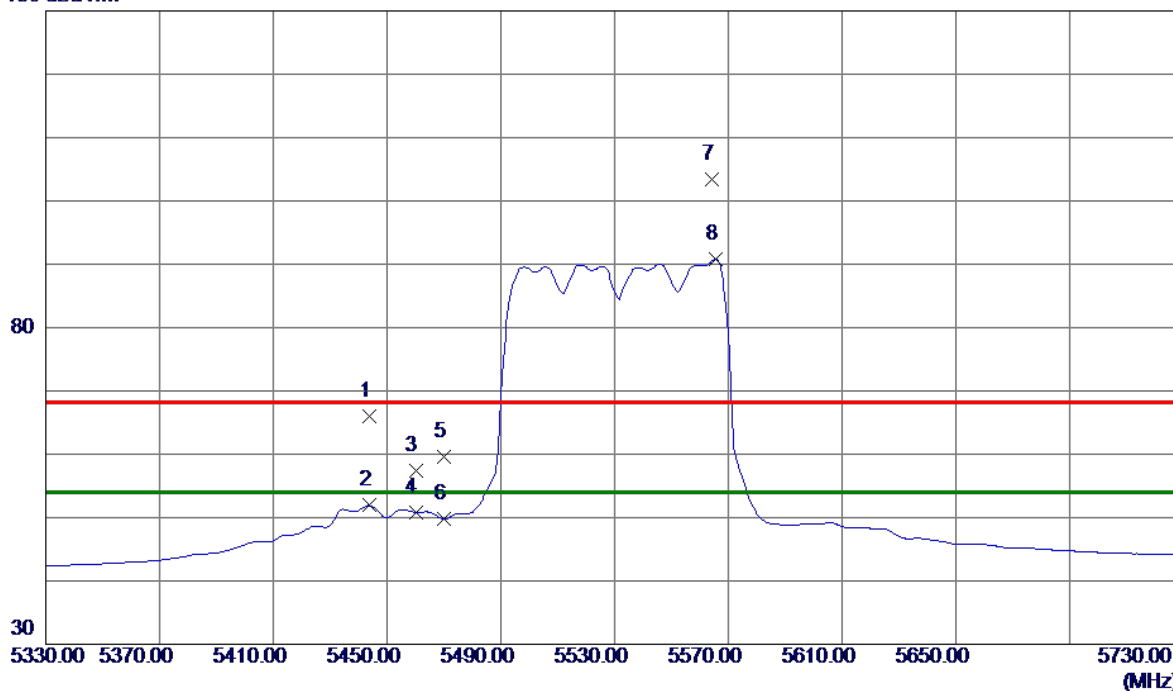

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5443.6000	23.40	42.59	65.99	68.30	-2.31	Peak	
2	5443.6000	9.33	42.59	51.92	54.00	-2.08	AVG	
3	5460.0000	14.73	42.68	57.41	68.30	-10.89	Peak	
4	5460.0000	8.13	42.68	50.81	54.00	-3.19	AVG	
5	5470.0000	16.96	42.73	59.69	68.30	-8.61	Peak	
6	5470.0000	7.02	42.73	49.75	54.00	-4.25	AVG	
7	5564.4000	60.24	43.07	103.31	68.30	35.01	Peak	No Limit
8 *	5565.6000	47.65	43.08	90.73	54.00	36.73	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal

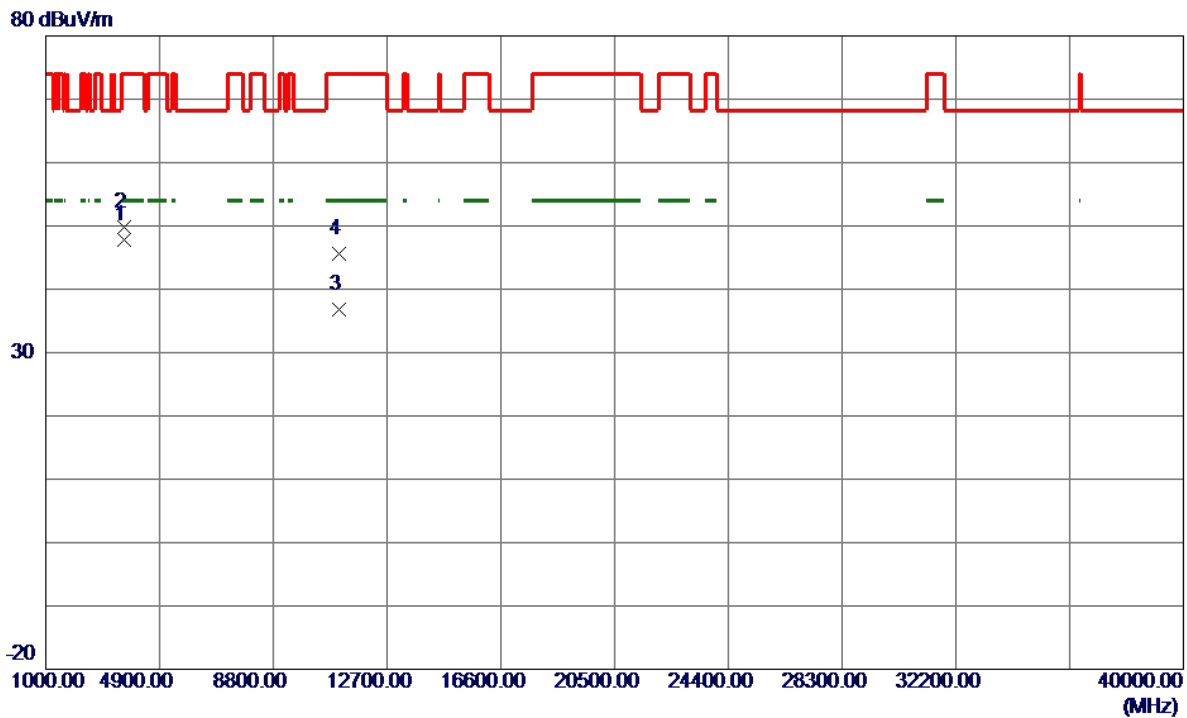


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	3686.6530	44.70	3.14	47.84	54.00	-6.16	AVG	
2	3686.6640	46.73	3.14	49.87	74.00	-24.13	Peak	
3	11059.7250	20.53	16.24	36.77	54.00	-17.23	AVG	
4	11060.6000	29.32	16.24	45.56	74.00	-28.44	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical


130 dBuV/m

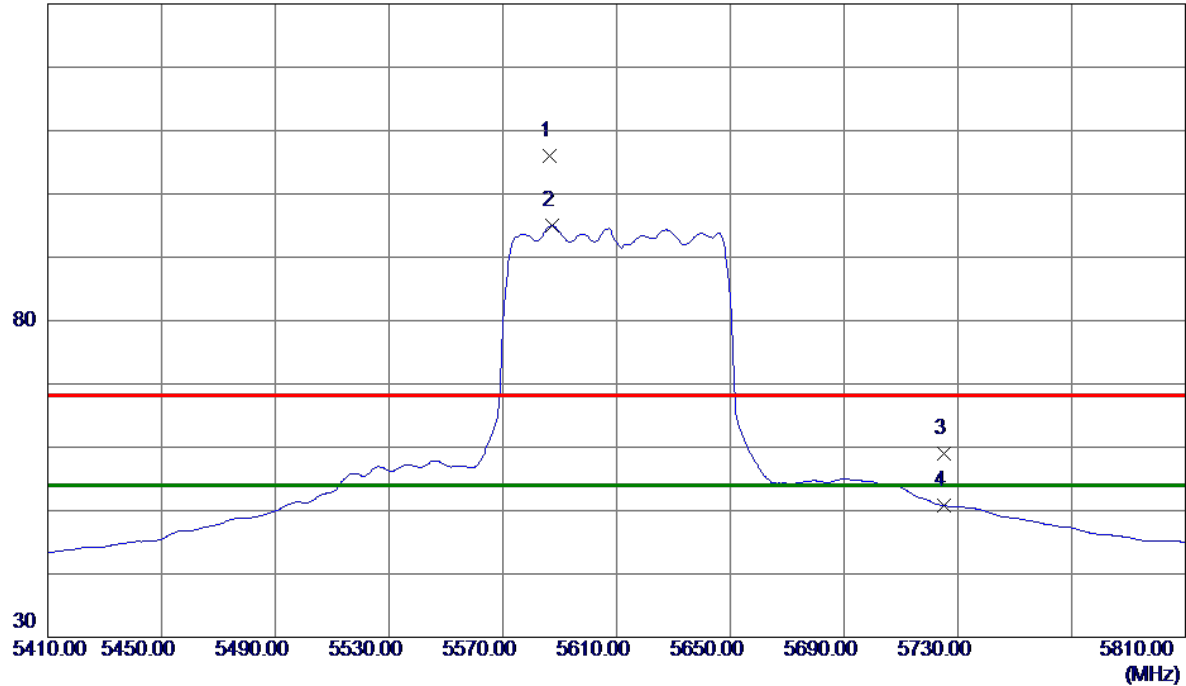

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5586.4000	62.78	43.14	105.92	68.30	37.62	Peak	No Limit
2 *	5587.2000	51.79	43.14	94.93	54.00	40.93	AVG	No Limit
3	5725.0000	15.35	43.56	58.91	68.30	-9.39	Peak	
4	5725.0000	7.17	43.56	50.73	54.00	-3.27	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical

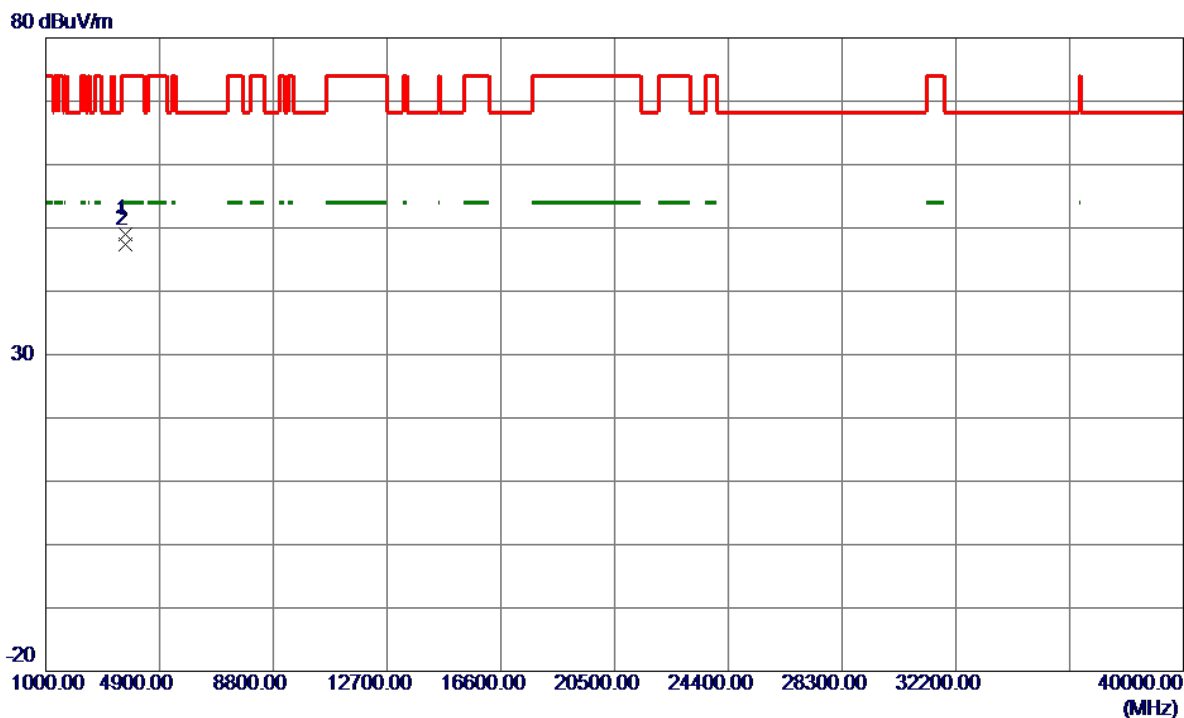


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	3739.8650	45.70	3.26	48.96	74.00	-25.04	Peak	
2 *	3739.9700	44.06	3.26	47.32	54.00	-6.68	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Horizontal


130 dBuV/m

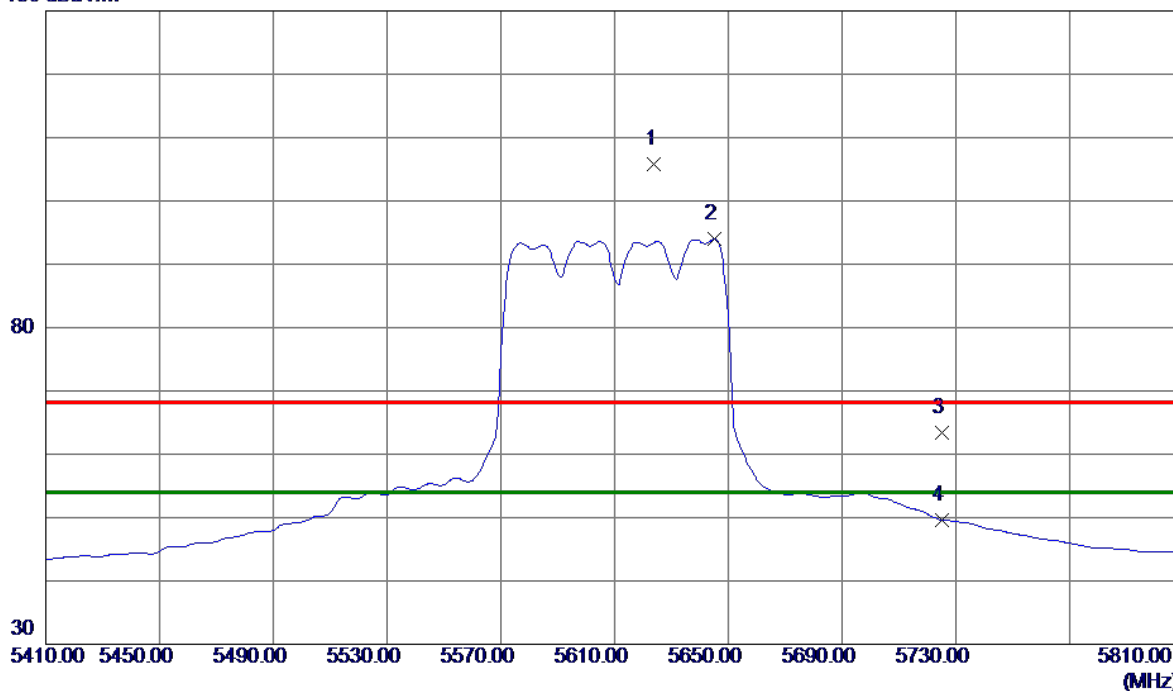

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5624.0000	62.57	43.25	105.82	68.30	37.52	Peak	No Limit
2 *	5645.2000	50.60	43.32	93.92	54.00	39.92	AVG	No Limit
3	5725.0000	19.92	43.56	63.48	68.30	-4.82	Peak	
4	5725.0000	6.07	43.56	49.63	54.00	-4.37	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Horizontal

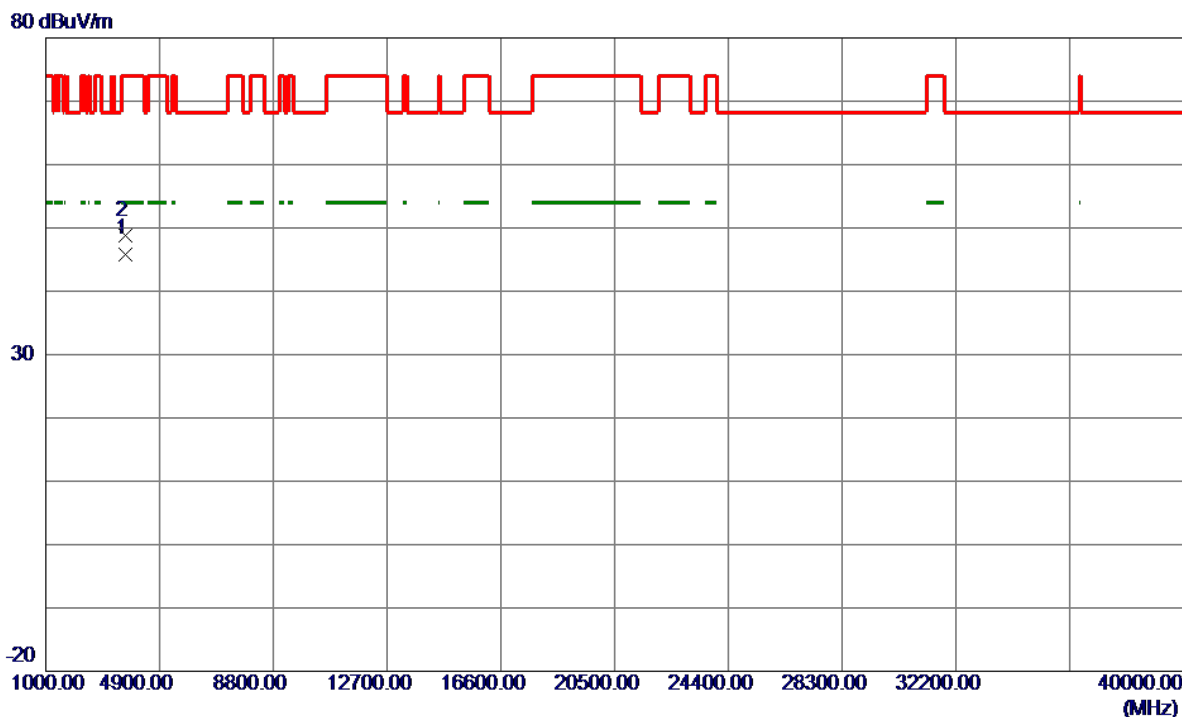

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	3739.9300	42.64	3.26	45.90	54.00	-8.10	AVG	
2	3739.9450	45.61	3.26	48.87	74.00	-25.13	Peak	

TX A Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 2.04 msec

T_{Total} : 2.10 msec

Duty cycle: 97.14%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.13

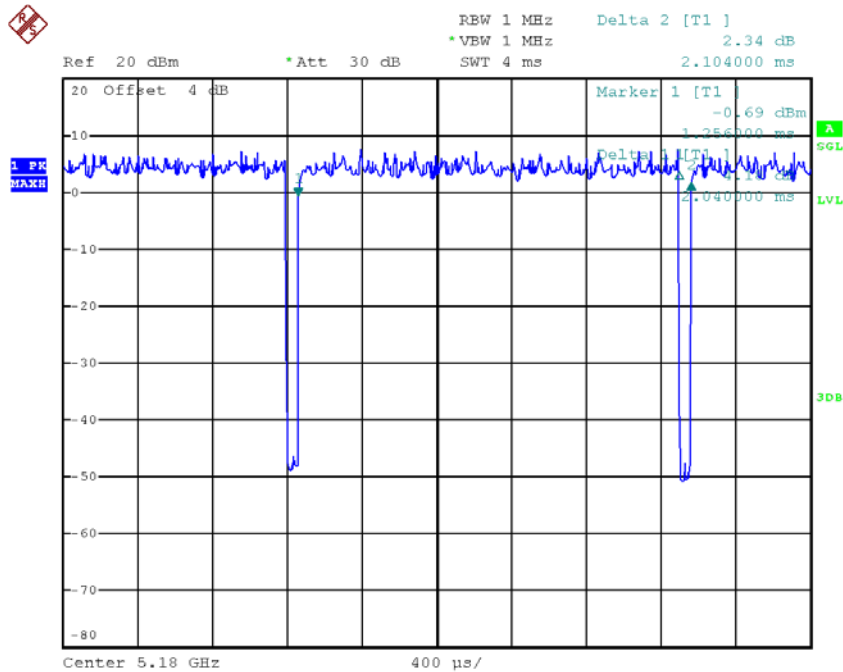

Date: 21.NOV.2017 10:20:43

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be cacluated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

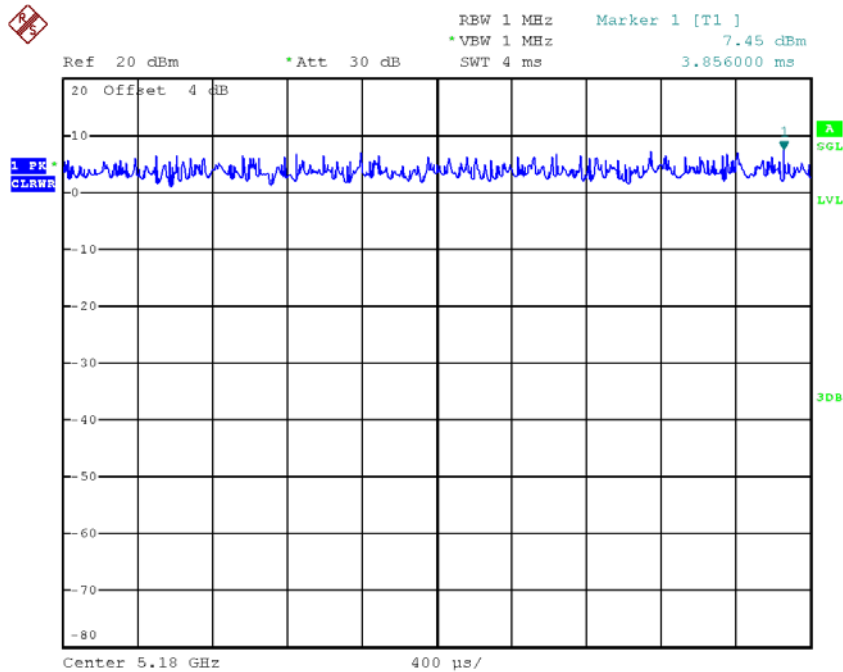

Date: 21.NOV.2017 10:21:05

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be caculated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 2.41 msec

T_{Total} : 2.48 msec

Duty cycle: 97.18%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.12

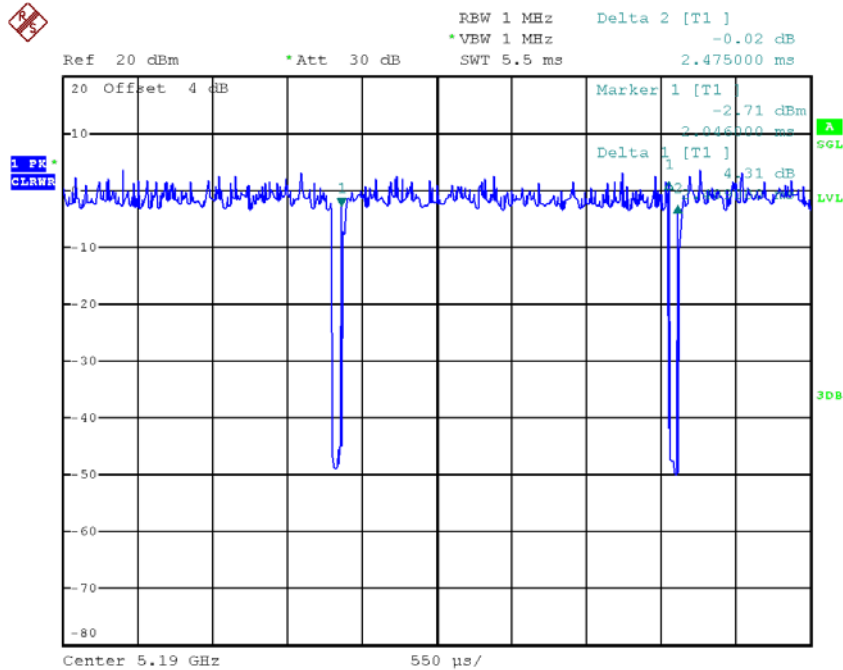

Date: 21.NOV.2017 10:22:53

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON}: 100000.00 msec

T_{Total}: 100000.00 msec

Duty cycle: 100.00%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.00

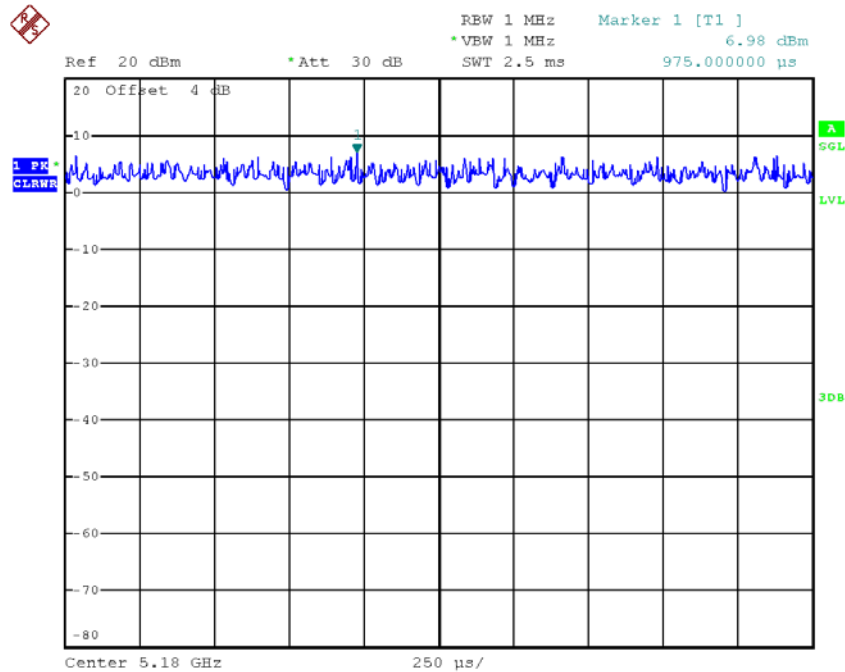

Date: 21.NOV.2017 10:22:25

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 2.43 msec

T_{Total} : 2.50 msec

Duty cycle: 97.20%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.12

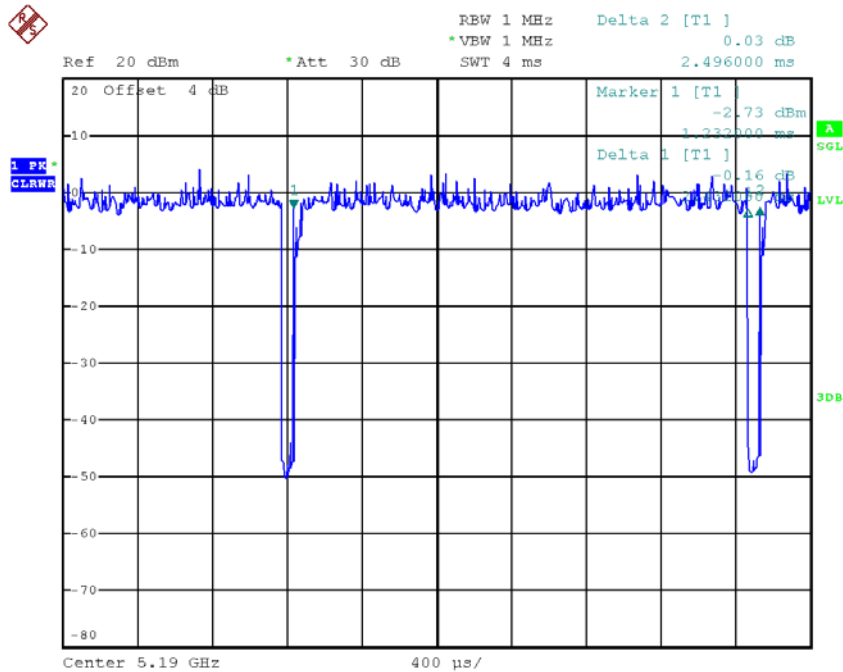

Date: 21.NOV.2017 10:23:06

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 1.14 msec

T_{Total} : 1.21 msec

Duty cycle: 94.21%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.26

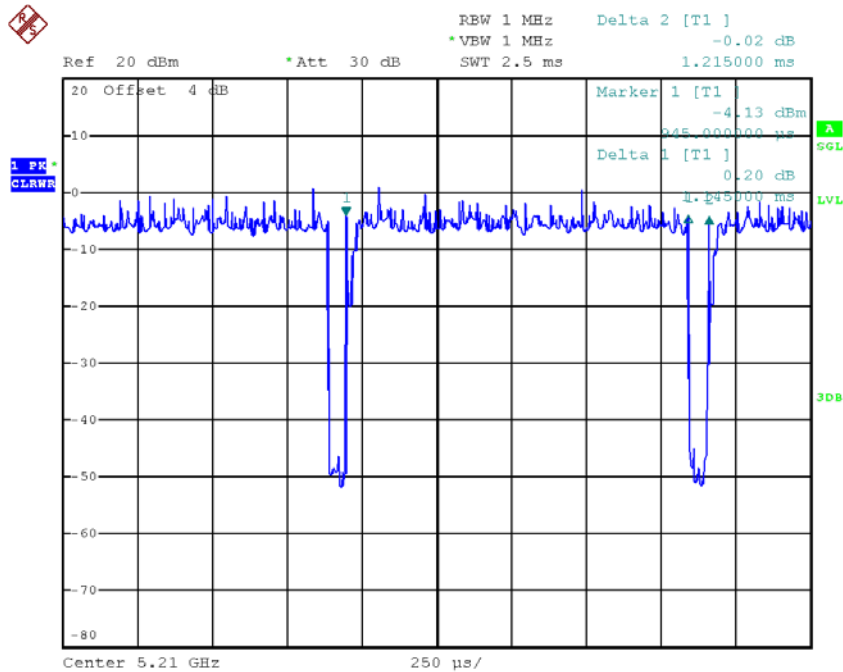

Date: 21.NOV.2017 10:23:23


Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

APPENDIX E - BANDWIDTH

Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.46	16.60
CH60	5300	21.30	16.70
CH64	5320	20.85	16.70

TX CH52

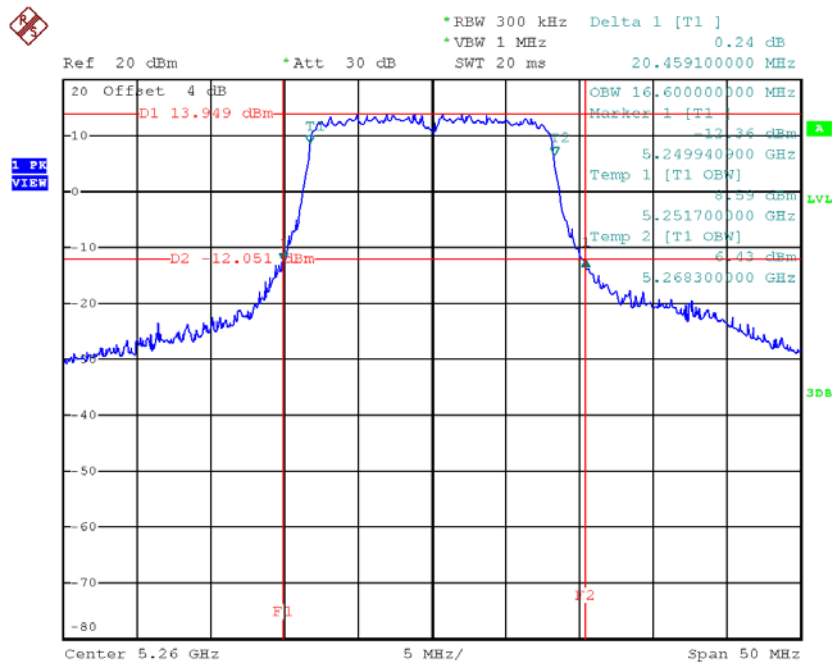


Date: 30.NOV.2017 14:28:56

TX CH60

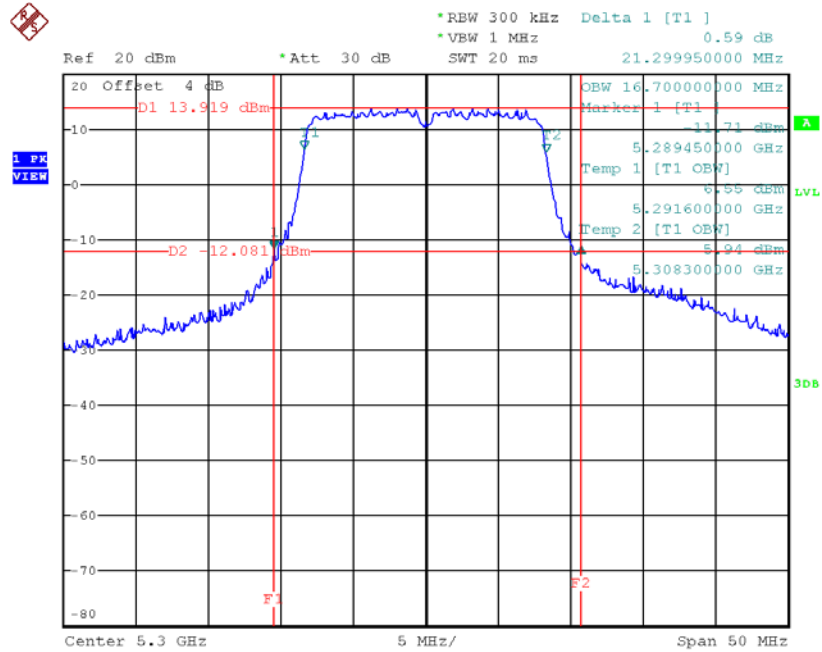

Date: 30.NOV.2017 14:29:28

TX CH64

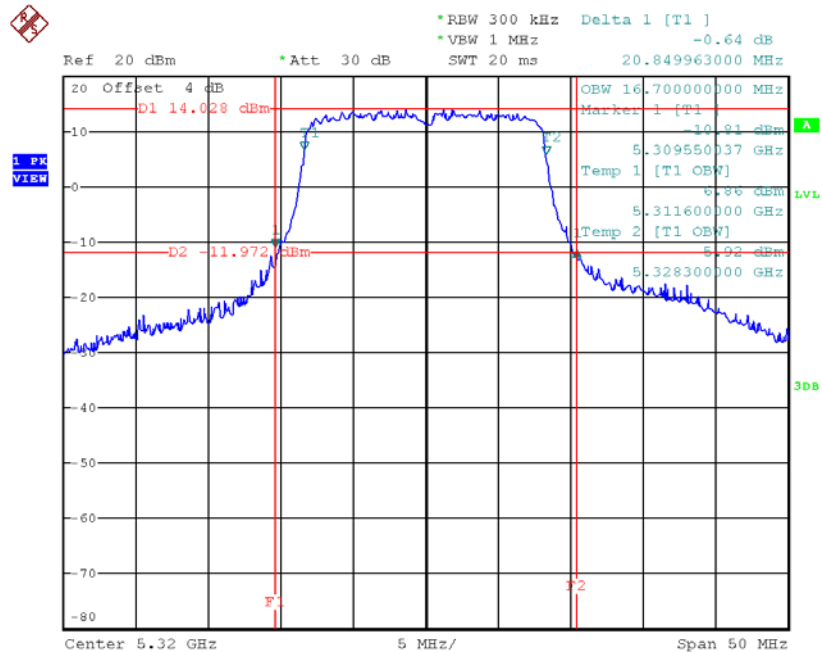


Date: 30.NOV.2017 14:30:04

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.89	17.70
CH60	5300	21.09	17.70
CH64	5320	21.15	17.70

TX CH52

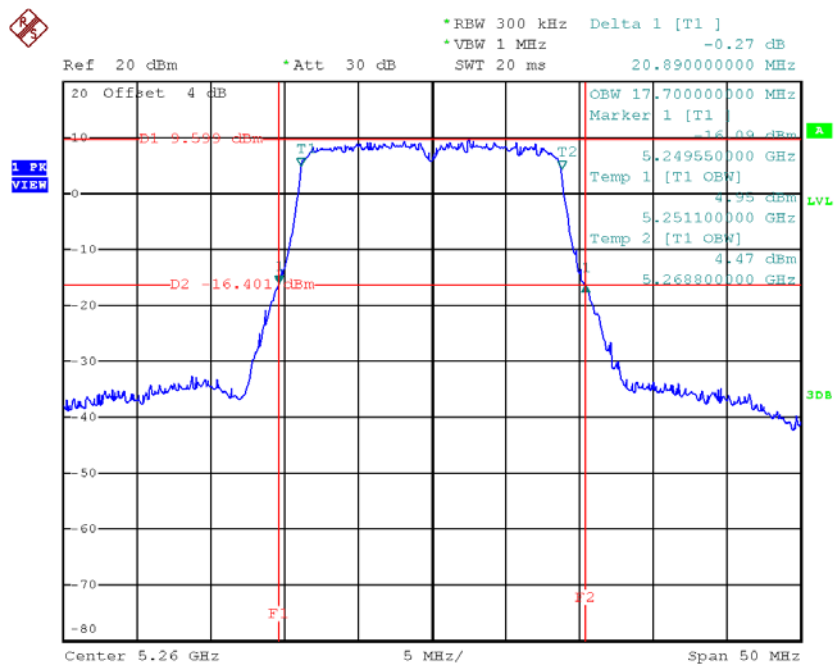


Date: 30.NOV.2017 14:39:25

TX CH60

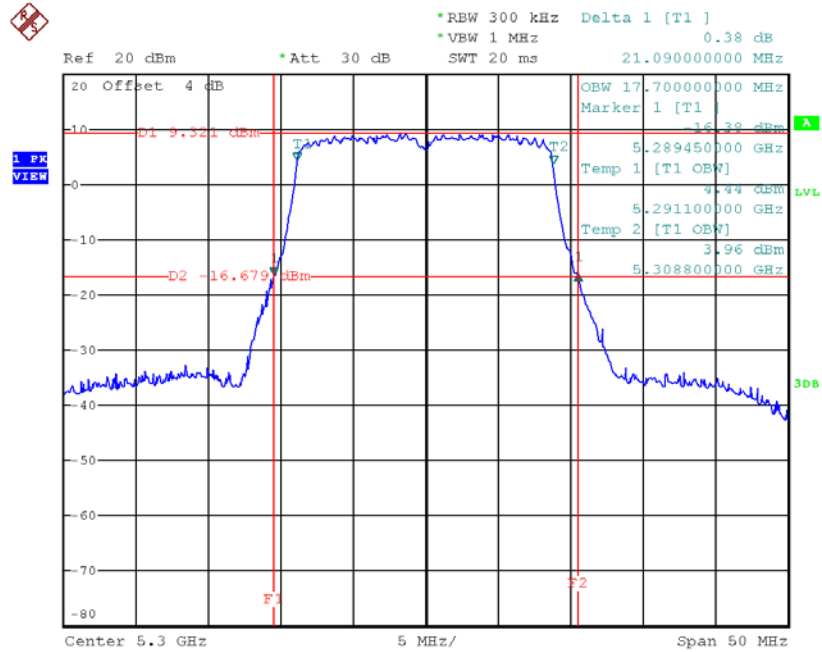

Date: 30.NOV.2017 14:40:01

TX CH64

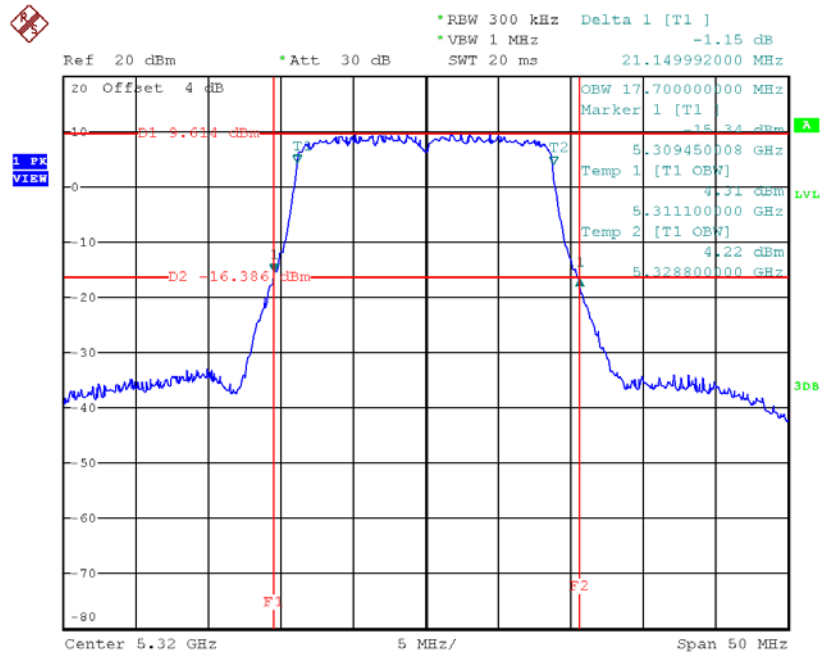


Date: 30.NOV.2017 14:46:21

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	41.30	36.20
CH62	5310	40.79	36.40

TX CH54

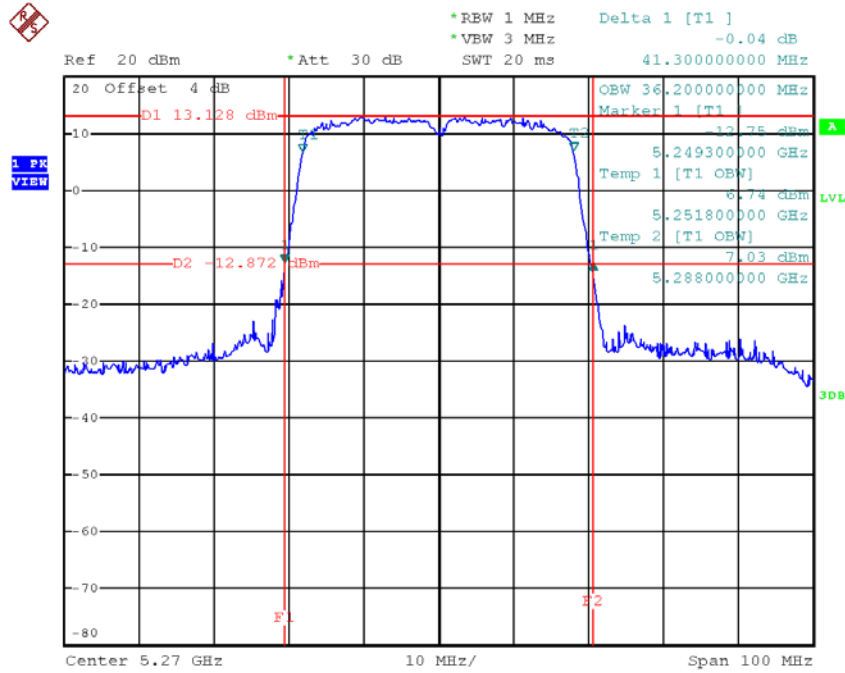

Date: 30.NOV.2017 15:30:25

TX CH62

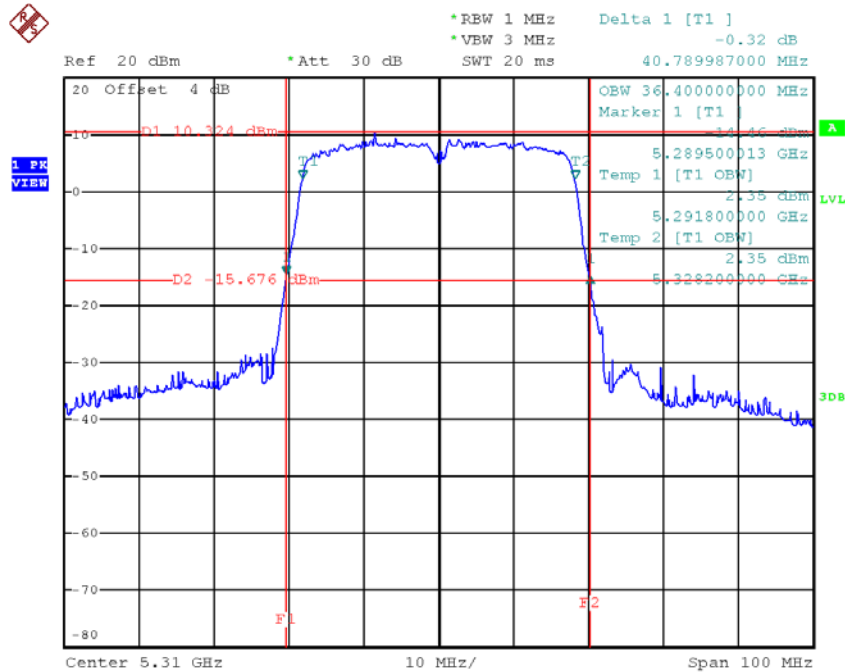


Date: 30.NOV.2017 15:31:56

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	21.49	16.60
CH116	5580	20.89	16.70
CH140	5700	20.45	16.60

TX CH100

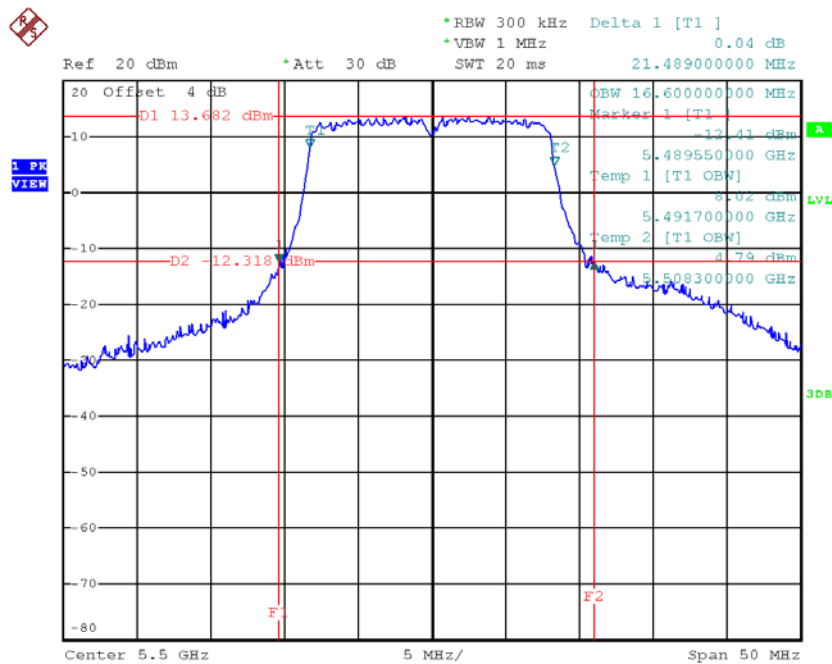


Date: 30.NOV.2017 14:30:52

TX CH116

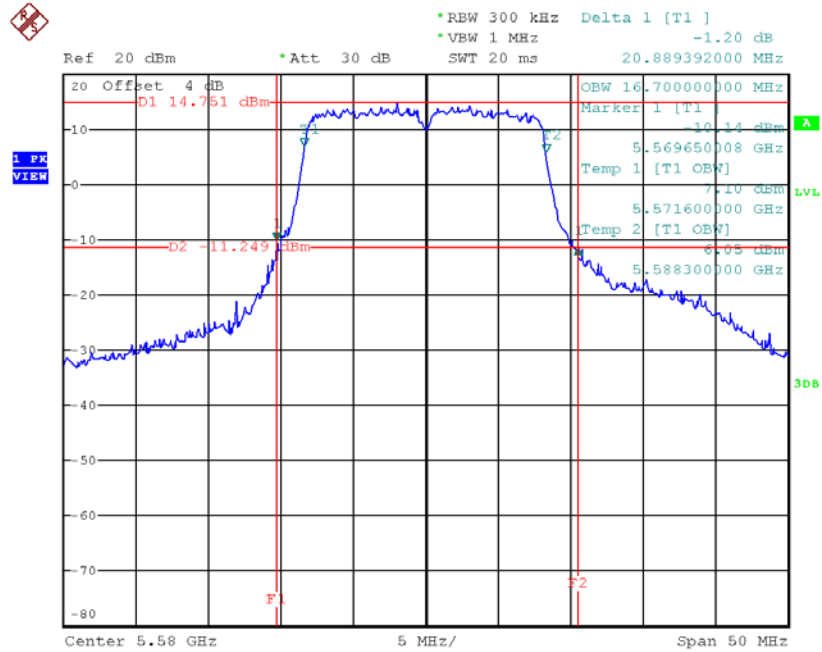

Date: 30.NOV.2017 14:31:31

TX CH140

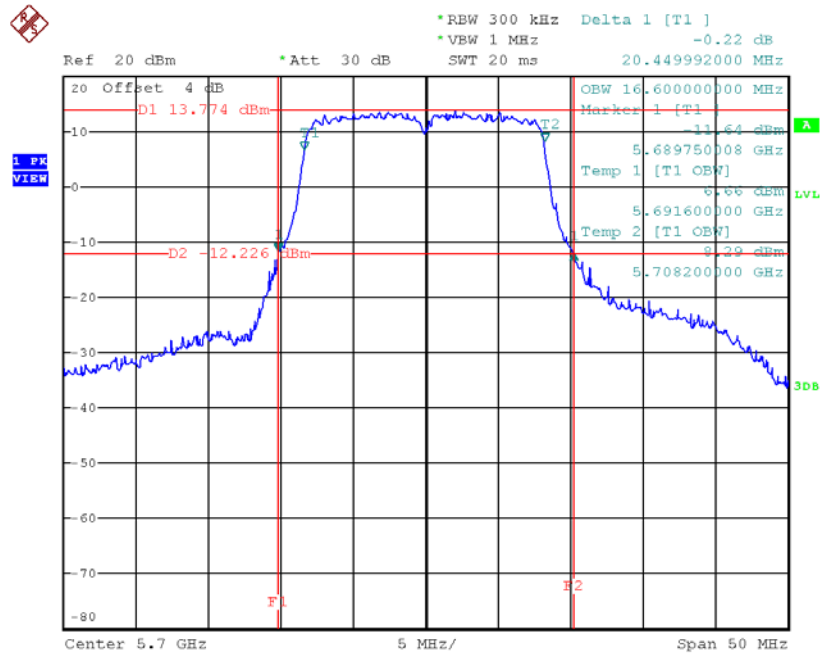


Date: 30.NOV.2017 14:32:07

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.95	17.70
CH116	5580	20.95	17.70
CH140	5700	20.70	17.70

TX CH100

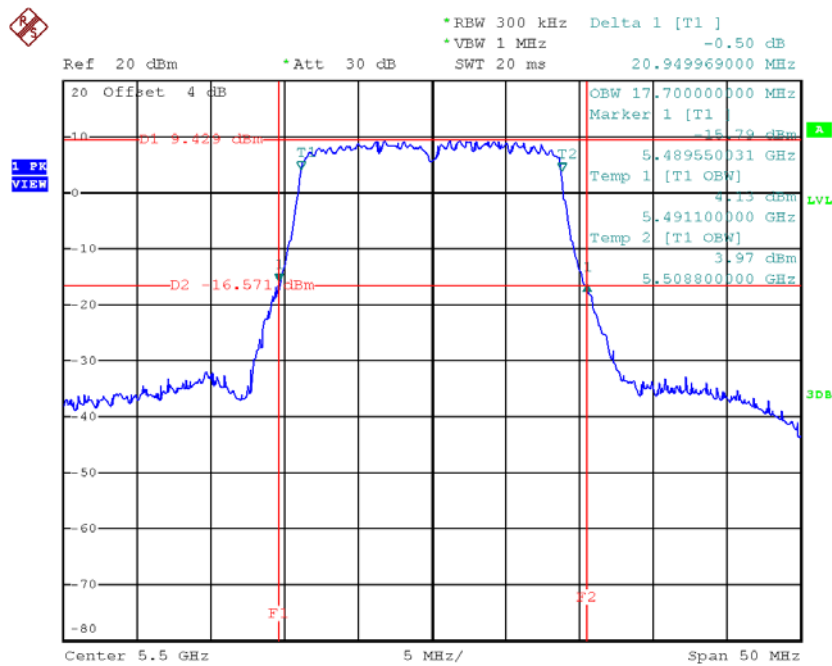


Date: 30.NOV.2017 14:49:01

TX CH116

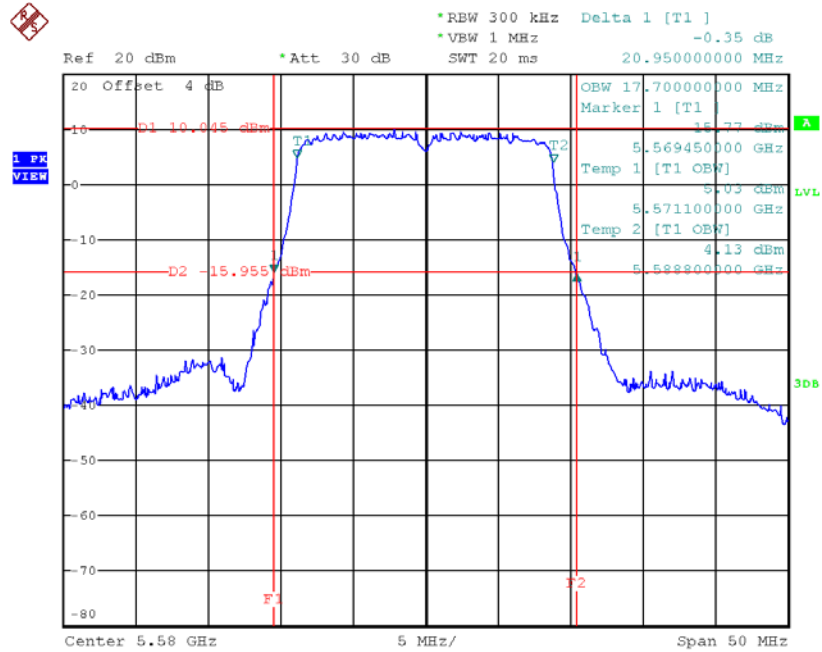

Date: 30.NOV.2017 14:49:38

TX CH140

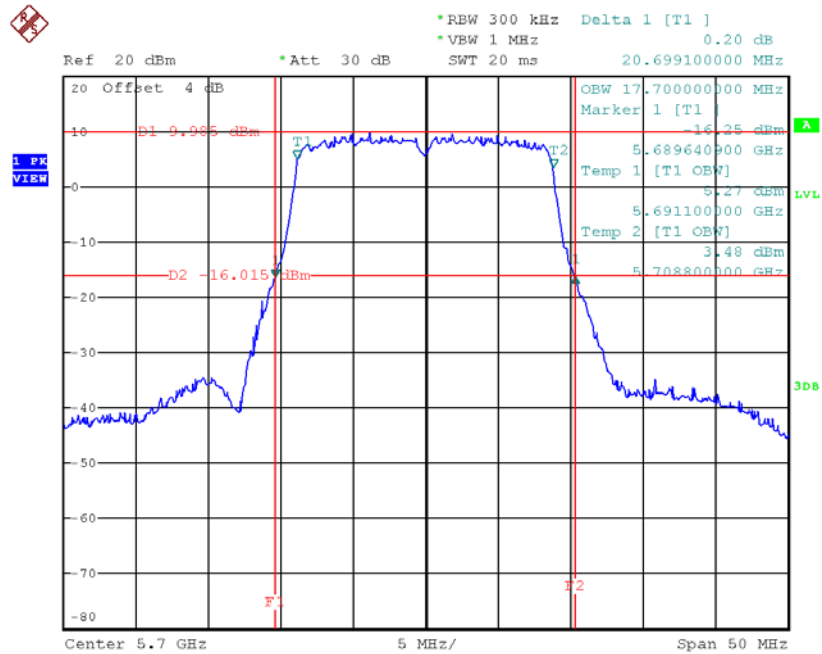


Date: 30.NOV.2017 14:50:28

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	40.80	36.00
CH110	5550	40.90	36.20
CH134	5670	40.79	36.20

TX CH102

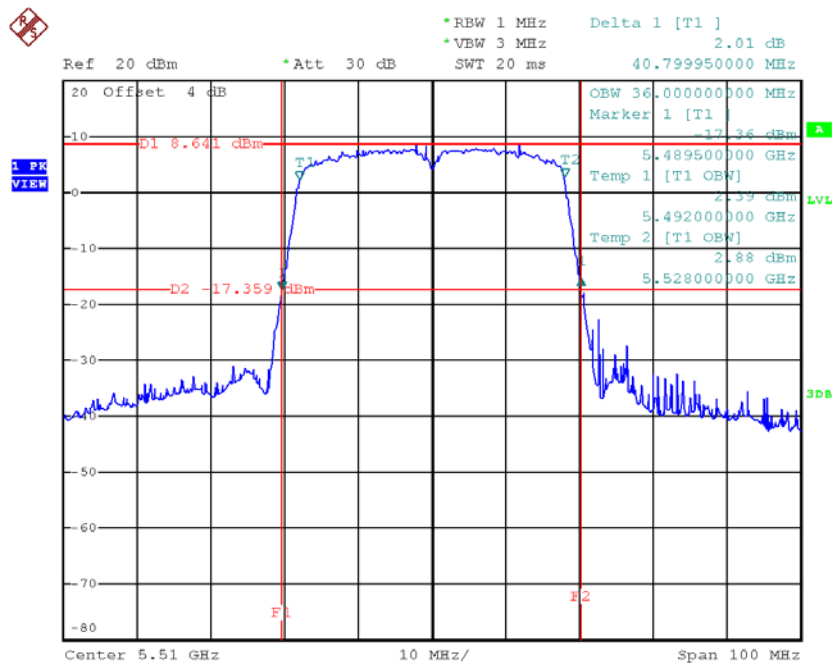


Date: 30.NOV.2017 15:33:17

TX CH110

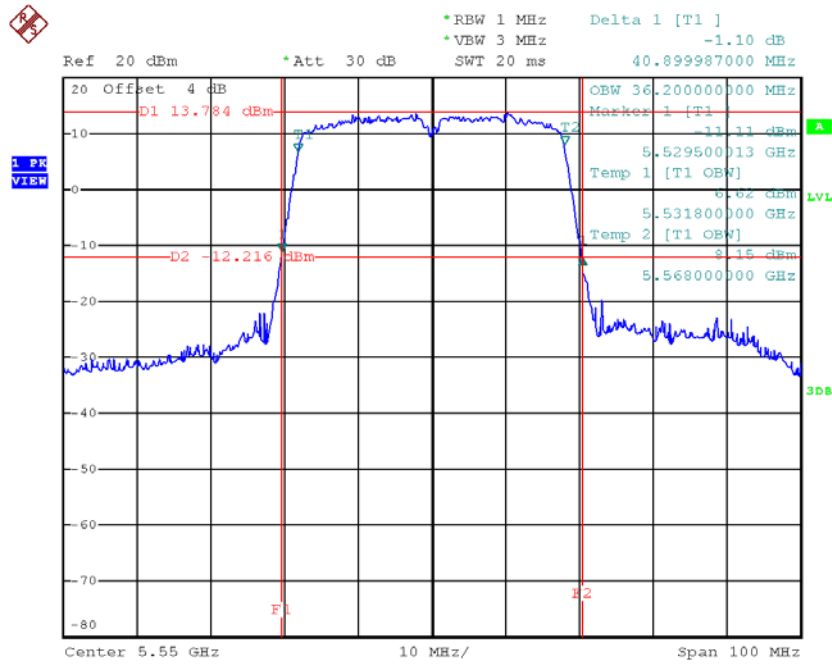

Date: 30.NOV.2017 15:34:26

TX CH134

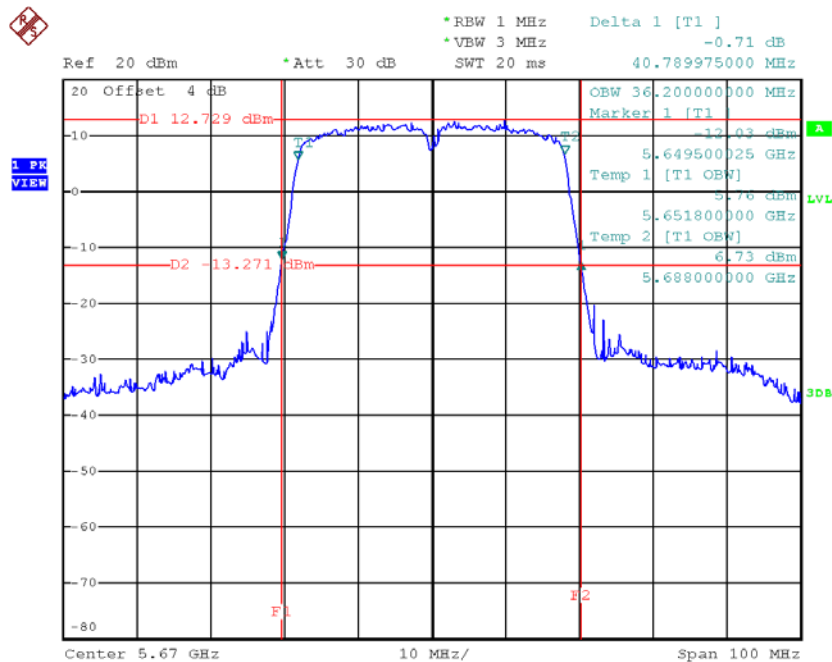


Date: 30.NOV.2017 15:35:43

Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	21.05	17.80
CH60	5300	21.15	17.70
CH64	5320	21.15	17.70

TX CH52

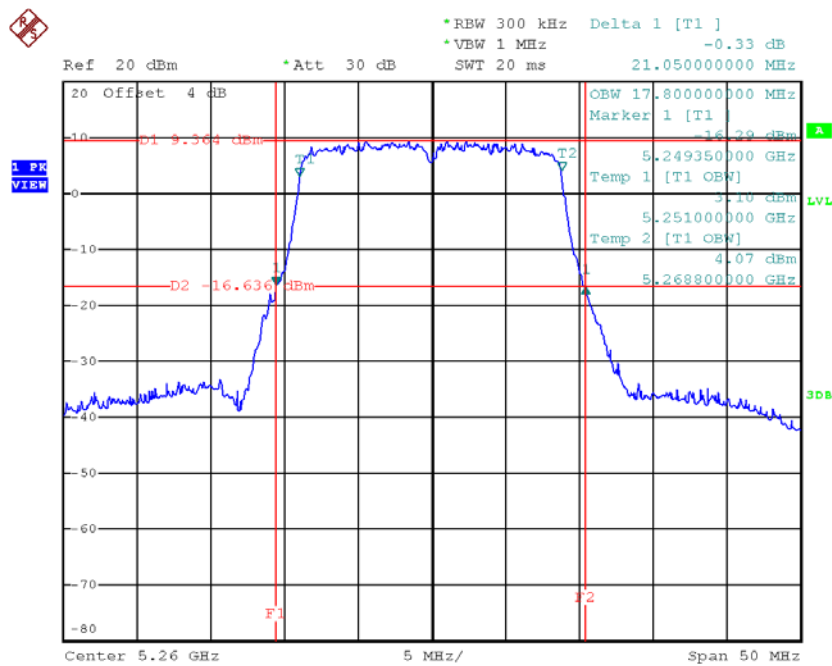


Date: 30.NOV.2017 15:01:35

TX CH60

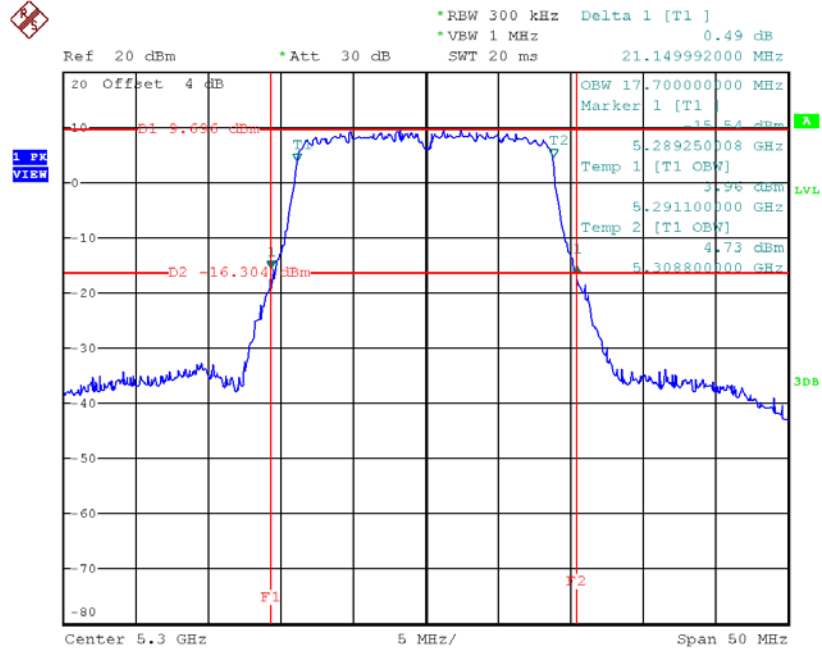

Date: 30.NOV.2017 15:02:18

TX CH64

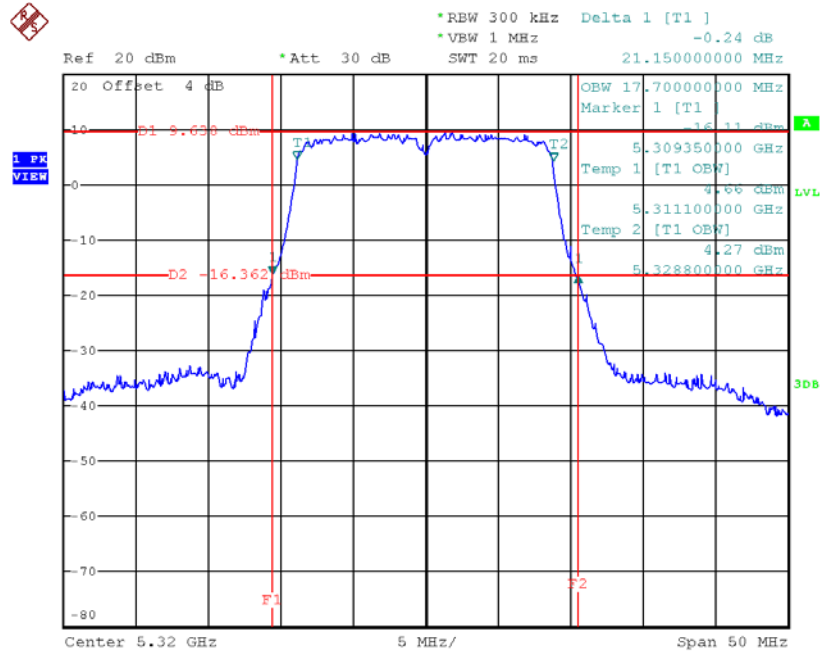


Date: 30.NOV.2017 15:02:53

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	41.10	36.20
CH62	5310	40.80	36.20

TX CH54

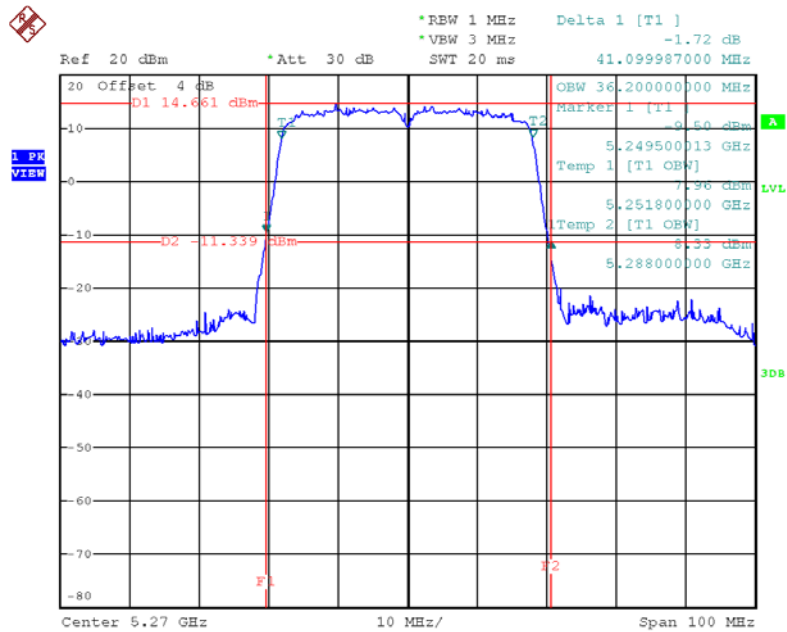

Date: 30.NOV.2017 16:04:28

TX CH62

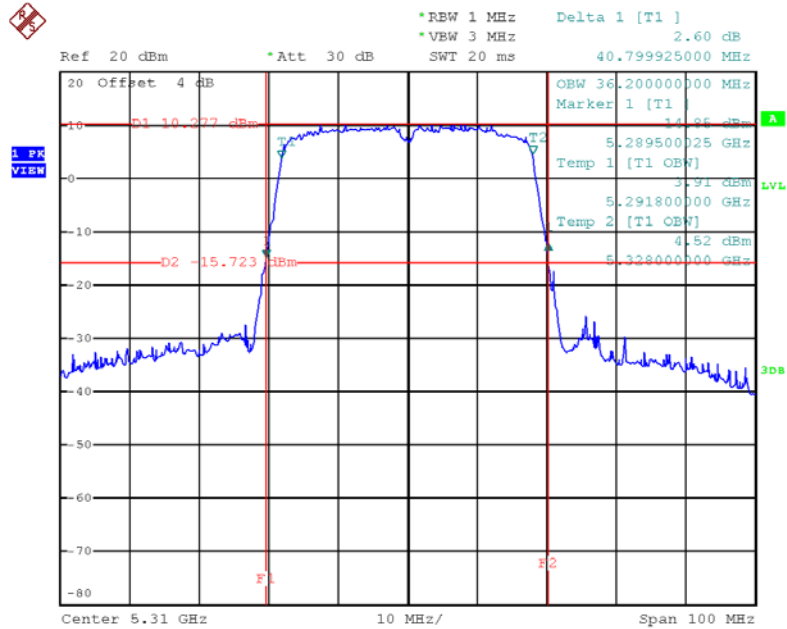


Date: 30.NOV.2017 16:05:26

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	86.40	76.00

TX CH58

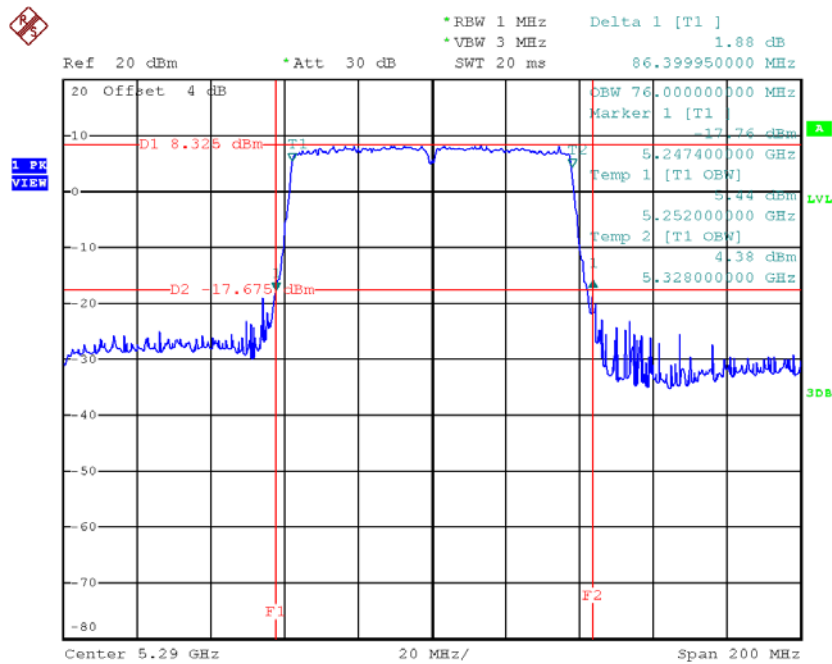


Date: 30.NOV.2017 16:10:49

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.85	17.70
CH116	5580	21.25	17.70
CH140	5700	20.90	17.70

TX CH100

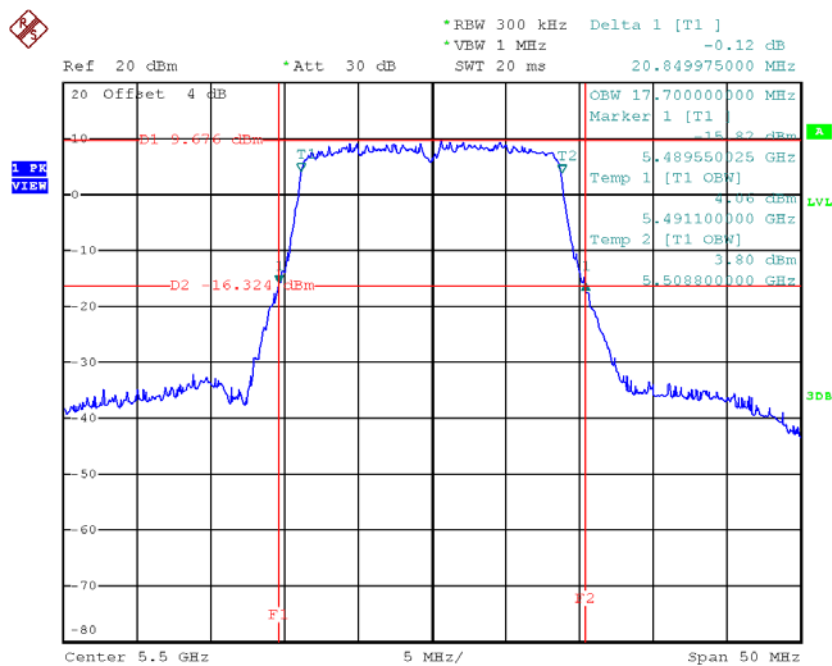


Date: 30.NOV.2017 15:05:32

TX CH116

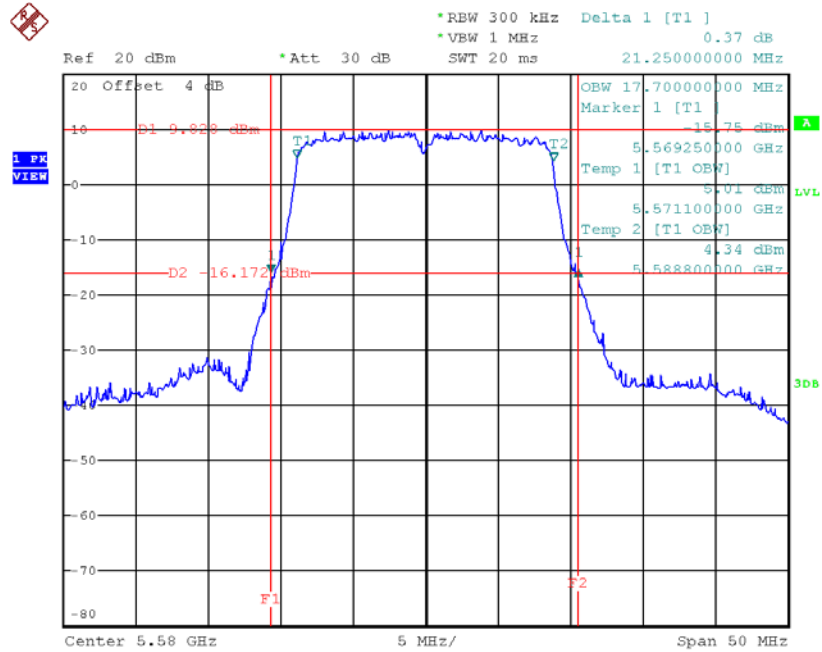

Date: 30.NOV.2017 15:14:30

TX CH140

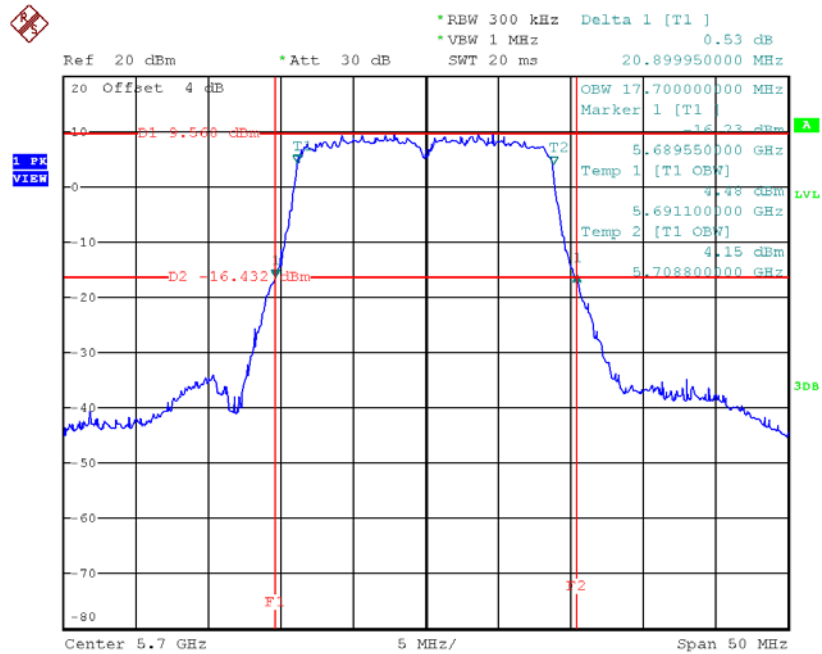


Date: 30.NOV.2017 15:15:07

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	41.00	36.40
CH110	5550	40.90	36.20
CH134	5670	41.10	36.40

TX CH102

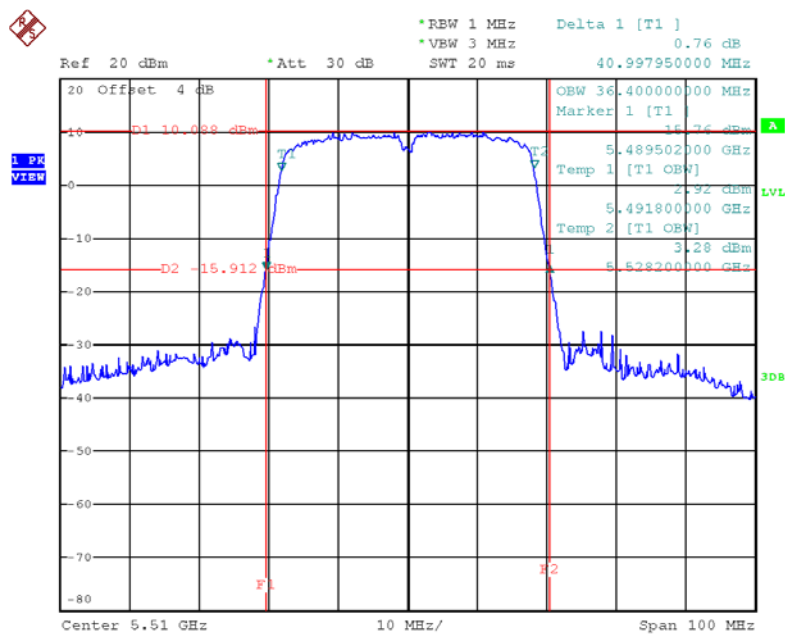


Date: 30.NOV.2017 16:07:01

TX CH110

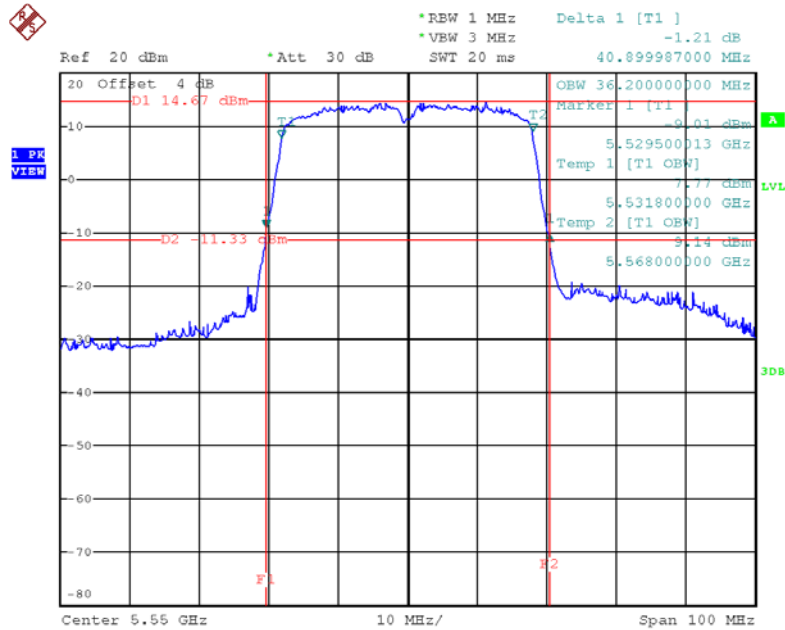

Date: 30.NOV.2017 16:08:06

TX CH134

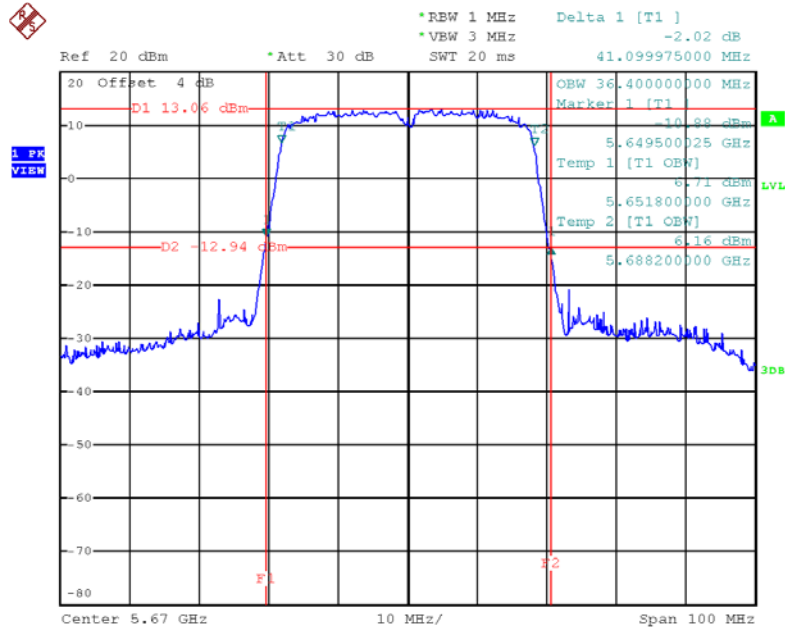


Date: 30.NOV.2017 16:09:00

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	86.41	76.40
CH122	5610	86.20	76.00

TX CH106

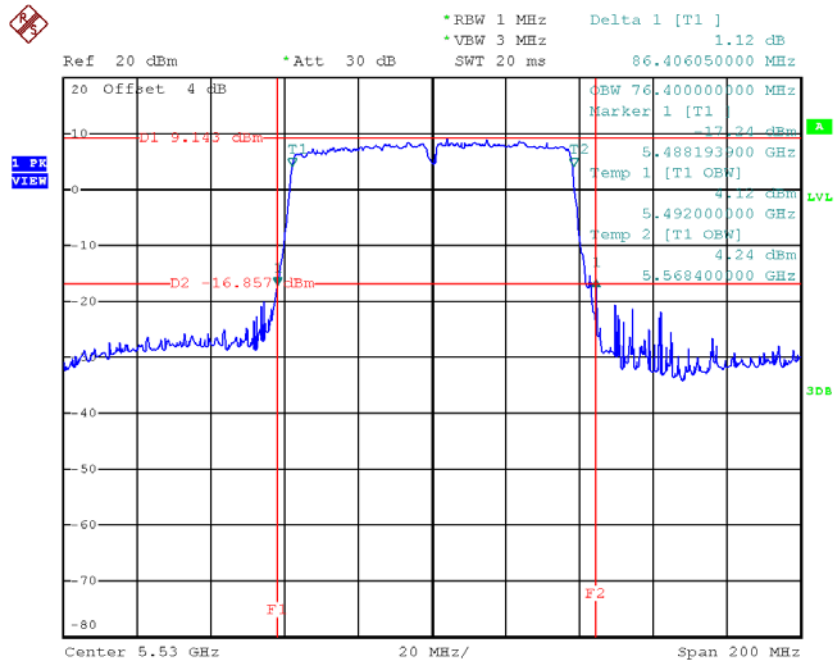

Date: 30.NOV.2017 16:11:36

TX CH122

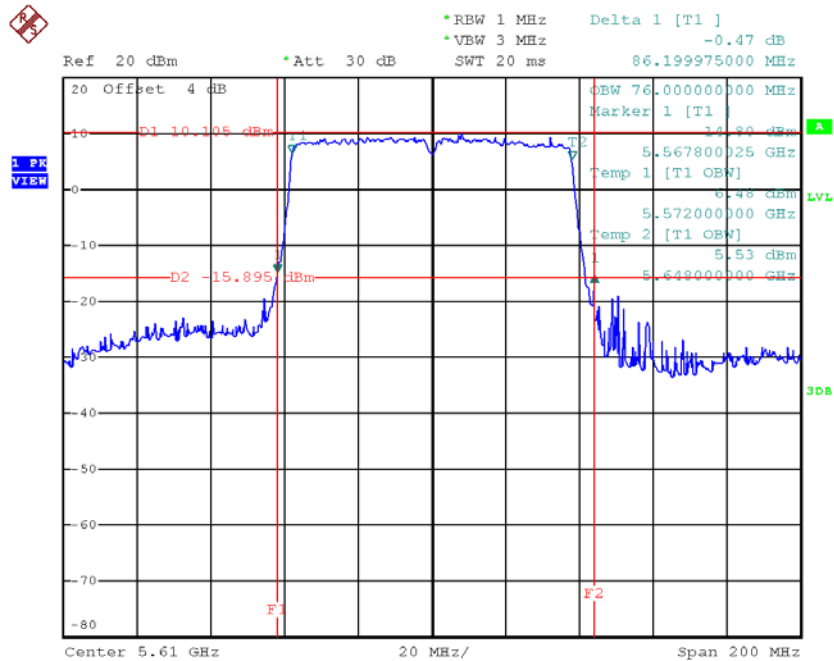

Date: 30.NOV.2017 16:12:44

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode: UNII-2A/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	21.09	0.13	21.22	24.00	0.25
CH60	5300	20.80	0.13	20.93	24.00	0.25
CH64	5320	18.83	0.13	18.96	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	17.68	0.00	17.68	24.00	0.25
CH60	5300	17.45	0.00	17.45	24.00	0.25
CH64	5320	15.76	0.00	15.76	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	17.87	0.00	17.87	24.00	0.25
CH60	5300	17.54	0.00	17.54	24.00	0.25
CH64	5320	15.67	0.00	15.67	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	17.65	0.00	17.65	24.00	0.25
CH60	5300	18.74	0.00	18.74	24.00	0.25
CH64	5320	14.38	0.00	14.38	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	22.51	24.00	0.25
CH60	5300	22.72	24.00	0.25
CH64	5320	20.09	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	17.18	0.12	17.30	24.00	0.25
CH62	5310	13.65	0.12	13.77	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	17.44	0.12	17.56	24.00	0.25
CH62	5310	13.35	0.12	13.47	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	16.45	0.12	16.57	24.00	0.25
CH62	5310	12.12	0.12	12.24	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	21.93	24.00	0.25
CH62	5310	17.98	24.00	0.25

Test Mode: UNII-2C/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	18.43	0.13	18.56	24.00	0.25
CH116	5580	21.21	0.13	21.34	24.00	0.25
CH140	5700	18.97	0.13	19.10	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	13.84	0.00	13.84	24.00	0.25
CH116	5580	17.76	0.00	17.76	24.00	0.25
CH140	5700	12.96	0.00	12.96	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.53	0.00	14.53	24.00	0.25
CH116	5580	17.22	0.00	17.22	24.00	0.25
CH140	5700	12.95	0.00	12.95	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.20	0.00	15.20	24.00	0.25
CH116	5580	17.92	0.00	17.92	24.00	0.25
CH140	5700	13.33	0.00	13.33	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	19.33	24.00	0.25
CH116	5580	22.41	24.00	0.25
CH140	5700	17.85	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	9.04	0.12	9.16	24.00	0.25
CH110	5550	14.32	0.12	14.44	24.00	0.25
CH134	5670	13.93	0.12	14.05	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	8.65	0.12	8.77	24.00	0.25
CH110	5550	13.60	0.12	13.72	24.00	0.25
CH134	5670	14.12	0.12	14.24	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	9.81	0.12	9.93	24.00	0.25
CH110	5550	14.35	0.12	14.47	24.00	0.25
CH134	5670	15.38	0.12	15.50	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.08	24.00	0.25
CH110	5550	18.99	24.00	0.25
CH134	5670	19.42	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	17.47	0.00	17.47	24.00	0.25
CH60	5300	17.19	0.00	17.19	24.00	0.25
CH64	5320	14.12	0.00	14.12	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	17.87	0.00	17.87	24.00	0.25
CH60	5300	17.57	0.00	17.57	24.00	0.25
CH64	5320	13.79	0.00	13.79	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	17.30	0.00	17.30	24.00	0.25
CH60	5300	17.42	0.00	17.42	24.00	0.25
CH64	5320	15.18	0.00	15.18	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	22.32	24.00	0.25
CH60	5300	22.17	24.00	0.25
CH64	5320	19.18	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	18.25	0.12	18.37	24.00	0.25
CH62	5310	14.64	0.12	14.76	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	18.19	0.12	18.31	24.00	0.25
CH62	5310	14.33	0.12	14.45	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	17.52	0.12	17.64	24.00	0.25
CH62	5310	13.11	0.12	13.23	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	22.89	24.00	0.25
CH62	5310	18.97	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	13.33	0.26	13.59	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	13.47	0.26	13.73	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	13.11	0.26	13.37	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	18.34	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.56	0.00	14.56	24.00	0.25
CH116	5580	17.71	0.00	17.71	24.00	0.25
CH140	5700	14.20	0.00	14.20	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	13.38	0.00	13.38	24.00	0.25
CH116	5580	17.46	0.00	17.46	24.00	0.25
CH140	5700	14.11	0.00	14.11	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.25	0.00	14.25	24.00	0.25
CH116	5580	17.87	0.00	17.87	24.00	0.25
CH140	5700	15.23	0.00	15.23	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	18.86	24.00	0.25
CH116	5580	22.45	24.00	0.25
CH140	5700	19.32	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	11.08	0.12	11.20	24.00	0.25
CH110	5550	18.84	0.12	18.96	24.00	0.25
CH134	5670	13.82	0.12	13.94	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	10.77	0.12	10.89	24.00	0.25
CH110	5550	18.16	0.12	18.28	24.00	0.25
CH134	5670	13.93	0.12	14.05	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	11.97	0.12	12.09	24.00	0.25
CH110	5550	17.62	0.12	17.74	24.00	0.25
CH134	5670	15.27	0.12	15.39	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	16.19	24.00	0.25
CH110	5550	23.13	24.00	0.25
CH134	5670	19.28	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	10.15	0.26	10.41	24.00	0.25
CH122	5610	15.13	0.26	15.39	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.90	0.26	10.16	24.00	0.25
CH122	5610	14.42	0.26	14.68	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	10.17	0.26	10.43	24.00	0.25
CH122	5610	14.05	0.26	14.31	24.00	0.25


Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	15.11	24.00	0.25
CH122	5610	19.59	24.00	0.25

APPENDIX G - POWER SPECTRAL DENSITY

Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	10.20	0.13	10.33	11.00
CH60	5300	10.14	0.13	10.27	11.00
CH64	5320	10.15	0.13	10.28	11.00

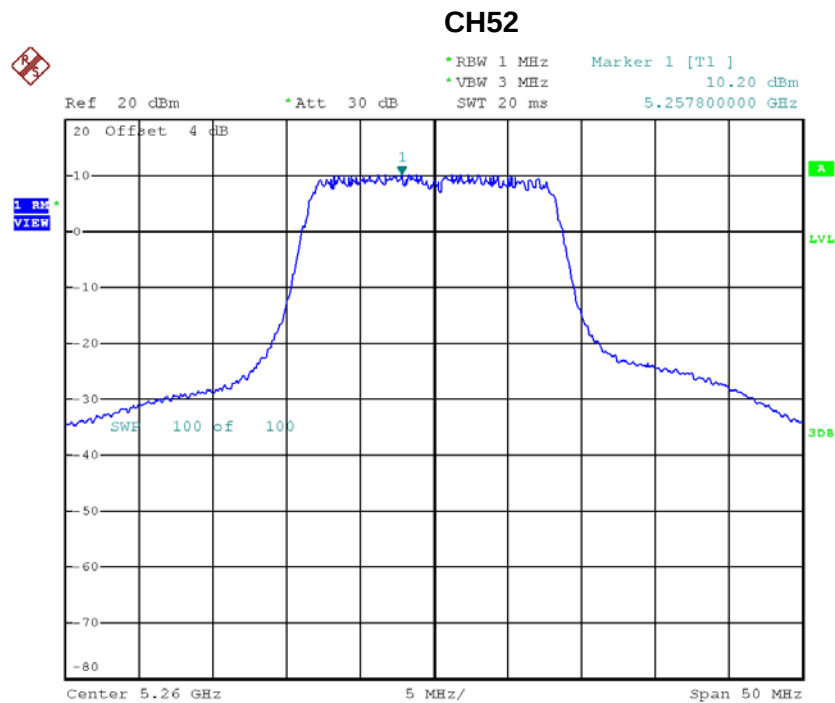


Date: 30.NOV.2017 13:38:16



Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	5.65	0.00	5.65	11.00
CH60	5300	5.55	0.00	5.55	11.00
CH64	5320	4.64	0.00	4.64	11.00

CH52

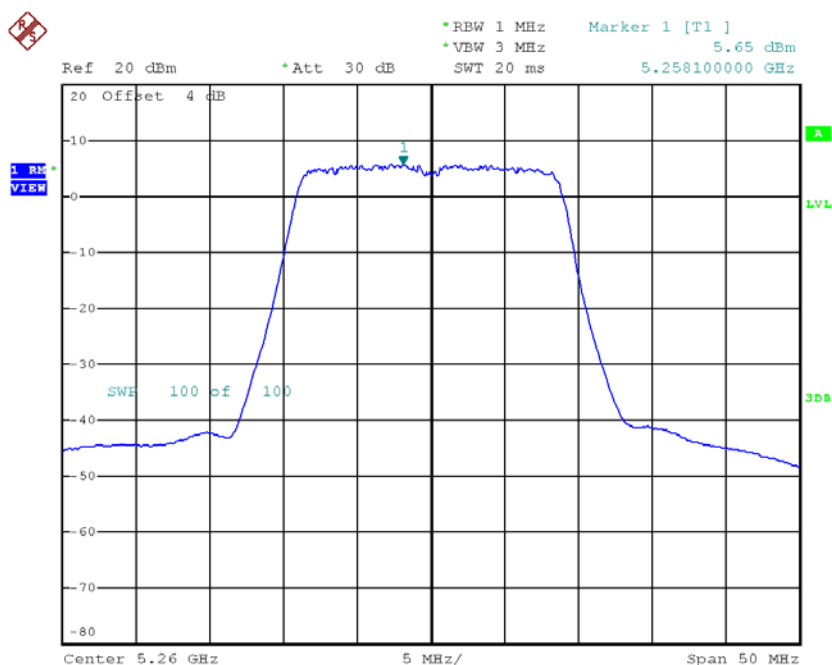


Date: 30.NOV.2017 13:14:56

CH60

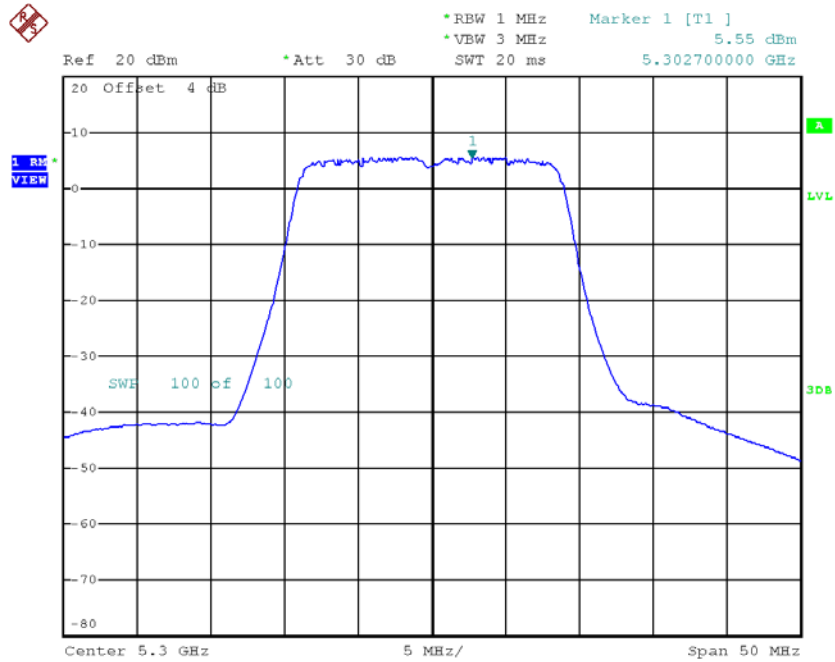

Date: 30.NOV.2017 13:17:40

CH64

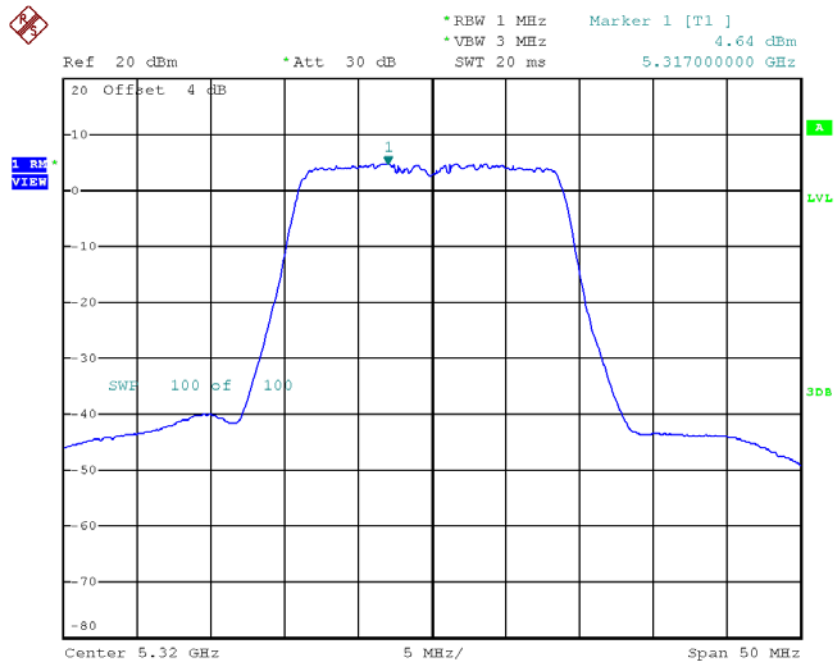


Date: 30.NOV.2017 13:25:07

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	5.49	0.00	5.49	11.00
CH60	5300	5.36	0.00	5.36	11.00
CH64	5320	4.54	0.00	4.54	11.00

CH52

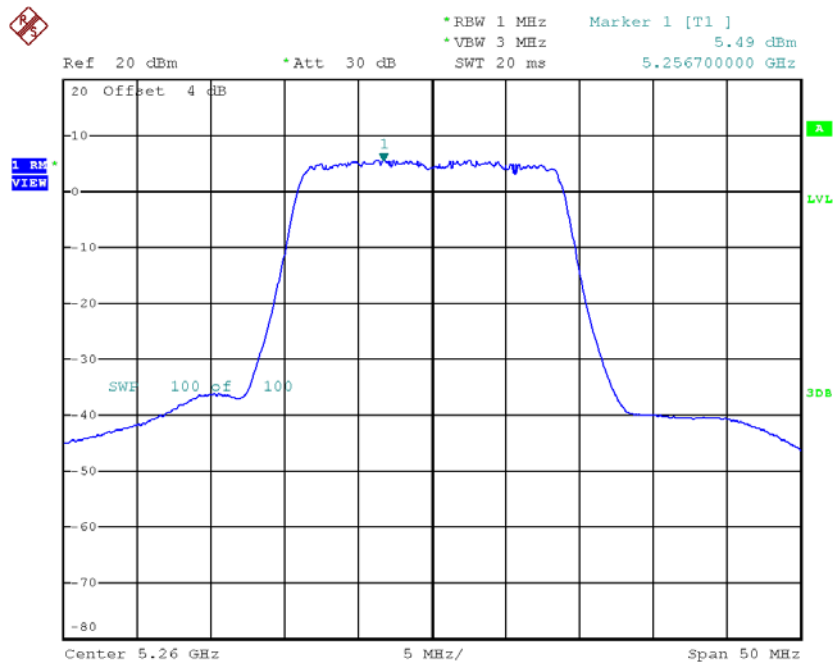


Date: 30.NOV.2017 13:15:22

CH60

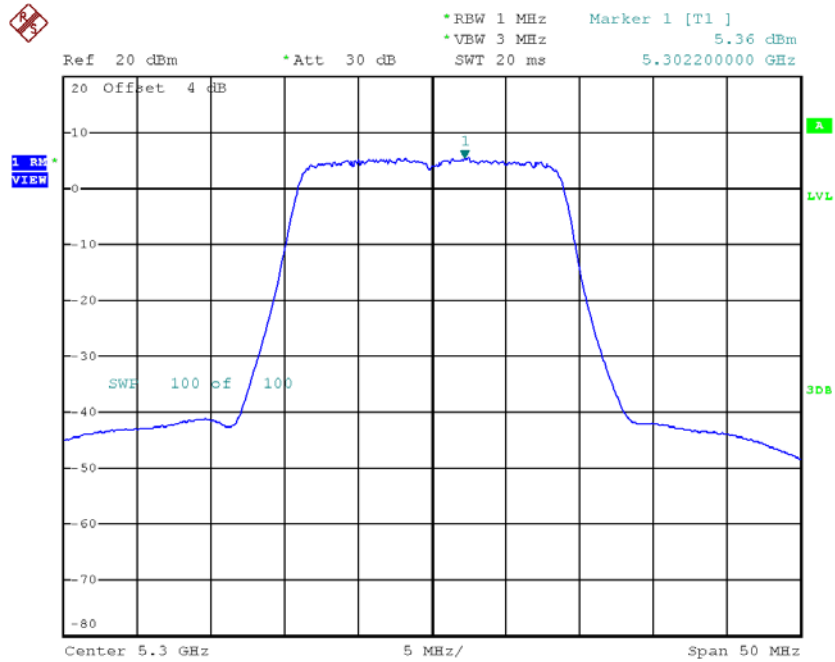

Date: 30.NOV.2017 13:17:09

CH64

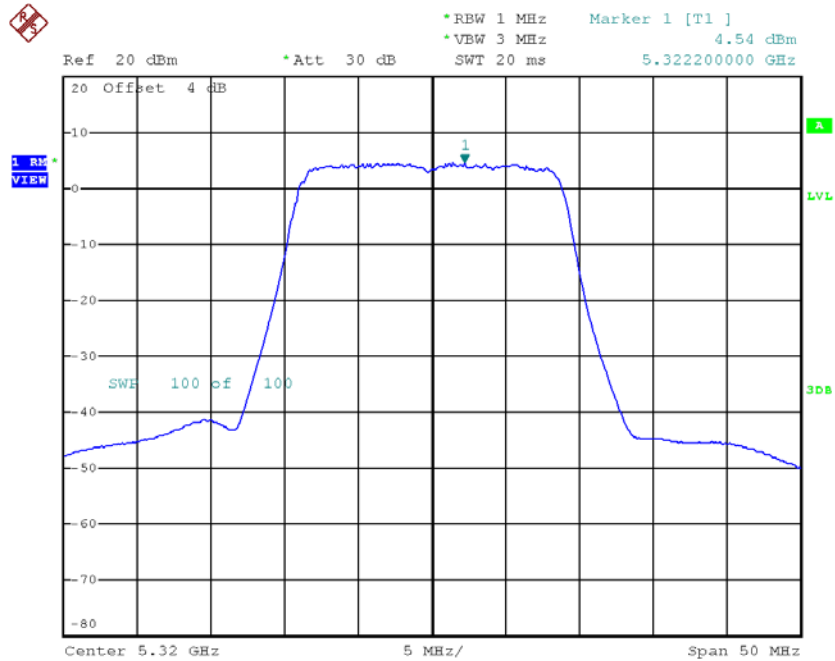


Date: 30.NOV.2017 13:25:32

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 3

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	5.63	0.00	5.63	11.00
CH60	5300	5.68	0.00	5.68	11.00
CH64	5320	5.02	0.00	5.02	11.00

CH52

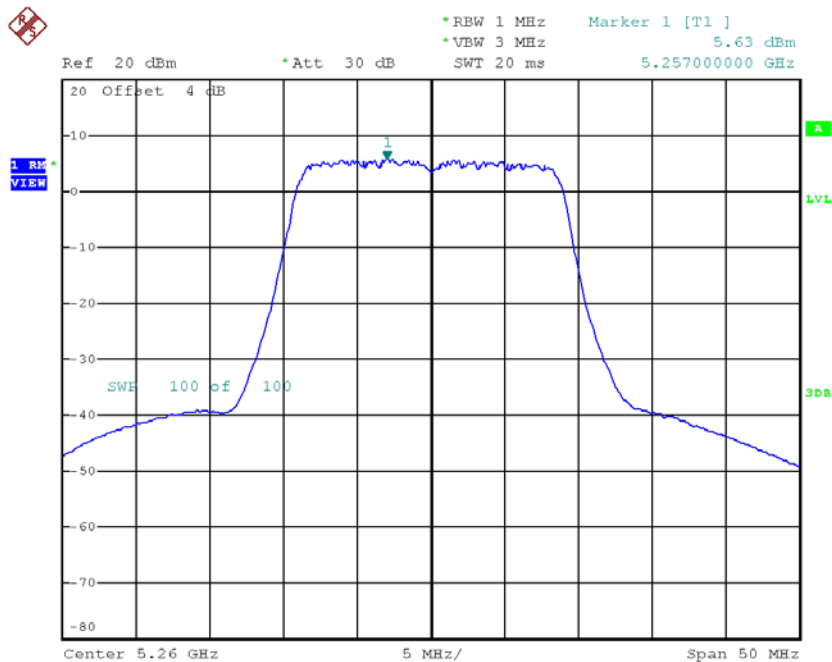

Date: 30.NOV.2017 13:15:49