

SPECIFICATION FOR APPROVAL

client:
CUSTOMER:

Customer No. :
CUSTP/N:

Tao soft material number:
BESOFTP/N:

product model:
DESC:Φ 20. 5x39-10Ts-0. 08x24-10mm-CLB

date:
DATE:2020/11/16

edition:
Version:A.0

fiction PREPARED BY	examine and verify CHECKED BY	ratify APPROVED BY	Customer acknowledges CUSTOMER APPROVE
Su Yanping	Qian Lizhi	Qian Lizhi	

Shenzhen Tao Soft Electronics Co., LTD

Factory address: 9th Floor, Building
90-6, Dayuan Road, First
Industrial Zone, Gongming Street,
Guangming District, Shenzhen TEL:

13824883512/18038013240

Version change resume


Version Change History

[illegible]

SPECIFICATION

product model: DESC	$\Phi 20.5 \times 39-10 \text{Ts}-0.08 \times 24-10 \text{mm}-\text{C LB}$	edition Rev: A.0	client CUST :	
			Tao Soft Material No. Fine P / N :	
			Customer Material number CUST P / N :	

1. Dimension DIMENSION :

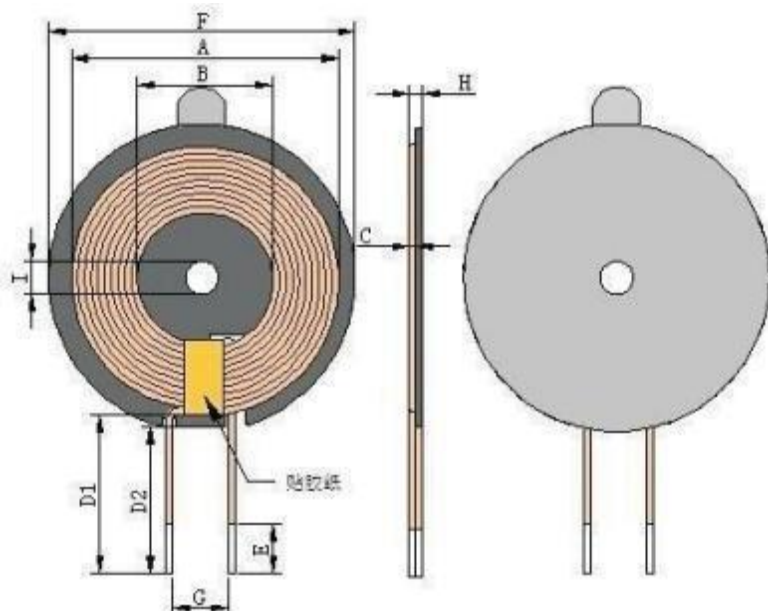

A	39.0 ± 1.5
B	20.5 ± 0.5
C	0.5 ± 0.1
D1	12 ref
D2	10 ± 2
E	3.5 ± 1.5
F	42.5 ± 0.5
G	11.0 ref
H	1.2 Max
I	5.3 ref

pour :

1. Ccoil chip, chip size
42.5 ± 0.5 mm, inner hole 5.3 mm, thickness of 0.8 ± 0.2 mm, L slot.
2. The winding width of the coil is 8mm ± 0.5 high temperature tape.
3. The back of the magnetic piece is round with hand tear 42.8 mm (ref), inner hole 6.0 mm (ref) plain double-sided tape.

2. A Schematic diagram of the



3. ~~Winding parameter~~ Winding Specification :

NO.	TERMINAL		WIRE	Turns	Winding Direction
1	S	F	Hot air line 0.08 * 24 * 2P	10Ts	CCW

4. Electrical characteristics ELECTRICAL CHARACTERISTICS :

Temperature TEMPERATURE : 25 $\pm$ 10 ° C, humidity RELATIVE HUMIDITY : 65 $\pm$ 20%

NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
1	IND.	S-F	3.8 uH $\pm$ 20% individual coil	100 KHz/1.0V	LCZ METER1062B


2	IND.	S-F	6.3 uH $\pm$ 10% with a magnetic chip	100 KHz/1.0V	LCZ METER1062B
3	Q price	S-F	70.0 (ref) plus magnetic	100 KHz/1.0V	LCZ METER1062B
4	DCR	S-F	$\leq 50m \ \Omega$		LCZ METER502B
File / date PREPARED BY / DATE				Review / Date CHECKED BY / DATE	
Su Yanping 2020 / 11 / 16				Qian Lmou 2020 / 11 / 16	

SPECIFICATION

product model: DESC	$\Phi 20.5 \times 39-10Ts-0.08 \times 24-10mm-C LB$	edition Rev: A.0	client CUST :	
			Tao Soft Material No. Fine P / N :	
			Customer material number CUST P / N :	

5. Packaging PACKONG :

5.1 Packaging picture Packing pictures :

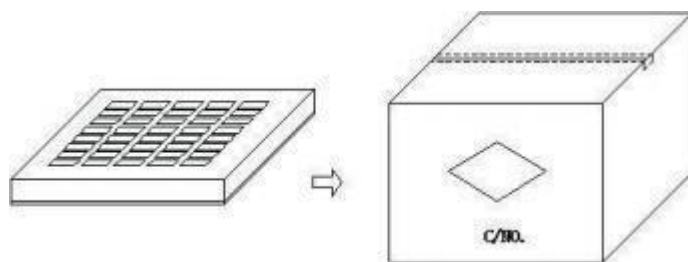

5.2 Packaging quantity and specification Packing Quantity:

project Item	Quantity	Material	
box Box	3500 Pcs	370*265*55 mm	
Box of Big Carton	1400 Pcs	420*270*310 mm	

5.3 The packaging shall be based on the existing packaging plate as the reference standard, and the actual shipping packaging shall prevail. If there are special requirements, it can be customized.

The packaging shall be based on the existing packing plate and the actual delivery packa geshall prevail. Ifthere is any requirement, we can customizeit.

Vi. List of Materials Material list :

order number number	Material name Material name	Product name description Description	manufacturer Manufacturer
1	0.07 * 100 strands	Hot air line 0.08 * 24 shares 2P	
2	No lead tin strip	No lead tin strip	
3	magnetic sheet	$\Phi 43.8 * 5.3 * 0.5$ mm manganese- zinc hard magnetic sheet	
4	glue	201 Glue	
5	High temperature rubber paper	8 mm wide high-temperature adhesive paper	
6	Double-sided glue with holes	Hand tear round diameter 42.8mm (ref) back glue	

File / date PREPARED BY / DATE	Review / Date CHECKED BY / DATE
Su Yanping, 2020 / 11 / 16	Qian Lmou 2020 / 11 / 16
