


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal

80 dBuV/m

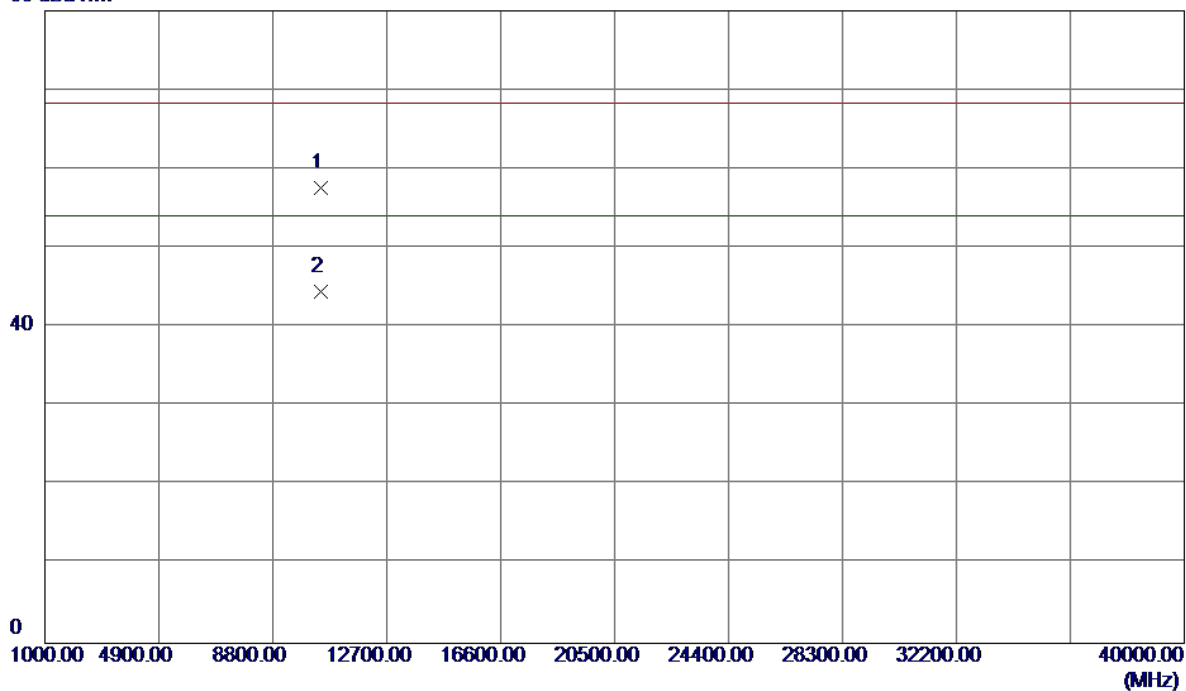


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10460.8000	43.84	13.72	57.56	68.30	-10.74	Peak	
2	10461.9800	30.80	13.72	44.52	54.00	-9.48	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

120 dBuV/m

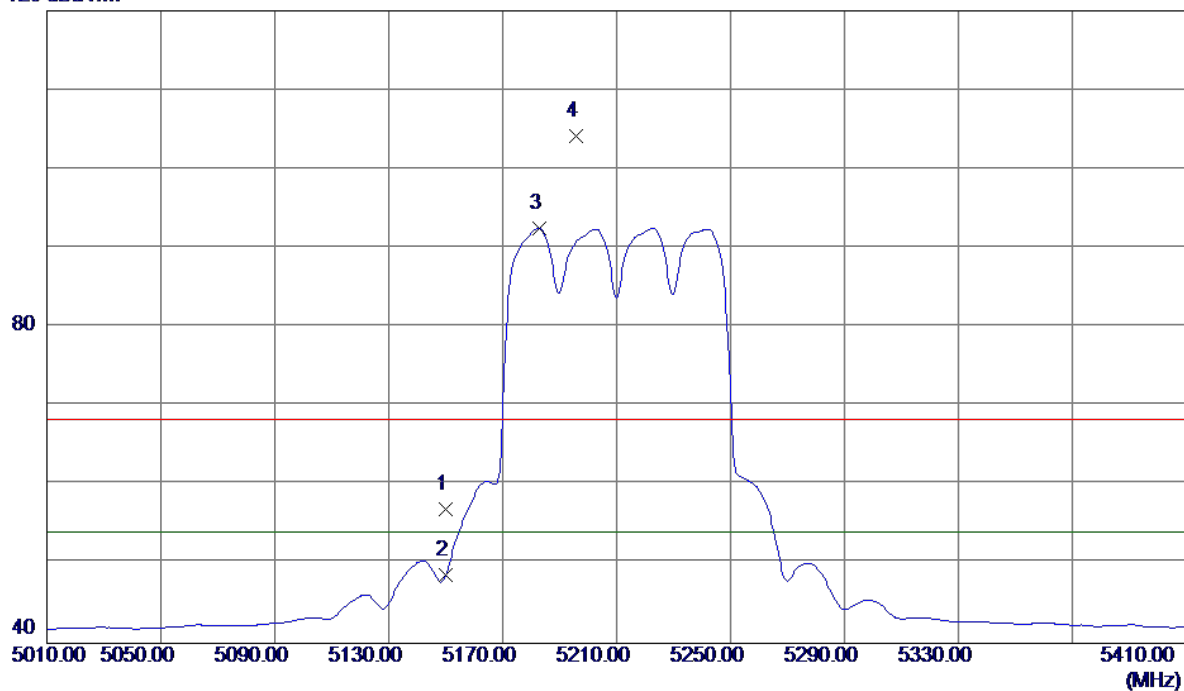


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	16.73	40.22	56.95	68.30	-11.35	Peak	
2	5150.0000	8.37	40.22	48.59	54.00	-5.41	AVG	
3	5182.8000	52.22	40.29	92.51	54.00	38.51	AVG	No Limit
4	5195.6000	63.87	40.31	104.18	68.30	35.88	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical


80 dBuV/m

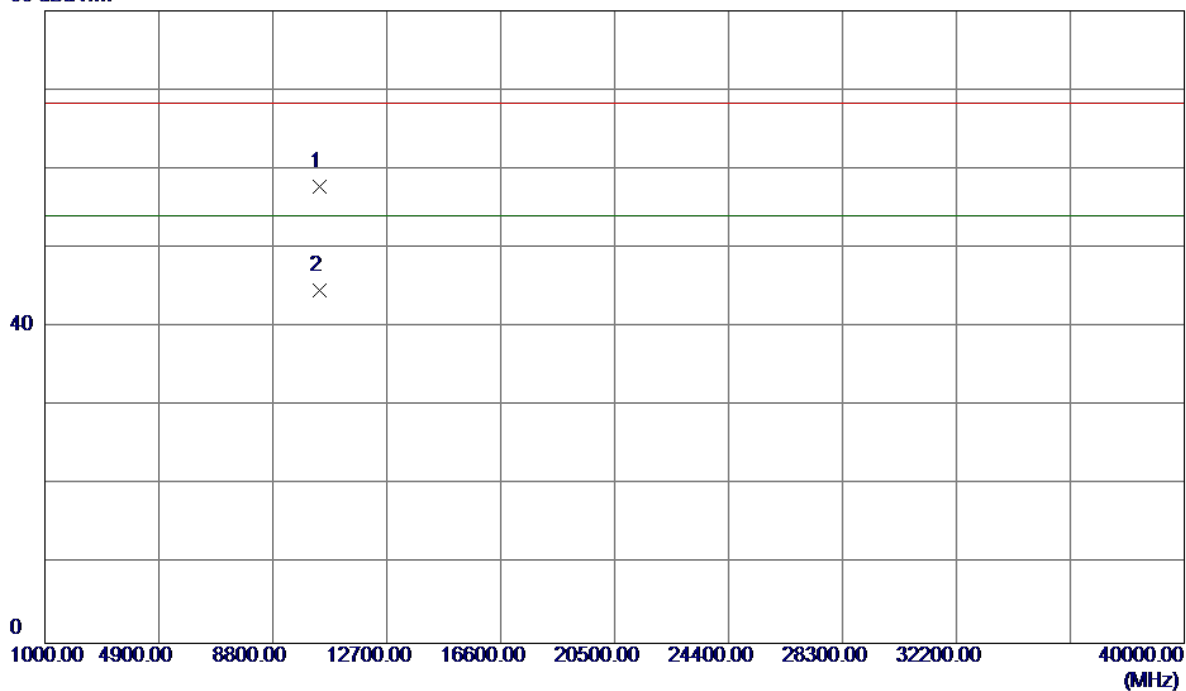

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10420.3200	43.92	13.77	57.69	68.30	-10.61	Peak	
2	10421.8000	30.80	13.77	44.57	54.00	-9.43	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal

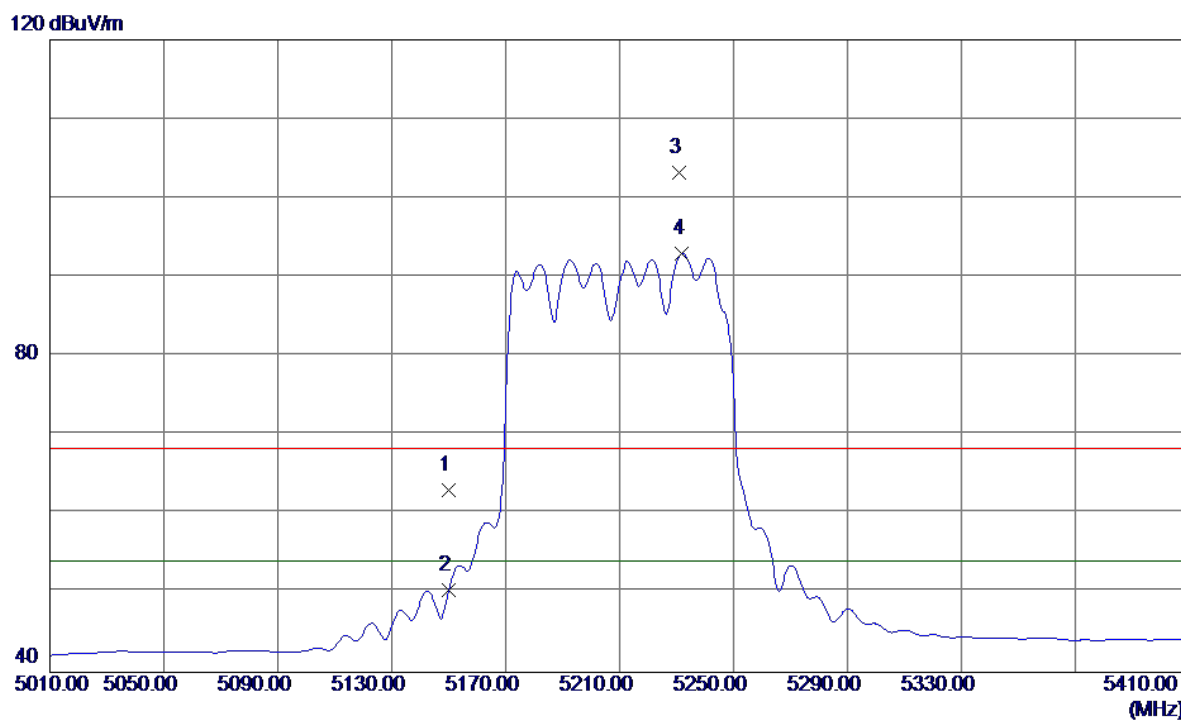


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	22.89	40.22	63.11	68.30	-5.19	Peak	
2	5150.0000	10.14	40.22	50.36	54.00	-3.64	AVG	
3	5230.8000	62.81	40.39	103.20	68.30	34.90	Peak	No Limit
4	5232.0000	52.62	40.39	93.01	54.00	39.01	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal


80 dBuV/m

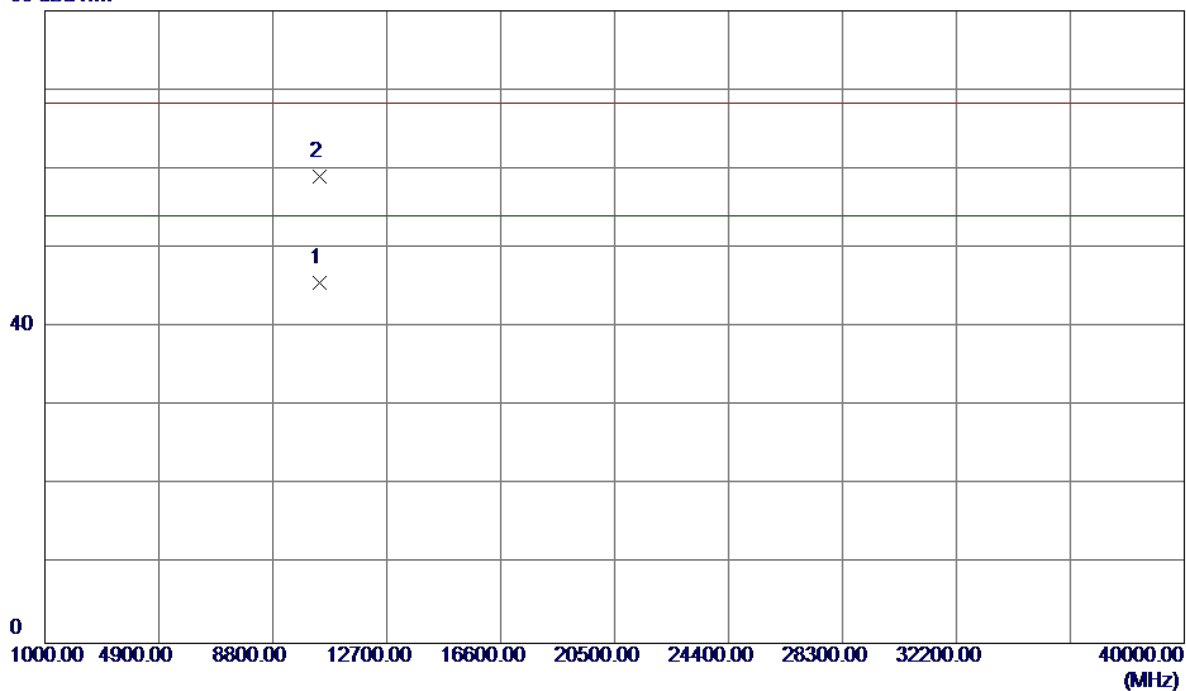

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10420.4600	31.84	13.77	45.61	54.00	-8.39	AVG	
2	10420.7500	45.26	13.77	59.03	68.30	-9.27	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Vertical

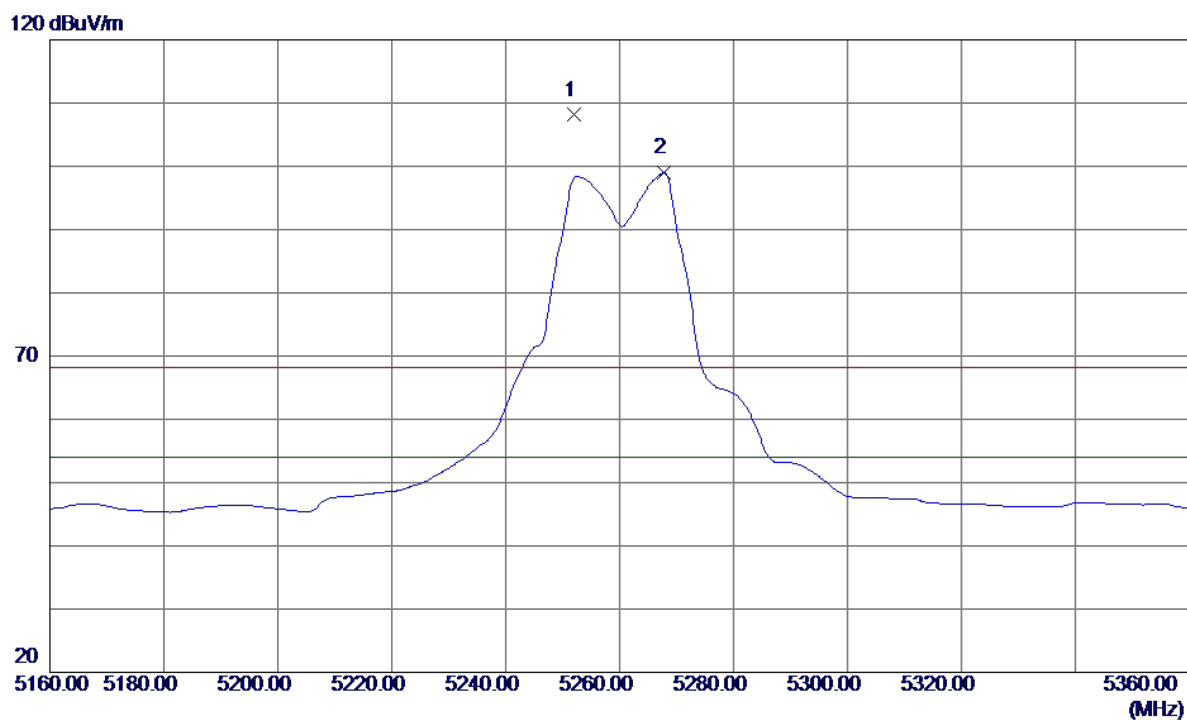


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5252.0000	67.67	40.43	108.10	68.30	39.80	Peak	No Limit
2	5267.8000	58.49	40.47	98.96	54.00	44.96	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Vertical


80 dBuV/m

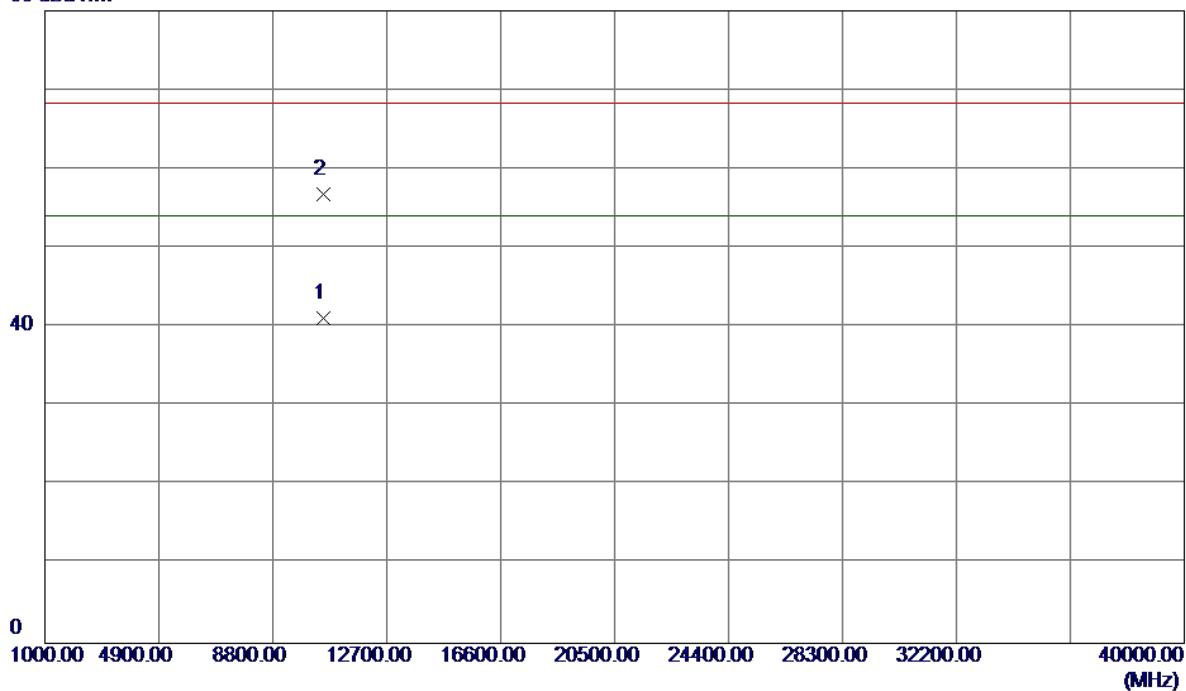

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10520.0100	27.40	13.75	41.15	54.00	-12.85	AVG	
2	10520.8500	43.03	13.75	56.78	68.30	-11.52	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Horizontal

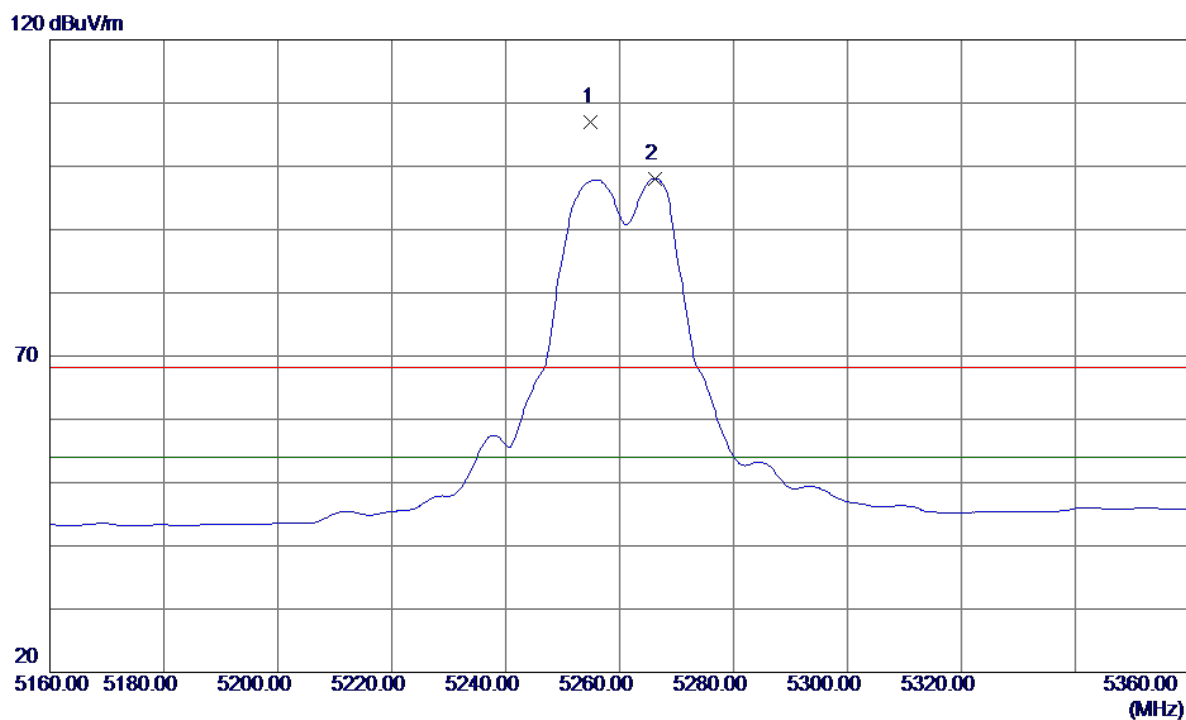


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5255.0000	66.53	40.44	106.97	68.30	38.67	Peak	No Limit
2	5266.2000	57.60	40.46	98.06	54.00	44.06	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Horizontal


80 dBuV/m

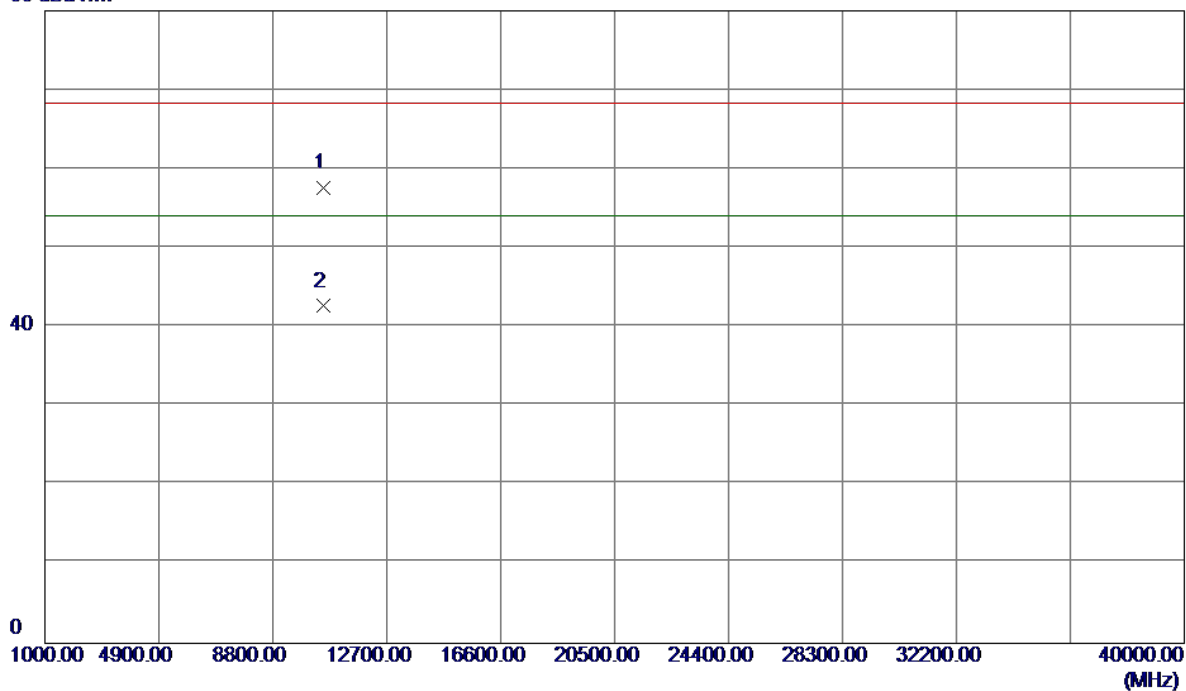

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10520.8000	43.91	13.75	57.66	68.30	-10.64	Peak	
2	10521.5400	28.89	13.75	42.64	54.00	-11.36	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

Vertical

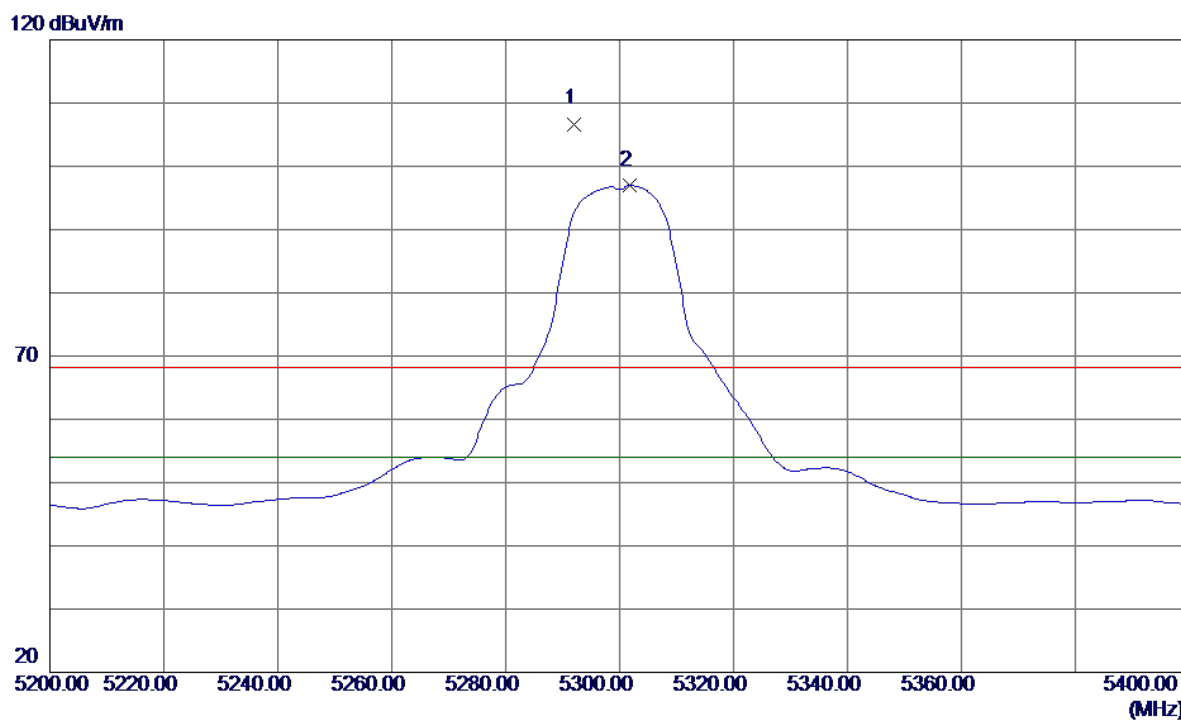


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5292.0000	66.18	40.52	106.70	68.30	38.40	Peak	No Limit
2	5301.8000	56.43	40.54	96.97	54.00	42.97	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

Vertical


80 dBuV/m

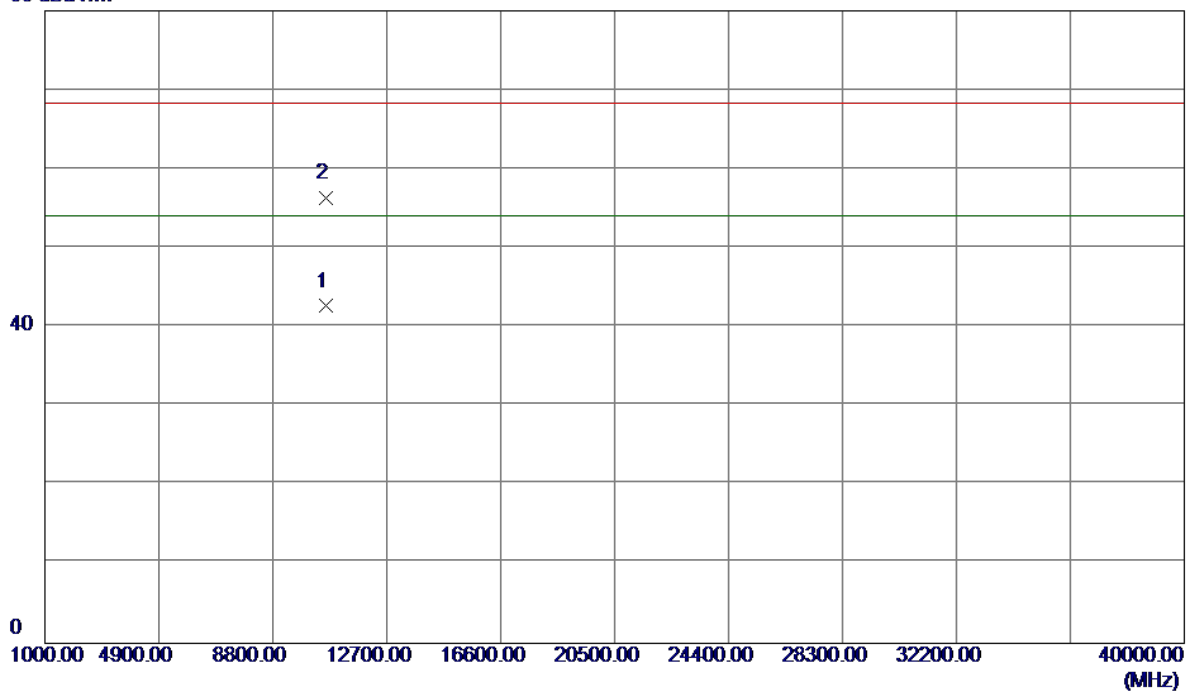

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10600.6800	28.56	14.08	42.64	54.00	-11.36	AVG	
2	10601.5599	42.25	14.09	56.34	68.30	-11.96	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

Horizontal

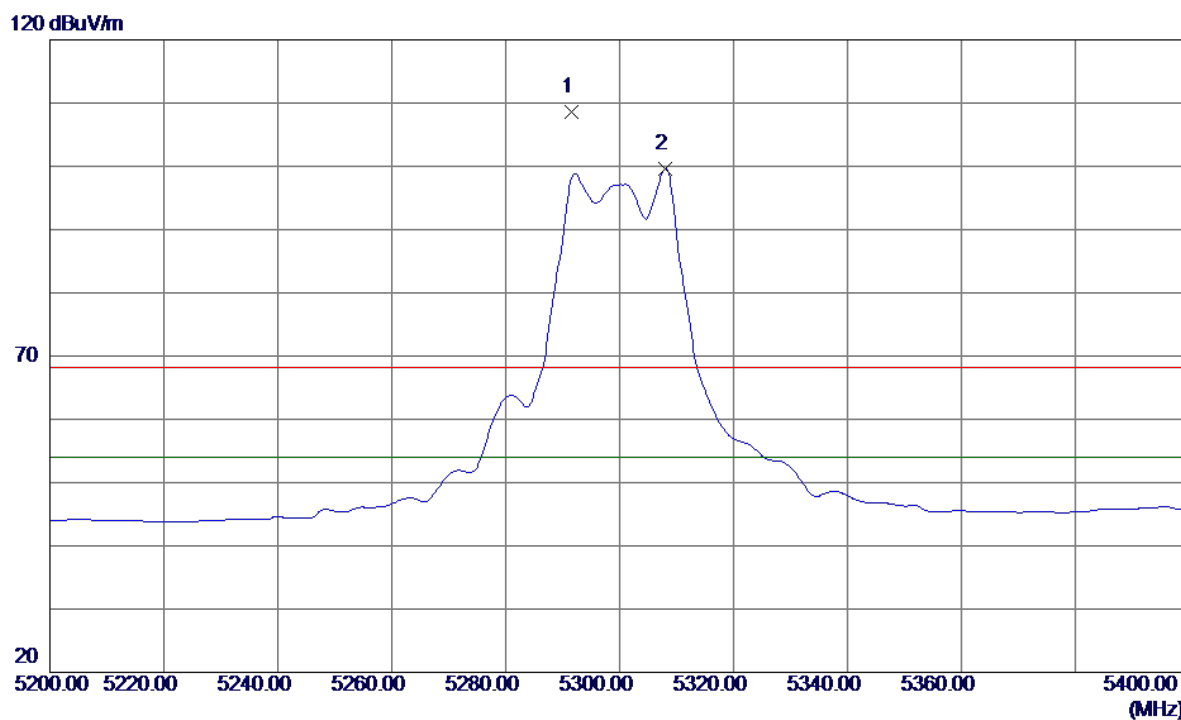


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5291.6000	68.11	40.52	108.63	68.30	40.33	Peak	No Limit
2	5308.0000	59.07	40.55	99.62	54.00	45.62	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

Horizontal


80 dBuV/m

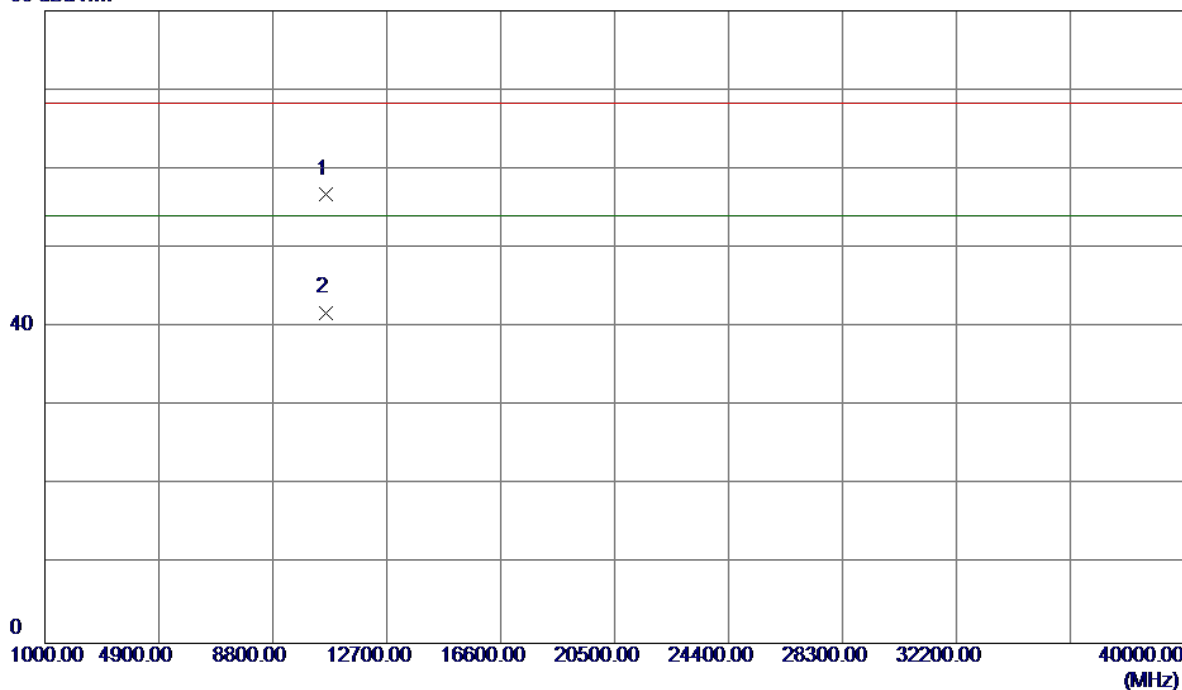

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10600.7600	42.69	14.09	56.78	68.30	-11.52	Peak	
2	10601.0199	27.75	14.09	41.84	54.00	-12.16	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Vertical

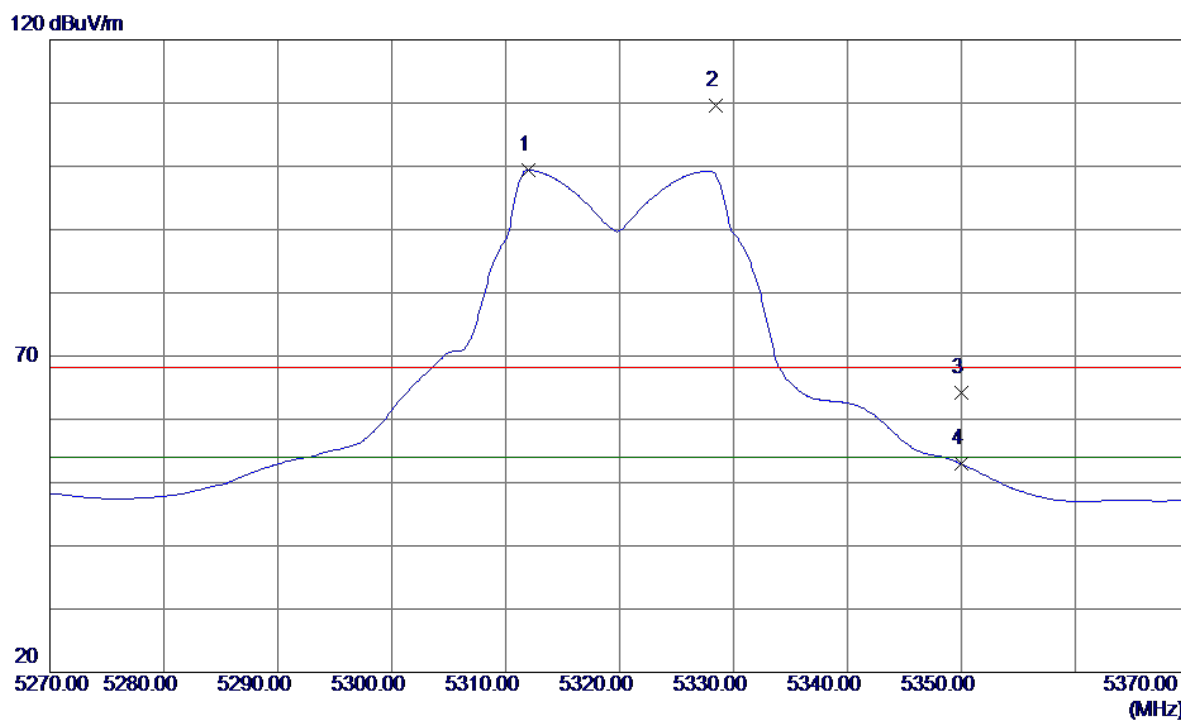


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5312.0000	58.87	40.56	99.43	54.00	45.43	AVG	No Limit
2	5328.4000	68.92	40.60	109.52	68.30	41.22	Peak	No Limit
3	5350.0000	23.63	40.64	64.27	68.30	-4.03	Peak	
4	5350.0000	12.28	40.64	52.92	54.00	-1.08	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Vertical


80 dBuV/m

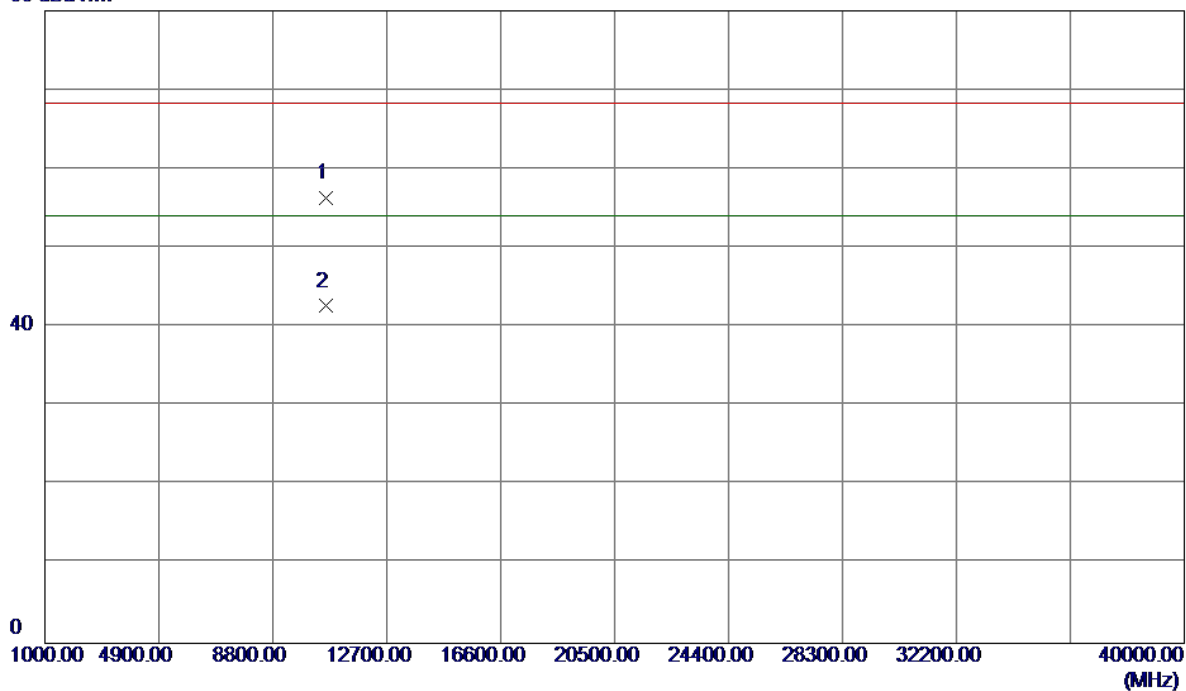

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.8000	42.09	14.25	56.34	68.30	-11.96	Peak	
2	10641.5000	28.39	14.25	42.64	54.00	-11.36	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Horizontal

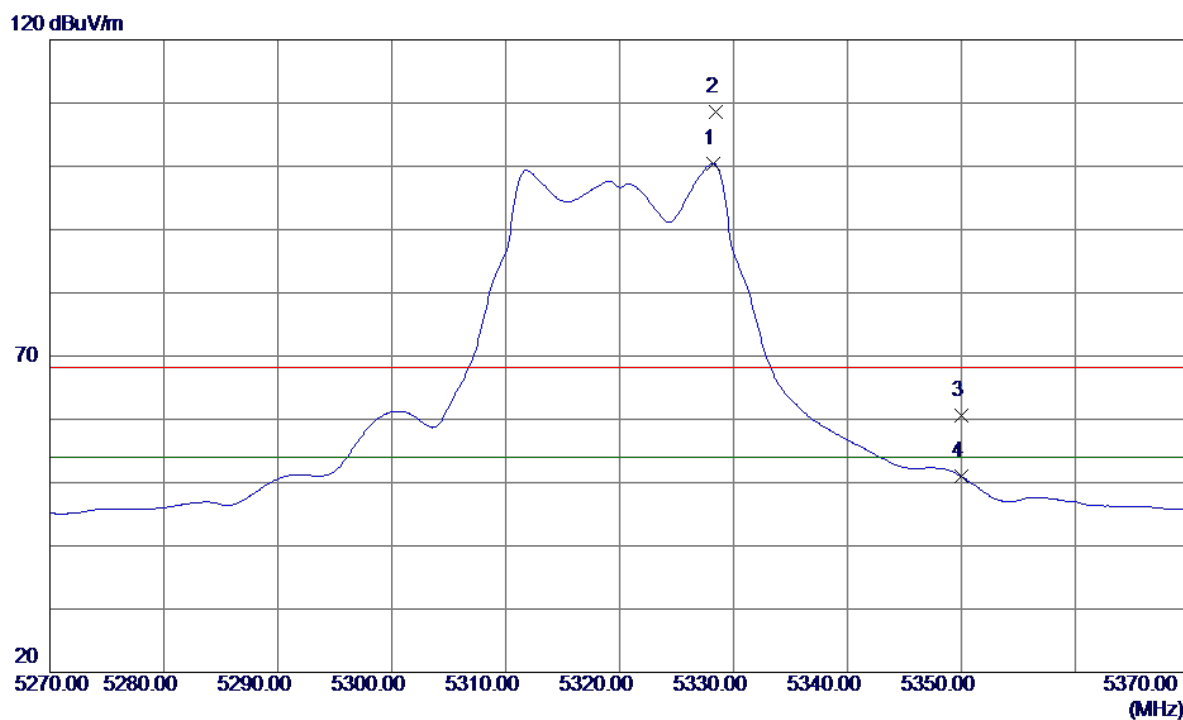


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5328.2000	59.84	40.60	100.44	54.00	46.44	AVG	No Limit
2	5328.4000	68.00	40.60	108.60	68.30	40.30	Peak	No Limit
3	5350.0000	19.91	40.64	60.55	68.30	-7.75	Peak	
4	5350.0000	10.32	40.64	50.96	54.00	-3.04	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Horizontal


80 dBuV/m

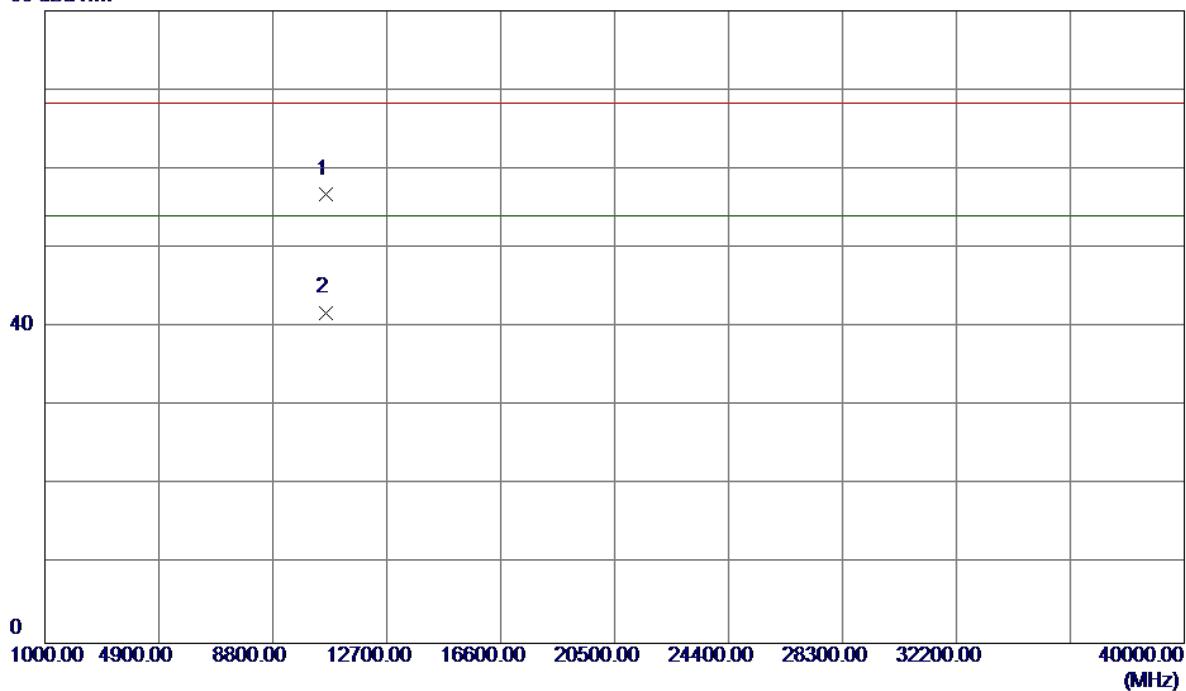

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.5199	42.53	14.25	56.78	68.30	-11.52	Peak	
2	10641.3000	27.59	14.25	41.84	54.00	-12.16	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Vertical

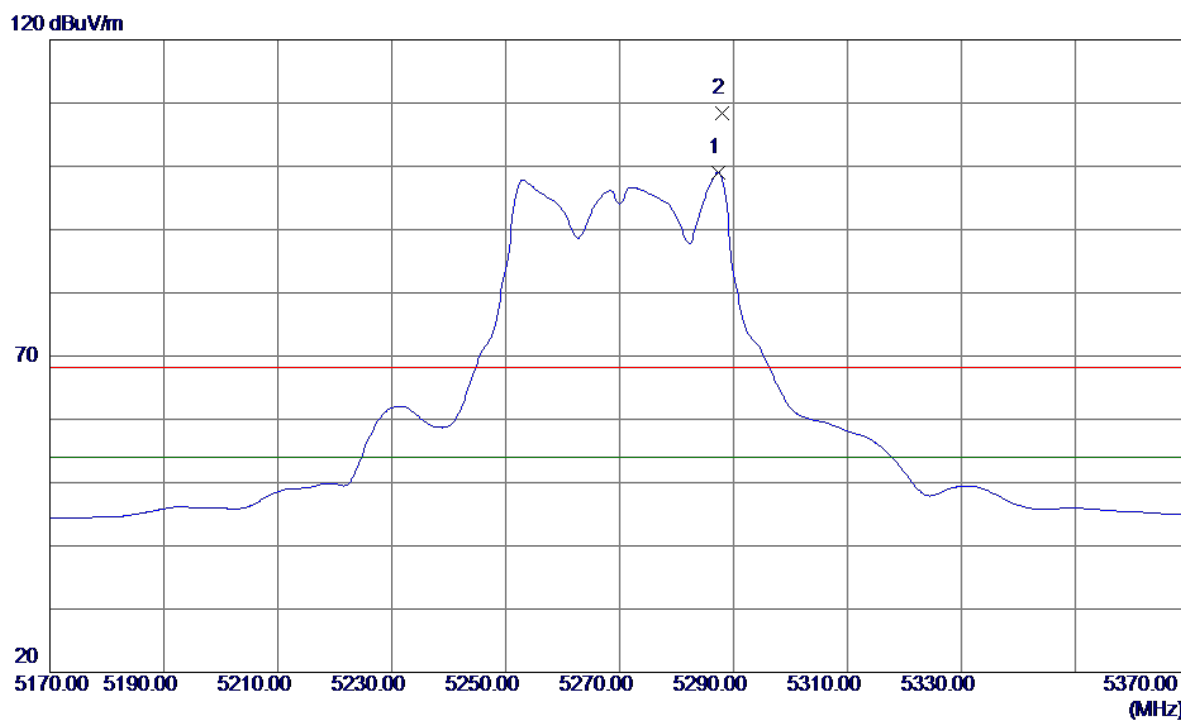


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5287.4000	58.56	40.51	99.07	54.00	45.07	AVG	No Limit
2	5288.0000	67.85	40.51	108.36	68.30	40.06	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Vertical


80 dBuV/m

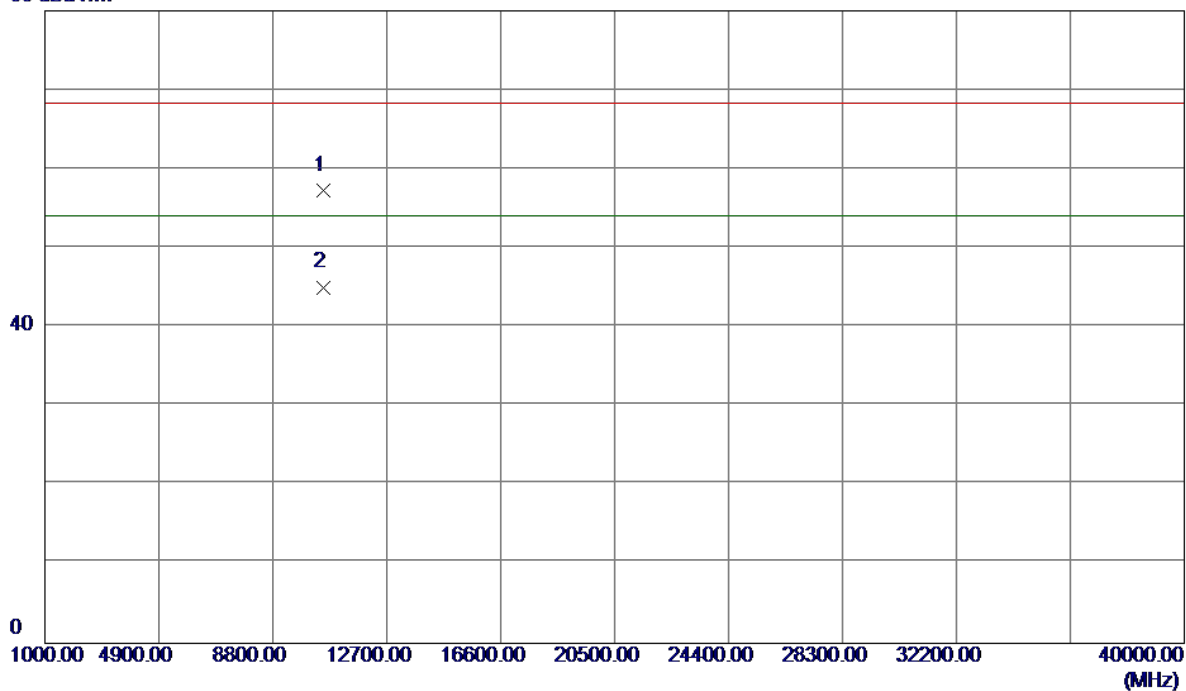

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10540.5000	43.41	13.83	57.24	68.30	-11.06	Peak	
2	10541.3800	31.20	13.84	45.04	54.00	-8.96	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal

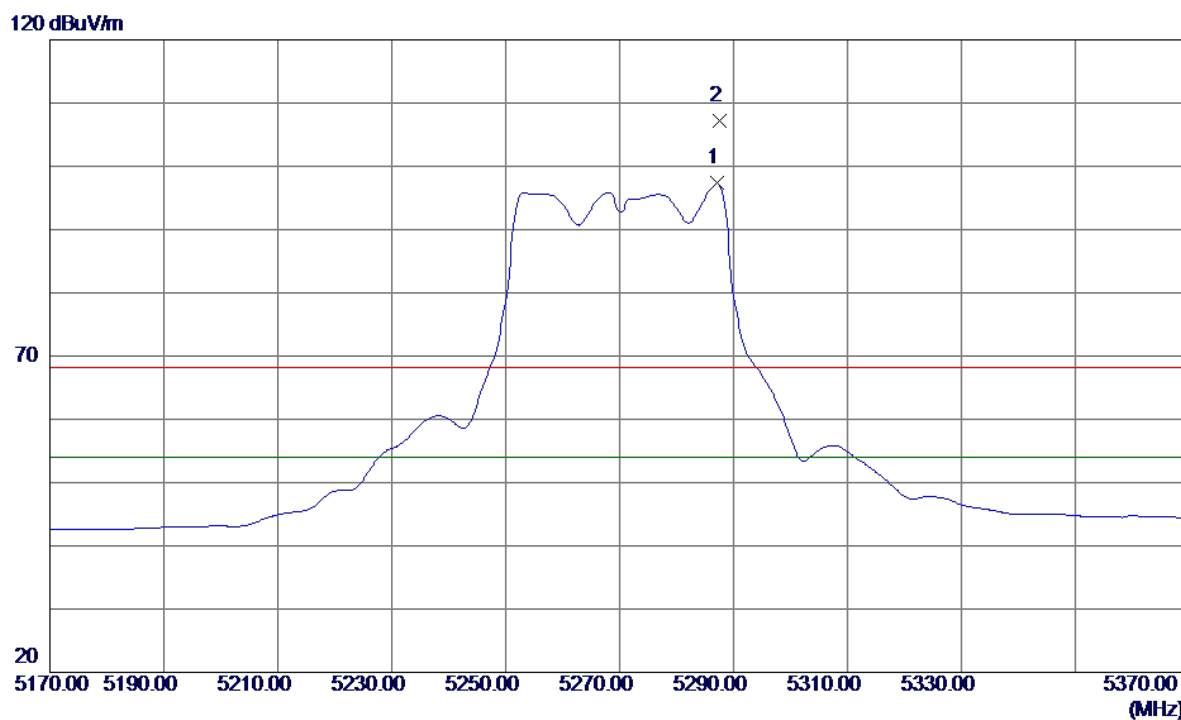


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5287.2000	56.80	40.51	97.31	54.00	43.31	AVG	No Limit
2	5287.6000	66.75	40.51	107.26	68.30	38.96	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal


80 dBuV/m

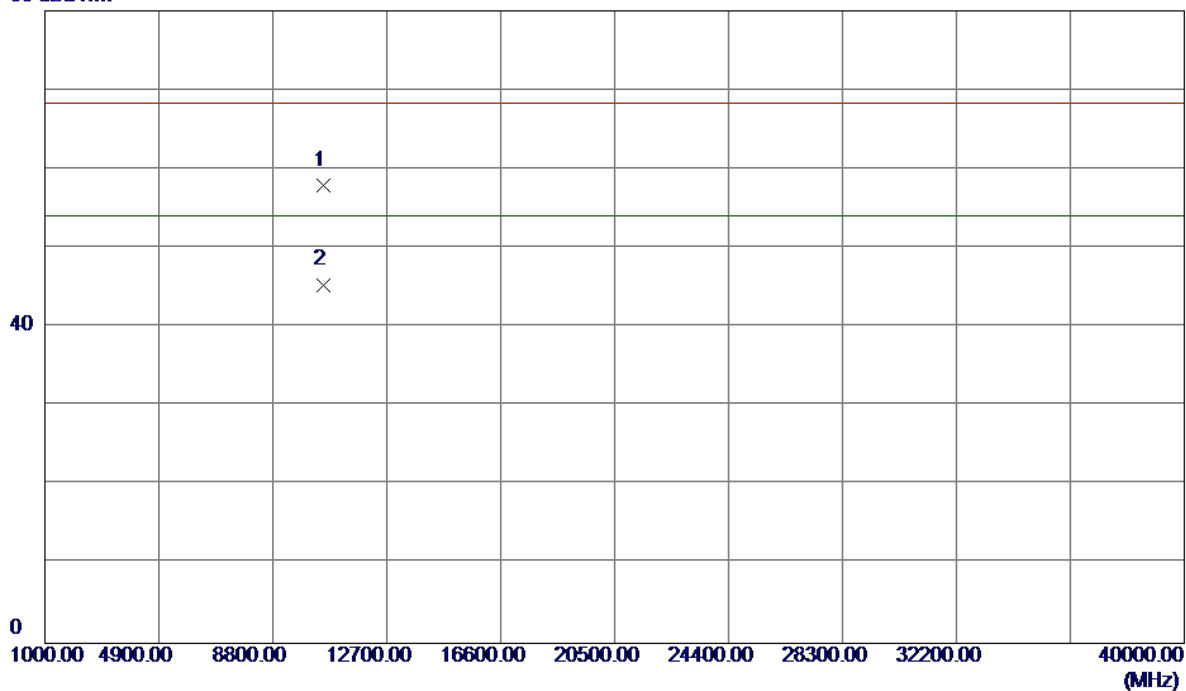

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	10540.2600	44.11	13.83	57.94	68.30	-10.36	Peak	
2	10541.2699	31.52	13.84	45.36	54.00	-8.64	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Vertical

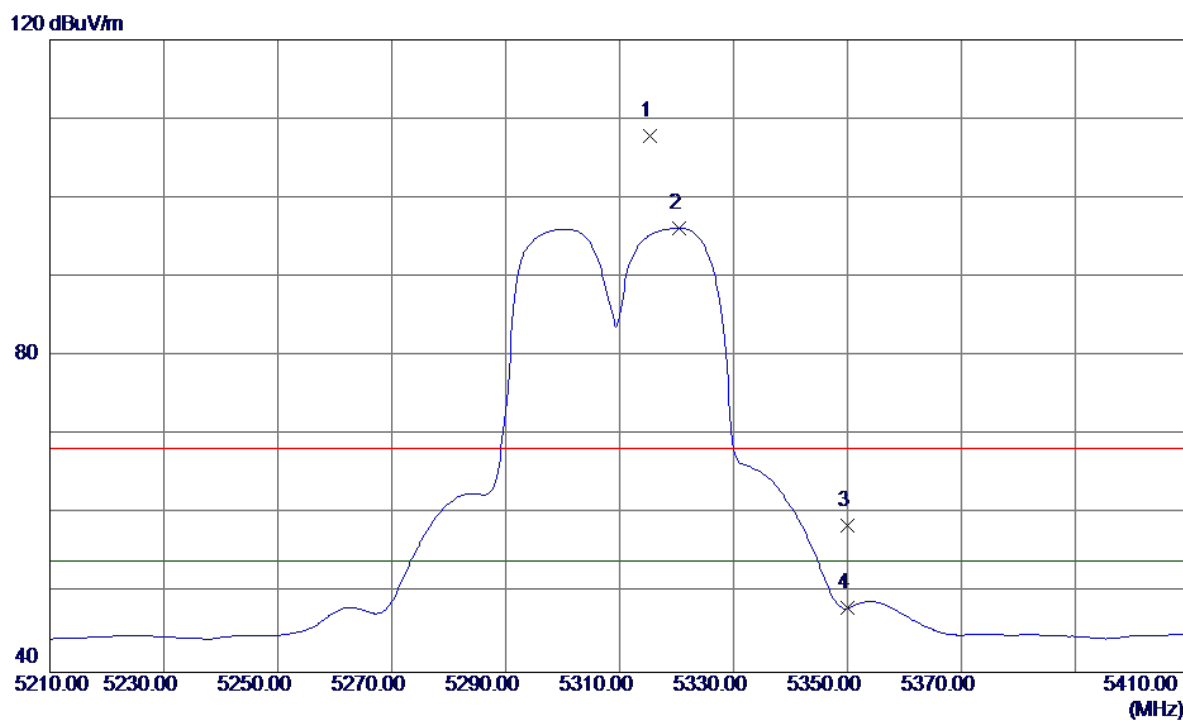


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5315.4000	67.19	40.57	107.76	68.30	39.46	Peak	No Limit
2	5320.4000	55.62	40.58	96.20	54.00	42.20	AVG	No Limit
3	5350.0000	17.89	40.64	58.53	68.30	-9.77	Peak	
4	5350.0000	7.48	40.64	48.12	54.00	-5.88	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Vertical


80 dBuV/m

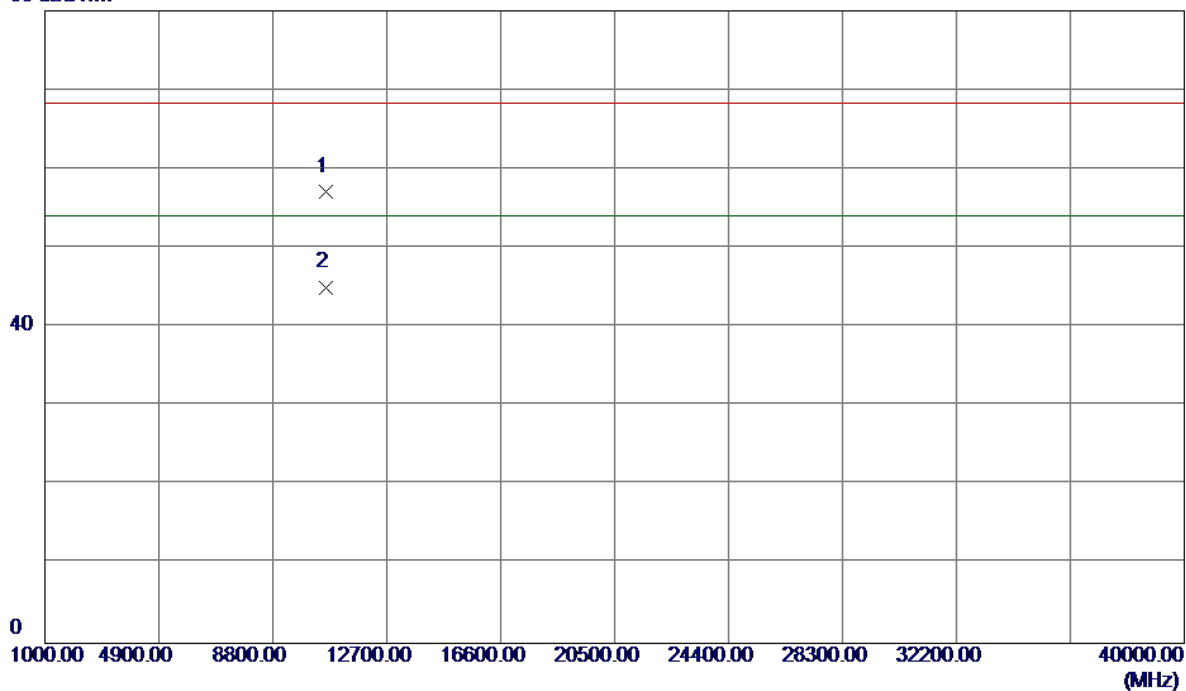

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.0100	42.88	14.17	57.05	68.30	-11.25	Peak	
2	10621.3000	30.87	14.17	45.04	54.00	-8.96	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Horizontal

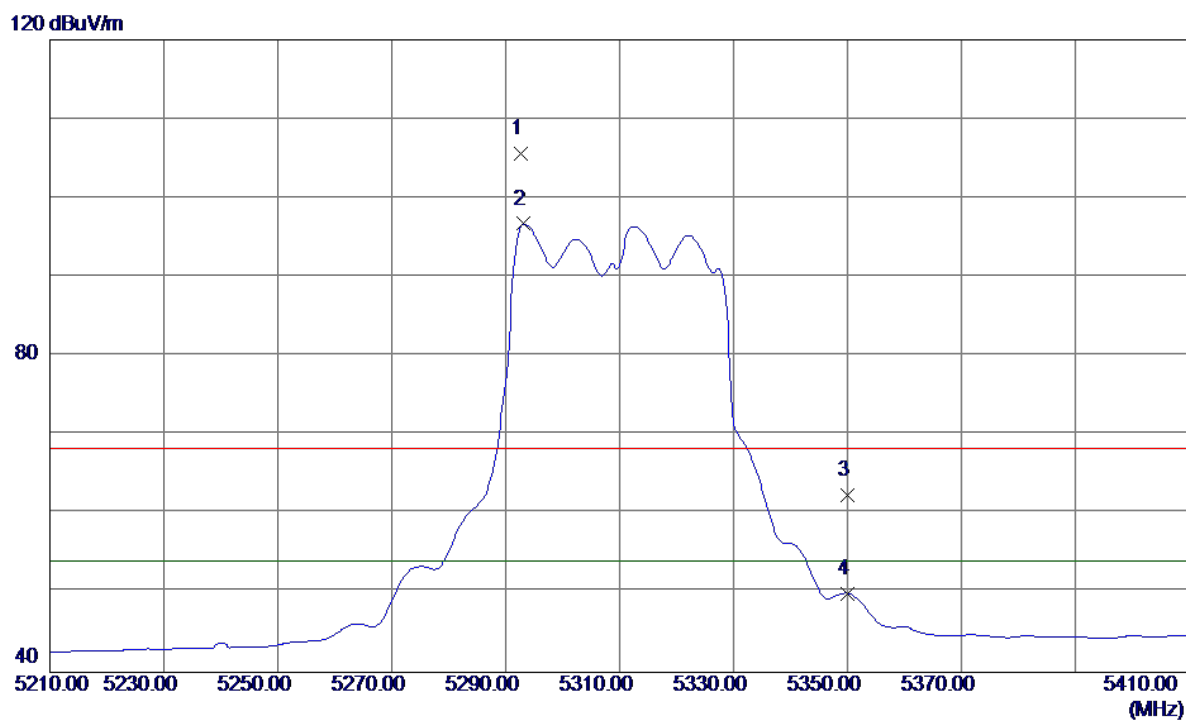


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5292.6000	65.10	40.52	105.62	68.30	37.32	Peak	No Limit
2	5293.2000	56.20	40.52	96.72	54.00	42.72	AVG	No Limit
3	5350.0000	21.81	40.64	62.45	68.30	-5.85	Peak	
4	5350.0000	9.34	40.64	49.98	54.00	-4.02	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Horizontal


80 dBuV/m

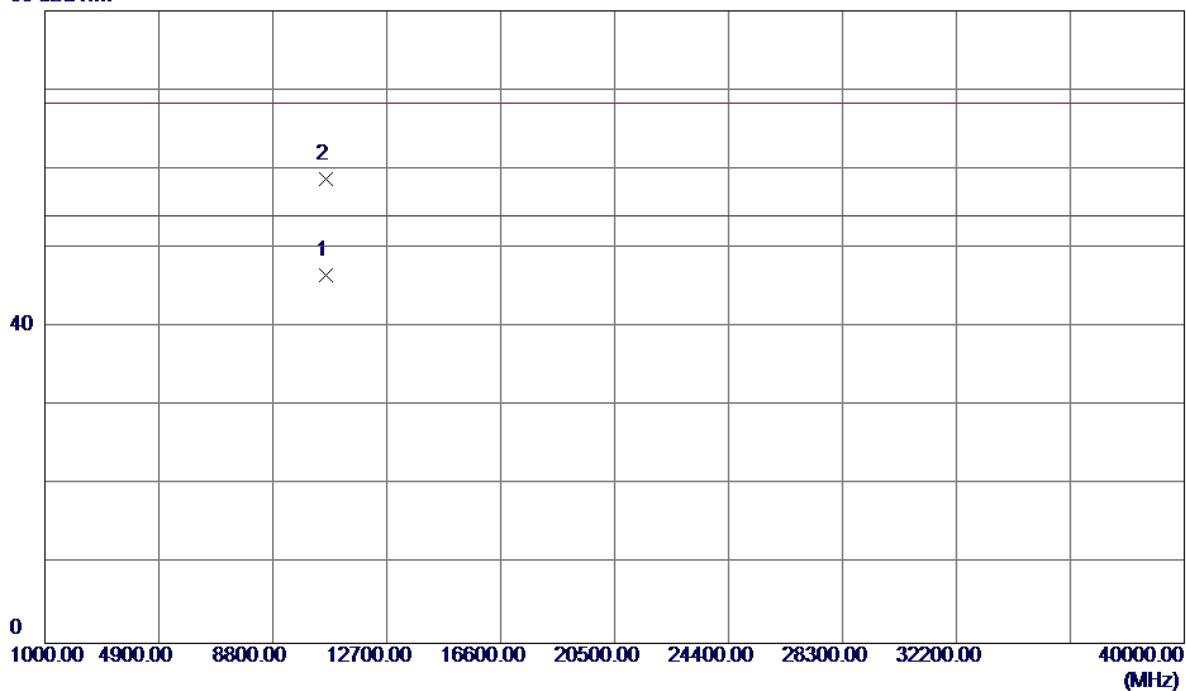

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10621.5000	32.40	14.17	46.57	54.00	-7.43	AVG	
2	10621.8000	44.62	14.17	58.79	68.30	-9.51	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Vertical

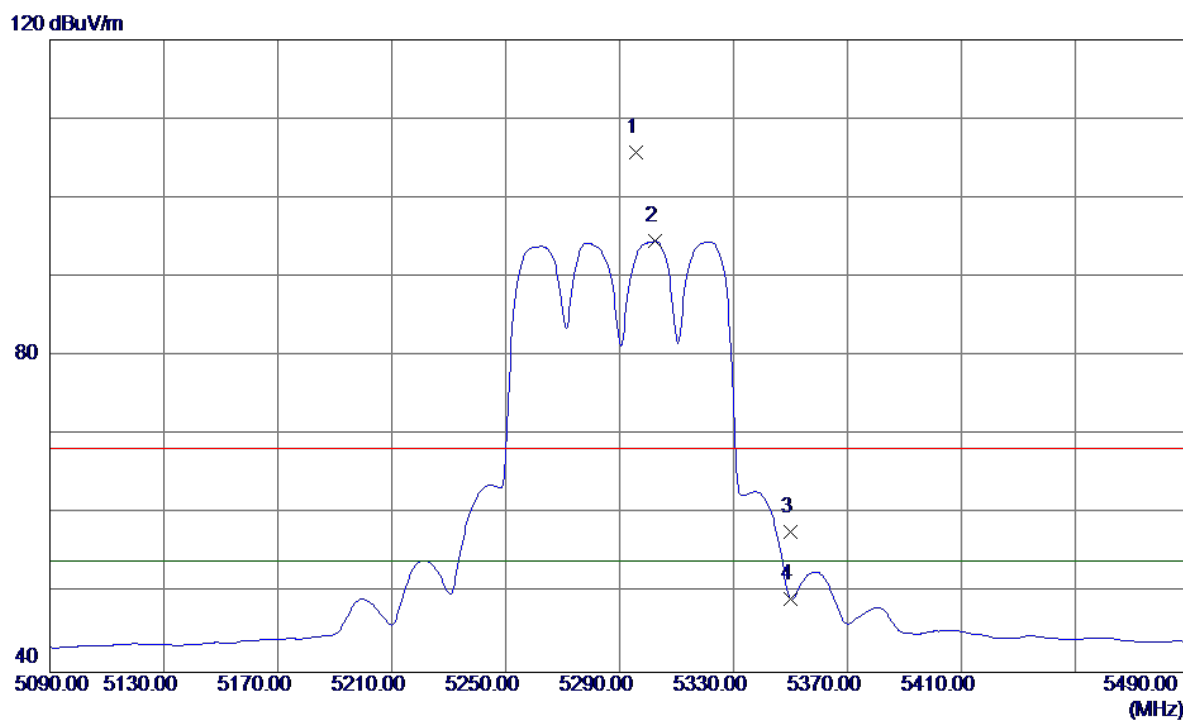


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5295.6000	65.17	40.53	105.70	68.30	37.40	Peak	No Limit
2	5302.4000	53.96	40.54	94.50	54.00	40.50	AVG	No Limit
3	5350.0000	17.06	40.64	57.70	68.30	-10.60	Peak	
4	5350.0000	8.70	40.64	49.34	54.00	-4.66	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Vertical


80 dBuV/m

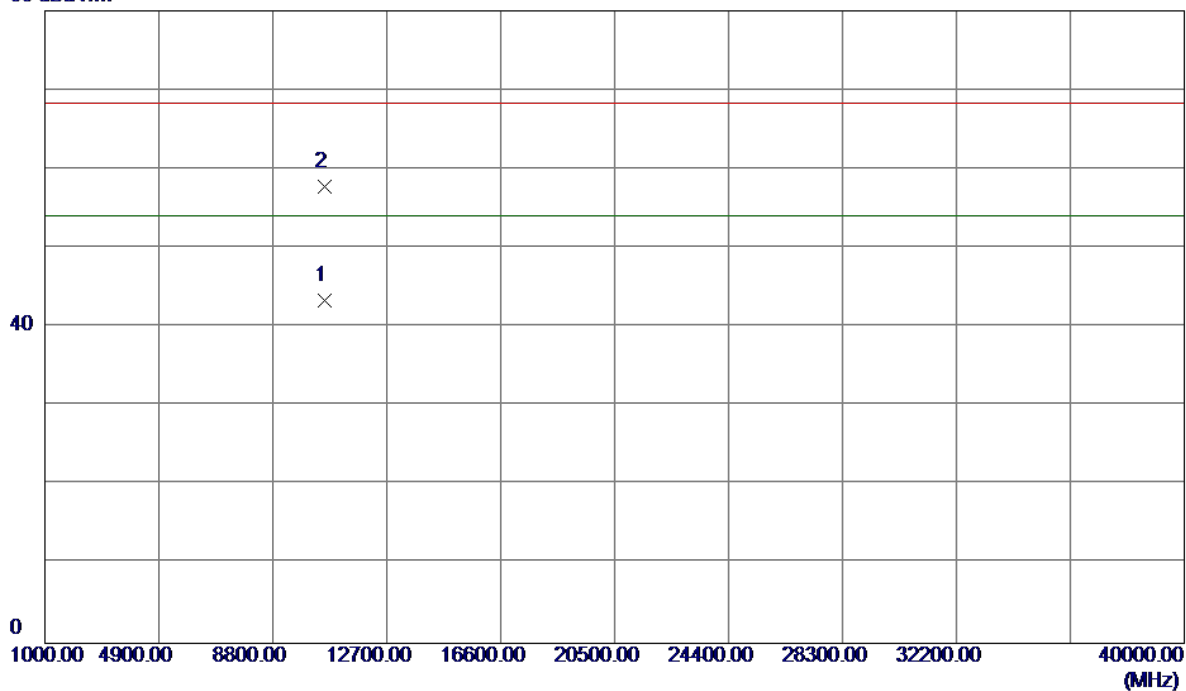

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10580.6400	29.40	14.00	43.40	54.00	-10.60	AVG	
2	10581.2000	43.69	14.00	57.69	68.30	-10.61	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal

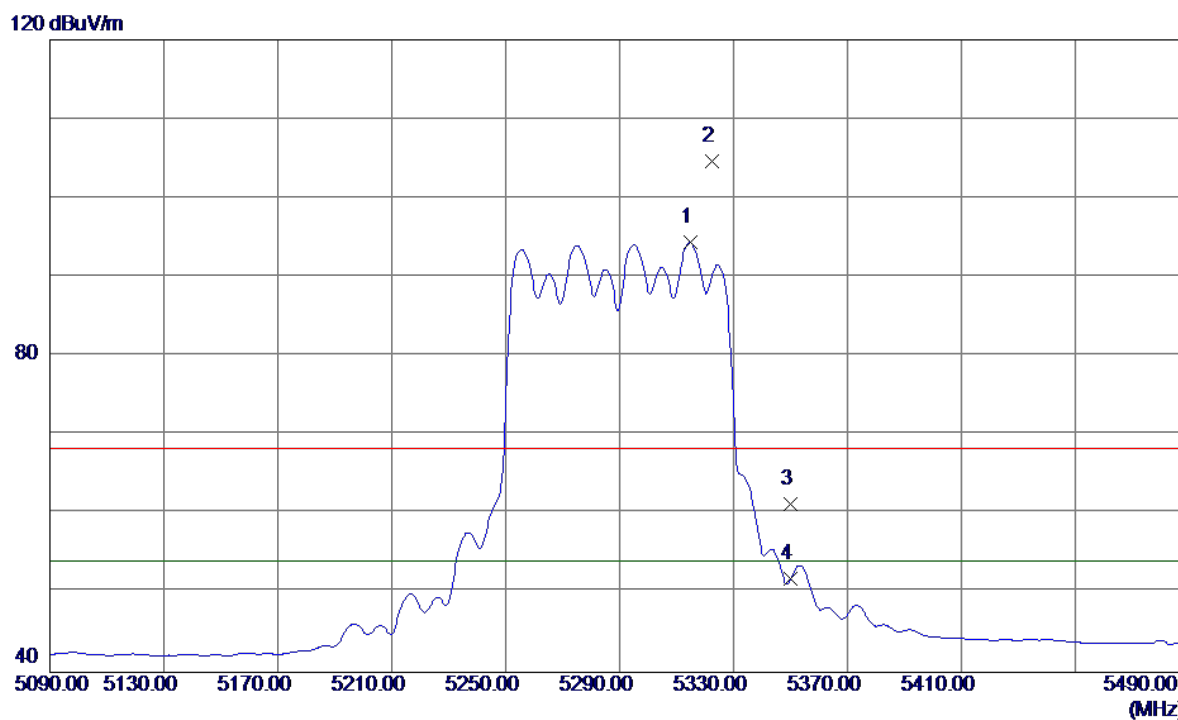


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5314.8000	53.77	40.57	94.34	54.00	40.34	AVG	No Limit
2	5322.4000	64.10	40.58	104.68	68.30	36.38	Peak	No Limit
3	5350.0000	20.64	40.64	61.28	68.30	-7.02	Peak	
4	5350.0000	11.18	40.64	51.82	54.00	-2.18	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal


80 dBuV/m

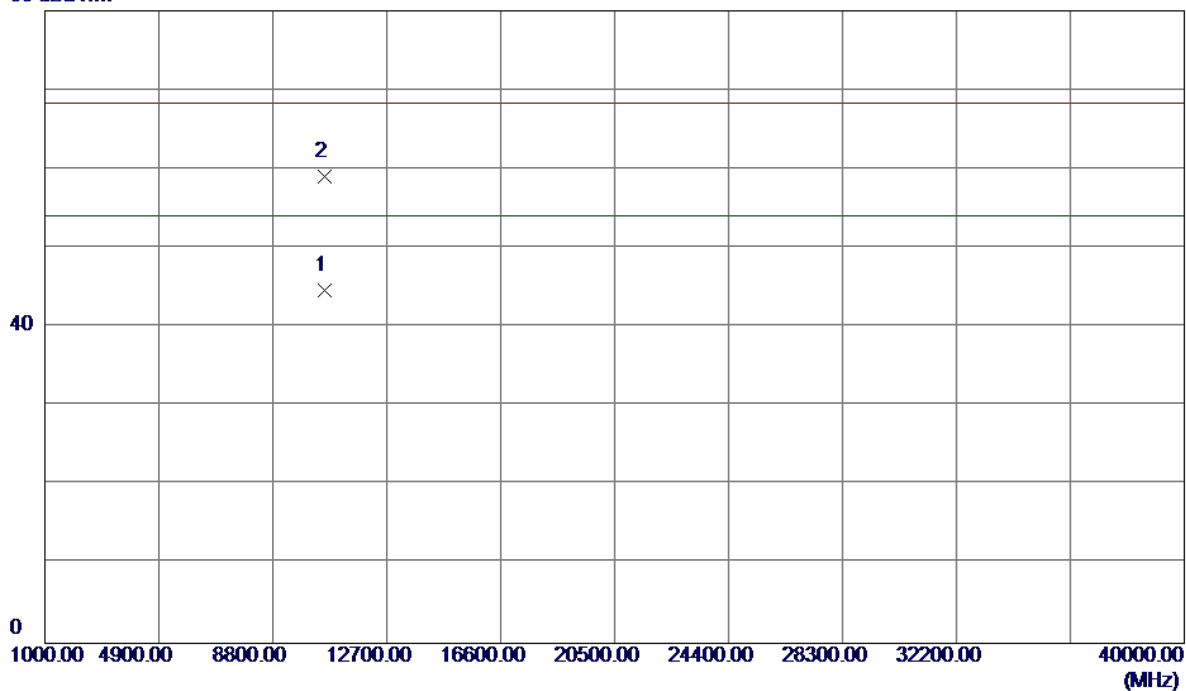

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10581.2699	30.61	14.00	44.61	54.00	-9.39	AVG	
2	10581.4000	45.06	14.00	59.06	68.30	-9.24	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Vertical

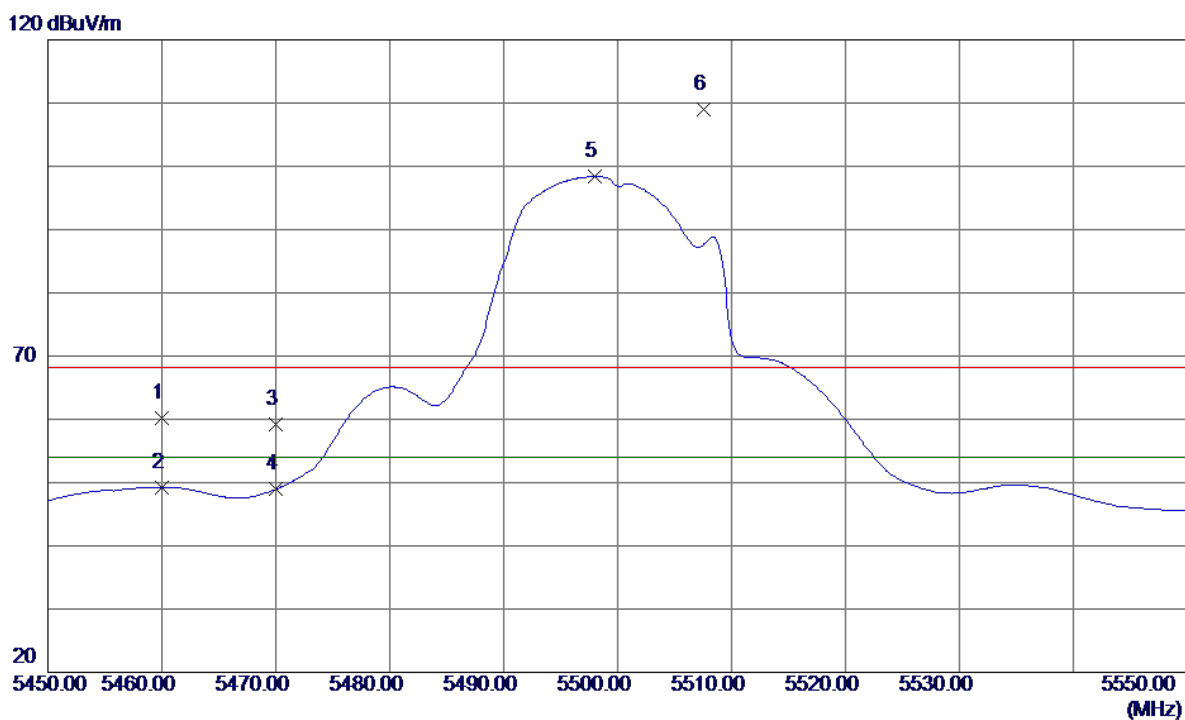


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	19.40	40.88	60.28	68.30	-8.02	Peak	
2	5460.0000	8.40	40.88	49.28	54.00	-4.72	AVG	
3	5470.0000	18.36	40.90	59.26	68.30	-9.04	Peak	
4	5470.0000	8.03	40.90	48.93	54.00	-5.07	AVG	
5	5498.0000	57.40	40.96	98.36	54.00	44.36	AVG	No Limit
6	5507.6000	68.08	40.97	109.05	68.30	40.75	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Vertical

80 dBuV/m

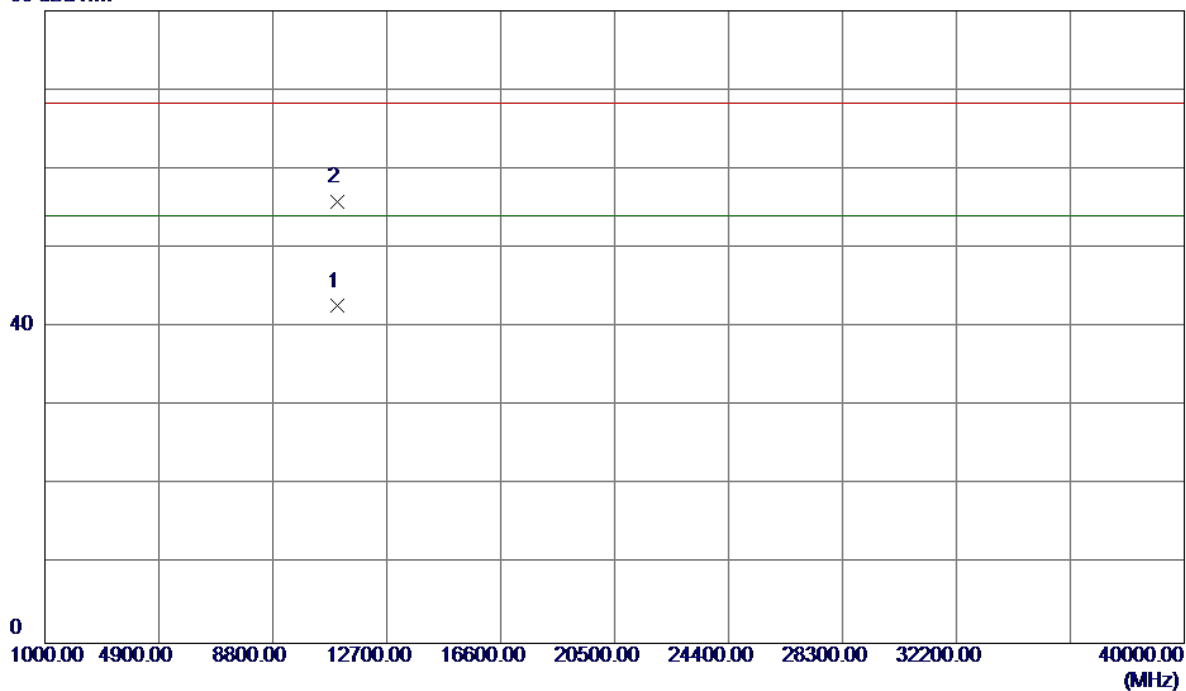


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.2300	26.89	15.75	42.64	54.00	-11.36	AVG	
2	11000.5000	40.05	15.75	55.80	68.30	-12.50	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Horizontal

120 dBuV/m

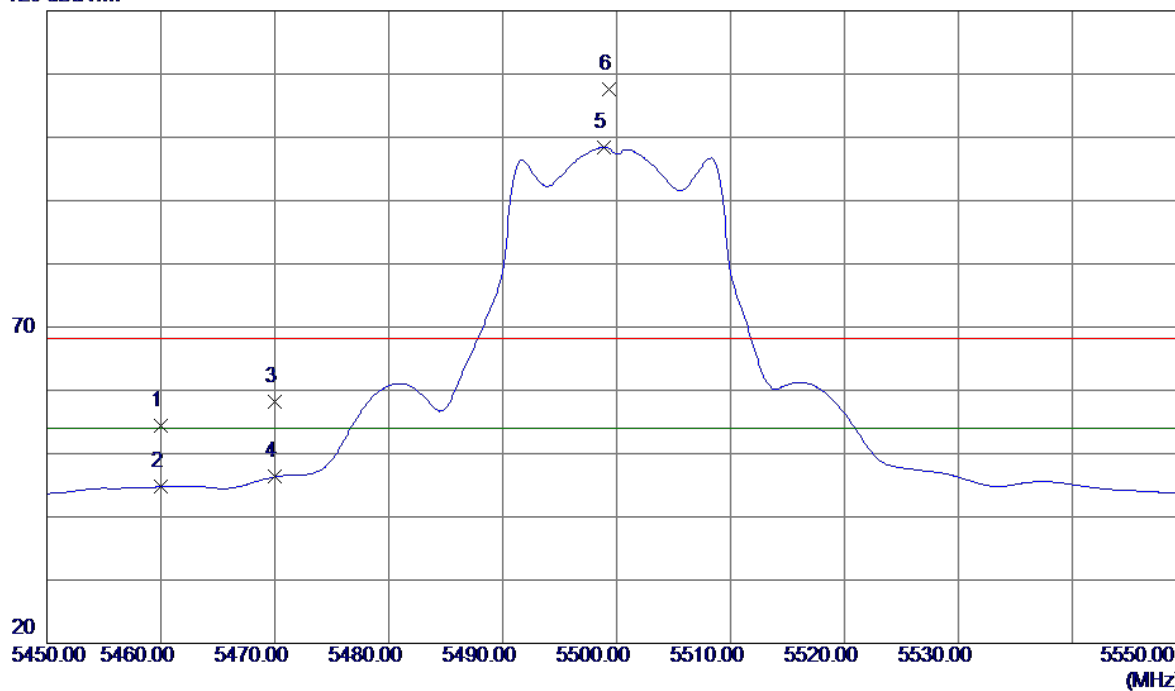


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	13.60	40.88	54.48	68.30	-13.82	Peak	
2	5460.0000	3.87	40.88	44.75	54.00	-9.25	AVG	
3	5470.0000	17.34	40.90	58.24	68.30	-10.06	Peak	
4	5470.0000	5.42	40.90	46.32	54.00	-7.68	AVG	
5	5498.9000	57.48	40.96	98.44	54.00	44.44	AVG	No Limit
6	5499.3000	66.56	40.96	107.52	68.30	39.22	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Horizontal


80 dBuV/m

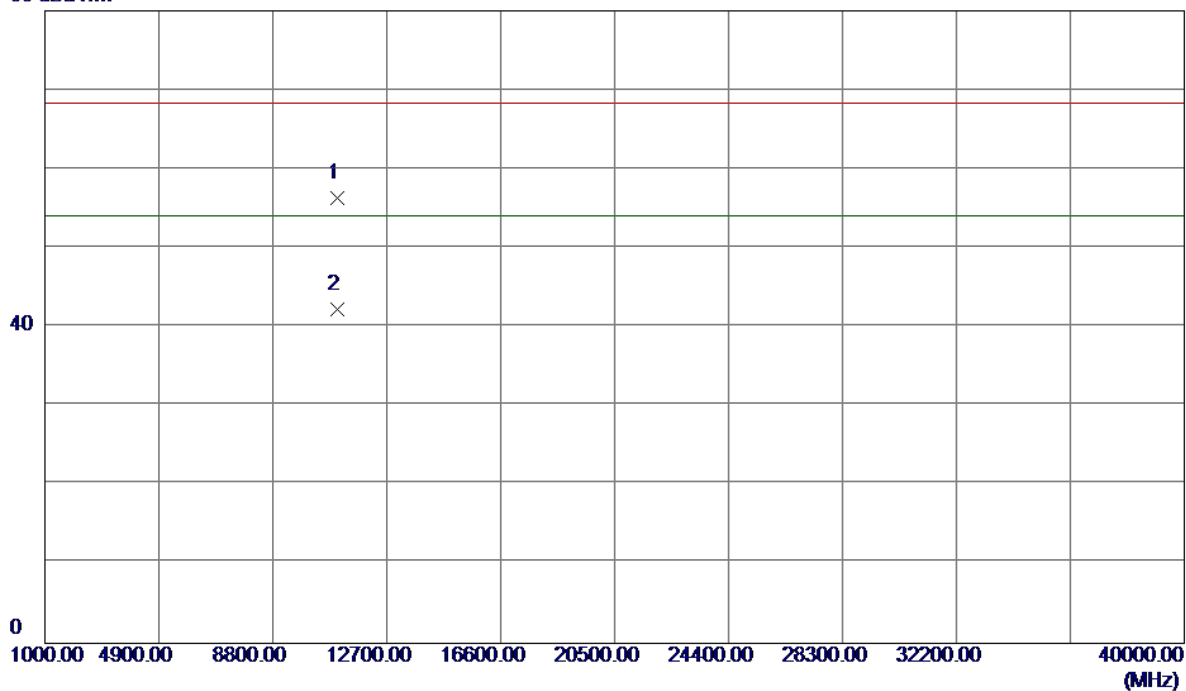

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.9600	40.59	15.75	56.34	68.30	-11.96	Peak	
2	11001.5000	26.45	15.75	42.20	54.00	-11.80	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Vertical

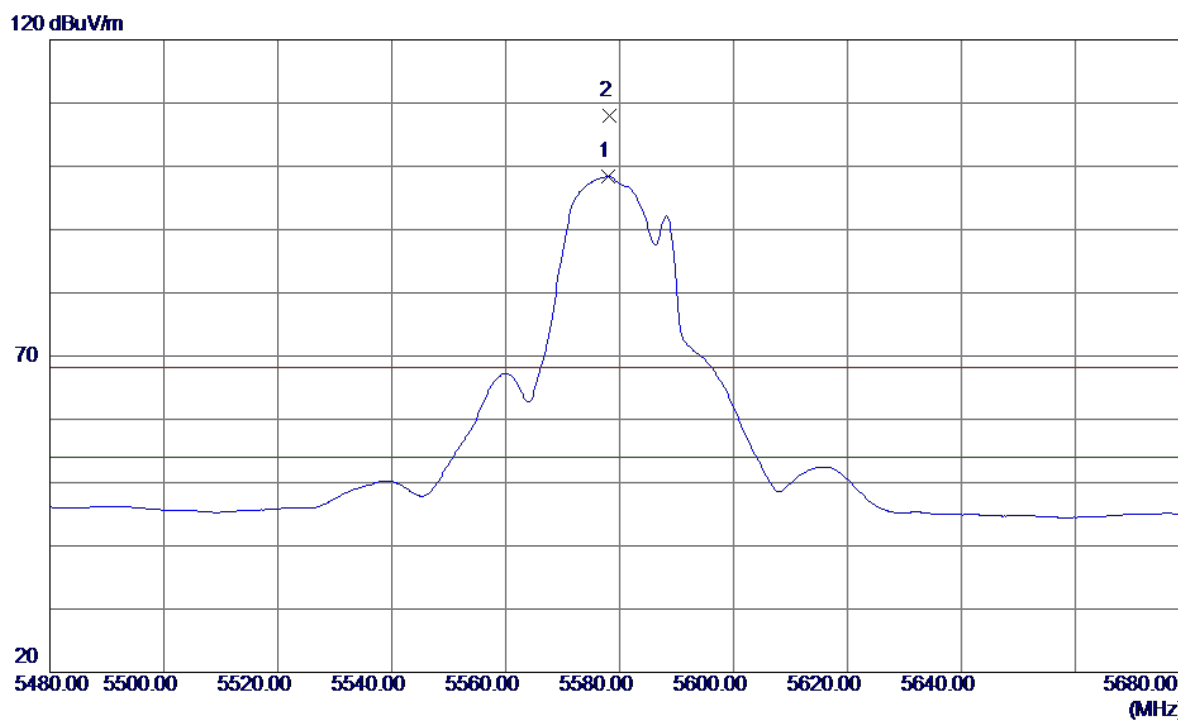


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5578.0000	57.28	41.07	98.35	54.00	44.35	AVG	No Limit
2	5578.2000	66.92	41.07	107.99	68.30	39.69	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Vertical


80 dBuV/m

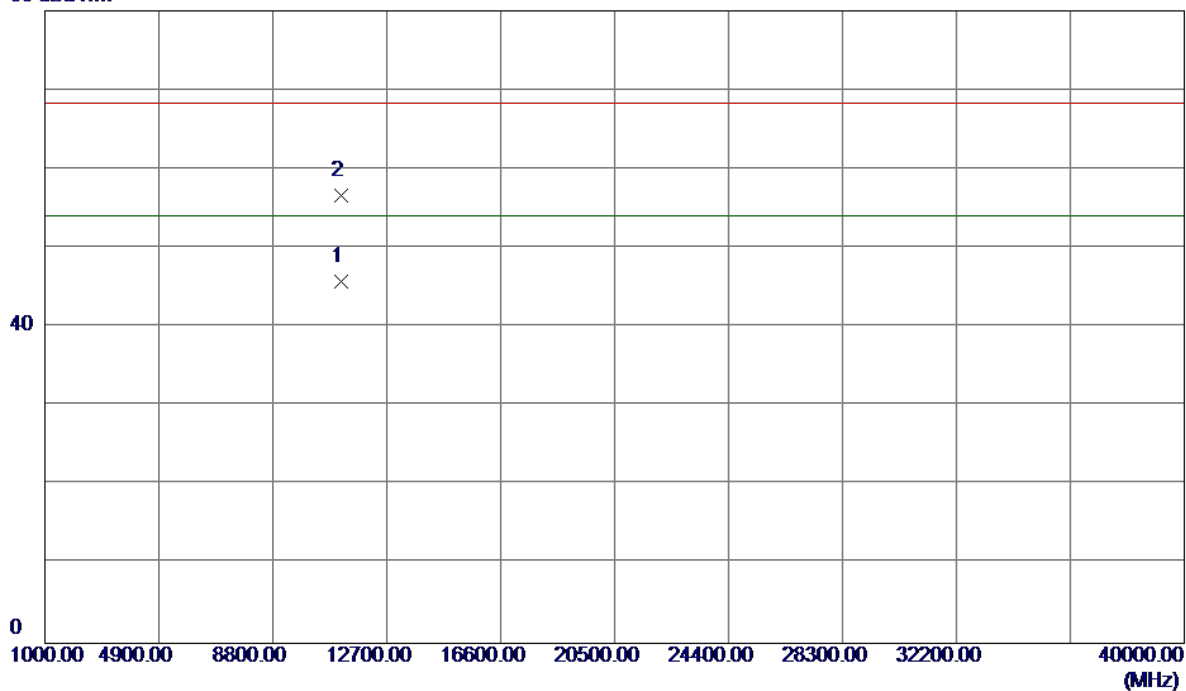

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0599	29.57	16.13	45.70	54.00	-8.30	AVG	
2	11161.2000	40.46	16.13	56.59	68.30	-11.71	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Horizontal

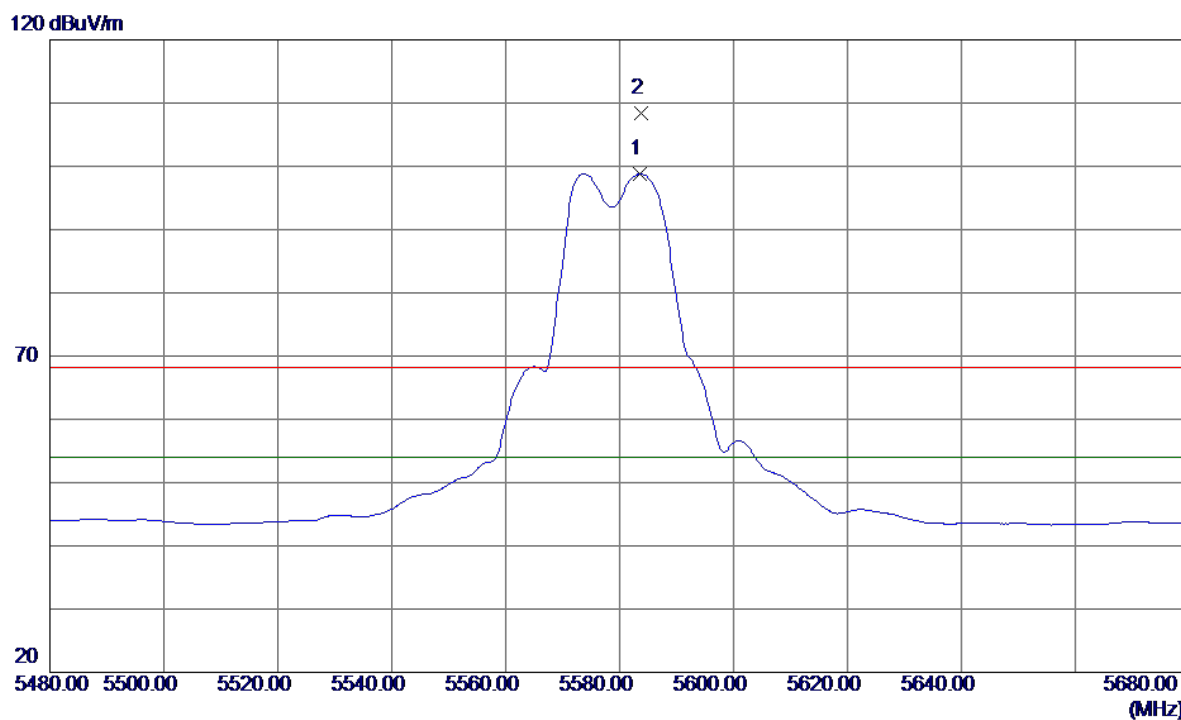


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5583.6000	57.71	41.07	98.78	54.00	44.78	AVG	No Limit
2	5583.8000	67.42	41.07	108.49	68.30	40.19	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Horizontal


80 dBuV/m

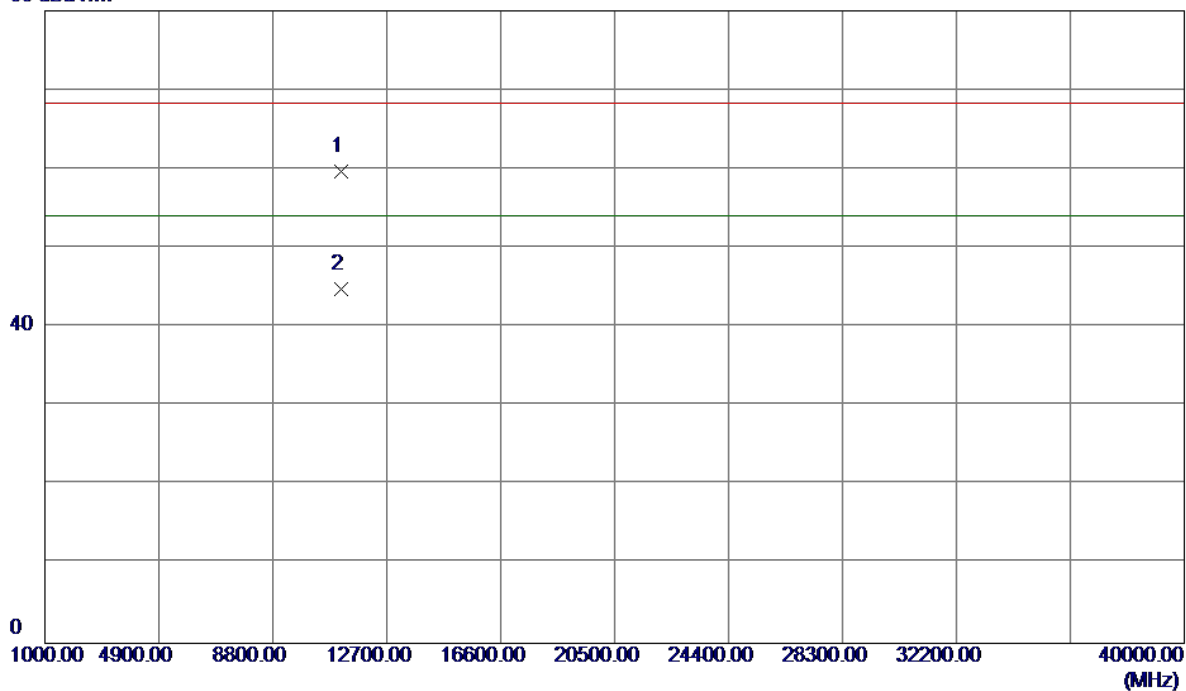

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.3000	43.50	16.13	59.63	68.30	-8.67	Peak	
2	11160.5199	28.72	16.13	44.85	54.00	-9.15	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Vertical

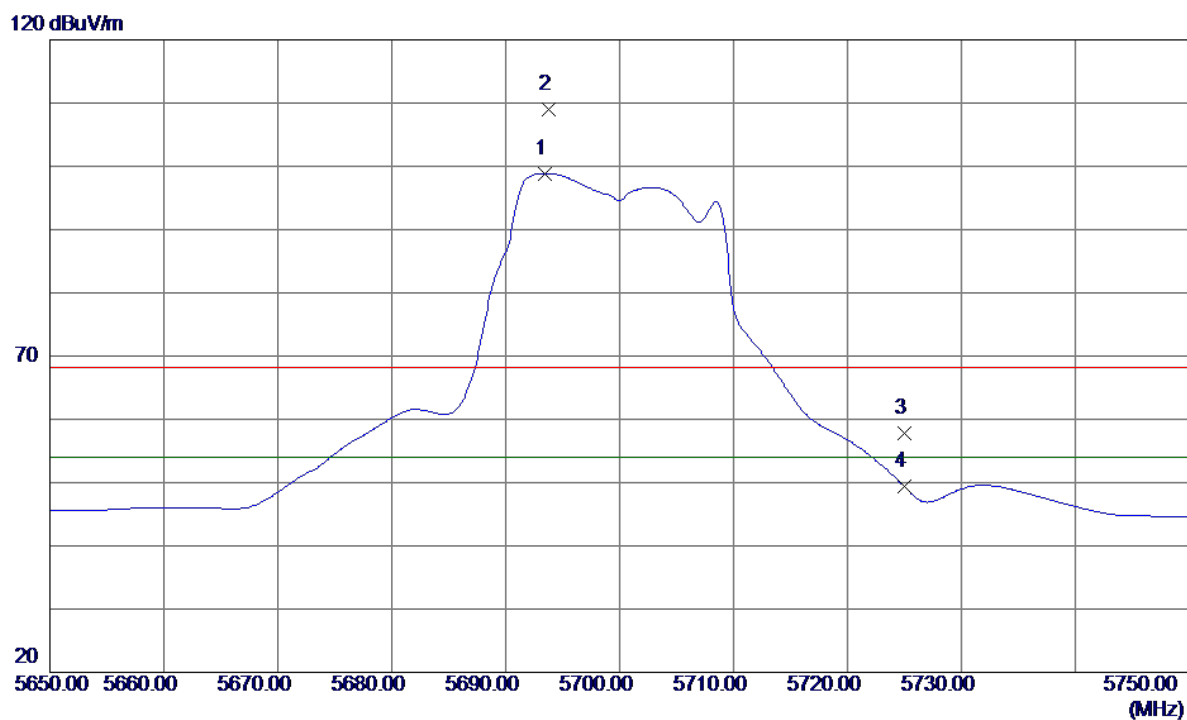


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5693.4000	57.67	41.22	98.89	54.00	44.89	AVG	No Limit
2	5693.8000	67.83	41.22	109.05	68.30	40.75	Peak	No Limit
3	5725.0000	16.51	41.27	57.78	68.30	-10.52	Peak	
4	5725.0000	8.08	41.27	49.35	54.00	-4.65	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Vertical


80 dBuV/m

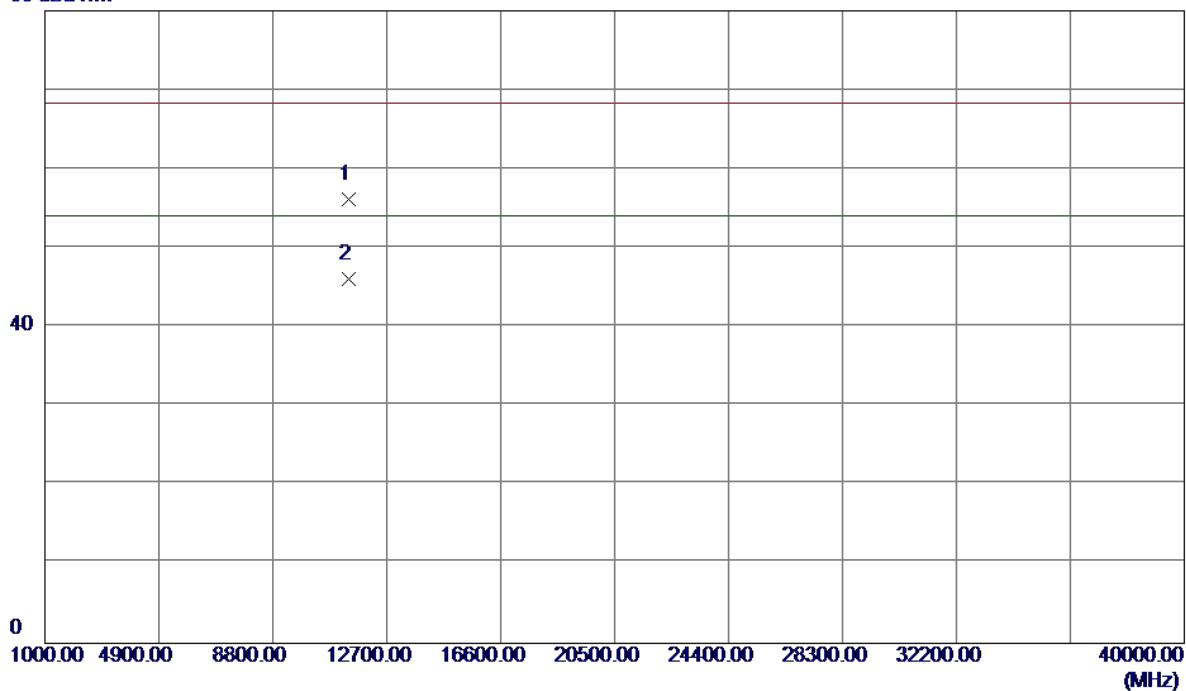

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.2400	39.50	16.70	56.20	68.30	-12.10	Peak	
2	11401.8600	29.36	16.70	46.06	54.00	-7.94	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Horizontal

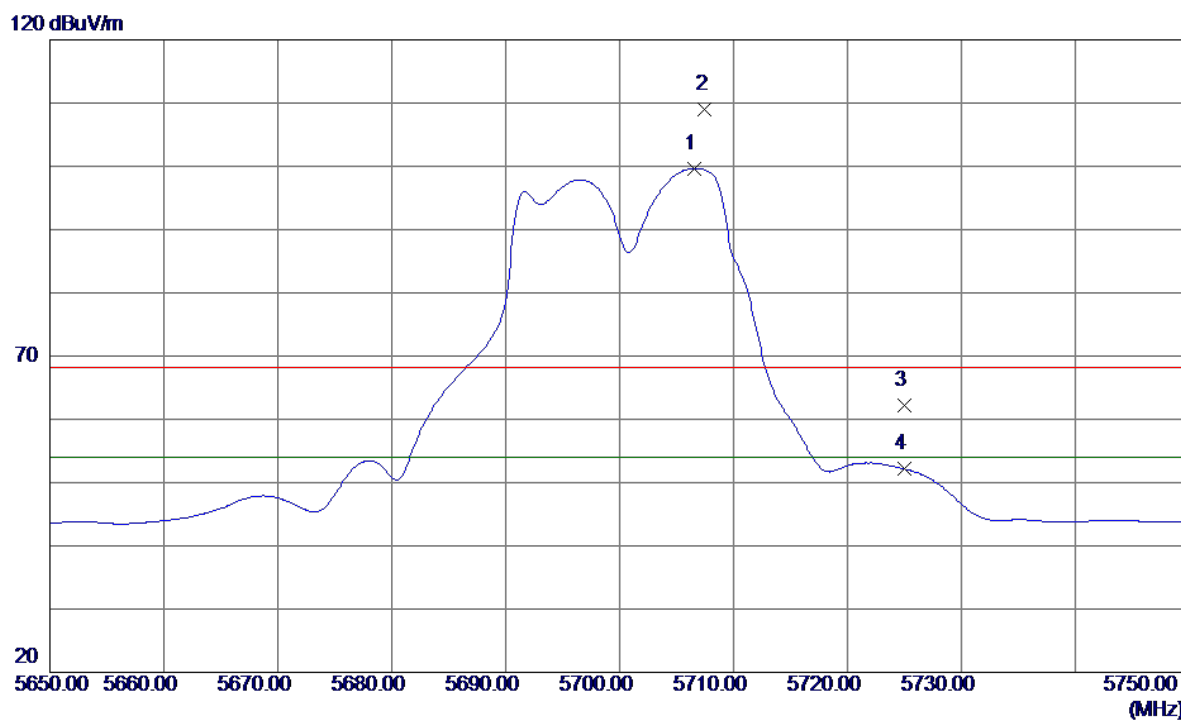


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5706.6000	58.41	41.24	99.65	54.00	45.65	AVG	No Limit
2	5707.5000	67.69	41.24	108.93	68.30	40.63	Peak	No Limit
3	5725.0000	20.84	41.27	62.11	68.30	-6.19	Peak	
4	5725.0000	10.87	41.27	52.14	54.00	-1.86	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Horizontal

80 dBuV/m

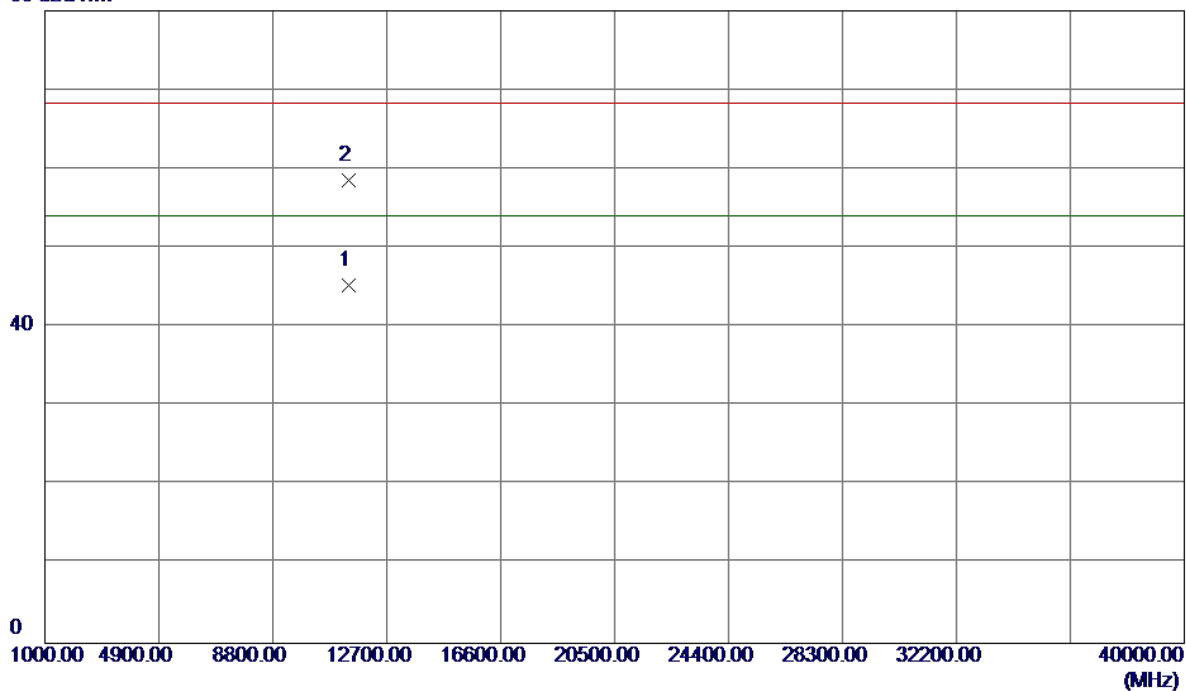


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.3000	28.56	16.70	45.26	54.00	-8.74	AVG	
2	11401.4700	41.85	16.70	58.55	68.30	-9.75	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical

120 dBuV/m

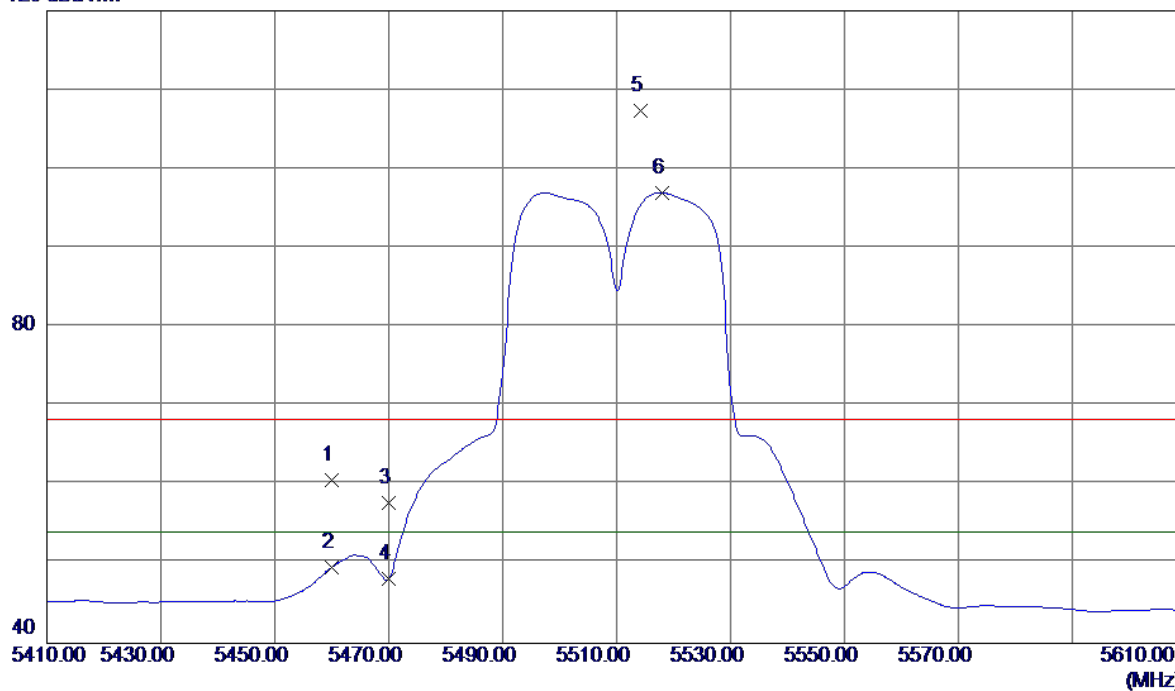


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	19.77	40.88	60.65	68.30	-7.65	Peak	
2	5460.0000	8.72	40.88	49.60	54.00	-4.40	AVG	
3	5470.0000	16.90	40.90	57.80	68.30	-10.50	Peak	
4	5470.0000	7.31	40.90	48.21	54.00	-5.79	AVG	
5	5514.2000	66.31	40.98	107.29	68.30	38.99	Peak	No Limit
6	5518.0000	56.02	40.98	97.00	54.00	43.00	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical

80 dBuV/m

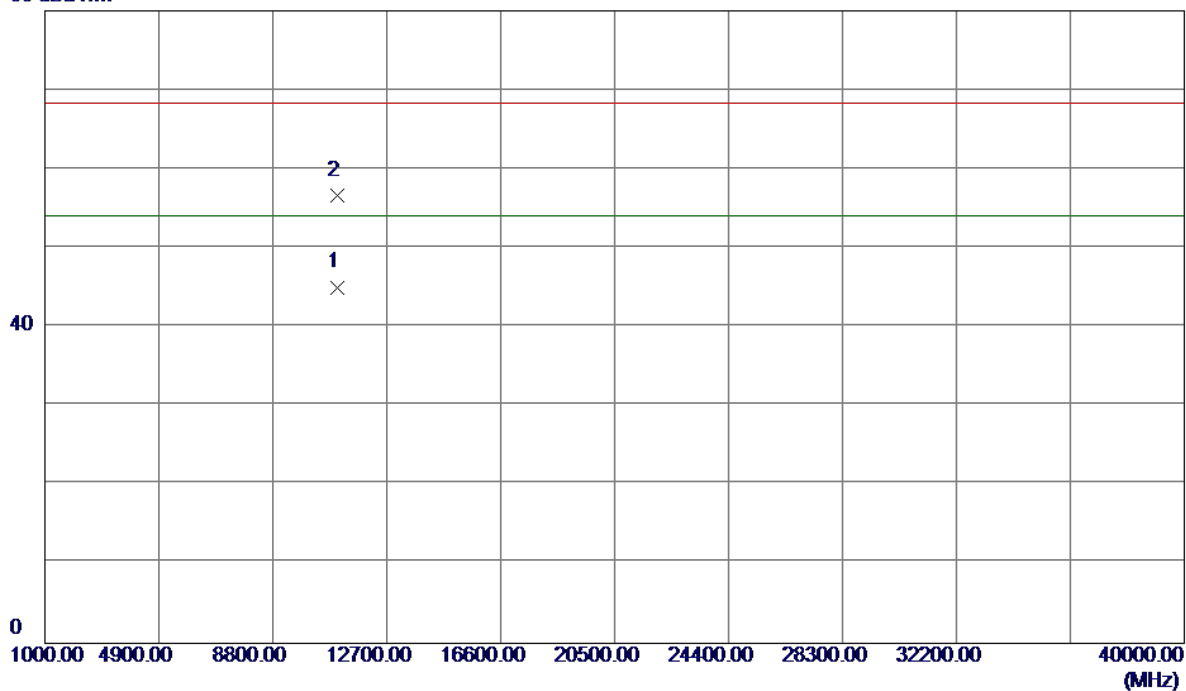


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.1000	29.24	15.80	45.04	54.00	-8.96	AVG	
2	11020.7000	40.85	15.80	56.65	68.30	-11.65	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Horizontal

120 dBuV/m

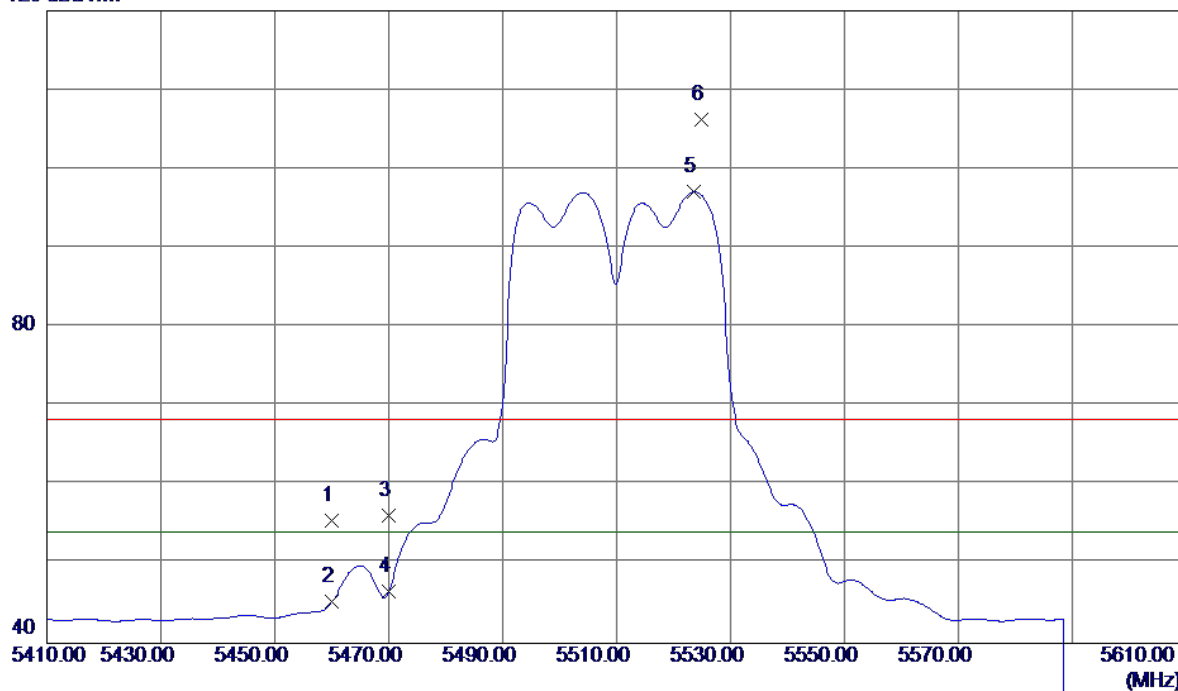


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	14.62	40.88	55.50	68.30	-12.80	Peak	
2	5460.0000	4.36	40.88	45.24	54.00	-8.76	AVG	
3	5470.0000	15.24	40.90	56.14	68.30	-12.16	Peak	
4	5470.0000	5.63	40.90	46.53	54.00	-7.47	AVG	
5	5523.6000	56.08	40.99	97.07	54.00	43.07	AVG	No Limit
6	5524.8000	65.33	40.99	106.32	68.30	38.02	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Horizontal


80 dBuV/m

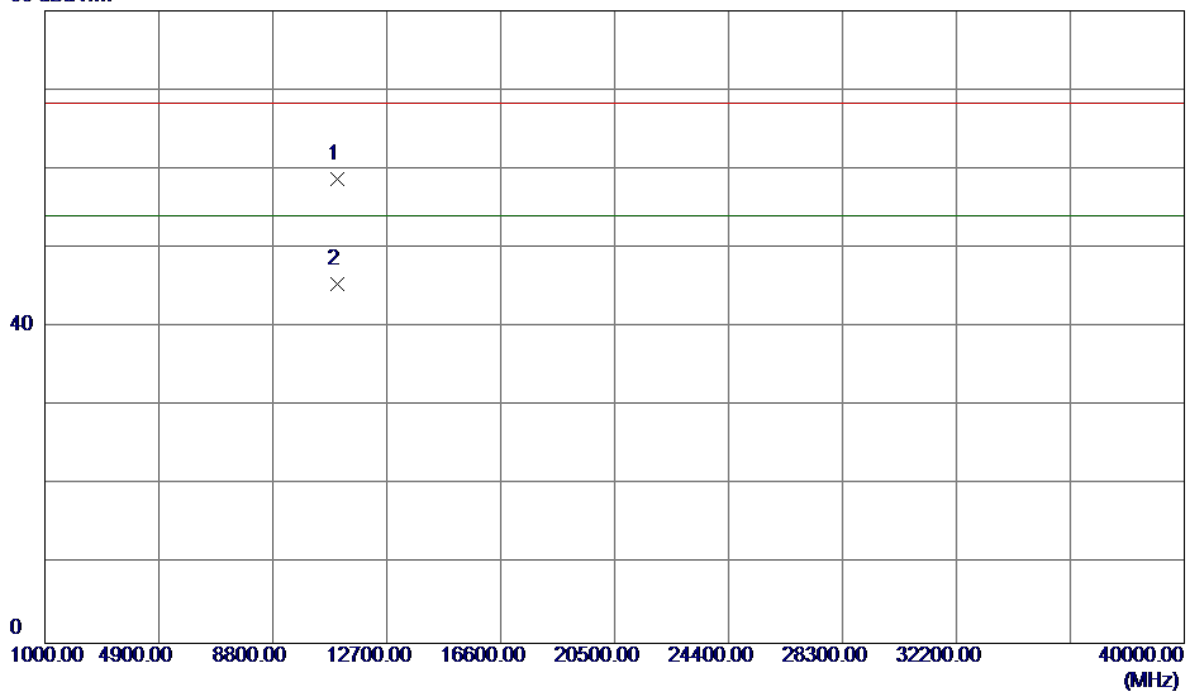

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11021.6300	42.99	15.80	58.79	68.30	-9.51	Peak	
2	11021.8700	29.65	15.80	45.45	54.00	-8.55	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Vertical

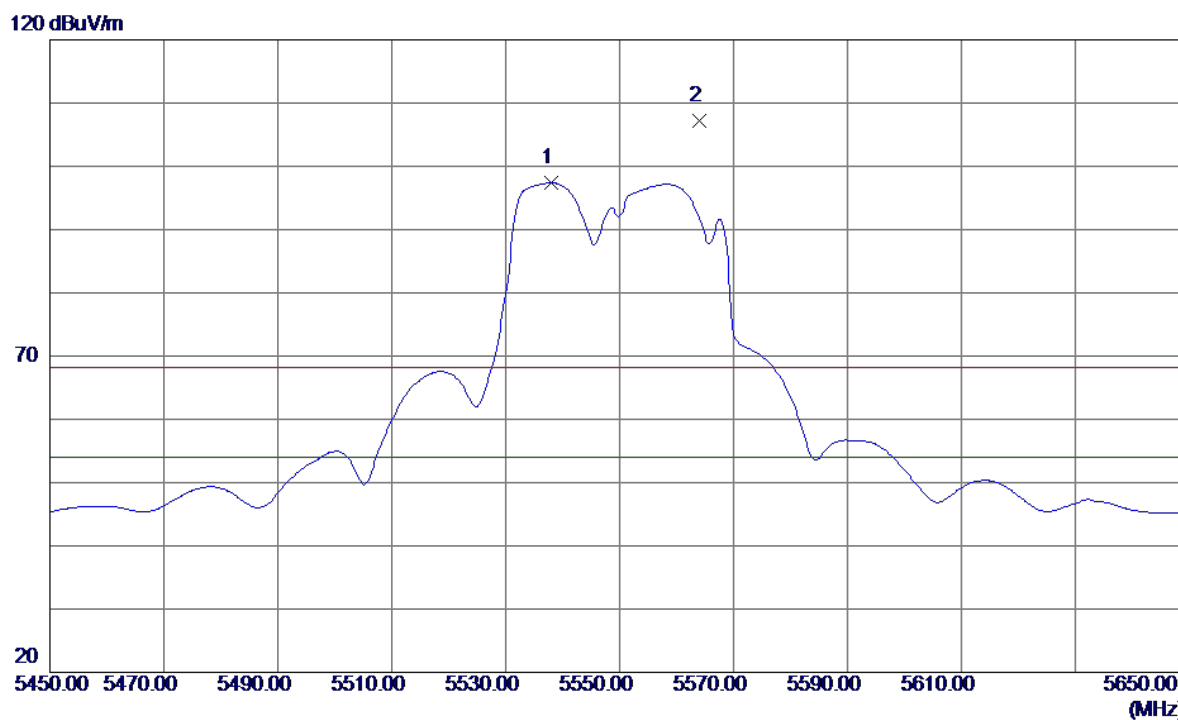


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5538.0000	56.37	41.01	97.38	54.00	43.38	AVG	No Limit
2	5564.0000	66.18	41.05	107.23	68.30	38.93	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Vertical


80 dBuV/m

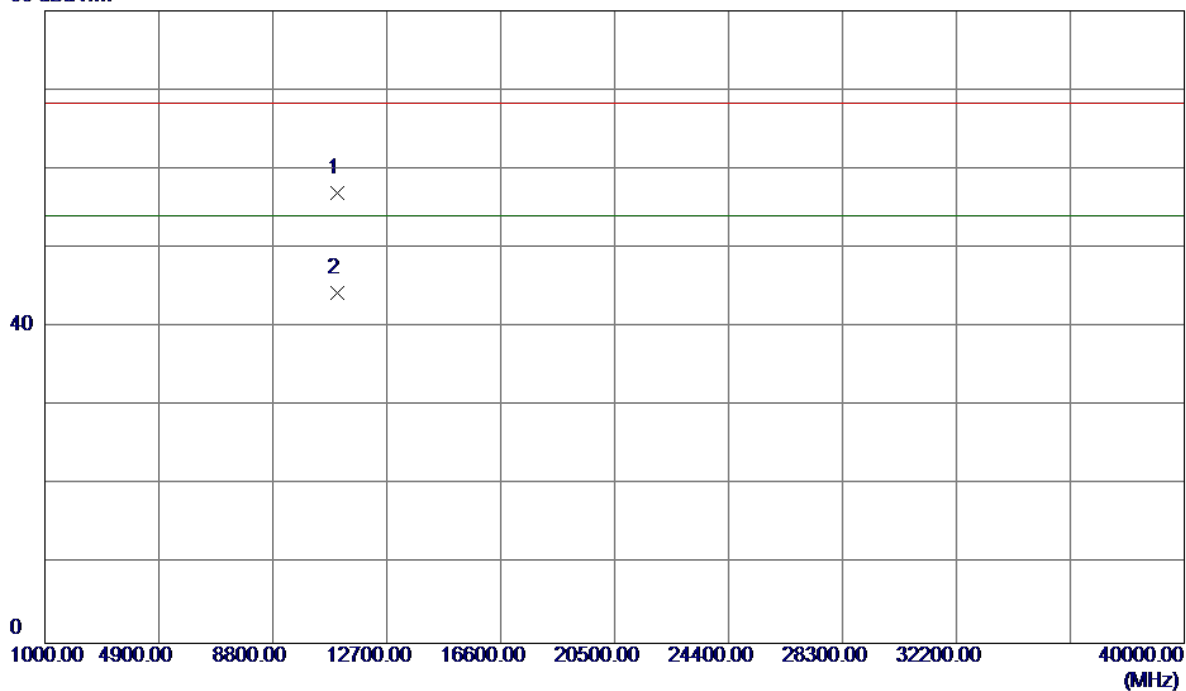

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0199	41.27	15.75	57.02	68.30	-11.28	Peak	
2	11001.2800	28.64	15.75	44.39	54.00	-9.61	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Horizontal

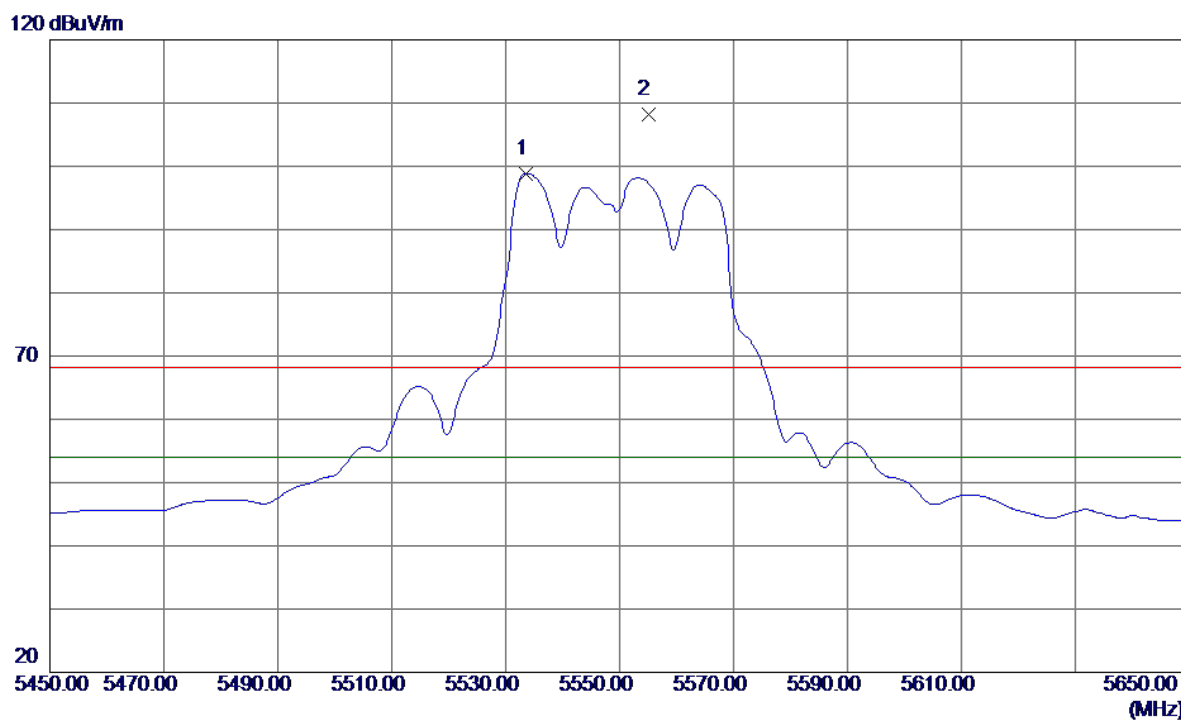

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5533.6000	57.84	41.01	98.85	54.00	44.85	AVG	No Limit
2	5555.0000	67.14	41.03	108.17	68.30	39.87	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Horizontal

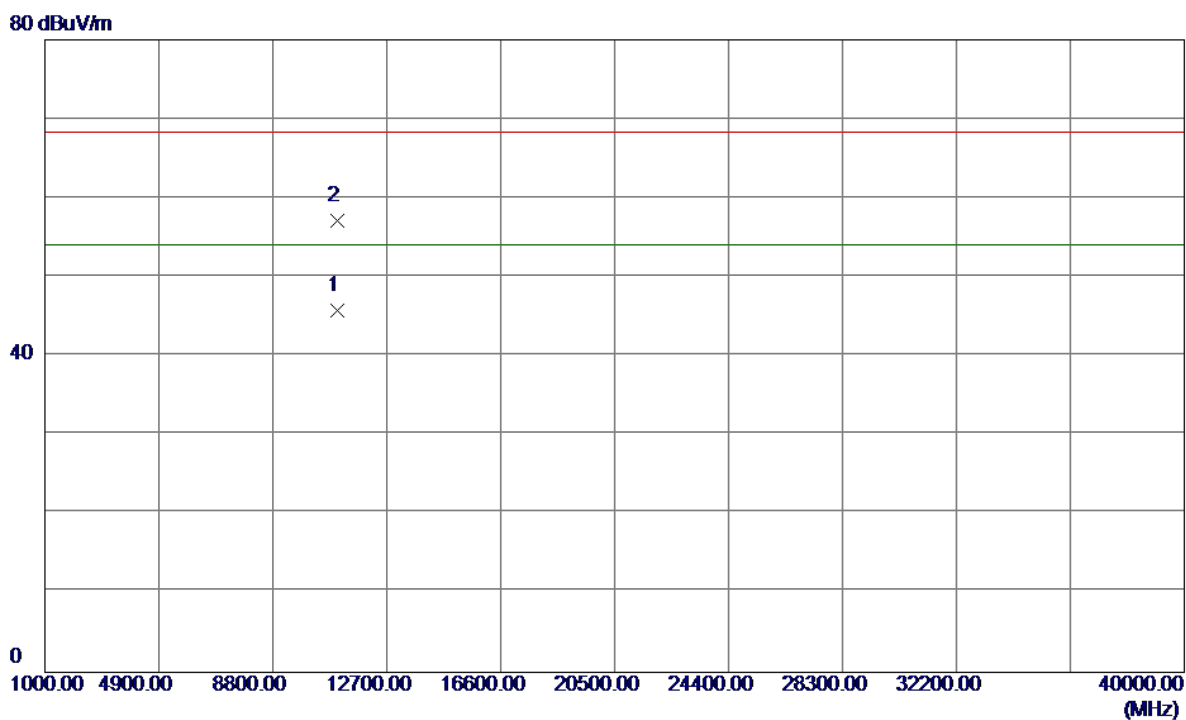

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.2000	30.05	15.75	45.80	54.00	-8.20	AVG	
2	11001.3000	41.44	15.75	57.19	68.30	-11.11	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Vertical

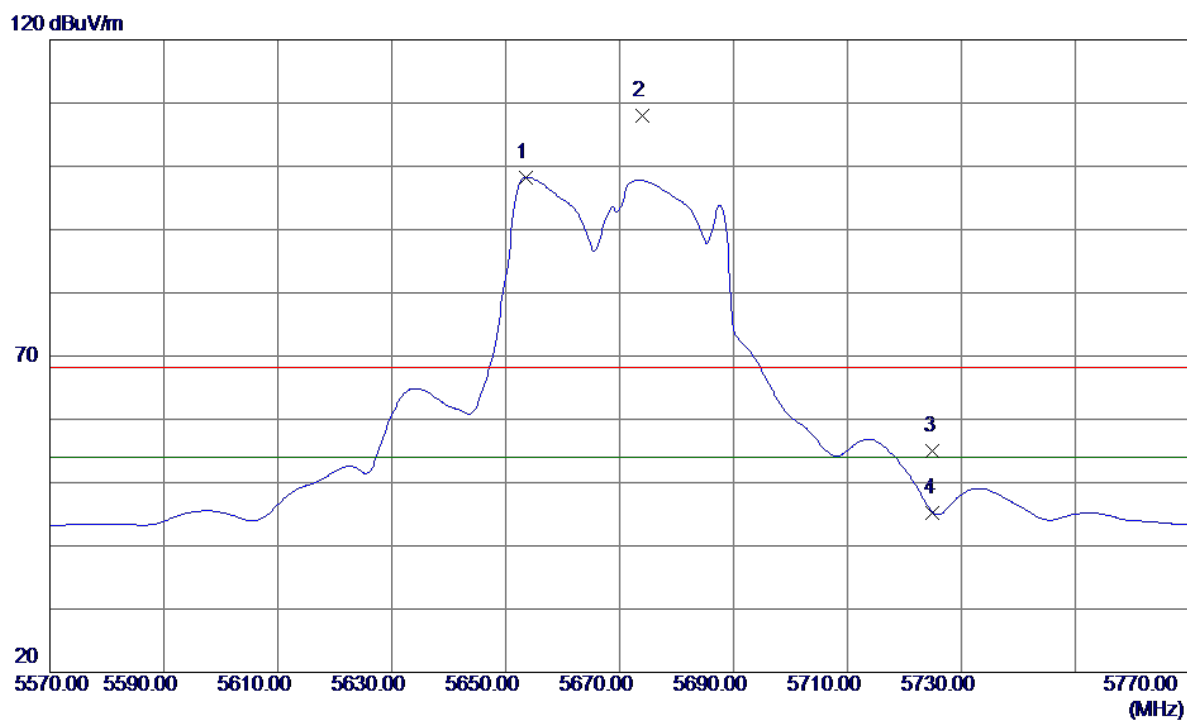


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5653.6000	57.07	41.17	98.24	54.00	44.24	AVG	No Limit
2	5674.0000	66.71	41.20	107.91	68.30	39.61	Peak	No Limit
3	5725.0000	13.82	41.27	55.09	68.30	-13.21	Peak	
4	5725.0000	4.01	41.27	45.28	54.00	-8.72	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Vertical


80 dBuV/m

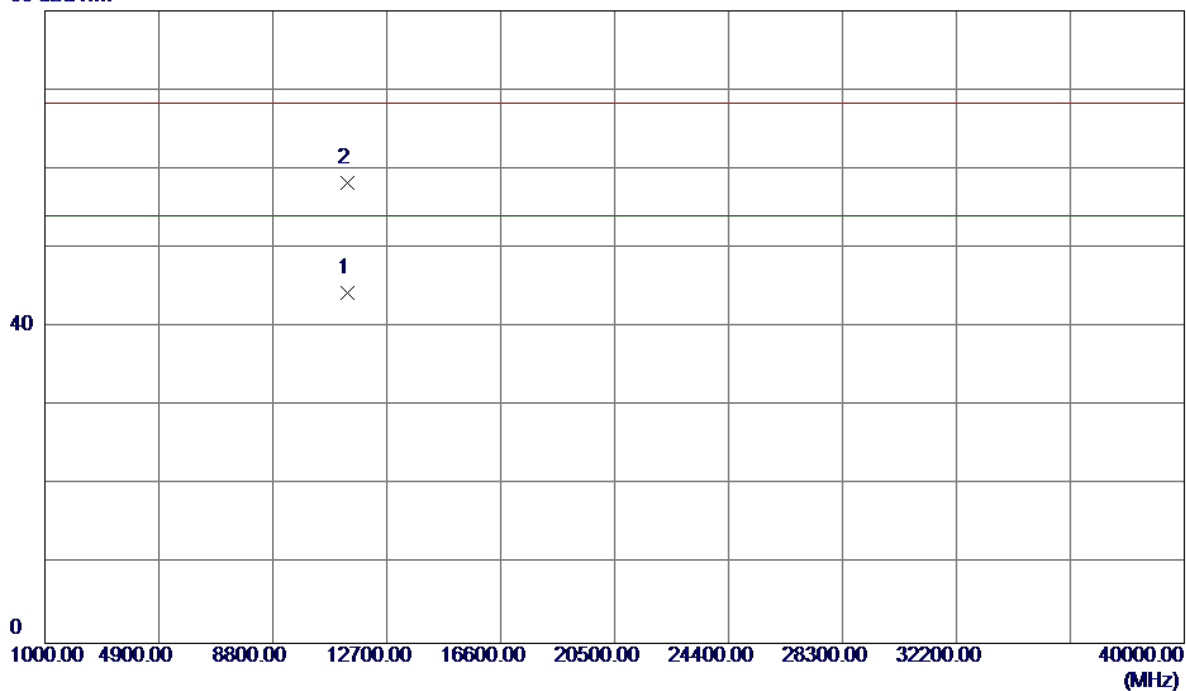

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.3000	27.83	16.56	44.39	54.00	-9.61	AVG	
2	11341.5599	41.67	16.56	58.23	68.30	-10.07	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Horizontal

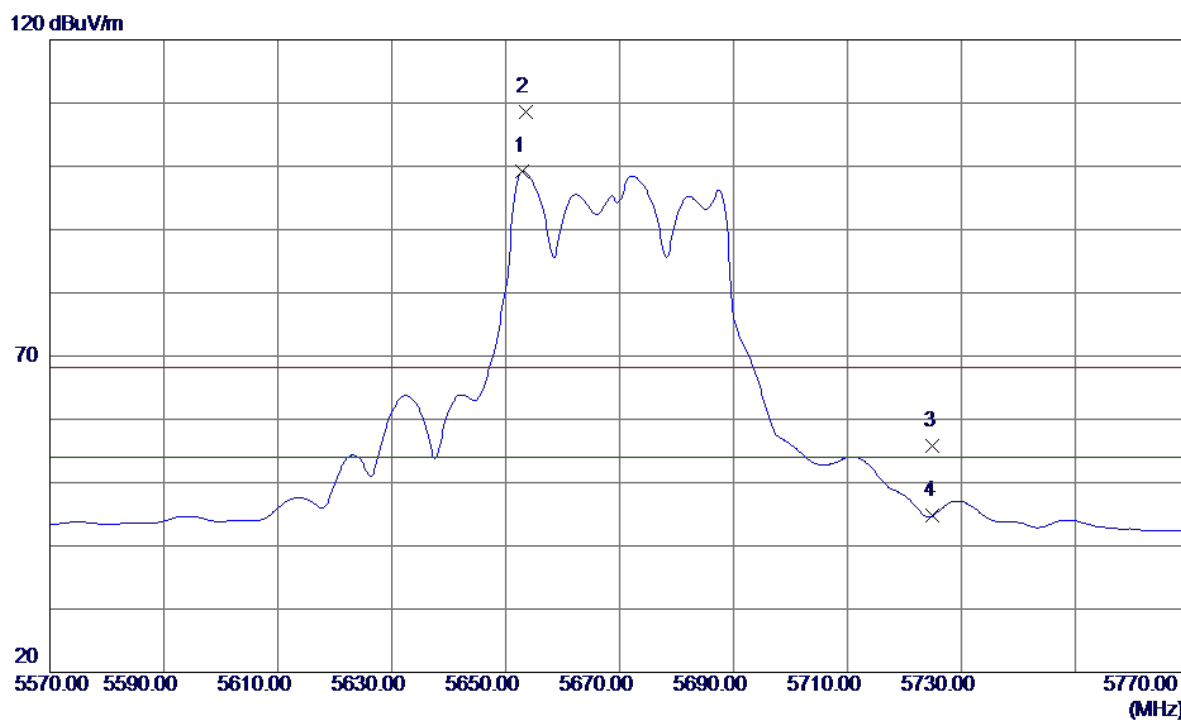

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5653.0000	58.09	41.17	99.26	54.00	45.26	AVG	No Limit
2	5653.6000	67.51	41.17	108.68	68.30	40.38	Peak	No Limit
3	5725.0000	14.54	41.27	55.81	68.30	-12.49	Peak	
4	5725.0000	3.51	41.27	44.78	54.00	-9.22	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Horizontal

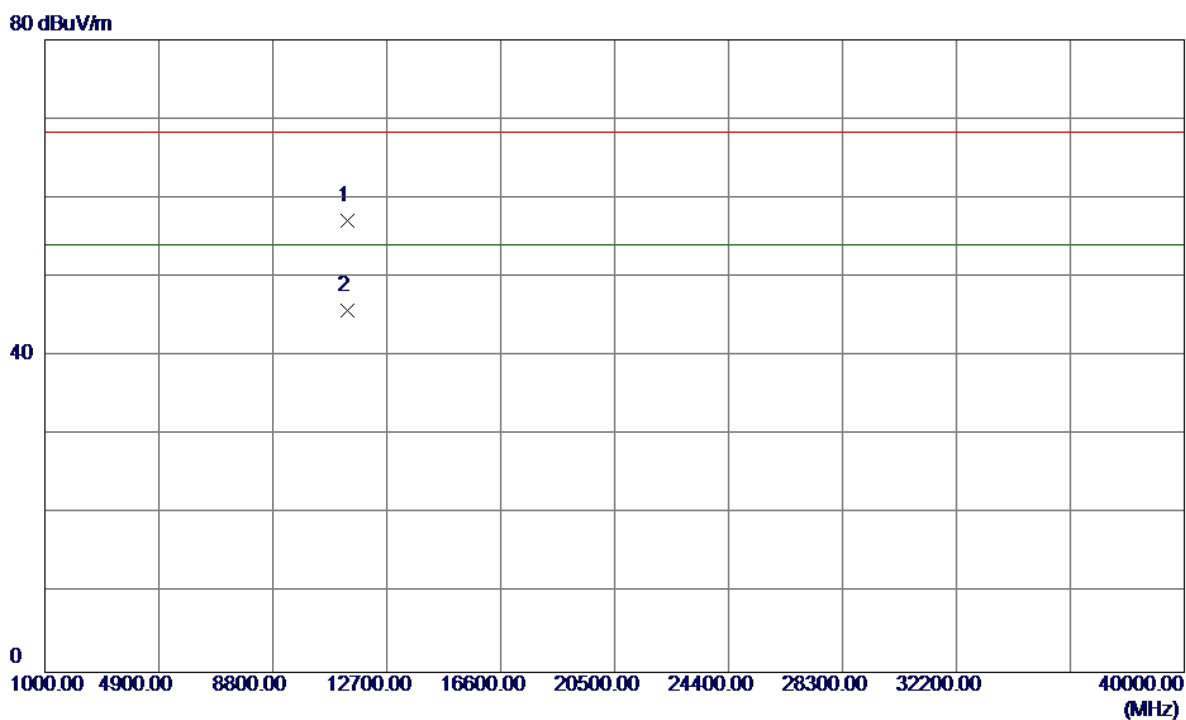


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.3900	40.63	16.56	57.19	68.30	-11.11	Peak	
2	11341.5800	29.24	16.56	45.80	54.00	-8.20	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical

120 dBuV/m

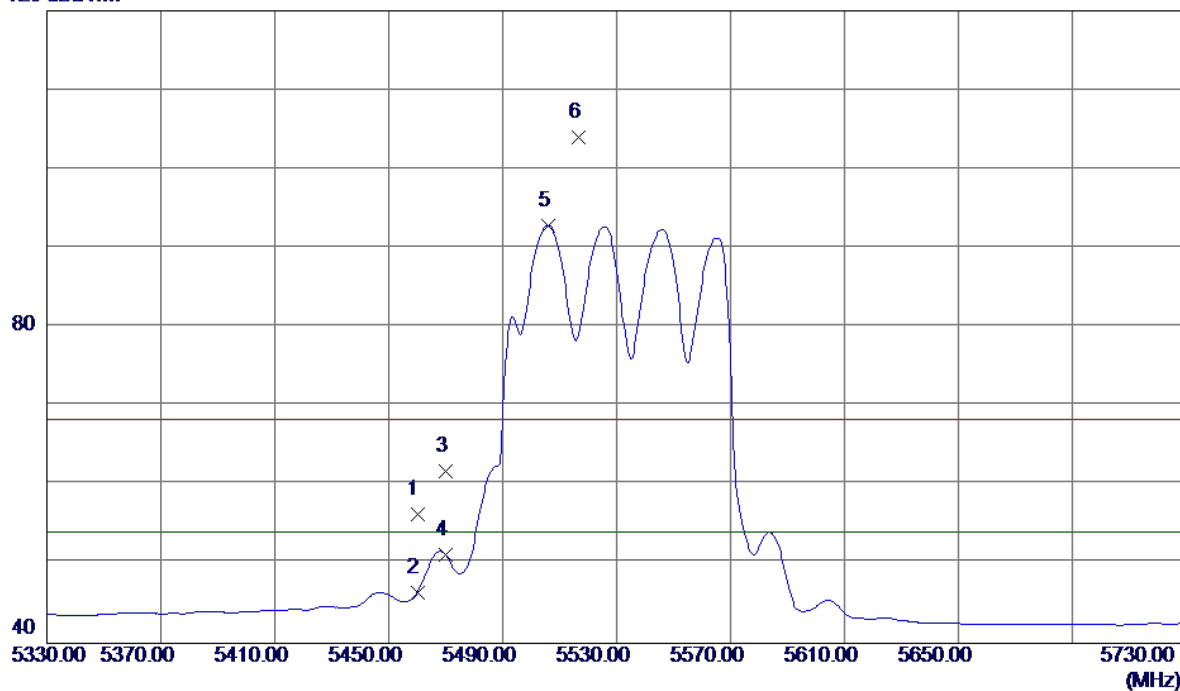


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	15.38	40.88	56.26	68.30	-12.04	Peak	
2	5460.0000	5.54	40.88	46.42	54.00	-7.58	AVG	
3	5470.0000	20.91	40.90	61.81	68.30	-6.49	Peak	
4	5470.0000	10.30	40.90	51.20	54.00	-2.80	AVG	
5	5506.0000	51.89	40.97	92.86	54.00	38.86	AVG	No Limit
6	5516.8000	63.03	40.98	104.01	68.30	35.71	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical

80 dBuV/m

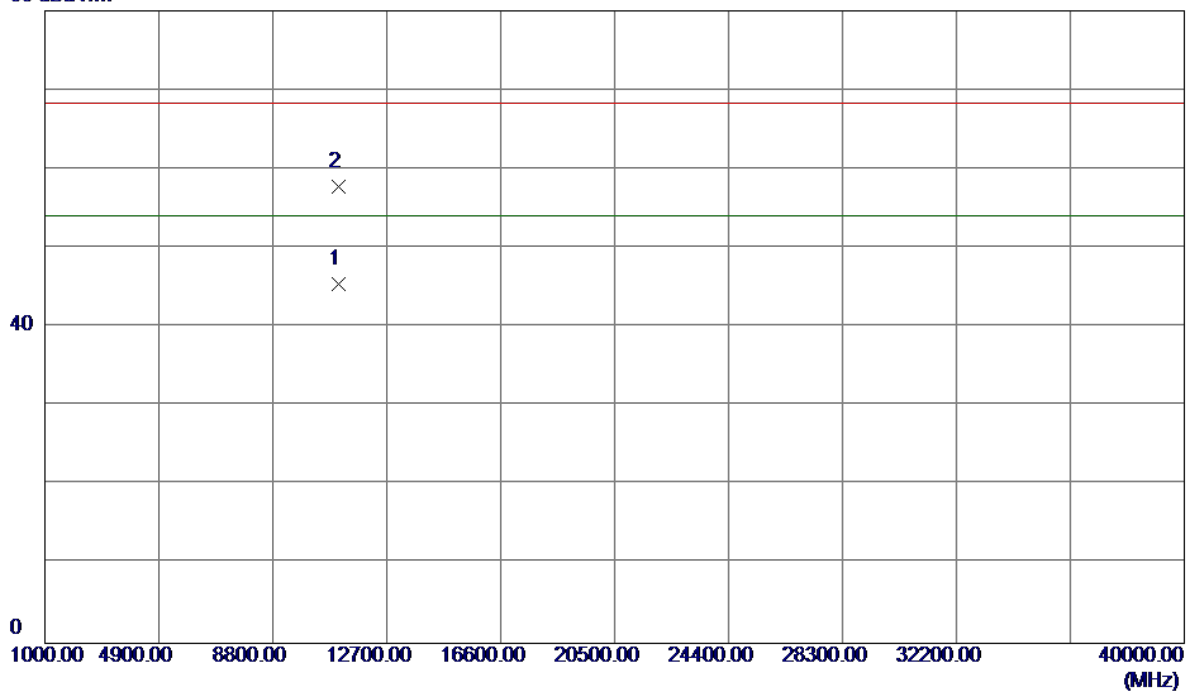


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.2300	29.60	15.89	45.49	54.00	-8.51	AVG	
2	11060.2800	41.80	15.89	57.69	68.30	-10.61	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal

120 dBuV/m

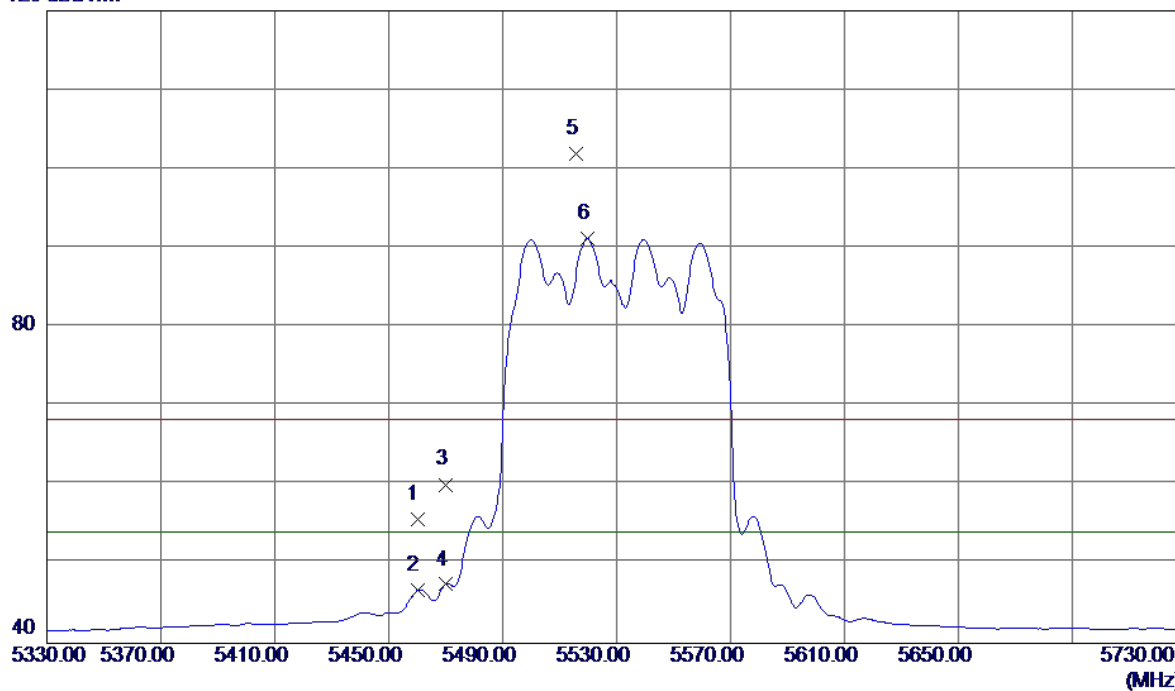


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	14.74	40.88	55.62	68.30	-12.68	Peak	
2	5460.0000	5.81	40.88	46.69	54.00	-7.31	AVG	
3	5470.0000	19.18	40.90	60.08	68.30	-8.22	Peak	
4	5470.0000	6.54	40.90	47.44	54.00	-6.56	AVG	
5	5515.6000	61.00	40.98	101.98	68.30	33.68	Peak	No Limit
6	5519.6000	50.18	40.99	91.17	54.00	37.17	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal


80 dBuV/m

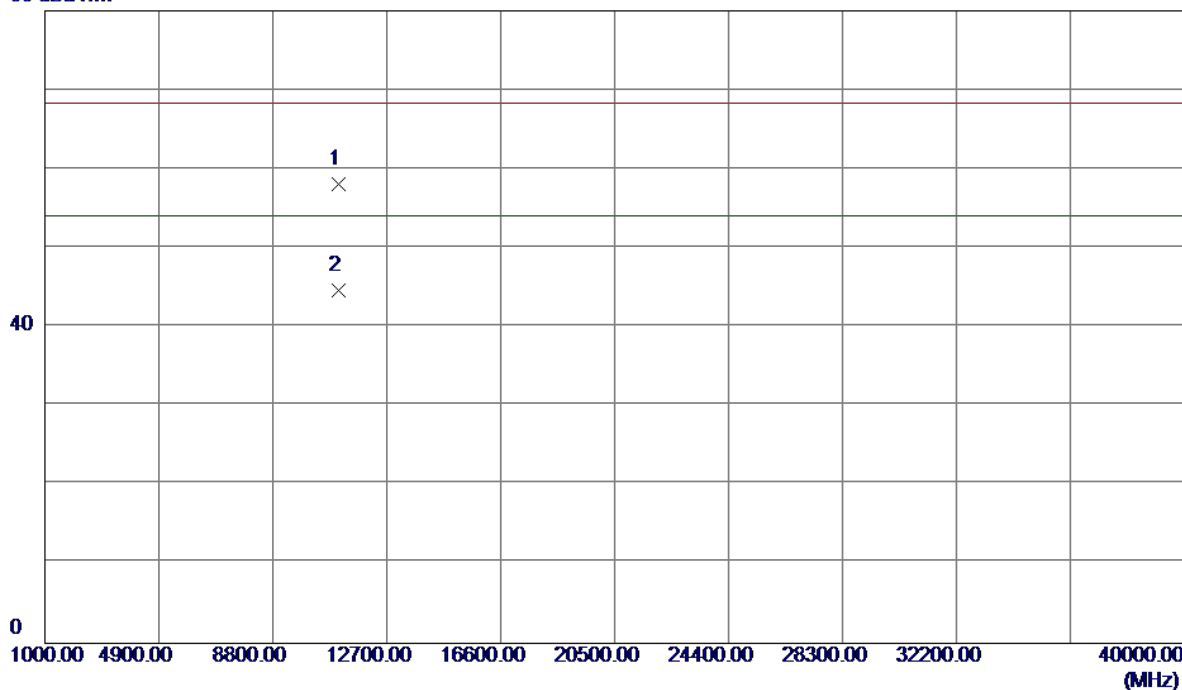

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.0800	42.13	15.89	58.02	68.30	-10.28	Peak	
2	11061.5900	28.71	15.90	44.61	54.00	-9.39	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical

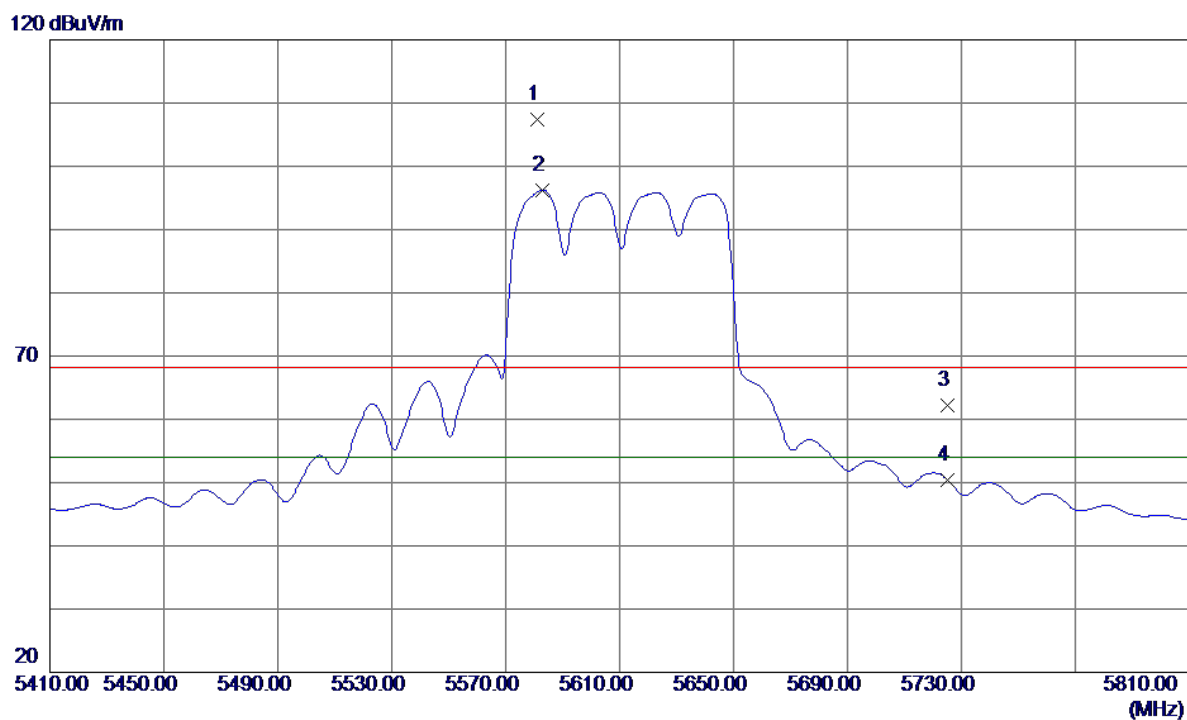


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5581.2000	66.40	41.07	107.47	68.30	39.17	Peak	No Limit
2	5582.8000	55.16	41.07	96.23	54.00	42.23	AVG	No Limit
3	5725.0000	21.01	41.27	62.28	68.30	-6.02	Peak	
4	5725.0000	9.13	41.27	50.40	54.00	-3.60	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical


80 dBuV/m

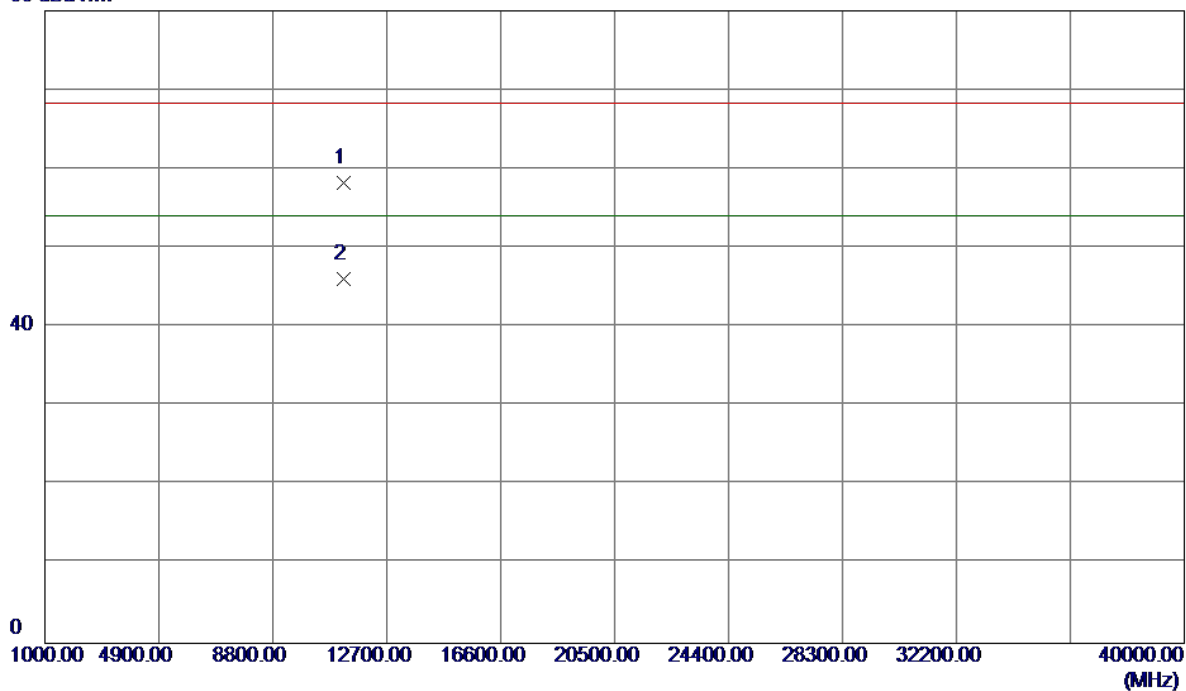

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.3400	41.94	16.27	58.21	68.30	-10.09	Peak	
2	11220.3900	29.84	16.27	46.11	54.00	-7.89	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Horizontal

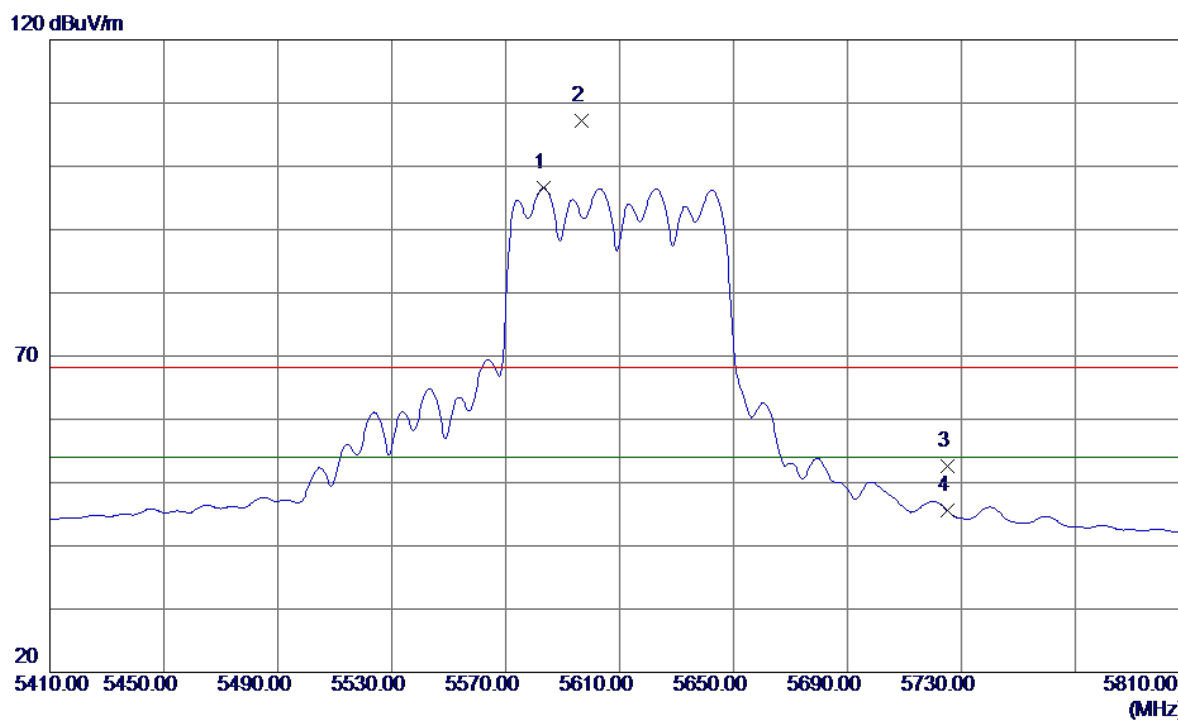


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5583.2000	55.48	41.07	96.55	54.00	42.55	AVG	No Limit
2	5596.8000	66.10	41.09	107.19	68.30	38.89	Peak	No Limit
3	5725.0000	11.36	41.27	52.63	68.30	-15.67	Peak	
4	5725.0000	4.25	41.27	45.52	54.00	-8.48	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Horizontal


80 dBuV/m

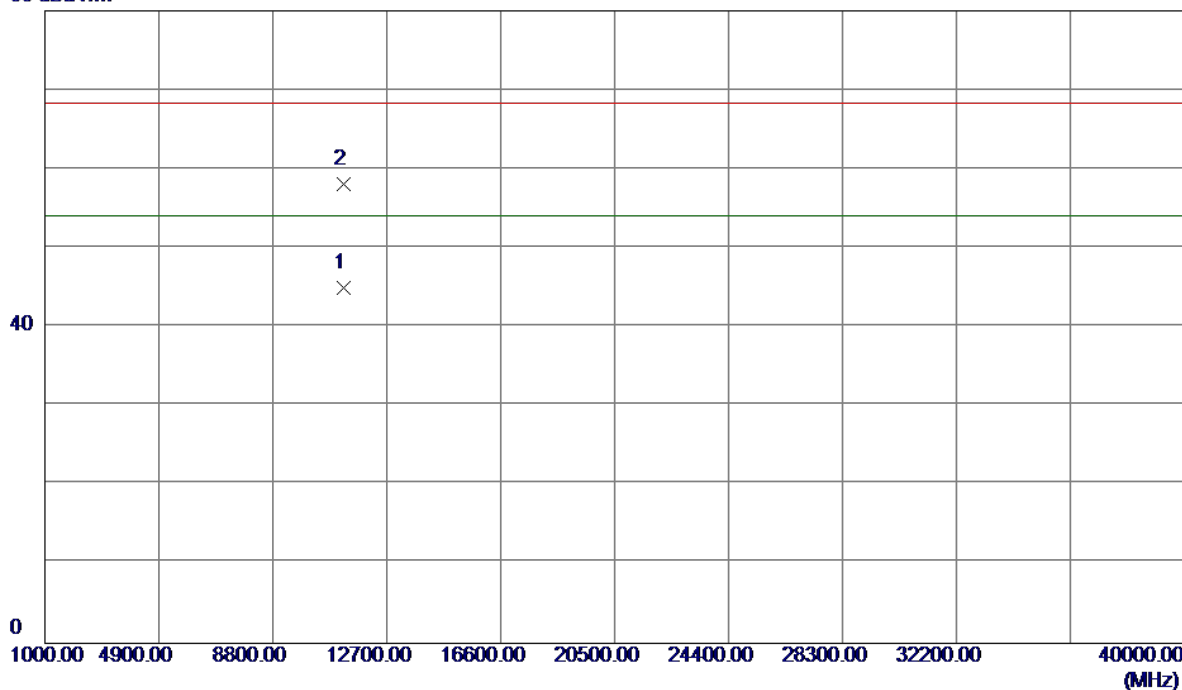

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.8700	28.69	16.27	44.96	54.00	-9.04	AVG	
2	11221.9500	41.74	16.28	58.02	68.30	-10.28	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Vertical

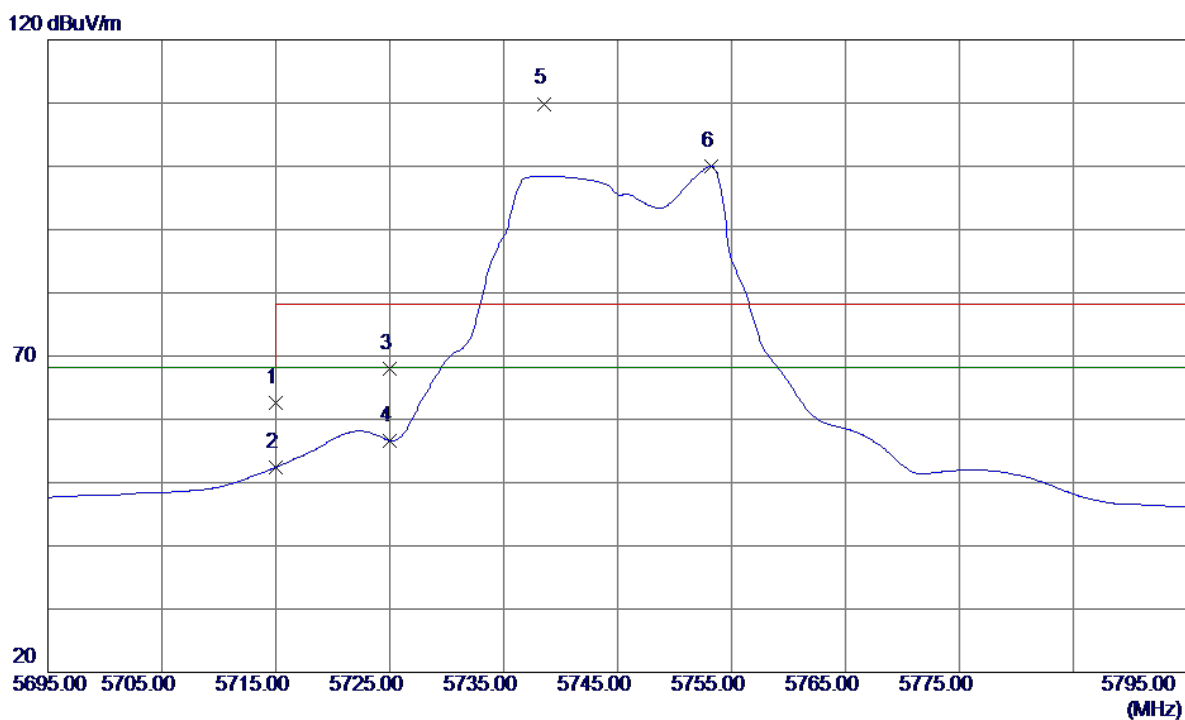


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	21.32	41.25	62.57	68.30	-5.73	Peak	
2	5715.0000	11.16	41.25	52.41	68.30	-15.89	AVG	
3	5725.0000	26.74	41.27	68.01	78.30	-10.29	Peak	
4	5725.0000	15.35	41.27	56.62	68.30	-11.68	AVG	
5	5738.6000	68.62	41.28	109.90	78.30	31.60	Peak	No Limit
6	5753.2000	58.73	41.30	100.03	68.30	31.73	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Vertical


80 dBuV/m

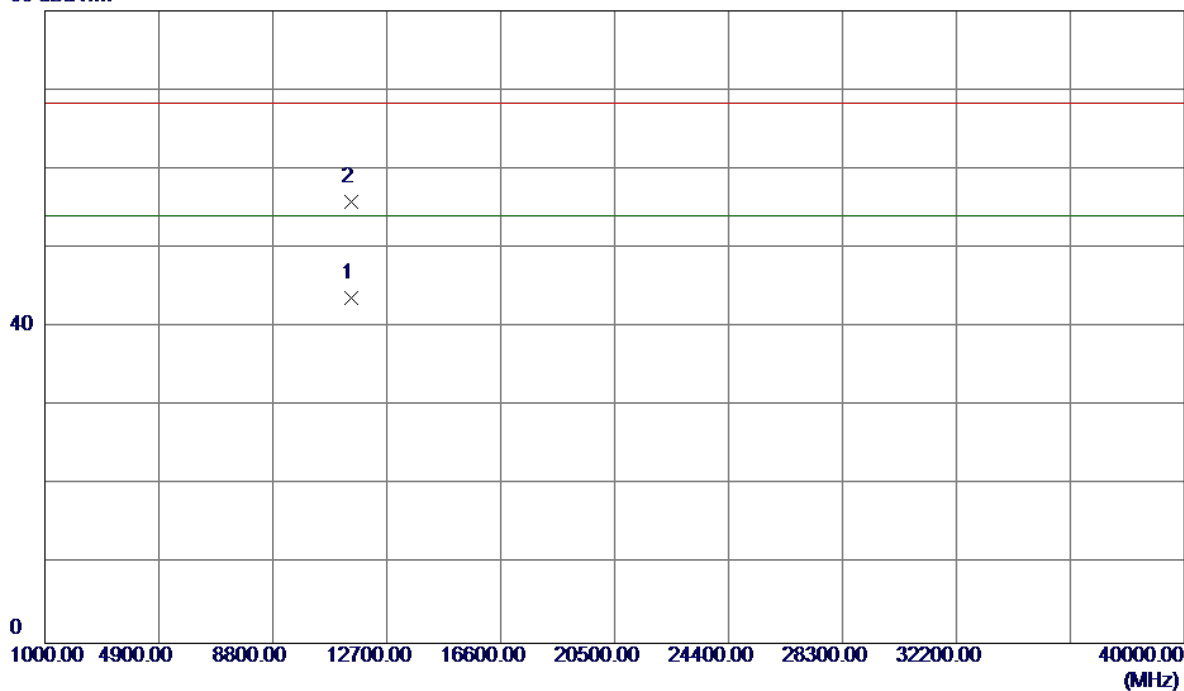

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11491.6300	26.69	16.92	43.61	54.00	-10.39	AVG	
2	11491.8000	38.88	16.92	55.80	68.30	-12.50	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Horizontal

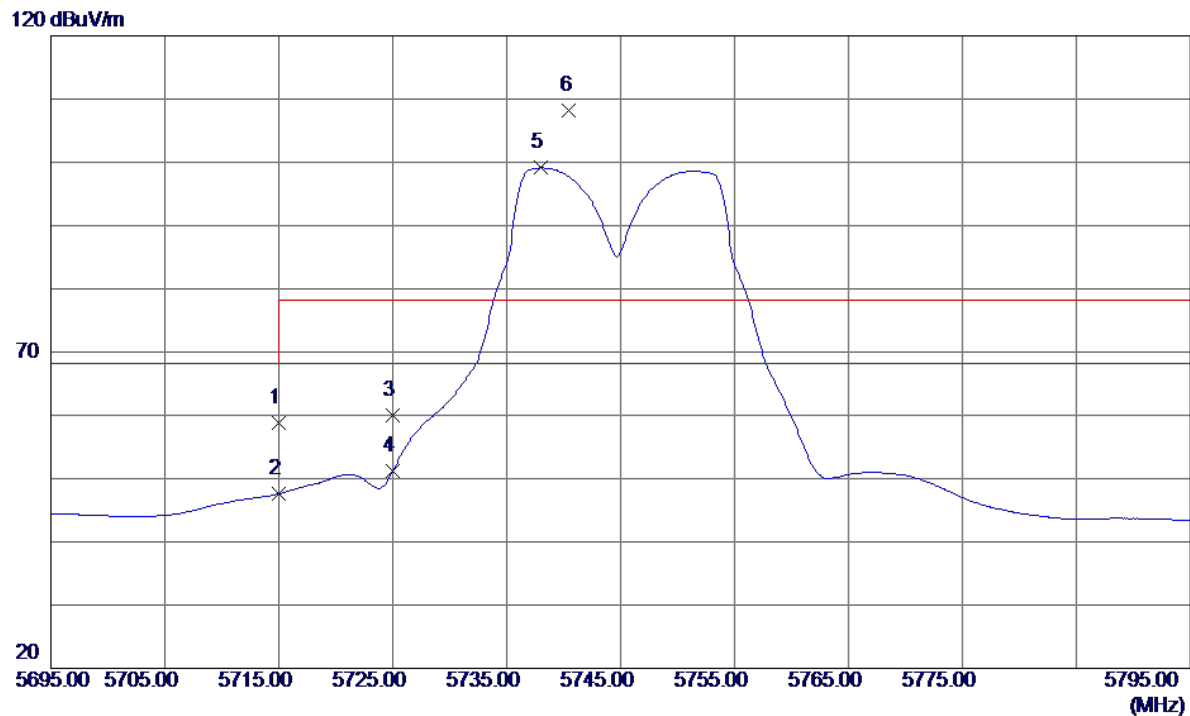


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	17.47	41.25	58.72	68.30	-9.58	Peak	
2	5715.0000	6.37	41.25	47.62	68.30	-20.68	AVG	
3	5725.0000	18.72	41.27	59.99	78.30	-18.31	Peak	
4	5725.0000	9.95	41.27	51.22	68.30	-17.08	AVG	
5	5738.0000	57.83	41.28	99.11	68.30	30.81	AVG	No Limit
6	5740.5000	66.85	41.29	108.14	78.30	29.84	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Horizontal


80 dBuV/m

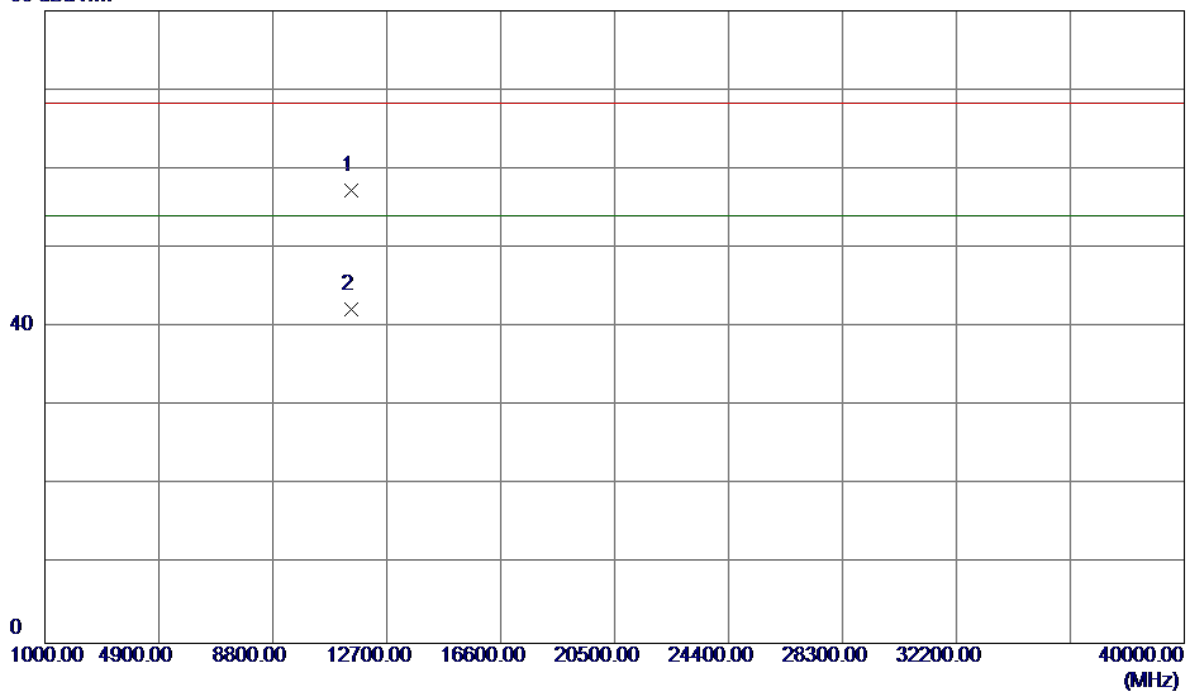

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.6000	40.39	16.91	57.30	68.30	-11.00	Peak	
2	11491.1510	25.29	16.91	42.20	54.00	-11.80	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Vertical

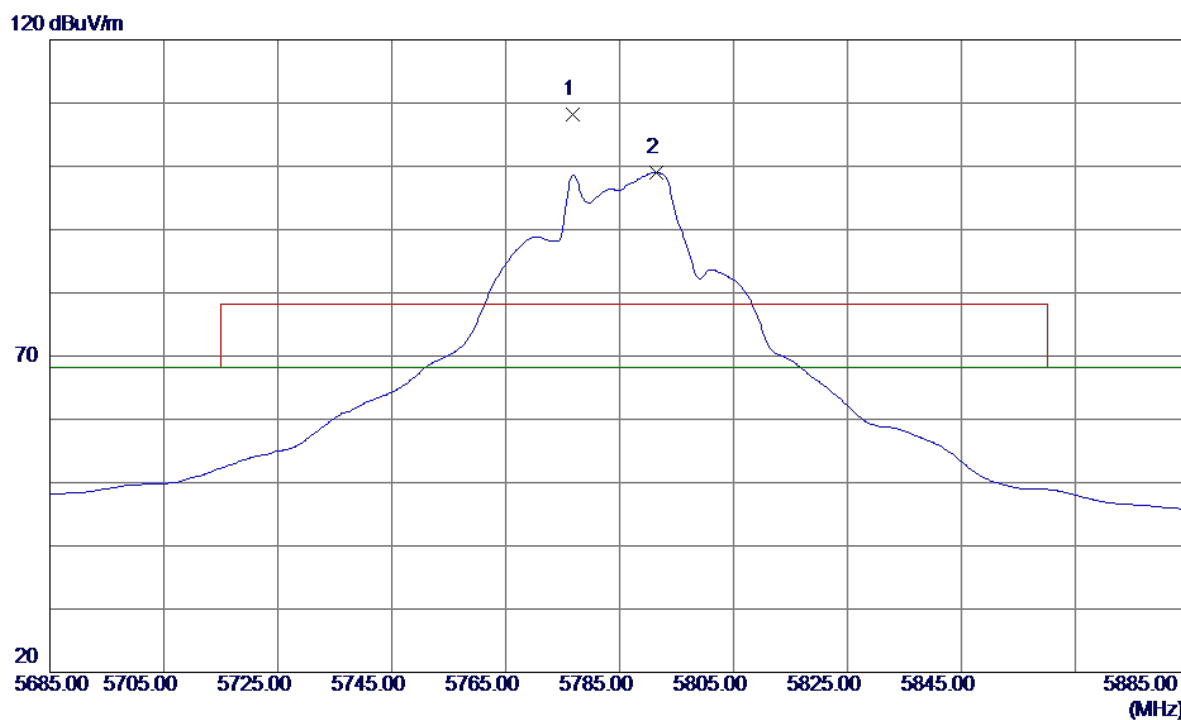


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5776.8000	66.80	41.34	108.14	78.30	29.84	Peak	No Limit
2	5791.4000	57.61	41.36	98.97	68.30	30.67	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Vertical


80 dBuV/m

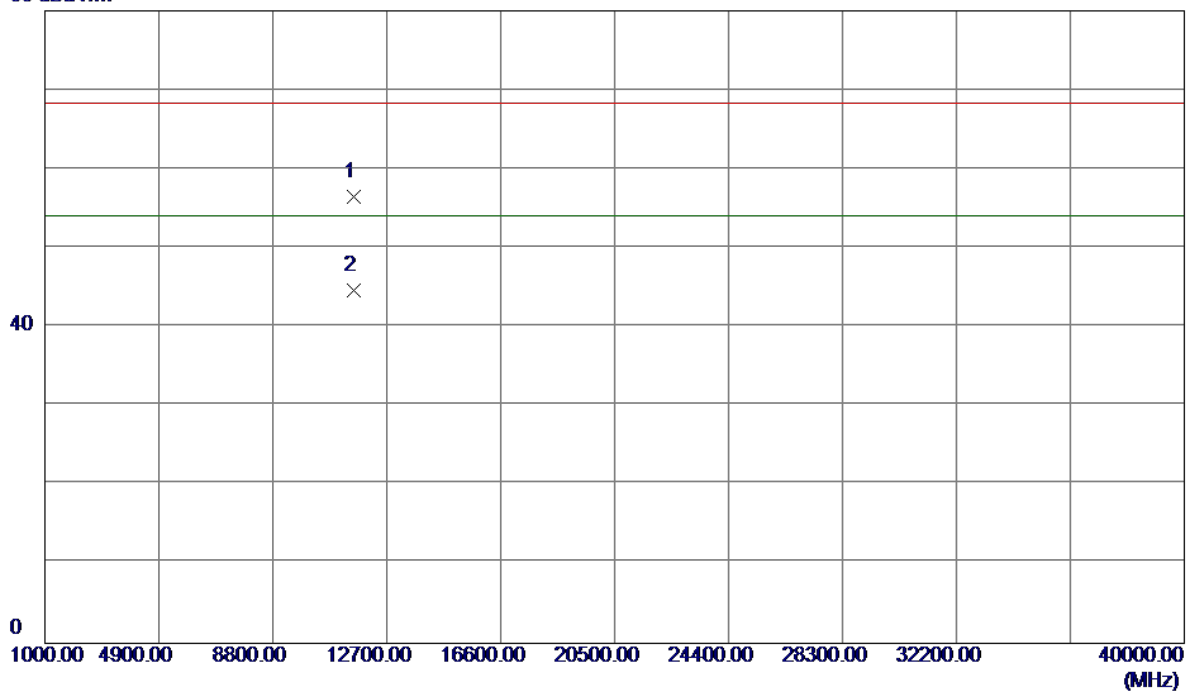

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.8500	39.41	17.05	56.46	68.30	-11.84	Peak	
2	11571.0199	27.56	17.05	44.61	54.00	-9.39	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Horizontal

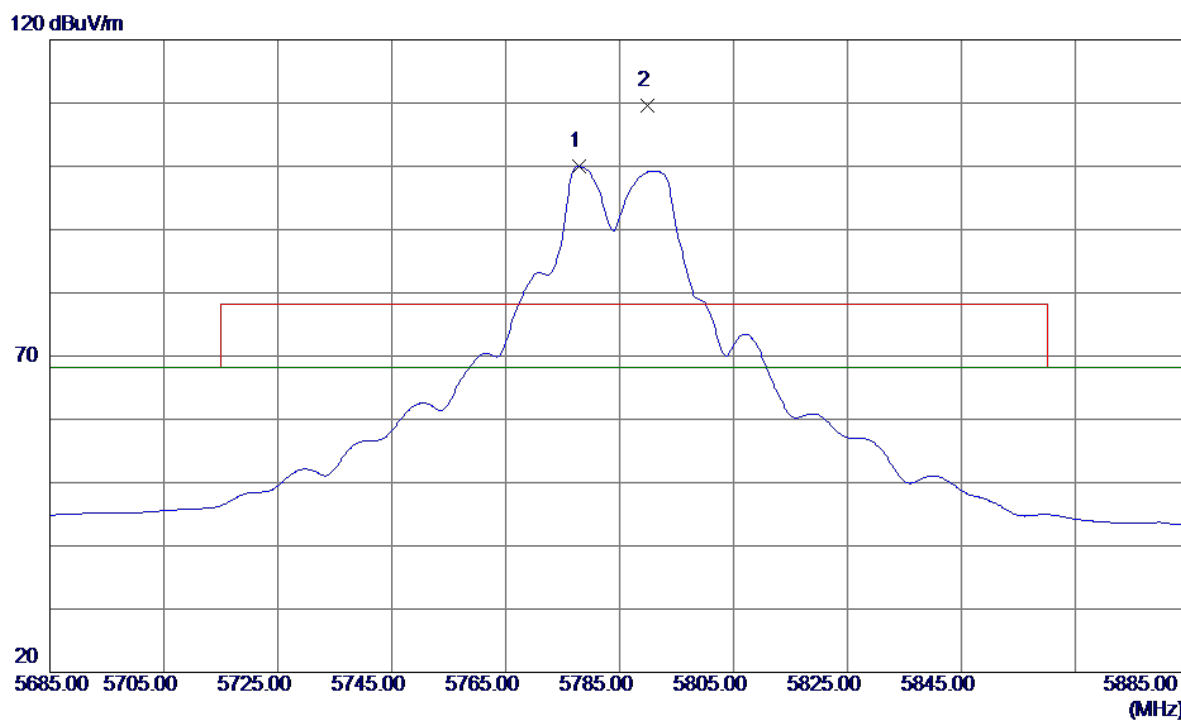


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5777.8000	58.61	41.34	99.95	68.30	31.65	AVG	No Limit
2	5789.8000	68.21	41.35	109.56	78.30	31.26	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Horizontal


80 dBuV/m

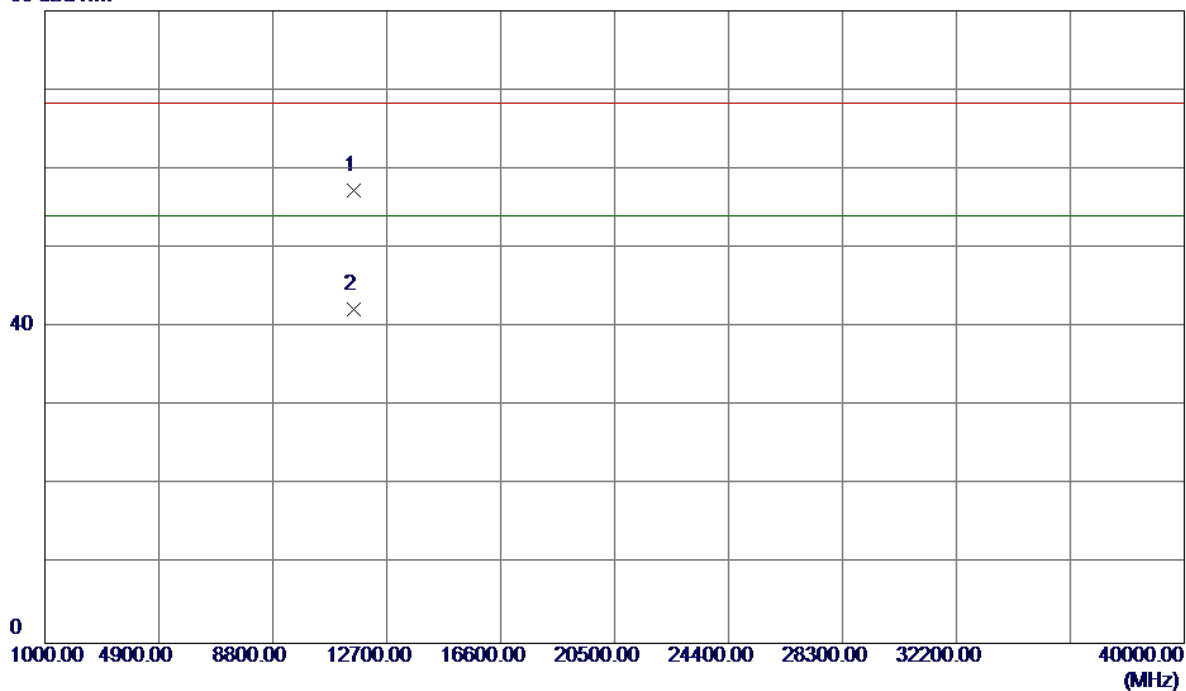

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.8400	40.25	17.05	57.30	68.30	-11.00	Peak	
2	11571.2500	25.15	17.05	42.20	54.00	-11.80	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Vertical

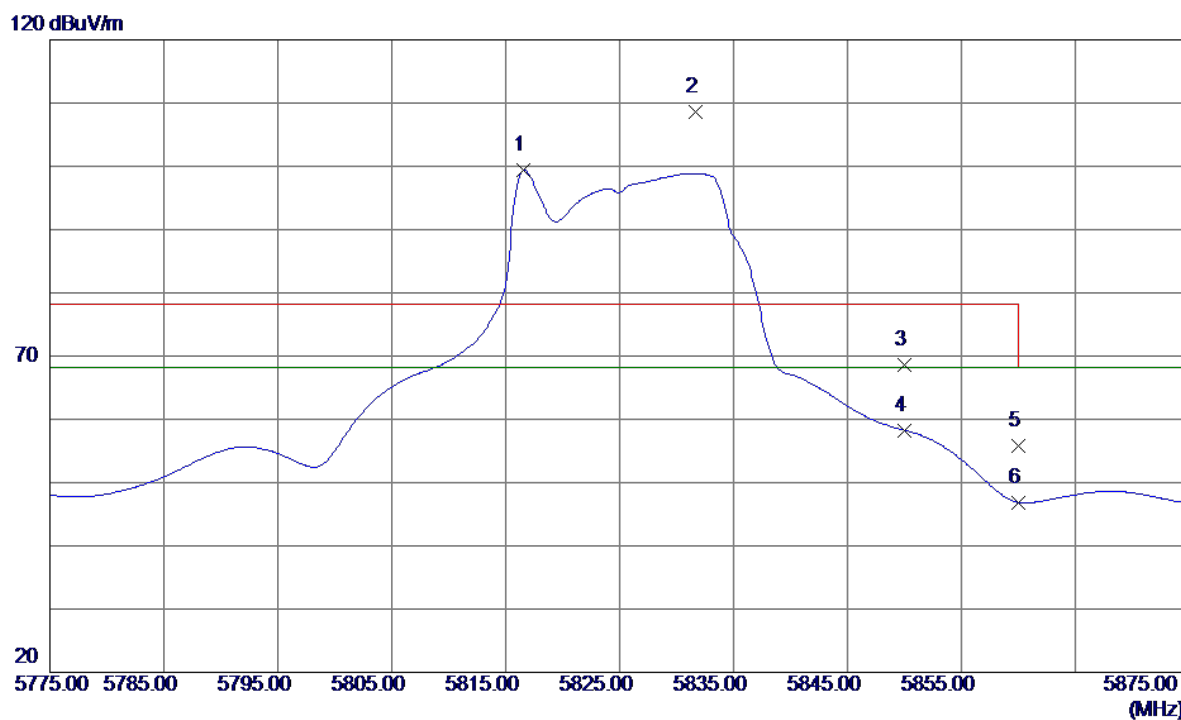


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5816.6000	58.05	41.39	99.44	68.30	31.14	AVG	No Limit
2	5831.7000	67.13	41.41	108.54	78.30	30.24	Peak	No Limit
3	5850.0000	27.13	41.44	68.57	78.30	-9.73	Peak	
4	5850.0000	16.84	41.44	58.28	68.30	-10.02	AVG	
5	5860.0000	14.33	41.45	55.78	78.30	-22.52	Peak	
6	5860.0000	5.41	41.45	46.86	68.30	-21.44	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Vertical


80 dBuV/m

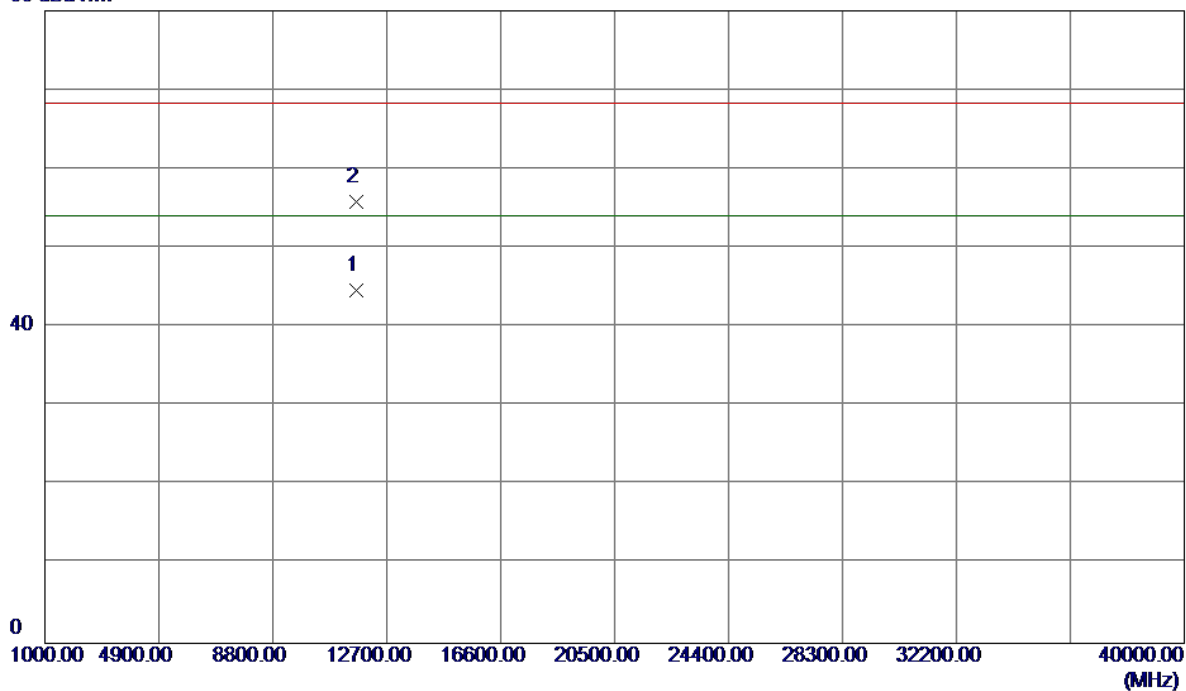

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.2400	27.44	17.17	44.61	54.00	-9.39	AVG	
2	11651.6300	38.68	17.18	55.86	68.30	-12.44	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Horizontal

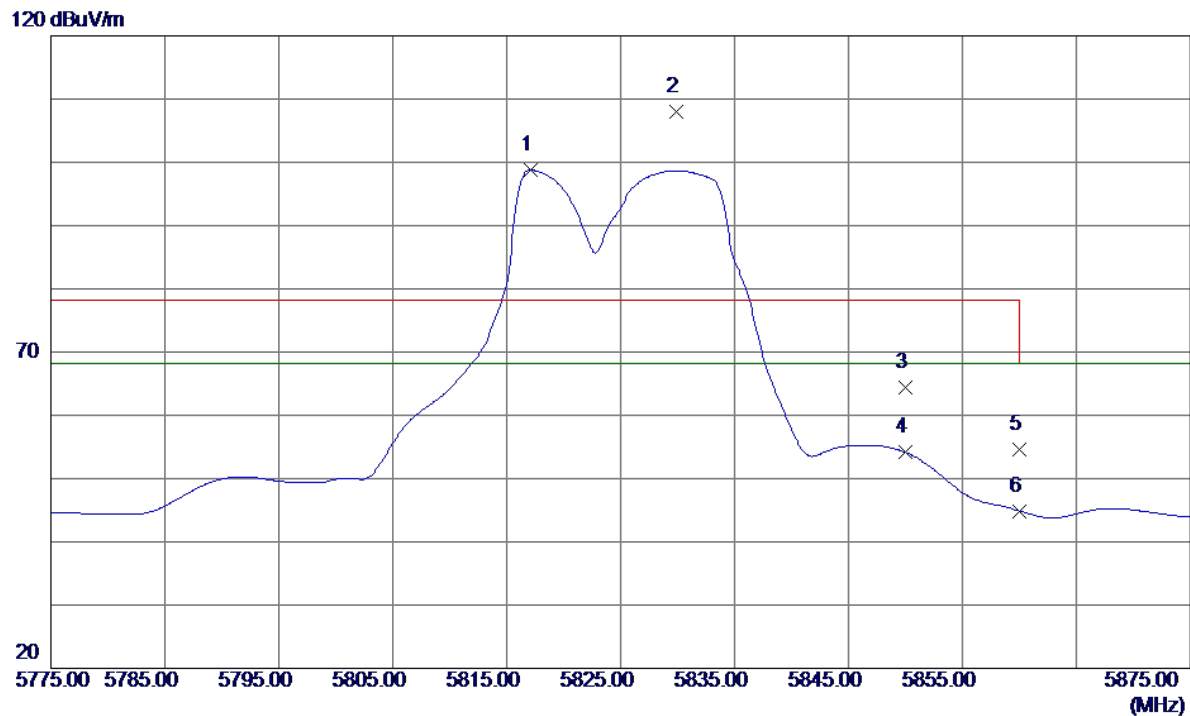


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5817.1000	57.38	41.39	98.77	68.30	30.47	AVG	No Limit
2	5829.9000	66.65	41.41	108.06	78.30	29.76	Peak	No Limit
3	5850.0000	22.88	41.44	64.32	78.30	-13.98	Peak	
4	5850.0000	12.71	41.44	54.15	68.30	-14.15	AVG	
5	5860.0000	13.13	41.45	54.58	78.30	-23.72	Peak	
6	5860.0000	3.43	41.45	44.88	68.30	-23.42	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Horizontal

80 dBuV/m

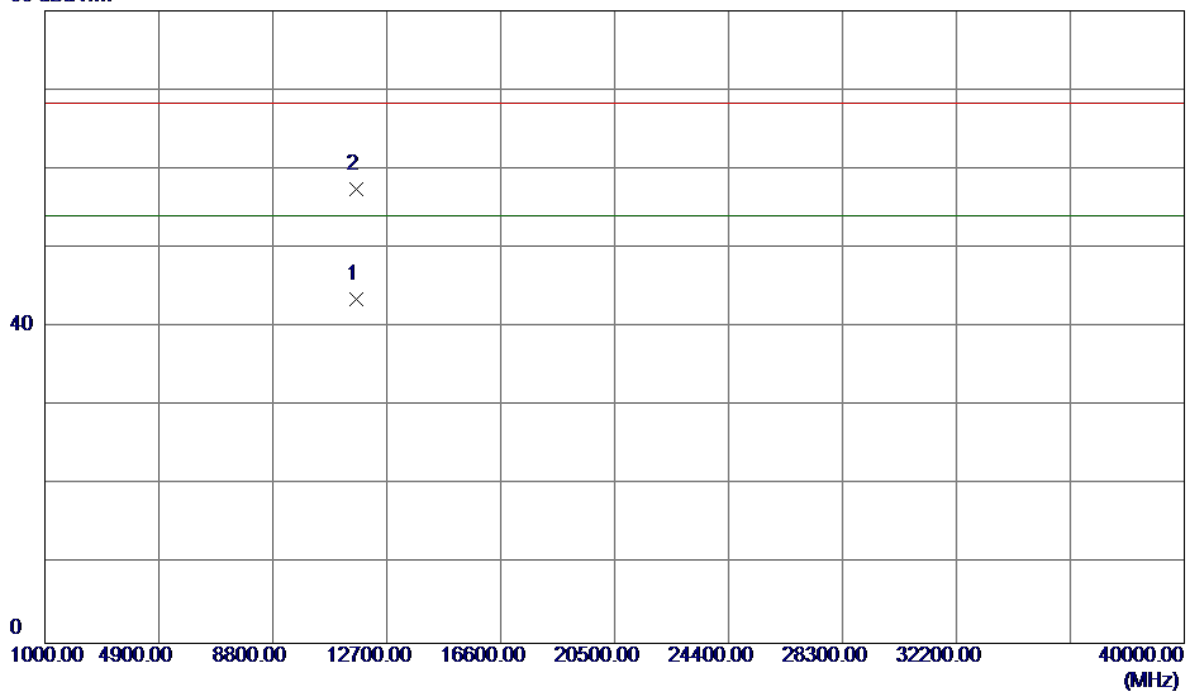


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.2400	26.34	17.17	43.51	54.00	-10.49	AVG	
2	11650.3000	40.20	17.17	57.37	68.30	-10.93	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Vertical

120 dBuV/m

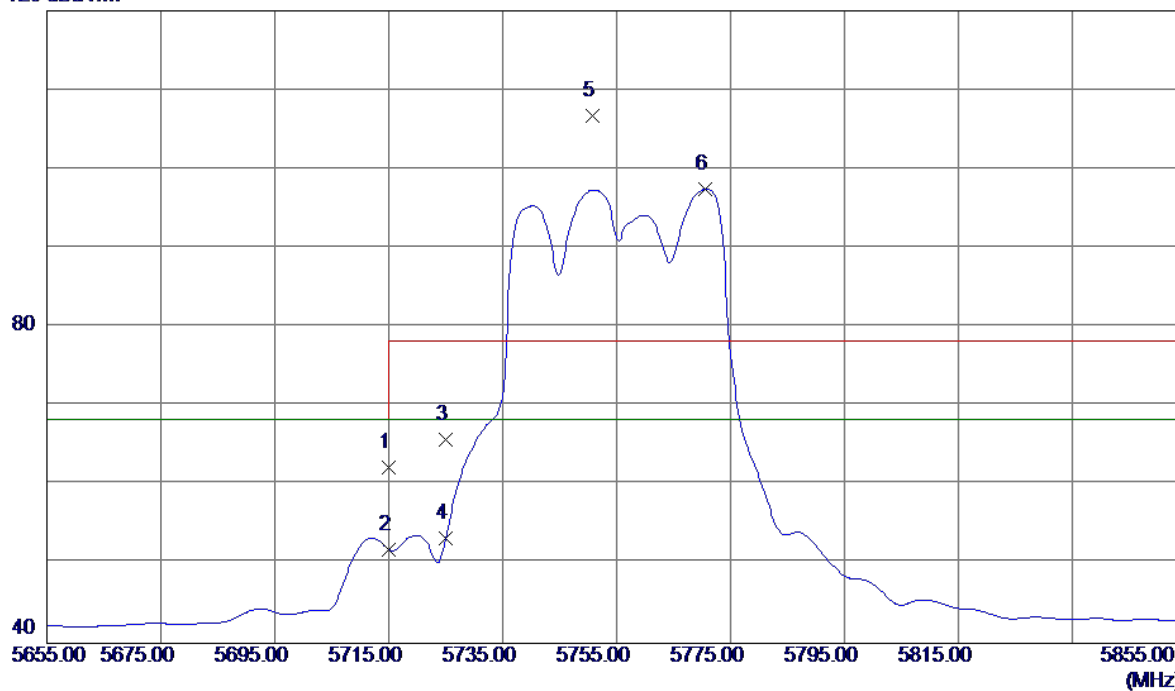


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	20.95	41.25	62.20	68.30	-6.10	Peak	
2	5715.0000	10.61	41.25	51.86	68.30	-16.44	AVG	
3	5725.0000	24.52	41.27	65.79	78.30	-12.51	Peak	
4	5725.0000	11.97	41.27	53.24	68.30	-15.06	AVG	
5	5750.8000	65.42	41.30	106.72	78.30	28.42	Peak	No Limit
6	5770.6000	56.11	41.33	97.44	68.30	29.14	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Vertical


80 dBuV/m

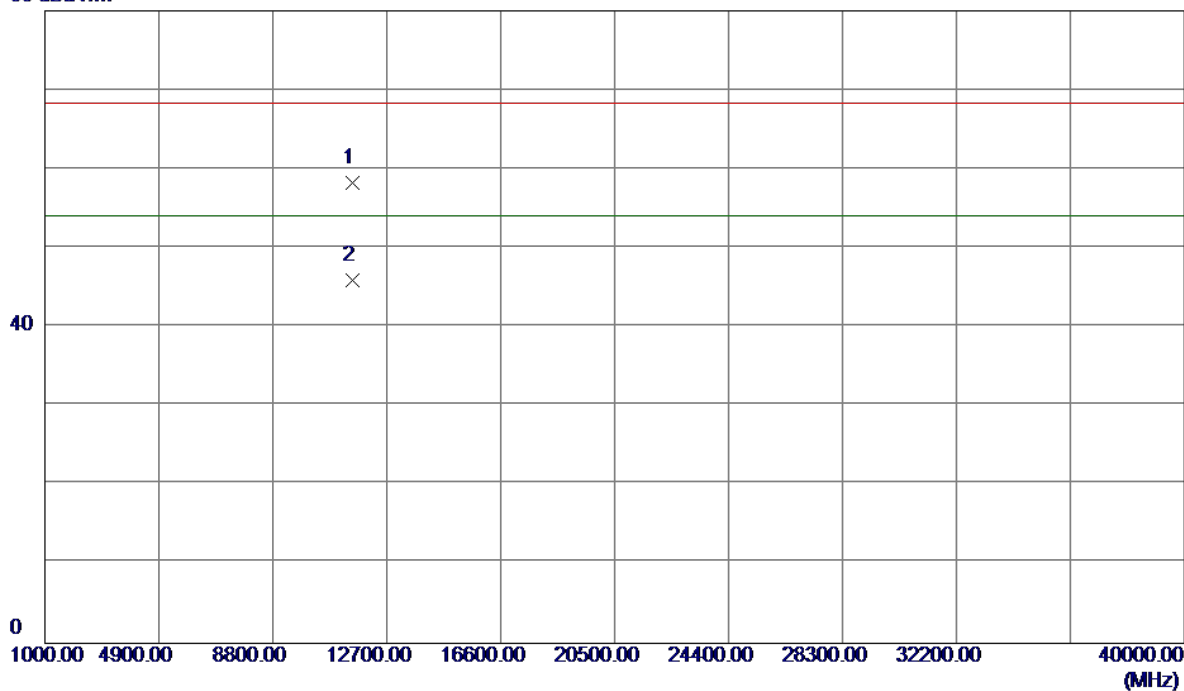

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.5000	41.28	16.95	58.23	68.30	-10.07	Peak	
2	11511.3400	28.92	16.95	45.87	54.00	-8.13	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Horizontal

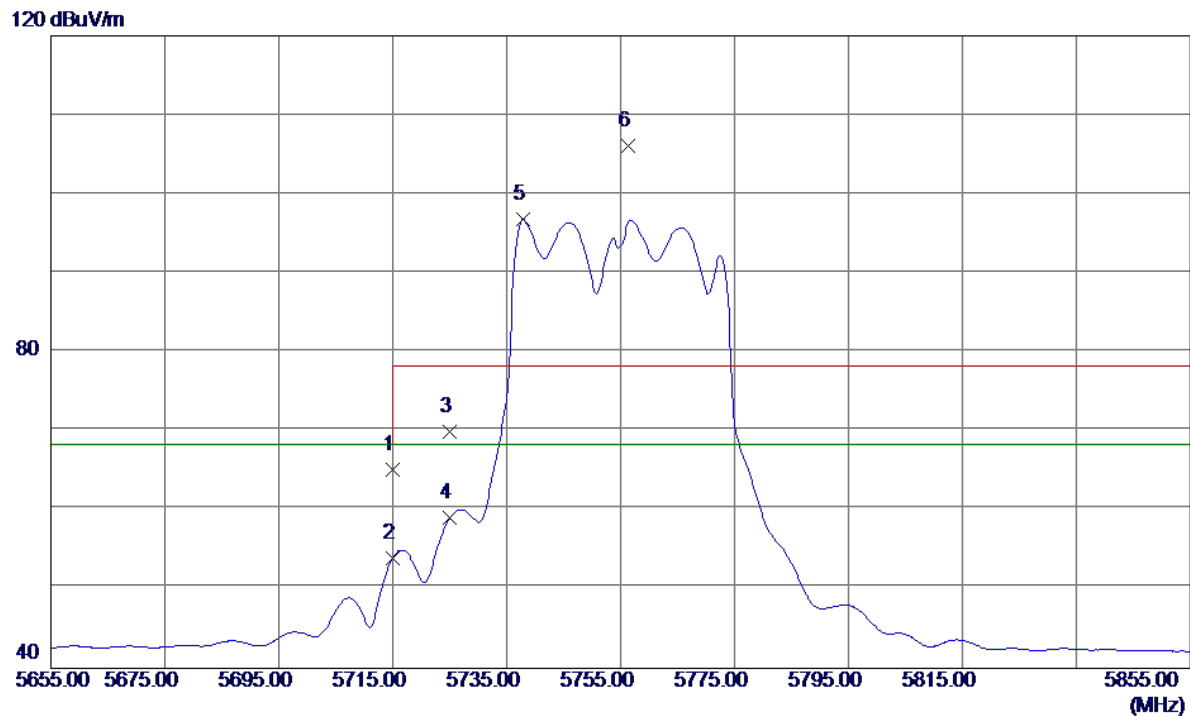


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	23.83	41.25	65.08	68.30	-3.22	Peak	
2	5715.0000	12.74	41.25	53.99	68.30	-14.31	AVG	
3	5725.0000	28.64	41.27	69.91	78.30	-8.39	Peak	
4	5725.0000	17.71	41.27	58.98	68.30	-9.32	AVG	
5	5737.8000	55.50	41.28	96.78	68.30	28.48	AVG	No Limit
6	5756.4000	64.80	41.31	106.11	78.30	27.81	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Horizontal

80 dBuV/m

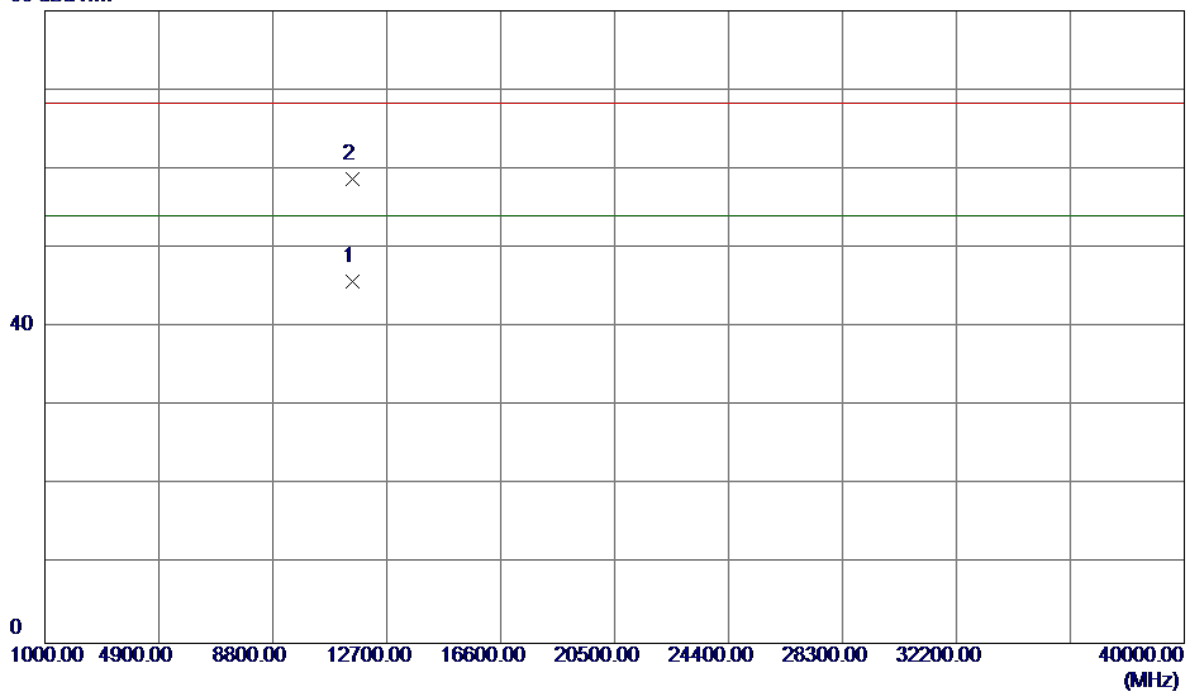


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	11510.9000	28.85	16.95	45.80	54.00	-8.20	AVG	
2	11511.8900	41.71	16.95	58.66	68.30	-9.64	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Vertical

120 dBuV/m

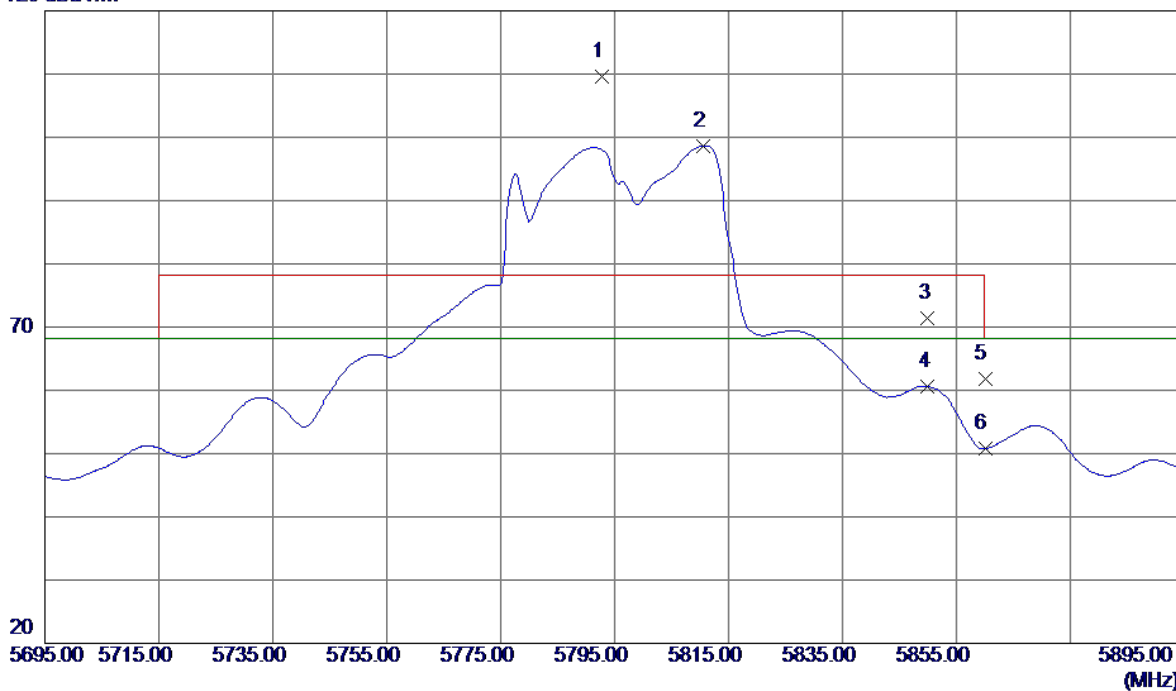


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5792.8000	68.33	41.36	109.69	78.30	31.39	Peak	No Limit
2	5810.6000	57.28	41.38	98.66	68.30	30.36	AVG	No Limit
3	5850.0000	29.94	41.44	71.38	78.30	-6.92	Peak	
4	5850.0000	19.12	41.44	60.56	68.30	-7.74	AVG	
5	5860.0000	20.30	41.45	61.75	78.30	-16.55	Peak	
6	5860.0000	9.28	41.45	50.73	68.30	-17.57	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Vertical


80 dBuV/m

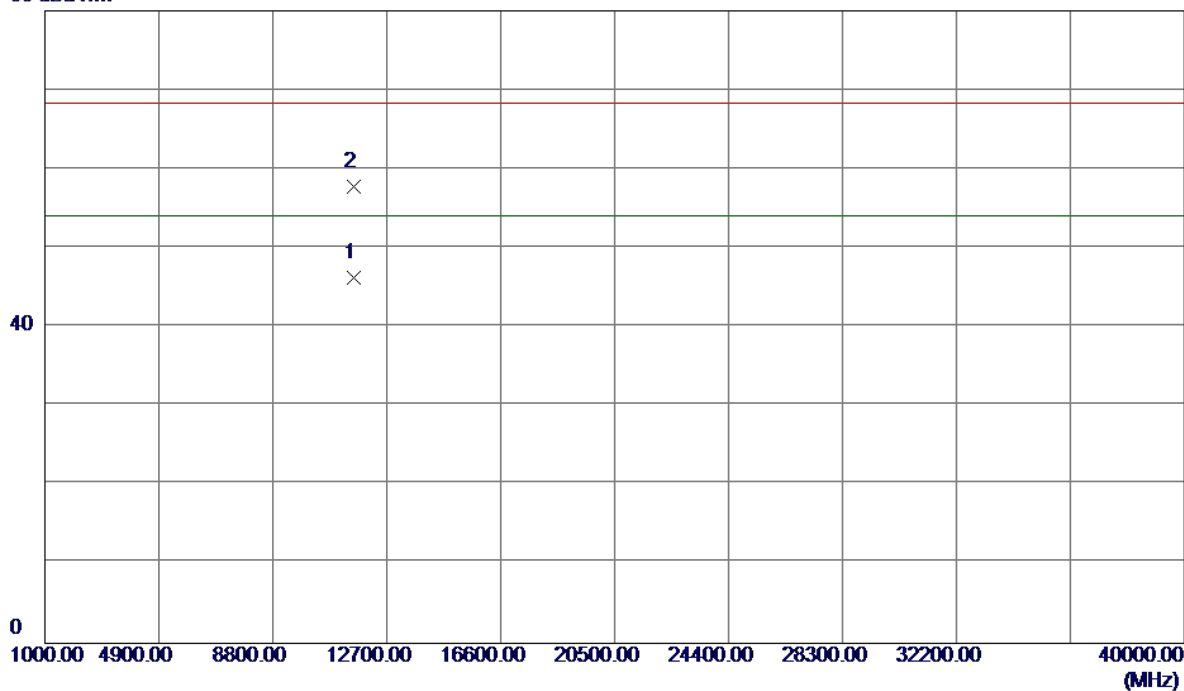

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	11590.7400	29.15	17.08	46.23	54.00	-7.77	AVG	
2	11591.8500	40.67	17.08	57.75	68.30	-10.55	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal

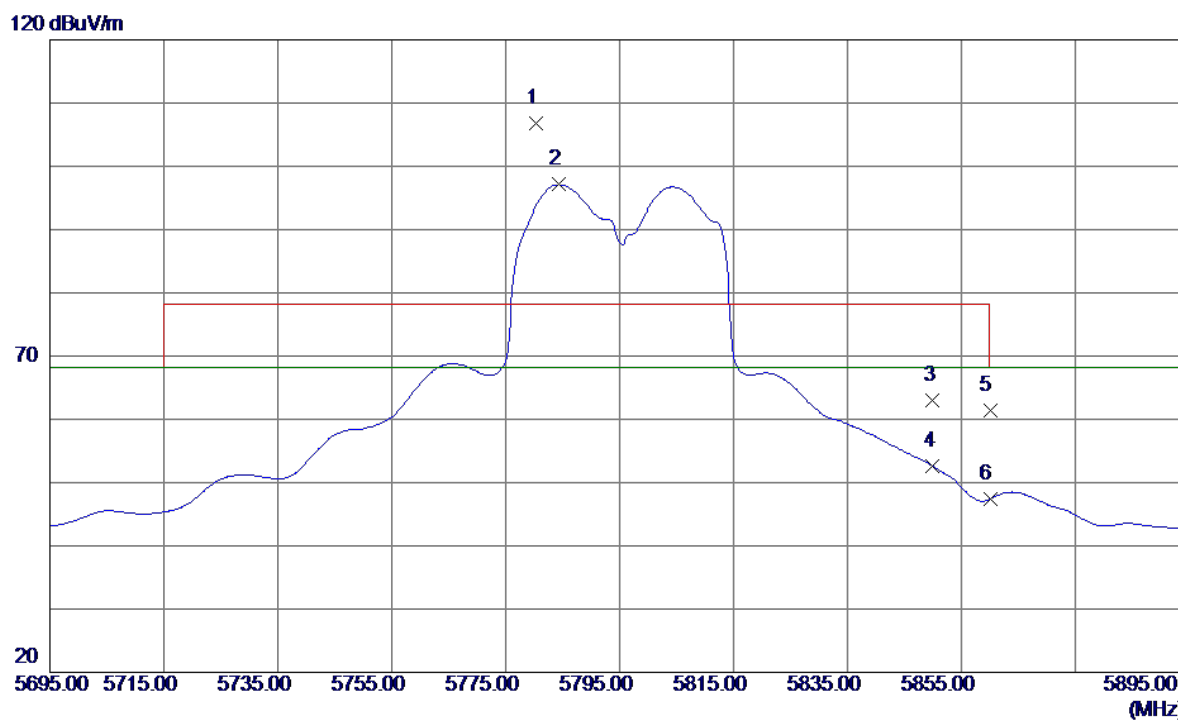


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5780.4000	65.51	41.34	106.85	78.30	28.55	Peak	No Limit
2	5784.4000	55.76	41.35	97.11	68.30	28.81	AVG	No Limit
3	5850.0000	21.51	41.44	62.95	78.30	-15.35	Peak	
4	5850.0000	11.08	41.44	52.52	68.30	-15.78	AVG	
5	5860.0000	20.04	41.45	61.49	78.30	-16.81	Peak	
6	5860.0000	5.95	41.45	47.40	68.30	-20.90	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal

80 dBuV/m

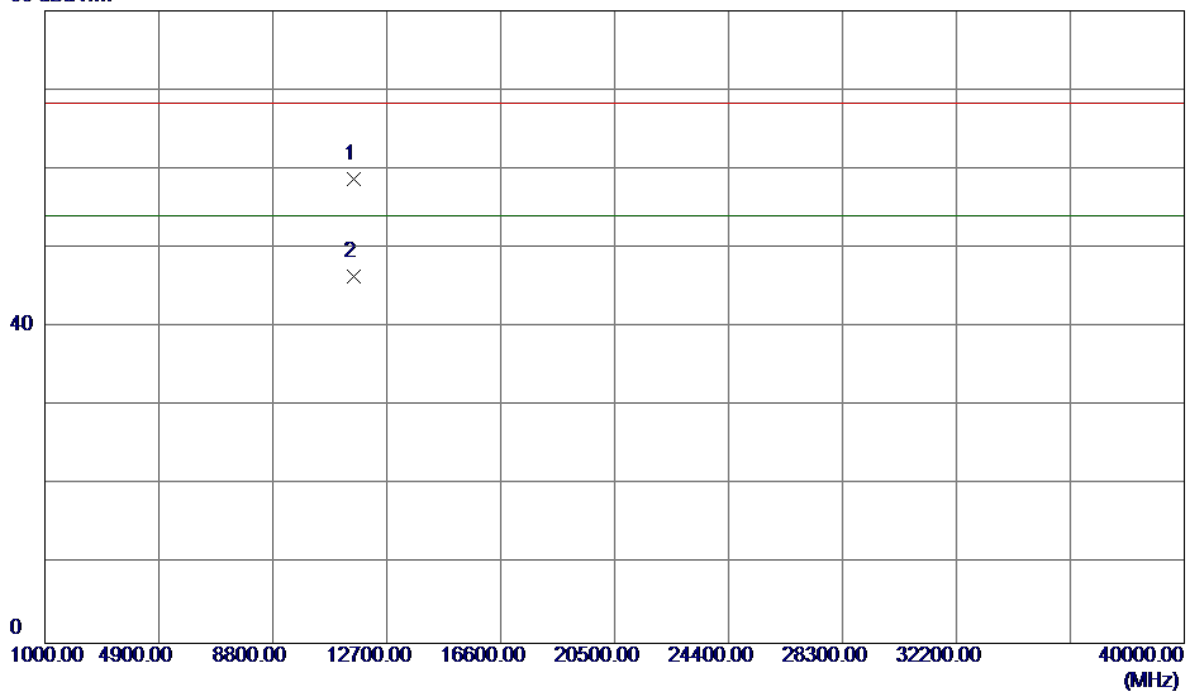


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.5000	41.58	17.08	58.66	68.30	-9.64	Peak	
2	11591.9000	29.35	17.08	46.43	54.00	-7.57	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical

120 dBuV/m

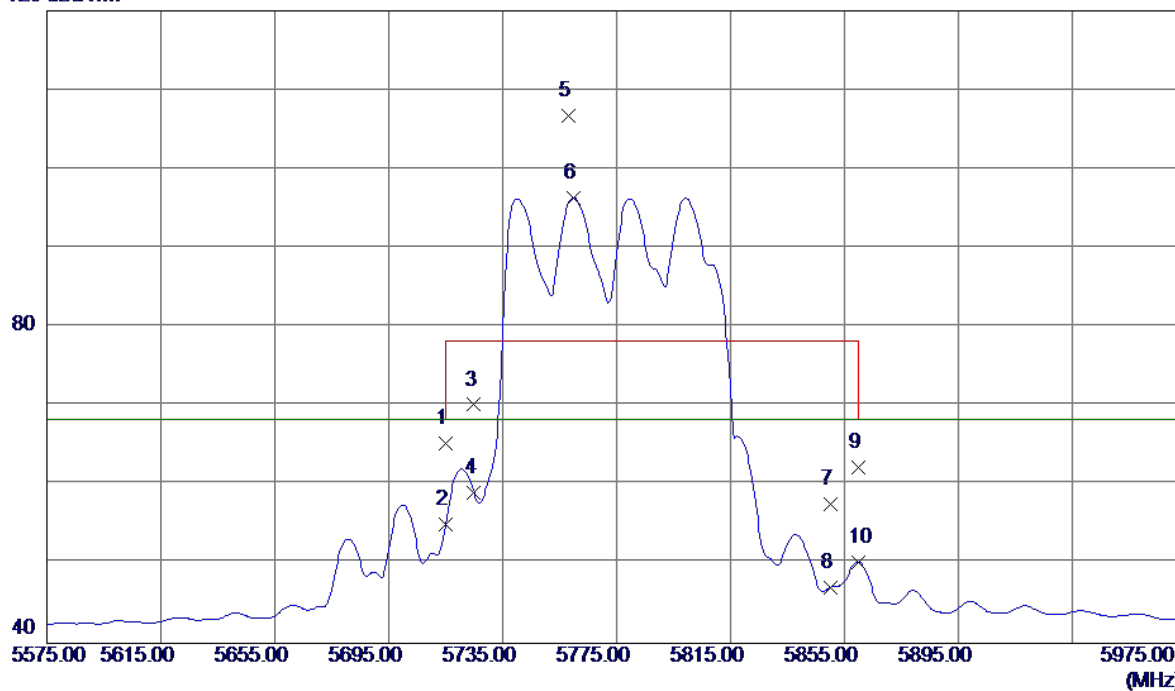


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	23.96	41.25	65.21	68.30	-3.09	Peak	
2	5715.0000	13.79	41.25	55.04	68.30	-13.26	AVG	
3	5725.0000	28.89	41.27	70.16	78.30	-8.14	Peak	
4	5725.0000	17.75	41.27	59.02	68.30	-9.28	AVG	
5	5758.2000	65.45	41.31	106.76	78.30	28.46	Peak	No Limit
6	5759.8000	55.00	41.31	96.31	68.30	28.01	AVG	No Limit
7	5850.0000	16.10	41.44	57.54	78.30	-20.76	Peak	
8	5850.0000	5.66	41.44	47.10	68.30	-21.20	AVG	
9	5860.0000	20.72	41.45	62.17	78.30	-16.13	Peak	
10	5860.0000	8.78	41.45	50.23	68.30	-18.07	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical

80 dBuV/m

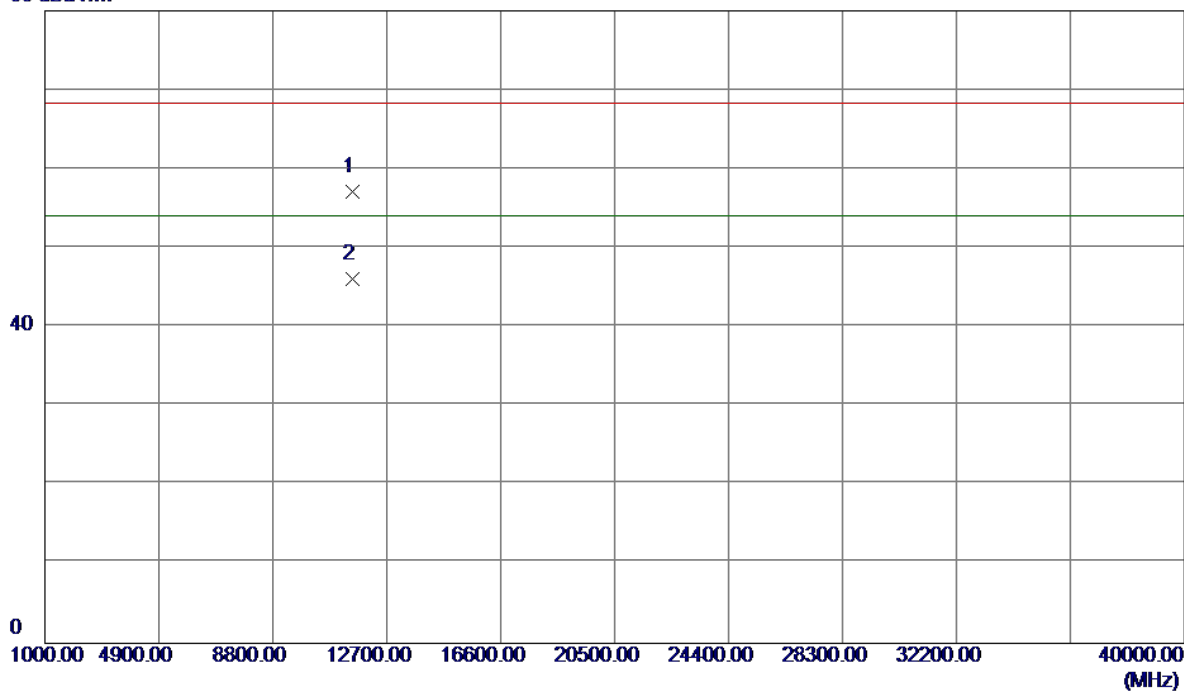


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.5000	40.16	17.02	57.18	68.30	-11.12	Peak	
2	11551.5000	29.11	17.02	46.13	54.00	-7.87	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

120 dBuV/m

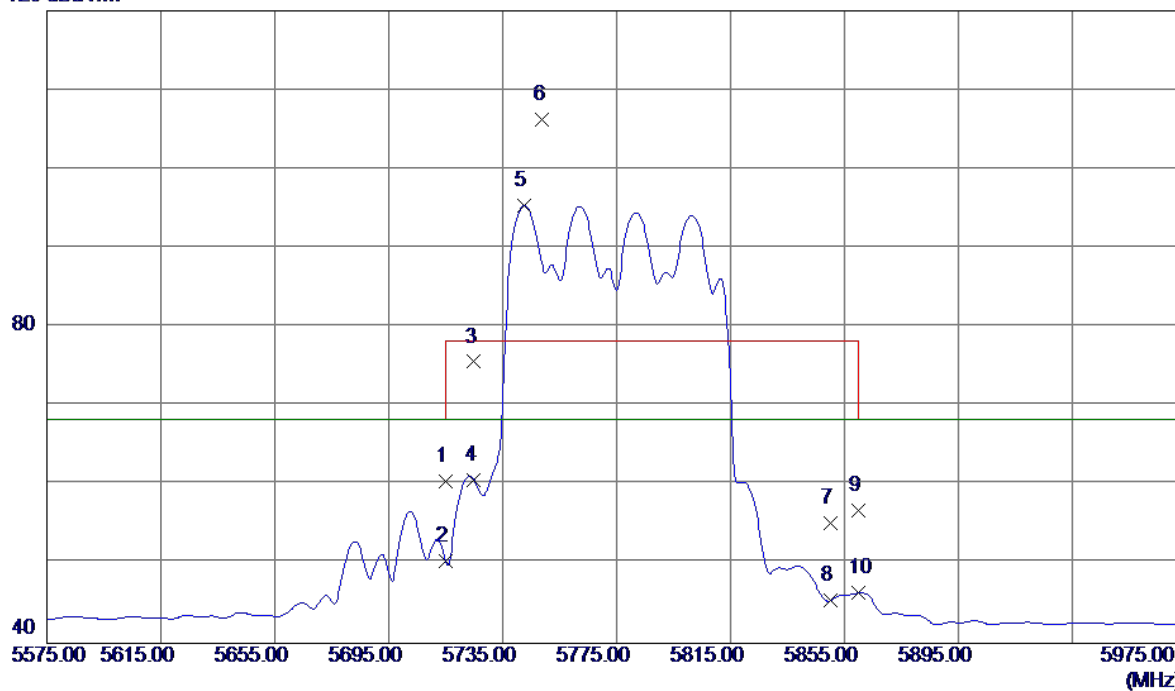


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	19.22	41.25	60.47	68.30	-7.83	Peak	
2	5715.0000	9.20	41.25	50.45	68.30	-17.85	AVG	
3	5725.0000	34.33	41.27	75.60	78.30	-2.70	Peak	
4	5725.0000	19.37	41.27	60.64	68.30	-7.66	AVG	
5	5742.6000	54.03	41.29	95.32	68.30	27.02	AVG	No Limit
6	5749.0000	64.90	41.30	106.20	78.30	27.90	Peak	No Limit
7	5850.0000	13.83	41.44	55.27	78.30	-23.03	Peak	
8	5850.0000	3.96	41.44	45.40	68.30	-22.90	AVG	
9	5860.0000	15.42	41.45	56.87	78.30	-21.43	Peak	
10	5860.0000	4.96	41.45	46.41	68.30	-21.89	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

80 dBuV/m

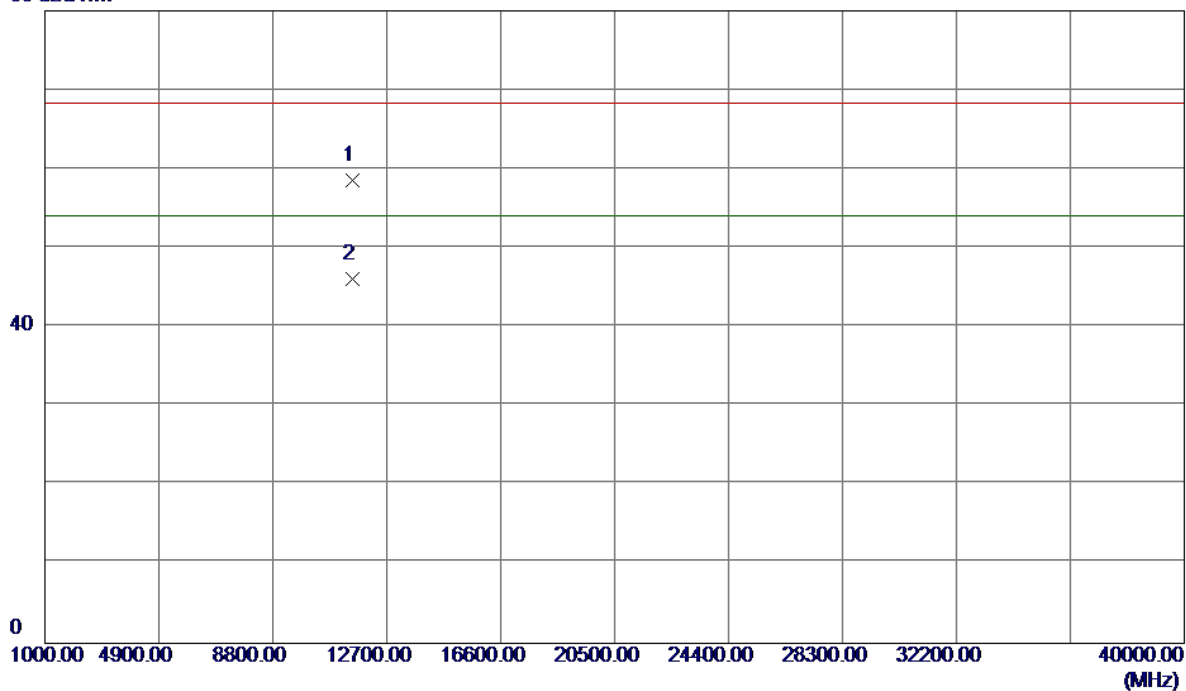

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11549.4000	41.58	17.01	58.59	68.30	-9.71	Peak	
2	11551.0000	29.11	17.02	46.13	54.00	-7.87	AVG	

TX A Mode_DUTY CYCLE

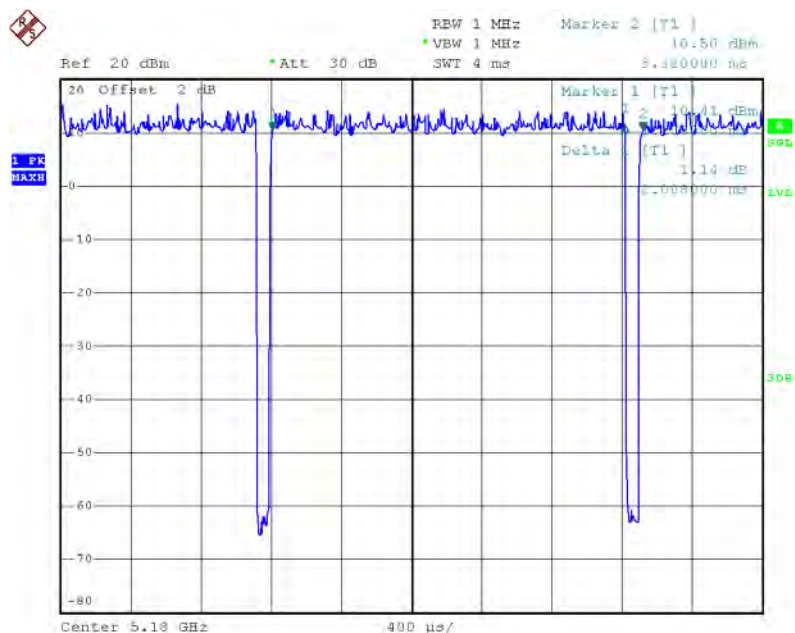

Date: 1.DEC.2015 16:31:02

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} : 2.01 msec

T_{Total} : 2.11 msec

Duty cycle: 95.26%

Duty Factor = $10 \log(1/\text{Duty cycle})$


Duty Factor = 0.21

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

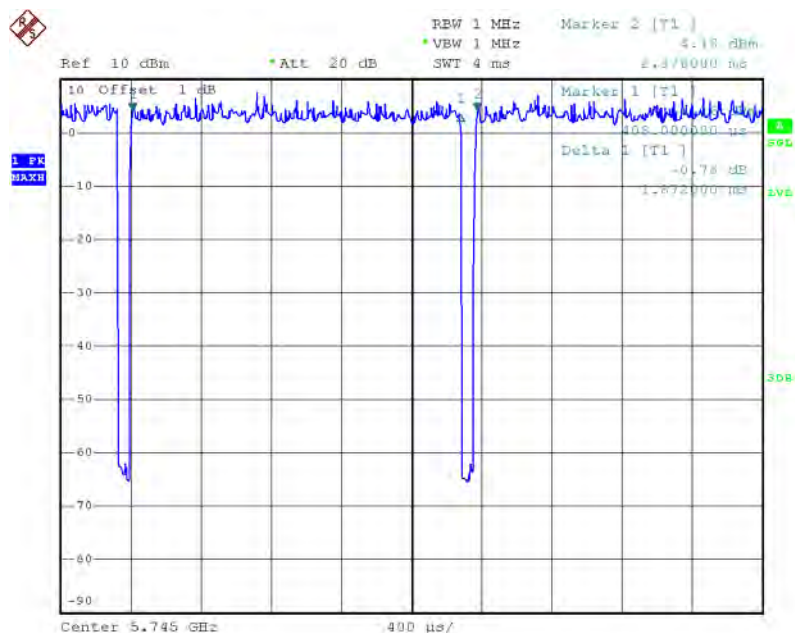

Date: 2.DEC.2015 14:27:27

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} : 1.88 msec

T_{Total} : 1.96 msec

Duty cycle: 95.92%

Duty Factor = $10 \log(1/\text{Duty cycle})$


Duty Factor = 0.18

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

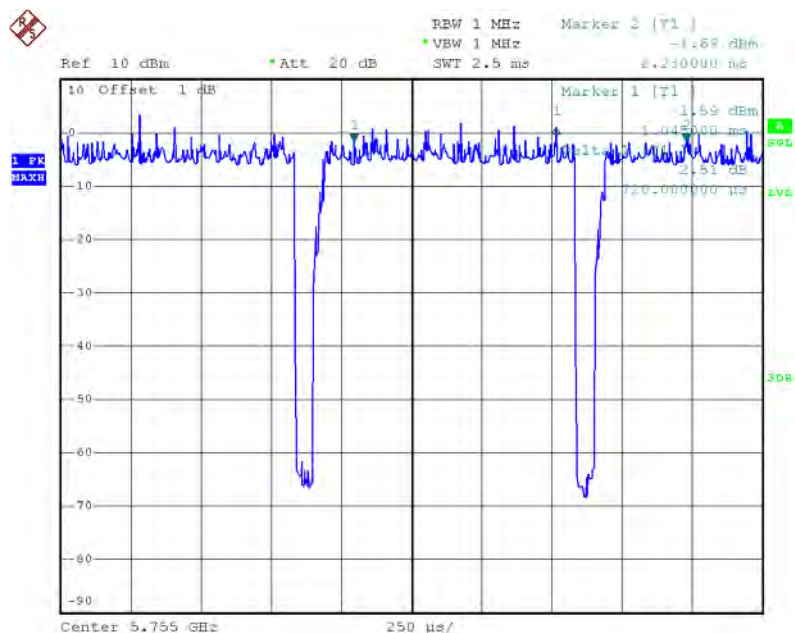

Date: 2.DEC.2015 15:05:11

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} : 0.86 msec

T_{Total} : 1.03 msec

Duty cycle: 83.50%

Duty Factor = $10 \log(1/\text{Duty cycle})$


Duty Factor = 0.78

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

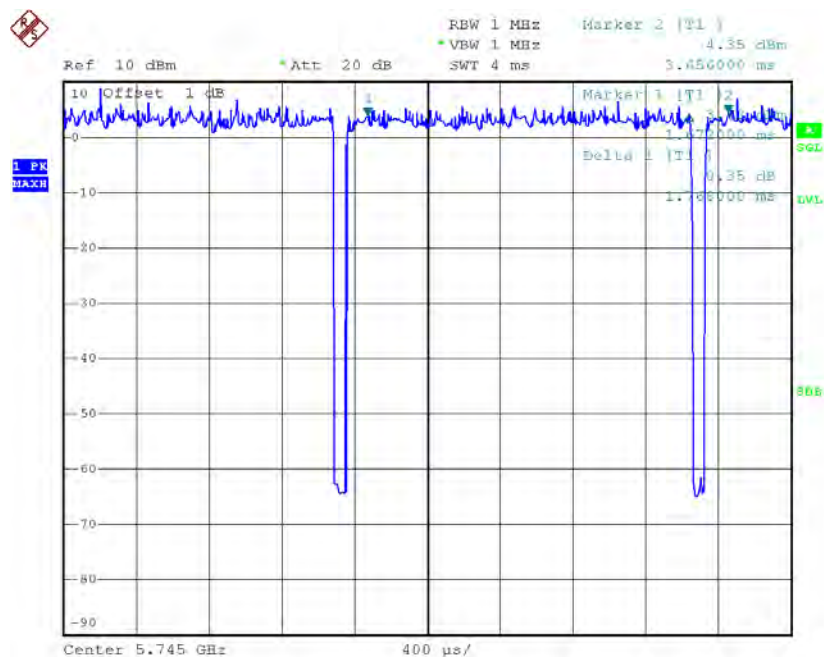

Date: 2.DEC.2015 14:43:47

Duty cycle: TX DUTYMHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 1.89 msec

T_{Total} : 1.98 msec

Duty cycle: 95.45%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.20

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

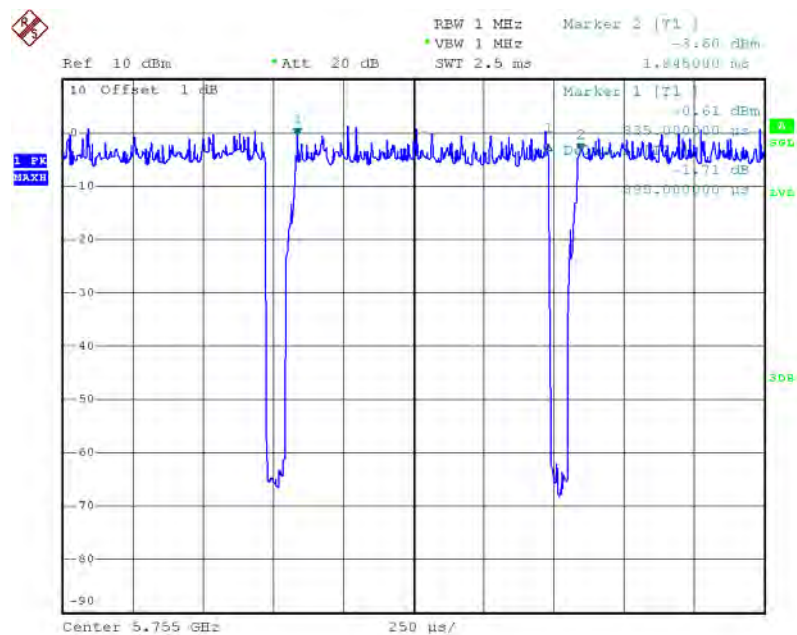

Date: 2.DEC.2015 15:17:06

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} : 0.87 msec

T_{Total} : 1.01 msec

Duty cycle: 86.14%

Duty Factor = $10 \log(1/\text{Duty cycle})$


Duty Factor = 0.65

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

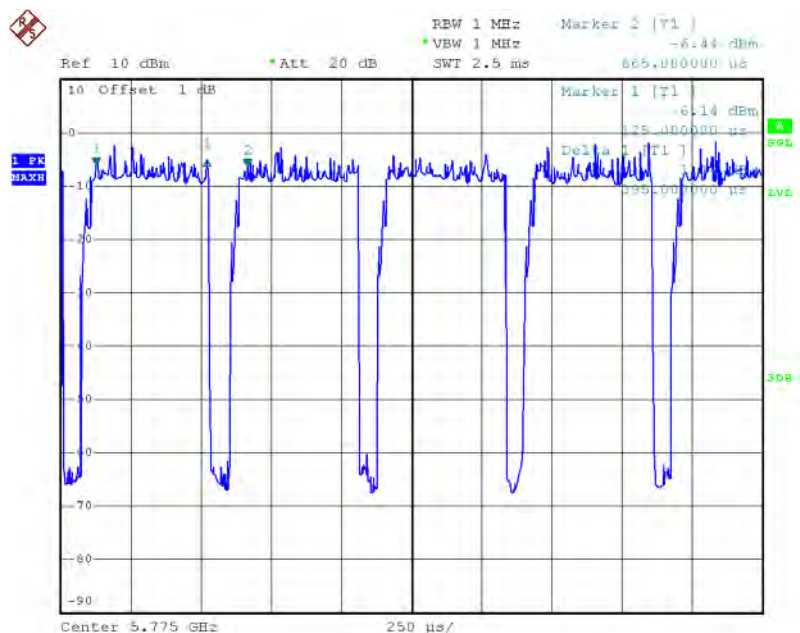

Date: 2.DEC.2015 15:29:25

Duty cycle: TX DUTYMHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.45 msec

T_{Total} : 0.56 msec

Duty cycle: 80.36%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.95

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be caculated as

Output Power = Measured power + Ducus factor


Power Spectral Density = Measured density + Duty factor

ATTACHMENT E - BANDWIDTH

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	22.05	16.90
CH40	5200	40.20	21.10
CH48	5240	38.49	19.10

TX CH36

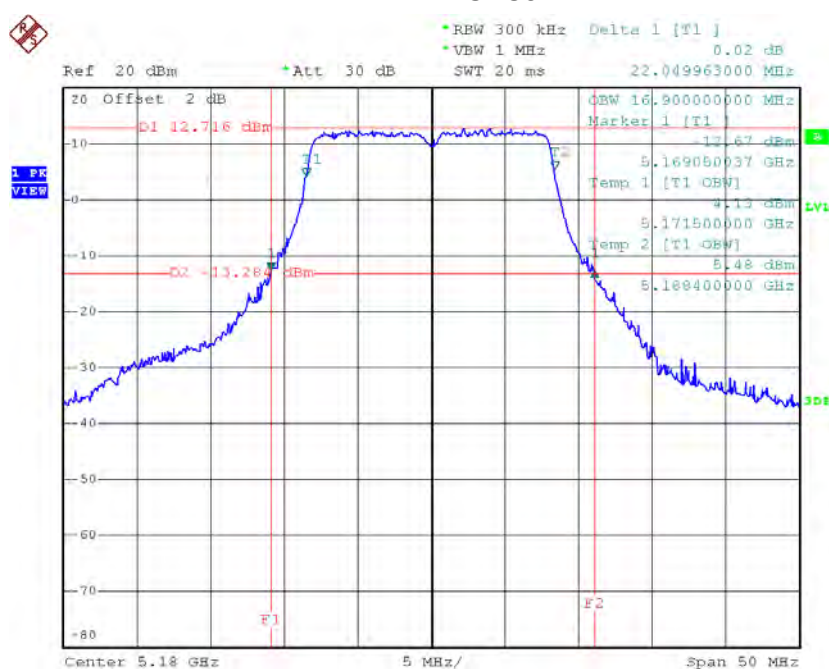


Date: 27.DEC.2015 11:39:49

TX CH40

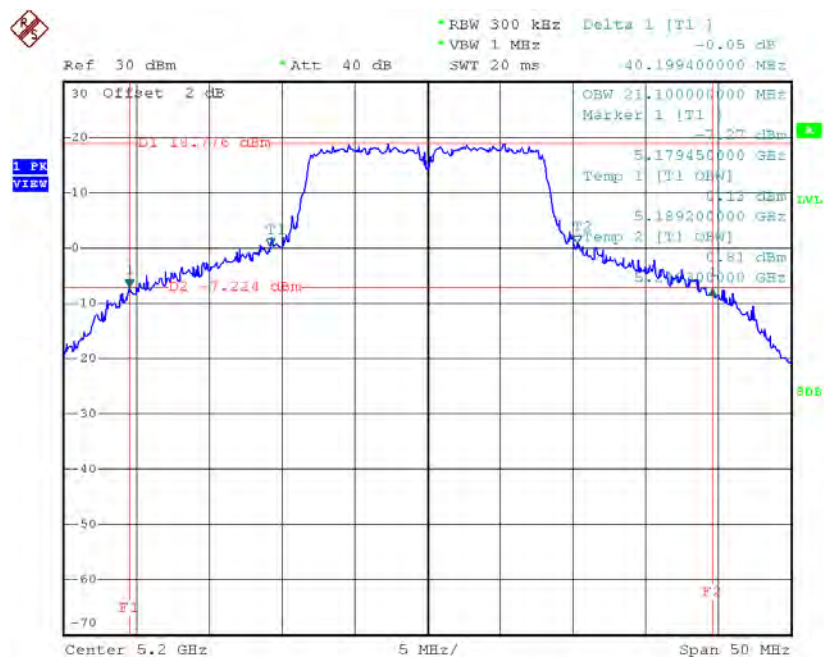

Date: 27.DEC.2015 12:19:12

TX CH48

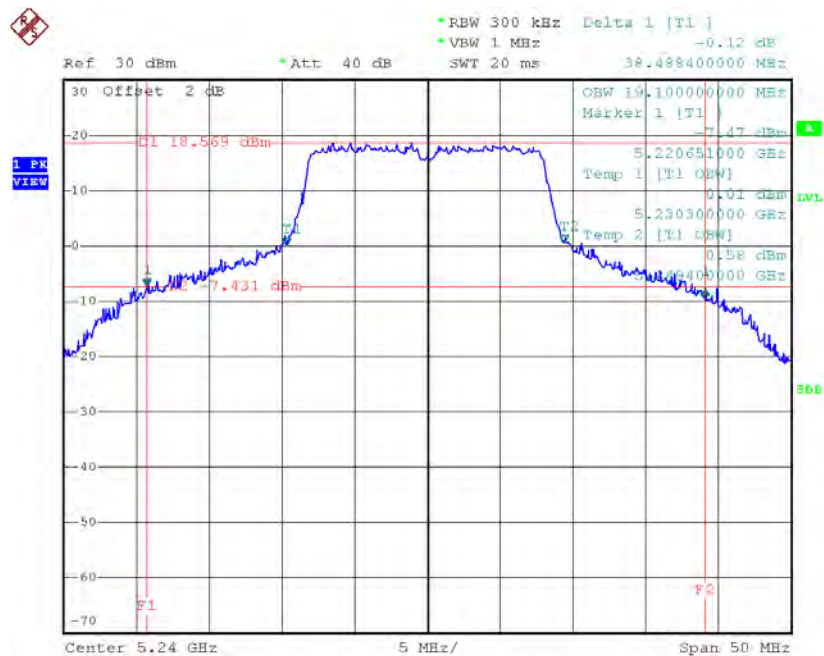


Date: 27.DEC.2015 12:21:20

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	23.25	18.00
CH40	5200	23.19	18.00
CH48	5240	23.11	18.00

TX CH36

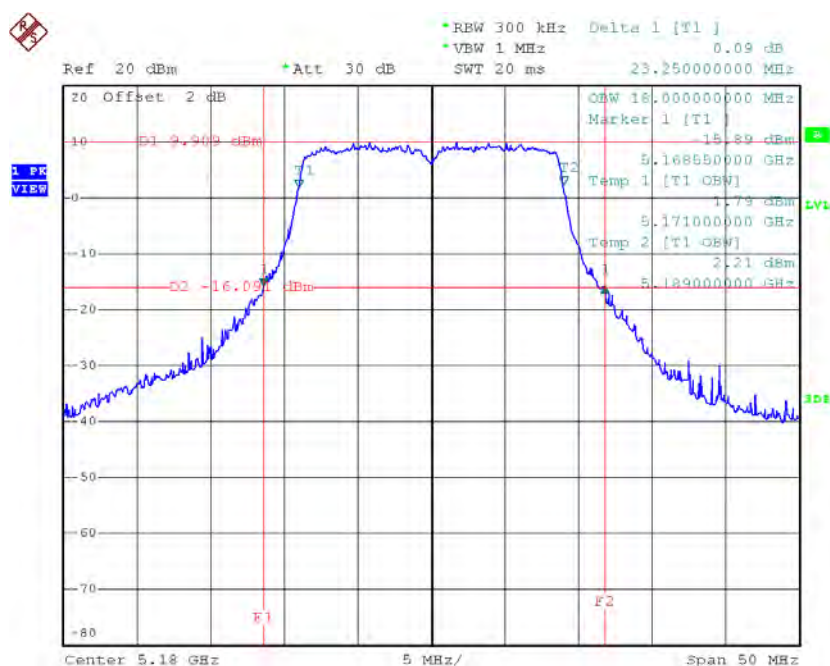


Date: 27.DEC.2015 16:48:47

TX CH40

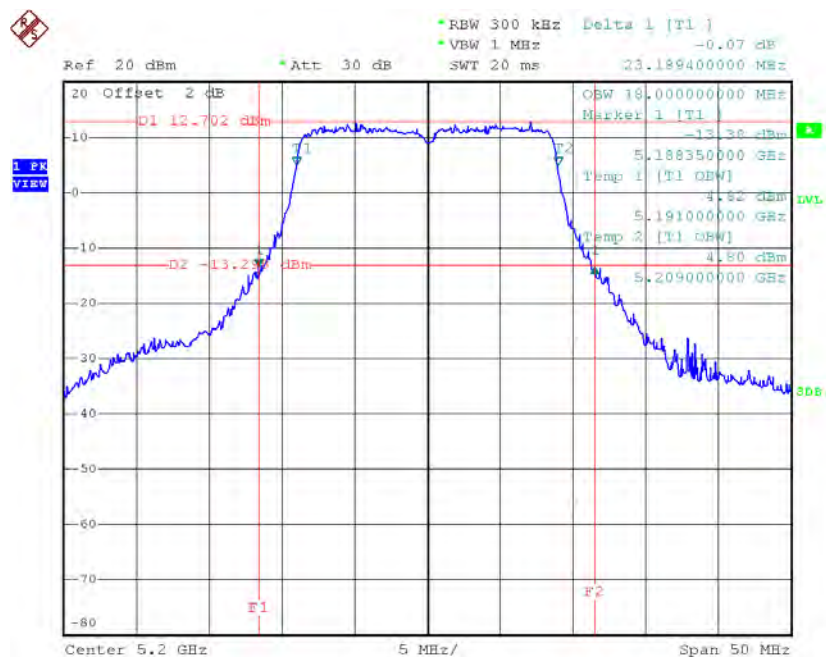

Date: 27.DEC.2015 16:50:30

TX CH48

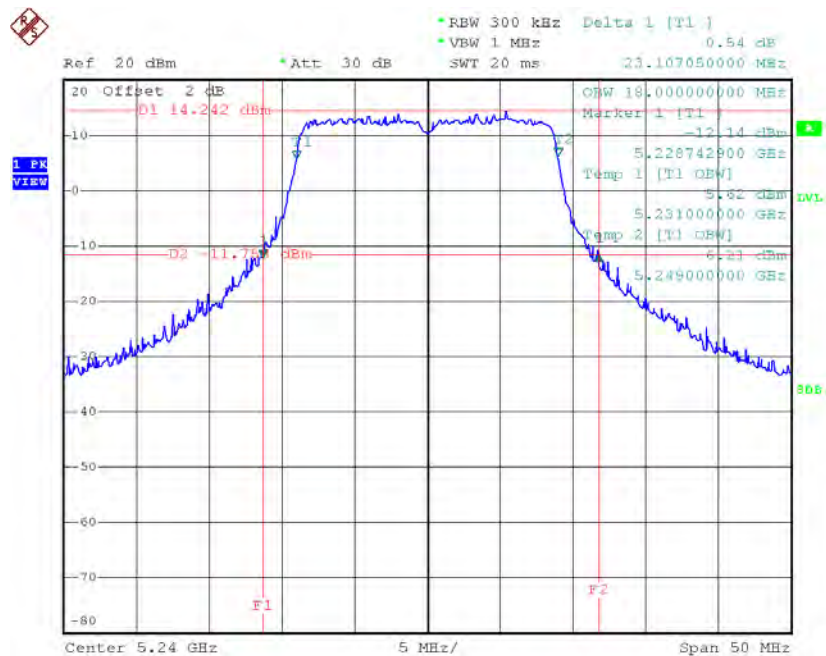


Date: 27.DEC.2015 16:54:49

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	45.10	36.40
CH46	5230	68.70	37.00

TX CH38

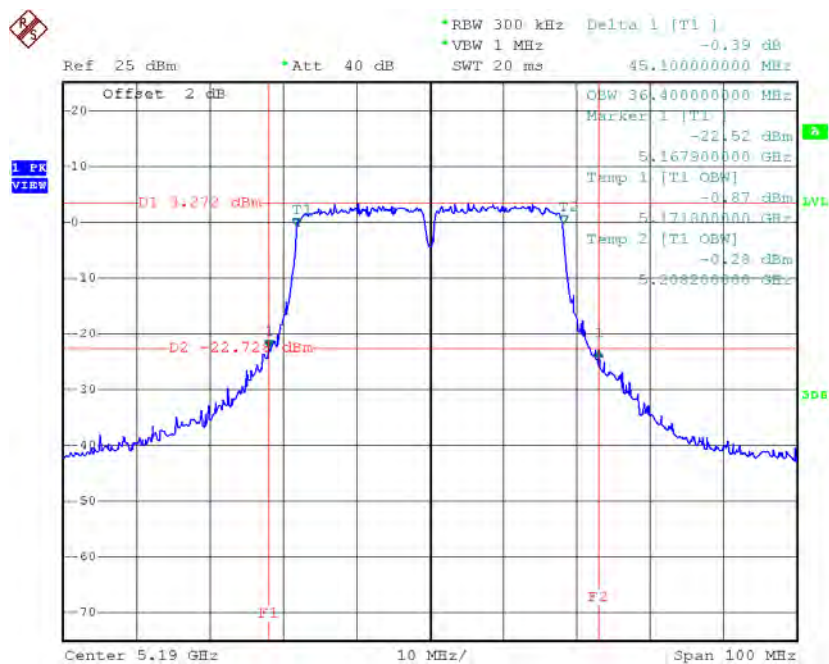

Date: 27.DEC.2015 18:28:30

TX CH46

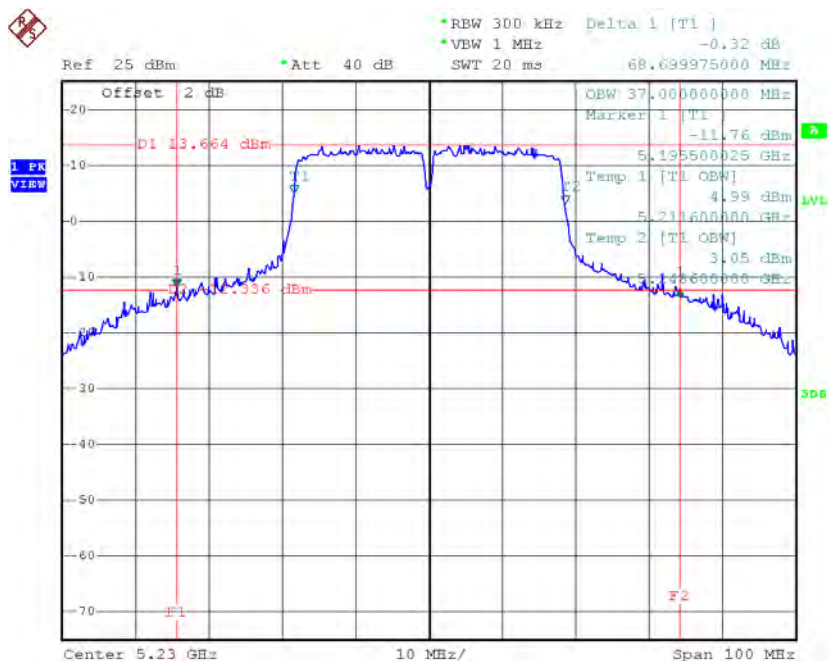


Date: 27.DEC.2015 18:30:27

Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	23.30	17.00
CH60	5300	22.30	16.90
CH64	5320	22.39	17.00

TX CH52

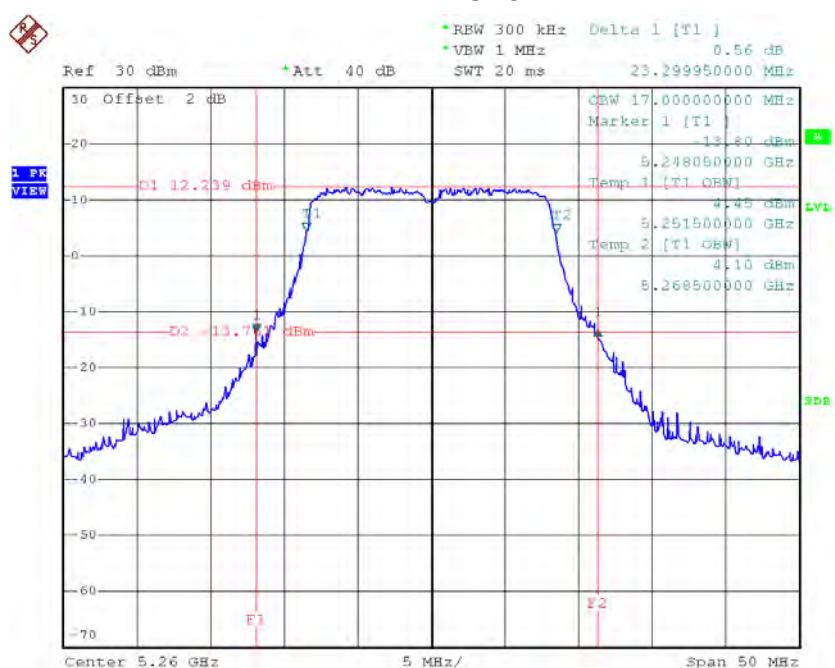


Date: 27.DEC.2015 12:13:10

TX CH60

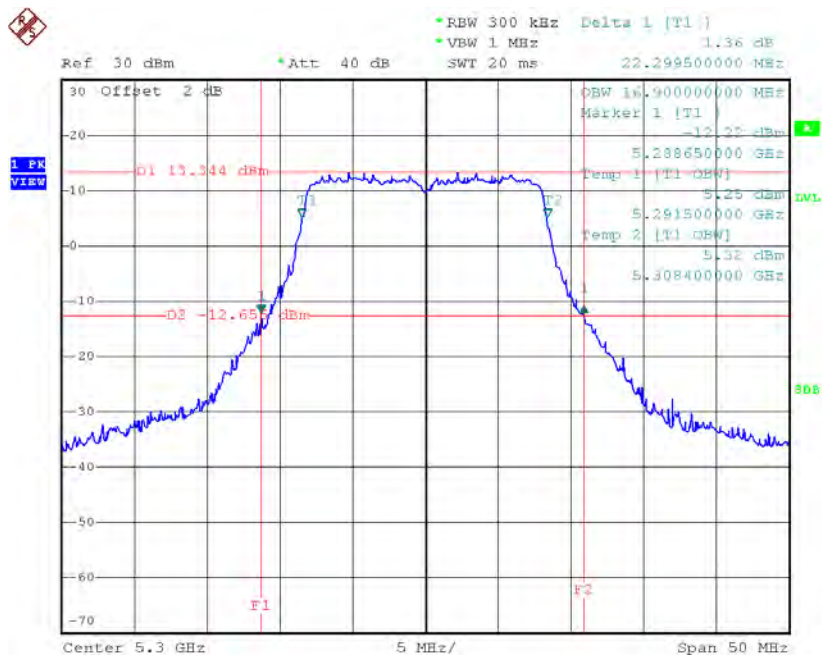

Date: 27.DEC.2015 12:29:12

TX CH64

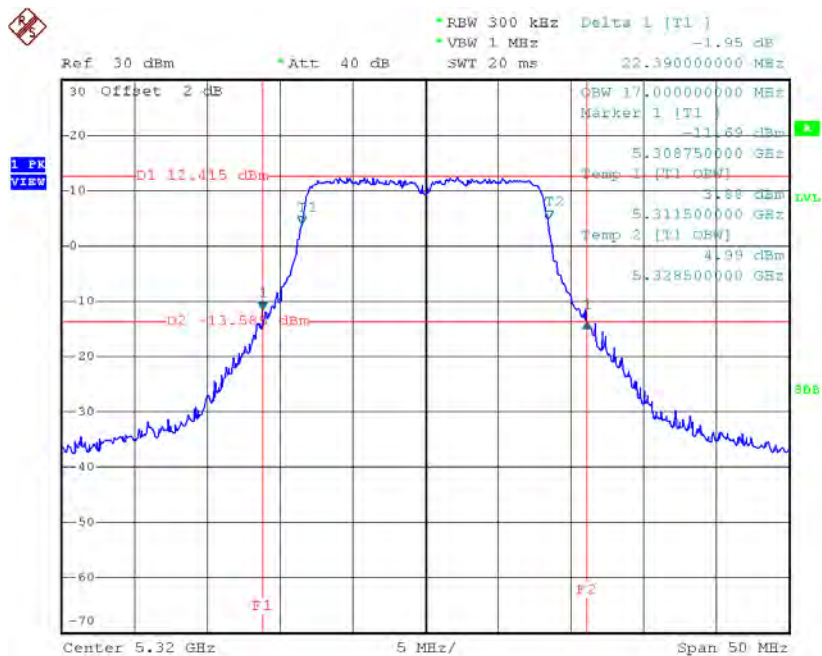


Date: 27.DEC.2015 12:31:14

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	22.79	18.00
CH60	5300	23.81	18.00
CH64	5320	24.50	18.00

TX CH52

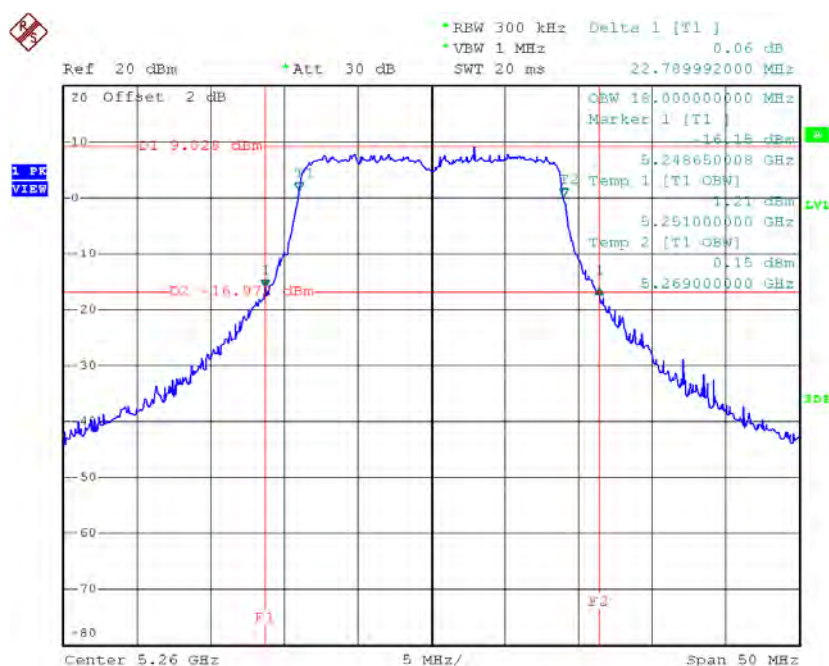


Date: 27.DEC.2015 16:57:20

TX CH60

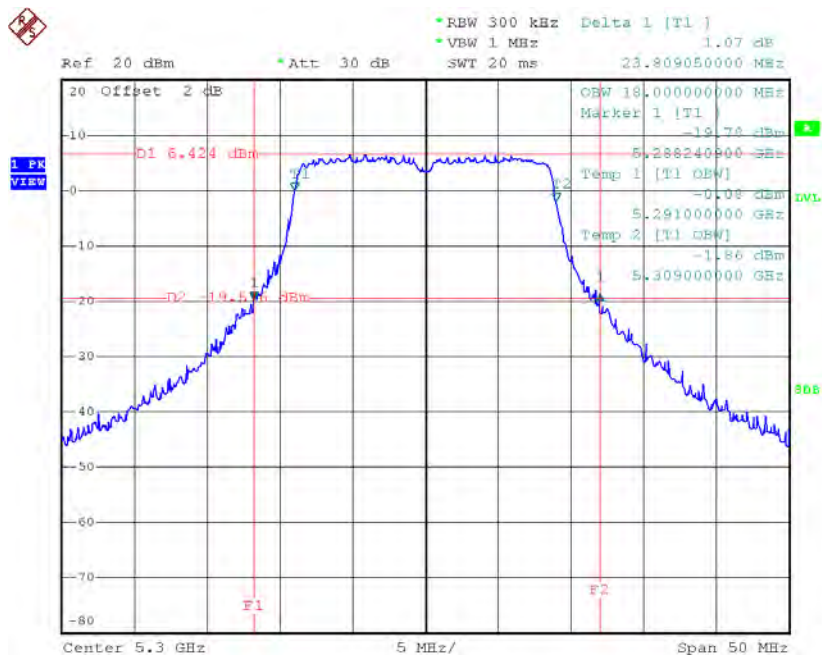

Date: 27.DEC.2015 17:03:47

TX CH64

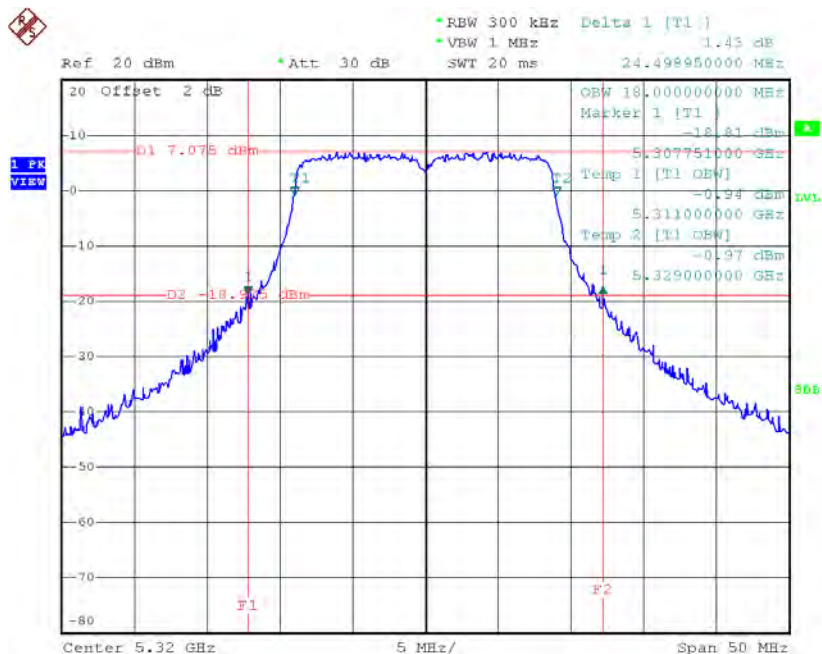


Date: 27.DEC.2015 17:05:21

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	43.11	36.40
CH62	5310	43.79	36.40

TX CH54

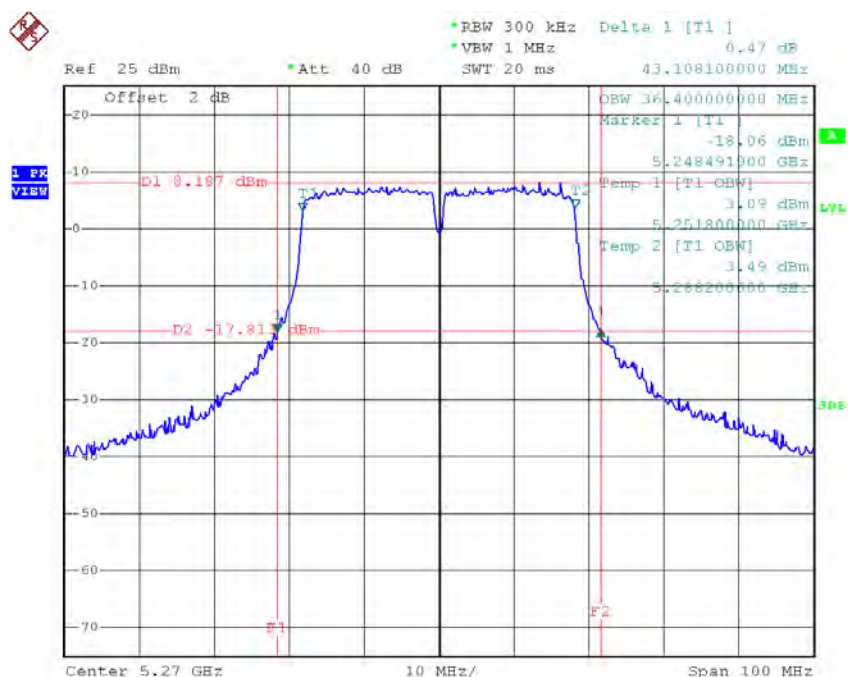

Date: 27.DEC.2015 18:34:23

TX CH62

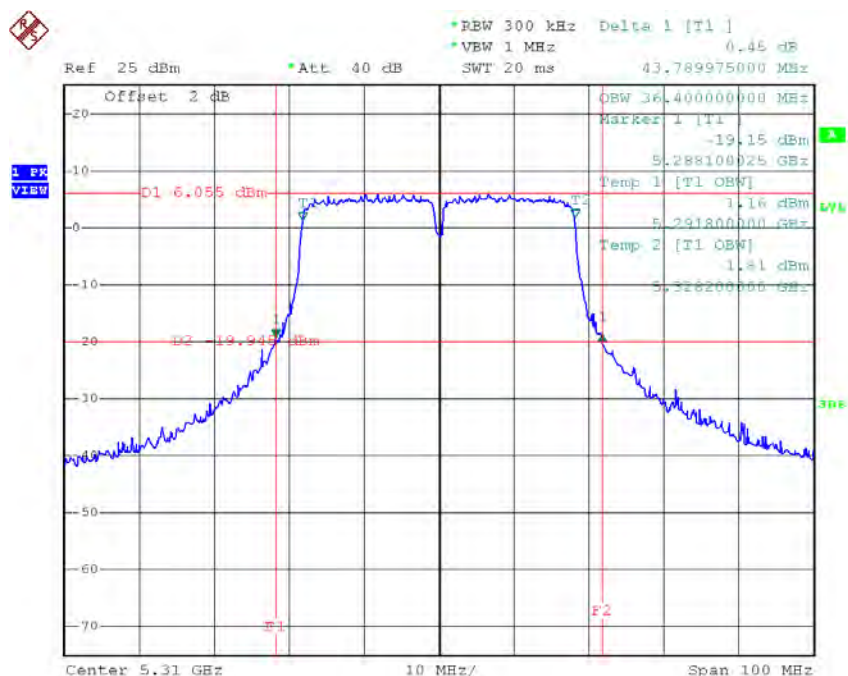


Date: 27.DEC.2015 18:39:07

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	23.29	16.90
CH116	5580	23.45	16.90
CH140	5700	22.70	17.00

TX CH100

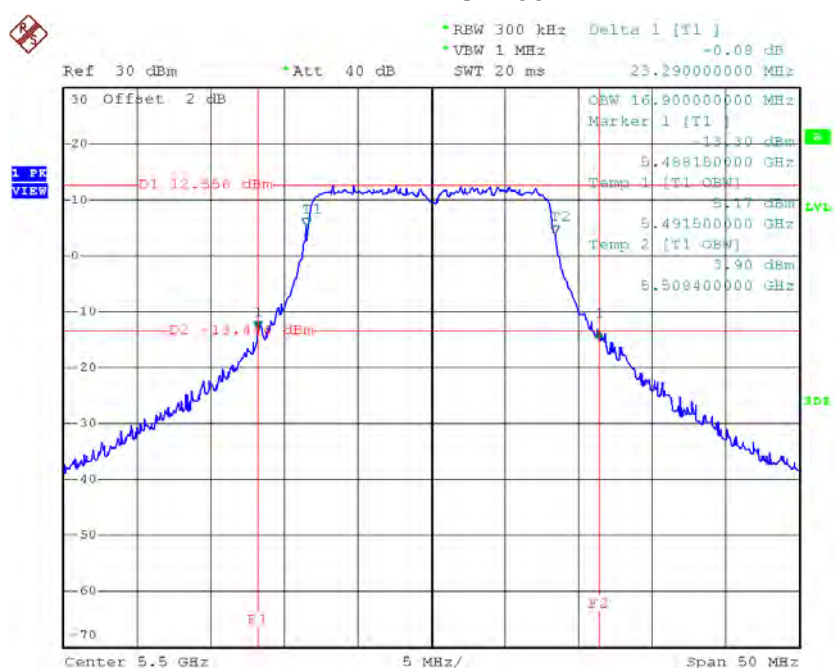


Date: 27.DEC.2015 12:33:21

TX CH116

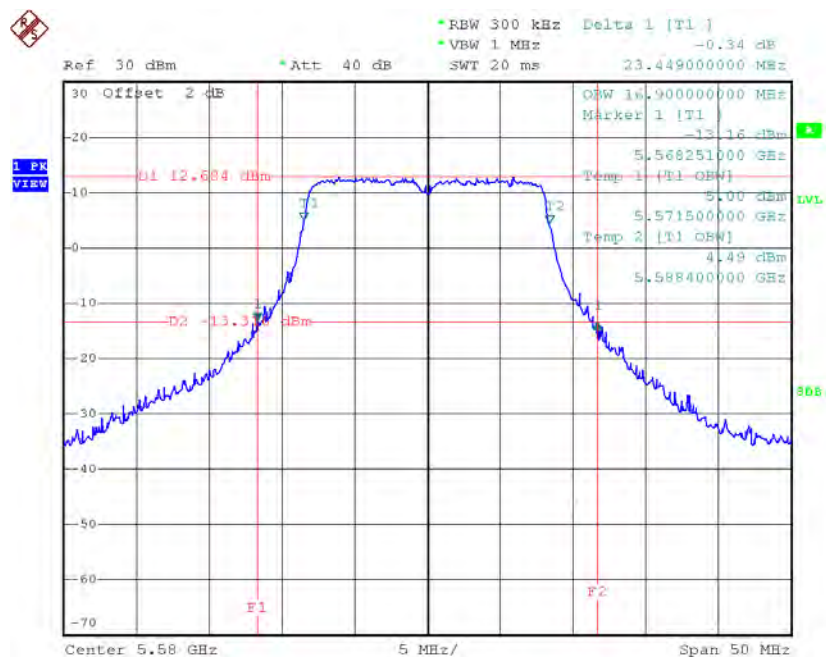

Date: 27.DEC.2015 12:37:32

TX CH140

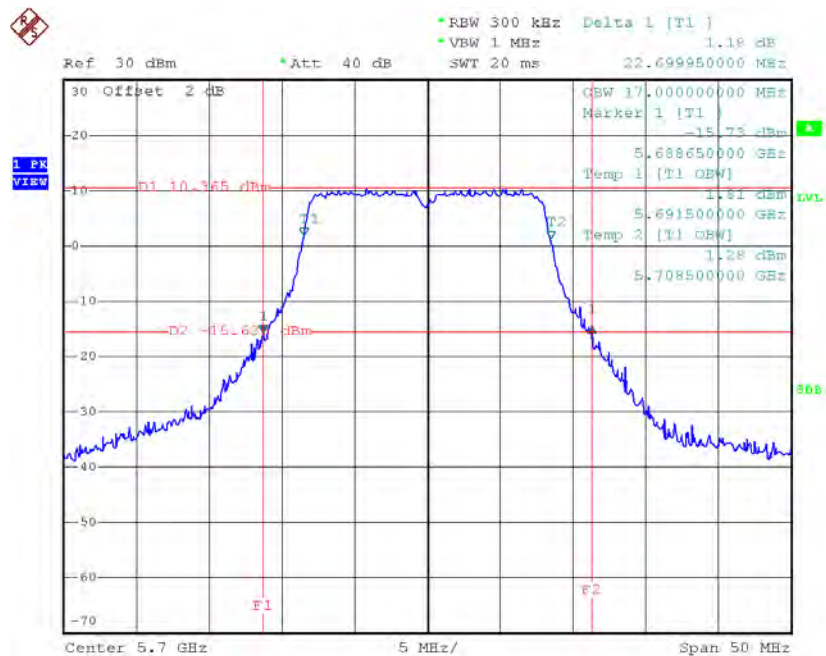


Date: 27.DEC.2015 12:42:21

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	23.55	18.10
CH116	5580	23.95	18.00
CH140	5700	23.01	18.10

TX CH100

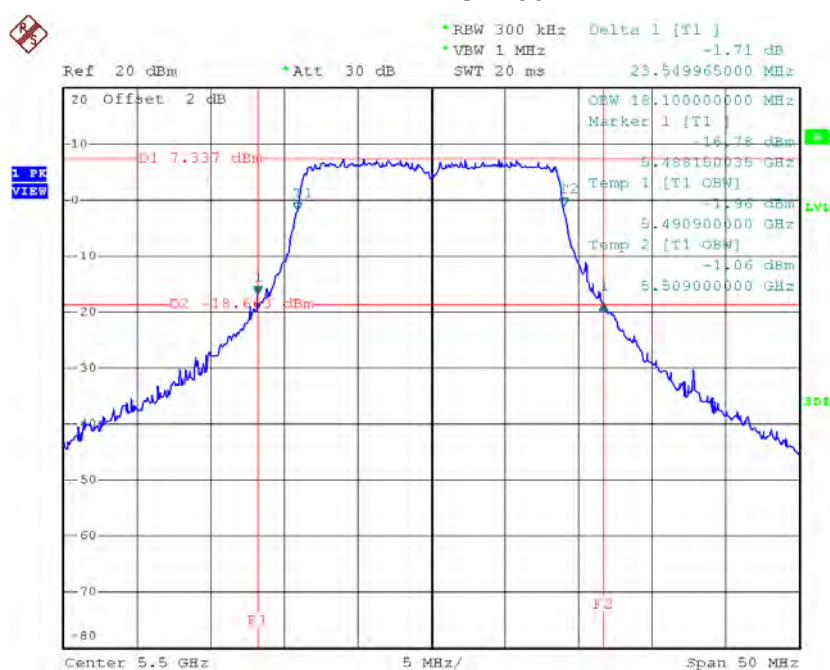


Date: 27.DEC.2015 17:14:27

TX CH116

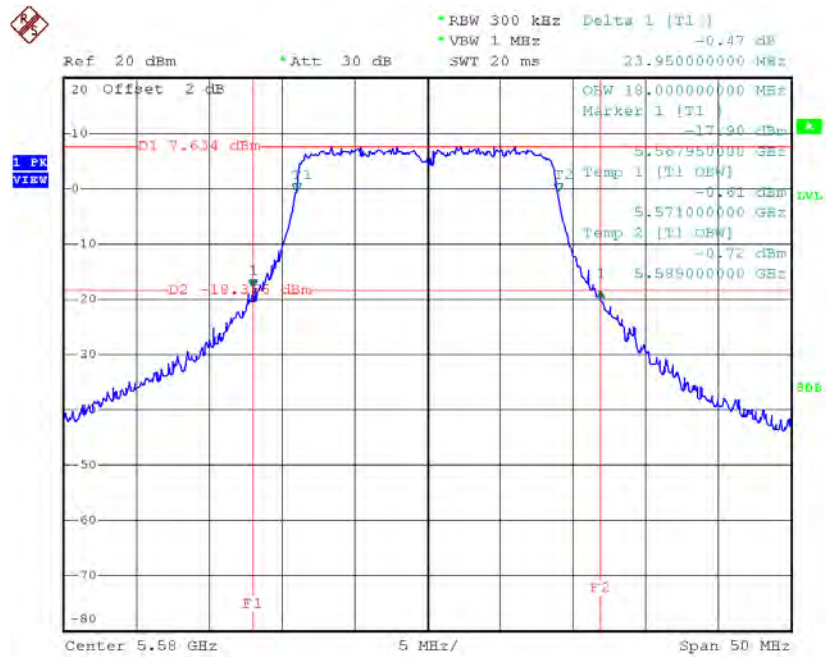

Date: 27.DEC.2015 17:16:11

TX CH140

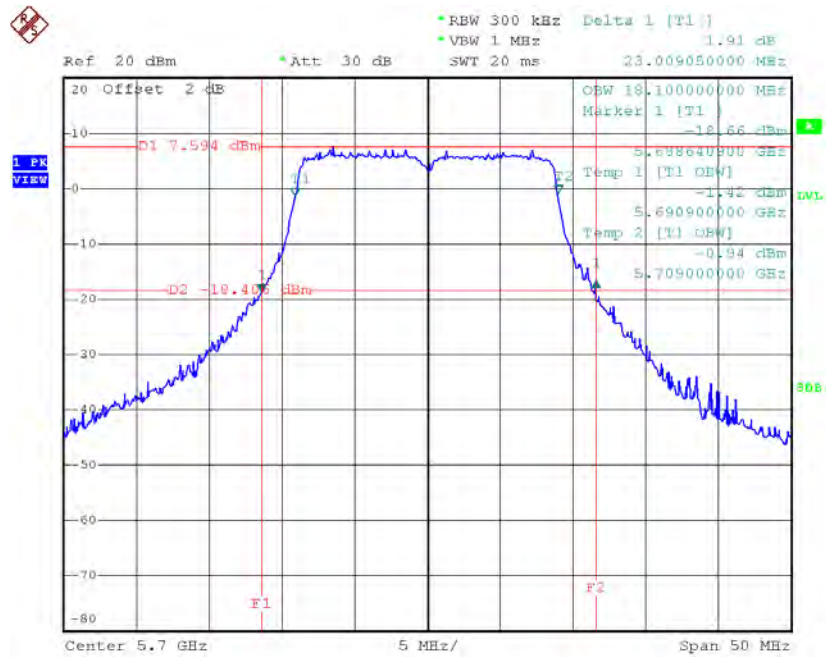


Date: 27.DEC.2015 17:19:53

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	43.61	36.40
CH110	5550	44.00	36.40
CH134	5670	43.80	36.40

TX CH102

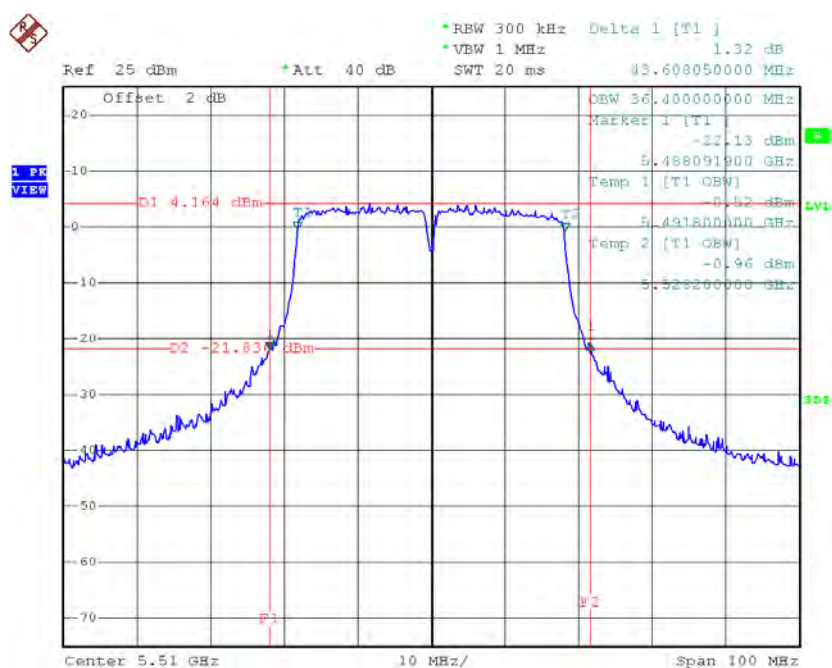


Date: 27.DEC.2015 18:49:09

TX CH110

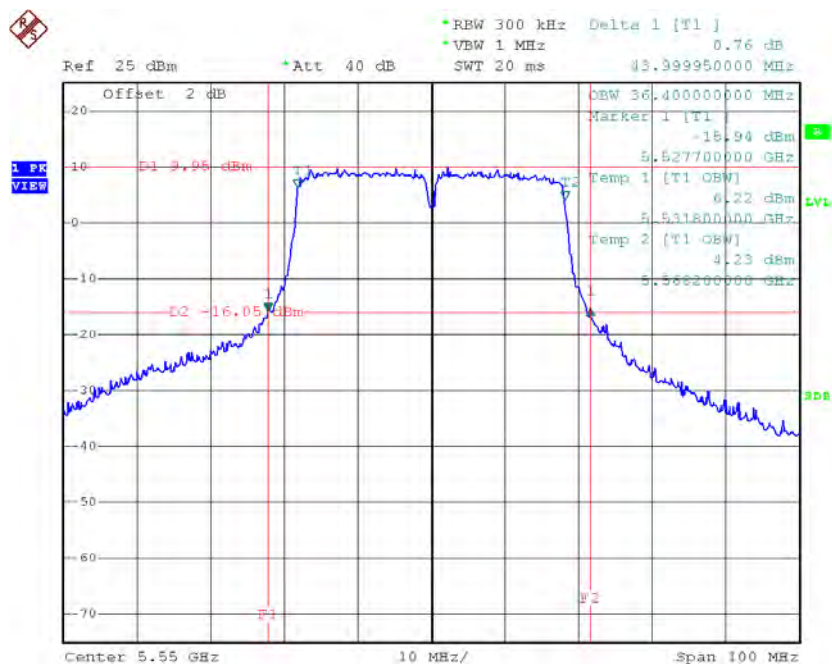

Date: 27.DEC.2015 18:50:39

TX CH134

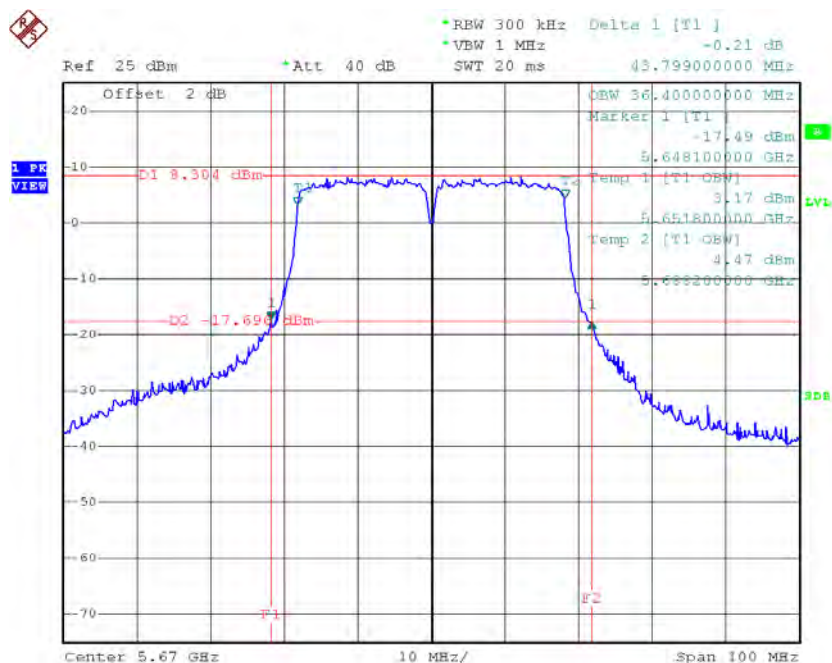


Date: 27.DEC.2015 18:55:07

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.39	16.50	>=500
CH157	5785	16.45	34.20	>=500
CH165	5825	16.39	16.50	>=500

TX CH 149

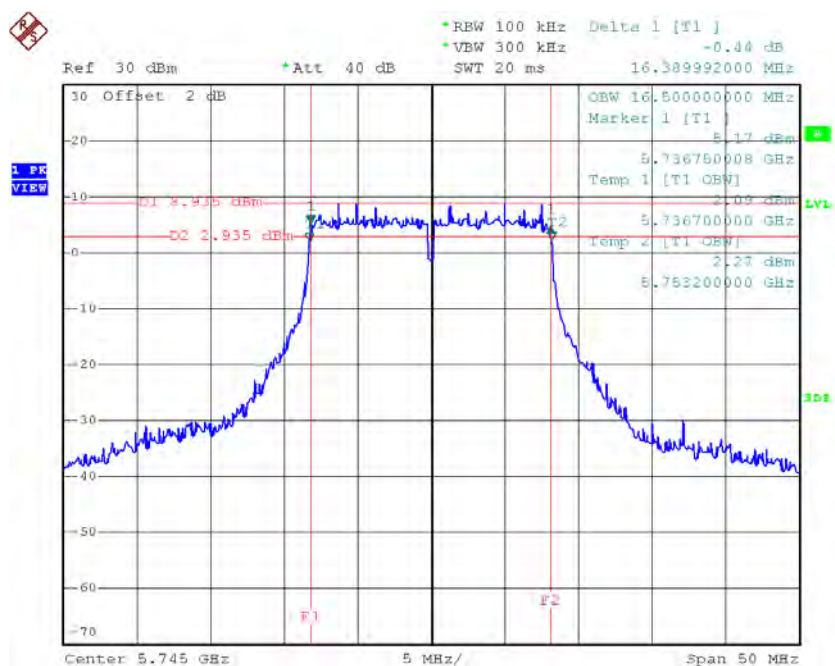


Date: 27.DEC.2015 12:46:09

TX CH 157

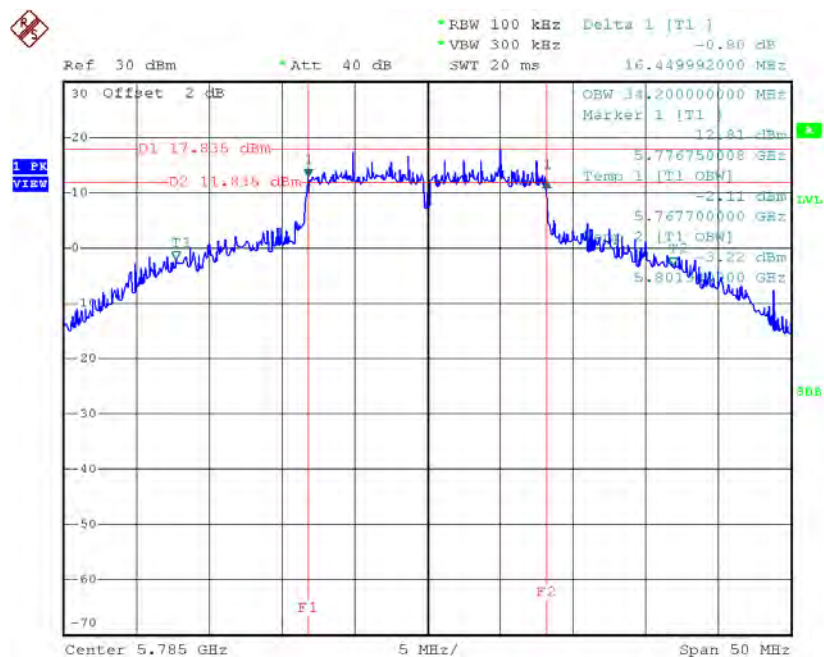

Date: 27.DEC.2015 12:47:57

TX CH 165

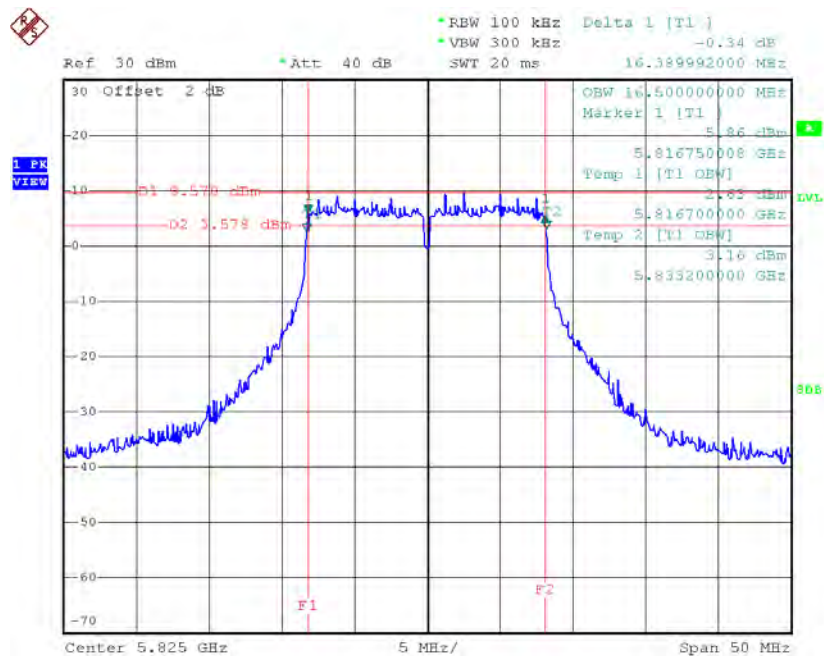


Date: 27.DEC.2015 12:57:42

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.65	17.80	>=500
CH157	5785	17.70	41.00	>=500
CH165	5825	17.59	17.90	>=500

TX CH 149

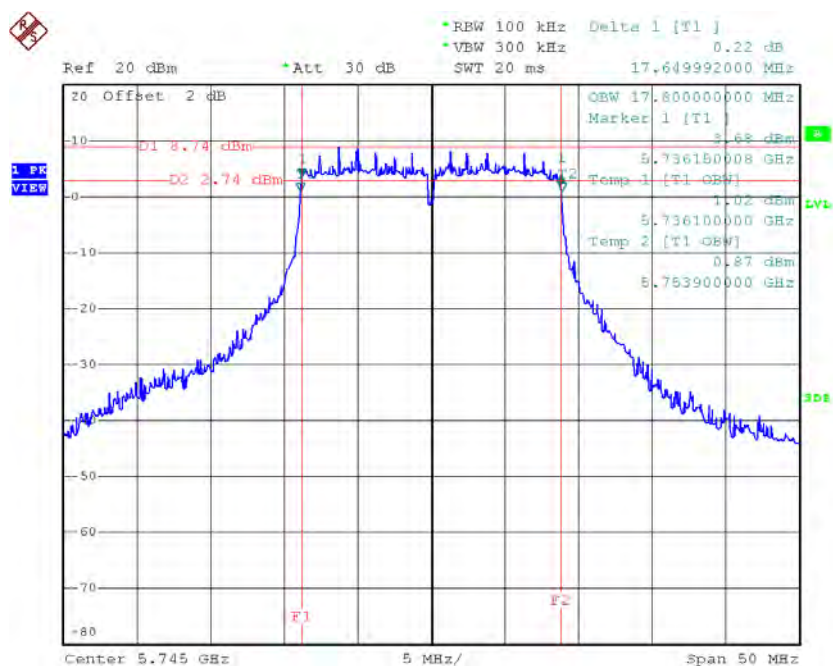


Date: 27.DEC.2015 17:23:49

TX CH 157

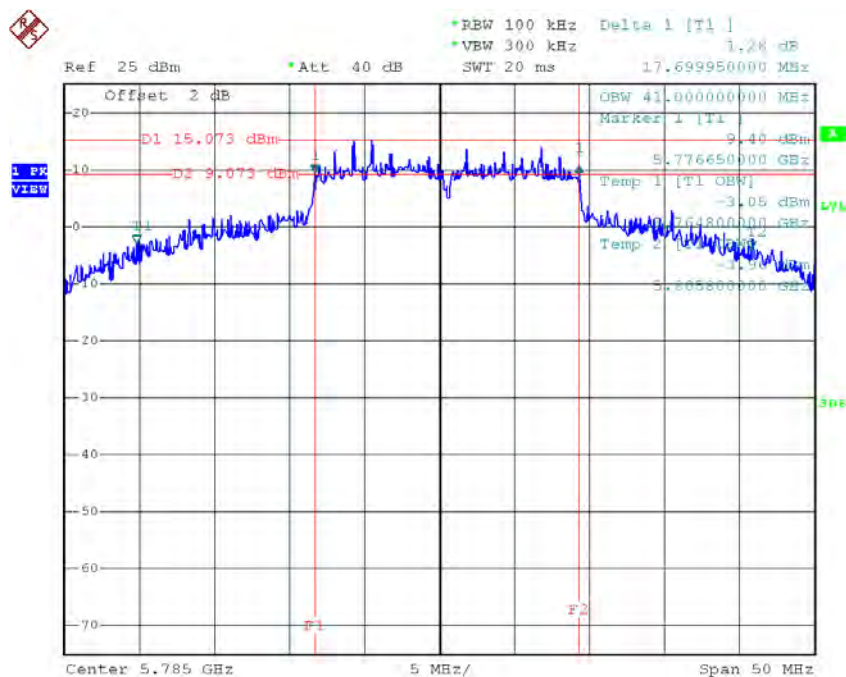

Date: 27.DEC.2015 17:33:57

TX CH 165

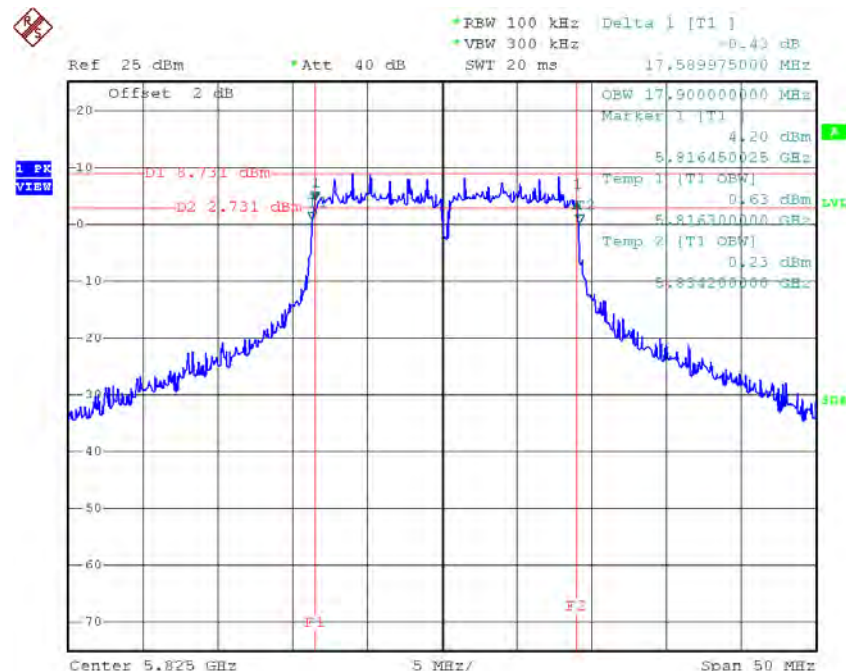


Date: 27.DEC.2015 17:35:37

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	36.40	>=500
CH159	5795	36.50	36.40	>=500

TX CH 151

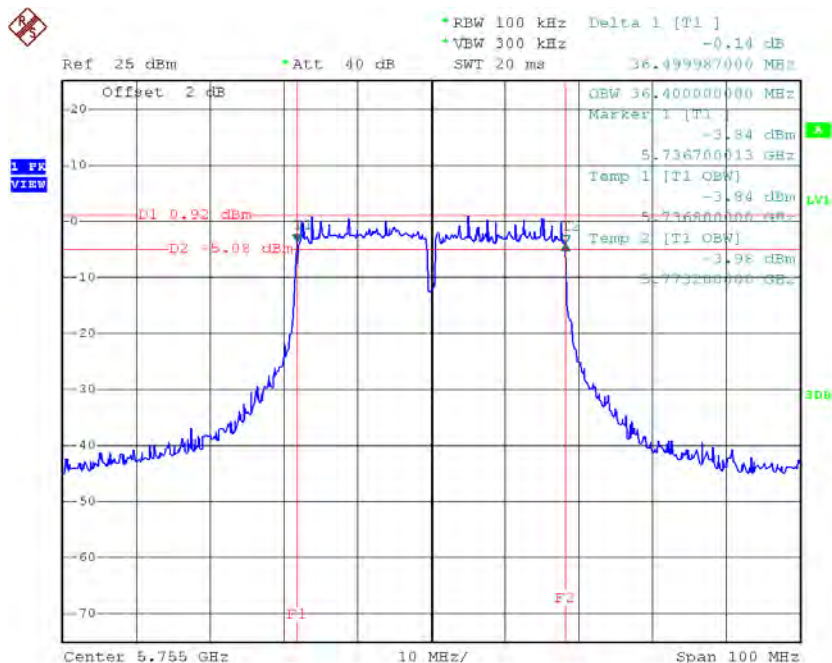


Date: 27.DEC.2015 18:56:54

TX CH 159

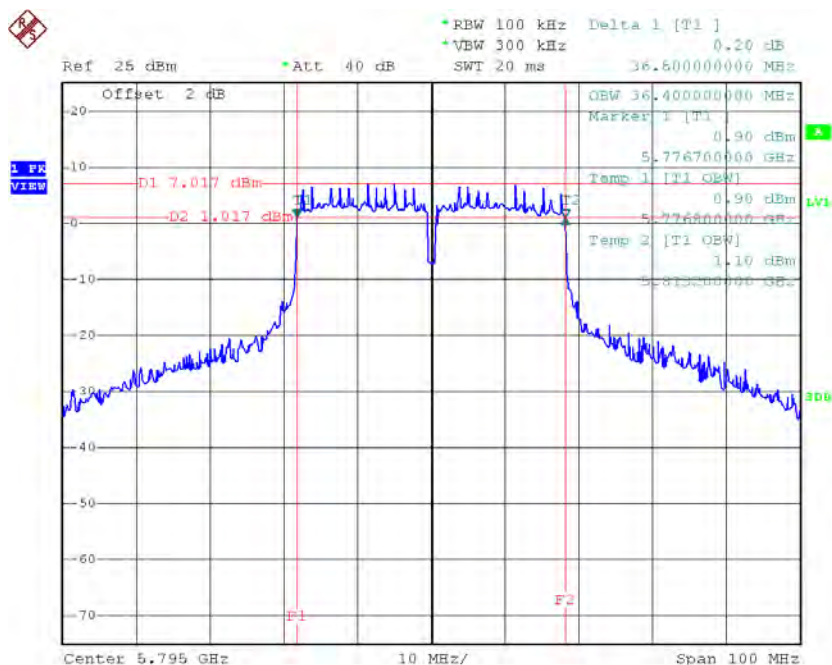


Date: 27.DEC.2015 19:00:55

TX CH40

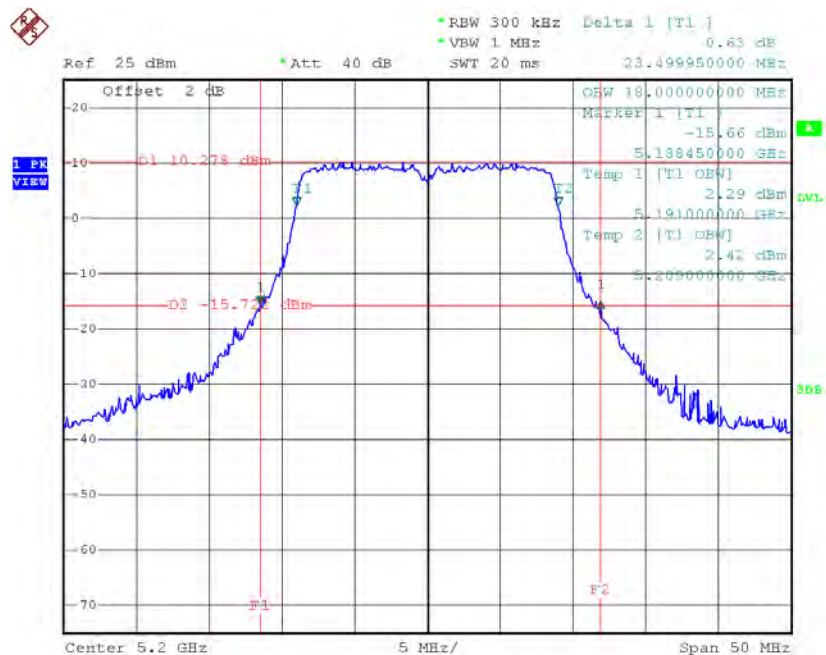

Date: 27.DEC.2015 17:44:22

TX CH48

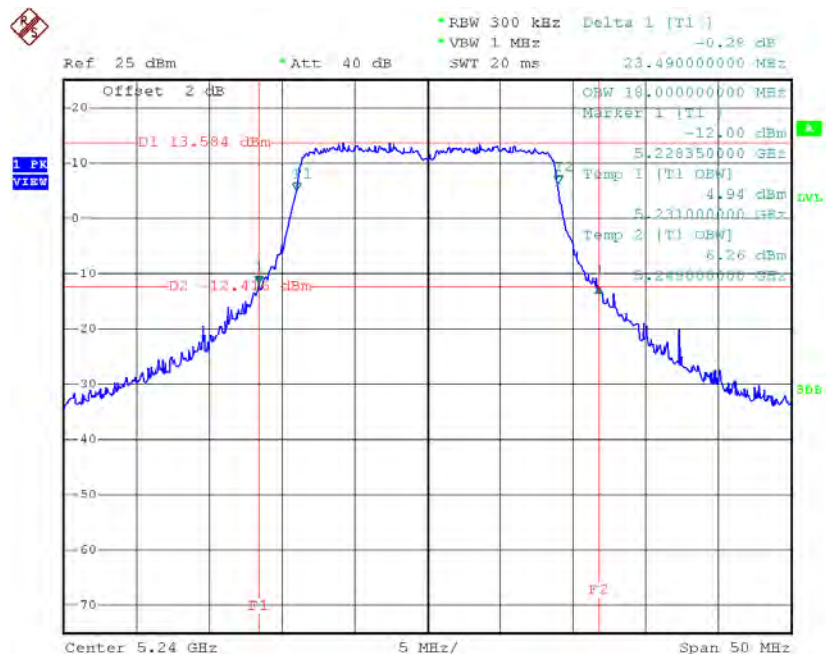


Date: 27.DEC.2015 17:50:49

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	43.79	36.40
CH46	5230	71.80	37.40

TX CH38

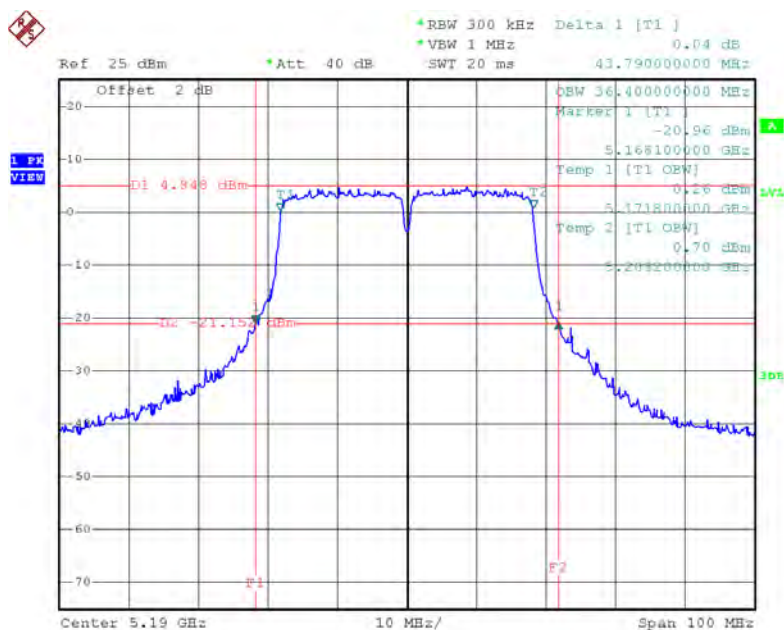

Date: 27.DEC.2015 19:05:37

TX CH46

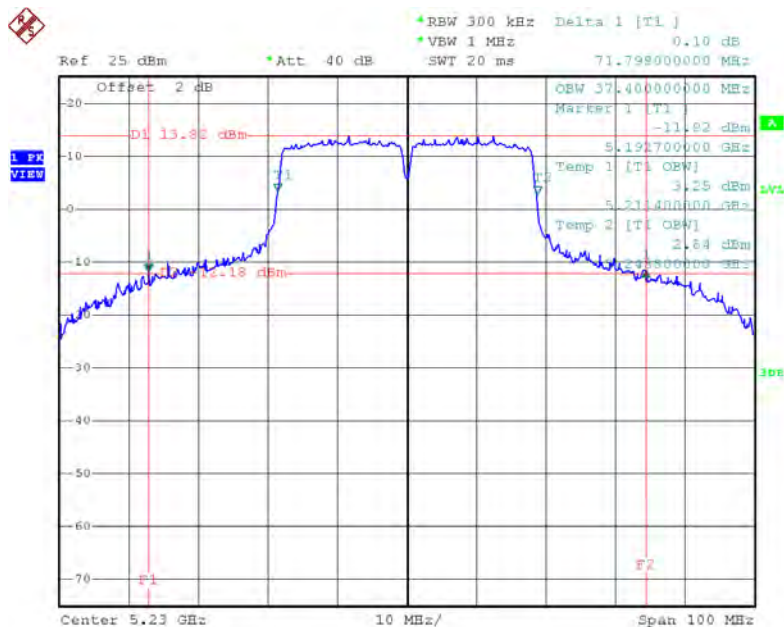


Date: 27.DEC.2015 19:10:18

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	83.60	76.00

TX CH42

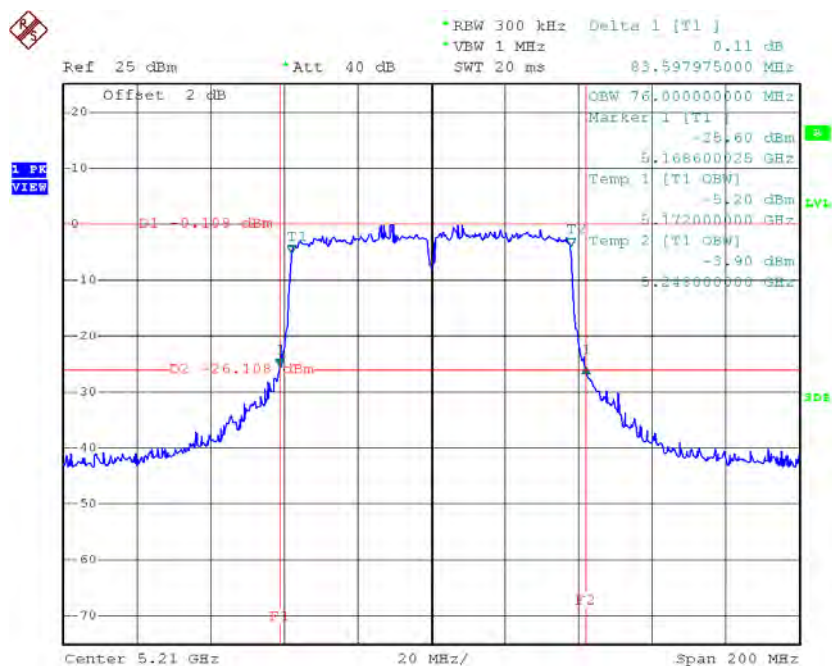


Date: 27.DEC.2015 19:38:03

Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	23.75	18.00
CH60	5300	23.35	18.00
CH64	5320	23.69	18.00

TX CH52

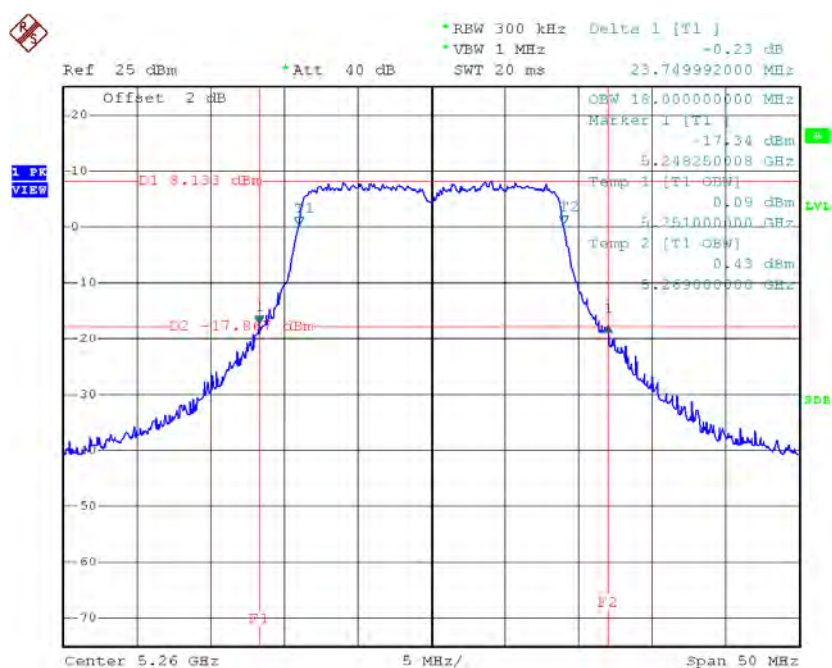


Date: 27.DEC.2015 17:52:15

TX CH60

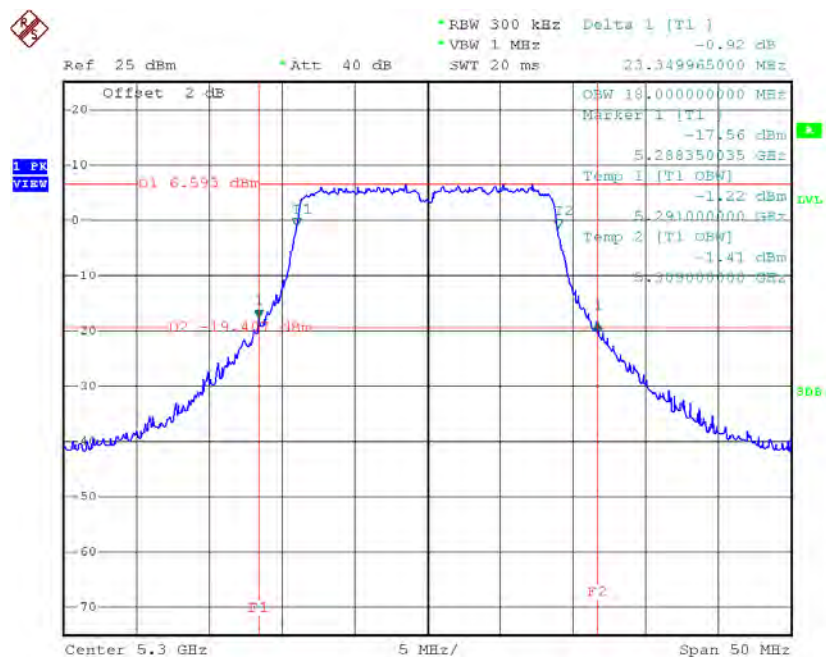

Date: 27.DEC.2015 17:58:10

TX CH64

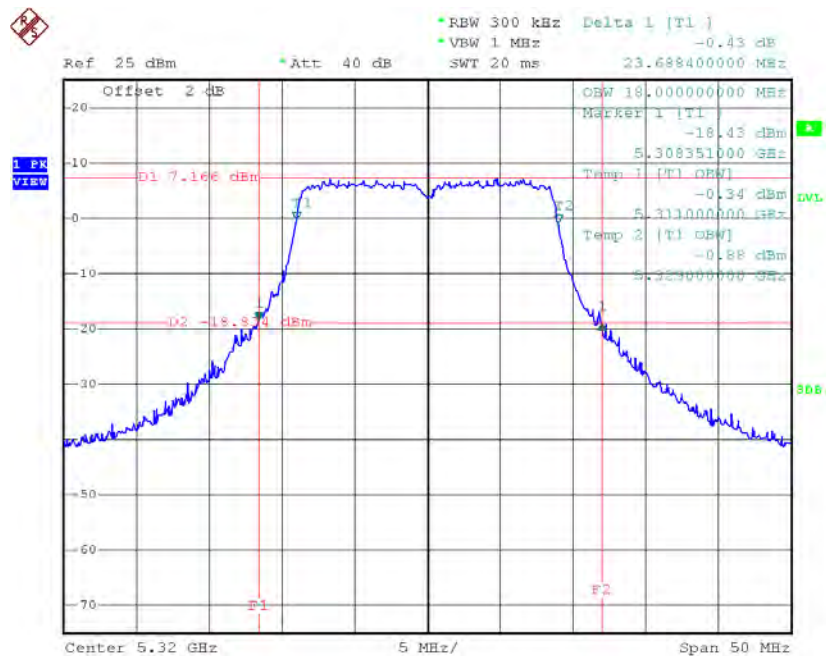


Date: 27.DEC.2015 17:59:41

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	44.20	36.40
CH62	5310	43.79	36.40

TX CH54

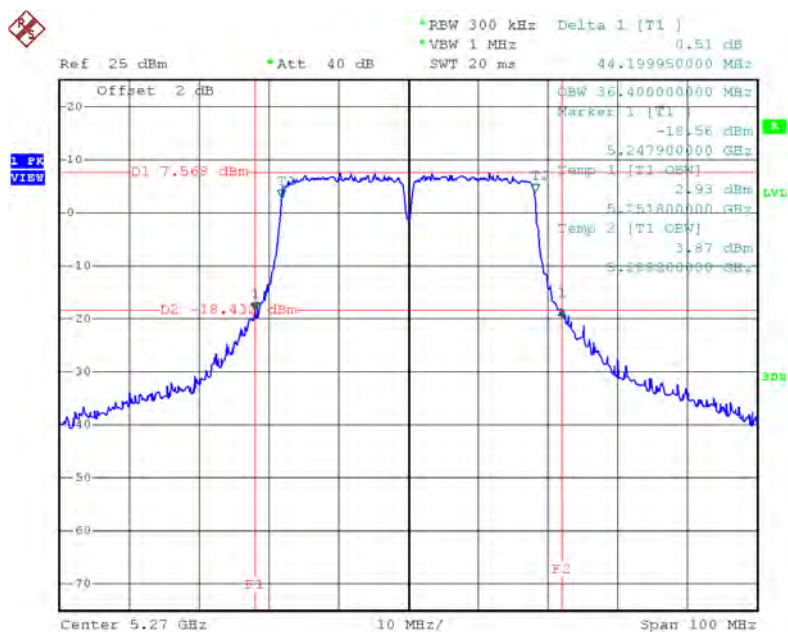

Date: 27.DEC.2015 19:11:53

TX CH62

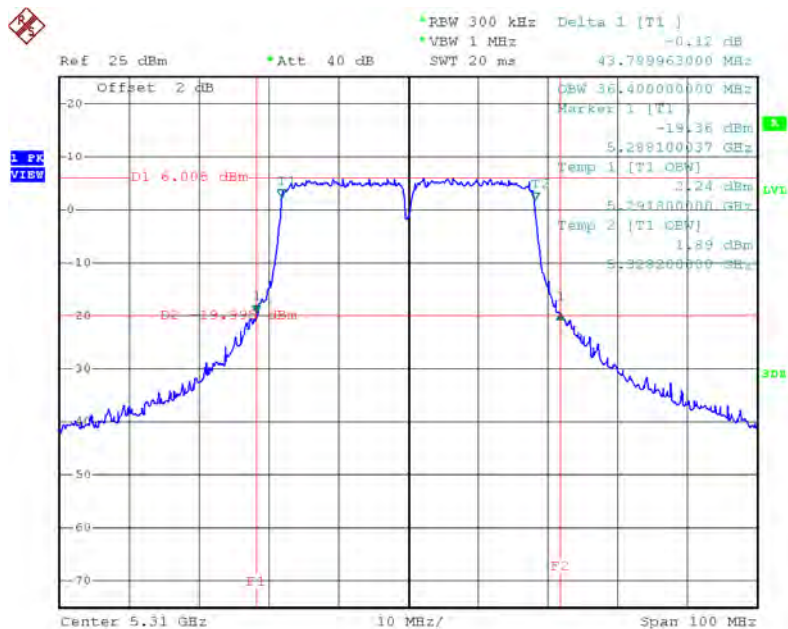


Date: 27.DEC.2015 19:18:20

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	85.00	76.00

TX CH58

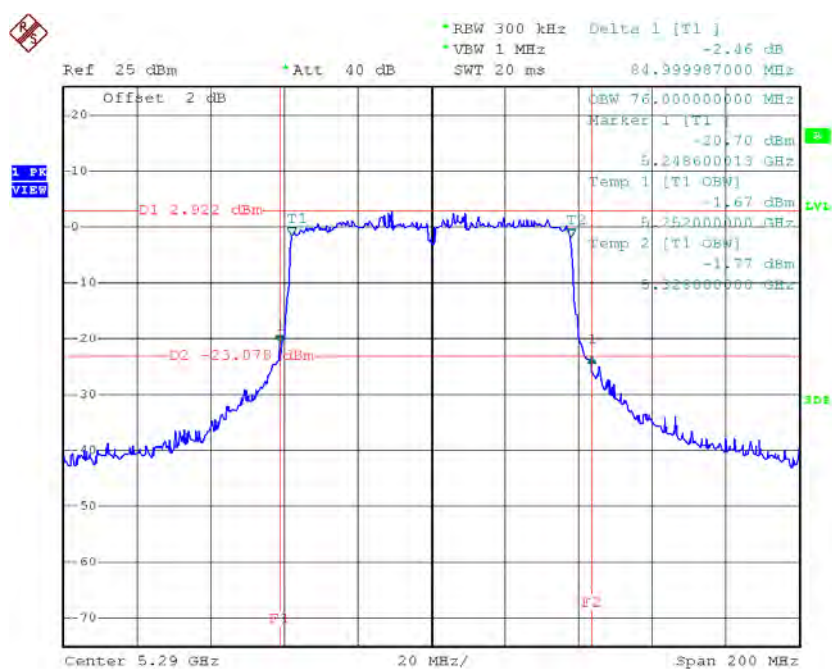


Date: 27.DEC.2015 19:39:58

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	24.15	18.00
CH116	5580	23.15	18.00
CH140	5700	23.40	18.00

TX CH100

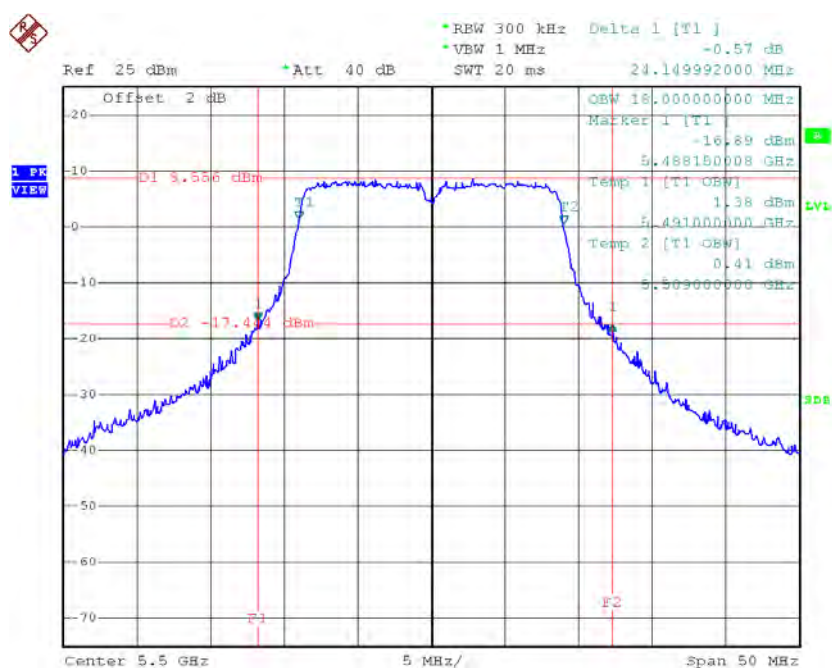


Date: 27.DEC.2015 18:04:28

TX CH116

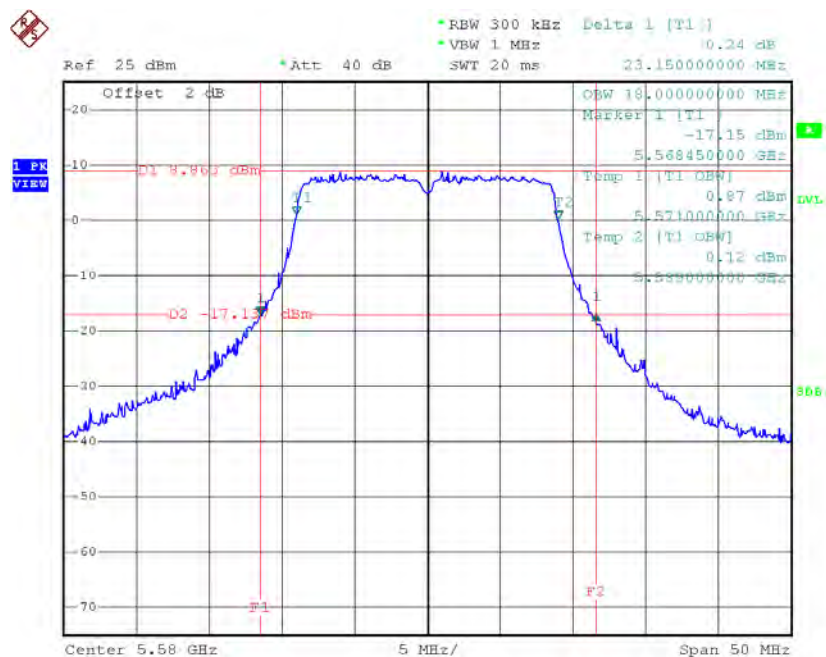

Date: 27.DEC.2015 18:08:15

TX CH140

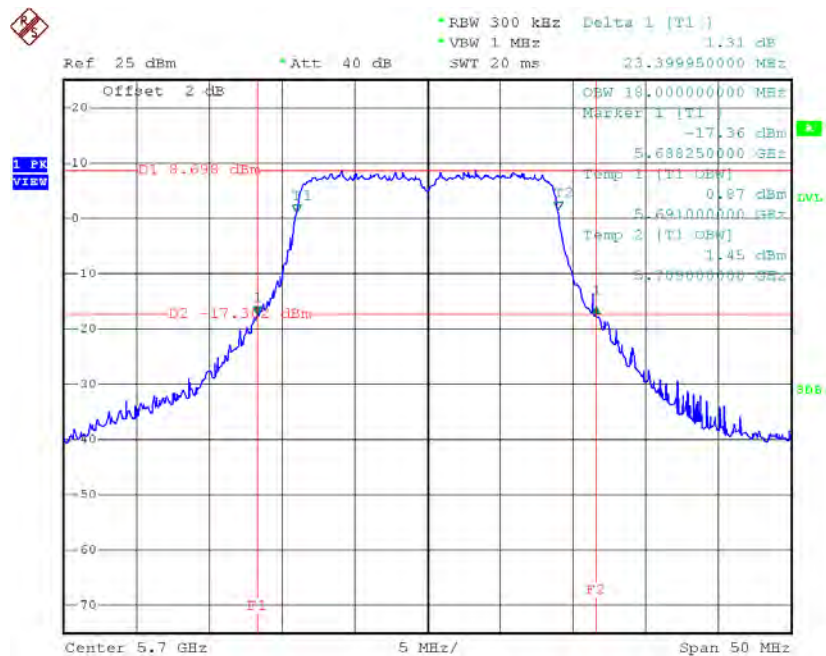


Date: 27.DEC.2015 18:14:10

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	43.59	36.40
CH110	5550	43.70	36.40
CH134	5670	43.60	36.40

TX CH102

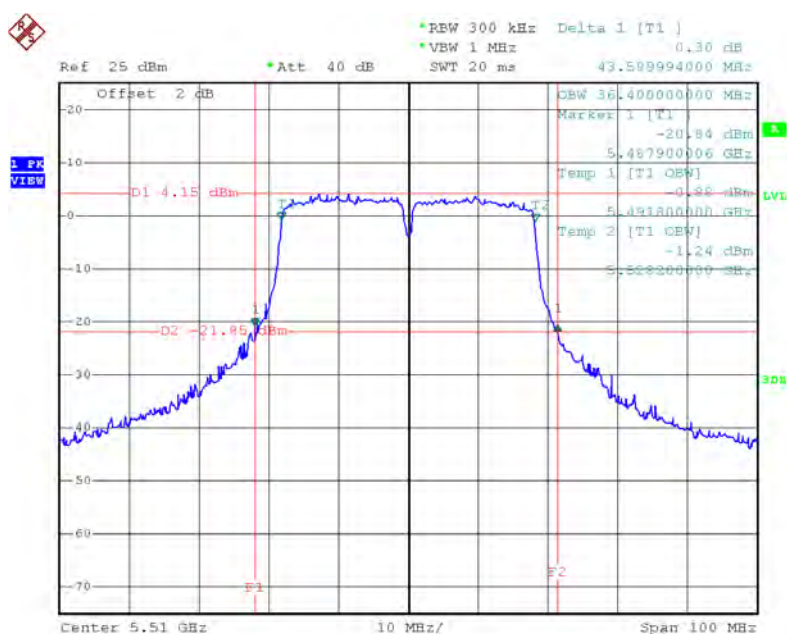


Date: 27.DEC.2015 19:19:59

TX CH110

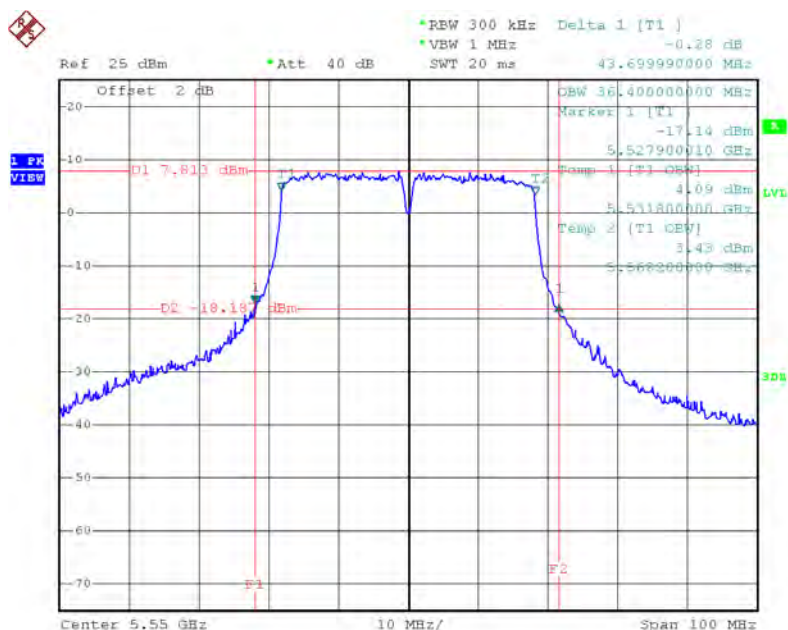

Date: 27.DEC.2015 19:24:13

TX CH134

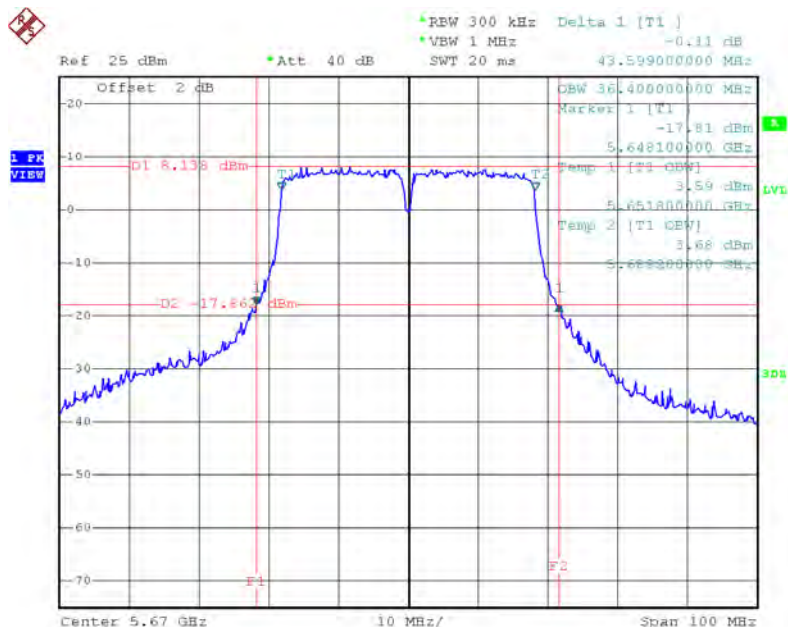


Date: 27.DEC.2015 19:25:22

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	83.60	76.00
CH122	5610	92.40	76.40

TX CH106

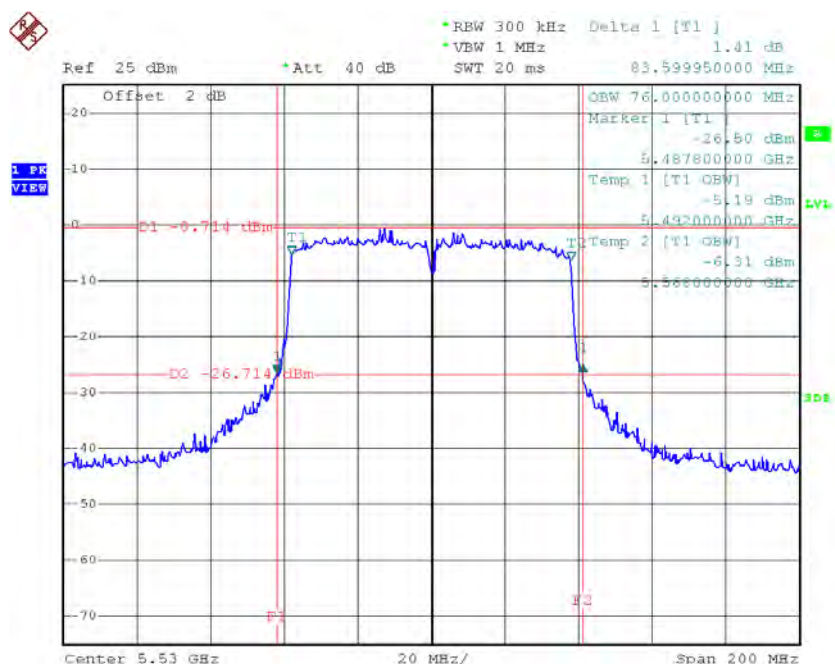

Date: 27.DEC.2015 19:49:10

TX CH122

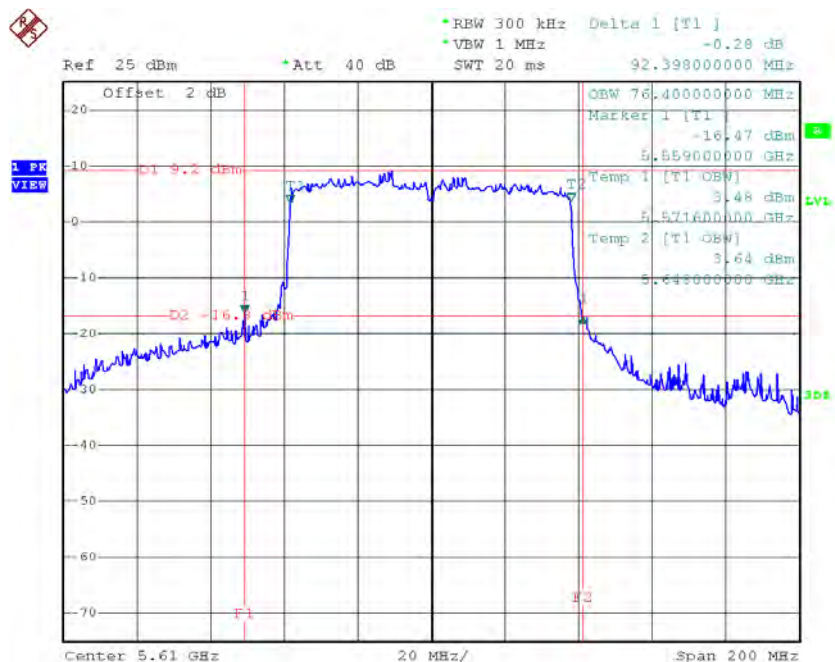


Date: 27.DEC.2015 19:51:48

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.70	17.70	>=500
CH157	5785	17.65	42.10	>=500
CH165	5825	17.65	17.70	>=500

TX CH 149

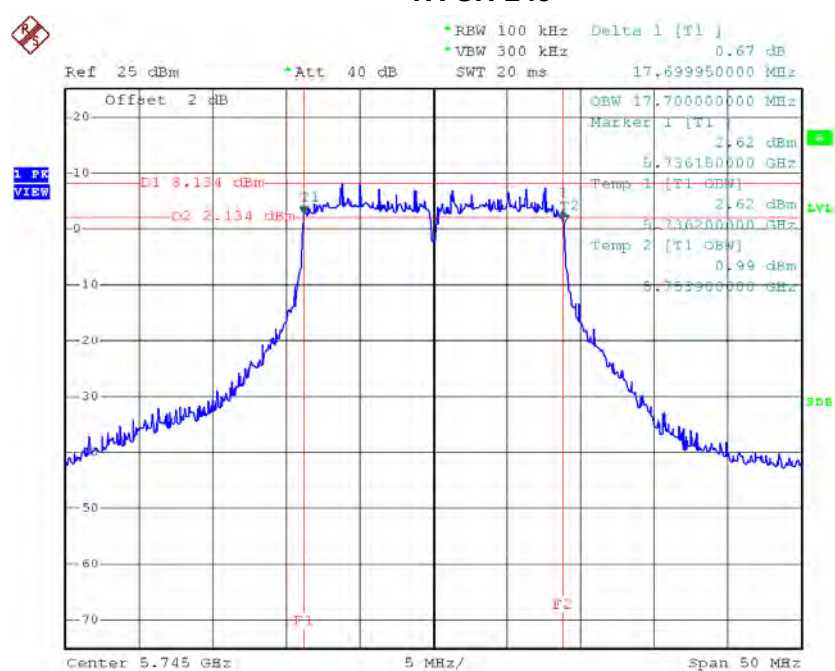


Date: 27.DEC.2015 18:15:33

TX CH 157

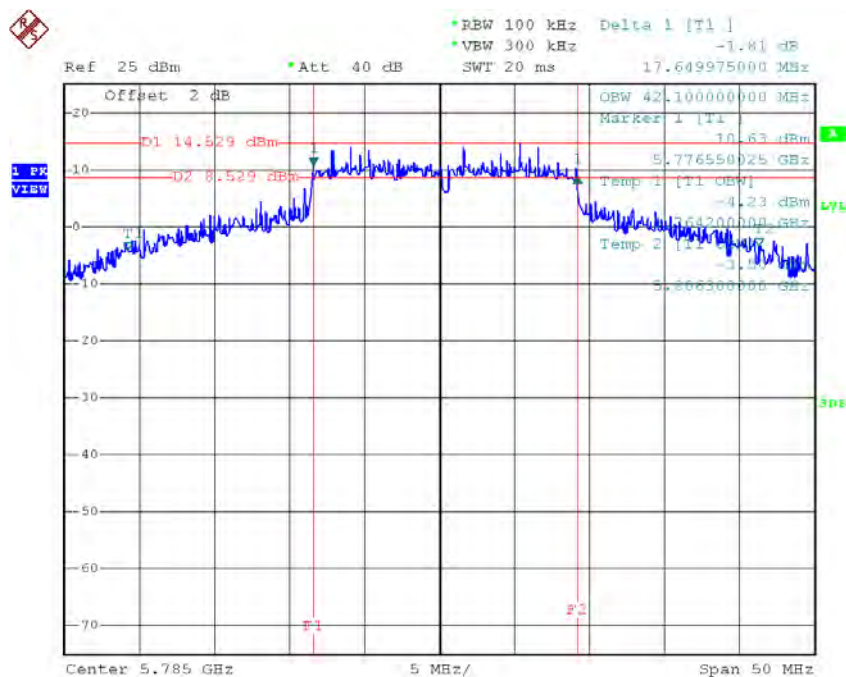

Date: 27.DEC.2015 18:22:00

TX CH 165

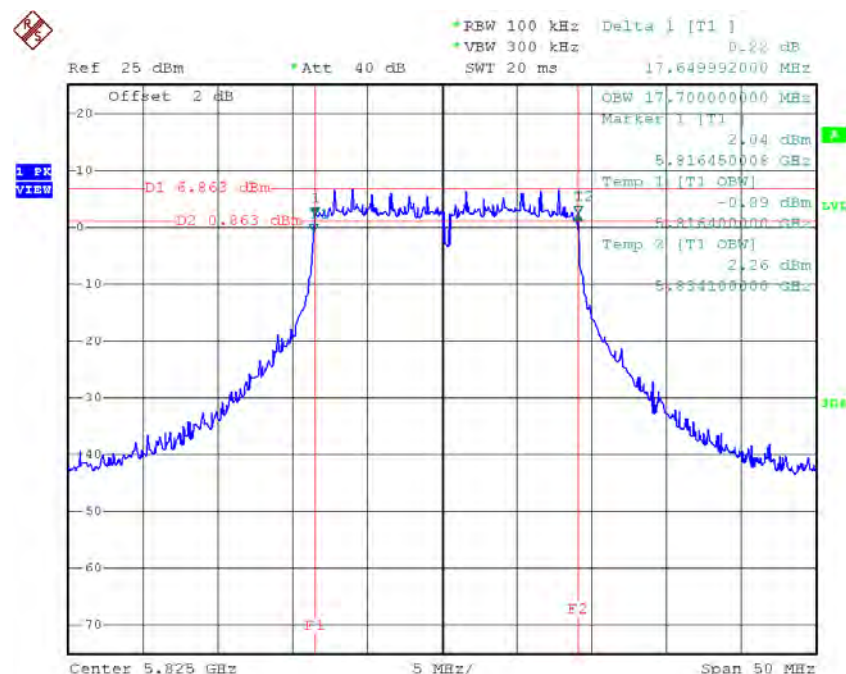


Date: 27.DEC.2015 18:23:29

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	36.40	>=500
CH159	5795	36.50	36.40	>=500

TX CH 151

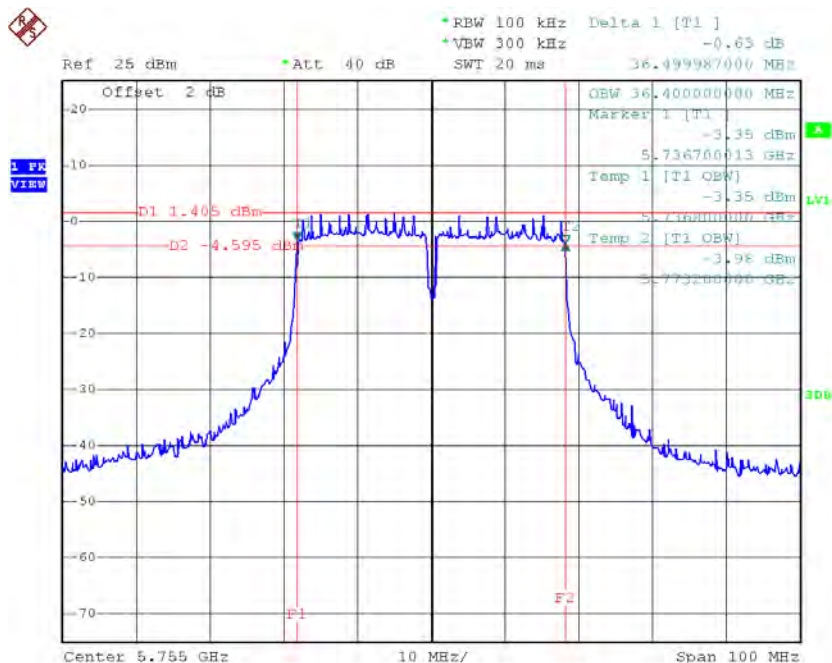

Date: 27.DEC.2015 19:29:37

TX CH 159

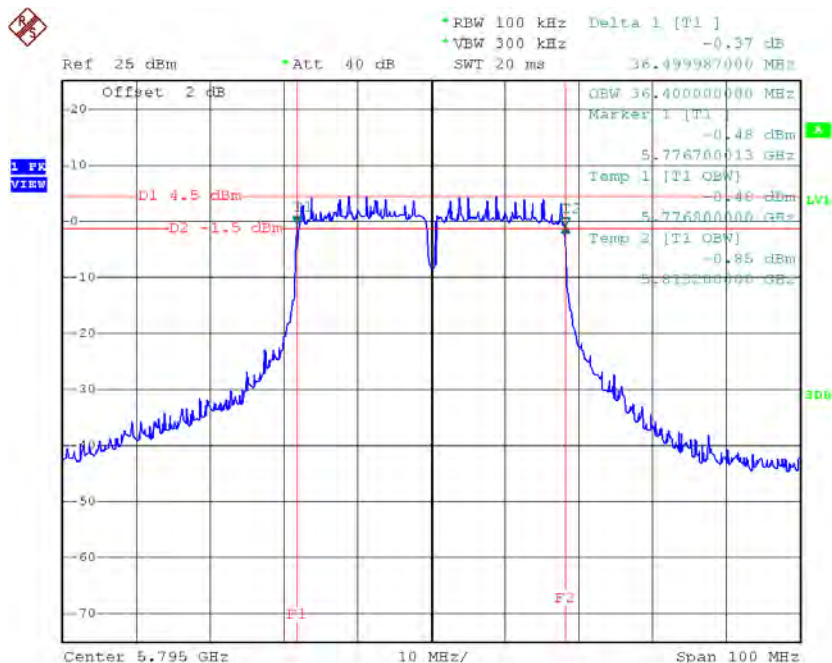


Date: 27.DEC.2015 19:31:08

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	76.60	76.00	>=500

TX CH 155

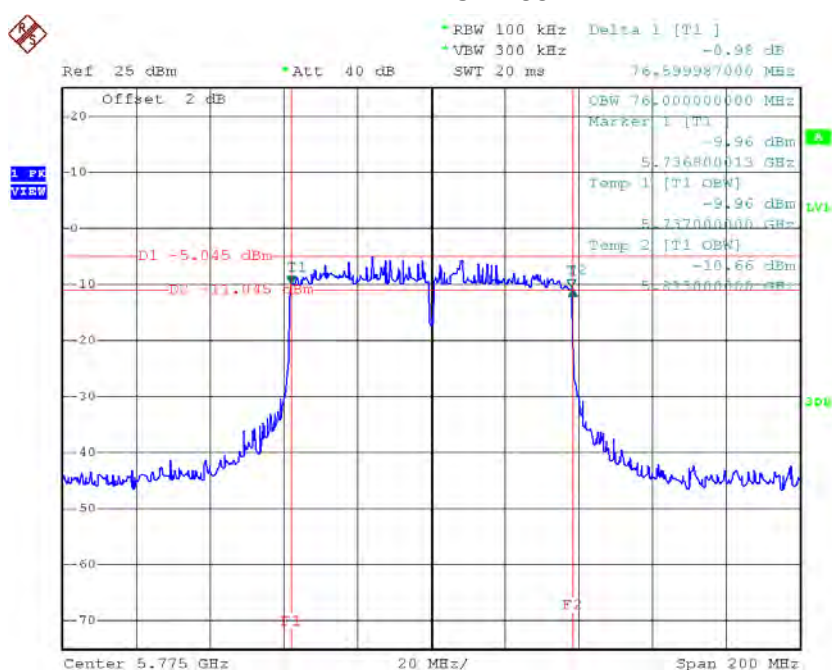

Date: 27.DEC.2015 20:03:51

ATTACHMENT F - MAXIMUM OUTPUT POWER

Test Mode: UNII-1/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	21.71	0.21	21.92	30.00	1.00
CH40	5200	27.11	0.21	27.32	30.00	1.00
CH48	5240	27.27	0.21	27.48	30.00	1.00

Test Mode: UNII-2A/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	21.68	0.21	21.89	24.00	0.25
CH60	5300	22.22	0.21	22.43	24.00	0.25
CH64	5320	20.61	0.21	20.82	24.00	0.25

Test Mode: UNII-2C/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	21.93	0.21	22.14	24.00	0.25
CH116	5580	23.17	0.21	23.38	24.00	0.25
CH140	5700	18.48	0.21	18.69	24.00	0.25

Test Mode: UNII-3/ TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	20.42	0.21	20.63	30.00	1.00
CH157	5785	25.87	0.21	26.08	30.00	1.00
CH165	5825	20.33	0.21	20.54	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.27	0.18	19.45	30.00	1.00
CH40	5200	21.26	0.18	21.44	30.00	1.00
CH48	5240	23.51	0.18	23.69	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	18.52	0.18	18.70	30.00	1.00
CH40	5200	20.80	0.18	20.98	30.00	1.00
CH48	5240	21.86	0.18	22.04	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	20.25	0.18	20.43	30.00	1.00
CH40	5200	23.41	0.18	23.59	30.00	1.00
CH48	5240	22.36	0.18	22.54	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	24.36	30.00	1.00
CH40	5200	26.93	30.00	1.00
CH48	5240	27.58	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	17.14	0.78	17.92	30.00	1.00
CH46	5230	23.99	0.78	24.77	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	15.77	0.78	16.55	30.00	1.00
CH46	5230	23.33	0.78	24.11	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	18.25	0.78	19.03	30.00	1.00
CH46	5230	25.00	0.78	25.78	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	22.72	30.00	1.00
CH46	5230	29.71	30.00	1.00

Test Mode: UNII-2A/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	17.54	0.18	17.72	24.00	0.25
CH60	5300	16.33	0.18	16.51	24.00	0.25
CH64	5320	16.04	0.18	16.22	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	16.77	0.18	16.95	24.00	0.25
CH60	5300	16.78	0.18	16.96	24.00	0.25
CH64	5320	17.34	0.18	17.52	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	16.62	0.18	16.80	24.00	0.25
CH60	5300	15.73	0.18	15.91	24.00	0.25
CH64	5320	16.43	0.18	16.61	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	21.95	24.00	0.25
CH60	5300	21.25	24.00	0.25
CH64	5320	21.59	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	17.94	0.78	18.72	24.00	0.25
CH62	5310	15.17	0.78	15.95	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	18.37	0.78	19.15	24.00	0.25
CH62	5310	16.58	0.78	17.36	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	18.56	0.78	19.34	24.00	0.25
CH62	5310	15.62	0.78	16.40	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	23.85	24.00	0.25
CH62	5310	21.38	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	16.71	0.18	16.89	24.00	0.25
CH116	5580	17.26	0.18	17.44	24.00	0.25
CH140	5700	15.98	0.18	16.16	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	17.83	0.18	18.01	24.00	0.25
CH116	5580	17.71	0.18	17.89	24.00	0.25
CH140	5700	15.85	0.18	16.03	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	16.79	0.18	16.97	24.00	0.25
CH116	5580	17.46	0.18	17.64	24.00	0.25
CH140	5700	16.41	0.18	16.59	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	22.09	24.00	0.25
CH116	5580	22.43	24.00	0.25
CH140	5700	21.04	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.79	0.78	16.57	24.00	0.25
CH110	5550	17.53	0.78	18.31	24.00	0.25
CH134	5670	16.57	0.78	17.35	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	16.75	0.78	17.53	24.00	0.25
CH110	5550	18.55	0.78	19.33	24.00	0.25
CH134	5670	16.63	0.78	17.41	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	16.11	0.78	16.89	24.00	0.25
CH110	5550	18.21	0.78	18.99	24.00	0.25
CH134	5670	17.01	0.78	17.79	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	21.79	24.00	0.25
CH110	5550	23.67	24.00	0.25
CH134	5670	22.29	24.00	0.25

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.47	0.18	18.65	30.00	1.00
CH157	5785	23.26	0.18	23.44	30.00	1.00
CH165	5825	19.56	0.18	19.74	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	17.06	0.18	17.24	30.00	1.00
CH157	5785	21.53	0.18	21.71	30.00	1.00
CH165	5825	17.64	0.18	17.82	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.33	0.18	18.51	30.00	1.00
CH157	5785	23.96	0.18	24.14	30.00	1.00
CH165	5825	20.05	0.18	20.23	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	22.95	30.00	1.00
CH157	5785	27.98	30.00	1.00
CH165	5825	24.15	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.91	0.78	16.69	30.00	1.00
CH159	5795	18.72	0.78	19.50	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.41	0.78	15.19	30.00	1.00
CH159	5795	16.74	0.78	17.52	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	16.84	0.78	17.62	30.00	1.00
CH159	5795	18.84	0.78	19.62	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	21.38	30.00	1.00
CH159	5795	23.75	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.94	0.20	18.14	30.00	1.00
CH40	5200	23.08	0.20	23.28	30.00	1.00
CH48	5240	23.28	0.20	23.48	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.27	0.20	17.47	30.00	1.00
CH40	5200	22.39	0.20	22.59	30.00	1.00
CH48	5240	22.79	0.20	22.99	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.37	0.20	19.57	30.00	1.00
CH40	5200	20.31	0.20	20.51	30.00	1.00
CH48	5240	24.21	0.20	24.41	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	23.25	30.00	1.00
CH40	5200	27.05	30.00	1.00
CH48	5240	28.44	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	17.00	0.65	17.65	30.00	1.00
CH46	5230	24.03	0.65	24.68	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	16.41	0.65	17.06	30.00	1.00
CH46	5230	23.29	0.65	23.94	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	18.41	0.65	19.06	30.00	1.00
CH46	5230	25.02	0.65	25.67	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	22.78	30.00	1.00
CH46	5230	29.59	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	15.07	0.95	16.02	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	14.72	0.95	15.67	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	16.30	0.95	17.25	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	21.14	30.00	1.00

Test Mode: UNII-2A/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.03	0.20	19.23	24.00	0.25
CH60	5300	17.34	0.20	17.54	24.00	0.25
CH64	5320	18.47	0.20	18.67	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	18.07	0.20	18.27	24.00	0.25
CH60	5300	15.78	0.20	15.98	24.00	0.25
CH64	5320	16.77	0.20	16.97	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	18.97	0.20	19.17	24.00	0.25
CH60	5300	16.39	0.20	16.59	24.00	0.25
CH64	5320	17.44	0.20	17.64	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	23.68	24.00	0.25
CH60	5300	21.52	24.00	0.25
CH64	5320	22.59	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	17.82	0.65	18.47	24.00	0.25
CH62	5310	15.74	0.65	16.39	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	18.31	0.65	18.96	24.00	0.25
CH62	5310	16.61	0.65	17.26	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	18.52	0.65	19.17	24.00	0.25
CH62	5310	15.66	0.65	16.31	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	23.65	24.00	0.25
CH62	5310	21.45	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	15.81	0.95	16.76	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	16.43	0.95	17.38	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	16.13	0.95	17.08	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	21.85	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	18.11	0.20	18.31	24.00	0.25
CH116	5580	17.28	0.20	17.48	24.00	0.25
CH140	5700	16.87	0.20	17.07	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	18.83	0.20	19.03	24.00	0.25
CH116	5580	17.69	0.20	17.89	24.00	0.25
CH140	5700	16.87	0.20	17.07	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	17.67	0.20	17.87	24.00	0.25
CH116	5580	17.57	0.20	17.77	24.00	0.25
CH140	5700	17.53	0.20	17.73	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	23.20	24.00	0.25
CH116	5580	22.49	24.00	0.25
CH140	5700	22.07	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.82	0.65	16.47	24.00	0.25
CH110	5550	17.52	0.65	18.17	24.00	0.25
CH134	5670	17.57	0.65	18.22	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	16.94	0.65	17.59	24.00	0.25
CH110	5550	18.37	0.65	19.02	24.00	0.25
CH134	5670	17.62	0.65	18.27	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	16.18	0.65	16.83	24.00	0.25
CH110	5550	18.29	0.65	18.94	24.00	0.25
CH134	5670	17.93	0.65	18.58	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	21.76	24.00	0.25
CH110	5550	23.50	24.00	0.25
CH134	5670	23.13	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	11.56	0.95	12.51	24.00	0.25
CH122	5610	16.34	0.95	17.29	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	12.41	0.95	13.36	24.00	0.25
CH122	5610	16.93	0.95	17.88	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	12.02	0.95	12.97	24.00	0.25
CH122	5610	16.96	0.95	17.91	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	17.73	24.00	0.25
CH122	5610	22.47	24.00	0.25

Test Mode: UNII-3/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	17.62	0.20	17.82	30.00	1.00
CH157	5785	23.38	0.20	23.58	30.00	1.00
CH165	5825	18.59	0.20	18.79	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	16.95	0.20	17.15	30.00	1.00
CH157	5785	21.65	0.20	21.85	30.00	1.00
CH165	5825	16.44	0.20	16.64	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.49	0.20	18.69	30.00	1.00
CH157	5785	23.91	0.20	24.11	30.00	1.00
CH165	5825	19.13	0.20	19.33	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	22.70	30.00	1.00
CH157	5785	28.05	30.00	1.00
CH165	5825	23.17	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.81	0.65	16.46	30.00	1.00
CH159	5795	18.71	0.65	19.36	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.31	0.65	14.96	30.00	1.00
CH159	5795	16.78	0.65	17.43	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	16.57	0.65	17.22	30.00	1.00
CH159	5795	19.43	0.65	20.08	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	21.08	30.00	1.00
CH159	5795	23.86	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	12.62	0.95	13.57	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	10.93	0.95	11.88	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	13.05	0.95	14.00	30.00	1.00


Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	18.01	30.00	1.00

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode:	UNII-1/TX A Mode
-------------------	-------------------------

TX mode CH36

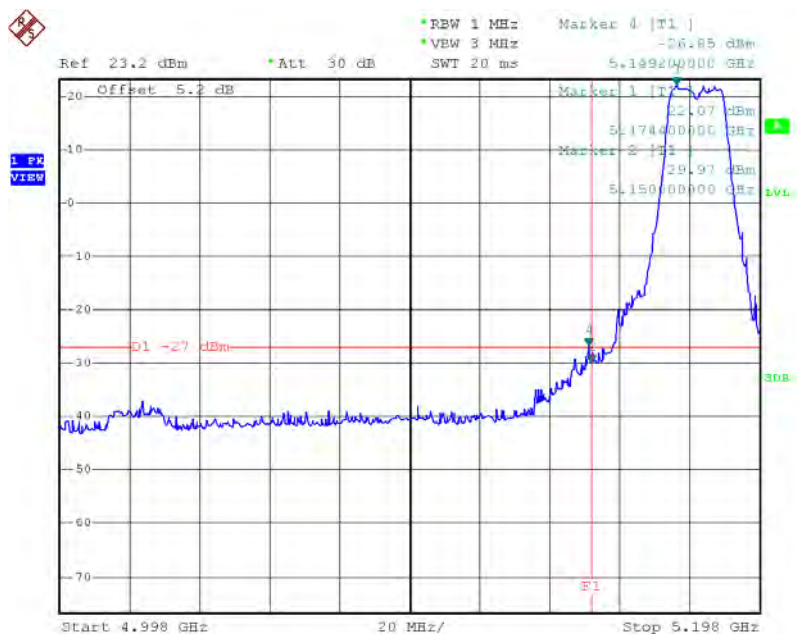

Date: 27.DEC.2015 11:37:54


TX mode CH48

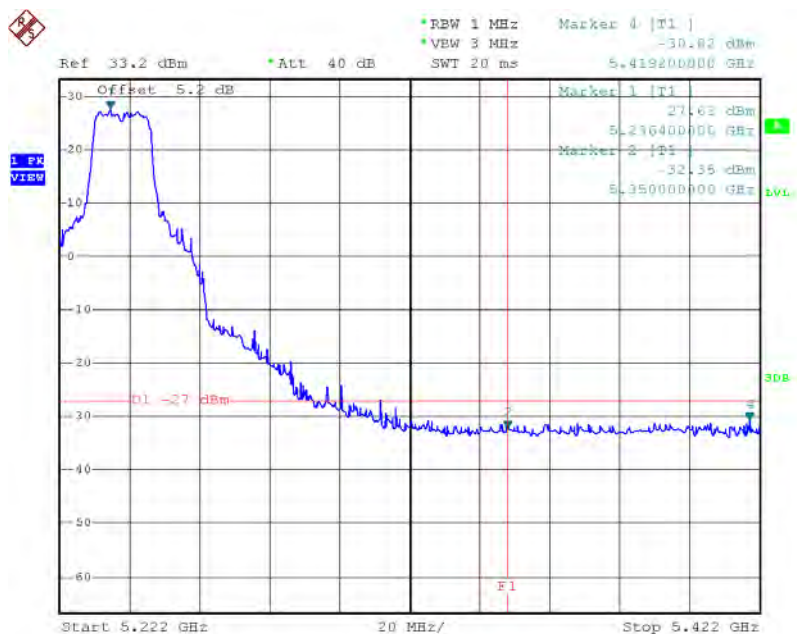

Date: 27.DEC.2015 12:21:37


Test Mode:	UNII-2A/TX A Mode
-------------------	--------------------------

TX mode CH52

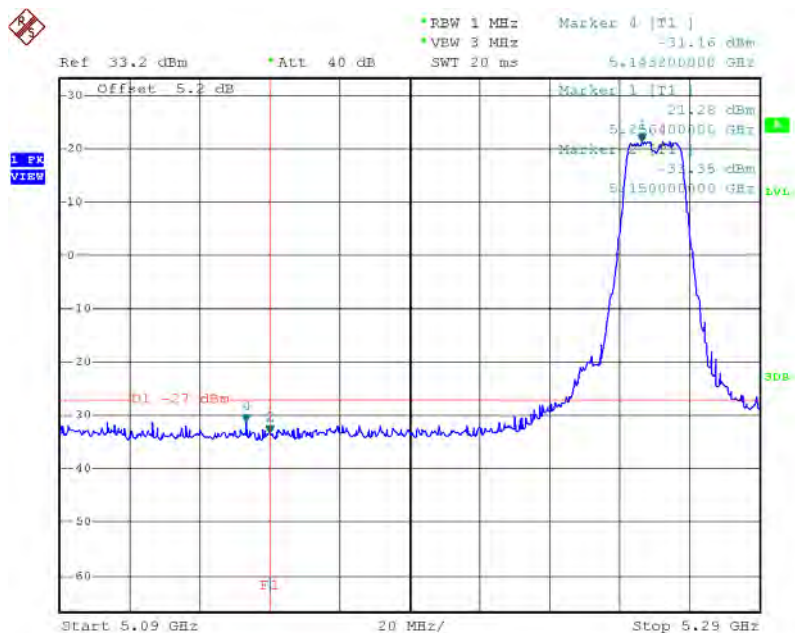

Date: 27.DEC.2015 12:13:18


TX mode CH64

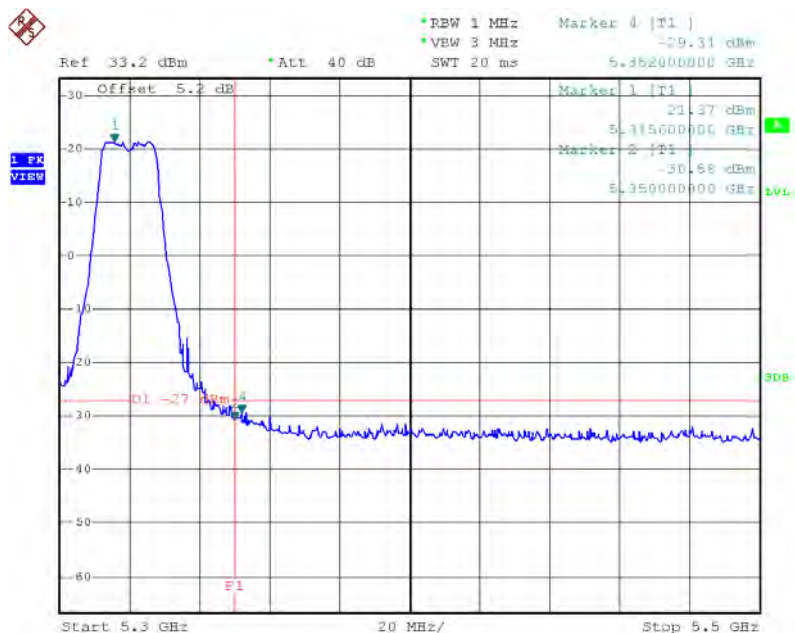

Date: 27.DEC.2015 12:31:22


Test Mode:	UNII-2C/TX A Mode
------------	-------------------

TX mode CH100

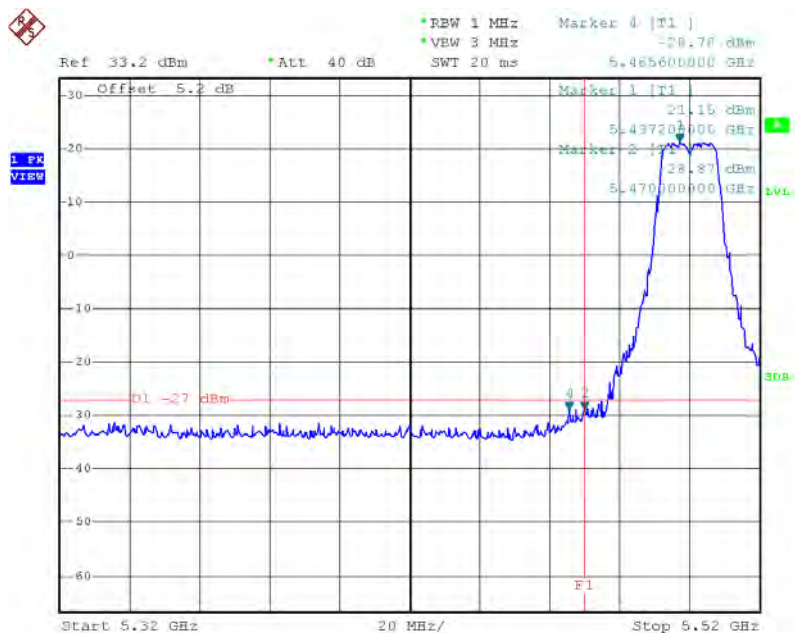

Date: 27.DEC.2015 12:33:28


TX mode CH140

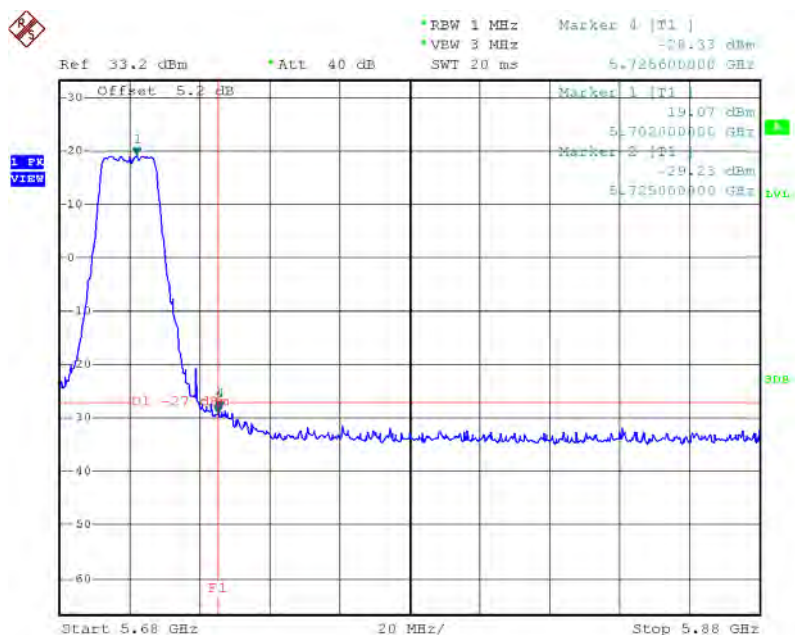

Date: 27.DEC.2015 12:41:09


Test Mode: UNII-3/TX A Mode

TX A Mode CH149

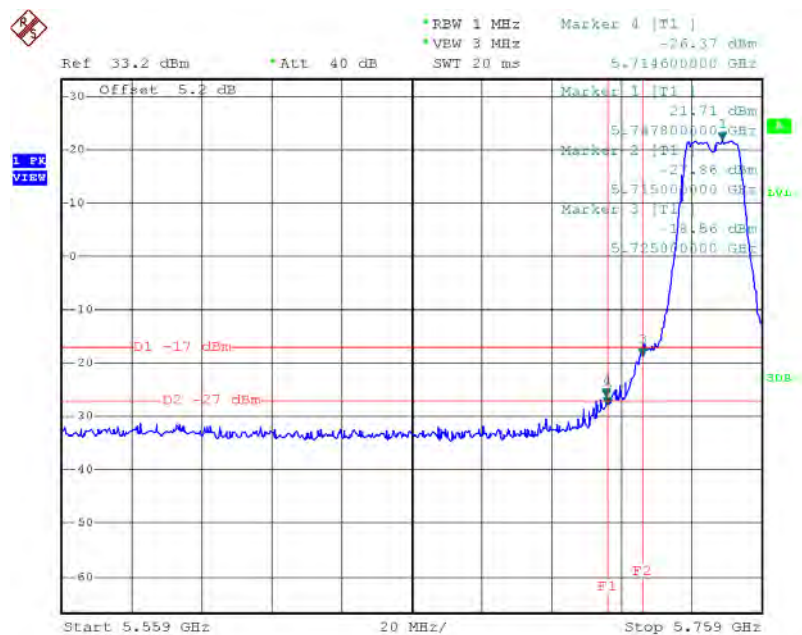

Date: 27.DEC.2015 12:44:44


TX A Mode CH165

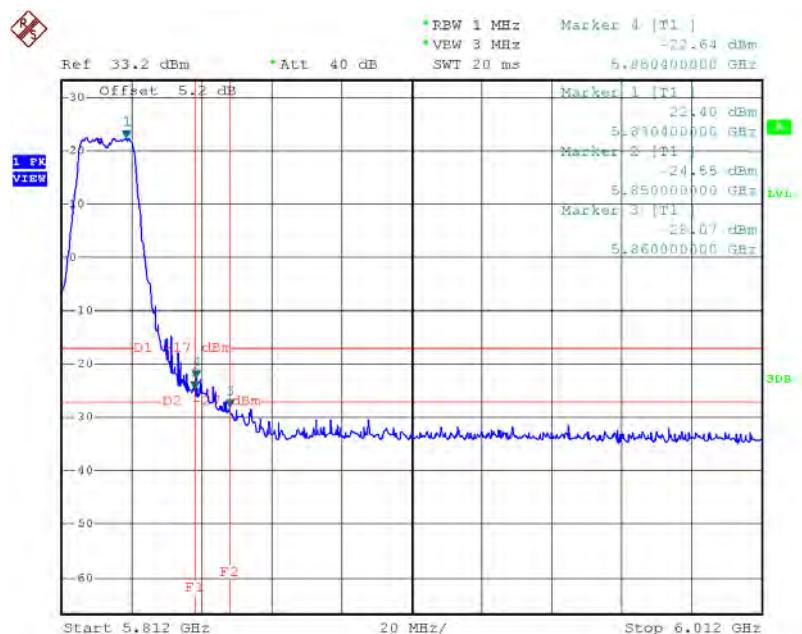

Date: 27.DEC.2015 12:55:45


Test Mode: UNII-1/TX N20 Mode_ANT 1

TX mode CH36

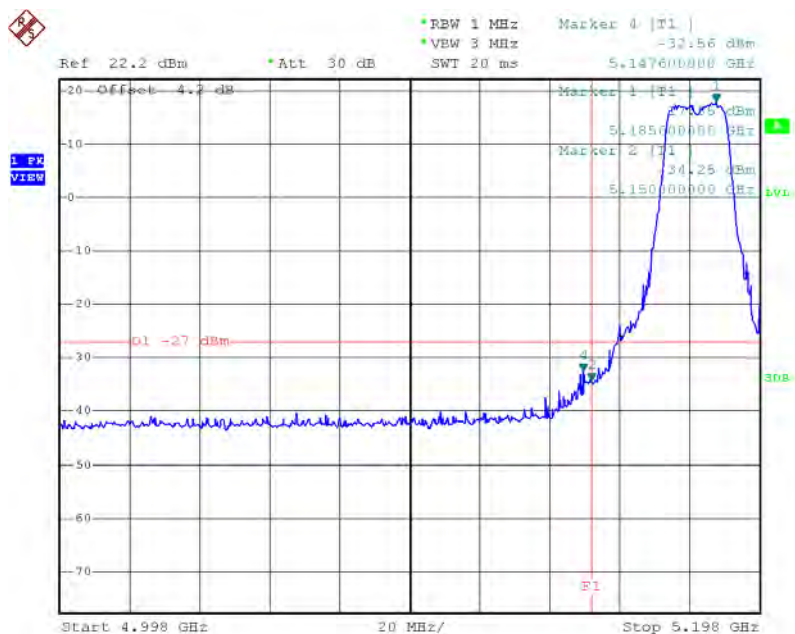

Date: 27.DEC.2015 16:49:04


TX mode CH48

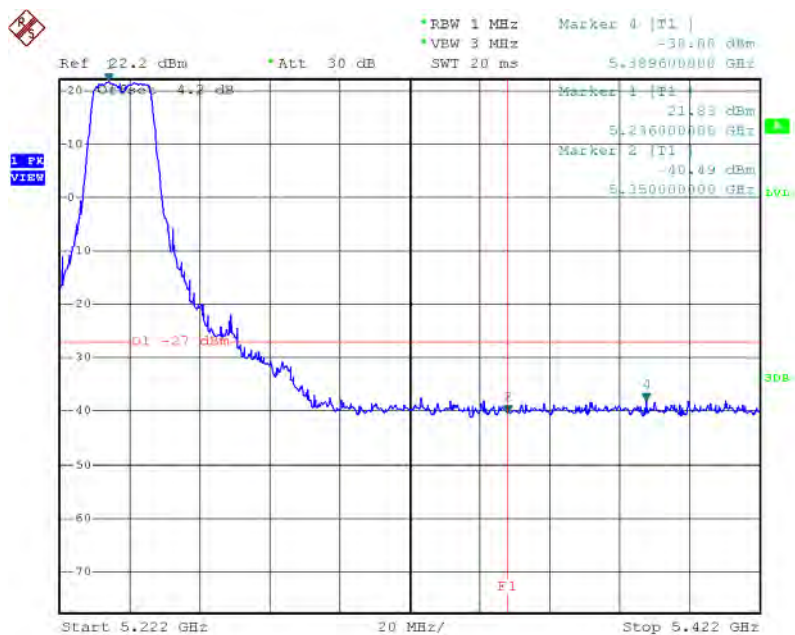

Date: 27.DEC.2015 16:55:06


Test Mode:	UNII-1/TX N20 Mode_ANT 3
-------------------	---------------------------------

TX mode CH36

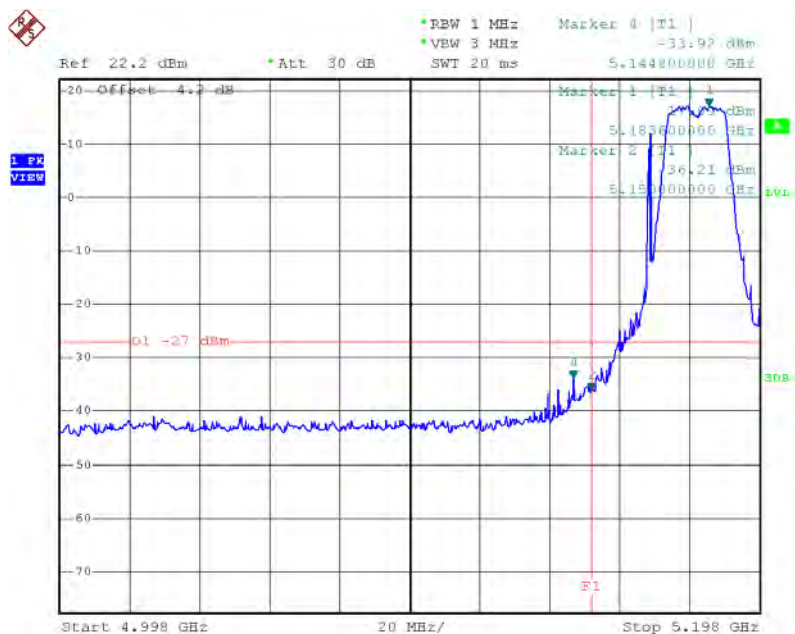

Date: 27.DEC.2015 16:44:18


TX mode CH48

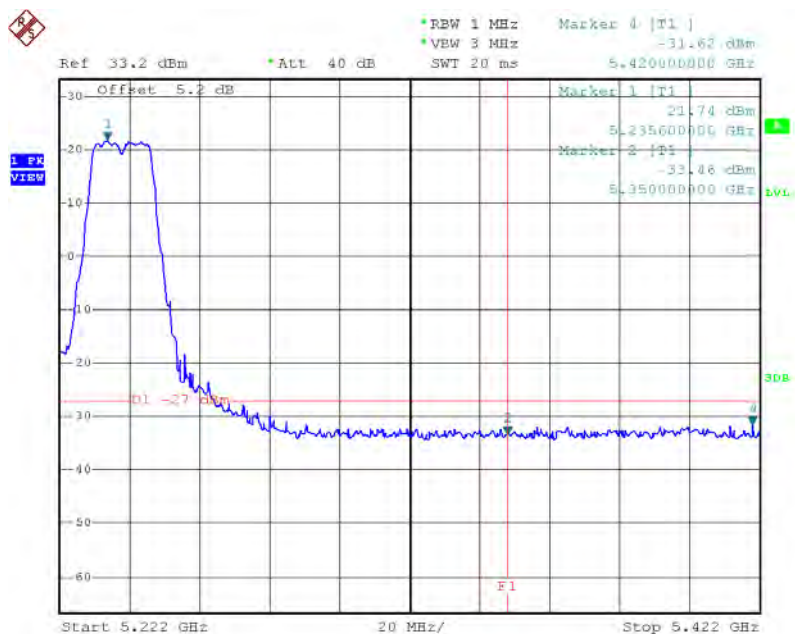

Date: 27.DEC.2015 13:36:01


Test Mode: UNII-1/TX N40 Mode_ANT 1

TX mode CH38

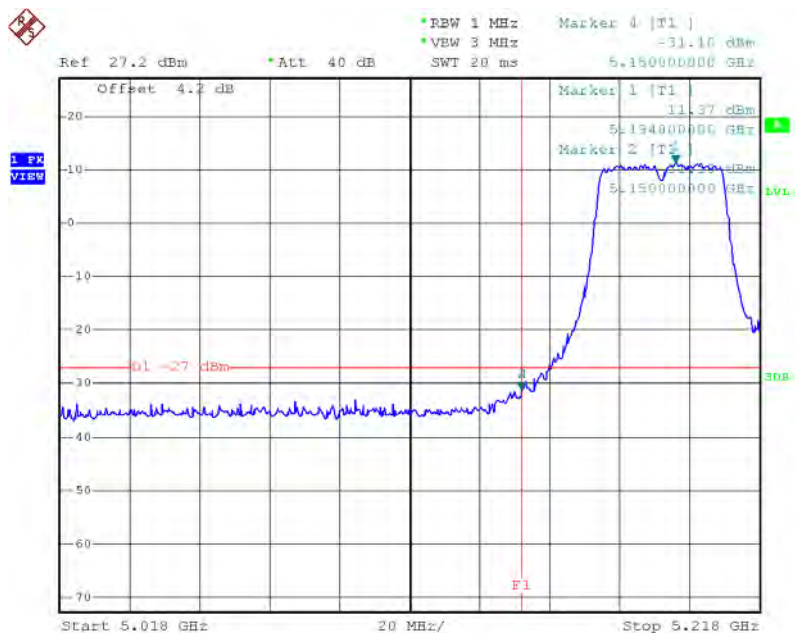

Date: 27.DEC.2015 18:28:47


TX mode CH46

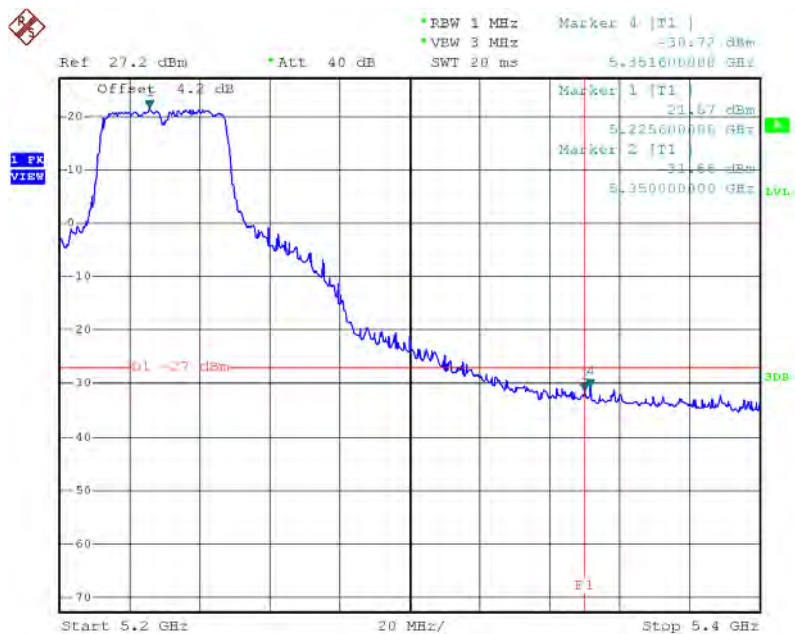

Date: 27.DEC.2015 18:30:44


Test Mode:	UNII-1/TX N40 Mode_ANT 2
-------------------	---------------------------------

TX mode CH38

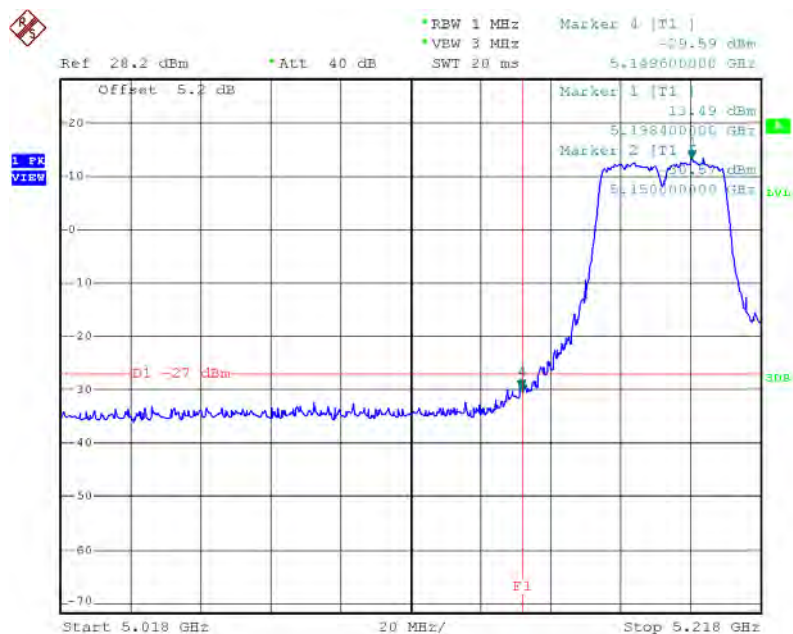

Date: 27.DEC.2015 18:27:35


TX mode CH46

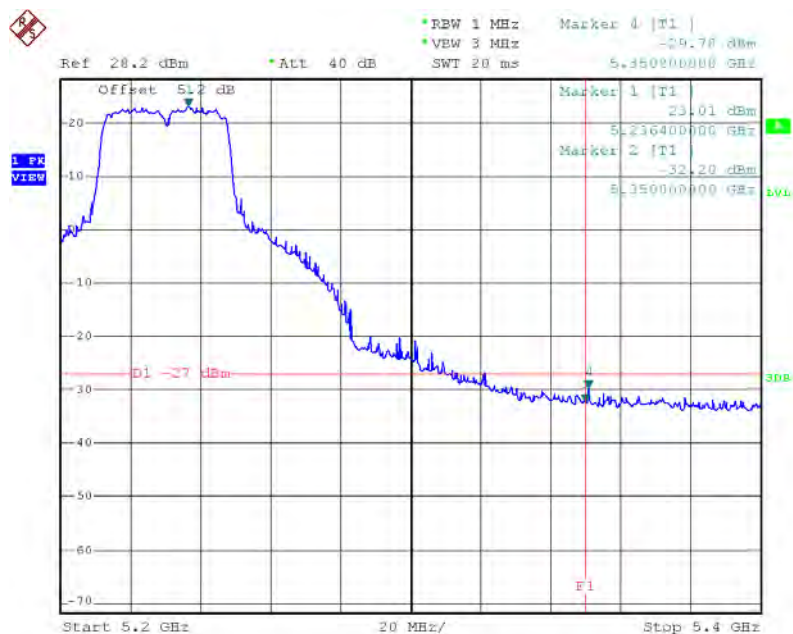

Date: 27.DEC.2015 18:31:57


Test Mode:	UNII-1/TX N40 Mode_ANT 3
-------------------	---------------------------------

TX mode CH38

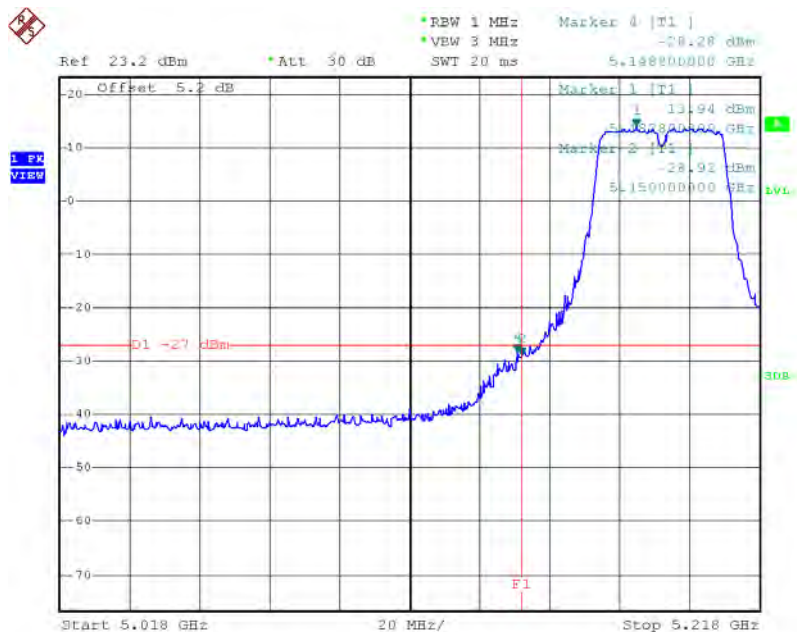

Date: 27.DEC.2015 14:40:42


TX mode CH46

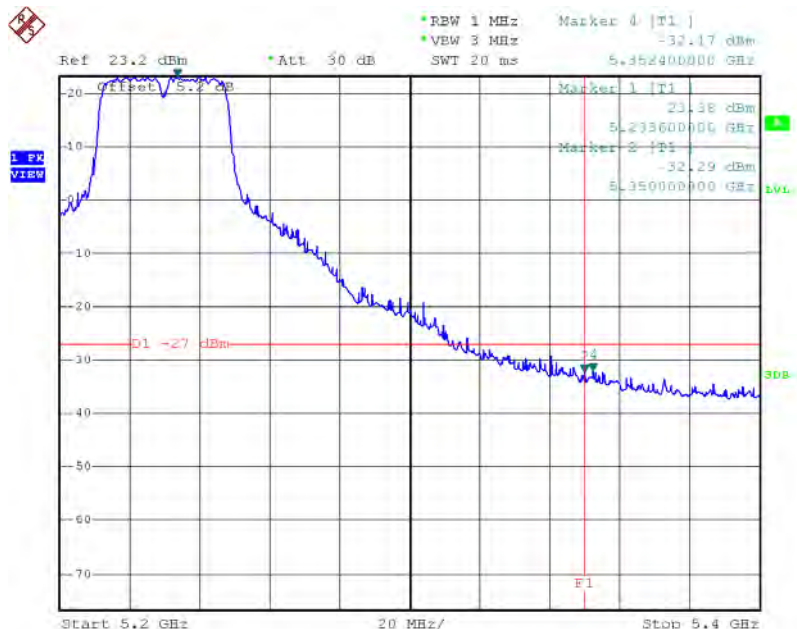

Date: 27.DEC.2015 14:44:26


Test Mode: UNII-2A/TX N20 Mode_ANT 1

TX mode CH52

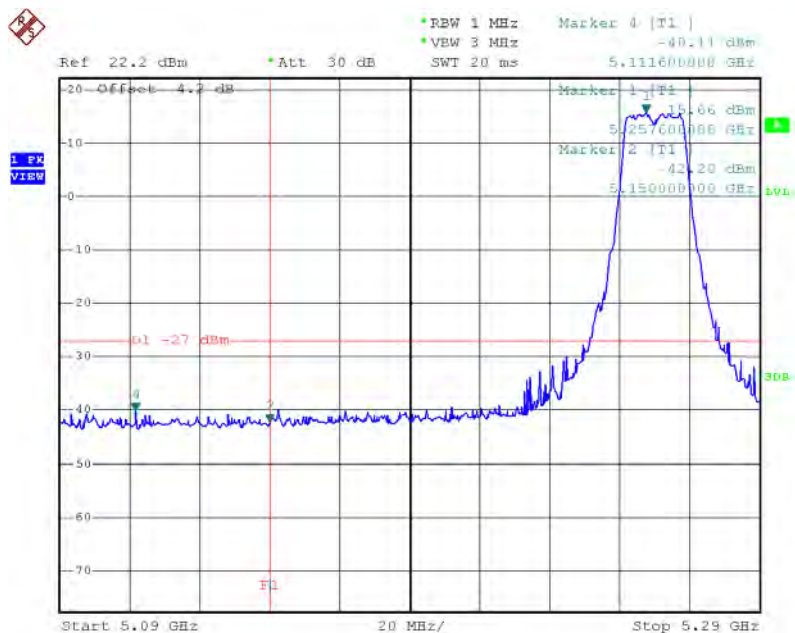

Date: 27.DEC.2015 16:57:38


TX mode CH64

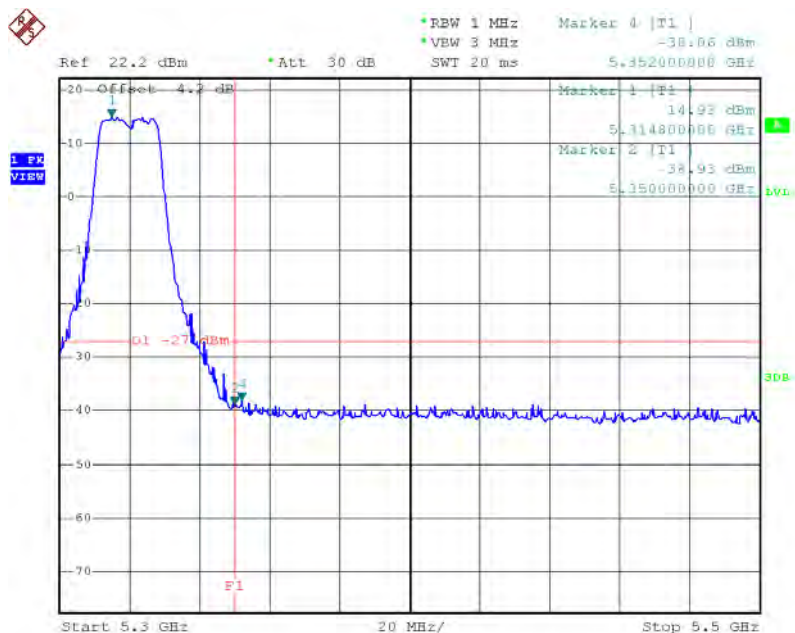

Date: 27.DEC.2015 17:05:39


Test Mode: UNII-2A/TX N20 Mode_ANT 2

TX mode CH52

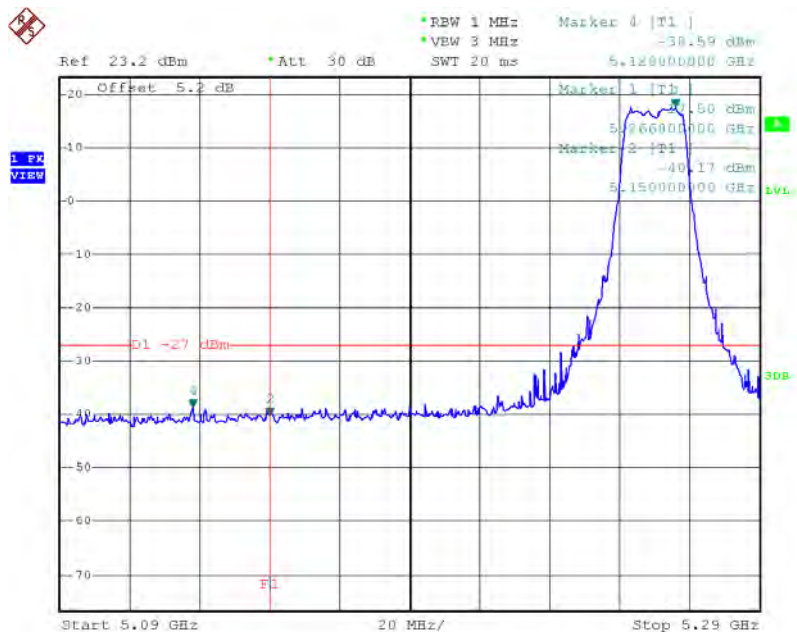

Date: 27.DEC.2015 16:58:53


TX mode CH64

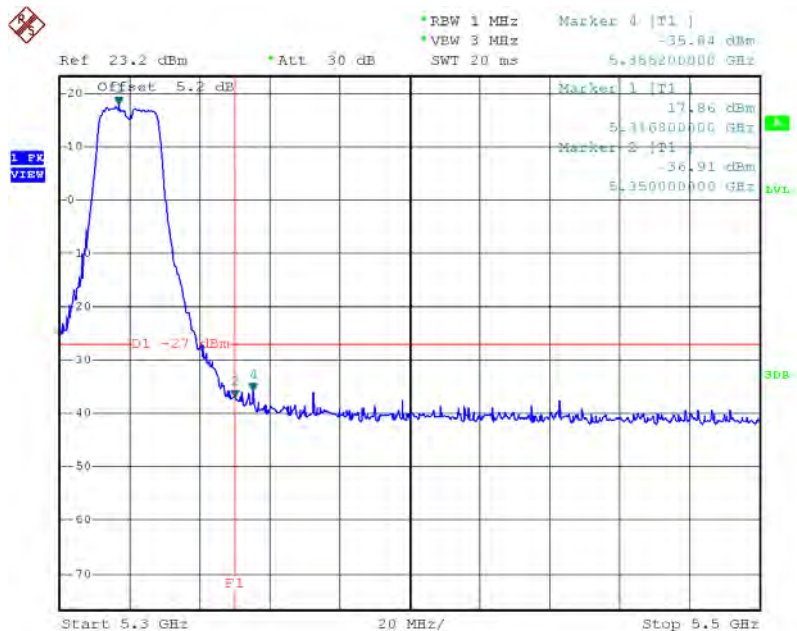

Date: 27.DEC.2015 17:06:49


Test Mode: UNII-2A/TX N20 Mode_ANT 3

TX mode CH52

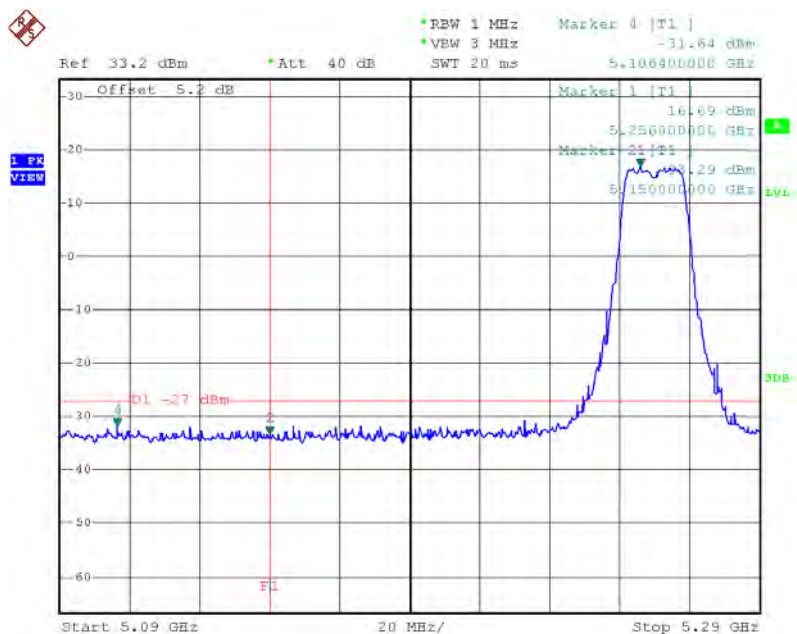

Date: 27.DEC.2015 13:39:22


TX mode CH64

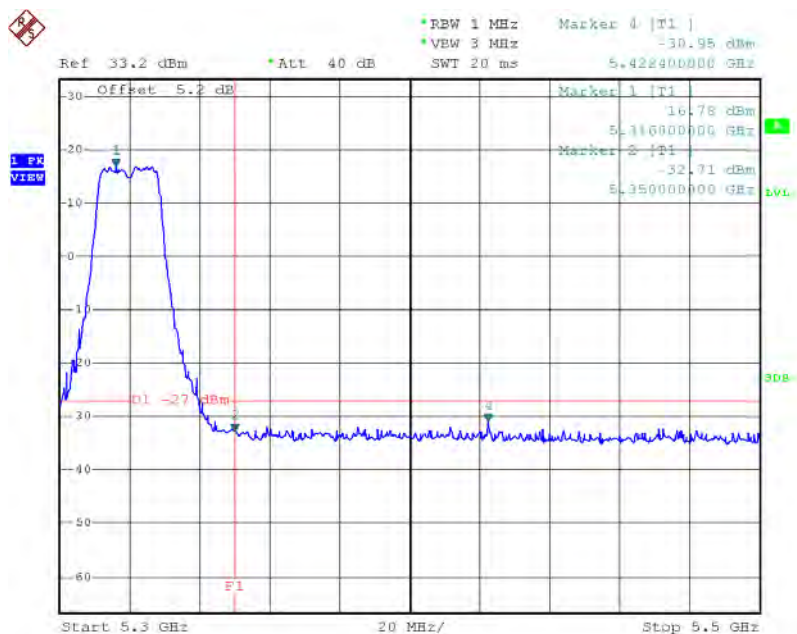

Date: 27.DEC.2015 13:43:33


Test Mode: UNII-2A/TX N40 Mode_ANT 1

TX mode CH54

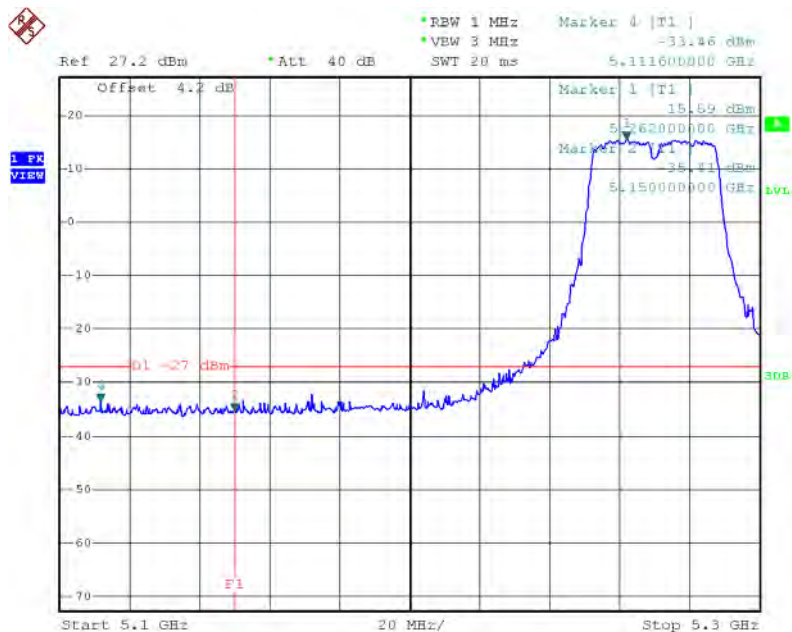

Date: 27.DEC.2015 18:34:40


TX mode CH62

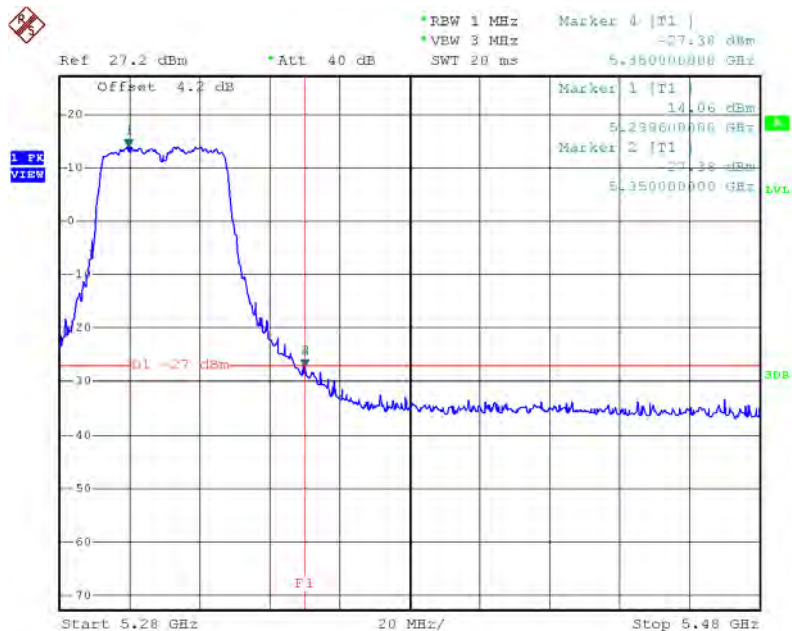

Date: 27.DEC.2015 18:39:25


Test Mode:	UNII-2A/TX N40 Mode_ANT 2
------------	---------------------------

TX mode CH54

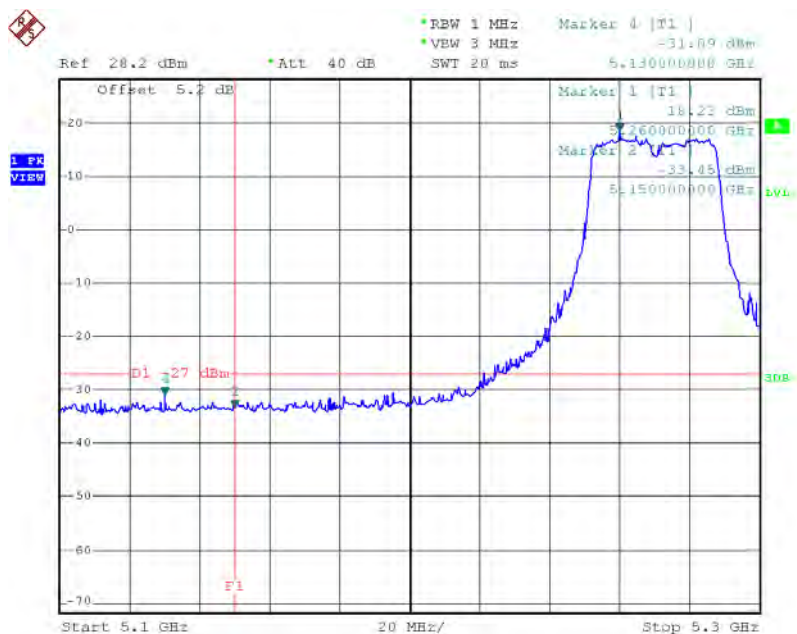

Date: 27.DEC.2015 18:33:34


TX mode CH62

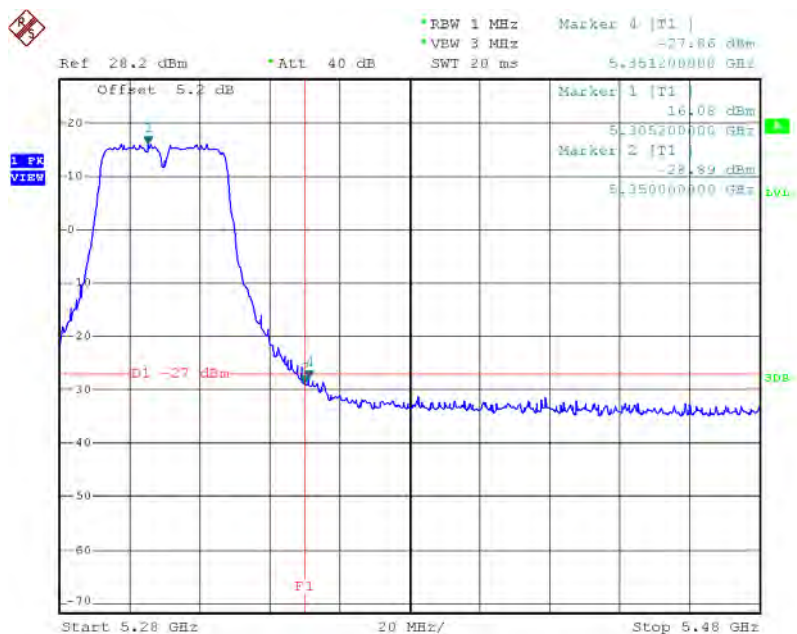

Date: 27.DEC.2015 18:41:16


Test Mode:	UNII-2A/TX N40 Mode_ANT 3
------------	---------------------------

TX mode CH54

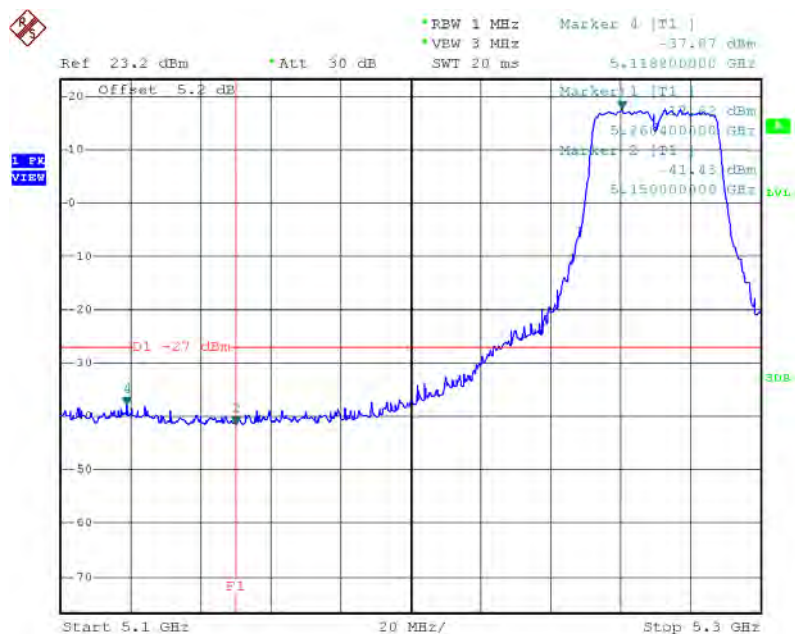

Date: 27.DEC.2015 14:49:46


TX mode CH62

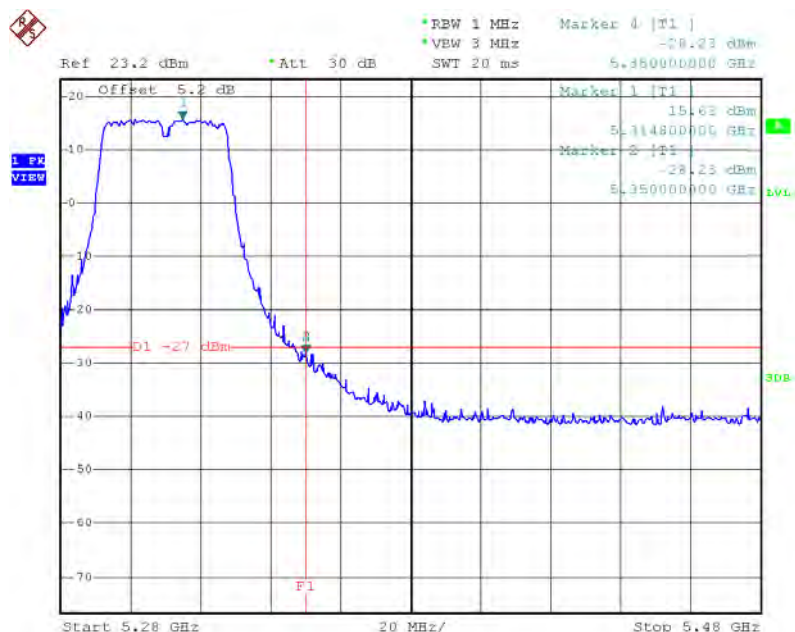

Date: 27.DEC.2015 14:54:10


Test Mode:	UNII-2C/TX N20 Mode_ANT 1
------------	---------------------------

TX mode CH100

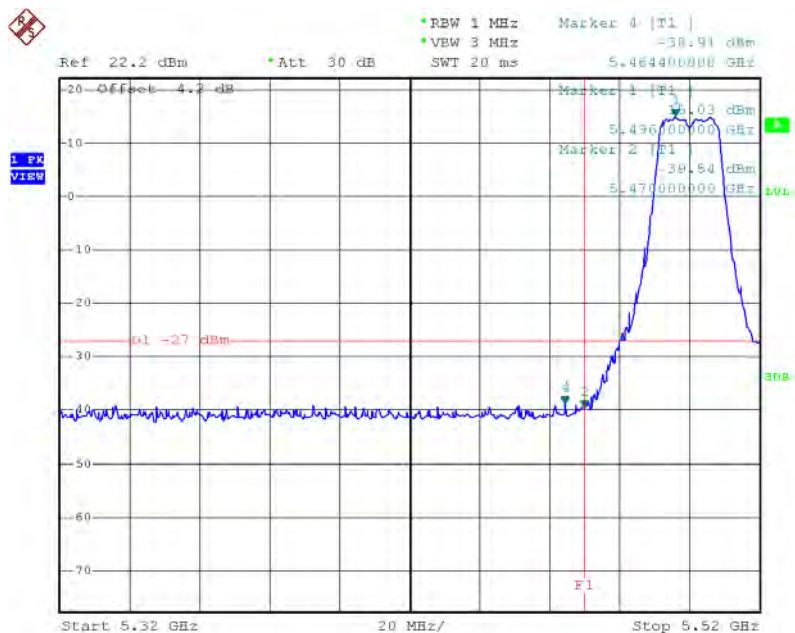

Date: 27.DEC.2015 17:14:44


TX mode CH140

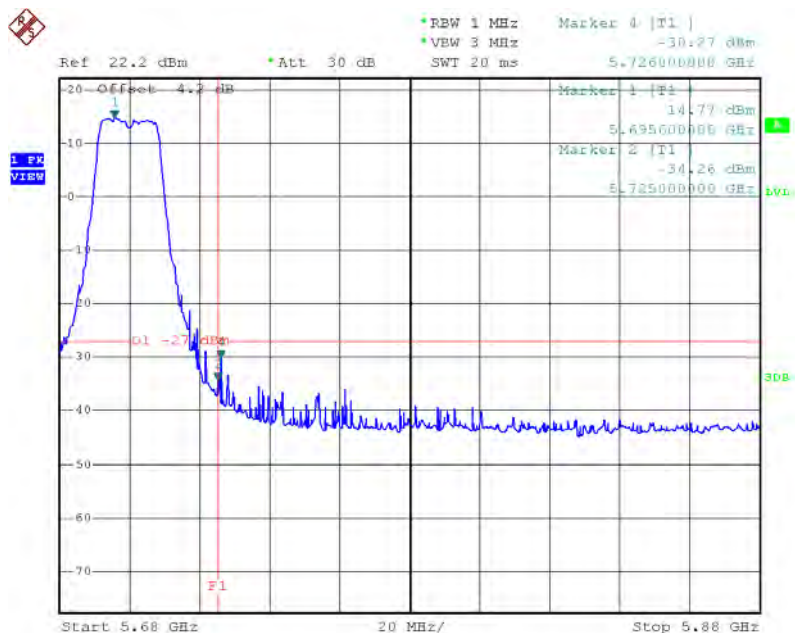

Date: 27.DEC.2015 17:20:10


Test Mode: UNII-2C/TX N20 Mode_ANT 2

TX mode CH100

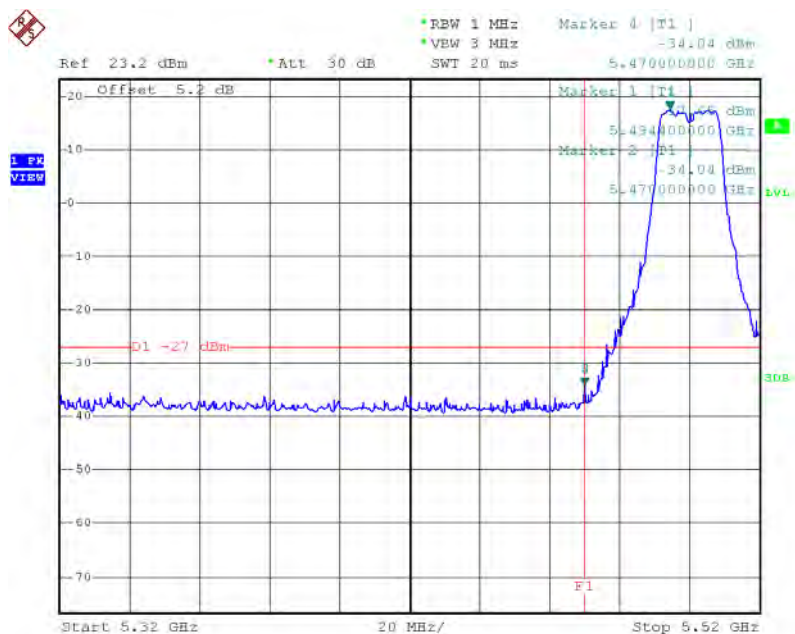

Date: 27.DEC.2015 17:12:37

TX mode CH140

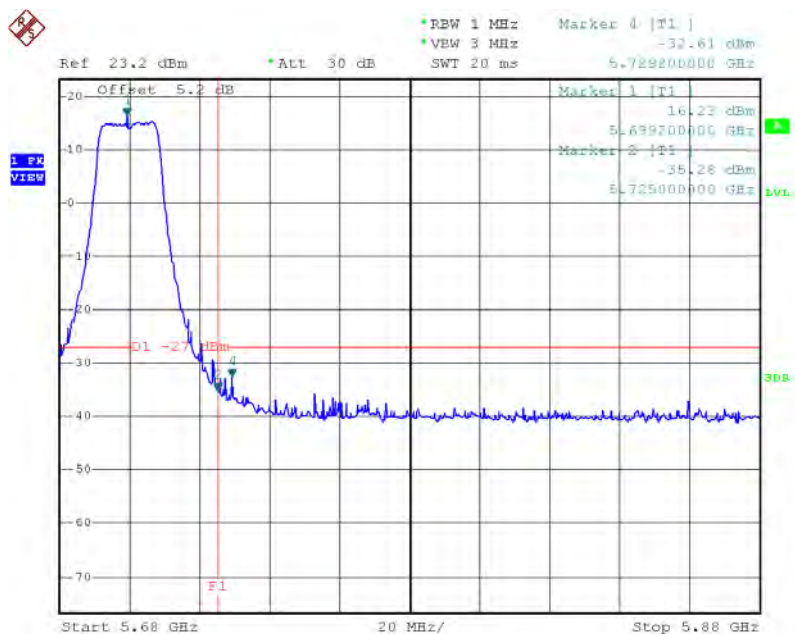

Date: 27.DEC.2015 17:18:58

