


Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

### Horizontal

115 dBuV/m

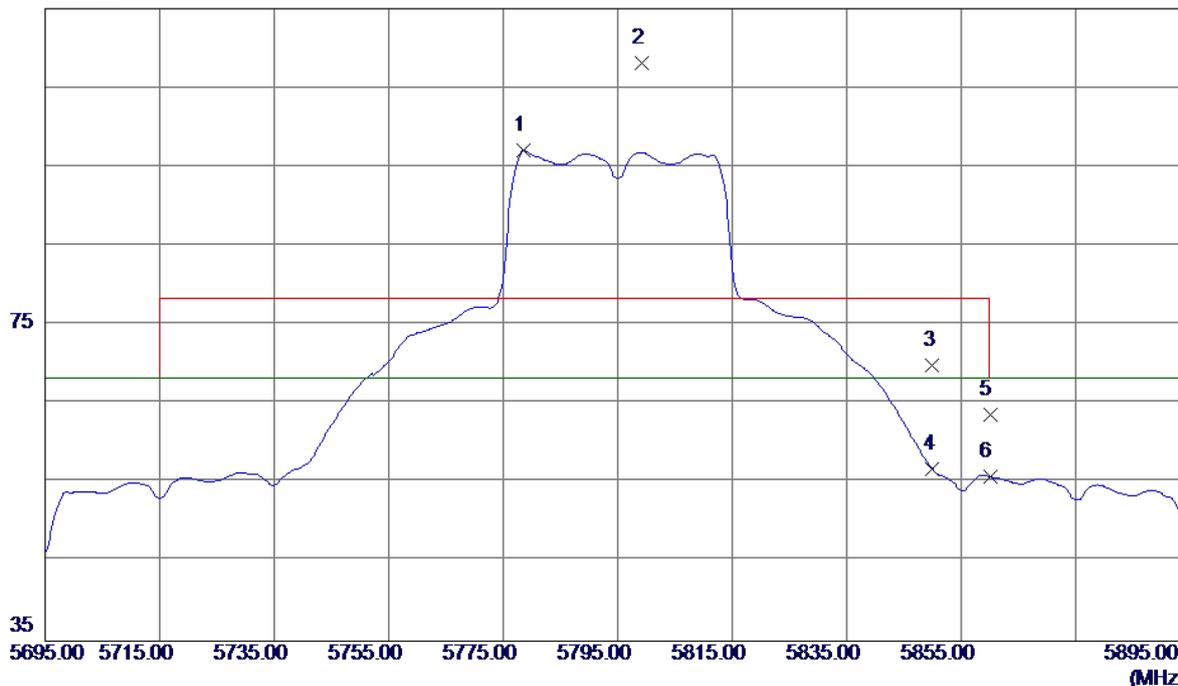


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5778.6000	55.73	41.34	97.07	68.30	28.77	AVG	No Limit
2	5799.2000	66.67	41.37	108.04	78.30	29.74	Peak	No Limit
3	5850.0000	28.45	41.44	69.89	78.30	-8.41	Peak	
4	5850.0000	15.27	41.44	56.71	68.30	-11.59	AVG	
5	5860.0000	22.21	41.45	63.66	78.30	-14.64	Peak	
6	5860.0000	14.38	41.45	55.83	68.30	-12.47	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

### Horizontal

80 dBuV/m

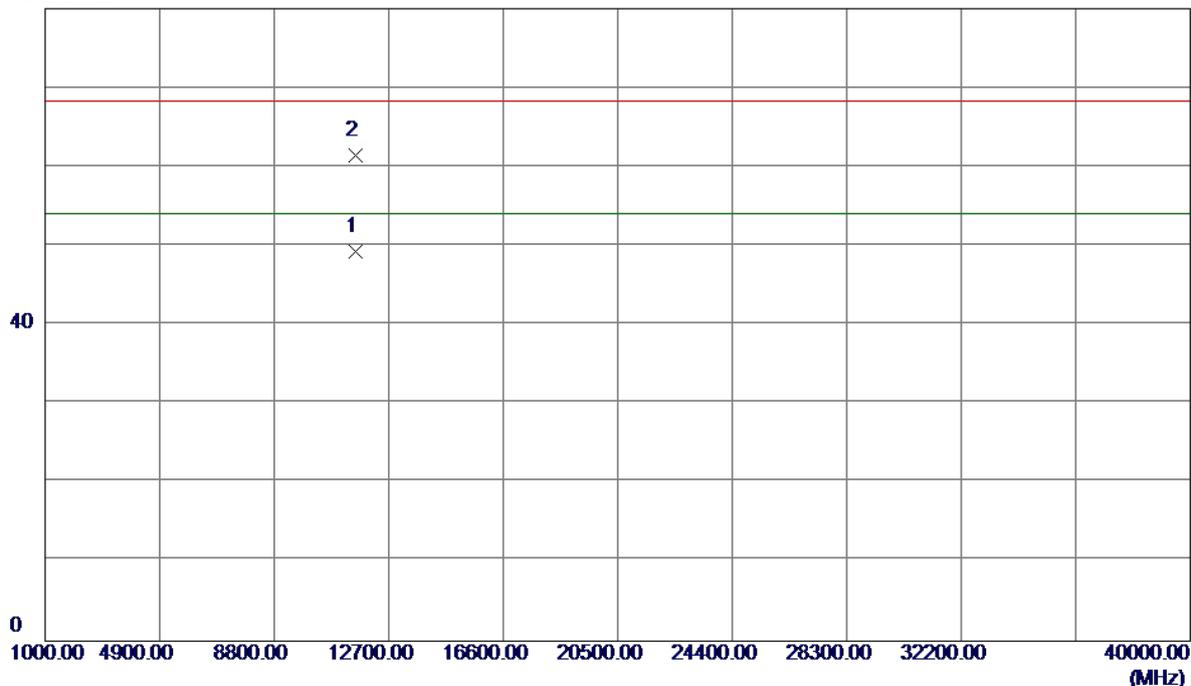


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.0300	32.23	17.08	49.31	54.00	-4.69	AVG	
2	11590.1600	44.42	17.08	61.50	68.30	-6.80	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

### Vertical

115 dBuV/m

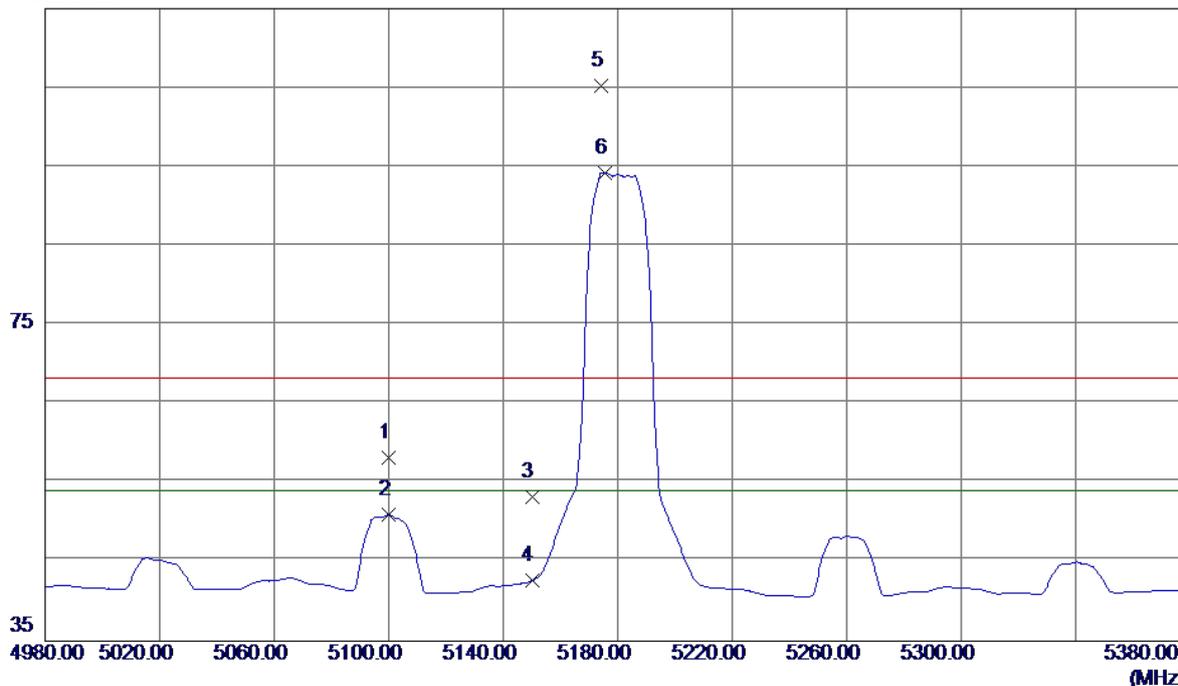


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5100.0000	18.15	40.11	58.26	68.30	-10.04	Peak	
2	5100.0000	10.86	40.11	50.97	54.00	-3.03	AVG	
3	5150.0000	12.98	40.22	53.20	68.30	-15.10	Peak	
4	5150.0000	2.40	40.22	42.62	54.00	-11.38	AVG	
5	5174.4000	64.94	40.27	105.21	68.30	36.91	Peak	No Limit
6	5175.6000	53.97	40.27	94.24	54.00	40.24	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

### Vertical

80 dBuV/m

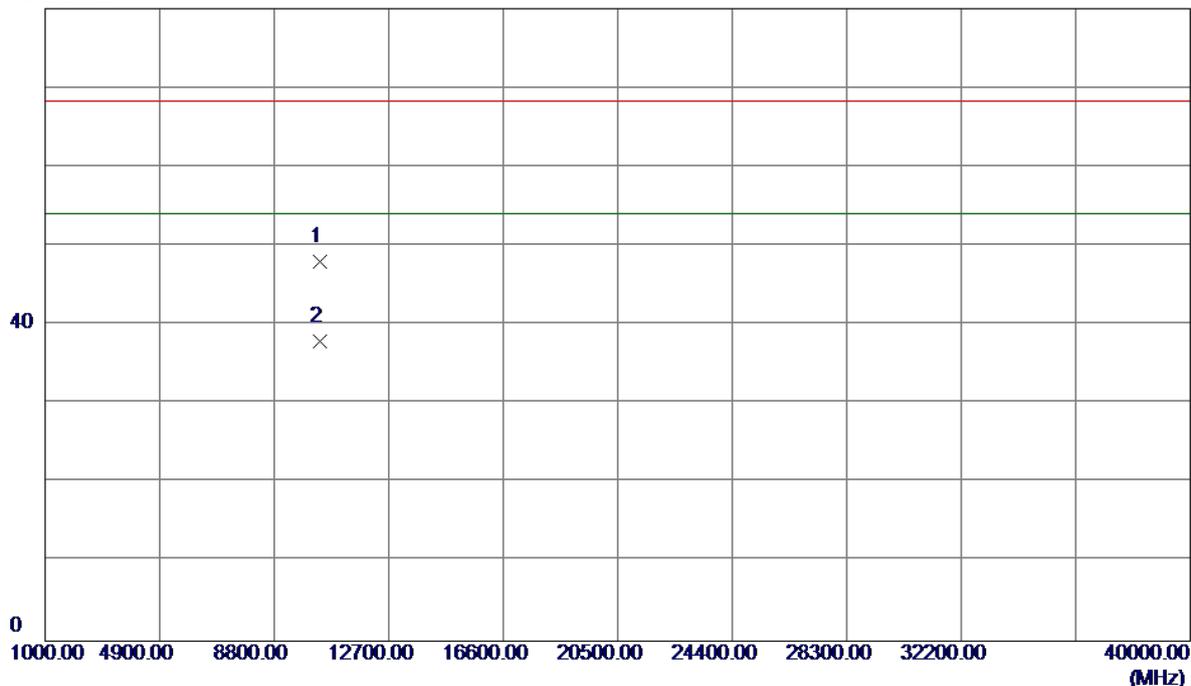


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10360.1210	34.07	13.86	47.93	68.30	-20.37	Peak	
2	10360.3280	24.01	13.86	37.87	54.00	-16.13	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

### Horizontal

110 dBuV/m

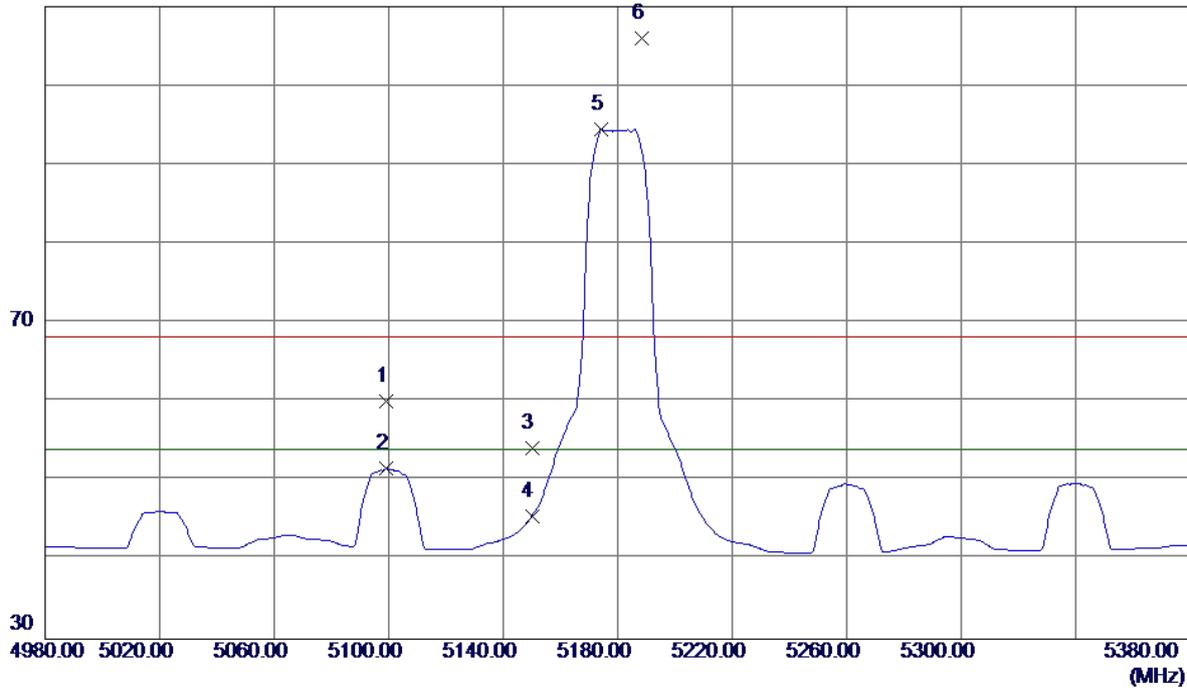


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5099.2000	19.92	40.11	60.03	68.30	-8.27	Peak	
2	5099.2000	11.42	40.11	51.53	54.00	-2.47	AVG	
3	5150.0000	13.96	40.22	54.18	68.30	-14.12	Peak	
4	5150.0000	5.35	40.22	45.57	54.00	-8.43	AVG	
5	5174.4000	54.23	40.27	94.50	54.00	40.50	AVG	No Limit
6	5188.4000	65.63	40.30	105.93	68.30	37.63	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

### Horizontal

80 dBuV/m

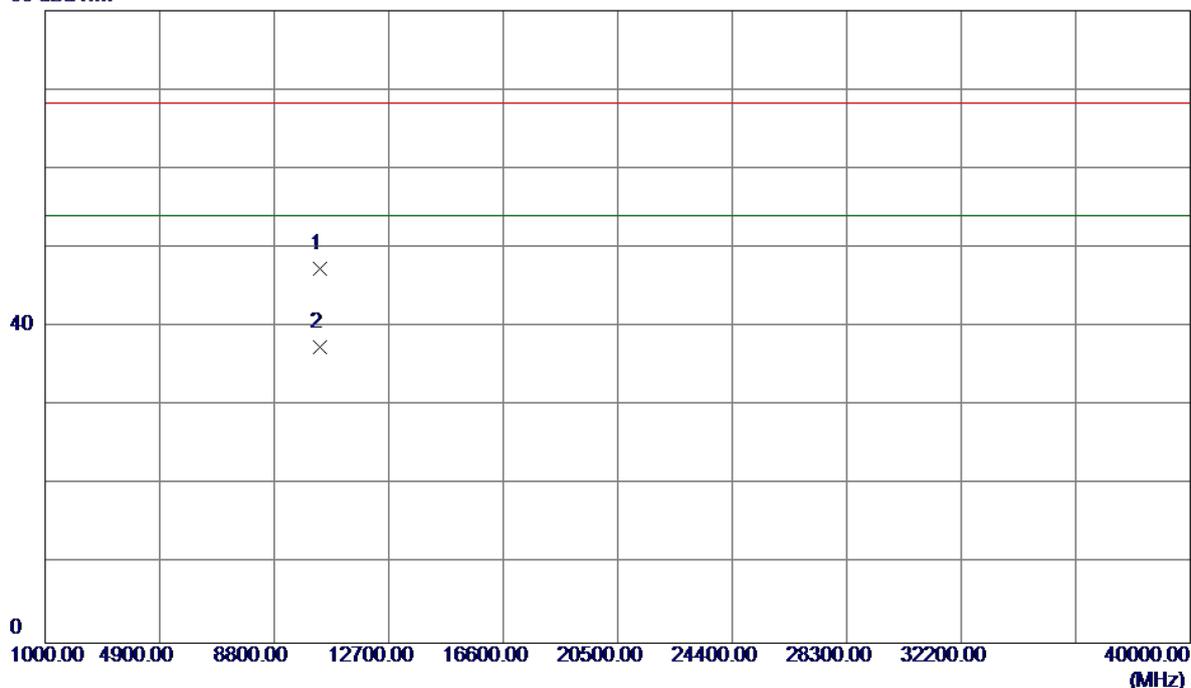


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10360.0100	33.55	13.86	47.41	68.30	-20.89	Peak	
2	10360.0100	23.57	13.86	37.43	54.00	-16.57	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

### Vertical

115 dBuV/m

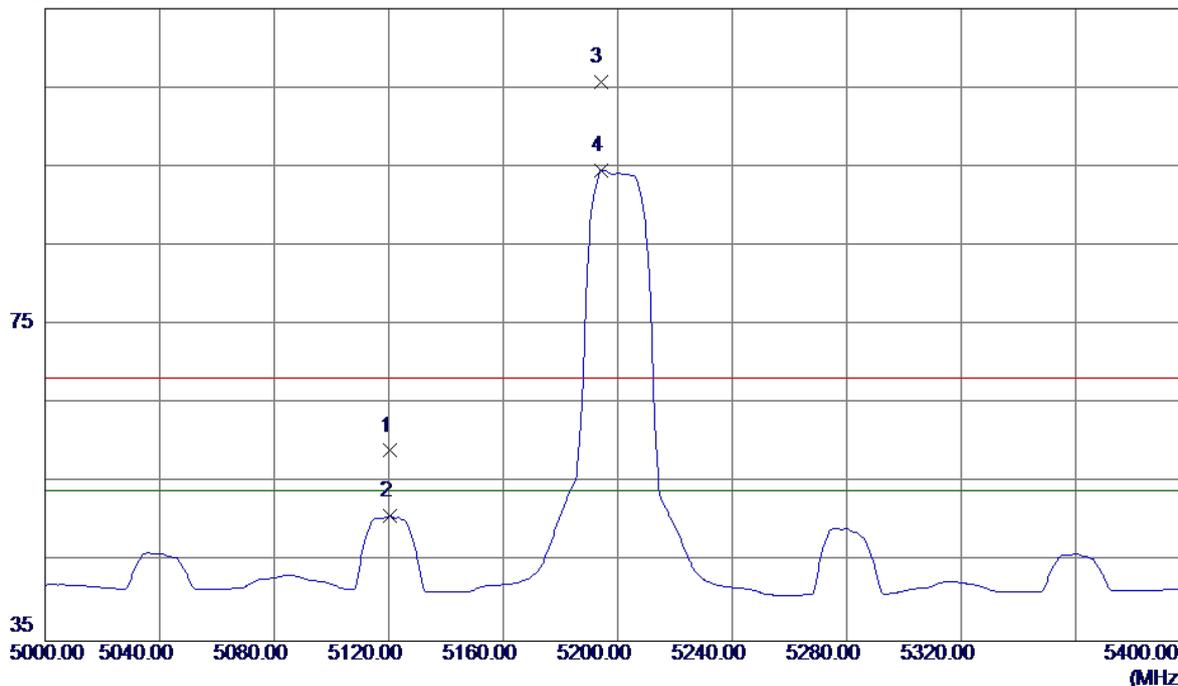


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5120.4000	18.92	40.16	59.08	68.30	-9.22	Peak	
2	5120.4000	10.66	40.16	50.82	54.00	-3.18	AVG	
3	5194.0000	65.36	40.31	105.67	68.30	37.37	Peak	No Limit
4	5194.4000	54.28	40.31	94.59	54.00	40.59	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

### Vertical


80 dBuV/m

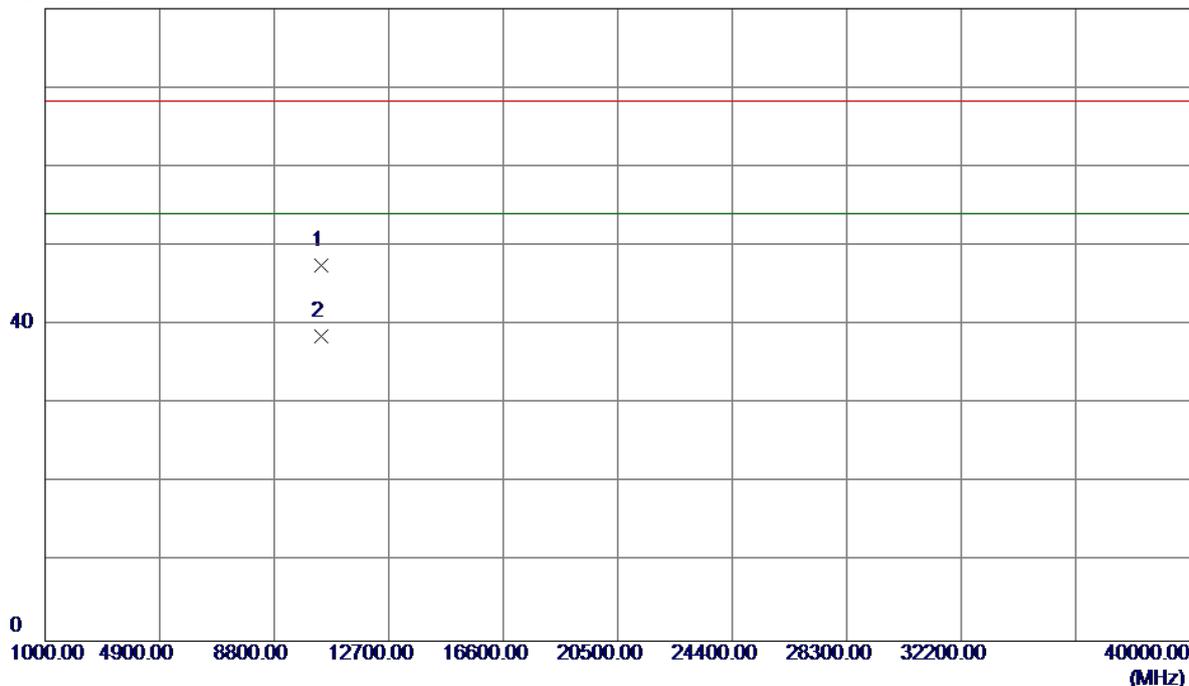

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10400.3500	33.78	13.80	47.58	68.30	-20.72	Peak	
2	10400.3500	24.81	13.80	38.61	54.00	-15.39	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

### Horizontal

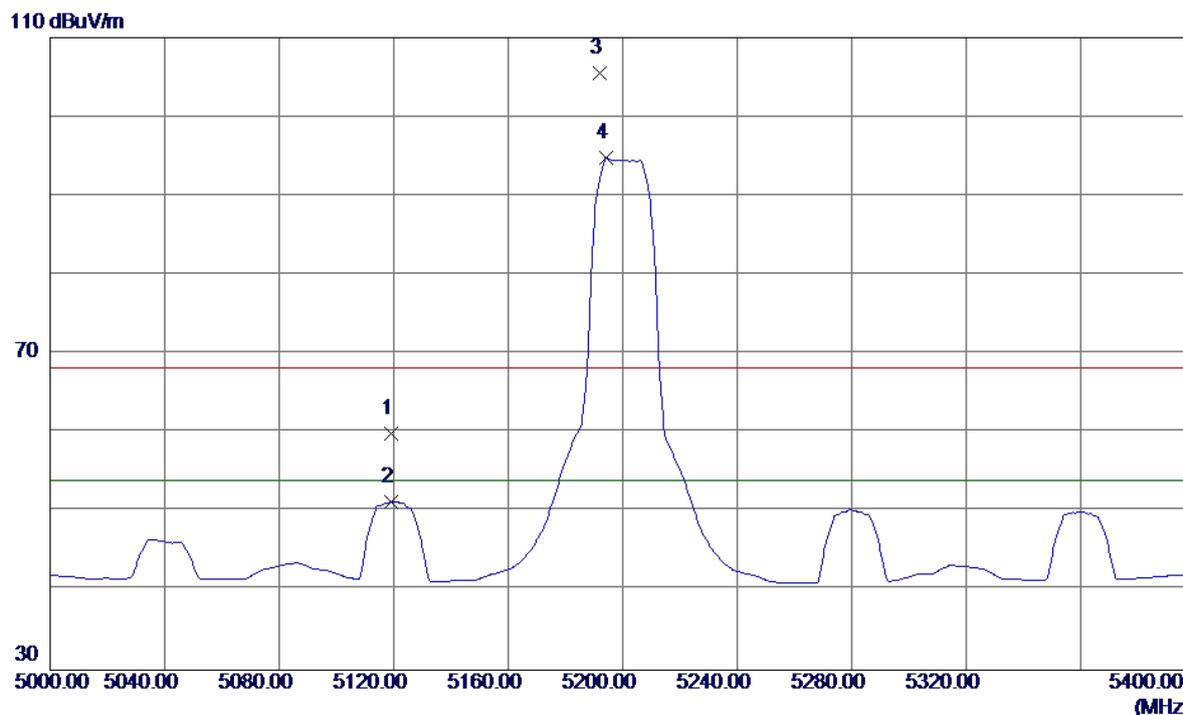


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5119.2000	19.80	40.15	59.95	68.30	-8.35	Peak	
2	5119.2000	11.19	40.15	51.34	54.00	-2.66	AVG	
3	5192.0000	65.24	40.31	105.55	68.30	37.25	Peak	No Limit
4	5194.4000	54.52	40.31	94.83	54.00	40.83	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

### Horizontal

80 dBuV/m

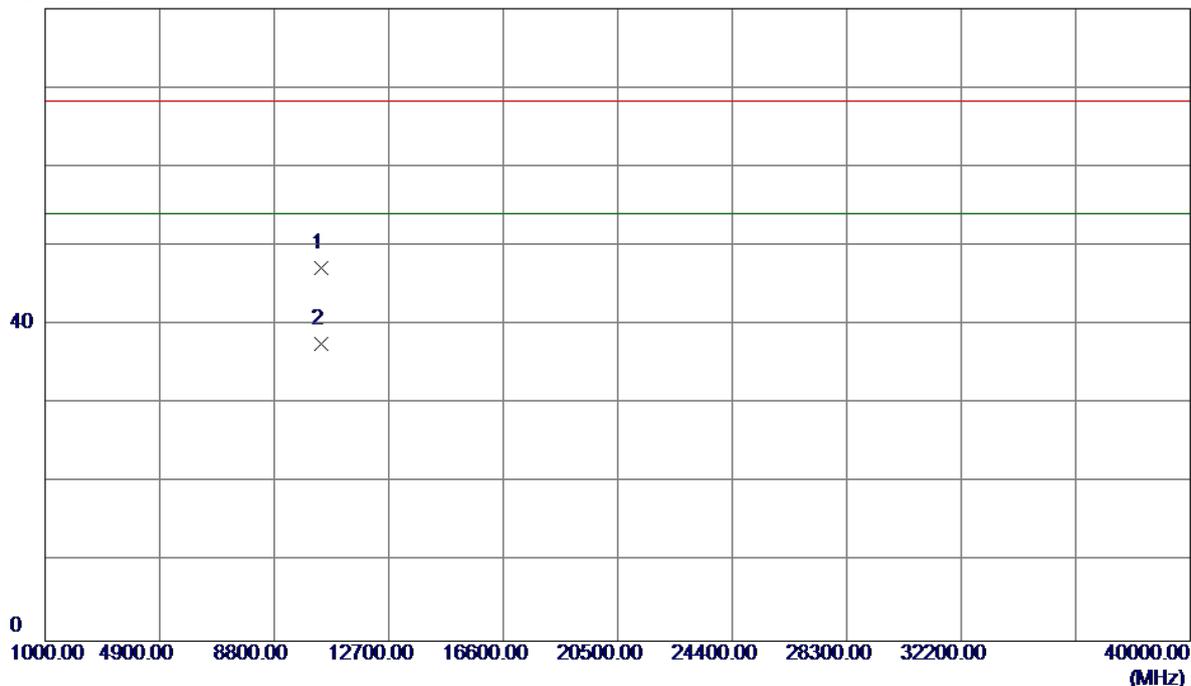


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10400.6210	33.33	13.80	47.13	68.30	-21.17	Peak	
2	10400.5540	23.74	13.80	37.54	54.00	-16.46	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

### Vertical

115 dBuV/m

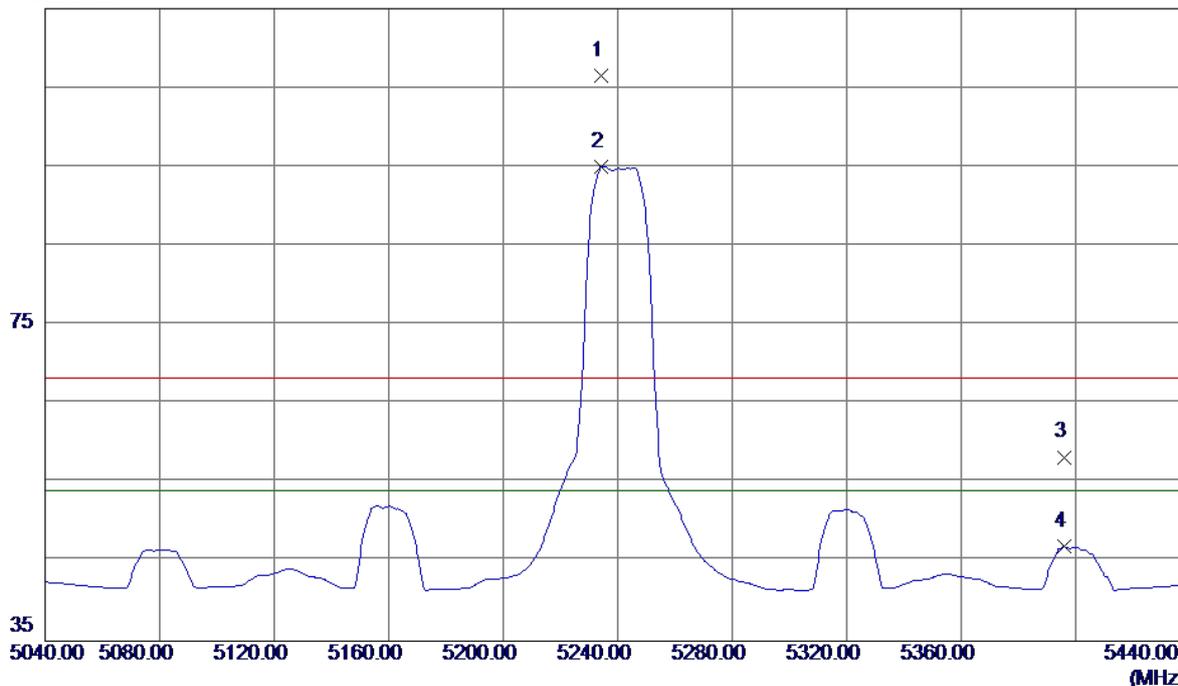


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5234.4000	66.14	40.40	106.54	68.30	38.24	Peak	No Limit
2	5234.4000	54.63	40.40	95.03	54.00	41.03	AVG	No Limit
3	5396.0000	17.54	40.74	58.28	68.30	-10.02	Peak	
4	5396.0000	6.19	40.74	46.93	54.00	-7.07	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

### Vertical

80 dBuV/m

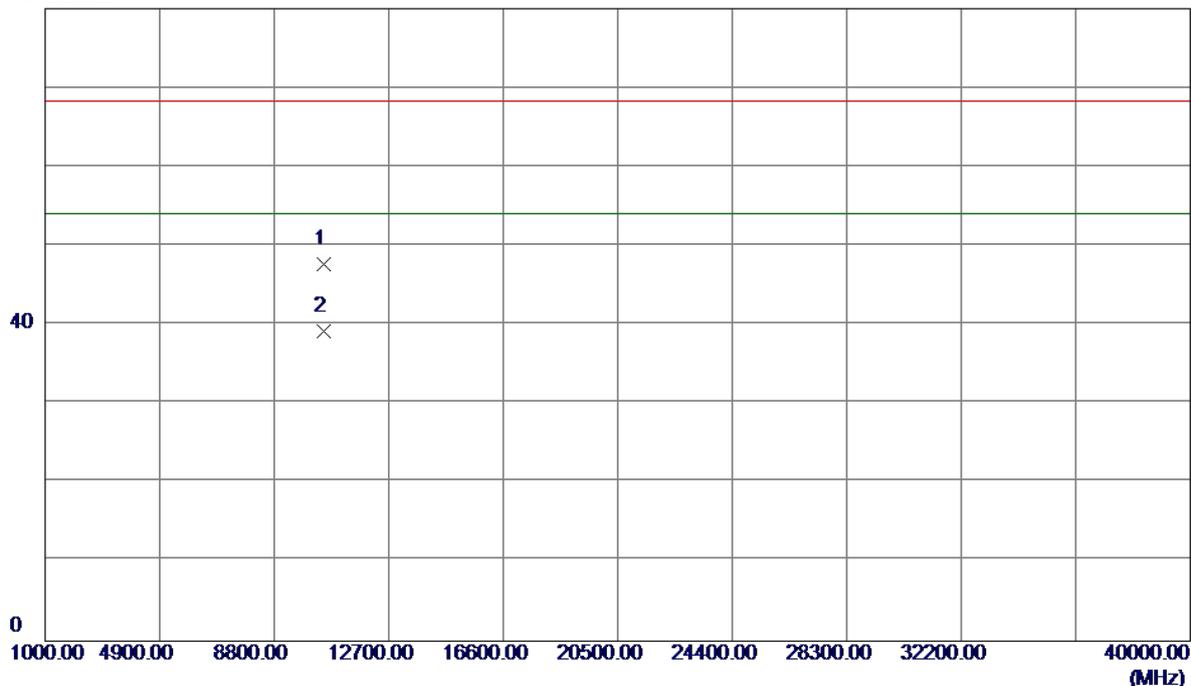


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10480.6220	34.01	13.69	47.70	68.30	-20.60	Peak	
2	10480.1230	25.47	13.69	39.16	54.00	-14.84	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

### Horizontal

115 dBuV/m

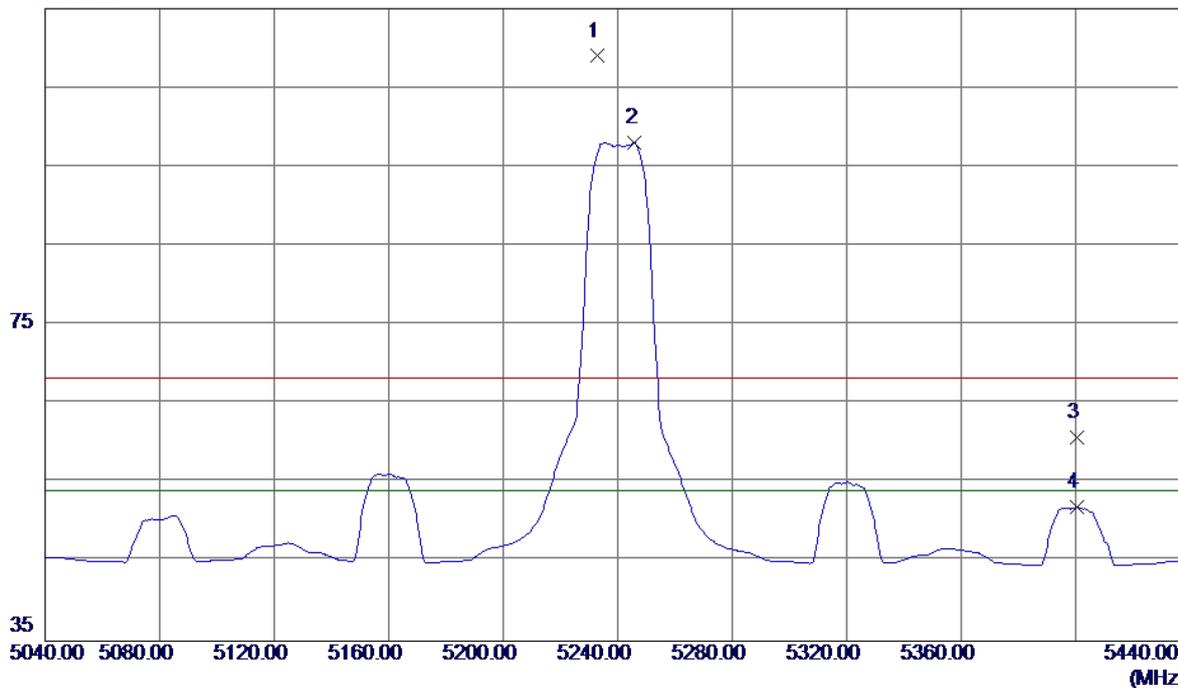


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5232.8000	68.61	40.39	109.00	68.30	40.70	Peak	No Limit
2	5246.0000	57.63	40.42	98.05	54.00	44.05	AVG	No Limit
3	5400.4000	19.95	40.75	60.70	68.30	-7.60	Peak	
4	5400.4000	11.19	40.75	51.94	54.00	-2.06	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

### Horizontal

80 dBuV/m

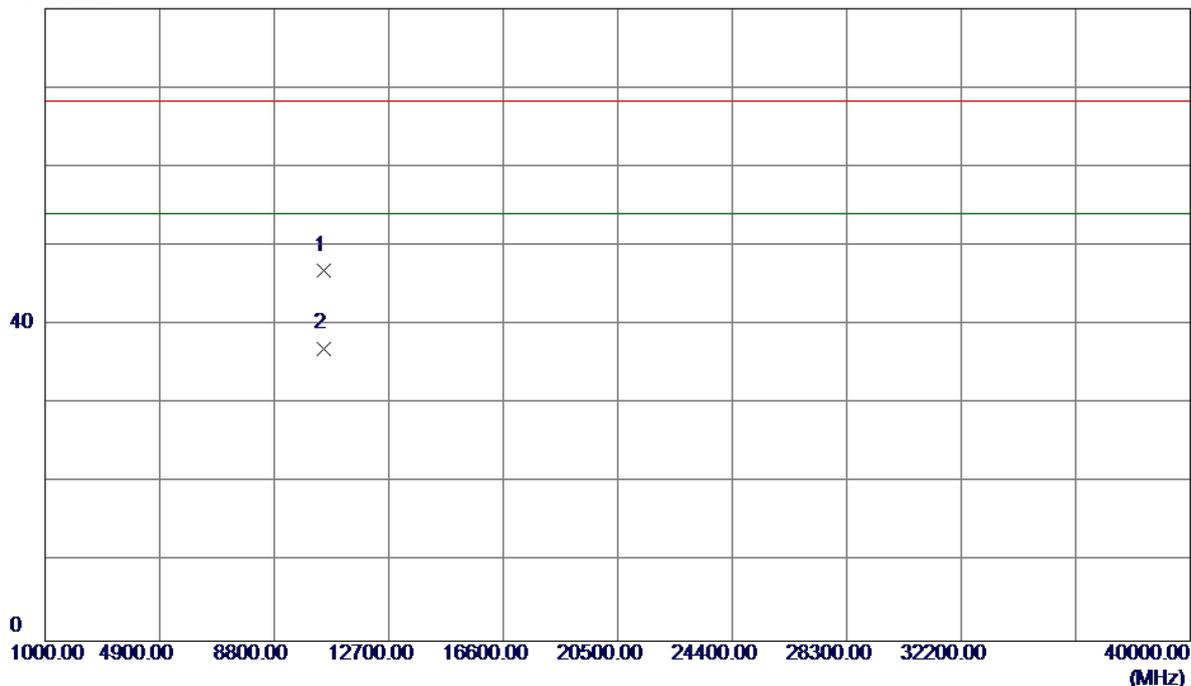


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10480.3400	33.12	13.69	46.81	68.30	-21.49	Peak	
2	10480.3400	23.35	13.69	37.04	54.00	-16.96	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

### Vertical


115 dBuV/m

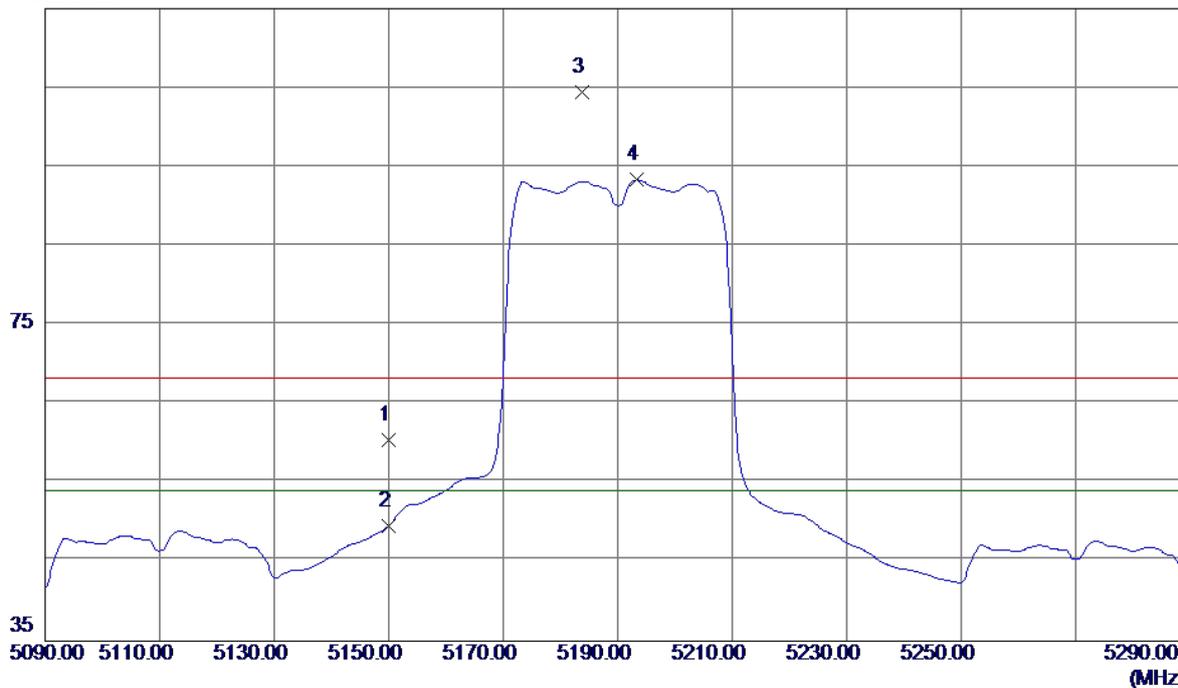

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	20.22	40.22	60.44	68.30	-7.86	Peak	
2	5150.0000	9.32	40.22	49.54	54.00	-4.46	AVG	
3	5183.8000	64.18	40.29	104.47	68.30	36.17	Peak	No Limit
4	5193.4000	53.02	40.31	93.33	54.00	39.33	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

### Vertical

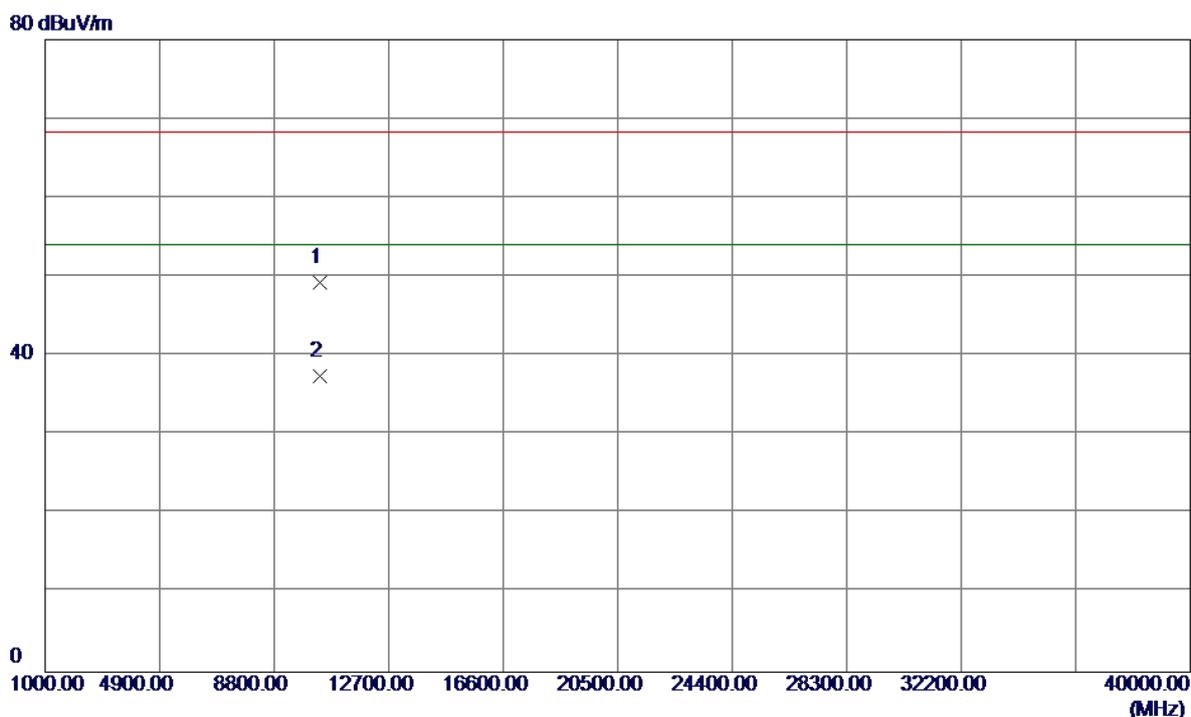


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10380.3099	35.45	13.83	49.28	68.30	-19.02	Peak	
2	10380.3099	23.63	13.83	37.46	54.00	-16.54	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

### Horizontal

115 dBuV/m

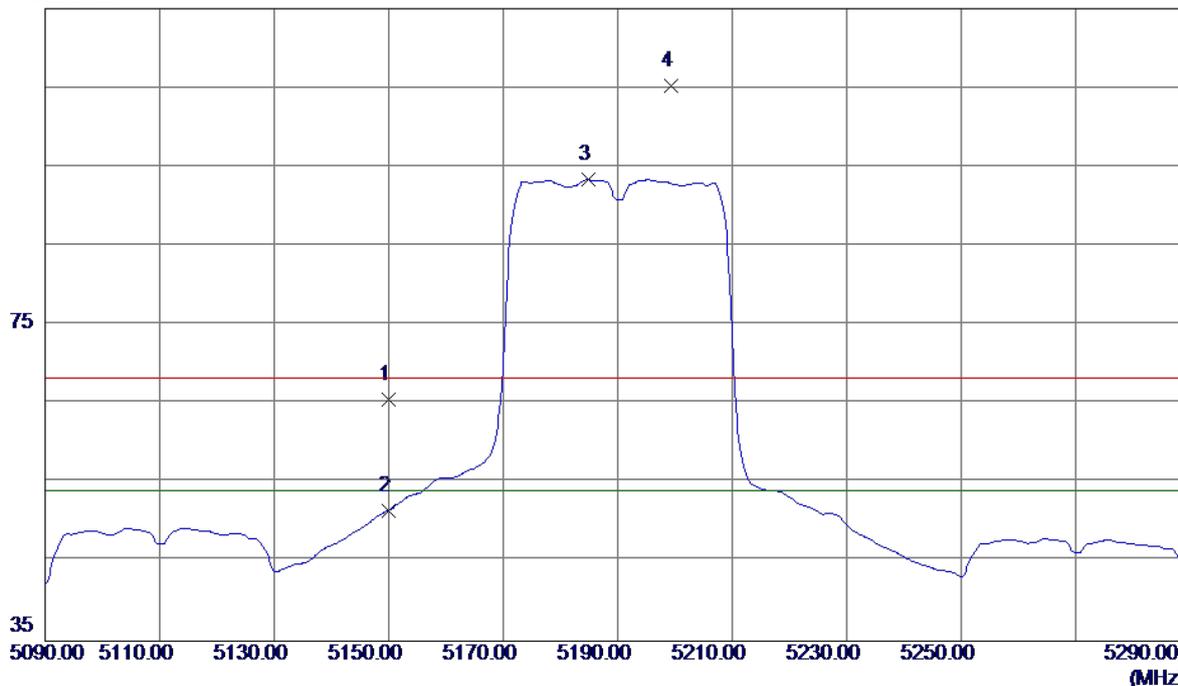


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	25.40	40.22	65.62	68.30	-2.68	Peak	
2	5150.0000	11.33	40.22	51.55	54.00	-2.45	AVG	
3	5184.8000	53.10	40.29	93.39	54.00	39.39	AVG	No Limit
4	5199.4000	64.97	40.32	105.29	68.30	36.99	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

### Horizontal

80 dBuV/m

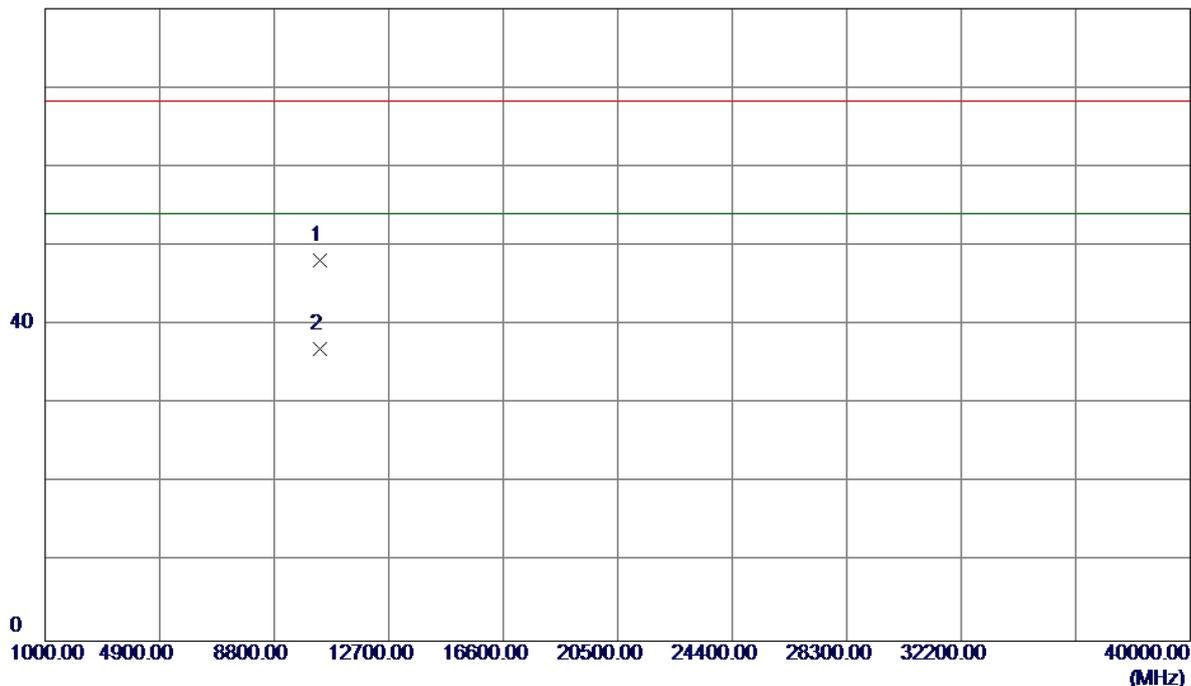


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10381.5199	34.40	13.83	48.23	68.30	-20.07	Peak	
2	10381.5199	23.06	13.83	36.89	54.00	-17.11	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

### Vertical


115 dBuV/m

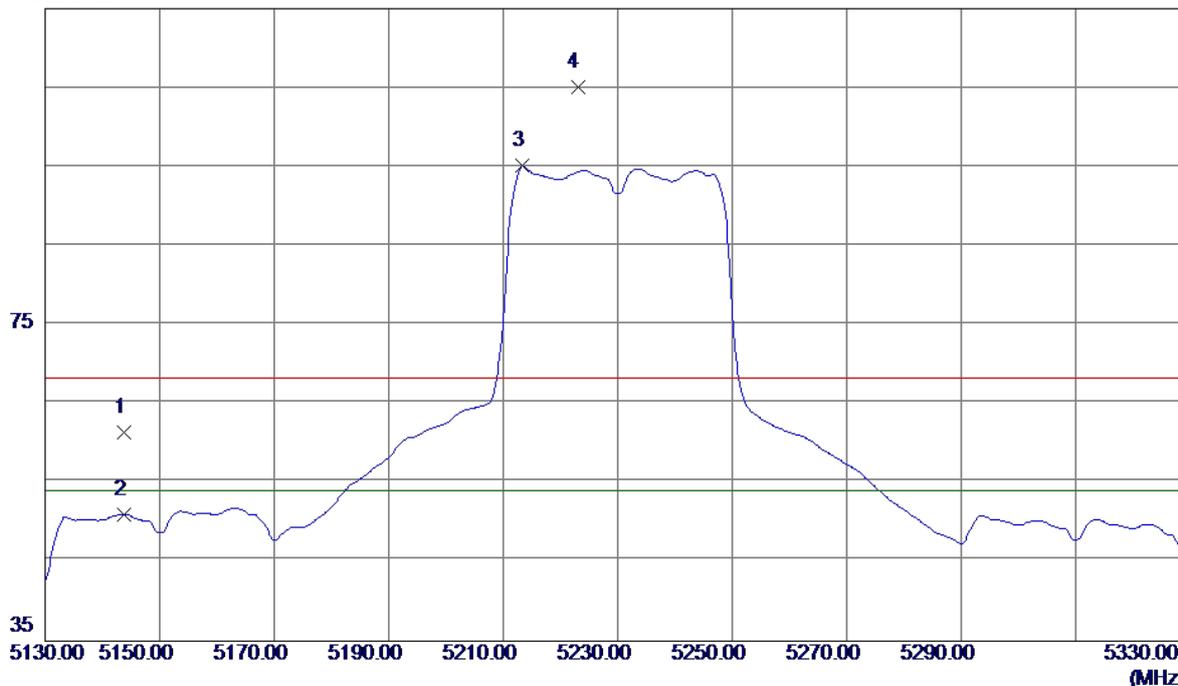

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5143.8000	21.26	40.20	61.46	68.30	-6.84	Peak	
2	5143.8000	10.82	40.20	51.02	54.00	-2.98	AVG	
3	5213.4000	54.74	40.35	95.09	54.00	41.09	AVG	No Limit
4	5223.0000	64.77	40.37	105.14	68.30	36.84	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

### Vertical

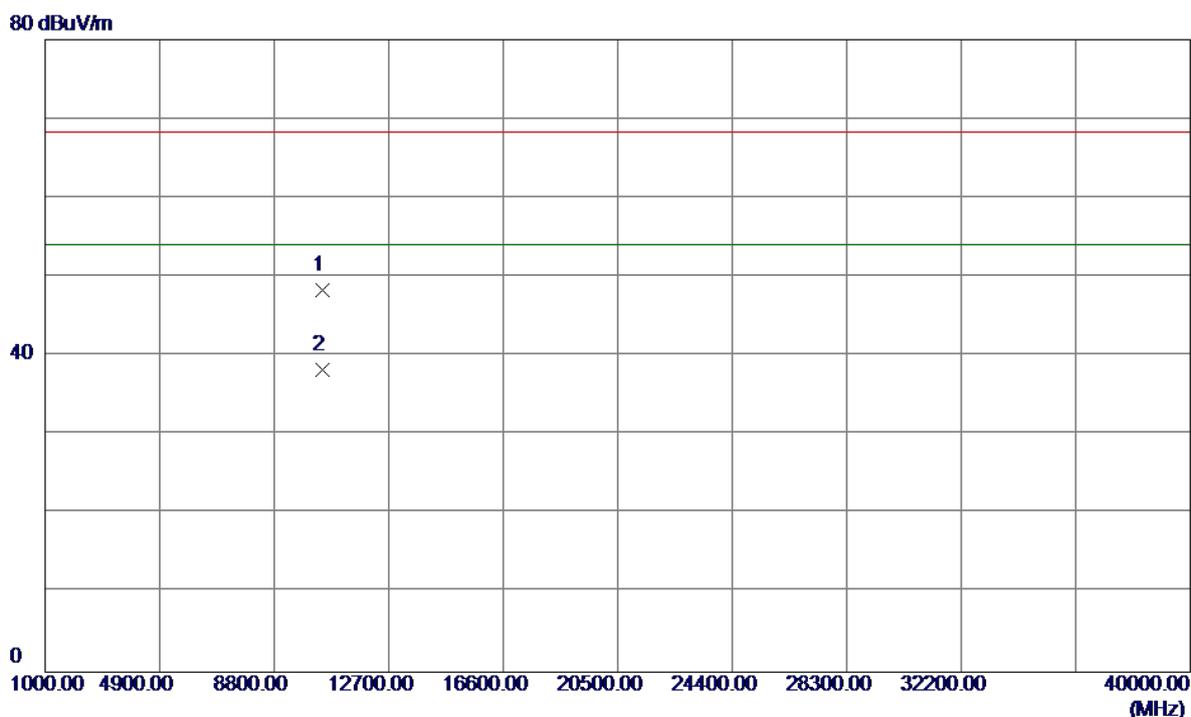


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10460.1449	34.56	13.72	48.28	68.30	-20.02	Peak	
2	10460.5670	24.46	13.72	38.18	54.00	-15.82	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

### Horizontal

115 dBuV/m

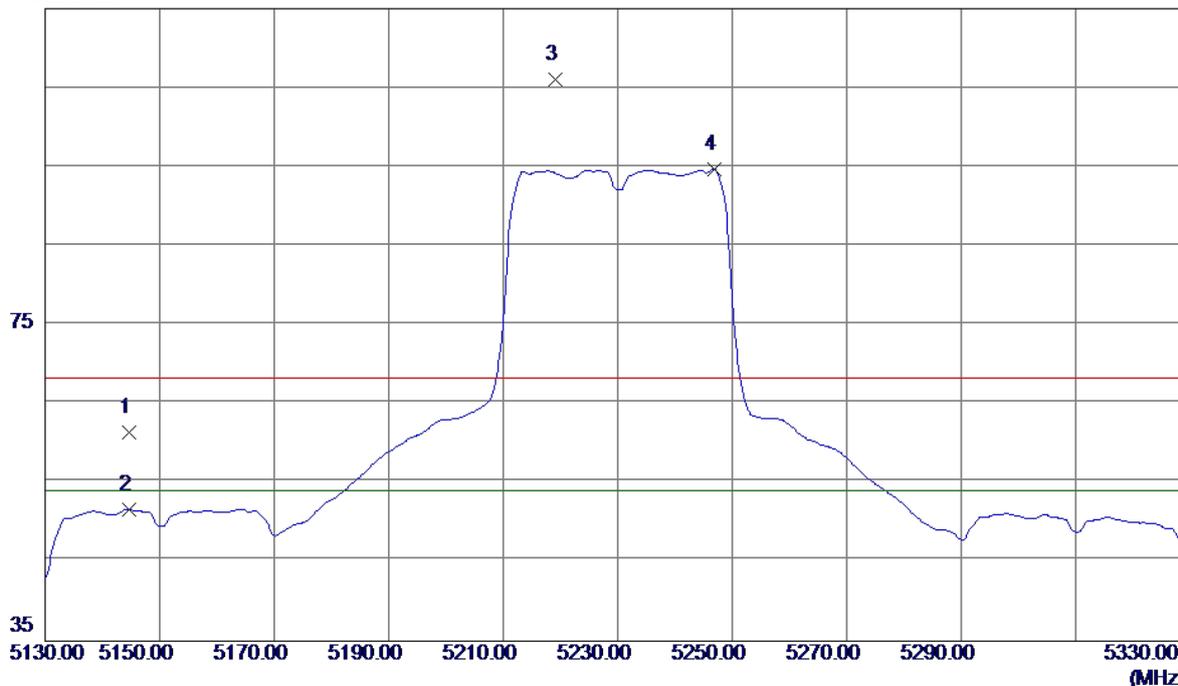


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5144.6000	21.16	40.21	61.37	68.30	-6.93	Peak	
2	5144.6000	11.50	40.21	51.71	54.00	-2.29	AVG	
3	5219.2000	65.63	40.36	105.99	68.30	37.69	Peak	No Limit
4	5246.8000	54.32	40.42	94.74	54.00	40.74	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

### Horizontal

80 dBuV/m

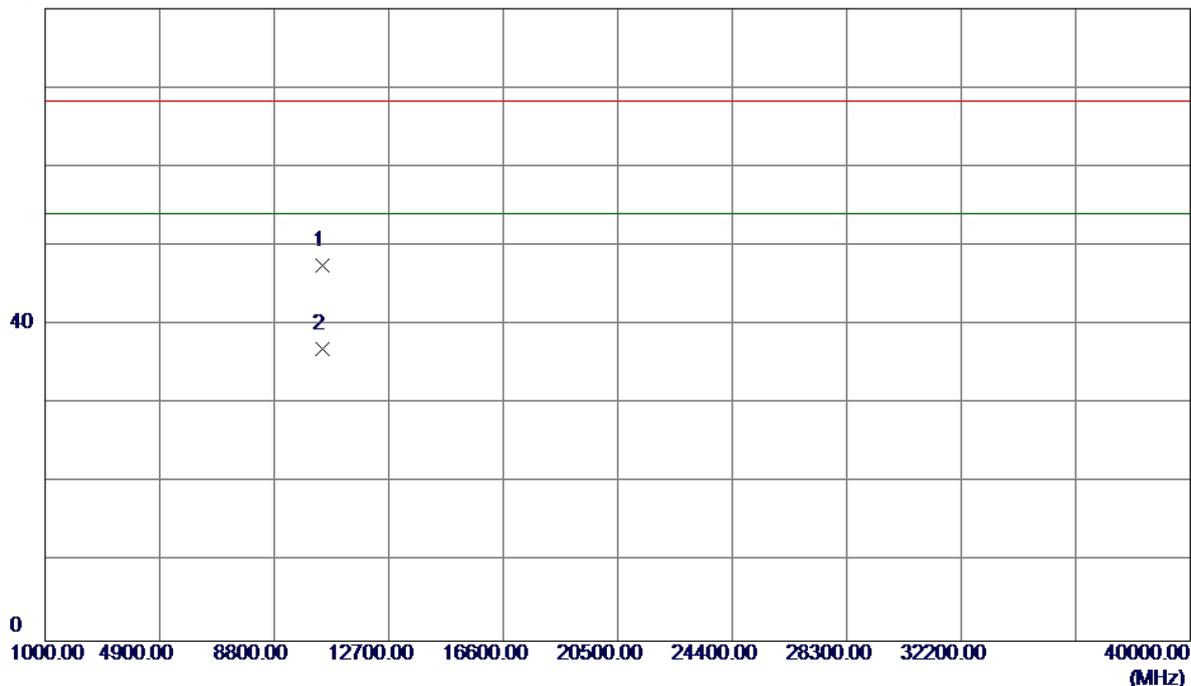


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10460.1800	33.83	13.72	47.55	68.30	-20.75	Peak	
2	10460.1800	23.24	13.72	36.96	54.00	-17.04	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

### Vertical


115 dBuV/m

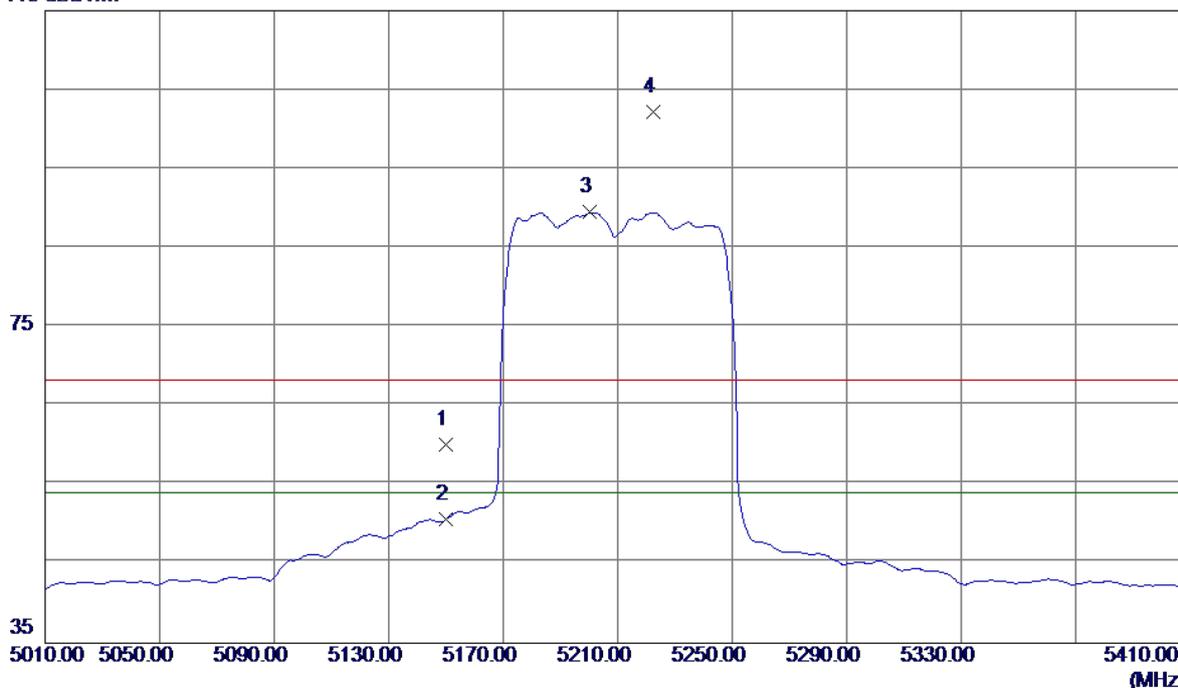

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	19.91	40.22	60.13	68.30	-8.17	Peak	
2	5150.0000	10.45	40.22	50.67	54.00	-3.33	AVG	
3	5200.4000	49.18	40.32	89.50	54.00	35.50	AVG	No Limit
4	5222.4000	61.77	40.37	102.14	68.30	33.84	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

### Vertical

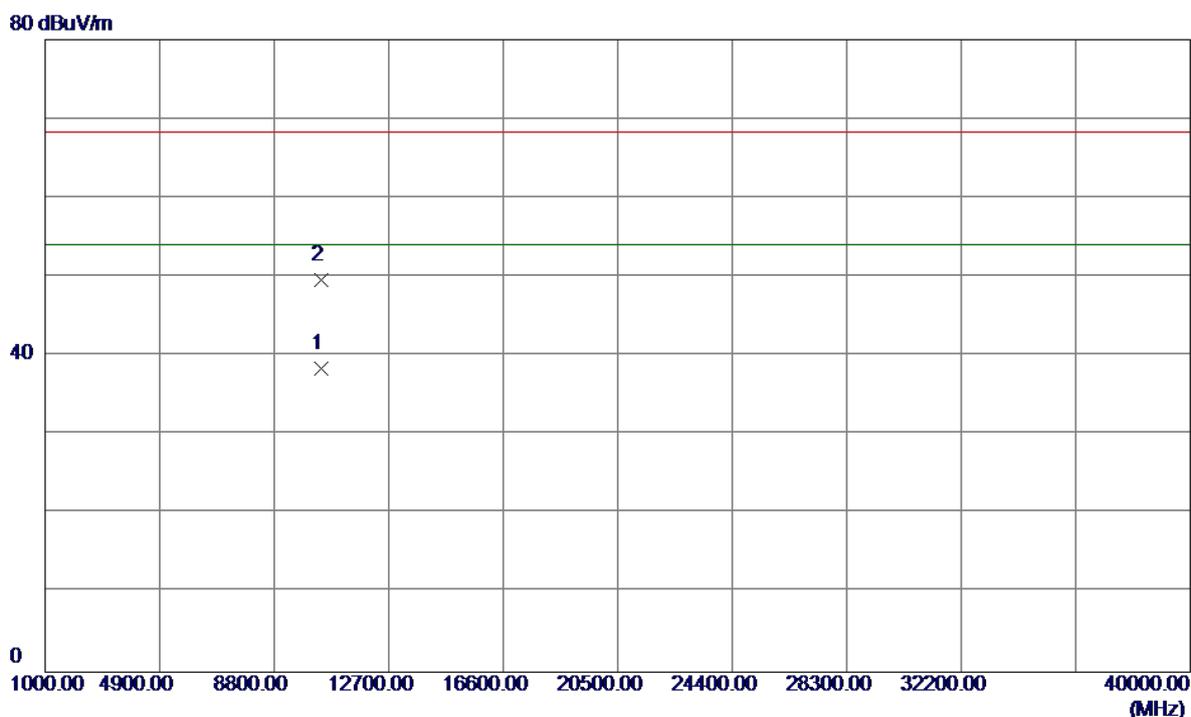


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10422.6000	24.57	13.77	38.34	54.00	-15.66	AVG	
2	10422.7000	35.79	13.77	49.56	68.30	-18.74	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

### Horizontal

115 dBuV/m

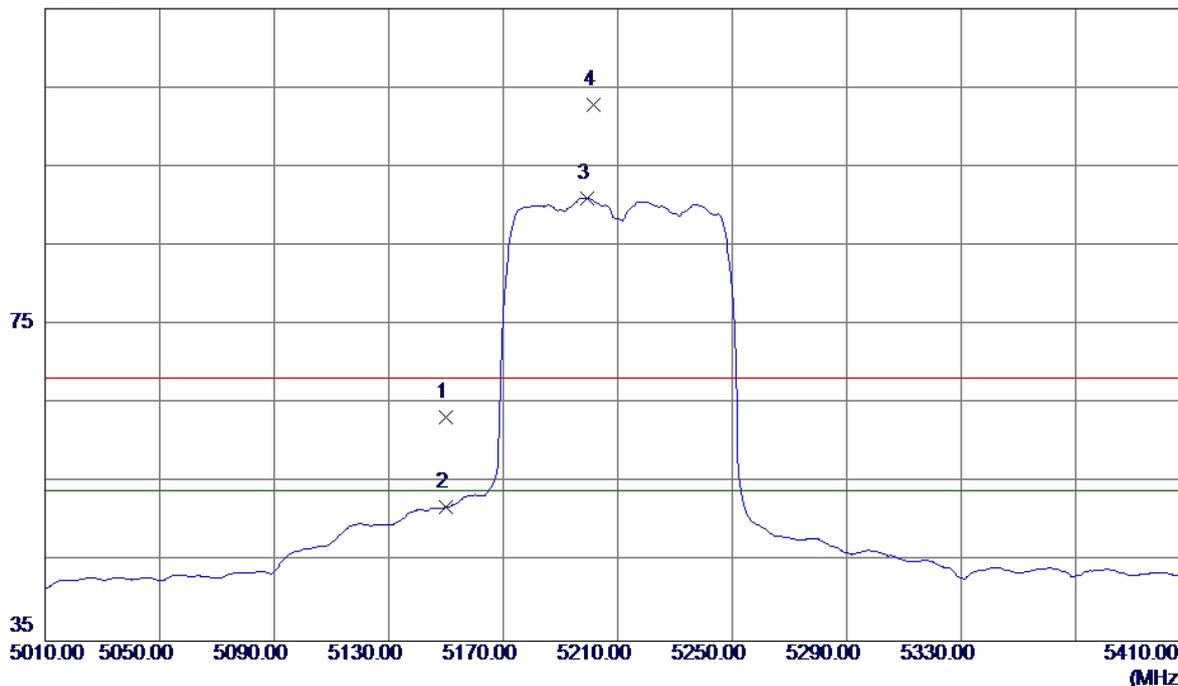


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.13	40.22	63.35	68.30	-4.95	Peak	
2	5150.0000	11.73	40.22	51.95	54.00	-2.05	AVG	
3	5199.2000	50.72	40.32	91.04	54.00	37.04	AVG	No Limit
4	5201.6000	62.52	40.33	102.85	68.30	34.55	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

### Horizontal

80 dBuV/m

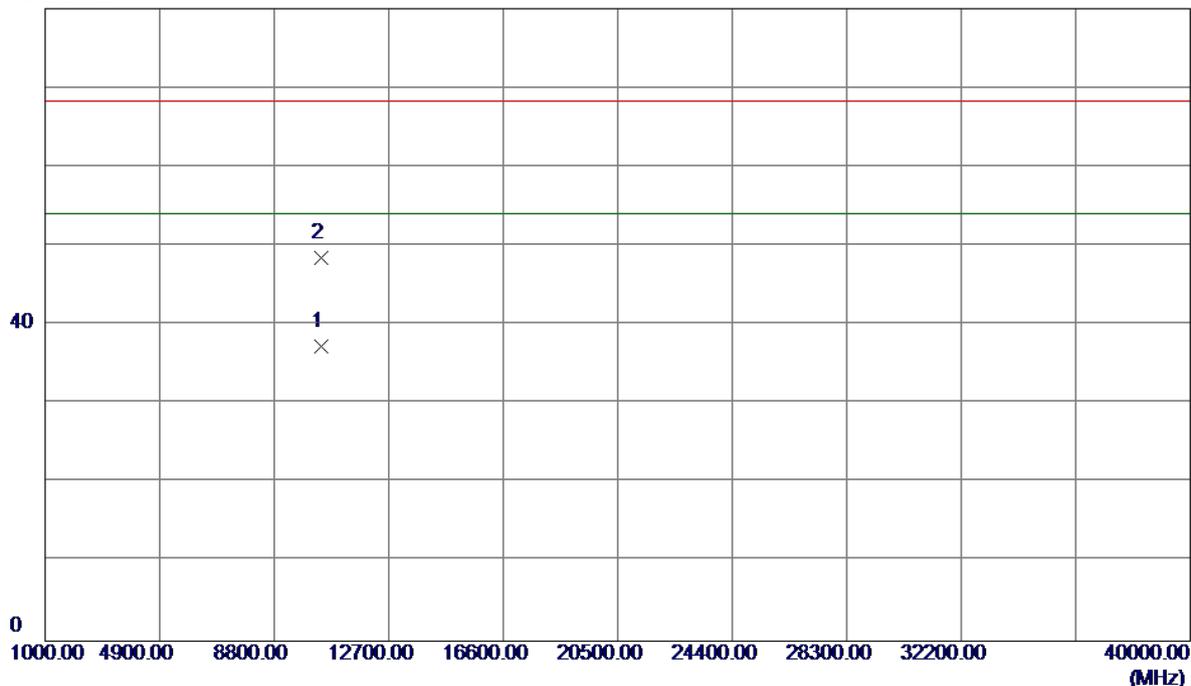


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10421.1200	23.57	13.77	37.34	54.00	-16.66	AVG	
2	10421.5630	34.74	13.77	48.51	68.30	-19.79	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

### Vertical

115 dBuV/m

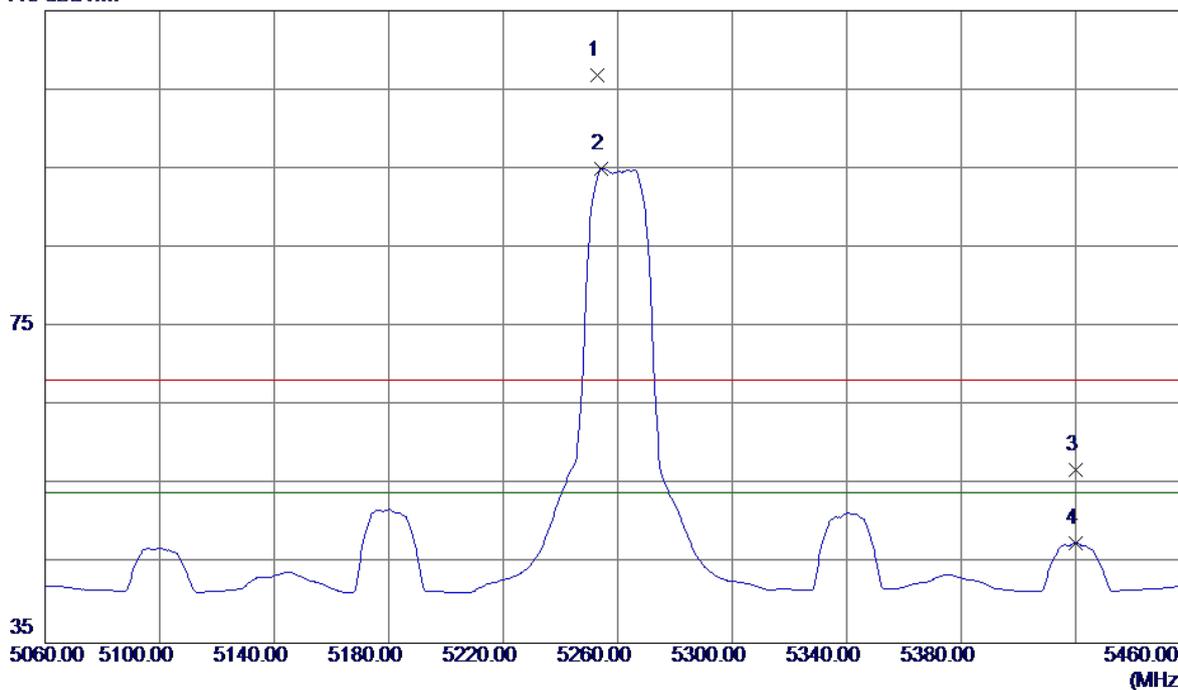


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5252.8000	66.32	40.44	106.76	68.30	38.46	Peak	No Limit
2	5254.4000	54.60	40.44	95.04	54.00	41.04	AVG	No Limit
3	5420.0000	16.12	40.79	56.91	68.30	-11.39	Peak	
4	5420.0000	6.92	40.79	47.71	54.00	-6.29	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

### Vertical


80 dBuV/m

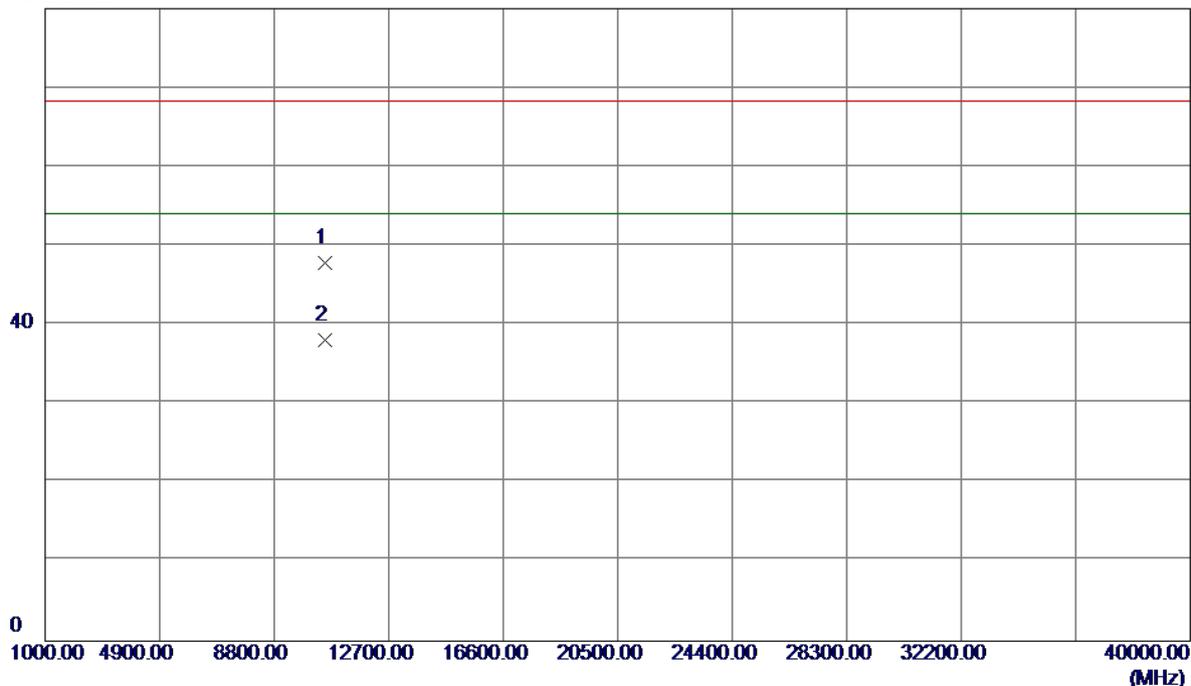

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10520.3400	34.10	13.75	47.85	68.30	-20.45	Peak	
2	10520.3400	24.37	13.75	38.12	54.00	-15.88	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

### Horizontal

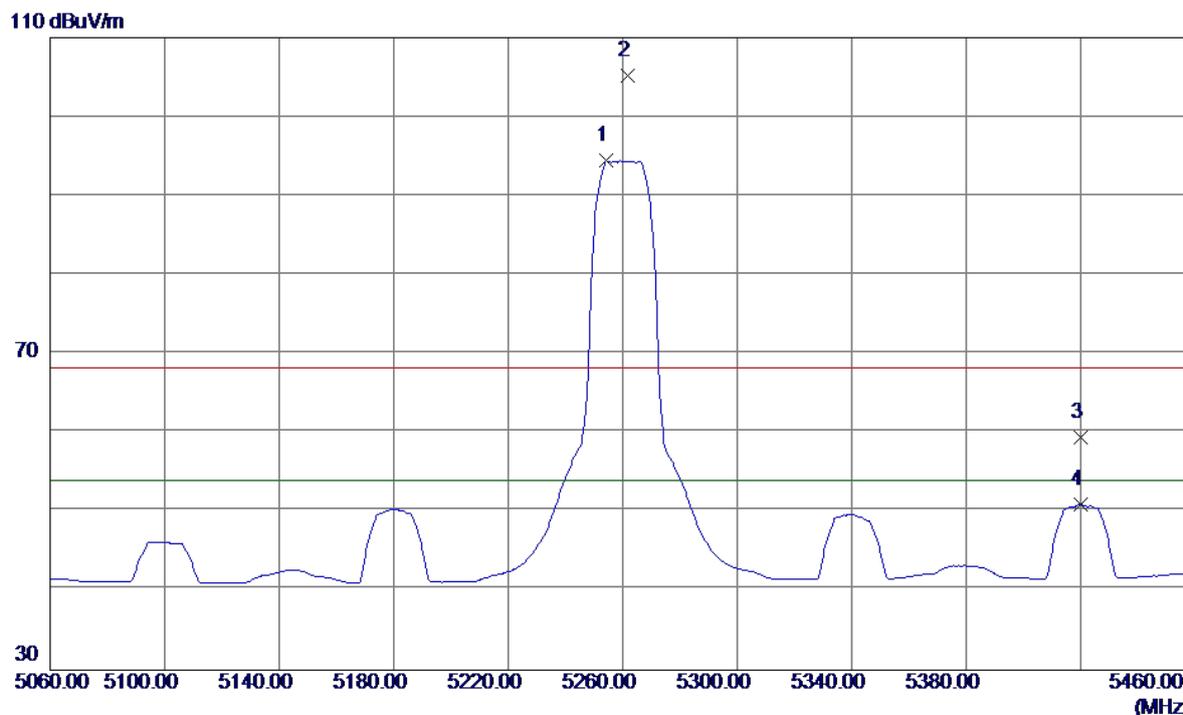


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5254.4000	53.98	40.44	94.42	54.00	40.42	AVG	No Limit
2	5261.6000	64.79	40.45	105.24	68.30	36.94	Peak	No Limit
3	5420.0000	18.69	40.79	59.48	68.30	-8.82	Peak	
4	5420.0000	10.11	40.79	50.90	54.00	-3.10	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

### Horizontal

80 dBuV/m

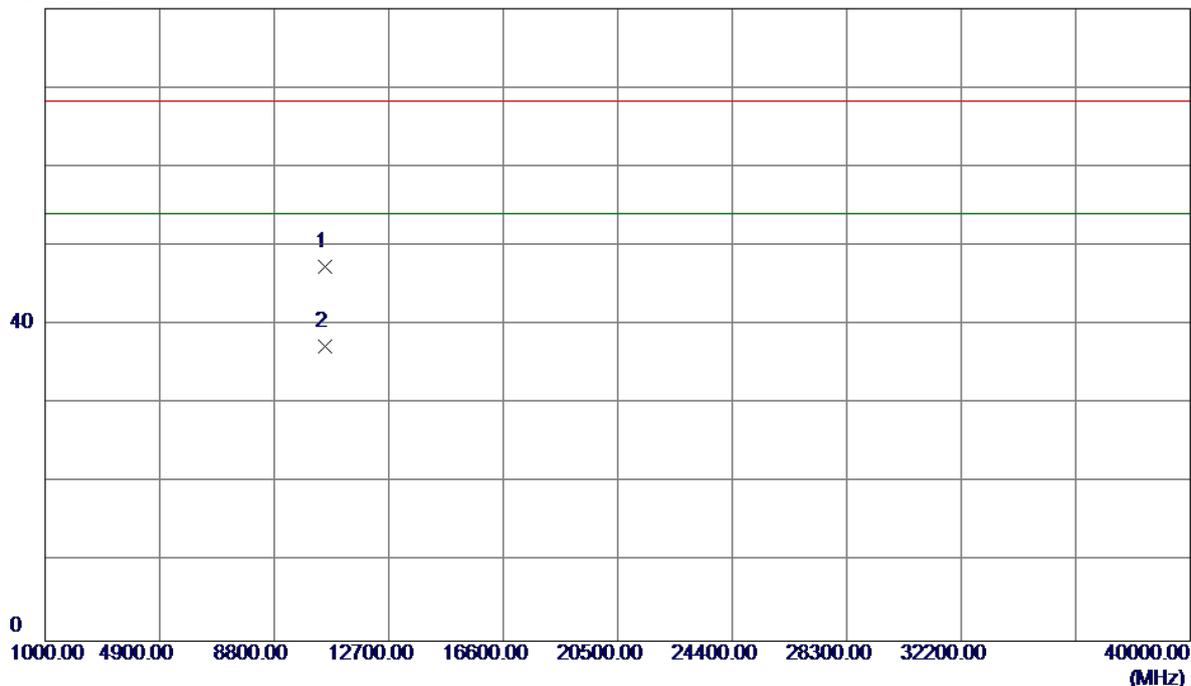


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10520.6689	33.68	13.75	47.43	68.30	-20.87	Peak	
2	10520.5500	23.53	13.75	37.28	54.00	-16.72	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

### Vertical

115 dBuV/m

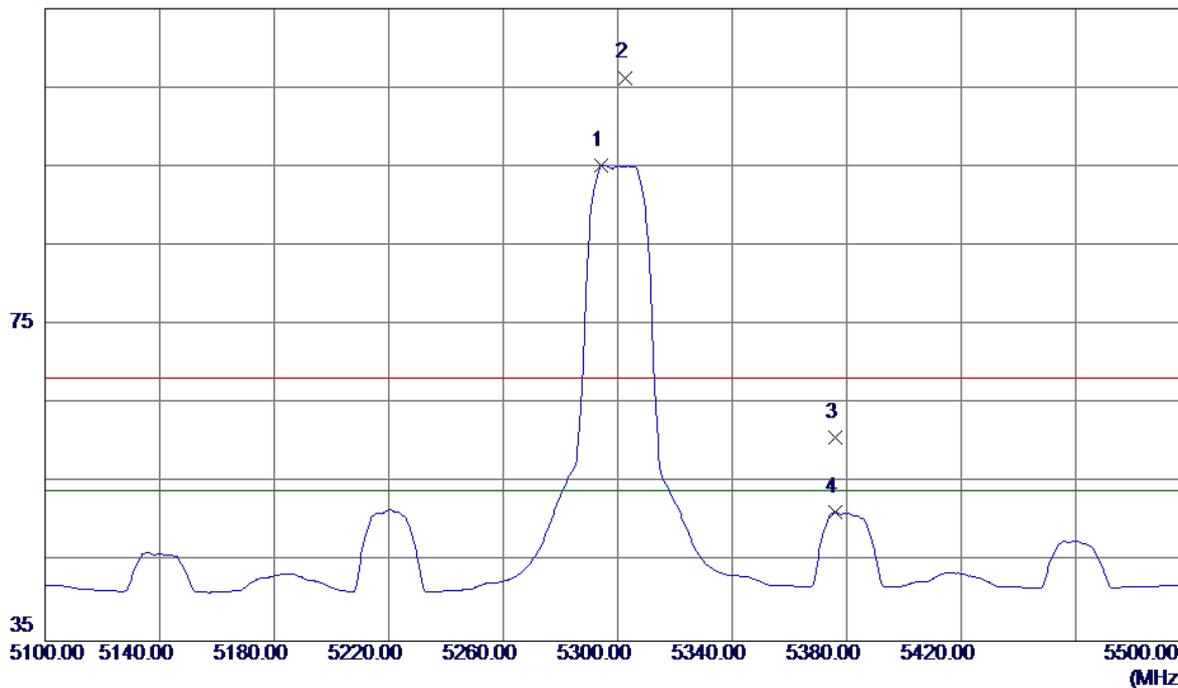


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5294.4000	54.67	40.52	95.19	54.00	41.19	AVG	No Limit
2	5302.8000	65.74	40.54	106.28	68.30	37.98	Peak	No Limit
3	5376.0000	20.11	40.70	60.81	68.30	-7.49	Peak	
4	5376.0000	10.58	40.70	51.28	54.00	-2.72	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

### Vertical

80 dBuV/m

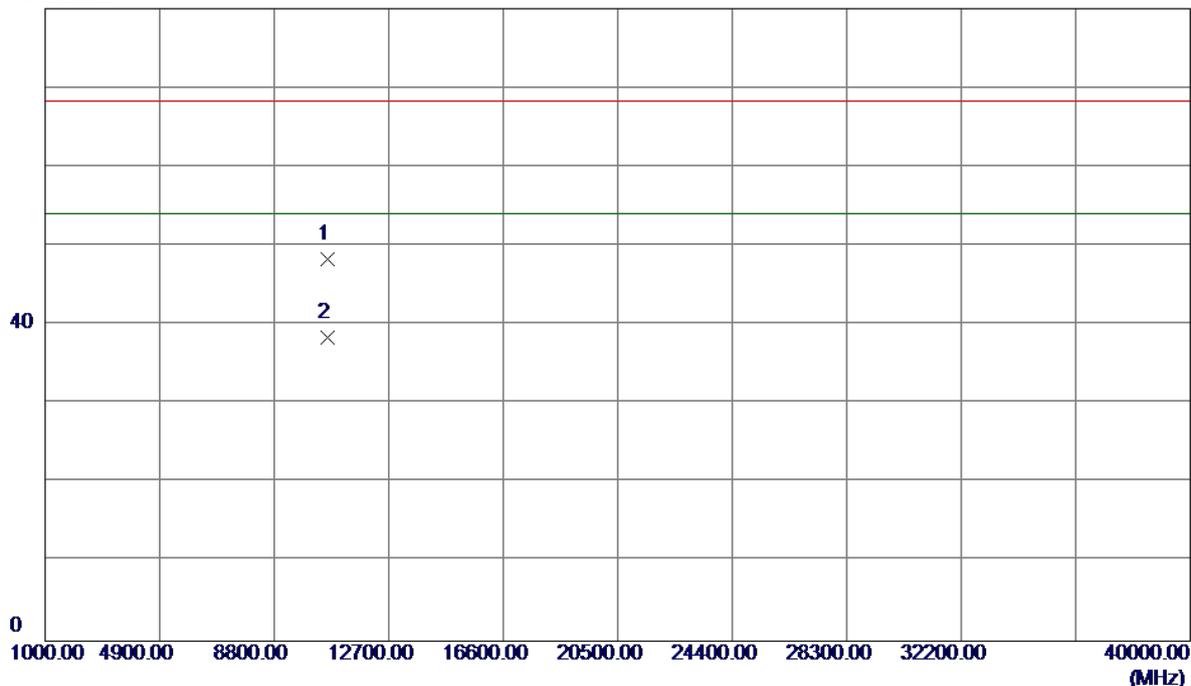


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10600.3339	34.25	14.08	48.33	68.30	-19.97	Peak	
2	10600.1710	24.37	14.08	38.45	54.00	-15.55	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

### Horizontal


115 dBuV/m

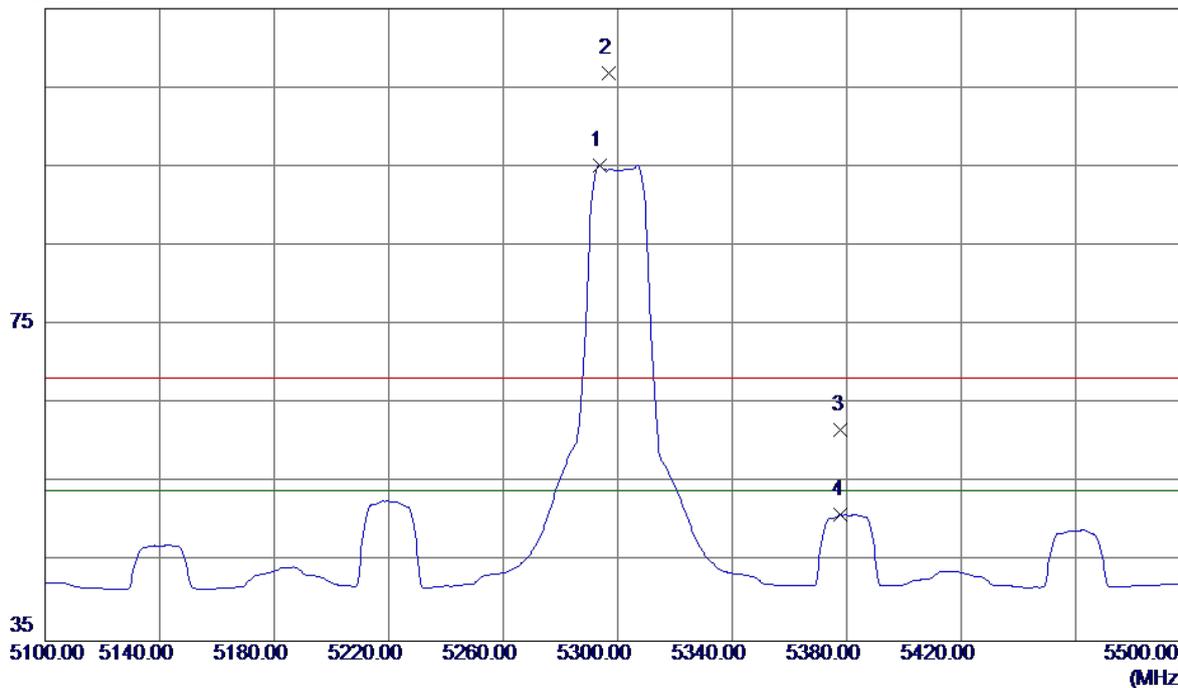

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5293.6000	54.70	40.52	95.22	54.00	41.22	AVG	No Limit
2	5296.8000	66.26	40.53	106.79	68.30	38.49	Peak	No Limit
3	5378.0000	21.08	40.70	61.78	68.30	-6.52	Peak	
4	5378.0000	10.32	40.70	51.02	54.00	-2.98	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

### Horizontal

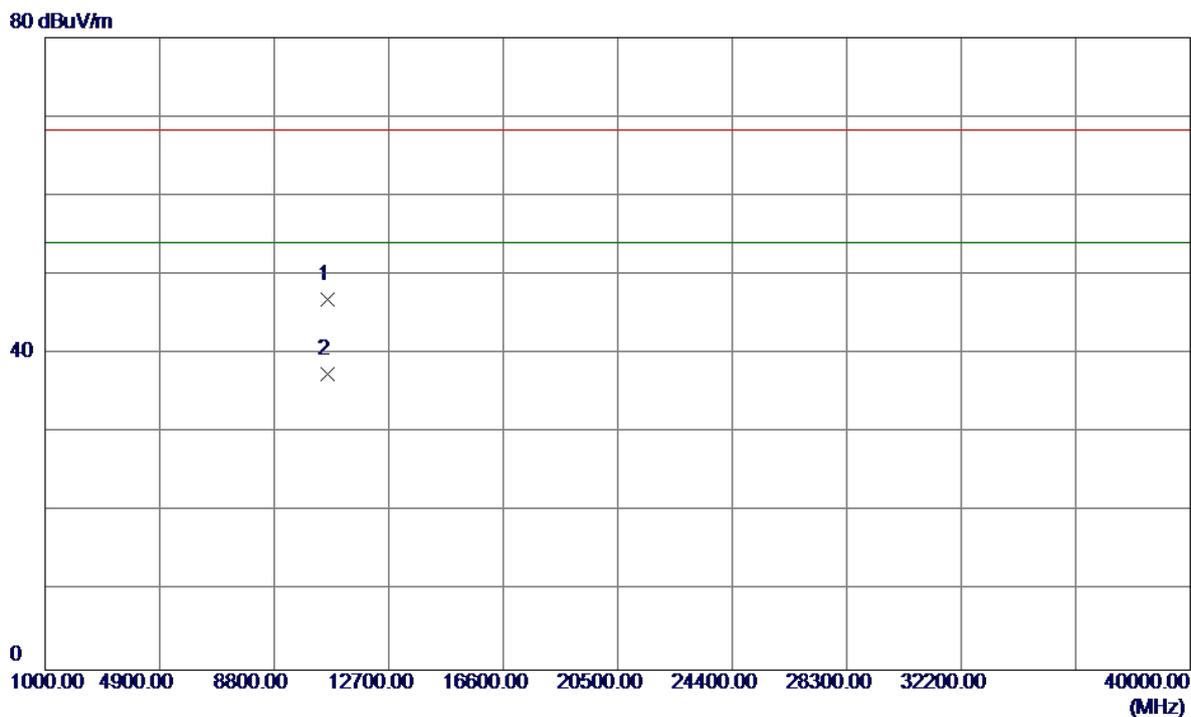


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10600.7100	32.79	14.08	46.87	68.30	-21.43	Peak	
2	10600.7100	23.38	14.08	37.46	54.00	-16.54	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

### Vertical

115 dBuV/m

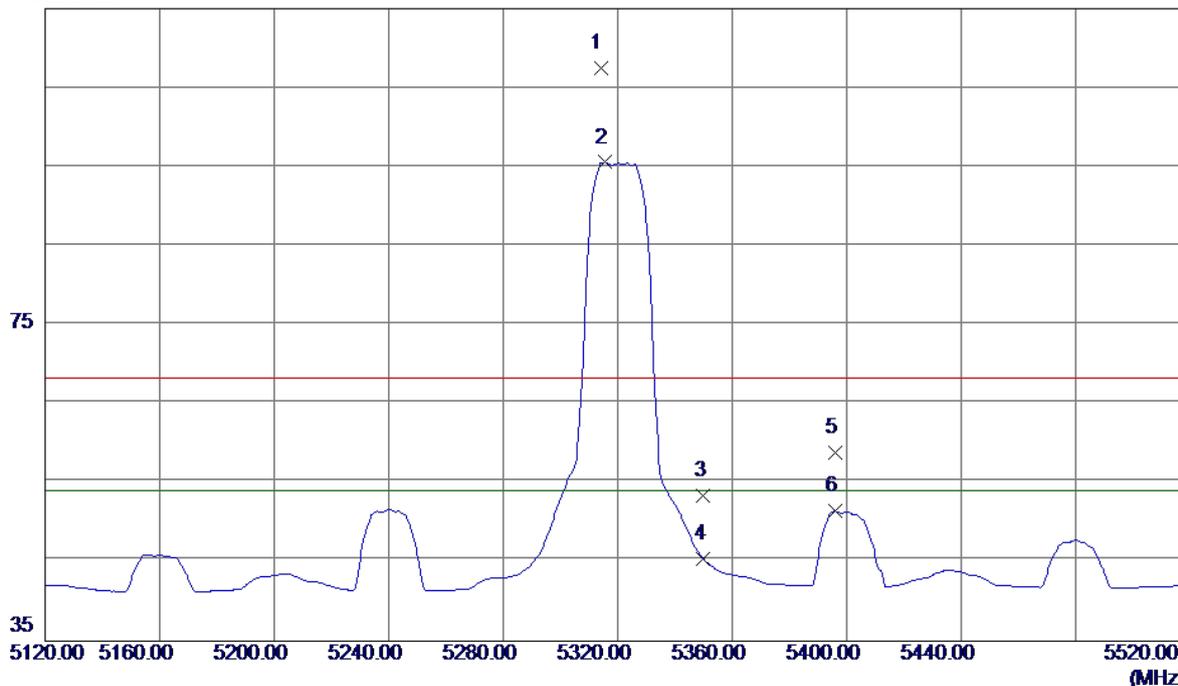


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5314.0000	66.94	40.57	107.51	68.30	39.21	Peak	No Limit
2	5315.6000	54.99	40.57	95.56	54.00	41.56	AVG	No Limit
3	5350.0000	12.78	40.64	53.42	68.30	-14.88	Peak	
4	5350.0000	4.79	40.64	45.43	54.00	-8.57	AVG	
5	5396.0000	18.12	40.74	58.86	68.30	-9.44	Peak	
6	5396.0000	10.67	40.74	51.41	54.00	-2.59	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

### Vertical


80 dBuV/m

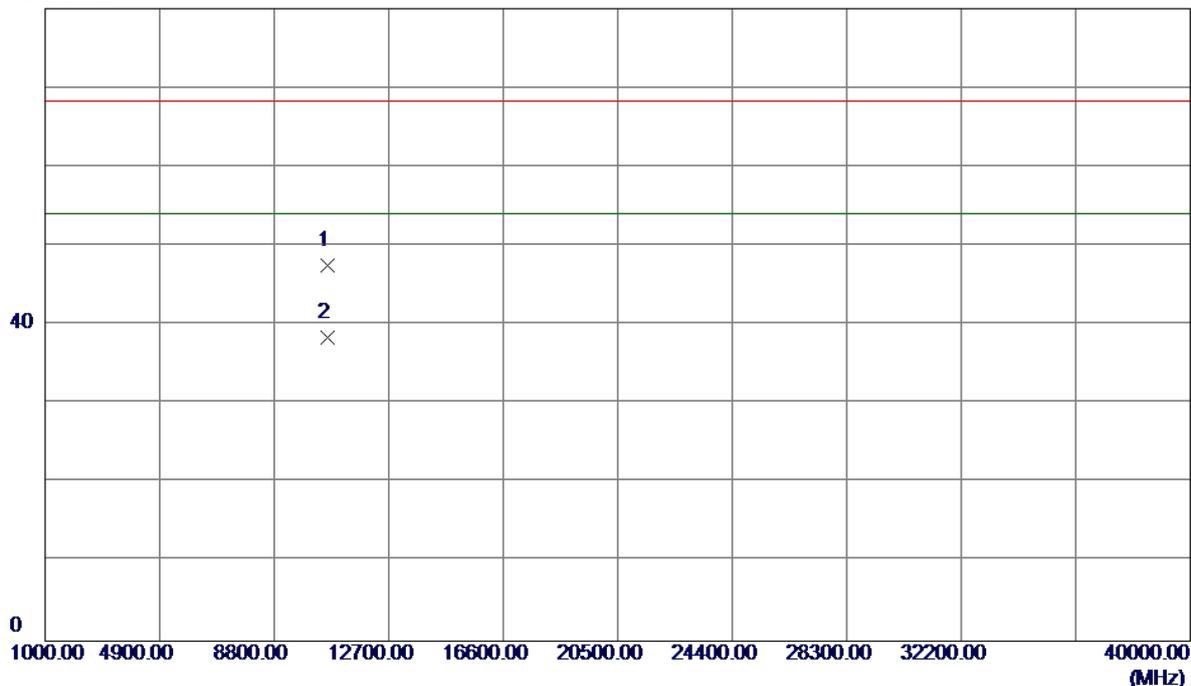

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.2800	33.31	14.25	47.56	68.30	-20.74	Peak	
2	10640.2800	24.09	14.25	38.34	54.00	-15.66	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

### Horizontal

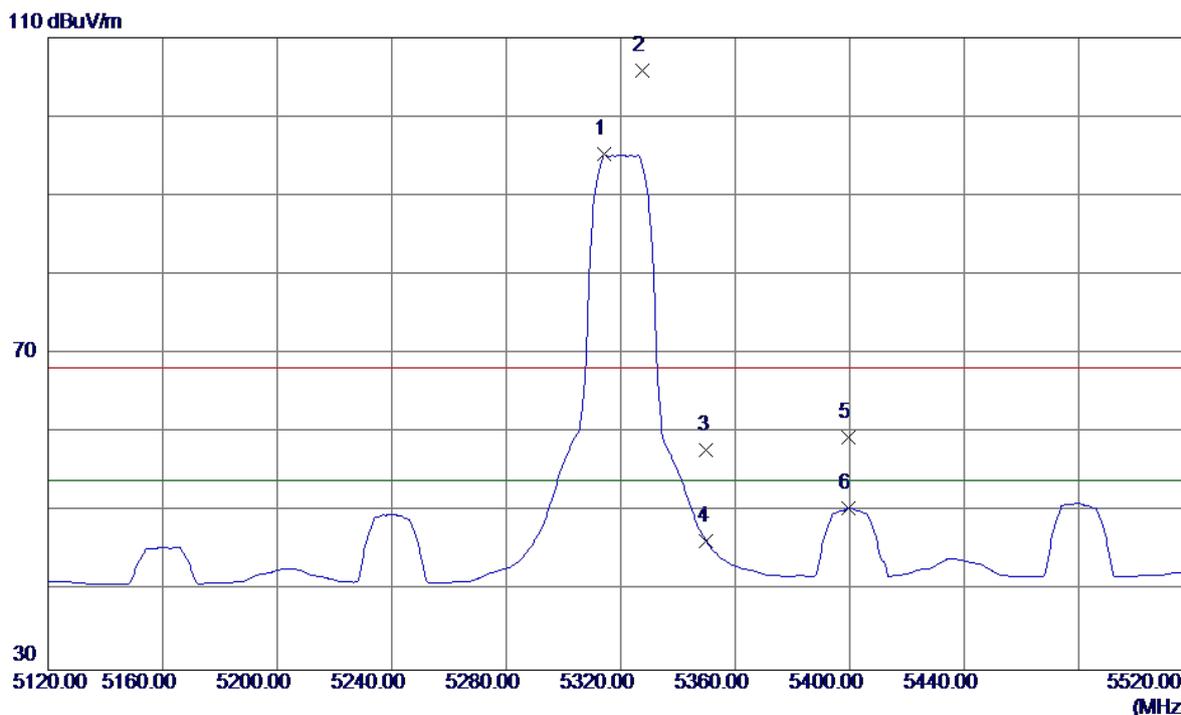


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5314.4000	54.65	40.57	95.22	54.00	41.22	AVG	No Limit
2	5327.6000	65.30	40.59	105.89	68.30	37.59	Peak	No Limit
3	5350.0000	17.16	40.64	57.80	68.30	-10.50	Peak	
4	5350.0000	5.64	40.64	46.28	54.00	-7.72	AVG	
5	5399.6000	18.69	40.75	59.44	68.30	-8.86	Peak	
6	5399.6000	9.67	40.75	50.42	54.00	-3.58	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

### Horizontal

80 dBuV/m

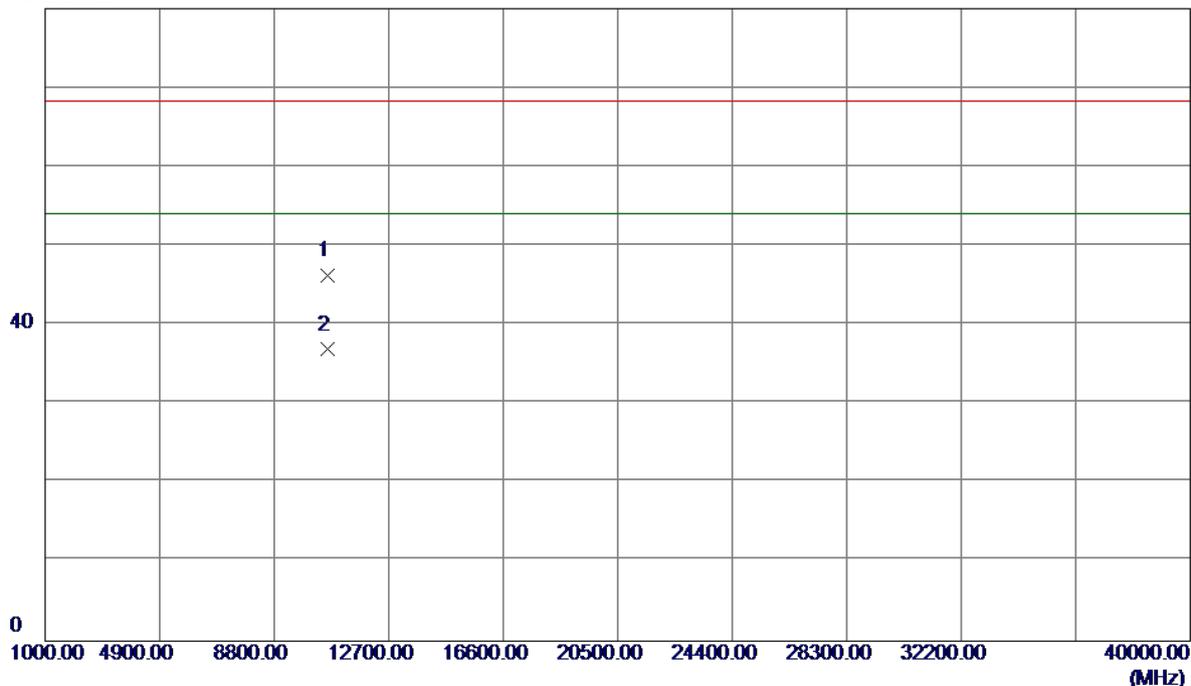


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.1140	32.02	14.25	46.27	68.30	-22.03	Peak	
2	10640.5880	22.63	14.25	36.88	54.00	-17.12	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

### Vertical

115 dBuV/m

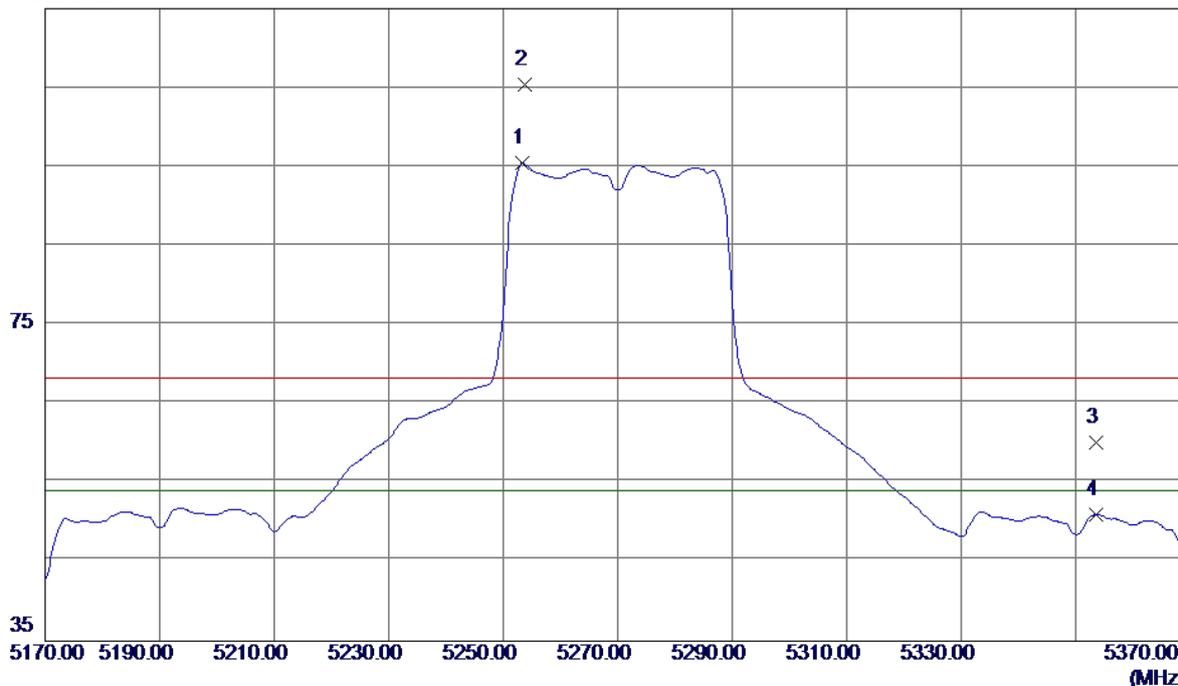


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5253.4000	55.07	40.44	95.51	54.00	41.51	AVG	No Limit
2	5253.8000	64.93	40.44	105.37	68.30	37.07	Peak	No Limit
3	5353.6000	19.40	40.65	60.05	68.30	-8.25	Peak	
4	5353.6000	10.34	40.65	50.99	54.00	-3.01	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

### Vertical

80 dBuV/m

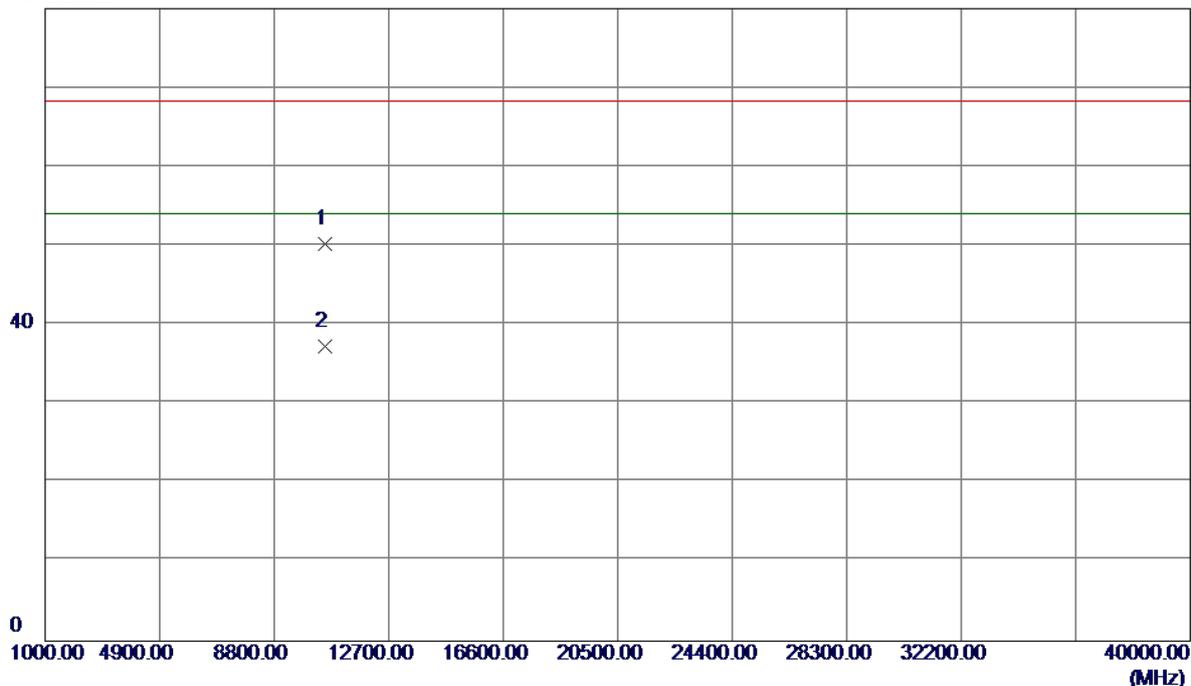


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10540.2570	36.46	13.83	50.29	68.30	-18.01	Peak	
2	10540.6550	23.47	13.83	37.30	54.00	-16.70	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

### Horizontal

115 dBuV/m

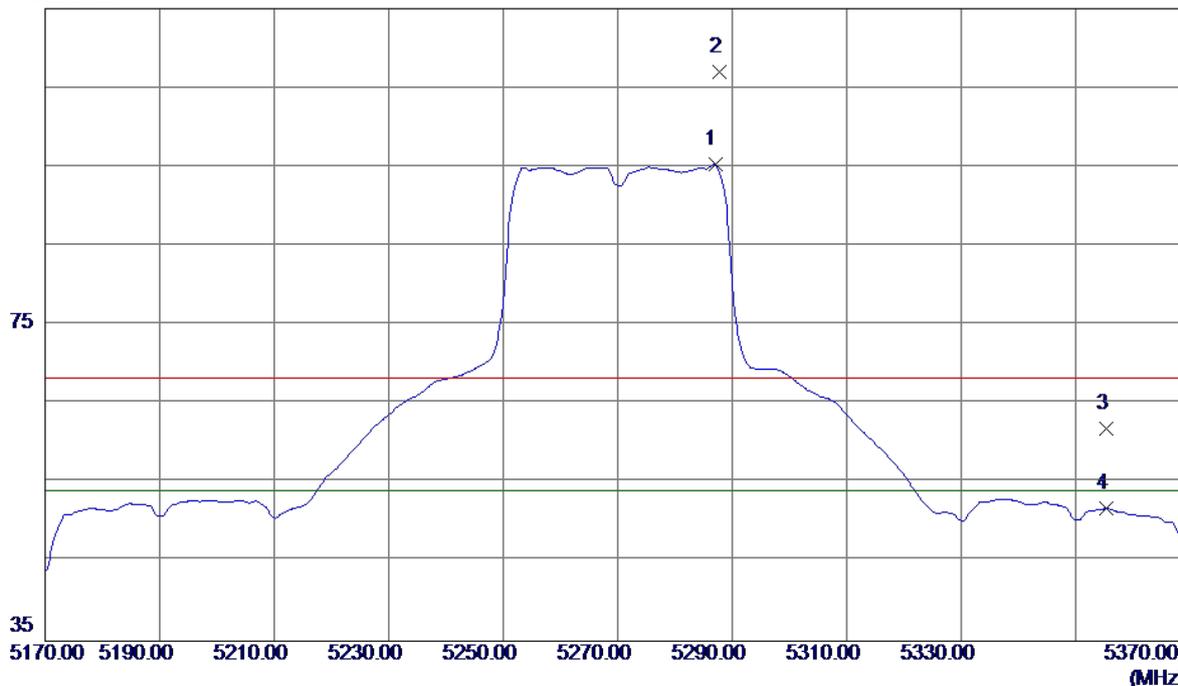


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5287.0000	54.86	40.51	95.37	54.00	41.37	AVG	No Limit
2	5287.8000	66.42	40.51	106.93	68.30	38.63	Peak	No Limit
3	5355.4000	21.20	40.65	61.85	68.30	-6.45	Peak	
4	5355.4000	11.12	40.65	51.77	54.00	-2.23	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

### Horizontal

80 dBuV/m

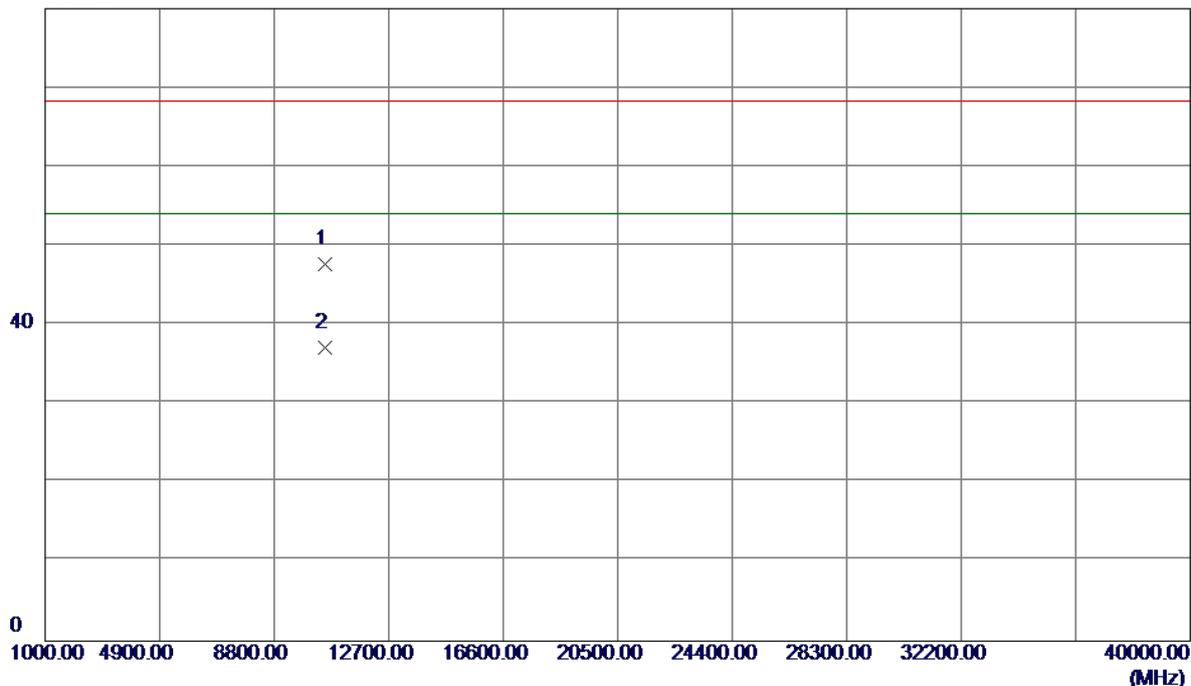


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10540.8700	33.85	13.84	47.69	68.30	-20.61	Peak	
2	10540.8700	23.28	13.84	37.12	54.00	-16.88	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

### Vertical


115 dBuV/m

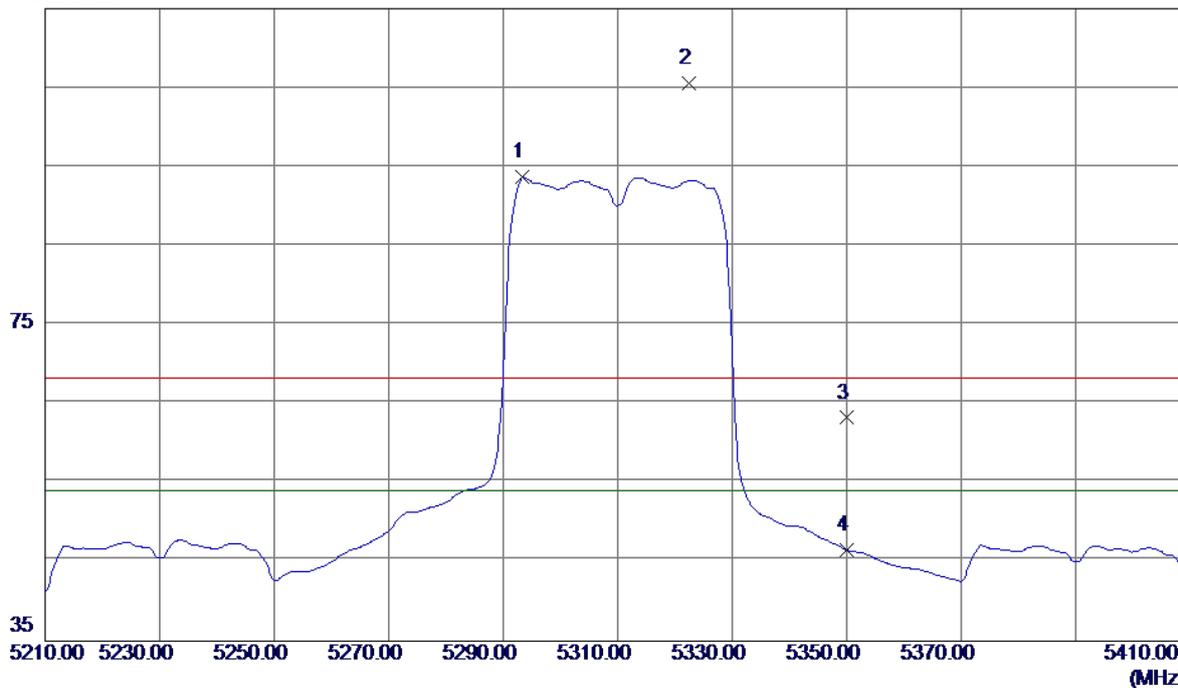

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5293.4000	53.16	40.52	93.68	54.00	39.68	AVG	No Limit
2	5322.4000	64.97	40.58	105.55	68.30	37.25	Peak	No Limit
3	5350.0000	22.60	40.64	63.24	68.30	-5.06	Peak	
4	5350.0000	5.85	40.64	46.49	54.00	-7.51	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

### Vertical

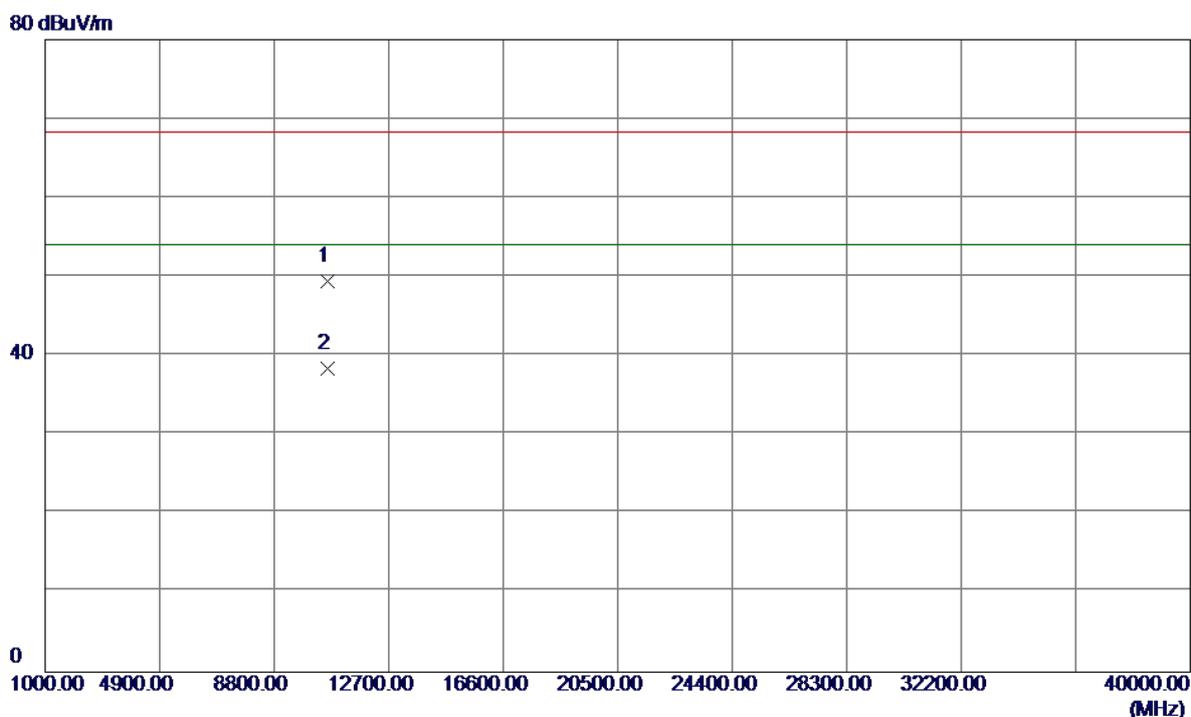


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.2500	35.21	14.17	49.38	68.30	-18.92	Peak	
2	10620.2500	24.30	14.17	38.47	54.00	-15.53	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

### Horizontal

115 dBuV/m

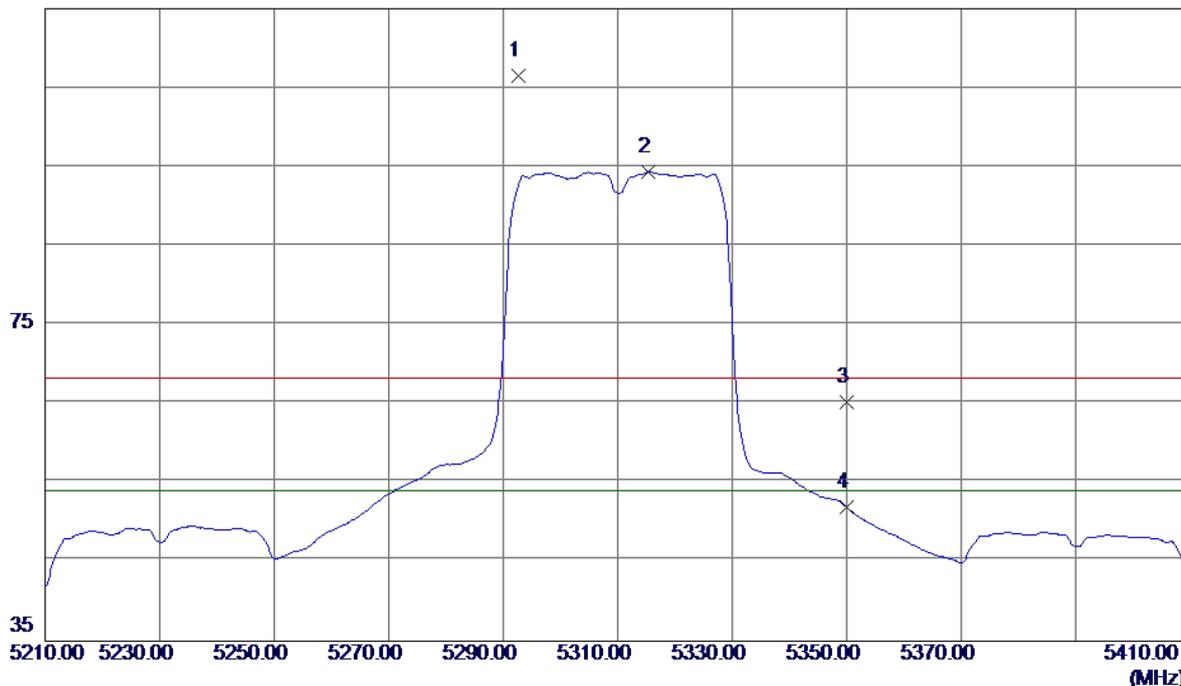


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5292.6000	65.96	40.52	106.48	68.30	38.18	Peak	No Limit
2	5315.4000	53.76	40.57	94.33	54.00	40.33	AVG	No Limit
3	5350.0000	24.55	40.64	65.19	68.30	-3.11	Peak	
4	5350.0000	11.28	40.64	51.92	54.00	-2.08	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

### Horizontal

80 dBuV/m

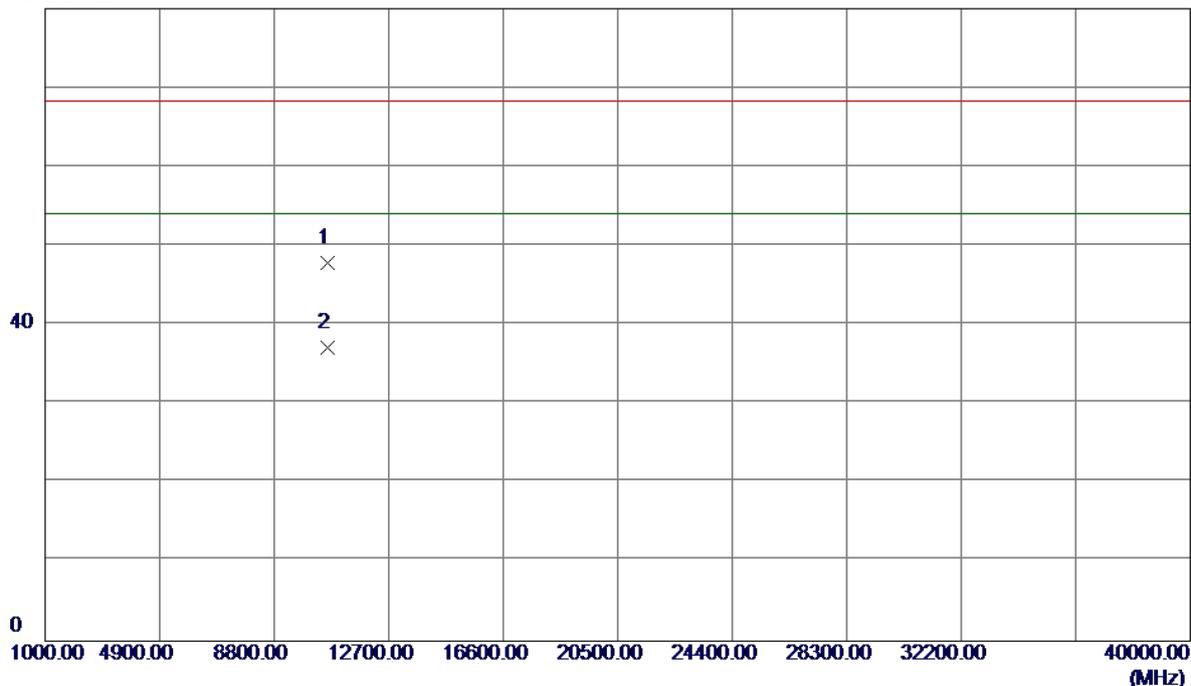


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.3700	33.69	14.17	47.86	68.30	-20.44	Peak	
2	10620.3700	22.99	14.17	37.16	54.00	-16.84	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

### Vertical

115 dBuV/m

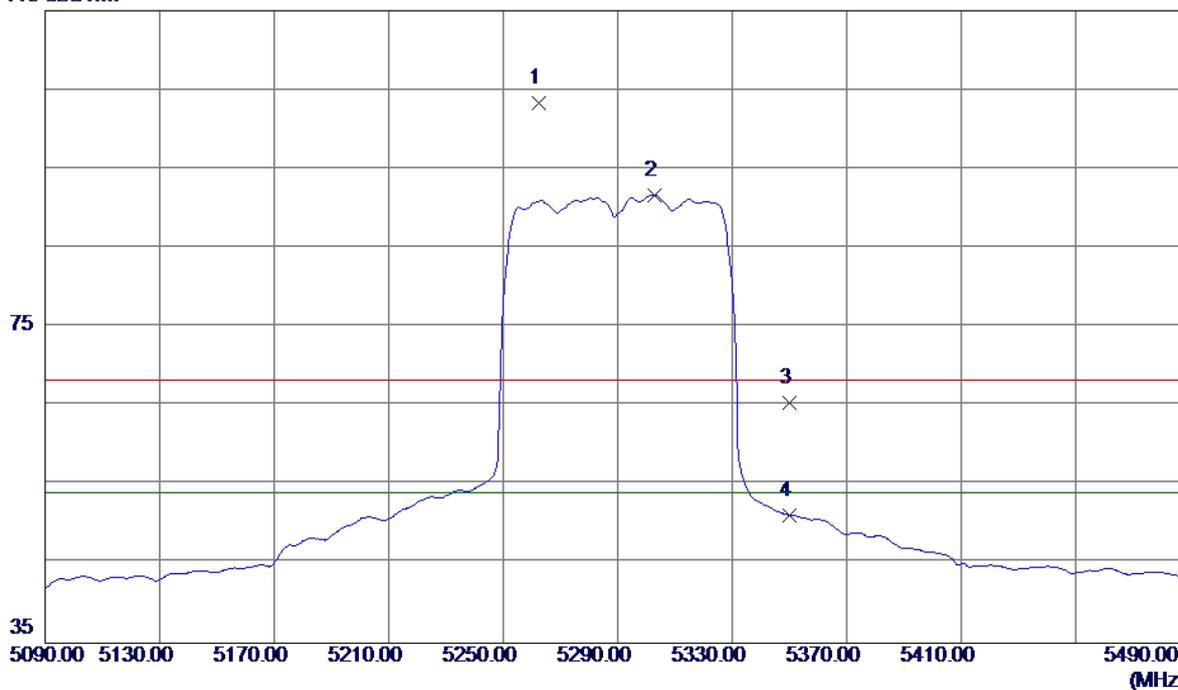


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5262.4000	62.86	40.46	103.32	68.30	35.02	Peak	No Limit
2	5302.8000	51.15	40.54	91.69	54.00	37.69	AVG	No Limit
3	5350.0000	24.83	40.64	65.47	68.30	-2.83	Peak	
4	5350.0000	10.58	40.64	51.22	54.00	-2.78	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

### Vertical

80 dBuV/m

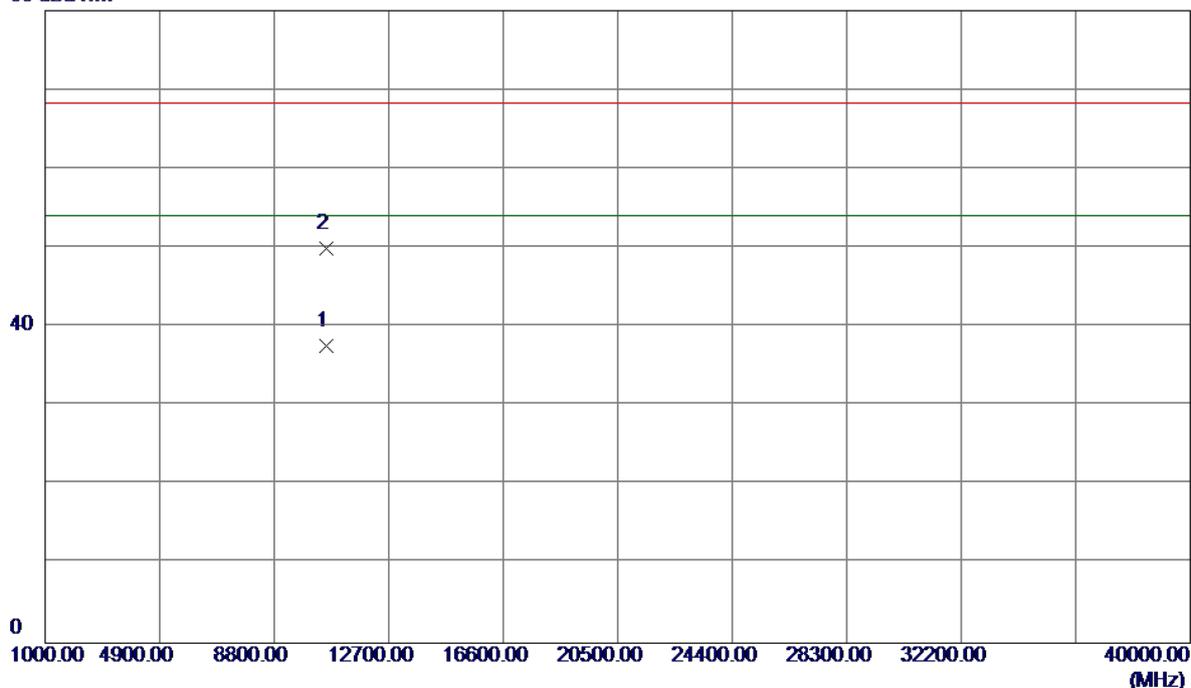


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10581.3400	23.58	14.00	37.58	54.00	-16.42	AVG	
2	10581.3900	35.86	14.00	49.86	68.30	-18.44	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

### Horizontal

115 dBuV/m

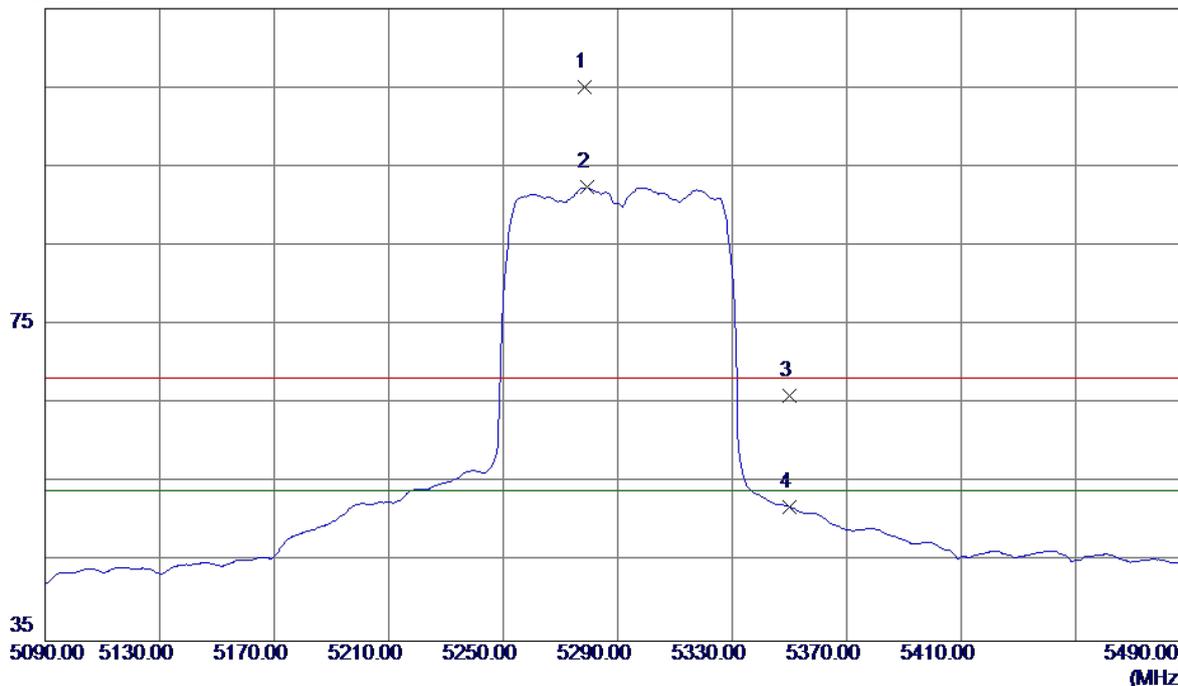


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5278.4000	64.62	40.49	105.11	68.30	36.81	Peak	No Limit
2	5279.2000	51.88	40.49	92.37	54.00	38.37	AVG	No Limit
3	5350.0000	25.45	40.64	66.09	68.30	-2.21	Peak	
4	5350.0000	11.35	40.64	51.99	54.00	-2.01	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

### Horizontal

80 dBuV/m

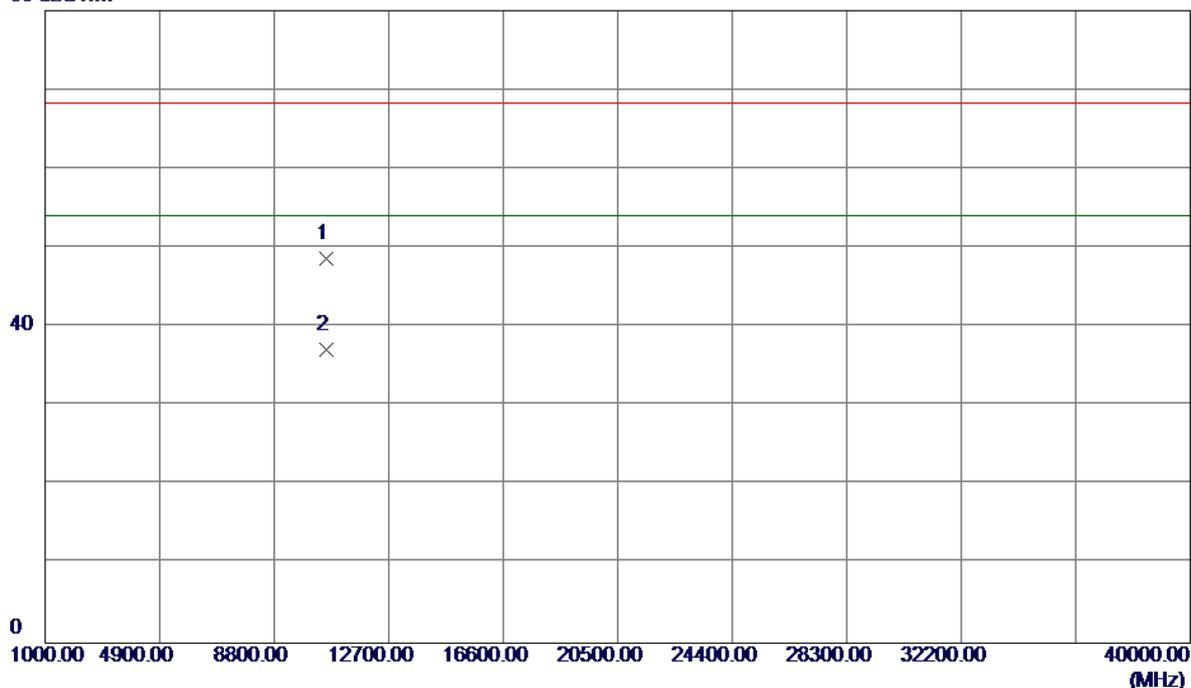


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10580.9900	34.57	14.00	48.57	68.30	-19.73	Peak	
2	10580.9900	23.14	14.00	37.14	54.00	-16.86	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

### Vertical

115 dBuV/m

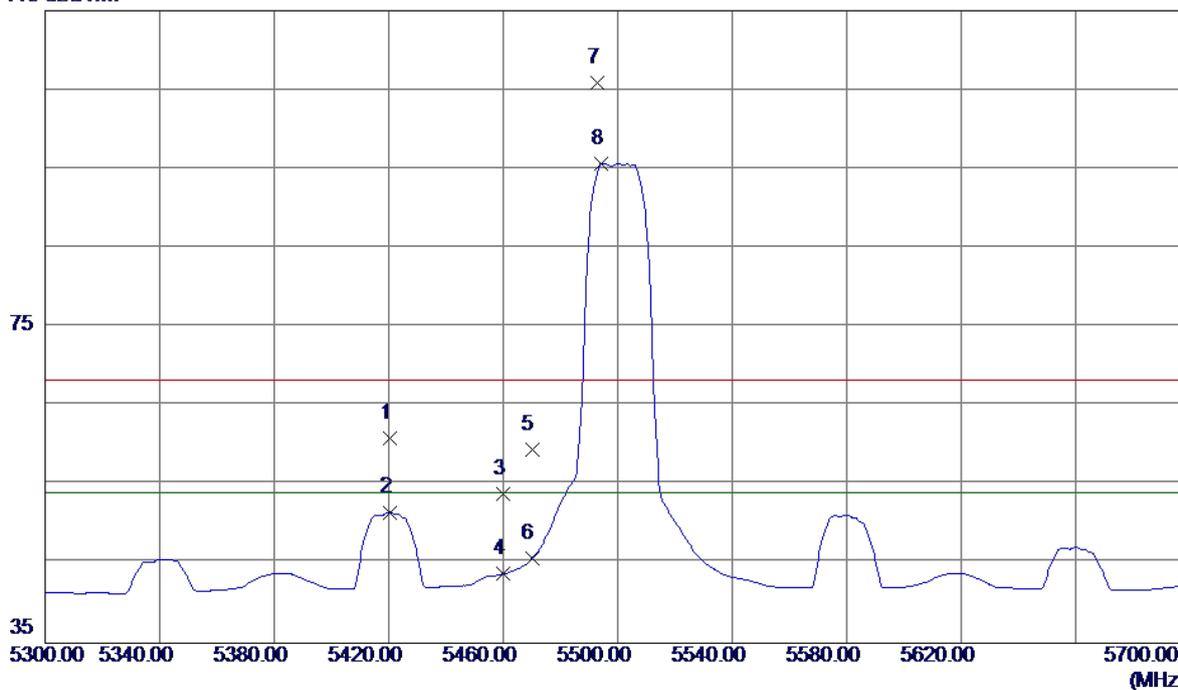


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5420.4000	20.16	40.79	60.95	68.30	-7.35	Peak	
2	5420.4000	10.77	40.79	51.56	54.00	-2.44	AVG	
3	5460.0000	12.99	40.88	53.87	68.30	-14.43	Peak	
4	5460.0000	2.88	40.88	43.76	54.00	-10.24	AVG	
5	5470.0000	18.51	40.90	59.41	68.30	-8.89	Peak	
6	5470.0000	4.78	40.90	45.68	54.00	-8.32	AVG	
7	5492.8000	64.88	40.94	105.82	68.30	37.52	Peak	No Limit
8	5494.4000	54.72	40.95	95.67	54.00	41.67	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

### Vertical

80 dBuV/m

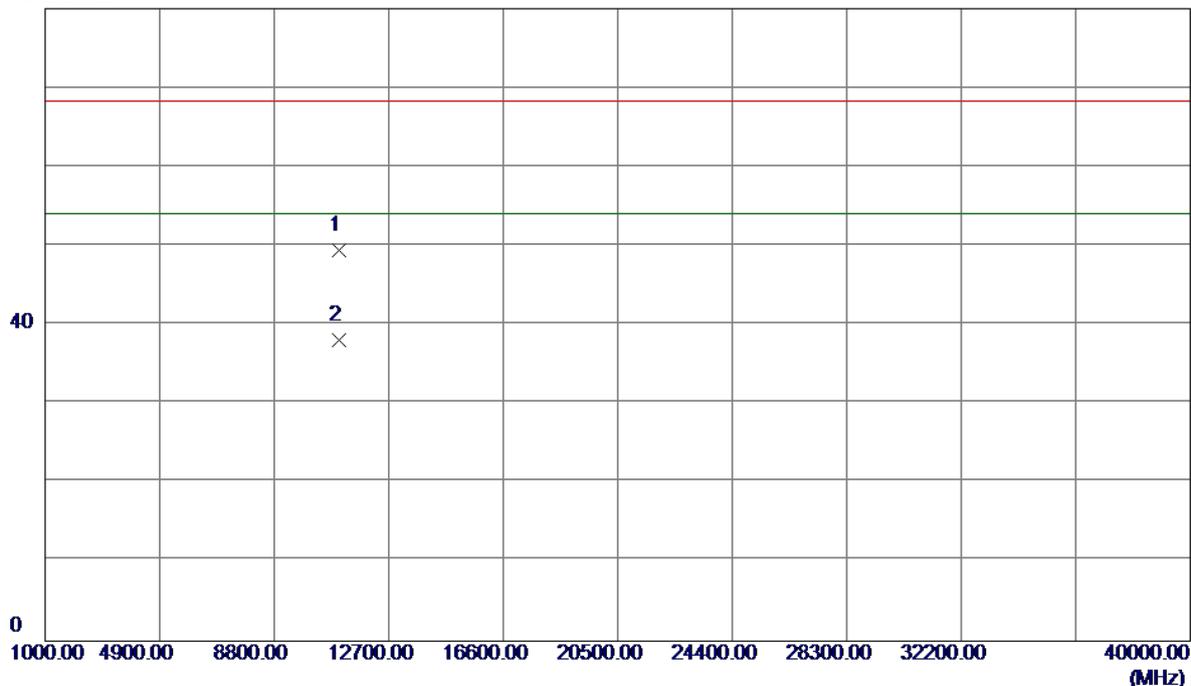


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.6700	33.65	15.75	49.40	68.30	-18.90	Peak	
2	11000.6200	22.36	15.75	38.11	54.00	-15.89	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

### Horizontal

112 dBuV/m

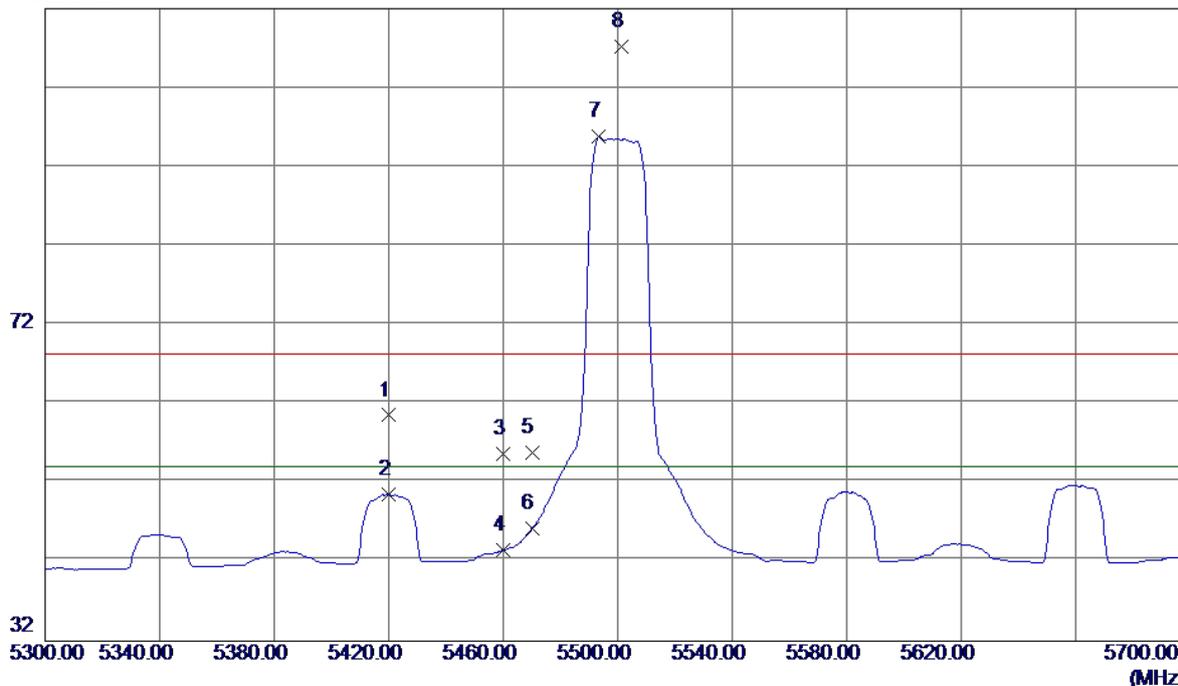


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5420.0000	19.77	40.79	60.56	68.30	-7.74	Peak	
2	5420.0000	9.82	40.79	50.61	54.00	-3.39	AVG	
3	5460.0000	14.79	40.88	55.67	68.30	-12.63	Peak	
4	5460.0000	2.65	40.88	43.53	54.00	-10.47	AVG	
5	5470.0000	14.95	40.90	55.85	68.30	-12.45	Peak	
6	5470.0000	5.27	40.90	46.17	54.00	-7.83	AVG	
7	5493.2000	54.91	40.95	95.86	54.00	41.86	AVG	No Limit
8	5501.2000	66.17	40.96	107.13	68.30	38.83	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

### Horizontal

80 dBuV/m

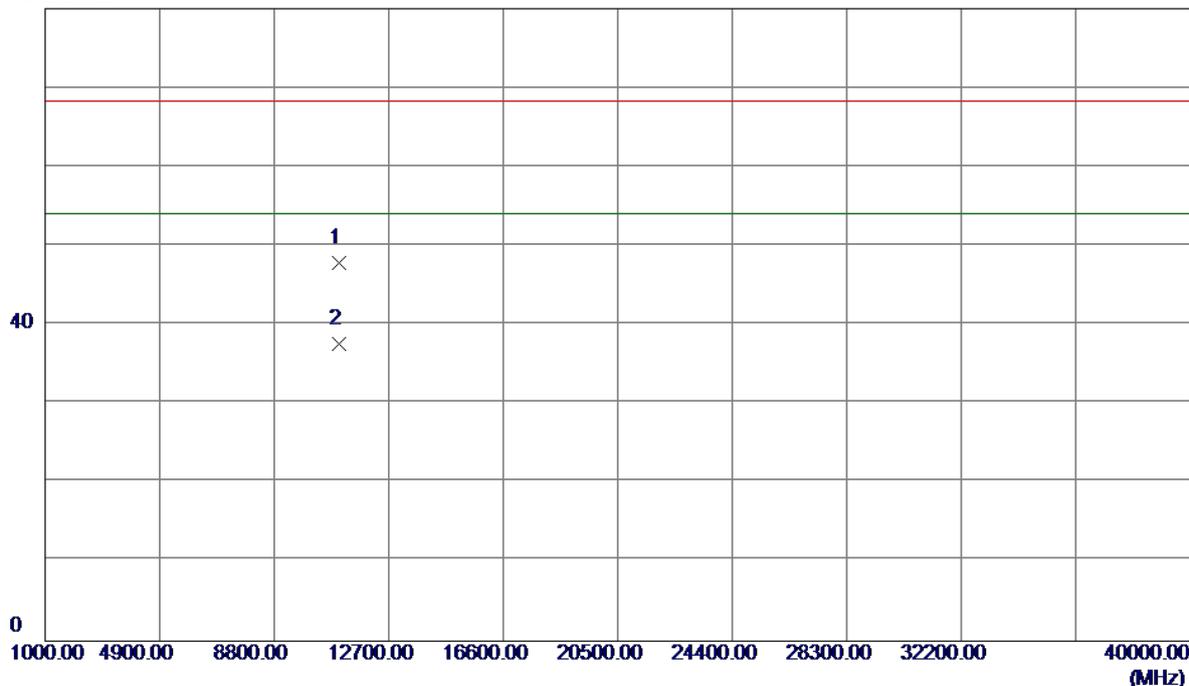


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0800	32.07	15.75	47.82	68.30	-20.48	Peak	
2	11000.0800	21.90	15.75	37.65	54.00	-16.35	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

### Vertical

115 dBuV/m

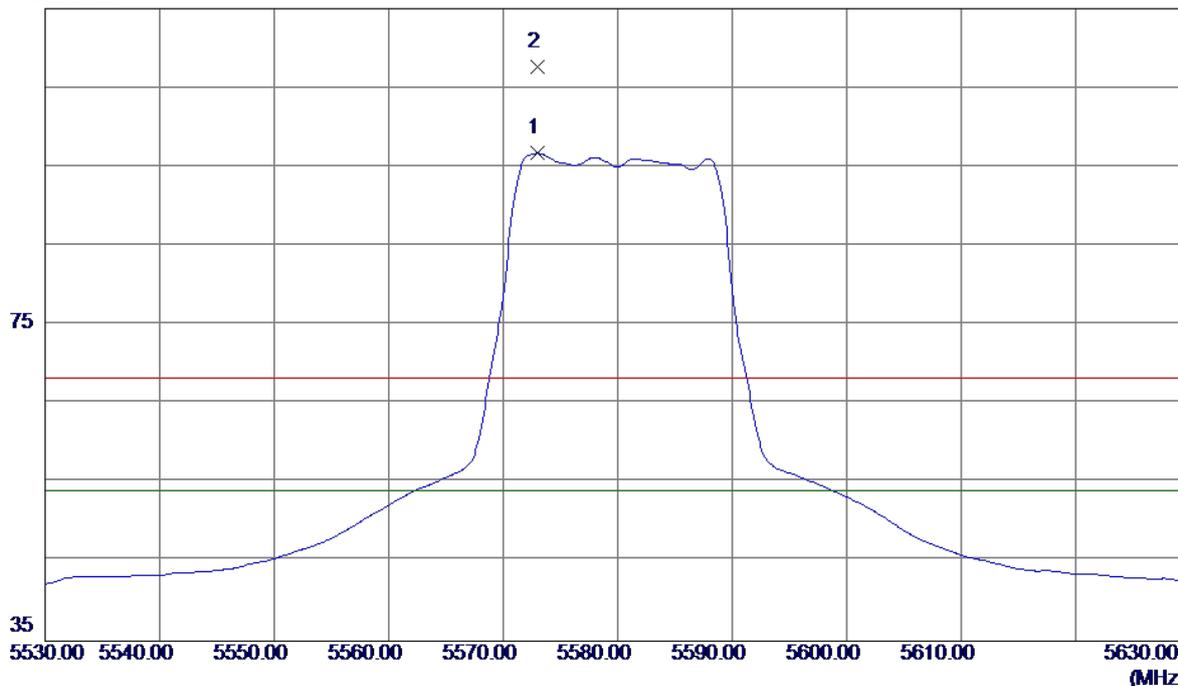


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5573.0000	55.62	41.06	96.68	54.00	42.68	AVG	No Limit
2	5573.0000	66.54	41.06	107.60	68.30	39.30	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

### Vertical


80 dBuV/m

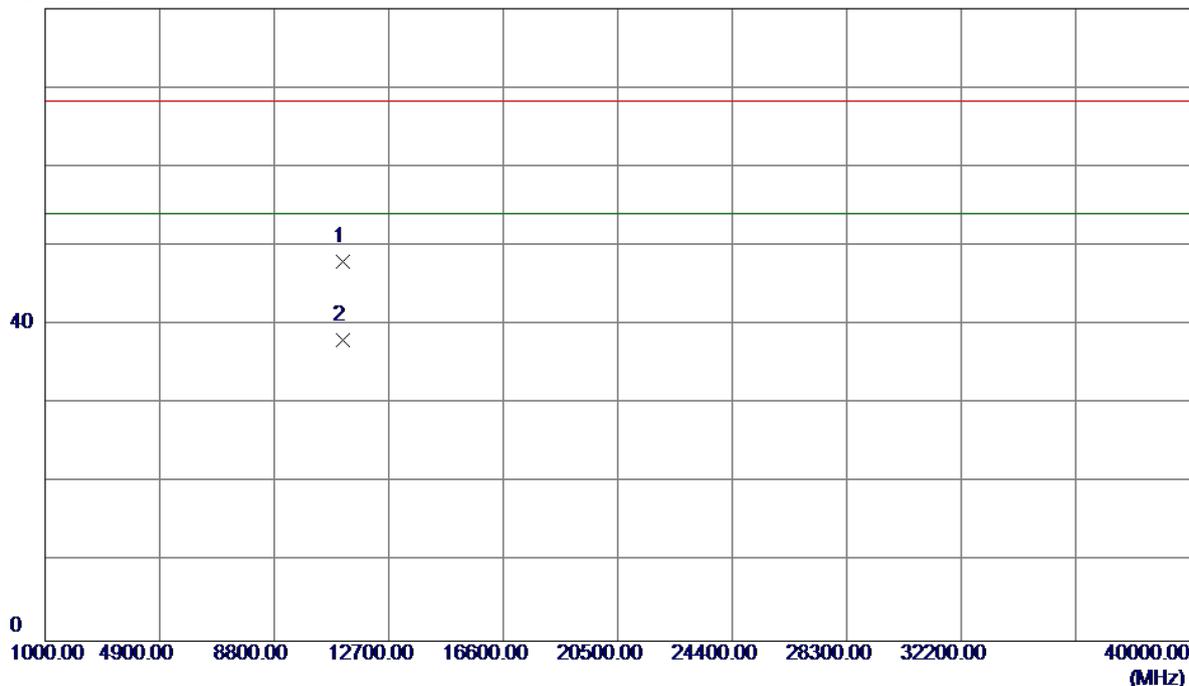

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.7100	31.89	16.13	48.02	68.30	-20.28	Peak	
2	11160.7100	21.88	16.13	38.01	54.00	-15.99	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

### Horizontal

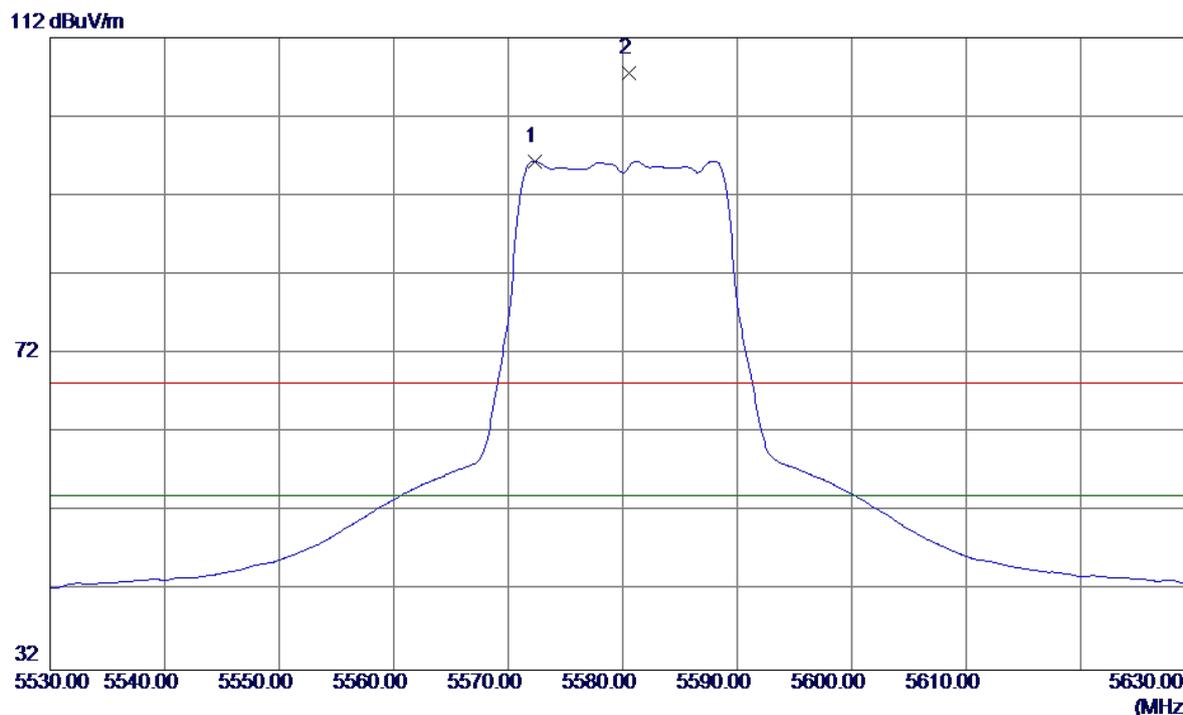


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5572.3000	55.32	41.06	96.38	54.00	42.38	AVG	No Limit
2	5580.6000	66.40	41.07	107.47	68.30	39.17	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

### Horizontal

80 dBuV/m

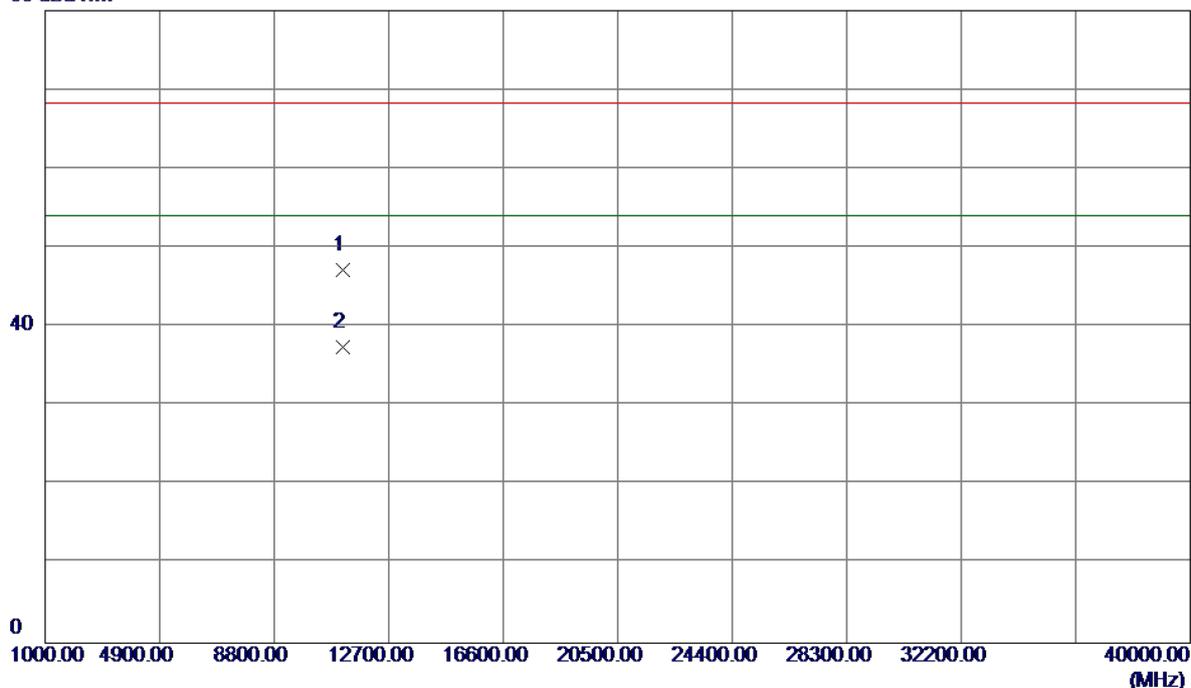


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0300	31.10	16.13	47.23	68.30	-21.07	Peak	
2	11160.0300	21.29	16.13	37.42	54.00	-16.58	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

### Vertical

115 dBuV/m

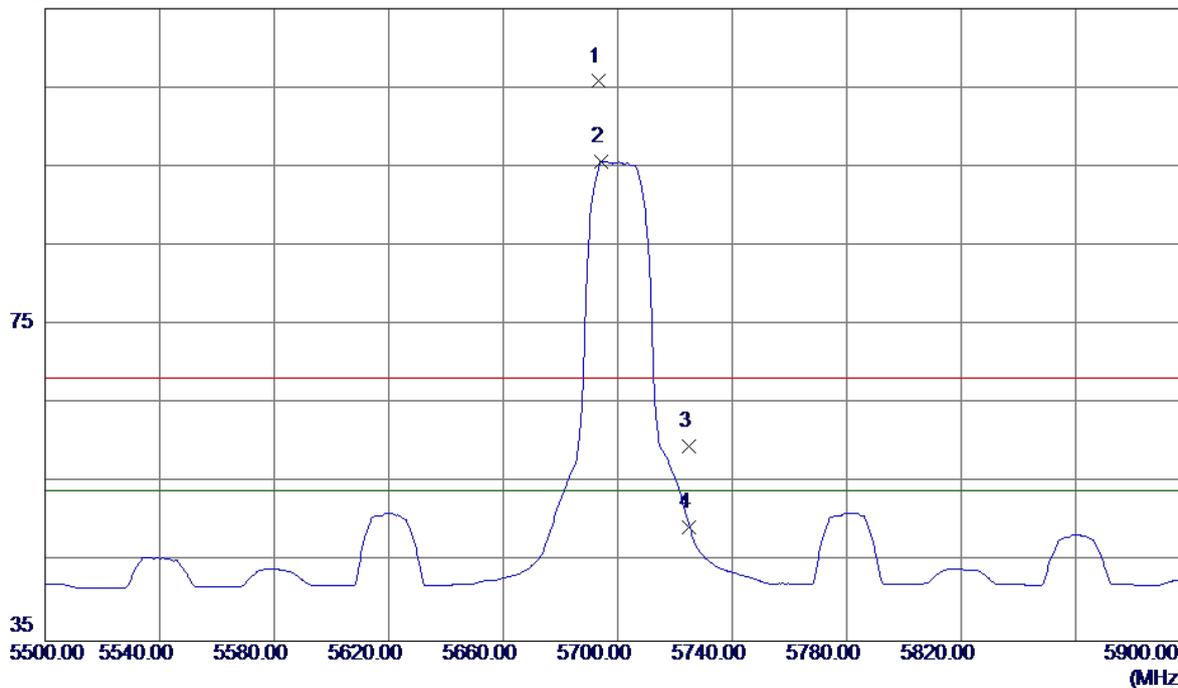


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5693.2000	64.58	41.22	105.80	68.30	37.50	Peak	No Limit
2	5694.4000	54.48	41.22	95.70	54.00	41.70	AVG	No Limit
3	5725.0000	18.41	41.27	59.68	68.30	-8.62	Peak	
4	5725.0000	8.13	41.27	49.40	54.00	-4.60	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

### Vertical


80 dBuV/m

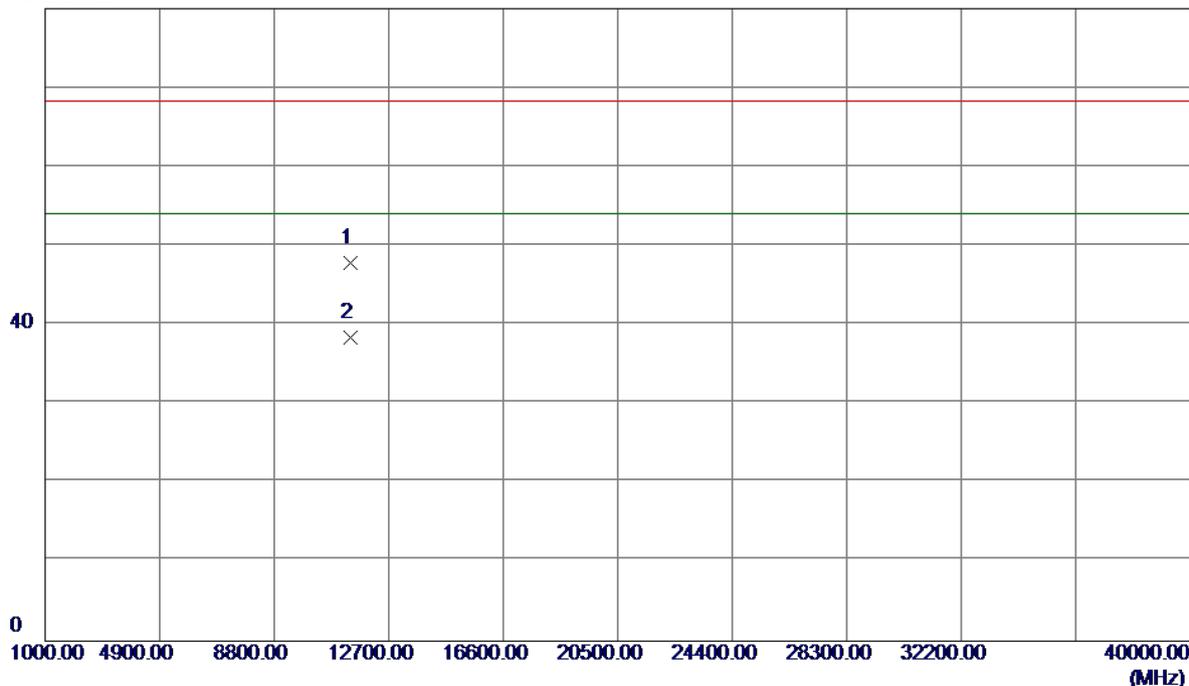

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.7900	31.21	16.70	47.91	68.30	-20.39	Peak	
2	11400.7900	21.63	16.70	38.33	54.00	-15.67	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

### Horizontal

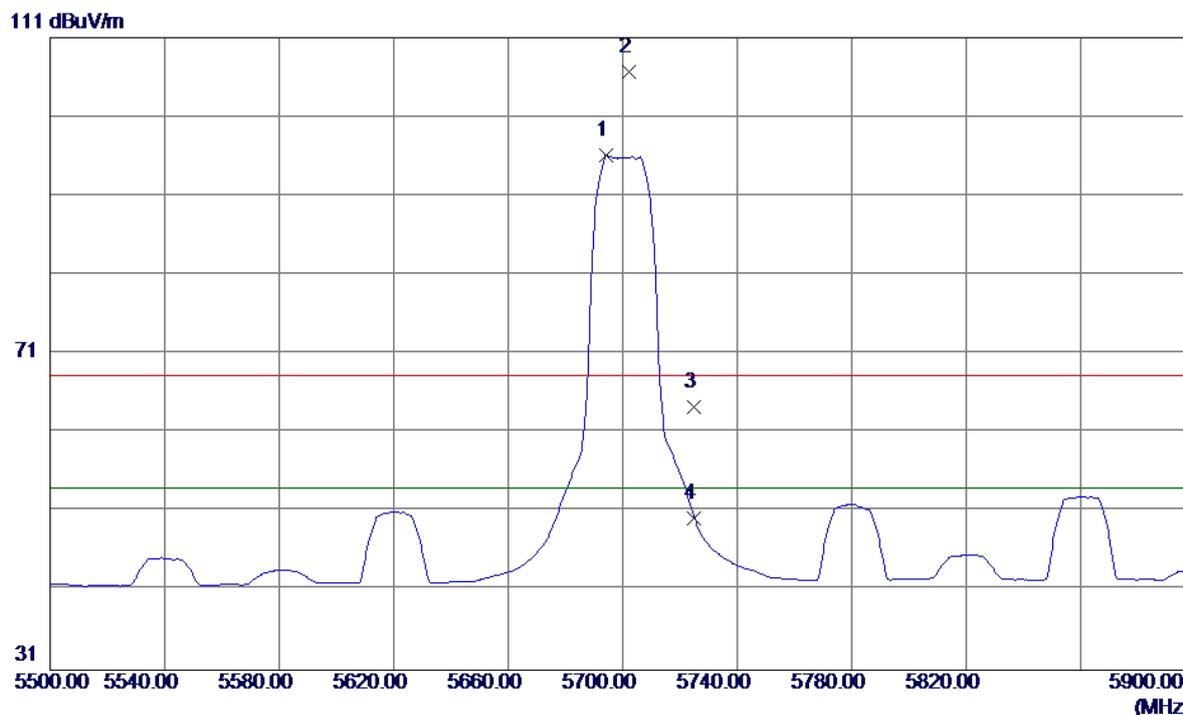


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5694.4000	54.87	41.22	96.09	54.00	42.09	AVG	No Limit
2	5702.4000	65.51	41.24	106.75	68.30	38.45	Peak	No Limit
3	5725.0000	23.05	41.27	64.32	68.30	-3.98	Peak	
4	5725.0000	8.91	41.27	50.18	54.00	-3.82	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

### Horizontal

80 dBuV/m

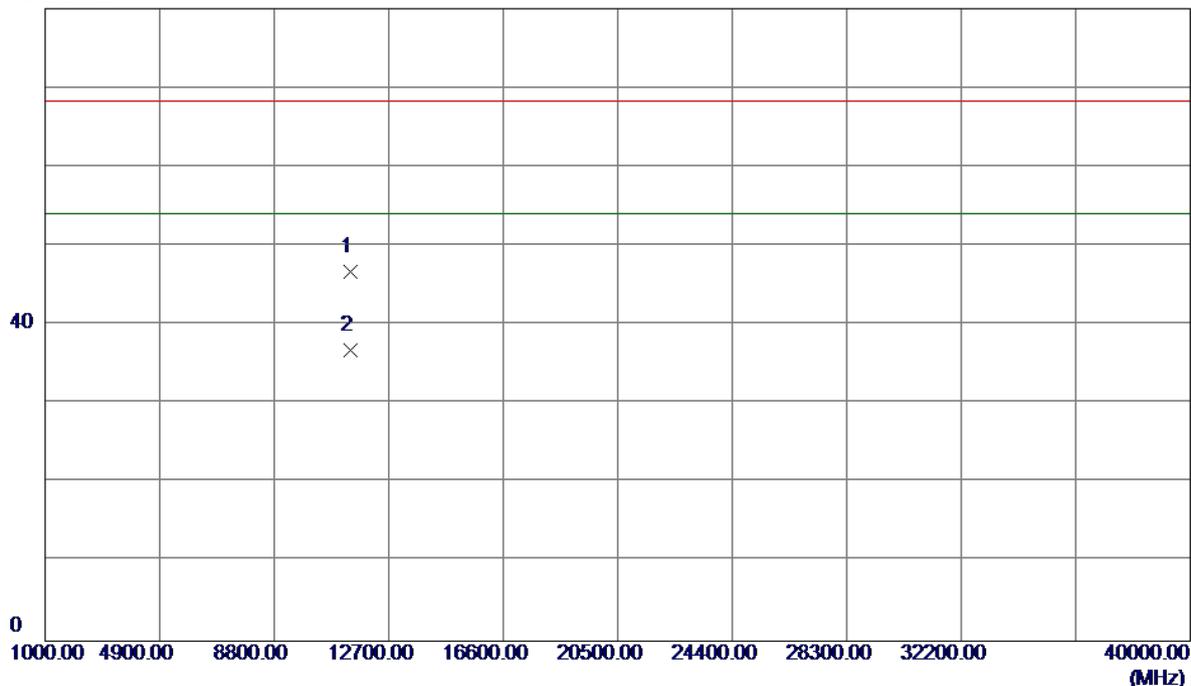


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.6300	30.07	16.70	46.77	68.30	-21.53	Peak	
2	11400.2200	20.14	16.70	36.84	54.00	-17.16	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

### Vertical

115 dBuV/m

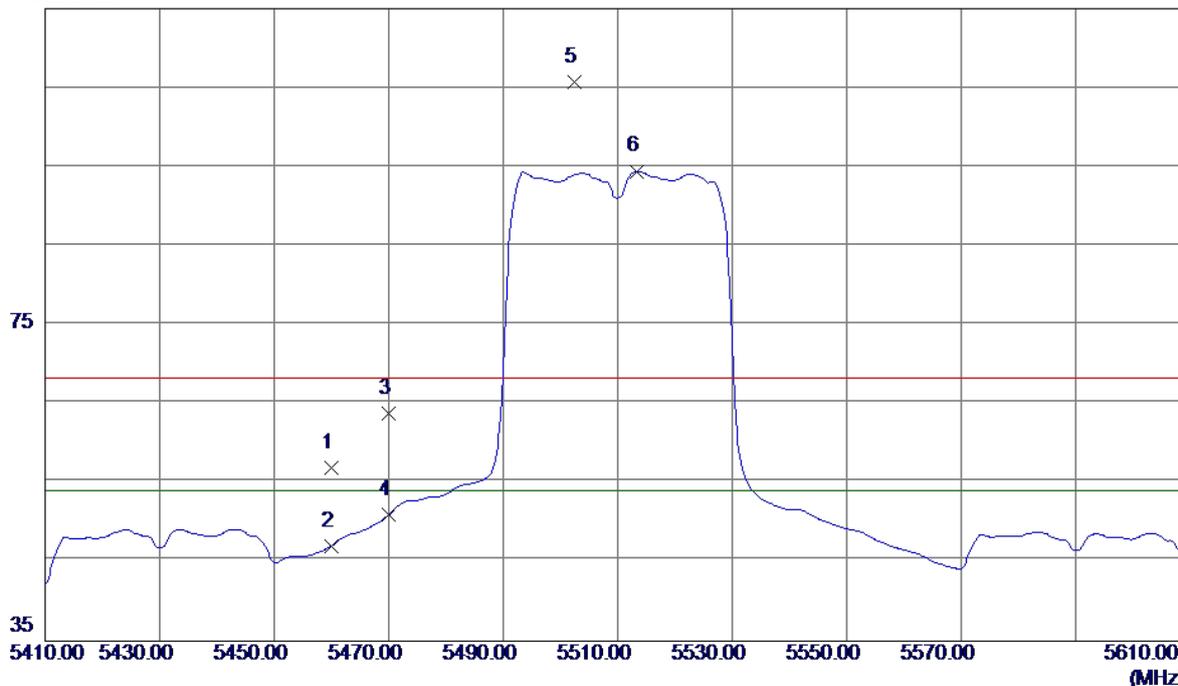


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	16.04	40.88	56.92	68.30	-11.38	Peak	
2	5460.0000	6.15	40.88	47.03	54.00	-6.97	AVG	
3	5470.0000	22.93	40.90	63.83	68.30	-4.47	Peak	
4	5470.0000	10.03	40.90	50.93	54.00	-3.07	AVG	
5	5502.4000	64.81	40.96	105.77	68.30	37.47	Peak	No Limit
6	5513.4000	53.46	40.98	94.44	54.00	40.44	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

### Vertical

80 dBuV/m

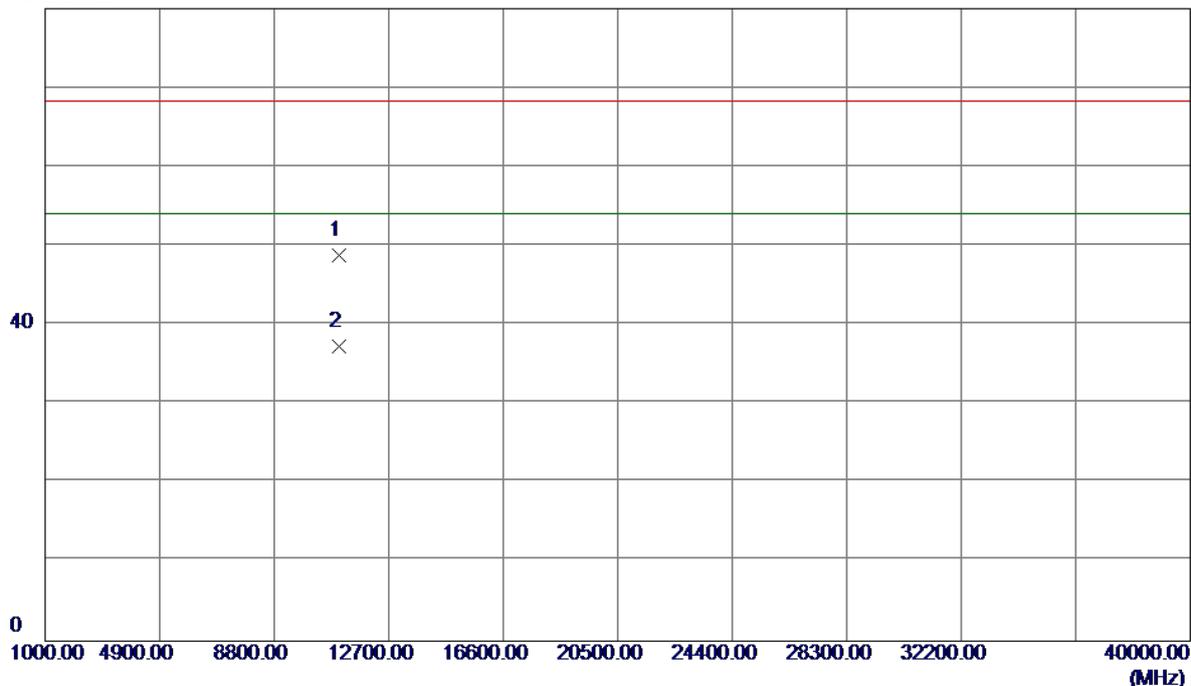


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0300	32.95	15.80	48.75	68.30	-19.55	Peak	
2	11020.0300	21.54	15.80	37.34	54.00	-16.66	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

### Horizontal

115 dBuV/m

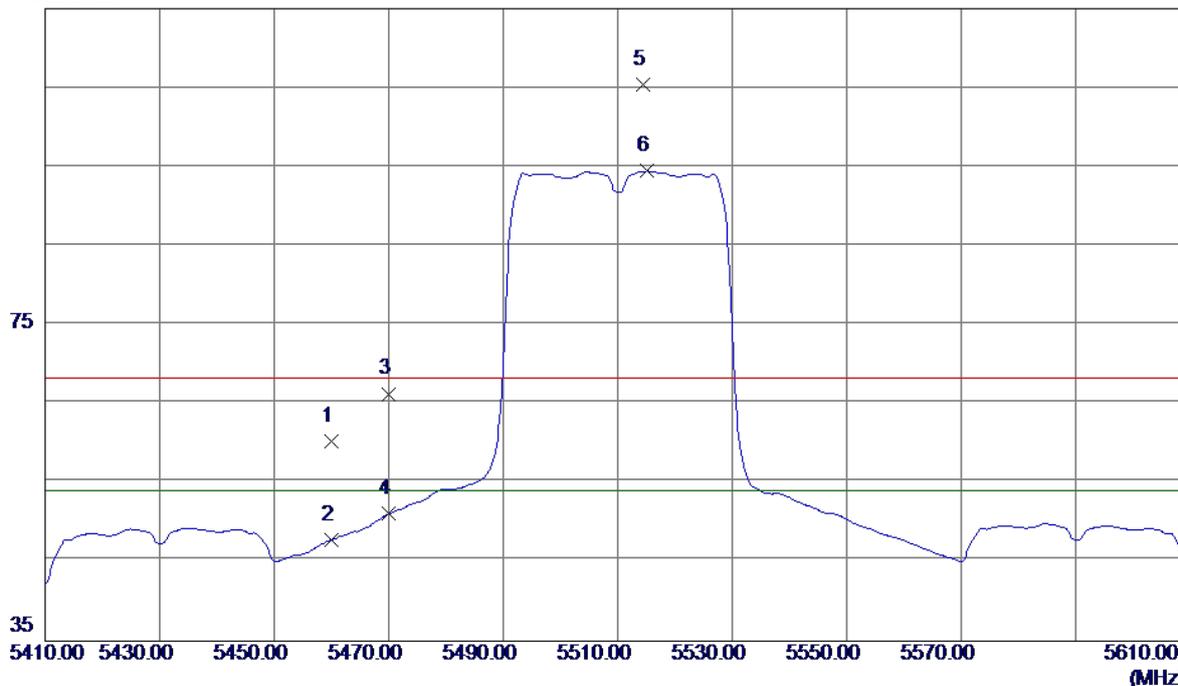


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	19.34	40.88	60.22	68.30	-8.08	Peak	
2	5460.0000	6.92	40.88	47.80	54.00	-6.20	AVG	
3	5470.0000	25.38	40.90	66.28	68.30	-2.02	Peak	
4	5470.0000	10.20	40.90	51.10	54.00	-2.90	AVG	
5	5514.4000	64.41	40.98	105.39	68.30	37.09	Peak	No Limit
6	5515.2000	53.47	40.98	94.45	54.00	40.45	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

### Horizontal

80 dBuV/m

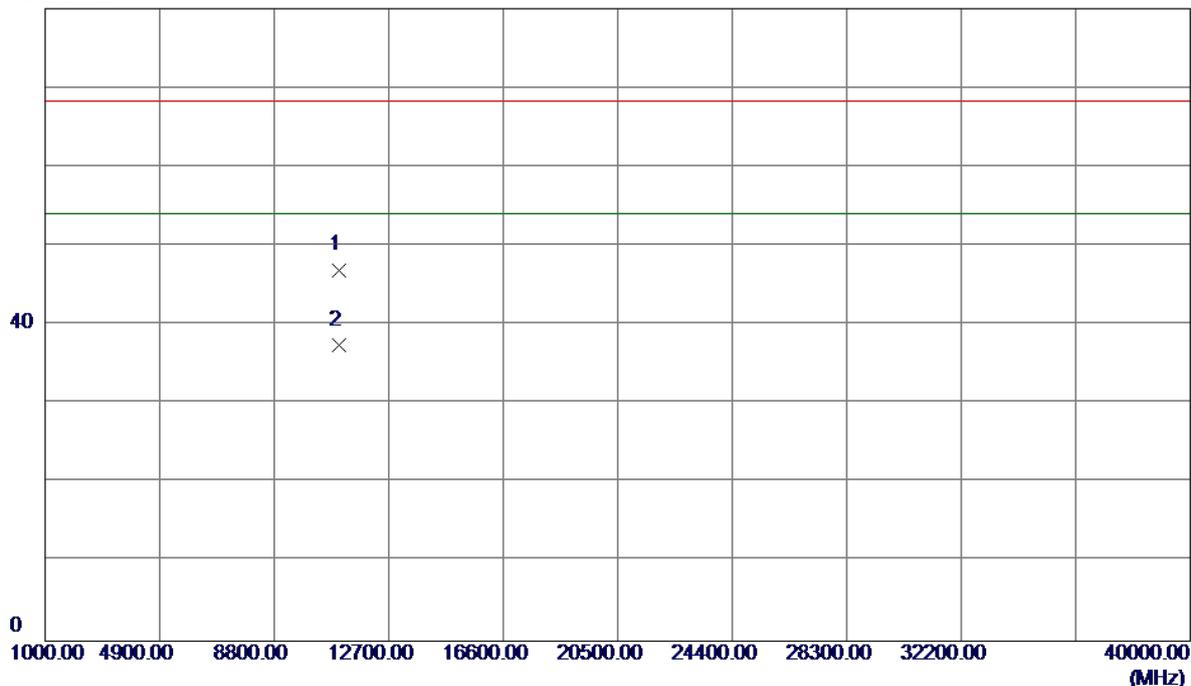


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.4560	31.16	15.80	46.96	68.30	-21.34	Peak	
2	11020.2440	21.65	15.80	37.45	54.00	-16.55	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

### Vertical

115 dBuV/m

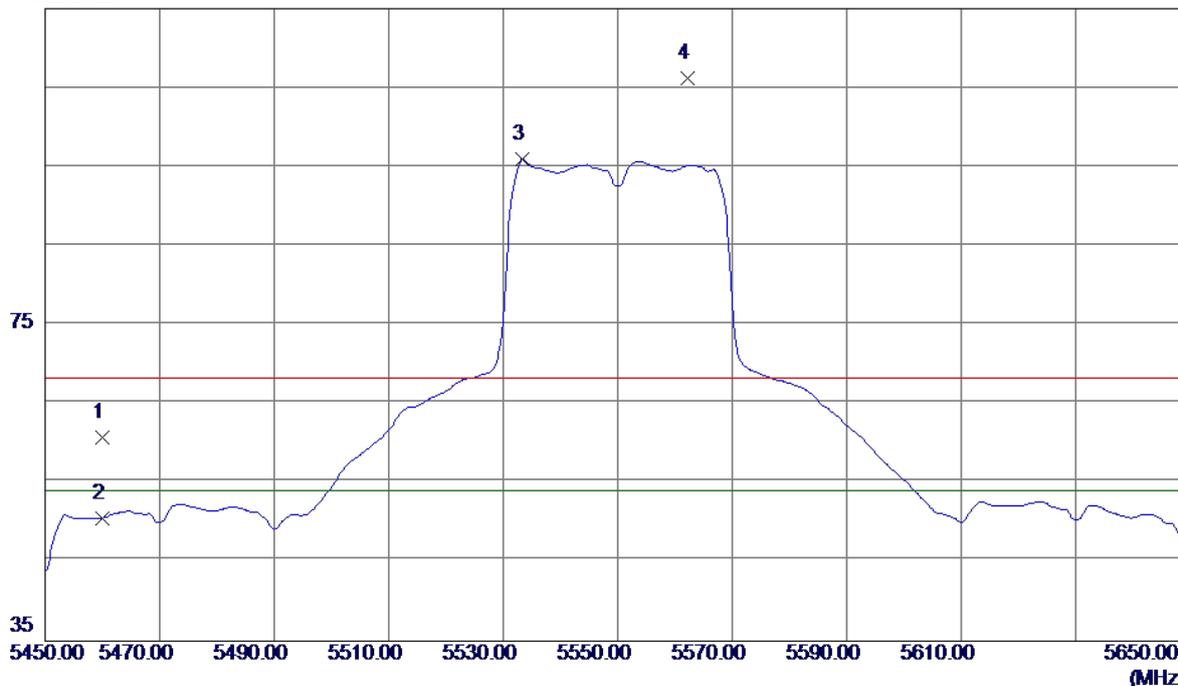


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	19.91	40.88	60.79	68.30	-7.51	Peak	
2	5460.0000	9.70	40.88	50.58	54.00	-3.42	AVG	
3	5533.4000	54.91	41.01	95.92	54.00	41.92	AVG	No Limit
4	5562.2000	65.09	41.04	106.13	68.30	37.83	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

### Vertical

80 dBuV/m

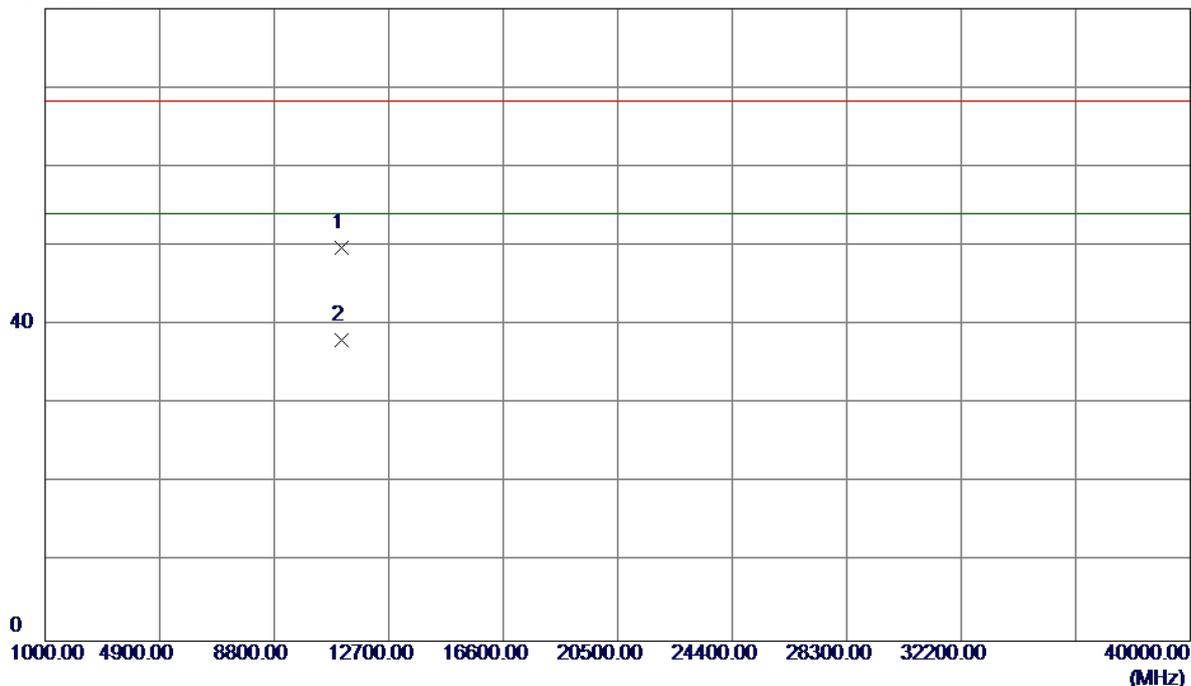


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.5800	33.75	15.99	49.74	68.30	-18.56	Peak	
2	11100.5800	22.14	15.99	38.13	54.00	-15.87	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

### Horizontal

115 dBuV/m

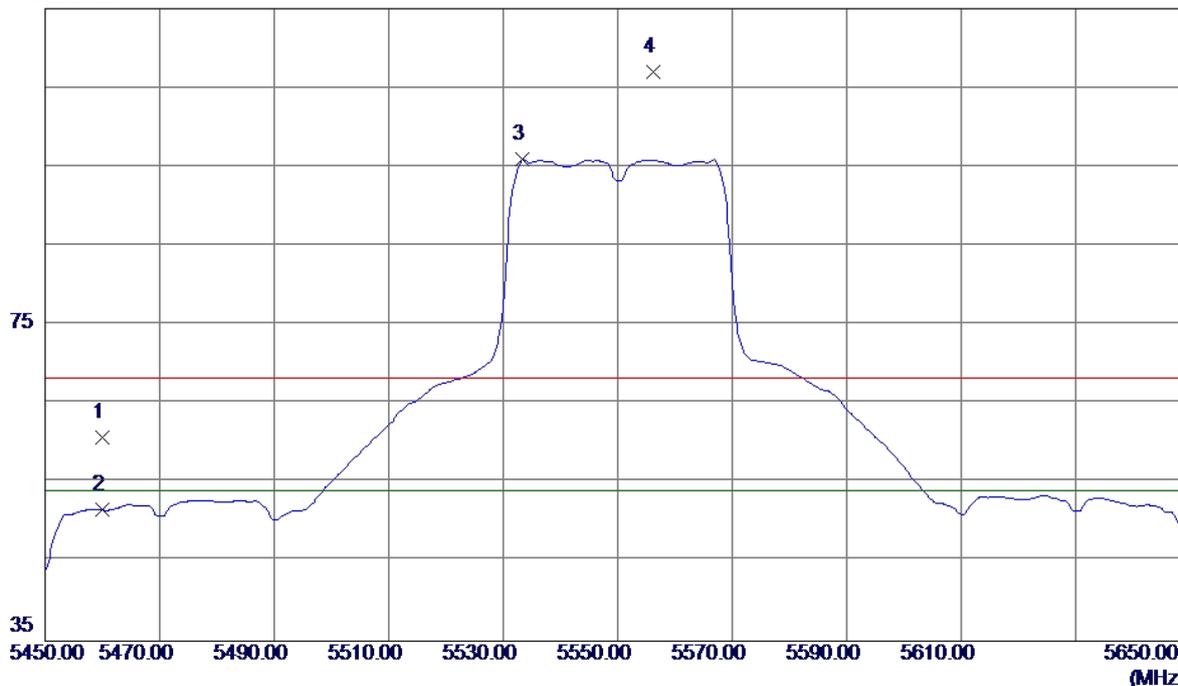


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	19.87	40.88	60.75	68.30	-7.55	Peak	
2	5460.0000	10.72	40.88	51.60	54.00	-2.40	AVG	
3	5533.4000	54.89	41.01	95.90	54.00	41.90	AVG	No Limit
4	5556.2000	65.94	41.04	106.98	68.30	38.68	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

### Horizontal

80 dBuV/m

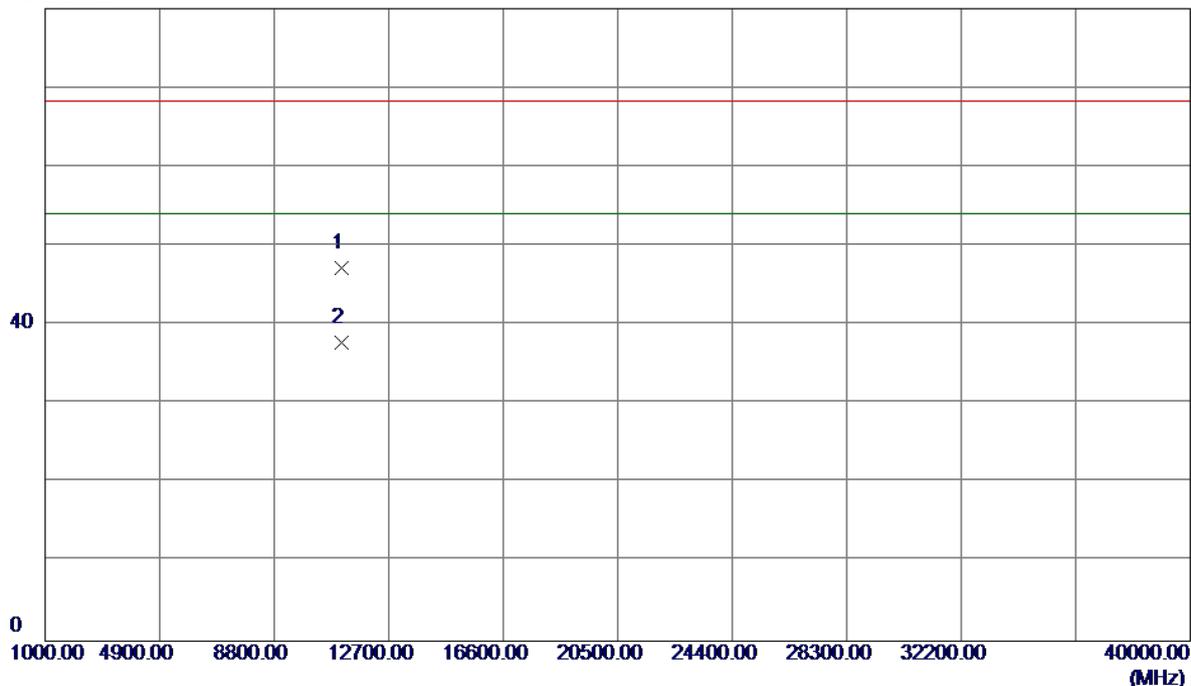


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.7870	31.14	15.99	47.13	68.30	-21.17	Peak	
2	11100.1460	21.75	15.99	37.74	54.00	-16.26	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

### Vertical

115 dBuV/m

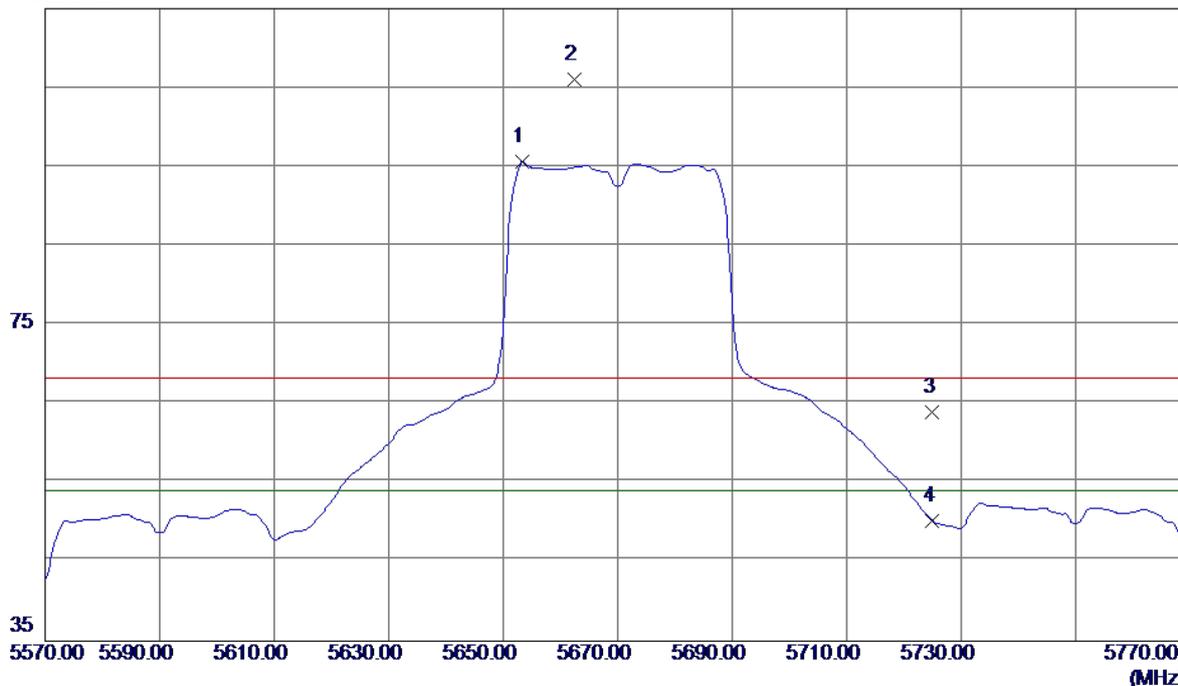


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5653.4000	54.46	41.17	95.63	54.00	41.63	AVG	No Limit
2	5662.4000	64.91	41.18	106.09	68.30	37.79	Peak	No Limit
3	5725.0000	22.65	41.27	63.92	68.30	-4.38	Peak	
4	5725.0000	8.94	41.27	50.21	54.00	-3.79	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

### Vertical

80 dBuV/m

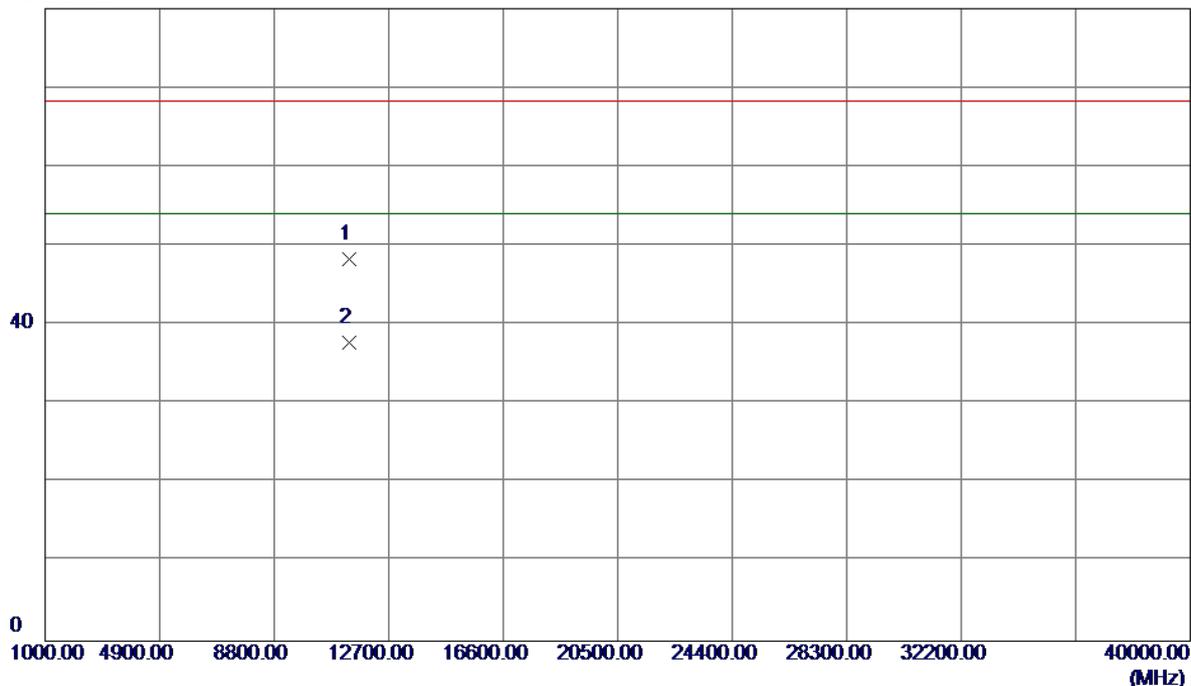


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11341.2300	31.79	16.56	48.35	68.30	-19.95	Peak	
2	11341.2300	21.26	16.56	37.82	54.00	-16.18	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

### Horizontal

115 dBuV/m

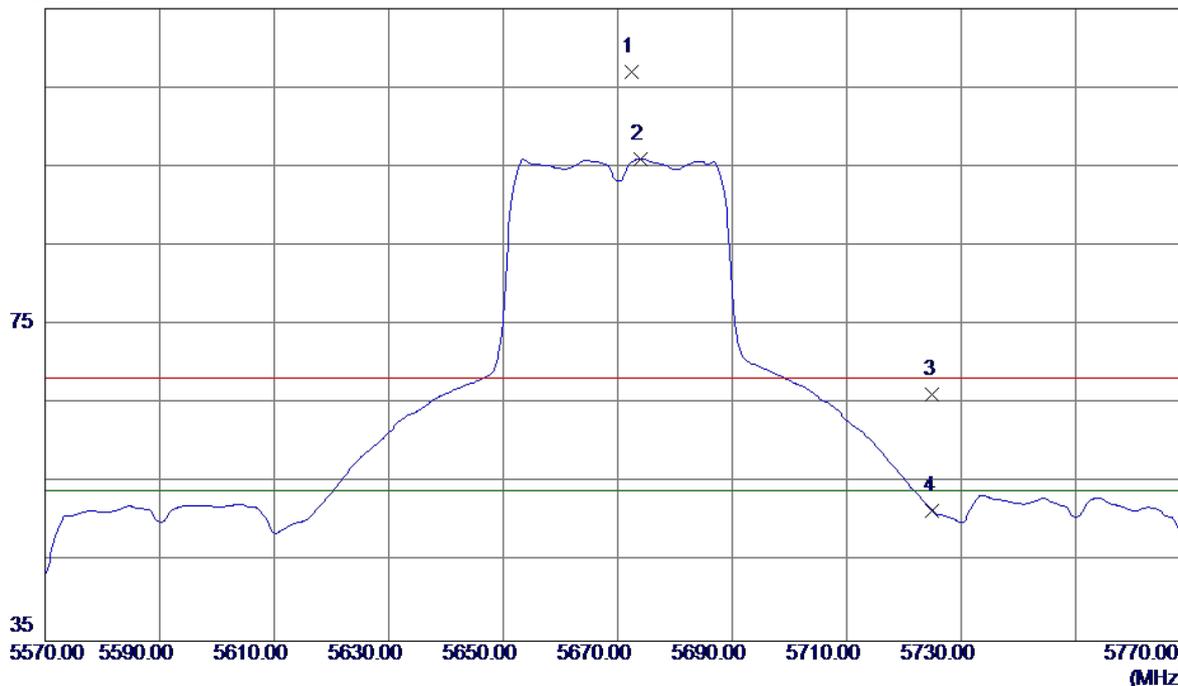


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5672.4000	65.78	41.19	106.97	68.30	38.67	Peak	No Limit
2	5674.0000	54.81	41.20	96.01	54.00	42.01	AVG	No Limit
3	5725.0000	25.00	41.27	66.27	68.30	-2.03	Peak	
4	5725.0000	10.21	41.27	51.48	54.00	-2.52	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

### Horizontal

80 dBuV/m

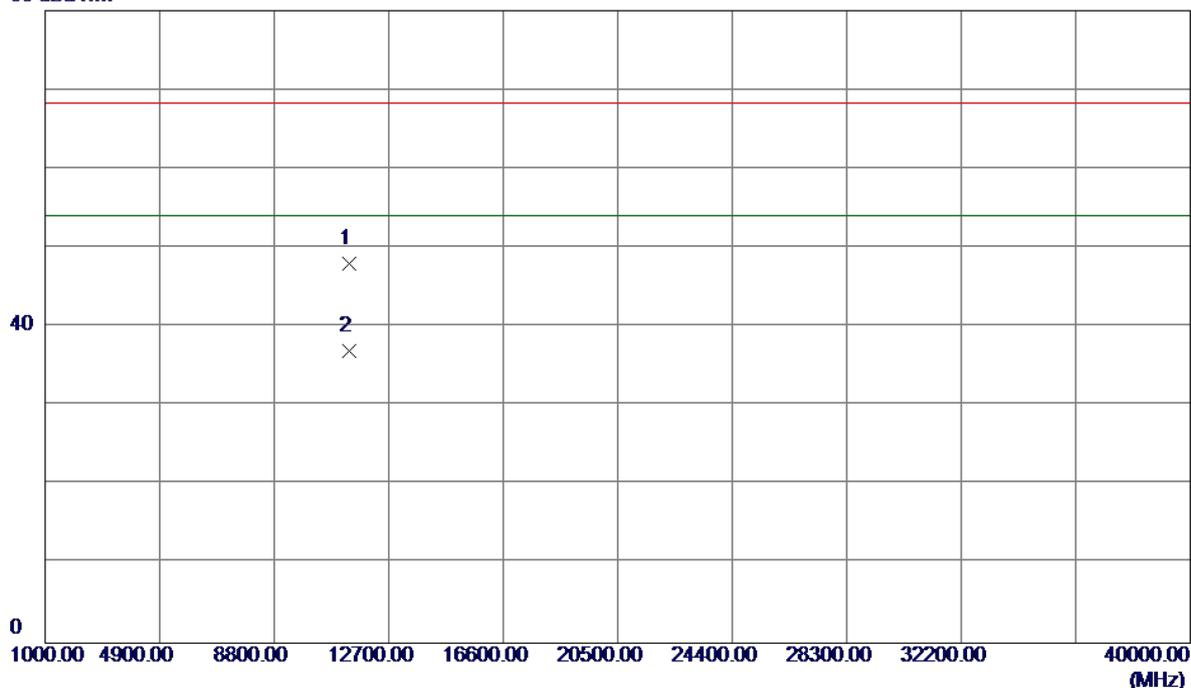


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.5199	31.47	16.56	48.03	68.30	-20.27	Peak	
2	11340.5199	20.45	16.56	37.01	54.00	-16.99	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

### Vertical

115 dBuV/m

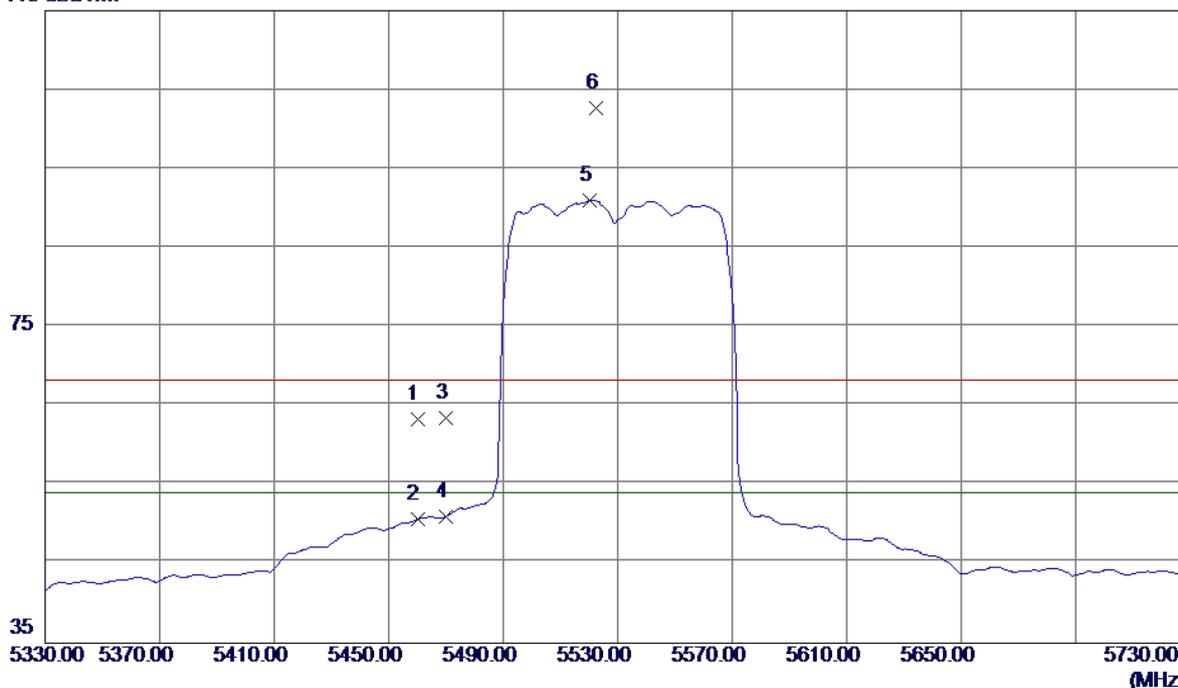


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	22.45	40.88	63.33	68.30	-4.97	Peak	
2	5460.0000	9.78	40.88	50.66	54.00	-3.34	AVG	
3	5470.0000	22.62	40.90	63.52	68.30	-4.78	Peak	
4	5470.0000	10.16	40.90	51.06	54.00	-2.94	AVG	
5	5520.4000	50.08	40.99	91.07	54.00	37.07	AVG	No Limit
6	5522.4000	61.70	40.99	102.69	68.30	34.39	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

### Vertical

80 dBuV/m

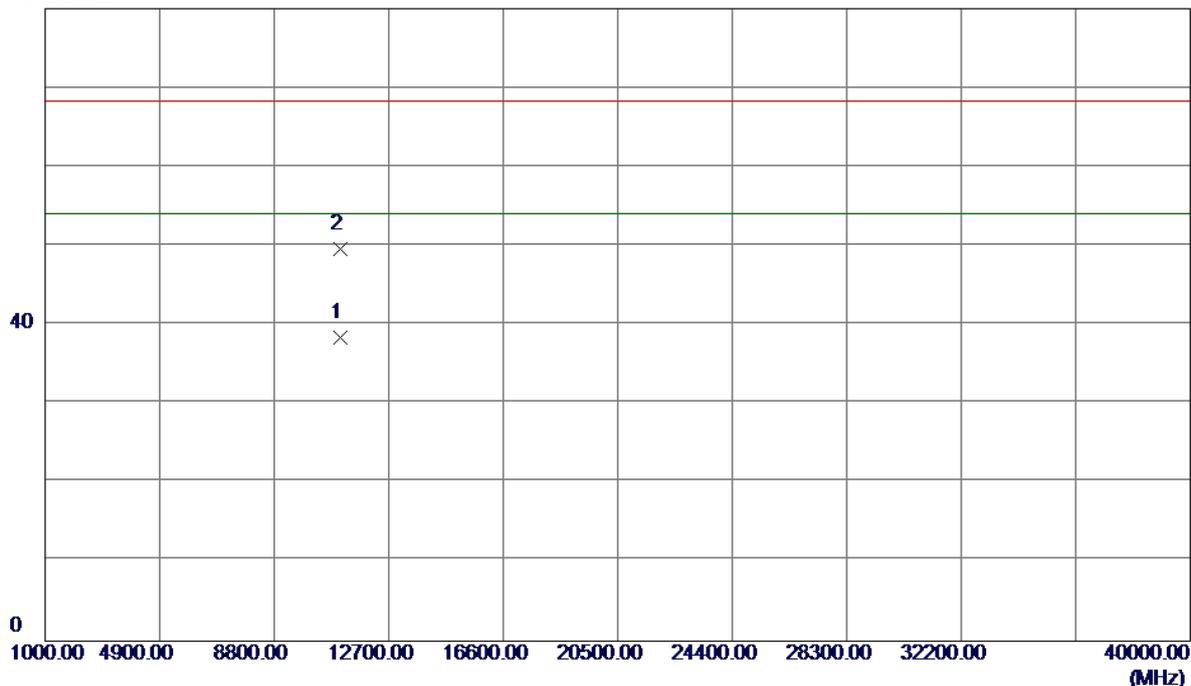


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11062.1760	22.52	15.90	38.42	54.00	-15.58	AVG	
2	11062.3380	33.75	15.90	49.65	68.30	-18.65	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

### Horizontal


115 dBuV/m

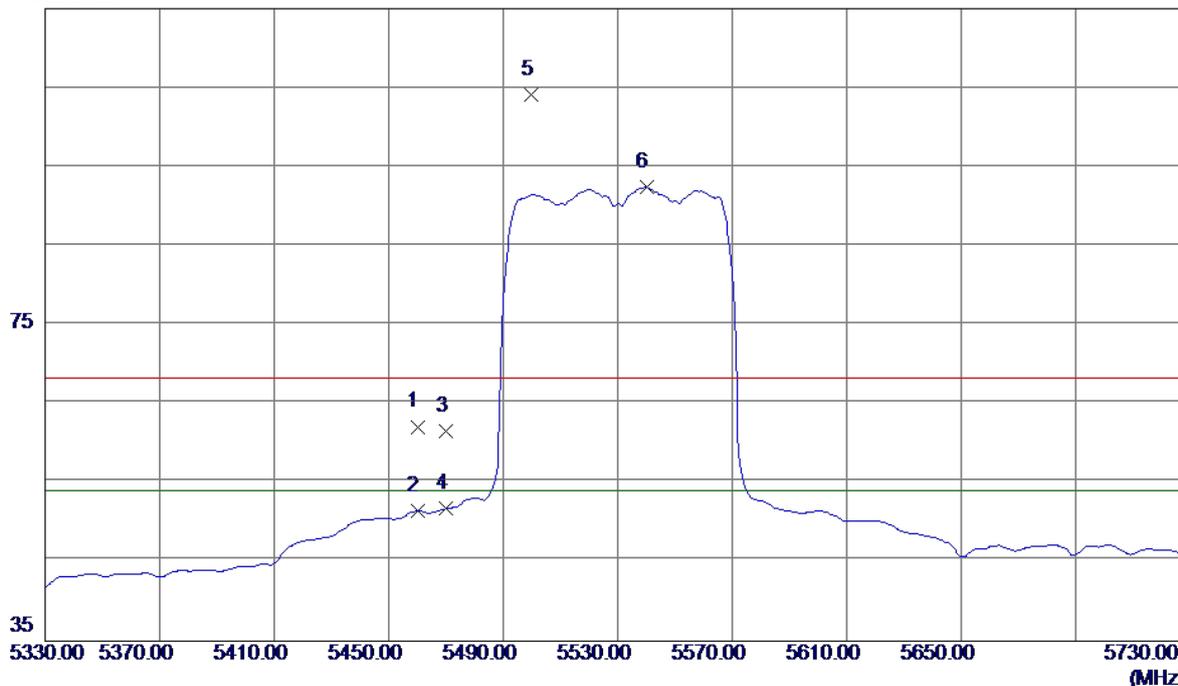

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	21.24	40.88	62.12	68.30	-6.18	Peak	
2	5460.0000	10.61	40.88	51.49	54.00	-2.51	AVG	
3	5470.0000	20.66	40.90	61.56	68.30	-6.74	Peak	
4	5470.0000	10.85	40.90	51.75	54.00	-2.25	AVG	
5	5499.6000	63.13	40.96	104.09	68.30	35.79	Peak	No Limit
6	5540.0000	51.41	41.01	92.42	54.00	38.42	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

### Horizontal

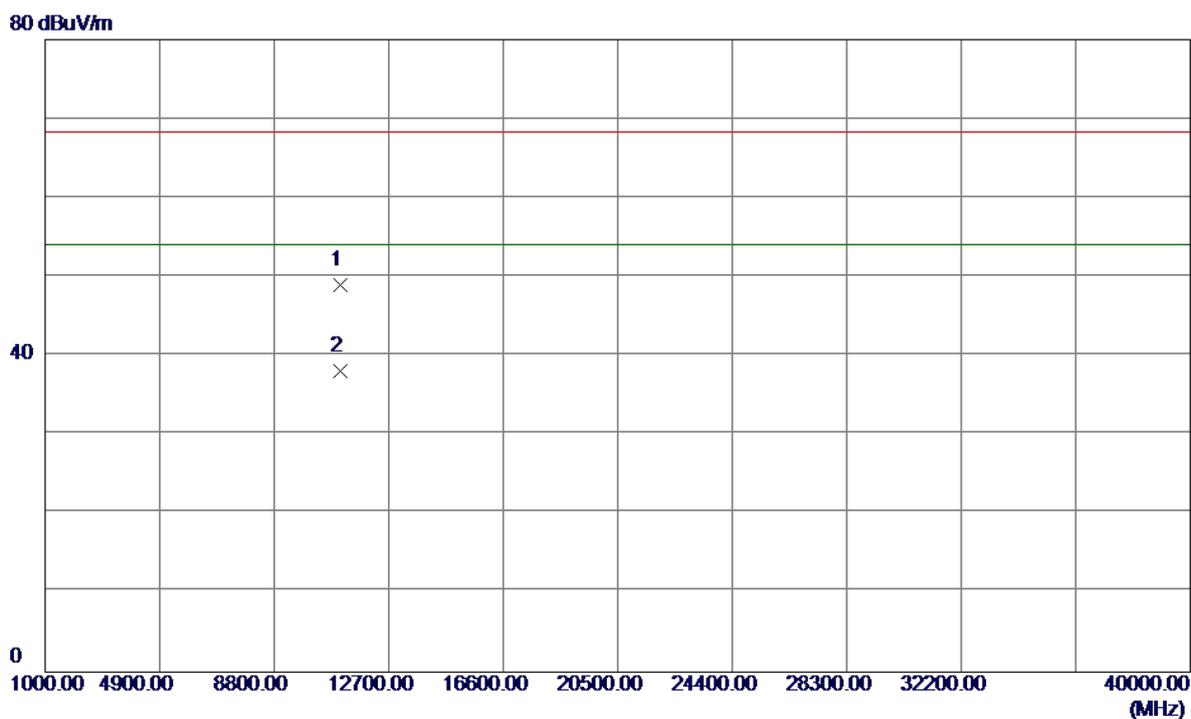


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11059.3600	33.11	15.89	49.00	68.30	-19.30	Peak	
2	11059.8700	22.14	15.89	38.03	54.00	-15.97	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

### Vertical


115 dBuV/m

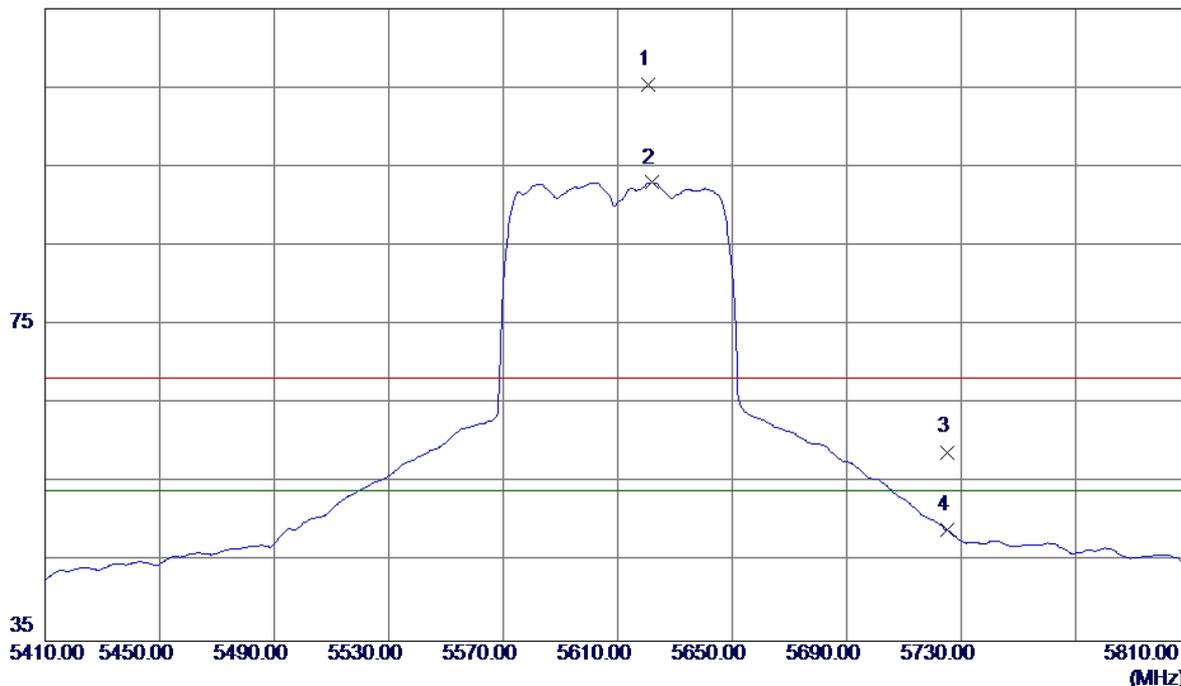

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5620.8000	64.31	41.12	105.43	68.30	37.13	Peak	No Limit
2	5622.0000	51.87	41.13	93.00	54.00	39.00	AVG	No Limit
3	5725.0000	17.65	41.27	58.92	68.30	-9.38	Peak	
4	5725.0000	7.78	41.27	49.05	54.00	-4.95	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

### Vertical

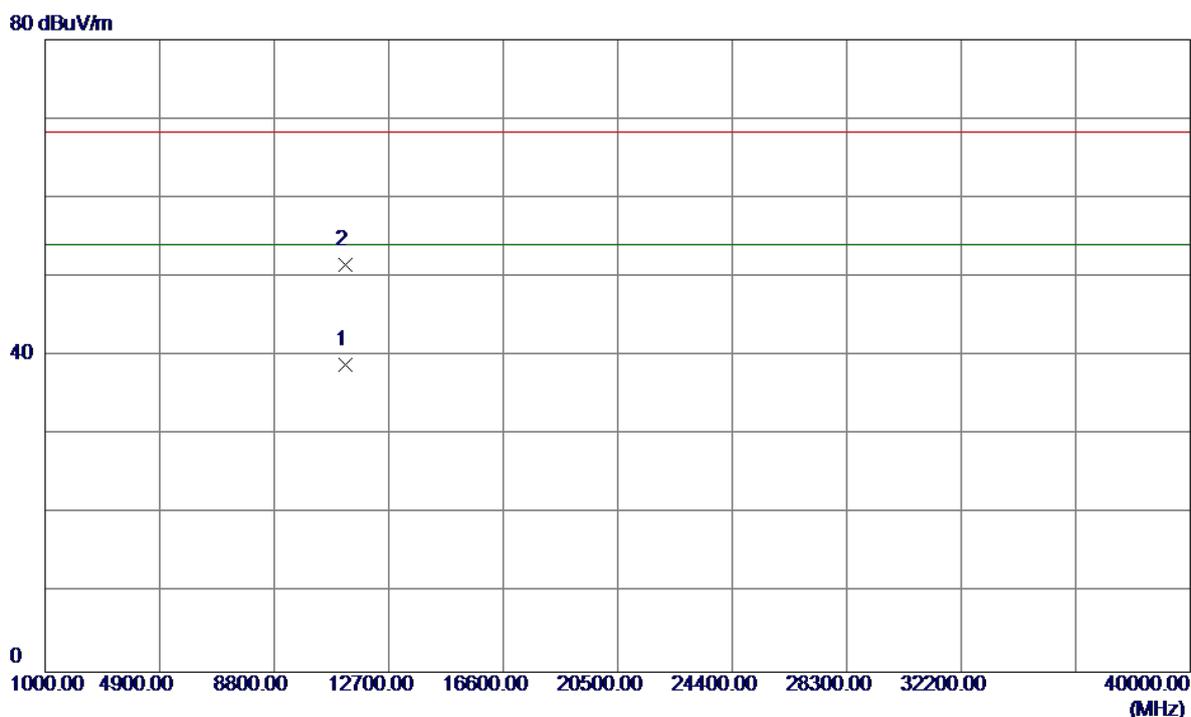


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11221.3259	22.63	16.27	38.90	54.00	-15.10	AVG	
2	11221.5519	35.21	16.28	51.49	68.30	-16.81	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

### Horizontal


115 dBuV/m

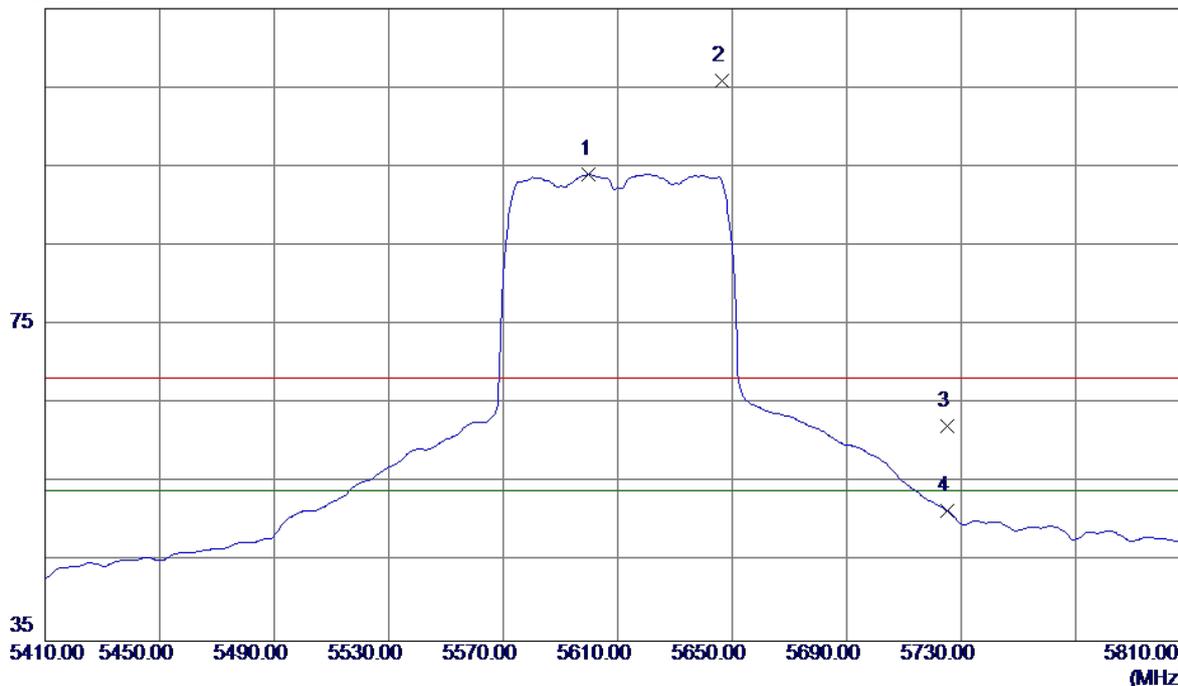

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5600.0000	53.00	41.10	94.10	54.00	40.10	AVG	No Limit
2	5646.4000	64.74	41.16	105.90	68.30	37.60	Peak	No Limit
3	5725.0000	20.90	41.27	62.17	68.30	-6.13	Peak	
4	5725.0000	10.28	41.27	51.55	54.00	-2.45	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

### Horizontal

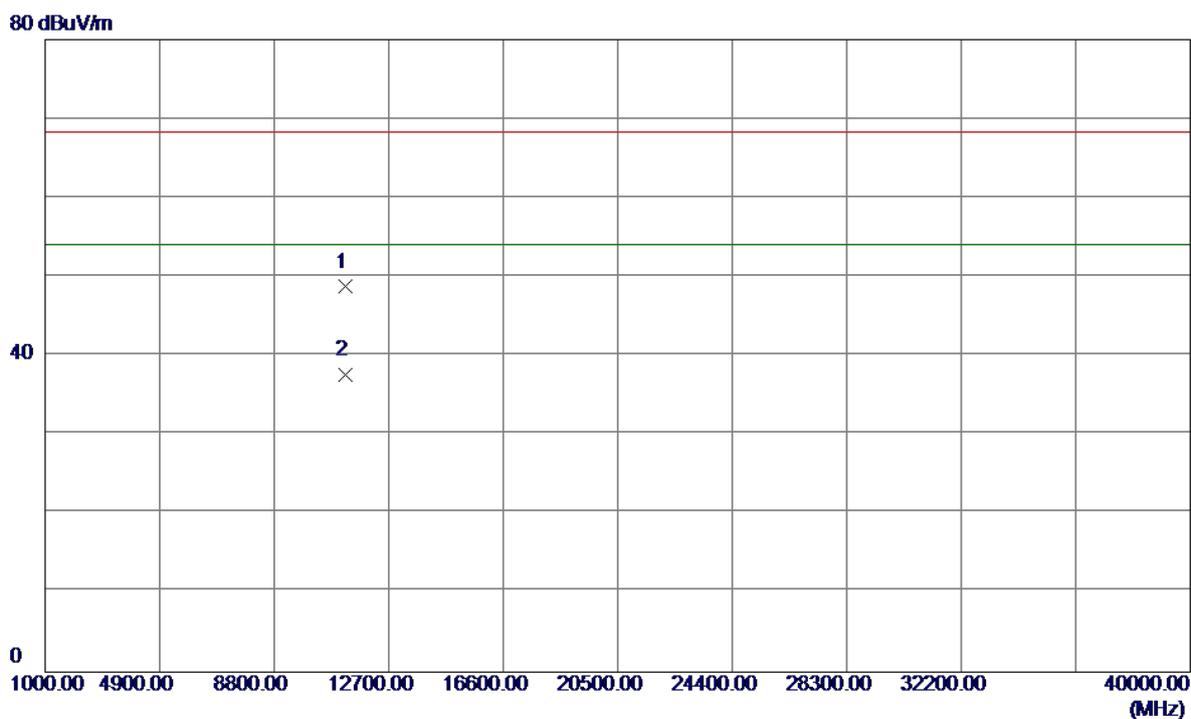


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.4500	32.45	16.27	48.72	68.30	-19.58	Peak	
2	11220.5599	21.36	16.27	37.63	54.00	-16.37	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

### Vertical


115 dBuV/m

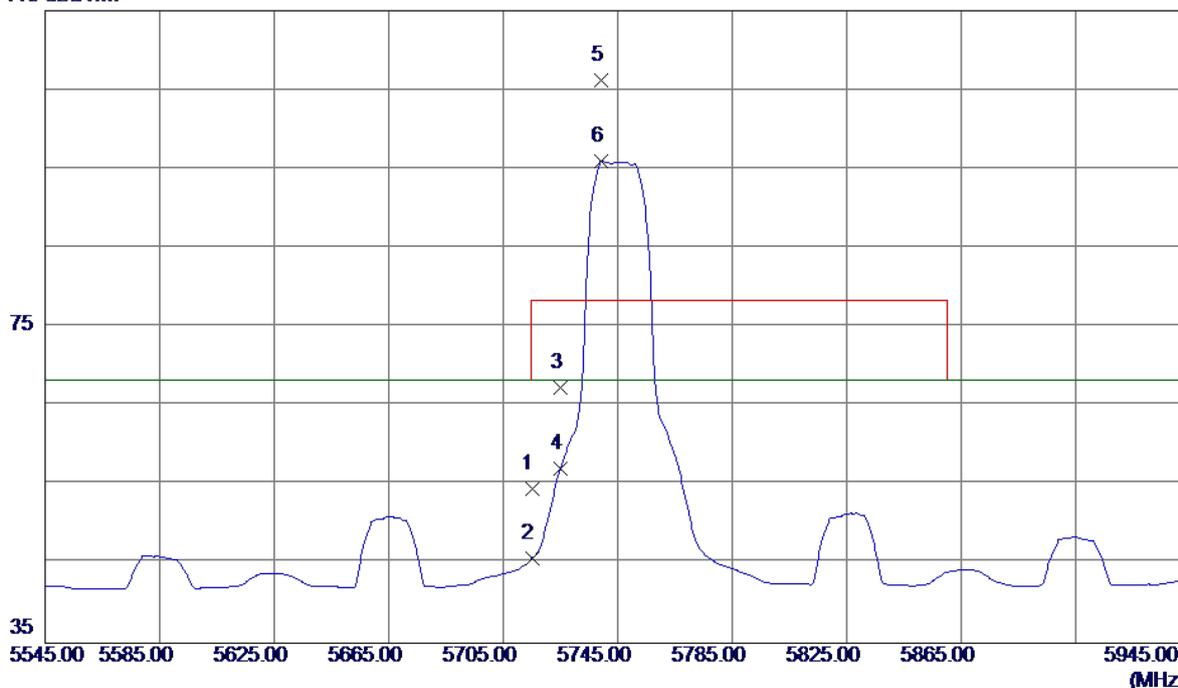

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	13.20	41.25	54.45	68.30	-13.85	Peak	
2	5715.0000	4.41	41.25	45.66	68.30	-22.64	AVG	
3	5725.0000	26.12	41.27	67.39	78.30	-10.91	Peak	
4	5725.0000	15.86	41.27	57.13	68.30	-11.17	AVG	
5	5739.4000	64.84	41.29	106.13	78.30	27.83	Peak	No Limit
6	5739.4000	54.68	41.29	95.97	68.30	27.67	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


### Vertical

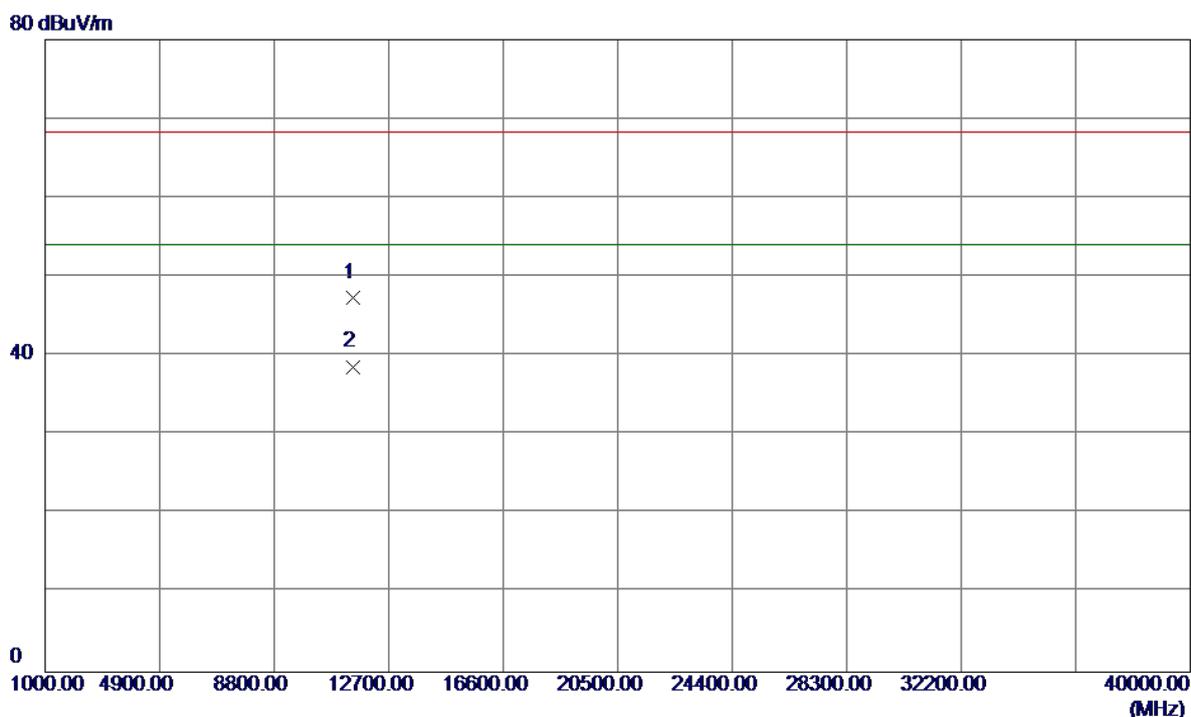

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.7100	30.41	16.91	47.32	68.30	-20.98	Peak	
2	11490.7100	21.73	16.91	38.64	54.00	-15.36	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

### Horizontal

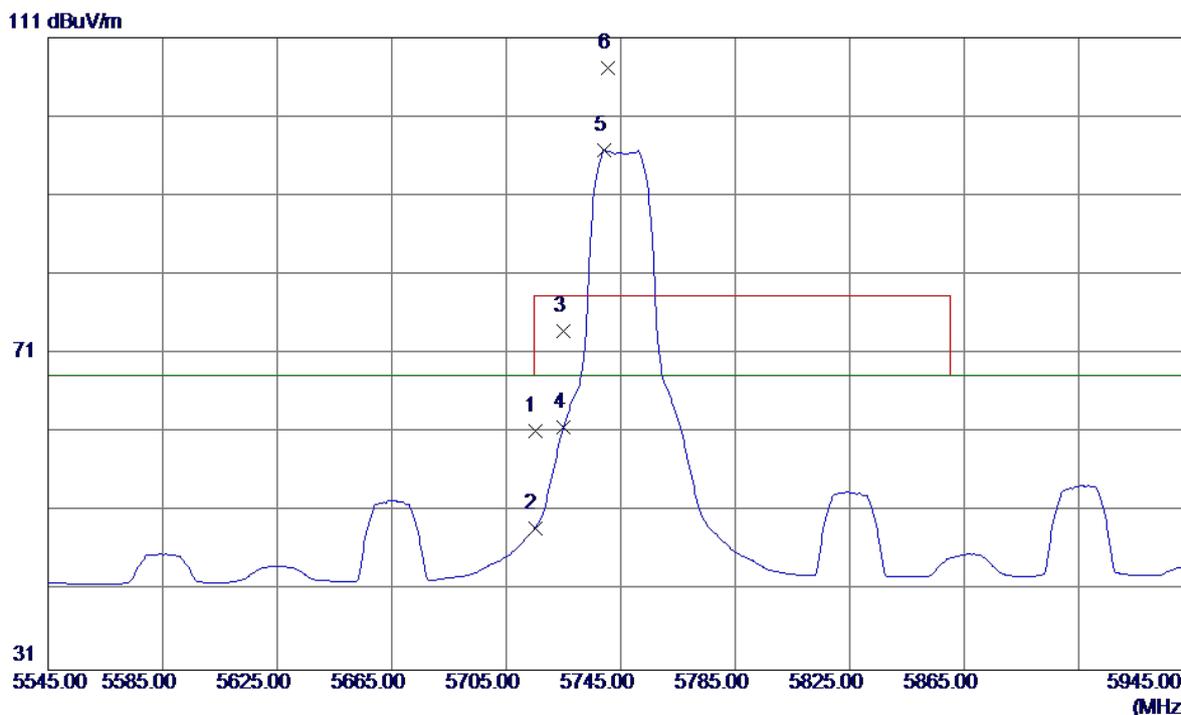


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	19.99	41.25	61.24	68.30	-7.06	Peak	
2	5715.0000	7.70	41.25	48.95	68.30	-19.35	AVG	
3	5725.0000	32.57	41.27	73.84	78.30	-4.46	Peak	
4	5725.0000	20.41	41.27	61.68	68.30	-6.62	AVG	
5	5739.4000	55.49	41.29	96.78	68.30	28.48	AVG	No Limit
6	5740.6000	65.87	41.29	107.16	78.30	28.86	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

### Horizontal

80 dBuV/m

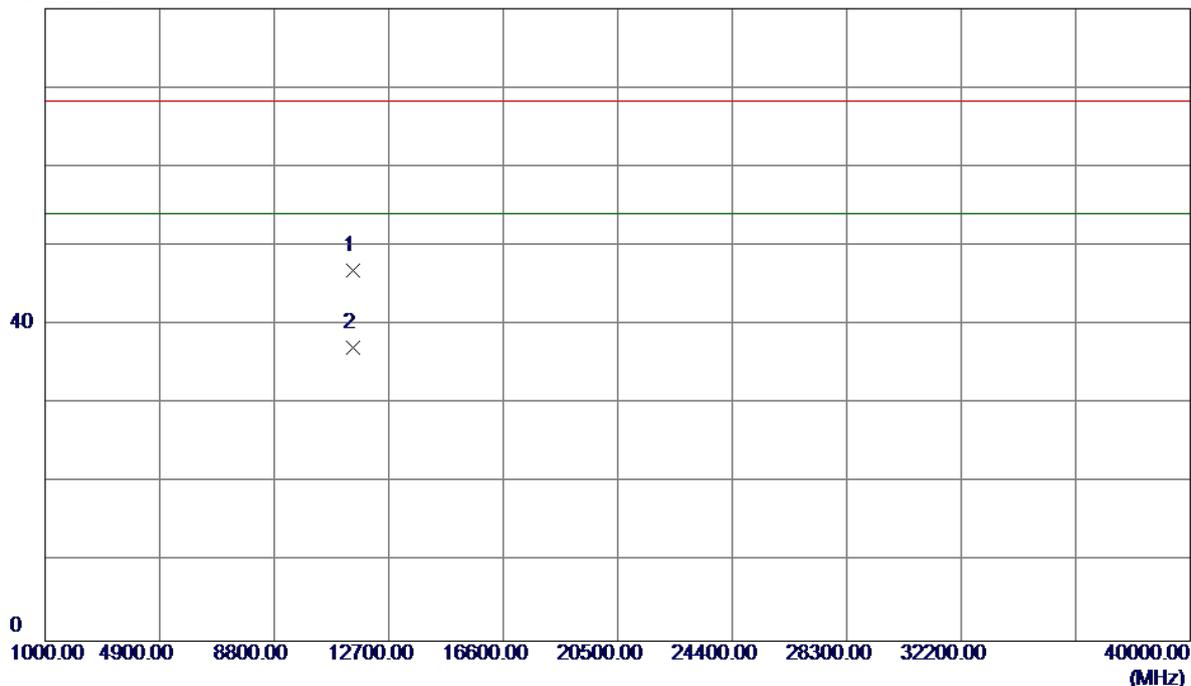


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.3400	29.92	16.91	46.83	68.30	-21.47	Peak	
2	11490.3400	20.21	16.91	37.12	54.00	-16.88	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

### Vertical

115 dBuV/m

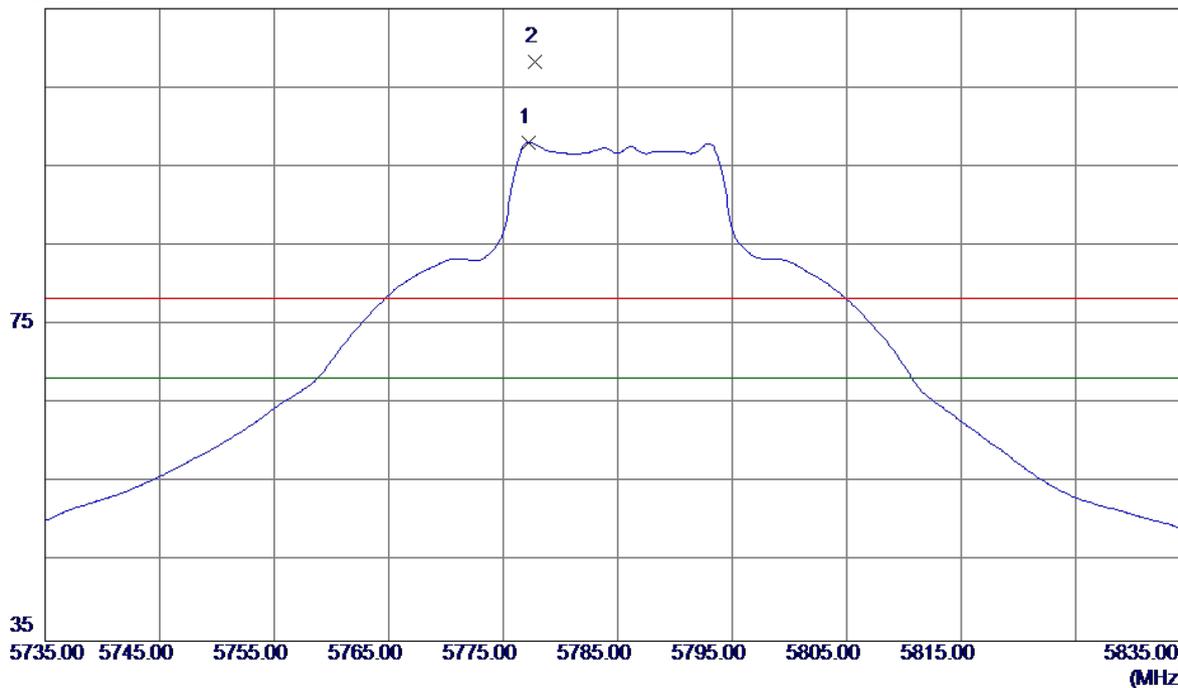


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5777.2000	56.75	41.34	98.09	78.30	19.79	Peak	No Limit
2	5777.8000	66.90	41.34	108.24	78.30	29.94	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

### Vertical


80 dBuV/m

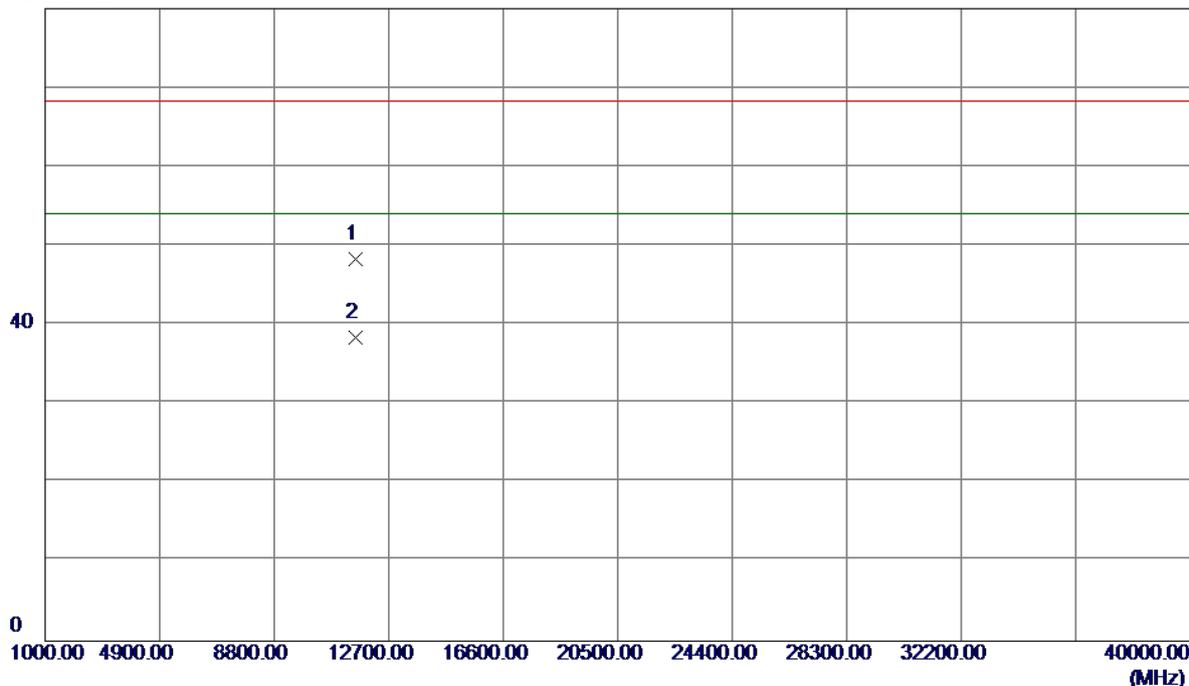

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.3640	31.34	17.05	48.39	68.30	-19.91	Peak	
2	11570.1230	21.41	17.05	38.46	54.00	-15.54	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

### Horizontal

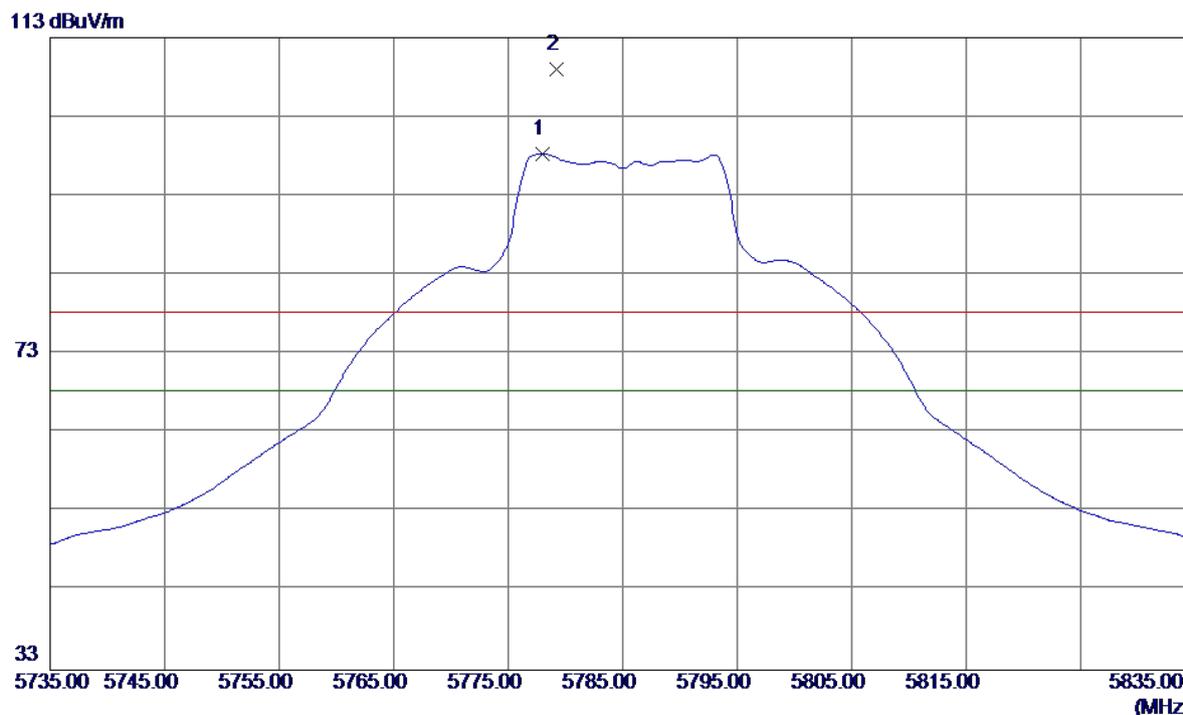


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5778.0000	56.93	41.34	98.27	68.30	29.97	AVG	No Limit
2	5779.2000	67.70	41.34	109.04	78.30	30.74	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

### Horizontal

80 dBuV/m

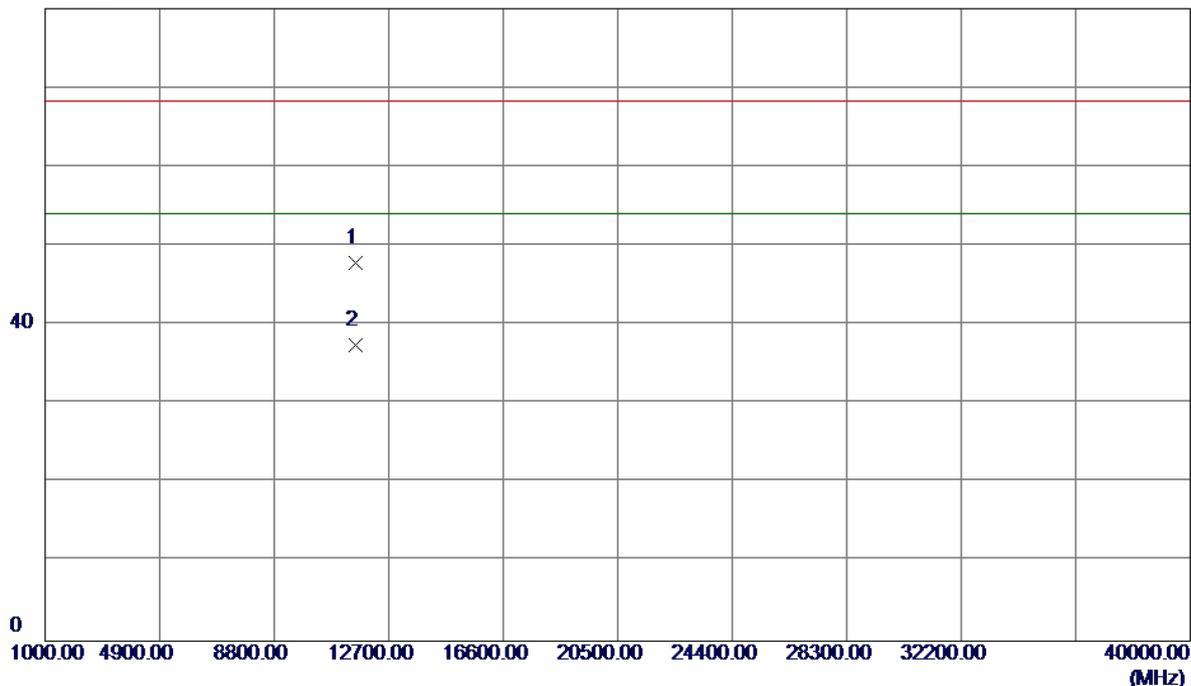


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.1700	30.80	17.05	47.85	68.30	-20.45	Peak	
2	11570.1700	20.41	17.05	37.46	54.00	-16.54	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

### Vertical

115 dBuV/m

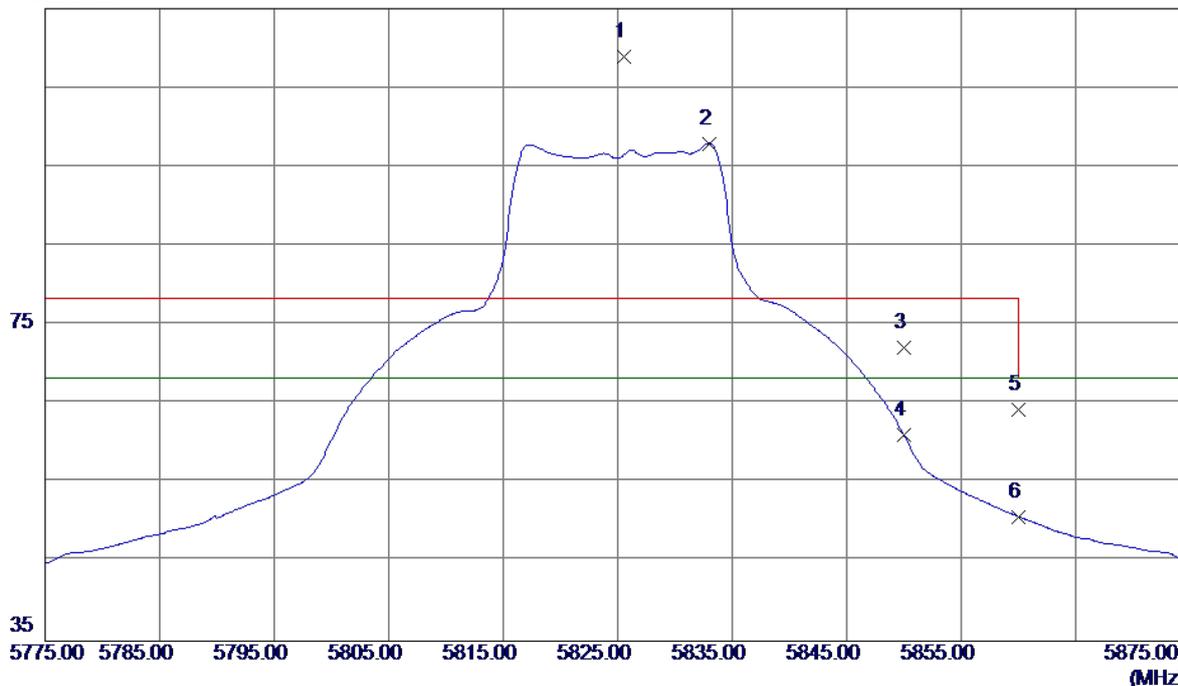


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5825.6000	67.57	41.40	108.97	78.30	30.67	Peak	No Limit
2	5833.0000	56.55	41.41	97.96	68.30	29.66	AVG	No Limit
3	5850.0000	30.63	41.44	72.07	78.30	-6.23	Peak	
4	5850.0000	19.69	41.44	61.13	68.30	-7.17	AVG	
5	5860.0000	22.78	41.45	64.23	78.30	-14.07	Peak	
6	5860.0000	9.29	41.45	50.74	68.30	-17.56	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

### Vertical

80 dBuV/m

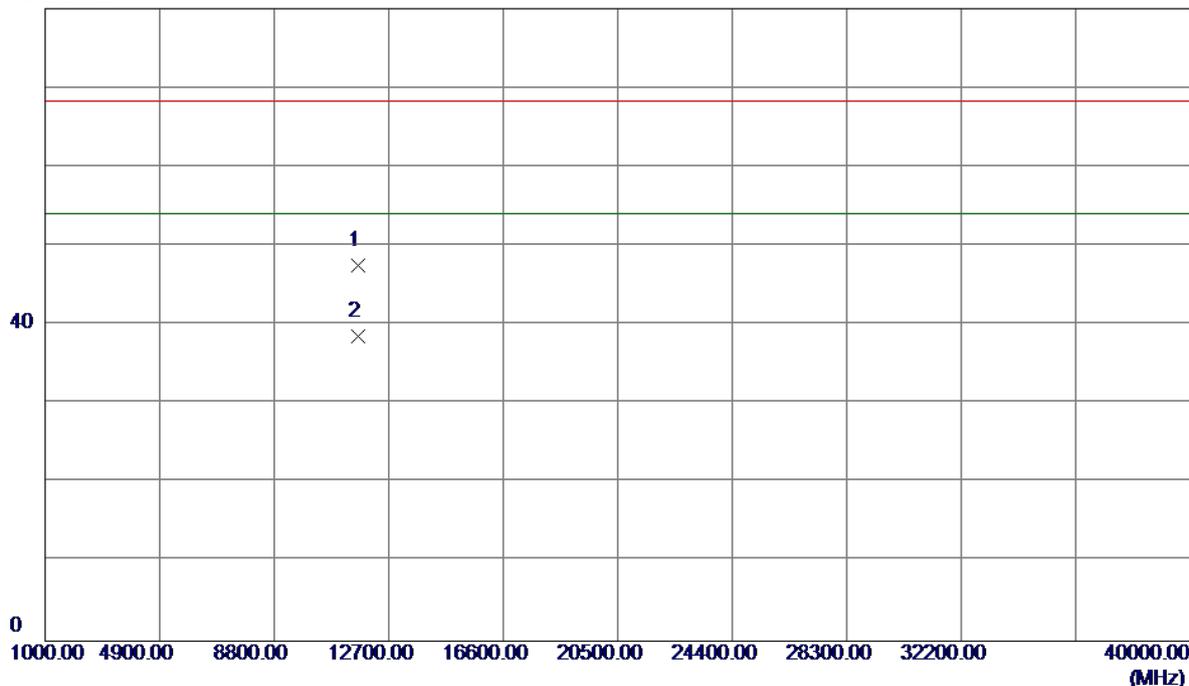


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.1300	30.38	17.17	47.55	68.30	-20.75	Peak	
2	11650.1300	21.44	17.17	38.61	54.00	-15.39	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

### Horizontal

113 dBuV/m

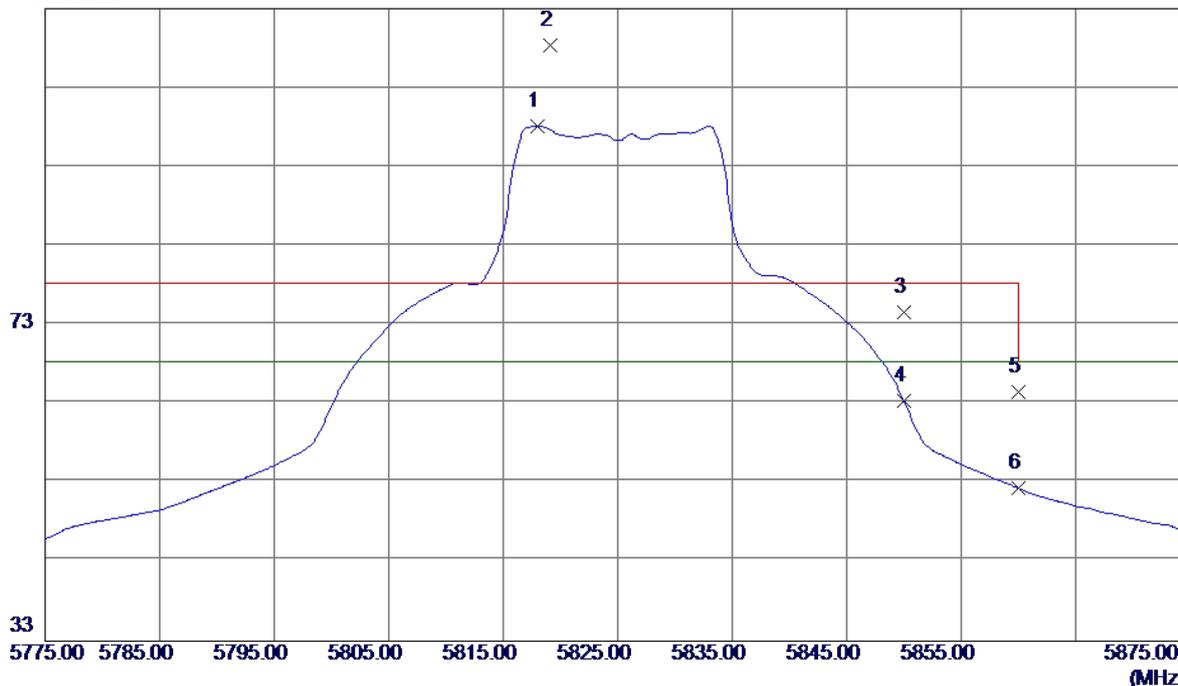


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5818.0000	56.74	41.39	98.13	68.30	29.83	AVG	No Limit
2	5819.1000	66.99	41.39	108.38	78.30	30.08	Peak	No Limit
3	5850.0000	33.14	41.44	74.58	78.30	-3.72	Peak	
4	5850.0000	22.03	41.44	63.47	68.30	-4.83	AVG	
5	5860.0000	23.03	41.45	64.48	78.30	-13.82	Peak	
6	5860.0000	10.88	41.45	52.33	68.30	-15.97	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

### Horizontal

80 dBuV/m

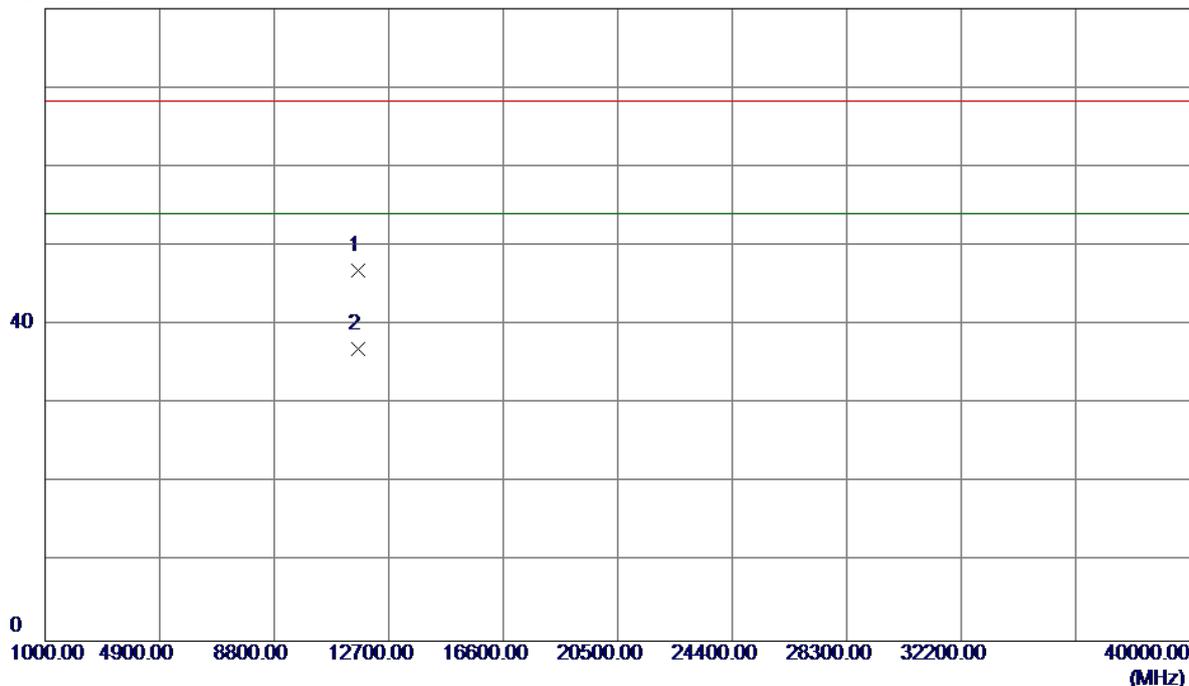


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.3400	29.71	17.17	46.88	68.30	-21.42	Peak	
2	11650.3400	19.85	17.17	37.02	54.00	-16.98	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

### Vertical

115 dBuV/m

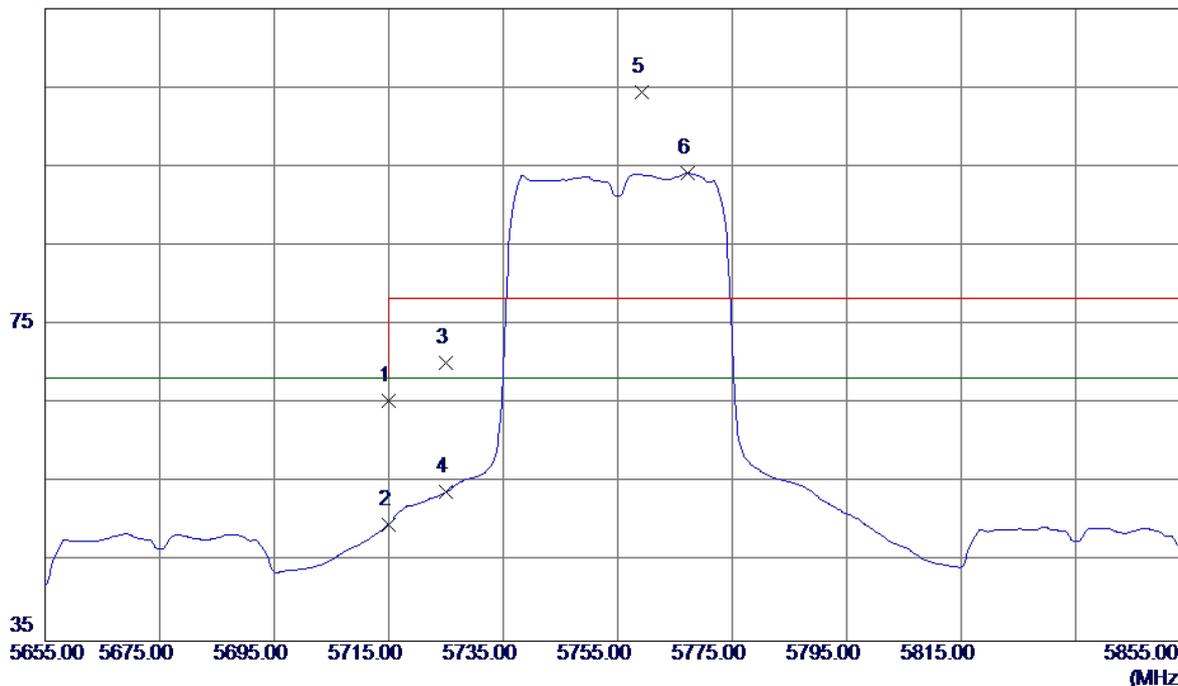


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	24.13	41.25	65.38	68.30	-2.92	Peak	
2	5715.0000	8.54	41.25	49.79	68.30	-18.51	AVG	
3	5725.0000	28.97	41.27	70.24	78.30	-8.06	Peak	
4	5725.0000	12.60	41.27	53.87	68.30	-14.43	AVG	
5	5759.2000	63.20	41.31	104.51	78.30	26.21	Peak	No Limit
6	5767.2000	52.84	41.32	94.16	68.30	25.86	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

### Vertical

80 dBuV/m

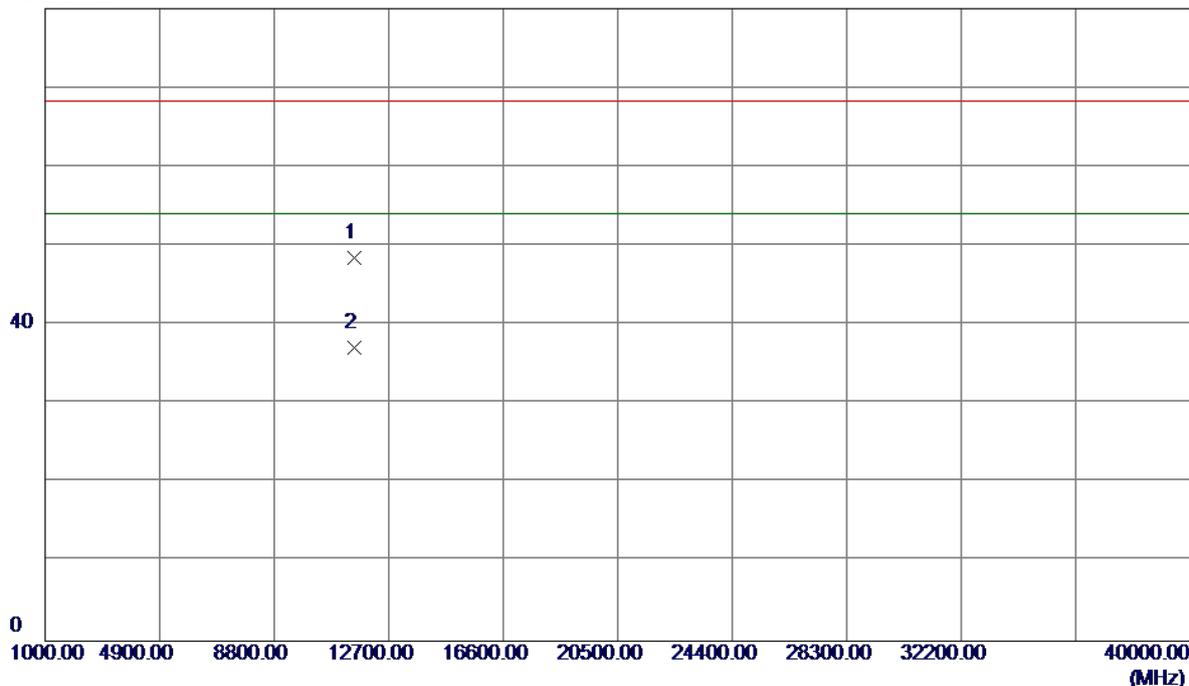


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.7730	31.57	16.95	48.52	68.30	-19.78	Peak	
2	11510.2730	20.16	16.95	37.11	54.00	-16.89	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

### Horizontal

112 dBuV/m

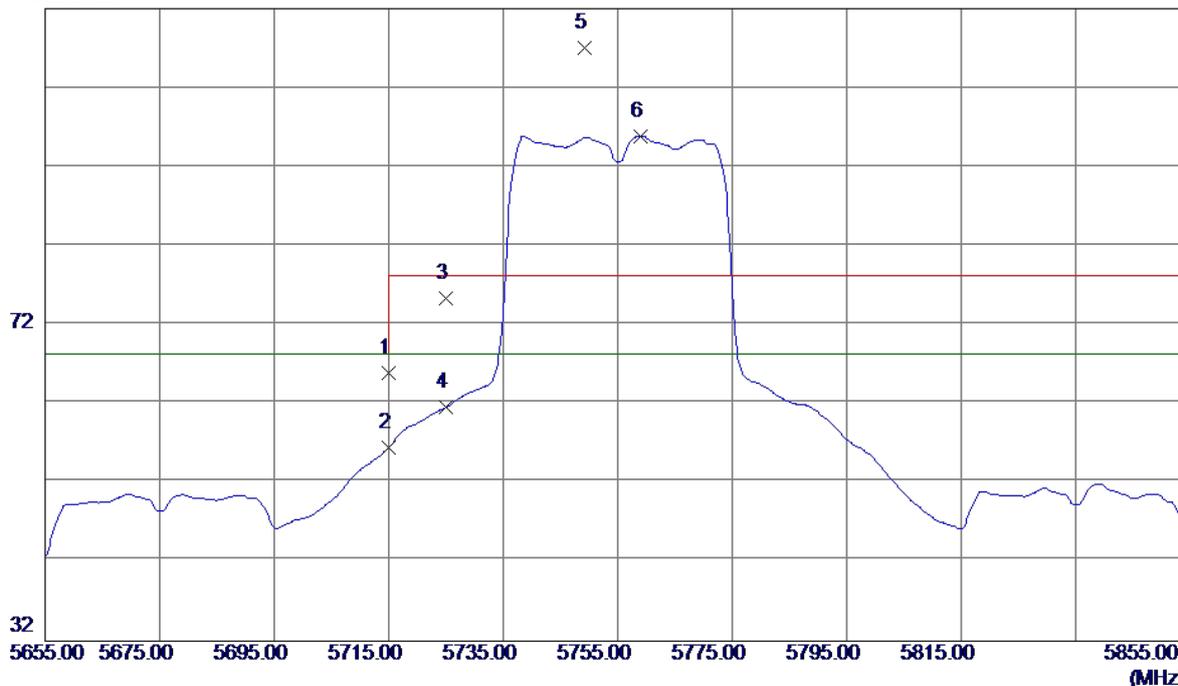


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	24.73	41.25	65.98	68.30	-2.32	Peak	
2	5715.0000	15.22	41.25	56.47	68.30	-11.83	AVG	
3	5725.0000	34.05	41.27	75.32	78.30	-2.98	Peak	
4	5725.0000	20.32	41.27	61.59	68.30	-6.71	AVG	
5	5749.2000	65.76	41.30	107.06	78.30	28.76	Peak	No Limit
6	5759.0000	54.59	41.31	95.90	68.30	27.60	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

### Horizontal

80 dBuV/m

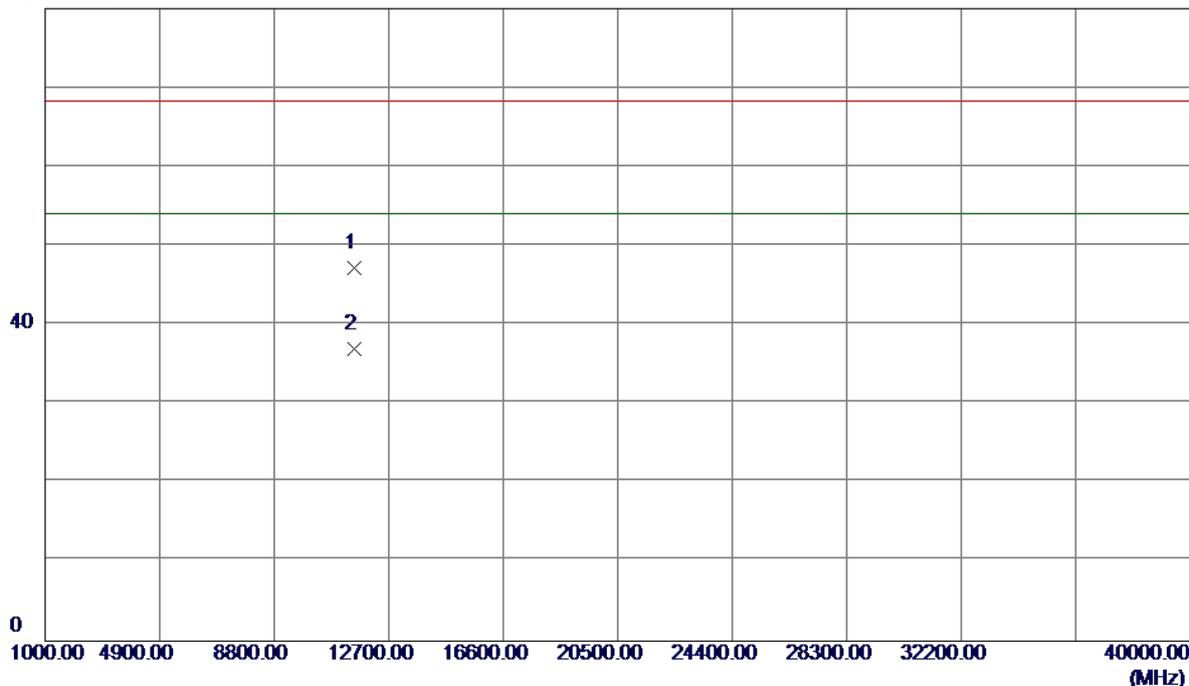


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.2699	30.29	16.95	47.24	68.30	-21.06	Peak	
2	11510.2699	20.08	16.95	37.03	54.00	-16.97	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

### Vertical

115 dBuV/m

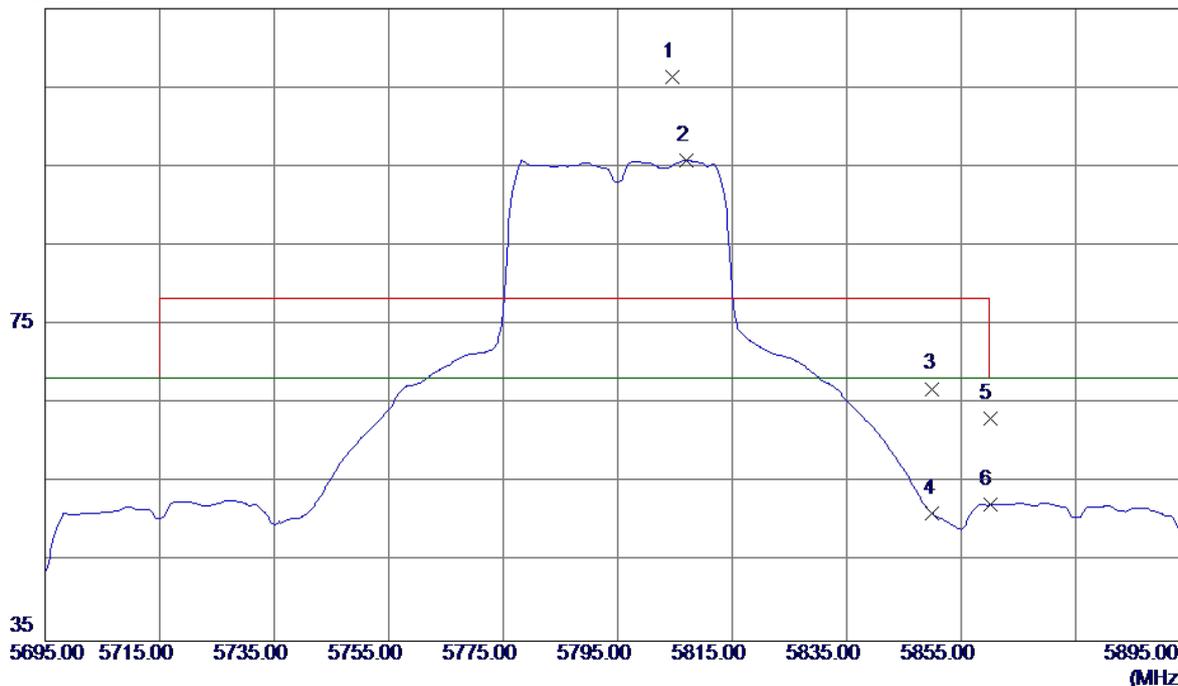


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5804.6000	65.01	41.37	106.38	78.30	28.08	Peak	No Limit
2	5807.0000	54.46	41.38	95.84	68.30	27.54	AVG	No Limit
3	5850.0000	25.48	41.44	66.92	78.30	-11.38	Peak	
4	5850.0000	9.65	41.44	51.09	68.30	-17.21	AVG	
5	5860.0000	21.77	41.45	63.22	78.30	-15.08	Peak	
6	5860.0000	10.82	41.45	52.27	68.30	-16.03	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

### Vertical

80 dBuV/m

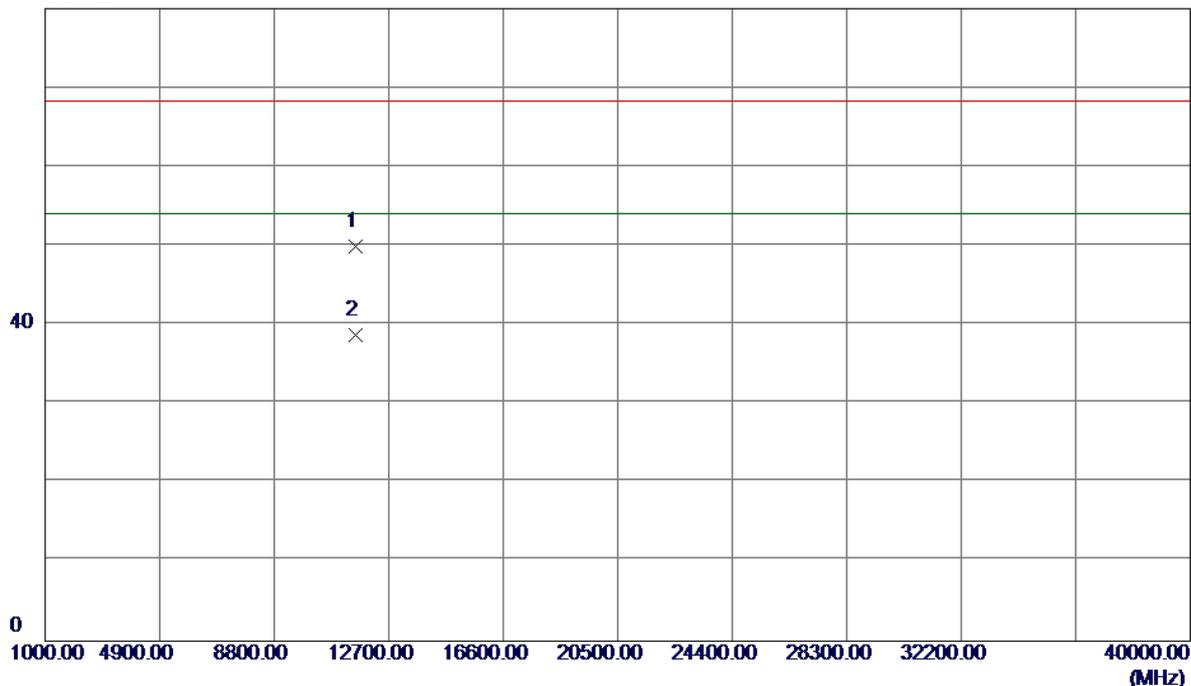


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.0300	32.80	17.08	49.88	68.30	-18.42	Peak	
2	11590.0300	21.58	17.08	38.66	54.00	-15.34	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

### Horizontal

113 dBuV/m

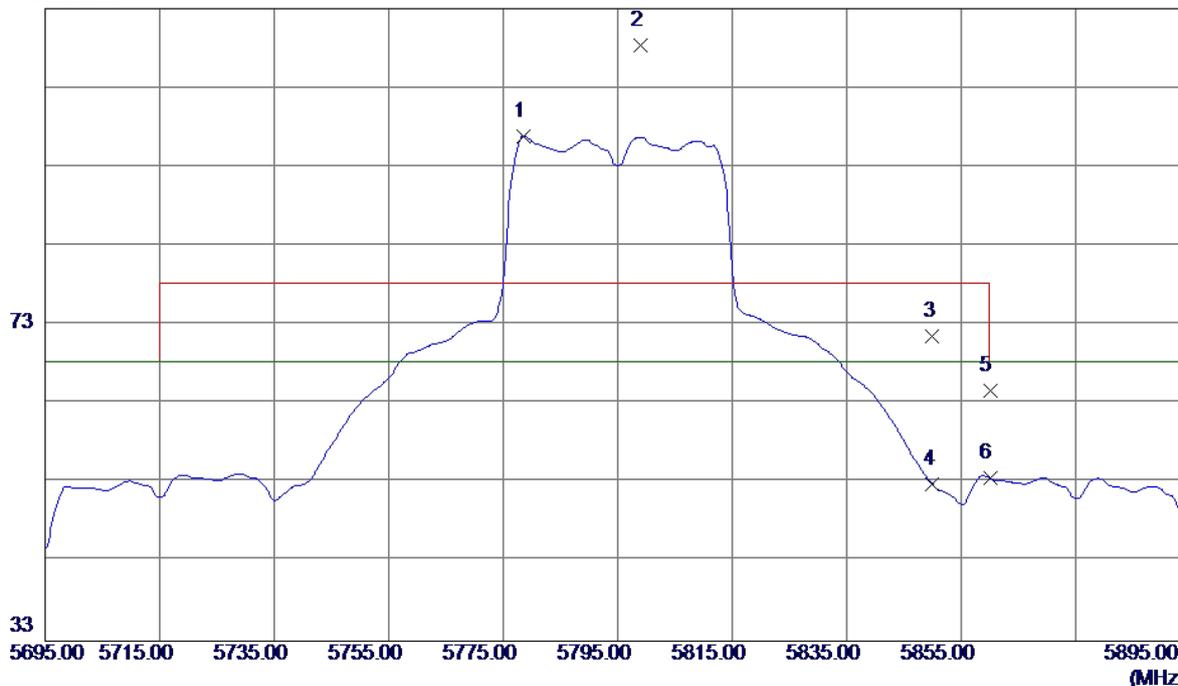


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5778.6000	55.56	41.34	96.90	68.30	28.60	AVG	No Limit
2	5799.0000	66.99	41.37	108.36	78.30	30.06	Peak	No Limit
3	5850.0000	30.09	41.44	71.53	78.30	-6.77	Peak	
4	5850.0000	11.35	41.44	52.79	68.30	-15.51	AVG	
5	5860.0000	23.19	41.45	64.64	78.30	-13.66	Peak	
6	5860.0000	12.18	41.45	53.63	68.30	-14.67	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

### Horizontal

80 dBuV/m

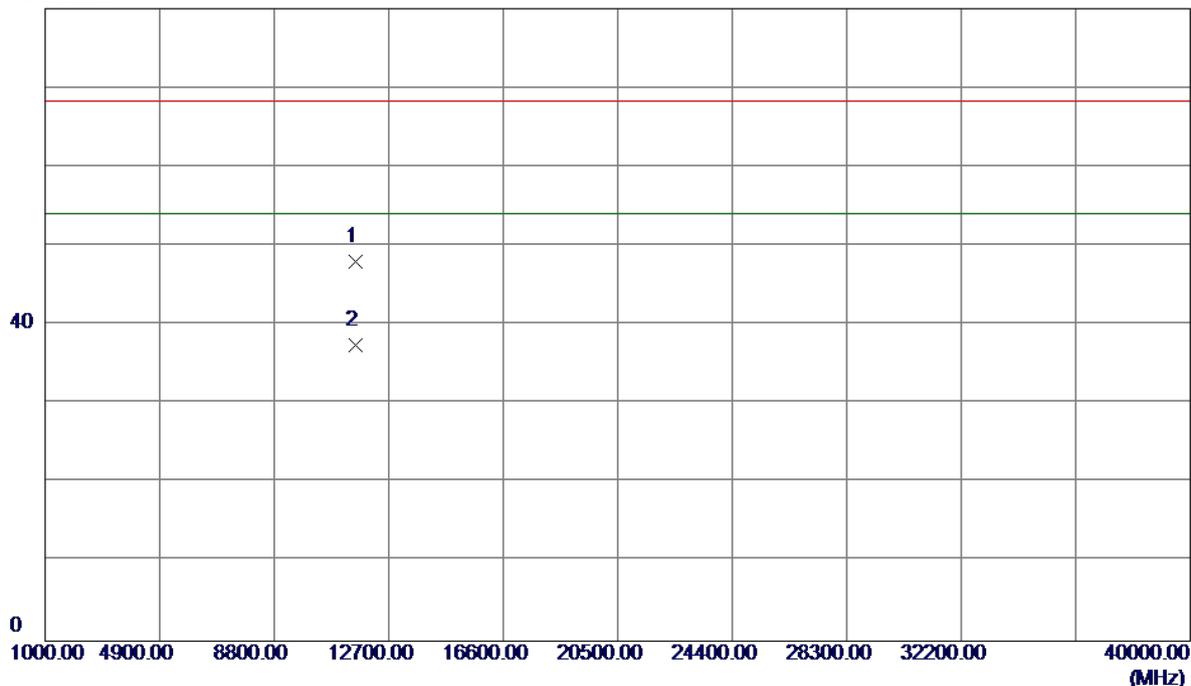


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.7400	30.94	17.08	48.02	68.30	-20.28	Peak	
2	11590.7400	20.38	17.08	37.46	54.00	-16.54	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

### Vertical

115 dBuV/m

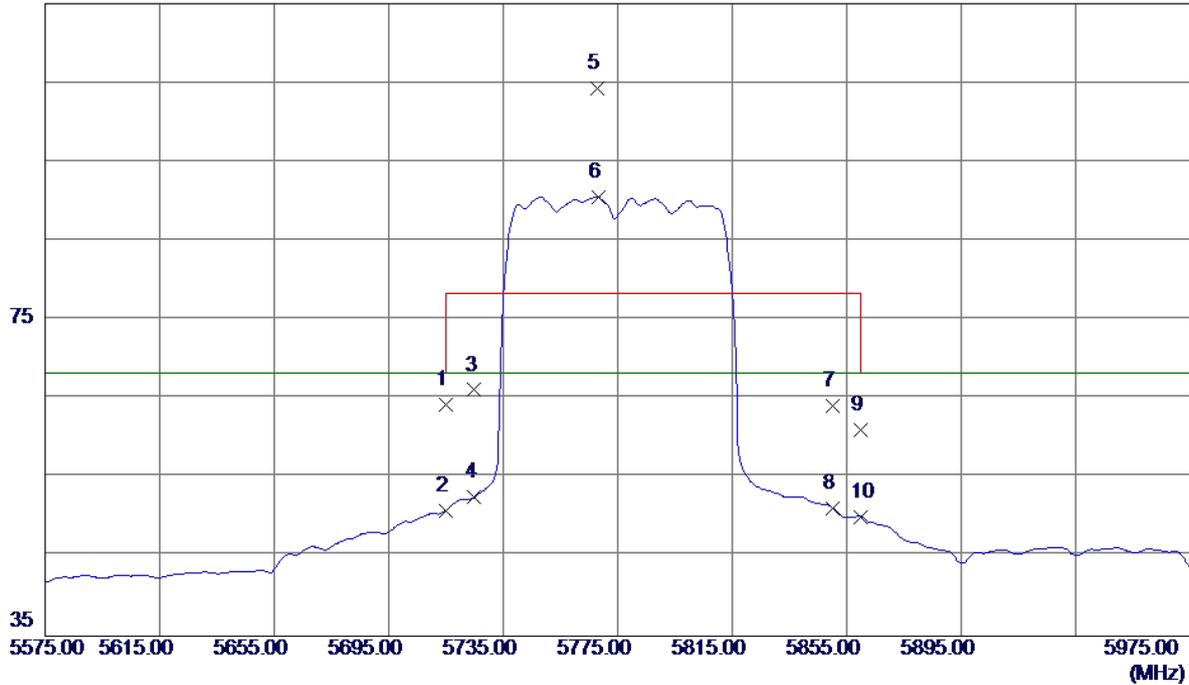


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	23.00	41.25	64.25	68.30	-4.05	Peak	
2	5715.0000	9.65	41.25	50.90	68.30	-17.40	AVG	
3	5725.0000	24.85	41.27	66.12	78.30	-12.18	Peak	
4	5725.0000	11.35	41.27	52.62	68.30	-15.68	AVG	
5	5767.8000	62.92	41.32	104.24	78.30	25.94	Peak	No Limit
6	5768.2000	49.25	41.32	90.57	68.30	22.27	AVG	No Limit
7	5850.0000	22.74	41.44	64.18	78.30	-14.12	Peak	
8	5850.0000	9.77	41.44	51.21	68.30	-17.09	AVG	
9	5860.0000	19.57	41.45	61.02	78.30	-17.28	Peak	
10	5860.0000	8.64	41.45	50.09	68.30	-18.21	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

### Vertical

80 dBuV/m

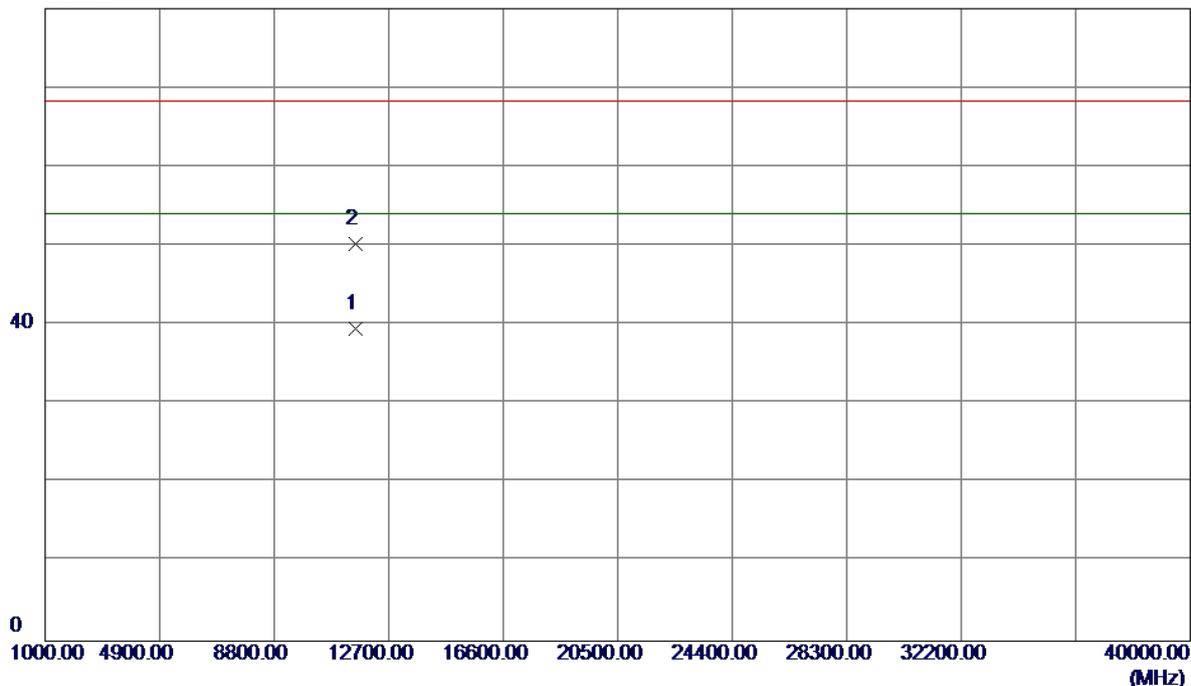


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11552.1560	22.52	17.02	39.54	54.00	-14.46	AVG	
2	11552.3690	33.21	17.02	50.23	68.30	-18.07	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

### Horizontal

115 dBuV/m

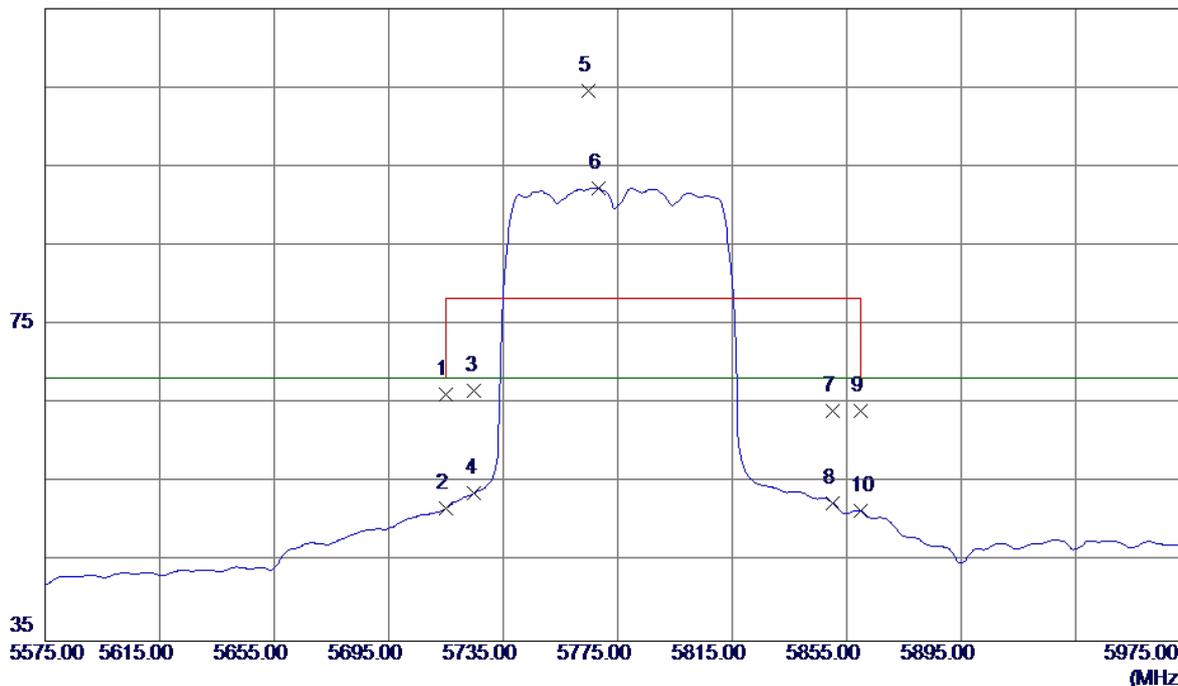


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	24.94	41.25	66.19	68.30	-2.11	Peak	
2	5715.0000	10.53	41.25	51.78	68.30	-16.52	AVG	
3	5725.0000	25.37	41.27	66.64	78.30	-11.66	Peak	
4	5725.0000	12.52	41.27	53.79	68.30	-14.51	AVG	
5	5764.6000	63.31	41.32	104.63	78.30	26.33	Peak	No Limit
6	5768.2000	51.02	41.32	92.34	68.30	24.04	AVG	No Limit
7	5850.0000	22.63	41.44	64.07	78.30	-14.23	Peak	
8	5850.0000	11.03	41.44	52.47	68.30	-15.83	AVG	
9	5860.0000	22.65	41.45	64.10	78.30	-14.20	Peak	
10	5860.0000	9.97	41.45	51.42	68.30	-16.88	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


### Horizontal

80 dBuV/m

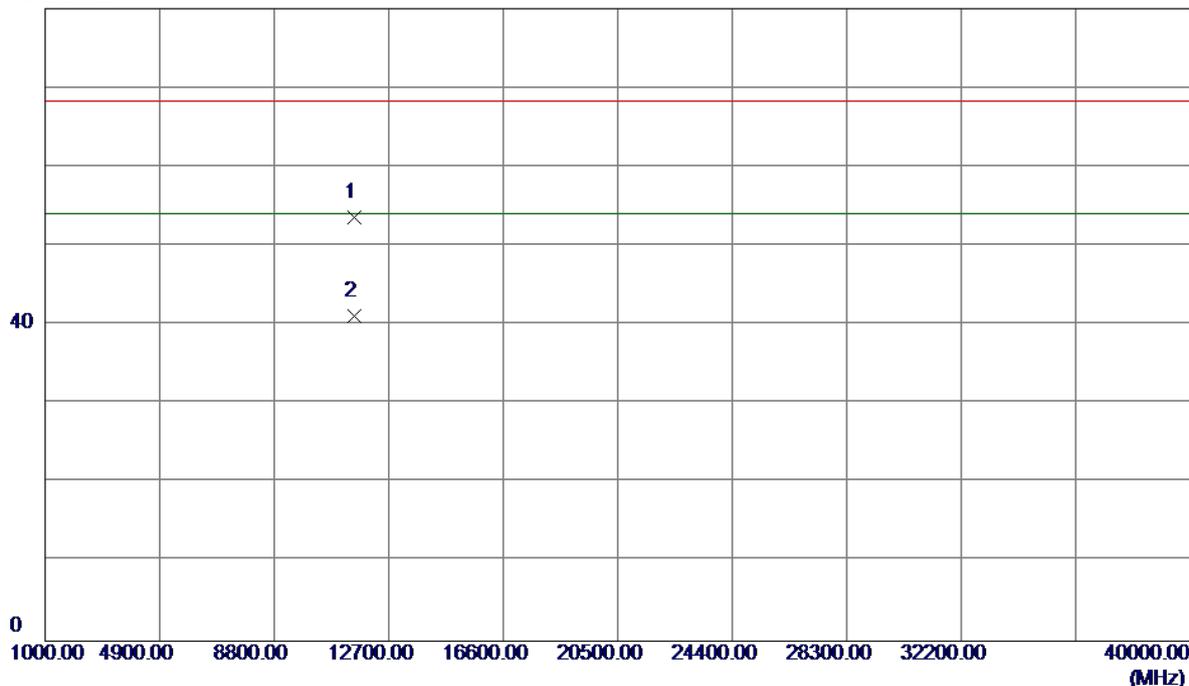

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.0000	36.57	17.01	53.58	68.30	-14.72	Peak	
2	11550.1200	24.17	17.01	41.18	54.00	-12.82	AVG	

### TX A Mode\_DUTY CYCLE

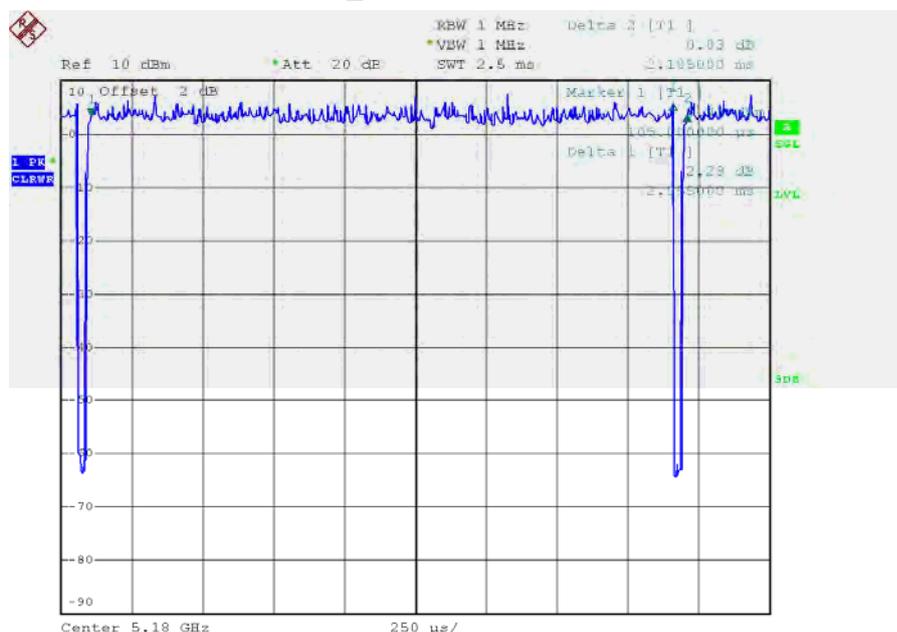

Date: 18.DEC.2015 16:35:10

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

$T_{\text{ON}}$ : 2.06 msec

$T_{\text{Total}}$ : 2.11 msec

Duty cycle: 97.63%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.10

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

### TX N20 Mode\_DUTY CYCLE

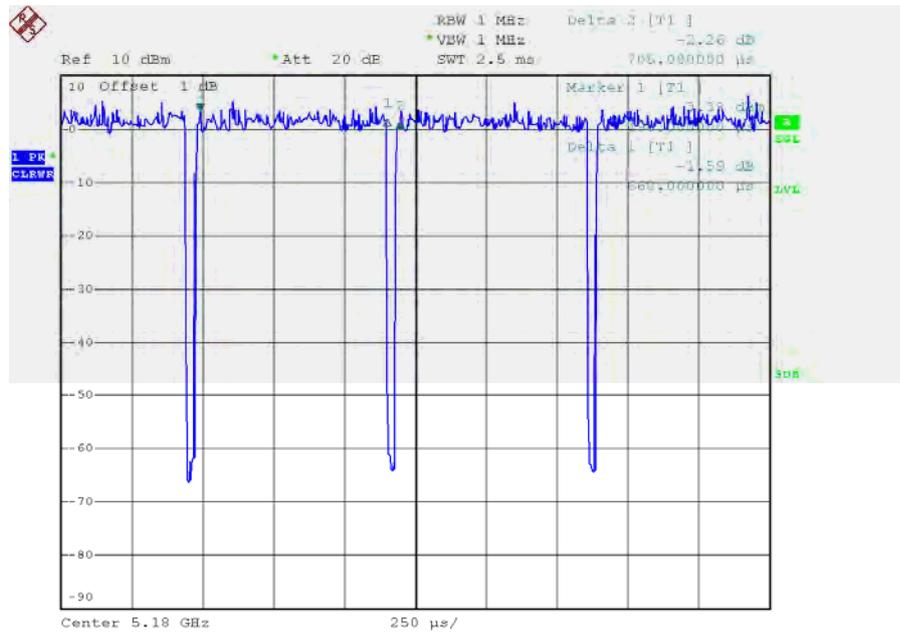

Date: 10.DEC.2015 09:56:32

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

$T_{\text{ON}}$ : 0.66 msec

$T_{\text{Total}}$ : 0.70 msec

Duty cycle: 94.29%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.26

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

### TX N40 Mode\_DUTY CYCLE

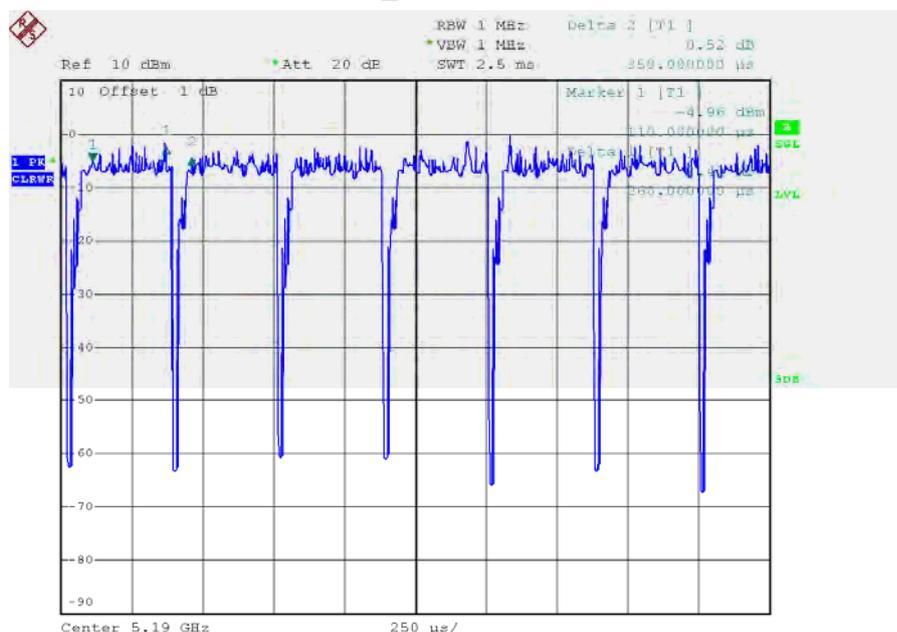

Date: 10.DEC.2015 09:57:31

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

$T_{\text{ON}}$ : 0.26 msec

$T_{\text{Total}}$ : 0.35 msec

Duty cycle: 74.29%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 1.29

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

### TX AC20 Mode\_DUTY CYCLE

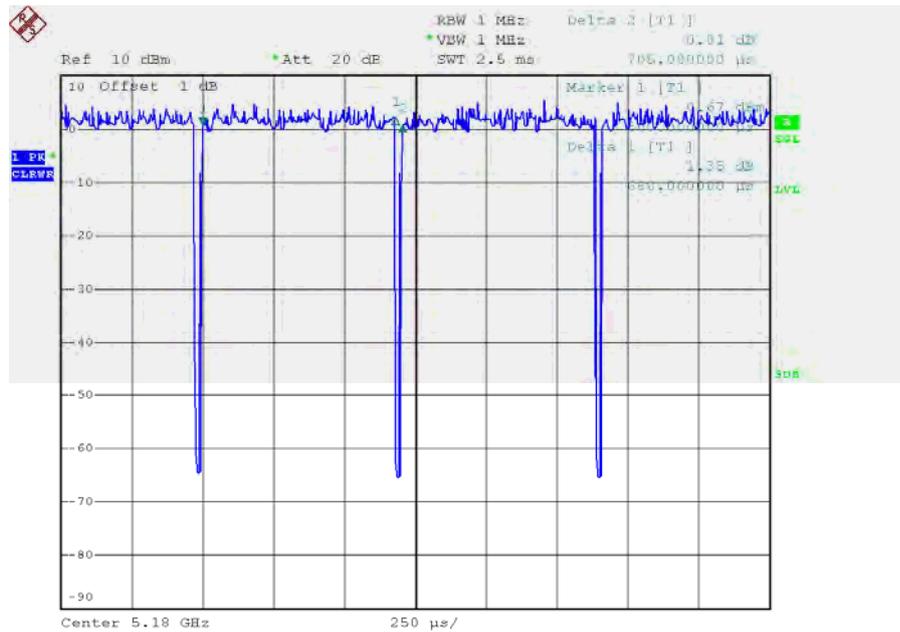

Date: 10.DEC.2015 09:57:05

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

$T_{\text{ON}}$ : 0.68 msec

$T_{\text{Total}}$ : 0.70 msec


Duty cycle: 97.14%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.13

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor  
Power Spectral Density = Measured density + Duty factor

### TX AC40 Mode\_DUTY CYCLE

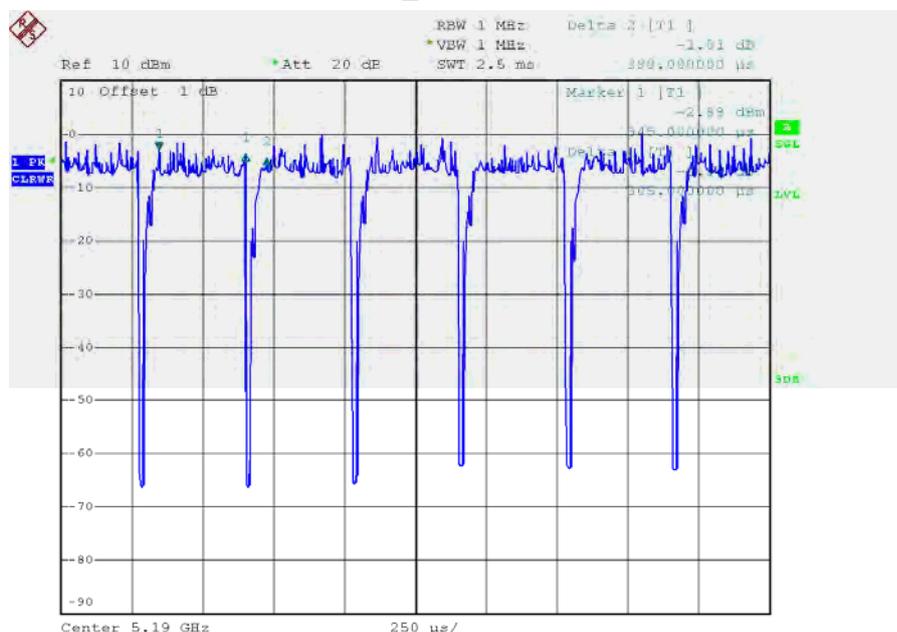

Date: 10.DEC.2015 09:58:13

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

$T_{\text{ON}}$ : 0.30 msec

$T_{\text{Total}}$ : 0.38 msec

Duty cycle: 78.95%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 1.03

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor




## ATTACHMENT E - BANDWIDTH

**Test Mode: UNII-1/TX A Mode\_CH36/CH40/CH48**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.79	17.10
CH40	5200	20.69	17.10
CH48	5240	28.51	17.30

**TX CH36**

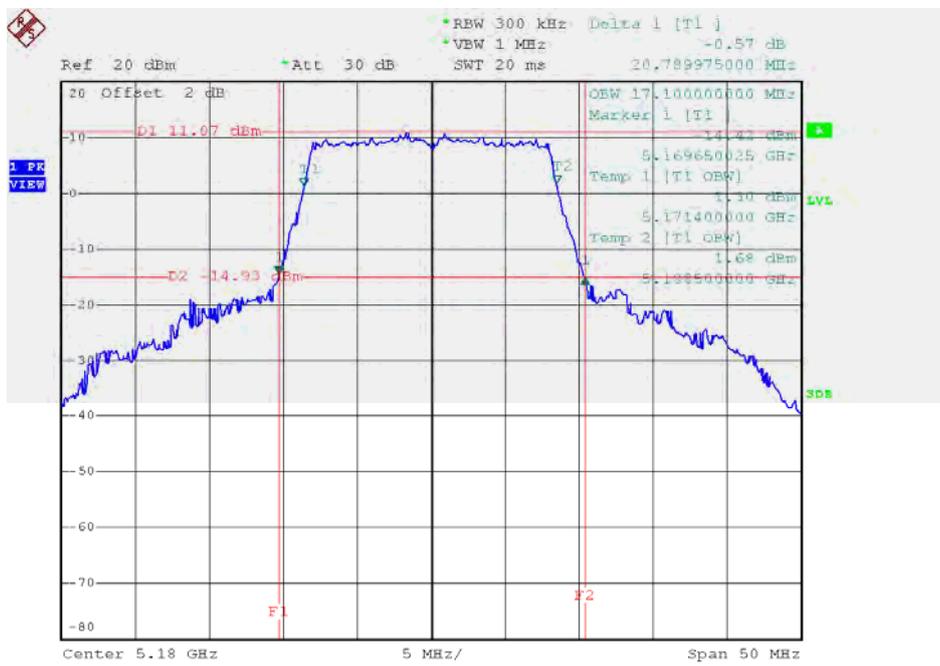


Date: 23.DEC.2015 15:49:34

### TX CH40

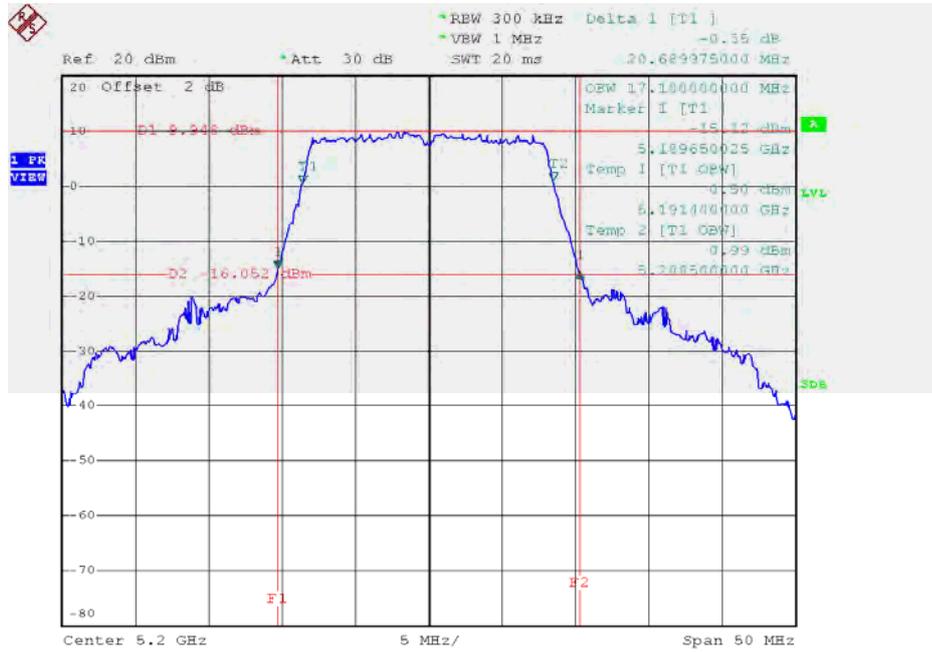

Date: 23.DEC.2015 15:54:20


### TX CH48

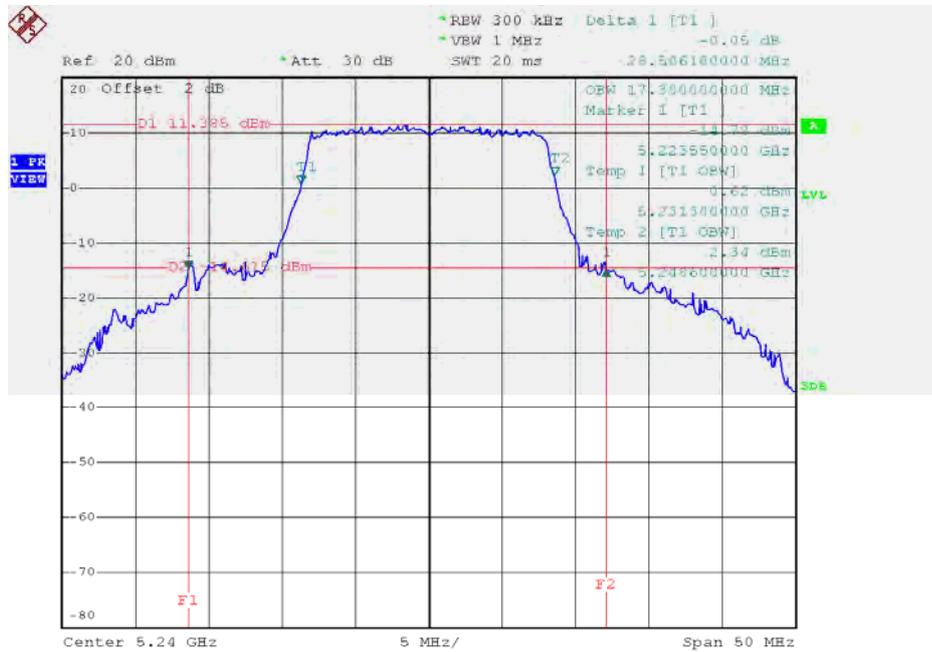

Date: 23.DEC.2015 15:57:30


**Test Mode: UNII-1/TX N20 Mode\_CH36/CH40/CH48**

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.71	18.00
CH40	5200	20.91	18.00
CH48	5240	20.75	18.10

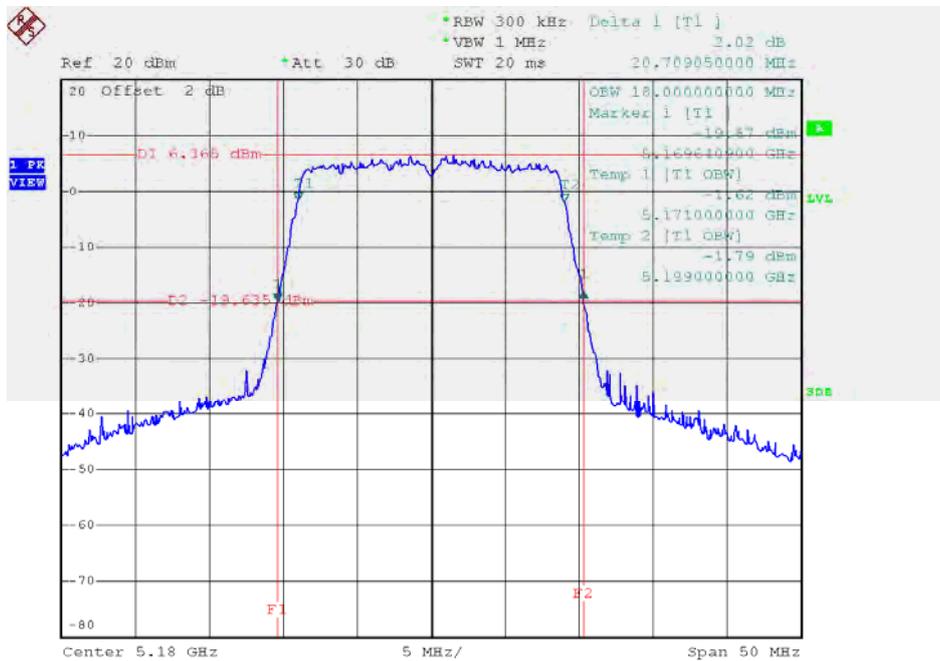**TX CH36**


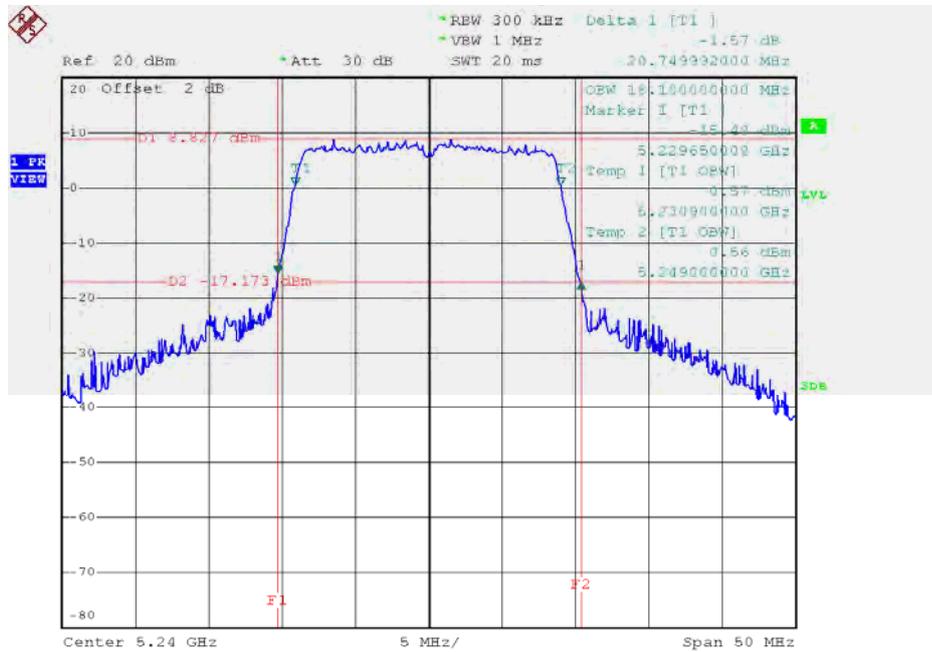
Date: 23.DEC.2015 16:18:01

### TX CH40

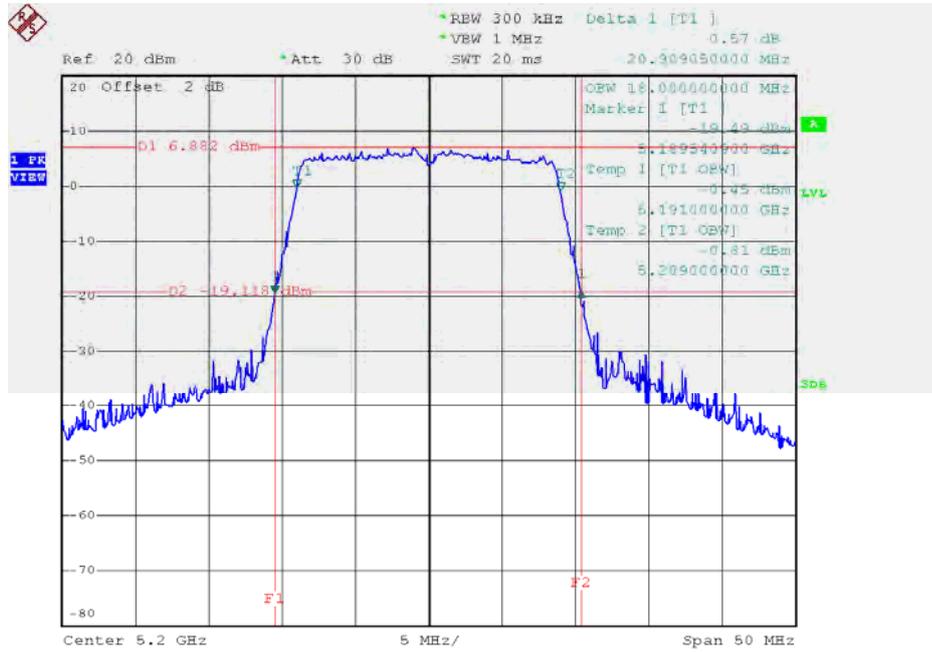

Date: 23.DEC.2015 16:18:55

### TX CH48




Date: 23.DEC.2015 16:20:03

**Test Mode: UNII-1/TX N40 Mode\_CH38/CH46**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	39.90	36.40
CH46	5230	39.80	36.40

### TX CH38

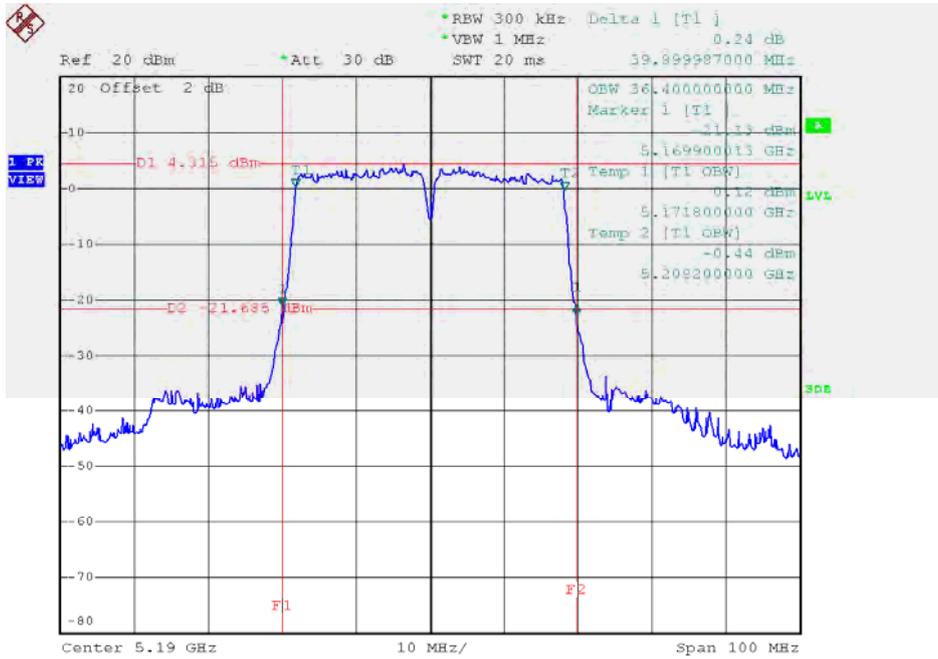

Date: 23.DEC.2015 16:50:03

### TX CH46

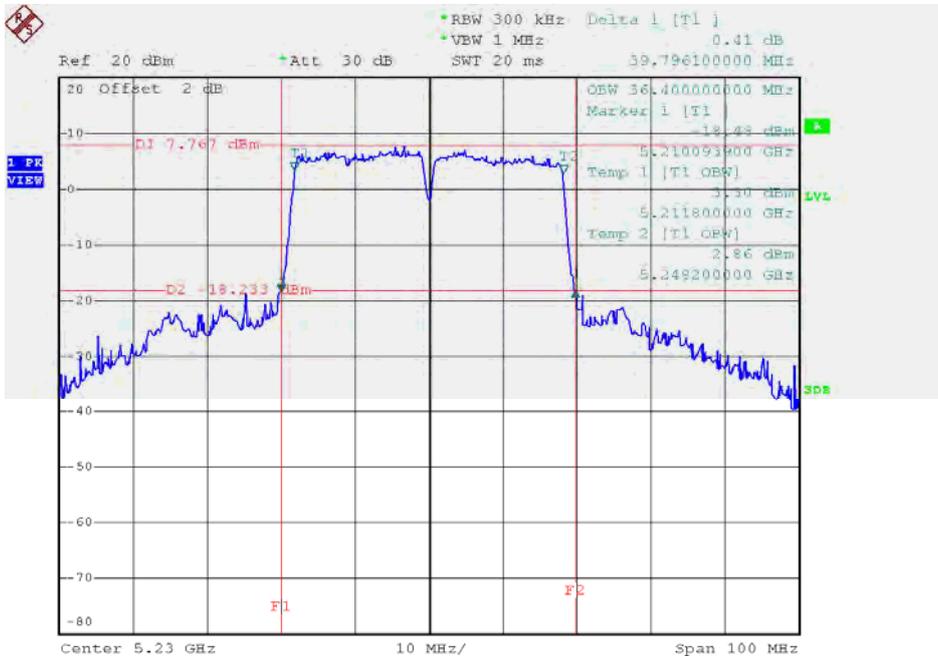


Date: 23.DEC.2015 16:51:13

**Test Mode: UNII-2A/TX A Mode\_CH52/CH60/CH64**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.66	17.10
CH60	5300	21.49	17.20
CH64	5320	20.65	17.00

**TX CH52**

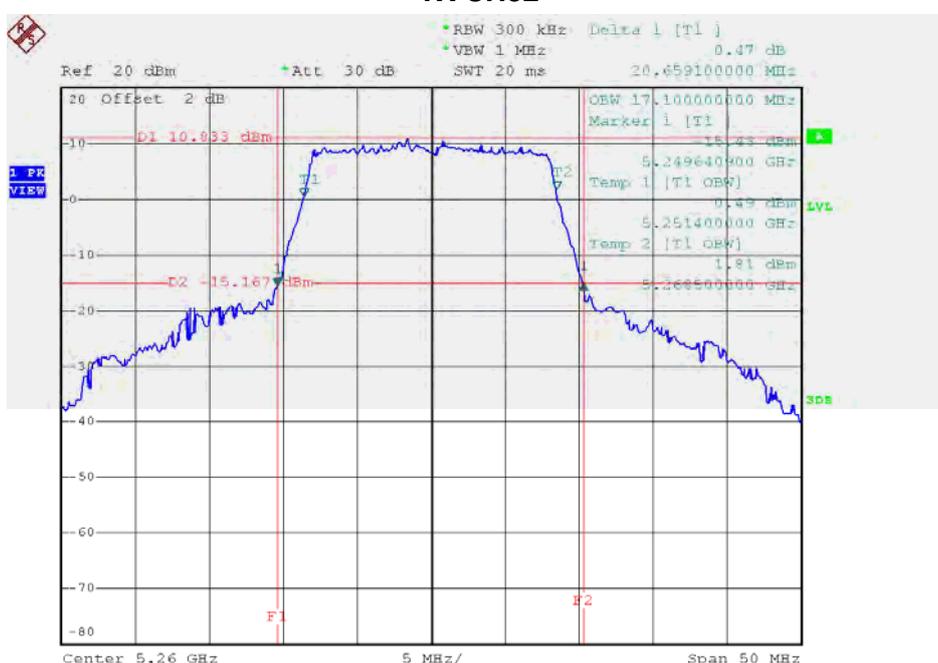


Date: 23.DEC.2015 15:59:14

### TX CH60

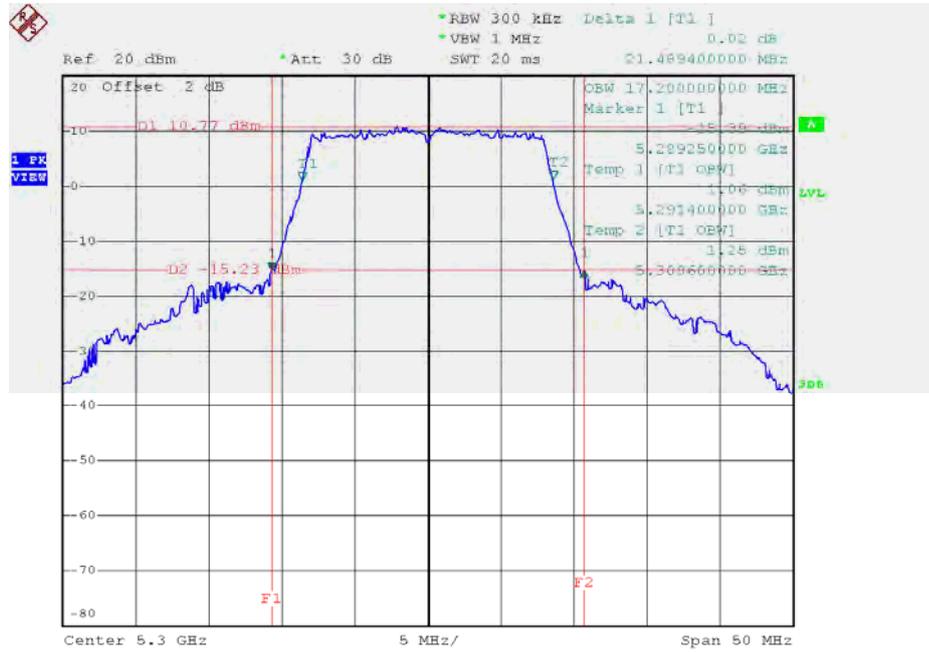

Date: 23.DEC.2015 16:02:16

### TX CH64

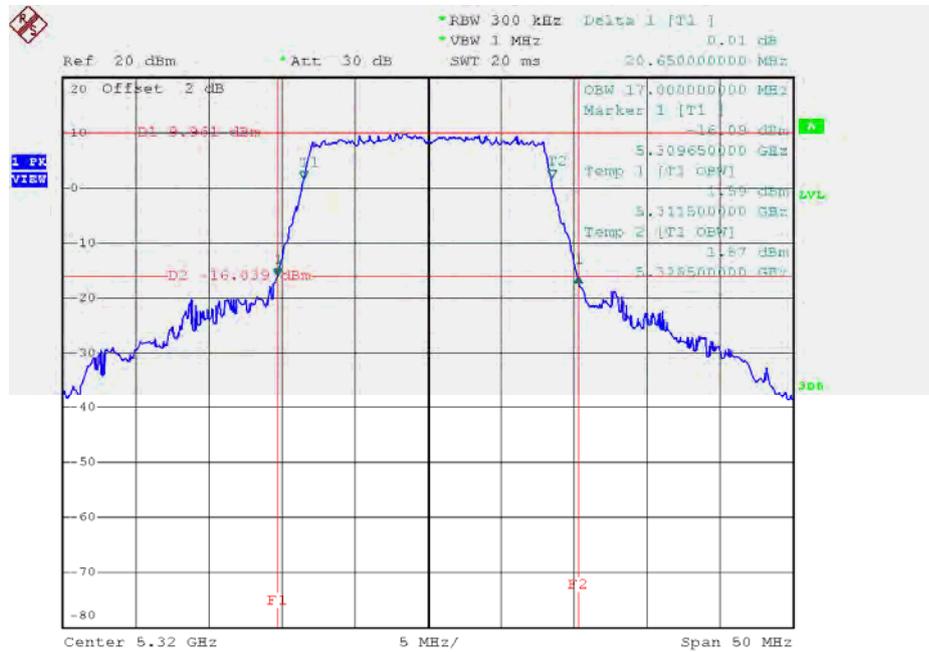


Date: 23.DEC.2015 16:03:05

**Test Mode: UNII-2A/TX N20 Mode\_CH52/CH60/CH64**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.85	18.00
CH60	5300	20.95	18.00
CH64	5320	20.79	18.00

**TX CH52**

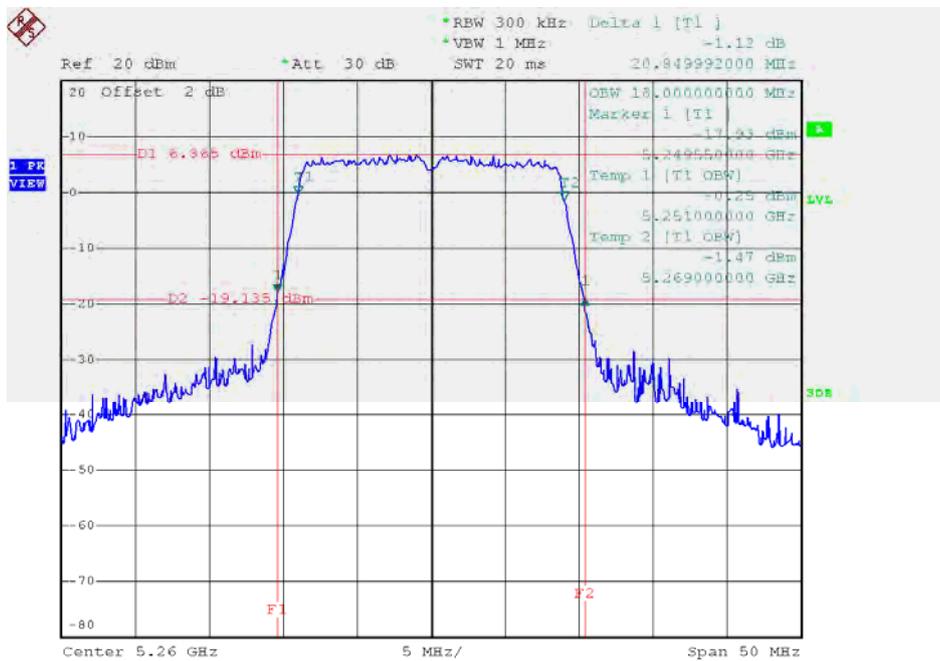


Date: 23.DEC.2015 16:21:02

### TX CH60

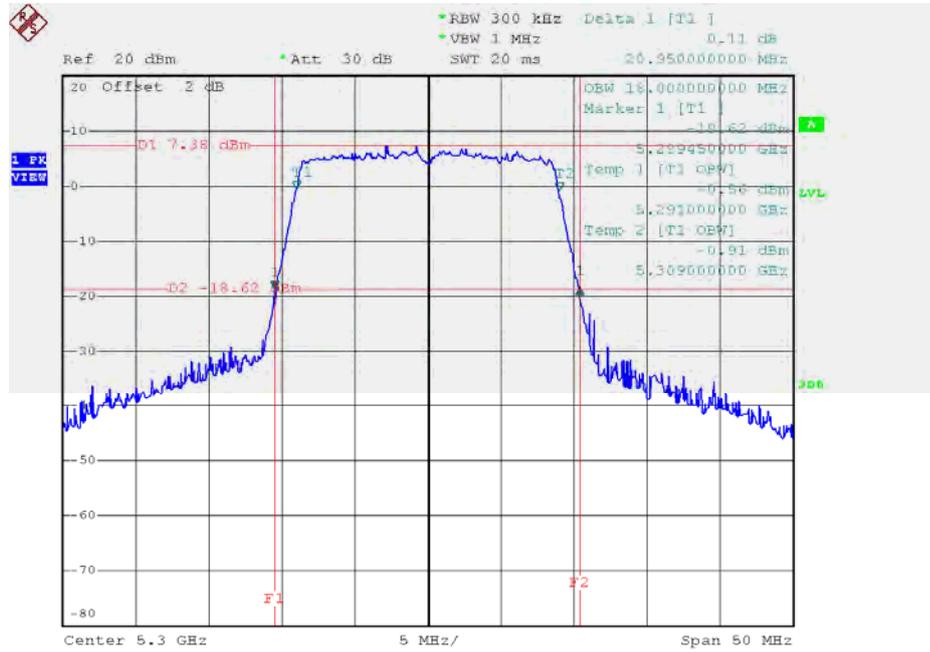

Date: 23.DEC.2015 16:21:50

### TX CH64

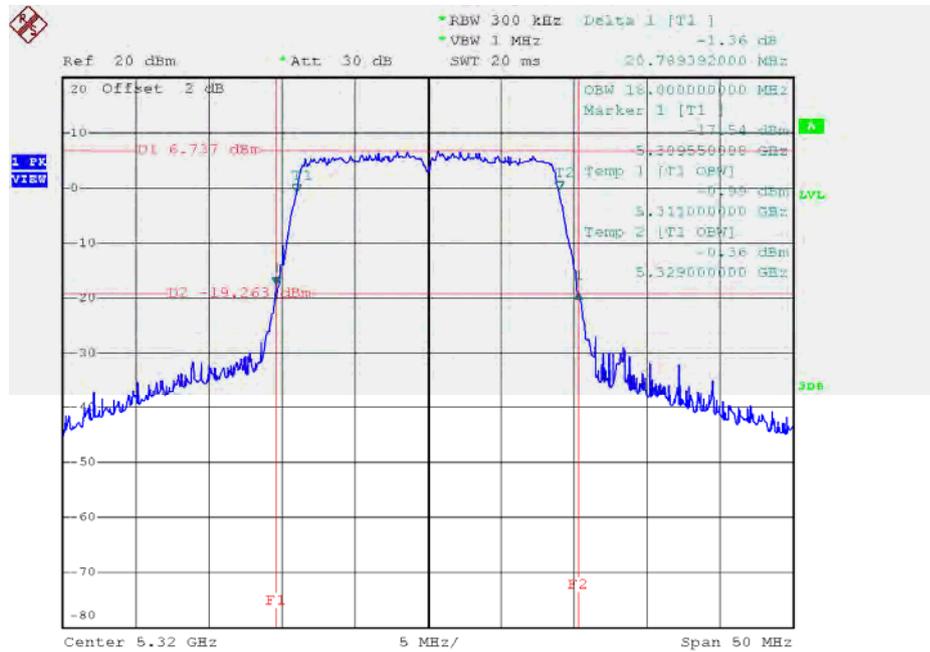

Date: 23.DEC.2015 16:22:41

**Test Mode: UNII-2A/TX N40 Mode\_CH54/CH62**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	40.30	36.40
CH62	5310	39.80	36.40



**Test Mode: UNII-2C/TX A Mode\_CH100/CH116/CH140**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.80	17.10
CH116	5580	25.99	17.20
CH140	5700	20.55	17.00

**TX CH100**

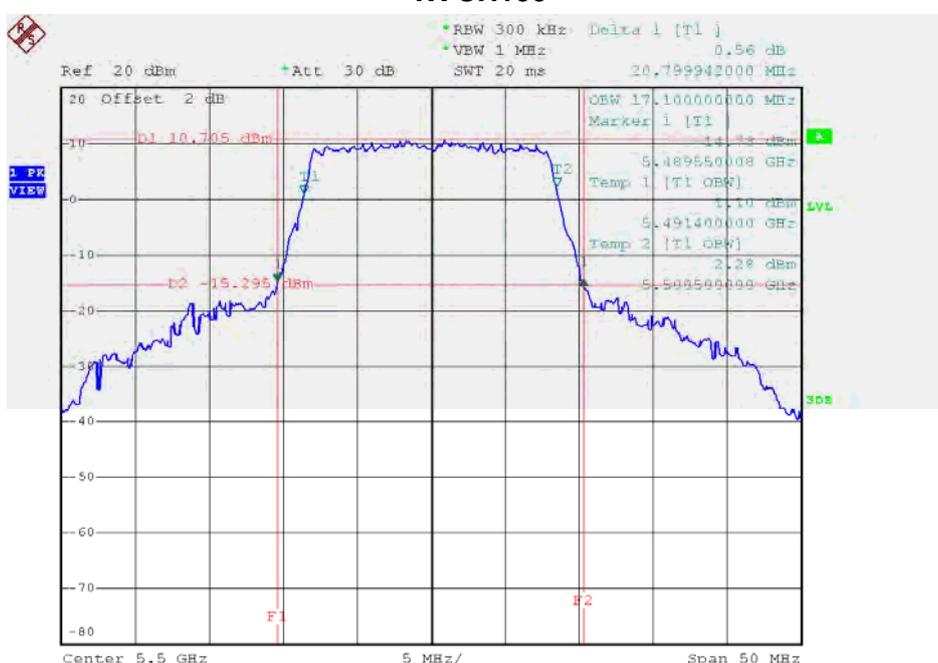


Date: 23.DEC.2015 16:03:53

### TX CH116

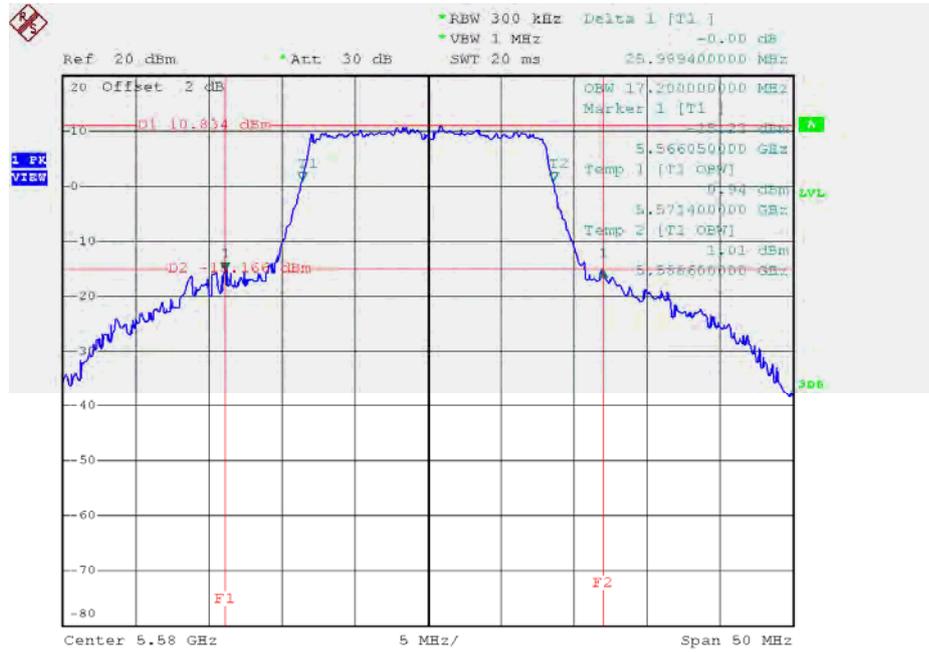

Date: 23.DEC.2015 16:06:26

### TX CH140

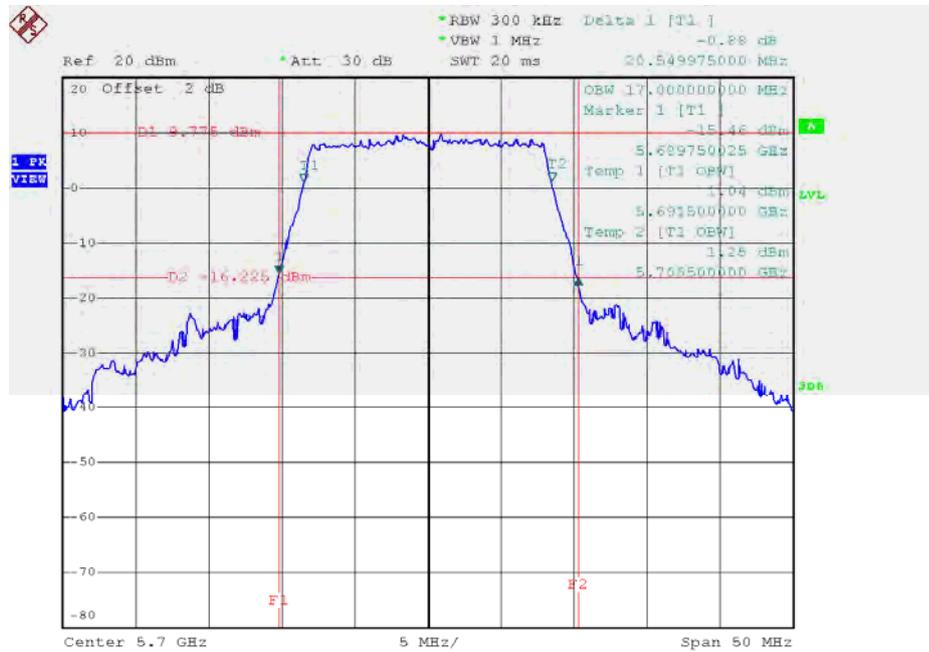


Date: 23.DEC.2015 16:07:49

**Test Mode: UNII-2C/TX N20 Mode\_CH100/CH116/CH140**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.80	18.00
CH116	5580	21.00	18.10
CH140	5700	20.89	18.00

**TX CH100**

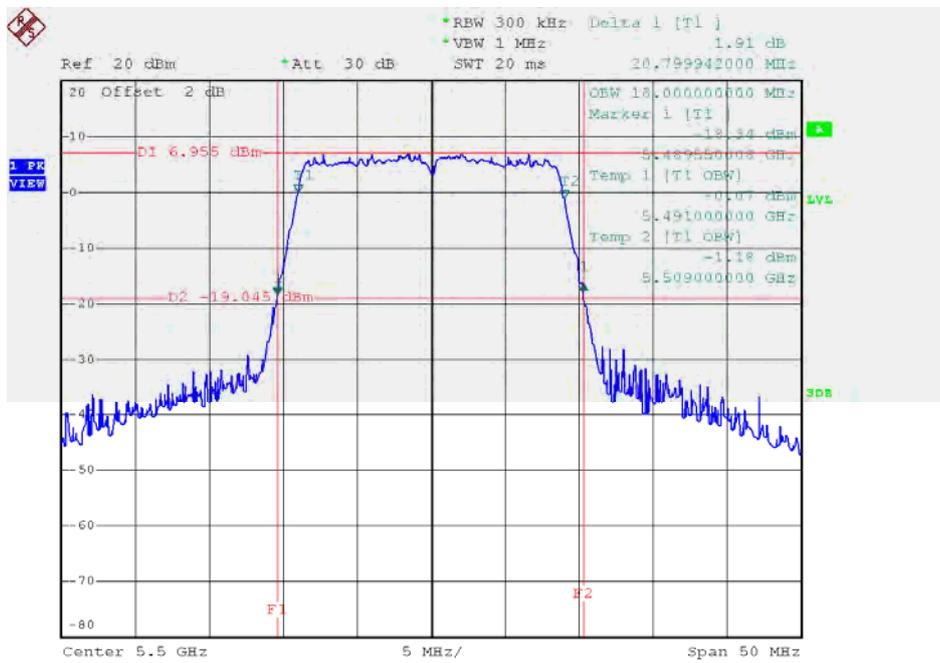


Date: 23.DEC.2015 16:23:31

### TX CH116

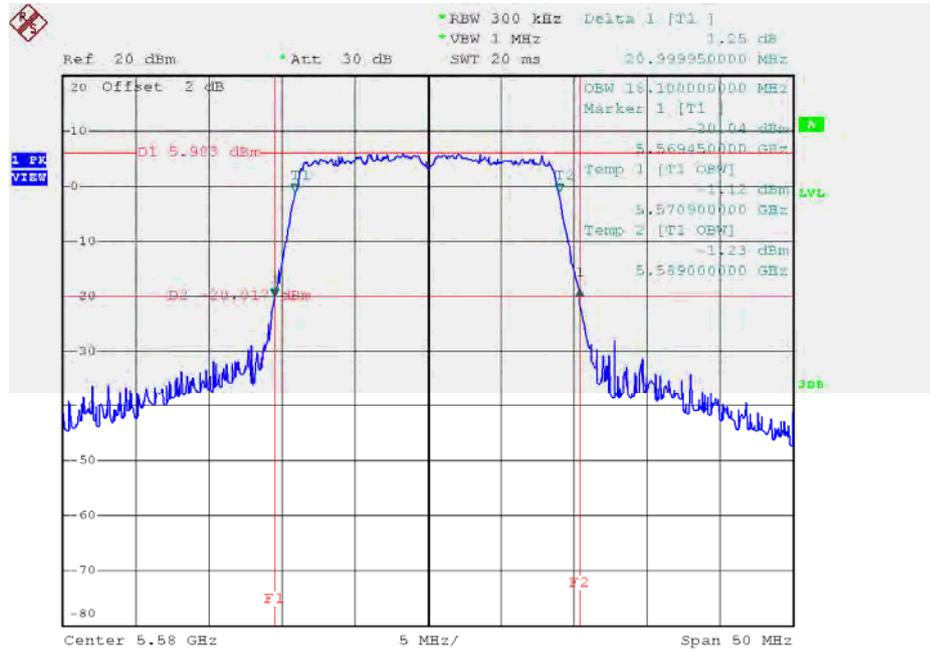

Date: 23.DEC.2015 16:24:23

### TX CH140

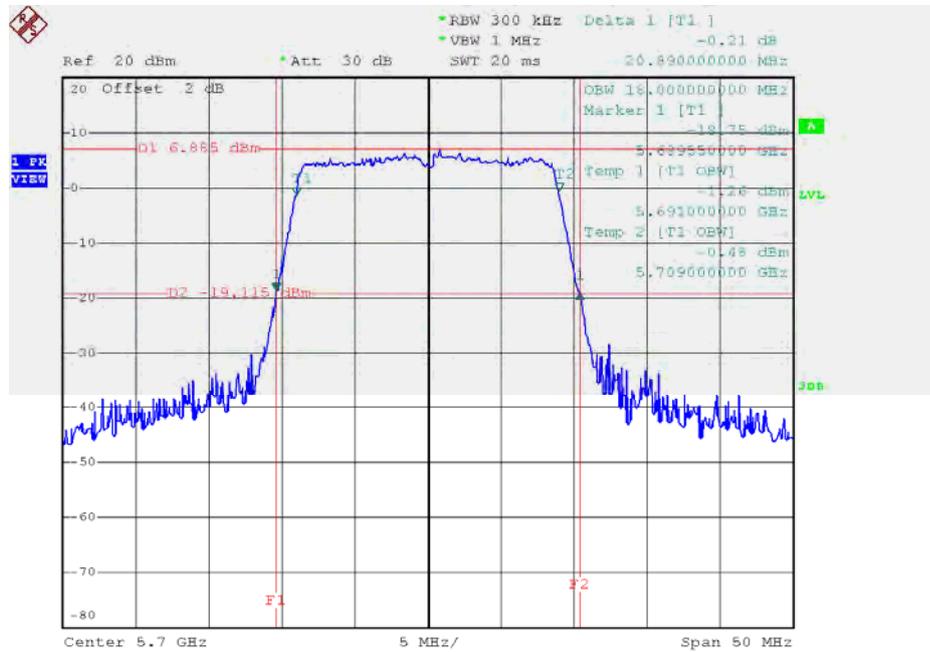


Date: 23.DEC.2015 16:25:17

**Test Mode: UNII-2C/TX N40 Mode\_CH102/CH110/CH134**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	39.70	36.40
CH110	5550	40.10	36.40
CH134	5670	40.10	36.40

**TX CH102**

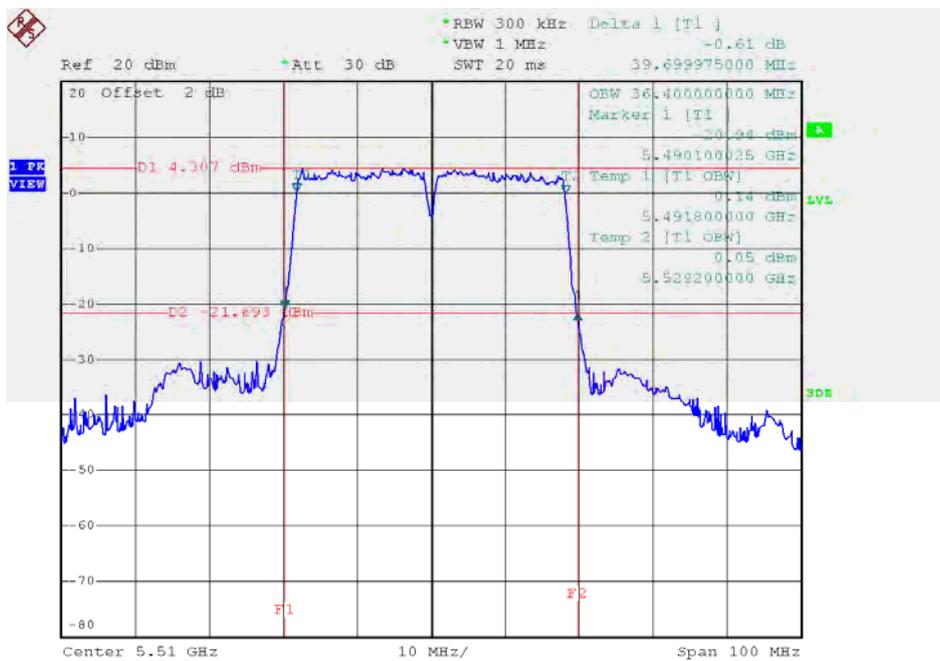


Date: 23.DEC.2015 16:54:17

### TX CH110

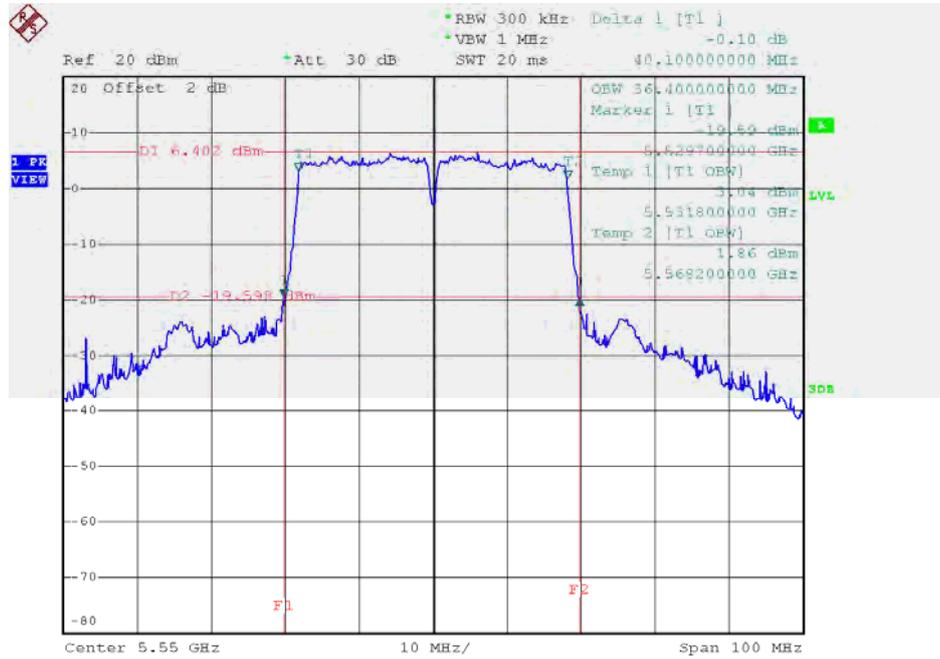

Date: 23.DEC.2015 16:55:06

### TX CH134

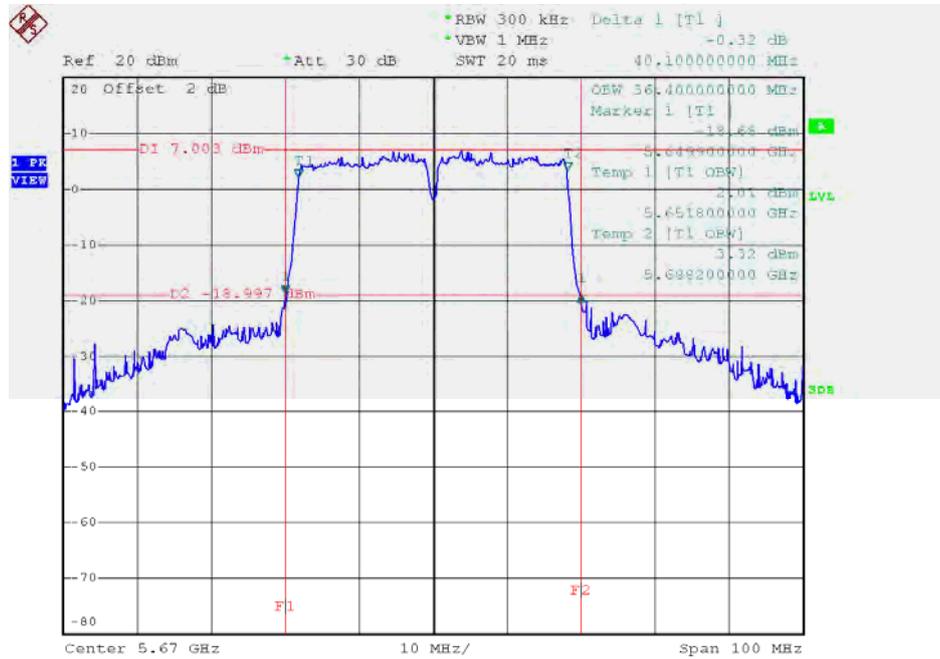


Date: 23.DEC.2015 16:56:03

**Test Mode: UNII-3/ TX A Mode\_CH149/CH157/CH165**


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.45	16.60	>=500
CH157	5785	16.45	28.50	>=500
CH165	5825	16.45	16.60	>=500

**TX CH 149**

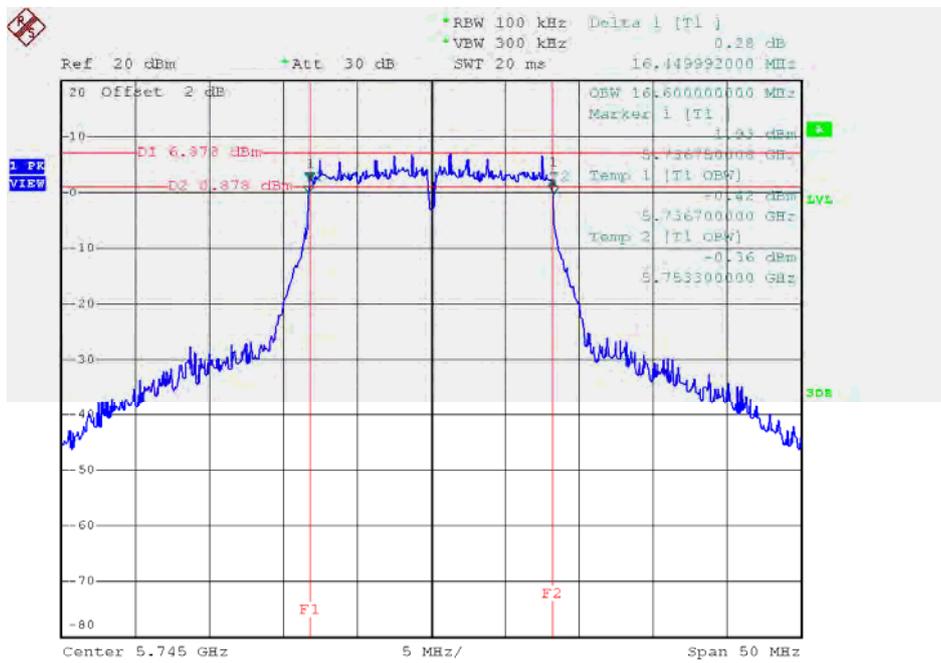


Date: 23.DEC.2015 16:10:31

### TX CH 157

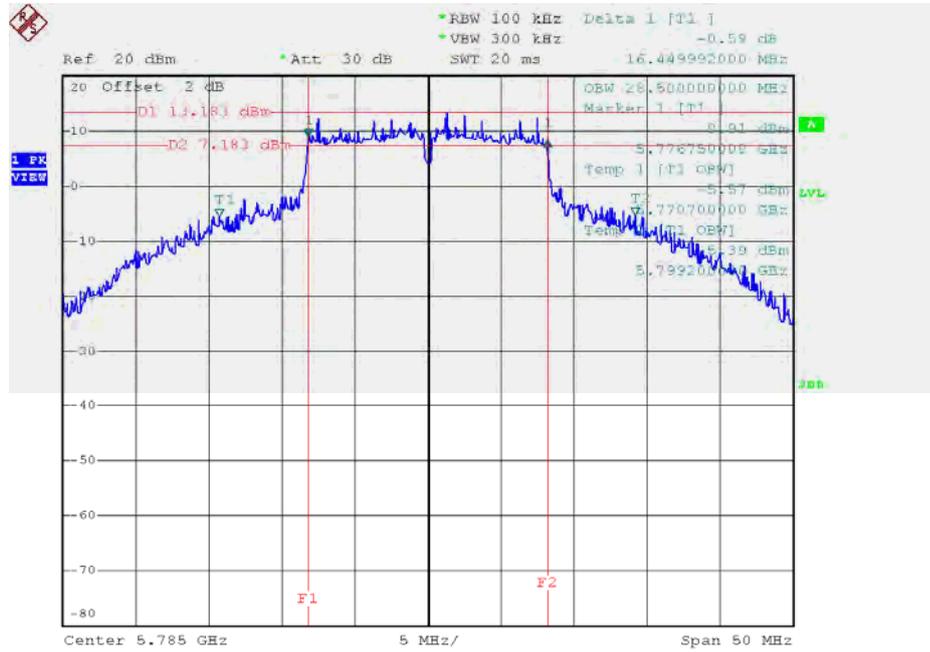

Date: 23.DEC.2015 16:15:24

### TX CH 165

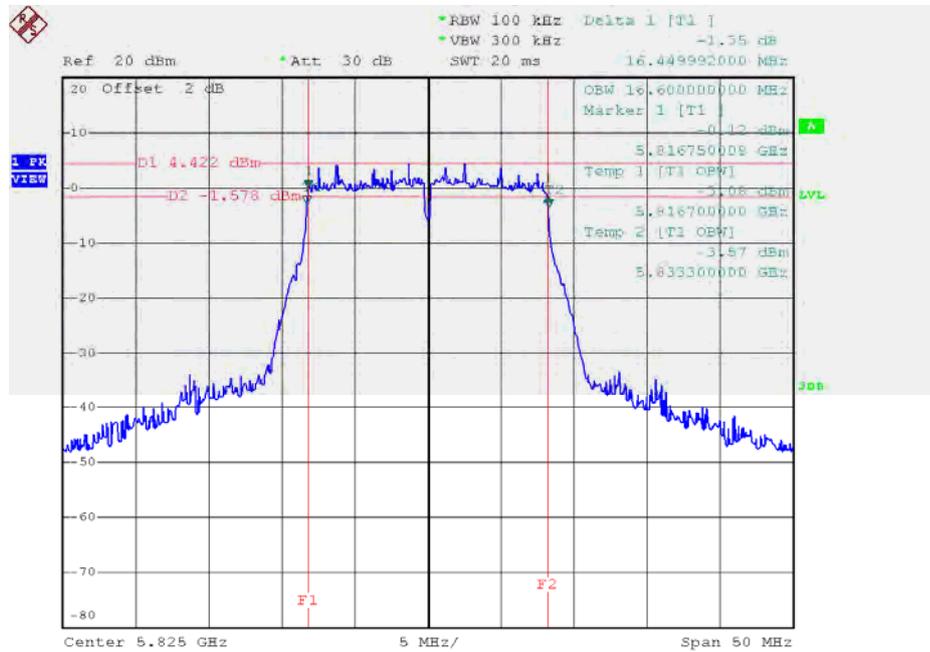


Date: 23.DEC.2015 16:16:44

**Test Mode: UNII-3/ TX N20 Mode\_CH149/CH157/CH165**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.70	17.70	>=500
CH157	5785	17.65	24.80	>=500
CH165	5825	17.65	17.60	>=500

**TX CH 149**

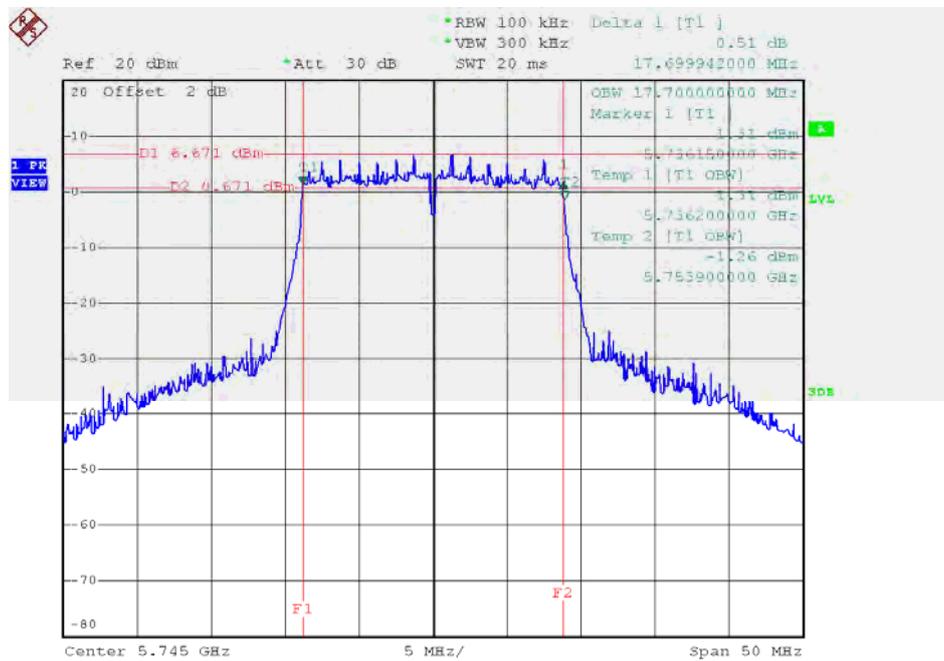


Date: 23.DEC.2015 16:29:09



**Test Mode: UNII-3/ TX N40 Mode\_CH151/CH159**


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	36.40	>=500
CH159	5795	36.50	36.40	>=500

### TX CH 151

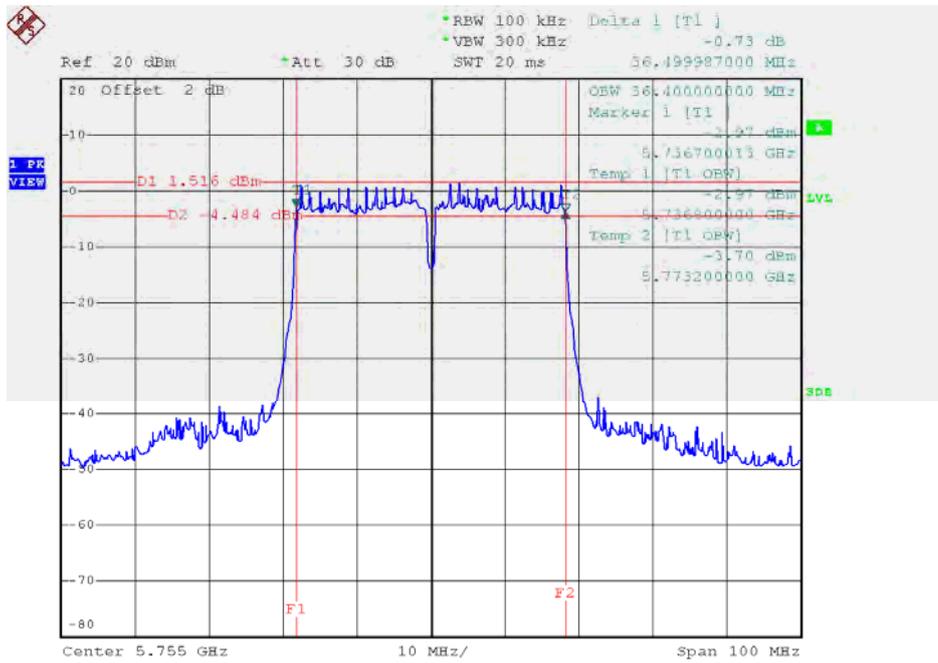

Date: 23.DEC.2015 16:56:58

### TX CH 159

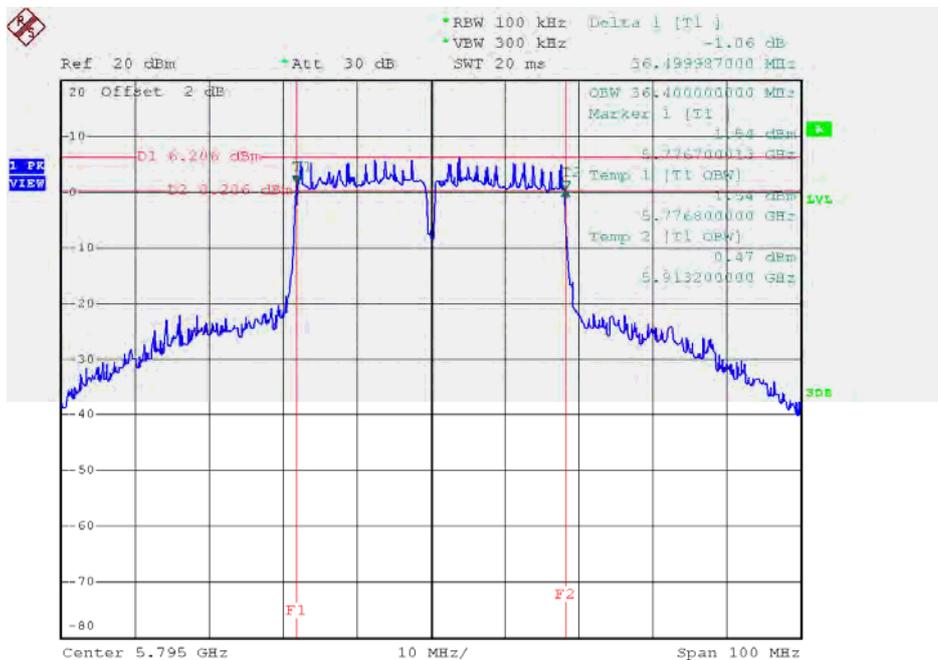


Date: 23.DEC.2015 16:57:53

**Test Mode: UNII-1/TX AC20 Mode\_CH36/CH40/CH48**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.89	18.00
CH40	5200	20.89	18.00
CH48	5240	36.15	18.60

**TX CH36**

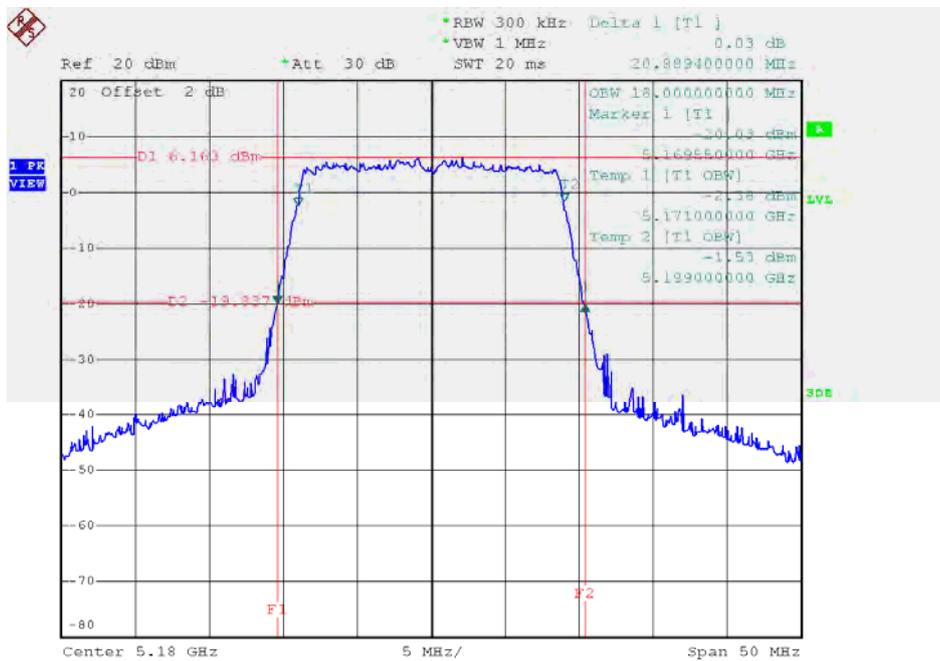


Date: 23.DEC.2015 16:32:45

### TX CH40

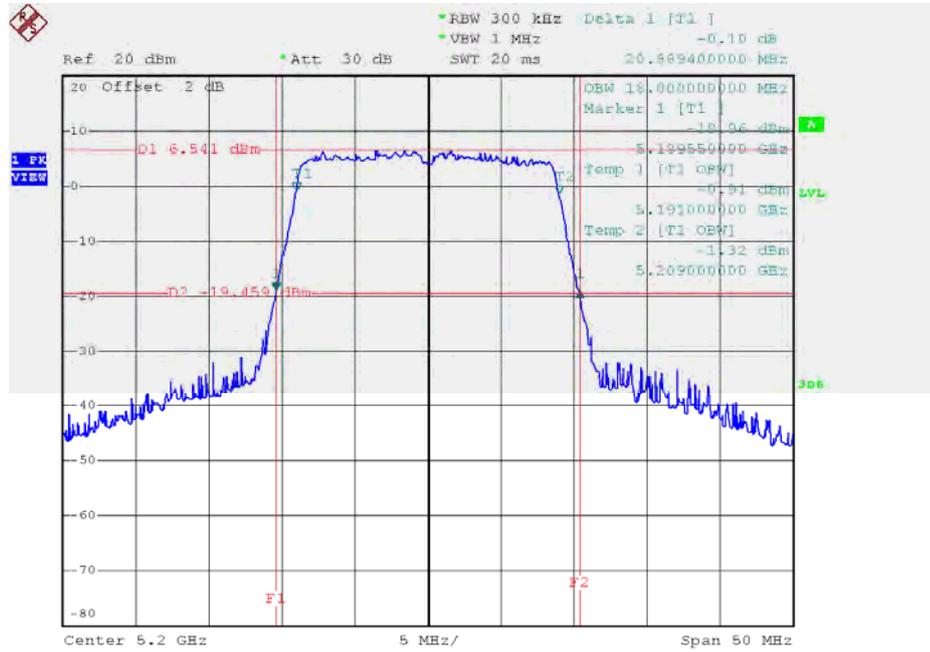

Date: 23.DEC.2015 16:33:37

### TX CH48

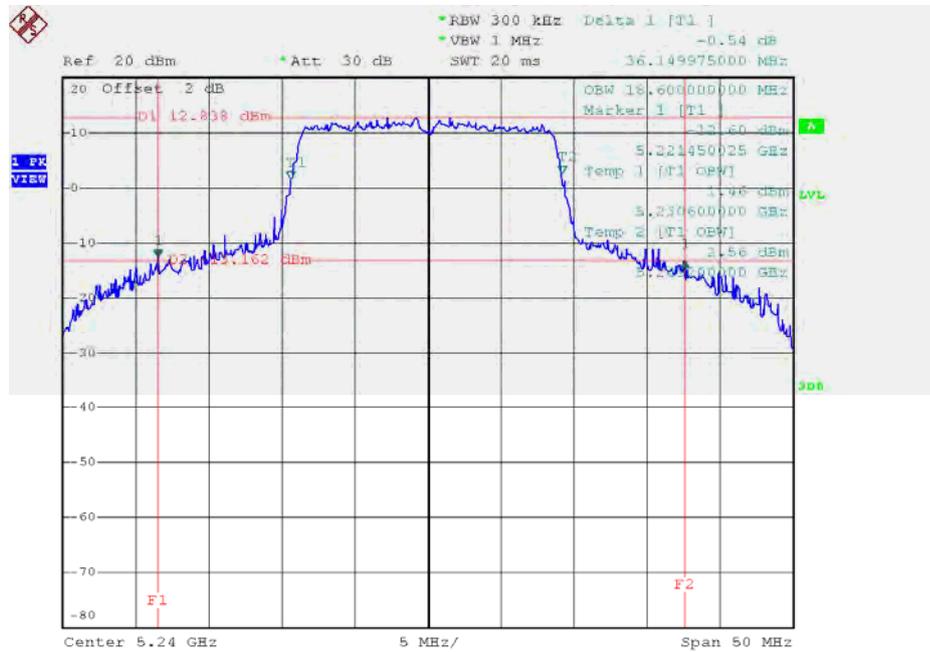

Date: 23.DEC.2015 16:34:54

**Test Mode: UNII-1/TX AC40 Mode\_CH38/CH46**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	39.80	36.40
CH46	5230	45.39	36.40



**Test Mode: UNII-1/TX AC80 Mode\_CH42**

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	81.40	76.00

**TX CH42**

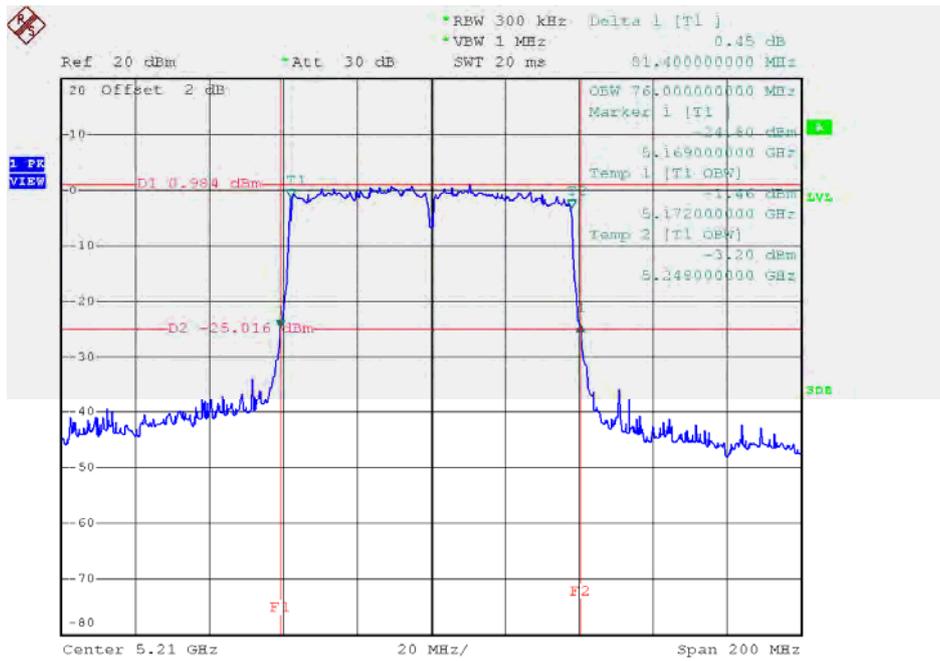


Date: 29.DEC.2015 11:07:46

**Test Mode: UNII-2A/TX AC20 Mode\_CH52/CH60/CH64**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.80	18.00
CH60	5300	20.85	18.10
CH64	5320	20.90	18.00

**TX CH52**

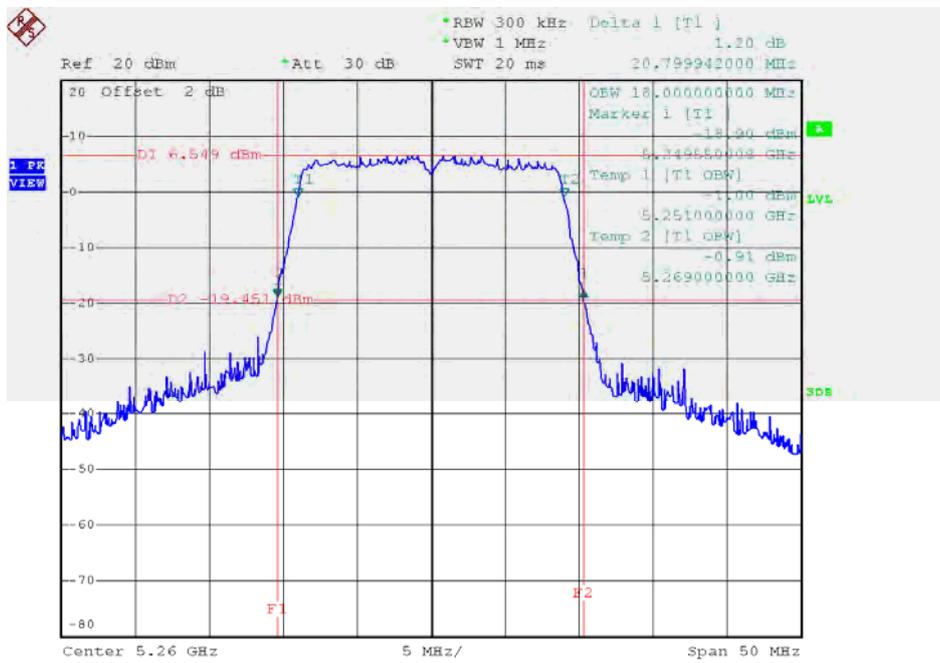


Date: 23.DEC.2015 16:37:34

### TX CH60

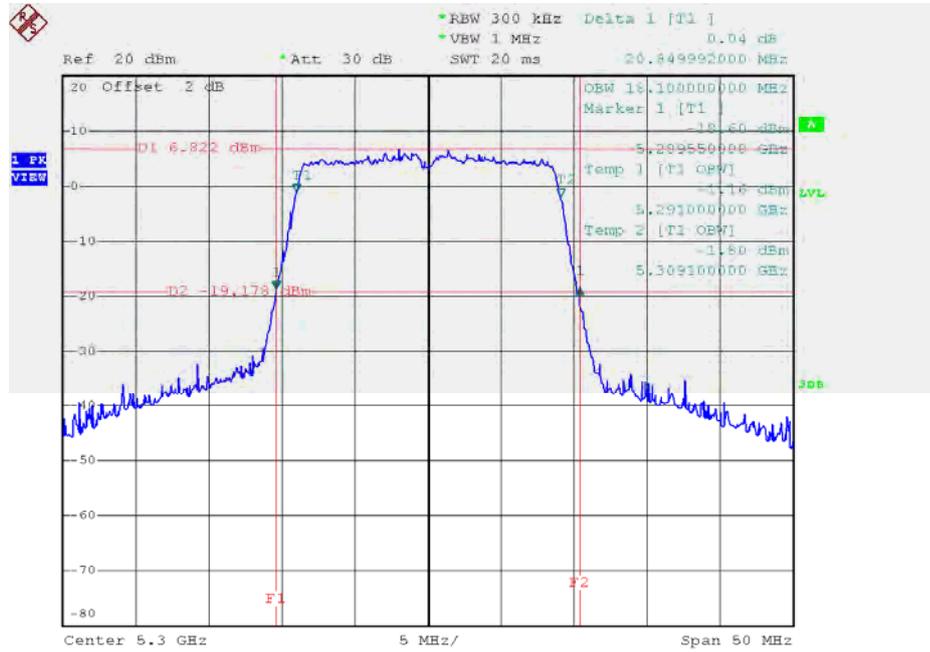

Date: 23.DEC.2015 16:38:32

### TX CH64

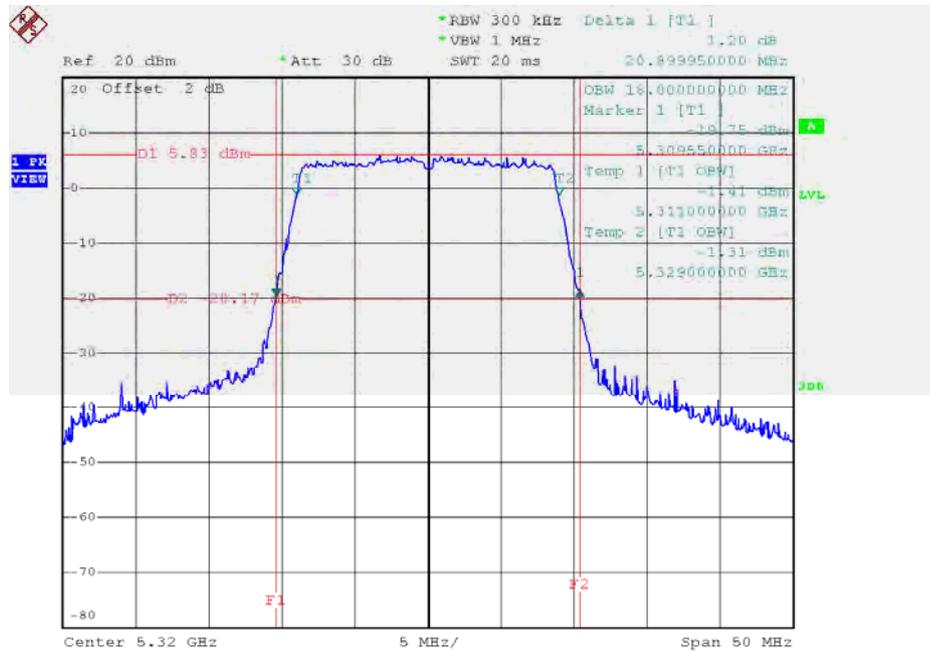


Date: 23.DEC.2015 16:39:28

**Test Mode: UNII-2A/TX AC40 Mode\_CH54/CH62**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	45.19	36.40
CH62	5310	40.00	36.40

### TX CH54

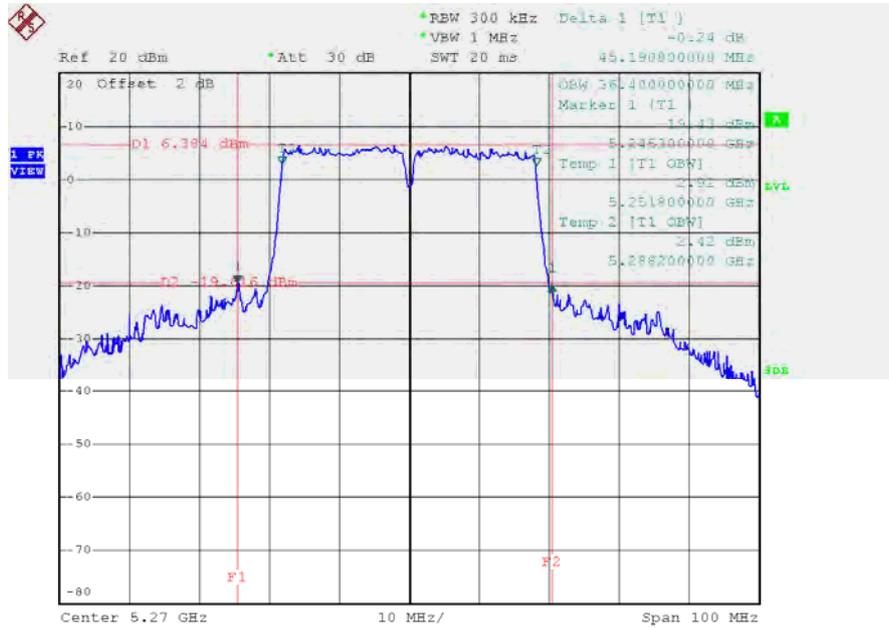

Date: 23.DEC.2015 17:00:44

### TX CH62

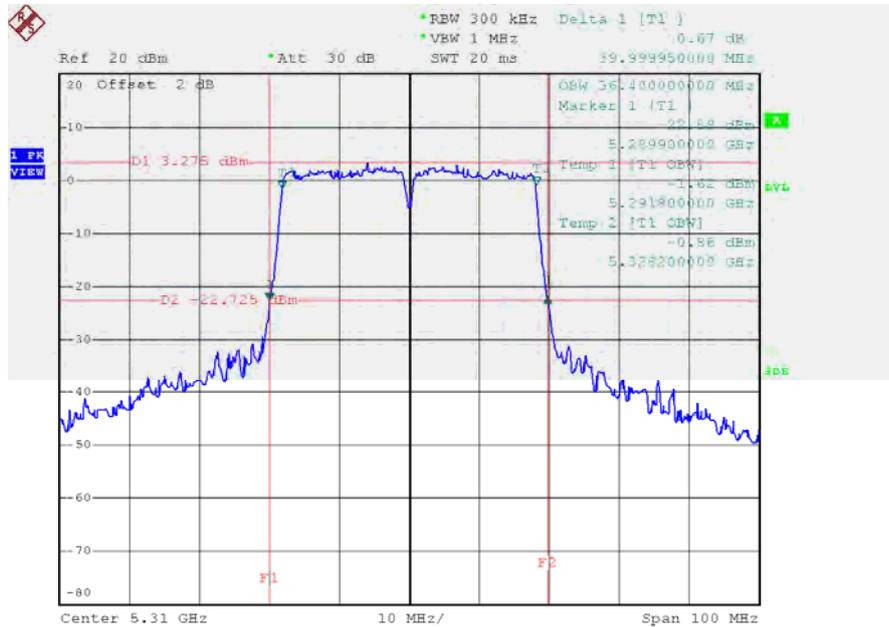


Date: 23.DEC.2015 17:03:05

**Test Mode: UNII-2A/TX AC80 Mode\_CH58**

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	81.01	76.00

**TX CH58**

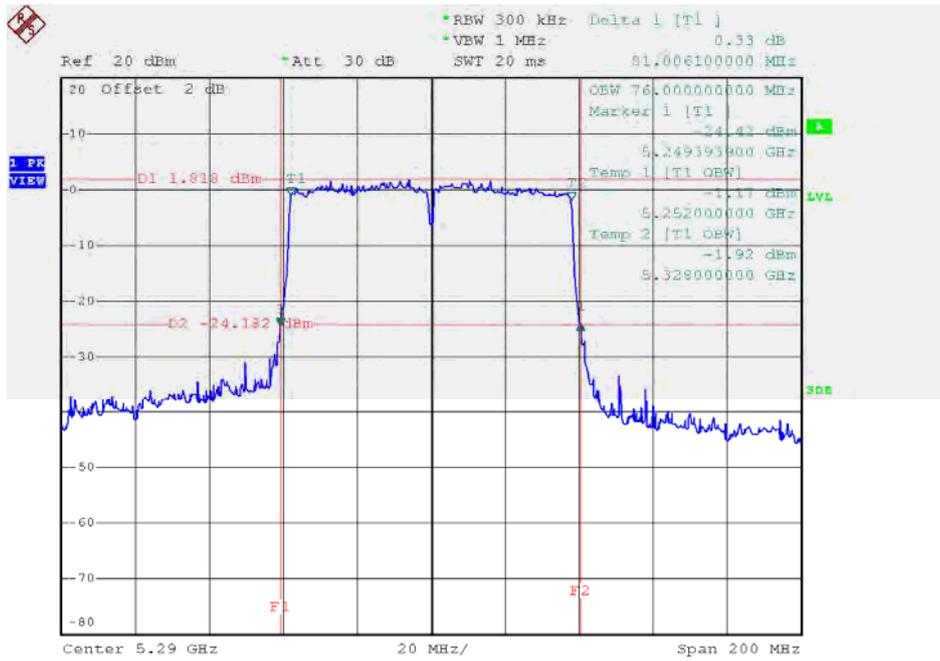


Date: 29.DEC.2015 11:08:50

**Test Mode: UNII-2C/TX AC20 Mode\_CH100/CH116/CH140**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.85	18.00
CH116	5580	20.95	18.00
CH140	5700	20.85	18.00

**TX CH100**

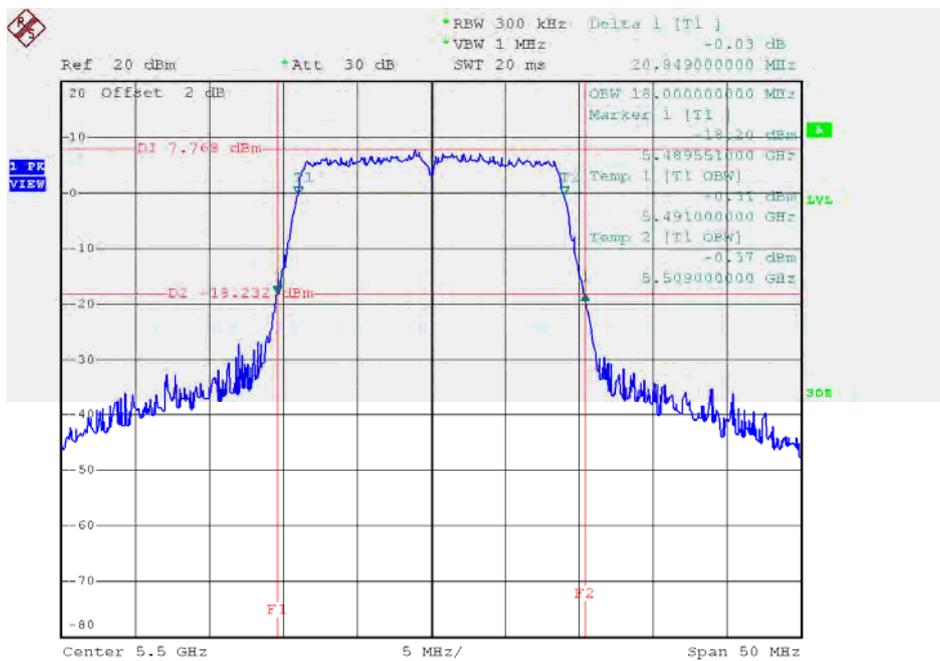


Date: 23.DEC.2015 16:42:54

### TX CH116

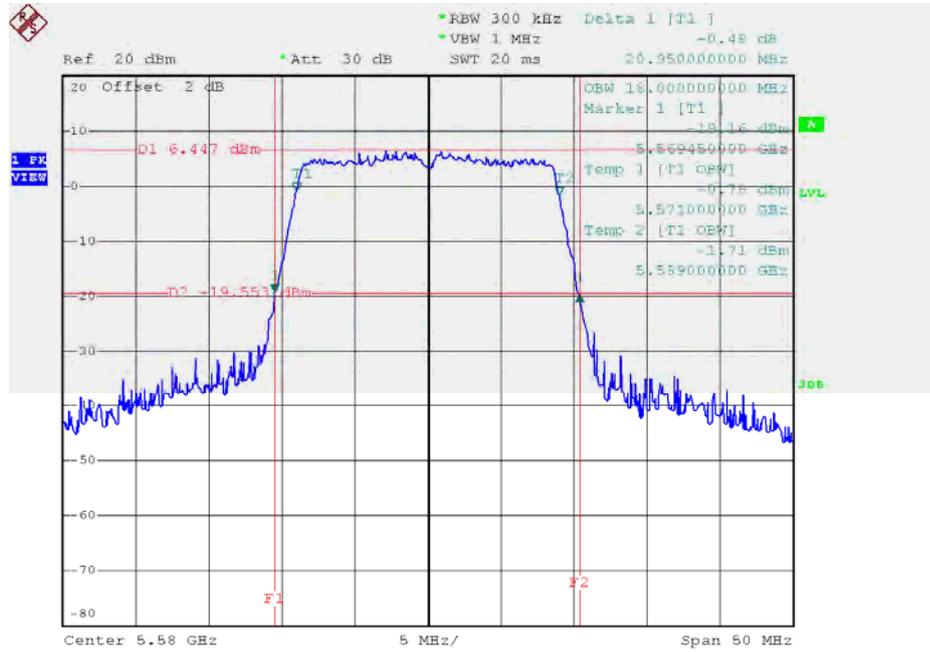

Date: 23.DEC.2015 16:44:14

### TX CH140

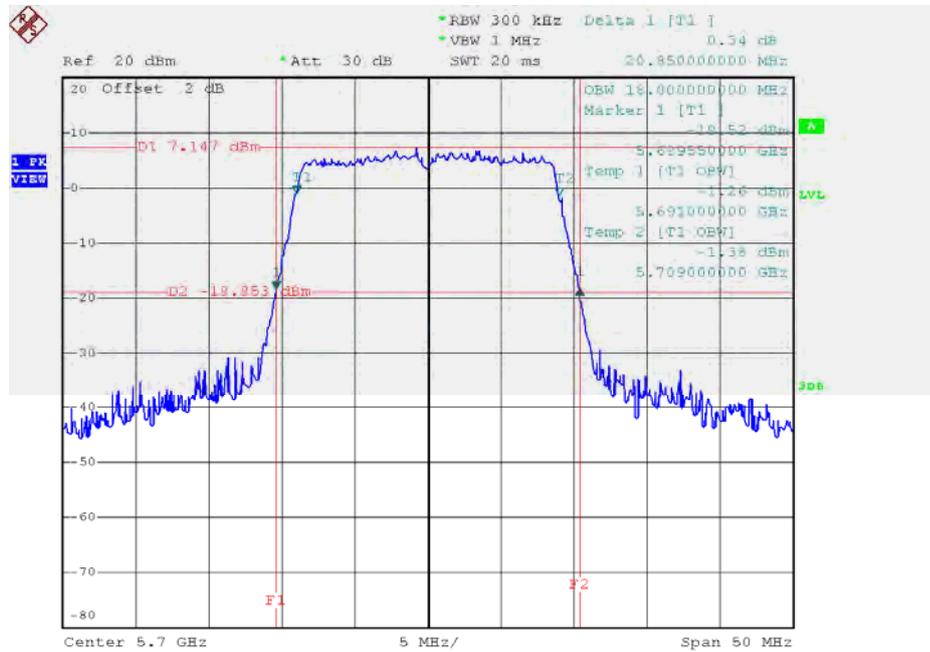


Date: 23.DEC.2015 16:45:22

**Test Mode: UNII-2C/TX AC40 Mode\_CH102/CH110/CH134**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	39.79	36.40
CH110	5550	40.19	36.40
CH134	5670	40.50	36.40

**TX CH102**

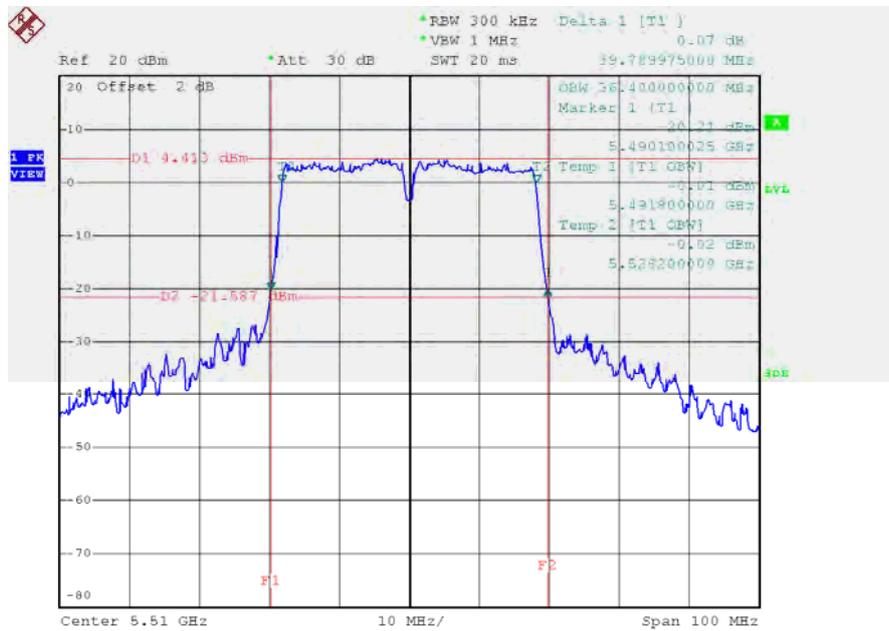


Date: 23.DEC.2015 17:04:00

### TX CH110

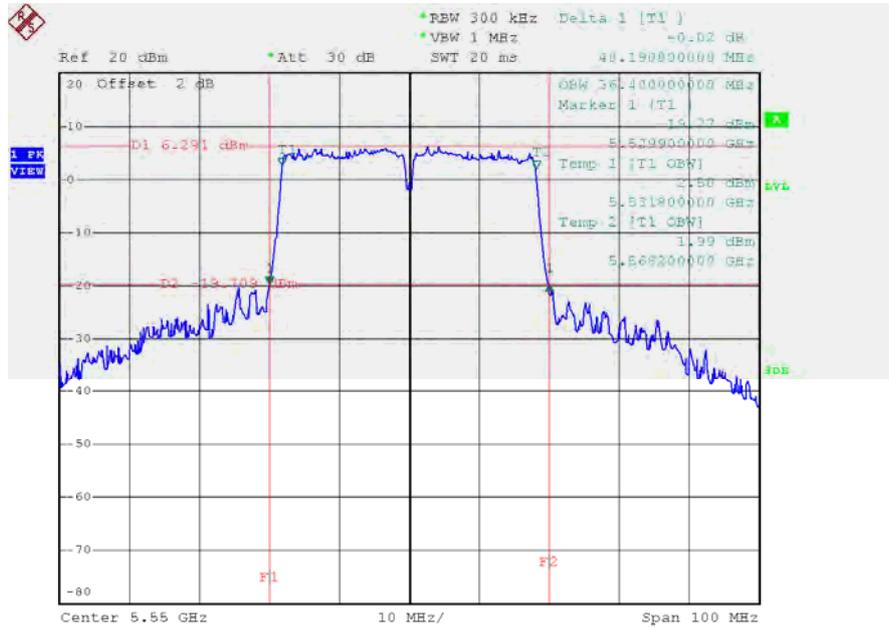

Date: 23.DEC.2015 17:05:04

### TX CH134

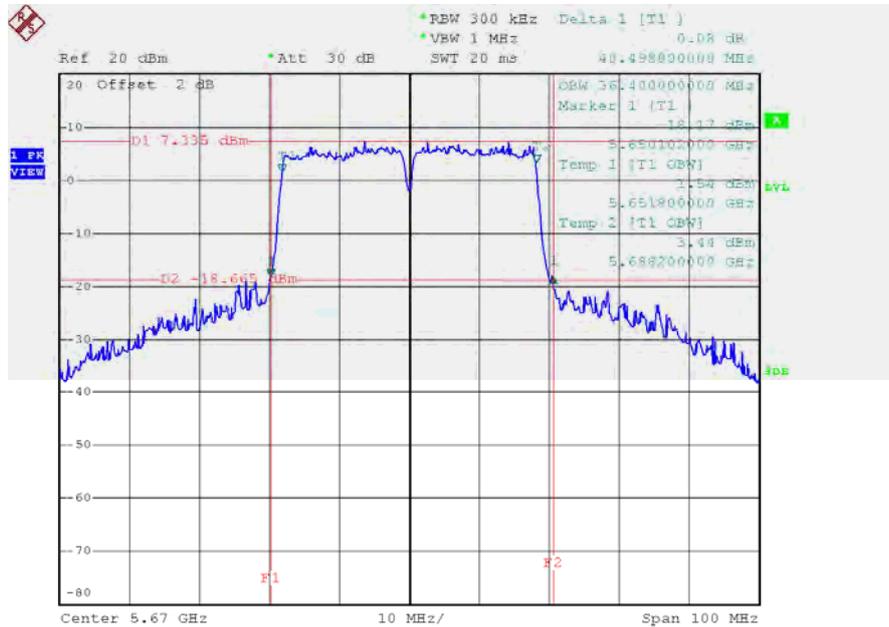


Date: 23.DEC.2015 17:06:47

**Test Mode: UNII-2C/TX AC80 Mode\_CH106/CH122**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	80.60	76.00
CH122	5610	82.20	76.00

### TX CH106

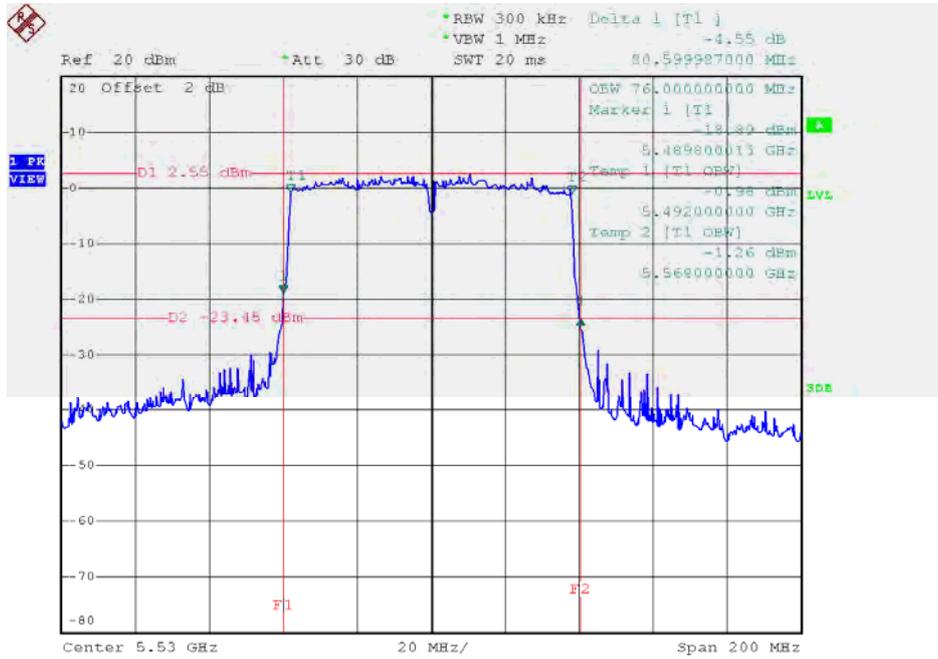

Date: 29.DEC.2015 11:09:49

### TX CH122

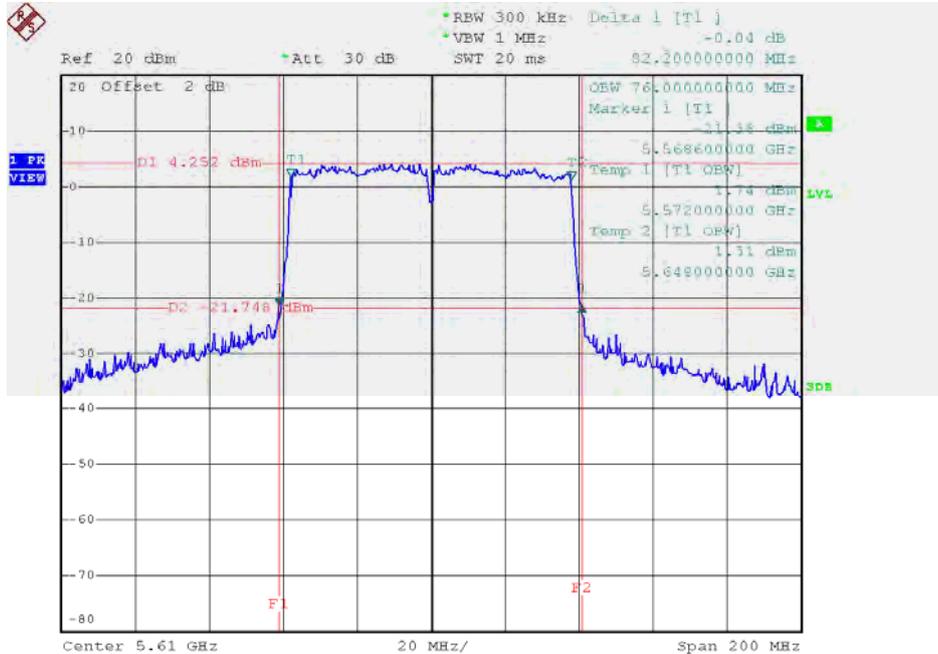


Date: 29.DEC.2015 11:10:44

**Test Mode: UNII-3/ TX AC20 Mode\_CH149/CH157/CH165**


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.65	17.60	>=500
CH157	5785	17.39	30.20	>=500
CH165	5825	17.65	17.70	>=500

**TX CH 149**

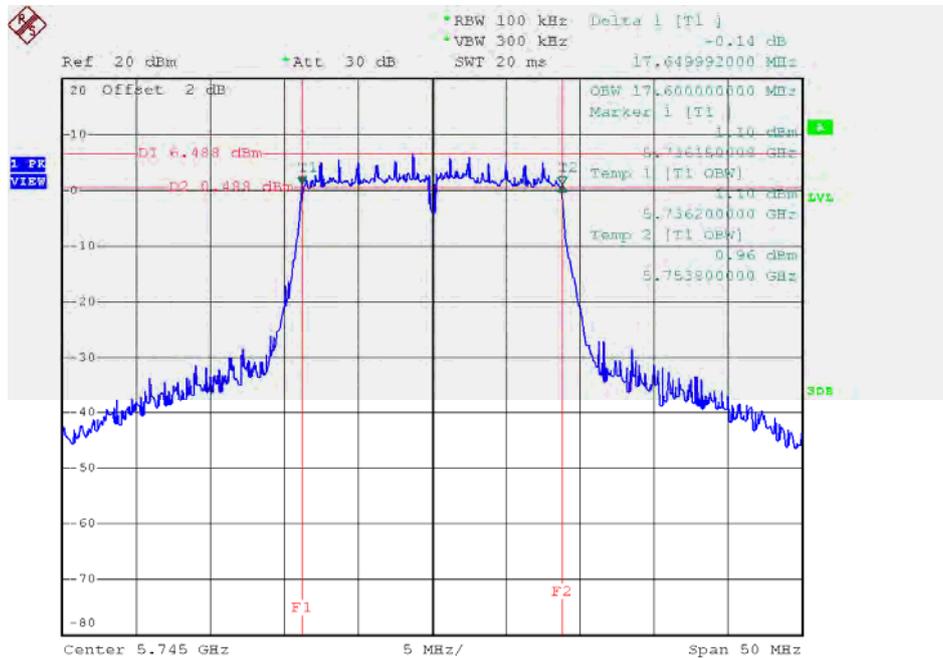


Date: 23.DEC.2015 16:46:24

### TX CH 157

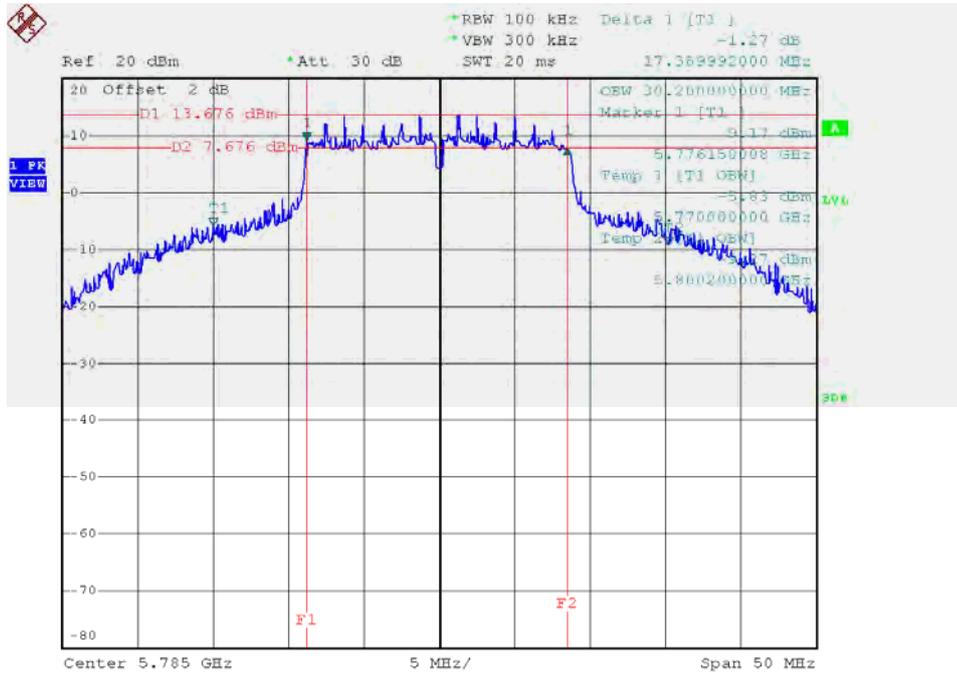

Date: 23.DEC.2015 16:47:42

### TX CH 165

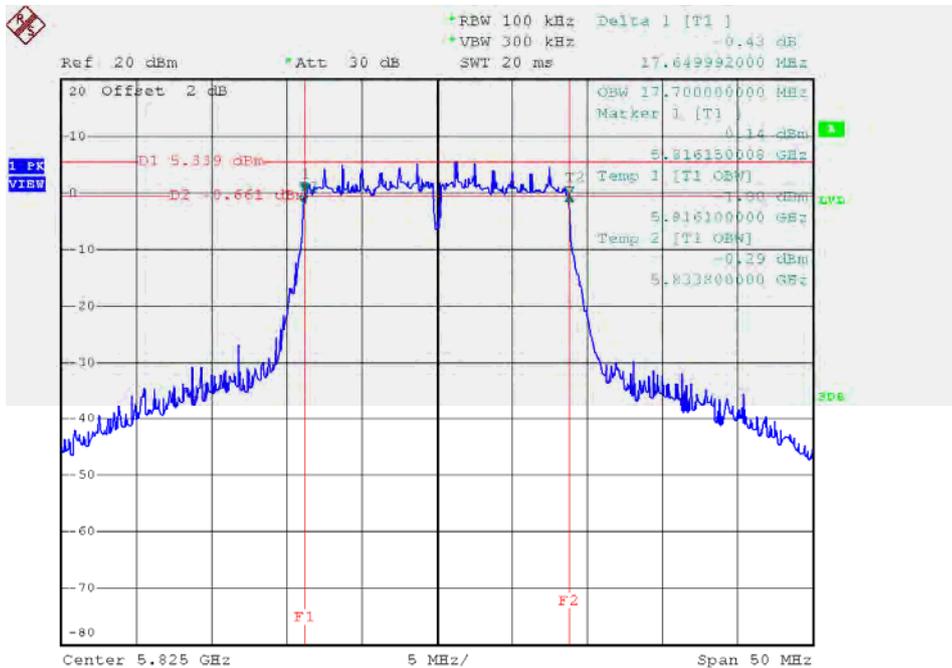


Date: 23.DEC.2015 16:48:40

**Test Mode: UNII-3/ TX AC40 Mode\_CH151/CH159**


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.60	36.40	>=500
CH159	5795	36.50	36.40	>=500

### TX CH 151

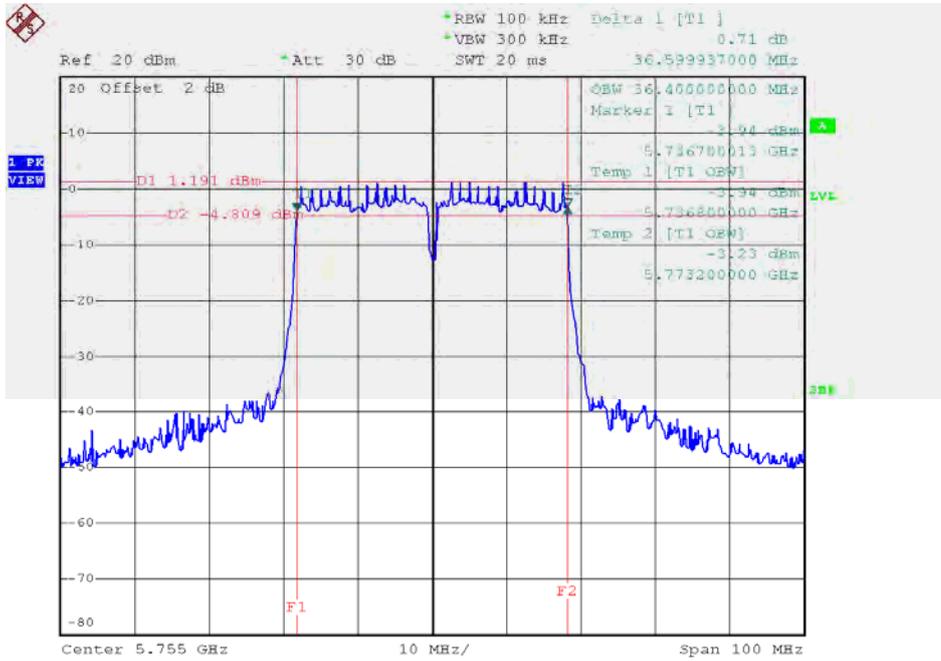

Date: 23.DEC.2015 17:09:03

### TX CH 159

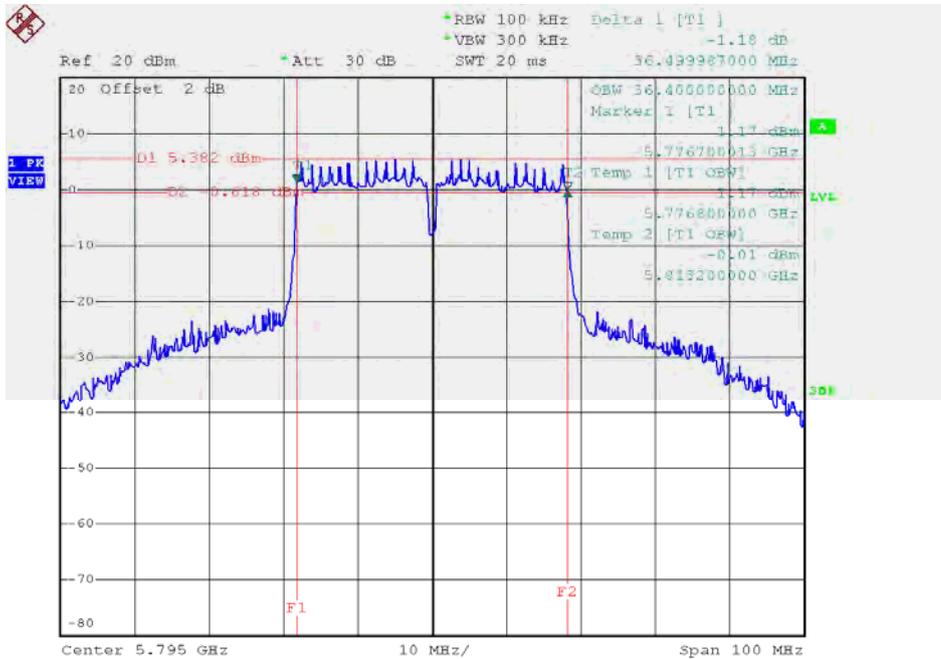


Date: 23.DEC.2015 17:15:32

**Test Mode: UNII-3/ TX AC80 Mode\_CH155**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	76.00	76.00	>=500

**TX CH 155**

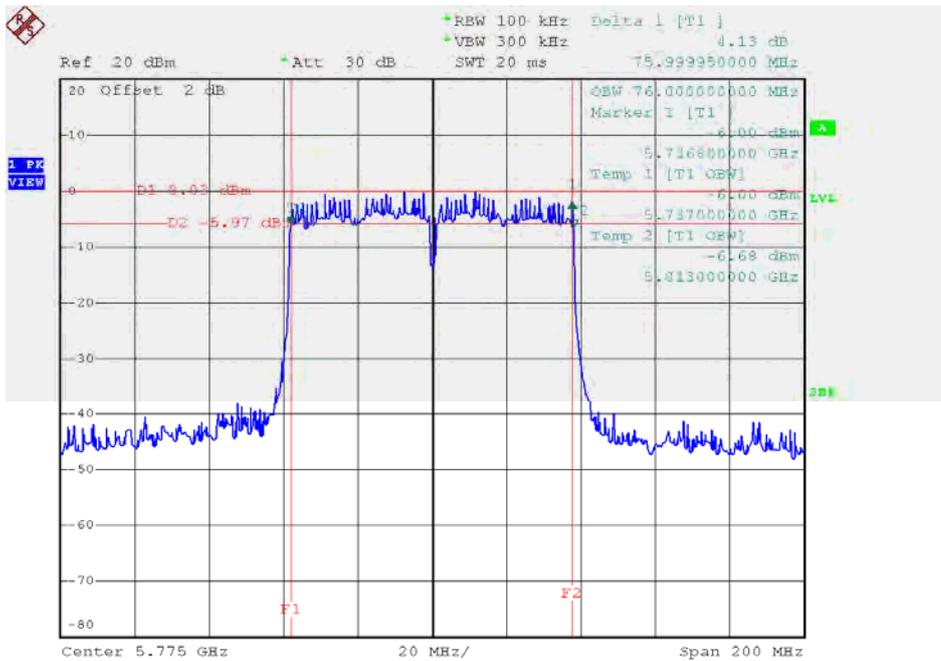

Date: 29.DEC.2015 11:11:55

## ATTACHMENT F - MAXIMUM OUTPUT POWER

**Test Mode: UNII-1/TX A Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.64	0.10	19.74	30.00	1.00
CH40	5200	19.02	0.10	19.12	30.00	1.00
CH48	5240	20.83	0.10	20.93	30.00	1.00

**Test Mode: UNII-1/TX N20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.69	0.26	14.95	30.00	1.00
CH40	5200	15.04	0.26	15.30	30.00	1.00
CH48	5240	17.09	0.26	17.35	30.00	1.00

**Test Mode: UNII-1/TX N20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.97	0.26	13.23	30.00	1.00
CH40	5200	13.59	0.26	13.85	30.00	1.00
CH48	5240	16.13	0.26	16.39	30.00	1.00

**Test Mode: UNII-1/TX N20 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.03	0.26	14.29	30.00	1.00
CH40	5200	15.31	0.26	15.57	30.00	1.00
CH48	5240	17.33	0.26	17.59	30.00	1.00

**Test Mode: UNII-1/TX N20 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	18.98	30.00	1.00
CH40	5200	19.74	30.00	1.00
CH48	5240	21.91	30.00	1.00

**Test Mode: UNII-1/TX N40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.64	1.29	15.93	30.00	1.00
CH46	5230	17.82	1.29	19.11	30.00	1.00

**Test Mode: UNII-1/TX N40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.04	1.29	14.33	30.00	1.00
CH46	5230	16.81	1.29	18.10	30.00	1.00

**Test Mode: UNII-1/TX N40 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.57	1.29	15.86	30.00	1.00
CH46	5230	18.32	1.29	19.61	30.00	1.00

**Test Mode: UNII-1/TX N40 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	20.20	30.00	1.00
CH46	5230	23.76	30.00	1.00

**Test Mode: UNII-1/TX A Mode**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.98	2.00	19.98	23.00	0.20
CH40	5200	17.41	2.00	19.41	23.00	0.20
CH48	5240	17.61	2.00	19.61	23.00	0.20

**Test Mode: UNII-1/TX N20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.19	2.00	14.19	23.00	0.20
CH40	5200	12.78	2.00	14.78	23.00	0.20
CH48	5240	11.80	2.00	13.80	23.00	0.20

**Test Mode: UNII-1/TX N20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	10.93	2.00	12.93	23.00	0.20
CH40	5200	11.50	2.00	13.50	23.00	0.20
CH48	5240	11.39	2.00	13.39	23.00	0.20

**Test Mode: UNII-1/TX N20 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.37	2.00	14.37	23.00	0.20
CH40	5200	13.10	2.00	15.10	23.00	0.20
CH48	5240	12.68	2.00	14.68	23.00	0.20

**Test Mode: UNII-1/TX N20 Mode\_Total**

Channel	Frequency (MHz)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	18.65	23.00	0.20
CH40	5200	19.28	23.00	0.20
CH48	5240	18.76	23.00	0.20

**Test Mode: UNII-1/TX N40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.95	2.00	16.95	23.00	0.20
CH46	5230	14.98	2.00	16.98	23.00	0.20

**Test Mode: UNII-1/TX N40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.50	2.00	15.50	23.00	0.20
CH46	5230	13.91	2.00	15.91	23.00	0.20

**Test Mode: UNII-1/TX N40 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.97	2.00	16.97	23.00	0.20
CH46	5230	15.36	2.00	17.36	23.00	0.20

**Test Mode: UNII-1/TX N40 Mode\_Total**

Channel	Frequency (MHz)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	21.30	23.00	0.20
CH46	5230	21.56	23.00	0.20

**Test Mode: UNII-2A/TX A Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.35	0.10	19.45	24.00	0.25
CH60	5300	20.22	0.10	20.32	24.00	0.25
CH64	5320	19.45	0.10	19.55	24.00	0.25

**Test Mode: UNII-2A/TX N20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.18	0.26	15.44	24.00	0.25
CH60	5300	15.56	0.26	15.82	24.00	0.25
CH64	5320	15.63	0.26	15.89	24.00	0.25

**Test Mode: UNII-2A/TX N20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.28	0.26	15.54	24.00	0.25
CH60	5300	16.23	0.26	16.49	24.00	0.25
CH64	5320	16.51	0.26	16.77	24.00	0.25

**Test Mode: UNII-2A/TX N20 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.56	0.26	15.82	24.00	0.25
CH60	5300	15.57	0.26	15.83	24.00	0.25
CH64	5320	15.48	0.26	15.74	24.00	0.25

**Test Mode: UNII-2A/TX N20 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	20.37	24.00	0.25
CH60	5300	20.83	24.00	0.25
CH64	5320	20.93	24.00	0.25

**Test Mode: UNII-2A/TX N40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.89	1.29	16.18	24.00	0.25
CH62	5310	14.53	1.29	15.82	24.00	0.25

**Test Mode: UNII-2A/TX N40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	13.82	1.29	15.11	24.00	0.25
CH62	5310	14.14	1.29	15.43	24.00	0.25

**Test Mode: UNII-2A/TX N40 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.03	1.29	16.32	24.00	0.25
CH62	5310	14.85	1.29	16.14	24.00	0.25

**Test Mode: UNII-2A/TX N40 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	20.67	24.00	0.25
CH62	5310	20.58	24.00	0.25

**Test Mode: UNII-2C/TX A Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	19.43	0.10	19.53	24.00	0.25
CH116	5580	20.46	0.10	20.56	24.00	0.25
CH140	5700	19.44	0.10	19.54	24.00	0.25

**Test Mode: UNII-2C/TX N20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.06	0.26	15.32	24.00	0.25
CH116	5580	15.11	0.26	15.37	24.00	0.25
CH140	5700	15.61	0.26	15.87	24.00	0.25

**Test Mode: UNII-2C/TX N20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	13.67	0.26	13.93	24.00	0.25
CH116	5580	15.14	0.26	15.40	24.00	0.25
CH140	5700	14.78	0.26	15.04	24.00	0.25

**Test Mode: UNII-2C/TX N20 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.31	0.26	15.57	24.00	0.25
CH116	5580	15.19	0.26	15.45	24.00	0.25
CH140	5700	14.83	0.26	15.09	24.00	0.25

**Test Mode: UNII-2C/TX N20 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	19.77	24.00	0.25
CH116	5580	20.18	24.00	0.25
CH140	5700	20.12	24.00	0.25

**Test Mode: UNII-2C/TX N40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.75	1.29	16.04	24.00	0.25
CH110	5550	17.03	1.29	18.32	24.00	0.25
CH134	5670	18.01	1.29	19.30	24.00	0.25

**Test Mode: UNII-2C/TX N40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	13.74	1.29	15.03	24.00	0.25
CH110	5550	16.73	1.29	18.02	24.00	0.25
CH134	5670	17.82	1.29	19.11	24.00	0.25

**Test Mode: UNII-2C/TX N40 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.21	1.29	16.50	24.00	0.25
CH110	5550	17.43	1.29	18.72	24.00	0.25
CH134	5670	17.34	1.29	18.63	24.00	0.25

**Test Mode: UNII-2C/TX N40 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	20.67	24.00	0.25
CH110	5550	23.13	24.00	0.25
CH134	5670	23.79	24.00	0.25

**Test Mode: UNII-3/ TX A Mode**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.81	0.10	19.98	30.00	1.00
CH157	5785	25.56	0.10	25.66	30.00	1.00
CH165	5825	16.78	0.10	16.88	30.00	1.00

**Test Mode: UNII-3/TX N20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.46	0.26	18.72	30.00	1.00
CH157	5785	24.16	0.26	24.42	30.00	1.00
CH165	5825	17.26	0.26	17.52	30.00	1.00

**Test Mode: UNII-3/TX N20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	16.42	0.26	16.68	30.00	1.00
CH157	5785	23.14	0.26	23.40	30.00	1.00
CH165	5825	16.34	0.26	16.60	30.00	1.00

**Test Mode: UNII-3/TX N20 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.23	0.26	18.49	30.00	1.00
CH157	5785	23.82	0.26	24.08	30.00	1.00
CH165	5825	17.83	0.26	18.09	30.00	1.00

**Test Mode: UNII-3/TX N20 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	22.83	30.00	1.00
CH157	5785	28.76	30.00	1.00
CH165	5825	22.22	30.00	1.00

**Test Mode: UNII-3/ TX N40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.34	1.29	16.63	30.00	1.00
CH159	5795	19.81	1.29	21.10	30.00	1.00

**Test Mode: UNII-3/ TX N40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	13.51	1.29	14.80	30.00	1.00
CH159	5795	18.51	1.29	19.80	30.00	1.00

**Test Mode: UNII-3/ TX N40 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.38	1.29	16.67	30.00	1.00
CH159	5795	20.11	1.29	21.40	30.00	1.00

**Test Mode: UNII-3/ TX N40 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	20.89	30.00	1.00
CH159	5795	25.59	30.00	1.00

**Test Mode: UNII-1/TX AC20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.03	0.13	14.16	30.00	1.00
CH40	5200	14.48	0.13	14.61	30.00	1.00
CH48	5240	21.48	0.13	21.61	30.00	1.00

**Test Mode: UNII-1/TX AC20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.29	0.13	12.42	30.00	1.00
CH40	5200	12.91	0.13	13.04	30.00	1.00
CH48	5240	20.32	0.13	20.45	30.00	1.00

**Test Mode: UNII-1/TX AC20 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	13.68	0.13	13.81	30.00	1.00
CH40	5200	14.81	0.13	14.94	30.00	1.00
CH48	5240	22.04	0.13	22.17	30.00	1.00

**Test Mode: UNII-1/TX AC20 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	18.30	30.00	1.00
CH40	5200	19.04	30.00	1.00
CH48	5240	26.24	30.00	1.00

**Test Mode: UNII-1/TX AC40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.42	1.03	15.45	30.00	1.00
CH46	5230	17.41	1.03	18.44	30.00	1.00

**Test Mode: UNII-1/TX AC40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.02	1.03	14.05	30.00	1.00
CH46	5230	16.53	1.03	17.56	30.00	1.00

**Test Mode: UNII-1/TX AC40 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.55	1.03	15.58	30.00	1.00
CH46	5230	17.91	1.03	18.94	30.00	1.00

**Test Mode: UNII-1/TX AC40 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	19.85	30.00	1.00
CH46	5230	23.12	30.00	1.00

**Test Mode: UNII-1/TX AC80 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	14.36	1.38	15.74	30.00	1.00

**Test Mode: UNII-1/TX AC80 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	13.09	1.38	14.47	30.00	1.00

**Test Mode: UNII-1/TX AC80 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	14.22	1.38	15.60	30.00	1.00

**Test Mode: UNII-1/TX AC80 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	20.08	30.00	1.00

**Test Mode: UNII-1/TX AC20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.30	2.00	14.30	23.00	0.20
CH40	5200	12.34	2.00	14.34	23.00	0.20
CH48	5240	11.65	2.00	13.65	23.00	0.20

**Test Mode: UNII-1/TX AC20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	10.97	2.00	12.97	23.00	0.20
CH40	5200	11.16	2.00	13.16	23.00	0.20
CH48	5240	10.99	2.00	12.99	23.00	0.20

**Test Mode: UNII-1/TX AC20 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.35	2.00	14.35	23.00	0.20
CH40	5200	12.81	2.00	14.81	23.00	0.20
CH48	5240	12.54	2.00	14.54	23.00	0.20

**Test Mode: UNII-1/TX AC20 Mode\_Total**

Channel	Frequency (MHz)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	18.69	23.00	0.20
CH40	5200	18.93	23.00	0.20
CH48	5240	18.54	23.00	0.20

**Test Mode: UNII-1/TX AC40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.94	2.00	16.94	23.00	0.20
CH46	5230	14.54	2.00	16.54	23.00	0.20

**Test Mode: UNII-1/TX AC40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.41	2.00	15.41	23.00	0.20
CH46	5230	13.41	2.00	15.41	23.00	0.20

**Test Mode: UNII-1/TX AC40 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.84	2.00	16.84	23.00	0.20
CH46	5230	15.09	2.00	15.09	23.00	0.20

**Test Mode: UNII-1/TX AC40 Mode\_Total**

Channel	Frequency (MHz)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	21.22	23.00	0.20
CH46	5230	20.50	23.00	0.20

**Test Mode: UNII-1/TX AC80 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	15.61	2.00	17.61	23.00	0.20

**Test Mode: UNII-1/TX AC80 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	14.15	2.00	16.15	23.00	0.20

**Test Mode: UNII-1/TX AC80 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Antenna Gain (dBi)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	15.40	2.00	17.40	23.00	0.20

**Test Mode: UNII-1/TX AC80 Mode\_Total**

Channel	Frequency (MHz)	RSS-247 EIRP Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	21.87	23.00	0.20

**Test Mode: UNII-2A/TX AC20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.51	0.13	14.64	24.00	0.25
CH60	5300	14.48	0.13	14.61	24.00	0.25
CH64	5320	14.43	0.13	14.56	24.00	0.25

**Test Mode: UNII-2A/TX AC20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.41	0.13	14.54	24.00	0.25
CH60	5300	15.41	0.13	15.54	24.00	0.25
CH64	5320	15.63	0.13	15.76	24.00	0.25

**Test Mode: UNII-2A/TX AC20 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.89	0.13	15.02	24.00	0.25
CH60	5300	14.42	0.13	14.55	24.00	0.25
CH64	5320	14.43	0.13	14.56	24.00	0.25

**Test Mode: UNII-2A/TX AC20 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.51	24.00	0.25
CH60	5300	19.70	24.00	0.25
CH64	5320	19.77	24.00	0.25

**Test Mode: UNII-2A/TX AC40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.91	1.03	15.94	24.00	0.25
CH62	5310	13.41	1.03	14.44	24.00	0.25

**Test Mode: UNII-2A/TX AC40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.07	1.03	15.10	24.00	0.25
CH62	5310	14.43	1.03	15.46	24.00	0.25

**Test Mode: UNII-2A/TX AC40 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.79	1.03	15.82	24.00	0.25
CH62	5310	13.41	1.03	14.44	24.00	0.25

**Test Mode: UNII-2A/TX AC40 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	20.41	24.00	0.25
CH62	5310	19.58	24.00	0.25

**Test Mode: UNII-2A/TX AC80 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	14.68	1.38	16.06	24.00	0.25

**Test Mode: UNII-2A/TX AC80 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	13.86	1.38	15.24	24.00	0.25

**Test Mode: UNII-2A/TX AC80 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	14.87	1.38	16.25	24.00	0.25

**Test Mode: UNII-2A/TX AC80 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	20.64	24.00	0.25

**Test Mode: UNII-2C/TX AC20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.49	0.13	14.62	24.00	0.25
CH116	5580	14.61	0.13	14.74	24.00	0.25
CH140	5700	15.42	0.13	15.55	24.00	0.25

**Test Mode: UNII-2C/TX AC20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	13.23	0.13	13.36	24.00	0.25
CH116	5580	14.54	0.13	14.67	24.00	0.25
CH140	5700	14.46	0.13	14.59	24.00	0.25

**Test Mode: UNII-2C/TX AC20 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.86	0.13	14.99	24.00	0.25
CH116	5580	14.76	0.13	14.89	24.00	0.25
CH140	5700	14.71	0.13	14.84	24.00	0.25

**Test Mode: UNII-2C/TX AC20 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	19.15	24.00	0.25
CH116	5580	19.54	24.00	0.25
CH140	5700	19.78	24.00	0.25

**Test Mode: UNII-2C/TX AC40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.12	1.03	15.15	24.00	0.25
CH110	5550	16.25	1.03	17.28	24.00	0.25
CH134	5670	17.83	1.03	18.86	24.00	0.25

**Test Mode: UNII-2C/TX AC40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	12.91	1.03	13.94	24.00	0.25
CH110	5550	15.91	1.03	16.94	24.00	0.25
CH134	5670	17.72	1.03	18.75	24.00	0.25

**Test Mode: UNII-2C/TX AC40 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.42	1.03	15.45	24.00	0.25
CH110	5550	16.81	1.03	17.84	24.00	0.25
CH134	5670	17.53	1.03	18.56	24.00	0.25

**Test Mode: UNII-2C/TX AC40 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	19.67	24.00	0.25
CH110	5550	22.14	24.00	0.25
CH134	5670	23.50	24.00	0.25

**Test Mode: UNII-2C/TX AC80 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	15.26	1.38	16.64	24.00	0.25
CH122	5610	17.28	1.38	18.66	24.00	0.25

**Test Mode: UNII-2C/TX AC80 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	14.15	1.38	15.53		0.25
CH122	5610	16.88	1.38	18.26	24.00	0.25

**Test Mode: UNII-2C/TX AC80 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	15.50	1.38	16.88	24.00	0.25
CH122	5610	17.87	1.38	19.25	24.00	0.25

**Test Mode: UNII-2C/TX AC80 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	21.16	24.00	0.25
CH122	5610	23.51	24.00	0.25

**Test Mode: UNII-3/TX AC20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	17.43	0.13	17.56	30.00	1.00
CH157	5785	23.25	0.13	23.38	30.00	1.00
CH165	5825	16.43	0.13	16.56	30.00	1.00

**Test Mode: UNII-3/TX AC20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.31	0.13	15.44	30.00	1.00
CH157	5785	21.35	0.13	21.48	30.00	1.00
CH165	5825	15.55	0.13	15.68	30.00	1.00

**Test Mode: UNII-3/TX AC20 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	17.34	0.13	17.47	30.00	1.00
CH157	5785	22.32	0.13	22.45	30.00	1.00
CH165	5825	16.93	0.13	17.06	30.00	1.00

**Test Mode: UNII-3/TX AC20 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	21.70	30.00	1.00
CH157	5785	27.28	30.00	1.00
CH165	5825	21.24	30.00	1.00

**Test Mode: UNII-3/TX AC40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.82	1.03	15.85	30.00	1.00
CH159	5795	18.81	1.03	19.84	30.00	1.00

**Test Mode: UNII-3/TX AC40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	13.17	1.03	14.20	30.00	1.00
CH159	5795	17.51	1.03	18.54	30.00	1.00

**Test Mode: UNII-3/TX AC40 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.02	1.03	16.05	30.00	1.00
CH159	5795	19.17	1.03	20.20	30.00	1.00

**Test Mode: UNII-3/TX AC40 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	20.21	30.00	1.00
CH159	5795	24.35	30.00	1.00

**Test Mode: UNII-3/TX AC80 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	16.38	1.38	17.76	30.00	1.00

**Test Mode: UNII-3/TX AC80 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	15.22	1.38	16.60	30.00	1.00

**Test Mode: UNII-3/TX AC80 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	16.01	1.38	17.39	30.00	1.00


**Test Mode: UNII-3/TX AC80 Mode\_Total**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	22.05	30.00	1.00

## **ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION**


Test Mode: UNII-1/TX A Mode

### TX mode CH36

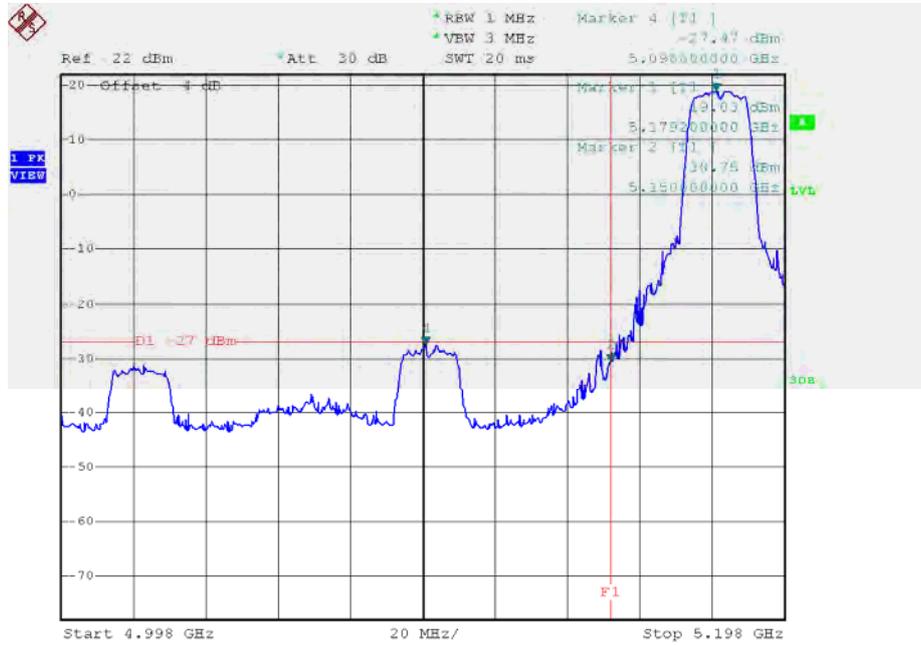

Date: 18.DEC.2015 17:12:13


### TX mode CH48

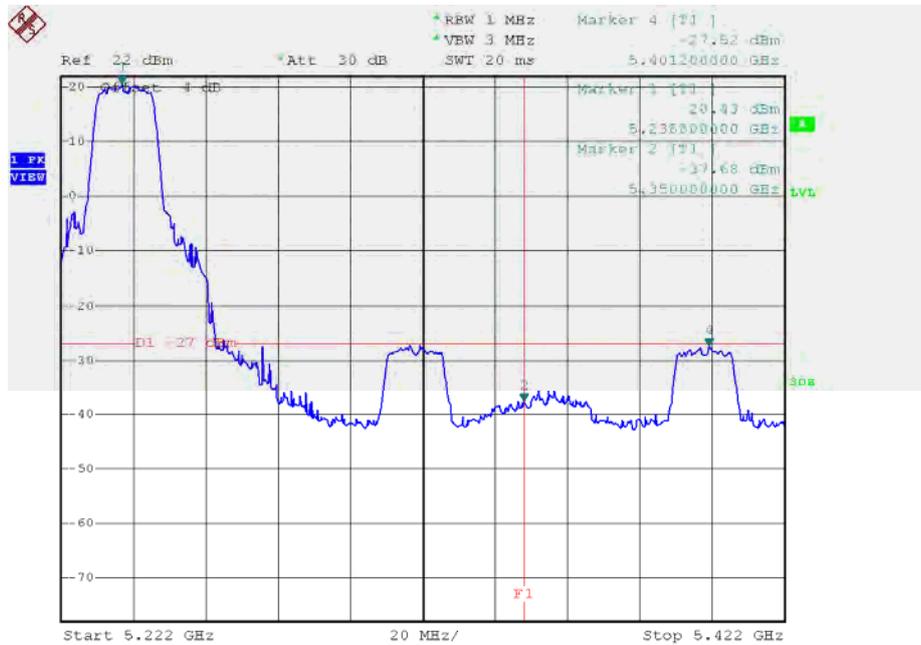

Date: 18.DEC.2015 15:38:29


Test Mode: UNII-1/TX N20 Mode\_ANT 1

### TX mode CH36

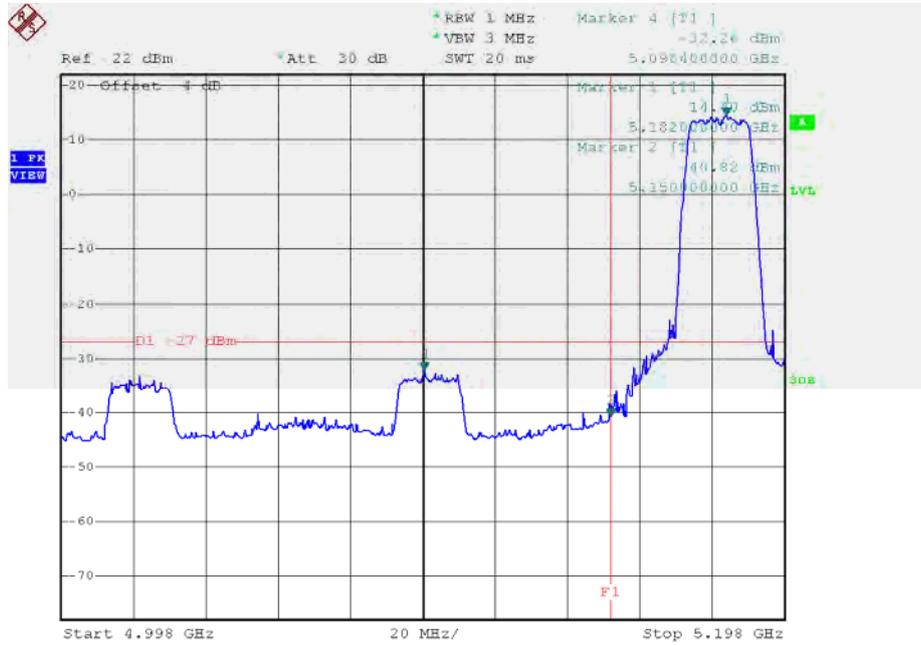

Date: 18.DEC.2015 17:13:10


### TX mode CH48

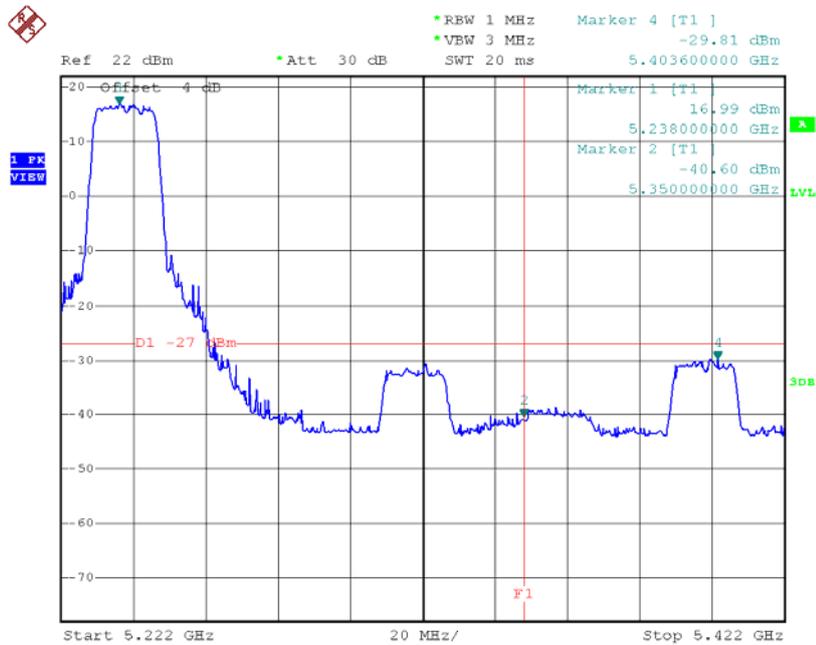

Date: 18.DEC.2015 17:21:44


**Test Mode:** UNII-1/TX N20 Mode\_ANT 2

**TX mode CH36**

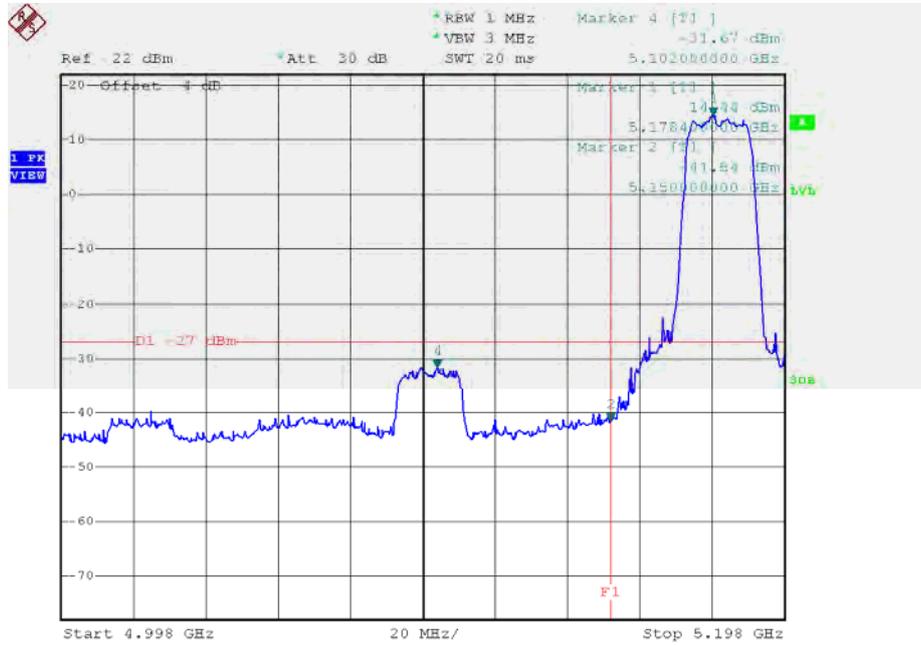

Date: 18.DEC.2015 17:13:52


**TX mode CH48**

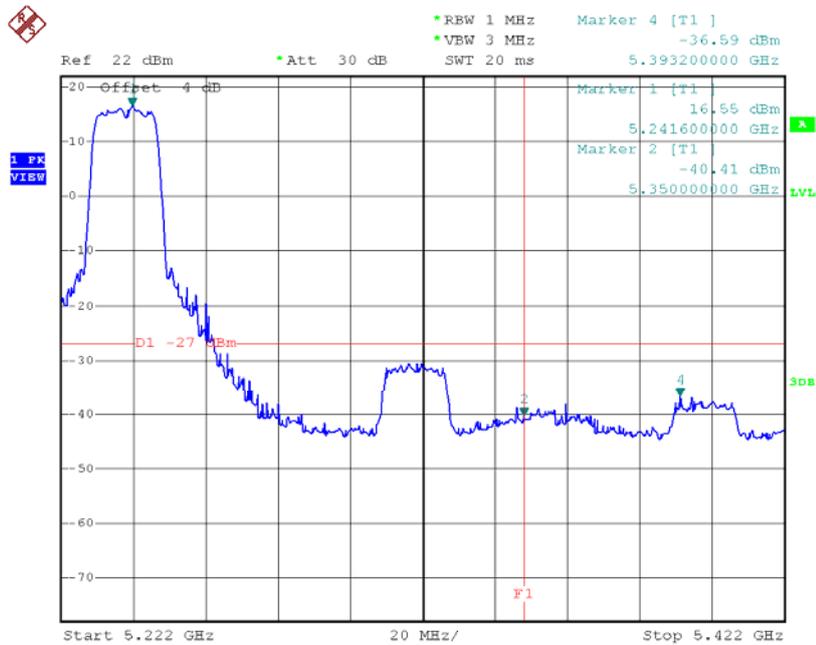

Date: 18.DEC.2015 17:21:13


**Test Mode:** UNII-1/TX N20 Mode\_ANT 3

**TX mode CH36**

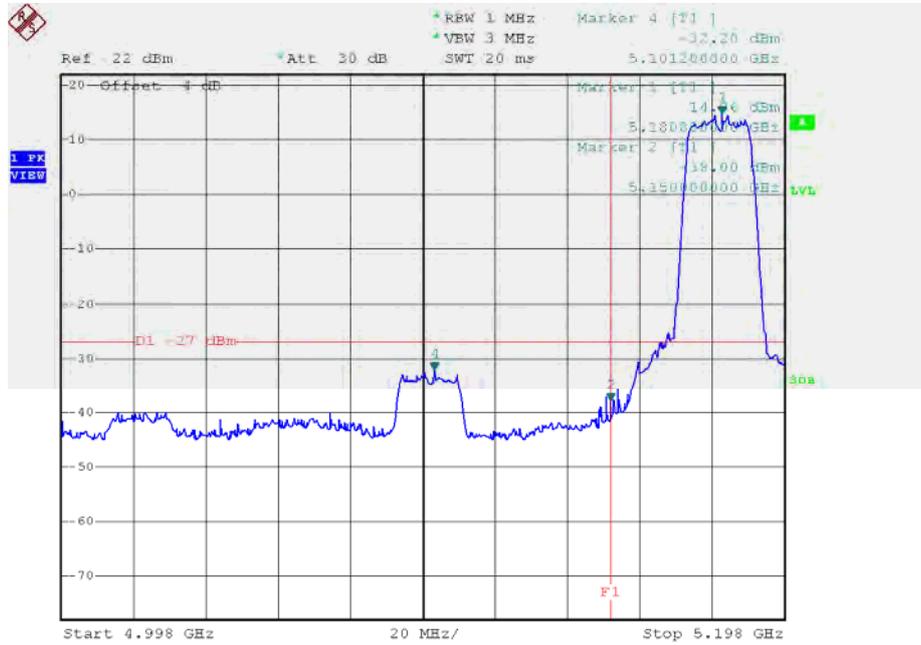

Date: 18.DEC.2015 17:14:21


**TX mode CH48**

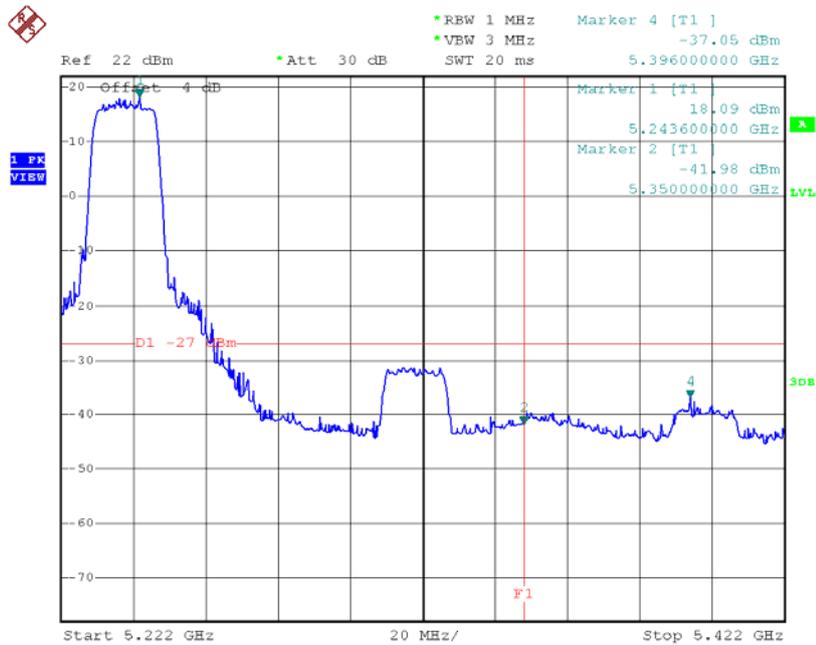

Date: 18.DEC.2015 17:20:10


**Test Mode:** UNII-1/TX N40 Mode\_ANT 1

**TX mode CH38**

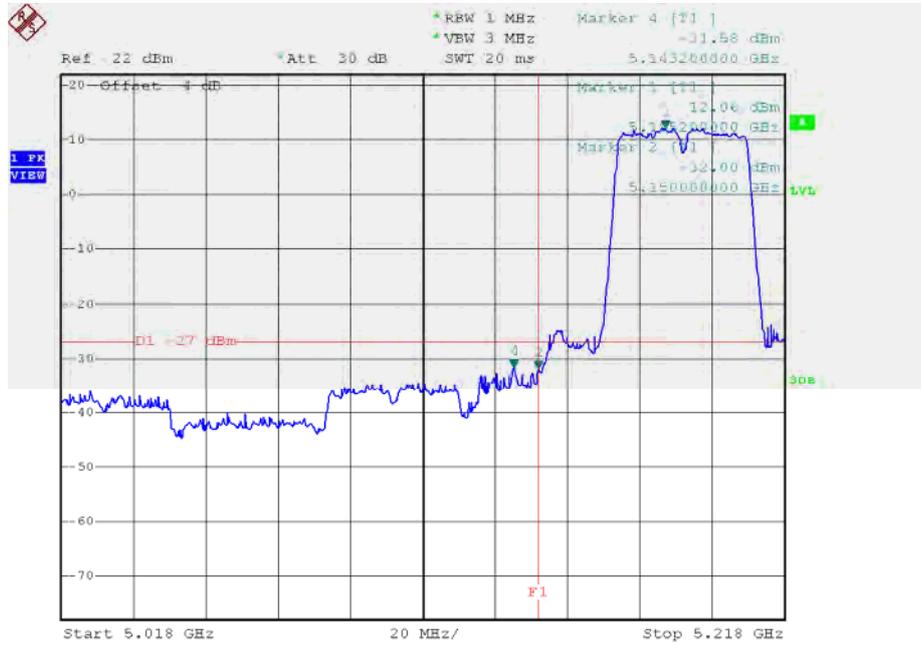

Date: 19.DEC.2015 15:53:31


**TX mode CH46**

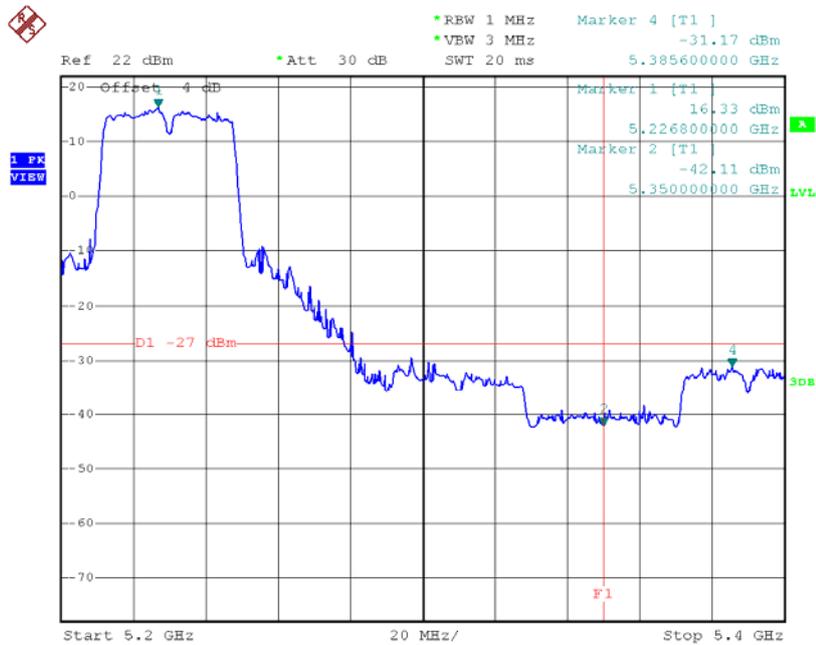

Date: 19.DEC.2015 15:55:53


**Test Mode:** UNII-1/TX N40 Mode\_ANT 2

**TX mode CH38**

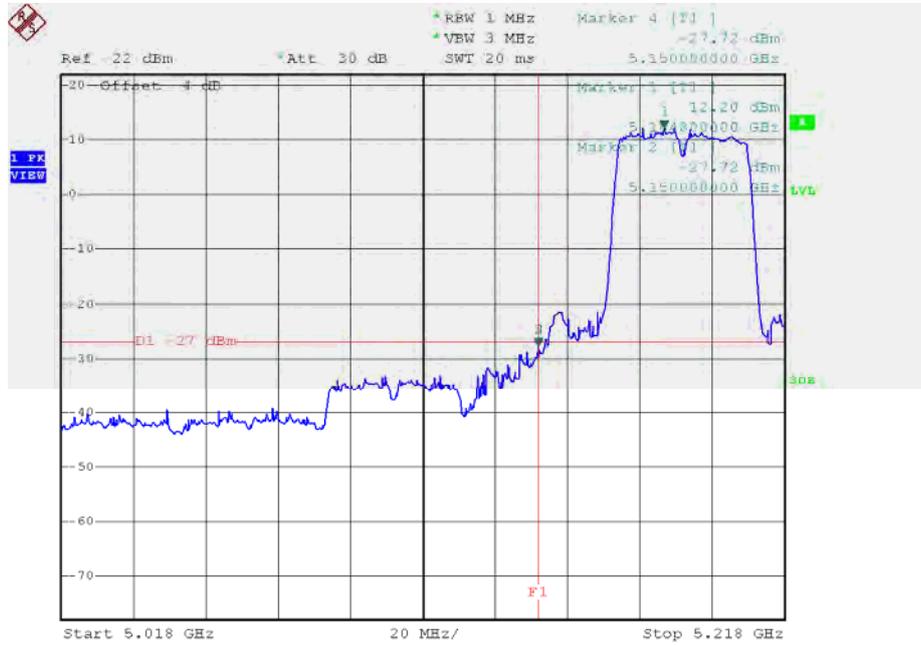

Date: 19.DEC.2015 15:53:00


**TX mode CH46**

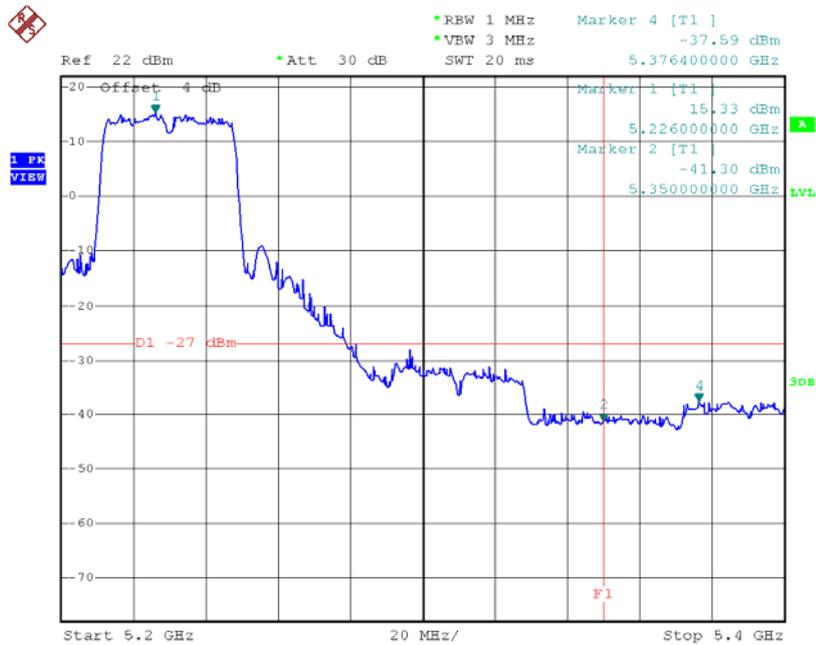

Date: 19.DEC.2015 15:56:34


**Test Mode:** UNII-1/TX N40 Mode\_ANT 3

**TX mode CH38**

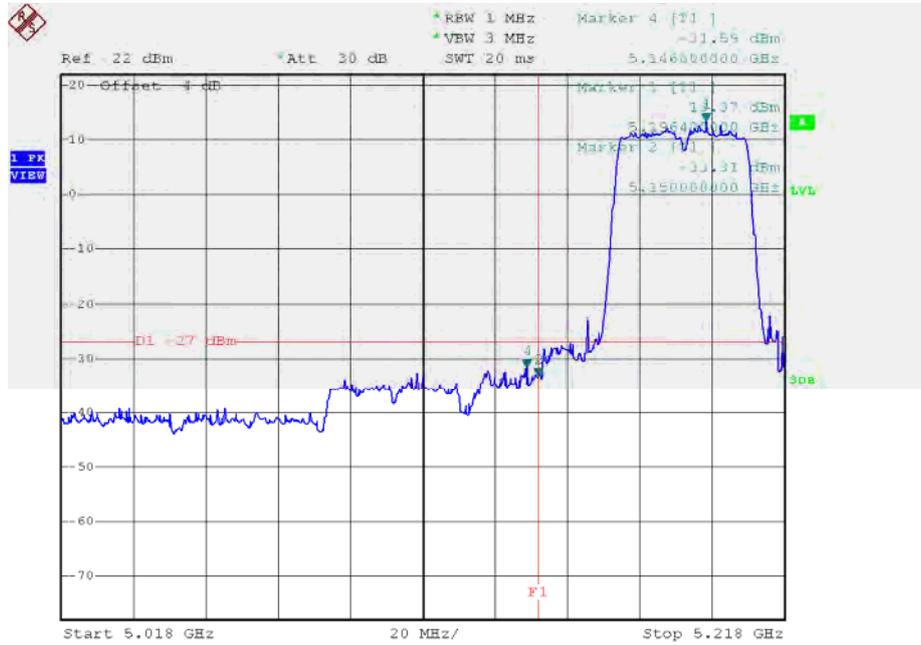

Date: 19.DEC.2015 15:52:06


**TX mode CH46**

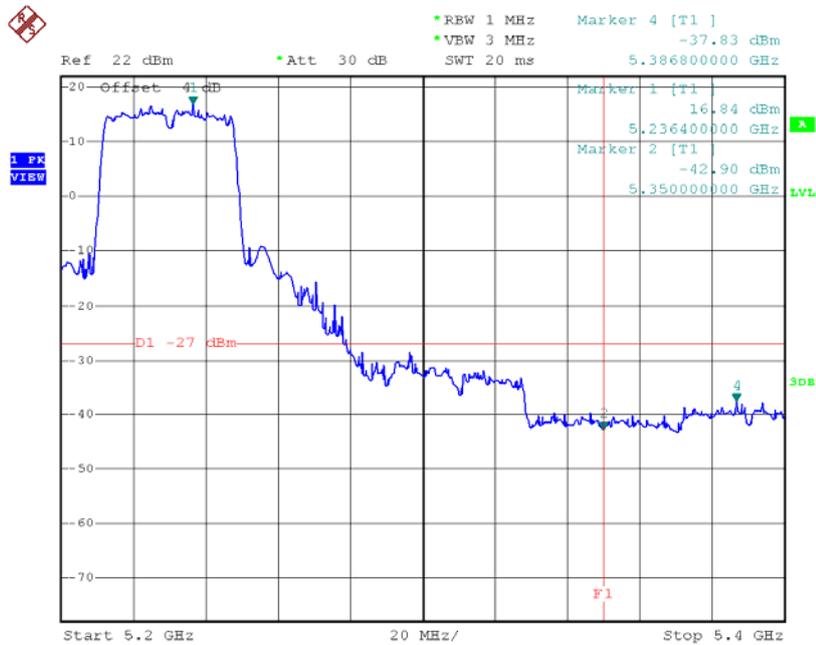

Date: 19.DEC.2015 15:57:01


**Test Mode:** UNII-2A/TX A Mode

**TX mode CH52**

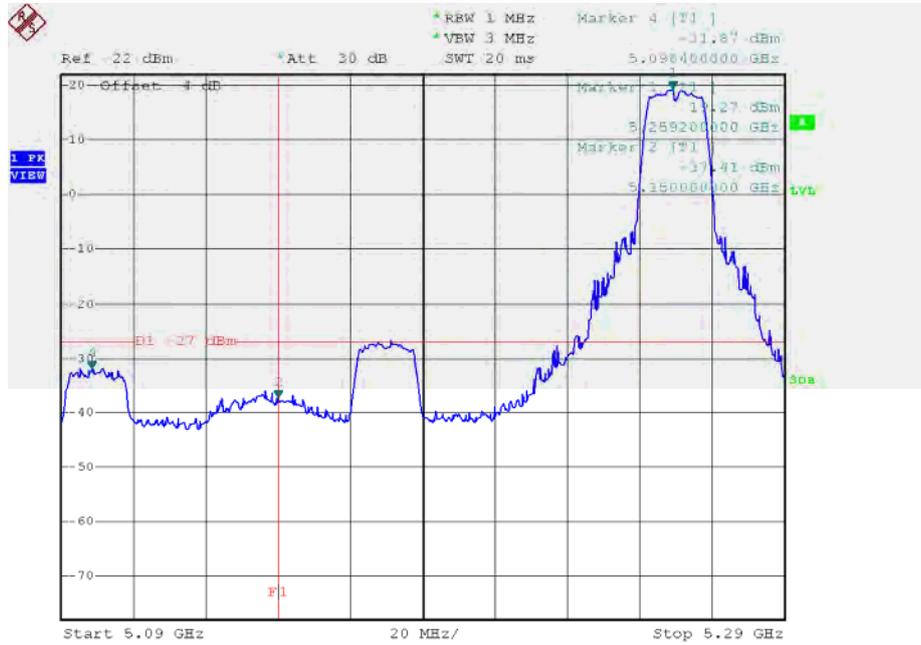

Date: 18.DEC.2015 15:40:29


**TX mode CH64**

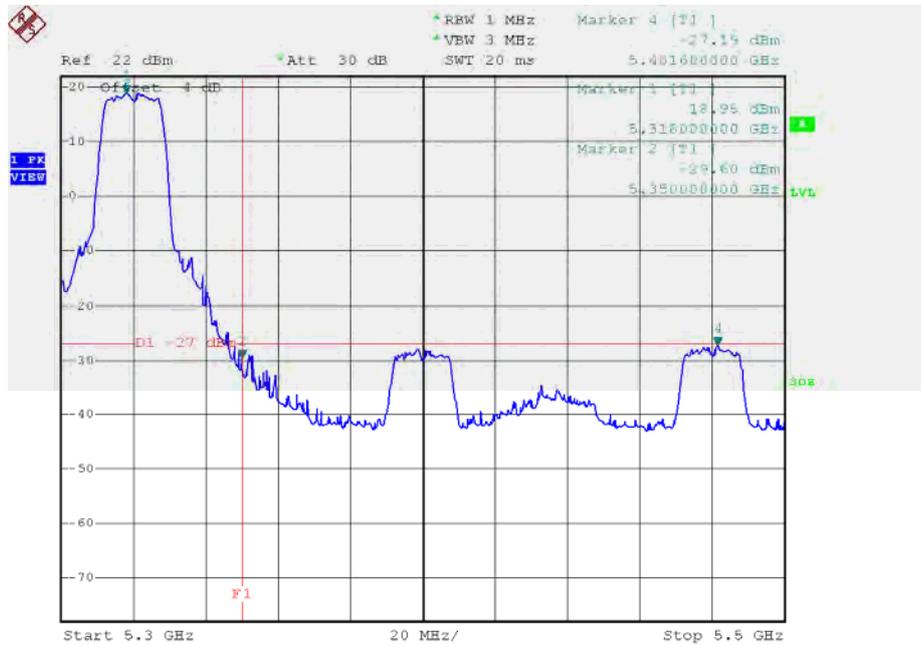

Date: 18.DEC.2015 15:43:12


Test Mode: UNII-2A/TX N20 Mode\_ANT 1

### TX mode CH52

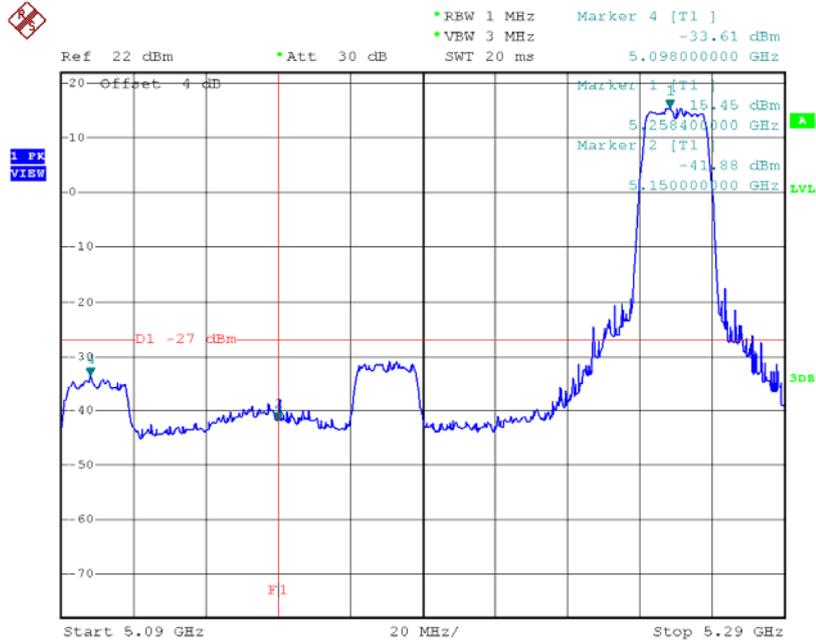

Date: 18.DEC.2015 17:47:40


### TX mode CH64

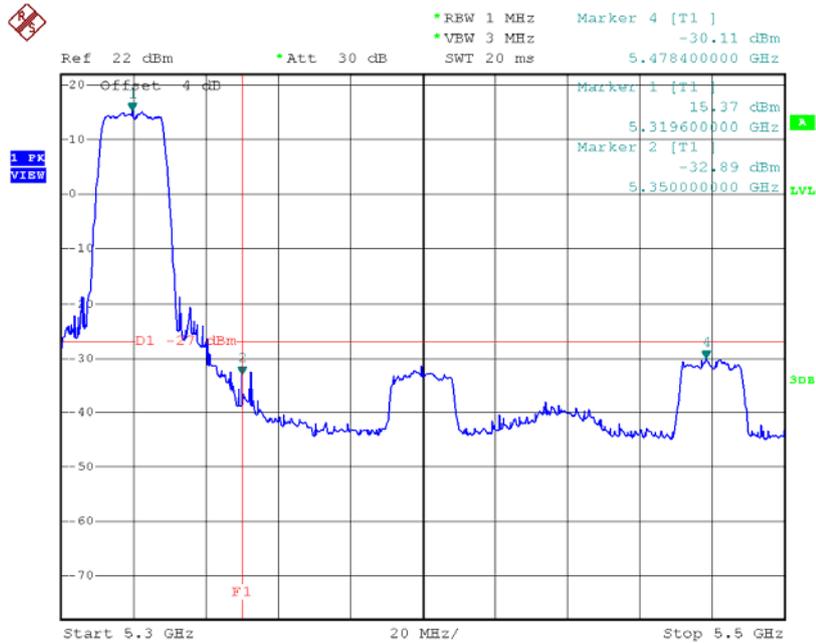

Date: 18.DEC.2015 17:57:17


Test Mode: UNII-2A/TX N20 Mode\_ANT 2

### TX mode CH52

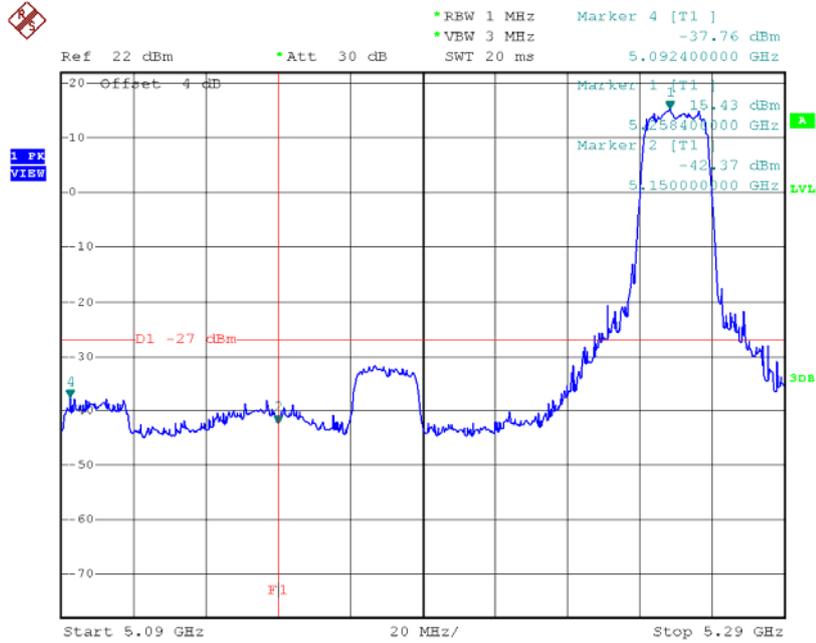

Date: 18.DEC.2015 17:48:27

### TX mode CH64

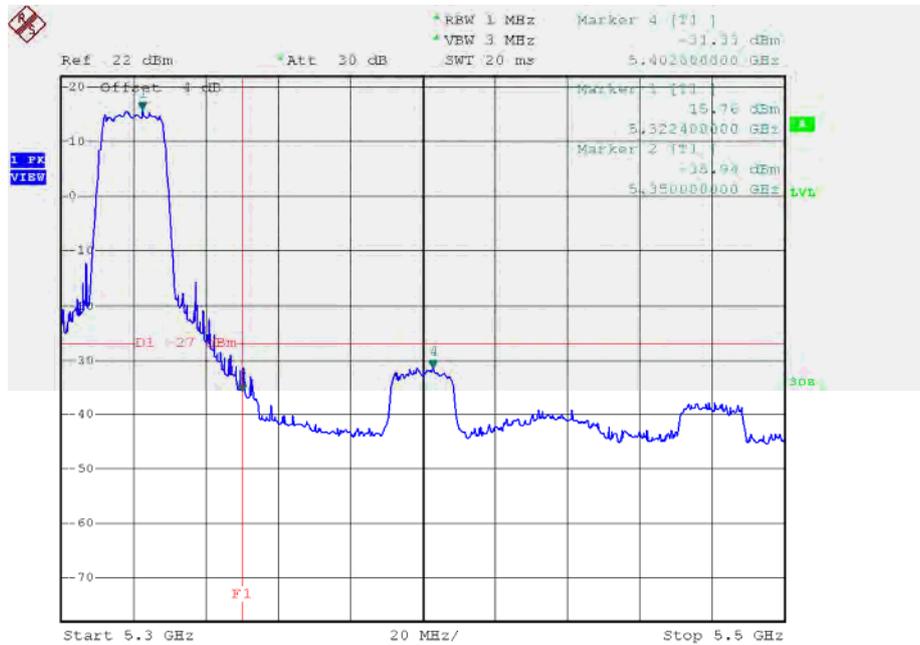

Date: 18.DEC.2015 17:57:44