


User's Manual

For Model:JW-001

Jingle World Company Ltd. Touch Sensor Switch Usage Manual

(一) Wiring Chart :

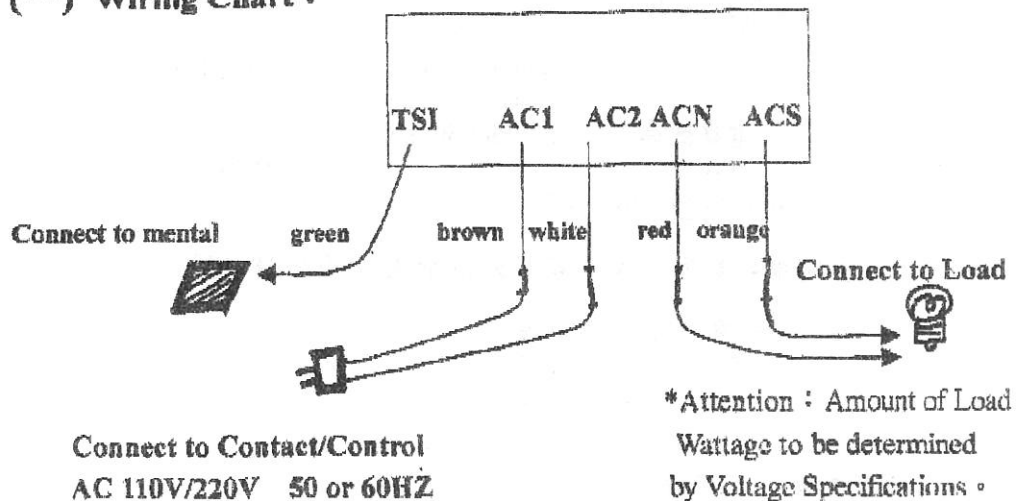

(二) Electrical Character :

Description Item		Minimum	Maximum
AC Supply Voltage		110 V	220 V
AC Supply Frequency		40 HZ	70 HZ
Power Consumption	AC 110 V	0.4 W	0.6 W
	AC 220 V	0.8 W	1.0 W
Output Power	AC 110 V	—	80 W
	AC 220 V	—	120 W
Input Impedance From TSI to AC1 or AC2		9.5 MΩ	11MΩ
The Response. Time of Touch switch		30 ms	100 ms

(三) Introduction of Product Function and specifications :

This Contact/Control Switch can be used with tungsten filament bulbs , energy saving bulbs , and fluorescent bulbs . The outer appearance is rectangular . The length is about 6cm , width about 3.6cm , height about 1.9cm , and weight about 39g . The material used for the outer covering is environmentally friendly and can be recycled . The outer enhancing the safety of the switch and extending its life .

FCC Warning Statement

This product may cause interference to radio equipment and should not be installed near maritime safety communications equipment or other critical navigation or communication equipment operating between 0.45 – 30 MHz. This device complies with Part 18 of the FCC rules.