

	Date	Doc No.	Rev No.	File Name	Page
	2003/06/25	YRT-030625-1	1.0	Tune_Up.doc	1/1
Report by Ji-Hyo Kim	Approve by	Document control Manager Kong-Hoe Hur		Type of Document Technical Document	
Title : Tune up Procedure of 20W High Power RF Repeater System					

Tune up Procedure of 20W High Power RF Repeater System

JUN / 2003

	Date	Doc No.	Rev No.	File Name	Page
	2003/06/25	YRT-030625-1	1.0	Tune_Up.doc	2/2
Report by Ji-Hyo Kim	Approve by	Document control Manager Kong-Hoe Hur		Type of Document Technical Document	
Title : Tune up Procedure of 20W High Power RF Repeater System					

CONTENTS

1. Tune Up Procedure for Forward Link	3
1.1. Maximum Output Power, System Gain and Gain Control.....	3
1.1.1. Object.....	3
1.1.2. Standard	3
1.1.3. Instrument List	3
1.1.4. Calibration Procedure	3
1.1.5. Test Configuration Diagram	5
1.1.6. Test Procedure	5
1.2. Gain Control Test.....	7
1.2.1. Object.....	7
1.2.2. Standard	7
1.2.3. Instrument List	7
1.2.4. Test Configuration Diagram	7
1.2.5. Test Procedure	8
2. Tune Up Procedure for Reverse Link	9
2.1. Maximum Output Power, System Gain and Gain Control.....	9
2.1.1. Object.....	9
2.1.2. Standard	9
2.1.3. Instrument List	9
2.1.4. Calibration Procedure	9
2.1.5. Test Configuration Diagram	11
2.1.6. Test Procedure	11
2.2. Gain Control Test.....	13
2.2.1. Object.....	13
2.2.2. Standard	13
2.2.3. Instrument List	13
2.2.4. Test Configuration Diagram	13
2.2.5. Test Procedure	14

YURASYS		Date 2003/06/25	Doc No. YRT-030625-1	Rev No. 1.0	File Name Tune_Up.doc	Page 3/3
Report by Ji-Hyo Kim	Approve by	Document control Manager Kong-Hoe Hur			Type of Document Technical Document	
Title : Tune up Procedure of 20W High Power RF Repeater System						

1. Tune Up Procedure for Forward Link

1.1. Maximum Output Power, System Gain and Gain Control

1.1.1. Object

The characteristics of Maximum Output Power and System Gain shall meet the standard specification

1.1.2. Standard

Input Power	Output Power	Error
-52dBm/1FA	43dBm/1FA	-2dB ~ +2dB

Gain	Error
95 dB	< 7 2dB

1.1.3. Instrument List

- 1) HP8563E Spectrum Analyzer 1 Set
- 2) HP4432B Digital Signal Generator 1 Set
- 3) Power Meter 1 set and Power sensor 1 set
- 4) High Power 30dB Attenuator 1 EA (Over 100W) 1 Set
- 5) Cable Set
- 6) N-type(F) to N-type(F) Connector 1 Set

1.1.4. Calibration Procedure

- 1) Set System as follow Figure 1.

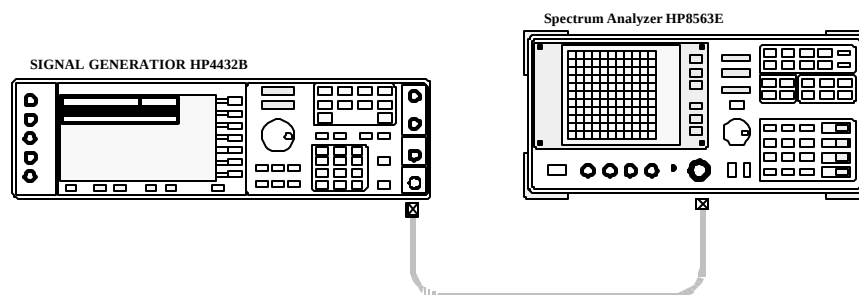


Figure 1 Signal Generator Calibration Configuration for Forward Link

- 2) Set Signal Generator as below.
 - (1) Frequency: 1932.5MHz
 - (2) Amplitude: -10dBm
 - (3) Mode > CDMA Formats > IS-95
 - (4) Multi carrier Define > Carrier: 9CH, 3 Carriers
 - (5) Offset Frequency: -1.25MHz, +1.25MHz
 - (6) CDMA: ON, Mult -Carrier: Off
 - (7) Amp Offset: 0dB

YURASYS

Date 2003/06/25	Doc No. YRT-030625-1	Rev No. 1.0	File Name Tune_Up.doc	Page 4/4
Report by Ji-Hyo Kim	Approve by	Document control Manager Kong-Hoe Hur	Type of Document Technical Document	
Title : Tune up Procedure of 20W High Power RF Repeater System				

- (8) Mod: On, RF: On
- 3) Set Spectrum Analyzer as below.
 - (1) Center Frequency: 1932.5MHz
 - (2) Span: 10MHz
 - (3) RBW: 30KHz, VBW: 300Hz
 - (4) Amplitude
 - ATTN: 10dB
 - REF LVL: 0dBm
 - (5) Set to Channel Power Mode
 - (6) Channel Bandwidth > 1.25MHz
- 4) Set Input Cable loss offset to Signal Generator
- 5) Set more Offset to Signal Generator the difference between the Amplitude of Signal Generator and the Power level of Spectrum Analyzer.
 - Ampl > More (1 of 2) > Ampl Offset : TBD
- 6) Set System as follow Figure 2.

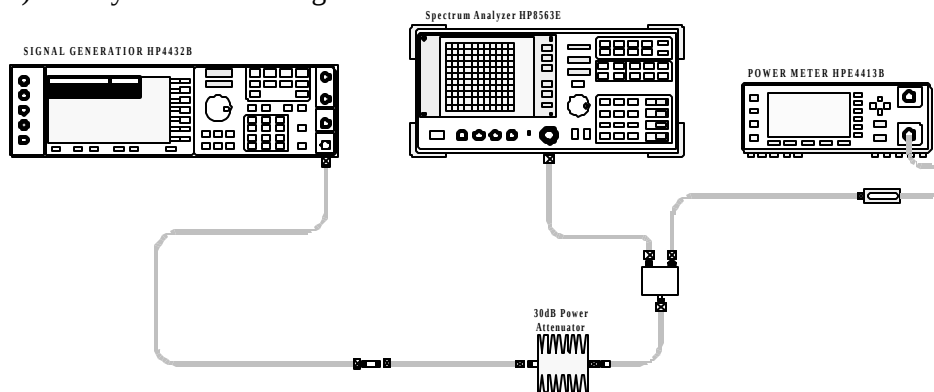


Figure 2 Spectrum Analyzer Calibration Configuration for Forward Link

- 7) Set Output cable loss offset to Spectrum Analyzer
- 8) Set more Offset to Spectrum Analyzer and Power Meter the difference between the Amplitude of Signal Generator and the power level of Power Meter.: Amplitude > More (1 of 2) > REF LVL OFFSET : TBD
- 9) Set signal Generator as below
 - RF: OFF
- 10) Record the Offset data of Signal Generator and Spectrum Analyzer

Date 2003/06/25	Doc No. YRT-030625-1	Rev No. 1.0	File Name Tune_Up.doc	Page 5/5
Drawn by	Document control Manager Kong-Hoe Hur		Type of Document Technical Document	
High Power RF Repeater System				

1.1.5. Test Configuration Diagram

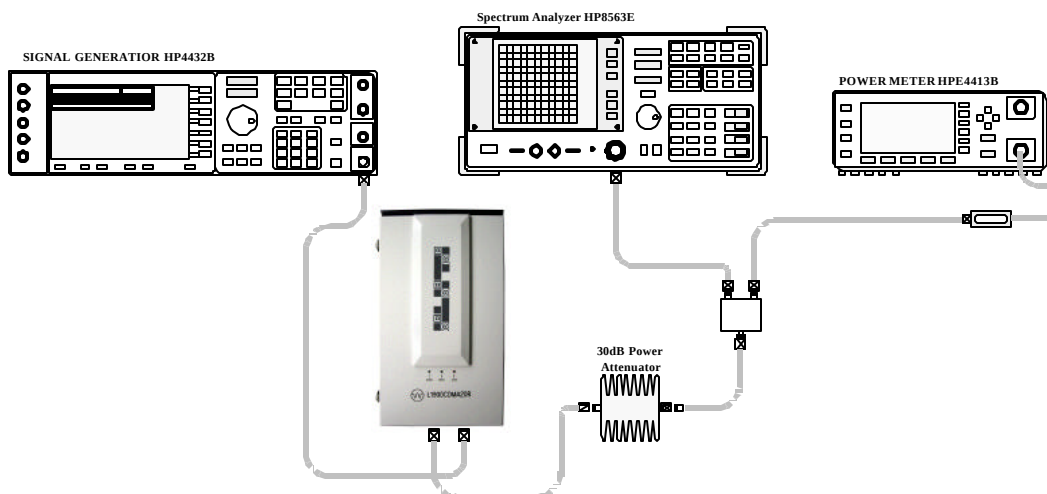


Figure 3 System Configuration Diagram with Spectrum Analyzer for forward link

1.1.6. Test Procedure

- Set system as Figure 3.
(Connect: Signal Generator – RX-OUT, Spectrum Analyzer – TX-OUT)

User Control Values

Repeater ID	3424636	Alarm Reset
Repeater Type	51	Update RTC
System Version	0	Read Record
Over Temp	70 °C	Change GT 1
	FWD	RVS
HPA Power	OFF	ON
ALC	OFF	OFF
Temp. Comp.	OFF	OFF
ALC level	44	30 dBm
Ovr Pwr Level	46	33 dBm
ATT	30	0 dB
Band	C3	B3
Set	Cancel	

Figure 1 Control Window GUI

YURASYS

Date 2003/06/25	Doc No. YRT-030625-1	Rev No. 1.0	File Name Tune_Up.doc	Page 6/6
Report by Ji-Hyo Kim	Approve by Document control Manager Kong-Hoe Hur	Type of Document Technical Document		
Title : Tune up Procedure of 20W High Power RF Repeater System				

- 2) Set the Forward Link of Repeater System to maximum gain (= ATT: 0dB) with Laptop or Key Pad, and HPA (FWD): ON, select A1 band, ALC: Off and Temp. Comp: Off (Please refer to Operating Manual)
- 3) Set Signal Generator as below
 - Amplitude: -52dBm
 - RF: ON
- 4) Set Spectrum Analyzer as below
 - ATTEN: 30dB
 - REF LVL: +50dBm
- 5) Measure and record the output power on Power Meter.
- 6) Calculate and record the system gain

- 7) Set Signal Generator as below;
 - Frequency: 1962.5MHz
- 8) Set Spectrum Analyzer as below
 - Frequency: 1962.5MHz
- 9) Set the Forward Link band: B3
- 10) Measure and record the output power on Power Meter.
- 11) Calculate and record the system gain

- 12) Set Signal Generator as below;
 - Frequency: 1987.5MHz
- 13) Set Spectrum Analyzer as below
 - Frequency: 1987.5MHz
- 14) Set the Forward Link band: C3
- 15) Measure and record the output power on Power Meter.
- 16) Calculate and record the system gain

YURASYS

Date 2003/06/25	Doc No. YRT-030625-1	Rev No. 1.0	File Name Tune_Up.doc	Page 7/7
Report by Ji-Hyo Kim	Approve by	Document control Manager Kong-Hoe Hur	Type of Document Technical Document	
Title : Tune up Procedure of 20W High Power RF Repeater System				

1.2. Gain Control Test

1.2.1. Object

The characteristics of Gain Control Range and Gain Control Error shall meet the standard specification

1.2.2. Standard

Gain Control Range	Step Size	Remarks
30 dB	1dB	

Step	Step Size	Error/Step
0 dB ~ 10 dB	1 dB	< 1.0 dB
10 dB ~ 20 dB	1 dB	< 1.0 dB
20 dB ~ 30 dB	1 dB	< 1.0dB

1.2.3. Instrument List

- 1) HP8563E Spectrum Analyzer 1 Set
- 2) HP4432B Digital Signal Generator 1 Set
- 3) Power Meter 1 set and Power sensor 1 set
- 4) High Power 30dB Attenuator 1 EA (Over 100W) 1 Set
- 5) Cable Set
- 6) N-type(F) to N-type(F) Connector 1 Set

1.2.4. Test Configuration Diagram

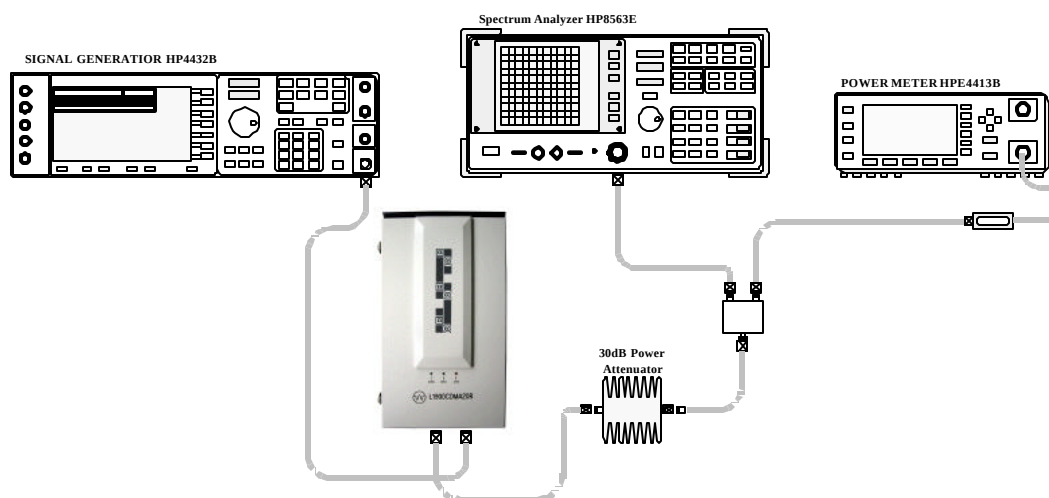


Figure 4 System Configuration Diagram with Spectrum Analyzer for forward link