



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 231 of 293

For example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log} (\text{level } (\mu\text{V/m}))$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

Section 5.1.6.1 Transmitter Spurious above 1 GHz identifies that emissions peaking above 54 dB μ V/m emanate from the EUT and not transmitted through the antenna port. These (1 – 3.5 GHz) emissions were formally measured and characterized and are not considered when examining Receiver Radiated Spurious above 1 GHz.


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Receiver Radiated Spurious Emissions above 1 GHz

Test Setup – Integral Antenna, Channel 52, 5260 MHz, all modes Legacy, HT-20, HT-40.

TABLE OF RESULTS –

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V/m)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)

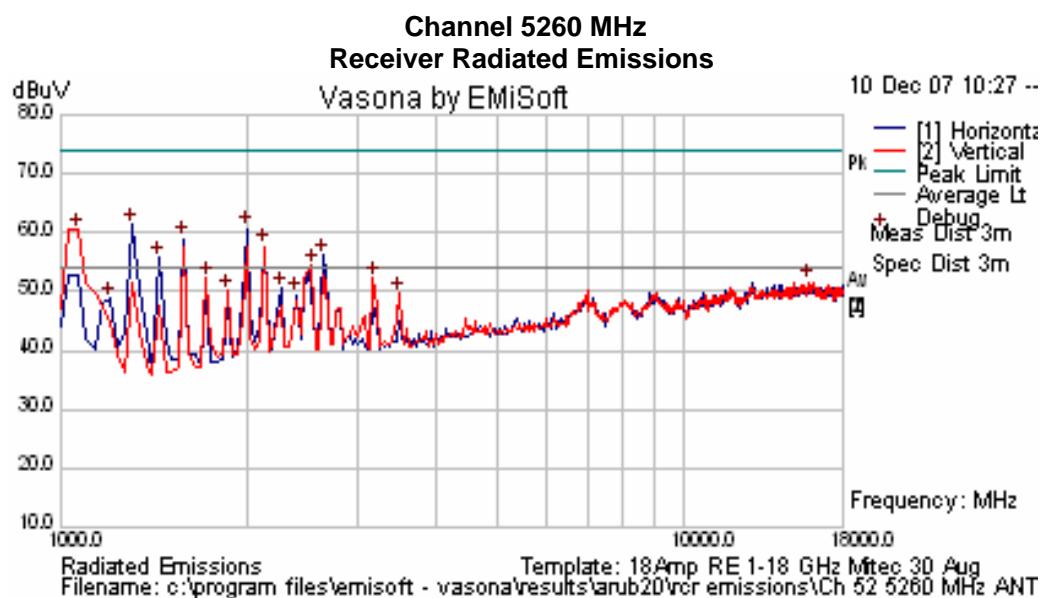

See Section 5.1.7.1 for characterization of emissions (1 – 3.5 GHz) breaking the 54 dB μ V/m limit line.


No receiver emissions were observed.

Receiver Radiated Spurious Emissions above 1 GHz

Test Setup – Antenna ANT-10, Channel 52, 5260 MHz, all modes Legacy, HT-20, HT-40.

TABLE OF RESULTS –

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V/m)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)

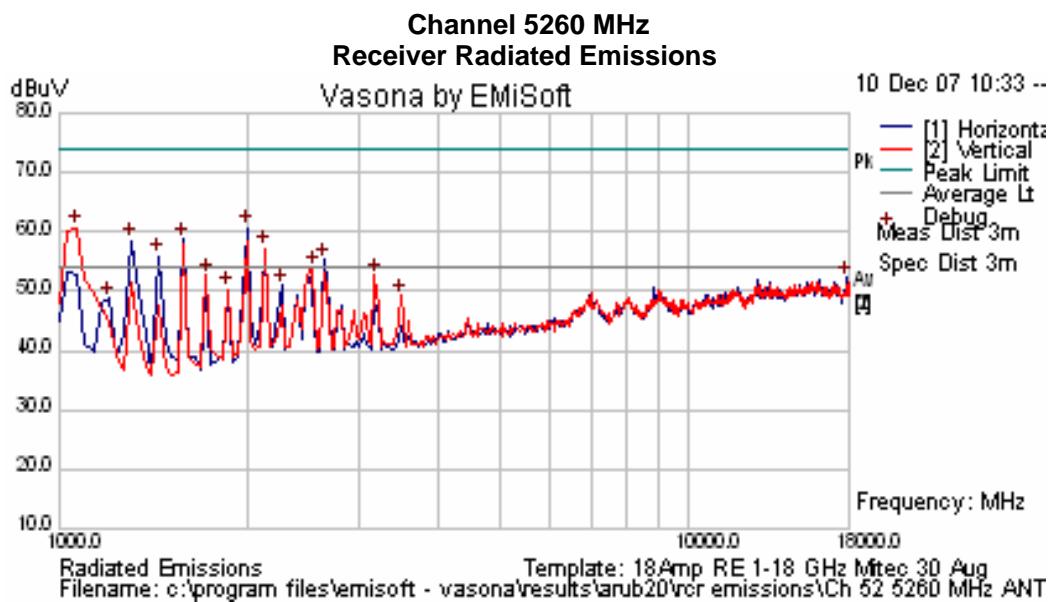

See Section 5.1.7.1 for characterization of emissions (1 – 3.5 GHz) breaking the 54 dB μ V/m limit line.

No receiver emissions were observed.


Receiver Radiated Spurious Emissions above 1 GHz

Test Setup – Antenna ANT-12, Channel 52, 5260 MHz, all modes Legacy, HT-20, HT-40.

TABLE OF RESULTS –

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V/m)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)

Channel 5260 MHz Receiver Radiated Emissions

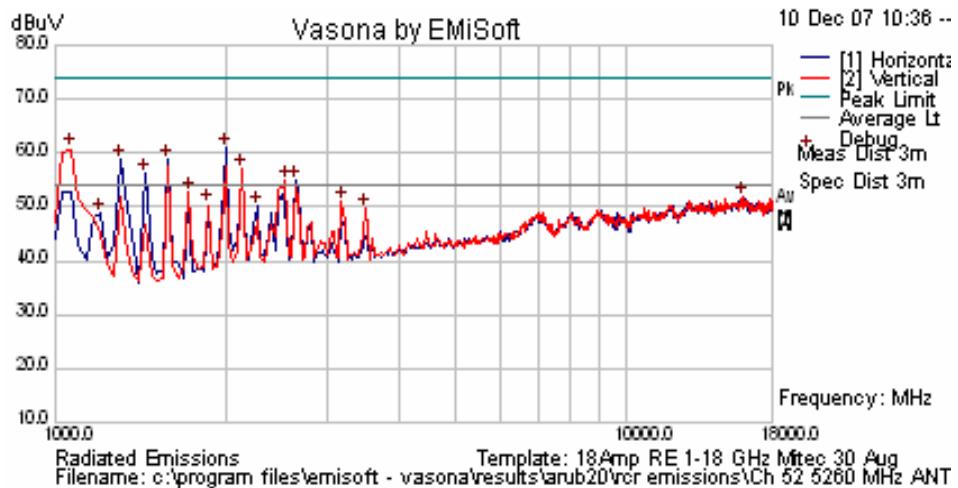

See Section 5.1.7.1 for characterization of emissions (1 – 3.5 GHz) breaking the 54 dB μ V/m limit line.


No receiver emissions were observed.

Receiver Radiated Spurious Emissions above 1 GHz

Test Setup – Integral Antenna, Channel 120, 5600 MHz, all modes Legacy, HT-20, HT-40.

TABLE OF RESULTS –

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V/m)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)

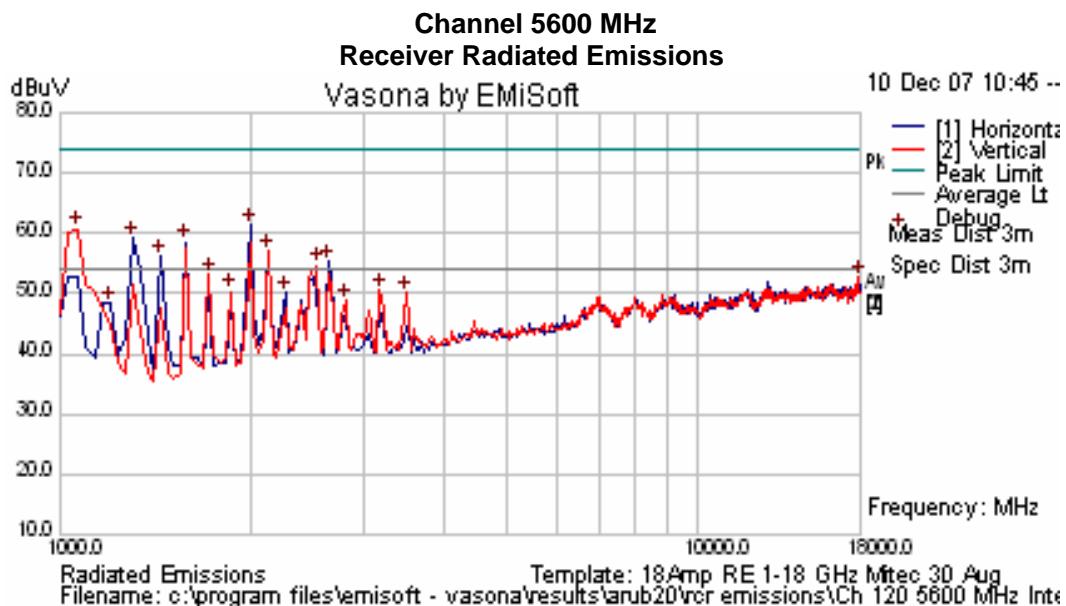

See Section 5.1.7.1 for characterization of emissions (1 – 3.5 GHz) breaking the 54 dB μ V/m limit line.


No receiver emissions were observed.

Receiver Radiated Spurious Emissions above 1 GHz

Test Setup – Antenna ANT-10, Channel 120, 5600 MHz, all modes Legacy, HT-20, HT-40.

TABLE OF RESULTS –

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V/m)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)

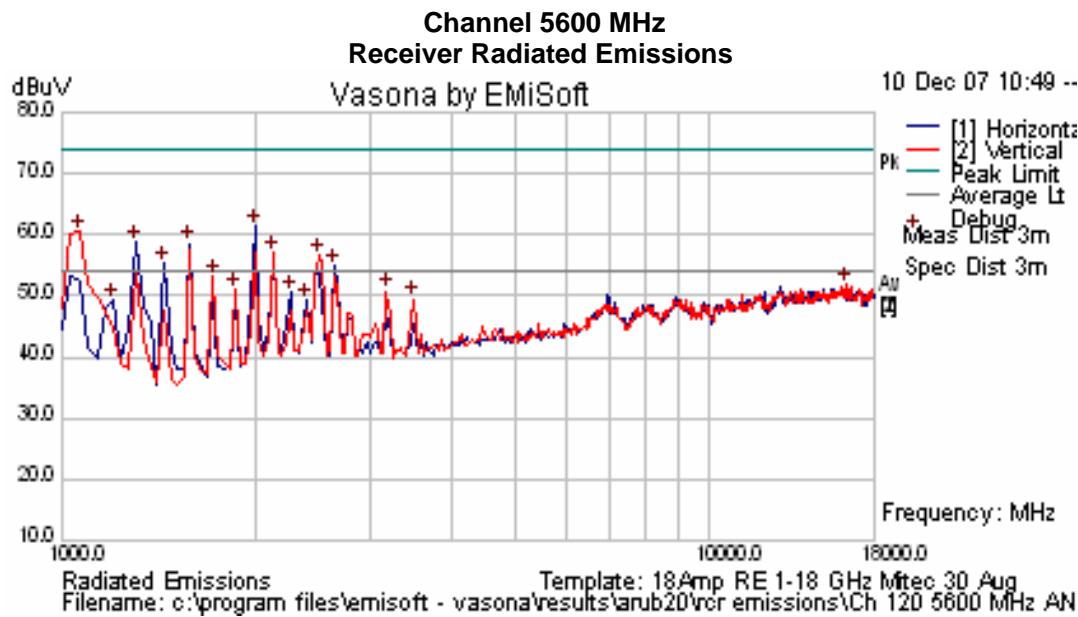

See Section 5.1.7.1 for characterization of emissions (1 – 3.5 GHz) breaking the 54 dB μ V/m limit line.


No receiver emissions were observed.

Receiver Radiated Spurious Emissions above 1 GHz

Test Setup – Antenna ANT-12, Channel 120, 5600 MHz, all modes Legacy, HT-20, HT-40.

TABLE OF RESULTS –

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V/m)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)

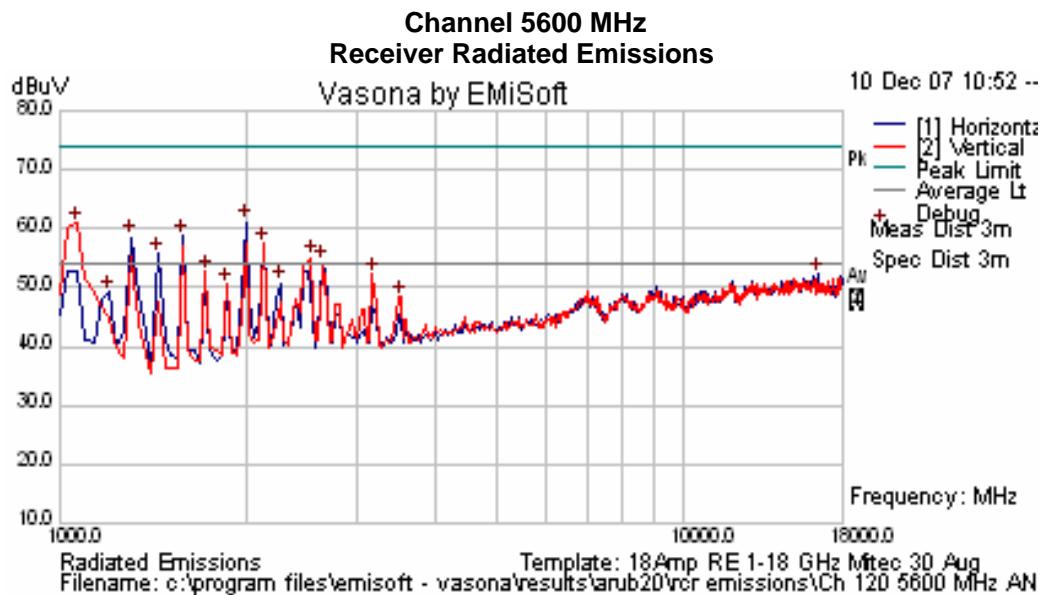

See Section 5.1.7.1 for characterization of emissions (1 – 3.5 GHz) breaking the 54 dB μ V/m limit line.

No receiver emissions were observed.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 238 of 293

Specification

Receiver Radiated Spurious Emissions

Industry Canada RSS-Gen §4.8,

The search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is the higher, to at least 3 times the highest tunable or local oscillator frequency, whichever is the higher, without exceeding 40 GHz.

RSS-Gen §6

The following receiver spurious emission limits shall be complied with;

(a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 1.

Frequency (MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.7.3. Radiated Spurious Emissions (30M-1 GHz)

FCC, Part 15 Subpart C §15.407(b)(6); §15.205(a); §15.209(a)
Industry Canada RSS-210 §2.2

Test Procedure

Preliminary radiated emissions are measured in the anechoic chamber at a 10-meter distance on every azimuth in both horizontal and vertical polarity. The emissions are recorded with a spectrum analyzer in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet, Both modes were tested.

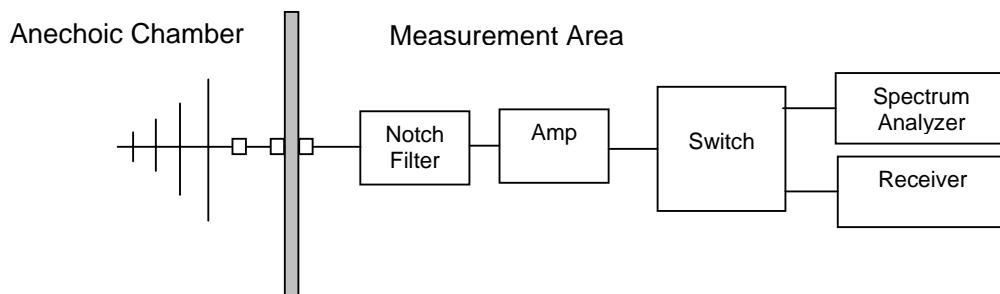

Test Measurement Set up

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 240 of 293

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log}(\text{level (}\mu\text{V/m)})$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

Measurement Results for Spurious Emissions (30 MHz – 1 GHz)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS

EUT powered via AC/DC Convertor

Freq. (MHz)	Peak (dBuV/m)	QP (dBuV/m)	QP Lmt (dBuV/m)	QP Margin (dB)	Angle (deg)	Height (cm)	Polarity
37.435	40.29	32.89	40.5	-7.61	303	98	V
65.034	41.09	37.15	40.5	-3.35	286	98	V
100.489	37.58	31.55	40.5	-8.95	105	103	V
125.008	26.69	35.38	40.5	-5.12	174	98	V
625.011	41.2	42.51	47.5	-4.99	130	110	H
875.054	42.57	42.84	47.5	-4.66	0	102	V

Radiated Spurious Emissions 30 MHz to 1 GHz – AC/DC Convertor

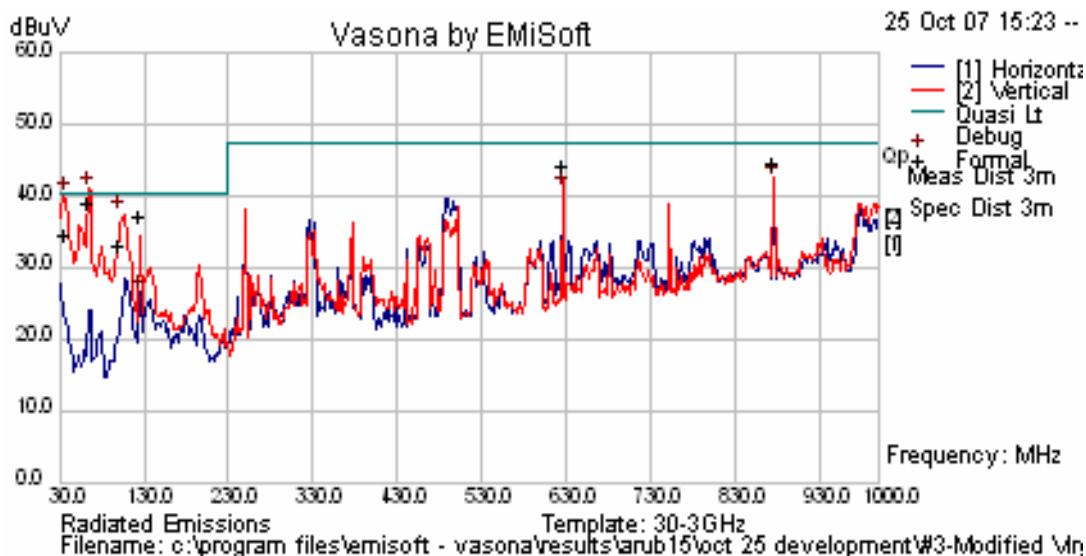


This test report may be reproduced in full only. The document may only be updated by MiCOM
 Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS

EUT powered via POE

Freq. (MHz)	Peak (dBuV/m)	QP (dBuV/m)	QP Lmt (dBuV/m)	QP Margin (dB)	Angle (deg)	Height (cm)	Polarity
38.846	41.38	34.54	40.5	-5.96	243	98	V
55.443	41.3	38.15	40.5	-2.35	44	101	V
98.097	36.18	34.47	40.5	-6.03	80	118	V

Radiated Spurious Emissions 30 MHz to 1 GHz - POE

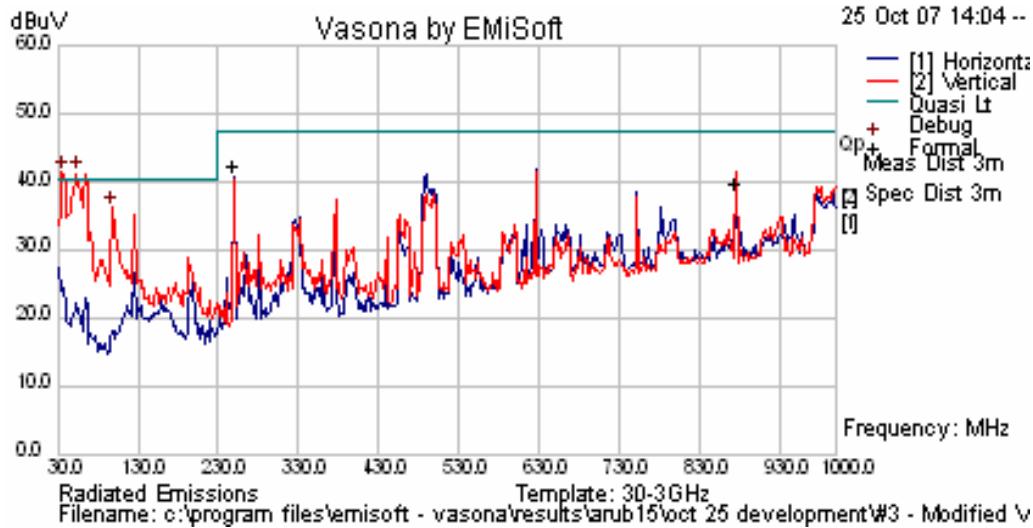

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 243 of 293

Specification

Limits

§15.407(b)(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

RSS-210 §2.2 refers to Section 2.7 Table 2 below;-

Frequency(MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 244 of 293

5.1.8. AC Wireline Conducted Emissions (150 kHz – 30 MHz)


FCC, Part 15 Subpart C §15.407(b)(6)/15.207

Industry Canada RSS-Gen §7.2.2

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test Measurement Set up

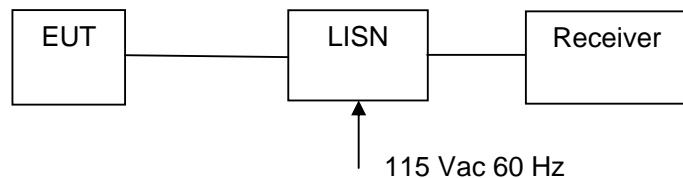

Measurement set up for AC Wireline Conducted Emissions Test

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

AC Wireline Emissions 115Vac 60Hz


Transmitter Power Level: Maximum

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – ac/dc Converter

Freq (MHz)	Line	Peak (dB μ V)	QP (dB μ V)	QP Limit (dB μ V)	QP Margin (dB)	Ave. (dB μ V)	Ave. Limit (dB μ V)	Ave. Margin (dB)
0.150	Live	71.57	58.36	65.99	-7.64	29.19	55.99	-26.80
0.187	Live	69.74	55.98	64.18	-8.21	29.05	54.18	-25.13
0.265	Live	64.52	51.52	61.27	-9.75	42.39	51.27	-8.89
0.392	Live	52.92	45.03	58.02	-12.99	32.22	48.02	-15.8
0.463	Live	55.83	42.49	56.65	-14.16	35.68	46.65	-10.97
0.534	Live	54.53	38.97	56.00	-17.03	21.39	46.00	-24.61

AC Wireline Conducted Emissions –150 kHz – 30 MHz) ac/dc Converter

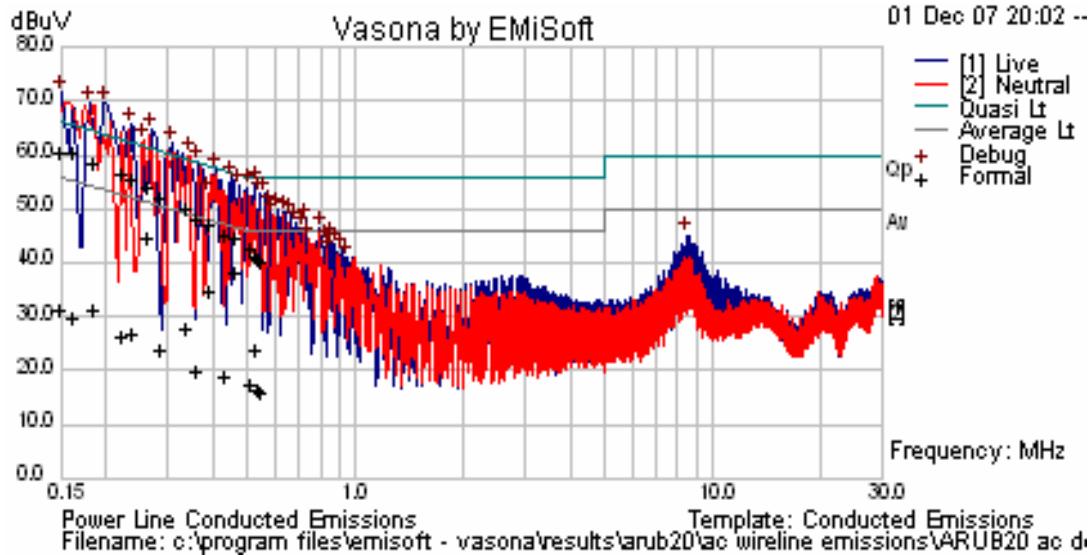


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – POE

Freq (MHz)	Line	Peak (dB μ V)	QP (dB μ V)	QP Limit (dB μ V)	QP Margin (dB)	Ave. (dB μ V)	Ave. Limit (dB μ V)	Ave. Margin (dB)
0.154	Neutral		50.3	65.78	-15.48	50.3	55.78	-5.48
0.515	Neutral		48.08	56.00	-7.92	39.28	46.00	-6.72
2.204	Neutral		45.93	56.00	-10.07	30.93	46.00	-15.17
1.803	Neutral		47.31	56.00	-8.69	28.60	46.00	-17.40
2.039	Neutral		45.94	56.00	-10.06	25.65	46.00	-20.35
1.195	Neutral		44.77	56.00	-11.23	23.71	46.00	-22.29

AC Wireline Conducted Emissions –150 kHz – 30 MHz) POE

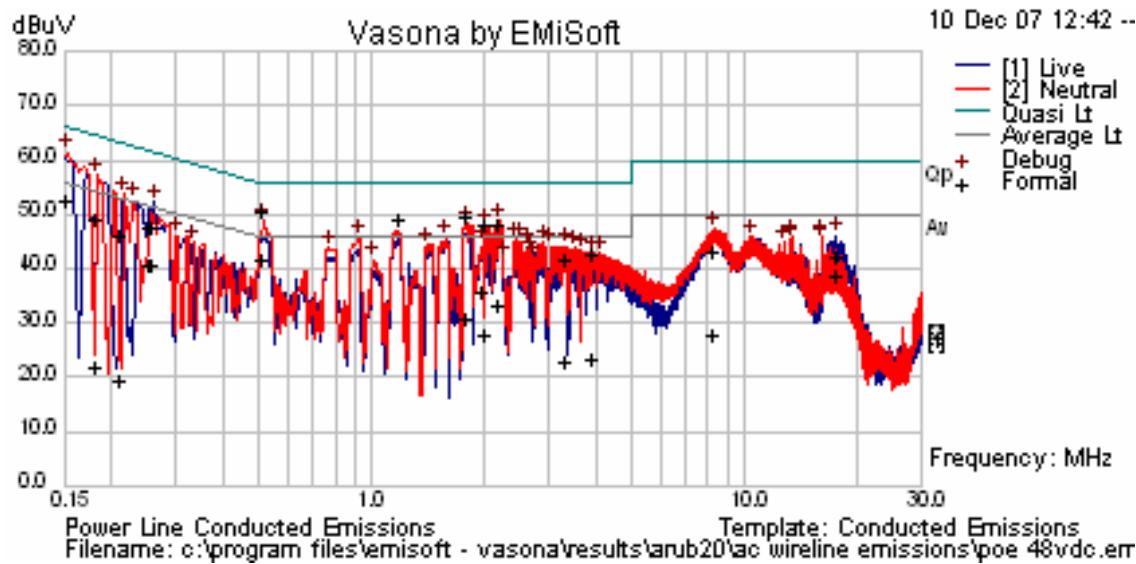

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 247 of 293

Specification

Limit

§15.407 (b)(6); Any U-NII devices using an AC power line are required to comply also with the limits set forth in Section 15.207.

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

§15.207 (a) and RSS-Gen §7.2.2 Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	± 2.64 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0193, 0190, 0293, 0307

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 248 of 293

6. Dynamic Frequency Selection (DFS)

6.1. Test Procedure and Setup

FCC, Part 15 Subpart C §15.407(h)
FCC 06-96 Memorandum Opinion and Order
Industry Canada RSS-210 A9.4

6.1.1. Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna

6.1.2. DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 80% of the 99% power bandwidth See Note 3.

Note 1: The instant that the *Channel Move Time* and the *Channel Closing Transmission Time* begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the *Burst*.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar *Burst* generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate *Channel* changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 249 of 293

6.1.3. Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 250 of 293

Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 *Bursts* in the 12 second period, with the number of *Bursts* being randomly chosen. This number is *Burst Count*.
- 3) Each *Burst* consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each *Burst* within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a *Burst* will have the same pulse width. Pulses in different *Bursts* may have different pulse widths.
- 5) Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a *Burst* will have the same chirp width. Pulses in different *Bursts* may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a *Burst*, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a *Burst*, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to *Burst_Count*. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one *Burst*. The start time for the *Burst*, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each *Burst* is chosen independently.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 251 of 293

A representative example of a Long Pulse radar test waveform:

- 1) The total test signal length is 12 seconds.
- 2) 8 *Bursts* are randomly generated for the *Burst_Count*.
- 3) *Burst 1* has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) *Bursts 2* through 8 are generated using steps 3 – 5.
- 7) Each *Burst* is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, *Burst 1* is randomly generated (1 to 1,500,000 minus the total *Burst 1* length + 1 random PRI interval) at the 325,001 microsecond step. *Bursts 2* through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. *Burst 2* falls in the 1,500,001 – 3,000,000 microsecond range).

Graphical representation of the Long Pulse radar Test Waveform.

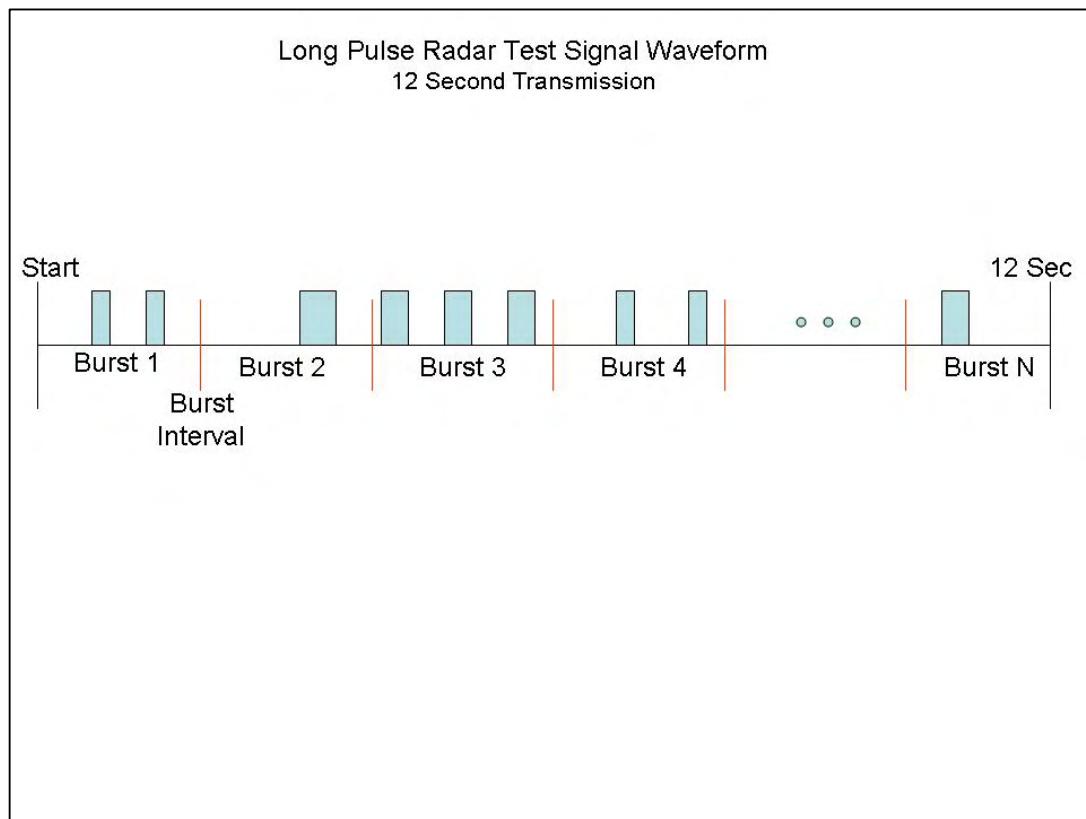

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.1.4. Frequency Hopping Radar Test Waveform

Frequency Hopping Radar Test Waveform


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

6.1.5. Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted Radar Waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) mode at the frequency of the Radar Waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz.


The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm (Ref Section 5.1). The 30dB amplifier gain was entered as an amplitude offset on the spectrum analyzer.

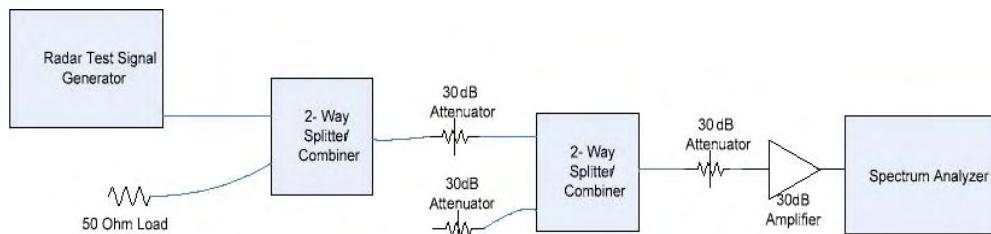

Conducted Calibration Setup

6.1.6. Radar Waveform Calibration Plots


The following are the calibration plots for required radar waveforms

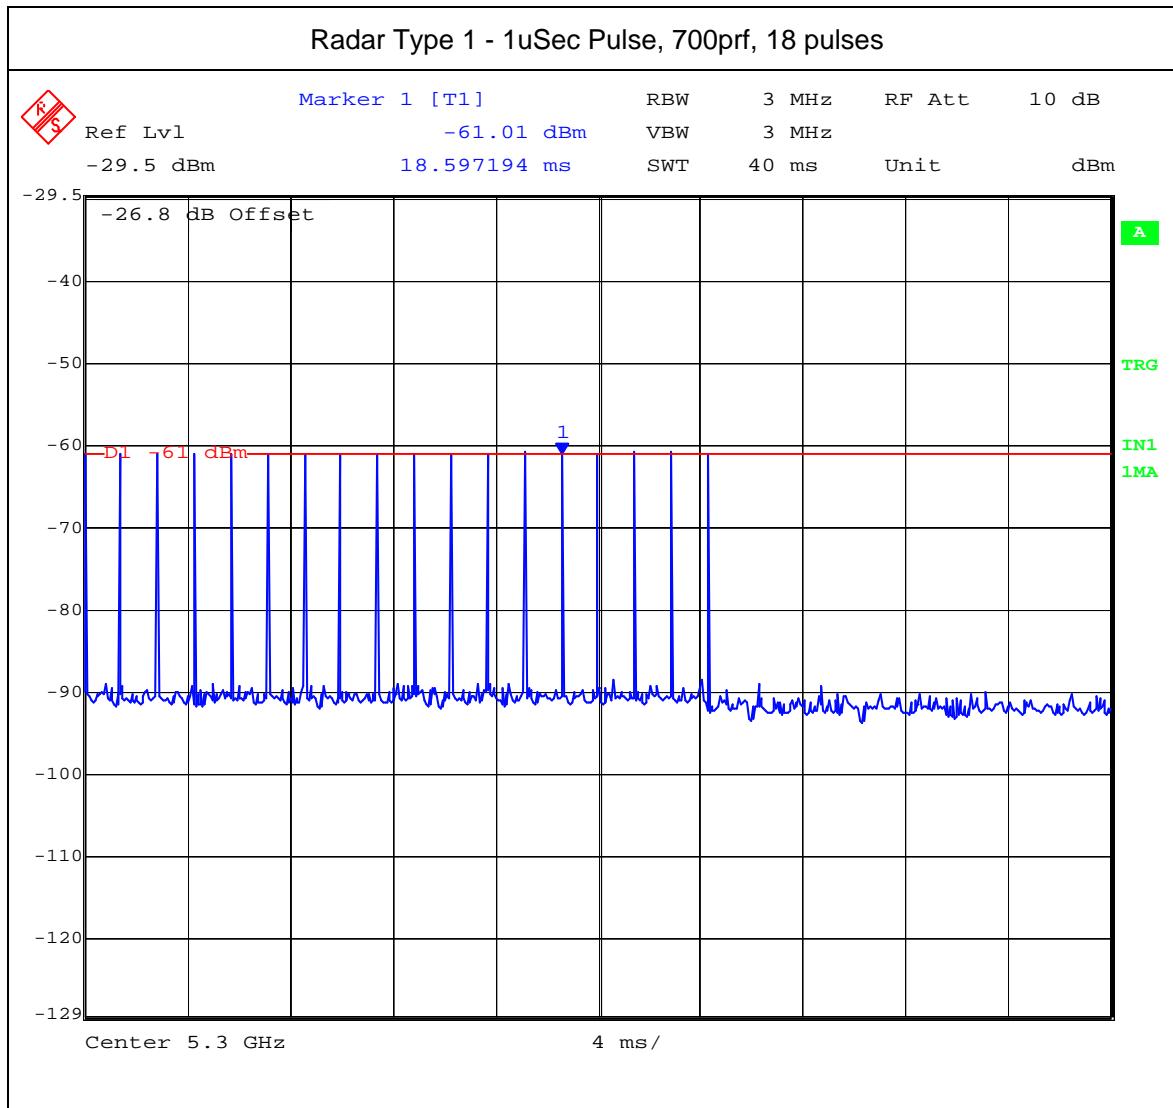

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 254 of 293

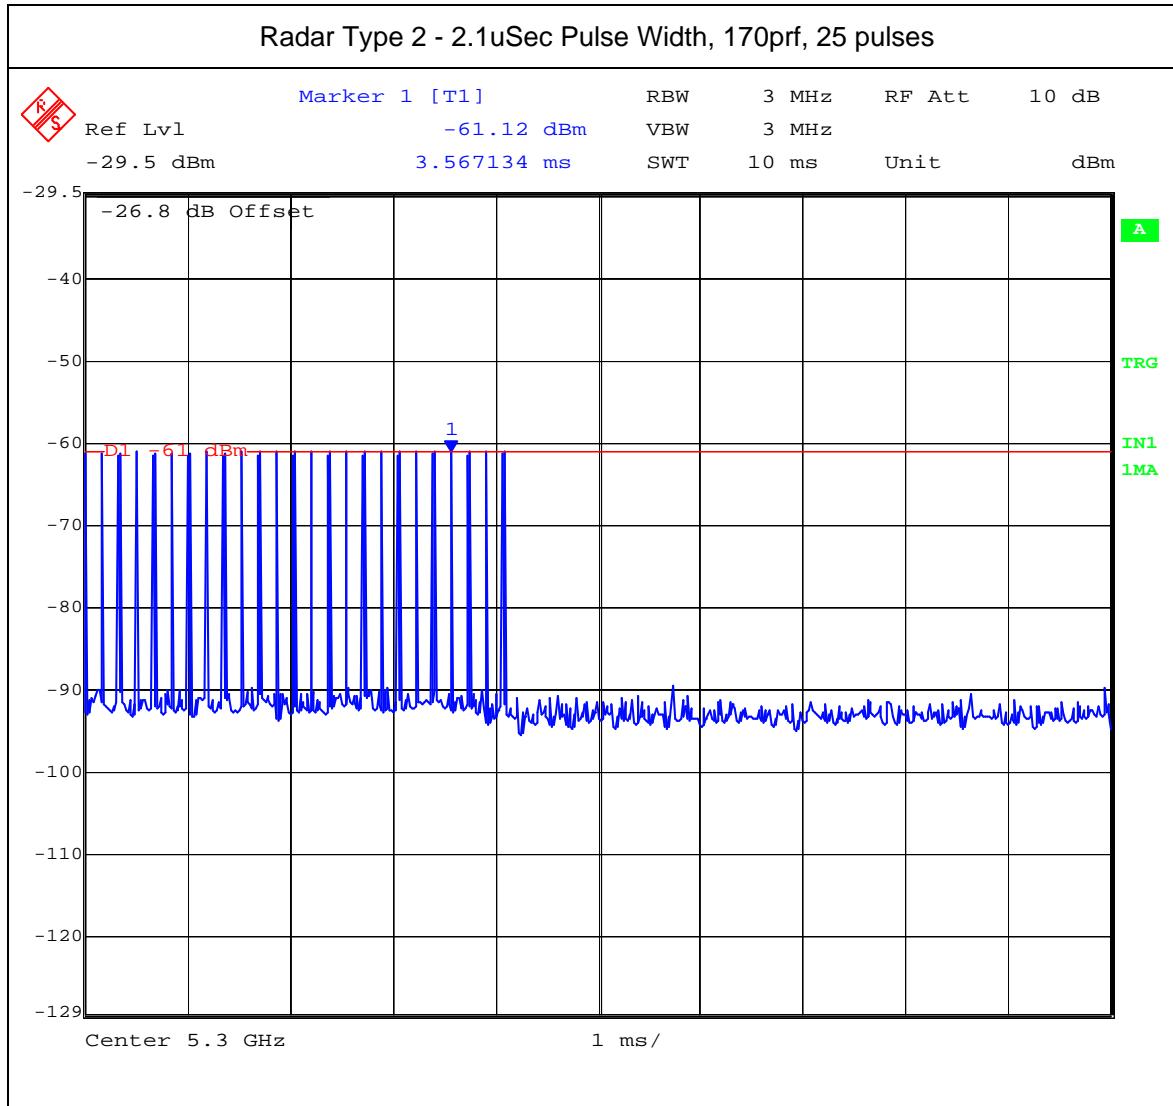

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 255 of 293

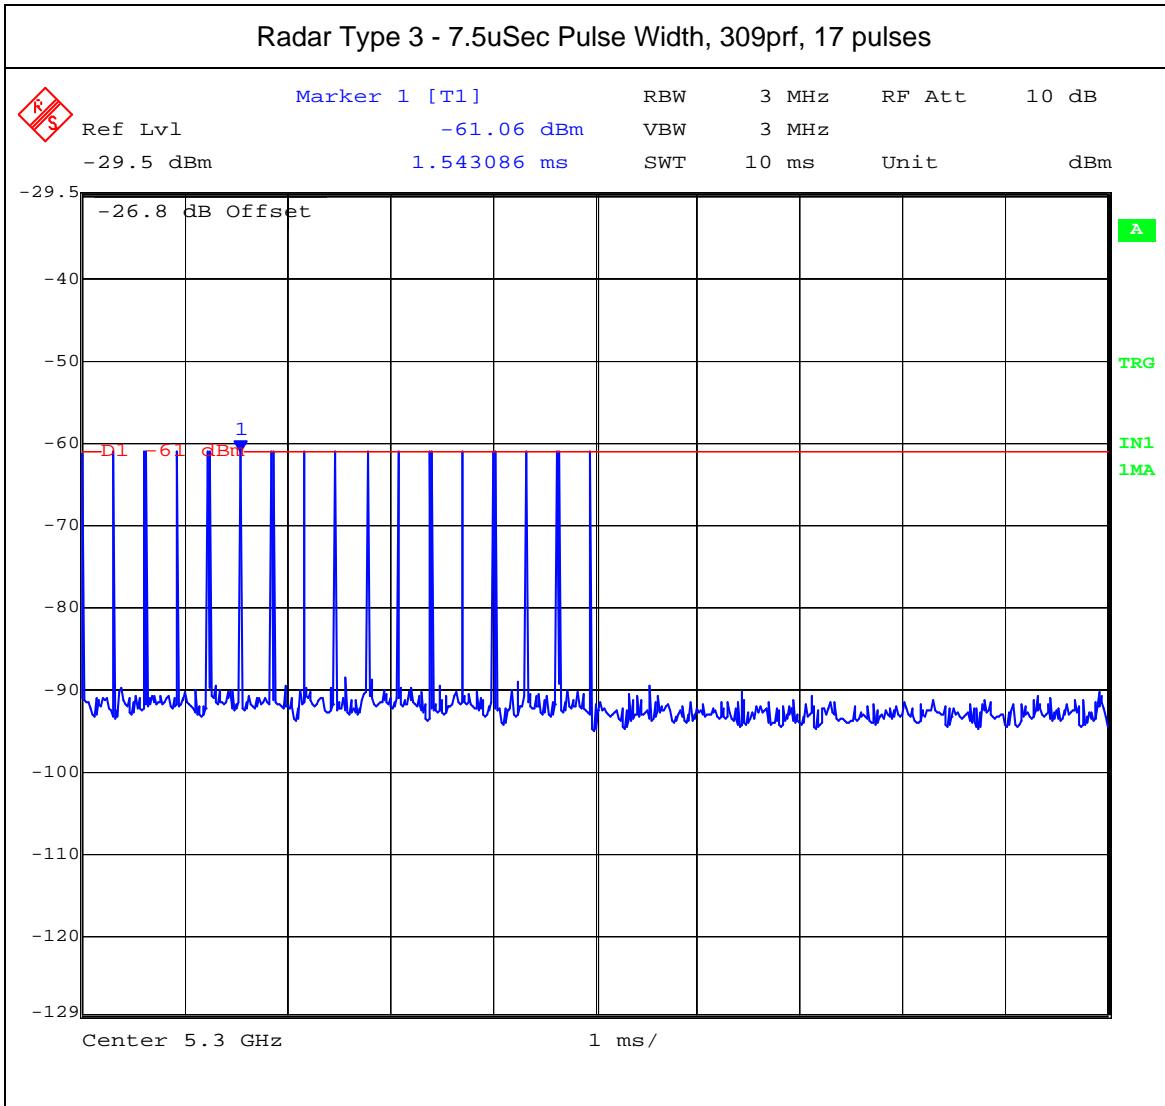

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 256 of 293

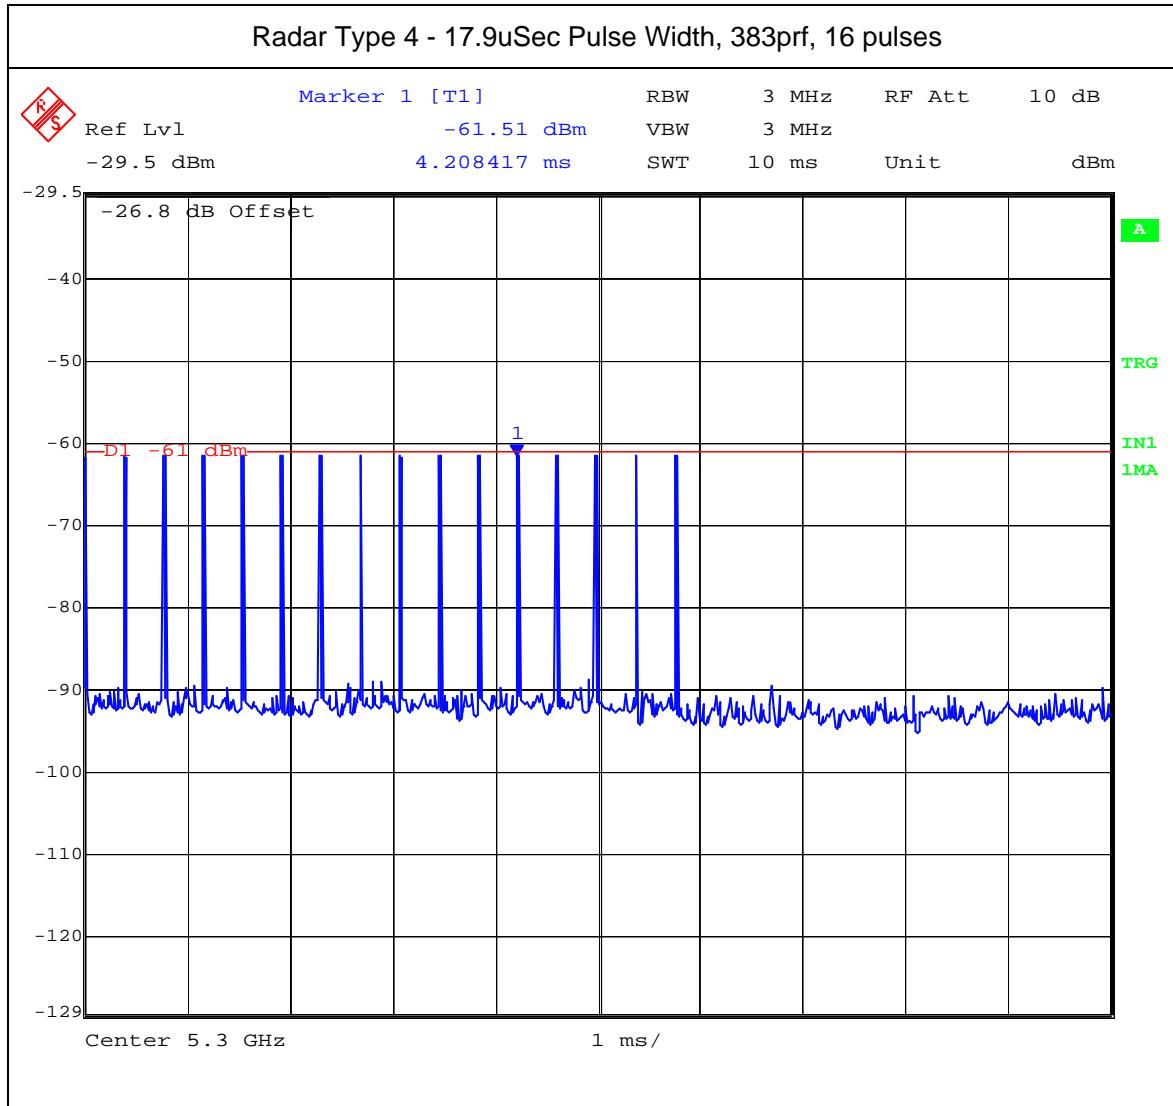

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 257 of 293

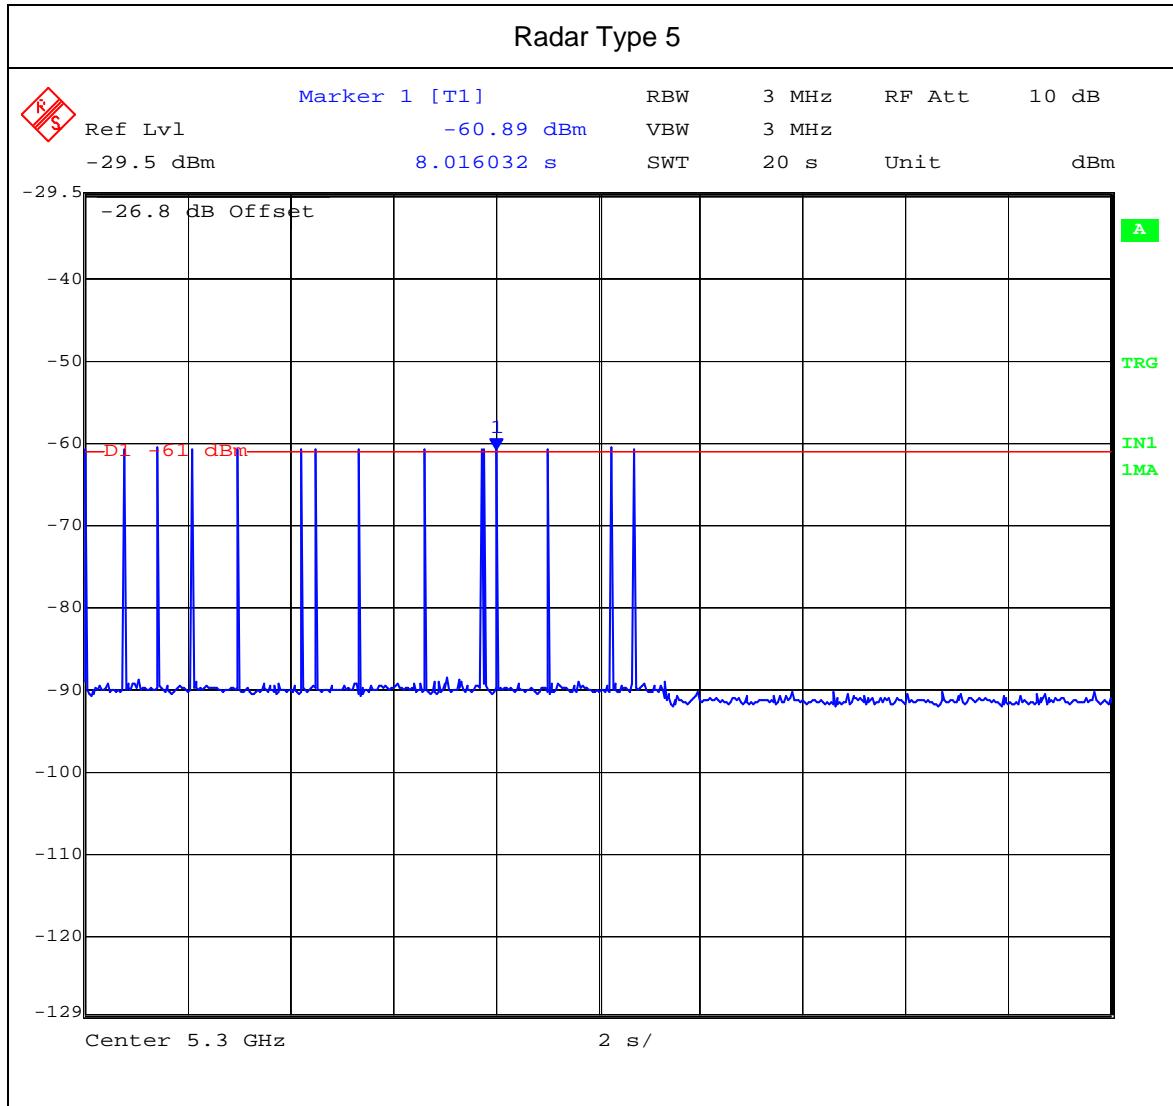

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 258 of 293

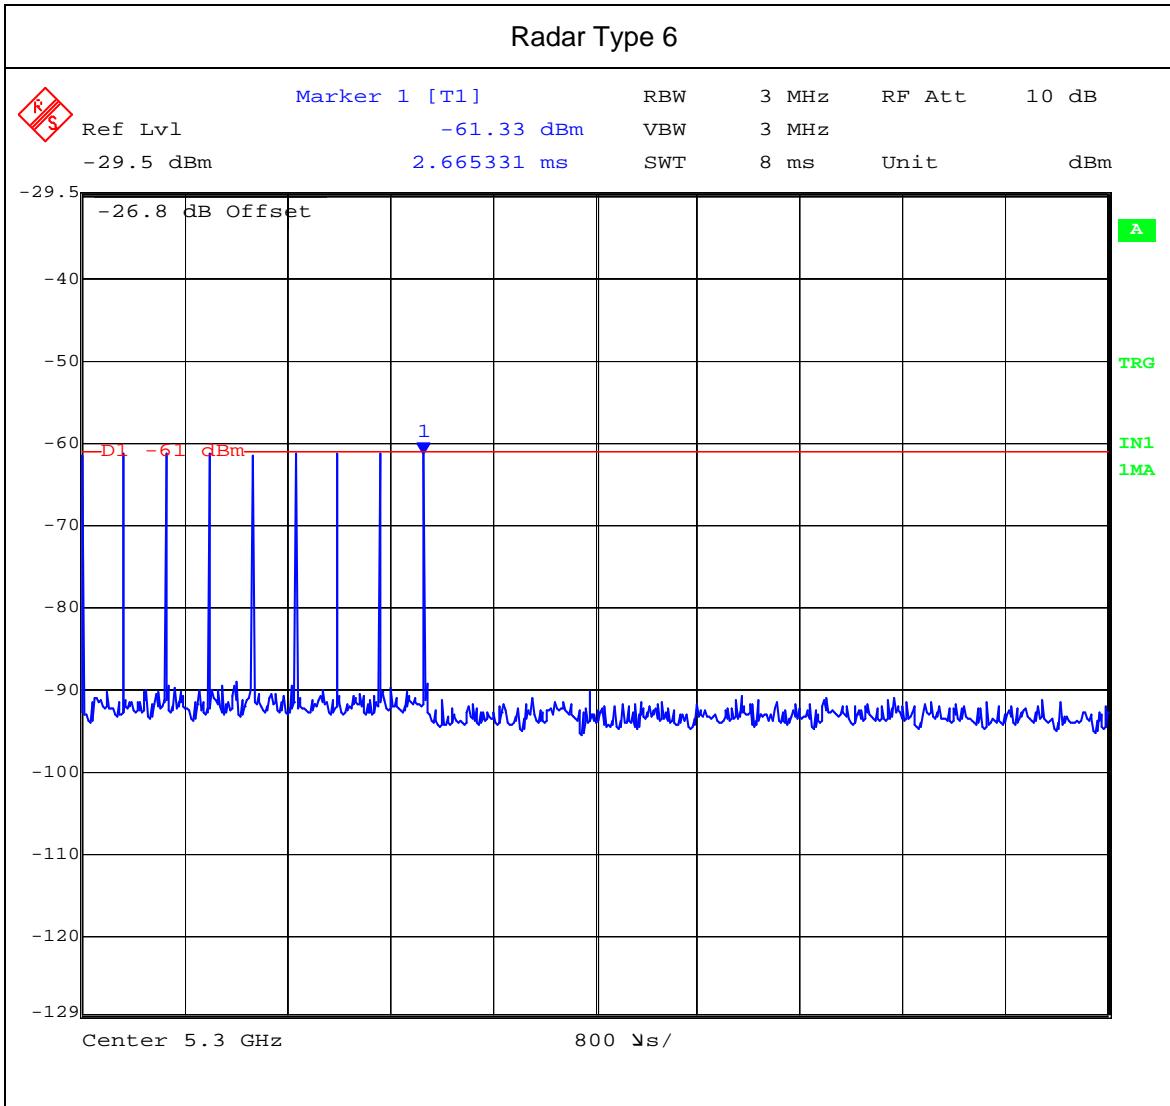


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


6.1.7. Test Set Up:

Block Diagram(s) of Test Setup

Setup for Conducted Measurements where the EUT is the Master with injection of Radar Test Waveforms at the Master.

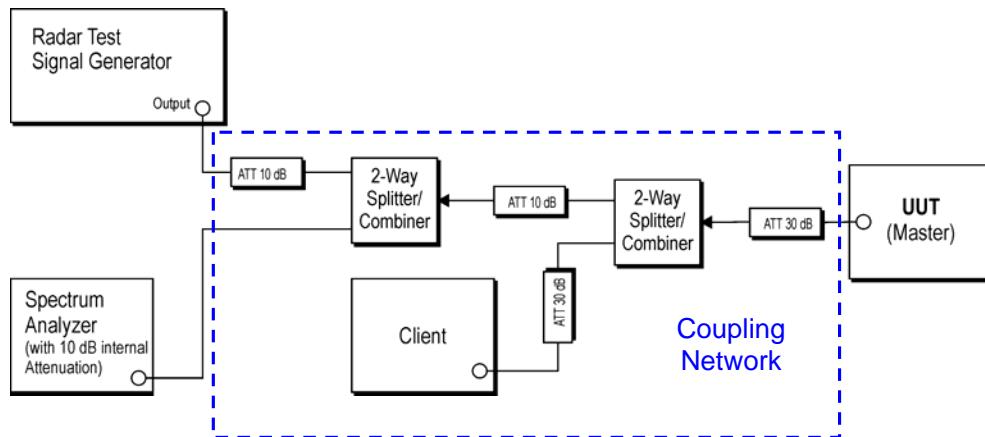

Support Equipment Configuration

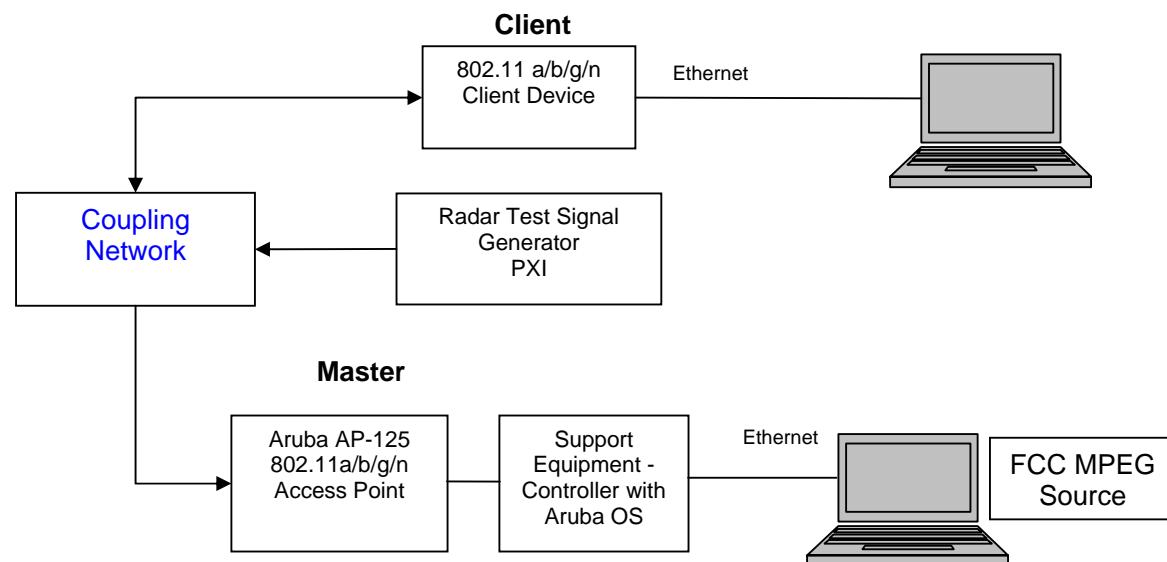

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 260 of 293

For the frequency band 5,470 – 5,725 MHz, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm. The EUT was tested in HT-40 mode.

Declared minimum antenna gain 3 dBi. ;

Radar receive signal level = -62 dBm + minimum antenna gain + 1 dB

$$= -62 + 3 + 1$$

Radar receive signal level = -58 dBm

Measurement Results - Dynamic Frequency Selection (DFS)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57% Pressure: 999 to 1012 mbar

Radio parameters.

Test methodology: Conducted

Device Type: Master

Transmit Power: Maximum

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 261 of 293

6.2. Dynamic Frequency Selection (DFS) Test Results

6.2.1. UNII Detection Bandwidth:

All UNII channels for this device have identical channel bandwidths and DFS testing was completed on channel 5,580 MHz.

The generating equipment is configured as shown in the Conducted Test Setup above. A single Burst of the short pulse radar Type 1 through 6 was produced at 5,580 MHz at a level of -58 dBm (Ref Section 5.1). The EUT is set up as a standalone device (no associated Client and no traffic).

A single radar Burst is generated for a minimum of 10 trials, and the response of the EUT is noted. The EUT must detect the Radar Waveform 90% or more of the time.

The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as F_H .

The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as F_L .

The U-NII Detection Bandwidth is calculated as follows:

$$\text{U-NII Detection Bandwidth} = F_H - F_L$$

The U-NII Detection Bandwidth must be at least 80% of the EUT transmitter 99% power

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 262 of 293

Radar Frequency (MHz)	EUT Frequency=5580MHz(TX) (✓=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
-11	0	0	0	0	0	0	0	0	0	0	0%
-10	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
-9	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
-8	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
-7	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
-6	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
-5	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
-4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
-3	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
-2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
-1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
F ₀	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%

Table of results are continued on the next page.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 263 of 293

EUT Frequency=5580MHz(TX) (✓=Detection, 0= No Detection)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
F0	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+3	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+5	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+6	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+7	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+8	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+9	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+10	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+11	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+12	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+13	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+14	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+15	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+16	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+17	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+18	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+19	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+21	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+22	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+23	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+24	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+25	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+26	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+27	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+28	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+29	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+30	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%
+31	0	0	0	0	0	0	0	0	0	0	0%

Detection Bandwidth = $F_H - F_L = 5610 - 5570 = 40$ MHz

EUT 99% Bandwidth = 39.078 MHz (ref. bandwidth channel 5690 MHz)

39.078 MHz *80% = 31.262 MHz

For each frequency step the minimum percentage detection is 90%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 264 of 293

6.2.2. Initial Channel Availability Check Time

This test verifies that the EUT does not emit pulse, control, or data signals on the test Channel until the power-up sequence has been completed and the U-NII device checks for Radar Waveforms for one minute on the test Channel. This test does not use any Radar Waveforms.

The U-NII device is powered on and be instructed to operate at 5,580 MHz. At the same time the EUT is powered on, the spectrum analyzer is set for zero span with a 1 MHz resolution bandwidth at 5,580 MHz with a 220 second sweep time. The analyzer's sweep will be started the same time power is applied to the U-NII device.

The EUT should not transmit any pulse or data transmissions until at least 1 minute after the completion of the power-on cycle.

The first red marker line shown on the following plot denotes the instant when the EUT starts its power-up sequence i.e. T_0 (as defined within the FCC's MO&O 06-96 Normative Reference 2). The power-up reference T_0 is determined by the time it takes for the EUT to start "beaconing" i.e. initial beacon – 60 secs = end of power-up.


The Channel Availability Check Time commences at instant T_0 and will end no sooner than $T_0 + 60$ seconds.

The EUT Master device requires 68.76 seconds to complete its power-on cycle.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 265 of 293

**Initial Channel Availability Check Time during power up of EUT
Ch 5,580 MHz**

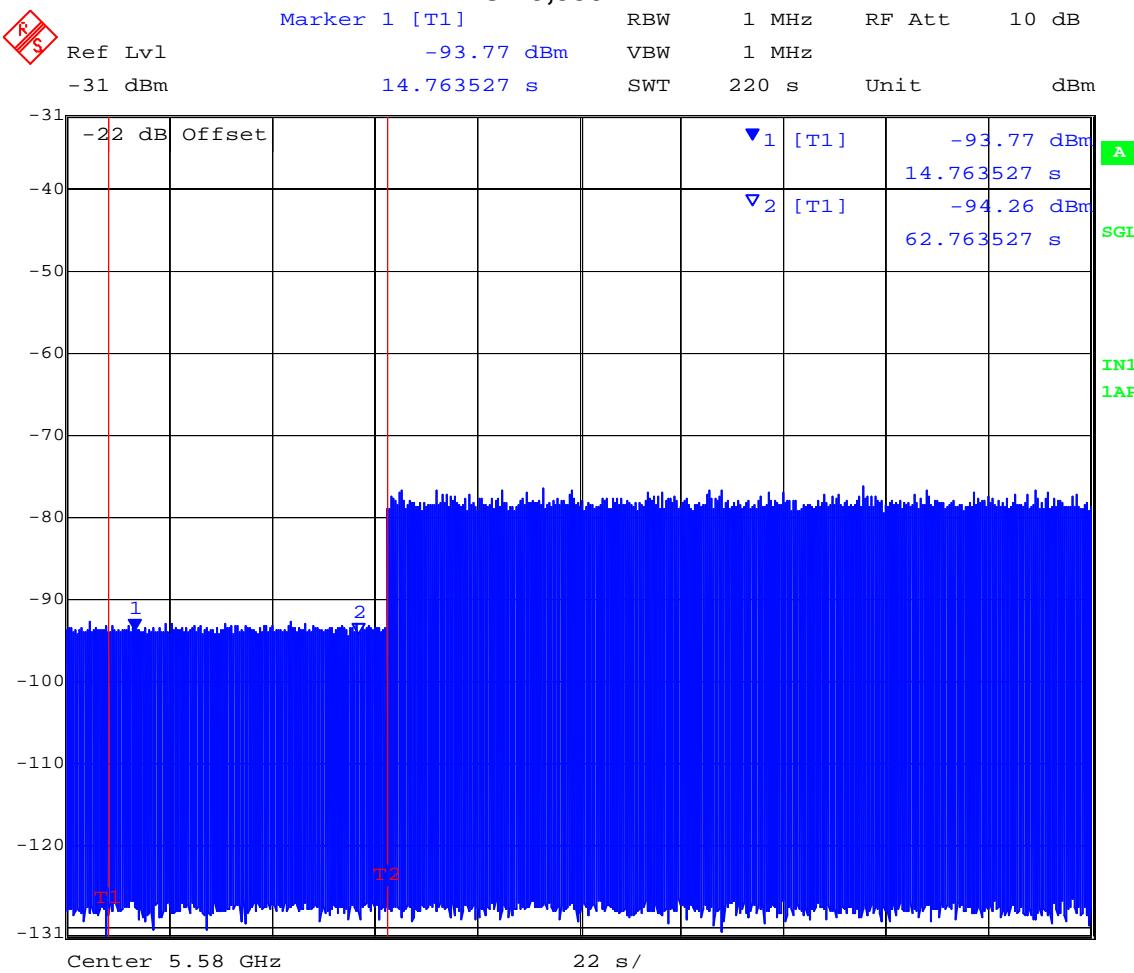

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 266 of 293

6.2.3. Radar Burst at the Beginning of the Channel Availability Check Time:

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold +6 dB (-58 dBm Ref Section 6.1.7) occurs at the beginning of the Channel Availability Check Time.

A single Burst of short pulse of radar Type 1 will commence within a 6 second window starting at T_0 (first red marker line on the following plot).


Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5,580MHz will continue for 2.5 minutes after the radar burst has been generated.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 267 of 293

Channel Availability Check Time at the start of the 60 second Check Time
Ch 5,580 MHz

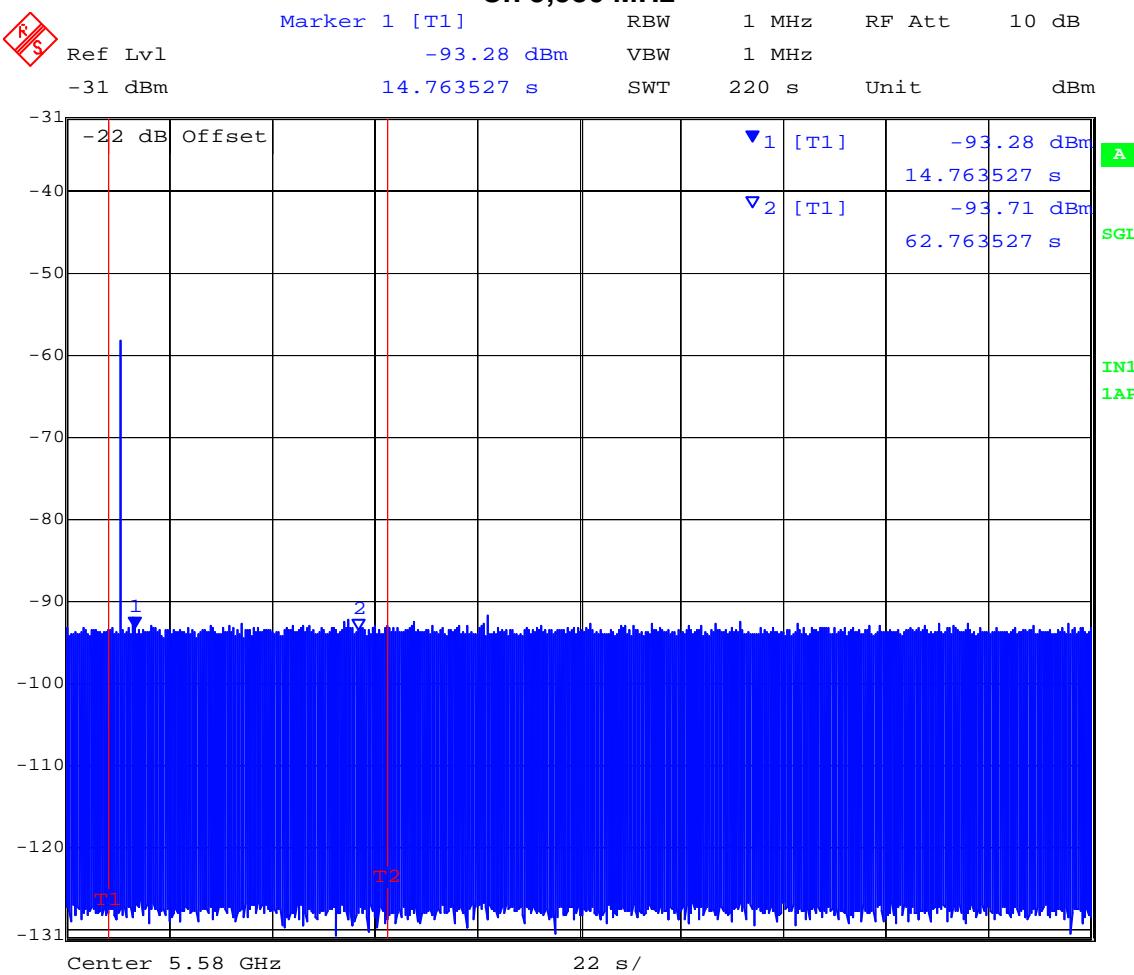

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 268 of 293

6.2.4. Radar Burst at the End of the Channel Availability Check Time:

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold occurs at the end of the Channel Availability Check Time.

A single Burst of short pulse of radar type 1 will commence within a 6 second window starting at $T_0 + 54$ seconds. The window will commence at marker 2 and end at the red frequency line T_2 .


Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5,580MHz will continue for 2.5 minutes after the radar burst has been generated.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 269 of 293

Channel Availability Check Time at the end of the 60 second Check Time
Ch 5,580 MHz

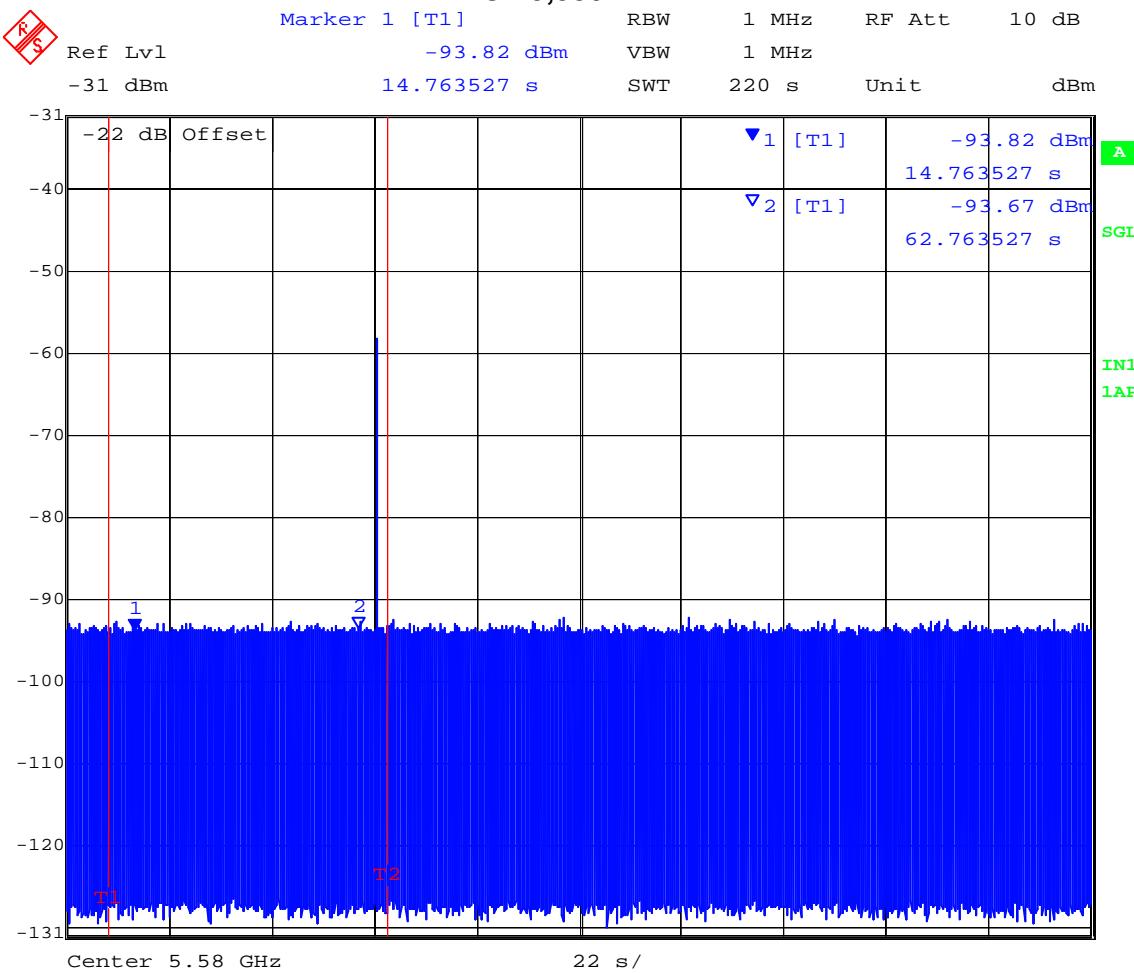

Date: 13.FEB.2008 16:26:48

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 270 of 293

**6.2.5. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period
FCC §15.407(h)(2)(iii)**

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the EUT (Master). The requisite MPEG video file ("TestFile.mpg" available on the NTIA website at the following link <http://ntiacsd.ntia.doc.gov/dfs/>) is streamed from the master device (AP) to the client.

Channel Closing Transmission Time - Measurement

A Type 1 waveform was introduced to the EUT, from which a 12 second transmission record was digitally captured, collecting nearly 250M samples of data, which included in excess of 600 ms of pre-trigger data. This Type 1 waveform had an integral marker built into its construction, marking the start of the radar waveform play, which directly triggered the PXI digitizer's data capture via the PXI backplane trigger bus.

The test system was set-up to capture all transmission data for access point events above a threshold level of -50 dBm. The test equipment time stamps all captured events with respect to T_0 (zero time indicating the start of the measurements sequence) starting the 612.1 ms pre-trigger period followed by the radar type 1 burst period.

Radar (Type 1) Pre-trigger period 612.1 ms

Type 1 burst period 25.705 ms

(The period of the 18 pulse burst includes [18 pulses *1.428mS PRI] = 25.704 ms. Then add 1 μ s pulse width for the final pulse.)

Channel Closing Transmission Time starts immediately after the last radar pulse is transmitted i.e. 637.8 ms after the start of the trace capture period.




Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 271 of 293

Therefore, pulses seen after this 637.8 ms boundary are identified and totaled to provide an aggregate total of transmissions in order to determine whether the EUT is compliant with the Channel Closing Transmission Time requirements as described in MO&O FCC 06-96. In this case, it was found that an aggregate total of 3.69 ms of transmission time accrued. This value is found at the right hand side at the foot of the following plot (10s Total).

Channel Closing Transmission Time = 3.69 mSecs (limit 260 mSecs)

**Channel Move Time, Channel Closing Transmission Time for Type 1 Radar
Captured by the Test System - 0 to 2 seconds**

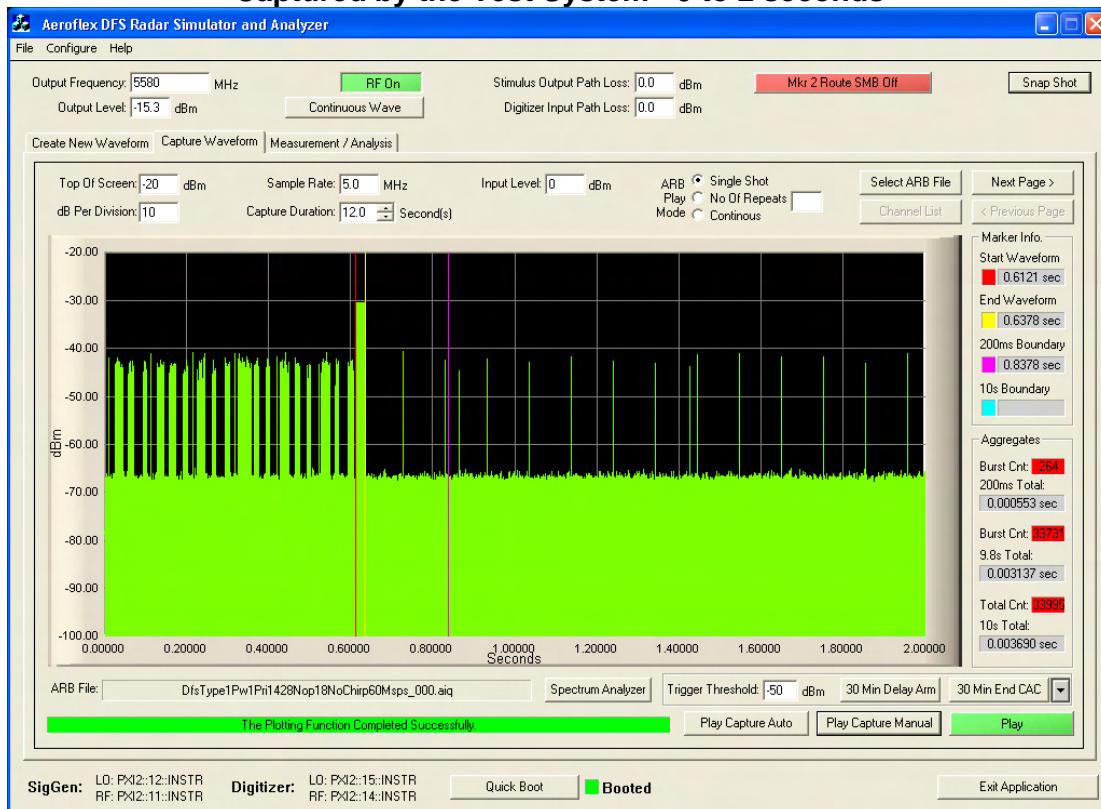


From the plot above it can be seen that the transmission activity within the 200 mS window is 0.553 mS (see 200 mS Total). From the following plots which shows all additional activity within the remained of the 10 sec measurement window it can be determined that the aggregate transmission is 3.137 mS. This is less than the 60 mS limit.

Further investigation into the nature of the emission i.e. control or data is provided on one of the pulses observed after the end of the radar signature in a separate 2 second duration plot.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 272 of 293

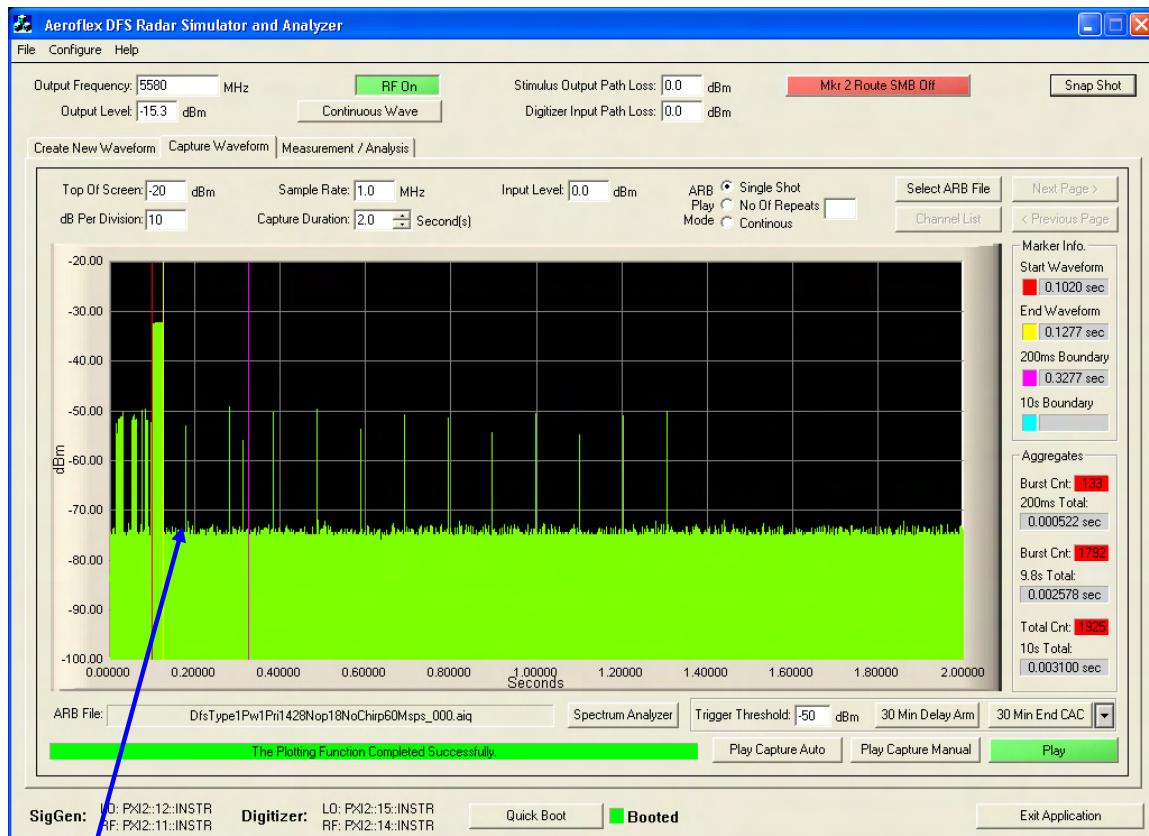


Further investigation was performed on the indicated emission at 179 mS i.e. control or data emission. As the source data for the plots was digitized this gave the ability to zoom-in on this single emission.

The next three plots identify that as a result of the duration the emission is a control signal and not data related.



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 273 of 293

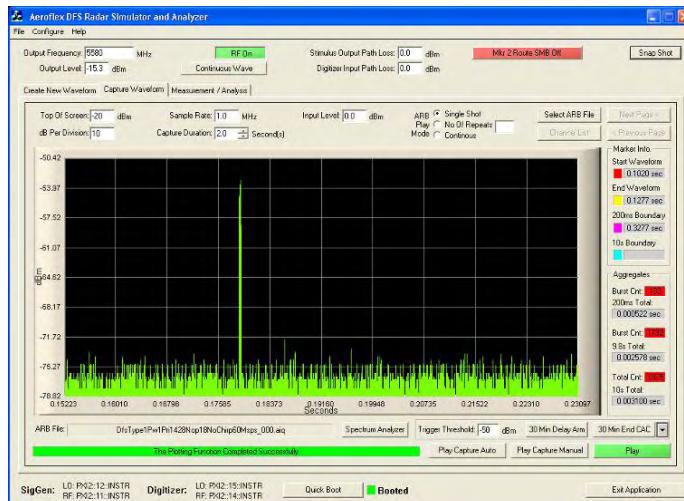

Signal investigated at 179 mS

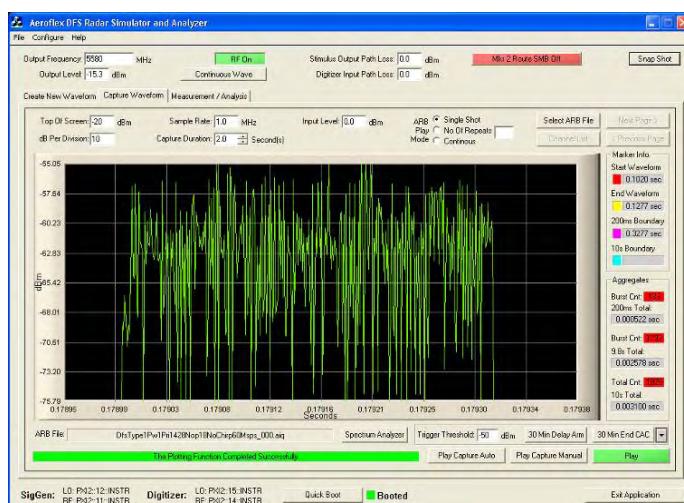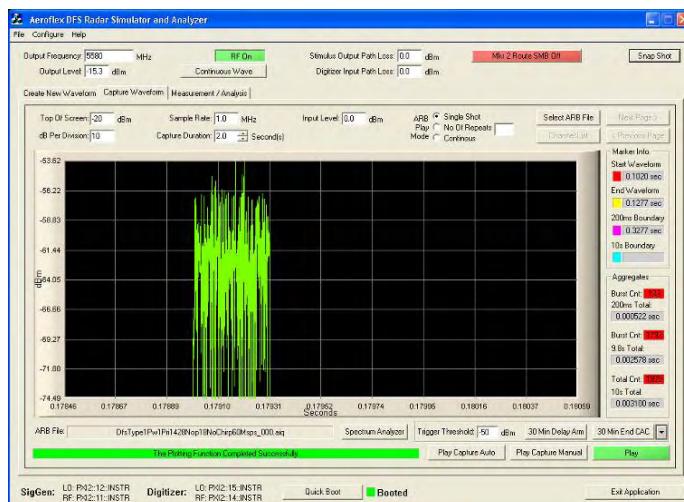


Actual duration of signal is 310 μ S
which is control information

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 274 of 293

Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 2 to 4 seconds

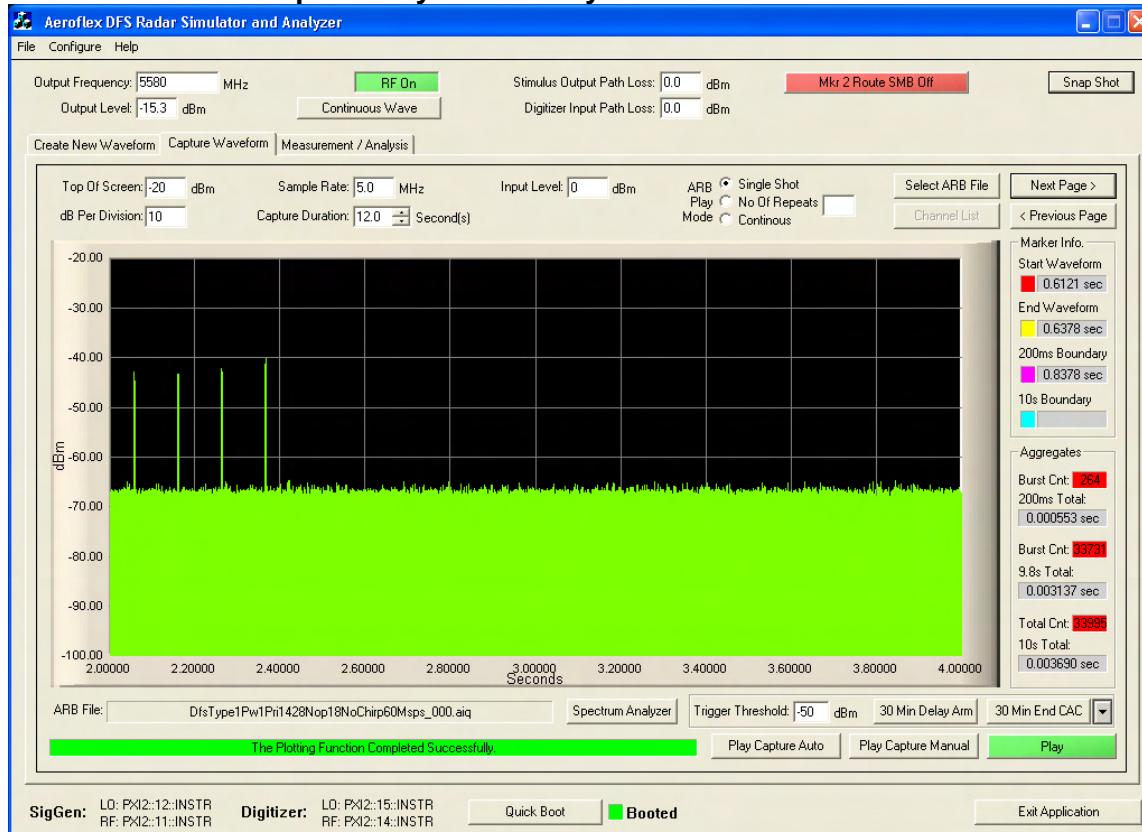

Last Transmitter Activity = 2.35 Seconds

Last Radar Activity = 0.6378 Seconds

Channel Move Time = Last Transmitter Activity – Last Radar Activity = 2.35 – 0.6378


Channel Move Time = 1.7122 secs (Limit 10 secs)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 275 of 293

Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 4 to 6 seconds

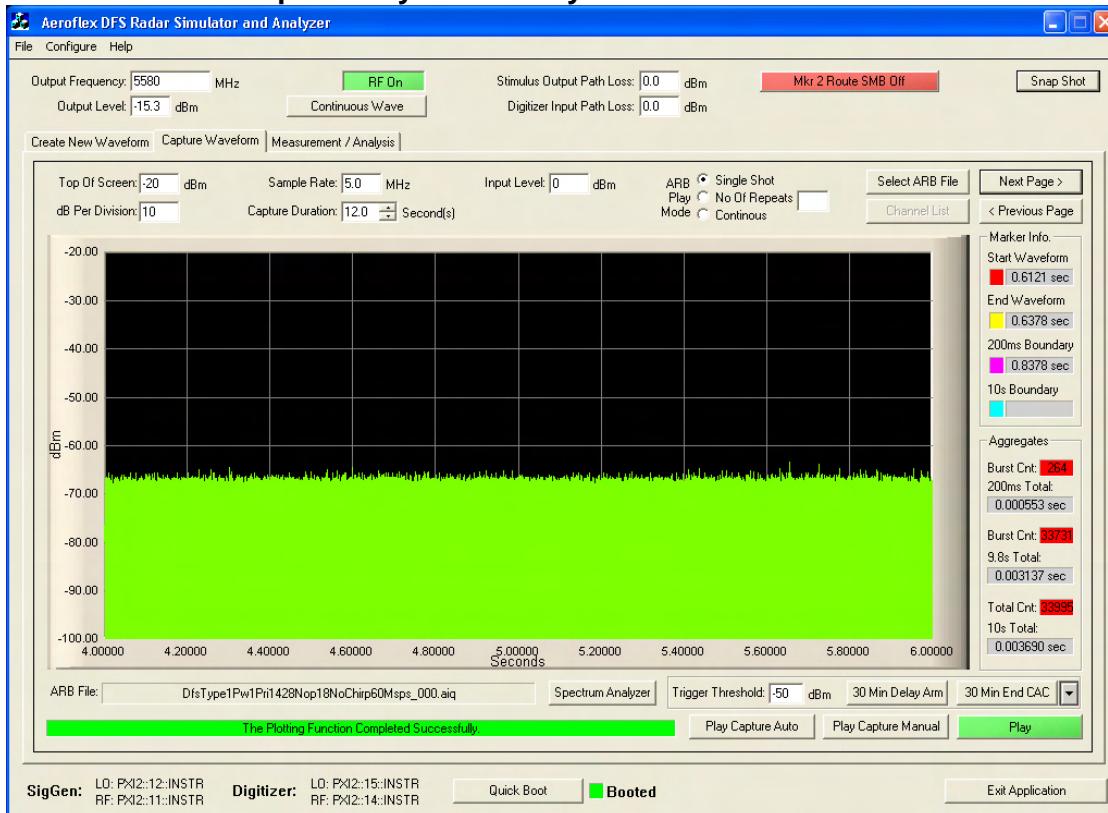


This test report may be reproduced in full only. The document may only be updated by MiCOM
Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 276 of 293

Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 6 to 8 seconds

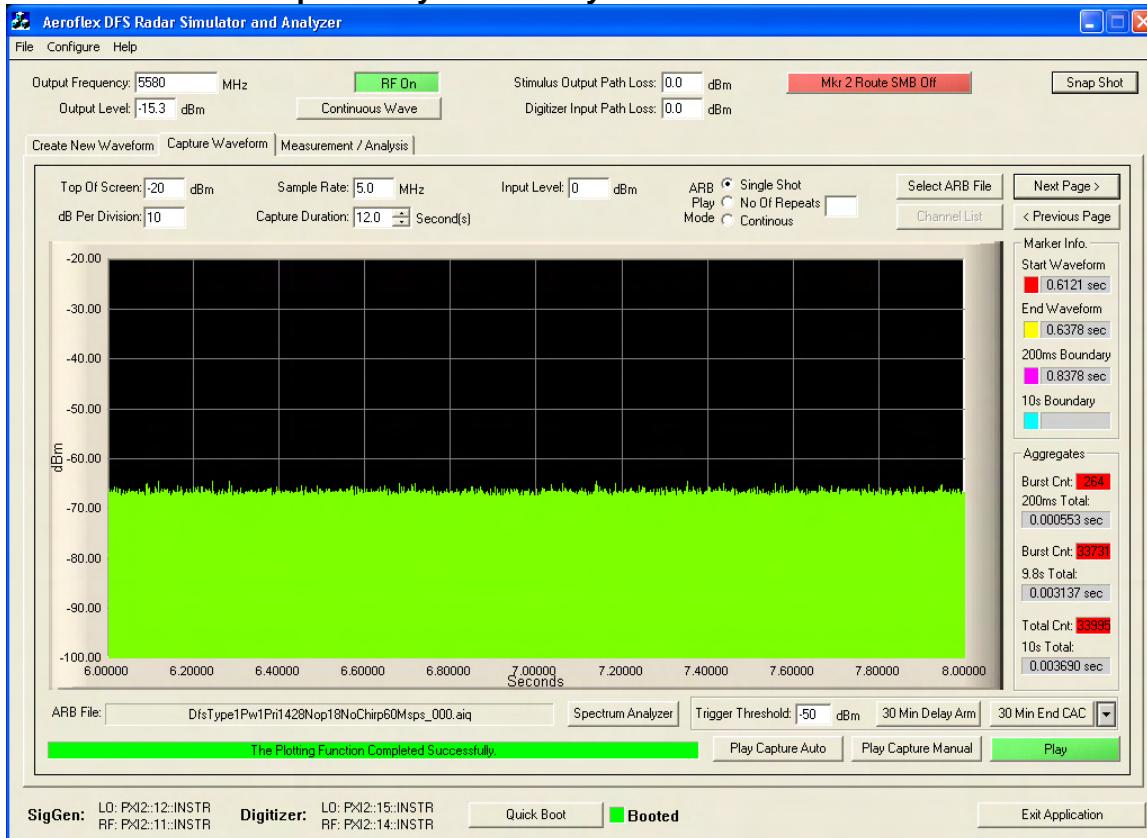


This test report may be reproduced in full only. The document may only be updated by MiCOM
Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 277 of 293

Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 8 to 10 seconds

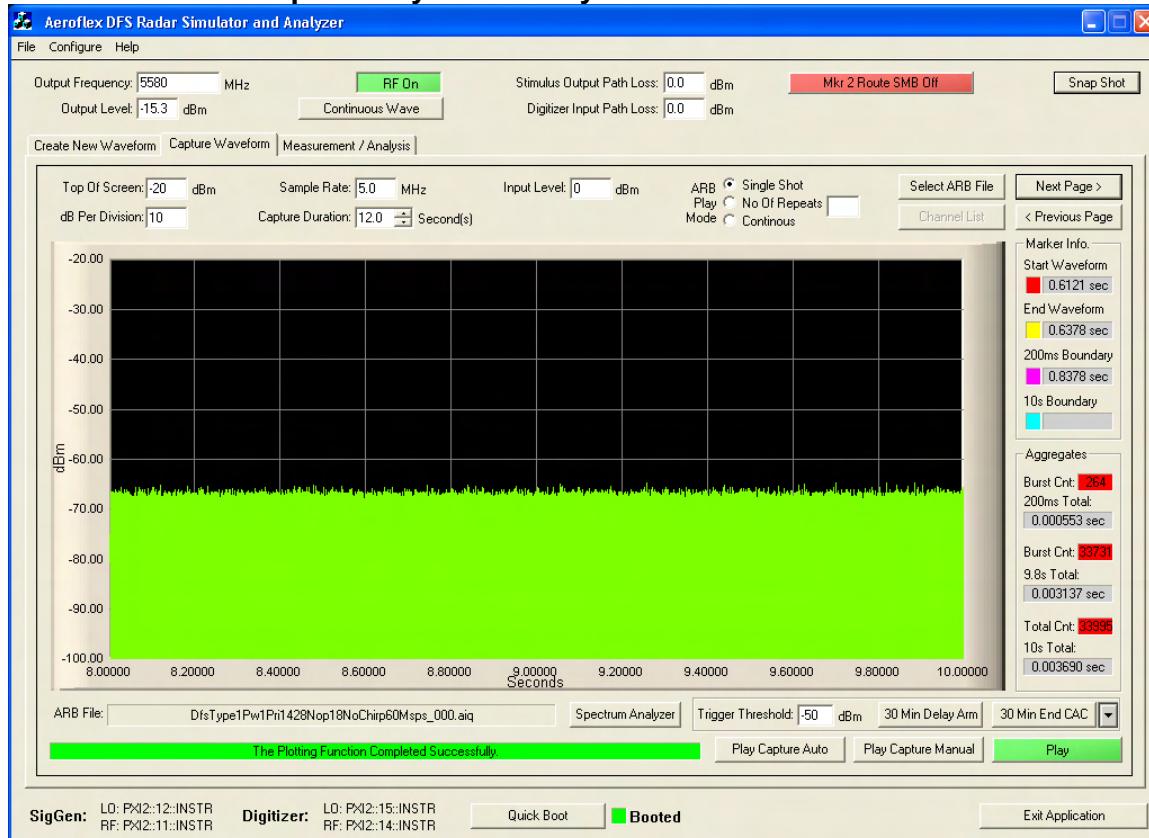


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 278 of 293

Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 10 to 12 seconds

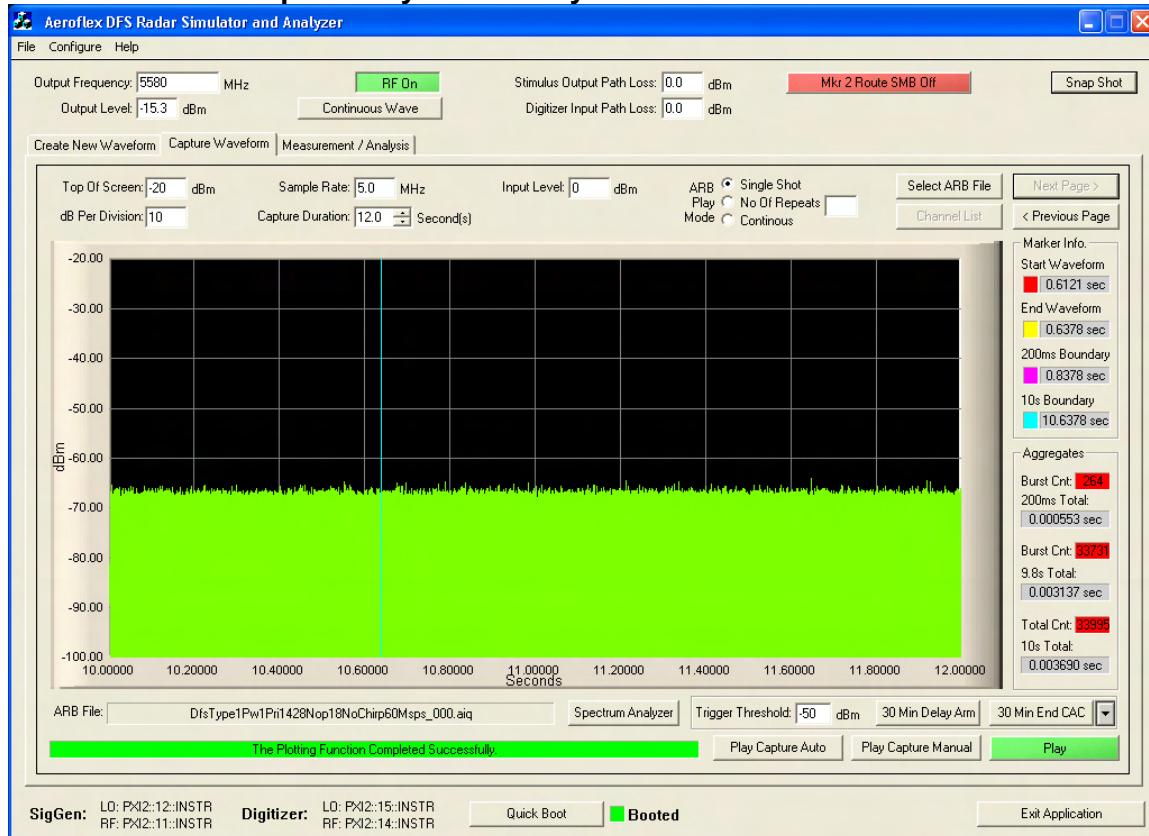


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 279 of 293

Channel Move Time, Channel Closing Transmission Time for Type 5 Radar

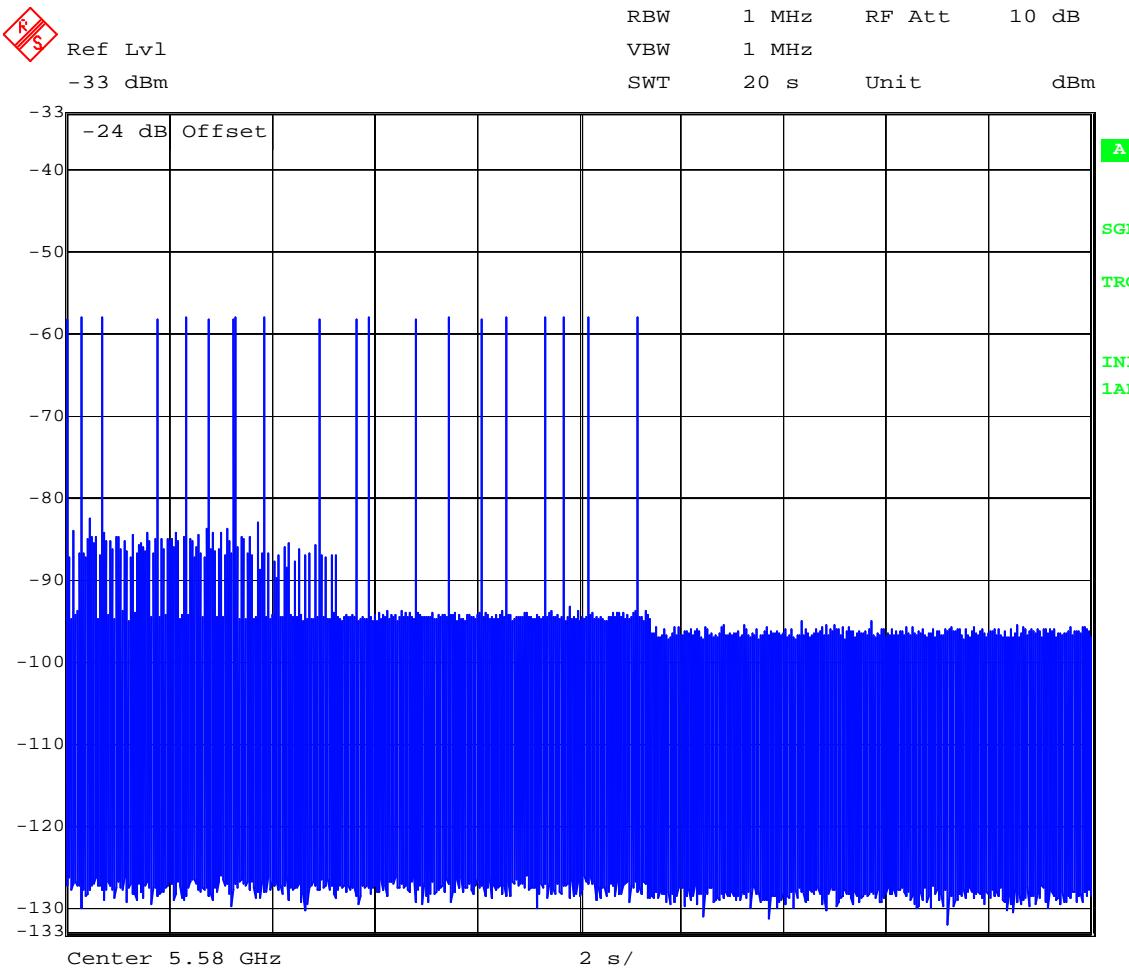

With reference to the requirements of FCC MO & O 06-96;- The instant that the Channel Move Time and Channel Closing Time begins for the long Pulse Radar Test Signal is the instant at the end of the 12 Second period defining the Radar Waveform. From the above plot is can be seen that the EUT stopped transmitting data before completion of the Radar Test Signal, therefore the Channel Closing Time and Channel Move time complies with the requirements.

By definition Channel Closing Transmission Time for Type 5 (Long Pulse) commences after the falling edge of the last radar pulse. Channel Closing Transmission Time = 0 secs.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 280 of 293

30 Minute Non-Occupancy Period

The EUT is monitored for more than 30 minutes following the channel close/move time to verify no transmissions resume on this Channel.

30 Minute Non-Occupancy Period Type 1 Radar Ch 5,580 MHz

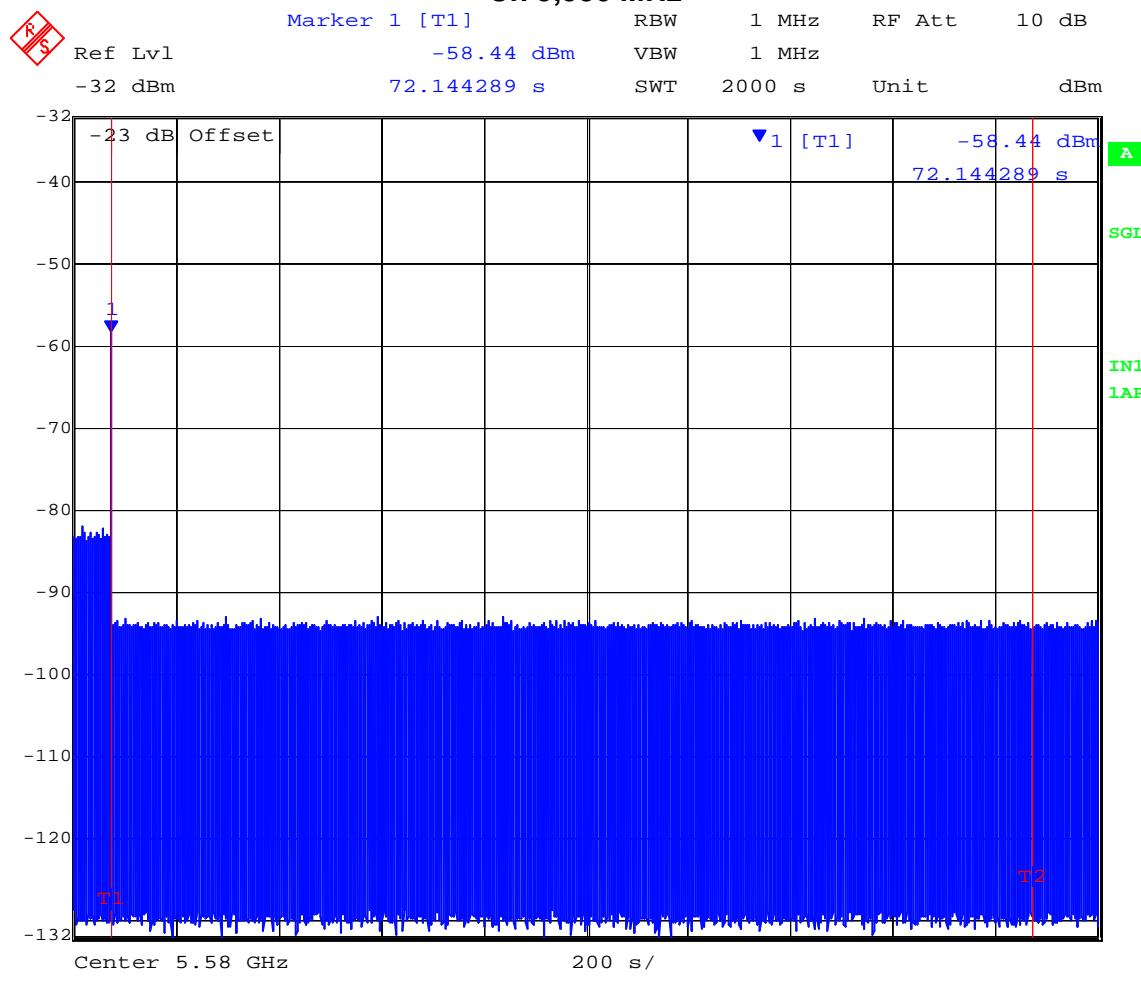

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 281 of 293

6.2.6. Statistical Performance Check

The steps below define the procedure to determine the minimum percentage of detection when a radar burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5,580 MHz. Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

The Radar Waveform generator sends the individual waveform for each of the radar types 1-6. Statistical data will be gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. The percentage of successful detection is calculated by:

Total # of detections ÷ Total # of Trials × 100 = Probability of Detection

The Minimum number of trials, minimum percentage of successful detection and the average minimum percentage of successful detection are found in the Radar Test Waveforms section.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 282 of 293

Verification of Detection

Trial #	Detection = ✓, No Detection = 0					
	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	✓	✓	✓	✓	✓	✓
2	✓	✓	✓	✓	✓	✓
3	✓	0	✓	✓	✓	✓
4	✓	✓	✓	✓	✓	✓
5	✓	✓	✓	✓	✓	0
6	✓	✓	✓	✓	✓	✓
7	✓	✓	✓	✓	✓	0
8	✓	✓	✓	✓	✓	✓
9	0	✓	✓	✓	✓	✓
10	✓	✓	✓	✓	✓	✓
11	✓	✓	✓	✓	✓	✓
12	✓	✓	✓	✓	✓	✓
13	✓	✓	✓	✓	✓	✓
14	✓	✓	✓	✓	✓	✓
15	✓	0	✓	✓	✓	✓
16	✓	0	0	✓	✓	✓
17	✓	✓	✓	✓	✓	✓
18	✓	✓	✓	✓	✓	✓
19	✓	✓	✓	✓	✓	✓
20	✓	✓	✓	✓	✓	✓
21	✓	✓	✓	✓	✓	✓
22	✓	✓	✓	✓	✓	✓
23	✓	✓	✓	✓	✓	✓
24	0	✓	✓	✓	✓	✓
25	✓	✓	✓	✓	✓	✓
26	✓	✓	✓	✓	✓	✓
27	✓	✓	✓	✓	✓	✓
28	✓	0	✓	✓	✓	✓
29	✓	✓	✓	✓	✓	✓
30	✓	✓	✓	✓	✓	0
Detection Percentage	93.3% (>60%)	86.7% (>60%)	96.7% (>60%)	100% (>60%)	100% (>80%)	90% (>80%)

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows:

$$(P_d1 + P_d2 + P_d3 + P_d4) / 4 = (93.3\% + 86.7\% + 96.7\% + 100\%) / 4 = 94.2\% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 283 of 293

Measurement Uncertainty Time/Power

Measurement uncertainty	
- Time	4%
- Power	1.33dB


Traceability**Test Equipment Used**

0072, 0083, 0098, 0116, 0132, 0158, 0313, 0314, 0193, 0223, 0252, 0253, 0251, 0256, 0328, 0329

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7. PHOTOGRAPHS

7.1. Radiated Emissions > 1GHz

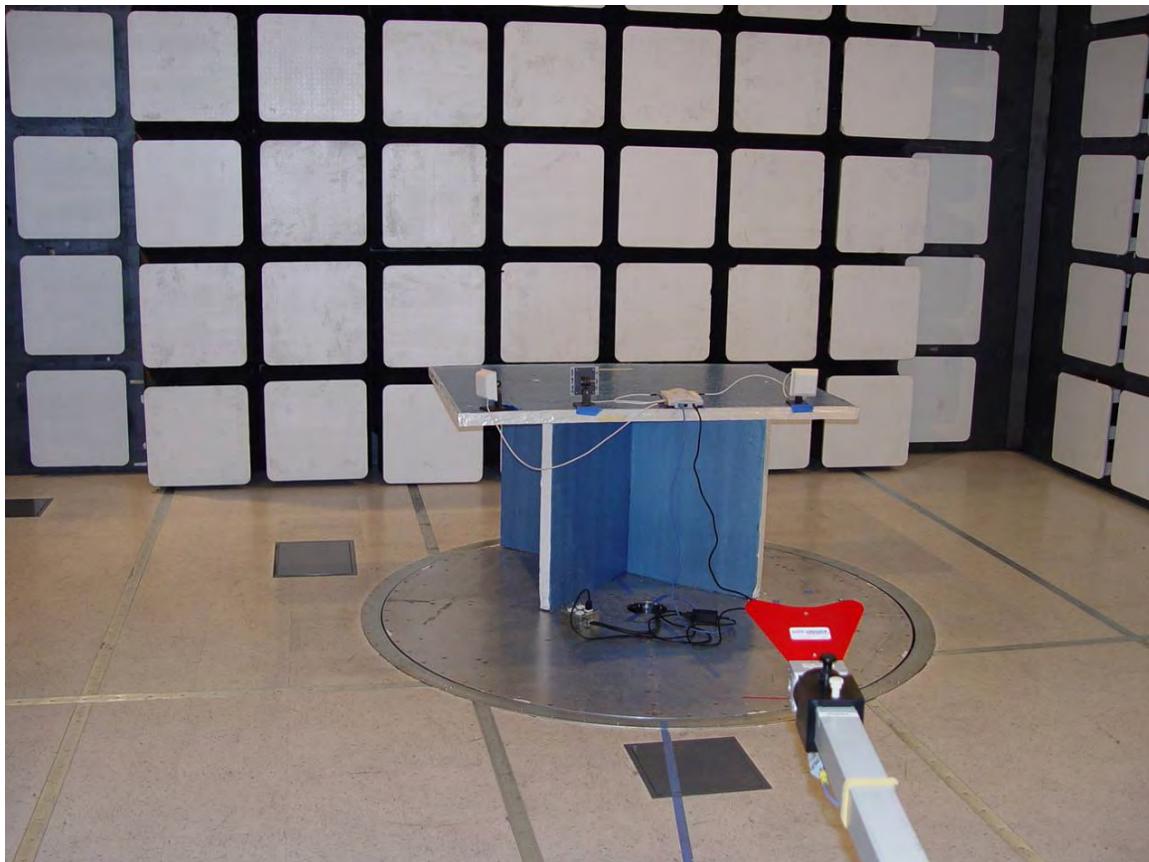

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7.2. Radiated Emissions < 1GHz with Power Convertor




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7.3. Radiated Emissions < 1GHz with POE (Power Over EtherNet)




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7.4. AC Wireline Conducted Emissions ac/dc Convertor

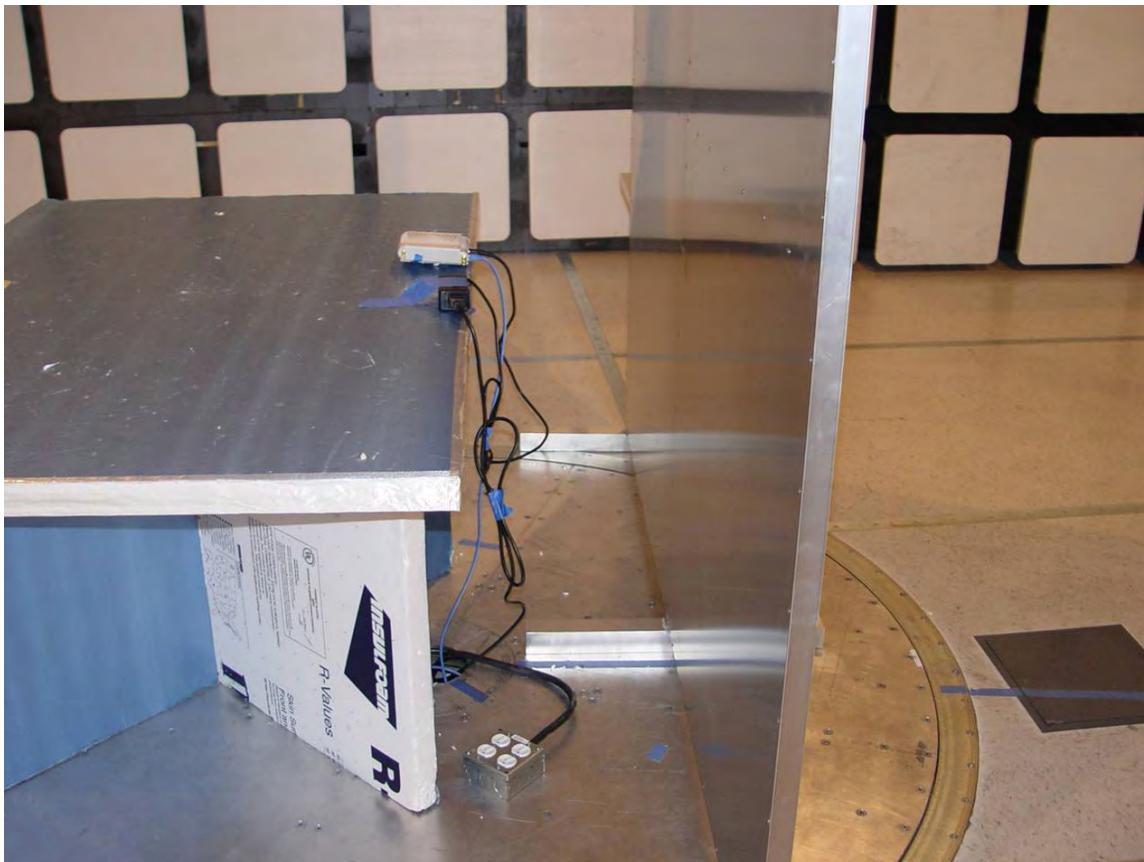

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7.5. AC Wireline Conducted Emissions POE

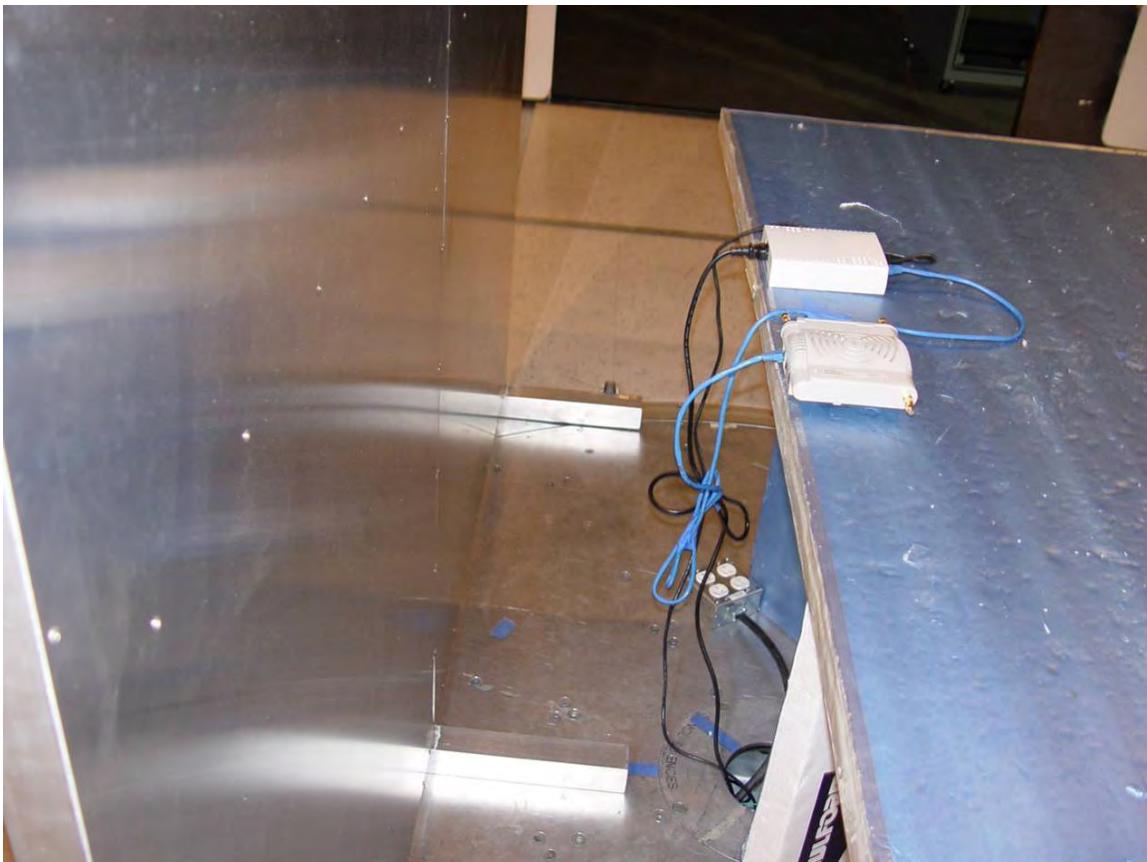

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


7.6. General Measurement Test Set-Up



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


7.7. Dynamic Frequency Selection Test Set-Up

General DFS Test Setup

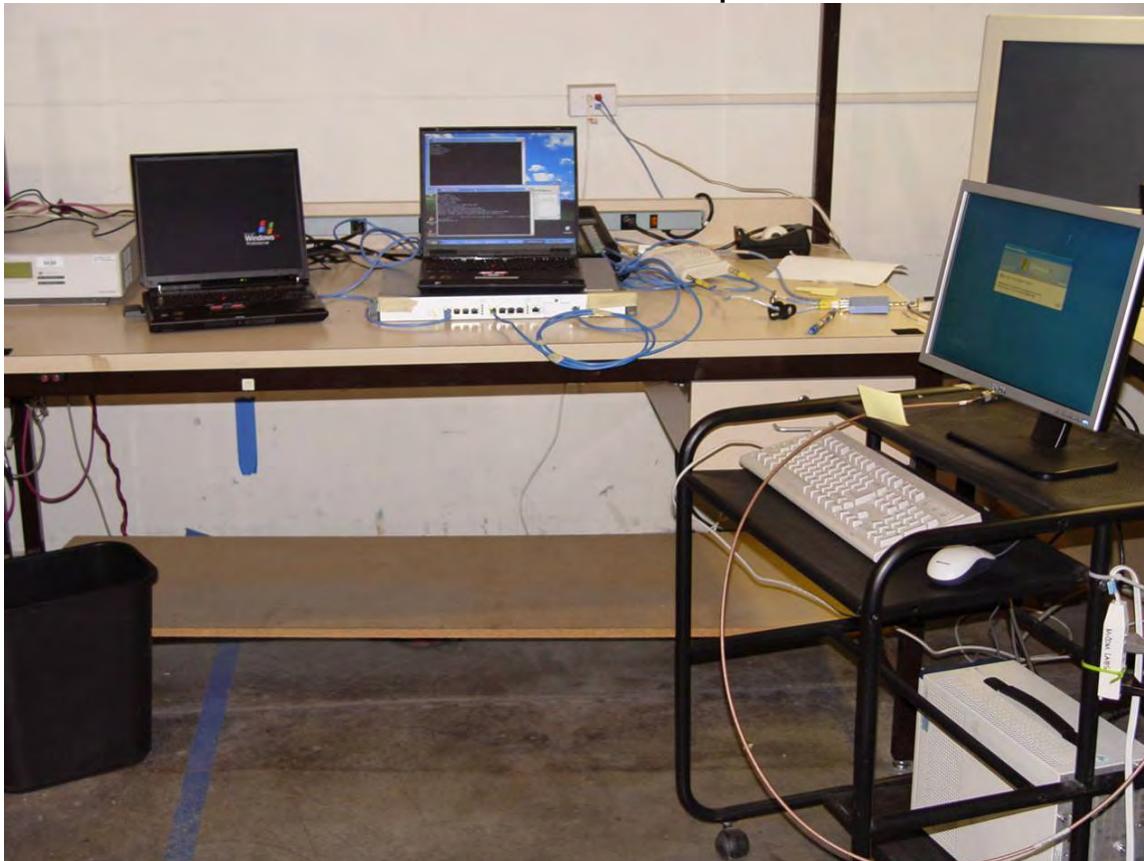

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

DFS Test Equipment

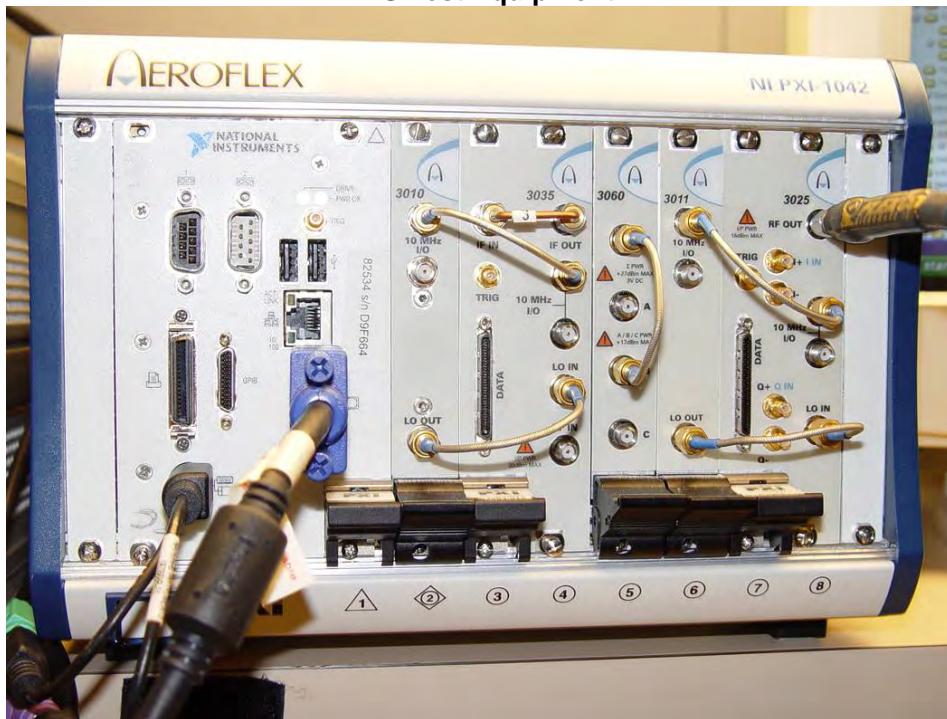

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP124,125 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB20-A4D Rev B
Issue Date: 23rd April 2008
Page: 292 of 293

8. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #
0088	Spectrum Analyzer	Hewlett Packard	8564E	3410A00141
0134	Amplifier	Com Power	PA 122	181910
0158	Barometer /Thermometer	Control Co.	4196	E2846
0193	EMI Receiver	Rhode & Schwartz	ESI 7	838496/007
0252	SMA Cable	Megaphase	Sucoflex 104	None
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001
0313	Coupler	Hewlett Packard	86205A	3140A01285
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623
0070	Power Meter	Hewlett Packard	437B	3125U11552
0116	Power Sensor	Hewlett Packard	8485A	3318A19694
0117	Power Sensor	Hewlett Packard	8487D	3318A00371
0184	Pulse Limiter	Rhode & Schwartz	ESH3Z2	357.8810.52
0190	LISN	Rhode & Schwartz	ESH3Z5	836679/006
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001
0301	5.6 GHz Notch Filter	Micro-Tronics	RBC50704	001
0302	5.25 GHz Notch Filter	Micro-Tronics	BRC50703	002
0303	5.8 GHz Notch Filter	Micro-Tronics	BRC50705	003
0304	2.4GHzHz Notch Filter	Micro-Tronics	--	001
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002
0335	1-18GHz Horn Antenna	ETS- Lindgren	3117	00066580
0337	Amplifier	MiCOM Labs	--	--
0338	Antenna	Sunol Sciences	JB-3	A052907

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200
Pleasanton, CA 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com