



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104,Building 7 and 8,DCC Cultural and Creative Garden No.98,Pingxin North Road,Shangmugu,Pinghu Street, Longgang District,Shenzhen,Guangdong,China

TEST REPORT

FCC Rules and Regulations Part 15 Subpart C (Section 15.209), ANSI C63.10: 2013

Report Reference No.....: GTS20220124005-1-3

FCC ID.....: 2A5ZDWS15WGGLBLK-A

Compiled by

(position+printed name+signature)...: File administrators Peter Xiao

Supervised by

(position+printed name+signature)...: Test Engineer Jenny Zeng

Approved by

(position+printed name+signature)...: Manager Simon Hu



Date of issue.....: Jun.02, 2022

Representative Laboratory Name .: Shenzhen Global Test Service Co.,Ltd.

Address.....: No.7-101 and 8A-104,Building 7 and 8,DCC Cultural and Creative Garden No.98,Pingxin North Road,Shangmugu,Pinghu Street,Longgang District,Shenzhen,Guangdong,China

Applicant's name XENTRIS WIRELESS LLC

Address: 1250 N GREENBRIAR DR STE A ADDISION, IL 60101-1098, USA

Test specification

Standard: FCC Rules and Regulations Part 15 Subpart C (Section 15.209), ANSI C63.10: 2013

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description 15W Dual Coil Wireless Charger

Trade Mark: N/A

Manufacturer: XENTRIS WIRELESS LLC

Model/Type reference.....: WS15WGGLBLK-A

List Model: N/A

Modulation Type: CW (Continuous Wave)

Operation Frequency.....: 115-205KHz

Ratings: Input: DC 5.0V/3.0A, DC 9.0V/2.77A, DC 12.0V/2.08A, DC 15.0V/1.66A
Wireless Output: 5W for 5.0V(Max), 7.5W for 9.0V(Max), 10W for 12.0V(Max), 15W for 15.0V (Max)

Result.....: **PASS**

TEST REPORT

Test Report No. : GTS20220124005-1-3	Jun.02, 2022 Date of issue
--	-------------------------------

Equipment under Test : 15W Dual Coil Wireless Charger

Model /Type : WS15WGGLBLK-A

Listed Models : N/A

Applicant : **XENTRIS WIRELESS LLC**

Address : 1250 N GREENBRIAR DR STE A ADDISION, IL 60101-1098, USA

Manufacturer **XENTRIS WIRELESS LLC**

Address : 1250 N GREENBRIAR DR STE A ADDISION, IL 60101-1098, USA

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS	4
2. SUMMARY	5
2.1. General Remarks	5
2.2. Product Description	5
2.3. Equipment Under Test	6
2.4. EUT Exercise Software	6
2.5. Special Accessories	6
2.6. External I/O Cable	6
2.7. Modifications	6
3. TEST ENVIRONMENT	7
3.1. Address of the test laboratory	7
3.2. Test Facility	7
3.3. Test Description	7
3.4. Statement of the measurement uncertainty	7
3.5. Equipments Used during the Test	8
4. TEST CONDITIONS AND RESULTS	9
4.1. AC Power Conducted Emission	9
4.2. Radiated Emission	11
4.3. Occupied Bandwidth	15
4.4. Antenna Requirement	16
5. TEST SETUP PHOTOS OF THE EUT	17
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	19

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules and Regulations Part 15 Subpart C \(Section 15.209\)](#): Radiated emission limits; general requirements.

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	May.12, 2022
Testing commenced on	:	May.12, 2022
Testing concluded on	:	Jun.01, 2022

2.2. Product Description

Product Name:	15W Dual Coil Wireless Charger
Trade Mark:	N/A
Model/Type reference:	WS15WGGLBLK-A
List Model:	N/A
Model Declaration	N/A
Power supply:	Input: DC 5.0V/3.0A, DC 9.0V/2.77A, DC 12.0V/2.08A, DC 15.0V/1.66A Wireless Output: 5W for 5.0V(Max), 7.5W for 9.0V(Max), 10W for 12.0V(Max), 15W for 15.0V (Max)
Hardware version	N/A
Software version	N/A
Sample ID	GTS20220124005-1-3#
WPT	
Operation frequency	115-205KHz
Modulation Type	CW (Continuous Wave)
Load Sensing	Contact transmission
Antenna Type	Coil Antenna
Antenna Gain	0dBi

2.3. Equipment Under Test**Power supply system utilised**

Power supply voltage	:	☐	230V / 50 Hz	☐	120V / 60Hz
		☐	12 V DC	☐	24 V DC
		☒	Other (specified in blank below)		

DC 15.0V**Description of the test mode**

Operation Frequency each of channel	
Channel	Frequency
1	127.7KHz

Mode	Mode1
AC mode	Wireless Charging 15W

Note: All input voltage modes are tested, only the worst mode (DC 15.0V/1.66A) is recorded in the report.

2.4. EUT Exercise Software

N/A

2.5. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
XENTRIS WIRELESS LLC	Adapter	580245A650	--	SDOC

2.6. External I/O Cable

I/O Port Description	Quantity	Cable
DC IN Port	1	1.2M, Unscreened Cable

2.7. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104,Building 7 and 8,DCC Cultural and Creative Garden No.98,Pingxin North Road,Shangmugu,Pinghu Street,Longgang District,Shenzhen,Guangdong,China

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2019 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

Industry Canada Registration Number. is 24189.

FCC Designation Number is CN1234.

FCC Registered Test Site Number is165725.

IC Registration Number is 24189.

CAB identifier is CN0082.

3.3. Test Description

Description Of Test	Result
Conducted Emissions Test	Compliant
Radiated Emission Test	Compliant
Occupied Bandwidth Measurement	Compliant
Antenna Requirement	Compliant

3.4. Statement of the measurement uncertainty

Measurement Uncertainty		
Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	=	4.06dB, k=2

3.5. Equipments Used during the Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	ULTRA-BROADBAND ANTENNA	Schwarzbeck	VULB9163	000976	2021/09/19	2022/09/18
2	EMI Test Receiver	R&S	ESCI 3	101841-cd	2021/09/19	2022/09/18
3	Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2021/09/19	2022/09/18
4	Pre-Amplifier	Agilent	8349B	3008A02306	2021/09/19	2022/09/18
5	Pre-Amplifier	Agilent	8447D	2944A10176	2021/09/19	2022/09/18
6	Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	15006	2021/09/19	2022/09/18
7	RS SPECTRUM ANALYZER	R&S	FSP40-N	101800	2021/09/19	2022/09/18
8	EMI Test software	Tonscend	JS32-RE	Version 2.0.1.5	/	/
9	EMI Test Software	AUDIX	E3	/	N/A	N/A
10	EMI Test Receiver	ROHDE & SCHWARZ	ESCI 7	101102	2021/09/19	2022/09/18
11	Artificial Mains	ROHDE & SCHWARZ	ESH2-Z5	893606/008	2021/09/19	2022/09/18
12	Artificial Mains	CYBERTEK	EM5040A	E1850400105	2021/09/19	2022/09/18
13	Pulse Limiter	Agilent	11947A	3107A04120	2021/09/19	2022/09/18
14	Impedance Stabilization Network	Schwarzbeck	CAT5 8158	102	2021/09/19	2022/09/18
15	Transient Limiter	CYBERTEK	EM5010A	E1950100106	2021/09/19	2022/09/18
16	Spectrum Analyzer	Agilent	N9020A	MY48010425	2021/09/19	2022/09/18

The calibration interval is 1 year.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

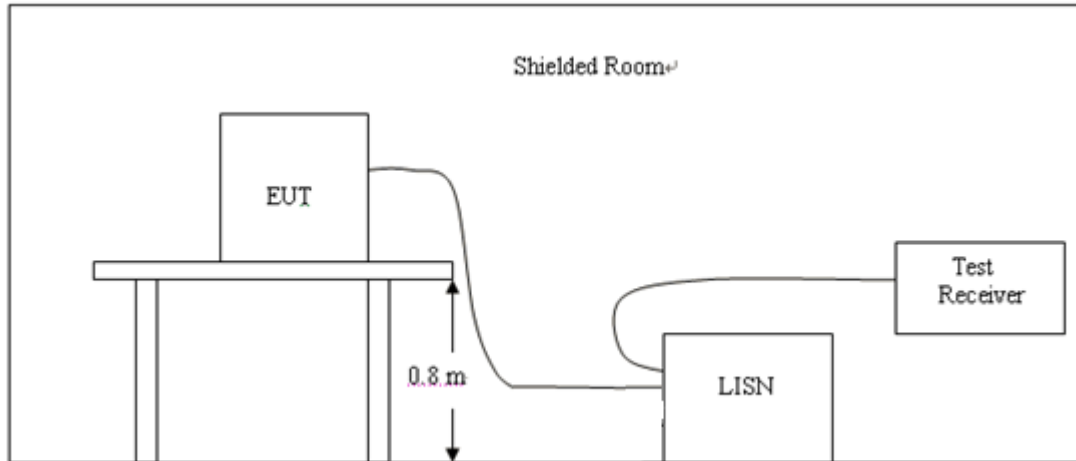

TEST PROCEDURE

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of adapter, the adapter received power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

1. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:.

Temperature	23.6°C	Humidity	55.3%
Test Engineer	Jenny Zeng	Configurations	WPT


Power supply:

AC 120V/60Hz

Polarization

L

Test Graph

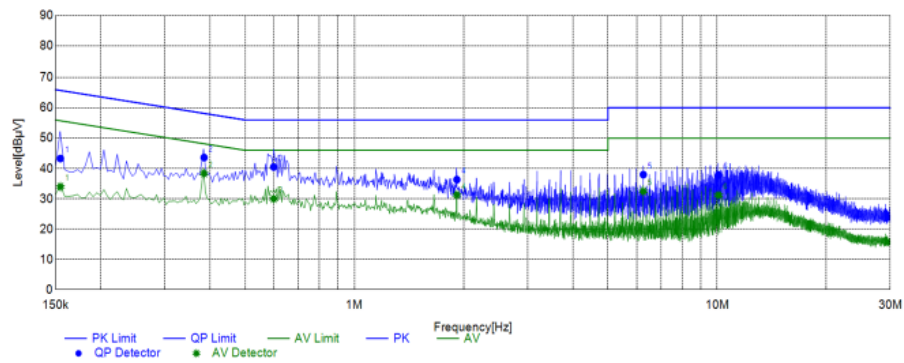

Final Data List

NO.	Frequency [MHz]	QP Reading [dBμV]	AVG. Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG. Result [dBμV]	QP Limit [dBμV]	AVG. Limit [dBμV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.1548	33.69	24.38	9.60	43.29	33.98	65.74	55.74	22.45	21.76	L1	PASS
2	0.3852	34.17	28.92	9.44	43.61	38.36	58.17	48.17	14.56	9.81	L1	PASS
3	0.5992	30.81	20.31	9.70	40.51	30.01	56.00	46.00	15.49	15.99	L1	PASS
4	1.9164	26.97	21.93	9.35	36.32	31.28	56.00	46.00	19.68	14.72	L1	PASS
5	6.2589	28.67	23.13	9.32	37.99	32.45	60.00	50.00	22.01	17.55	L1	PASS
6	10.0932	28.68	22.00	9.18	37.86	31.18	60.00	50.00	22.14	18.82	L1	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


Power supply:

AC 120V/60Hz

Polarization

N

Test Graph

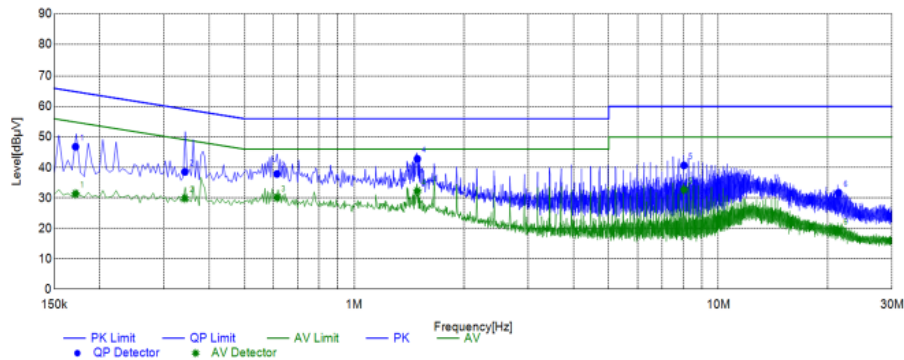

Final Data List

NO.	Frequency [MHz]	QP Reading [dBμV]	AVG. Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG. Result [dBμV]	QP Limit [dBμV]	AVG. Limit [dBμV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.1717	37.22	21.74	9.59	46.81	31.33	64.88	54.88	18.07	23.55	N	PASS
2	0.3426	29.08	20.39	9.47	38.55	29.86	59.14	49.14	20.59	19.28	N	PASS
3	0.6135	28.48	20.66	9.40	37.88	30.06	56.00	46.00	18.12	15.94	N	PASS
4	1.4904	33.47	22.89	9.36	42.83	32.25	56.00	46.00	13.17	13.75	N	PASS
5	8.0491	31.38	23.42	9.30	40.68	32.72	60.00	50.00	19.32	17.28	N	PASS
6	21.3958	22.46	10.02	9.24	31.70	19.26	60.00	50.00	28.30	30.74	N	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).


2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Note: All the modes have been tested and recorded worst mode in the report.


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

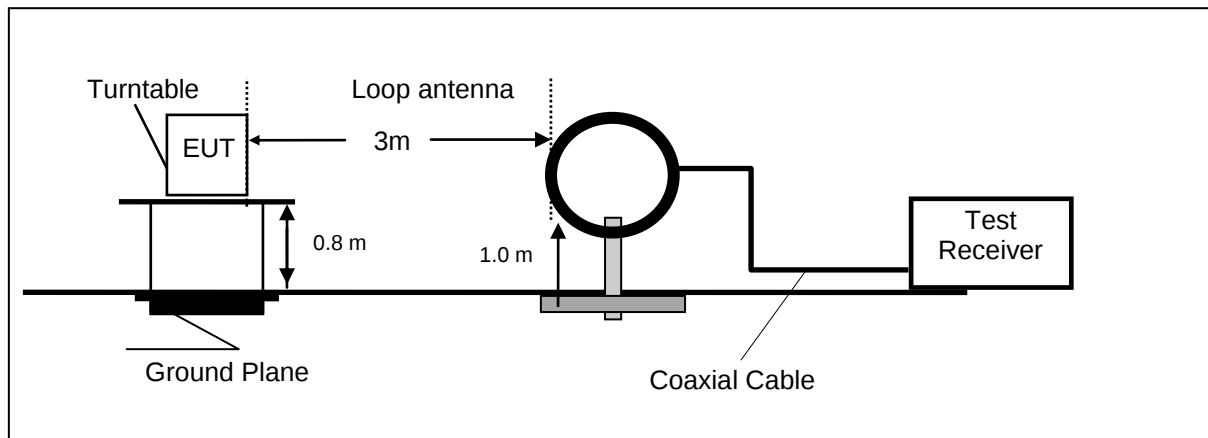

Frequency range 30MHz – 1000MHz

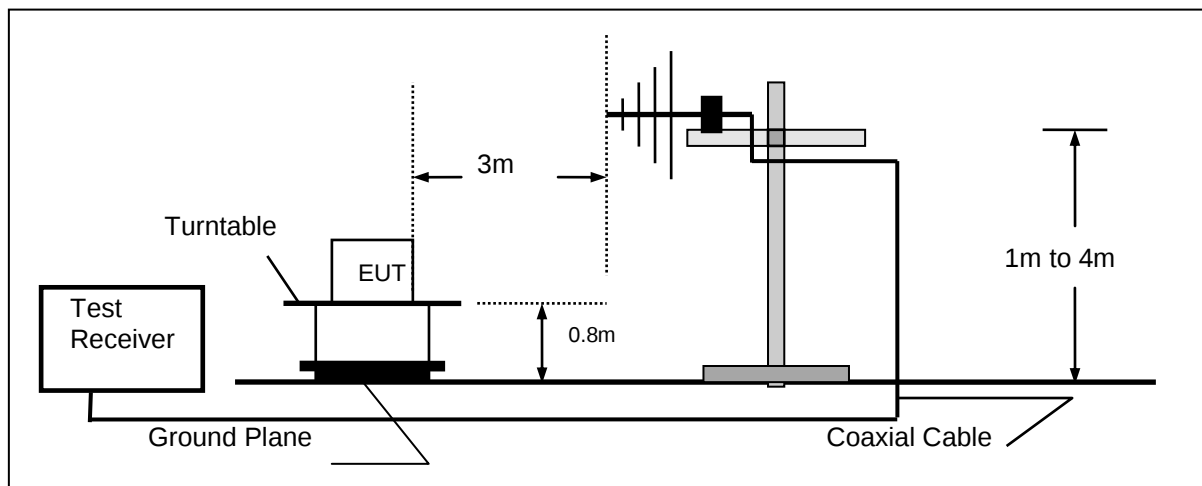

Frequency range above 1GHz-25GHz

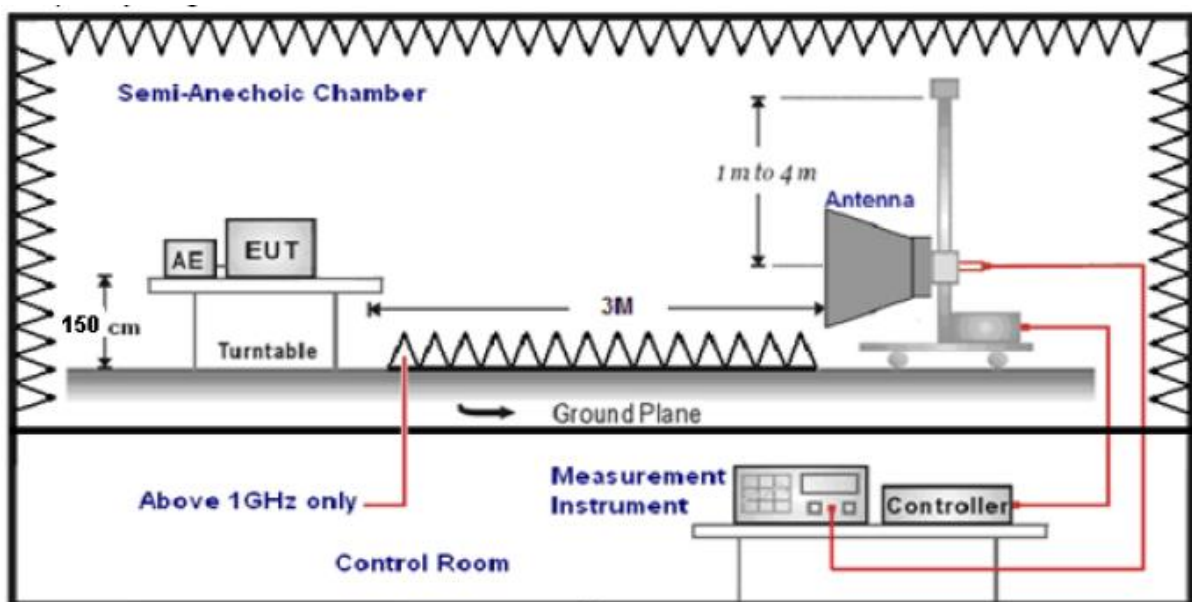

TEST PROCEDURE

- 1.The EUT was placed on a turn table which is 12mm above ground plane when testing frequency range 9 KHz –25GHz.
- 2.Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
- 3.And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4.Repeat above procedures until all frequency measurements have been completed.
- 5.The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 205KHz.so radiated emission test frequency band from 9KHz to 1GHz.
- 6.The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- 7.Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$Transd=AF +CL-AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(KHz))+40\log(300/3)$	$2400/F(KHz)$
0.49-1.705	3	$20\log(24000/F(KHz))+40\log(30/3)$	$24000/F(KHz)$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS


Temperature	23.6°C	Humidity	55.3%
Test Engineer	Jenny Zeng	Configurations	WPT

For 9 KHz-30MHz

Frequency (MHz)	Corrected Reading (dBuV/m)@3m	FCC Limit (dBuV/m) @3m	Margin (dB)	Detector	Result
0.127	87.28	105.55	18.27	QP	PASS
0.573	49.89	72.43	22.54	QP	PASS
1.531	33.22	63.90	30.68	QP	PASS
6.037	52.24	69.54	17.31	QP	PASS
9.960	46.84	69.54	22.70	QP	PASS
15.706	47.90	69.54	21.64	QP	PASS

For 30MHz-1GHz**AC mode:**

Horizontal

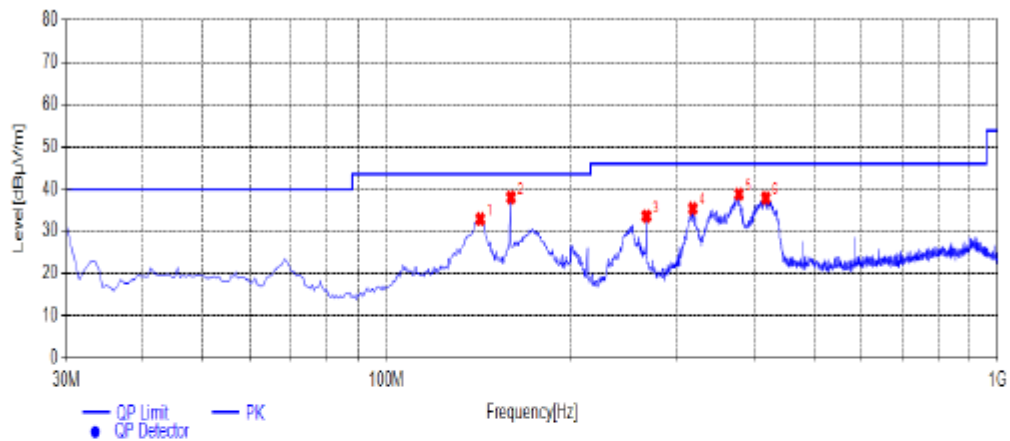Test Graph**Suspected List**


NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	142.5200	45.23	-12.33	32.90	43.50	10.60	100	27	PK	Horizontal	PASS
2	159.9800	49.46	-11.42	38.04	43.50	5.46	100	65	PK	Horizontal	PASS
3	266.6800	41.75	-8.17	33.58	46.00	12.42	100	297	PK	Horizontal	PASS
4	317.6050	42.47	-7.07	35.40	46.00	10.60	100	6	PK	Horizontal	PASS
5	377.7450	45.03	-6.20	38.83	46.00	7.17	100	343	PK	Horizontal	PASS
6	418.0000	42.75	-4.84	37.91	46.00	8.09	100	340	PK	Horizontal	PASS

Note:1. Result (dBuV/m) = Reading (dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

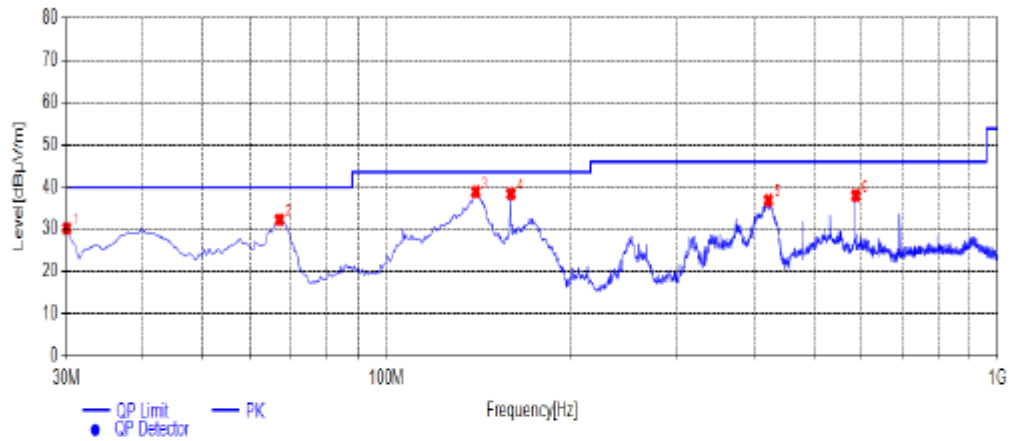

Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	30.0000	39.96	-9.76	30.20	40.00	9.80	100	33	PK	Vertical	PASS
2	66.8600	41.99	-9.77	32.22	40.00	7.78	100	121	PK	Vertical	PASS
3	140.0950	51.41	-12.49	38.92	43.50	4.58	100	39	PK	Vertical	PASS
4	159.9800	49.84	-11.42	38.42	43.50	5.08	100	44	PK	Vertical	PASS
5	421.8800	41.61	-4.71	36.90	46.00	9.10	100	153	PK	Vertical	PASS
6	586.7800	39.97	-1.95	38.02	46.00	7.98	100	186	PK	Vertical	PASS


Note: 1. Result (dBμV/m) = Reading (dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Note: All the modes have been tested and recorded worst mode in the report.

4.3. Occupied Bandwidth

TEST CONFIGURATION



TEST PROCEDURE


Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be demonstrated by measuring the radiated emissions.

LIMIT

TEST RESULTS

Temperature	24.5°C	Humidity	53.9%
Test Engineer	Jenny Zeng	Configurations	WPT

Mode	Freq (KHz)	20dB Bandwidth (KHz)	Limit (kHz)	Conclusion
Tx Mode	127.7	2.48	/	PASS

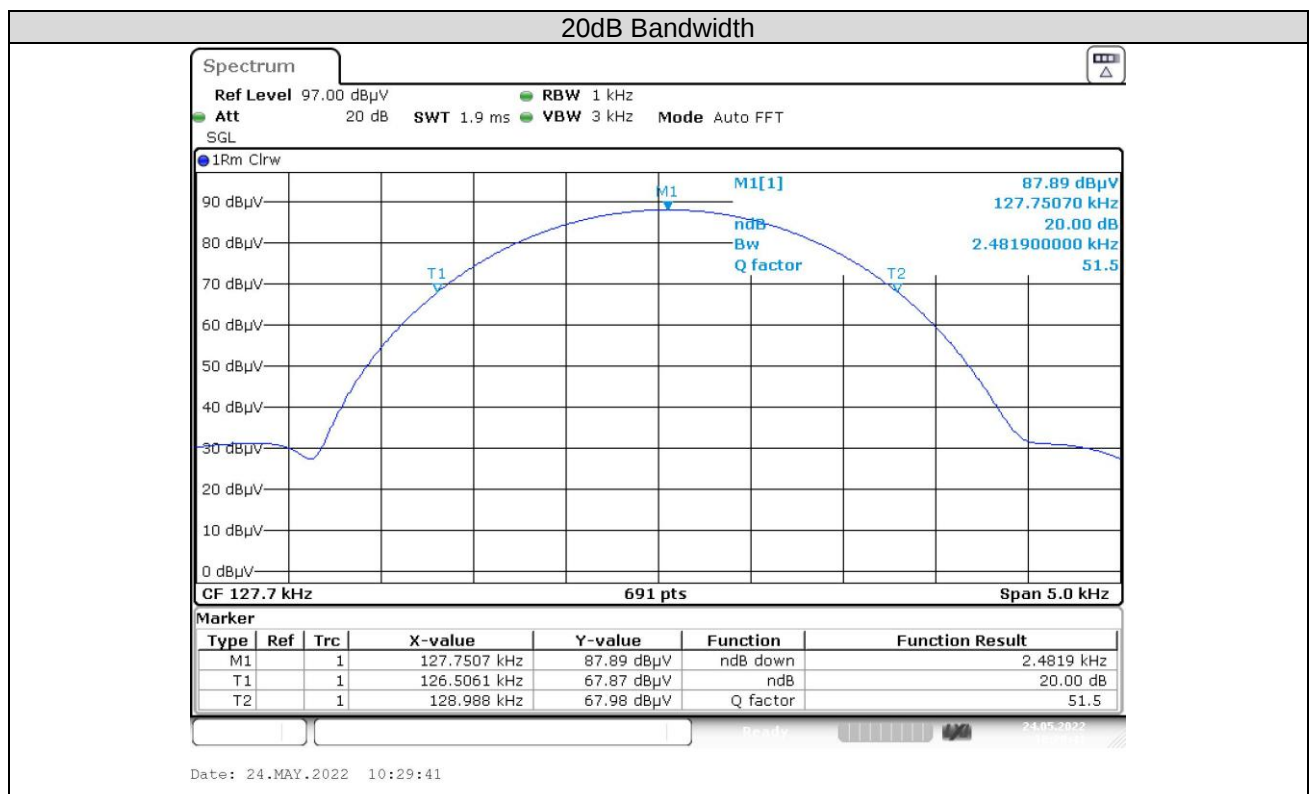

4.4. Antenna Requirement

Standard Applicable

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Information

The antenna used in this product is a Coil Antenna, The directional gains of antenna used for transmitting is 0dBi.

Reference to the **Internal photos**.

5. Test Setup Photos of the EUT

Photo of Radiated Emissions Measurement



Fig. 1



Fig. 2

Photo of Conducted Emissions Measurement

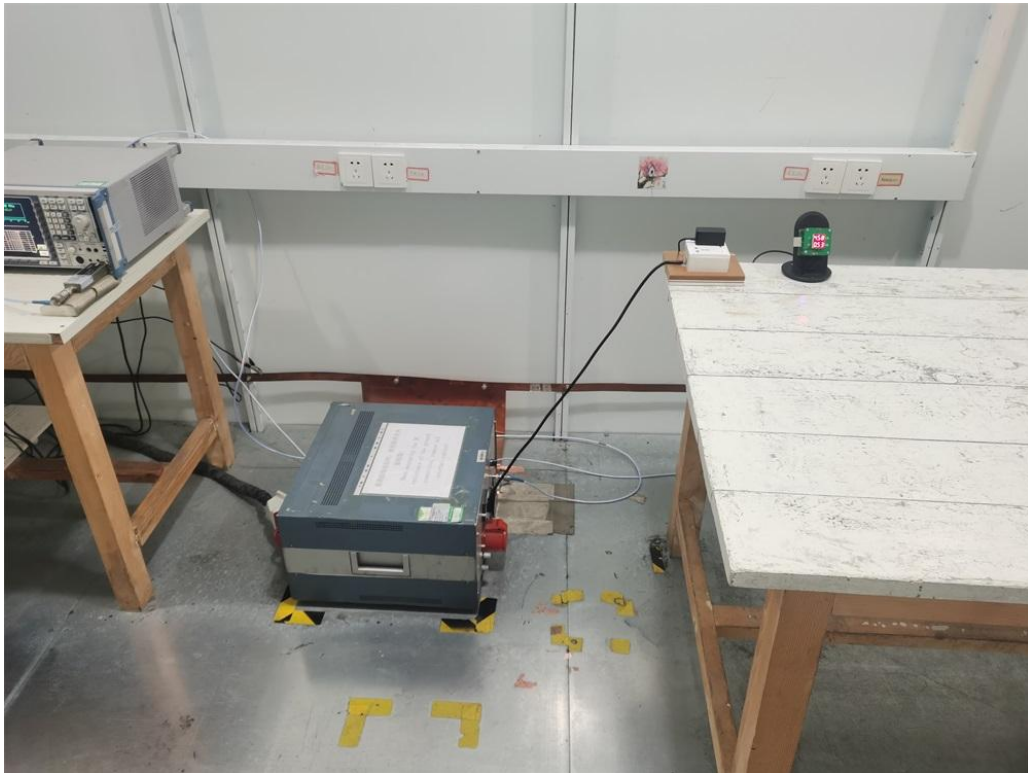


Fig. 3

6. External and Internal Photos of the EUT



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5

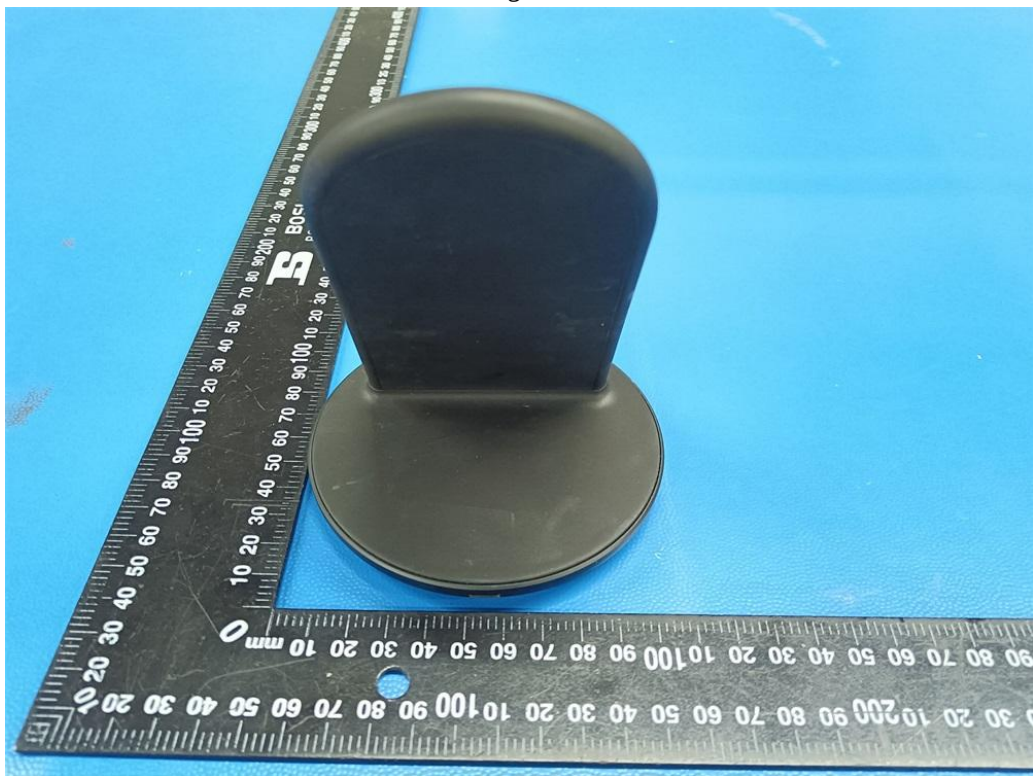


Fig. 6

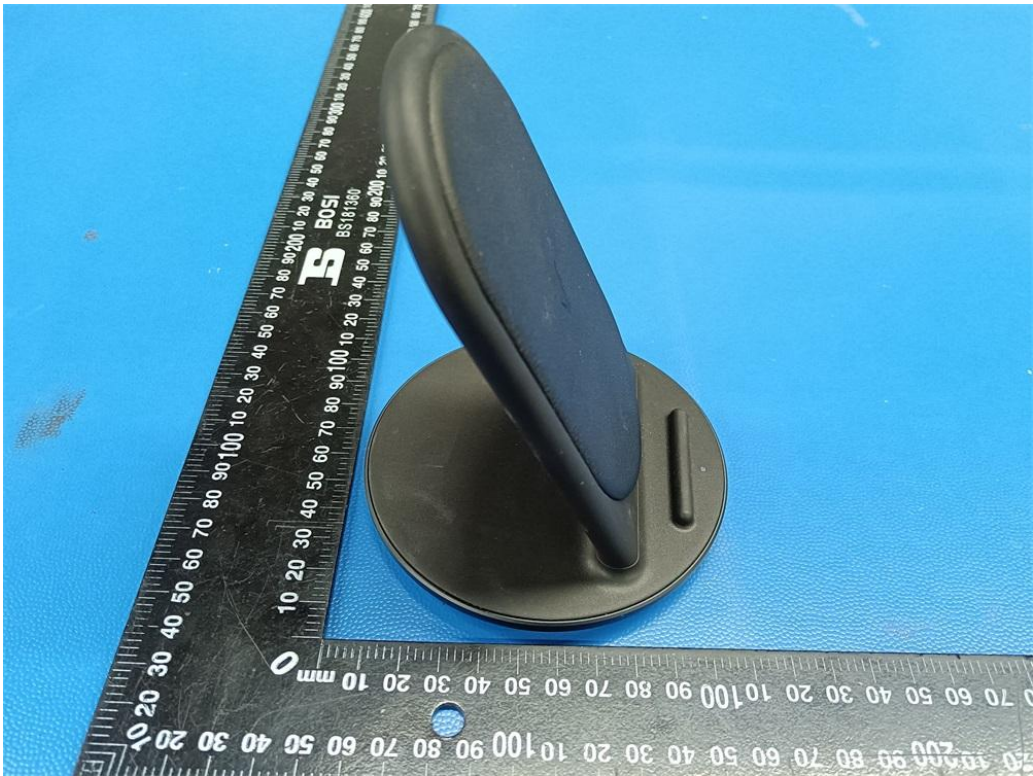


Fig. 7



Fig. 8



Fig. 9

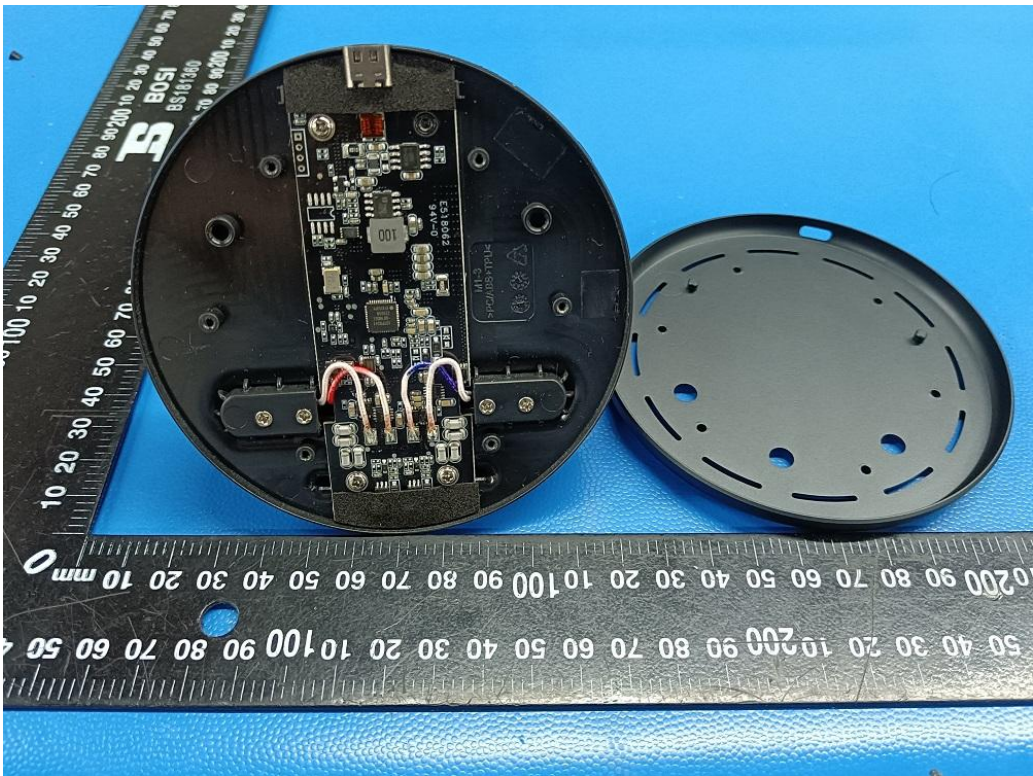


Fig. 10

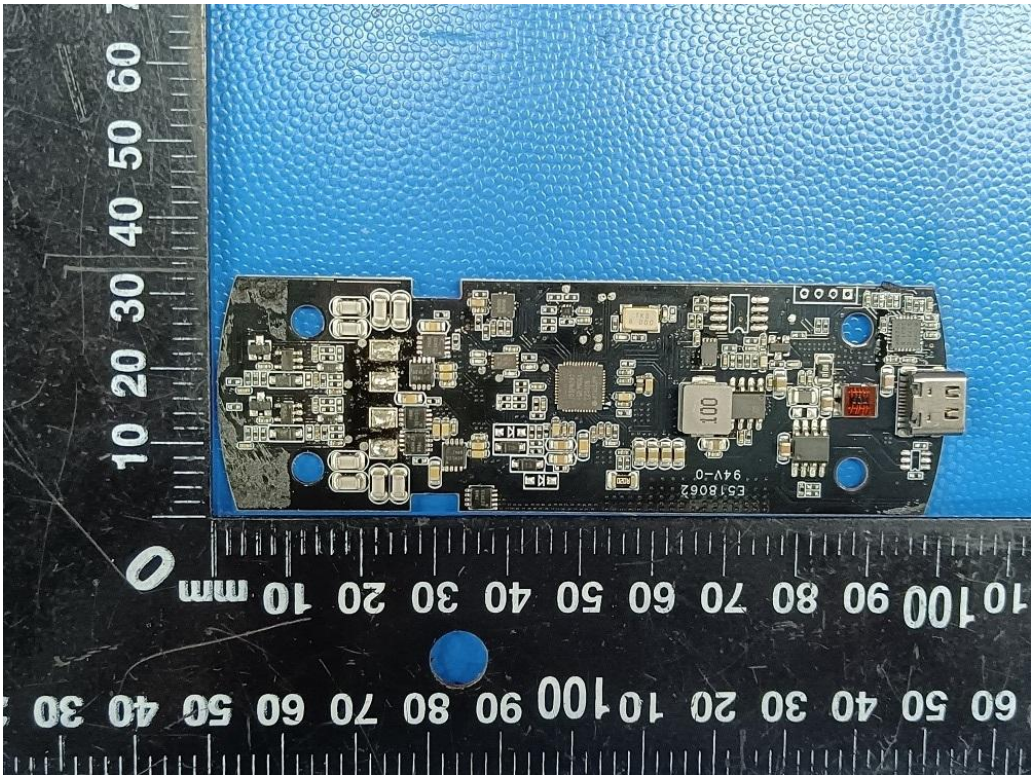


Fig. 11

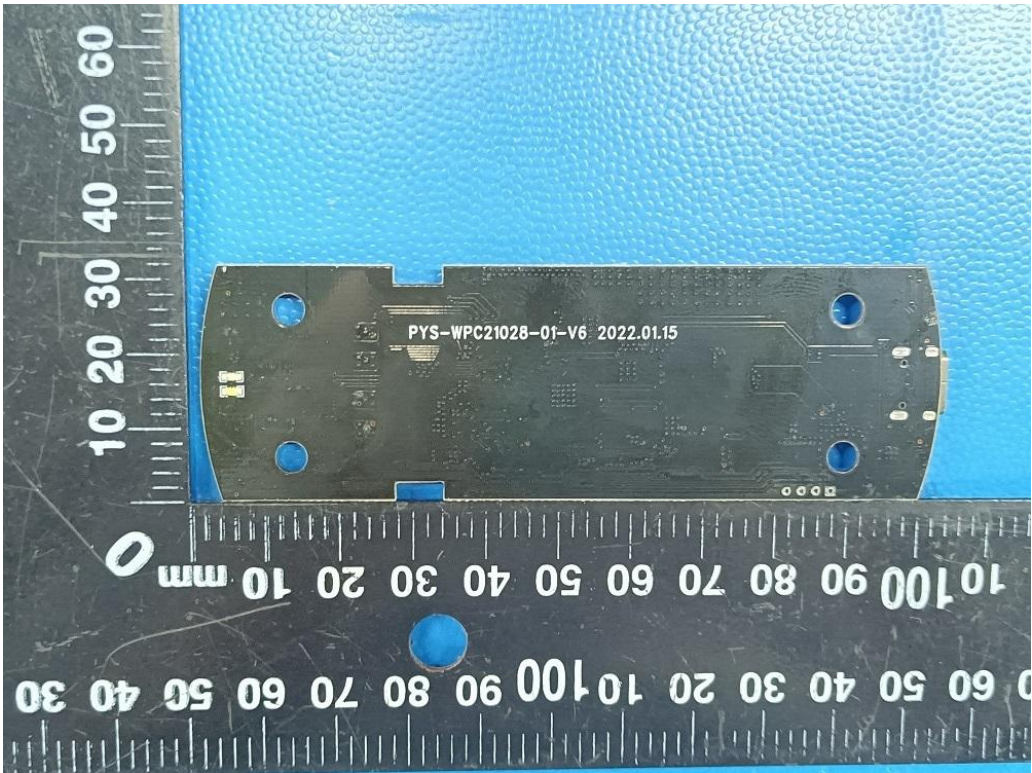


Fig. 12

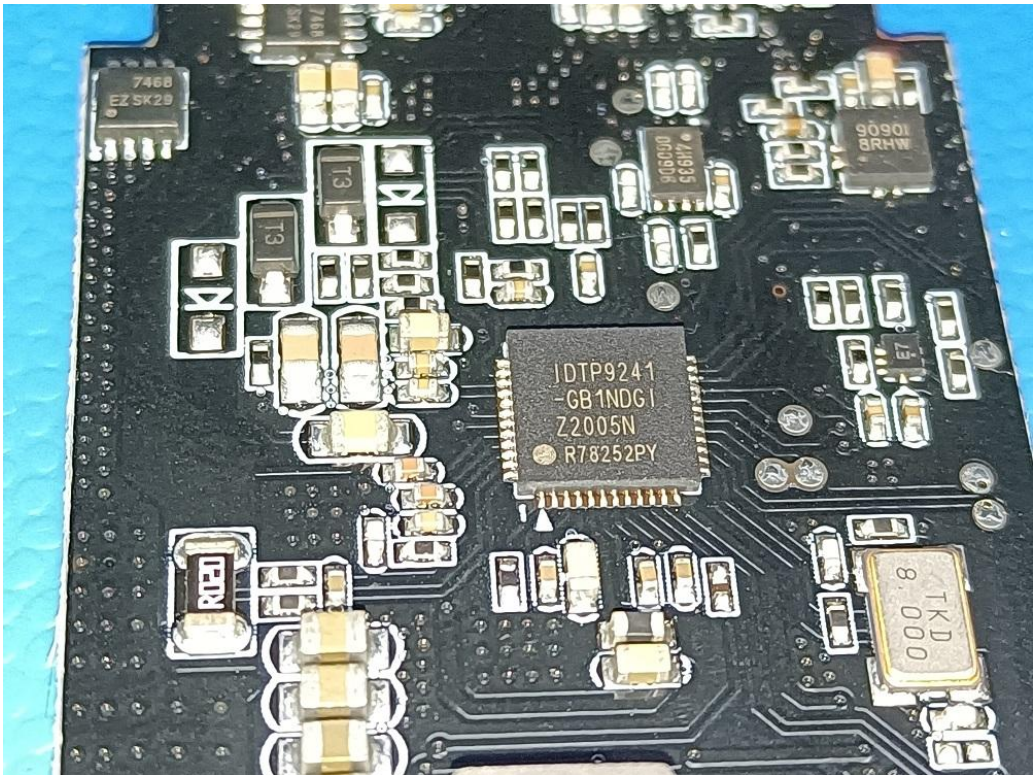


Fig. 13

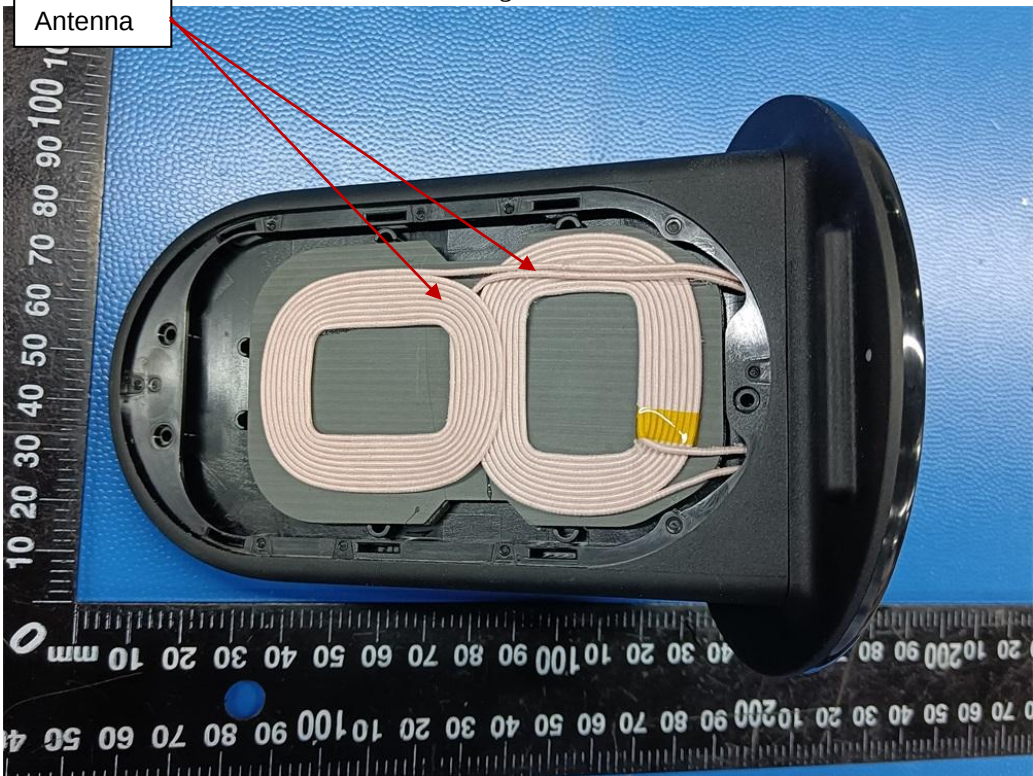


Fig. 14

.....End of Report.....