

A.6 Frequency Stability Test Result

Test Site	WZ-TR3	Test Engineer	Amy Zhang
Test Date	2023-07-19~2023-07-20		
Test Mode	5955MHz (Carrier Mode)		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	120	- 30	17.25	17.25	17.29	17.25
		- 20	17.83	17.88	17.92	17.92
		- 10	12.79	15.31	15.56	15.76
		0	12.18	12.18	12.13	12.13
		+ 10	33.02	33.06	33.11	33.15
		+ 20	27.69	27.78	27.86	27.90
		+ 30	25.51	25.64	25.72	25.76
		+ 40	-5.62	-5.33	-5.04	-4.91
		+ 50	20.02	-6.04	-6.08	-6.04
115	138	+ 20	14.85	14.60	14.23	14.06
85	102	+ 20	13.85	13.72	13.60	13.47

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} *10⁶.

A.7 Radiated Spurious Emission Test Result

ANT-311

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	8828.5	33.9	12.6	46.5	88.2	-41.7	Peak	Horizontal
*	10358.5	35.8	14.9	50.7	88.2	-37.5	Peak	Horizontal
	11089.5	33.5	16.7	50.2	74.0	-23.8	Peak	Horizontal
	11650.5	32.6	17.8	50.4	74.0	-23.6	Peak	Horizontal
*	8786.0	33.5	12.6	46.1	88.2	-42.1	Peak	Vertical
*	10358.5	36.8	14.9	51.7	88.2	-36.5	Peak	Vertical
	10860.0	33.0	16.2	49.2	74.0	-24.8	Peak	Vertical
	11344.5	31.8	17.2	49.0	74.0	-25.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	35.3	14.9	50.2	88.2	-38.0	Peak	Horizontal
	11455.0	32.2	17.3	49.5	74.0	-24.5	Peak	Horizontal
*	14430.0	32.8	19.5	52.3	88.2	-35.9	Peak	Horizontal
	16079.0	32.0	18.2	50.2	74.0	-23.8	Peak	Horizontal
*	10358.5	36.8	14.9	51.7	88.2	-36.5	Peak	Vertical
	11438.0	32.5	17.1	49.6	74.0	-24.4	Peak	Vertical
	11633.5	31.6	17.7	49.3	74.0	-24.7	Peak	Vertical
*	14846.5	32.1	20.1	52.2	88.2	-36.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	10919.5	32.0	16.5	48.5	74.0	-25.5	Peak	Horizontal
	11718.5	31.9	17.8	49.7	74.0	-24.3	Peak	Horizontal
*	14421.5	32.5	19.3	51.8	88.2	-36.4	Peak	Horizontal
*	14940.0	32.1	20.3	52.4	88.2	-35.8	Peak	Horizontal
*	10358.5	35.5	14.9	50.4	88.2	-37.8	Peak	Vertical
	11497.5	31.3	17.5	48.8	74.0	-25.2	Peak	Vertical
	11973.5	31.7	17.1	48.8	74.0	-25.2	Peak	Vertical
*	14838.0	31.7	20.2	51.9	88.2	-36.3	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	35.3	14.9	50.2	88.2	-38.0	Peak	Horizontal
	11548.5	32.0	17.7	49.7	74.0	-24.3	Peak	Horizontal
	12194.5	31.3	17.7	49.0	74.0	-25.0	Peak	Horizontal
*	14880.5	32.5	19.6	52.1	88.2	-36.1	Peak	Horizontal
*	10358.5	35.9	14.9	50.8	88.2	-37.4	Peak	Vertical
	11336.0	32.0	17.3	49.3	74.0	-24.7	Peak	Vertical
	11642.0	31.7	17.9	49.6	74.0	-24.4	Peak	Vertical
*	14064.5	32.3	19.1	51.4	88.2	-36.8	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE20	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	34.0	14.9	48.9	88.2	-39.3	Peak	Horizontal
	10800.5	32.1	16.2	48.3	74.0	-25.7	Peak	Horizontal
	11820.5	31.7	17.5	49.2	74.0	-24.8	Peak	Horizontal
*	14413.0	32.0	19.2	51.2	88.2	-37.0	Peak	Horizontal
*	10358.5	35.5	14.9	50.4	88.2	-37.8	Peak	Vertical
	11659.0	31.4	17.7	49.1	74.0	-24.9	Peak	Vertical
*	15025.0	32.1	19.7	51.8	88.2	-36.4	Peak	Vertical
	16121.5	32.8	17.7	50.5	74.0	-23.5	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	35.3	14.9	50.2	88.2	-38.0	Peak	Horizontal
	10970.5	32.6	16.0	48.6	74.0	-25.4	Peak	Horizontal
	11548.5	31.6	17.7	49.3	74.0	-24.7	Peak	Horizontal
*	13707.5	32.3	19.0	51.3	88.2	-36.9	Peak	Horizontal
*	10358.5	37.2	14.9	52.1	88.2	-36.1	Peak	Vertical
	11472.0	31.9	17.4	49.3	74.0	-24.7	Peak	Vertical
	12305.0	31.3	17.6	48.9	74.0	-25.1	Peak	Vertical
*	13707.5	39.3	19.0	58.3	88.2	-29.9	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	35.3	14.9	50.2	88.2	-38.0	Peak	Horizontal
	11132.0	32.1	16.2	48.3	74.0	-25.7	Peak	Horizontal
	11676.0	31.9	17.3	49.2	74.0	-24.8	Peak	Horizontal
*	14744.5	32.6	19.7	52.3	88.2	-35.9	Peak	Horizontal
*	10358.5	37.3	14.9	52.2	88.2	-36.0	Peak	Vertical
	11072.5	33.7	16.4	50.1	74.0	-23.9	Peak	Vertical
	11531.5	32.1	17.3	49.4	74.0	-24.6	Peak	Vertical
*	14625.5	32.8	19.5	52.3	88.2	-35.9	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	35.0	14.9	49.9	88.2	-38.3	Peak	Horizontal
	11106.5	32.0	16.6	48.6	74.0	-25.4	Peak	Horizontal
	11718.5	31.4	17.8	49.2	74.0	-24.8	Peak	Horizontal
*	14319.5	33.3	19.4	52.7	88.2	-35.5	Peak	Horizontal
*	10358.5	37.1	14.9	52.0	88.2	-36.2	Peak	Vertical
	11081.0	32.6	16.6	49.2	74.0	-24.8	Peak	Vertical
	11718.5	31.8	17.8	49.6	74.0	-24.4	Peak	Vertical
*	13707.5	32.1	19.0	51.1	88.2	-37.1	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	34.0	14.9	48.9	88.2	-39.3	Peak	Horizontal
	10928.0	32.4	16.5	48.9	74.0	-25.1	Peak	Horizontal
	11710.0	31.7	17.8	49.5	74.0	-24.5	Peak	Horizontal
*	14438.5	32.2	19.7	51.9	88.2	-36.3	Peak	Horizontal
*	10358.5	36.2	14.9	51.1	88.2	-37.1	Peak	Vertical
	11489.0	32.2	17.7	49.9	74.0	-24.1	Peak	Vertical
*	14345.0	31.9	19.6	51.5	88.2	-36.7	Peak	Vertical
	15433.0	31.1	19.0	50.1	74.0	-23.9	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	35.7	14.9	50.6	88.2	-37.6	Peak	Horizontal
	11642.0	31.3	17.9	49.2	74.0	-24.8	Peak	Horizontal
	12262.5	31.3	17.4	48.7	74.0	-25.3	Peak	Horizontal
*	15254.5	32.7	18.8	51.5	88.2	-36.7	Peak	Horizontal
*	10358.5	36.0	14.9	50.9	88.2	-37.3	Peak	Vertical
	11548.5	31.8	17.7	49.5	74.0	-24.5	Peak	Vertical
	12237.0	32.2	17.5	49.7	74.0	-24.3	Peak	Vertical
*	14838.0	33.1	20.2	53.3	88.2	-34.9	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	35.0	14.9	49.9	88.2	-38.3	Peak	Horizontal
	11174.5	30.5	16.9	47.4	74.0	-26.6	Peak	Horizontal
	11574.0	31.9	17.6	49.5	74.0	-24.5	Peak	Horizontal
*	14345.0	32.2	19.6	51.8	88.2	-36.4	Peak	Horizontal
*	10358.5	38.0	14.9	52.9	88.2	-35.3	Peak	Vertical
	11650.5	32.0	17.8	49.8	74.0	-24.2	Peak	Vertical
*	14948.5	31.7	19.9	51.6	88.2	-36.6	Peak	Vertical
	15424.5	31.5	19.1	50.6	74.0	-23.4	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	34.7	14.9	49.6	88.2	-38.6	Peak	Horizontal
	11089.5	33.1	16.7	49.8	74.0	-24.2	Peak	Horizontal
	11642.0	31.9	17.9	49.8	74.0	-24.2	Peak	Horizontal
*	14379.0	32.2	19.5	51.7	88.2	-36.5	Peak	Horizontal
*	10358.5	36.4	14.9	51.3	88.2	-36.9	Peak	Vertical
	11140.5	32.3	16.4	48.7	74.0	-25.3	Peak	Vertical
	11650.5	31.4	17.8	49.2	74.0	-24.8	Peak	Vertical
*	13707.5	36.1	19.0	55.1	88.2	-33.1	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	34.5	14.9	49.4	88.2	-38.8	Peak	Horizontal
	11081.0	32.3	16.6	48.9	74.0	-25.1	Peak	Horizontal
	11506.0	31.9	17.4	49.3	74.0	-24.7	Peak	Horizontal
*	14115.5	32.3	19.2	51.5	88.2	-36.7	Peak	Horizontal
*	10358.5	36.6	14.9	51.5	88.2	-36.7	Peak	Vertical
	10996.0	32.2	16.3	48.5	74.0	-25.5	Peak	Vertical
	11531.5	31.7	17.3	49.0	74.0	-25.0	Peak	Vertical
*	14532.0	32.8	19.7	52.5	88.2	-35.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	34.8	14.9	49.7	88.2	-38.5	Peak	Horizontal
	11089.5	32.3	16.7	49.0	74.0	-25.0	Peak	Horizontal
	11710.0	31.5	17.8	49.3	74.0	-24.7	Peak	Horizontal
*	13656.5	32.8	18.7	51.5	88.2	-36.7	Peak	Horizontal
*	10358.5	36.0	14.9	50.9	88.2	-37.3	Peak	Vertical
	11242.5	32.3	17.0	49.3	74.0	-24.7	Peak	Vertical
	12203.0	31.2	17.6	48.8	74.0	-25.2	Peak	Vertical
*	14209.0	32.7	19.2	51.9	88.2	-36.3	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	34.1	14.9	49.0	88.2	-39.2	Peak	Horizontal
	11472.0	32.2	17.4	49.6	74.0	-24.4	Peak	Horizontal
	11633.5	31.5	17.7	49.2	74.0	-24.8	Peak	Horizontal
*	14107.0	32.4	19.2	51.6	88.2	-36.6	Peak	Horizontal
*	10358.5	36.7	14.9	51.6	88.2	-36.6	Peak	Vertical
	11480.5	31.7	17.5	49.2	74.0	-24.8	Peak	Vertical
	12313.5	31.6	17.4	49.0	74.0	-25.0	Peak	Vertical
*	14829.5	32.0	20.0	52.0	88.2	-36.2	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	11472.0	32.2	17.4	49.6	74.0	-24.4	Peak	Horizontal
	12016.0	32.3	16.8	49.1	74.0	-24.9	Peak	Horizontal
*	13809.5	32.3	18.4	50.7	88.2	-37.5	Peak	Horizontal
*	16912.0	30.6	21.7	52.3	88.2	-35.9	Peak	Horizontal
*	10358.5	35.2	14.9	50.1	88.2	-38.1	Peak	Vertical
	11361.5	31.9	17.1	49.0	74.0	-25.0	Peak	Vertical
	12169.0	31.6	17.3	48.9	74.0	-25.1	Peak	Vertical
*	14328.0	32.3	19.6	51.9	88.2	-36.3	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	36.5	14.9	51.4	88.2	-36.8	Peak	Horizontal
	11429.5	31.5	17.2	48.7	74.0	-25.3	Peak	Horizontal
	12211.5	30.9	17.4	48.3	74.0	-25.7	Peak	Horizontal
*	14447.0	32.1	19.9	52.0	88.2	-36.2	Peak	Horizontal
	8089.0	33.4	11.8	45.2	74.0	-28.8	Peak	Vertical
*	10358.5	36.4	14.9	51.3	88.2	-36.9	Peak	Vertical
	11438.0	32.0	17.1	49.1	74.0	-24.9	Peak	Vertical
*	14770.0	32.6	19.6	52.2	88.2	-36.0	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	7553.5	34.1	11.9	46.0	74.0	-28.0	Peak	Horizontal
*	10358.5	35.1	14.9	50.0	88.2	-38.2	Peak	Horizontal
	11557.0	32.3	17.8	50.1	74.0	-23.9	Peak	Horizontal
*	14889.0	32.0	19.4	51.4	88.2	-36.8	Peak	Horizontal
*	10358.5	35.9	14.9	50.8	88.2	-37.4	Peak	Vertical
	11480.5	32.4	17.5	49.9	74.0	-24.1	Peak	Vertical
*	13546.0	32.4	19.1	51.5	88.2	-36.7	Peak	Vertical
	15424.5	31.6	19.1	50.7	74.0	-23.3	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2023-11-18
Test Mode	802.11ax-HE160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	9891.0	35.9	13.1	49.0	88.2	-39.2	Peak	Horizontal
	11030.0	35.2	14.0	49.2	74.0	-24.8	Peak	Horizontal
	12092.5	37.0	12.4	49.4	74.0	-24.6	Peak	Horizontal
*	13061.5	36.3	12.6	48.9	88.2	-39.3	Peak	Horizontal
*	10171.5	33.2	13.3	46.5	88.2	-41.7	Peak	Vertical
	11072.5	36.1	14.0	50.1	74.0	-23.9	Peak	Vertical
	12058.5	36.1	12.5	48.6	74.0	-25.4	Peak	Vertical
*	13189.0	35.8	12.9	48.7	88.2	-39.5	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2023-11-18
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10239.5	34.8	13.4	48.2	88.2	-40.0	Peak	Horizontal
	11336.0	37.1	13.4	50.5	74.0	-23.5	Peak	Horizontal
	11931.0	36.7	12.3	49.0	74.0	-25.0	Peak	Horizontal
*	13070.0	35.4	12.6	48.0	88.2	-40.2	Peak	Horizontal
*	9933.5	36.1	13.1	49.2	88.2	-39.0	Peak	Vertical
	11081.0	35.2	14.0	49.2	74.0	-24.8	Peak	Vertical
	11523.0	36.3	13.6	49.9	74.0	-24.1	Peak	Vertical
*	12951.0	34.9	12.7	47.6	88.2	-40.6	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2023-11-18
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	9814.5	34.6	13.2	47.8	88.2	-40.4	Peak	Horizontal
	10800.5	35.7	14.1	49.8	74.0	-24.2	Peak	Horizontal
	12322.0	36.2	12.4	48.6	74.0	-25.4	Peak	Horizontal
*	13155.0	35.7	12.7	48.4	88.2	-39.8	Peak	Horizontal
*	9848.5	35.6	12.9	48.5	88.2	-39.7	Peak	Vertical
	11480.5	36.1	13.6	49.7	74.0	-24.3	Peak	Vertical
	12262.5	37.4	12.5	49.9	74.0	-24.1	Peak	Vertical
*	12891.5	35.2	12.7	47.9	88.2	-40.3	Peak	Vertical

Note 1: “**” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-07-28
Test Mode	802.11ax-HE160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	8437.5	33.6	11.5	45.1	74.0	-28.9	Peak	Horizontal
*	10358.5	34.5	14.9	49.4	88.2	-38.8	Peak	Horizontal
	11081.0	31.6	16.6	48.2	74.0	-25.8	Peak	Horizontal
	11582.5	32.0	17.5	49.5	74.0	-24.5	Peak	Horizontal
*	10358.5	36.3	14.9	51.2	88.2	-37.0	Peak	Vertical
	10681.5	33.2	16.1	49.3	74.0	-24.7	Peak	Vertical
	11667.5	31.7	17.5	49.2	74.0	-24.8	Peak	Vertical
*	13852.0	30.4	18.7	49.1	88.2	-39.1	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

ANT-312:

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-12
Test Mode	802.11ax-HE20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	9474.5	32.8	13.5	46.3	74.0	-27.7	Peak	Horizontal
*	10477.5	35.8	15.1	50.9	88.2	-37.3	Peak	Horizontal
	11642.0	31.9	17.9	49.8	74.0	-24.2	Peak	Horizontal
*	14192.0	33.3	19.2	52.5	88.2	-35.7	Peak	Horizontal
*	10477.5	39.3	15.1	54.4	88.2	-33.8	Peak	Vertical
	11489.0	31.8	17.7	49.5	74.0	-24.5	Peak	Vertical
	12305.0	31.1	17.6	48.7	74.0	-25.3	Peak	Vertical
*	13495.0	31.6	19.2	50.8	88.2	-37.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-12
Test Mode	802.11ax-HE20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	9075.0	33.1	13.0	46.1	74.0	-27.9	Peak	Horizontal
*	10477.5	35.2	15.1	50.3	88.2	-37.9	Peak	Horizontal
	12143.5	32.8	17.2	50.0	74.0	-24.0	Peak	Horizontal
*	13886.0	32.1	19.0	51.1	88.2	-37.1	Peak	Horizontal
	9134.5	33.7	13.2	46.9	74.0	-27.1	Peak	Vertical
*	10477.5	38.6	15.1	53.7	88.2	-34.5	Peak	Vertical
	11523.0	31.7	17.1	48.8	74.0	-25.2	Peak	Vertical
*	16682.5	33.8	20.3	54.1	88.2	-34.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-12
Test Mode	802.11ax-HE20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	9644.5	33.6	13.4	47.0	88.2	-41.2	Peak	Horizontal
*	10477.5	34.5	15.1	49.6	88.2	-38.6	Peak	Horizontal
	11557.0	31.5	17.8	49.3	74.0	-24.7	Peak	Horizontal
	12186.0	31.1	17.7	48.8	74.0	-25.2	Peak	Horizontal
*	10477.5	38.8	15.1	53.9	88.2	-34.3	Peak	Vertical
	11089.5	31.5	16.7	48.2	74.0	-25.8	Peak	Vertical
	11642.0	31.0	17.9	48.9	74.0	-25.1	Peak	Vertical
*	14345.0	31.4	19.6	51.0	88.2	-37.2	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-12
Test Mode	802.11ax-HE20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10477.5	36.4	15.1	51.5	88.2	-36.7	Peak	Horizontal
	11557.0	31.4	17.8	49.2	74.0	-24.8	Peak	Horizontal
	12279.5	31.4	17.5	48.9	74.0	-25.1	Peak	Horizontal
*	12866.0	31.6	17.1	48.7	88.2	-39.5	Peak	Horizontal
*	10477.5	36.4	15.1	51.5	88.2	-36.7	Peak	Vertical
	11021.5	31.5	16.2	47.7	74.0	-26.3	Peak	Vertical
	13265.5	32.5	17.8	50.3	74.0	-23.7	Peak	Vertical
*	14948.5	32.1	19.9	52.0	88.2	-36.2	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-12
Test Mode	802.11ax-HE20	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	33.2	14.9	48.1	88.2	-40.1	Peak	Horizontal
	11327.5	31.8	17.3	49.1	74.0	-24.9	Peak	Horizontal
	12262.5	30.6	17.4	48.0	74.0	-26.0	Peak	Horizontal
*	14022.0	30.5	19.0	49.5	88.2	-38.7	Peak	Horizontal
*	10358.5	34.4	14.9	49.3	88.2	-38.9	Peak	Vertical
	11506.0	31.4	17.4	48.8	74.0	-25.2	Peak	Vertical
	11888.5	31.2	17.2	48.4	74.0	-25.6	Peak	Vertical
*	13427.0	33.6	18.6	52.2	88.2	-36.0	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-12
Test Mode	802.11ax-HE20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	33.1	14.9	48.0	88.2	-40.2	Peak	Horizontal
	10919.5	31.2	16.5	47.7	74.0	-26.3	Peak	Horizontal
	11710.0	30.5	17.8	48.3	74.0	-25.7	Peak	Horizontal
*	13707.5	30.5	19.0	49.5	88.2	-38.7	Peak	Horizontal
*	10358.5	33.7	14.9	48.6	88.2	-39.6	Peak	Vertical
	11463.5	31.1	17.4	48.5	74.0	-25.5	Peak	Vertical
	12177.5	30.7	17.6	48.3	74.0	-25.7	Peak	Vertical
*	13707.5	35.8	19.0	54.8	88.2	-33.4	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-12
Test Mode	802.11ax-HE40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	34.8	14.9	49.7	88.2	-38.5	Peak	Horizontal
	11480.5	30.7	17.5	48.2	74.0	-25.8	Peak	Horizontal
	12288.0	29.9	17.6	47.5	74.0	-26.5	Peak	Horizontal
*	13699.0	30.0	18.7	48.7	88.2	-39.5	Peak	Horizontal
*	10358.5	34.8	14.9	49.7	88.2	-38.5	Peak	Vertical
	11480.5	30.7	17.5	48.2	74.0	-25.8	Peak	Vertical
	11803.5	30.5	17.6	48.1	74.0	-25.9	Peak	Vertical
*	13699.0	30.0	18.7	48.7	88.2	-39.5	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-12
Test Mode	802.11ax-HE40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	34.2	14.9	49.1	88.2	-39.1	Peak	Horizontal
	11140.5	31.0	16.4	47.4	74.0	-26.6	Peak	Horizontal
	11752.5	30.7	17.4	48.1	74.0	-25.9	Peak	Horizontal
*	12925.5	30.8	17.2	48.0	88.2	-40.2	Peak	Horizontal
*	8718.0	32.0	12.4	44.4	88.2	-43.8	Peak	Vertical
*	10358.5	33.8	14.9	48.7	88.2	-39.5	Peak	Vertical
	11072.5	31.3	16.4	47.7	74.0	-26.3	Peak	Vertical
	11608.0	31.5	17.1	48.6	74.0	-25.4	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-12
Test Mode	802.11ax-HE40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	34.1	14.9	49.0	88.2	-39.2	Peak	Horizontal
	11081.0	30.5	16.6	47.1	74.0	-26.9	Peak	Horizontal
	11676.0	30.8	17.3	48.1	74.0	-25.9	Peak	Horizontal
*	13699.0	30.6	18.7	49.3	88.2	-38.9	Peak	Horizontal
*	10358.5	34.1	14.9	49.0	88.2	-39.2	Peak	Vertical
	11472.0	30.6	17.4	48.0	74.0	-26.0	Peak	Vertical
	12194.5	30.8	17.7	48.5	74.0	-25.5	Peak	Vertical
*	13724.5	31.1	19.0	50.1	88.2	-38.1	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-12
Test Mode	802.11ax-HE40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	32.3	14.9	47.2	88.2	-41.0	Peak	Horizontal
	11514.5	31.3	17.2	48.5	74.0	-25.5	Peak	Horizontal
	12305.0	30.6	17.6	48.2	74.0	-25.8	Peak	Horizontal
*	13716.0	30.2	19.1	49.3	88.2	-38.9	Peak	Horizontal
*	9882.5	32.7	13.6	46.3	88.2	-41.9	Peak	Vertical
*	10358.5	34.1	14.9	49.0	88.2	-39.2	Peak	Vertical
	11089.5	31.3	16.7	48.0	74.0	-26.0	Peak	Vertical
	14472.5	32.9	19.4	52.3	74.0	-21.7	Peak	Vertical
	14472.5	25.5	19.4	44.9	54.0	-9.1	Average	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-12
Test Mode	802.11ax-HE40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	34.1	14.9	49.0	88.2	-39.2	Peak	Horizontal
	11106.5	32.0	16.6	48.6	74.0	-25.4	Peak	Horizontal
	11489.0	31.2	17.7	48.9	74.0	-25.1	Peak	Horizontal
*	12900.0	30.7	17.4	48.1	88.2	-40.1	Peak	Horizontal
*	10358.5	34.9	14.9	49.8	88.2	-38.4	Peak	Vertical
	11225.5	31.8	16.8	48.6	74.0	-25.4	Peak	Vertical
	11803.5	32.0	17.6	49.6	74.0	-24.4	Peak	Vertical
*	13146.5	30.0	18.0	48.0	88.2	-40.2	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-12
Test Mode	802.11ax-HE40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	33.8	14.9	48.7	88.2	-39.5	Peak	Horizontal
	10860.0	34.2	16.2	50.4	74.0	-23.6	Peak	Horizontal
	11812.0	31.0	17.6	48.6	74.0	-25.4	Peak	Horizontal
*	13614.0	31.6	18.5	50.1	88.2	-38.1	Peak	Horizontal
*	10358.5	35.0	14.9	49.9	88.2	-38.3	Peak	Vertical
	11472.0	31.6	17.4	49.0	74.0	-25.0	Peak	Vertical
	12211.5	31.5	17.4	48.9	74.0	-25.1	Peak	Vertical
*	13707.5	34.1	19.0	53.1	88.2	-35.1	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-13
Test Mode	802.11ax-HE80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	8888.0	32.2	12.7	44.9	88.2	-43.3	Peak	Horizontal
*	10358.5	33.9	14.9	48.8	88.2	-39.4	Peak	Horizontal
	11497.5	31.4	17.5	48.9	74.0	-25.1	Peak	Horizontal
	12305.0	30.6	17.6	48.2	74.0	-25.8	Peak	Horizontal
*	10358.5	34.7	14.9	49.6	88.2	-38.6	Peak	Vertical
	10987.5	32.2	16.2	48.4	74.0	-25.6	Peak	Vertical
	11548.5	31.9	17.7	49.6	74.0	-24.4	Peak	Vertical
*	13146.5	30.8	18.0	48.8	88.2	-39.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-13
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	9899.5	33.2	13.5	46.7	88.2	-41.5	Peak	Horizontal
*	10358.5	33.5	14.9	48.4	88.2	-39.8	Peak	Horizontal
	11438.0	31.5	17.1	48.6	74.0	-25.4	Peak	Horizontal
	12237.0	31.1	17.5	48.6	74.0	-25.4	Peak	Horizontal
*	9746.5	34.1	13.3	47.4	88.2	-40.8	Peak	Vertical
*	10358.5	35.2	14.9	50.1	88.2	-38.1	Peak	Vertical
	11455.0	31.0	17.3	48.3	74.0	-25.7	Peak	Vertical
	12220.0	31.9	17.4	49.3	74.0	-24.7	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-13
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	34.5	14.9	49.4	88.2	-38.8	Peak	Horizontal
	11021.5	32.2	16.2	48.4	74.0	-25.6	Peak	Horizontal
	11608.0	31.9	17.1	49.0	74.0	-25.0	Peak	Horizontal
*	13937.0	31.6	19.1	50.7	88.2	-37.5	Peak	Horizontal
*	10358.5	37.1	14.9	52.0	88.2	-36.2	Peak	Vertical
	11548.5	31.5	17.7	49.2	74.0	-24.8	Peak	Vertical
	12194.5	31.2	17.7	48.9	74.0	-25.1	Peak	Vertical
*	13639.5	30.8	19.0	49.8	88.2	-38.4	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-13
Test Mode	802.11ax-HE80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	36.9	14.9	51.8	88.2	-36.4	Peak	Horizontal
	11531.5	32.3	17.3	49.6	74.0	-24.4	Peak	Horizontal
	12194.5	30.8	17.7	48.5	74.0	-25.5	Peak	Horizontal
*	12823.5	31.9	17.1	49.0	88.2	-39.2	Peak	Horizontal
*	8828.5	32.7	12.6	45.3	88.2	-42.9	Peak	Vertical
*	10358.5	36.9	14.9	51.8	88.2	-36.4	Peak	Vertical
	11098.0	32.1	16.7	48.8	74.0	-25.2	Peak	Vertical
	11531.5	32.3	17.3	49.6	74.0	-24.4	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-13
Test Mode	802.11ax-HE80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	34.9	14.9	49.8	88.2	-38.4	Peak	Horizontal
	10894.0	32.7	16.2	48.9	74.0	-25.1	Peak	Horizontal
	11812.0	31.5	17.6	49.1	74.0	-24.9	Peak	Horizontal
*	13172.0	31.8	18.0	49.8	88.2	-38.4	Peak	Horizontal
*	10358.5	36.3	14.9	51.2	88.2	-37.0	Peak	Vertical
	10894.0	32.1	16.2	48.3	74.0	-25.7	Peak	Vertical
	11633.5	31.0	17.7	48.7	74.0	-25.3	Peak	Vertical
*	14931.5	32.5	20.2	52.7	88.2	-35.5	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-13
Test Mode	802.11ax-HE80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10358.5	34.6	14.9	49.5	88.2	-38.7	Peak	Horizontal
	11463.5	31.5	17.4	48.9	74.0	-25.1	Peak	Horizontal
	12288.0	31.0	17.6	48.6	74.0	-25.4	Peak	Horizontal
*	14370.5	33.0	19.6	52.6	88.2	-35.6	Peak	Horizontal
*	9814.5	33.7	13.6	47.3	88.2	-40.9	Peak	Vertical
*	10358.5	35.6	14.9	50.5	88.2	-37.7	Peak	Vertical
	11055.5	32.4	16.1	48.5	74.0	-25.5	Peak	Vertical
	11786.5	31.7	17.5	49.2	74.0	-24.8	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2023-11-18
Test Mode	802.11ax-HE160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10120.5	35.9	13.1	49.0	88.2	-39.2	Peak	Horizontal
	11089.5	36.2	13.9	50.1	74.0	-23.9	Peak	Horizontal
	11735.5	35.1	12.3	47.4	74.0	-26.6	Peak	Horizontal
*	13070.0	35.6	12.6	48.2	88.2	-40.0	Peak	Horizontal
*	9993.0	33.7	13.0	46.7	88.2	-41.5	Peak	Vertical
	10953.5	35.4	14.1	49.5	74.0	-24.5	Peak	Vertical
	11897.0	35.3	12.2	47.5	74.0	-26.5	Peak	Vertical
*	13070.0	34.6	12.6	47.2	88.2	-41.0	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2023-11-18
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10197.0	34.7	13.4	48.1	88.2	-40.1	Peak	Horizontal
	11140.5	35.5	13.7	49.2	74.0	-24.8	Peak	Horizontal
	11948.0	36.5	12.3	48.8	74.0	-25.2	Peak	Horizontal
*	12891.5	34.6	12.7	47.3	88.2	-40.9	Peak	Horizontal
*	9678.5	36.8	12.8	49.6	88.2	-38.6	Peak	Vertical
	10817.5	35.6	13.9	49.5	74.0	-24.5	Peak	Vertical
	11846.0	34.6	12.3	46.9	74.0	-27.1	Peak	Vertical
*	13010.5	35.1	12.7	47.8	88.2	-40.4	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2023-11-18
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	9695.5	36.1	12.8	48.9	88.2	-39.3	Peak	Horizontal
	11523.0	35.6	13.6	49.2	74.0	-24.8	Peak	Horizontal
	12381.5	36.6	12.1	48.7	74.0	-25.3	Peak	Horizontal
*	12985.0	36.3	12.7	49.0	88.2	-39.2	Peak	Horizontal
*	9772.0	35.9	12.9	48.8	88.2	-39.4	Peak	Vertical
	10996.0	35.2	14.4	49.6	74.0	-24.4	Peak	Vertical
	12109.5	36.7	12.4	49.1	74.0	-24.9	Peak	Vertical
*	13155.0	35.0	12.7	47.7	88.2	-40.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2023-07-13
Test Mode	802.11ax-HE160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	9789.0	33.3	13.5	46.8	88.2	-41.4	Peak	Horizontal
*	10358.5	34.4	14.9	49.3	88.2	-38.9	Peak	Horizontal
	11123.5	31.2	16.3	47.5	74.0	-26.5	Peak	Horizontal
	11557.0	32.4	17.8	50.2	74.0	-23.8	Peak	Horizontal
*	10358.5	35.5	14.9	50.4	88.2	-37.8	Peak	Vertical
	11497.5	31.9	17.5	49.4	74.0	-24.6	Peak	Vertical
	11735.5	30.4	17.7	48.1	74.0	-25.9	Peak	Vertical
*	12866.0	30.6	17.1	47.7	88.2	-40.5	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

ANT-348:

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	8735.0	32.9	11.0	43.9	88.2	-44.3	Peak	Horizontal
*	10018.5	33.7	12.2	45.9	88.2	-42.3	Peak	Horizontal
	11897.0	33.4	16.8	50.2	74.0	-23.8	Peak	Horizontal
	16053.5	31.4	20.6	52.0	74.0	-22.0	Peak	Horizontal
*	10358.5	33.7	13.4	47.1	88.2	-41.1	Peak	Vertical
	10817.5	32.2	14.5	46.7	74.0	-27.3	Peak	Vertical
	11820.5	32.7	16.8	49.5	74.0	-24.5	Peak	Vertical
*	13724.5	31.6	17.8	49.4	88.2	-38.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	10698.5	32.8	14.1	46.9	74.0	-27.1	Peak	Horizontal
	11625.0	31.9	16.1	48.0	74.0	-26.0	Peak	Horizontal
*	13019.0	31.2	17.6	48.8	88.2	-39.4	Peak	Horizontal
*	17056.5	31.3	22.5	53.8	88.2	-34.4	Peak	Horizontal
*	8811.5	32.6	11.2	43.8	88.2	-44.4	Peak	Vertical
*	10358.5	34.5	13.4	47.9	88.2	-40.3	Peak	Vertical
	12143.5	32.0	16.7	48.7	74.0	-25.3	Peak	Vertical
*	14336.5	33.2	17.7	50.9	88.2	-37.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	9678.5	33.9	11.5	45.4	88.2	-42.8	Peak	Horizontal
	10817.5	31.9	14.5	46.4	74.0	-27.6	Peak	Horizontal
	11803.5	31.3	16.9	48.2	74.0	-25.8	Peak	Horizontal
*	16589.0	30.9	22.1	53.0	88.2	-35.2	Peak	Horizontal
	8148.5	33.9	10.5	44.4	74.0	-29.6	Peak	Vertical
*	10358.5	35.3	13.4	48.7	88.2	-39.5	Peak	Vertical
	12296.5	31.8	17.4	49.2	74.0	-24.8	Peak	Vertical
*	13724.5	31.4	17.8	49.2	88.2	-39.0	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	8726.5	33.0	11.0	44.0	88.2	-44.2	Peak	Horizontal
*	10358.5	33.1	13.4	46.5	88.2	-41.7	Peak	Horizontal
	11412.5	32.0	15.6	47.6	74.0	-26.4	Peak	Horizontal
	12245.5	31.0	17.3	48.3	74.0	-25.7	Peak	Horizontal
*	8803.0	33.3	11.2	44.5	88.2	-43.7	Peak	Vertical
*	10358.5	35.6	13.4	49.0	88.2	-39.2	Peak	Vertical
	11718.5	30.9	16.8	47.7	74.0	-26.3	Peak	Vertical
	12203.0	32.2	17.2	49.4	74.0	-24.6	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE20	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	8131.5	33.3	10.7	44.0	74.0	-30.0	Peak	Horizontal
*	10095.0	33.4	12.4	45.8	88.2	-42.4	Peak	Horizontal
	11812.0	32.4	16.9	49.3	74.0	-24.7	Peak	Horizontal
*	16912.0	30.6	22.6	53.2	88.2	-35.0	Peak	Horizontal
*	10358.5	34.8	13.4	48.2	88.2	-40.0	Peak	Vertical
	11191.5	31.7	15.1	46.8	74.0	-27.2	Peak	Vertical
	12305.0	30.9	17.5	48.4	74.0	-25.6	Peak	Vertical
*	15110.0	33.0	18.2	51.2	88.2	-37.0	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	8284.5	34.3	10.4	44.7	74.0	-29.3	Peak	Horizontal
*	8896.5	33.1	11.4	44.5	88.2	-43.7	Peak	Horizontal
*	9993.0	31.4	12.1	43.5	88.2	-44.7	Peak	Horizontal
	12313.5	32.0	17.3	49.3	74.0	-24.7	Peak	Horizontal
	8259.0	34.0	10.4	44.4	74.0	-29.6	Peak	Vertical
*	10358.5	34.1	13.4	47.5	88.2	-40.7	Peak	Vertical
	11421.0	31.8	15.6	47.4	74.0	-26.6	Peak	Vertical
*	13716.0	32.7	17.9	50.6	88.2	-37.6	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	8131.5	33.5	10.7	44.2	74.0	-29.8	Peak	Horizontal
*	10044.0	33.0	12.4	45.4	88.2	-42.8	Peak	Horizontal
	12305.0	32.5	17.5	50.0	74.0	-24.0	Peak	Horizontal
*	17158.5	31.8	22.4	54.2	88.2	-34.0	Peak	Horizontal
	8318.5	34.0	10.3	44.3	74.0	-29.7	Peak	Vertical
*	10358.5	35.0	13.4	48.4	88.2	-39.8	Peak	Vertical
	11514.5	32.5	15.5	48.0	74.0	-26.0	Peak	Vertical
*	14387.5	32.7	17.2	49.9	88.2	-38.3	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	8284.5	33.1	10.4	43.5	74.0	-30.5	Peak	Horizontal
*	10341.5	33.3	13.4	46.7	88.2	-41.5	Peak	Horizontal
	11718.5	32.5	16.8	49.3	74.0	-24.7	Peak	Horizontal
*	14863.5	31.7	18.1	49.8	88.2	-38.4	Peak	Horizontal
	8437.5	33.2	10.8	44.0	74.0	-30.0	Peak	Vertical
*	10358.5	34.5	13.4	47.9	88.2	-40.3	Peak	Vertical
	12305.0	31.9	17.5	49.4	74.0	-24.6	Peak	Vertical
*	17141.5	31.4	22.8	54.2	88.2	-34.0	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	8344.0	34.4	10.5	44.9	74.0	-29.1	Peak	Horizontal
	11744.0	32.2	16.6	48.8	74.0	-25.2	Peak	Horizontal
*	15101.5	33.4	18.1	51.5	88.2	-36.7	Peak	Horizontal
*	16597.5	32.0	21.9	53.9	88.2	-34.3	Peak	Horizontal
	8276.0	33.9	10.5	44.4	74.0	-29.6	Peak	Vertical
*	10358.5	35.8	13.4	49.2	88.2	-39.0	Peak	Vertical
	11778.0	32.3	16.6	48.9	74.0	-25.1	Peak	Vertical
*	17141.5	31.0	22.8	53.8	88.2	-34.4	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	8820.0	32.9	11.2	44.1	88.2	-44.1	Peak	Horizontal
*	10358.5	34.0	13.4	47.4	88.2	-40.8	Peak	Horizontal
	11404.0	31.8	15.6	47.4	74.0	-26.6	Peak	Horizontal
	12245.5	31.5	17.3	48.8	74.0	-25.2	Peak	Horizontal
	8301.5	33.7	10.3	44.0	74.0	-30.0	Peak	Vertical
*	10358.5	35.0	13.4	48.4	88.2	-39.8	Peak	Vertical
	11795.0	31.9	16.9	48.8	74.0	-25.2	Peak	Vertical
*	14200.5	32.3	17.4	49.7	88.2	-38.5	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	8131.5	33.3	10.7	44.0	74.0	-30.0	Peak	Horizontal
*	10171.5	33.6	12.6	46.2	88.2	-42.0	Peak	Horizontal
	11650.5	31.8	16.5	48.3	74.0	-25.7	Peak	Horizontal
*	13818.0	32.1	17.1	49.2	88.2	-39.0	Peak	Horizontal
	8123.0	33.6	10.8	44.4	74.0	-29.6	Peak	Vertical
*	10358.5	33.8	13.4	47.2	88.2	-41.0	Peak	Vertical
	12296.5	31.9	17.4	49.3	74.0	-24.7	Peak	Vertical
*	13784.0	31.4	17.5	48.9	88.2	-39.3	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	8208.0	34.1	10.4	44.5	74.0	-29.5	Peak	Horizontal
*	9661.5	33.4	11.5	44.9	88.2	-43.3	Peak	Horizontal
	11863.0	31.8	16.5	48.3	74.0	-25.7	Peak	Horizontal
*	13605.5	31.8	17.4	49.2	88.2	-39.0	Peak	Horizontal
	8335.5	33.4	10.4	43.8	74.0	-30.2	Peak	Vertical
*	10358.5	33.1	13.4	46.5	88.2	-41.7	Peak	Vertical
	11633.5	32.0	16.3	48.3	74.0	-25.7	Peak	Vertical
*	17150.0	31.5	22.8	54.3	88.2	-33.9	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	8335.5	34.2	10.4	44.6	74.0	-29.4	Peak	Horizontal
	10724.0	33.6	13.9	47.5	74.0	-26.5	Peak	Horizontal
*	12713.0	31.7	17.4	49.1	88.2	-39.1	Peak	Horizontal
*	13614.0	32.9	17.4	50.3	88.2	-37.9	Peak	Horizontal
	8191.0	32.8	10.5	43.3	74.0	-30.7	Peak	Vertical
*	10358.5	34.0	13.4	47.4	88.2	-40.8	Peak	Vertical
	11948.0	32.0	16.3	48.3	74.0	-25.7	Peak	Vertical
*	14940.0	32.4	18.6	51.0	88.2	-37.2	Peak	Vertical

Note 1: “**” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	8097.5	32.9	10.7	43.6	74.0	-30.4	Peak	Horizontal
*	10061.0	33.1	12.2	45.3	88.2	-42.9	Peak	Horizontal
	11523.0	32.2	15.3	47.5	74.0	-26.5	Peak	Horizontal
*	13707.5	31.0	17.7	48.7	88.2	-39.5	Peak	Horizontal
	8250.5	33.4	10.3	43.7	74.0	-30.3	Peak	Vertical
*	8735.0	32.9	11.0	43.9	88.2	-44.3	Peak	Vertical
*	10358.5	35.6	13.4	49.0	88.2	-39.2	Peak	Vertical
	12288.0	31.7	17.4	49.1	74.0	-24.9	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	8361.0	33.3	10.5	43.8	74.0	-30.2	Peak	Horizontal
*	8871.0	32.6	11.3	43.9	88.2	-44.3	Peak	Horizontal
*	10069.5	33.4	12.2	45.6	88.2	-42.6	Peak	Horizontal
	11548.5	31.8	16.0	47.8	74.0	-26.2	Peak	Horizontal
	8250.5	32.4	10.3	42.7	74.0	-31.3	Peak	Vertical
*	10358.5	34.7	13.4	48.1	88.2	-40.1	Peak	Vertical
	12305.0	31.5	17.5	49.0	74.0	-25.0	Peak	Vertical
*	17150.0	31.0	22.8	53.8	88.2	-34.4	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	8403.5	33.0	10.8	43.8	74.0	-30.2	Peak	Horizontal
*	10316.0	33.0	13.3	46.3	88.2	-41.9	Peak	Horizontal
	11727.0	32.2	16.8	49.0	74.0	-25.0	Peak	Horizontal
*	16555.0	32.8	21.8	54.6	88.2	-33.6	Peak	Horizontal
	8131.5	32.0	10.7	42.7	74.0	-31.3	Peak	Vertical
*	10358.5	34.9	13.4	48.3	88.2	-39.9	Peak	Vertical
	11880.0	32.0	16.7	48.7	74.0	-25.3	Peak	Vertical
*	14319.5	32.1	17.4	49.5	88.2	-38.7	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	8335.5	33.8	10.4	44.2	74.0	-29.8	Peak	Horizontal
*	10358.5	33.4	13.4	46.8	88.2	-41.4	Peak	Horizontal
	10673.0	32.5	14.5	47.0	74.0	-27.0	Peak	Horizontal
*	13988.0	32.1	16.9	49.0	88.2	-39.2	Peak	Horizontal
*	8743.5	33.2	11.1	44.3	88.2	-43.9	Peak	Vertical
*	10358.5	34.3	13.4	47.7	88.2	-40.5	Peak	Vertical
	11472.0	31.8	15.7	47.5	74.0	-26.5	Peak	Vertical
	12305.0	31.5	17.5	49.0	74.0	-25.0	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	9814.5	34.7	11.7	46.4	88.2	-41.8	Peak	Horizontal
	11871.5	31.7	16.6	48.3	74.0	-25.7	Peak	Horizontal
	12670.5	32.3	17.1	49.4	74.0	-24.6	Peak	Horizontal
*	14243.0	32.5	17.5	50.0	88.2	-38.2	Peak	Horizontal
	8335.5	33.1	10.4	43.5	74.0	-30.5	Peak	Vertical
*	10358.5	35.0	13.4	48.4	88.2	-39.8	Peak	Vertical
	11701.5	32.0	16.4	48.4	74.0	-25.6	Peak	Vertical
*	13614.0	32.2	17.4	49.6	88.2	-38.6	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2023-11-17
Test Mode	802.11ax-HE160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	9848.5	35.5	12.9	48.4	88.2	-39.8	Peak	Horizontal
	11446.5	36.2	13.6	49.8	74.0	-24.2	Peak	Horizontal
	12118.0	34.3	12.5	46.8	74.0	-27.2	Peak	Horizontal
*	12942.5	35.6	12.7	48.3	88.2	-39.9	Peak	Horizontal
*	10197.0	34.7	13.4	48.1	88.2	-40.1	Peak	Vertical
	10834.5	35.5	14.0	49.5	74.0	-24.5	Peak	Vertical
	11523.0	36.2	13.6	49.8	74.0	-24.2	Peak	Vertical
*	12721.5	37.9	12.4	50.3	88.2	-37.9	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2023-11-17
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	10180.0	34.9	13.5	48.4	88.2	-39.8	Peak	Horizontal
	11523.0	36.1	13.6	49.7	74.0	-24.3	Peak	Horizontal
	12041.5	36.0	12.5	48.5	74.0	-25.5	Peak	Horizontal
*	13180.5	36.3	12.9	49.2	88.2	-39.0	Peak	Horizontal
*	9644.5	37.5	12.7	50.2	88.2	-38.0	Peak	Vertical
	11421.0	35.1	13.5	48.6	74.0	-25.4	Peak	Vertical
	11786.5	36.0	12.3	48.3	74.0	-25.7	Peak	Vertical
*	13010.5	35.2	12.7	47.9	88.2	-40.3	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Carl Jiang
Test Site	WZ-AC1	Test Date	2023-11-17
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	9806.0	36.3	13.2	49.5	88.2	-38.7	Peak	Horizontal
	11021.5	34.8	14.1	48.9	74.0	-25.1	Peak	Horizontal
	12220.0	34.9	12.6	47.5	74.0	-26.5	Peak	Horizontal
*	13010.5	34.5	12.7	47.2	88.2	-41.0	Peak	Horizontal
*	10358.5	35.3	13.5	48.8	88.2	-39.4	Peak	Vertical
	10996.0	34.8	14.4	49.2	74.0	-24.8	Peak	Vertical
	12075.5	36.2	12.5	48.7	74.0	-25.3	Peak	Vertical
*	13010.5	35.0	12.7	47.7	88.2	-40.5	Peak	Vertical

Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2023-08-06
Test Mode	802.11ax-HE160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	8344.0	33.6	10.5	44.1	74.0	-29.9	Peak	Horizontal
*	8964.5	32.6	11.7	44.3	88.2	-43.9	Peak	Horizontal
*	10358.5	34.5	13.4	47.9	88.2	-40.3	Peak	Horizontal
	11820.5	31.5	16.8	48.3	74.0	-25.7	Peak	Horizontal
	8480.0	32.8	10.9	43.7	74.0	-30.3	Peak	Vertical
*	8896.5	32.2	11.4	43.6	88.2	-44.6	Peak	Vertical
*	10358.5	34.6	13.4	48.0	88.2	-40.2	Peak	Vertical
	12288.0	30.9	17.4	48.3	74.0	-25.7	Peak	Vertical


Note 1: ** is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission in 9kHz ~ 30MHz:

Site: WZ-AC1	Test Date: 2023-08-24
Limit: FCC_Part 15.209_RSE(3m)	Engineer: Carl Jiang
Probe: FMZB1519_0.009-30MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 6625MHz	

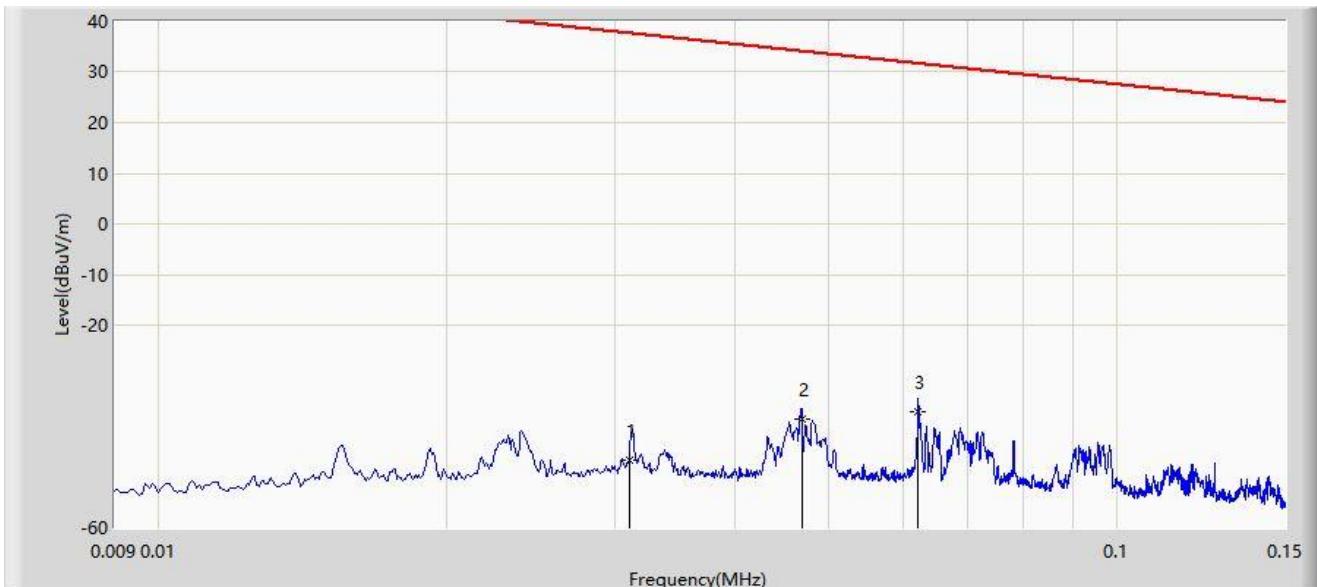

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		0.031	-46.623	20.826	-84.387	37.764	-61.302	PK
2		0.047	-38.598	25.710	-72.749	34.151	-62.325	PK
3	*	0.062	-37.003	27.893	-68.749	31.746	-62.475	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC1	Test Date: 2023-08-24
Limit: FCC_Part 15.209_RSE(3m)	Engineer: Carl Jiang
Probe: FMZB1519_0.009-30MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 6625MHz	

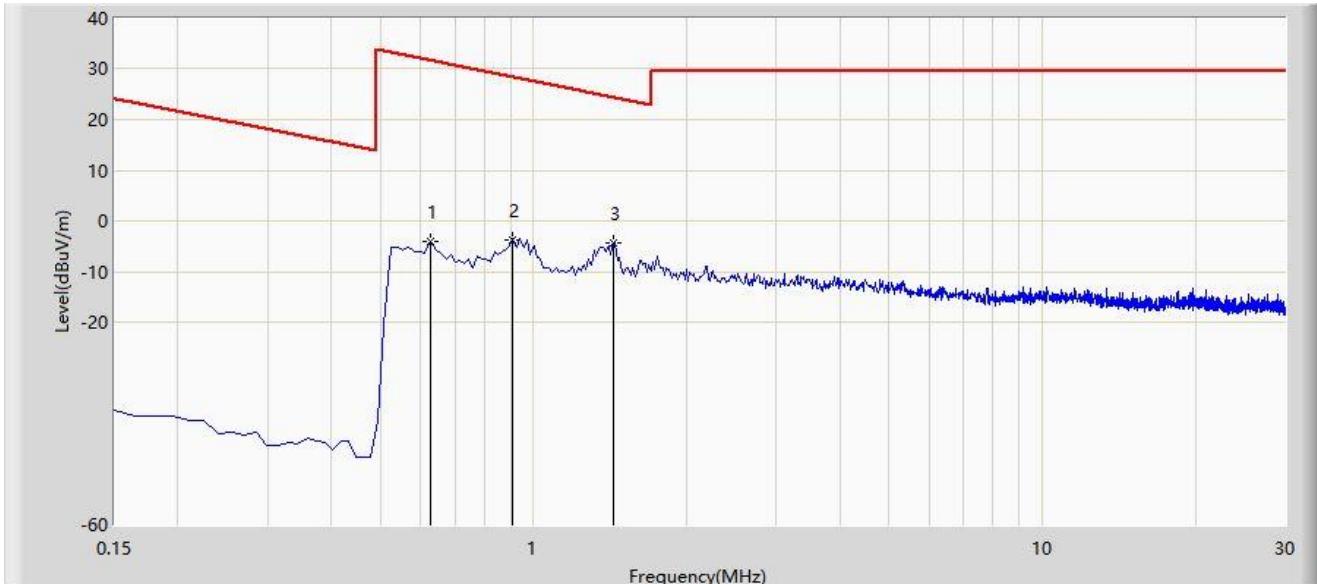

No	Mark	Frequency (MHz)	Measure Level (dBµV/m)	Reading Level (dBµV)	Margin (dB)	Limit (dBµV/m)	Factor (dB/m)	Type
1		0.628	-4.197	18.193	-35.848	31.651	-22.348	PK
2		0.911	-3.630	18.688	-32.059	28.429	-22.301	PK
3	*	1.434	-4.284	18.056	-28.783	24.499	-22.339	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC1	Test Date: 2023-08-24
Limit: FCC_Part 15.209_RSE(3m)	Engineer: Carl Jiang
Probe: FMZB1519_0.009-30MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 6625MHz	

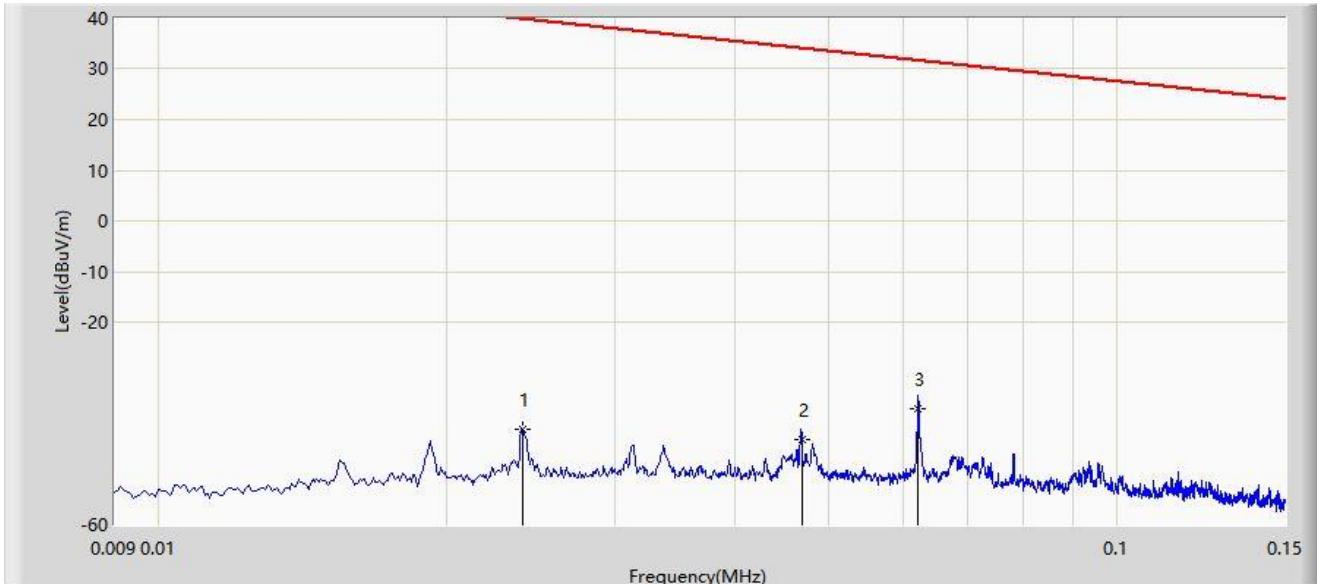

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		0.024	-41.148	19.436	-81.133	39.985	-60.476	PK
2		0.047	-43.116	21.042	-77.267	34.151	-62.325	PK
3	*	0.062	-37.155	28.096	-68.901	31.746	-62.475	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC1	Test Date: 2023-08-24
Limit: FCC_Part 15.209_RSE(3m)	Engineer: Carl Jiang
Probe: FMZB1519_0.009-30MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 6625MHz	

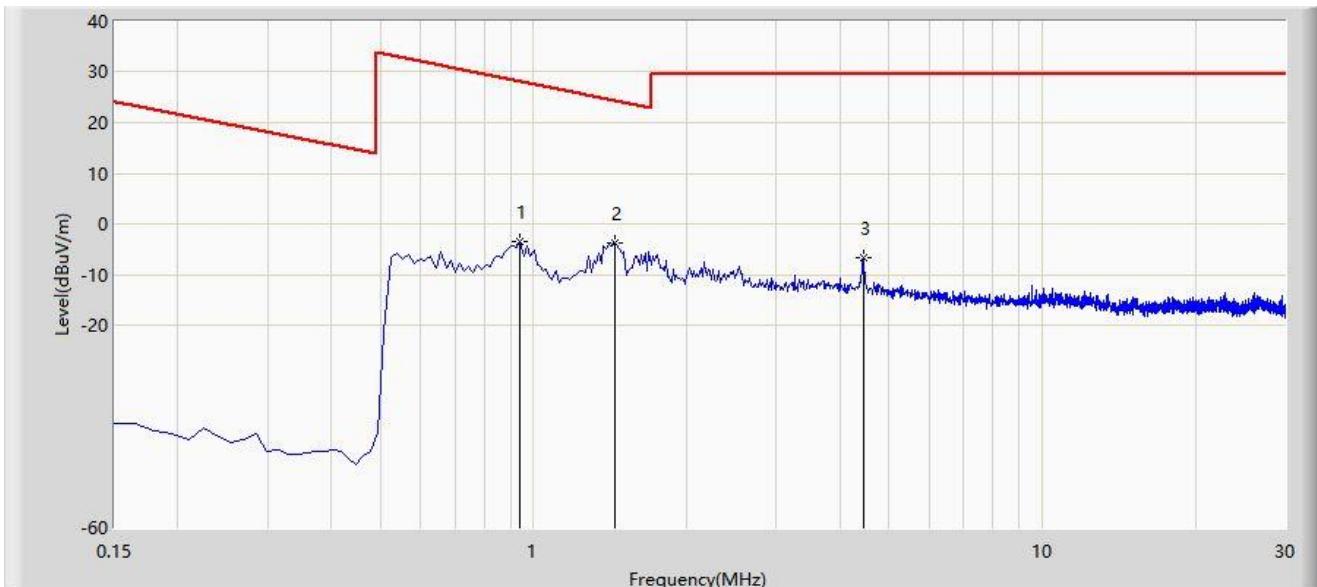

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		0.941	-3.451	18.854	-31.599	28.148	-22.303	PK
2	*	1.448	-3.784	18.557	-28.199	24.415	-22.340	PK
3		4.448	-6.646	15.648	-36.146	29.500	-22.285	PK

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

The Result of Radiated Emission in 30M ~ 1GHz:

Site: WZ-AC1	Test Date: 2023-08-22
Limit: FCC_Part15.209_RSE(3m)	Engineer: Carl Jiang
Probe: VULB 9168_25-2000MHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 6625MHz	

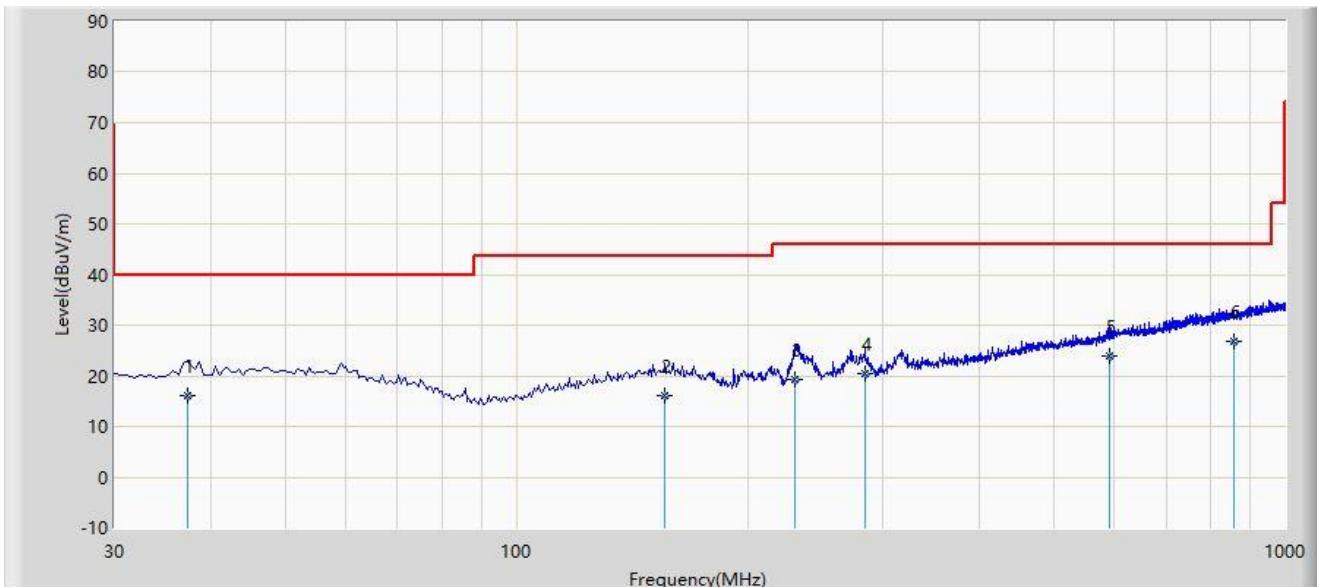

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		37.280	15.953	-1.770	-24.047	40.000	17.723	QP
2		156.230	16.167	-2.120	-27.333	43.500	18.286	QP
3		230.110	19.199	4.110	-26.801	46.000	15.089	QP
4		284.560	20.362	2.150	-25.638	46.000	18.212	QP
5		591.560	23.995	-1.250	-22.005	46.000	25.245	QP
6	*	857.230	26.894	-2.360	-19.106	46.000	29.255	QP

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC1	Test Date: 2023-08-22
Temperature: 25°C	Humidity: 61%
Limit: FCC_Part15.209_RSE(3m)	Engineer: Carl Jiang
Probe: VULB 9168_25-2000MHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 6625MHz	



No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	33.450	22.617	5.230	-17.383	40.000	17.387	QP
2		72.380	21.189	5.230	-18.811	40.000	15.959	QP
3		141.050	24.720	6.890	-18.780	43.500	17.830	QP
4		211.360	22.451	7.560	-21.049	43.500	14.891	QP
5		233.450	21.698	6.210	-24.302	46.000	15.488	QP
6		834.120	26.716	-2.150	-19.284	46.000	28.866	QP

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

The Result of Radiated Emission in 18G ~ 40GHz:

Site: WZ-AC2	Test Date: 2023-08-24
Limit: FCC_Part15.209_RSE(3m)_6G&5.9G(Client)	Engineer: Dick Shen
Probe: BBHA9170_993_18-40GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit By 802.11ax-HE80 at 6625MHz	

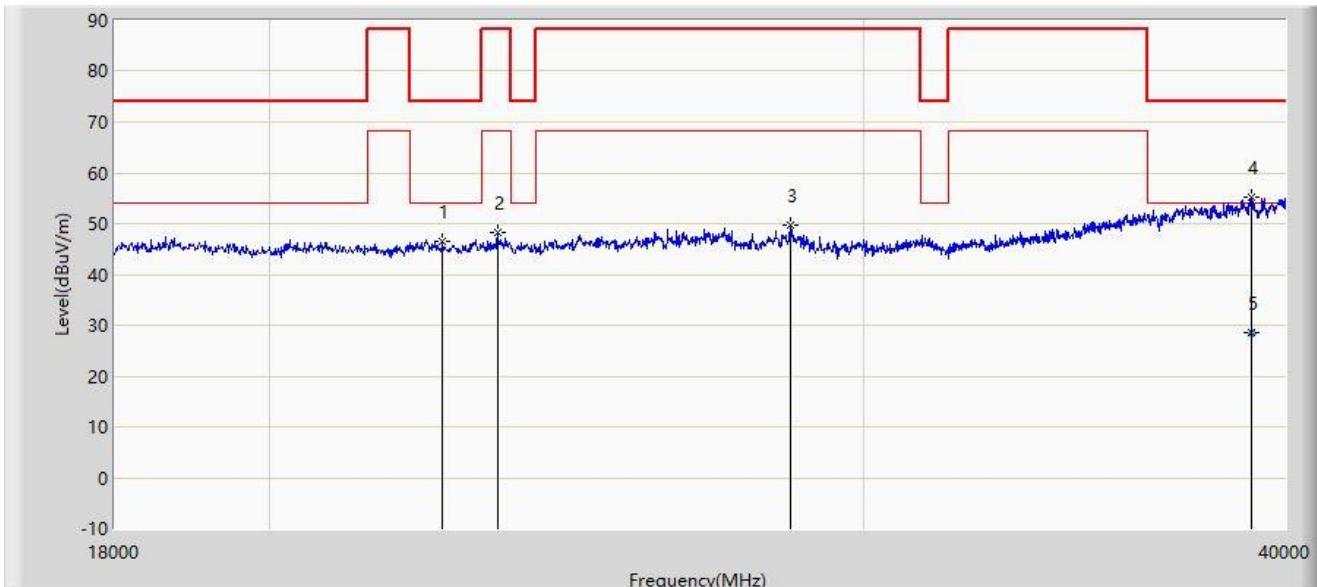

No	Mark	Frequency (MHz)	Measure Level (dBµV/m)	Reading Level (dBµV)	Margin (dB)	Limit (dBµV/m)	Factor (dB/m)	Type
1		22521.000	46.632	54.491	-27.368	74.000	-7.859	PK
2		23379.000	48.334	55.216	-39.866	88.200	-6.881	PK
3		28560.000	49.623	56.852	-38.577	88.200	-7.229	PK
4	*	39076.000	55.148	56.504	-18.852	74.000	-1.356	PK
5		39076.000	28.544	29.900	-25.456	54.000	-1.356	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

Site: WZ-AC2	Test Date: 2023-08-24
Limit: FCC_Part15.209_RSE(3m)_6G&5.9G(Client)	Engineer: Dick Shen
Probe: BBHA9170_993_18-40GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit By 802.11ax-HE80 at 6625MHz	

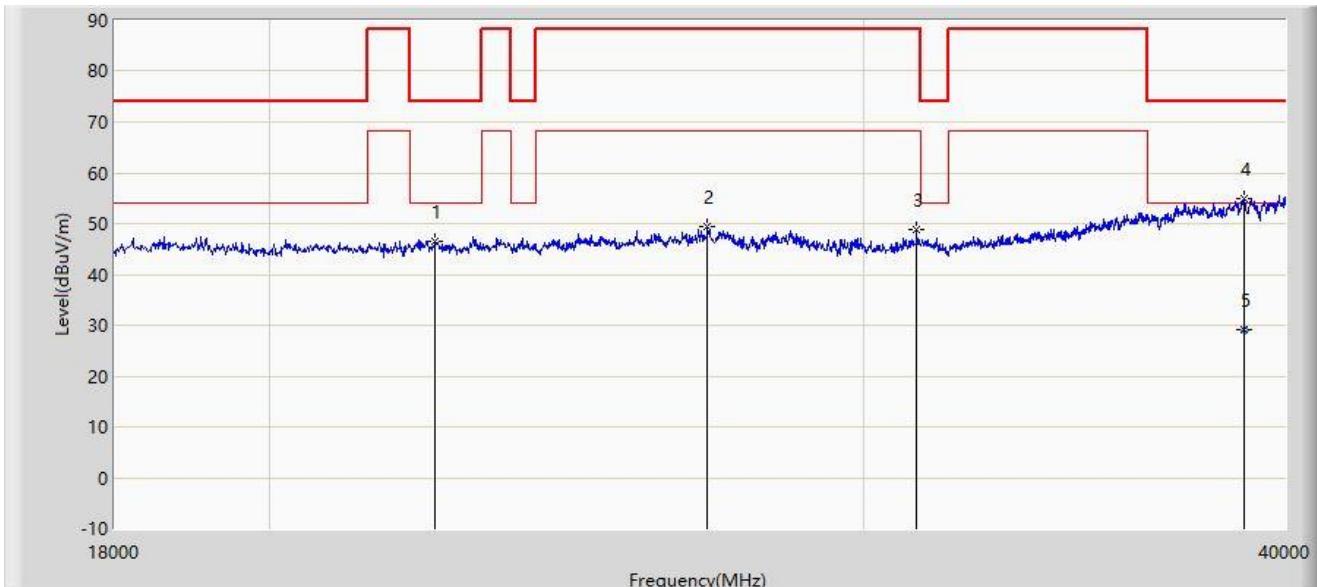

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		22400.000	46.399	54.457	-27.601	74.000	-8.058	PK
2		26976.000	49.427	55.659	-38.773	88.200	-6.232	PK
3		31112.000	48.698	56.146	-39.502	88.200	-7.448	PK
4	*	38900.000	55.018	56.898	-18.982	74.000	-1.880	PK
5		38900.000	29.120	31.000	-24.880	54.000	-1.880	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

A.8 Radiated Restricted Band Edge Test Result

ANT-311:

Site: WZ-AC2	Test Date: 2023-07-28
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

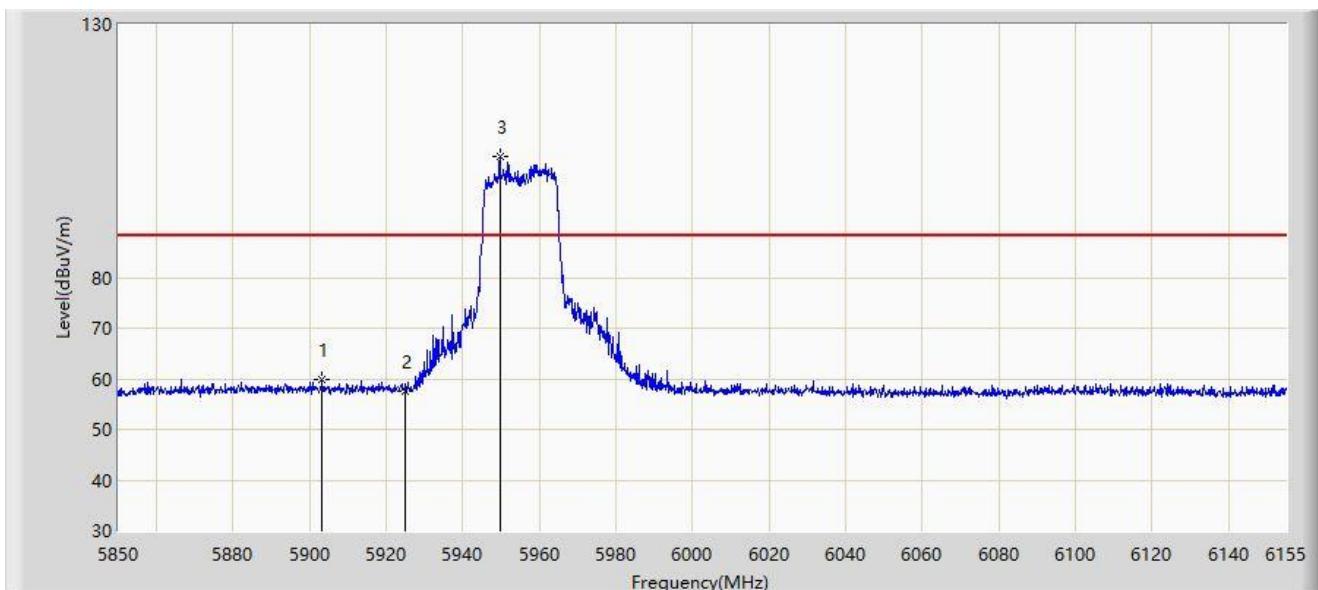


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5903.223	59.959	54.800	-28.241	88.200	5.159	PK
2		5925.000	57.598	52.328	-30.602	88.200	5.271	PK
3		5949.583	103.938	98.553	N/A	N/A	5.385	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-28
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

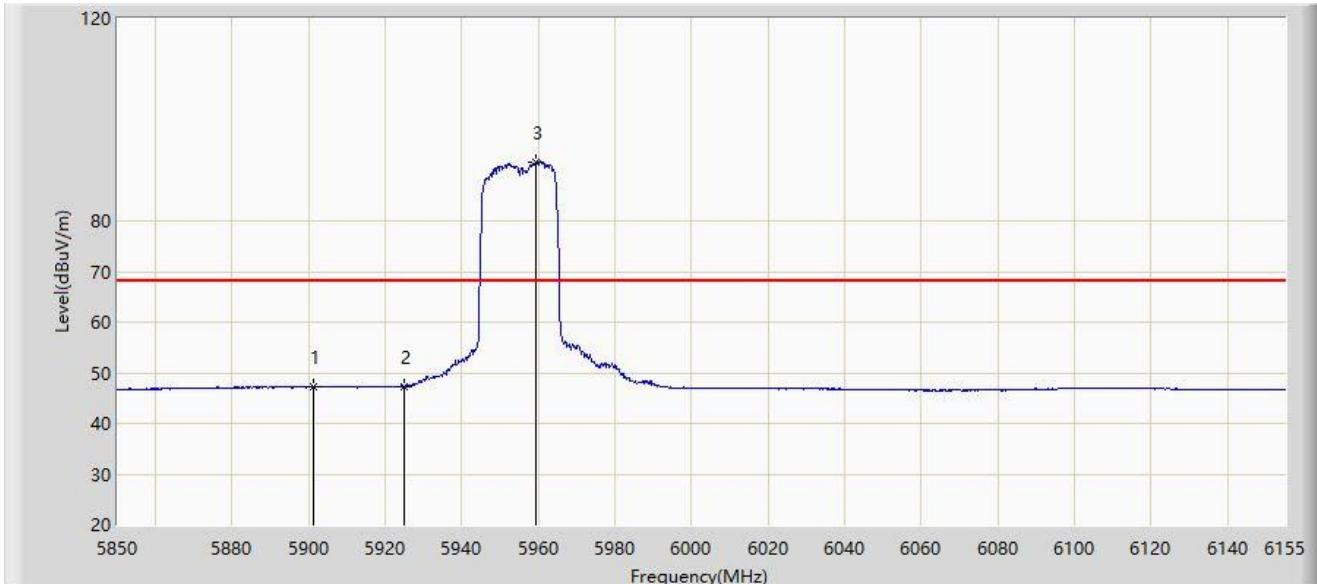


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5901.087	47.197	42.043	-21.003	68.200	5.155	AV
2	*	5925.000	47.347	42.077	-20.853	68.200	5.271	AV
3		5959.342	91.629	86.213	N/A	N/A	5.416	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-28
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

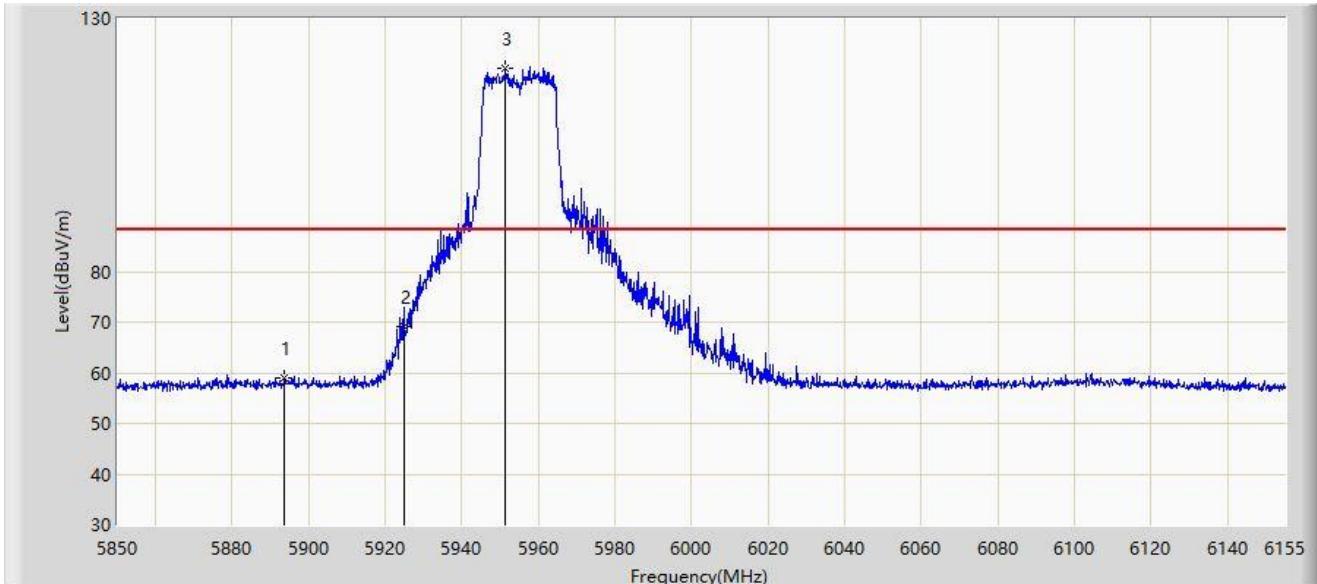


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5893.615	59.078	53.922	-29.122	88.200	5.156	PK
2	*	5925.000	69.027	63.757	-19.173	88.200	5.271	PK
3		5951.413	120.242	114.851	N/A	N/A	5.391	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-28
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

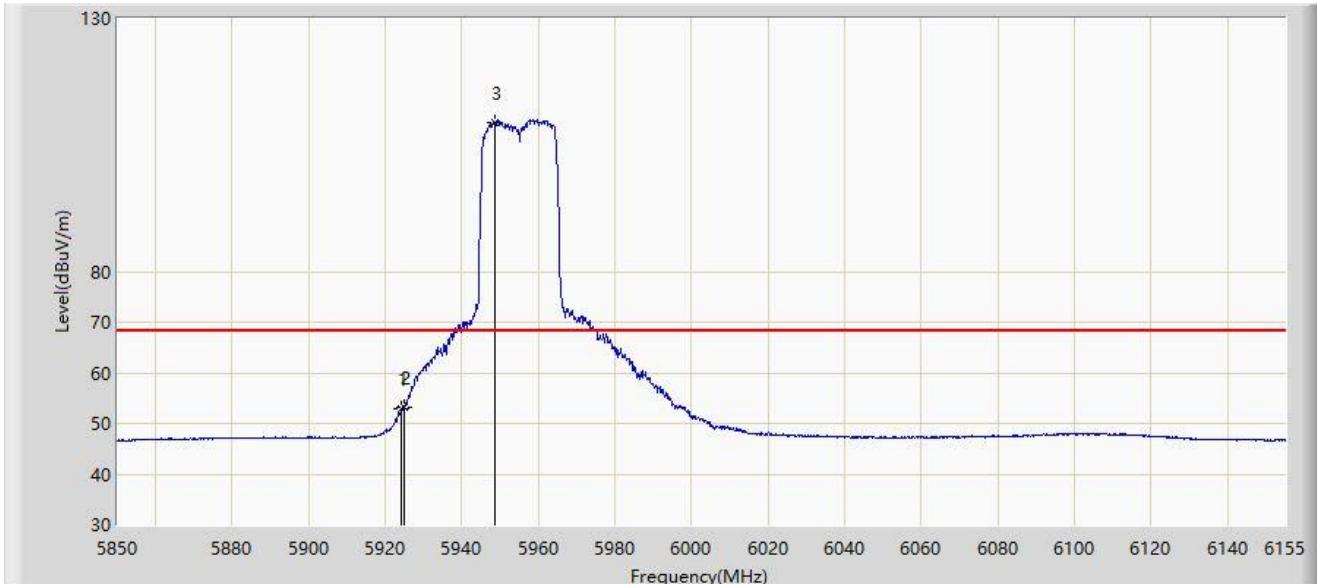


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5924.115	52.854	47.589	-15.346	68.200	5.265	AV
2	*	5925.000	53.263	47.993	-14.937	68.200	5.271	AV
3		5948.667	109.355	103.973	N/A	N/A	5.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-28
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

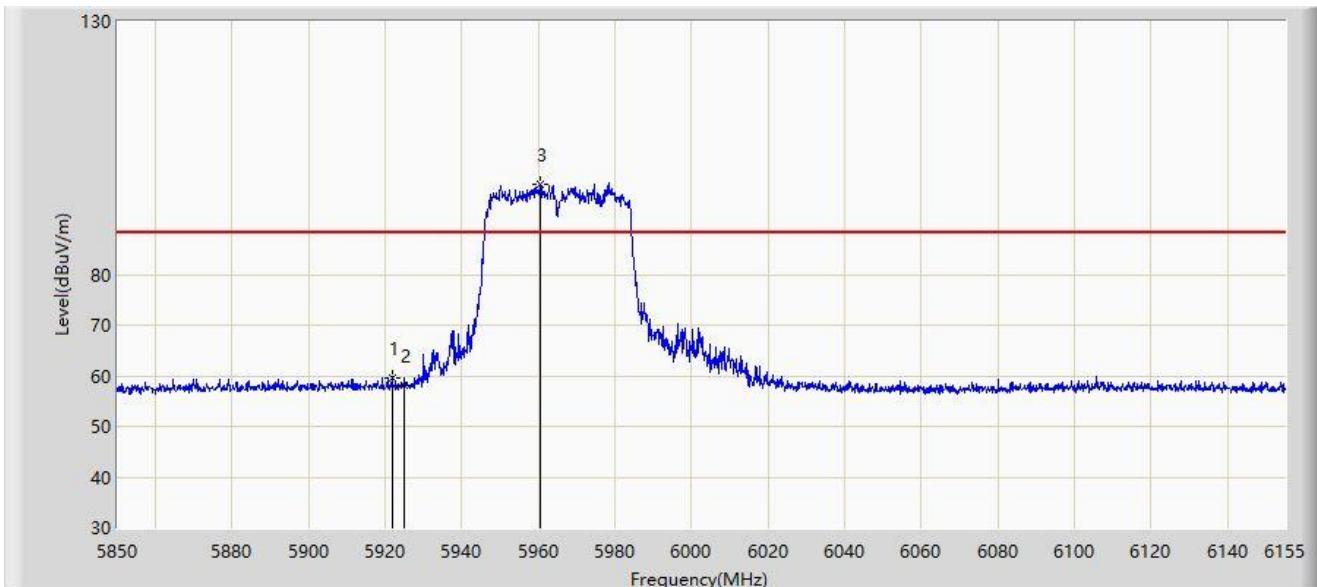


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5921.675	59.710	54.463	-28.490	88.200	5.247	PK
2		5925.000	58.159	52.889	-30.041	88.200	5.271	PK
3		5960.562	97.866	92.452	N/A	N/A	5.414	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-28
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

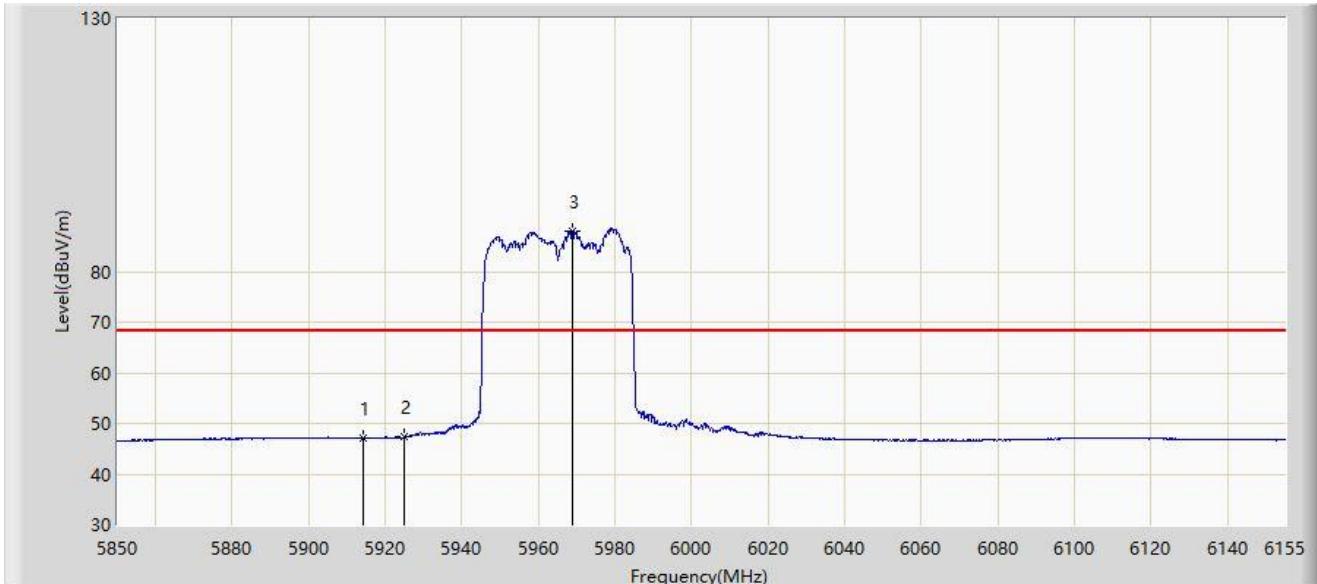


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5914.355	47.125	41.932	-21.075	68.200	5.193	AV
2	*	5925.000	47.298	42.028	-20.902	68.200	5.271	AV
3		5968.950	88.072	82.737	N/A	N/A	5.335	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-28
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

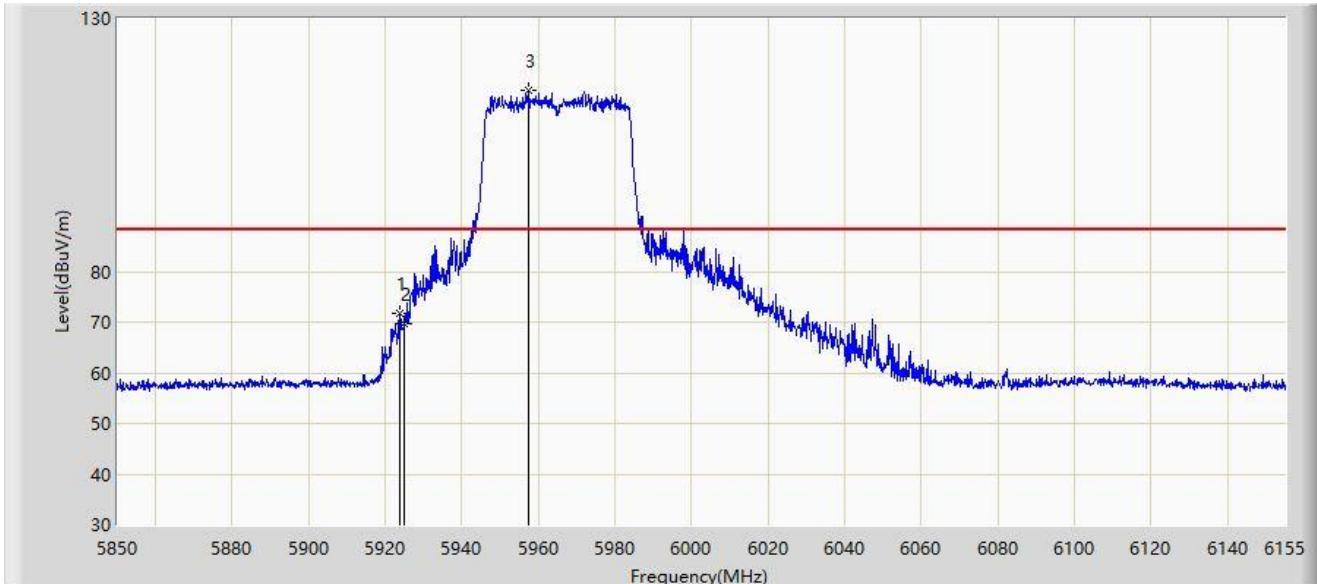


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5923.658	71.877	66.615	-16.323	88.200	5.262	PK
2		5925.000	69.746	64.476	-18.454	88.200	5.271	PK
3		5957.360	115.679	110.269	N/A	N/A	5.409	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-28
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

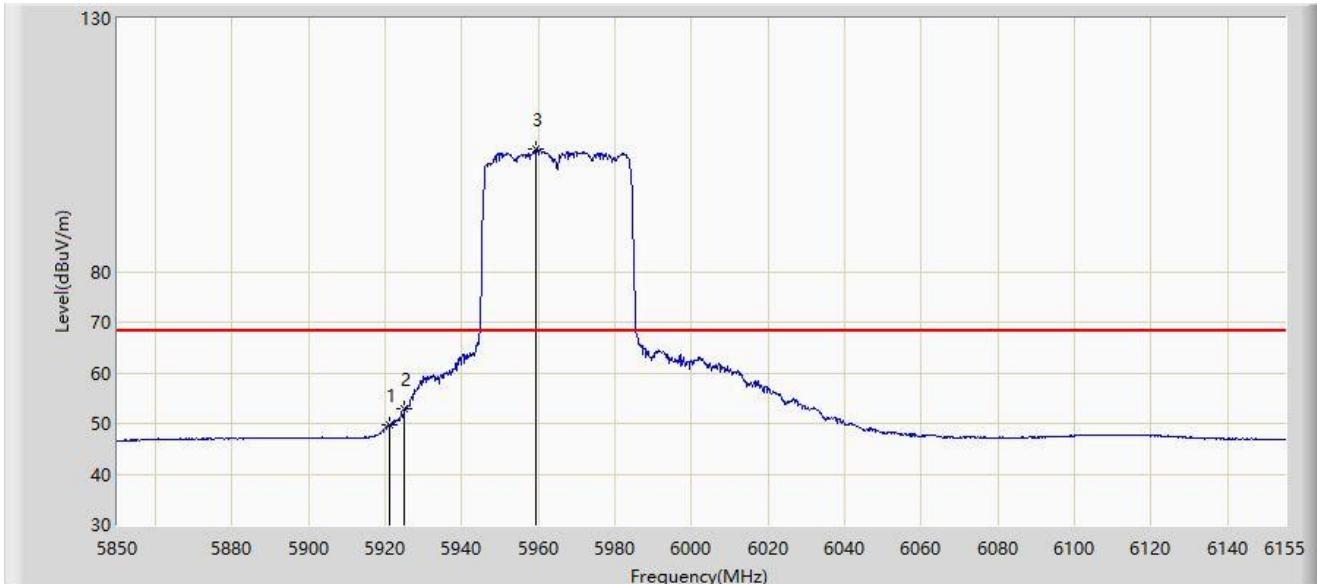


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5920.913	49.721	44.480	-18.479	68.200	5.242	AV
2	*	5925.000	52.832	47.562	-15.368	68.200	5.271	AV
3		5959.342	104.120	98.704	N/A	N/A	5.416	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-28
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

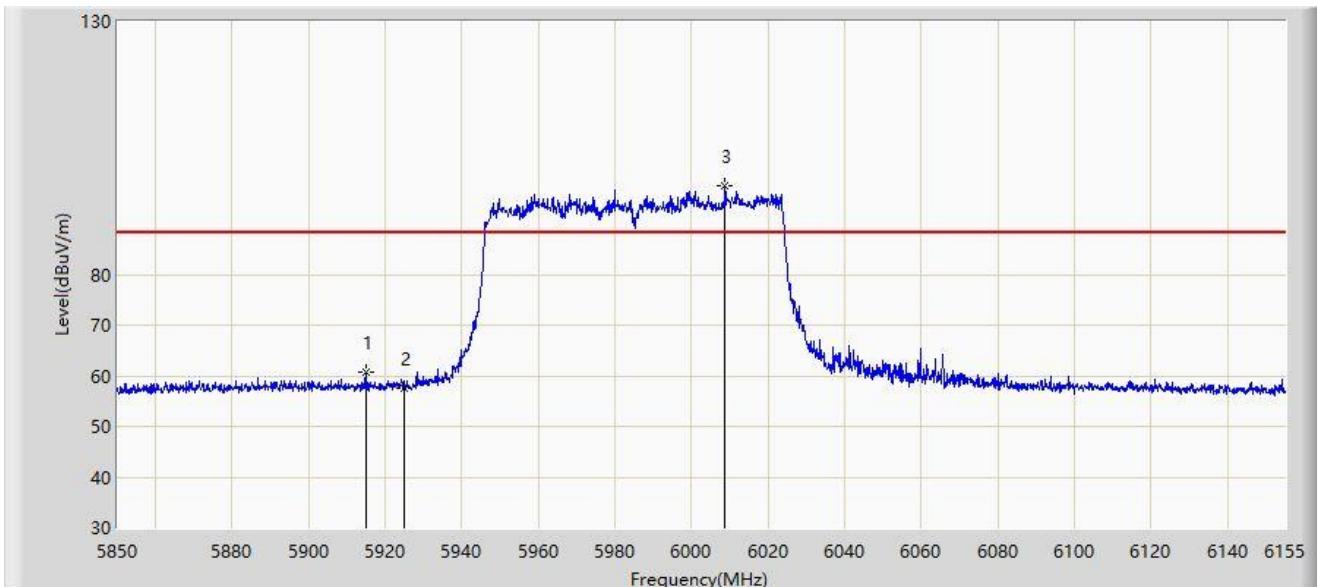


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5914.812	60.690	55.493	-27.510	88.200	5.196	PK
2		5925.000	57.646	52.376	-30.554	88.200	5.271	PK
3		6008.752	97.648	92.126	N/A	N/A	5.521	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-28
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

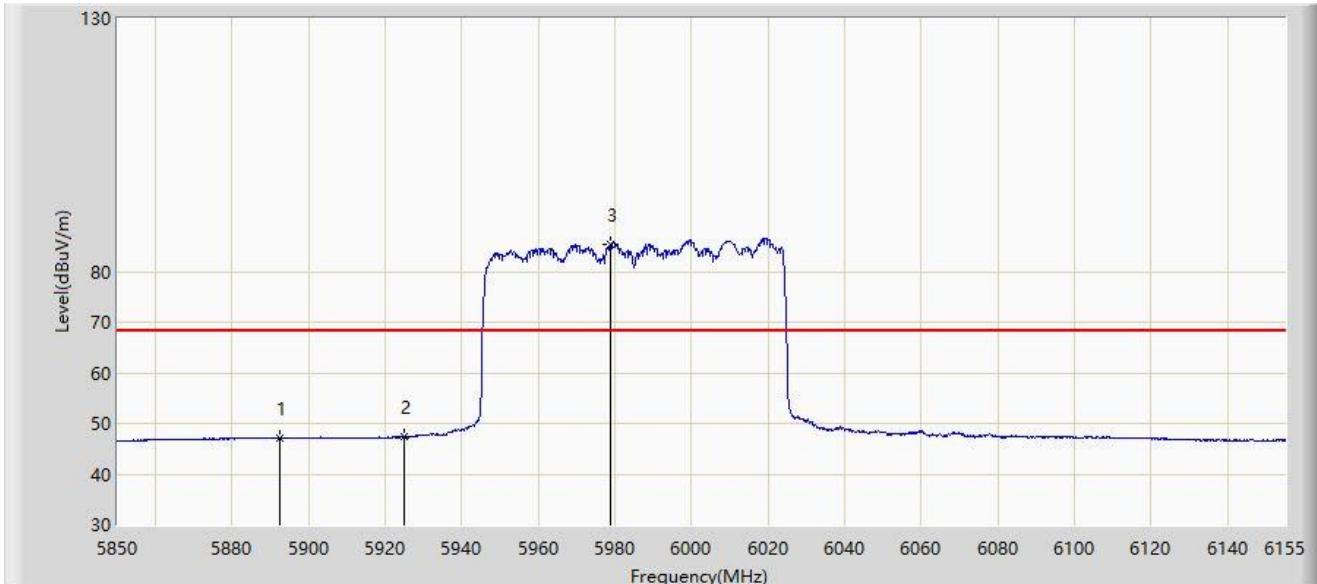


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5892.547	47.182	42.021	-21.018	68.200	5.162	AV
2	*	5925.000	47.263	41.993	-20.937	68.200	5.271	AV
3		5978.862	85.440	80.192	N/A	N/A	5.248	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-28
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

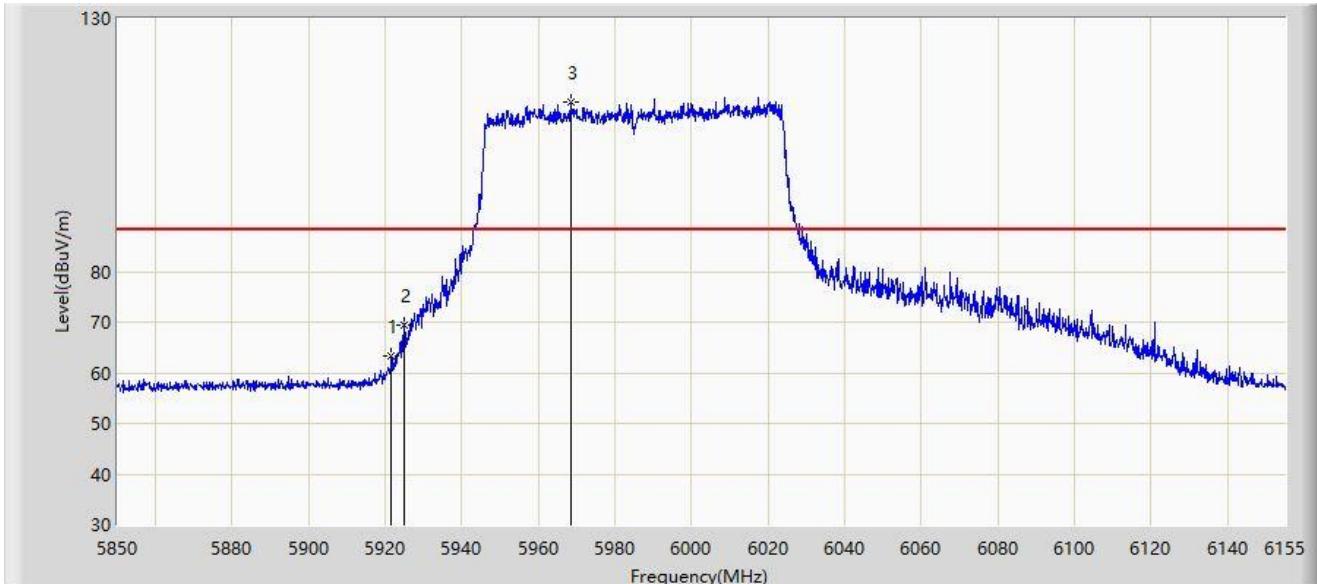


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5921.522	63.404	58.158	-24.796	88.200	5.246	PK
2	*	5925.000	69.479	64.209	-18.721	88.200	5.271	PK
3		5968.645	113.423	108.086	N/A	N/A	5.337	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-28
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

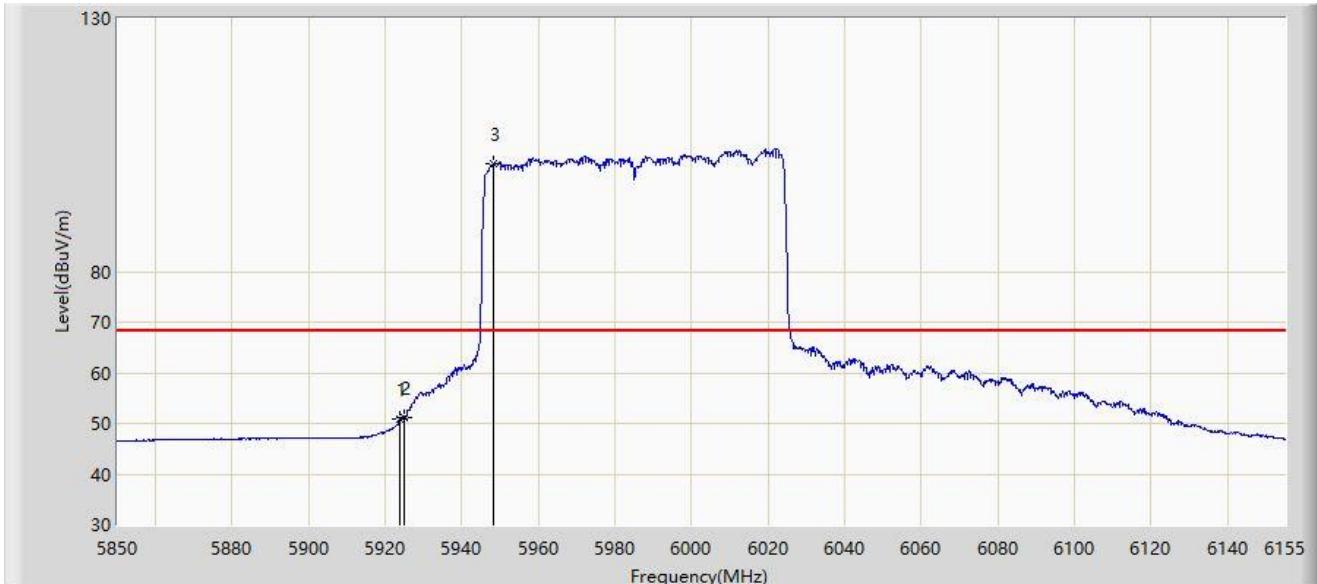


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5923.658	50.934	45.672	-17.266	68.200	5.262	AV
2	*	5925.000	51.123	45.853	-17.077	68.200	5.271	AV
3		5948.210	101.275	95.895	N/A	N/A	5.380	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-11-18
Limit: FCC_6G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

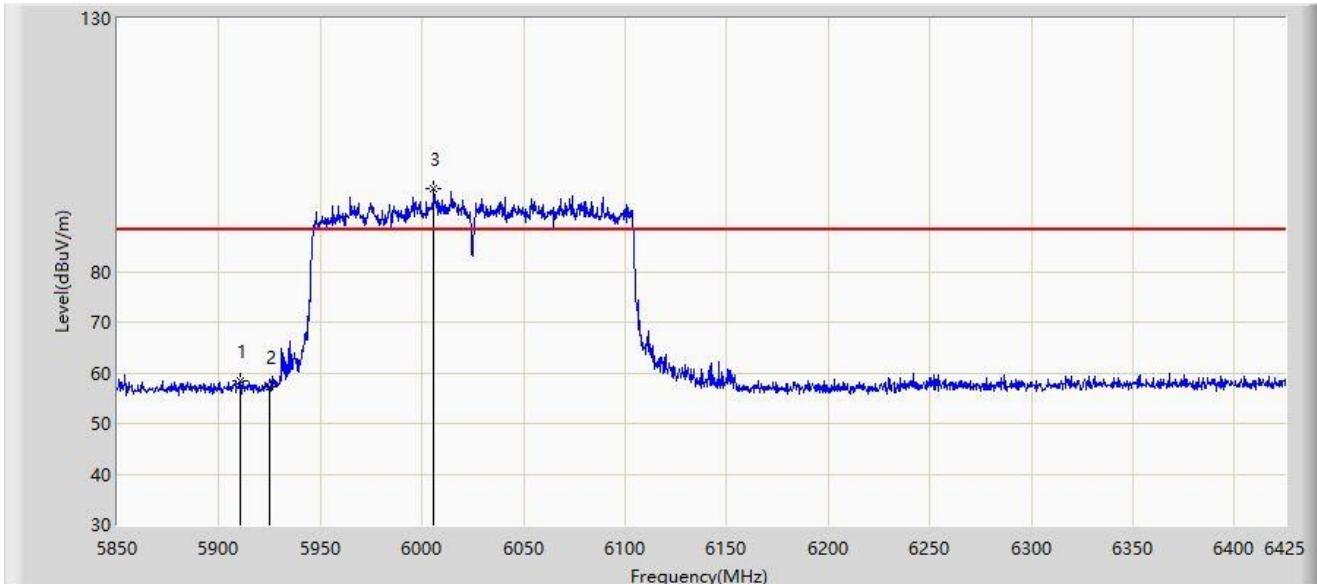


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5910.375	58.393	53.745	-29.807	88.200	4.647	PK
2		5925.000	57.225	52.594	-30.975	88.200	4.631	PK
3		6005.825	96.260	91.433	N/A	N/A	4.828	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-11-18
Limit: FCC_6G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

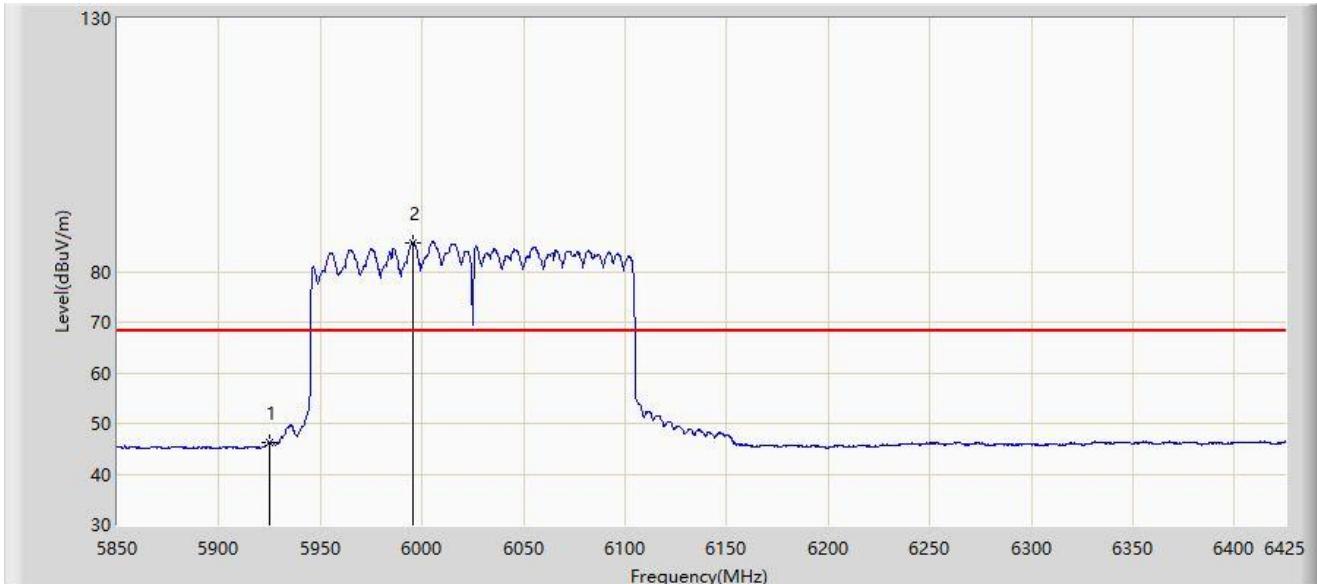


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5925.000	46.350	41.719	-21.850	68.200	4.631	AV
2		5995.475	85.769	80.986	N/A	N/A	4.784	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-11-18
Limit: FCC_6G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

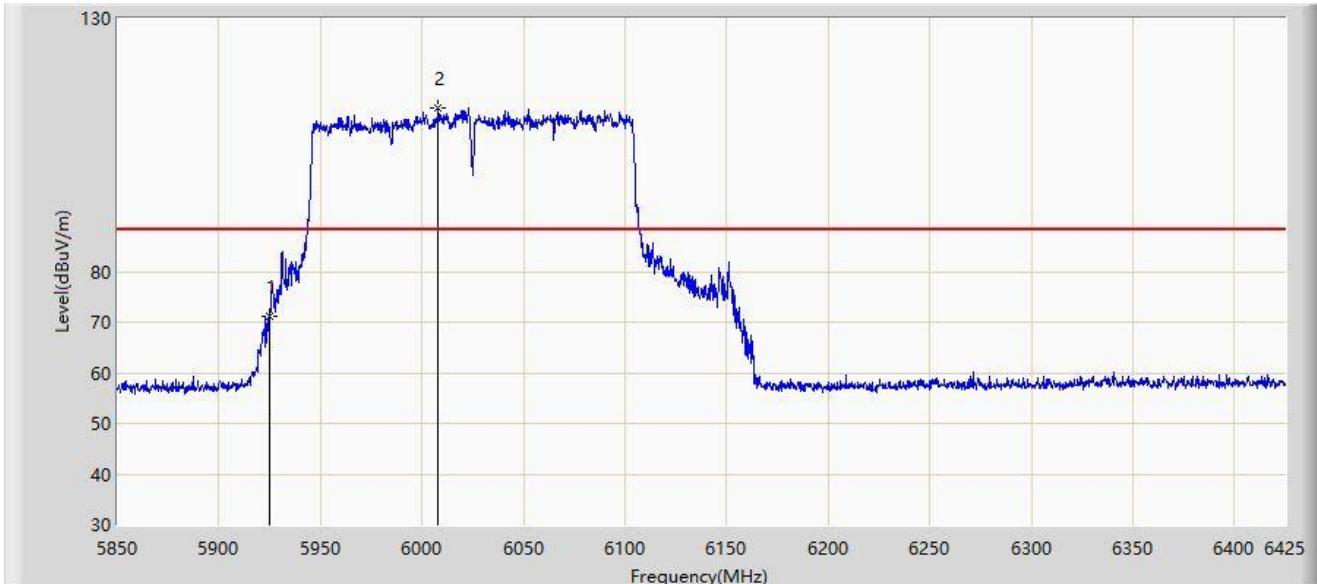


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5925.000	71.298	66.667	-16.902	88.200	4.631	PK
2		6008.125	112.333	107.498	N/A	N/A	4.834	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-11-18
Limit: FCC_6G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

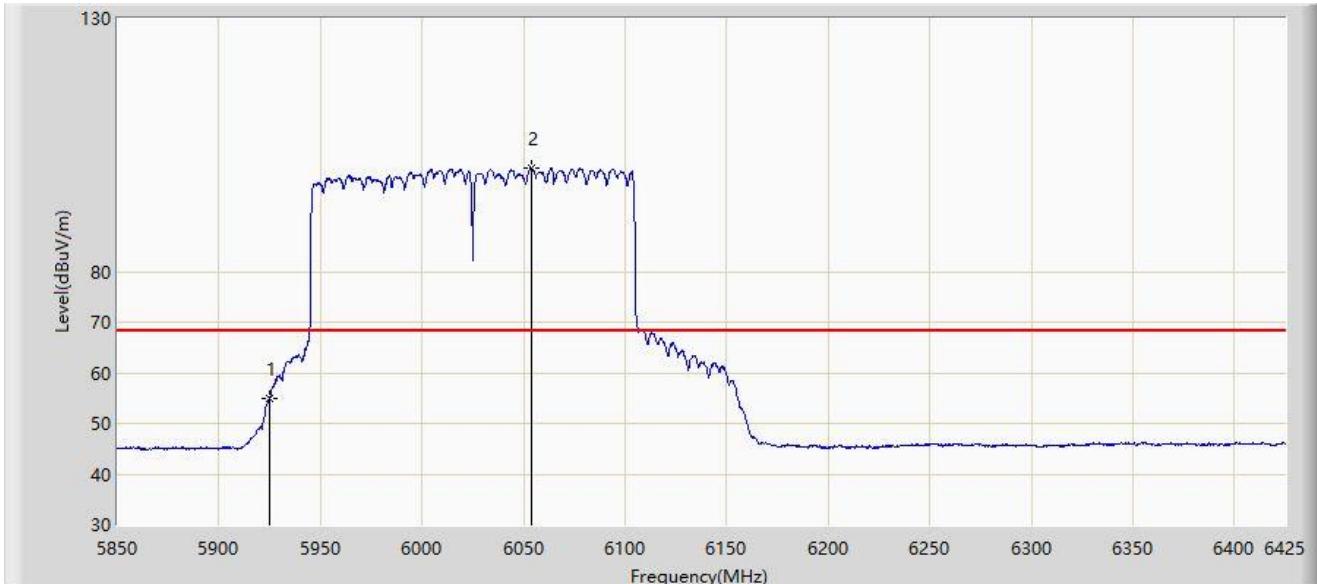

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5925.000	55.000	50.369	-13.200	68.200	4.631	AV
2		6053.837	100.414	95.715	N/A	N/A	4.699	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

ANT-312:

Site: WZ-AC2	Test Date: 2023-07-09
Limit: FCC_6G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

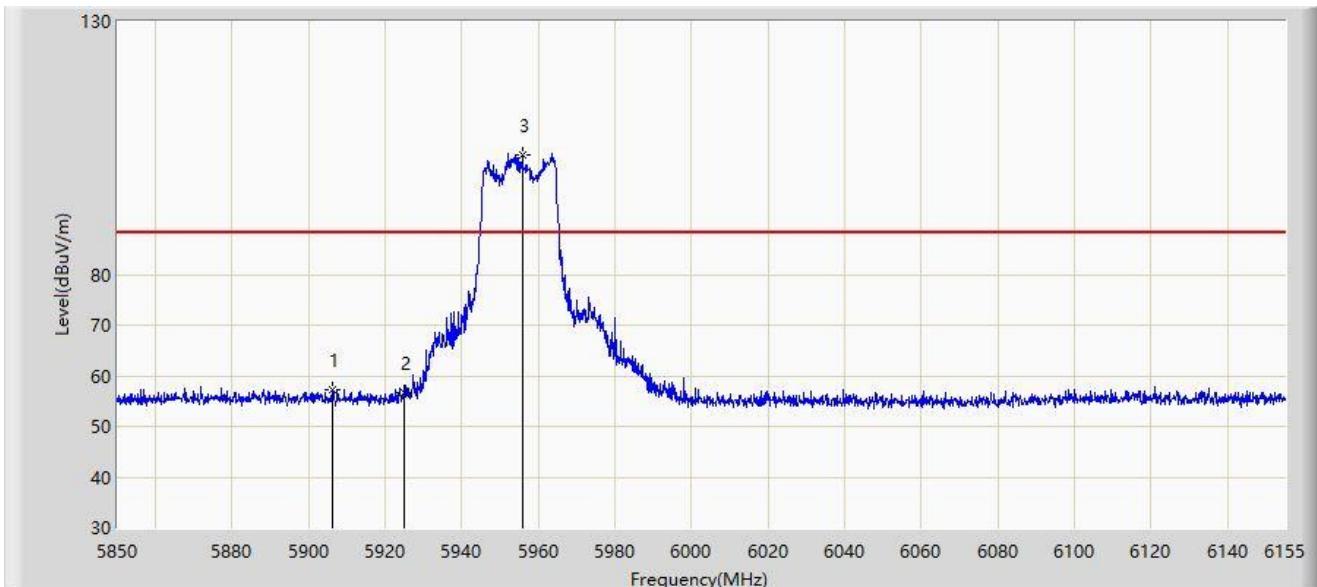


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5906.272	57.195	52.030	-31.005	88.200	5.165	PK
2		5925.000	56.581	51.311	-31.619	88.200	5.271	PK
3		5955.683	103.689	98.285	N/A	N/A	5.405	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-09
Limit: FCC_6G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

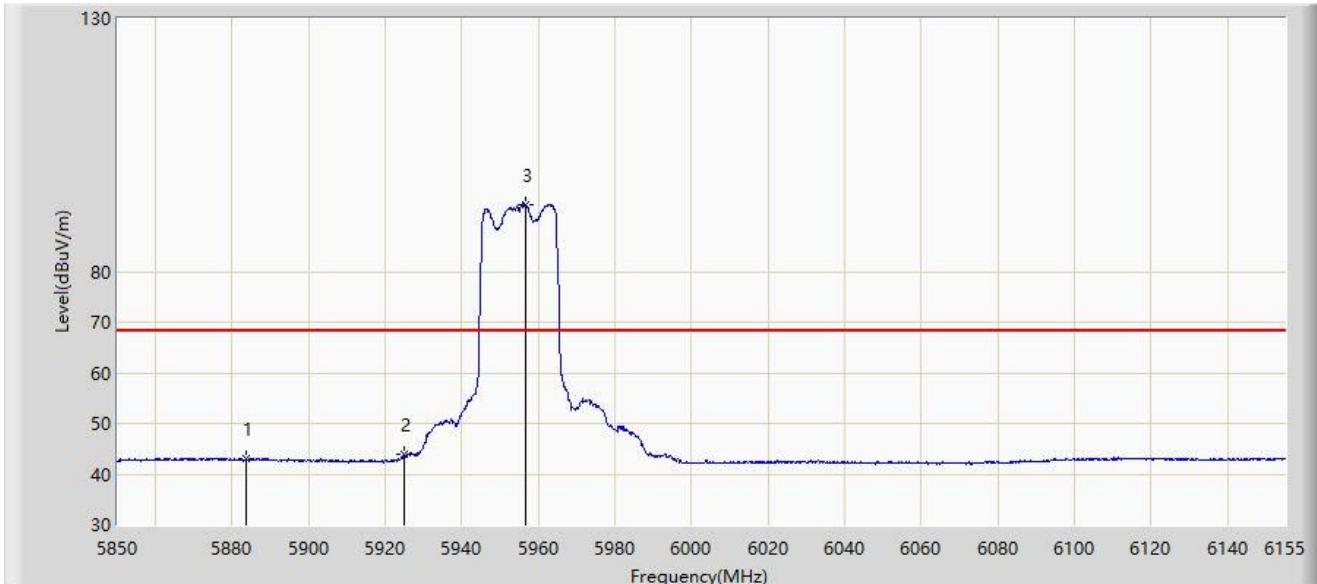


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5883.550	42.989	37.818	-25.211	68.200	5.171	AV
2	*	5925.000	43.830	38.560	-24.370	68.200	5.271	AV
3		5956.598	93.203	87.796	N/A	N/A	5.407	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-09
Limit: FCC_6G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

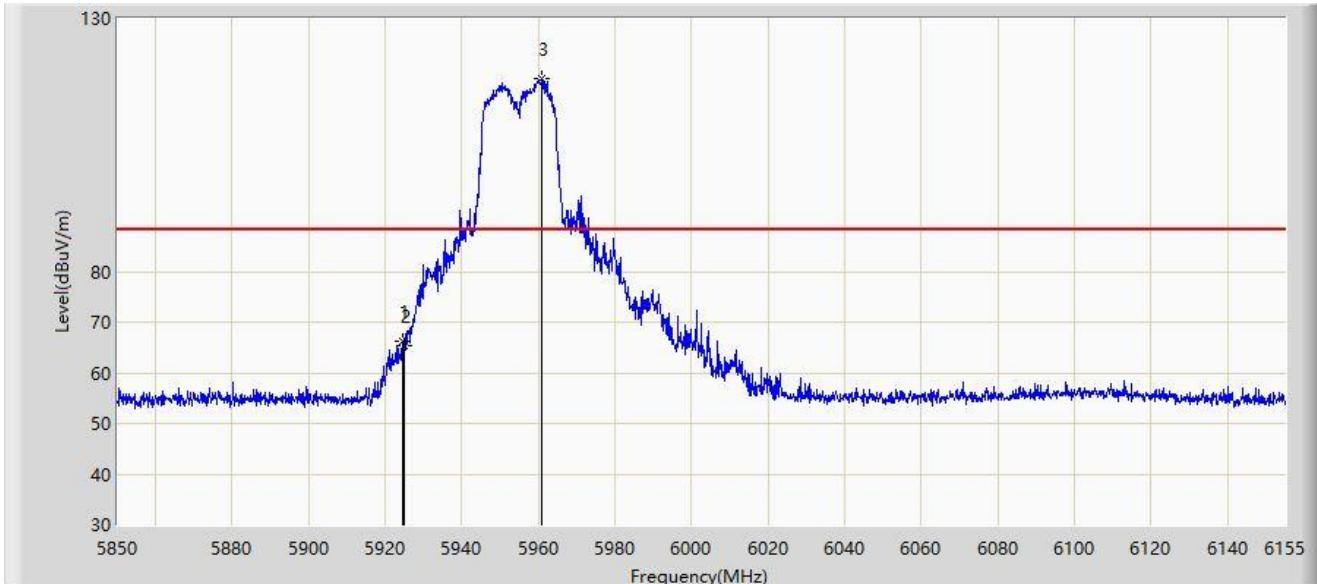


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5924.420	66.294	61.027	-21.906	88.200	5.266	PK
2		5925.000	65.261	59.991	-22.939	88.200	5.271	PK
3		5961.020	118.104	112.695	N/A	N/A	5.409	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-09
Limit: FCC_6G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

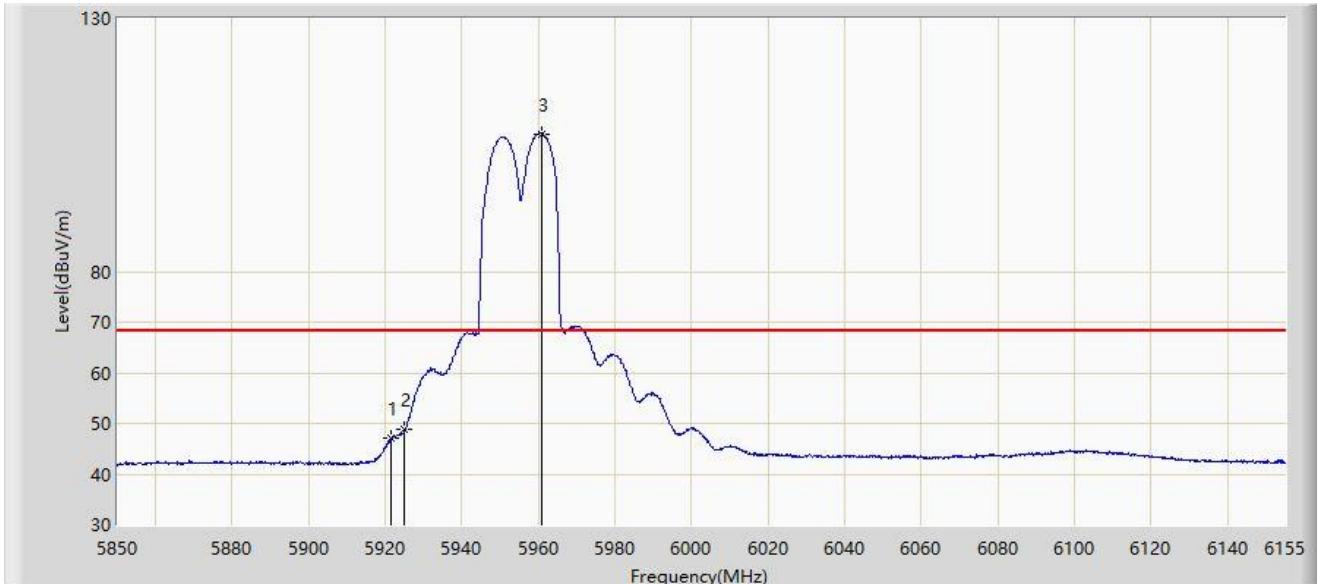


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5921.522	47.107	41.861	-21.093	68.200	5.246	AV
2	*	5925.000	48.841	43.571	-19.359	68.200	5.271	AV
3		5960.868	107.220	101.809	N/A	N/A	5.410	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-09
Limit: FCC_6G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

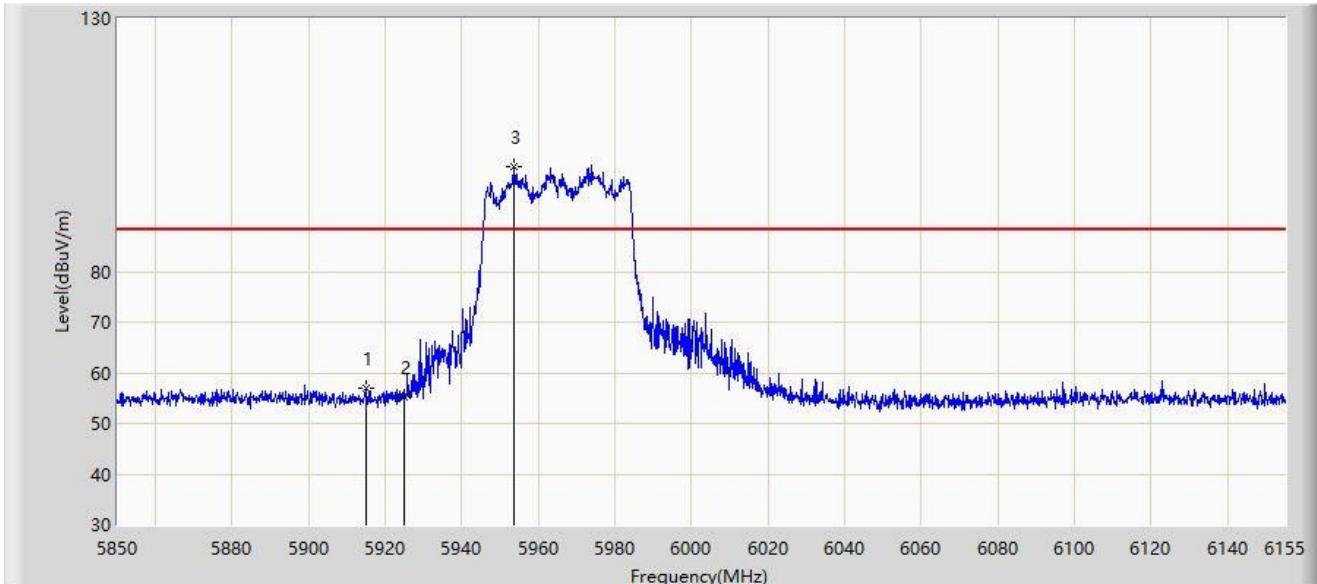


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5914.812	56.910	51.713	-31.290	88.200	5.196	PK
2		5925.000	55.248	49.978	-32.952	88.200	5.271	PK
3		5953.700	100.723	95.325	N/A	N/A	5.398	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-09
Limit: FCC_6G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

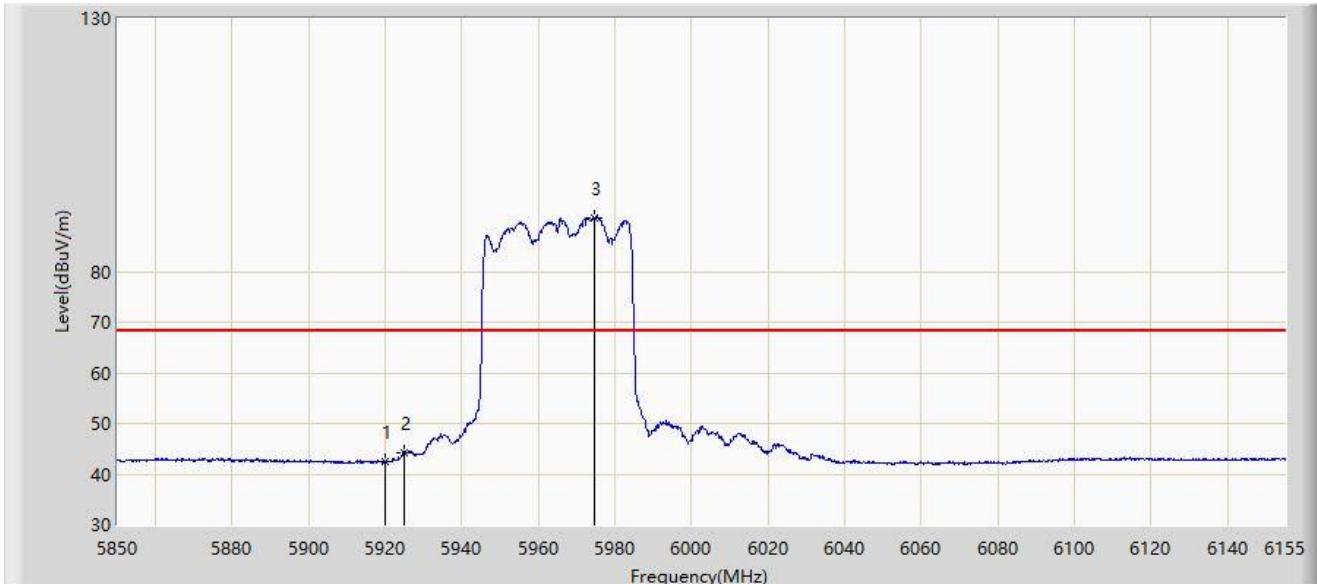


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5919.998	42.584	37.349	-25.616	68.200	5.235	AV
2	*	5925.000	44.162	38.892	-24.038	68.200	5.271	AV
3		5974.440	90.716	85.432	N/A	N/A	5.284	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-09
Limit: FCC_6G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

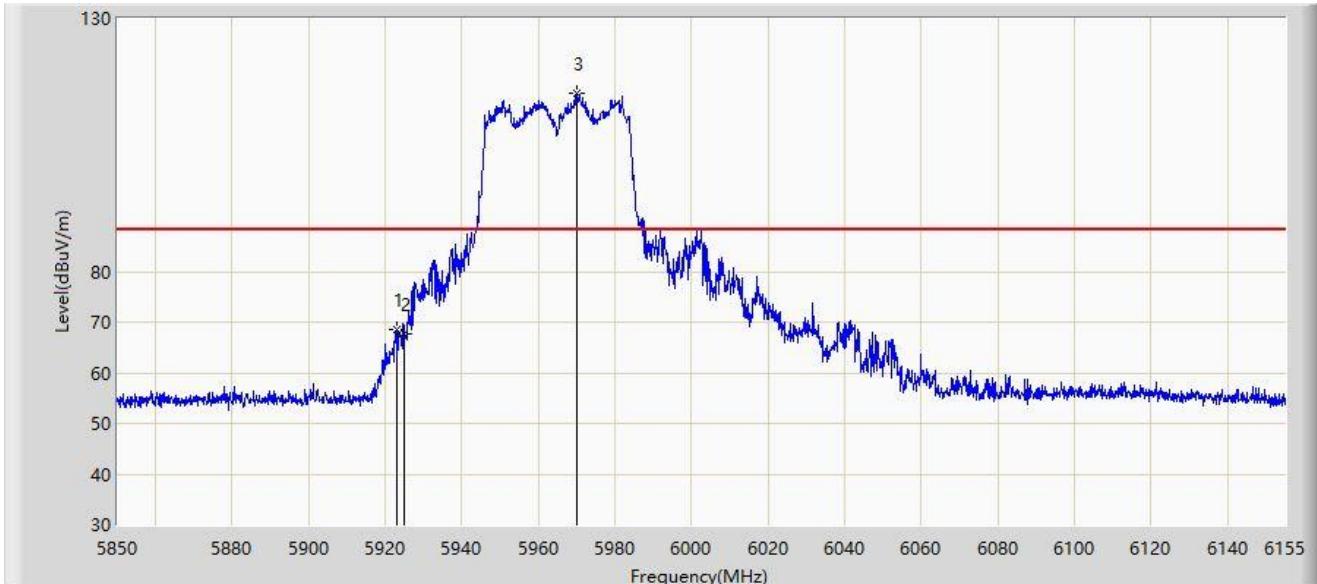


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5922.895	68.579	63.323	-19.621	88.200	5.256	PK
2		5925.000	67.727	62.457	-20.473	88.200	5.271	PK
3		5970.170	115.162	109.839	N/A	N/A	5.323	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-09
Limit: FCC_6G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

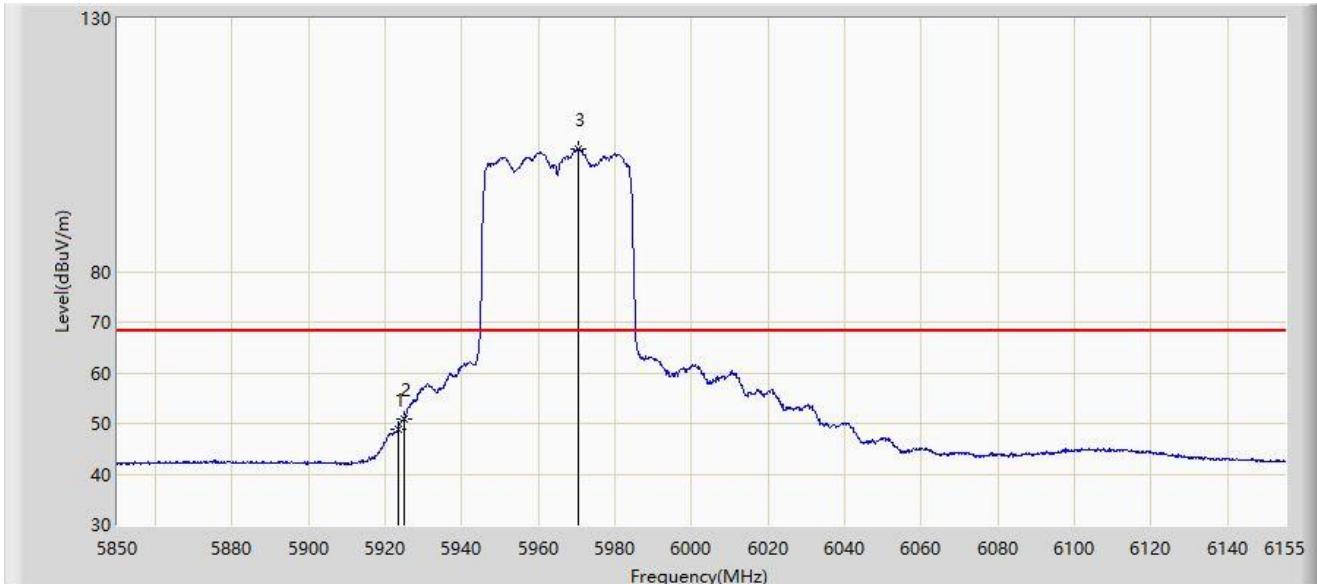


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5923.200	48.841	43.583	-19.359	68.200	5.258	AV
2	*	5925.000	50.934	45.664	-17.266	68.200	5.271	AV
3		5970.322	104.137	98.815	N/A	N/A	5.322	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-09
Limit: FCC_6G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

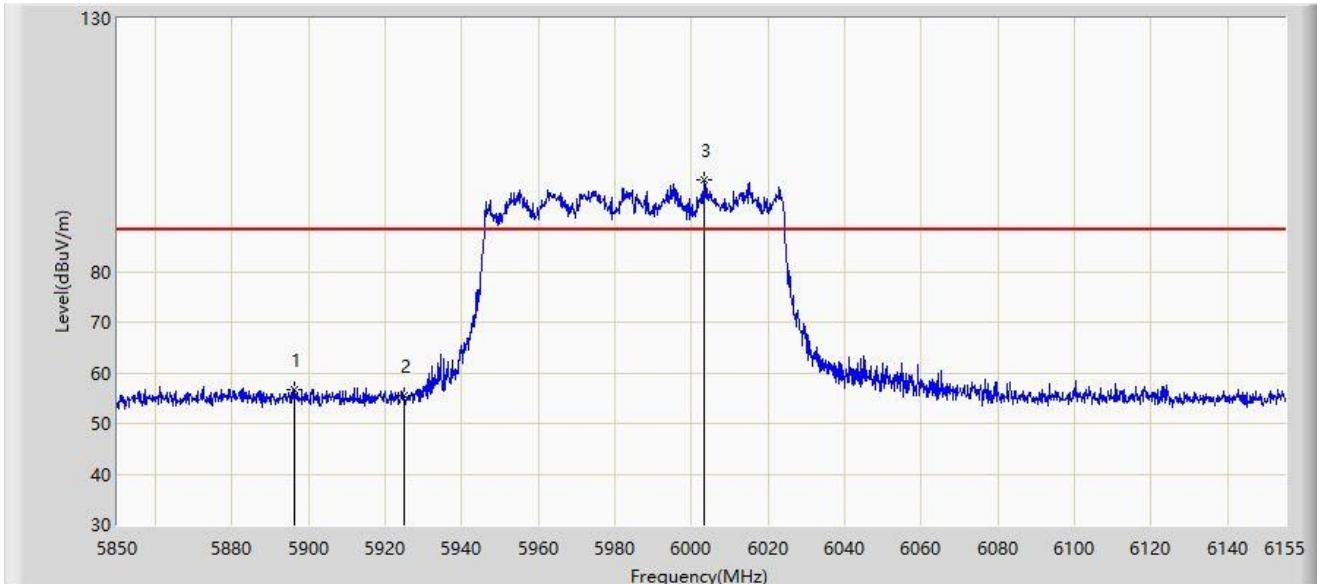


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5896.360	56.662	51.518	-31.538	88.200	5.144	PK
2		5925.000	55.425	50.155	-32.775	88.200	5.271	PK
3		6003.110	98.101	92.648	N/A	N/A	5.454	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-09
Limit: FCC_6G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

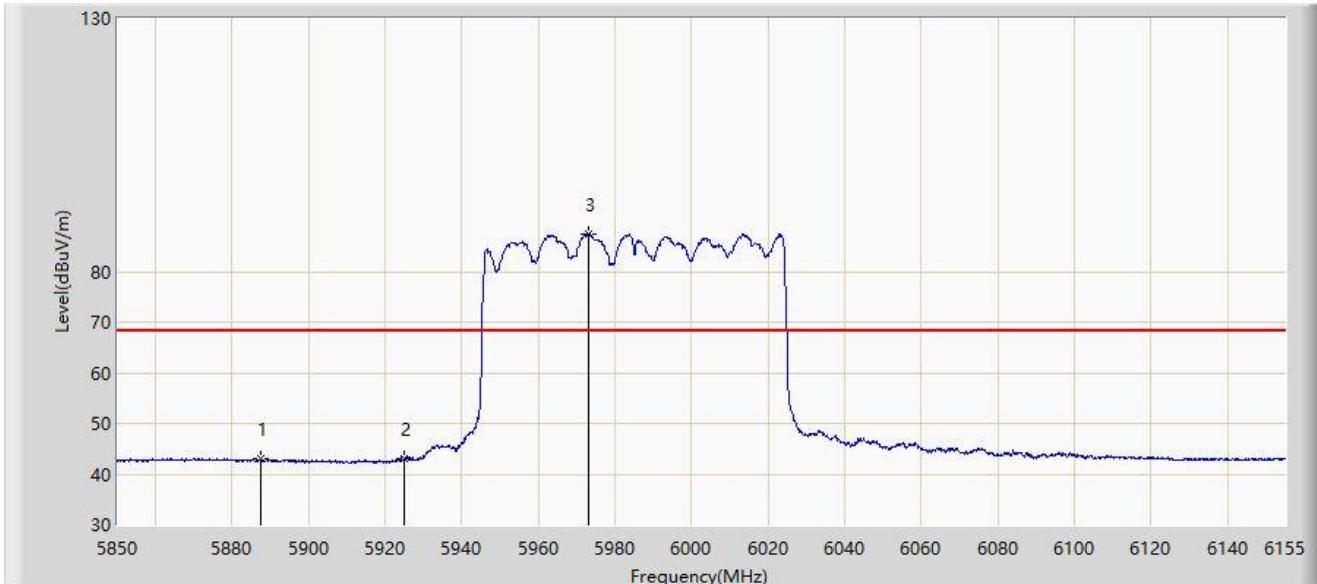


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5887.362	43.022	37.841	-25.178	68.200	5.182	AV
2	*	5925.000	43.065	37.795	-25.135	68.200	5.271	AV
3		5973.220	87.459	82.164	N/A	N/A	5.296	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-09
Limit: FCC_6G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

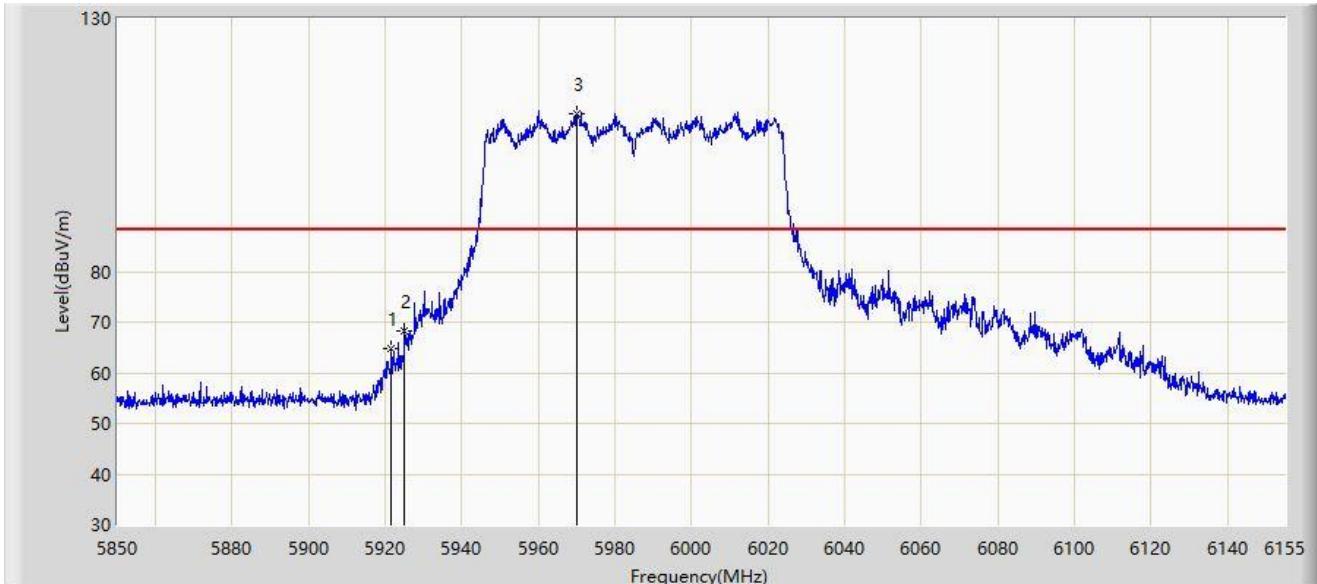


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5921.522	64.892	59.646	-23.308	88.200	5.246	PK
2	*	5925.000	68.196	62.926	-20.004	88.200	5.271	PK
3		5969.865	111.231	105.905	N/A	N/A	5.326	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-09
Limit: FCC_6G_RE(3m)	Engineer: Edith Yu
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

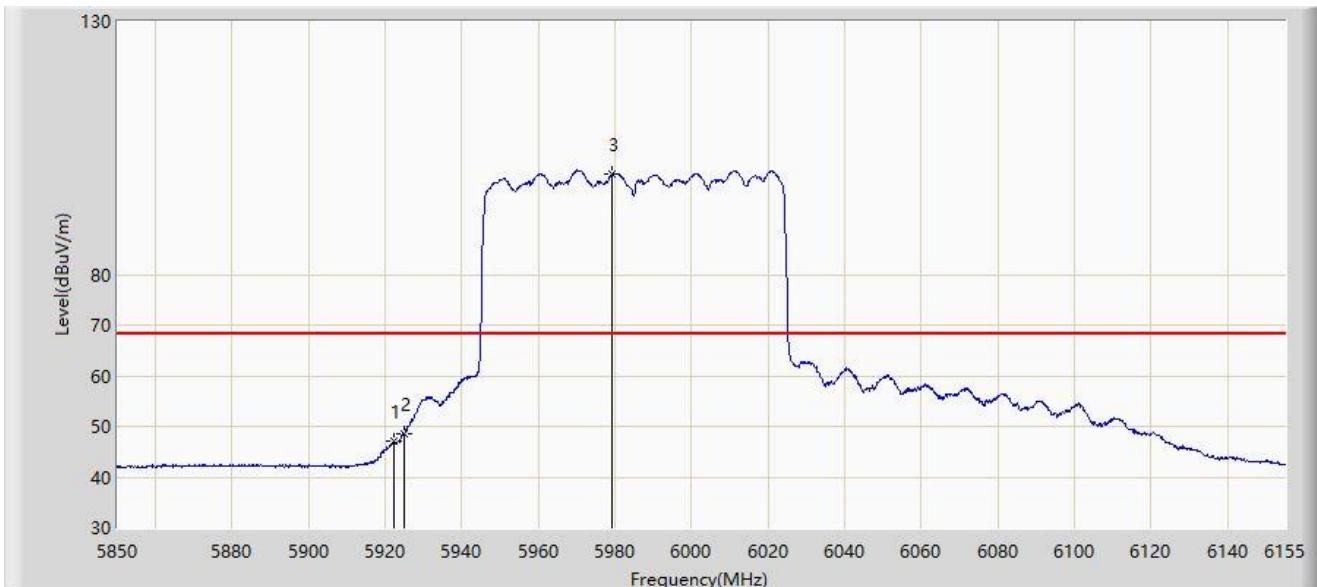


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5922.132	47.167	41.917	-21.033	68.200	5.251	AV
2	*	5925.000	48.534	43.264	-19.666	68.200	5.271	AV
3		5979.320	99.721	94.474	N/A	N/A	5.247	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-11-18
Limit: FCC_6G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

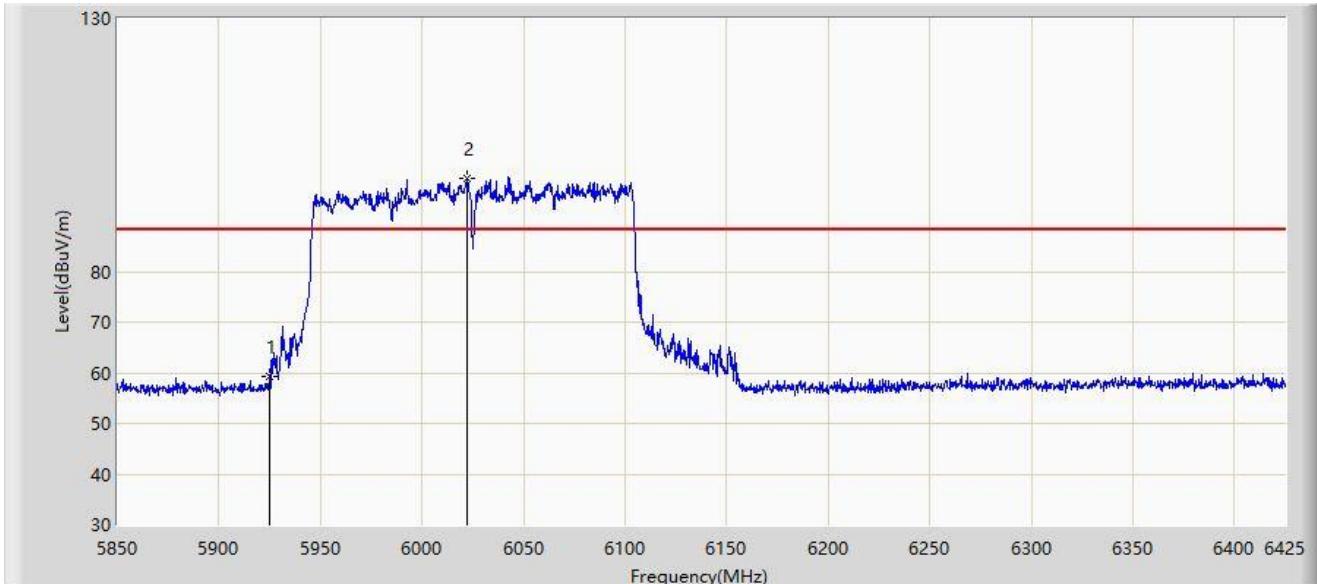


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5925.000	59.379	54.748	-28.821	88.200	4.631	PK
2		6022.500	98.521	93.846	N/A	N/A	4.675	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-11-18
Limit: FCC_6G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

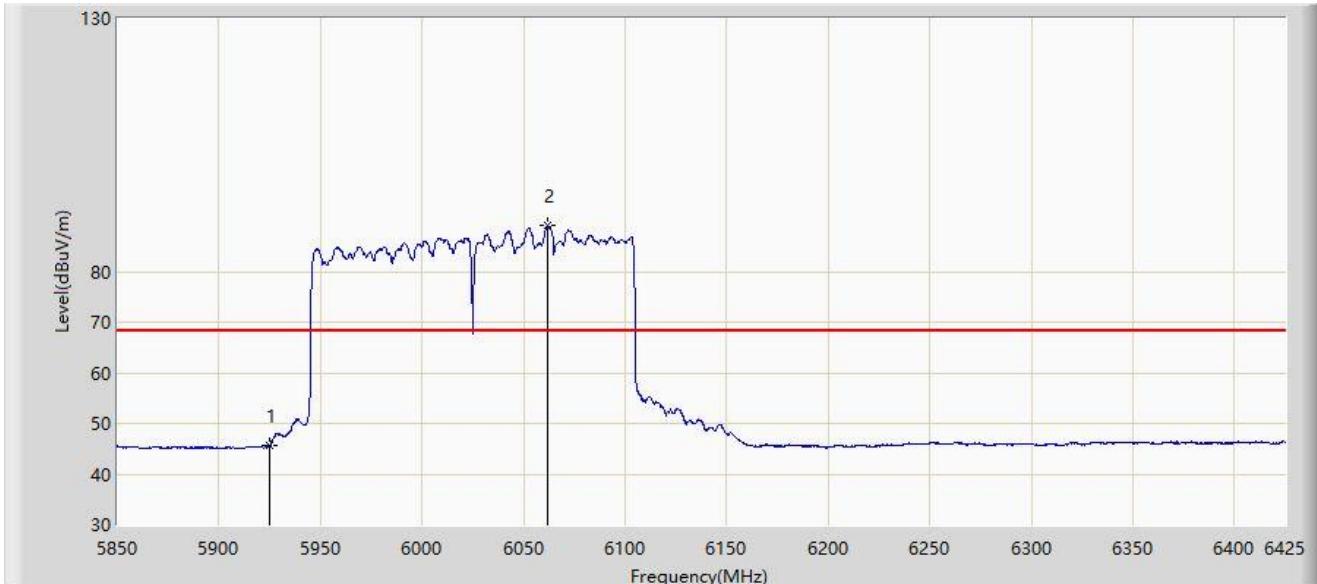


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5925.000	45.688	41.057	-22.512	68.200	4.631	AV
2		6062.175	88.986	84.216	N/A	N/A	4.770	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-11-18
Limit: FCC_6G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

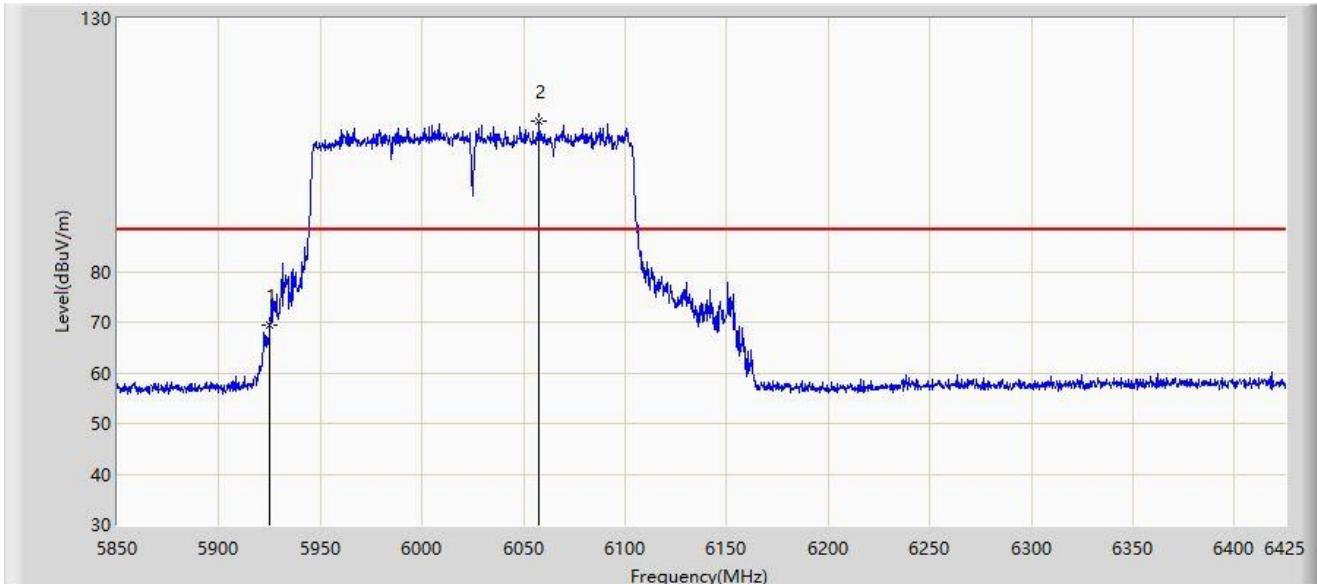


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5925.000	69.395	64.764	-18.805	88.200	4.631	PK
2		6057.862	109.847	105.114	N/A	N/A	4.733	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-11-18
Limit: FCC_6G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

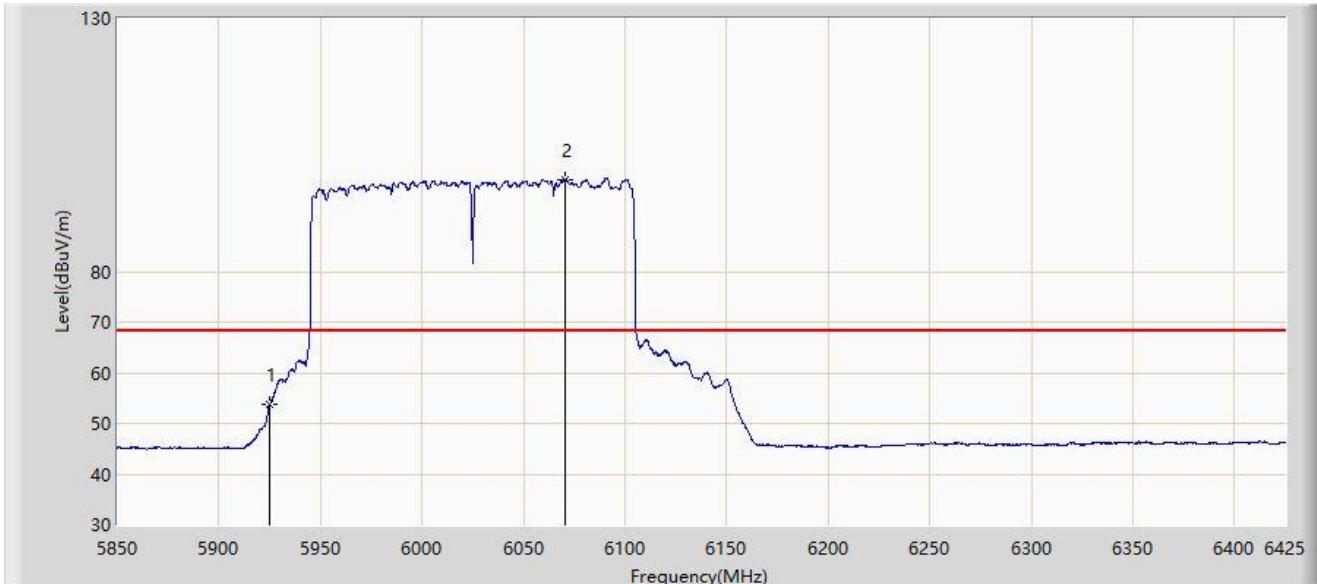

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5925.000	53.789	49.158	-14.411	68.200	4.631	AV
2		6070.225	98.173	93.342	N/A	N/A	4.830	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

ANT-348:

Site: WZ-AC2	Test Date: 2023-08-02
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

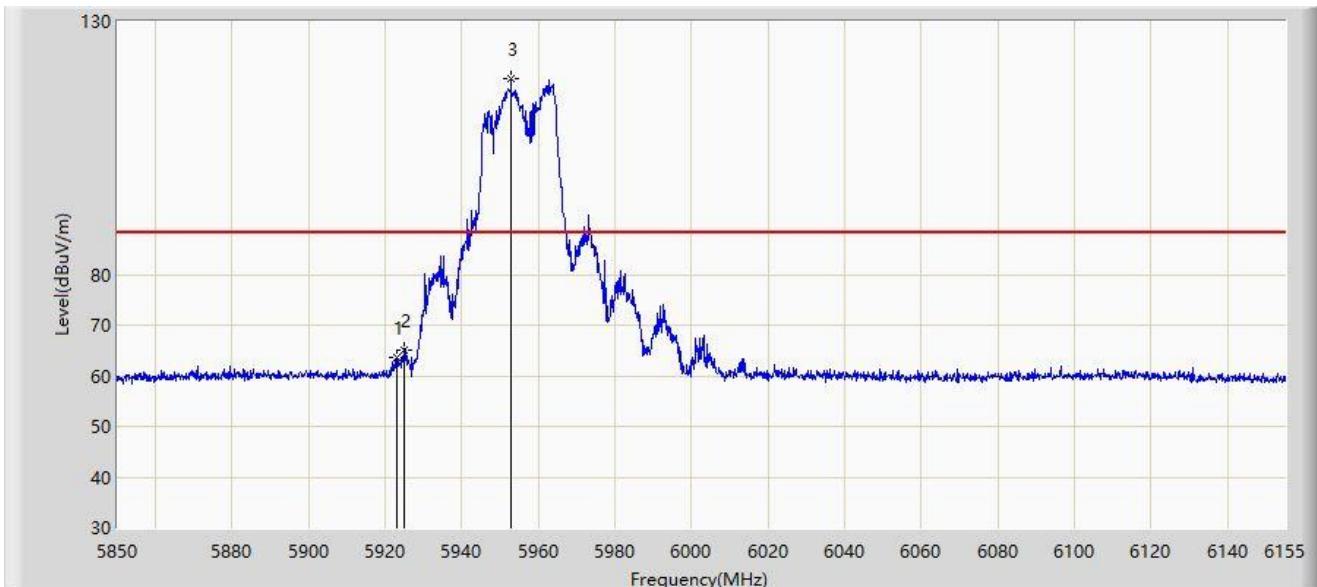


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5923.047	63.501	55.656	-24.699	88.200	7.845	PK
2	*	5925.000	65.195	57.335	-23.005	88.200	7.861	PK
3		5952.785	118.792	110.779	N/A	N/A	8.013	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-08-02
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

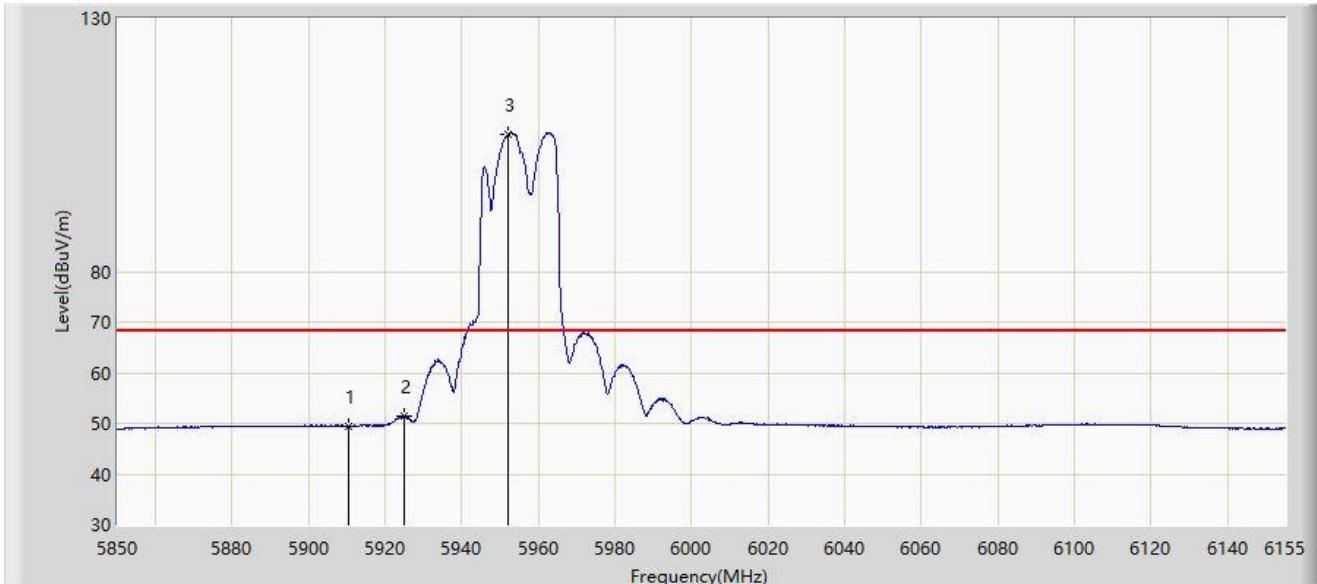


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5910.542	49.474	41.724	-18.726	68.200	7.749	AV
2	*	5925.000	51.464	43.604	-16.736	68.200	7.861	AV
3		5952.175	107.238	99.227	N/A	N/A	8.011	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-08-02
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

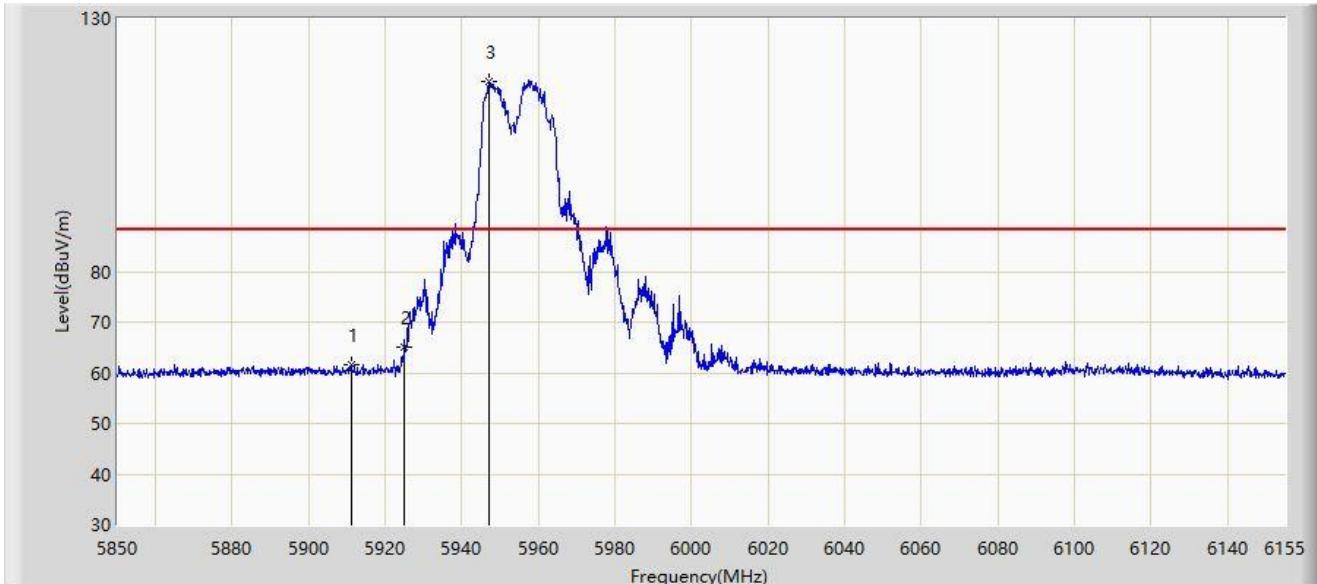


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5911.000	61.605	53.854	-26.595	88.200	7.752	PK
2	*	5925.000	65.080	57.220	-23.120	88.200	7.861	PK
3		5946.990	117.499	109.507	N/A	N/A	7.993	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-08-02
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

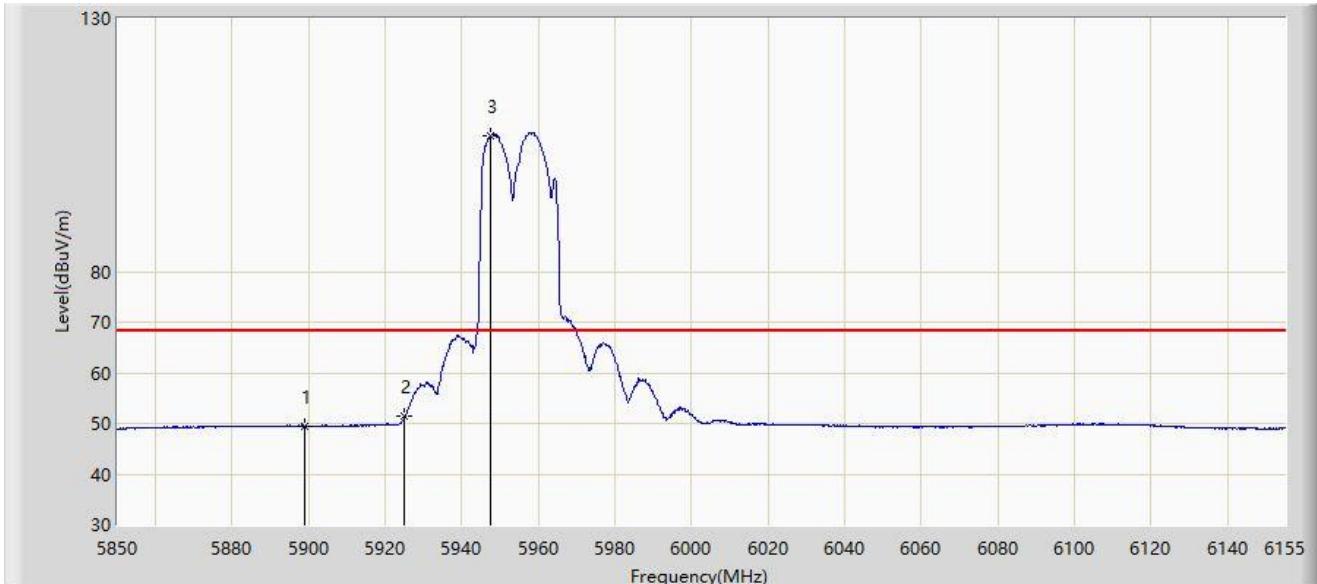


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5899.105	49.520	41.810	-18.680	68.200	7.710	AV
2	*	5925.000	51.362	43.502	-16.838	68.200	7.861	AV
3		5947.600	106.908	98.913	N/A	N/A	7.995	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-08-02
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

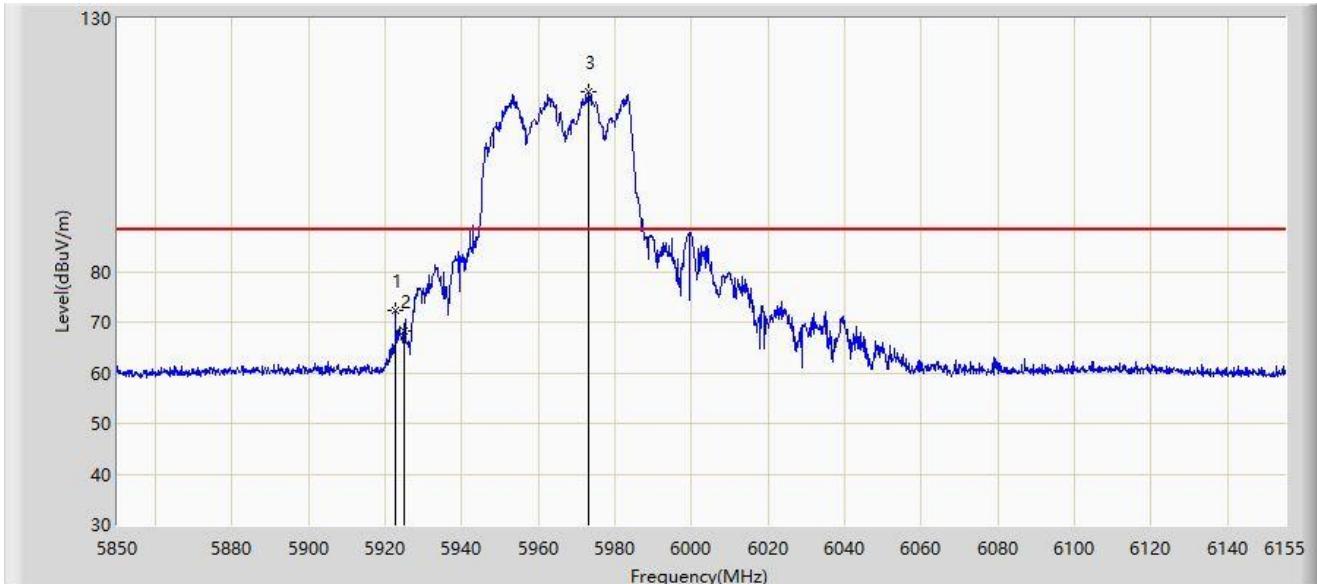


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5922.590	72.397	64.556	-15.803	88.200	7.841	PK
2		5925.000	68.273	60.413	-19.927	88.200	7.861	PK
3		5973.220	115.388	107.468	N/A	N/A	7.920	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-08-02
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

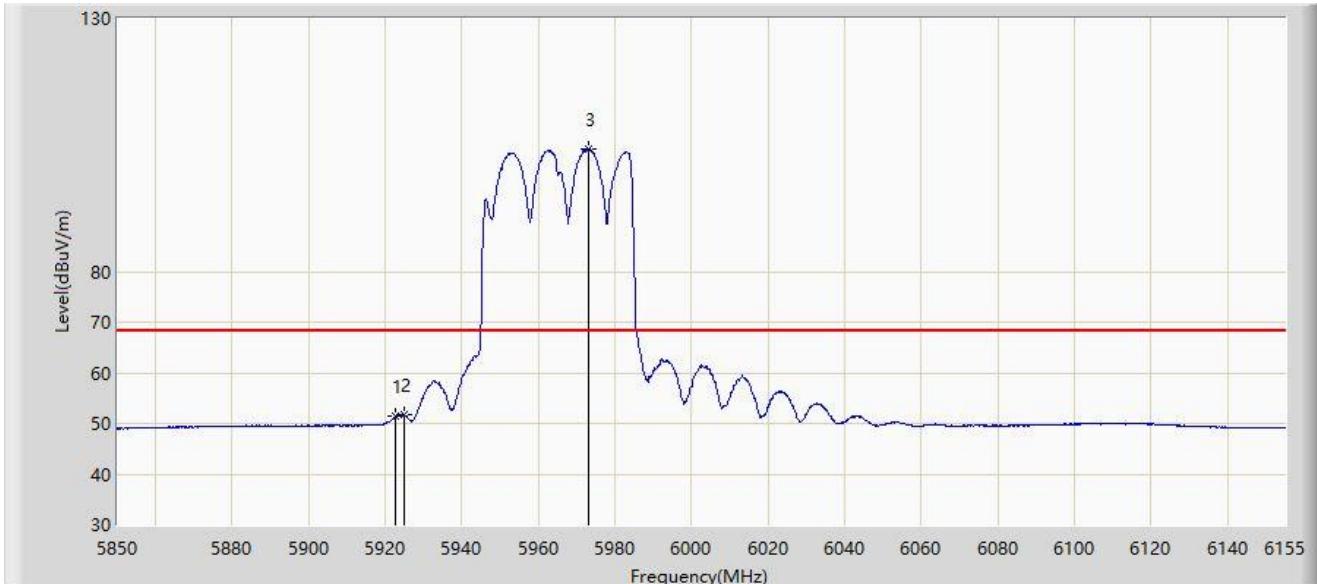


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5922.743	51.324	43.482	-16.876	68.200	7.842	AV
2	*	5925.000	51.608	43.748	-16.592	68.200	7.861	AV
3		5973.220	104.102	96.182	N/A	N/A	7.920	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-08-02
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

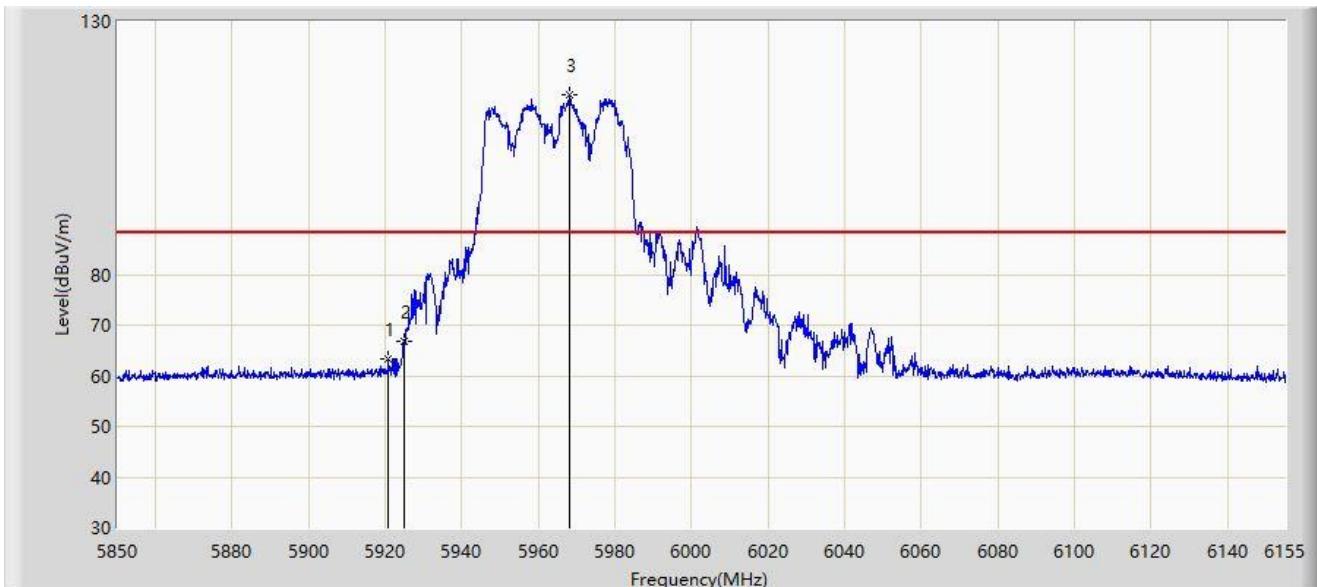


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5920.760	63.266	55.441	-24.934	88.200	7.826	PK
2	*	5925.000	66.942	59.082	-21.258	88.200	7.861	PK
3		5968.187	115.562	107.597	N/A	N/A	7.966	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-08-02
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

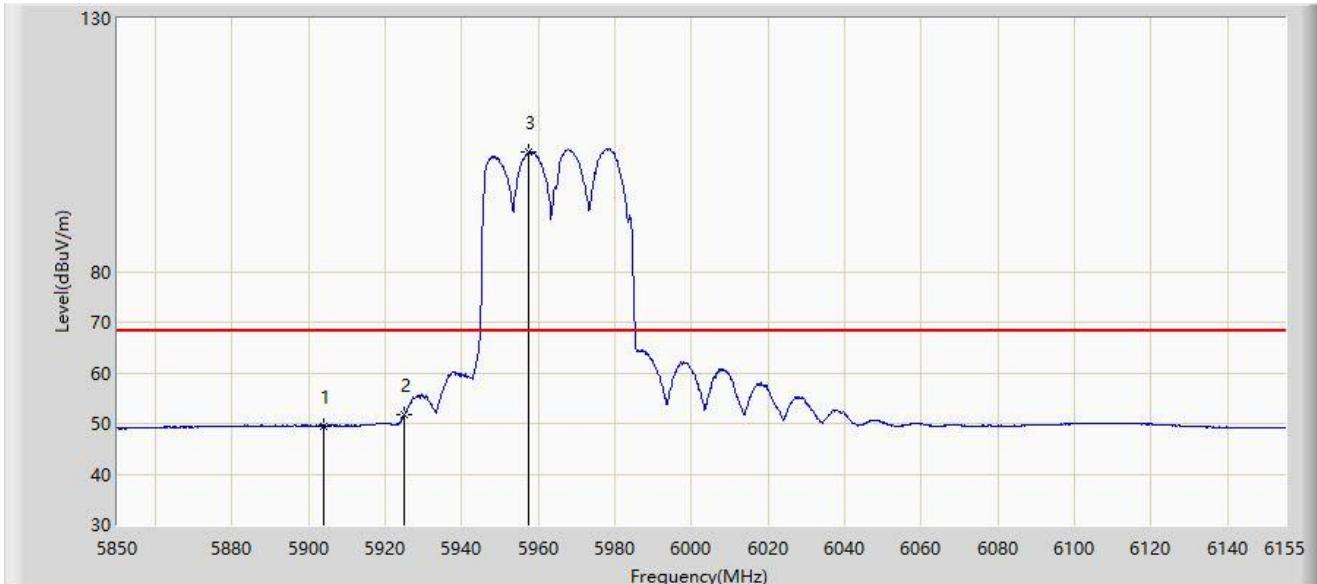


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5903.985	49.494	41.768	-18.706	68.200	7.726	AV
2	*	5925.000	51.722	43.862	-16.478	68.200	7.861	AV
3		5957.513	103.507	95.477	N/A	N/A	8.031	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-08-02
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

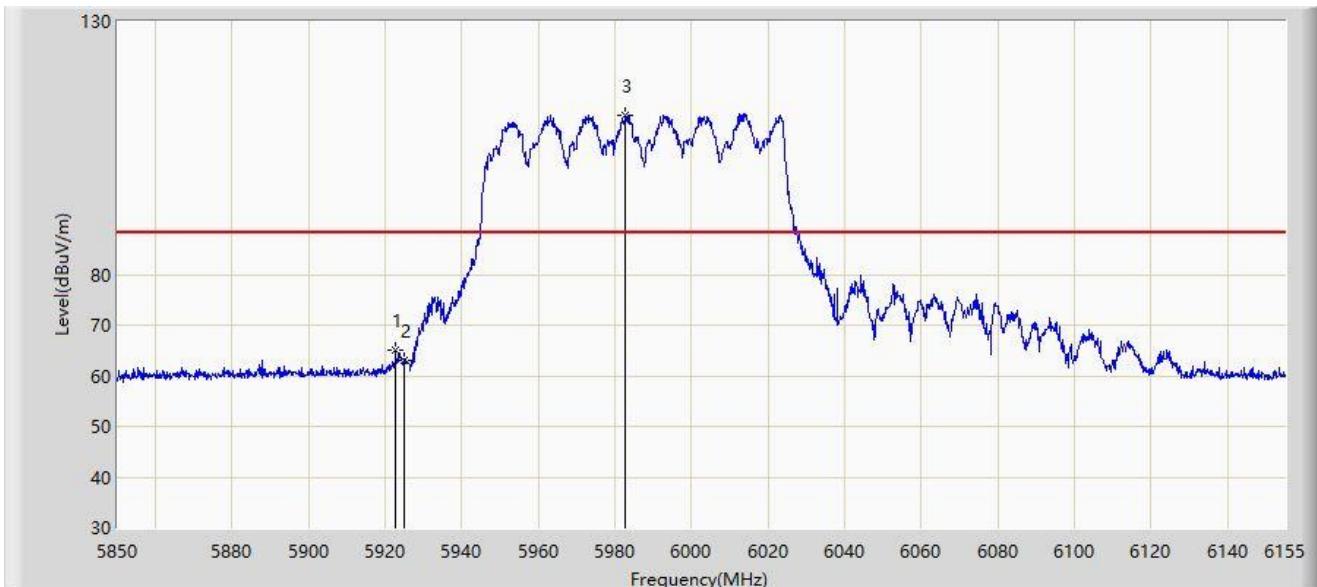


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5922.590	64.942	57.101	-23.258	88.200	7.841	PK
2		5925.000	63.160	55.300	-25.040	88.200	7.861	PK
3		5982.675	111.535	103.651	N/A	N/A	7.884	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-08-02
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

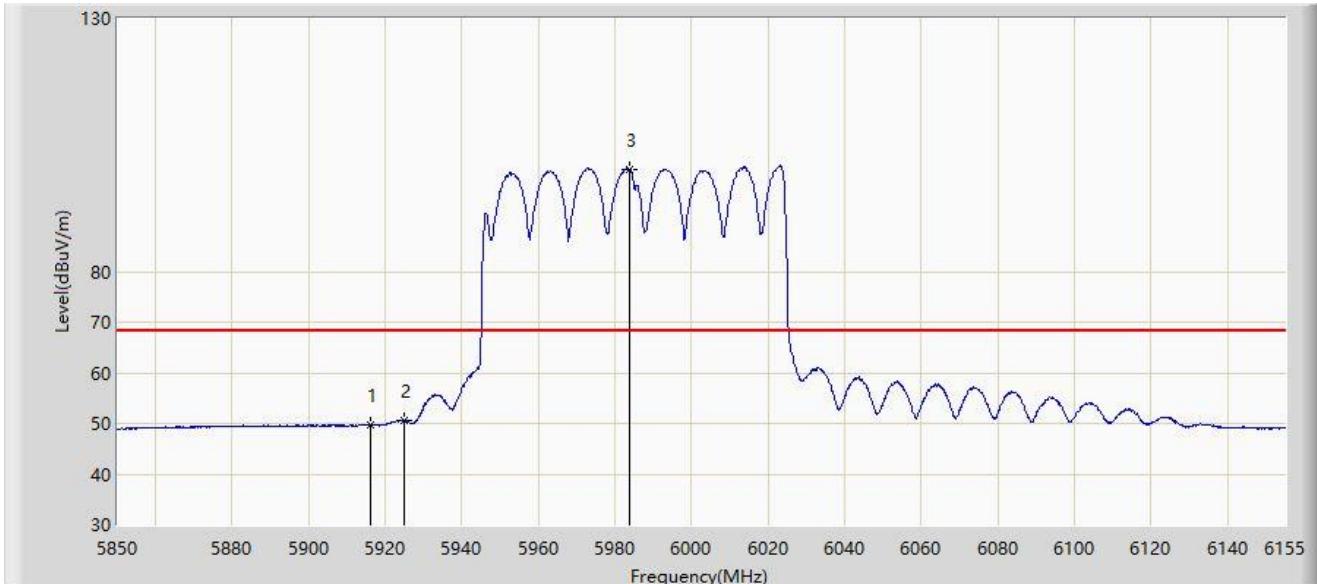


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5916.033	49.739	41.954	-18.461	68.200	7.785	AV
2	*	5925.000	50.466	42.606	-17.734	68.200	7.861	AV
3		5983.590	100.210	92.317	N/A	N/A	7.893	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-08-02
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

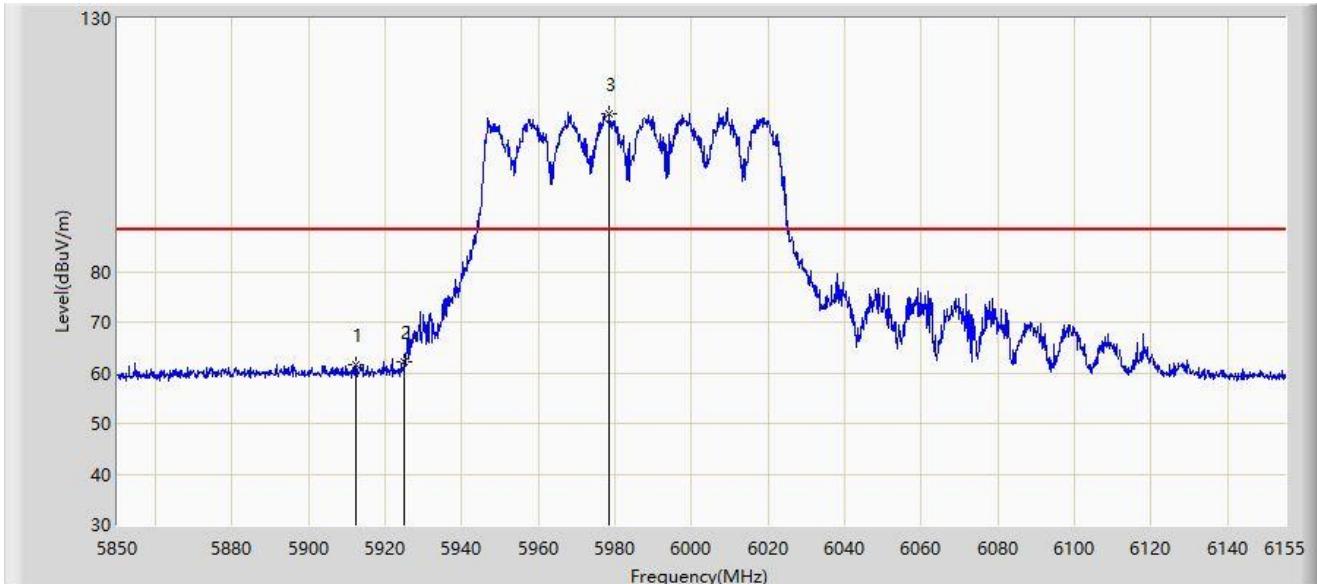


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5912.220	61.724	53.968	-26.476	88.200	7.756	PK
2	*	5925.000	62.126	54.266	-26.074	88.200	7.861	PK
3		5978.558	111.042	103.167	N/A	N/A	7.875	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-08-02
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

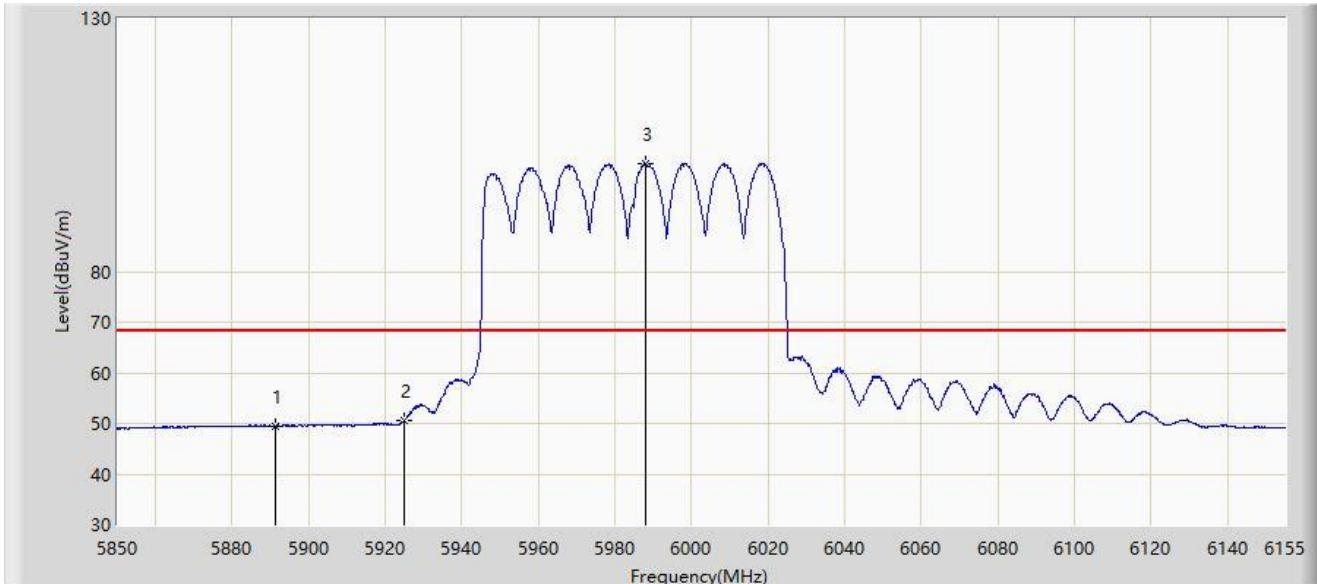


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5891.175	49.498	41.777	-18.702	68.200	7.721	AV
2	*	5925.000	50.706	42.846	-17.494	68.200	7.861	AV
3		5987.860	101.302	93.370	N/A	N/A	7.932	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-11-17
Limit: FCC_6G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

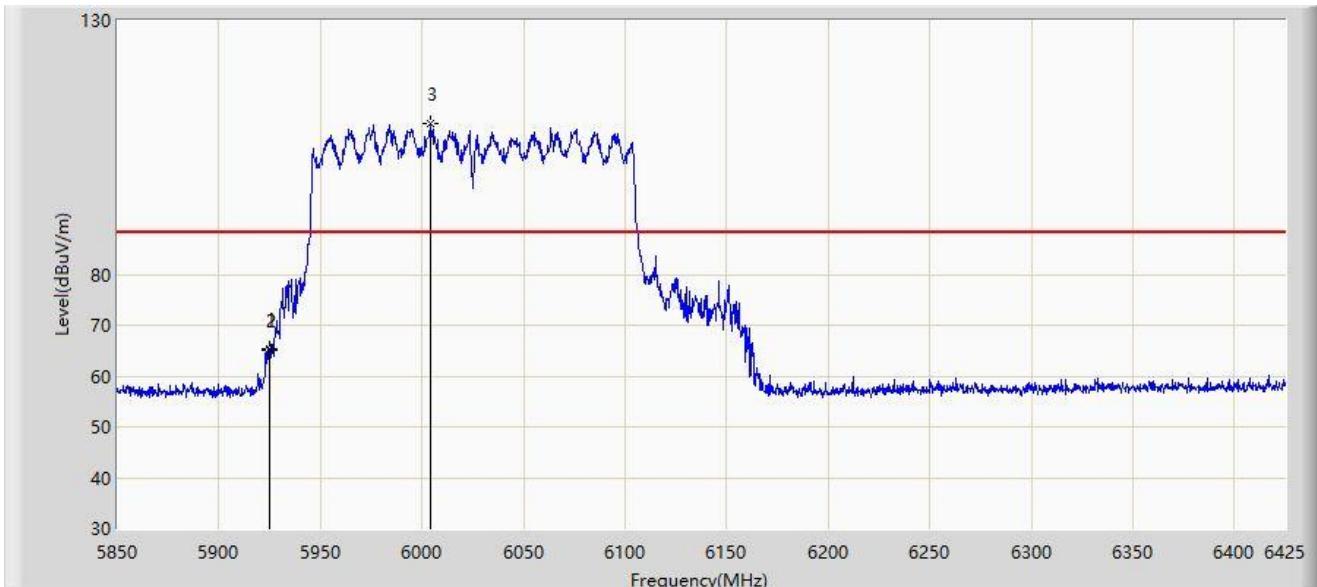


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5924.750	65.443	60.812	-22.757	88.200	4.631	PK
2		5925.000	64.992	60.361	-23.208	88.200	4.631	PK
3		6004.100	109.807	104.986	N/A	N/A	4.822	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-11-17
Limit: FCC_6G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

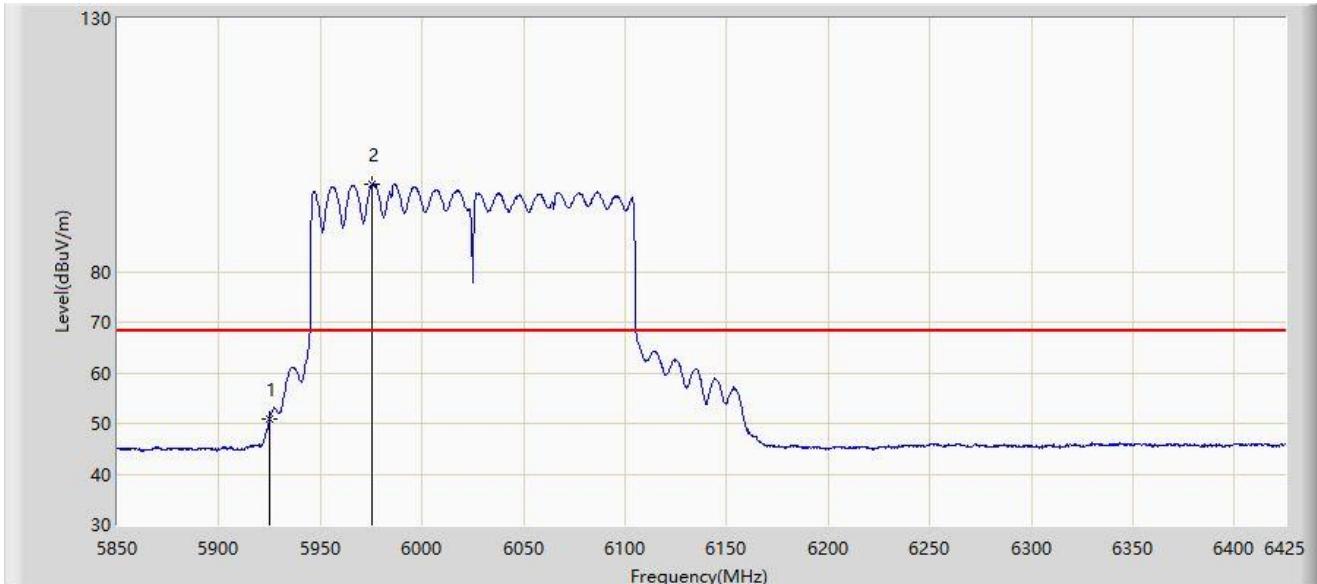


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5925.000	50.938	46.307	-17.262	68.200	4.631	AV
2		5975.638	97.338	92.754	N/A	N/A	4.585	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-11-17
Limit: FCC_6G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

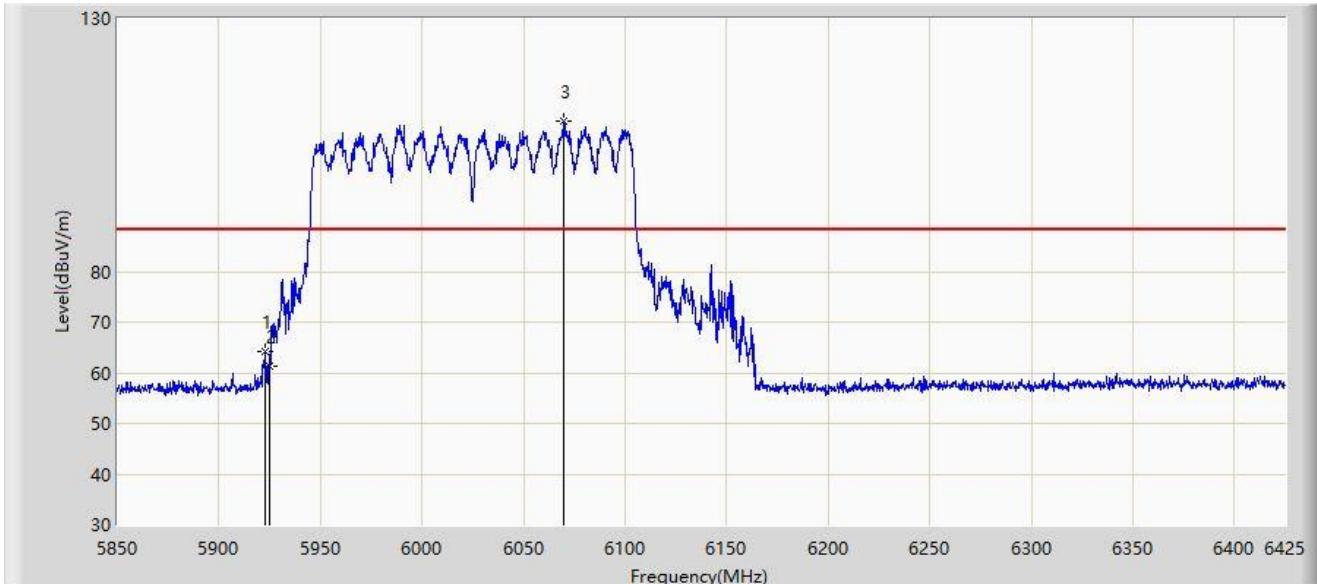


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5922.450	64.161	59.528	-24.039	88.200	4.634	PK
2		5925.000	61.421	56.790	-26.779	88.200	4.631	PK
3		6069.650	109.694	104.865	N/A	N/A	4.829	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-11-17
Limit: FCC_6G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

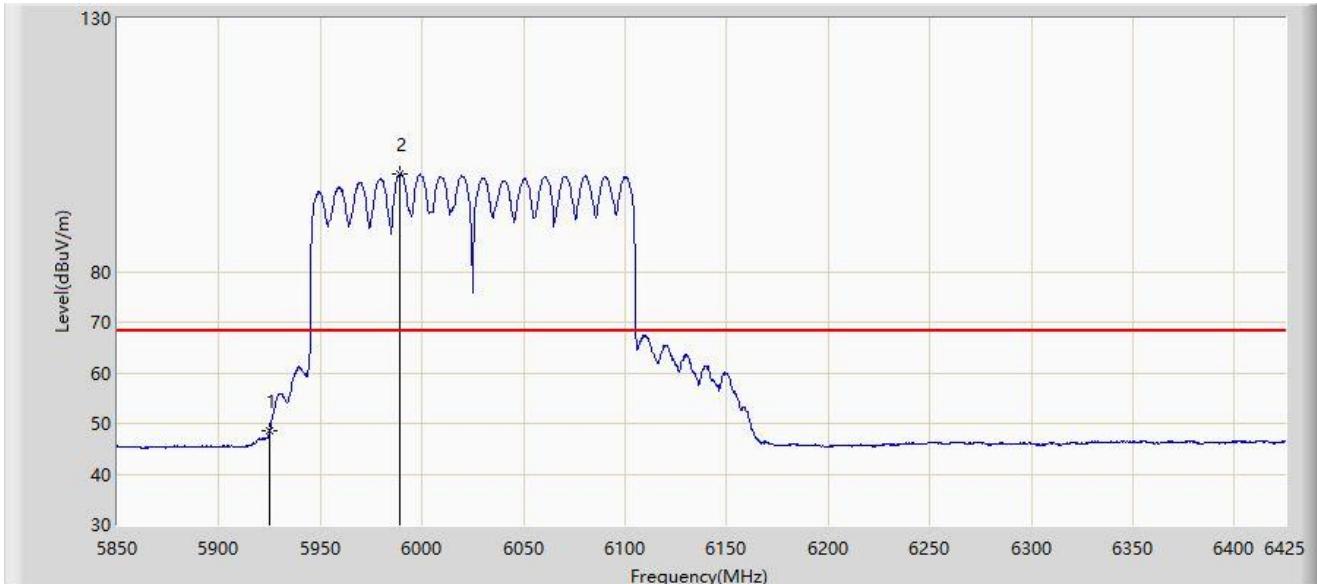

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5925.000	48.537	43.906	-19.663	68.200	4.631	AV
2		5988.862	99.220	94.488	N/A	N/A	4.732	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

A.9 AC Conducted Emissions Test Result

Site: WZ-SR2	Test Date: 2023-08-24
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_C	Polarity: Line
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 6625MHz	

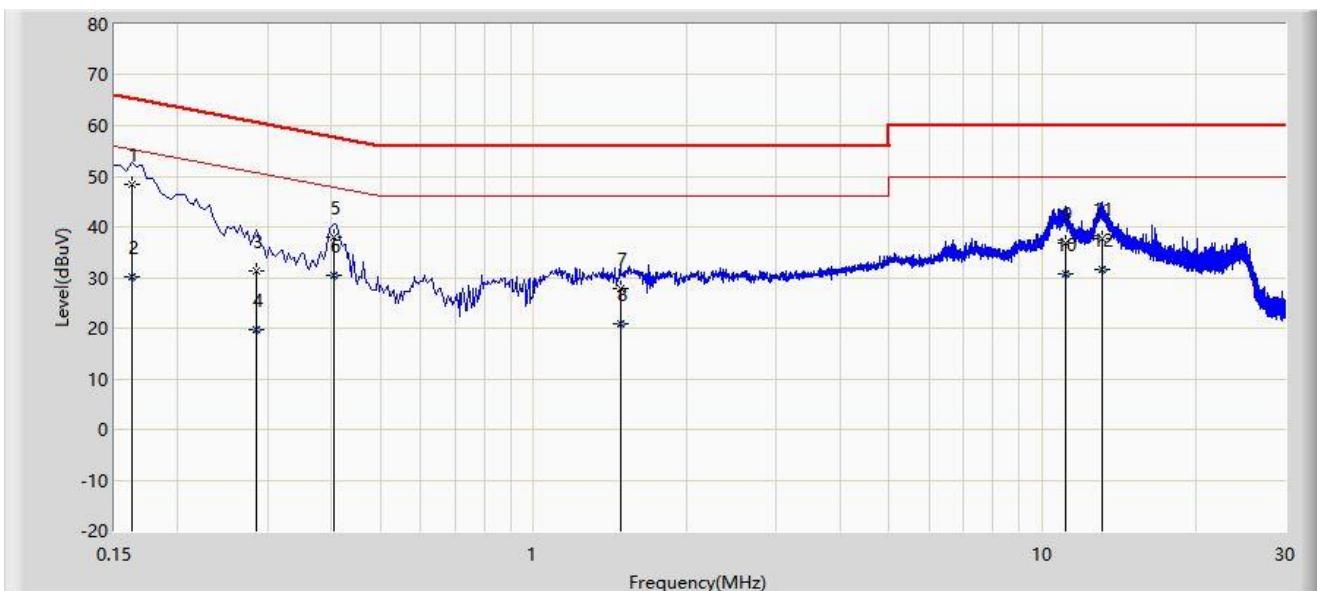


No	Mark	Frequency (MHz)	Measure Level (dB μ V)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V)	Factor (dB)	Type
1	*	0.162	48.475	38.758	-16.886	65.361	9.717	QP
2		0.162	30.272	20.555	-25.089	55.361	9.717	AV
3		0.286	31.274	21.527	-29.366	60.640	9.747	QP
4		0.286	19.653	9.906	-30.987	50.640	9.747	AV
5		0.406	38.086	28.288	-19.643	57.730	9.798	QP
6		0.406	30.456	20.657	-17.274	47.730	9.798	AV
7		1.482	27.874	17.788	-28.126	56.000	10.086	QP
8		1.482	20.729	10.643	-25.271	46.000	10.086	AV
9		11.134	36.862	26.565	-23.138	60.000	10.297	QP
10		11.134	30.751	20.454	-19.249	50.000	10.297	AV
11		13.074	37.685	27.391	-22.315	60.000	10.294	QP
12		13.074	31.723	21.429	-18.277	50.000	10.294	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Test Date: 2023-08-24
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_C	Polarity: Neutral
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 6625MHz	

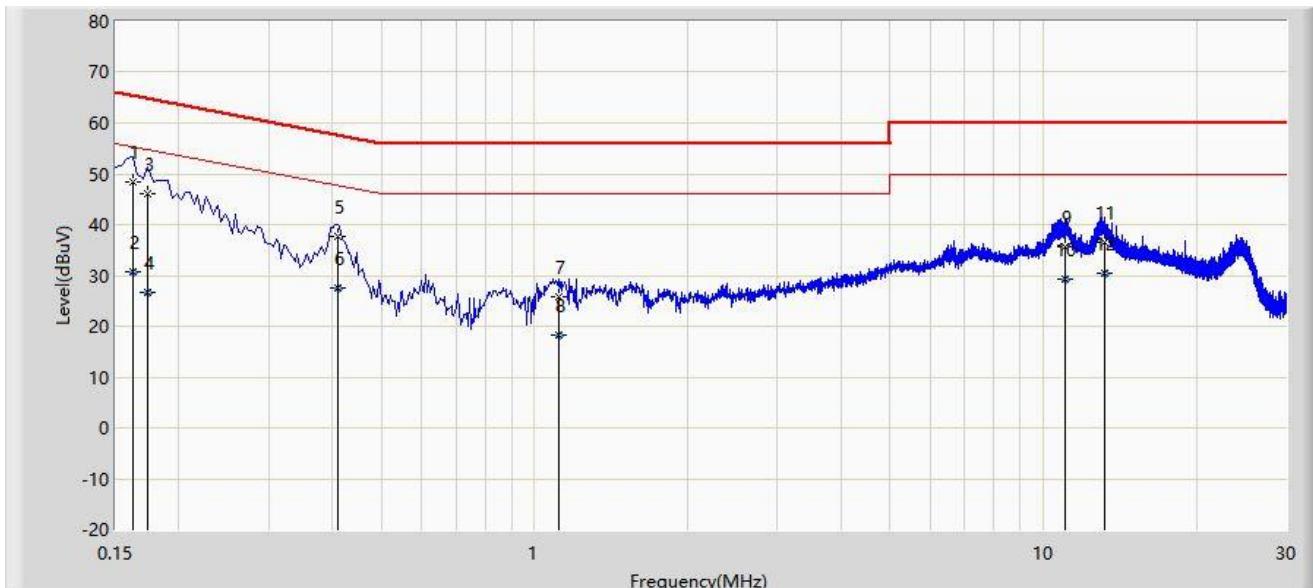

No	Mark	Frequency (MHz)	Measure Level (dB μ V)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V)	Factor (dB)	Type
1	*	0.162	48.425	38.718	-16.936	65.361	9.707	QP
2		0.162	30.665	20.958	-24.696	55.361	9.707	AV
3		0.174	46.057	36.348	-18.710	64.767	9.710	QP
4		0.174	26.797	17.088	-27.970	54.767	9.710	AV
5		0.410	37.747	27.957	-19.901	57.648	9.790	QP
6		0.410	27.508	17.718	-20.140	47.648	9.790	AV
7		1.114	25.693	15.622	-30.307	56.000	10.071	QP
8		1.114	18.224	8.153	-27.776	46.000	10.071	AV
9		11.050	35.667	25.380	-24.333	60.000	10.287	QP
10		11.050	29.404	19.116	-20.596	50.000	10.287	AV
11		13.194	36.514	26.230	-23.486	60.000	10.284	QP
12		13.194	30.440	20.156	-19.560	50.000	10.284	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B – Test Setup Photograph

Refer to “2306RSU040-UT” file.

Appendix C – EUT Photograph

Refer to “2306RSU040-UE” file.

The End