

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-09-05
Test Mode	802.11ax-HE80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10265.0	32.5	14.4	46.9	88.2	-41.3	Peak	Horizontal
	11225.5	30.0	16.8	46.8	74.0	-27.2	Peak	Horizontal
	11803.5	31.8	17.6	49.4	74.0	-24.6	Peak	Horizontal
*	13665.0	30.1	18.4	48.5	88.2	-39.7	Peak	Horizontal
*	10358.5	39.4	14.9	54.3	88.2	-33.9	Peak	Vertical
	11072.5	29.7	16.4	46.1	74.0	-27.9	Peak	Vertical
	11497.5	31.7	17.5	49.2	74.0	-24.8	Peak	Vertical
*	14268.5	32.6	19.1	51.7	88.2	-36.5	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-09-05
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10358.5	38.1	14.9	53.0	88.2	-35.2	Peak	Horizontal
	11217.0	31.3	16.8	48.1	74.0	-25.9	Peak	Horizontal
	11557.0	31.1	17.8	48.9	74.0	-25.1	Peak	Horizontal
*	13189.0	29.5	17.9	47.4	88.2	-40.8	Peak	Horizontal
*	10358.5	39.9	14.9	54.8	88.2	-33.4	Peak	Vertical
	10996.0	31.7	16.3	48.0	74.0	-26.0	Peak	Vertical
	11378.5	29.2	17.2	46.4	74.0	-27.6	Peak	Vertical
*	13852.0	29.8	18.7	48.5	88.2	-39.7	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-09-05
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10358.5	37.0	14.9	51.9	88.2	-36.3	Peak	Horizontal
	11098.0	32.5	16.7	49.2	74.0	-24.8	Peak	Horizontal
	11727.0	31.3	17.8	49.1	74.0	-24.9	Peak	Horizontal
*	13733.0	29.7	18.7	48.4	88.2	-39.8	Peak	Horizontal
*	10358.5	39.7	14.9	54.6	88.2	-33.6	Peak	Vertical
	11378.5	31.1	17.2	48.3	74.0	-25.7	Peak	Vertical
	12237.0	30.7	17.5	48.2	74.0	-25.8	Peak	Vertical
*	14107.0	29.3	19.2	48.5	88.2	-39.7	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-09-05
Test Mode	802.11ax-HE80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	6593.0	46.6	8.2	54.8	88.2	-33.4	Peak	Horizontal
*	10358.5	38.7	14.9	53.6	88.2	-34.6	Peak	Horizontal
	11514.5	30.0	17.2	47.2	74.0	-26.8	Peak	Horizontal
	12271.0	30.0	17.3	47.3	74.0	-26.7	Peak	Horizontal
*	10358.5	40.1	14.9	55.0	88.2	-33.2	Peak	Vertical
	11489.0	31.3	17.7	49.0	74.0	-25.0	Peak	Vertical
	12279.5	32.1	17.5	49.6	74.0	-24.4	Peak	Vertical
*	14829.5	33.0	20.0	53.0	88.2	-35.2	Peak	Vertical
Note 1: "*" is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-09-05
Test Mode	802.11ax-HE80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9950.5	30.9	13.7	44.6	88.2	-43.6	Peak	Horizontal
*	10443.5	31.1	15.3	46.4	88.2	-41.8	Peak	Horizontal
	11378.5	29.7	17.2	46.9	74.0	-27.1	Peak	Horizontal
	11769.5	31.0	17.3	48.3	74.0	-25.7	Peak	Horizontal
*	10358.5	39.0	14.9	53.9	88.2	-34.3	Peak	Vertical
	11098.0	32.2	16.7	48.9	74.0	-25.1	Peak	Vertical
	11693.0	31.3	17.3	48.6	74.0	-25.4	Peak	Vertical
*	14107.0	29.8	19.2	49.0	88.2	-39.2	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-09-05
Test Mode	802.11ax-HE80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10358.5	40.9	14.9	55.8	88.2	-32.4	Peak	Horizontal
	11642.0	32.3	17.9	50.2	74.0	-23.8	Peak	Horizontal
	12007.5	29.9	16.8	46.7	74.0	-27.3	Peak	Horizontal
*	13937.0	31.7	19.1	50.8	88.2	-37.4	Peak	Horizontal
*	10358.5	40.2	14.9	55.1	88.2	-33.1	Peak	Vertical
	11174.5	32.3	16.9	49.2	74.0	-24.8	Peak	Vertical
	11990.5	30.6	17.0	47.6	74.0	-26.4	Peak	Vertical
*	14107.0	30.1	19.2	49.3	88.2	-38.9	Peak	Vertical
Note 1: "*" is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-09-05
Test Mode	802.11ax-HE160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9721.0	32.6	13.4	46.0	88.2	-42.2	Peak	Horizontal
*	10358.5	37.3	14.9	52.2	88.2	-36.0	Peak	Horizontal
	10970.5	30.4	16.0	46.4	74.0	-27.6	Peak	Horizontal
	11489.0	31.7	17.7	49.4	74.0	-24.6	Peak	Horizontal
*	10358.5	39.1	14.9	54.0	88.2	-34.2	Peak	Vertical
	11489.0	31.2	17.7	48.9	74.0	-25.1	Peak	Vertical
	12007.5	31.3	16.8	48.1	74.0	-25.9	Peak	Vertical
*	13979.5	29.5	18.5	48.0	88.2	-40.2	Peak	Vertical
Note 1: "*" is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-09-05
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9772.0	31.3	13.4	44.7	88.2	-43.5	Peak	Horizontal
*	10358.5	38.7	14.9	53.6	88.2	-34.6	Peak	Horizontal
	11778.0	30.9	17.4	48.3	74.0	-25.7	Peak	Horizontal
	12109.5	30.8	16.8	47.6	74.0	-26.4	Peak	Horizontal
*	10358.5	40.0	14.9	54.9	88.2	-33.3	Peak	Vertical
	11574.0	31.4	17.6	49.0	74.0	-25.0	Peak	Vertical
	11735.5	29.2	17.7	46.9	74.0	-27.1	Peak	Vertical
*	13010.5	30.5	17.7	48.2	88.2	-40.0	Peak	Vertical
Note 1: “*” is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-09-05
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10358.5	35.5	14.9	50.4	88.2	-37.8	Peak	Horizontal
	11336.0	31.8	17.3	49.1	74.0	-24.9	Peak	Horizontal
	11812.0	30.4	17.6	48.0	74.0	-26.0	Peak	Horizontal
*	14693.5	32.7	19.8	52.5	88.2	-35.7	Peak	Horizontal
*	10358.5	40.5	14.9	55.4	88.2	-32.8	Peak	Vertical
	10885.5	32.3	16.1	48.4	74.0	-25.6	Peak	Vertical
	11489.0	30.9	17.7	48.6	74.0	-25.4	Peak	Vertical
*	14039.0	29.7	19.2	48.9	88.2	-39.3	Peak	Vertical
Note 1: "*" is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-09-05
Test Mode	802.11ax-HE160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9899.5	31.9	13.5	45.4	88.2	-42.8	Peak	Horizontal
*	10358.5	35.5	14.9	50.4	88.2	-37.8	Peak	Horizontal
	11659.0	32.2	17.7	49.9	74.0	-24.1	Peak	Horizontal
	11922.5	32.4	17.0	49.4	74.0	-24.6	Peak	Horizontal
*	10358.5	39.9	14.9	54.8	88.2	-33.4	Peak	Vertical
	11489.0	31.9	17.7	49.6	74.0	-24.4	Peak	Vertical
	11897.0	29.8	17.3	47.1	74.0	-26.9	Peak	Vertical
*	13724.5	31.7	19.0	50.7	88.2	-37.5	Peak	Vertical
Note 1: "*" is not in restricted band.us emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

The Result of Radiated Emission in 9kHz ~ 30MHz:

Site: SIP-AC1	Test Date: 2023-09-27
Limit: FCC_Part15.209_RSE	Engineer: Arvin Ding
Probe: FMZB1519B_9kHz-30MHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

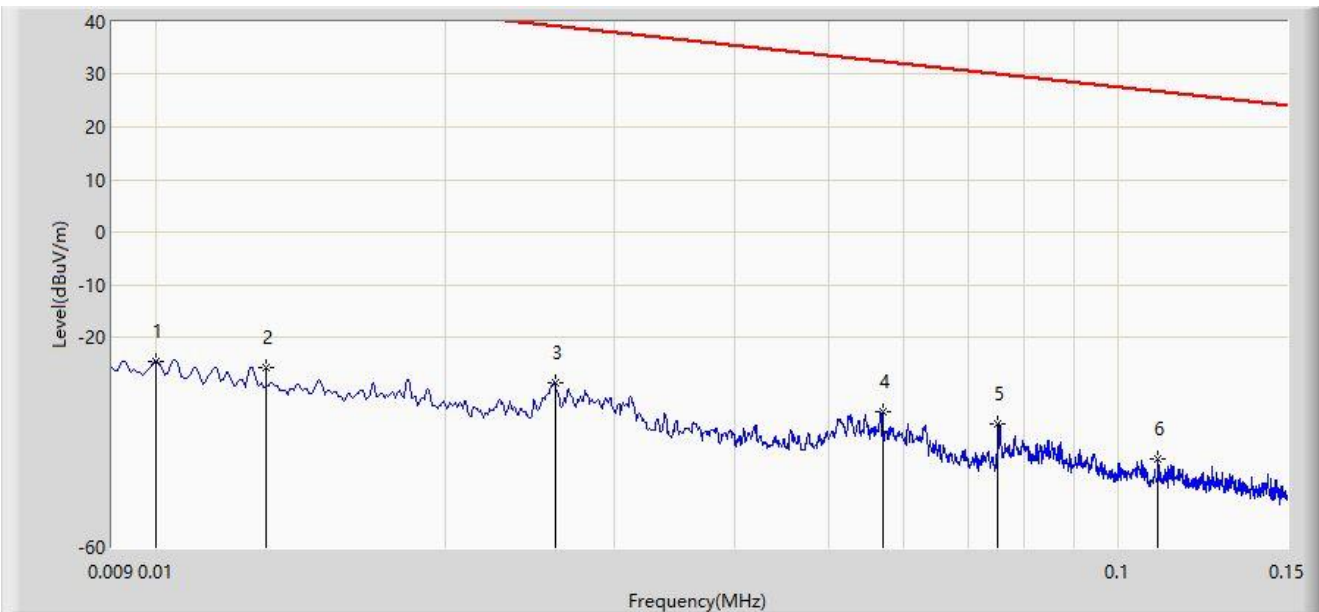

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		0.010	-24.734	34.785	-72.319	47.585	-59.519	PK
2		0.013	-25.694	33.947	-71.001	45.308	-59.641	PK
3		0.026	-28.637	31.532	-67.927	39.290	-60.169	PK
4		0.057	-34.301	26.478	-66.777	32.476	-60.779	PK
5	*	0.075	-36.489	24.358	-66.583	30.094	-60.847	PK
6		0.110	-43.141	17.772	-69.910	26.769	-60.913	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + 40log(d1/d2) (dB), d1 = 3m, d2 = 300m (9kHz-490kHz) or 30m (490kHz-30MHz).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: SIP-AC1	Test Date: 2023-09-27
Limit: FCC_Part15.209_RSE	Engineer: Arvin Ding
Probe: FMZB1519B_9kHz-30MHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

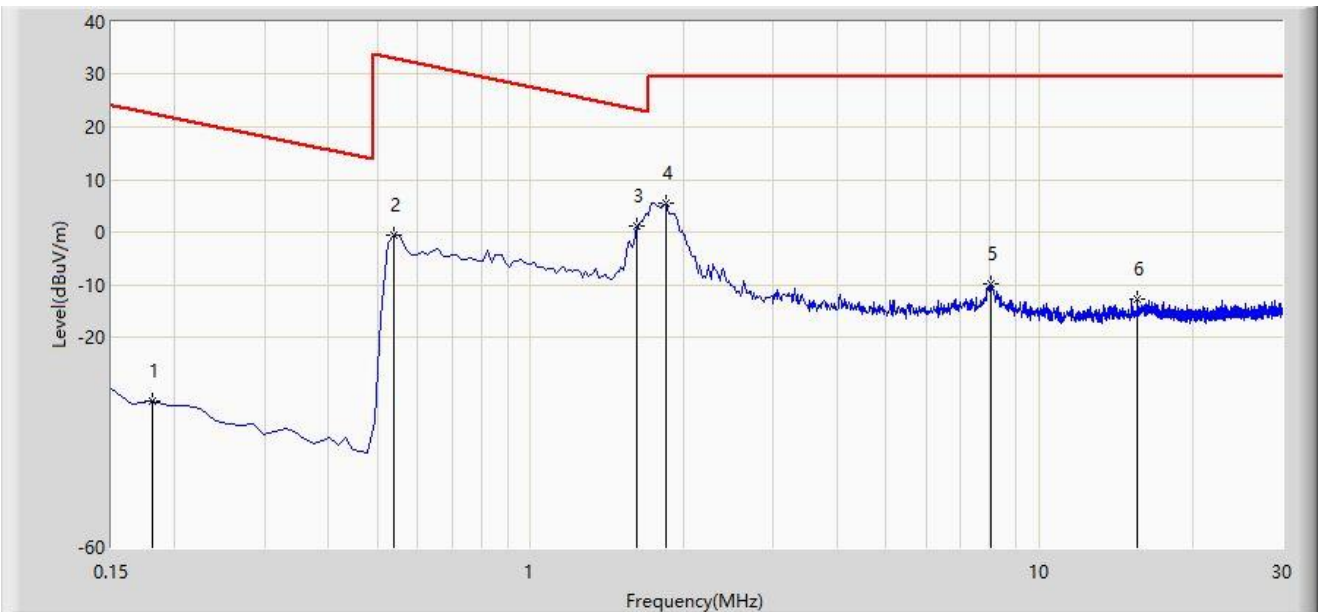

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		0.180	-32.197	28.769	-54.691	22.494	-60.966	PK
2		0.538	-0.599	21.372	-33.589	32.991	-21.971	PK
3	*	1.613	1.169	22.875	-22.311	23.480	-21.706	PK
4		1.851	5.370	26.985	-24.130	29.500	-21.615	PK
5		8.045	-9.980	11.274	-39.480	29.500	-21.254	PK
6		15.553	-12.804	8.607	-42.304	29.500	-21.411	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + 40log(d1/d2) (dB), d1 = 3m, d2 = 300m (9kHz-490kHz) or 30m (490kHz-30MHz).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: SIP-AC1	Test Date: 2023-09-27
Limit: FCC_Part15.209_RSE	Engineer: Arvin Ding
Probe: FMZB1519B_9kHz-30MHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

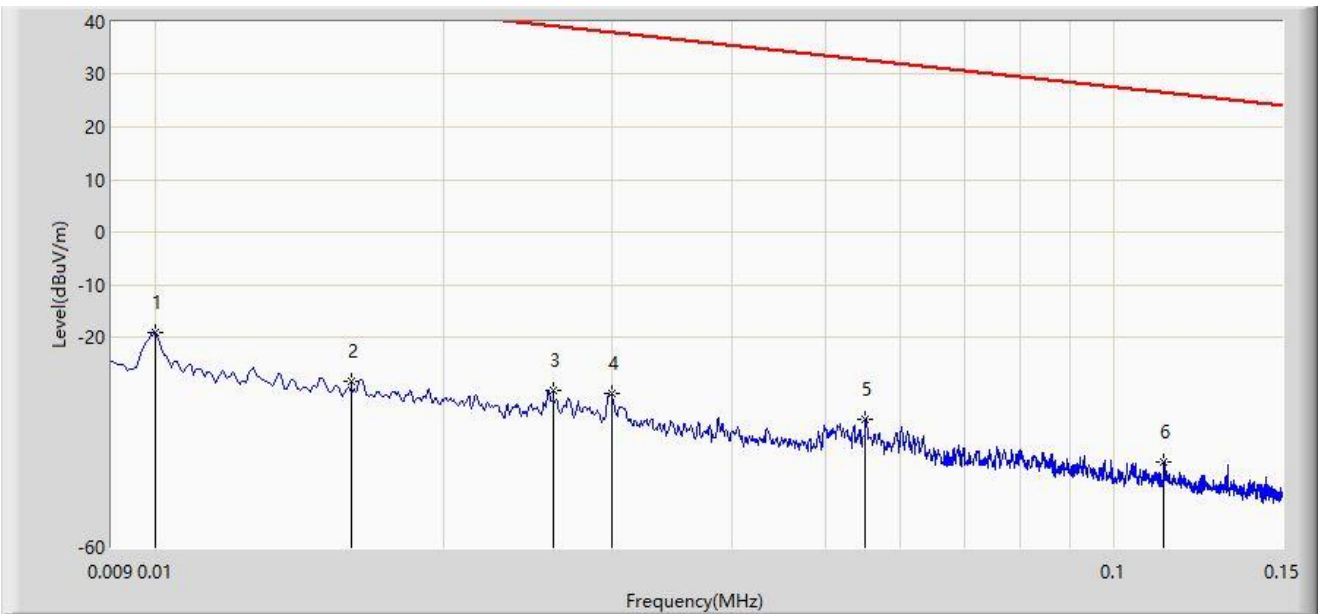

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	0.010	-19.086	40.433	-66.671	47.585	-59.519	PK
2		0.016	-28.400	31.363	-71.905	43.505	-59.763	PK
3		0.026	-30.040	30.129	-69.330	39.290	-60.169	PK
4		0.030	-30.811	29.521	-68.859	38.048	-60.332	PK
5		0.055	-35.737	25.033	-68.523	32.786	-60.770	PK
6		0.113	-43.904	17.012	-70.440	26.535	-60.916	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + 40log(d1/d2) (dB), d1 = 3m, d2 = 300m (9kHz-490kHz) or 30m (490kHz-30MHz).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: SIP-AC1	Test Date: 2023-09-27
Limit: FCC_Part15.209_RSE	Engineer: Arvin Ding
Probe: FMZB1519B_9kHz-30MHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

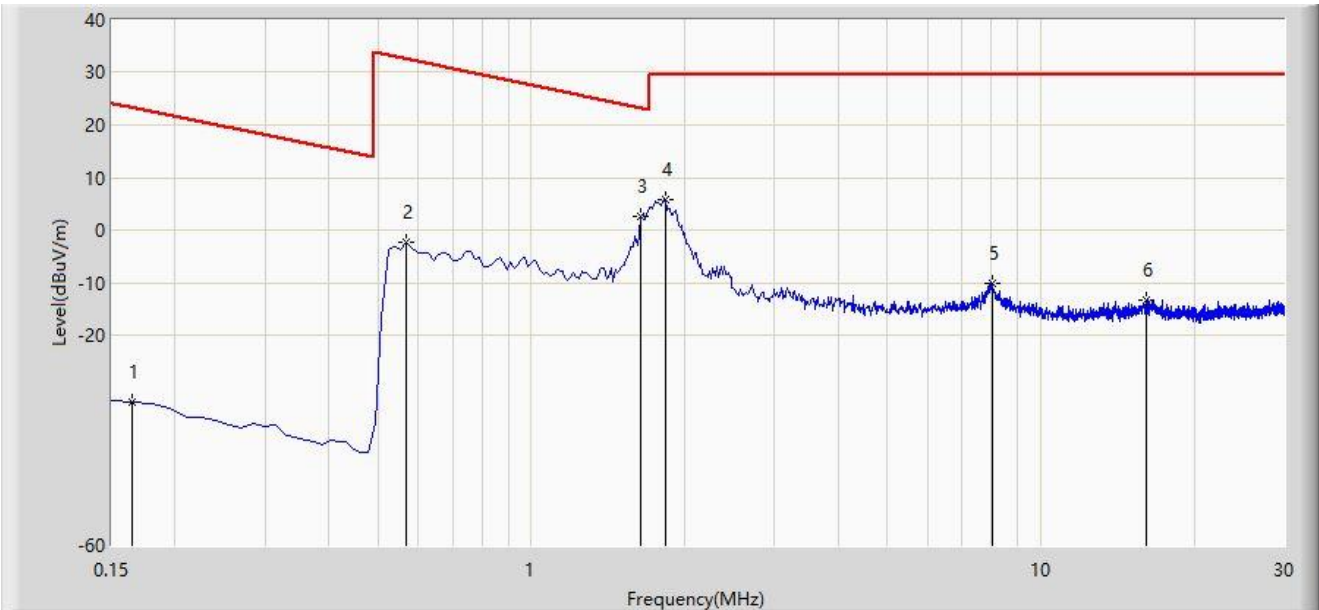

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		0.165	-32.761	28.199	-56.010	23.249	-60.960	PK
2		0.568	-2.373	19.606	-34.893	32.521	-21.978	PK
3	*	1.643	2.658	24.353	-20.663	23.321	-21.696	PK
4		1.837	5.867	27.491	-23.633	29.500	-21.624	PK
5		8.030	-10.122	11.119	-39.622	29.500	-21.241	PK
6		16.090	-13.423	7.972	-42.923	29.500	-21.395	PK

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + 40log(d1/d2) (dB), d1 = 3m, d2 = 300m (9kHz-490kHz) or 30m (490kHz-30MHz).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

The Result of Radiated Emission in 30M ~ 1GHz:

Site: WZ-AC1	Test Date: 2023-09-11
Limit: FCC_Part15.209_RSE(3m)	Engineer: Carl Jiang
Probe: VULB 9168_25-2000MHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

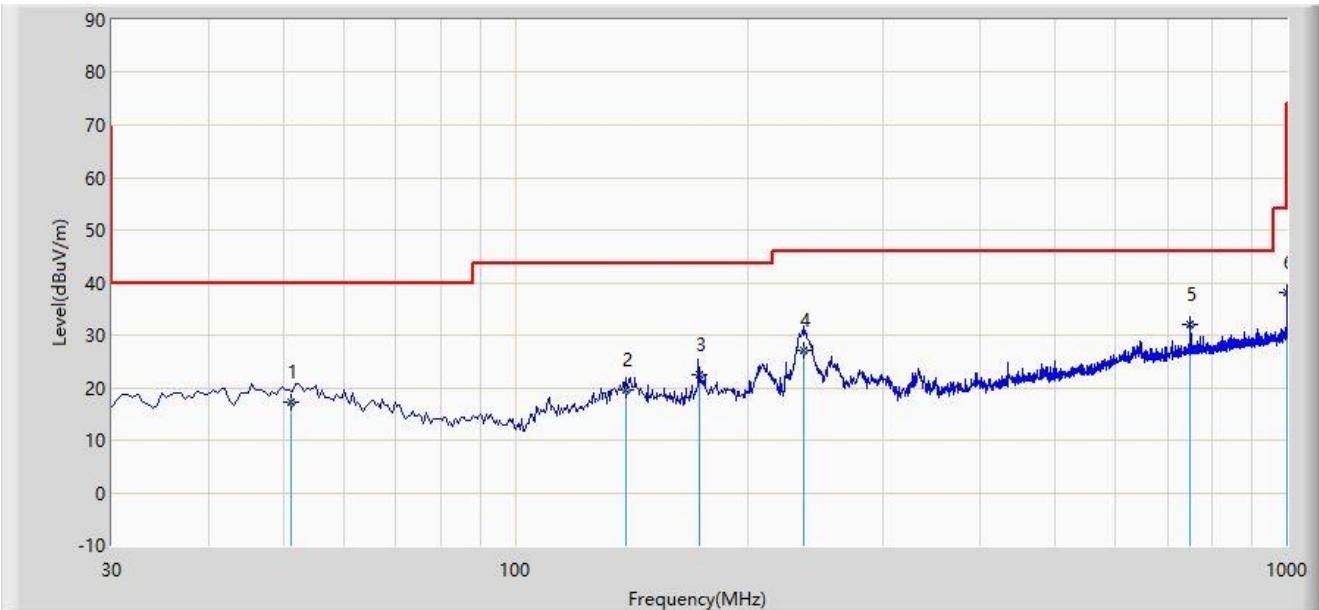


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		51.250	17.283	-1.300	-22.717	40.000	18.583	QP
2		139.200	19.662	2.000	-23.838	43.500	17.662	QP
3		173.100	22.566	4.900	-20.934	43.500	17.665	QP
4		236.500	27.092	11.200	-18.908	46.000	15.893	QP
5	*	750.000	32.162	4.100	-13.838	46.000	28.062	QP
6		1000.000	38.179	7.800	-15.821	54.000	30.379	QP

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-09-11
Limit: FCC_Part15.209_RSE(3m)	Engineer: Carl Jiang
Probe: VULB 9168_25-2000MHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

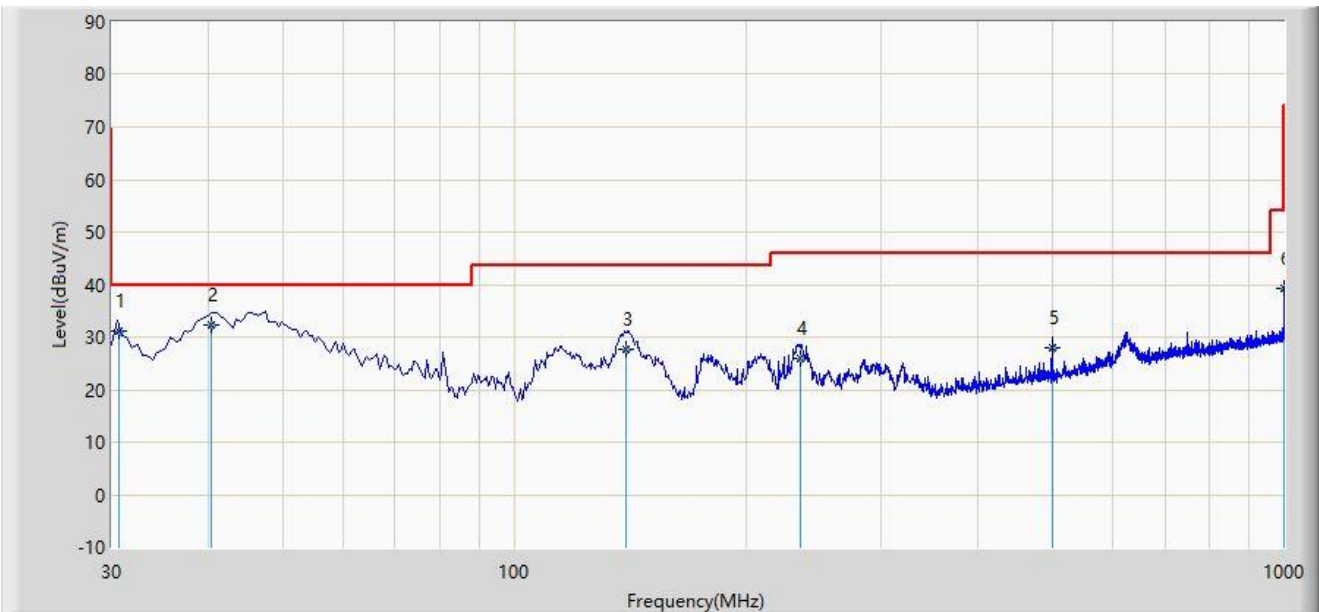

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		30.620	31.202	13.800	-8.798	40.000	17.403	QP
2	*	40.500	32.280	14.200	-7.720	40.000	18.079	QP
3		140.000	27.544	9.800	-15.956	43.500	17.744	QP
4		235.100	25.908	10.200	-20.092	46.000	15.708	QP
5		500.000	27.922	4.700	-18.078	46.000	23.222	QP
6		1000.000	39.379	9.000	-14.621	54.000	30.379	QP


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

The Result of Radiated Emission in 18G ~ 40GHz:

Site: WZ-AC1	Test Date: 2023-09-12
Limit: FCC_6G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9170_933_18-40GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

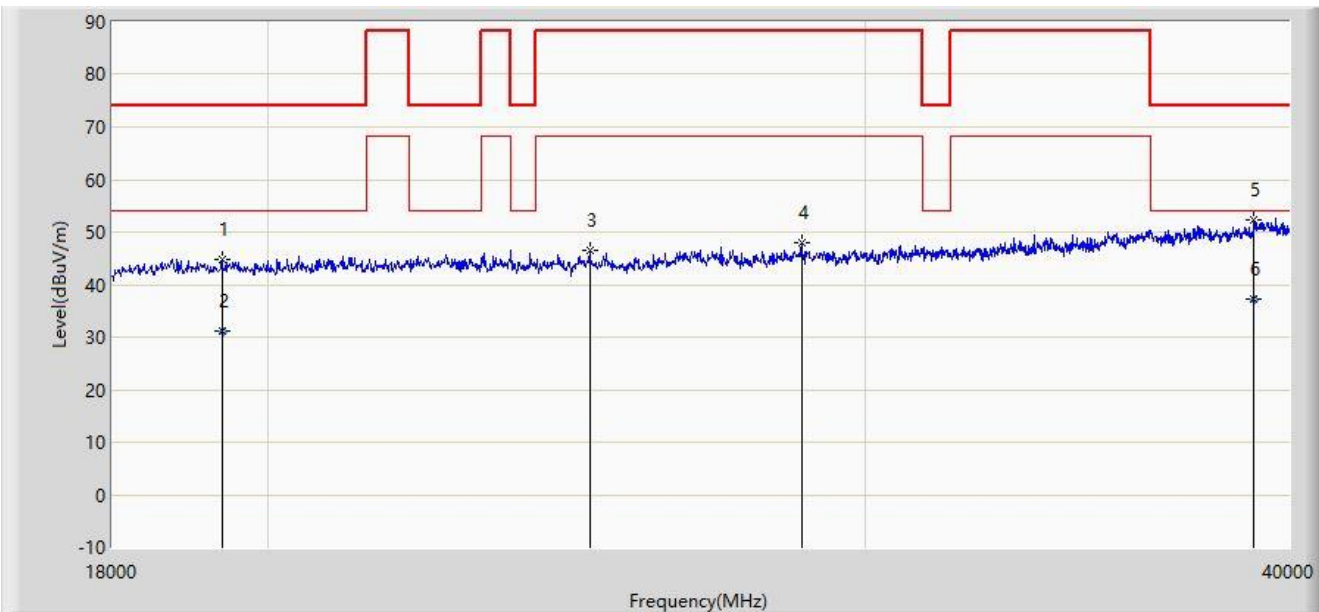

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		19397.000	44.721	54.842	-29.279	74.000	-10.121	PK
2		19397.000	31.239	41.360	-22.761	54.000	-10.121	AV
3		24886.000	46.591	91.987	-41.609	88.200	-45.396	PK
4		28736.000	47.901	94.259	-40.299	88.200	-46.358	PK
5		39054.000	52.388	54.177	-21.612	74.000	-1.789	PK
6	*	39054.000	37.271	39.060	-16.729	54.000	-1.789	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

Site: WZ-AC1	Test Date: 2023-09-12
Limit: FCC_6G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9170_933_18-40GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

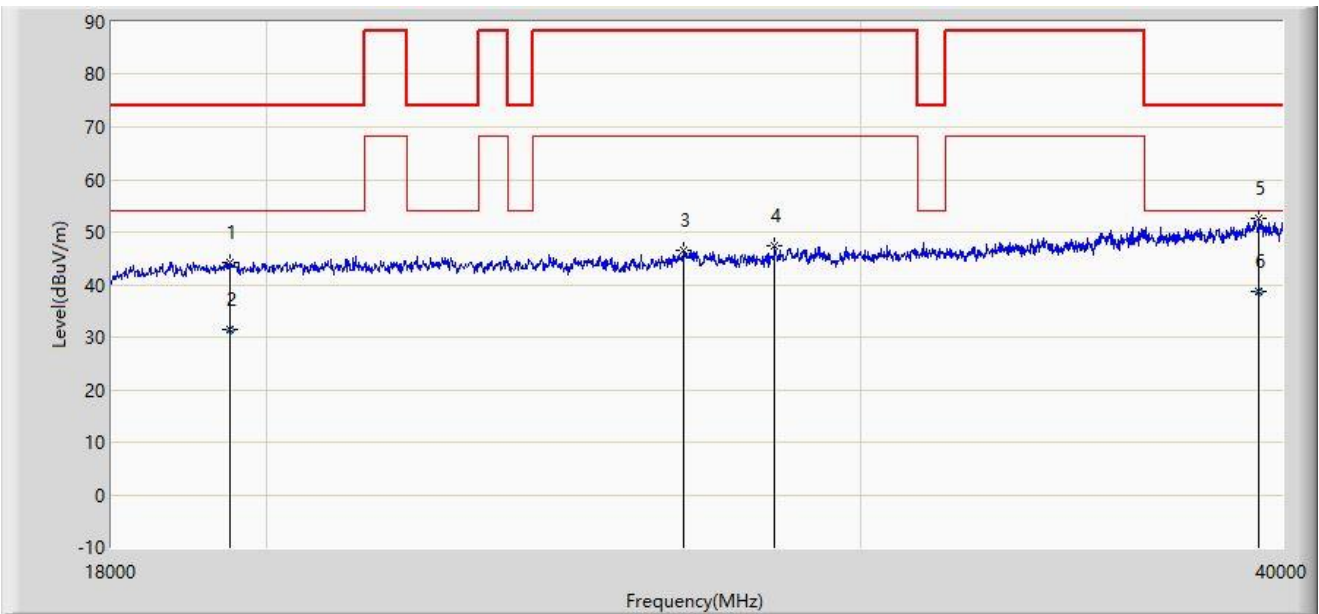

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		19507.000	44.307	54.310	-29.693	74.000	-10.004	PK
2		19507.000	31.387	41.390	-22.613	54.000	-10.004	AV
3		26580.000	46.512	92.208	-41.688	88.200	-45.696	PK
4		28296.000	47.535	93.866	-40.665	88.200	-46.331	PK
5		39384.000	52.496	53.190	-21.504	74.000	-0.694	PK
6	*	39384.000	38.556	39.250	-15.444	54.000	-0.694	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

A.8 Radiated Restricted Band Edge Test Result

ANT-311:

Site: WZ-AC2	Test Date: 2023-09-01
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

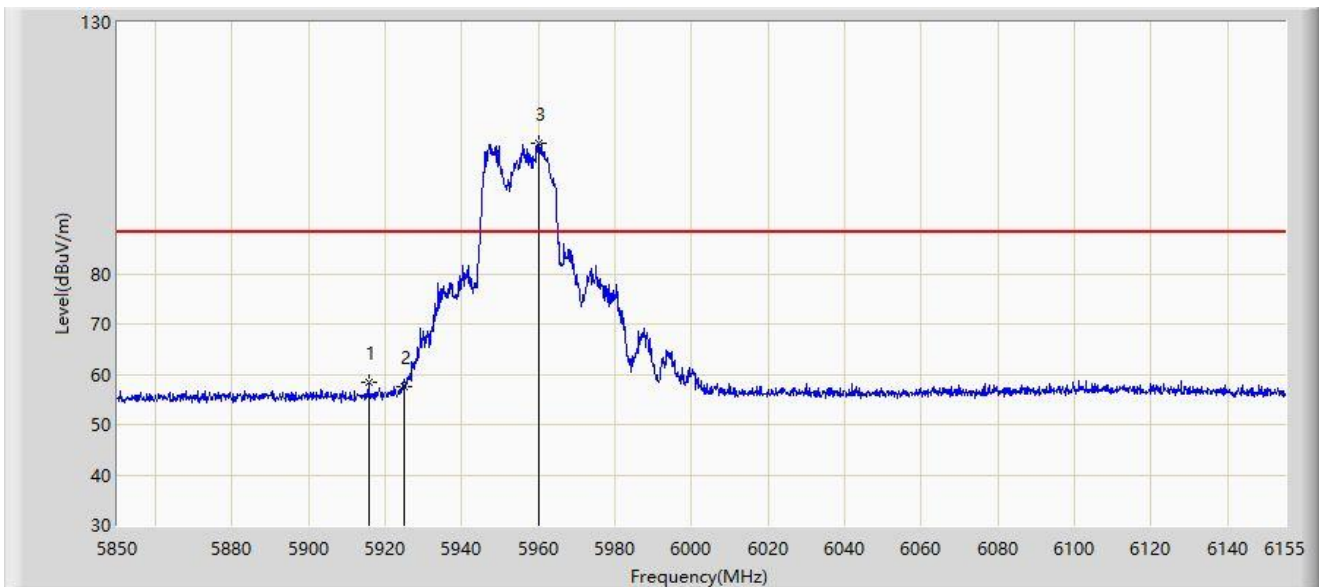


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5915.575	58.488	53.286	-29.712	88.200	5.202	PK
2		5925.000	57.666	52.396	-30.534	88.200	5.271	PK
3		5960.257	106.073	100.656	N/A	N/A	5.417	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-01
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

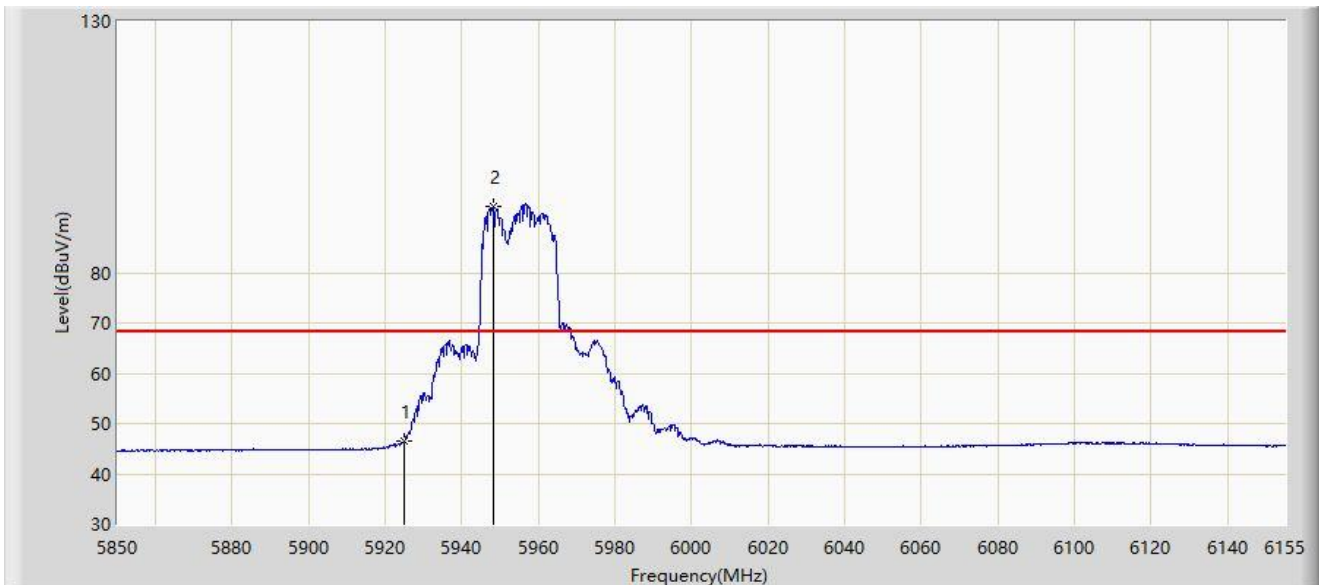


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	46.628	41.358	-21.572	68.200	5.271	AV
2		5948.210	93.221	87.841	N/A	N/A	5.380	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-01
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

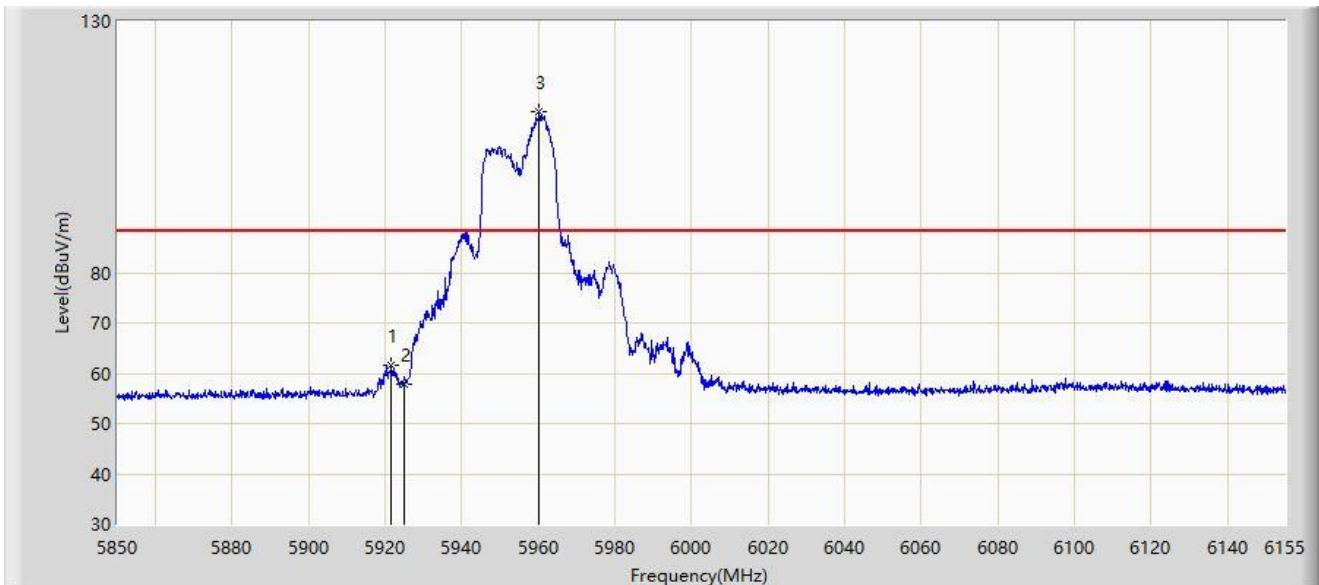


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5921.522	61.733	56.487	-26.467	88.200	5.246	PK
2		5925.000	57.883	52.613	-30.317	88.200	5.271	PK
3		5960.257	111.944	106.527	N/A	N/A	5.417	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-01
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

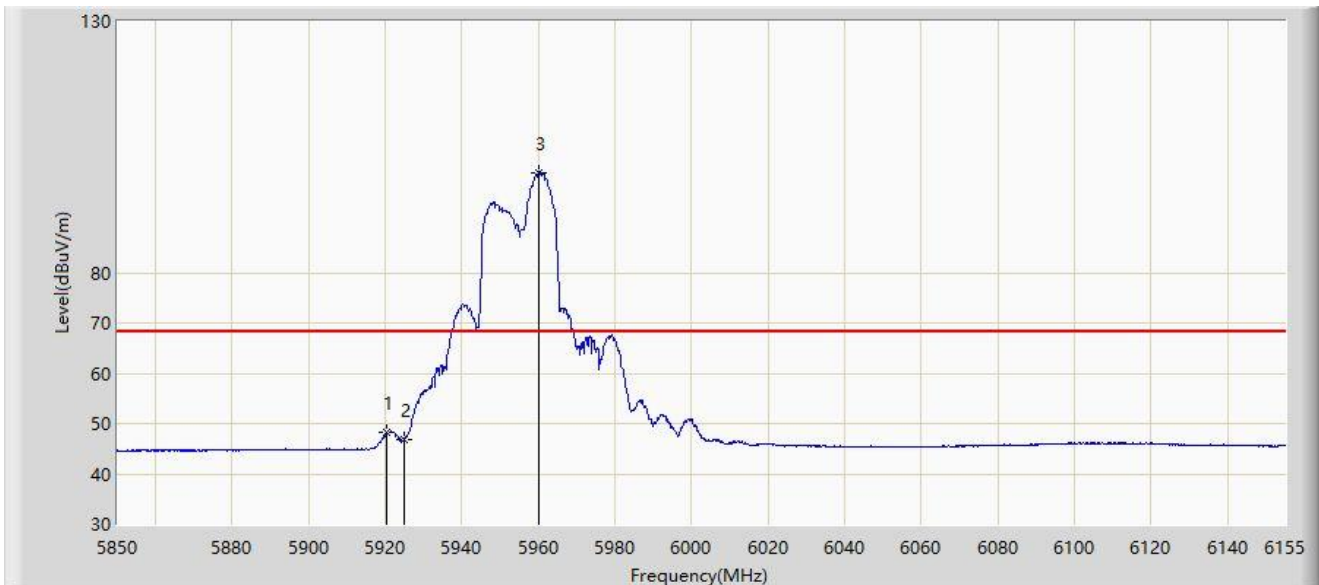


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5920.455	48.223	42.985	-19.977	68.200	5.238	AV
2		5925.000	46.915	41.645	-21.285	68.200	5.271	AV
3		5959.953	99.844	94.426	N/A	N/A	5.418	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-01
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

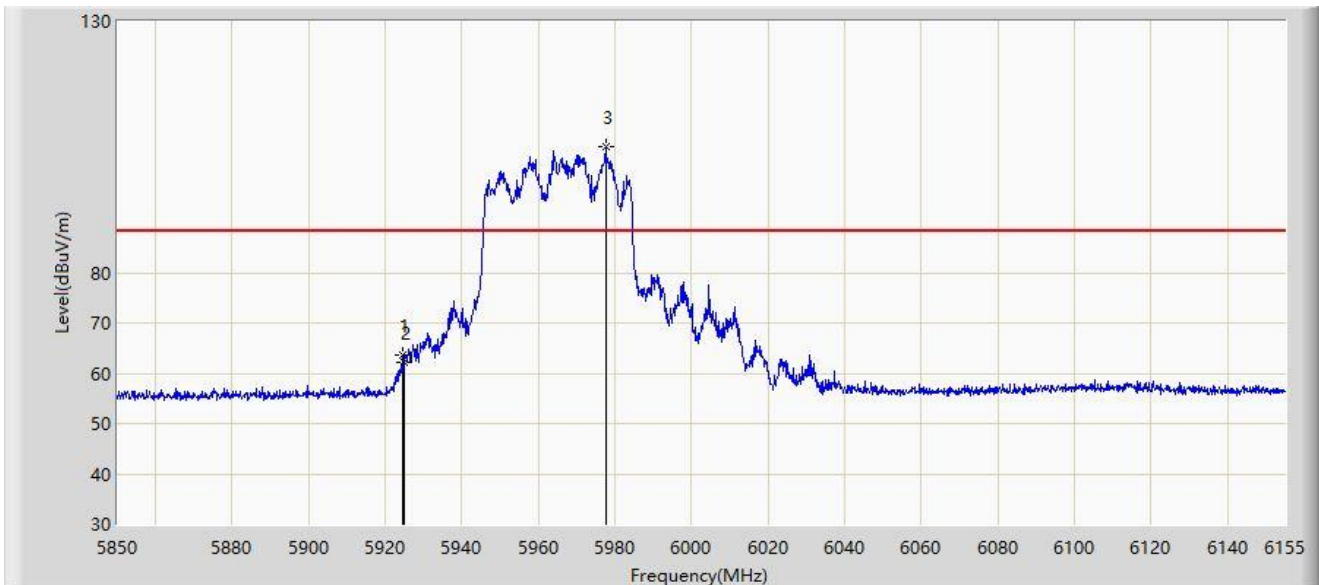


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5924.420	63.496	58.229	-24.704	88.200	5.266	PK
2		5925.000	62.172	56.902	-26.028	88.200	5.271	PK
3		5977.490	104.967	99.711	N/A	N/A	5.256	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-01
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

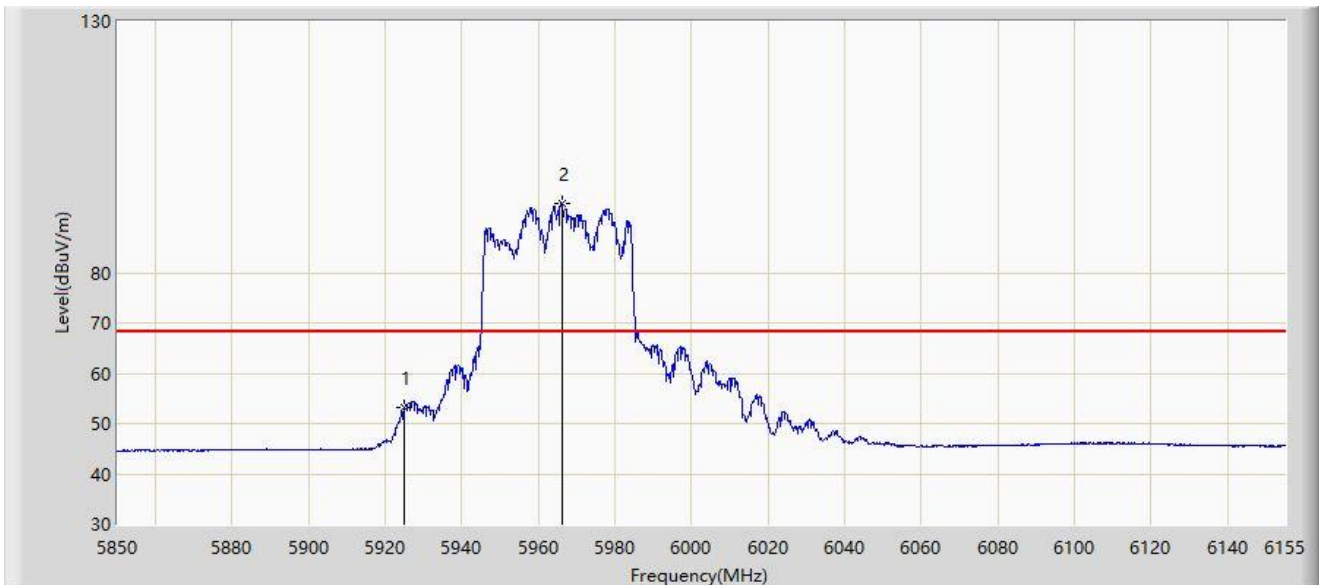


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	53.172	47.902	-15.028	68.200	5.271	AV
2		5966.053	93.849	88.488	N/A	N/A	5.361	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-01
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

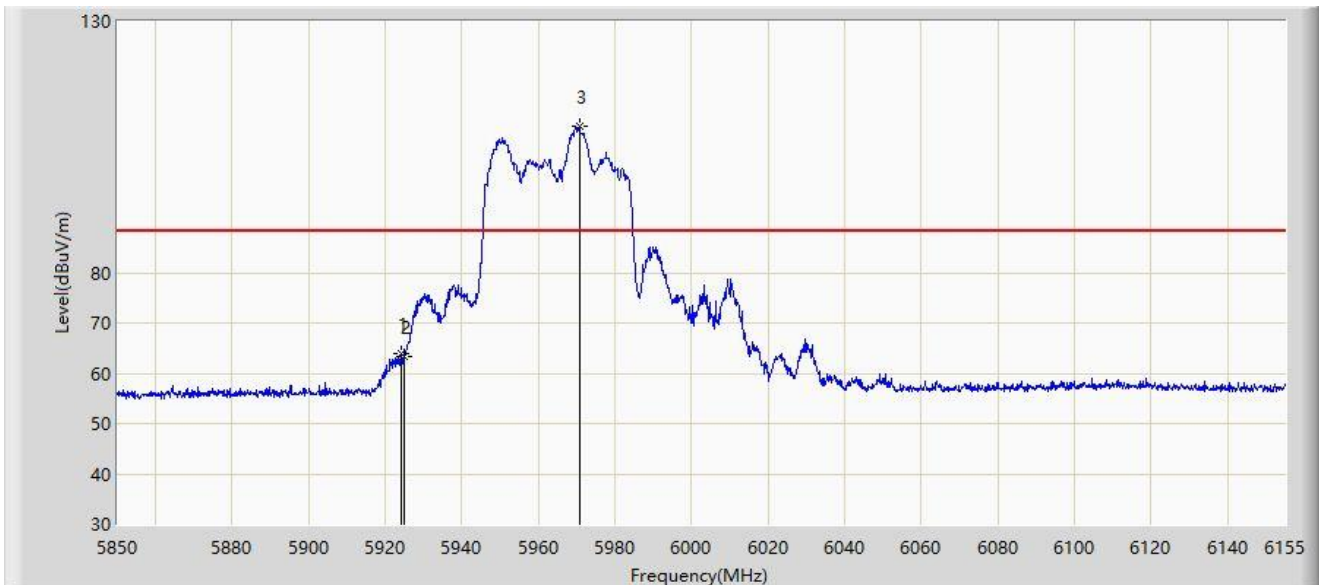


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5923.962	63.812	58.548	-24.388	88.200	5.264	PK
2		5925.000	63.267	57.997	-24.933	88.200	5.271	PK
3		5970.780	109.045	103.727	N/A	N/A	5.318	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-01
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

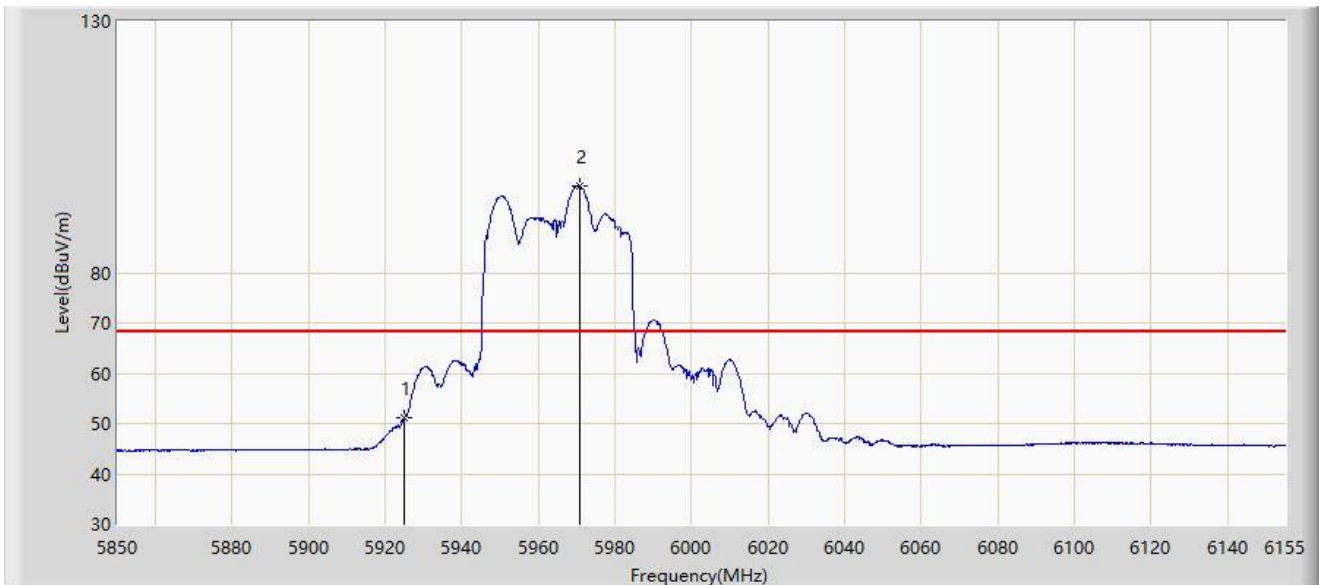


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5925.000	51.070	45.800	-17.130	68.200	5.271	AV
2		5970.780	97.238	91.920	N/A	N/A	5.318	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-01
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

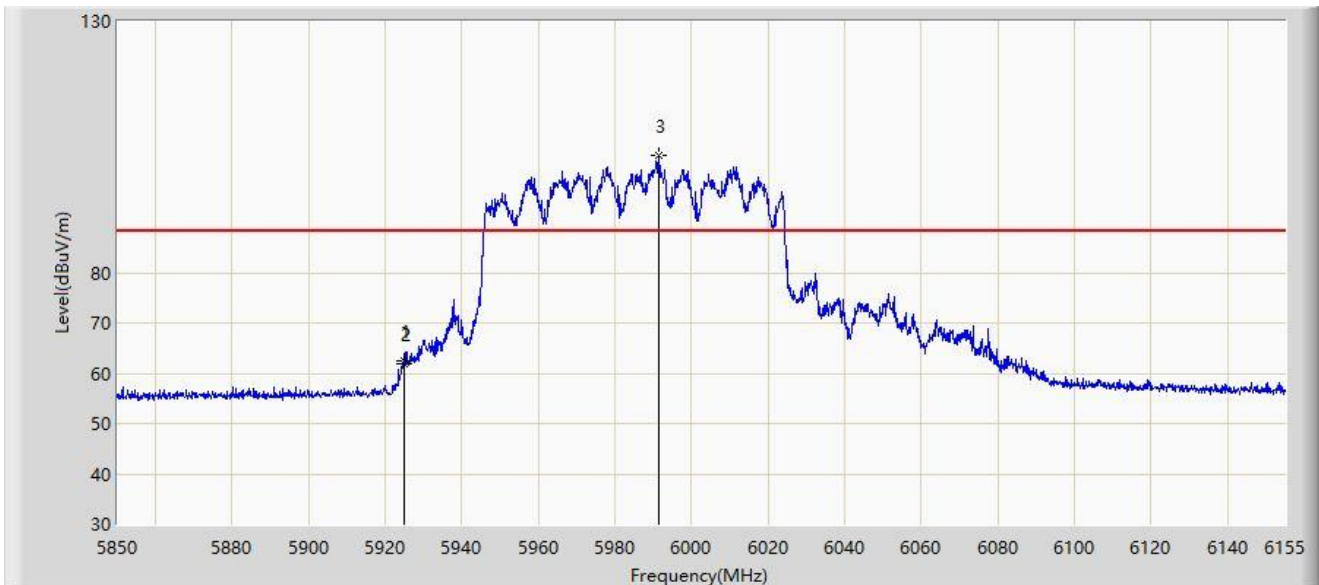


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5924.877	62.506	57.236	-25.694	88.200	5.270	PK
2		5925.000	61.781	56.511	-26.419	88.200	5.271	PK
3		5991.368	103.235	97.899	N/A	N/A	5.336	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-01
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

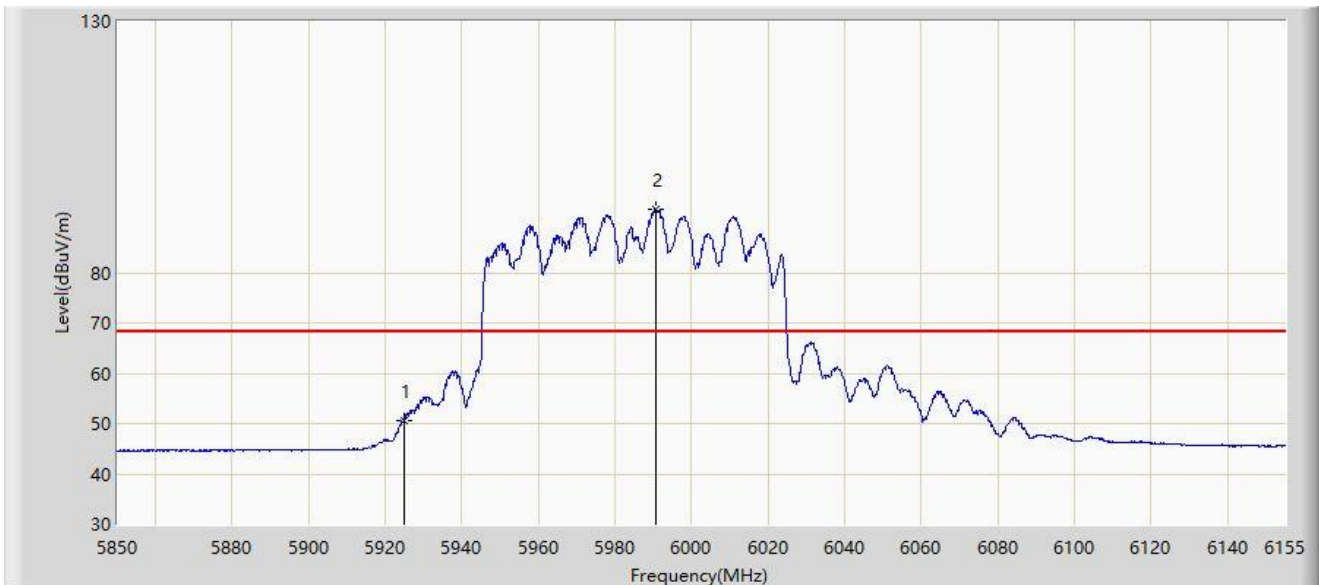


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	50.650	45.380	-17.550	68.200	5.271	AV
2		5990.605	92.626	87.297	N/A	N/A	5.329	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-01
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

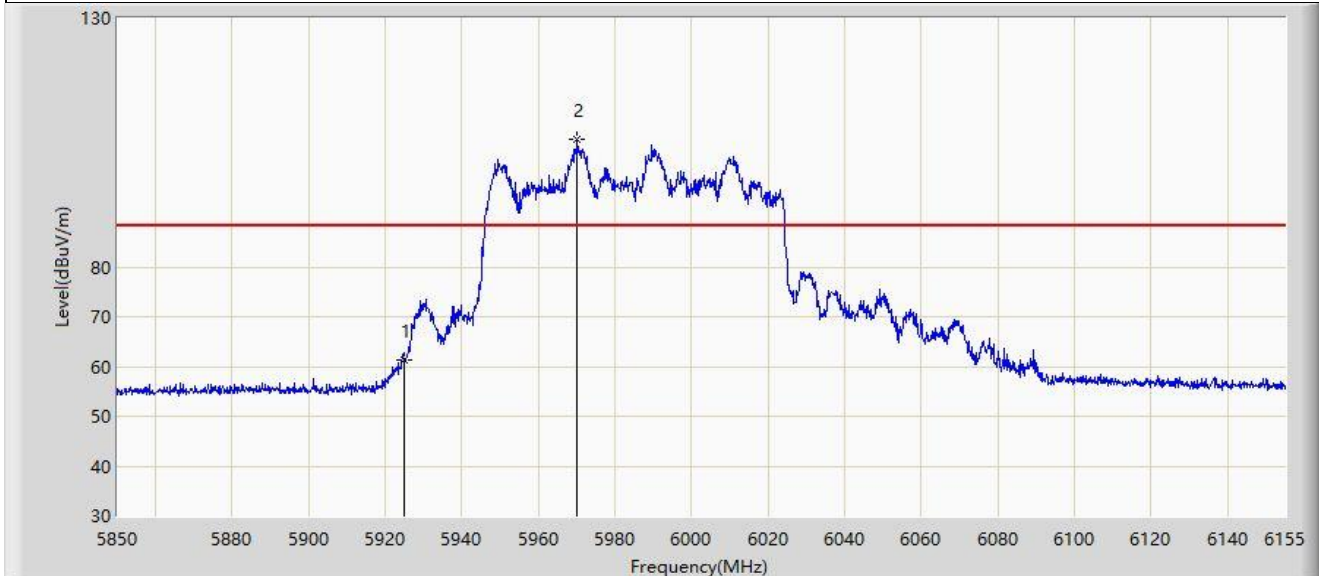


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	61.374	56.104	-26.826	88.200	5.271	PK
2		5970.170	105.708	100.385	N/A	N/A	5.323	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-01
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

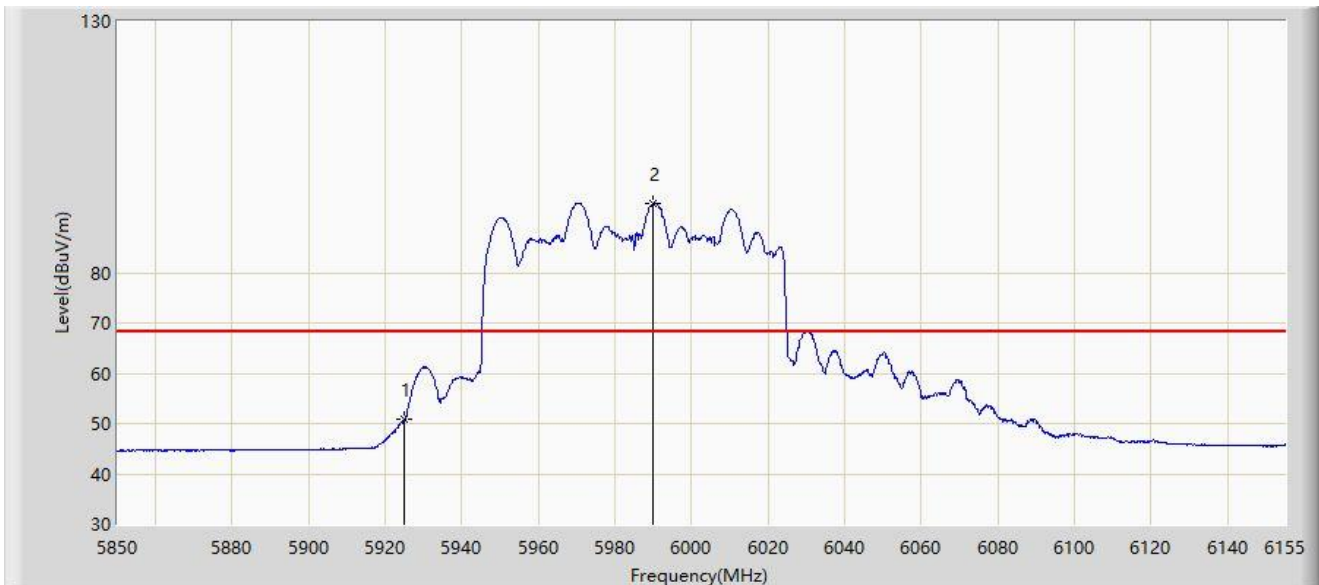


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	50.844	45.574	-17.356	68.200	5.271	AV
2		5989.995	93.876	88.552	N/A	N/A	5.324	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-01
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

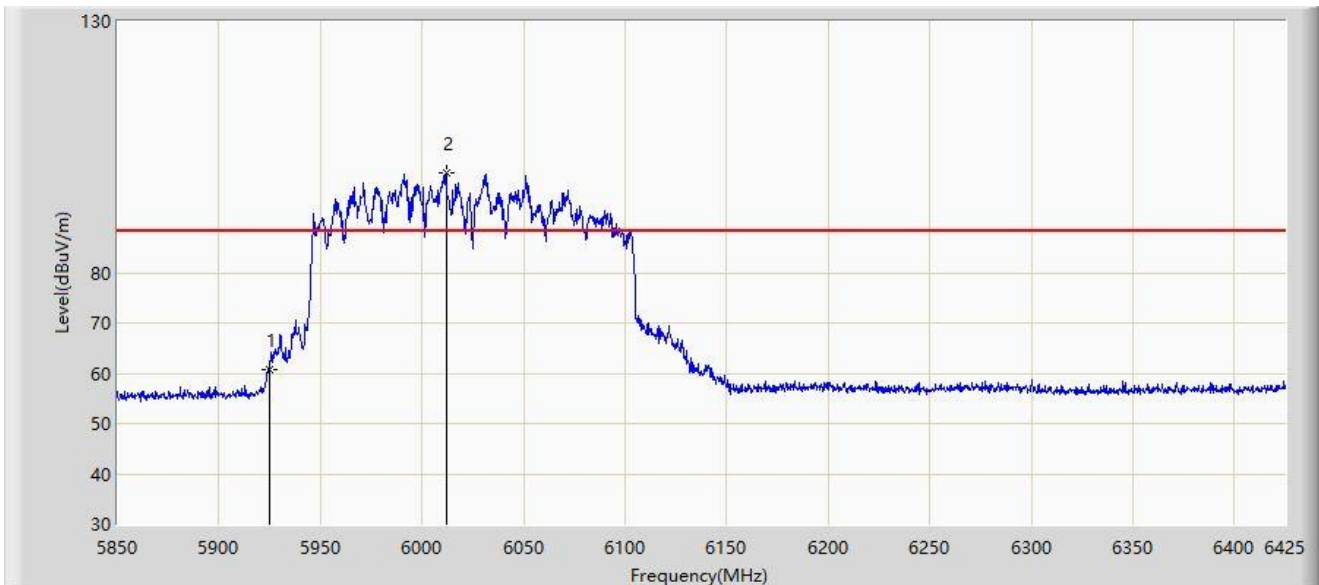


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	60.785	55.515	-27.415	88.200	5.271	PK
2		6011.862	99.850	94.291	N/A	N/A	5.559	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-01
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

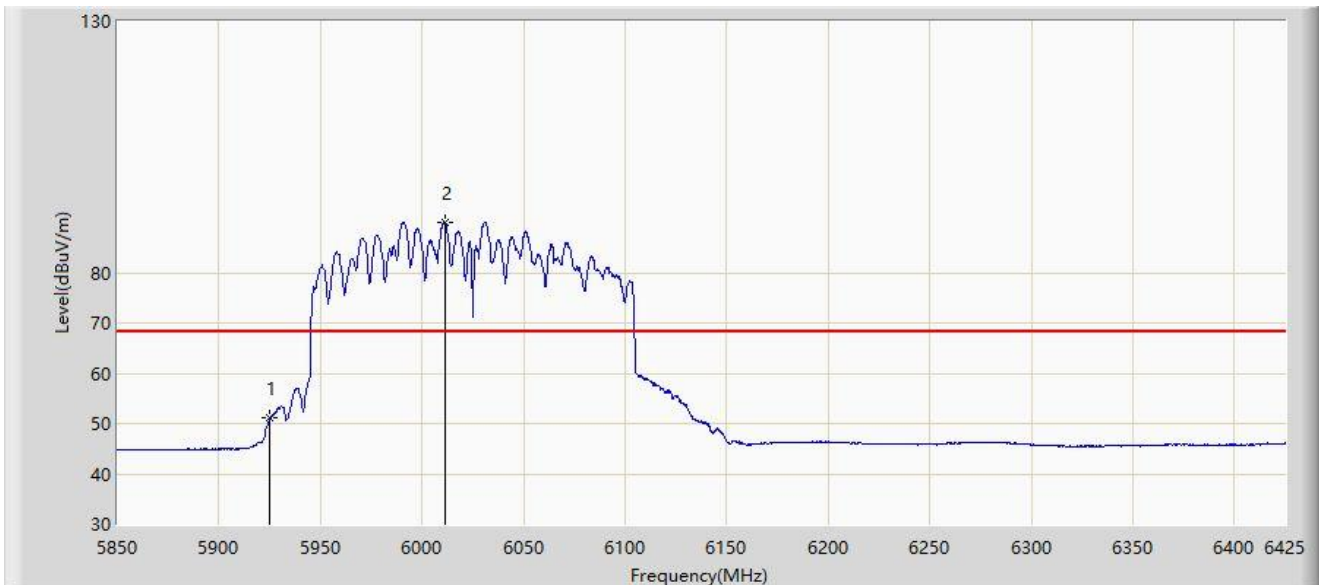


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	51.015	45.745	-17.185	68.200	5.271	AV
2		6011.575	90.005	84.449	N/A	N/A	5.556	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-01
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

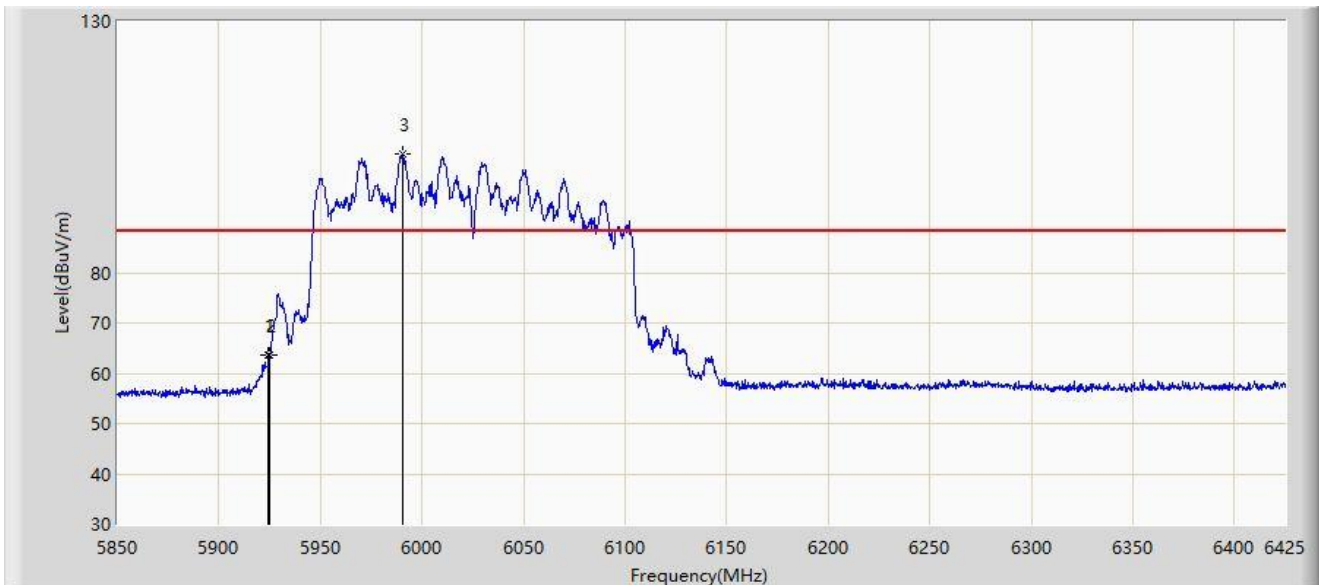


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5924.462	63.708	58.441	-24.492	88.200	5.266	PK
2		5925.000	63.549	58.279	-24.651	88.200	5.271	PK
3		5990.587	103.666	98.337	N/A	N/A	5.329	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-01
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

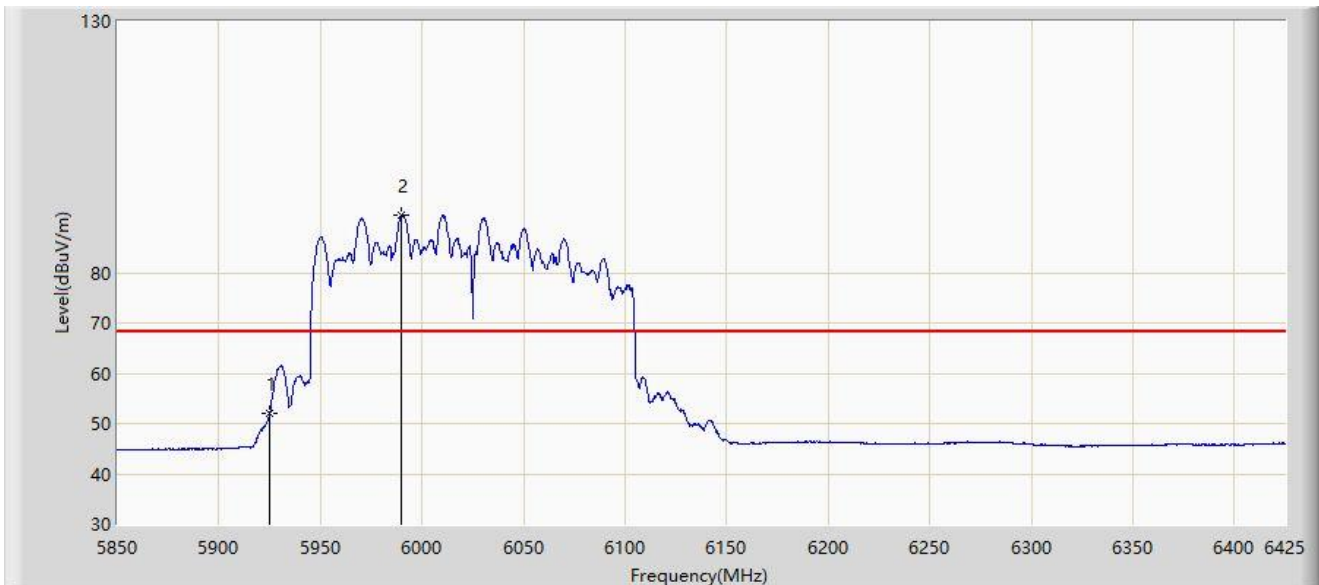

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5925.000	51.906	46.636	-16.294	68.200	5.271	AV
2		5990.013	91.390	86.066	N/A	N/A	5.324	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

ANT-312:

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

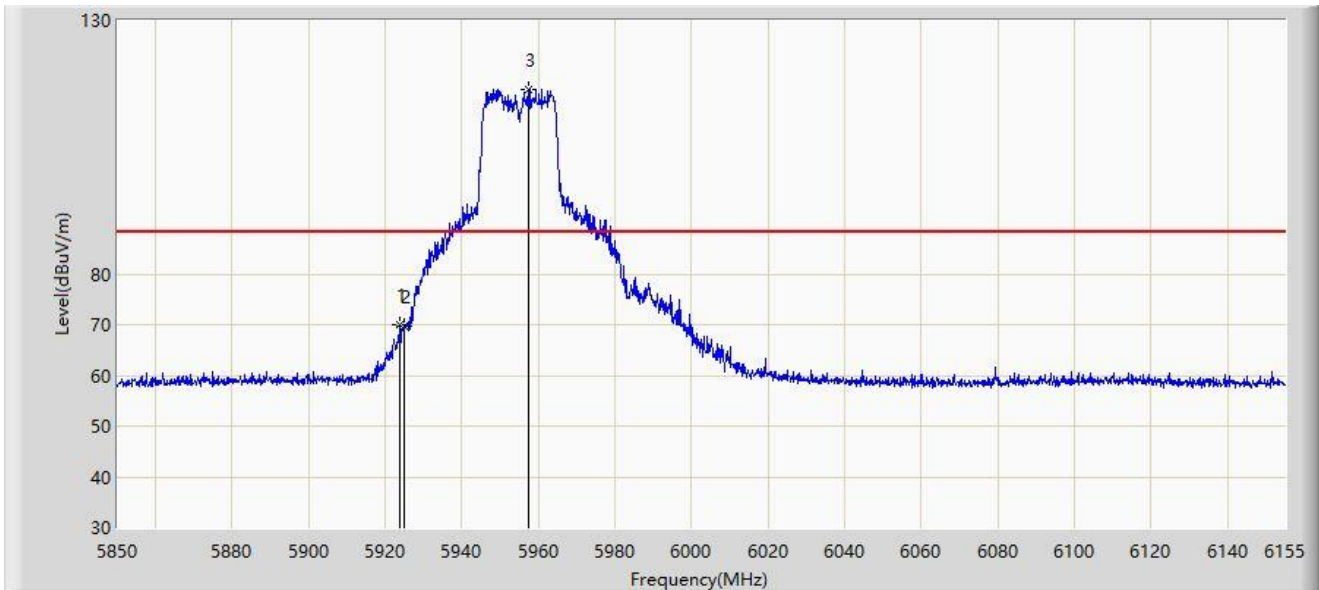


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5923.810	70.058	64.795	-18.142	88.200	5.263	PK
2		5925.000	69.598	64.328	-18.602	88.200	5.271	PK
3		5957.513	116.521	111.111	N/A	N/A	5.411	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

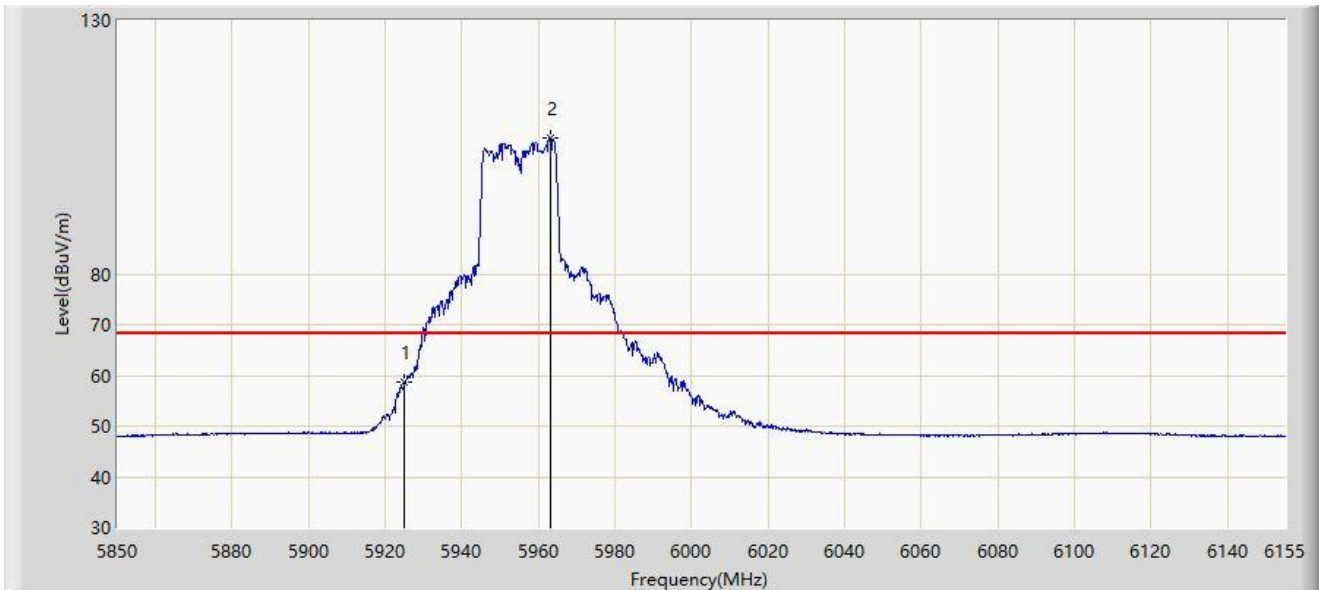


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	58.593	53.323	-9.607	68.200	5.271	AV
2		5963.002	106.891	101.501	N/A	N/A	5.391	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

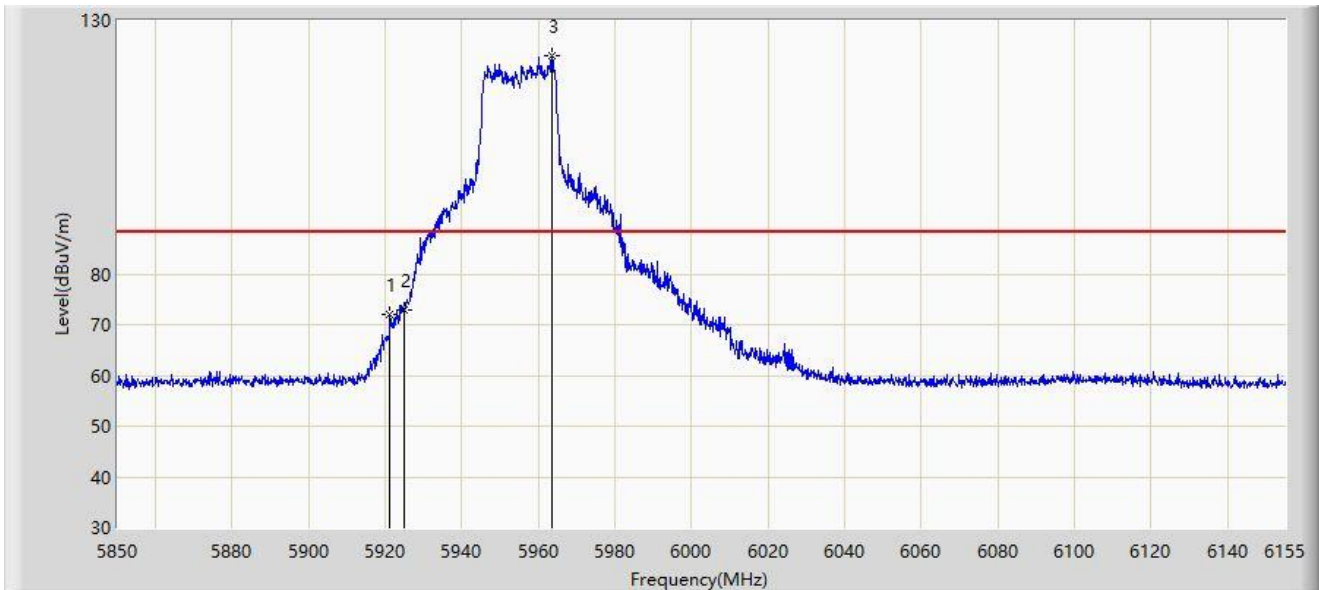


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5921.217	72.056	66.812	-16.144	88.200	5.244	PK
2	*	5925.000	72.904	67.634	-15.296	88.200	5.271	PK
3		5963.612	122.948	117.564	N/A	N/A	5.385	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

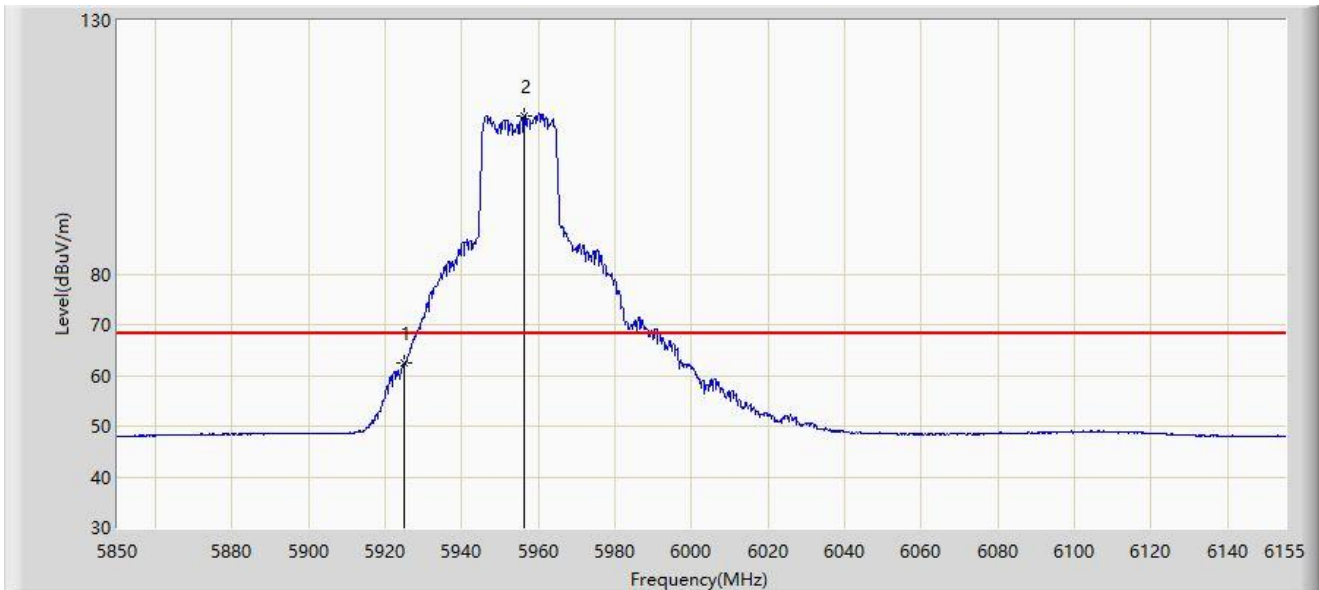


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	62.411	57.141	-5.789	68.200	5.271	AV
2		5956.292	111.240	105.834	N/A	N/A	5.406	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

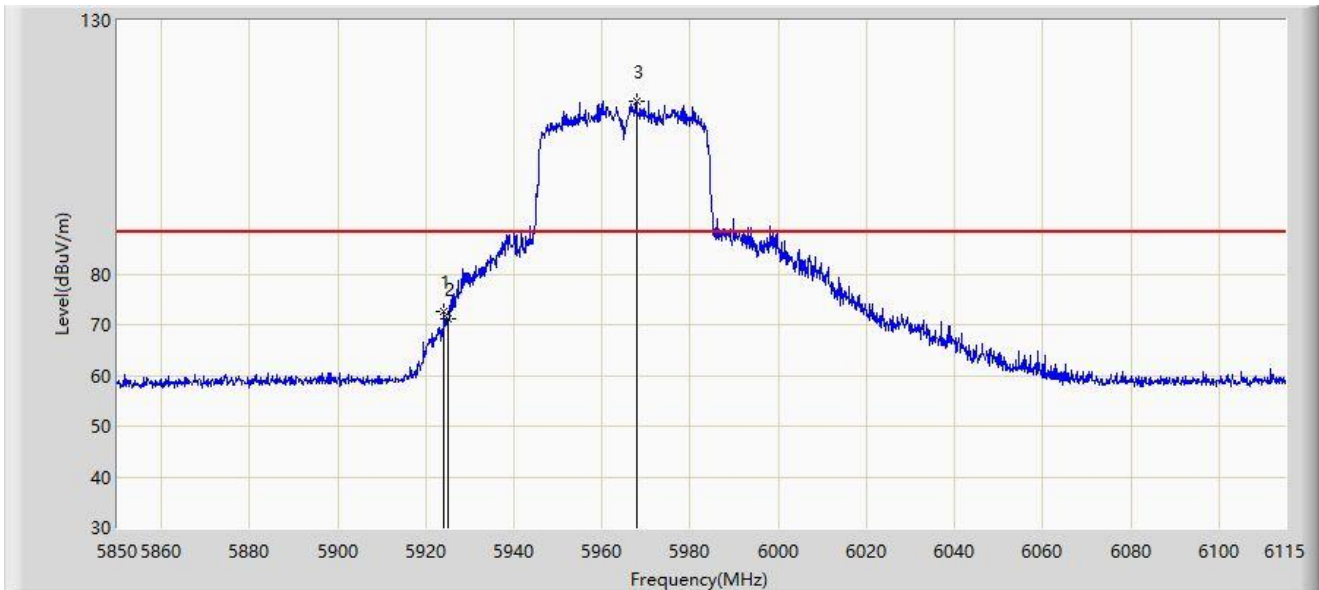


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5924.067	72.729	67.464	-15.471	88.200	5.265	PK
2		5925.000	71.088	65.818	-17.112	88.200	5.271	PK
3		5967.792	114.142	108.797	N/A	N/A	5.345	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

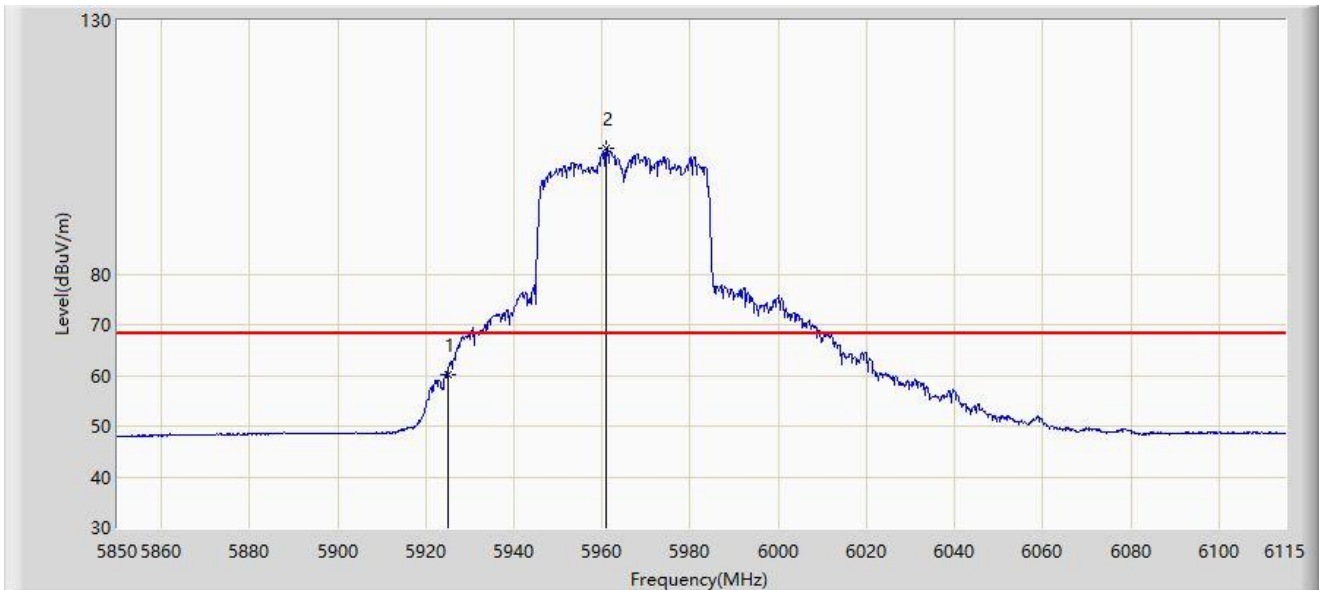


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5925.000	60.034	54.764	-8.166	68.200	5.271	AV
2		5961.035	104.779	99.370	N/A	N/A	5.409	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

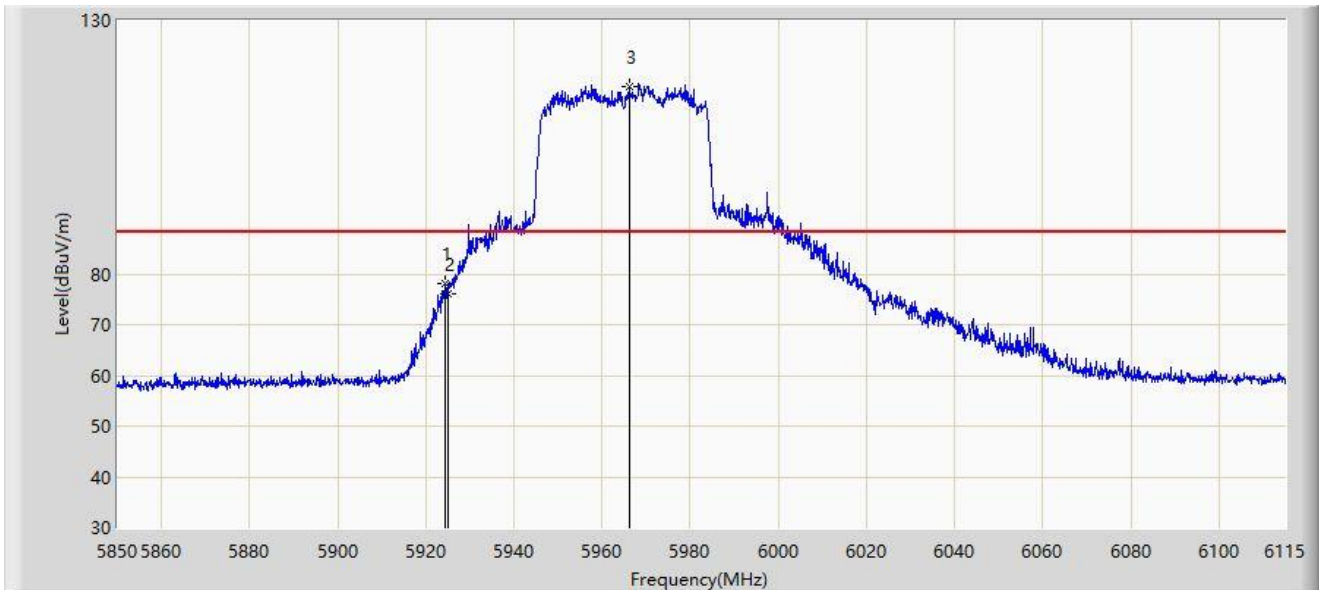


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5924.333	78.246	72.980	-9.954	88.200	5.267	PK
2		5925.000	75.967	70.697	-12.233	88.200	5.271	PK
3		5966.070	116.867	111.506	N/A	N/A	5.361	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

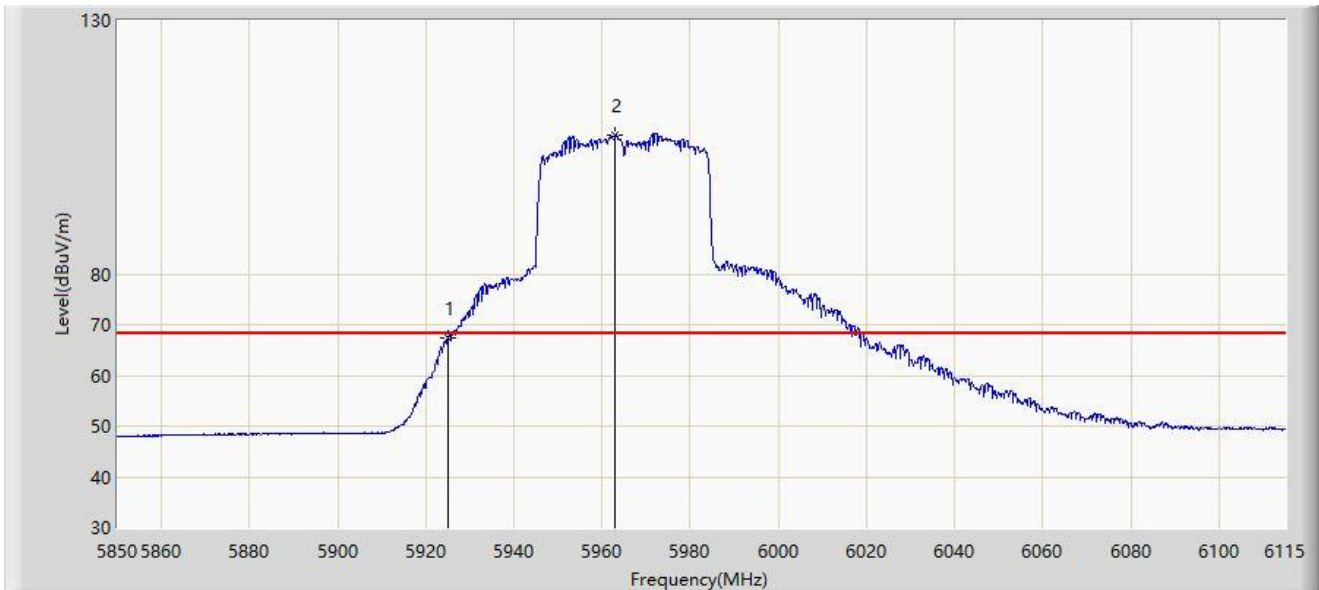


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	67.437	62.167	-0.763	68.200	5.271	AV
2		5963.022	107.259	101.869	N/A	N/A	5.390	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

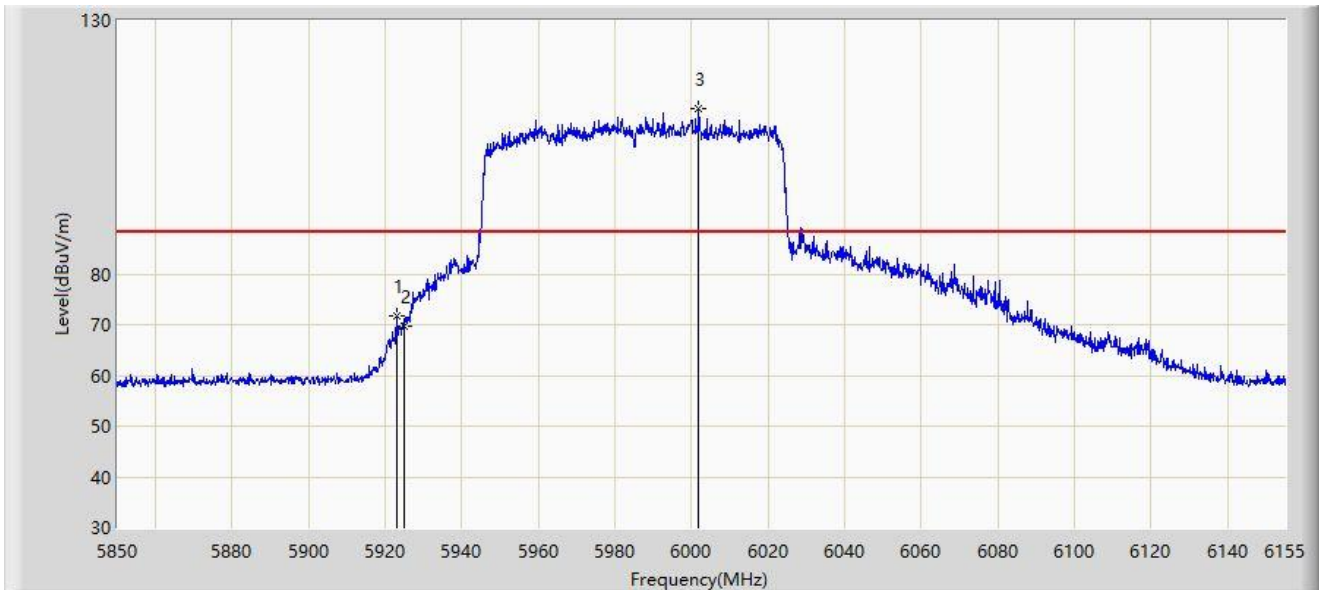


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5922.895	71.763	66.507	-16.437	88.200	5.256	PK
2		5925.000	69.702	64.432	-18.498	88.200	5.271	PK
3		6001.890	112.645	107.206	N/A	N/A	5.439	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

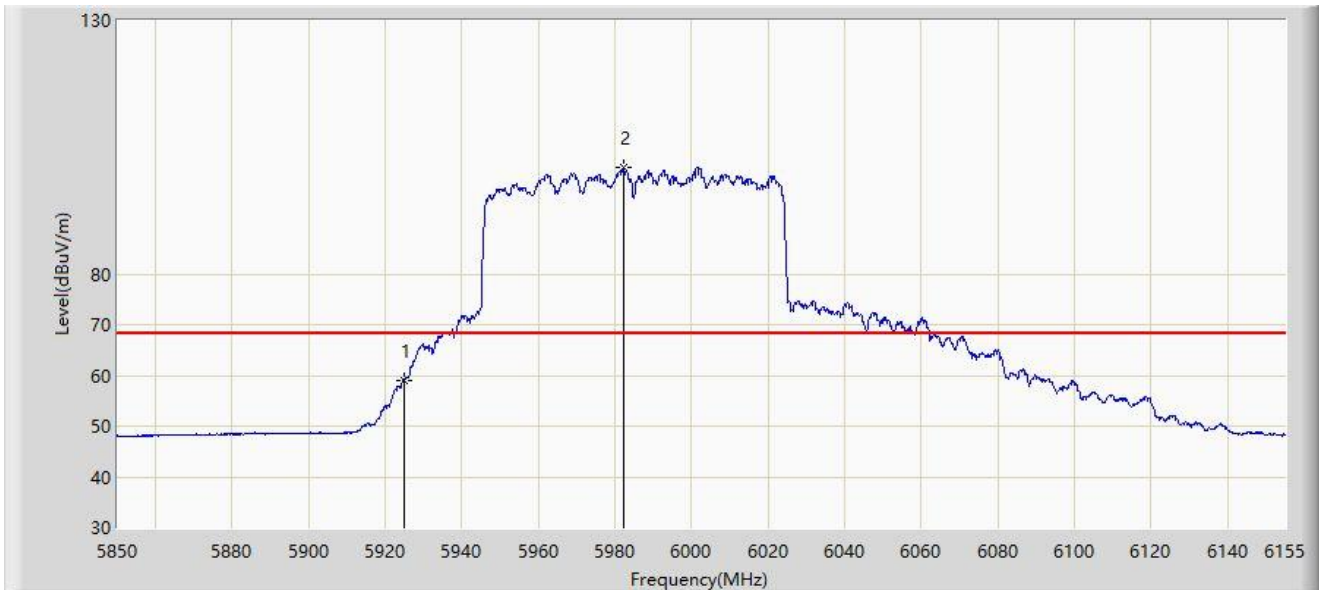


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	59.047	53.777	-9.153	68.200	5.271	AV
2		5982.217	100.907	95.653	N/A	N/A	5.254	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

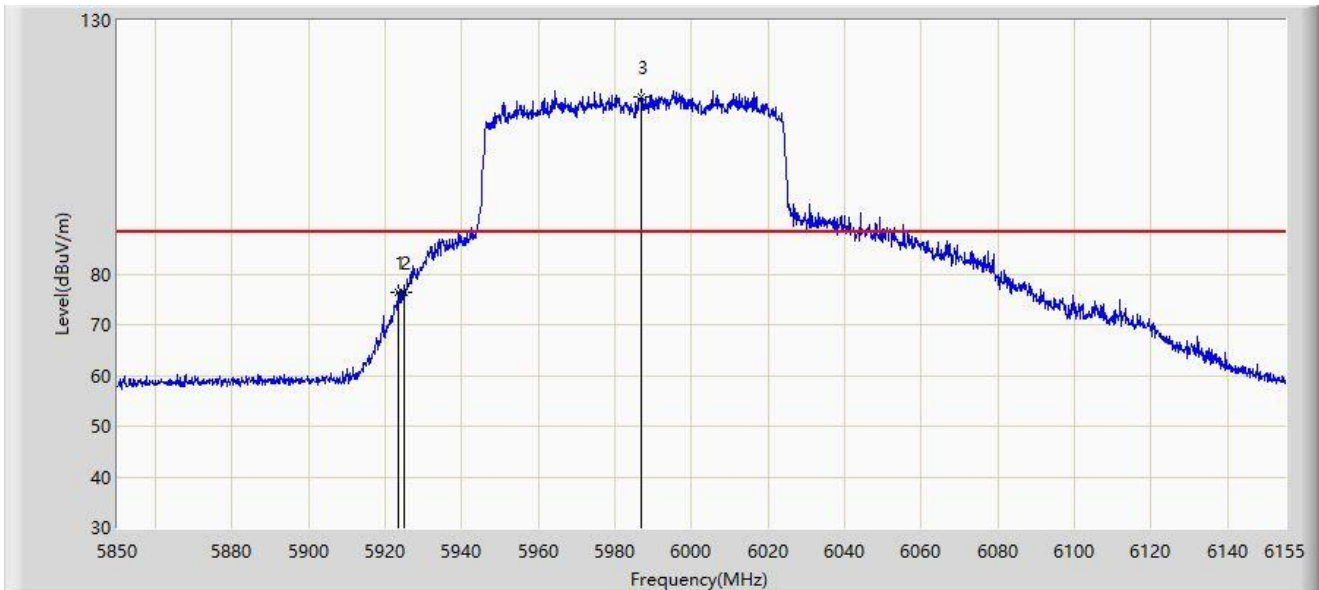


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5923.200	76.432	71.174	-11.768	88.200	5.258	PK
2		5925.000	76.341	71.071	-11.859	88.200	5.271	PK
3		5986.640	114.992	109.698	N/A	N/A	5.294	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

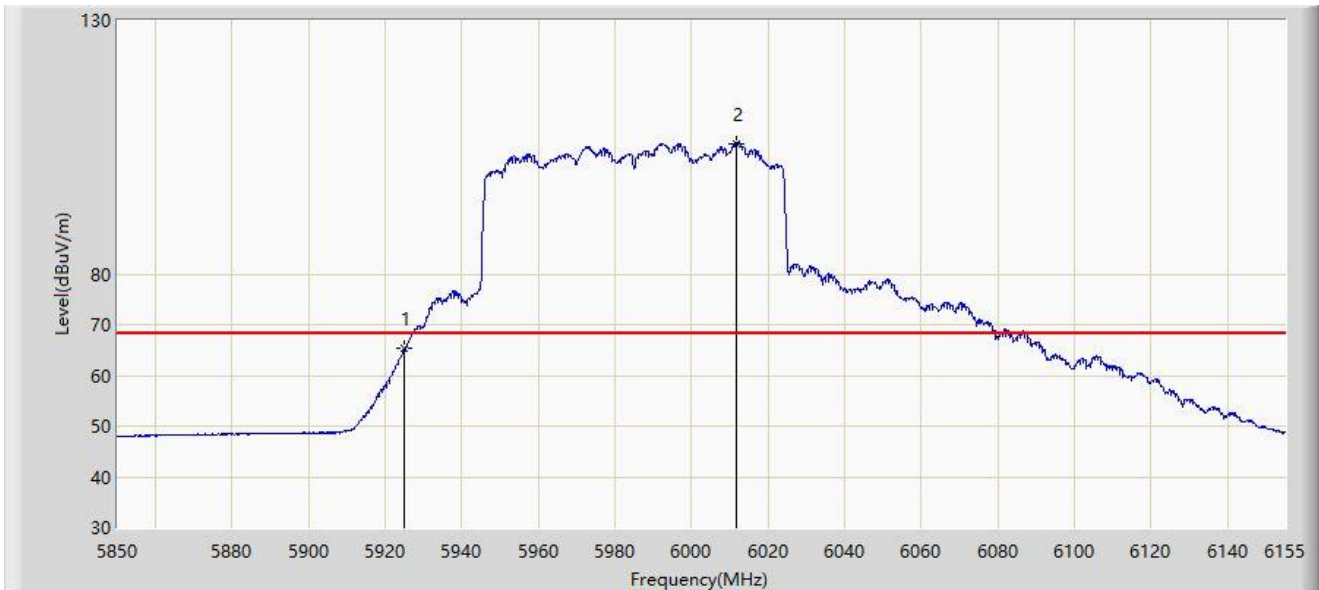


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	65.251	59.981	-2.949	68.200	5.271	AV
2		6011.498	105.736	100.181	N/A	N/A	5.555	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

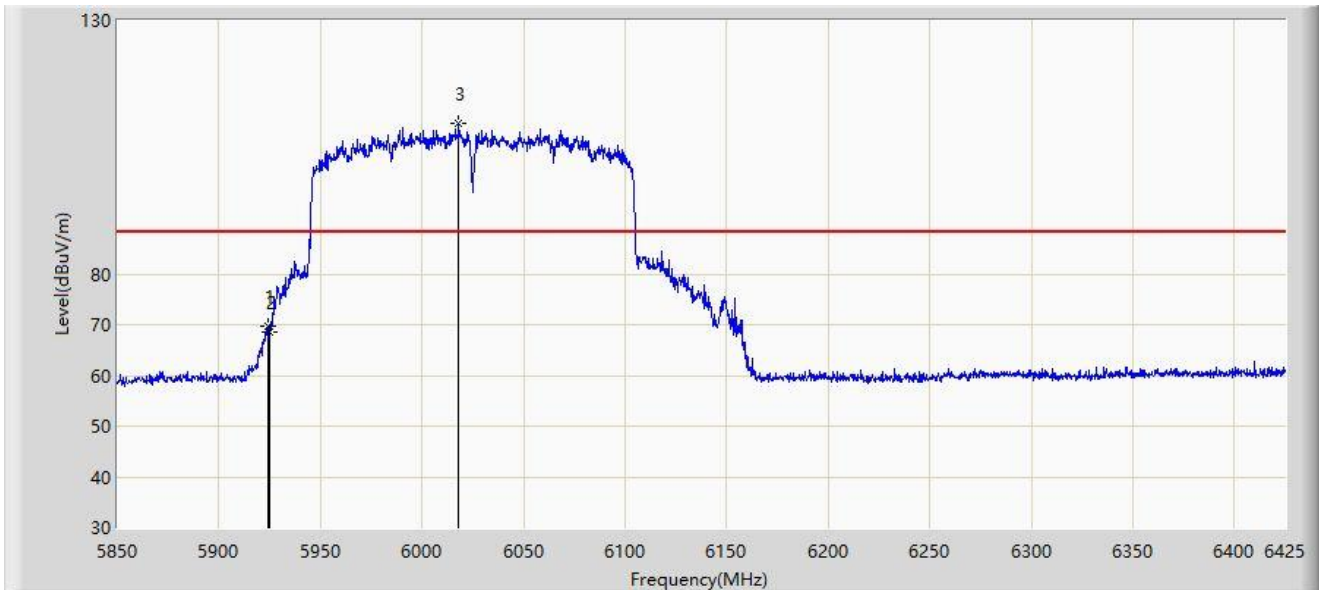


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5924.462	69.739	64.472	-18.461	88.200	5.266	PK
2		5925.000	68.694	63.424	-19.506	88.200	5.271	PK
3		6018.187	109.582	103.973	N/A	N/A	5.609	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

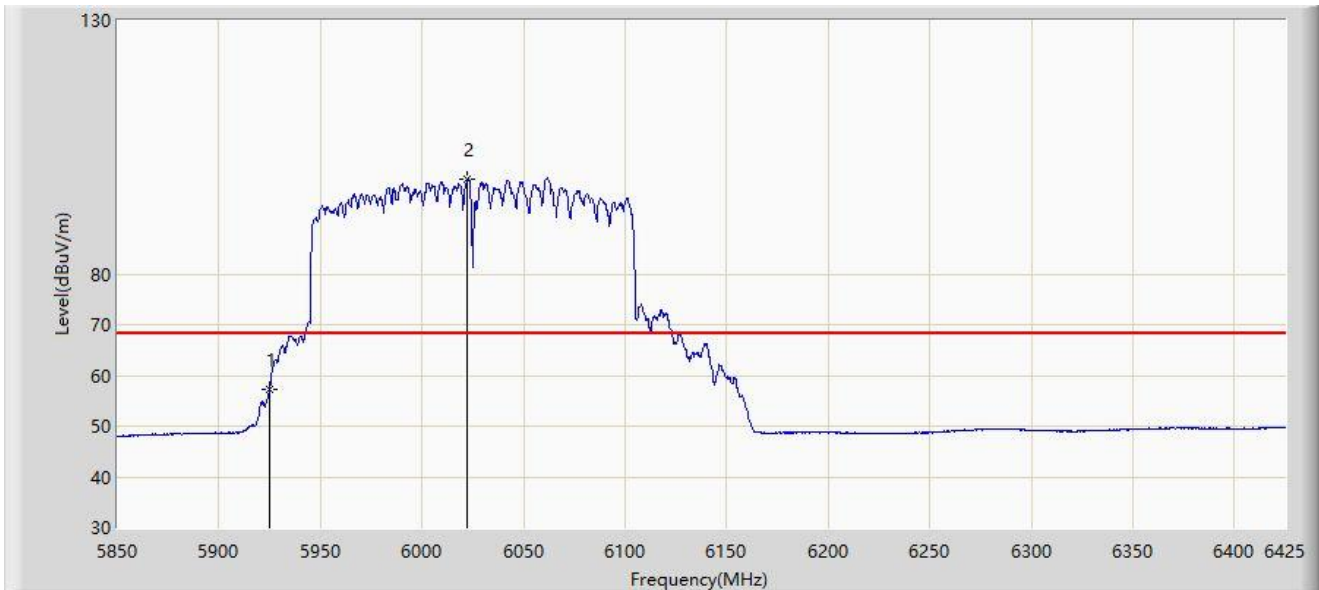


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5925.000	57.159	51.889	-11.041	68.200	5.271	AV
2		6022.500	98.831	93.210	N/A	N/A	5.621	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

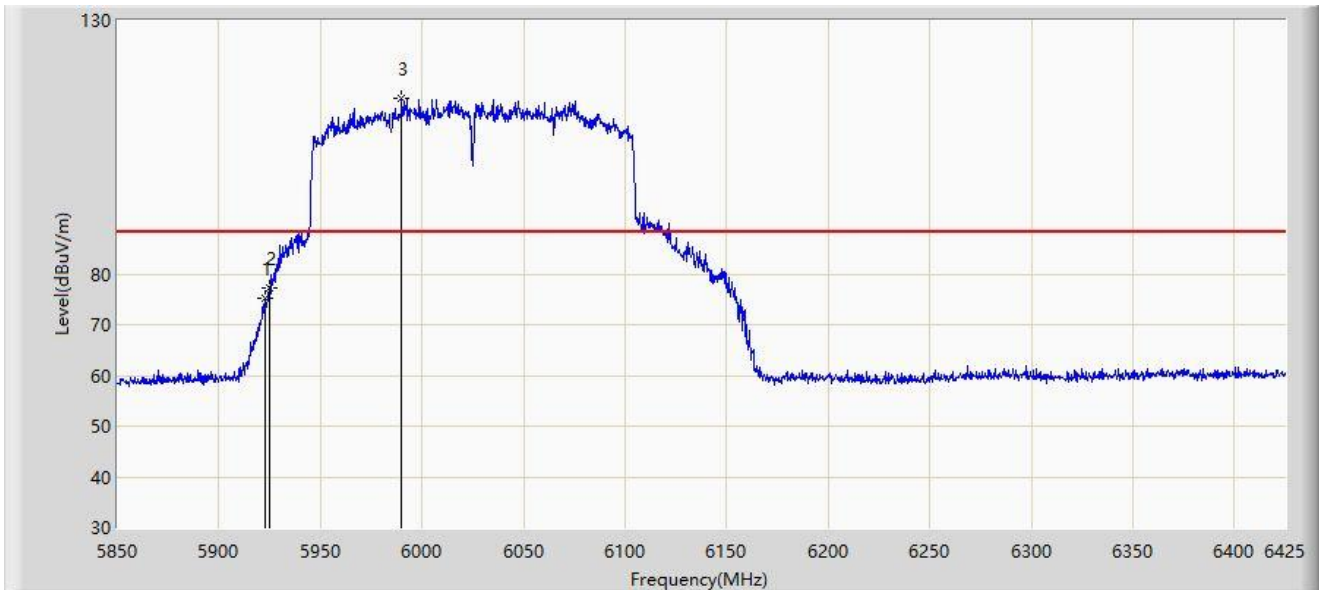


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5922.450	75.189	69.936	-13.011	88.200	5.253	PK
2	*	5925.000	77.284	72.014	-10.916	88.200	5.271	PK
3		5989.725	114.723	109.401	N/A	N/A	5.322	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

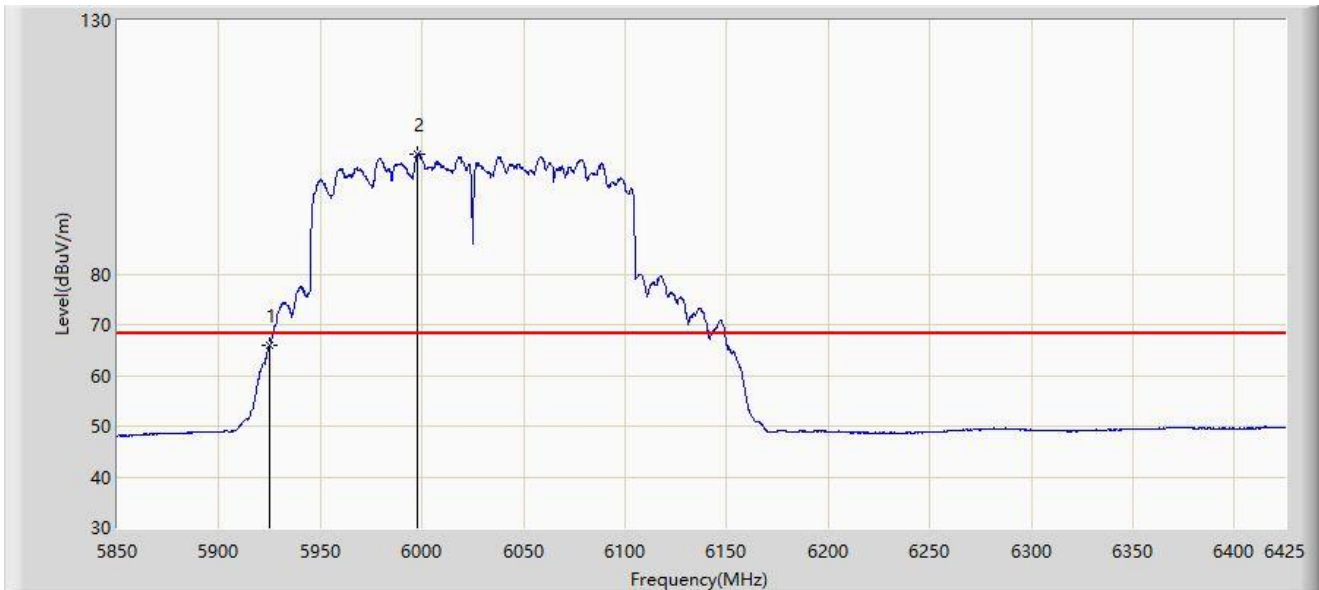

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	65.844	60.574	-2.356	68.200	5.271	AV
2		5998.062	103.572	98.180	N/A	N/A	5.393	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

ANT-348:

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

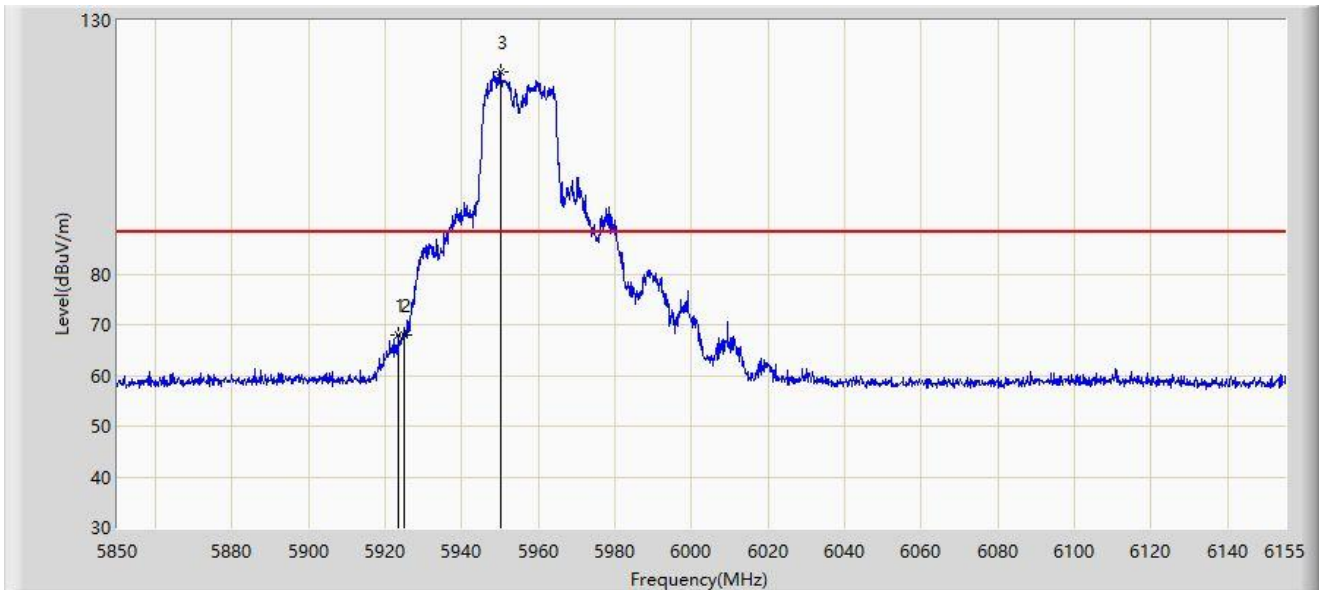


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5923.505	68.032	62.771	-20.168	88.200	5.261	PK
2		5925.000	67.975	62.705	-20.225	88.200	5.271	PK
3		5950.192	119.972	114.585	N/A	N/A	5.387	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

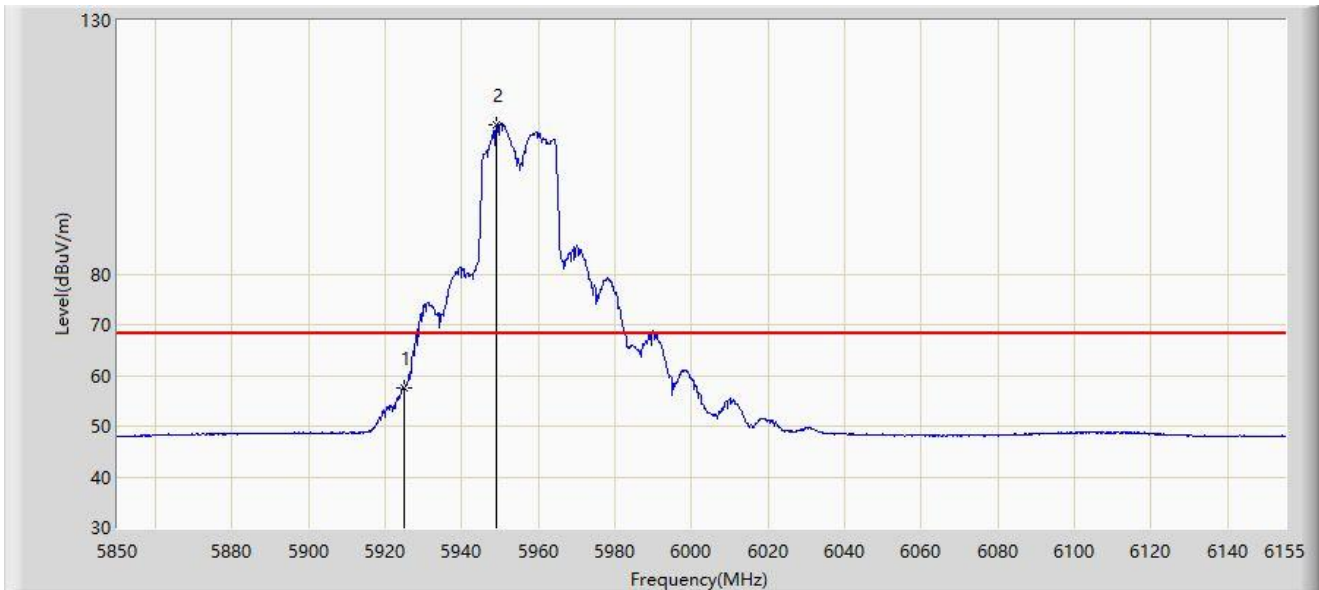


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	57.592	52.322	-10.608	68.200	5.271	AV
2		5949.125	109.357	103.974	N/A	N/A	5.383	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

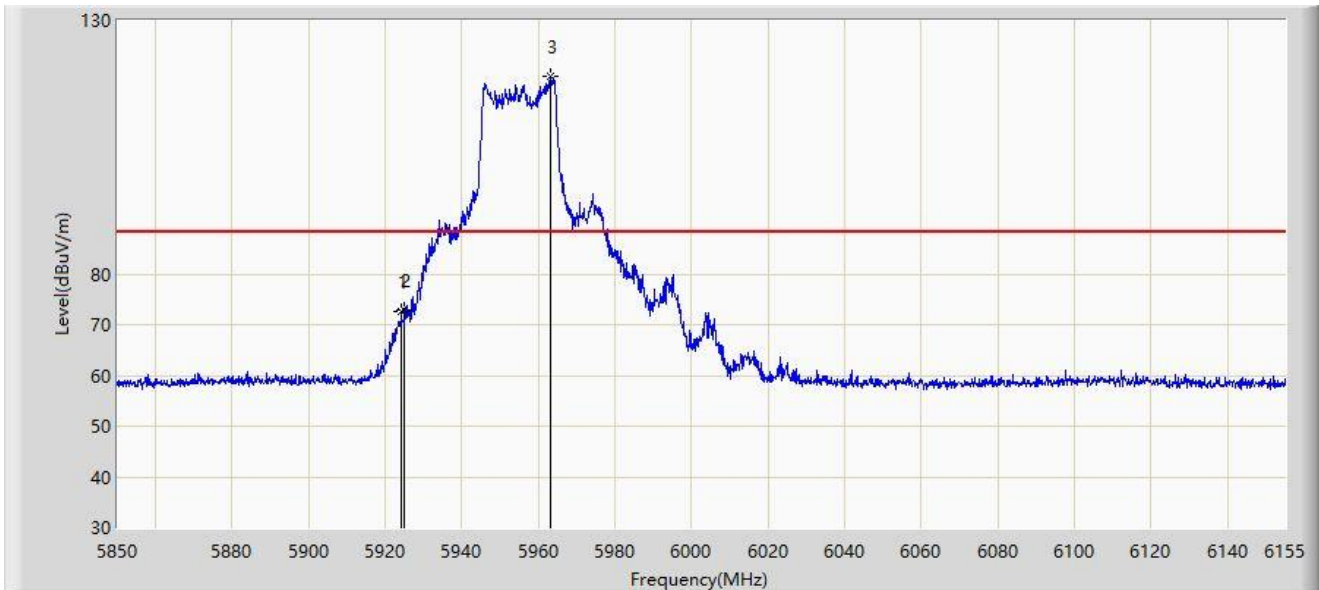


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5924.115	72.612	67.347	-15.588	88.200	5.265	PK
2	*	5925.000	72.894	67.624	-15.306	88.200	5.271	PK
3		5963.308	119.043	113.656	N/A	N/A	5.387	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

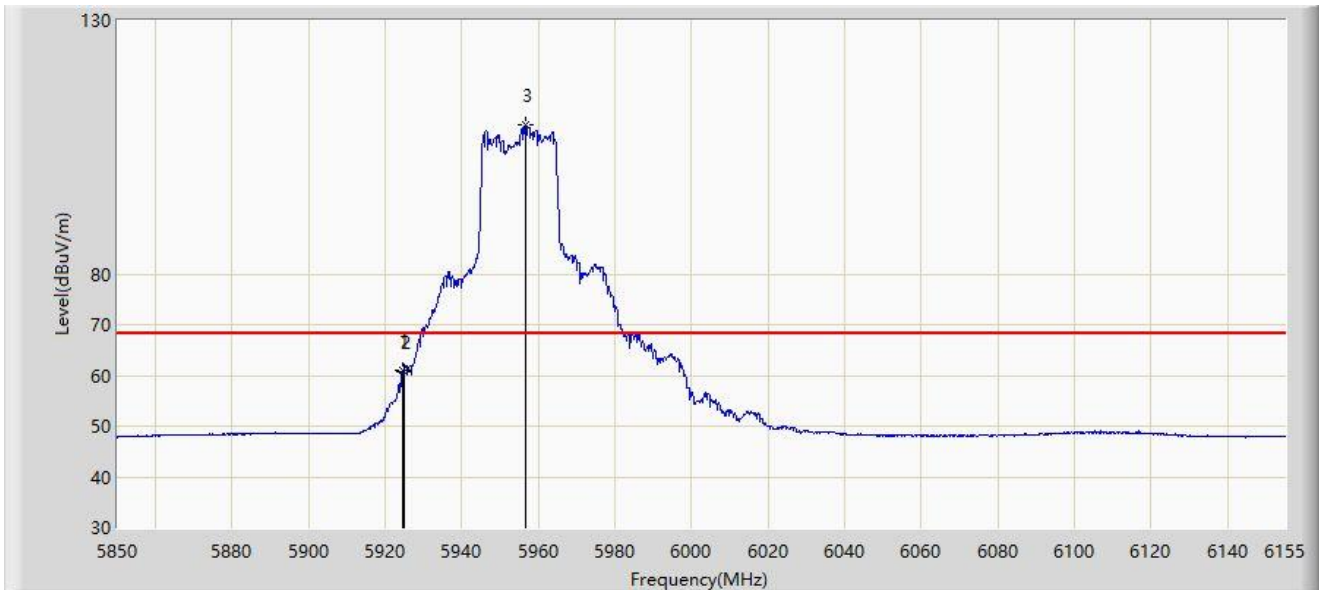


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5924.572	61.056	55.788	-7.144	68.200	5.268	AV
2		5925.000	60.859	55.589	-7.341	68.200	5.271	AV
3		5956.445	109.420	104.013	N/A	N/A	5.407	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

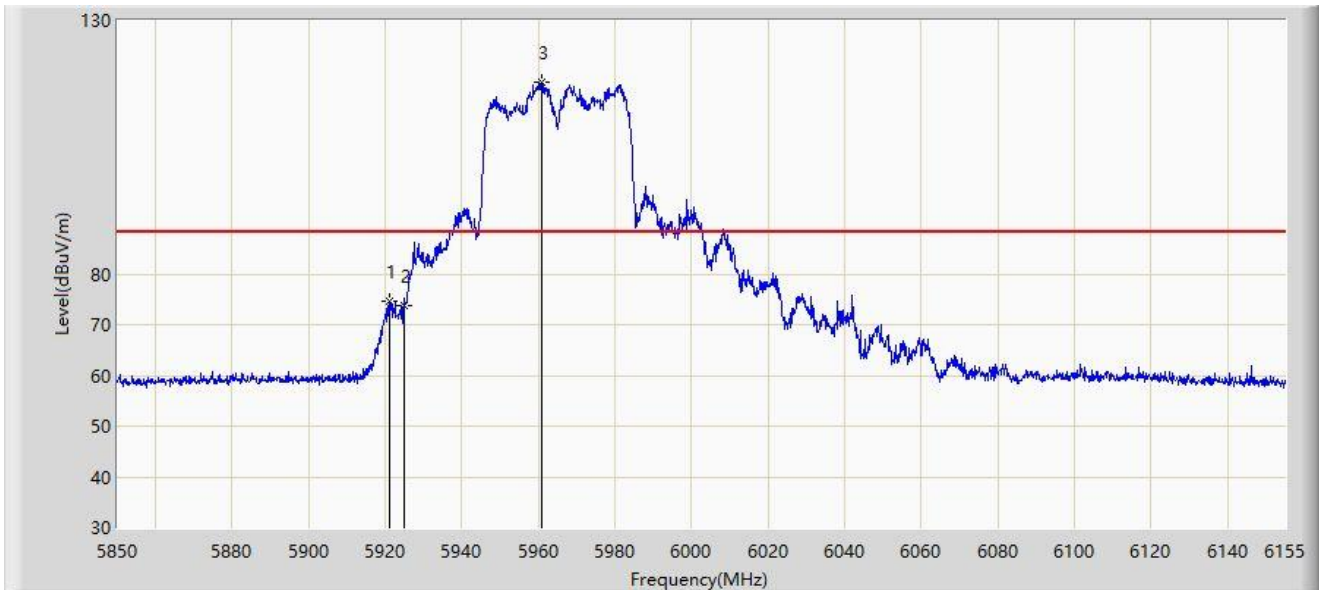


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5921.217	74.724	69.480	-13.476	88.200	5.244	PK
2		5925.000	73.856	68.586	-14.344	88.200	5.271	PK
3		5960.868	117.810	112.399	N/A	N/A	5.410	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

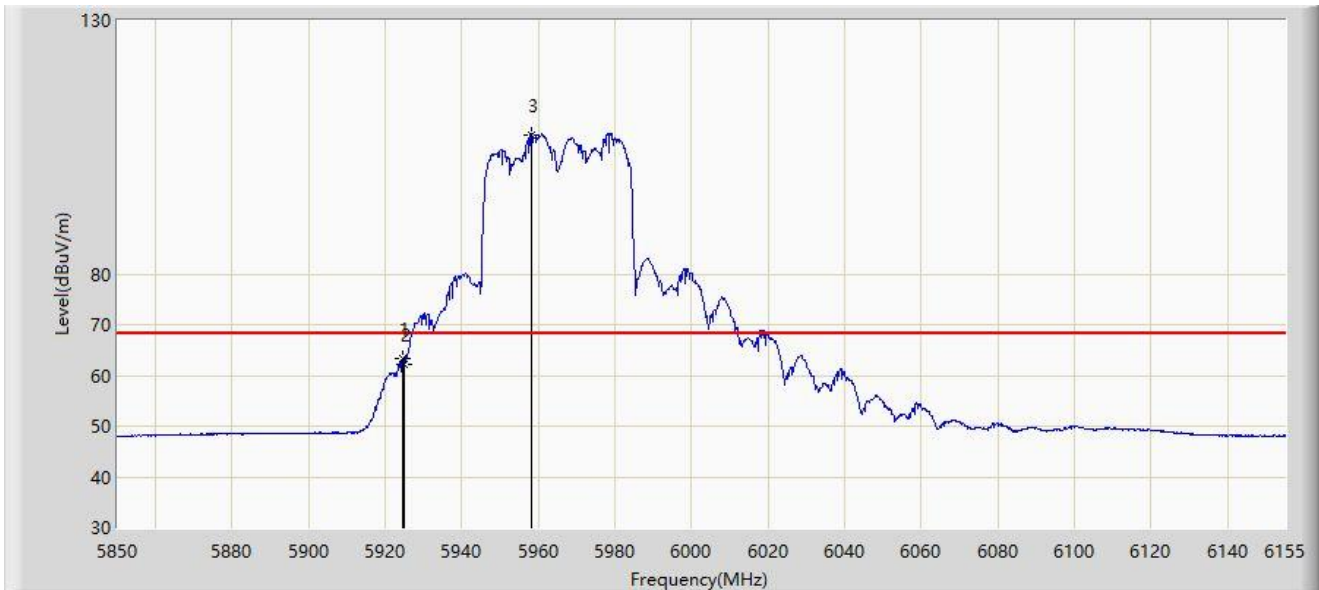


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5924.572	63.446	58.178	-4.754	68.200	5.268	AV
2		5925.000	62.251	56.981	-5.949	68.200	5.271	AV
3		5958.123	107.496	102.084	N/A	N/A	5.412	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

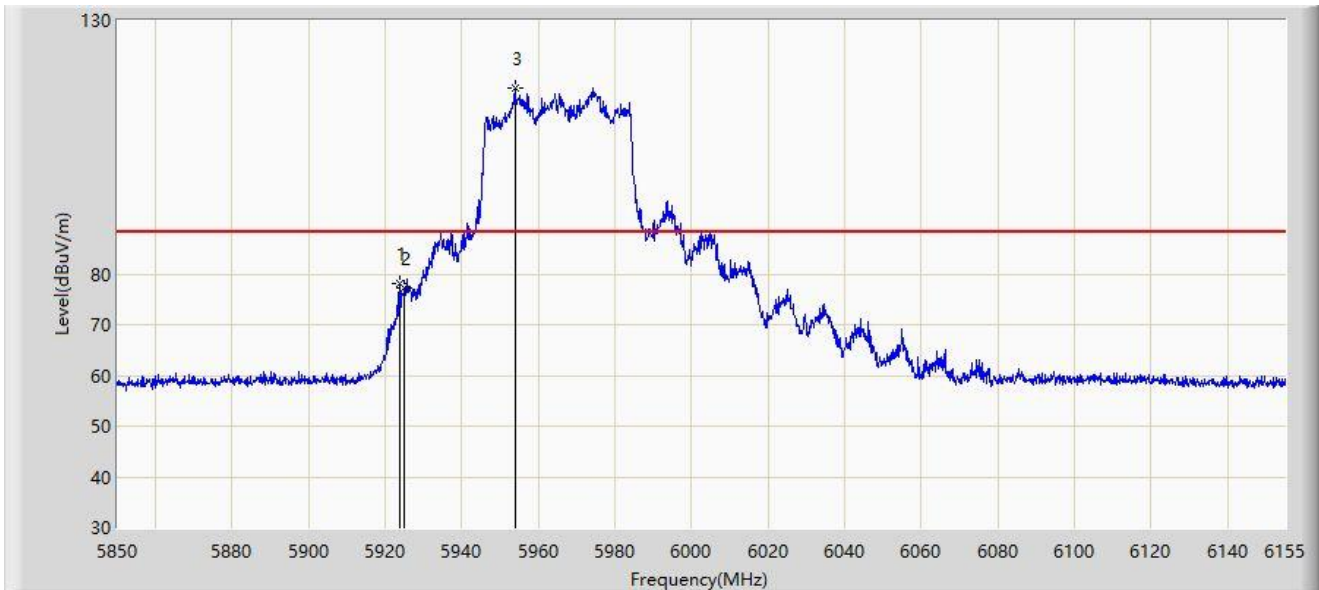


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5923.658	78.235	72.973	-9.965	88.200	5.262	PK
2		5925.000	77.126	71.856	-11.074	88.200	5.271	PK
3		5953.853	116.711	111.313	N/A	N/A	5.399	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

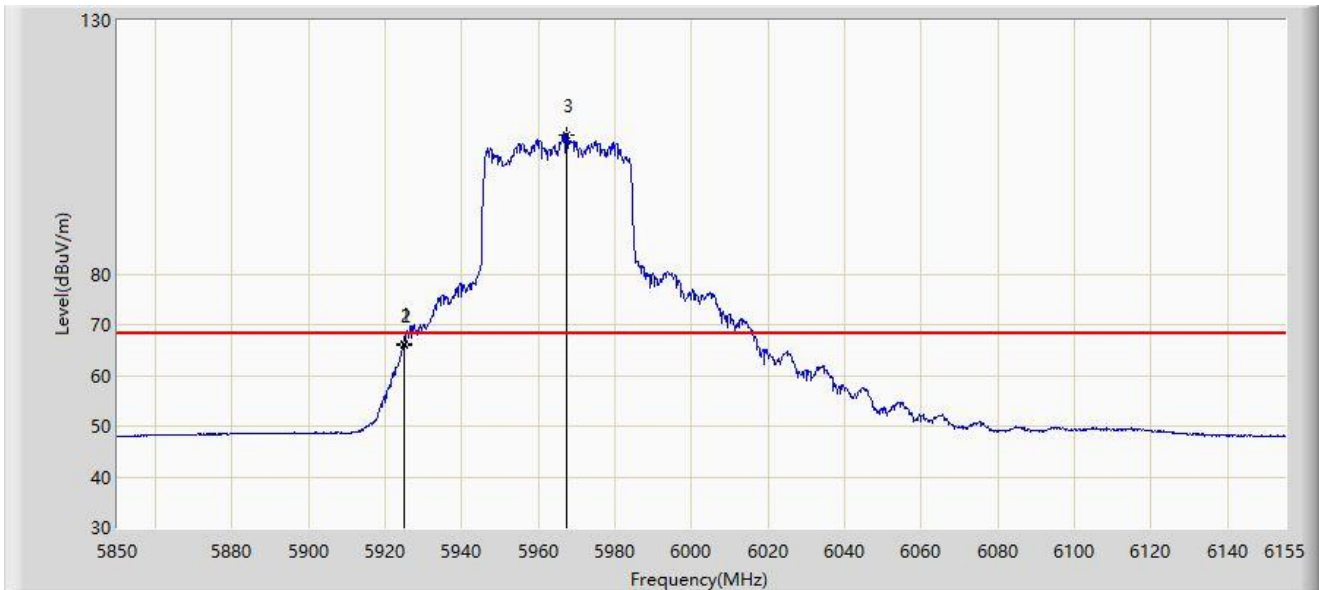


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5924.877	66.094	60.824	-2.106	68.200	5.270	AV
2		5925.000	65.878	60.608	-2.322	68.200	5.271	AV
3		5967.272	107.512	102.162	N/A	N/A	5.351	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

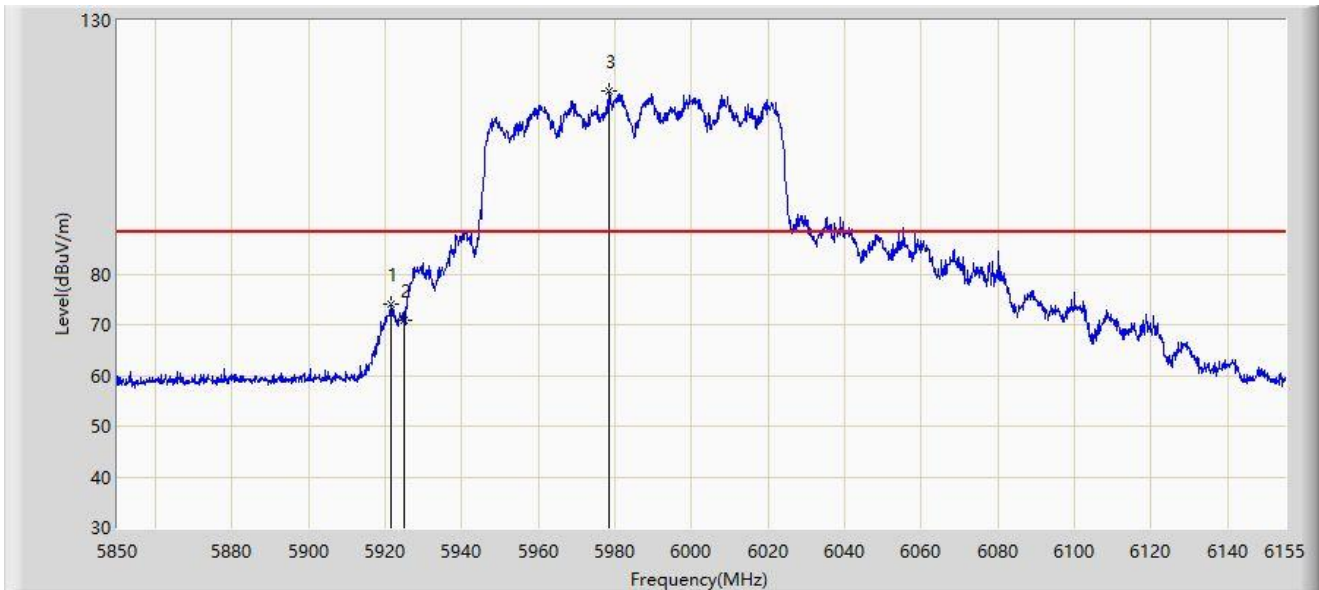


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5921.370	73.966	68.721	-14.234	88.200	5.245	PK
2		5925.000	70.728	65.458	-17.472	88.200	5.271	PK
3		5978.558	116.135	110.886	N/A	N/A	5.249	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

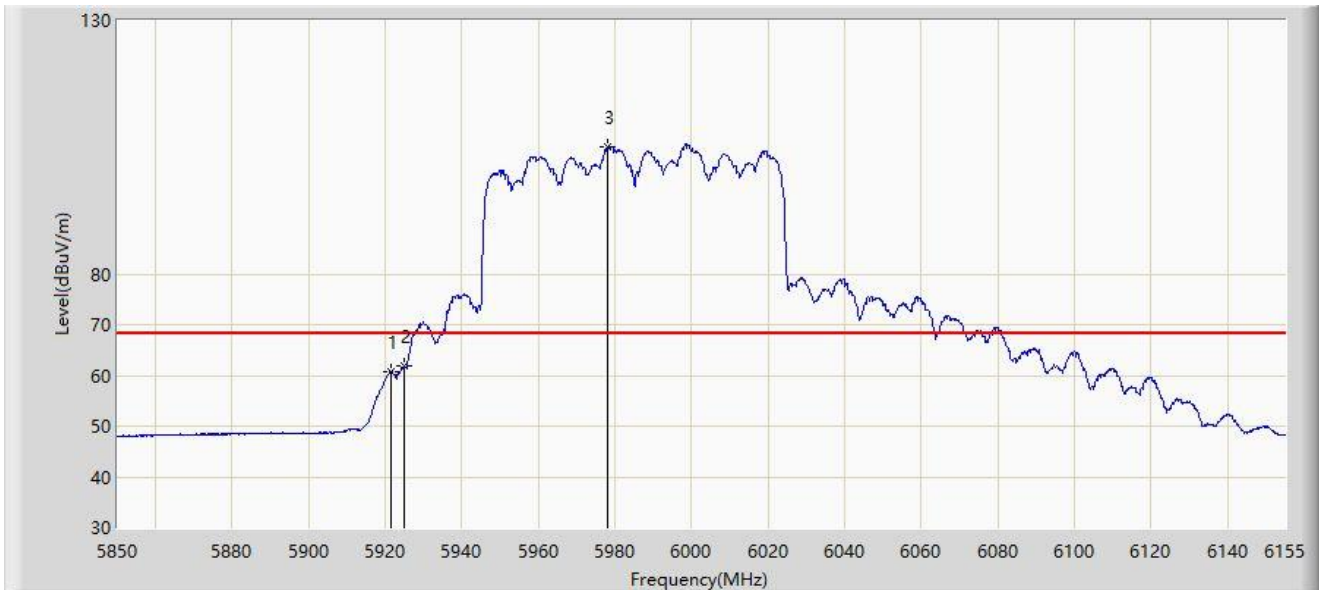


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5921.522	60.645	55.399	-7.555	68.200	5.246	AV
2	*	5925.000	61.755	56.485	-6.445	68.200	5.271	AV
3		5978.100	105.012	99.762	N/A	N/A	5.250	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

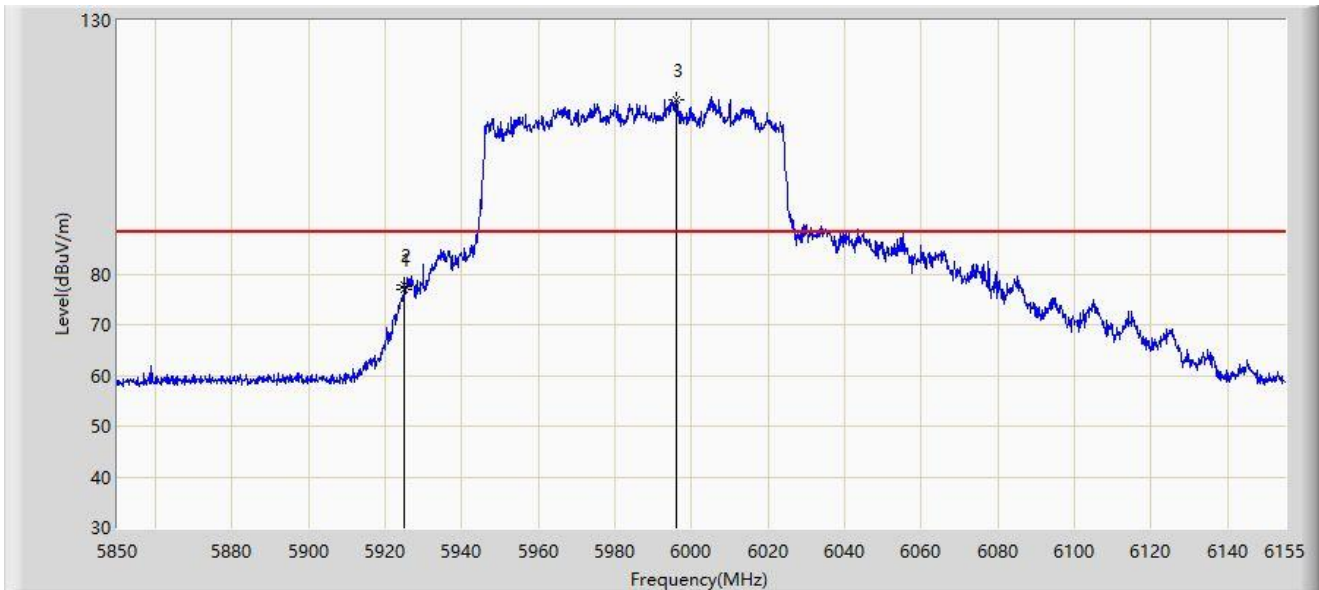


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5924.725	76.937	71.668	-11.263	88.200	5.269	PK
2	*	5925.000	77.818	72.548	-10.382	88.200	5.271	PK
3		5996.095	114.359	108.980	N/A	N/A	5.379	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

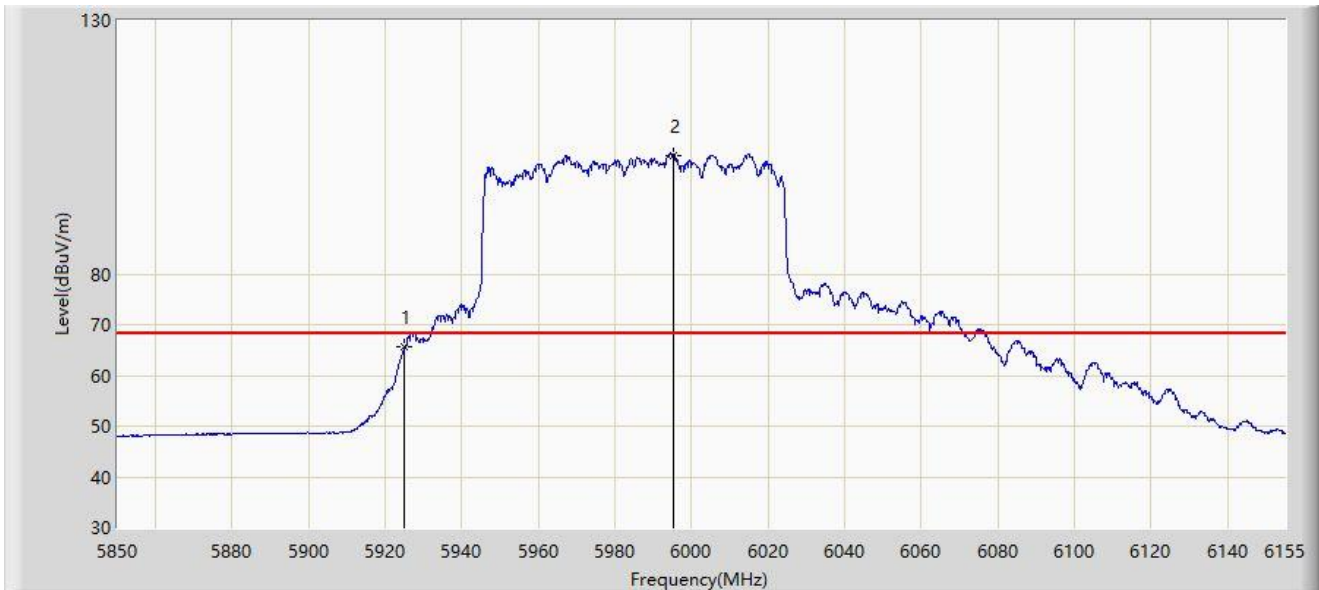


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	65.515	60.245	-2.685	68.200	5.271	AV
2		5995.180	103.470	98.099	N/A	N/A	5.371	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

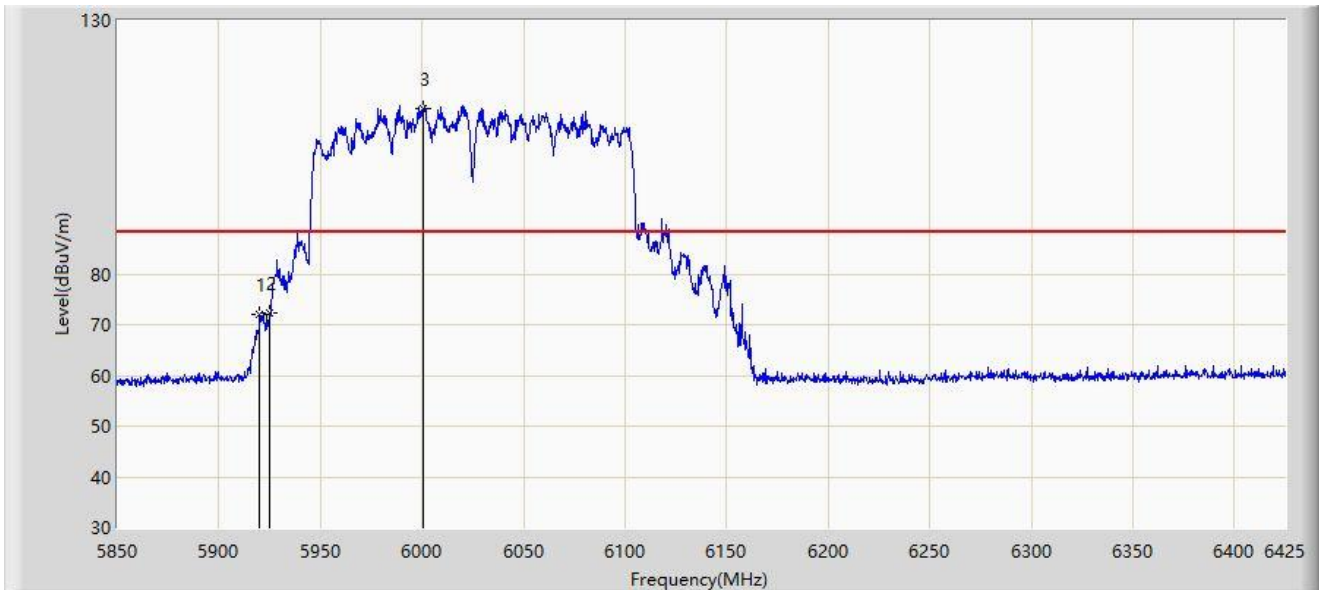


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5920.150	72.004	66.768	-16.196	88.200	5.236	PK
2	*	5925.000	72.374	67.104	-15.826	88.200	5.271	PK
3		6000.937	112.720	107.293	N/A	N/A	5.427	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

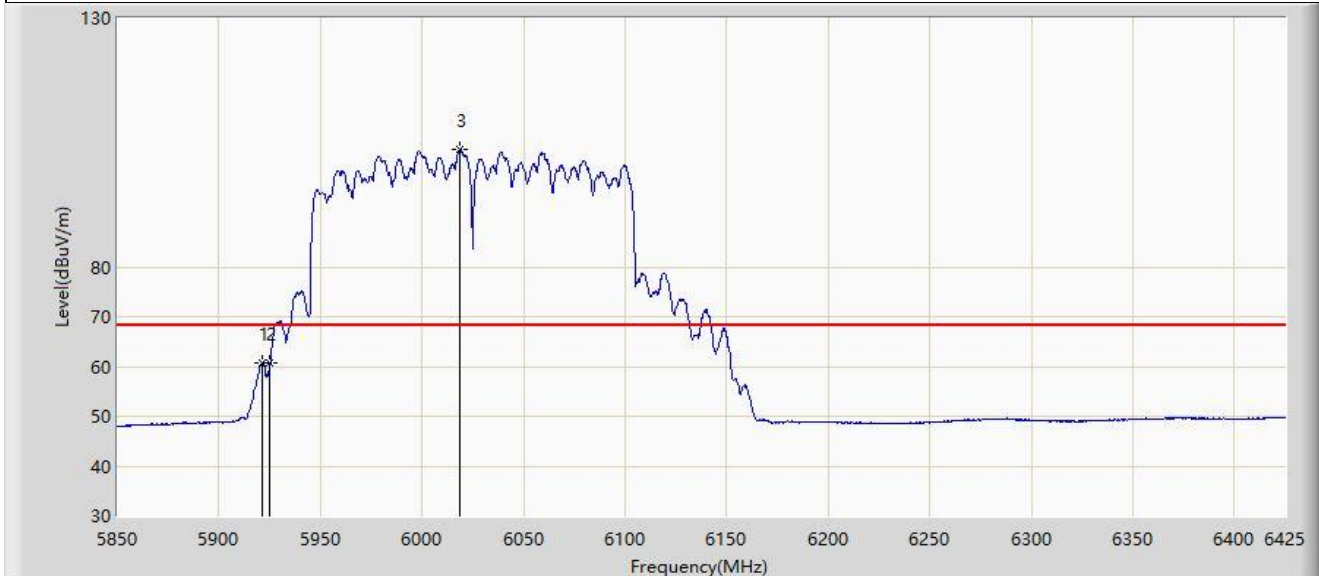


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5921.013	60.677	55.435	-7.523	68.200	5.243	AV
2		5925.000	60.614	55.344	-7.586	68.200	5.271	AV
3		6018.475	103.515	97.905	N/A	N/A	5.610	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

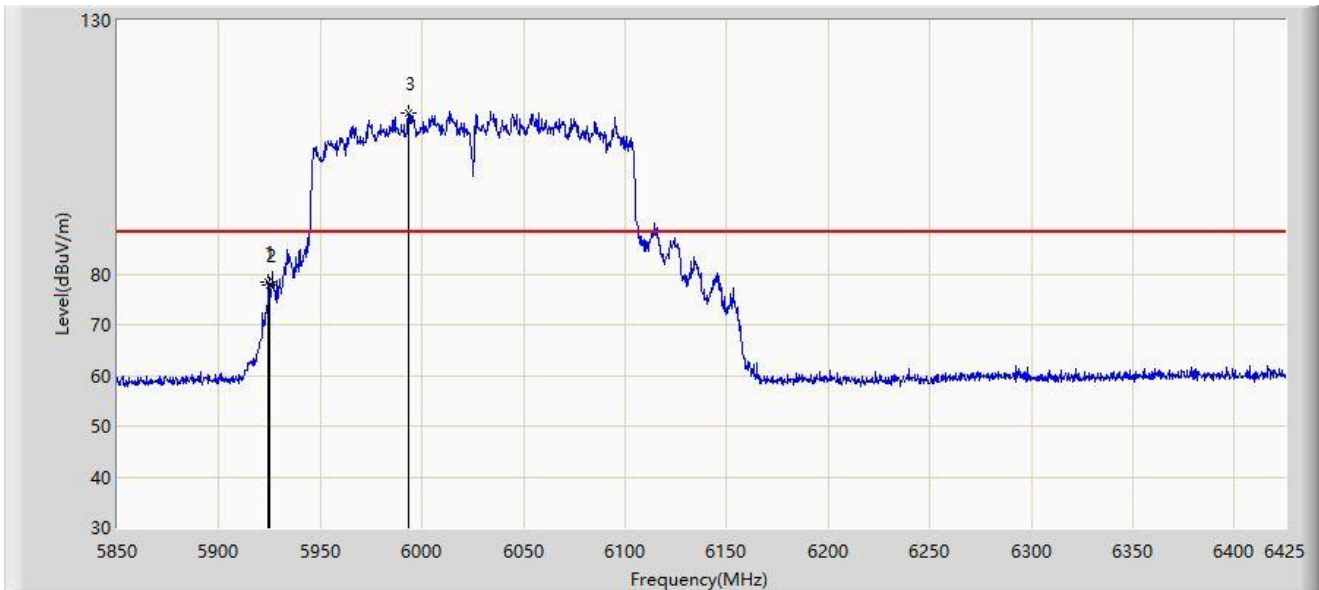


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5924.462	78.545	73.278	-9.655	88.200	5.266	PK
2		5925.000	77.882	72.612	-10.318	88.200	5.271	PK
3		5993.175	111.695	106.342	N/A	N/A	5.353	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-09-05
Limit: FCC_6G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

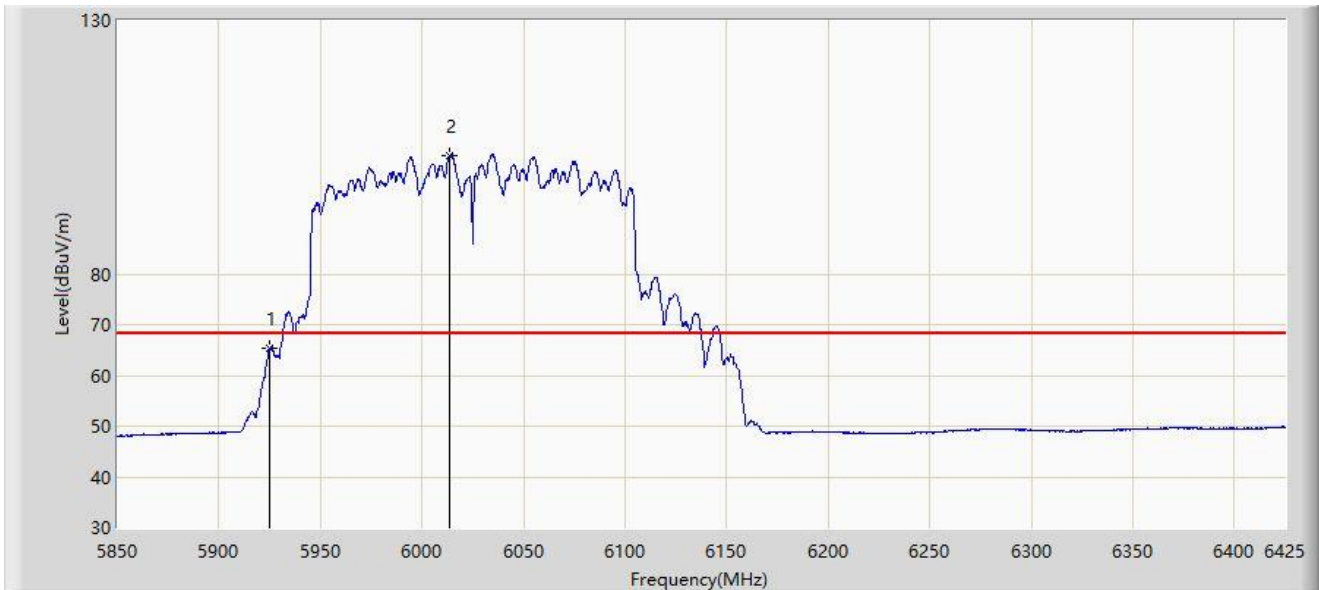

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	65.283	60.013	-2.917	68.200	5.271	AV
2		6013.875	103.477	97.893	N/A	N/A	5.583	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

A.9 AC Conducted Emissions Test Result

Site: WZ-SR2	Test Date: 2023-09-25
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_C	Polarity: Line
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

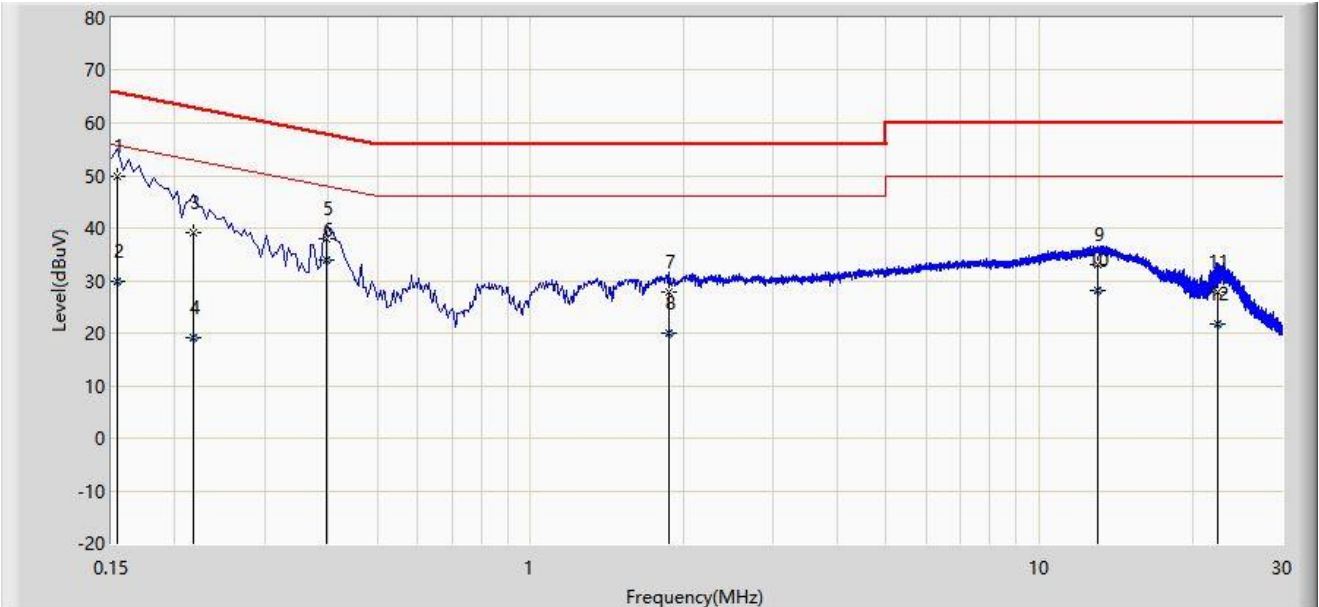


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.154	49.795	40.080	-15.986	65.781	9.716	QP
2		0.154	29.776	20.060	-26.006	55.781	9.716	AV
3		0.218	38.988	29.257	-23.907	62.895	9.731	QP
4		0.218	18.989	9.258	-33.906	52.895	9.731	AV
5		0.398	38.112	28.318	-19.783	57.895	9.795	QP
6	*	0.398	33.993	24.199	-13.902	47.895	9.795	AV
7		1.870	27.708	17.610	-28.292	56.000	10.098	QP
8		1.870	19.924	9.826	-26.076	46.000	10.098	AV
9		13.022	33.121	22.827	-26.879	60.000	10.294	QP
10		13.022	28.147	17.853	-21.853	50.000	10.294	AV
11		22.486	27.780	17.000	-32.220	60.000	10.779	QP
12		22.486	21.651	10.872	-28.349	50.000	10.779	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Test Date: 2023-09-25
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_C	Polarity: Neutral
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

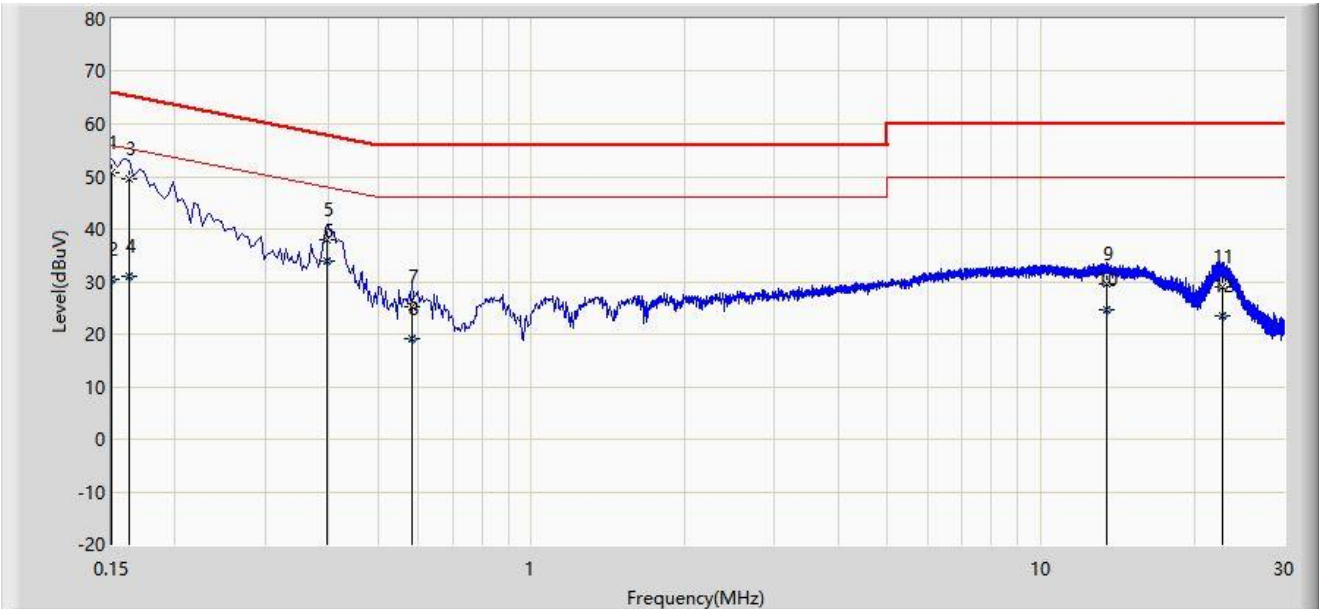

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.150	50.701	40.997	-15.299	66.000	9.704	QP
2		0.150	30.545	20.841	-25.455	56.000	9.704	AV
3		0.162	49.565	39.858	-15.796	65.361	9.707	QP
4		0.162	30.877	21.170	-24.484	55.361	9.707	AV
5		0.398	37.909	28.124	-19.986	57.895	9.785	QP
6	*	0.398	33.928	24.144	-13.967	47.895	9.785	AV
7		0.582	25.085	15.216	-30.915	56.000	9.868	QP
8		0.582	19.150	9.281	-26.850	46.000	9.868	AV
9		13.486	29.655	19.372	-30.345	60.000	10.283	QP
10		13.486	24.782	14.499	-25.218	50.000	10.283	AV
11		22.726	29.092	18.394	-30.908	60.000	10.697	QP
12		22.726	23.506	12.809	-26.494	50.000	10.697	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B – Test Setup Photograph

Refer to “2307RSU045-UT” file.

Appendix C – EUT Photograph

Refer to “2307RSU045-UE” file.

_____ The End _____