



RF MEASUREMENT REPORT

FCC ID: Q9DAPIN0655A

Applicant: Hewlett Packard Enterprise Company

Product: ACCESS POINT

Model No.: APIN0655A

Trademark: 

FCC Classification: 15E 6GHz Low Power Indoor Access Point (6ID)

FCC Rule Part(s): Part 15 Subpart E (Section 15.407)

Result: Complies

Received Date: 2024-12-24

Test Date: 2025-01-23 ~ 2025-02-21

Reviewed By:

Jame Yuan

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2412RSU040-U7	V01	Initial Report	2025-04-01	Valid

Note 1: The APIN0655A is a variation on the existing APIN0655. The APIN0655 is currently FCC certified under FCC ID: Q9DAPIN0655.

The APIN0655A differs from the APIN0655 in the following ways:

Part substitution for 5G and 6G passive filter

Note 2: Some spot check was done and all other test data were referenced from the original report.

Test Description	Remark
26dB Bandwidth	Spot Check
Maximum Equivalent Isotropically Radiated Power (EIRP)	Full Test
Maximum Power Spectral Density (EIRP)	Spot Check
In-Band Emission	Spot Check
Unwanted Emissions	Spot Check
Contention-Based Protocol	Spot Check
General Field Strength (Restricted Bands and Radiated Emission)	Spot Check
AC Conducted Emissions 150kHz - 30MHz	Full Test

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Testing Facility	6
1.4. Product Information	7
1.5. Radio Specification under Test	7
1.6. Working Frequencies	8
1.7. Antenna Details	9
2. Test Configuration	10
2.1. Test Mode	10
2.2. Test System Connection Diagram	10
2.3. Test Software	10
2.4. Applied Standards	11
2.5. Test Environment Condition	11
3. Antenna Requirements	12
4. Measuring Instrument	13
5. Decision Rules and Measurement Uncertainty	14
5.1. Decision Rules	14
5.2. Measurement Uncertainty	14
6. Test Result	15
6.1. Summary	15
6.2. 26dB Bandwidth Measurement	16
6.2.1. Test Limit	16
6.2.2. Test Procedure	16
6.2.3. Test Setting	16
6.2.4. Test Setup	17
6.2.5. Test Result	17
6.3. Output Power Measurement	18
6.3.1. Test Limit	18
6.3.2. Test Procedure	18
6.3.3. Test Setting	18
6.3.4. Test Setup	19
6.3.5. Test Result	19
6.4. Power Spectral Density Measurement	20
6.4.1. Test Limit	20

6.4.2.	Test Procedure	20
6.4.3.	Test Setting	20
6.4.4.	Test Setup.....	21
6.4.5.	Test Result.....	21
6.5.	In-Band Emission Measurement	22
6.5.1.	Test Limit	22
6.5.2.	Test Procedure	22
6.5.3.	Test Setting	22
6.5.4.	Test Setup.....	23
6.5.5.	Test Result.....	23
6.6.	Frequency Stability Measurement.....	24
6.6.1.	Test Limit	24
6.6.2.	Test Procedure	24
6.6.3.	Test Setup.....	24
6.6.4.	Test Result.....	25
6.7.	Contention Based Protocol Measurement	26
6.7.1.	Test Limit	26
6.7.2.	Test Procedure	26
6.7.3.	Test Setting	26
6.7.4.	Test Setup.....	27
6.7.5.	Test Result.....	27
6.8.	Radiated Spurious Emission Measurement	28
6.8.1.	Test Limit	28
6.8.2.	Test Procedure	28
6.8.3.	Test Setting	29
6.8.4.	Test Setup.....	31
6.8.5.	Test Result.....	32
6.9.	Radiated Restricted Band Edge Measurement.....	33
6.9.1.	Test Limit	33
6.9.2.	Test Procedure	35
6.9.3.	Test Setting	35
6.9.4.	Test Setup.....	36
6.9.5.	Test Result.....	36
6.10.	AC Conducted Emissions Measurement.....	37
6.10.1.	Test Limit	37
6.10.2.	Test Setup.....	37
6.10.3.	Test Result.....	37
Appendix A – Test Result.....		38

A.1	Duty Cycle Test Result	38
A.2	26dB Bandwidth Test Result	39
A.3	Output Power Test Result	41
A.4	Power Spectral Density Test Result	49
A.5	In-Band Emission Measurement	53
A.6	Frequency Stability Test Result	117
A.7	Contention Based Protocol Test Result	118
A.8	Radiated Spurious Emission Test Result	122
A.9	Radiated Restricted Band Edge Test Result	136
A.10	AC Conducted Emissions Test Result	148
Appendix B - Test Setup Photograph		152
Appendix C - EUT Photograph		153

1. General Information

1.1. Applicant

Hewlett Packard Enterprise Company
6280 America Center Drive, San Jose CA 95002, United States

1.2. Manufacturer

Hewlett Packard Enterprise Company
6280 America Center Drive, San Jose CA 95002, United States

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Location (Suzhou - Wujiang) Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China Laboratory Accreditations <table border="0"> <tr> <td>A2LA: 3628.01</td> <td>CNAS: L10551</td> </tr> <tr> <td>FCC: CN1166</td> <td>ISED: CN0001</td> </tr> <tr> <td>VCCI:</td> <td> ☐R-20025 ☐G-20034 ☐C-20020 ☐T-20020 ☐R-20141 ☐G-20134 ☐C-20103 ☐T-20104 </td> </tr> </table>	A2LA: 3628.01	CNAS: L10551	FCC: CN1166	ISED: CN0001	VCCI:	☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104
A2LA: 3628.01	CNAS: L10551						
FCC: CN1166	ISED: CN0001						
VCCI:	☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104						
☐	Test Site – MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations <table border="0"> <tr> <td>A2LA: 3628.02</td> <td>CNAS: L10551</td> </tr> <tr> <td>FCC: CN1284</td> <td>ISED: CN0105</td> </tr> </table>	A2LA: 3628.02	CNAS: L10551	FCC: CN1284	ISED: CN0105		
A2LA: 3628.02	CNAS: L10551						
FCC: CN1284	ISED: CN0105						
☐	Test Site – MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations <table border="0"> <tr> <td>TAF: 3261</td> <td></td> </tr> <tr> <td>FCC: 291082, TW3261</td> <td>ISED: TW3261</td> </tr> </table>	TAF: 3261		FCC: 291082, TW3261	ISED: TW3261		
TAF: 3261							
FCC: 291082, TW3261	ISED: TW3261						

1.4. Product Information

Product Name	ACCESS POINT
Model No.	APIN0655A
Serial No.	CNT0ML1024
	CNT0ML102S
Software Version	Spf11.4cs
	ArubaOS_Norma_10.7.2.0_91852_0208
Wi-Fi Specification	802.11a/b/g/n/ac/ax
Bluetooth Specification	v5.0 single mode, BLE only
Zigbee Specification	802.15.4
GNSS Specification	GPS, GLONASS, Galileo
Operating Temperature	0 ~ 50 °C
Antenna Information	Refer to Section 1.7
Power Type	AC Adapter or PoE input
Operating Environment	Indoor Use
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification under Test

Frequency Range	For 802.11ax-HE20: 6115 ~ 7095MHz For 802.11ax-HE40: 6125 ~ 7085MHz For 802.11ax-HE80: 6145 ~ 7025MHz For 802.11ax-HE160: 6185 ~ 6985MHz
Type of Modulation	802.11ax: OFDMA
Data Rate	802.11ax: up to 4804Mbps

Note: For other features of this EUT, test report will be issued separately.

1.6. Working Frequencies

802.11ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	5955 MHz	5	5975 MHz	9	5995 MHz
13	6015 MHz	17	6035 MHz	21	6055 MHz
25	6075 MHz	29	6095 MHz	33	6115 MHz
37	6135 MHz	41	6155 MHz	45	6175 MHz
49	6195 MHz	53	6215 MHz	57	6235 MHz
61	6255 MHz	65	6275 MHz	69	6295 MHz
73	6315 MHz	77	6335 MHz	81	6355 MHz
85	6375 MHz	89	6395 MHz	93	6415 MHz
97	6435 MHz	101	6455 MHz	105	6475 MHz
109	6495 MHz	113	6515 MHz	117	6535 MHz
121	6555 MHz	125	6575 MHz	129	6595 MHz
133	6615 MHz	137	6635 MHz	141	6655 MHz
145	6675 MHz	149	6695 MHz	153	6715 MHz
157	6735 MHz	161	6755 MHz	165	6775 MHz
169	6795 MHz	173	6815 MHz	177	6835 MHz
181	6855 MHz	185	6875 MHz	189	6895 MHz
193	6915 MHz	197	6935 MHz	201	6955 MHz
205	6975 MHz	209	6995 MHz	213	7015 MHz
217	7035 MHz	221	7055 MHz	225	7075 MHz
229	7095 MHz	--	--	--	--

802.11ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
3	5965 MHz	11	6005 MHz	19	6045 MHz
27	6085 MHz	35	6125 MHz	43	6165 MHz
51	6205 MHz	59	6245 MHz	67	6285 MHz
75	6325 MHz	83	6365 MHz	91	6405 MHz
99	6445 MHz	107	6485 MHz	115	6525 MHz
123	6565 MHz	131	6605 MHz	139	6645 MHz
147	6685 MHz	155	6725 MHz	163	6765 MHz
171	6805 MHz	179	6845 MHz	187	6885 MHz
195	6925 MHz	203	6965 MHz	211	7005 MHz
219	7045 MHz	227	7085 MHz		--

802.11ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
7	5985 MHz	23	6065 MHz	39	6145 MHz
55	6225 MHz	71	6305 MHz	87	6385 MHz
103	6465 MHz	119	6545 MHz	135	6625 MHz
151	6705 MHz	167	6785 MHz	183	6865 MHz
199	6945 MHz	215	7025 MHz		--

802.11ax-HE160

Channel	Frequency	Channel	Frequency	Channel	Frequency
15	6025 MHz	47	6185 MHz	79	6345 MHz
111	6505 MHz	143	6665 MHz	175	6825 MHz
207	6985 MHz		--		--

1.7. Antenna Details

Antenna Type	Frequency Band (GHz)	Max Peak Gain (dBi)	CDD Directional Gain (dBi)		BF Directional Gain (dBi)
			For Power	For PSD	
Wi-Fi Internal Antenna (4*4 MIMO)					
PIFA	2.4 ~ 2.5	3.26	3.26	6.23	6.23
	5.15 ~ 5.9	2.88	2.88	5.60	5.60
	5.9 ~ 7.2	3.97	3.97	6.97	6.97
Bluetooth / ZigBee Internal Antenna					
PIFA	2.4 ~ 2.5	3.60			

Note:

1. The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
2. The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax, not include 802.11a/b/g.
3. For beamforming operation, Aruba OS automatically backs power down based on a $10\log(N)$ factor based on CDD power.
4. All Wi-Fi antennas have cross polarized design, the detail information and calculation method refer to antenna specification.


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by 802.11ax-HE20 (MCS0)
Mode 2: Transmit by 802.11ax-HE40 (MCS0)
Mode 3: Transmit by 802.11ax-HE80 (MCS0)
Mode 4: Transmit by 802.11 ax-HE160 (MCS0)

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

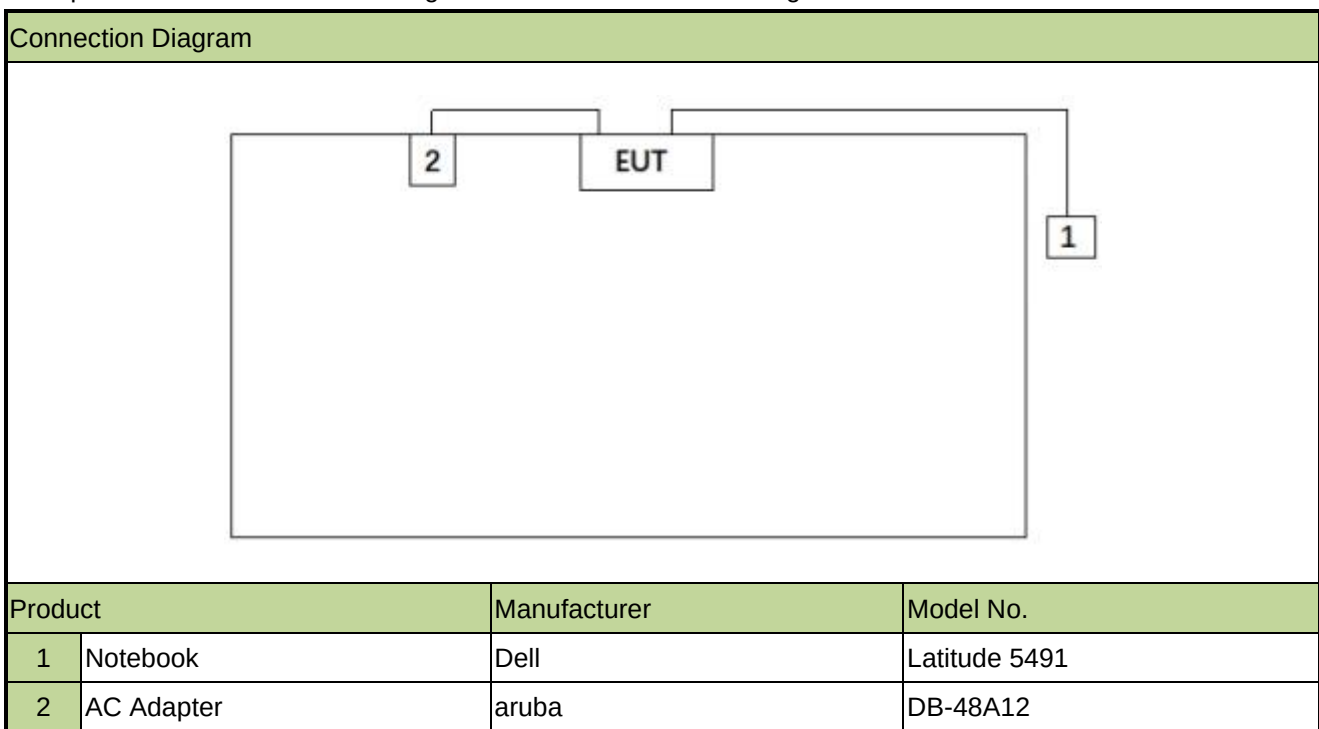

2.3. Test Software

The test utility software used during testing was “QRCT”, and the version was 4.0.

Note: Final power setting please refer to operational description.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.10-2013
- FCC KDB 789033 D02v02r01
- FCC KDB 987594 D02v02r01
- FCC KDB 987594 D04v02
- FCC KDB 662911 D01v02r01
- FCC KDB 414788 D01v01r01
- FCC KDB 412172 D01v01r01

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.407(a)(10) of the FCC Rules/Regulations:

Access points operating under the provisions of paragraphs (a)(5) and (a)(6) of this section must employ a permanently attached integrated antenna.

- The antenna of the device is built in and locked inside the enclosure.

Conclusion:

The device complies with the requirement of §15.407(a)(10).

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2025-05-12	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2025-05-08	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06558	1 year	2025-05-20	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11090	1 year	2025-06-05	WZ-SR5
USB Power Sensor	Keysight	U2021XA	MRTSUE06446	1 year	2025-05-08	WZ-SR5
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2025-04-17	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2025-05-08	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2025-09-23	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2025-05-06	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2025-04-18	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11263	1 year	2025-10-16	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2025-11-03	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2026-01-09	WZ-AC2
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2025-05-08	WZ-SR2
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	5 years	2026-12-20	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2025-05-12	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2025-09-05	WZ-SR2
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2025-09-02	WZ-TR3
Signal Analyzer	Keysight	N9010B	MRTSUE07027	1 year	2025-10-13	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE11268	1 year	2025-12-10	WZ-TR3

Software	Version	Function
e3	230711	RE & CE
Controller_MF 7802	1.02	RE Antenna & Turntable
BenchVue Power Meter	2018.1	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.61dB Coplanar: 9kHz~30MHz: 2.62dB Horizontal: 30MHz~200MHz: 3.79dB 200MHz~1GHz: 3.91dB 1GHz~40GHz: 4.99dB Vertical: 30MHz~200MHz: 4.06dB 200MHz~1GHz: 5.21dB 1GHz~40GHz: 4.90dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.2dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.4dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.2dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.7%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)(10)	26dB Bandwidth	Conducted	Pass
15.407(a)(5)	Maximum Equivalent Isotropically Radiated Power (EIRP)		Pass
15.407(a)(5)	Maximum Power Spectral Density (EIRP)		Pass
15.407(b)(7)	In-Band Emission		Pass
15.407(d)(6)	Contention-Based Protocol		Pass
15.407(b)(6)	Unwanted Emissions	Radiated	Pass
15.407(b)(9), (10)	General Field Strength (Restricted Bands and Radiated Emission)		Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Notes:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 26dB Bandwidth Measurement

6.2.1. Test Limit

The maximum transmitter channel bandwidth for U–NII devices in the 5.925–7.125 GHz band is 320 megahertz.

6.2.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)1) (26dB Bandwidth)

KDB 789033 D02v02r01- Section II)D) (99% Bandwidth)

6.2.3. Test Setting

26dB Bandwidth


1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 1% to 5% of the OBW
3. $VBW \geq 3 \times RBW$
4. Span = 1.5 times to 5 times the OBW
5. Detector = peak
6. Trace mode = max hold
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument.

6.2.4. Test Setup

Spectrum Analyzer



DC Block
&
Attenuator



EUT



6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum EIRP over the frequency band of operation must not exceed 30 dBm.


6.3.2. Test Procedure

KDB 789033D02v02r01- Section E)2)d) Method SA-2

6.3.3. Test Setting

1. Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal
2. Set RBW = 1 MHz
3. Set VBW $\geq$ 3 MHz
4. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$
5. Sweep time = auto
6. Detector = power averaging (rms)
7. Allow the sweep to “free run”
8. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
9. Use the Channel Power function of the instrument.
10. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times

6.3.4. Test Setup

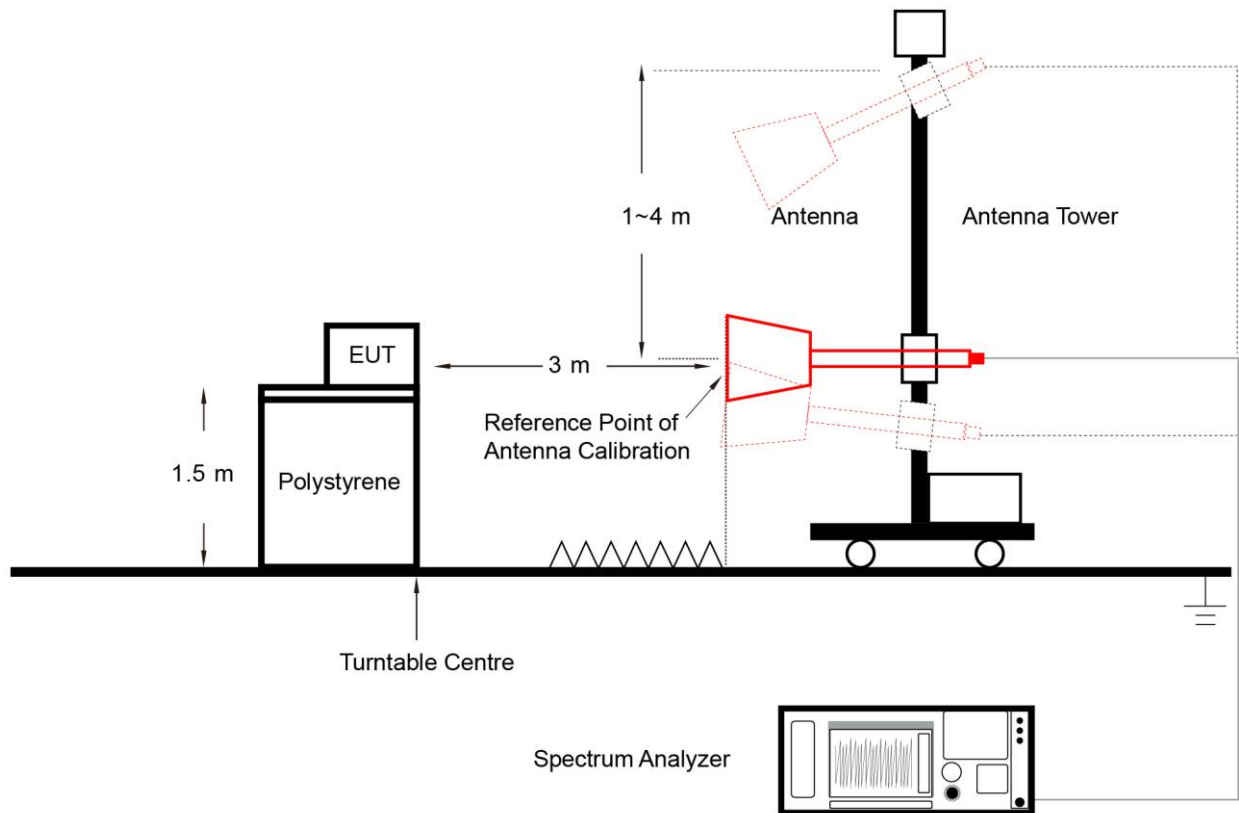

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum power spectral density must not exceed 5 dBm EIRP in any 1-megahertz band.


6.4.2. Test Procedure

KDB 789033 D02v02r01-Section II)F)

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
11. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

6.4.4. Test Setup

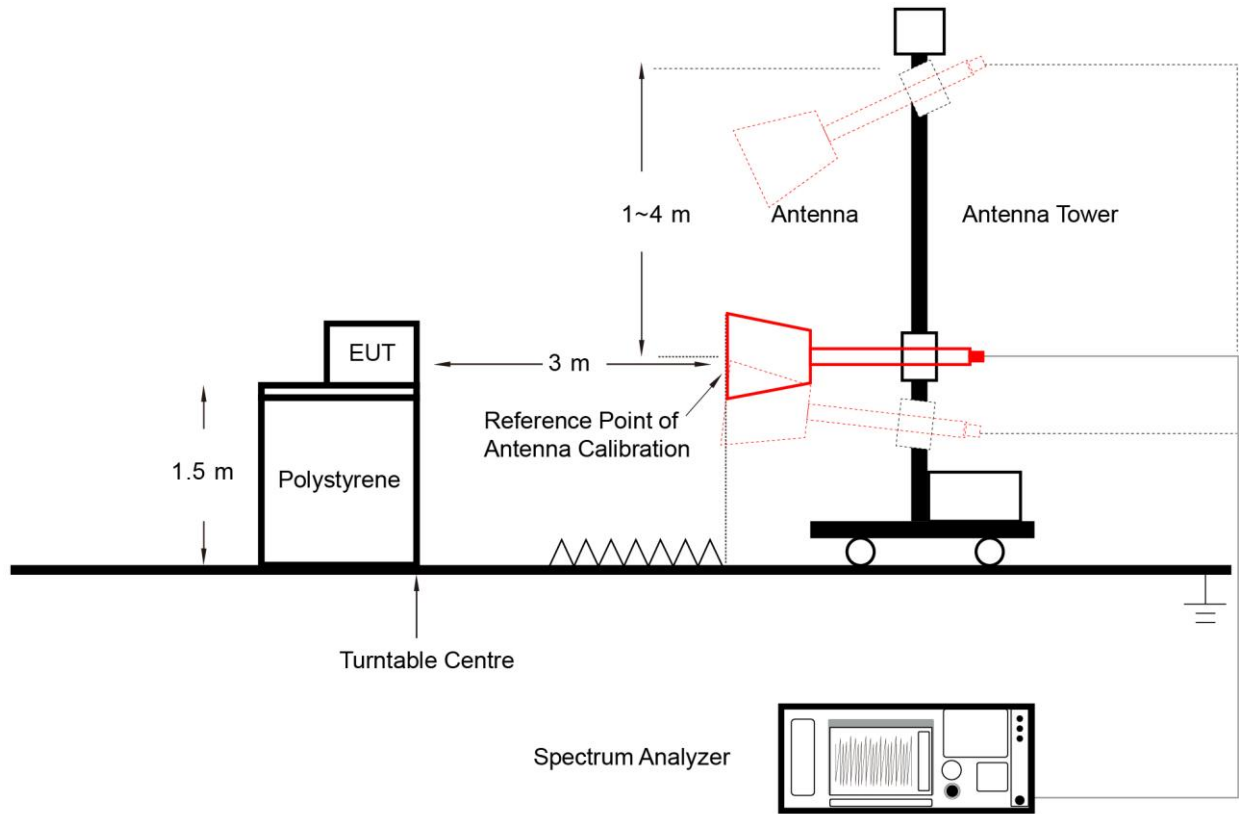

6.4.5. Test Result

Refer to Appendix A.4.

6.5. In-Band Emission Measurement

6.5.1. Test Limit

Suppressed by 20 dB at 1 MHz outside of the channel edge.

(The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)

Suppressed by 28 dB at one channel bandwidth from the channel center.

Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.

6.5.2. Test Procedure

KDB 987594 D02v02r01- Section II)J)

6.5.3. Test Setting

Emissions Mask Reference Level Measurement


1. Set the span to encompass the entire 26 dB EBW of the signal.
2. Set RBW = same RBW used for 26 dB EBW measurement.
3. Set VBW $\geq 3 \times$ RBW.
4. Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
5. Sweep time = auto.
6. Detector = RMS.
7. Trace average at least 100 traces in power averaging (rms) mode.
8. Use the peak search function on the instrument to find the peak of the spectrum.

In-Band Emission

1. Using the measuring equipment limit line function, develop the emissions mask based on rule.
2. Adjust the span to encompass the entire mask as necessary.
3. Clear trace.
4. Trace average at least 100 traces in power averaging (rms) mode.
5. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

6.5.4. Test Setup

Spectrum Analyzer



DC Block
&
Attenuator



EUT



6.5.5. Test Result

Refer to Appendix A.5.

6.6. Frequency Stability Measurement

6.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.6.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.6.3. Test Setup

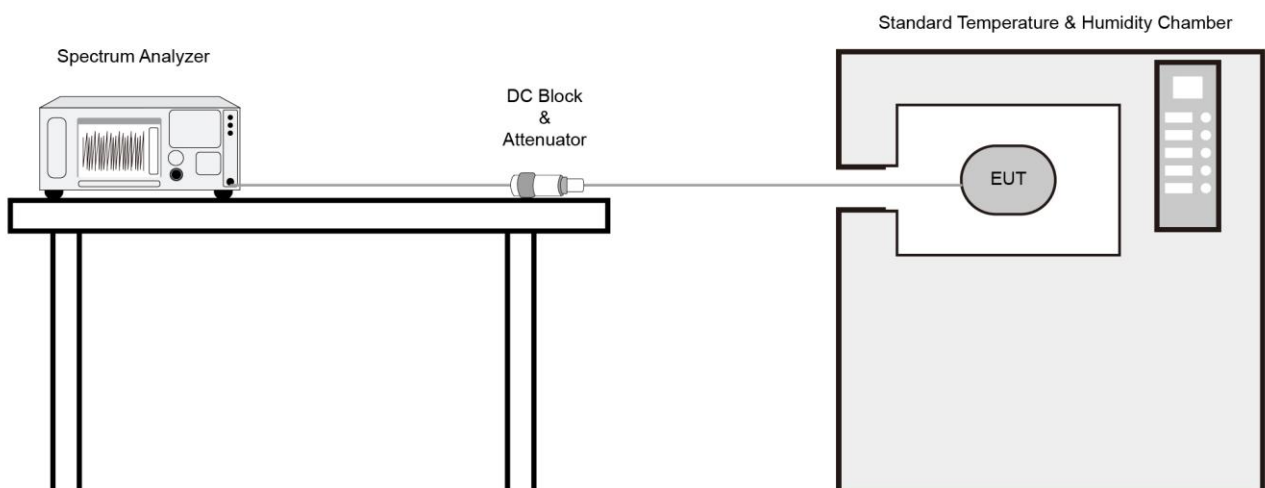

6.6.4. Test Result

Refer to Appendix A.6.

6.7. Contention Based Protocol Measurement

6.7.1. Test Limit

Unlicensed indoor low power device must detect co-channel radio frequency power that is at least -62dBm (The threshold is referenced to a 0dBi antenna gain.) or low.

Indoor low power device must detect an AWGN signal with 90% (or better) level of certainty.

6.7.2. Test Procedure


KDB 987594 D02v02r01- Section II)I)

6.7.3. Test Setting

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate a 10 MHz-wide AWGN signal. Use Table 1 of KDB 987594 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level. Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in below figure.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If

testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

6.7.4. Test Setup

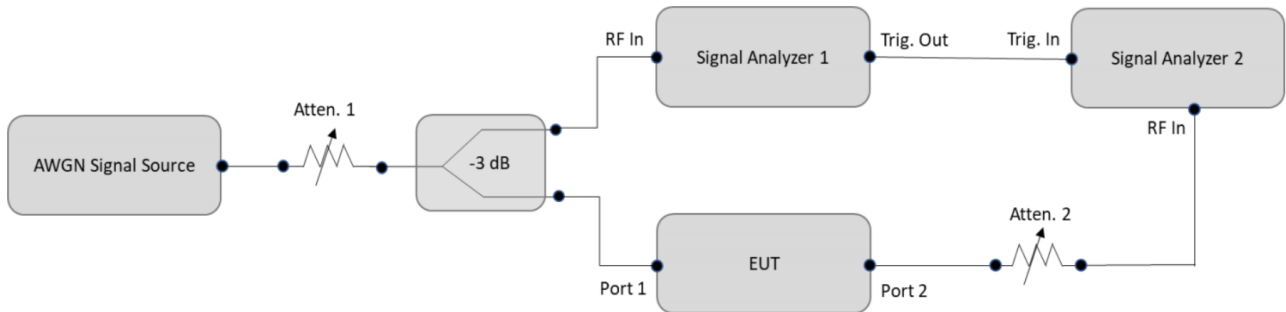

6.7.5. Test Result

Refer to Appendix A.7.

6.8. Radiated Spurious Emission Measurement

6.8.1. Test Limit

For 15.407(b)(5) requirement

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an EIRP. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v02r01 clause G

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure

KDB 789033 D02v02r01-Section II)G)

6.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.


If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.

802.11ax-HE20	VBW = 200Hz	802.11ax-HE40	VBW = 200Hz
802.11ax-HE80	VBW = 200Hz	802.11ax-HE160	VBW = 200Hz


4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.8.4. Test Setup


Below 30MHz Test Setup:

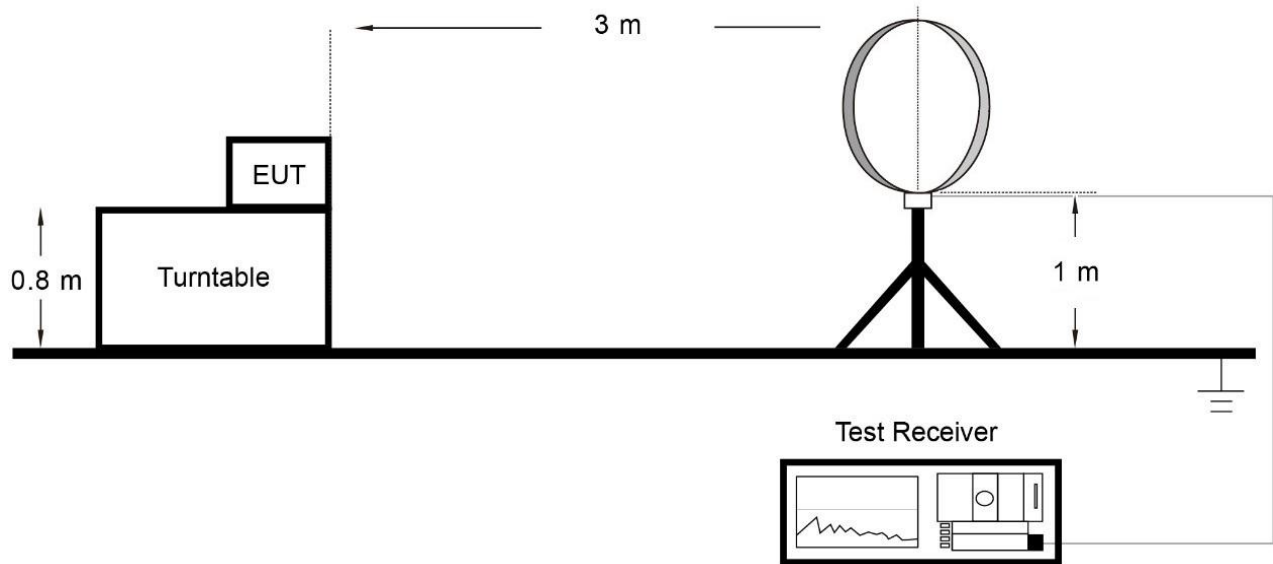

Below 1GHz Test Setup:

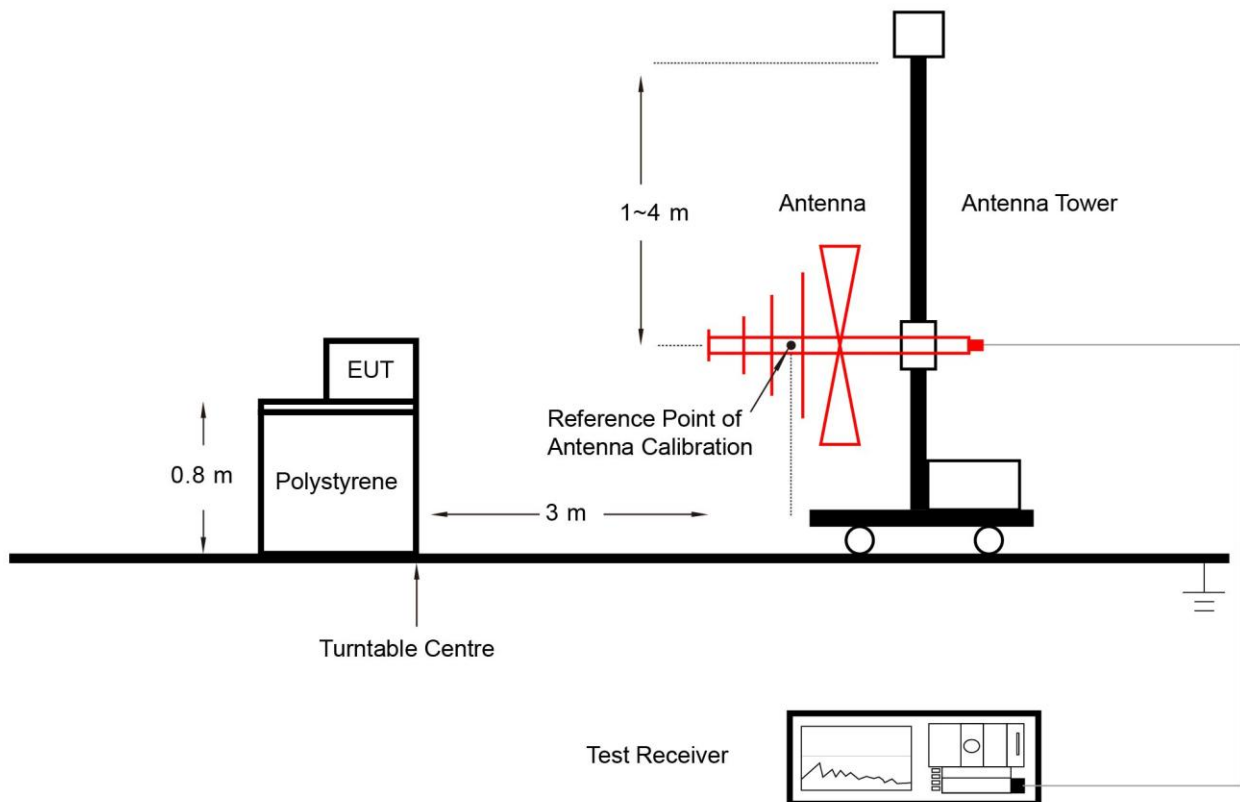

Above 1GHz Test Setup:

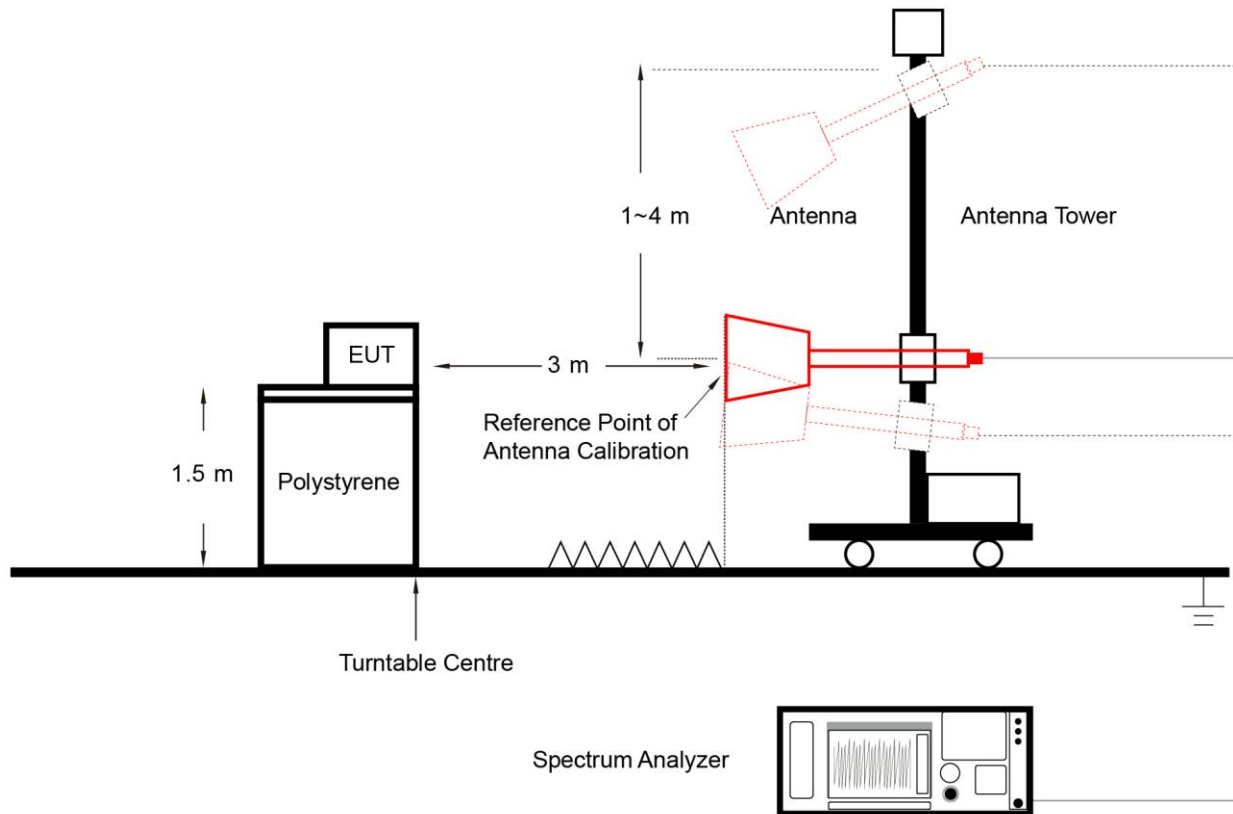

6.8.5. Test Result

Refer to Appendix A.8.

6.9. Radiated Restricted Band Edge Measurement

6.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b)(5) requirement:

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an EIRP. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v02r01 clause G - Unwanted Emission Measurement
Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.9.2. Test Procedure

KDB 789033 D02v02r01-Section II)G)

6.9.3. Test Setting

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.

802.11ax-HE20	VBW = 200Hz	802.11ax-HE40	VBW = 200Hz
802.11ax-HE80	VBW = 200Hz	802.11ax-HE160	VBW = 200Hz

4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.9.4. Test Setup

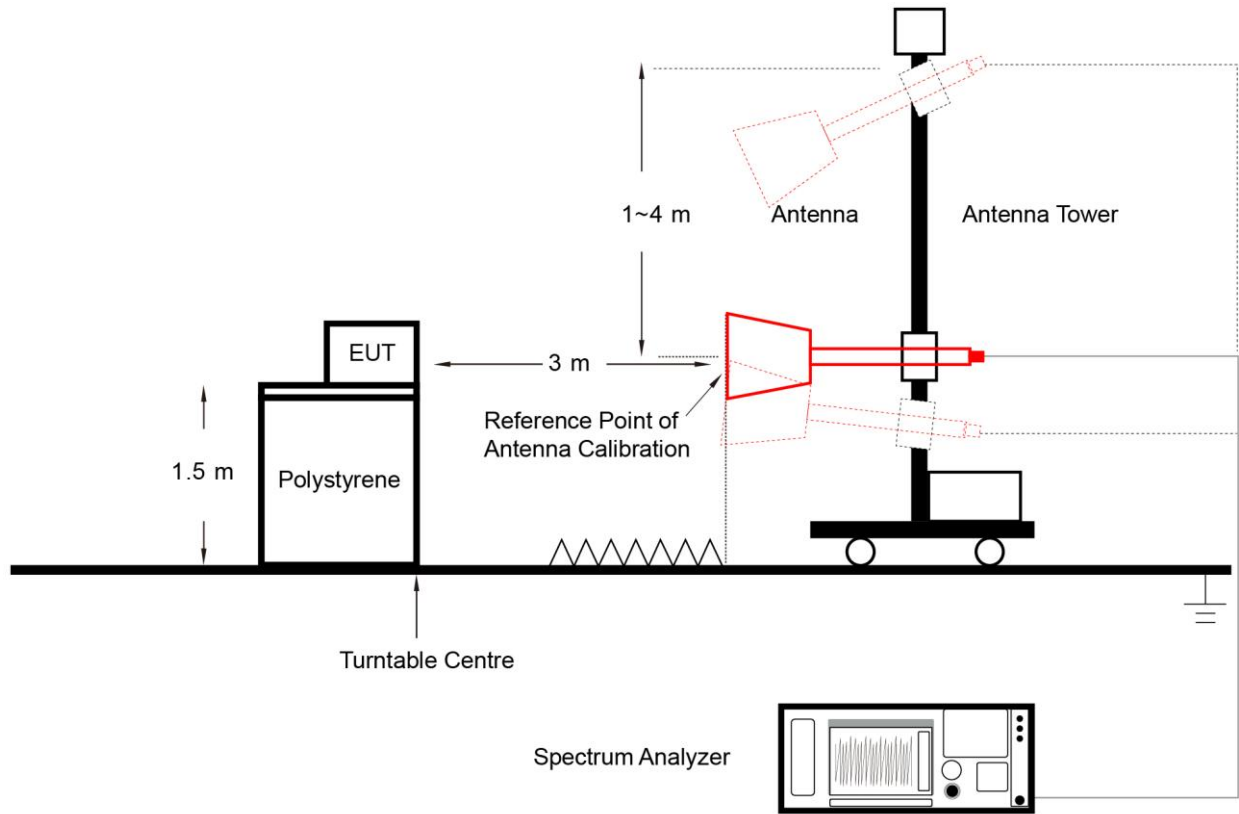

6.9.5. Test Result

Refer to Appendix A.9.

6.10. AC Conducted Emissions Measurement


6.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

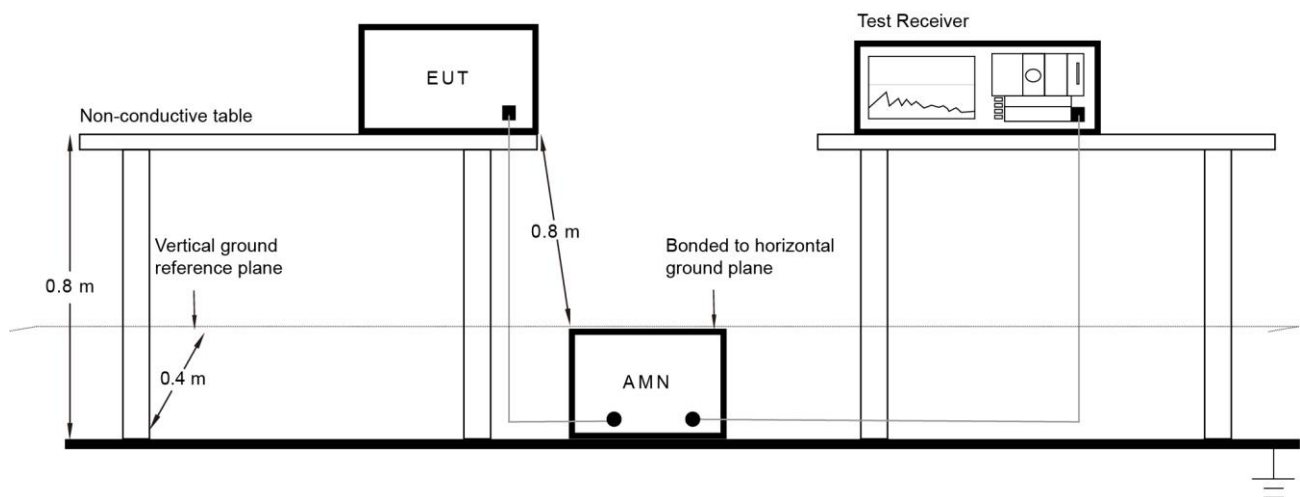

6.10.3. Test Result

Refer to Appendix A.10.

Appendix A – Test Result

A.1 Duty Cycle Test Result

Refer to MRT original report “2109RSU026-U2” clause A.1

A.2 26dB Bandwidth Test Result

Refer to MRT original report “2109RSU026-U2” clause A.2

Spot Check Test Data:

FB Filter (M5247)


Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-02-07	Test Mode	NSS=4

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Test Limit (MHz)
802.11ax-HE160	MCS0	47	6185	164.0	154.92	≤ 320

Note:

For channels with a nominal bandwidth less than 320 MHz compliance is demonstrated by way of the 26 dB EBW.

For channels with a nominal bandwidth of 320 MHz compliance is demonstrated by way of the 99% BW.

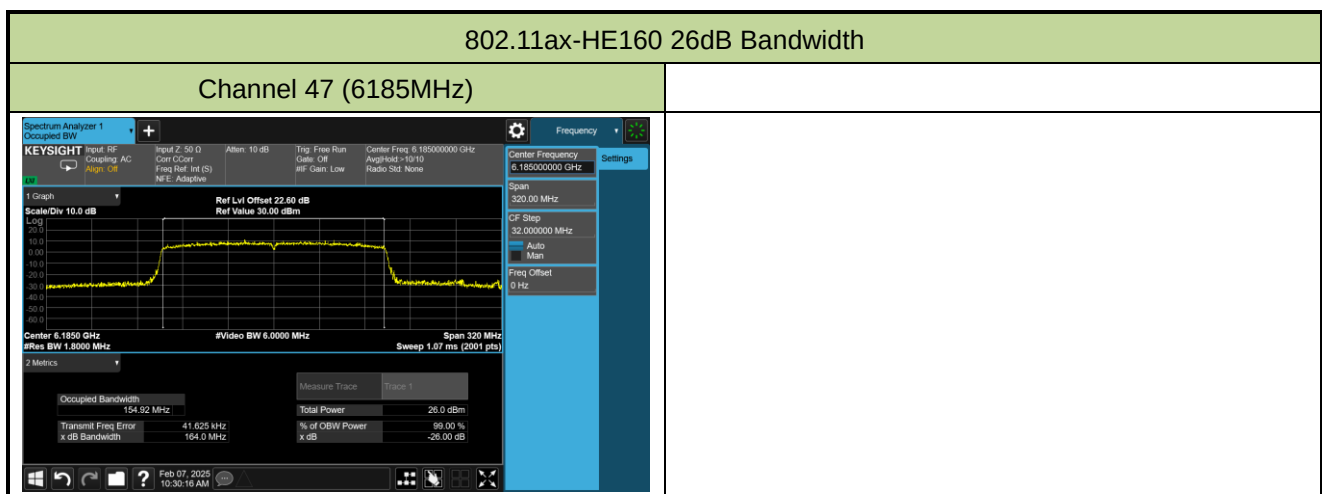

PB Filter (B8385)


Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-02-07	Test Mode	NSS=4

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Test Limit (MHz)
802.11ax-HE160	MCS0	47	6185	164.7	154.81	≤ 320

Note:

For channels with a nominal bandwidth less than 320 MHz compliance is demonstrated by way of the 26 dB EBW.

For channels with a nominal bandwidth of 320 MHz compliance is demonstrated by way of the 99% BW.

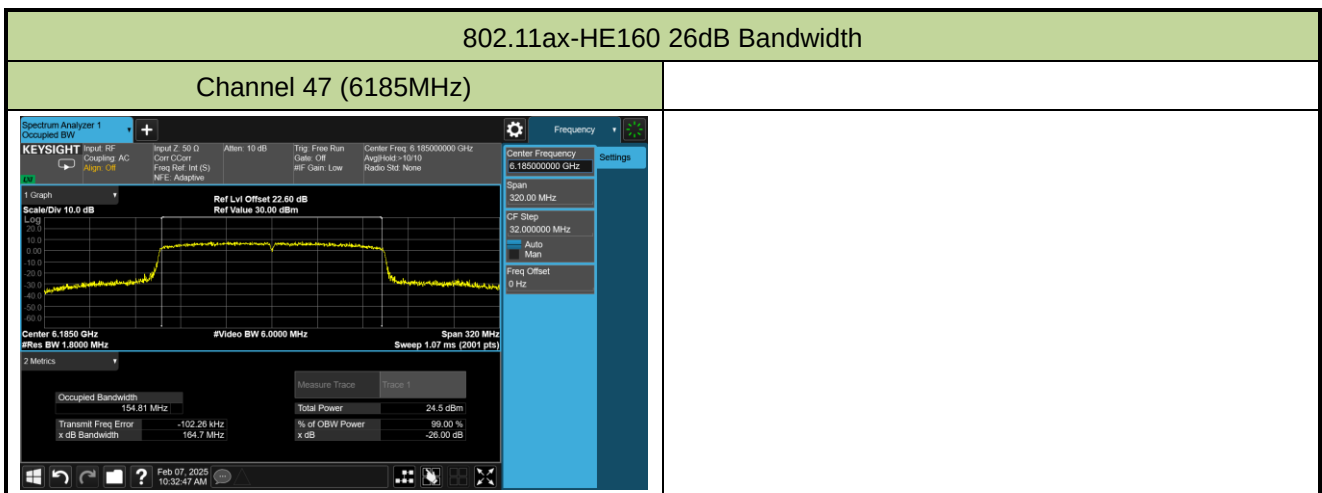

A.3 Output Power Test Result

FB Filter (M5247)

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-02-10	Test Mode	Nss = 1

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBμV/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	Limit (dBm)
802.11ax-HE20	MCS0	1	5955	109.6	14.40	85.91	15.06	≤ 30.00
802.11ax-HE20	MCS0	49	6195	108.6	13.40	85.91	14.06	≤ 30.00
802.11ax-HE20	MCS0	93	6415	109.5	14.30	85.91	14.96	≤ 30.00
802.11ax-HE20	MCS0	97	6435	109.5	14.30	85.91	14.96	≤ 30.00
802.11ax-HE20	MCS0	105	6475	108.7	13.50	85.91	14.16	≤ 30.00
802.11ax-HE20	MCS0	113	6515	108.6	13.40	85.91	14.06	≤ 30.00
802.11ax-HE20	MCS0	117	6535	109.0	13.80	85.91	14.46	≤ 30.00
802.11ax-HE20	MCS0	153	6715	108.4	13.20	85.91	13.86	≤ 30.00
802.11ax-HE20	MCS0	181	6855	108.7	13.50	85.91	14.16	≤ 30.00
802.11ax-HE20	MCS0	185	6875	109.4	14.20	85.91	14.86	≤ 30.00
802.11ax-HE20	MCS0	189	6895	108.4	13.20	85.91	13.86	≤ 30.00
802.11ax-HE20	MCS0	213	7015	108.8	13.60	85.91	14.26	≤ 30.00
802.11ax-HE20	MCS0	229	7095	108.5	13.30	85.91	13.96	≤ 30.00
802.11ax-HE40	MCS0	3	5965	111.4	16.20	85.31	16.89	≤ 30.00
802.11ax-HE40	MCS0	51	6205	111.3	16.10	85.31	16.79	≤ 30.00
802.11ax-HE40	MCS0	91	6405	111.8	16.60	85.31	17.29	≤ 30.00
802.11ax-HE40	MCS0	99	6445	111.9	16.70	85.31	17.39	≤ 30.00
802.11ax-HE40	MCS0	107	6485	111.3	16.10	85.31	16.79	≤ 30.00
802.11ax-HE40	MCS0	115	6525	111.9	16.70	85.31	17.39	≤ 30.00
802.11ax-HE40	MCS0	123	6565	111.7	16.50	85.31	17.19	≤ 30.00
802.11ax-HE40	MCS0	147	6685	111.6	16.40	85.31	17.09	≤ 30.00
802.11ax-HE40	MCS0	179	6845	112.2	17.00	85.31	17.69	≤ 30.00
802.11ax-HE40	MCS0	187	6885	112.4	17.20	85.31	17.89	≤ 30.00
802.11ax-HE40	MCS0	195	6925	112.0	16.80	85.31	17.49	≤ 30.00
802.11ax-HE40	MCS0	211	7005	112.0	16.80	85.31	17.49	≤ 30.00
802.11ax-HE40	MCS0	227	7085	112.5	17.30	85.31	17.99	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBuV/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	Limit (dBm)
802.11ax-HE80	MCS0	7	5985	113.9	18.70	92.90	19.02	≤ 30.00
802.11ax-HE80	MCS0	55	6225	114.5	19.30	92.90	19.62	≤ 30.00
802.11ax-HE80	MCS0	87	6385	114.6	19.40	92.90	19.72	≤ 30.00
802.11ax-HE80	MCS0	103	6465	114.7	19.50	92.90	19.82	≤ 30.00
802.11ax-HE80	MCS0	119	6545	114.9	19.70	92.90	20.02	≤ 30.00
802.11ax-HE80	MCS0	135	6625	114.6	19.40	92.90	19.72	≤ 30.00
802.11ax-HE80	MCS0	151	6705	114.2	19.00	92.90	19.32	≤ 30.00
802.11ax-HE80	MCS0	183	6865	113.6	18.40	92.90	18.72	≤ 30.00
802.11ax-HE80	MCS0	199	6945	113.5	18.30	92.90	18.62	≤ 30.00
802.11ax-HE80	MCS0	215	7025	113.6	18.40	92.90	18.72	≤ 30.00
802.11ax-HE160	MCS0	15	6025	117.2	22.00	91.70	22.38	≤ 30.00
802.11ax-HE160	MCS0	47	6185	116.9	21.70	91.70	22.08	≤ 30.00
802.11ax-HE160	MCS0	79	6345	116.9	21.70	91.70	22.08	≤ 30.00
802.11ax-HE160	MCS0	111	6505	118.0	22.80	91.70	23.18	≤ 30.00
802.11ax-HE160	MCS0	143	6665	117.3	22.10	91.70	22.48	≤ 30.00
802.11ax-HE160	MCS0	175	6825	116.7	21.50	91.70	21.88	≤ 30.00
802.11ax-HE160	MCS0	207	6985	116.1	20.90	91.70	21.28	≤ 30.00

Note 1: EIRP (dBm) = EIRP (dBuV/m) + Correction Factor @ 3m, Correction Factor @ 3m = $20\log(D) - 104.7$; where D is the measurement distance @3m = -95.2dB

Note 2: If Duty cycle<98%, Total EIRP (dBm) = EIRP (dBm) + $10*\log(1/\text{Duty cycle})$.

Note 3: Worst case polarization test data was shown in test report.

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-02-10	Test Mode	Nss = 4

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBuV/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	Limit (dBm)
802.11ax-HE20	MCS0	1	5955	110.8	15.60	85.91	16.26	≤ 30.00
802.11ax-HE20	MCS0	49	6195	112.1	16.90	85.91	17.56	≤ 30.00
802.11ax-HE20	MCS0	93	6415	112.1	16.90	85.91	17.56	≤ 30.00
802.11ax-HE20	MCS0	97	6435	112.1	16.90	85.91	17.56	≤ 30.00
802.11ax-HE20	MCS0	105	6475	111.5	16.30	85.91	16.96	≤ 30.00
802.11ax-HE20	MCS0	113	6515	111.9	16.70	85.91	17.36	≤ 30.00
802.11ax-HE20	MCS0	117	6535	111.8	16.60	85.91	17.26	≤ 30.00
802.11ax-HE20	MCS0	153	6715	112.1	16.90	85.91	17.56	≤ 30.00
802.11ax-HE20	MCS0	181	6855	111.5	16.30	85.91	16.96	≤ 30.00
802.11ax-HE20	MCS0	185	6875	111.9	16.70	85.91	17.36	≤ 30.00
802.11ax-HE20	MCS0	189	6895	111.9	16.70	85.91	17.36	≤ 30.00
802.11ax-HE20	MCS0	213	7015	111.4	16.20	85.91	16.86	≤ 30.00
802.11ax-HE20	MCS0	229	7095	111.6	16.40	85.91	17.06	≤ 30.00
802.11ax-HE40	MCS0	3	5965	114.6	19.40	85.31	20.09	≤ 30.00
802.11ax-HE40	MCS0	51	6205	115.1	19.90	85.31	20.59	≤ 30.00
802.11ax-HE40	MCS0	91	6405	115.1	19.90	85.31	20.59	≤ 30.00
802.11ax-HE40	MCS0	99	6445	114.7	19.50	85.31	20.19	≤ 30.00
802.11ax-HE40	MCS0	107	6485	114.0	18.80	85.31	19.49	≤ 30.00
802.11ax-HE40	MCS0	115	6525	114.6	19.40	85.31	20.09	≤ 30.00
802.11ax-HE40	MCS0	123	6565	114.0	18.80	85.31	19.49	≤ 30.00
802.11ax-HE40	MCS0	147	6685	114.6	19.40	85.31	20.09	≤ 30.00
802.11ax-HE40	MCS0	179	6845	114.9	19.70	85.31	20.39	≤ 30.00
802.11ax-HE40	MCS0	187	6885	114.8	19.60	85.31	20.29	≤ 30.00
802.11ax-HE40	MCS0	195	6925	114.0	18.80	85.31	19.49	≤ 30.00
802.11ax-HE40	MCS0	211	7005	114.6	19.40	85.31	20.09	≤ 30.00
802.11ax-HE40	MCS0	227	7085	113.5	18.30	85.31	18.99	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBuV/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	Limit (dBm)
802.11ax-HE80	MCS0	7	5985	117.4	22.20	92.90	22.52	≤ 30.00
802.11ax-HE80	MCS0	55	6225	118.2	23.00	92.90	23.32	≤ 30.00
802.11ax-HE80	MCS0	87	6385	117.8	22.60	92.90	22.92	≤ 30.00
802.11ax-HE80	MCS0	103	6465	118.4	23.20	92.90	23.52	≤ 30.00
802.11ax-HE80	MCS0	119	6545	118.3	23.10	92.90	23.42	≤ 30.00
802.11ax-HE80	MCS0	135	6625	118.1	22.90	92.90	23.22	≤ 30.00
802.11ax-HE80	MCS0	151	6705	117.9	22.70	92.90	23.02	≤ 30.00
802.11ax-HE80	MCS0	183	6865	117.1	21.90	92.90	22.22	≤ 30.00
802.11ax-HE80	MCS0	199	6945	117.4	22.20	92.90	22.52	≤ 30.00
802.11ax-HE80	MCS0	215	7025	117.6	22.40	92.90	22.72	≤ 30.00
802.11ax-HE160	MCS0	15	6025	120.7	25.50	91.70	25.88	≤ 30.00
802.11ax-HE160	MCS0	47	6185	120.4	25.20	91.70	25.58	≤ 30.00
802.11ax-HE160	MCS0	79	6345	121.3	26.10	91.70	26.48	≤ 30.00
802.11ax-HE160	MCS0	111	6505	120.4	25.20	91.70	25.58	≤ 30.00
802.11ax-HE160	MCS0	143	6665	120.6	25.40	91.70	25.78	≤ 30.00
802.11ax-HE160	MCS0	175	6825	121.1	25.90	91.70	26.28	≤ 30.00
802.11ax-HE160	MCS0	207	6985	120.7	25.50	91.70	25.88	≤ 30.00

Note 1: EIRP (dBm) = EIRP (dBuV/m) + Correction Factor @ 3m, Correction Factor @ 3m = $20\log(D) - 104.7$; where D is the measurement distance @3m = -95.2dB

Note 2: If Duty cycle<98%, Total EIRP (dBm) = EIRP (dBm) + $10*\log(1/\text{Duty cycle})$.

Note 3: Worst case polarization test data was shown in test report.

PB Filter (B8385)

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-02-10	Test Mode	Nss = 1

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBuV/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	Limit (dBm)
802.11ax-HE20	MCS0	33	6115	108.3	13.10	85.91	13.76	≤ 30.00
802.11ax-HE20	MCS0	61	6255	108.2	13.00	85.91	13.66	≤ 30.00
802.11ax-HE20	MCS0	93	6415	109.8	14.60	85.91	15.26	≤ 30.00
802.11ax-HE20	MCS0	97	6435	109.3	14.10	85.91	14.76	≤ 30.00
802.11ax-HE20	MCS0	105	6475	108.5	13.30	85.91	13.96	≤ 30.00
802.11ax-HE20	MCS0	113	6515	108.6	13.40	85.91	14.06	≤ 30.00
802.11ax-HE20	MCS0	117	6535	109.1	13.90	85.91	14.56	≤ 30.00
802.11ax-HE20	MCS0	153	6715	108.6	13.40	85.91	14.06	≤ 30.00
802.11ax-HE20	MCS0	181	6855	109.1	13.90	85.91	14.56	≤ 30.00
802.11ax-HE20	MCS0	185	6875	108.9	13.70	85.91	14.36	≤ 30.00
802.11ax-HE20	MCS0	189	6895	108.0	12.80	85.91	13.46	≤ 30.00
802.11ax-HE20	MCS0	213	7015	108.9	13.70	85.91	14.36	≤ 30.00
802.11ax-HE20	MCS0	229	7095	109.5	14.30	85.91	14.96	≤ 30.00
802.11ax-HE40	MCS0	35	6125	110.8	15.60	85.31	16.29	≤ 30.00
802.11ax-HE40	MCS0	59	6245	111.6	16.40	85.31	17.09	≤ 30.00
802.11ax-HE40	MCS0	91	6405	111.4	16.20	85.31	16.89	≤ 30.00
802.11ax-HE40	MCS0	99	6445	111.8	16.60	85.31	17.29	≤ 30.00
802.11ax-HE40	MCS0	107	6485	110.7	15.50	85.31	16.19	≤ 30.00
802.11ax-HE40	MCS0	115	6525	111.3	16.10	85.31	16.79	≤ 30.00
802.11ax-HE40	MCS0	123	6565	110.7	15.50	85.31	16.19	≤ 30.00
802.11ax-HE40	MCS0	147	6685	111.0	15.80	85.31	16.49	≤ 30.00
802.11ax-HE40	MCS0	179	6845	111.8	16.60	85.31	17.29	≤ 30.00
802.11ax-HE40	MCS0	187	6885	111.0	15.80	85.31	16.49	≤ 30.00
802.11ax-HE40	MCS0	195	6925	110.8	15.60	85.31	16.29	≤ 30.00
802.11ax-HE40	MCS0	211	7005	112.3	17.10	85.31	17.79	≤ 30.00
802.11ax-HE40	MCS0	227	7085	112.3	17.10	85.31	17.79	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBuV/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	Limit (dBm)
802.11ax-HE80	MCS0	39	6145	111.5	16.30	92.90	16.62	≤ 30.00
802.11ax-HE80	MCS0	55	6225	113.4	18.20	92.90	18.52	≤ 30.00
802.11ax-HE80	MCS0	87	6385	113.6	18.40	92.90	18.72	≤ 30.00
802.11ax-HE80	MCS0	103	6465	114.7	19.50	92.90	19.82	≤ 30.00
802.11ax-HE80	MCS0	119	6545	115.0	19.80	92.90	20.12	≤ 30.00
802.11ax-HE80	MCS0	135	6625	112.4	17.20	92.90	17.52	≤ 30.00
802.11ax-HE80	MCS0	151	6705	113.4	18.20	92.90	18.52	≤ 30.00
802.11ax-HE80	MCS0	167	6865	111.0	15.80	92.90	16.12	≤ 30.00
802.11ax-HE80	MCS0	199	6945	112.1	16.90	92.90	17.22	≤ 30.00
802.11ax-HE80	MCS0	215	7025	113.4	18.20	92.90	18.52	≤ 30.00
802.11ax-HE160	MCS0	47	6185	115.3	20.10	91.70	20.48	≤ 30.00
802.11ax-HE160	MCS0	79	6345	115.3	20.10	91.70	20.48	≤ 30.00
802.11ax-HE160	MCS0	111	6505	117.6	22.40	91.70	22.78	≤ 30.00
802.11ax-HE160	MCS0	143	6665	116.9	21.70	91.70	22.08	≤ 30.00
802.11ax-HE160	MCS0	175	6825	115.4	20.20	91.70	20.58	≤ 30.00
802.11ax-HE160	MCS0	207	6985	116.1	20.90	91.70	21.28	≤ 30.00

Note 1: EIRP (dBm) = EIRP (dBuV/m) + Correction Factor @ 3m, Correction Factor @ 3m = $20\log(D) - 104.7$; where D is the measurement distance @3m = -95.2dB

Note 2: If Duty cycle<98%, Total EIRP (dBm) = EIRP (dBm) + $10*\log(1/\text{Duty cycle})$.

Note 3: Worst case polarization test data was shown in test report.

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-02-10	Test Mode	Nss = 4

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBuV/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	Limit (dBm)
802.11ax-HE20	MCS0	33	6115	109.5	14.30	85.91	14.96	≤ 30.00
802.11ax-HE20	MCS0	61	6255	110.9	15.70	85.91	16.36	≤ 30.00
802.11ax-HE20	MCS0	93	6415	110.0	14.80	85.91	15.46	≤ 30.00
802.11ax-HE20	MCS0	97	6435	110.9	15.70	85.91	16.36	≤ 30.00
802.11ax-HE20	MCS0	105	6475	110.5	15.30	85.91	15.96	≤ 30.00
802.11ax-HE20	MCS0	113	6515	111.2	16.00	85.91	16.66	≤ 30.00
802.11ax-HE20	MCS0	117	6535	110.6	15.40	85.91	16.06	≤ 30.00
802.11ax-HE20	MCS0	153	6715	111.6	16.40	85.91	17.06	≤ 30.00
802.11ax-HE20	MCS0	181	6855	110.5	15.30	85.91	15.96	≤ 30.00
802.11ax-HE20	MCS0	185	6875	110.5	15.30	85.91	15.96	≤ 30.00
802.11ax-HE20	MCS0	189	6895	110.9	15.70	85.91	16.36	≤ 30.00
802.11ax-HE20	MCS0	213	7015	109.7	14.50	85.91	15.16	≤ 30.00
802.11ax-HE20	MCS0	229	7095	110.1	14.90	85.91	15.56	≤ 30.00
802.11ax-HE40	MCS0	35	6125	113.5	18.30	85.31	18.99	≤ 30.00
802.11ax-HE40	MCS0	59	6245	114.6	19.40	85.31	20.09	≤ 30.00
802.11ax-HE40	MCS0	91	6405	114.7	19.50	85.31	20.19	≤ 30.00
802.11ax-HE40	MCS0	99	6445	114.5	19.30	85.31	19.99	≤ 30.00
802.11ax-HE40	MCS0	107	6485	113.9	18.70	85.31	19.39	≤ 30.00
802.11ax-HE40	MCS0	115	6525	114.7	19.50	85.31	20.19	≤ 30.00
802.11ax-HE40	MCS0	123	6565	112.6	17.40	85.31	18.09	≤ 30.00
802.11ax-HE40	MCS0	147	6685	114.2	19.00	85.31	19.69	≤ 30.00
802.11ax-HE40	MCS0	179	6845	114.5	19.30	85.31	19.99	≤ 30.00
802.11ax-HE40	MCS0	187	6885	114.0	18.80	85.31	19.49	≤ 30.00
802.11ax-HE40	MCS0	195	6925	113.0	17.80	85.31	18.49	≤ 30.00
802.11ax-HE40	MCS0	211	7005	114.0	18.80	85.31	19.49	≤ 30.00
802.11ax-HE40	MCS0	227	7085	113.2	18.00	85.31	18.69	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBuV/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	Limit (dBm)
802.11ax-HE80	MCS0	39	6145	116.6	21.40	92.90	21.72	≤ 30.00
802.11ax-HE80	MCS0	55	6225	116.7	21.50	92.90	21.82	≤ 30.00
802.11ax-HE80	MCS0	87	6385	117.3	22.10	92.90	22.42	≤ 30.00
802.11ax-HE80	MCS0	103	6465	118.0	22.80	92.90	23.12	≤ 30.00
802.11ax-HE80	MCS0	119	6545	117.1	21.90	92.90	22.22	≤ 30.00
802.11ax-HE80	MCS0	135	6625	116.0	20.80	92.90	21.12	≤ 30.00
802.11ax-HE80	MCS0	151	6705	118.1	22.90	92.90	23.22	≤ 30.00
802.11ax-HE80	MCS0	167	6865	116.7	21.50	92.90	21.82	≤ 30.00
802.11ax-HE80	MCS0	199	6945	116.4	21.20	92.90	21.52	≤ 30.00
802.11ax-HE80	MCS0	215	7025	117.5	22.30	92.90	22.62	≤ 30.00
802.11ax-HE160	MCS0	47	6185	120.3	25.10	91.70	25.48	≤ 30.00
802.11ax-HE160	MCS0	79	6345	120.2	25.00	91.70	25.38	≤ 30.00
802.11ax-HE160	MCS0	111	6505	120.4	25.20	91.70	25.58	≤ 30.00
802.11ax-HE160	MCS0	143	6665	119.8	24.60	91.70	24.98	≤ 30.00
802.11ax-HE160	MCS0	175	6825	119.7	24.50	91.70	24.88	≤ 30.00
802.11ax-HE160	MCS0	207	6985	120.6	25.40	91.70	25.78	≤ 30.00

Note 1: EIRP (dBm) = EIRP (dBuV/m) + Correction Factor @ 3m, Correction Factor @ 3m = $20\log(D) - 104.7$; where D is the measurement distance @3m = -95.2dB

Note 2: If Duty cycle<98%, Total EIRP (dBm) = EIRP (dBm) + $10*\log(1/\text{Duty cycle})$.

Note 3: Worst case polarization test data was shown in test report.

A.4 Power Spectral Density Test Result

Refer to MRT original report "2109RSU026-U2" clause A.4

Spot Check Test Data:

FB Filter (M5247)

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2025-01-23	Test Mode	Nss = 1

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP PSD (dBμV/m/MHz)	EIRP PSD (dBm/MHz)	Duty Cycle (%)	Final EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
802.11ax-HE20	MCS0	117	6535	99.212	4.01	85.91	4.67	≤ 5.00

Note 1: EIRP PSD (dBm/MHz) = EIRP PSD (dBμV/m/MHz) + Correction Factor @ 3m, Correction Factor @ 3m = 20log(D) - 104.7; where D is the measurement distance @3m = -95.2dB

Note 2: If Duty cycle<98%, Final EIRP PSD (dBm/MHz) = EIRP PSD (dBm/MHz) + 10*Log(1/Duty cycle).

Note 3: Worst case polarization test data was shown in test report.

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2025-01-23	Test Mode	Nss = 4

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP PSD (dBμV/m/MHz)	EIRP PSD (dBm/MHz)	Duty Cycle (%)	Final EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
802.11ax-HE40	MCS0	211	7005	98.833	3.63	85.31	4.32	≤ 5.00


Note 1: EIRP PSD (dBm/MHz) = EIRP PSD (dBμV/m/MHz) + Correction Factor @ 3m, Correction Factor @ 3m = 20log(D) - 104.7; where D is the measurement distance @3m = -95.2dB

Note 2: If Duty cycle<98%, Final EIRP PSD (dBm/MHz) = EIRP PSD (dBm/MHz) + 10*Log(1/Duty cycle).

Note 3: Worst case polarization test data was shown in test report.


802.11ax-HE20 Power Spectral Density- Ant 0 (Nss = 1)

Channel 117 (6535MHz)

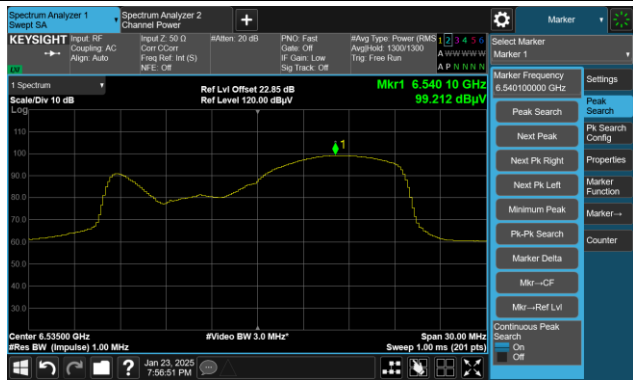

802.11ax-HE40 Power Spectral Density (Nss = 4)

Channel 211 (7005MHz)

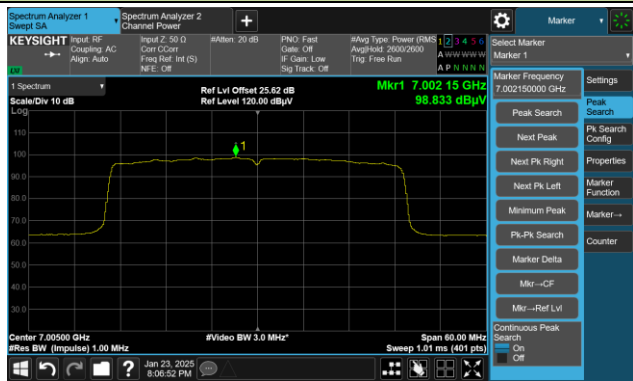

PB Filter (B8385)

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2025-01-23	Test Mode	Nss = 1

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP PSD (dBμV/m/MHz)	EIRP PSD (dBm/MHz)	Duty Cycle (%)	Final EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
802.11ax-HE20	MCS0	117	6535	99.078	3.88	85.91	4.54	≤ 5.00

Note 1: EIRP PSD (dBm/MHz) = EIRP PSD (dBμV/m/MHz) + Correction Factor @ 3m, Correction Factor @ 3m = $20\log(D) - 104.7$; where D is the measurement distance @3m = -95.2dB

Note 2: If Duty cycle<98%, Final EIRP PSD (dBm/MHz) = EIRP PSD (dBm/MHz) + $10*\log(1/\text{Duty cycle})$.

Note 3: Worst case polarization test data was shown in test report.

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2025-01-23	Test Mode	Nss = 4

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP PSD (dBμV/m/MHz)	EIRP PSD (dBm/MHz)	Duty Cycle (%)	Final EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
802.11ax-HE40	MCS0	211	7005	98.181	2.98	85.31	3.67	≤ 5.00


Note 1: EIRP PSD (dBm/MHz) = EIRP PSD (dBμV/m/MHz) + Correction Factor @ 3m, Correction Factor @ 3m = $20\log(D) - 104.7$; where D is the measurement distance @3m = -95.2dB

Note 2: If Duty cycle<98%, Final EIRP PSD (dBm/MHz) = EIRP PSD (dBm/MHz) + $10*\log(1/\text{Duty cycle})$.

Note 3: Worst case polarization test data was shown in test report.


802.11ax-HE20 Power Spectral Density- Ant 0 (Nss = 1)

Channel 117 (6535MHz)

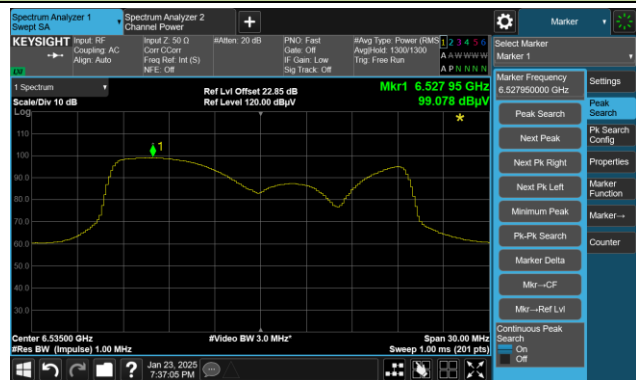

802.11ax-HE40 Power Spectral Density (Nss = 4)

Channel 211 (7005MHz)

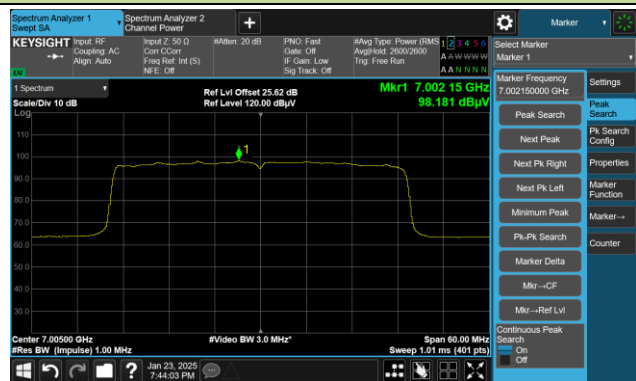

A.5 In-Band Emission Measurement

Refer to MRT original report “2109RSU026-U2” clause A.4

Spot Check Test Data:


FB Filter (M5247)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-02-07	Test Mode	Nss=4


802.11ax-HE20 – Ant 0

Channel 01 (5955MHz)

The Reference Level

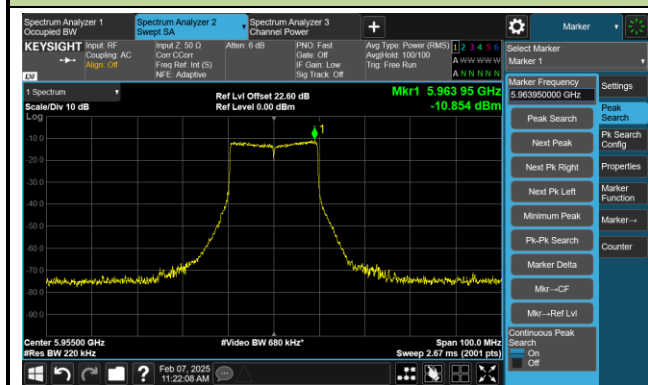


The Mask Data

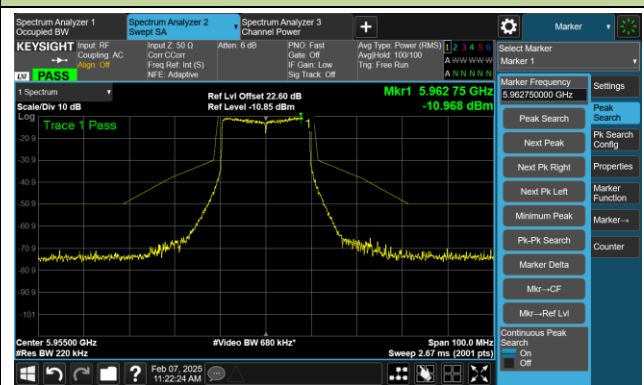


Channel 97 (6435MHz)

The Reference Level

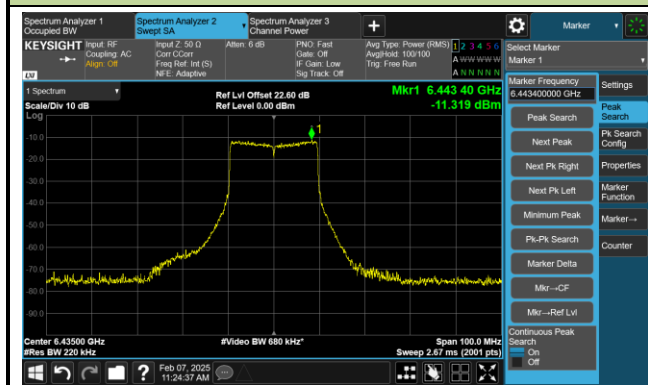


The Mask Data

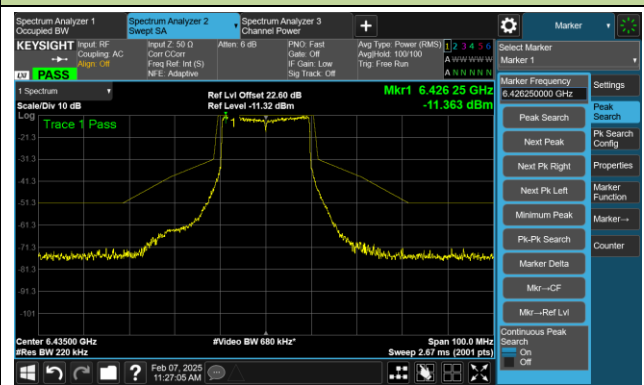


802.11ax-HE20 – Ant 0

Channel 117 (6535MHz)

The Reference Level

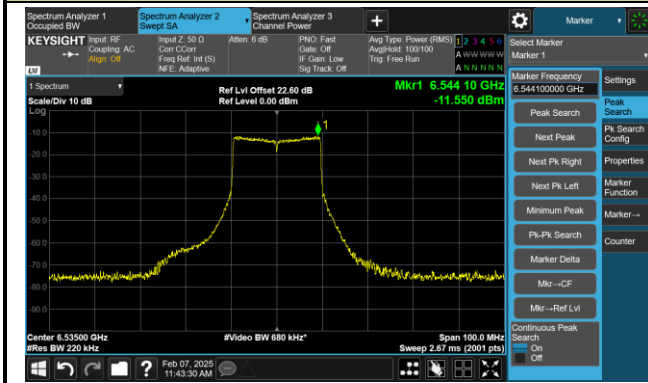


The Mask Data

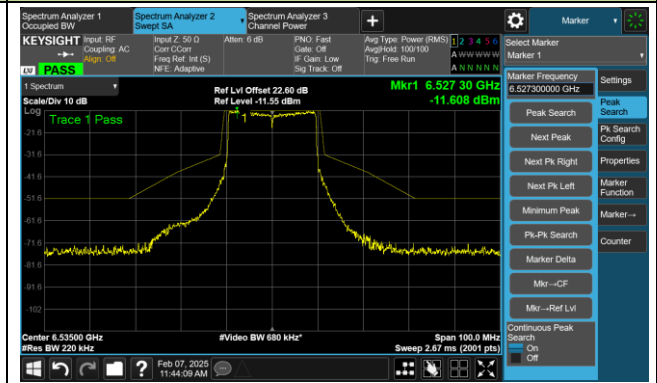


Channel 189 (6895MHz)

The Reference Level

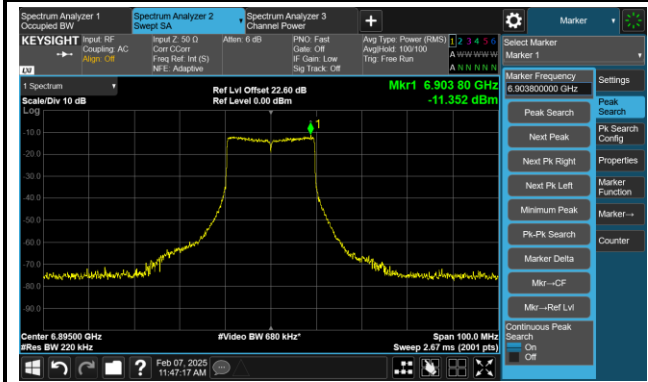


The Mask Data

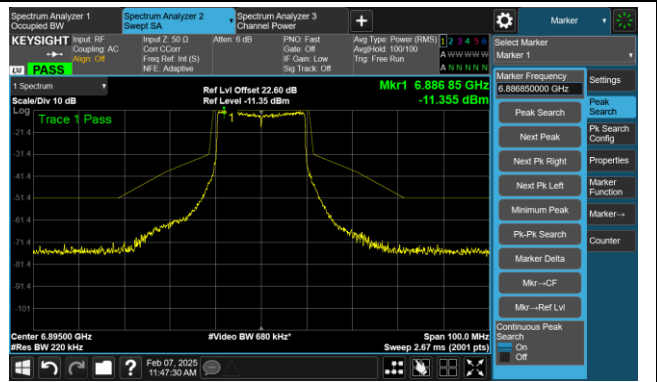


802.11ax-HE40 – Ant 0

Channel 03 (5965MHz)

The Reference Level

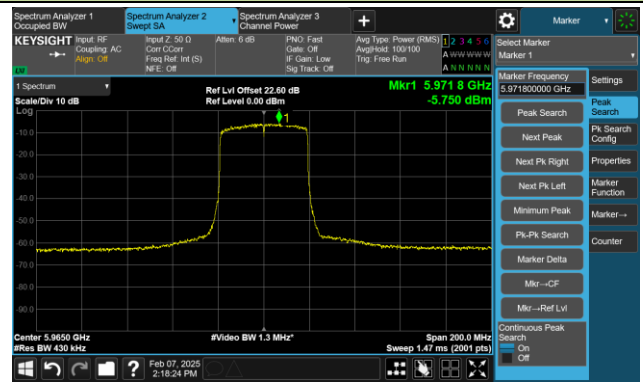


The Mask Data

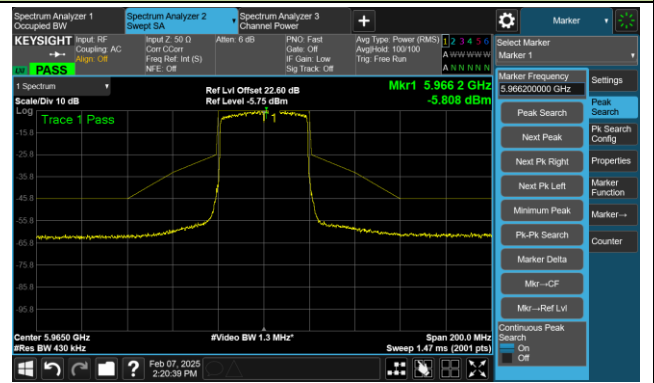


Channel 99 (6445MHz)

The Reference Level

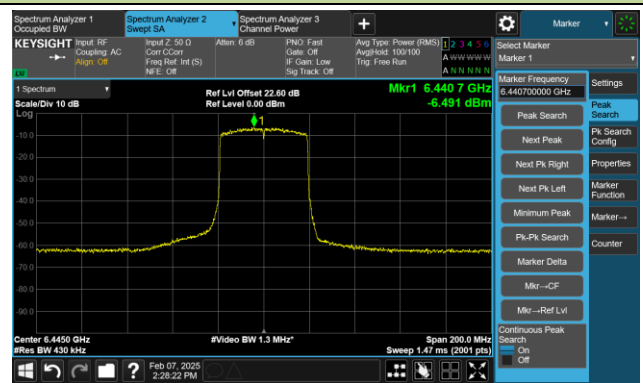


The Mask Data

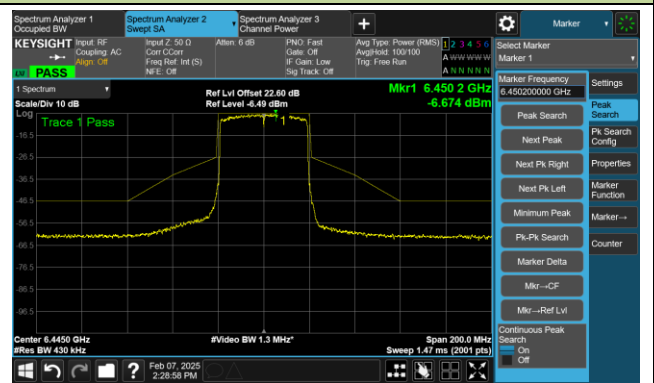


Channel 123 (6565MHz)

The Reference Level

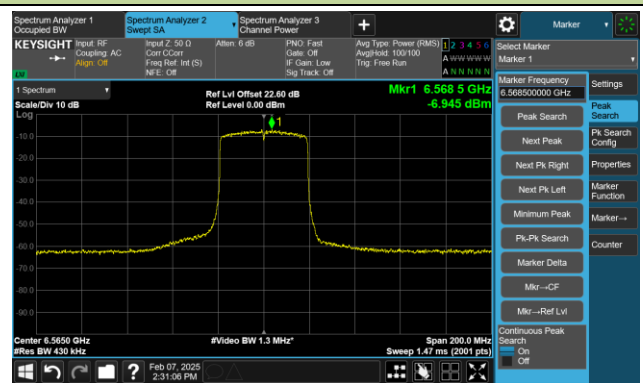


The Mask Data

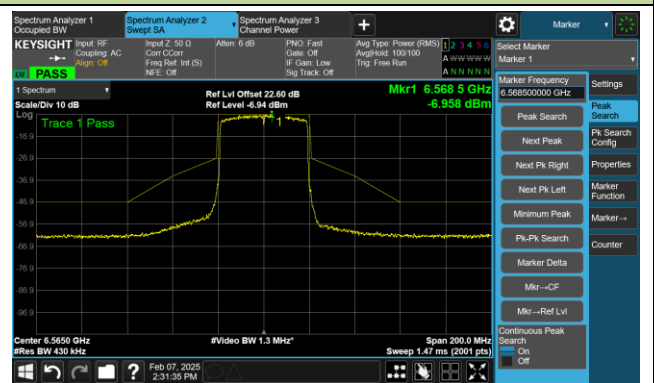


802.11ax-HE40 – Ant 0

Channel 195 (6925MHz)

The Reference Level

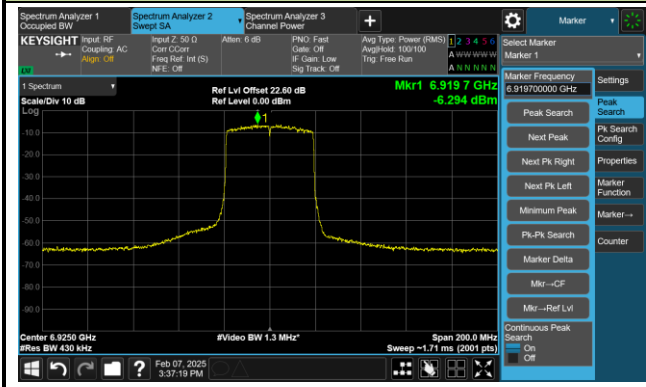


The Mask Data

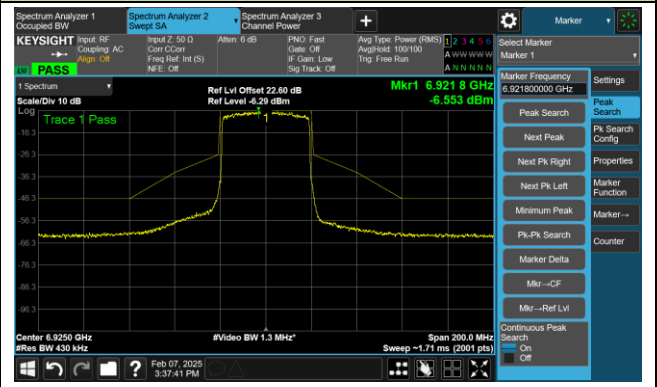


802.11ax-HE80 – Ant 0

Channel 07 (5985MHz)

The Reference Level

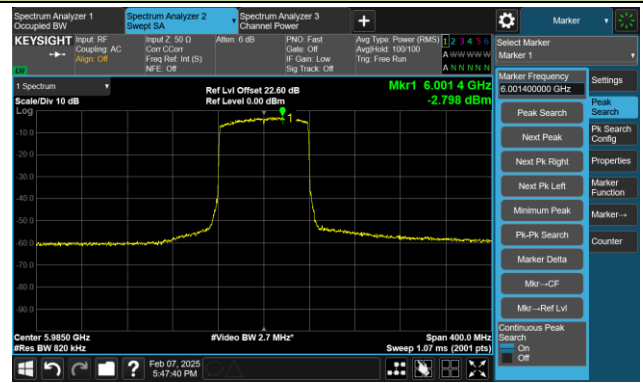


The Mask Data

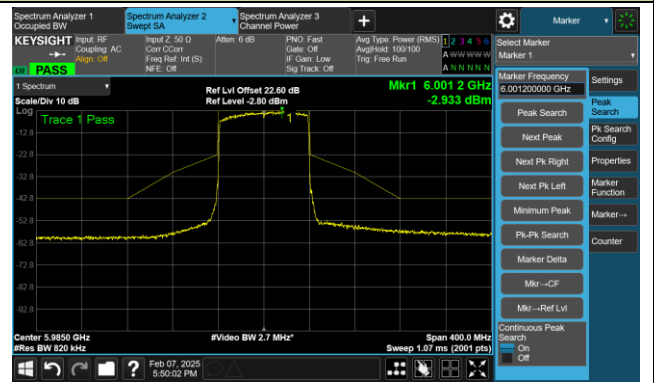


Channel 103 (6465MHz)

The Reference Level

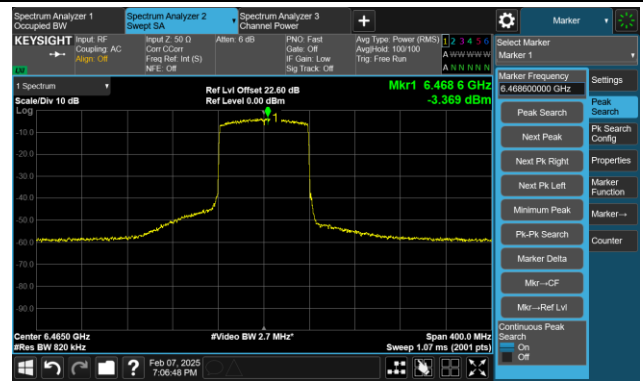


The Mask Data

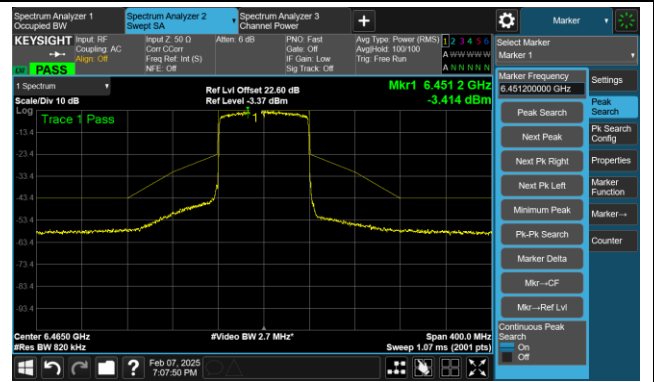


Channel 135 (6625MHz)

The Reference Level

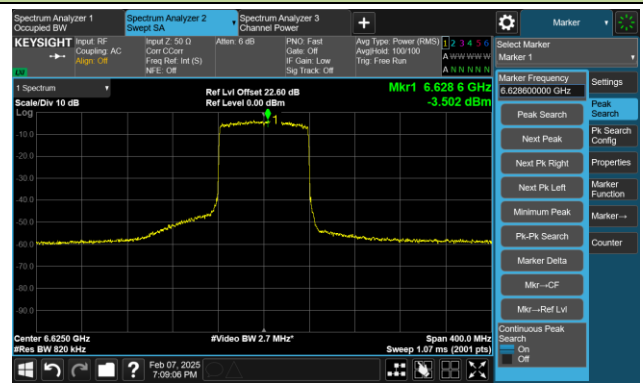


The Mask Data

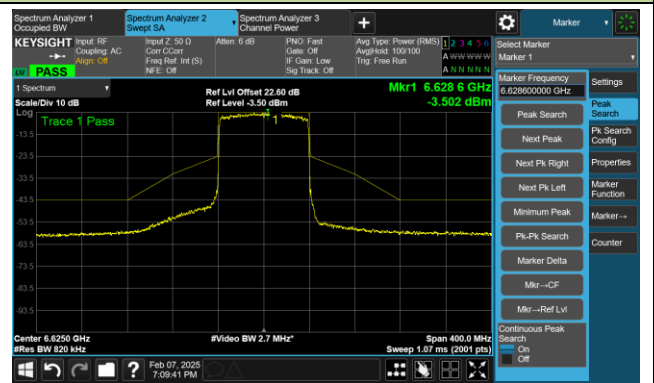


802.11ax-HE80 – Ant 0

Channel 199 (6945MHz)

The Reference Level

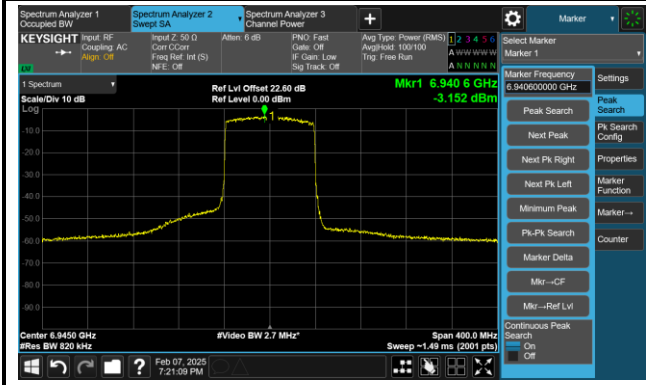


The Mask Data

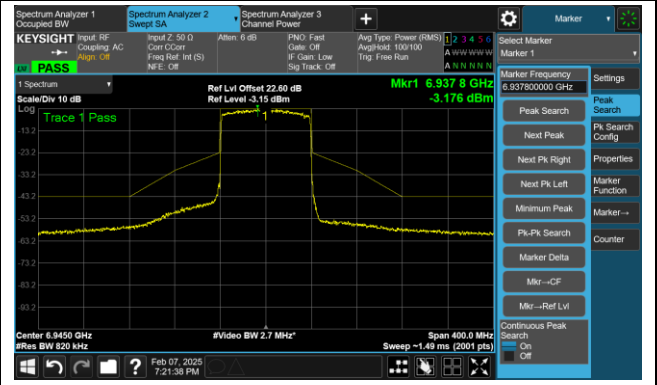


802.11ax-HE160 – Ant 0

Channel 15 (6025MHz)

The Reference Level

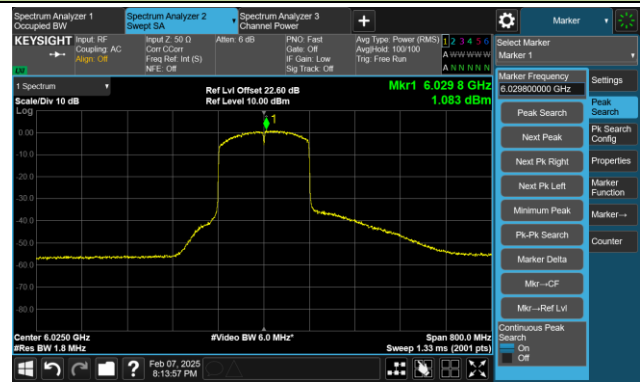


The Mask Data

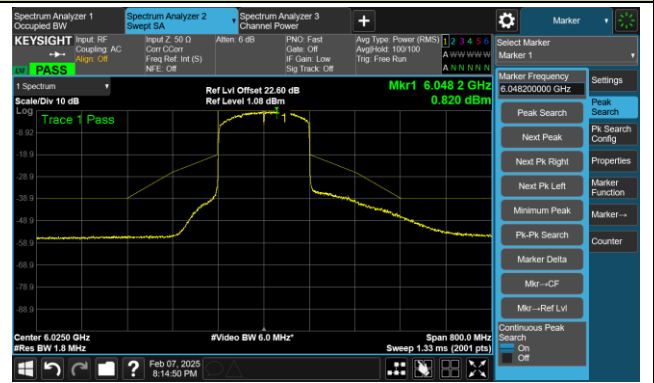


Channel 111 (6505MHz)

The Reference Level

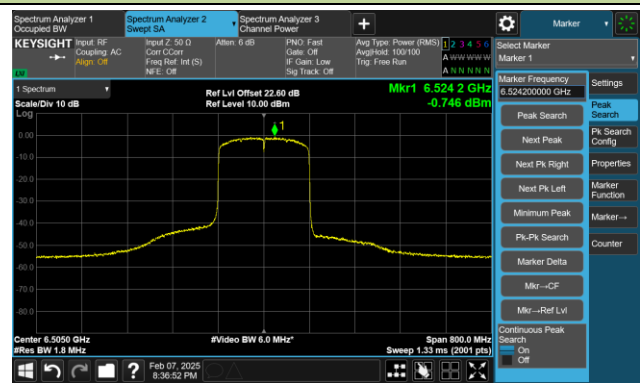


The Mask Data

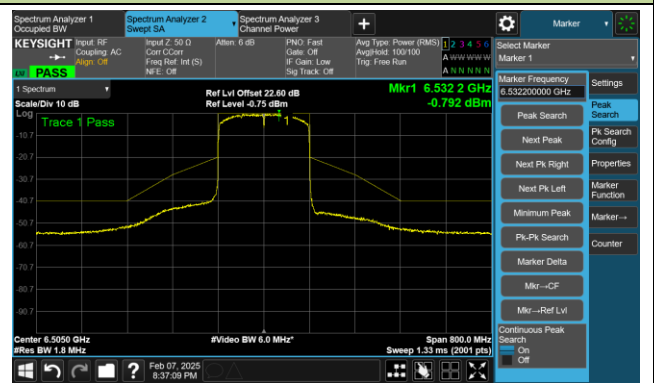


Channel 143 (6665MHz)

The Reference Level

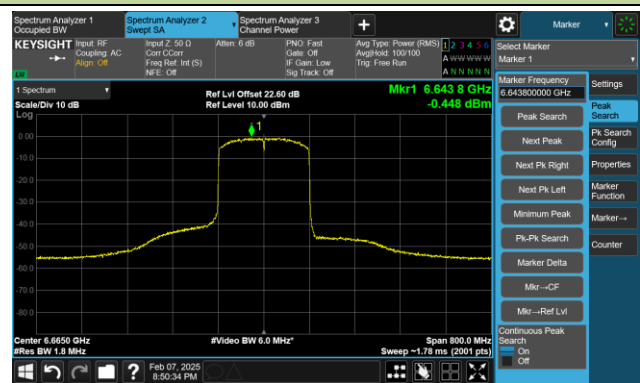


The Mask Data

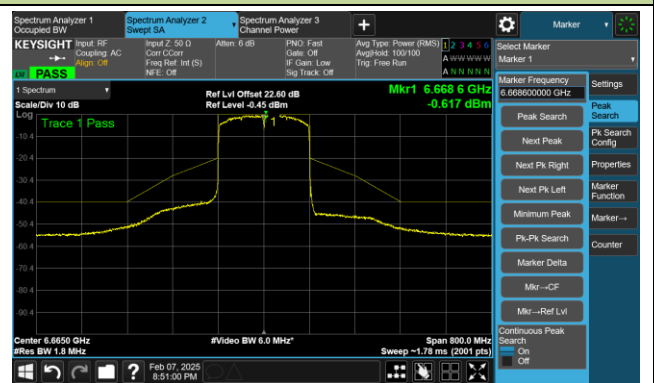


802.11ax-HE160 – Ant 0

Channel 207 (6985MHz)

The Reference Level

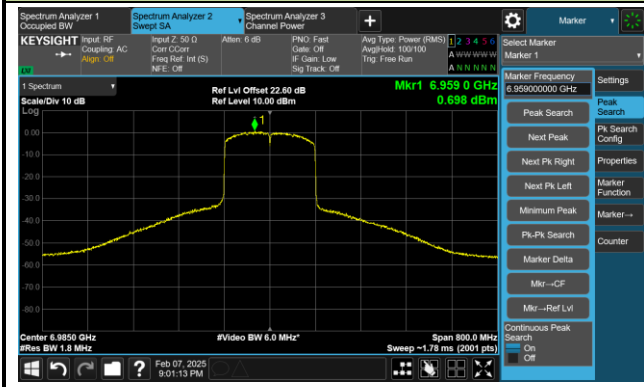


The Mask Data

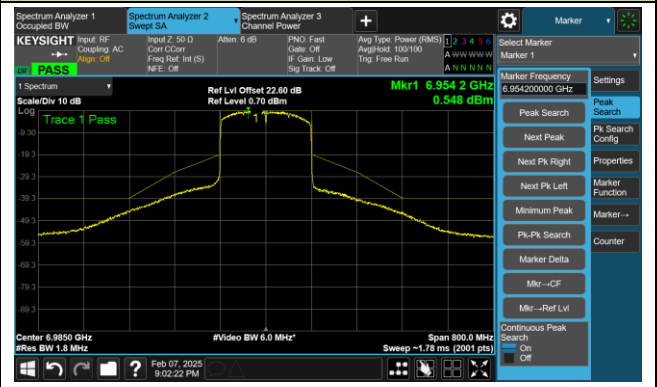


802.11ax-HE20 – Ant 1

Channel 01 (5955MHz)

The Reference Level

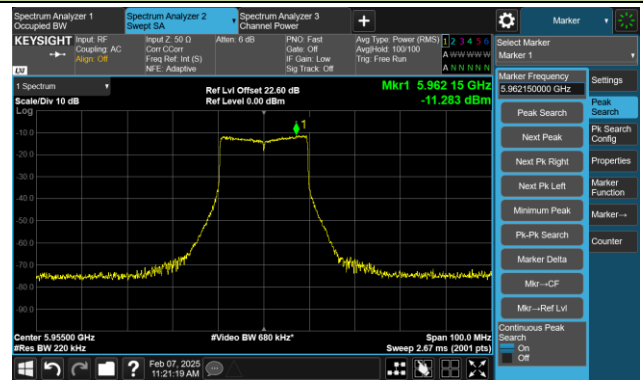


The Mask Data

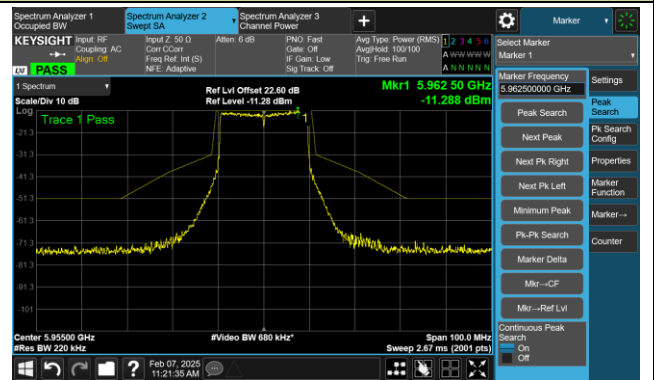


Channel 97 (6435MHz)

The Reference Level

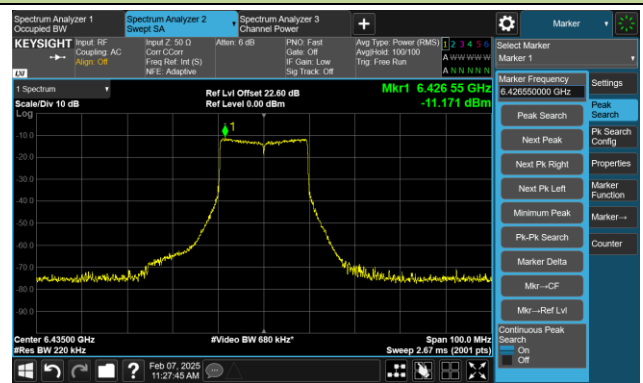


The Mask Data

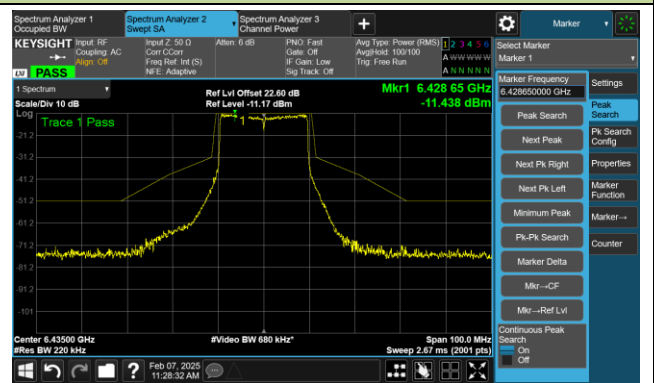


Channel 117 (6535MHz)

The Reference Level

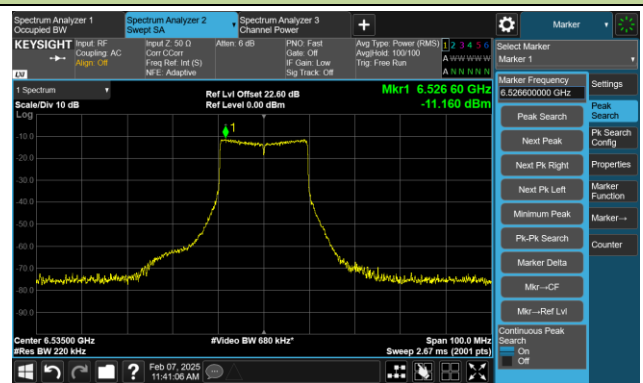


The Mask Data

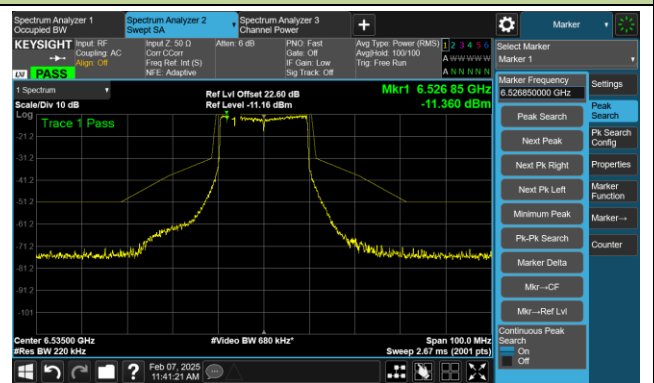


802.11ax-HE20 – Ant 1

Channel 189 (6895MHz)

The Reference Level

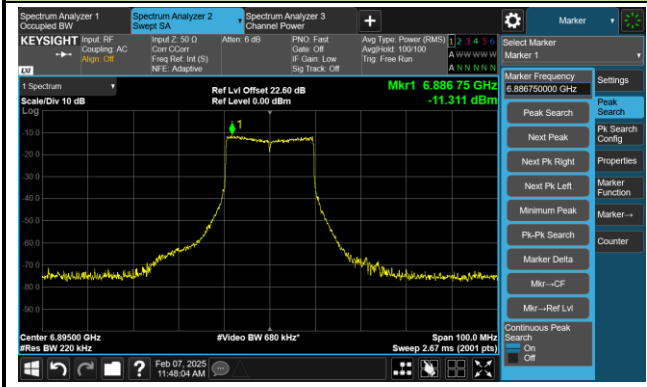


The Mask Data

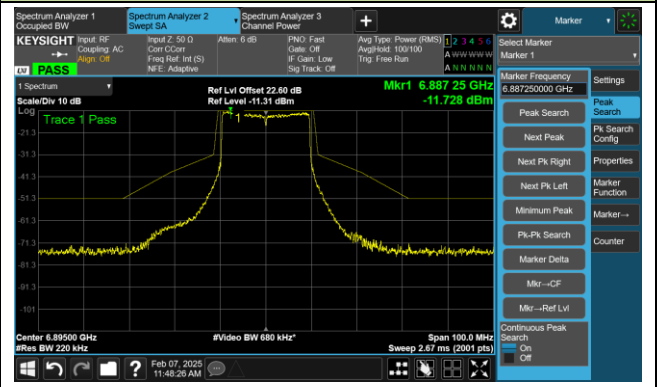


802.11ax-HE40 – Ant 1

Channel 03 (5965MHz)

The Reference Level

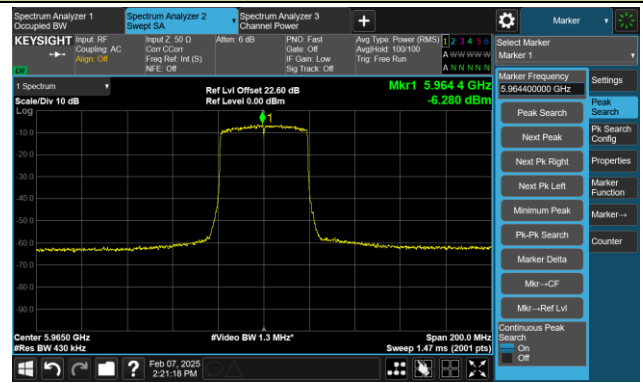


The Mask Data

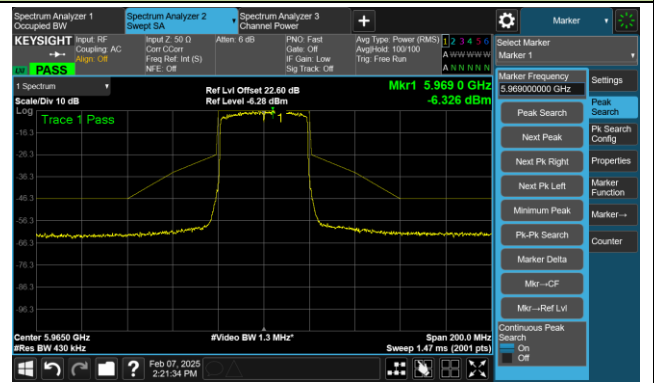


Channel 99 (6445MHz)

The Reference Level

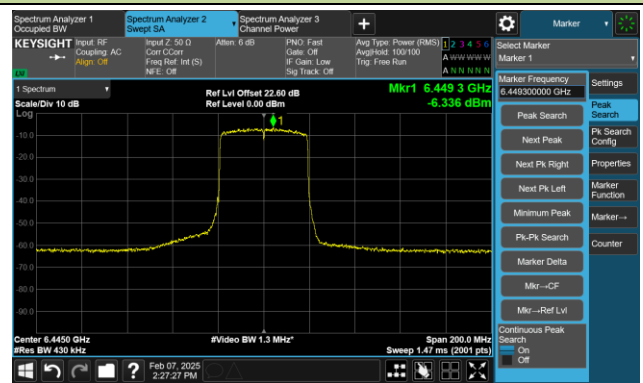


The Mask Data

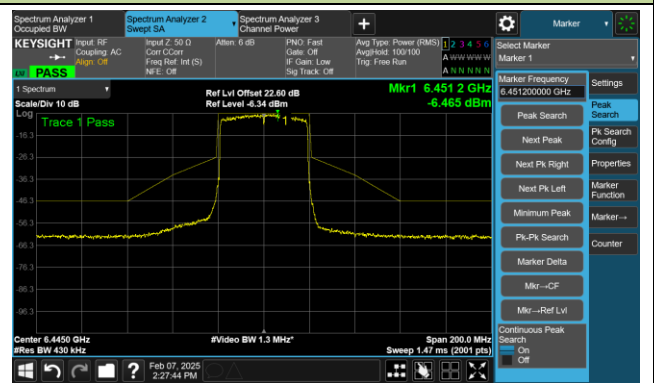


Channel 123 (6565MHz)

The Reference Level

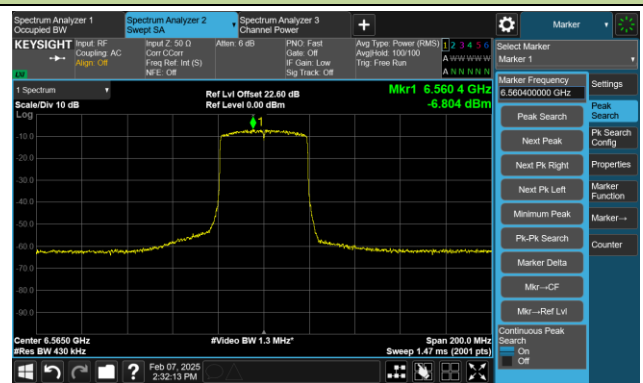


The Mask Data

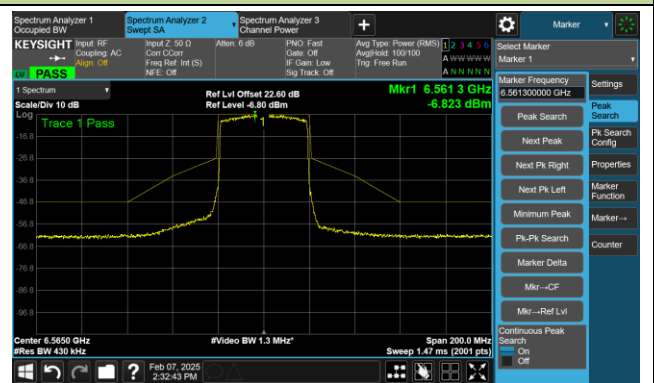


802.11ax-HE40 – Ant 1

Channel 195 (6925MHz)

The Reference Level

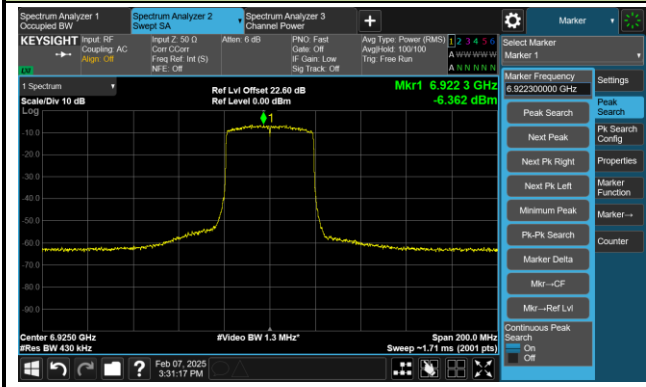


The Mask Data

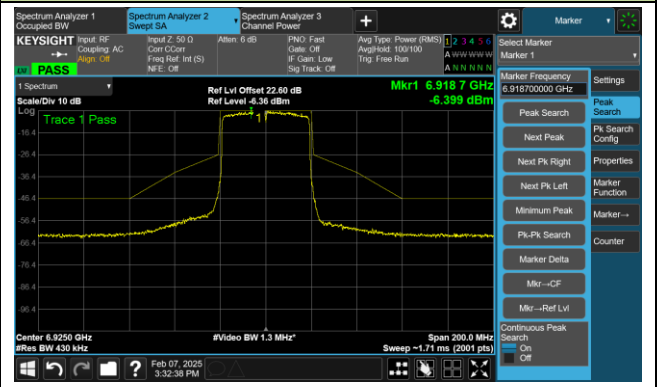


802.11ax-HE80 – Ant 1

Channel 07 (5985MHz)

The Reference Level

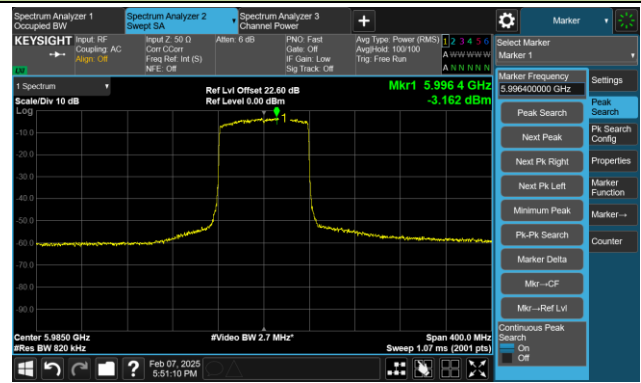


The Mask Data

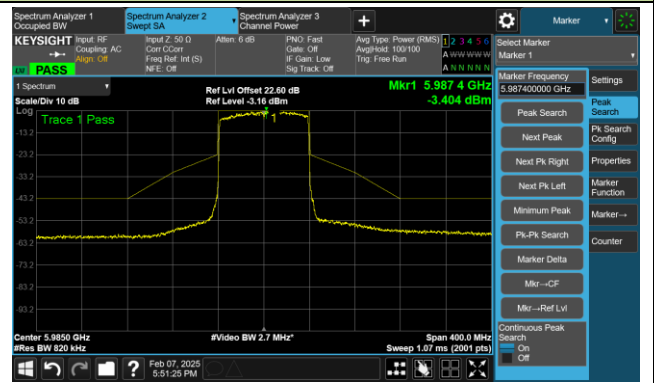


Channel 103 (6465MHz)

The Reference Level

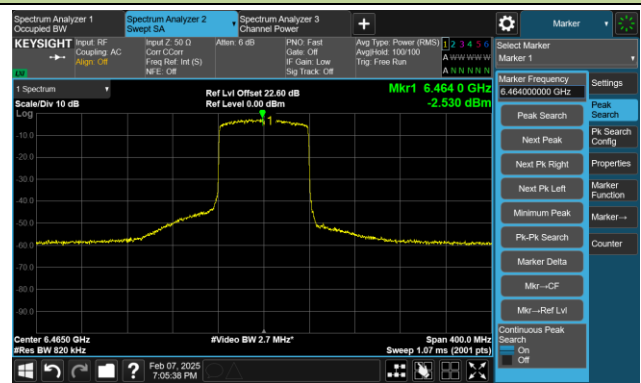


The Mask Data

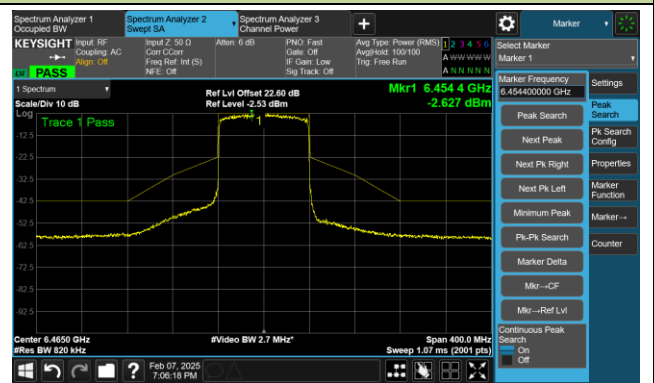


Channel 135 (6625MHz)

The Reference Level

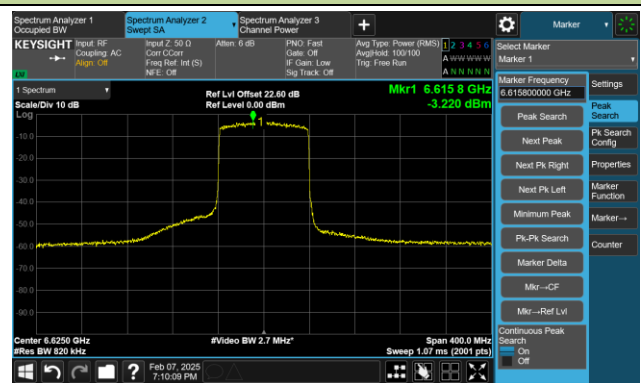


The Mask Data

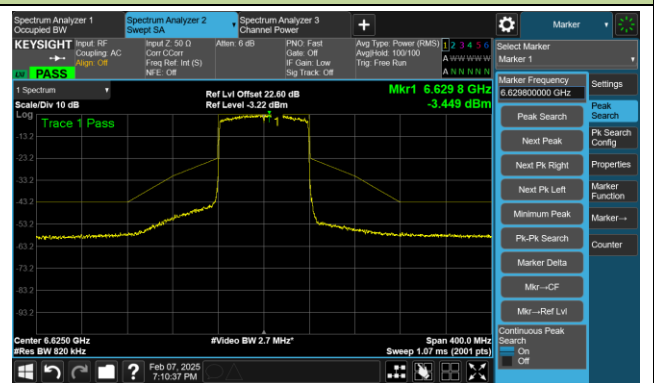

802.11ax-HE80 – Ant 1

Channel 199 (6945MHz)

The Reference Level

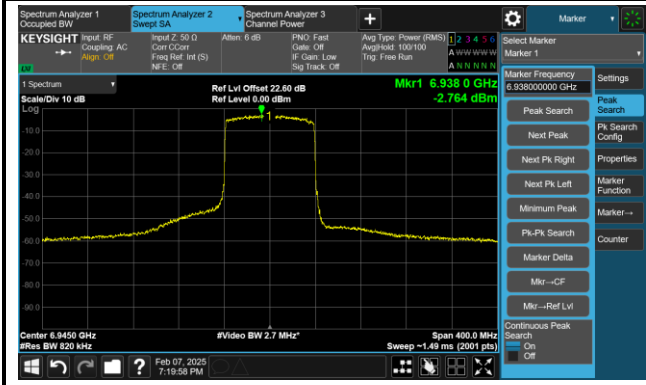

The Mask Data

