



ANSI/IEEE Std. C95.1-1992

in accordance with the requirements of
FCC Report and Order: ET Docket 93-62



FCC TEST REPORT

For

802.11a/b/g/n/ac WLAN + Bluetooth PCI-E Mini Card

Trade Name: Broadcom

Model: BCM94352Z

**Issued to
Broadcom Corporation
190 Mathilda Avenue, Sunnyvale, CA 94086**

Issued by

Compliance Certification Services Inc.

**No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891,
Taiwan. (R.O.C.)**

<http://www.ccsrf.com>

service@ccsrf.com

Issued Date: 2015/01/21



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



Revision History

| Rev. | Issue Date | Revisions | Effect Page | Revised By |
|------|------------|---|-------------|------------|
| 00 | 2015/1/21 | Initial Issue | ALL | Peter Chen |
| 01 | 2015/3/13 | <ol style="list-style-type: none">1. Add Battery note2. Add note for Spot check testing.3. Add explained test mode. | 06.41.43 | Peter Chen |



Table Of Contents

| | | |
|-----------|---|-----------|
| 1 | Certificate of Compliance (SAR Evaluation) | 5 |
| 2 | Description of Equipment Under Test | 6 |
| 3 | Requirements for Compliance Testing Defined..... | 7 |
| 3.1 | Requirements for Compliance Testing Defined by the FCC | 7 |
| 4 | Dosimetric Assessment System | 8 |
| 4.1 | Measurement System Diagram | 9 |
| 4.2 | System Components..... | 10 |
| 5 | Evaluation Procedures..... | 13 |
| 6 | SAR Measurement Procedures..... | 15 |
| 6.1 | Normal SAR Test Procedure | 15 |
| 7 | Device Under Test..... | 17 |
| 7.1 | Band Interface | 17 |
| 7.2 | Simultaneous Transmission..... | 18 |
| 8 | Summary of SAR Test Exclusion Configurations | 19 |
| 8.1 | Standalone SAR Test Exclusion Calculations | 19 |
| 8.1.1 | SAR Exclusion Calculations for Wi-Fi Antenna < 50mm from the User | 20 |
| 8.1.2 | SAR Exclusion Calculations for Wi-Fi Antenna > 50mm from the User | 22 |
| 8.1.3 | SAR test configuration..... | 24 |
| 9 | Measurement Uncertainty..... | 26 |
| 10 | Exposure Limit | 27 |
| 11 | Tissue Dielectric Properties..... | 28 |
| 11.1 | Test Liquid Confirmation..... | 28 |
| 11.2 | Typical Composition of Ingredients for Liquid Tissue Phantoms..... | 29 |
| 11.3 | Simulating Liquids Parameter Check Results | 30 |
| 12 | System Performance Check..... | 31 |
| 12.1 | System Performance Check Results | 32 |
| 13 | RF Output Power Measurement..... | 33 |
| 13.1 | Wi-Fi (2.4 GHz Band)..... | 33 |
| 13.2 | Wi-Fi (5 GHz Band)..... | 34 |
| 13.3 | Bluetooth..... | 40 |
| 14 | SAR Measurements Results | 41 |
| 15 | Summary of Highest SAR Values | 44 |
| 16 | Equipment List & Calibration Status | 45 |
| 17 | Facilities | 46 |



| | | |
|-----------|--------------------|-----------|
| 18 | Reference | 46 |
| 19 | Attachments | 47 |



1 Certificate of Compliance (SAR Evaluation)

Applicant: Broadcom Corporation
190 Mathilda Avenue, Sunnyvale, CA 94086

Equipment Under Test: 802.11a/b/g/n/ac WLAN + Bluetooth PCI-E Mini Card

Trade Name: Broadcom

Model Number: BCM94352Z

Date of Test: January 17~ January 20, 2015

Device Category: PORTABLE DEVICES

Exposure Category: GENERAL POPULATION/UNCONTROLLED EXPOSURE

| Applicable Standards | |
|----------------------|---|
| FCC | <ul style="list-style-type: none">● KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03● KDB 447498 D01 General RF Exposure Guidance v05r02● KDB 616217 D04 SAR for laptop and tablets v01r02● KDB 248227 D01 SAR measurement for 802.11 a b g v01r02 |
| Limit | |
| 1.6W/kg | |
| Test Result | |
| Pass | |

The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Alex Wu
Section Manager
Compliance Certification Services Inc.

Tested by:

Peter Chen
SAR Engineer
Compliance Certification Services Inc.



2 Description of Equipment Under Test

| | | | |
|---|---|-----------------|---|
| Product | 802.11a/b/g/n/ac WLAN + Bluetooth PCI-E Mini Card | | |
| Trade Name | Broadcom | | |
| Model Number | BCM94352Z | | |
| RF Module | Broadcom | Model: | BCM94352Z |
| Host Name | lenove | Host Model Name | Flex 3-1470 ; Flex 3-1435 ; Flex 3-1475 |
| Transmitters | Wi-Fi & Bluetooth | | |
| Modulation Technique | Bluetooth:GFSK for 1Mbps;π/4-DQPSK for 2Mbps;8DPSK for 3Mbps | | |
| | 802.11a: Orthogonal Frequency Division Multiplexing (OFDM) | | |
| | 802.11b: Direct Sequence Spread Spectrum(DSSS) | | |
| | 802.11g: Orthogonal Frequency Division Multiplexing (OFDM) | | |
| | 802.11n: Orthogonal Frequency Division Multiplexing (OFDM) | | |
| | 802.11ac: Orthogonal Frequency Division Multiplexing (OFDM) | | |
| Antenna Specification | Ant 1 | Brand name | High-Tek Electronics Co.,Ltd |
| | | Parts Number | Main: 025.9006R.0011 |
| | | Type | Aux: 025.9006S.0011 |
| | Ant 2 | Brand name | Wistron NeWeb Corporation |
| | | Parts Number | Main: 025.9006R.0001 |
| | | Type | Aux: 025.9006S.0001 |
| Rechargeable Li-polymer Battery-alternate | <p>1.Brand: LG Model: L14L3P21 Rating: 11.1 Vdc / 4050mAh, 45Wh</p> <p>2.Brand: SIMPLO Model: L14M3P21 Rating: 11.1 Vdc / 4050mAh, 45Wh</p> <p>3.Brand: LG Model: L14L2P21 Rating: 7.4 Vdc / 4050mAh, 30Wh</p> <p>4.Brand: SIMPLO Model: L14M2P21 Rating: 7.4 Vdc / 4050mAh, 30Wh</p> <p>Test is using battery No.1</p> | | |

Remark:

1. The sample selected for test was prototype that approximated to production product and was provided by manufacturer
2. The platform have Notebook mode, Stand mode, Tablet mode and Tent mode. But antennas are upper in the displays section of a laptop computer, we Performed SAR test in tablet mode, because the EUT can fold 360 degrees.



3 Requirements for Compliance Testing Defined

3.1 Requirements for Compliance Testing Defined by the FCC

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996 [1]. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 W/kg for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992 [6].




4 Dosimetric Assessment System

These measurements were performed with the automated near-field scanning system DASY4/DAST5 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m) which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetric probe EX3DV4-SN: 3554 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure and found to be better than ± 0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE 1528-2013.



4.1 Measurement System Diagram

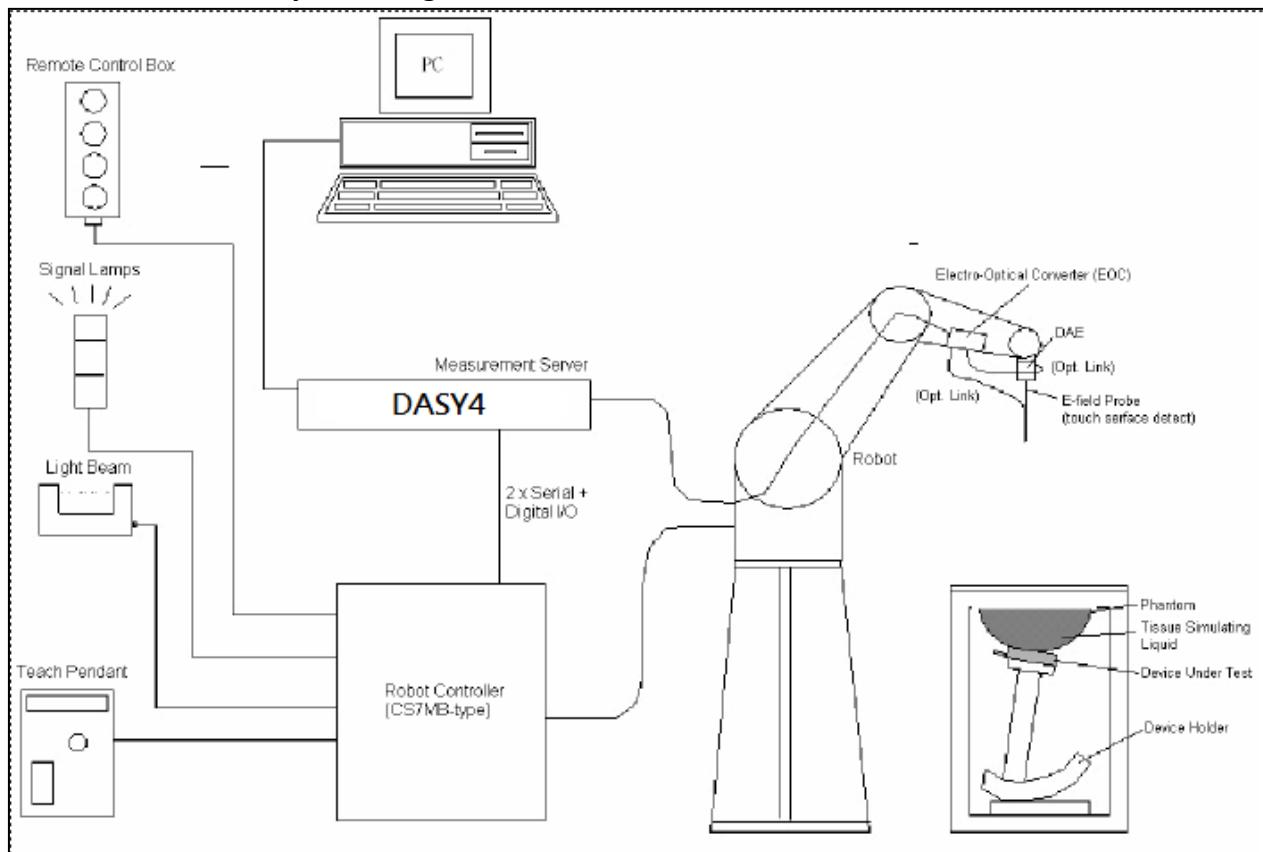

The DASY4/DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4/DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.



4.2 System Components

DASY4/DASY5 Measurement Server



The DASY4/DASY5 measurement server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chip disk and 64MB RAM. The necessary circuits for communication with either the DAE3 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4/DASY5 I/O-board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.



The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server. Calibration: No calibration required.

Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE4) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



EX3DV4 Isotropic E-Field Probe for Dosimetric Measurements

| | |
|-----------------------|---|
| Construction: | Symmetrical design with triangular core |
| | Built-in shielding against static charges |
| | PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |
| Calibration: | Basic Broad Band Calibration in air: 10-3000 MHz. Conversion Factors (CF) for HSL 900 and HSL 1800 CF-Calibration for other liquids and frequencies upon request. |
| Frequency: | 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz) |
| Directivity: | ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in HSL (rotation normal to probe axis) |
| Dynamic Range: | 10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g) |





| | |
|---------------------|--|
| Dimensions: | Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1 mm |
| Application: | High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%. |



Interior of probe


SAM Phantom (V4.0)

Construction: The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2013, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness: 2 ± 0.2 mm

Filling Volume: Approx. 25 liters

Dimensions: Height: 810mm; Length: 1000mm; Width: 500mm

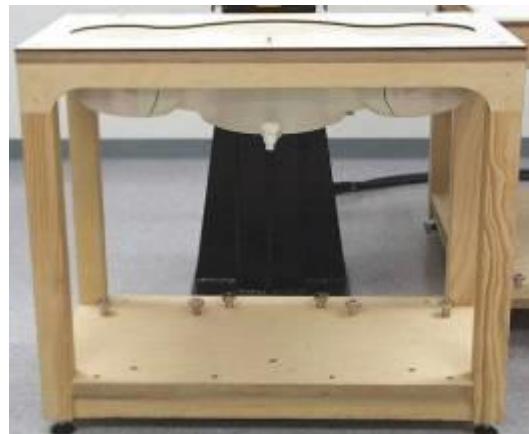**SAM Phantom (ELI4)**

Construction: Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY4/DASY5 and higher and is compatible with all SPEAG dosimetric probes and dipoles



Shell Thickness: 2.0 ± 0.2 mm (sagging: <1%)


Filling Volume: Approx. 25 liters

Dimensions: Major ellipse axis: 600 mm
Minor axis: 400 mm 500mm



Device Holder for SAM Twin Phantom

Construction: In combination with the Twin SAM Phantom V4.0 or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).

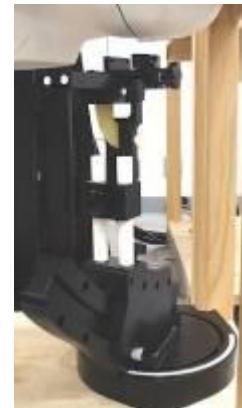

System Validation Kits for SAM Phantom (V4.0)

Construction: Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

Frequency: 2450, 5200, 5300, 5600, 5800 MHz

Return loss: > 20 dB at specified validation position

Power capability: > 100 W (f < 1GHz); > 40 W (f > 1GHz)

Dimensions: D2450V2: dipole length: 51.5 mm; overall height: 290 mm
D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm



System Validation Kits for ELI4 phantom

Construction: Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

Frequency: 2450, 5200, 5300, 5600, 5800 MHz

Return loss: > 20 dB at specified validation position

Power capability: > 100 W (f < 1GHz); > 40 W (f > 1GHz)

Dimensions: D2450V2: dipole length: 51.5 mm; overall height: 290 mm
D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm





5 Evaluation Procedures

Data Evaluation

The DASY4/DASY5 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

| | | |
|--------------------|---------------------------|----------------------------------|
| Probe parameters: | - Sensitivity | $Norm_i, a_{i0}, a_{i1}, a_{i2}$ |
| | - Conversion factor | $ConvF_i$ |
| | - Diode compression point | dcp_i |
| Device parameters: | - Frequency | f |
| | - Crest factor | cf |
| Media parameters: | - Conductivity | σ |
| | - Density | ρ |

These parameters must be set correctly in the software. They can be found in the component documents or be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

| | | | |
|------|---------|-----------------------------------|------------------|
| with | V_i | = Compensated signal of channel i | $(i = x, y, z)$ |
| | U_i | = Input signal of channel i | $(i = x, y, z)$ |
| | cf | = Crest factor of exciting field | (DASY parameter) |
| | dcp_i | = Diode compression point | (DASY parameter) |

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:
$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H-field probes:
$$H_i = \sqrt{Vi} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

| | | | |
|------|----------|-----------------------------------|-----------------|
| with | V_i | = Compensated signal of channel i | $(i = x, y, z)$ |
| | $Norm_i$ | = Sensor sensitivity of channel i | $(i = x, y, z)$ |

$\mu\text{V}/(\text{V}/\text{m})^2$ for E0field Probes

| | |
|----------|---|
| $ConvF$ | = Sensitivity enhancement in solution |
| a_{ij} | = Sensor sensitivity factors for H-field probes |
| f | = Carrier frequency (GHz) |
| Ei | = Electric field strength of channel i in V/m |
| Hi | = Magnetic field strength of channel i in A/m |



The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with

SAR = local specific absorption rate in W/kg

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{377} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with

P_{pwe} = Equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m



6 SAR Measurement Procedures

6.1 Normal SAR Test Procedure

- **Power Reference Measurement**

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

- **Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4/DASY5 software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, the grid resolution has to less than 15 mm by 15 mm at frequency \leq 2GHz; the grid resolution has to less than 12mm by 12 mm at frequency between 2GHz to 4GHz; grid resolution has to less than 10 mm by 10 mm at frequency between 4GHz to 6GHz.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01

| | \leq 3 GHz | $>$ 3 GHz |
|--|---|--|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 ± 1 mm | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm |
| Maximum probe abgle from probe axis to phantom surface normal at the measurement location | $30^\circ \pm 1^\circ$ | $20^\circ \pm 1^\circ$ |
| | \leq 2 GHz: \leq 15 mm 2 – 3 GHz: \leq 12 mm | 3 – 4 GHz: \leq 12 mm 4 – 6 GHz: \leq 10 mm |
| Maximum area scan spatial resolution: Δx_{zoom} , Δy_{zoom} | | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device. |



- **Zoom Scan**

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures points in accordance with the frequency can be divided into three parts. (1) The zoom scan volume was set to 5x5x7 points at frequency $\leq 2\text{GHz}$. (2) The zoom scan volume was set to 7x7x7 points at frequency between 2GHz to 4GHz (3) The zoom scan volume was set to 7x7x12 points at frequency between 4GHz to 6GHz. The measures points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more then one maximum, the number of Zoom Scans has to be enlarged accordingly.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01

| | | $\leq 3\text{ GHz}$ | $> 3\text{ GHz}$ |
|--|-------------|---|--|
| Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$ | | $\leq 2\text{ GHz}: \leq 8\text{ mm}$ $2 - 3\text{ GHz}: \leq 5\text{ mm}$ | $3 - 4\text{ GHz}: \leq 5\text{ mm}$ $4 - 6\text{ GHz}: \leq 4\text{ mm}$ |
| Uniform grid: $\Delta z_{\text{Zoom}}(n)$ | | $\leq 5\text{ mm}$ | $3 - 4\text{ GHz}: \leq 4\text{ mm}$ $4 - 5\text{ GHz}: \leq 3\text{ mm}$ $5 - 6\text{ GHz}: \leq 2\text{ mm}$ |
| Maximum zoom scan spatial resolution, normal to phantom surface | graded grid | $\Delta z_{\text{Zoom}}(1): \text{between 1}^{\text{st}} \text{ two points closest to phantom surface}$ | $\leq 4\text{ mm}$ $3 - 4\text{ GHz}: \leq 3\text{ mm}$ $4 - 5\text{ GHz}: \leq 2.5\text{ mm}$ $5 - 6\text{ GHz}: \leq 2\text{ mm}$ |
| | | $\Delta z_{\text{Zoom}}(n>1): \text{between subsequent points}$ | $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$ |
| Maximum zoom scan volume | x, y, z | $\geq 30\text{ mm}$ | $3 - 4\text{ GHz}: \geq 28\text{ mm}$ $4 - 5\text{ GHz}: \geq 25\text{ mm}$ $5 - 6\text{ GHz}: \geq 22\text{ mm}$ |

- **Power Drift Measurement**

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have DASY4/DASY5 software stop the measurements if this limit is exceeded.

- **Z-Scan**

The Z Scan job measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. A user can anchor the grid to the current probe location. As with any other grids, the local Z-axis of the anchor location establishes the Z-axis of the grid.



7 Device Under Test

7.1 Band Interface

| | |
|--------------------|---|
| Tx Frequency Bands | <ul style="list-style-type: none">802.11a/b/g/n/ac: 2412 - 2462 MHz5180 – 5825 MHz |
| Mode | <ul style="list-style-type: none">802.11 a/b/g/n HT20/ HT40/acBluetooth 4.0 LE |



7.2 Simultaneous Transmission

| No. | Conditions | Body SAR | Hotspot |
|-----|-----------------------------------|-------------------------------------|-------------------------------------|
| 1 | Wi-Fi 2.4GHz_Main Ant + Bluetooth | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 2 | Wi-Fi 2.4GHz_Aux Ant + Bluetooth | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 3 | Wi-Fi 5GHz_Main Ant + Bluetooth | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 4 | Wi-Fi 5GHz_Aux Ant + Bluetooth | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

: The Product can simultaneously transmit

: The Product can't simultaneously transmit



8 Summary of SAR Test Exclusion Configurations

8.1 Standalone SAR Test Exclusion Calculations

Since the Dedicated Host Approach is applied, the standalone SAR test exclusion procedure in KDB 447498 section 4.3.1 is applied in conjunction with KDB 616217 section 4.3 to determine the minimum test separation distance:

1. According to KDB 447498 Section 4.1.5) if the antenna is at close proximity to user then the outer surface of the DUT should be treated as the radiating surface. The test separation distance is then determined by the smallest distance between the outer surface of the device and the user. For the purposes of this report close proximity has been defined as closer than 50 mm. For antennas <50 mm from the rear or edge the separation distance used for the estimated SAR calculations is 0 mm.
2. When the minimum test separation distance is < 5mm, a distance of 5mm is applied to determine SAR test exclusion.
3. When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.
4. If the antenna to DUT adjacent edge or bottom separation distance >50mm the actual antenna to user separation distance is used to determine SAR exclusion and estimated SAR value.

Refer to Appendix for the specific details on the antenna-to-antenna and antenna-to-edge distances used for test exclusion calculations.

**8.1.1 SAR Exclusion Calculations for Wi-Fi Antenna < 50mm from the User**

According to KDB 447498 v05 r02 in section 4.3.1, if the calculated threshold value is > 3 then SAR testing is required.

Tablet Mode

| Antenna | Band | Mode | Frequency (MHz) | Output Power | | Separation Distances(mm) | | | | | Calculated Threshold Value | | | | | | |
|------------|--------|--------------|-----------------|--------------|-----|--------------------------|-------|-------|-------|-------|----------------------------|------|-------|-------|-------|-------|-----|
| | | | | dBm | mW | Rear | Edge1 | Edge2 | Edge3 | Edge4 | Front | Rear | Edge1 | Edge2 | Edge3 | Edge4 | |
| Wi-Fi Main | 2.4GHz | 802.11b | 2437 | 16 | 40 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 12.5 | 8.1 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 2.4GHz | 802.11g | 2437 | 16 | 40 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 12.5 | 8.1 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 2.4GHz | 802.11n HT20 | 2437 | 19 | 79 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 24.7 | 16.0 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 5.2GHz | 802.11a | 5180 | 14 | 25 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 11.4 | 7.4 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 5.3GHz | | 5260 | 14 | 25 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 11.5 | 7.4 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 5.5GHz | | 5600 | 16 | 40 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 18.9 | 12.3 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 5.8GHz | | 5785 | 18 | 63 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 30.3 | 19.7 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 5.2GHz | 802.11n HT20 | 5180 | 15.5 | 35 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 15.9 | 10.3 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 5.3GHz | | 5260 | 17 | 50 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 22.9 | 14.9 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 5.5GHz | | 5500 | 19 | 79 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 37.1 | 24.1 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 5.8GHz | | 5745 | 21 | 126 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 60.4 | 39.2 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 5.2GHz | 802.11n HT40 | 5190 | 16.5 | 45 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 5.5 | 13.3 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 5.3GHz | | 5270 | 17 | 50 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 6.2 | 14.9 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 5.5GHz | | 5550 | 19 | 79 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 10.0 | 24.2 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 5.8GHz | | 5795 | 21 | 126 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 16.3 | 39.4 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 5.2GHz | 802.11 ac | 5210 | 16.5 | 45 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 5.5 | 13.3 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 5.3GHz | | 5290 | 15.5 | 35 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 4.3 | 10.5 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 5.5GHz | | 5690 | 19 | 79 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 10.1 | 24.5 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Main | 5.8GHz | | 5775 | 17.5 | 56 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | 7.2 | 17.5 | >50mm | >50mm | >50mm | N/A |



| Antenna | Band | Mode | Frequency (MHz) | Output Power | | Separation Distances(mm) | | | | | Calculated Threshold Value | | | | | | |
|-----------|-----------|--------------|-----------------|--------------|-----|--------------------------|-------|-------|-------|-------|----------------------------|------|-------|-------|-------|-------|-------|
| | | | | dBm | mW | Rear | Edge1 | Edge2 | Edge3 | Edge4 | Front | Rear | Edge1 | Edge2 | Edge3 | Edge4 | Front |
| Wi-Fi Aux | 2.4GHz | 802.11b | 2437 | 16 | 40 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 12.5 | 12.5 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 2.4GHz | 802.11g | 2437 | 16 | 40 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 12.5 | 12.5 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 2.4GHz | 802.11n HT20 | 2437 | 19 | 79 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 24.7 | 24.7 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 5.2GHz | 802.11a | 5180 | 14 | 25 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 11.4 | 11.4 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 5.3GHz | | 5260 | 14 | 25 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 11.5 | 11.5 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 5.5GHz | | 5600 | 16 | 40 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 18.9 | 18.9 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 5.8GHz | | 5785 | 18 | 63 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 30.3 | 30.3 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 5.2GHz | 802.11n HT20 | 5180 | 15.5 | 35 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 15.9 | 15.9 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 5.3GHz | | 5260 | 17 | 50 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 22.9 | 22.9 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 5.5GHz | | 5500 | 19 | 79 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 37.1 | 37.1 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 5.8GHz | | 5745 | 21 | 126 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 60.4 | 60.4 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 5.2GHz | 802.11n HT40 | 5190 | 16.5 | 45 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 20.5 | 20.5 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 5.3GHz | | 5270 | 17 | 50 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 23.0 | 23.0 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 5.5GHz | | 5550 | 19 | 79 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 37.2 | 37.2 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 5.8GHz | | 5795 | 21 | 126 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 60.7 | 60.7 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 5.2GHz | 802.11 ac | 5210 | 16.5 | 45 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 20.5 | 20.5 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 5.3GHz | | 5290 | 15.5 | 35 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 16.1 | 16.1 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 5.5GHz | | 5690 | 19 | 79 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 37.7 | 37.7 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | 5.8GHz | | 5775 | 17.5 | 56 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 26.9 | 26.9 | >50mm | >50mm | >50mm | N/A |
| Wi-Fi Aux | Bluetooth | DH5 | 2402 | 1.5 | 1 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | 0.3 | 0.3 | >50mm | >50mm | >50mm | N/A |



8.1.2 SAR Exclusion Calculations for Wi-Fi Antenna > 50mm from the User

According to KDB 447498 v05 r02, if the calculated Power threshold is less than the output power then SAR testing is required.

Tablet Mode

| Antenna | Band | Mode | Frequency (MHz) | Output Power | | Separation Distances(mm) | | | | | Calculated Threshold Value | | | | | |
|------------|--------|--------------|-----------------|--------------|-----|--------------------------|-------|-------|-------|-------|----------------------------|-------|-------|--------|--------|-------|
| | | | | dBm | mW | Rear | Edge1 | Edge2 | Edge3 | Edge4 | Front | Rear | Edge1 | Edge2 | Edge3 | Edge4 |
| Wi-Fi Main | 2.4GHz | 802.11b | 2437 | 16 | 40 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 616.1 |
| Wi-Fi Main | 2.4GHz | 802.11g | 2437 | 16 | 40 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 616.1 |
| Wi-Fi Main | 2.4GHz | 802.11n HT20 | 2437 | 19 | 79 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 616.1 |
| Wi-Fi Main | 5.2GHz | 802.11a | 5180 | 14 | 25 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 585.9 |
| Wi-Fi Main | 5.3GHz | | 5260 | 14 | 25 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 585.4 |
| Wi-Fi Main | 5.5GHz | | 5600 | 16 | 40 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 583.4 |
| Wi-Fi Main | 5.8GHz | | 5785 | 18 | 63 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 582.4 |
| Wi-Fi Main | 5.2GHz | 802.11n HT20 | 5180 | 15.5 | 35 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 585.9 |
| Wi-Fi Main | 5.3GHz | | 5260 | 17 | 50 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 585.4 |
| Wi-Fi Main | 5.5GHz | | 5500 | 19 | 79 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 584.0 |
| Wi-Fi Main | 5.8GHz | | 5745 | 21 | 126 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 582.6 |
| Wi-Fi Main | 5.2GHz | 802.11n HT40 | 5190 | 16.5 | 45 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 585.8 |
| Wi-Fi Main | 5.3GHz | | 5270 | 17 | 50 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 585.3 |
| Wi-Fi Main | 5.5GHz | | 5550 | 19 | 79 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 583.7 |
| Wi-Fi Main | 5.8GHz | | 5795 | 21 | 126 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 582.3 |
| Wi-Fi Main | 5.2GHz | 802.11ac | 5210 | 16.5 | 45 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 585.7 |
| Wi-Fi Main | 5.3GHz | | 5290 | 15.5 | 35 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 585.2 |
| Wi-Fi Main | 5.5GHz | | 5690 | 19 | 79 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 582.9 |
| Wi-Fi Main | 5.8GHz | | 5775 | 17.5 | 56 | 18.6 | 7.7 | 216.0 | 219.0 | 102.0 | | <50mm | <50mm | >200mm | >200mm | 582.4 |



| Antenna | Band | Mode | Frequency (MHz) | Output Power | | Separation Distances(mm) | | | | | | Calculated Threshold Value | | | | | |
|-----------|-----------|--------------|-----------------|--------------|-----|--------------------------|-------|-------|-------|-------|-------|----------------------------|-------|-------|--------|--------|-------|
| | | | | dBm | mW | Rear | Edge1 | Edge2 | Edge3 | Edge4 | Front | Rear | Edge1 | Edge2 | Edge3 | Edge4 | Front |
| Wi-Fi Aux | 2.4GHz | 802.11b | 2437 | 16 | 40 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 276.1 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 2.4GHz | 802.11g | 2437 | 16 | 40 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 276.1 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 2.4GHz | 802.11n HT20 | 2437 | 19 | 79 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 276.1 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 5.2GHz | 802.11a | 5180 | 14 | 25 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 245.9 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 5.3GHz | | 5260 | 14 | 25 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 245.4 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 5.5GHz | | 5600 | 16 | 40 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 243.4 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 5.8GHz | | 5785 | 18 | 63 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 242.4 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 5.2GHz | 802.11n HT20 | 5180 | 15.5 | 35 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 245.9 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 5.3GHz | | 5260 | 17 | 50 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 245.4 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 5.5GHz | | 5500 | 19 | 79 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 244.0 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 5.8GHz | | 5745 | 21 | 126 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 242.6 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 5.2GHz | 802.11n HT40 | 5190 | 16.5 | 45 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 245.8 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 5.3GHz | | 5270 | 17 | 50 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 245.3 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 5.5GHz | | 5550 | 19 | 79 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 243.7 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 5.8GHz | | 5795 | 21 | 126 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 242.3 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 5.2GHz | 802.11 ac | 5210 | 16.5 | 45 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 245.7 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 5.3GHz | | 5290 | 15.5 | 35 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 245.2 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 5.5GHz | | 5690 | 19 | 79 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 242.9 | >200mm | >200mm | N/A |
| Wi-Fi Aux | 5.8GHz | | 5775 | 17.5 | 56 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 242.4 | >200mm | >200mm | N/A |
| Wi-Fi Aux | Bluetooth | DH5 | 2402 | 1.5 | 1 | 18.6 | 7.7 | 68.0 | 219.0 | 250.0 | | <50mm | <50mm | 276.8 | >200mm | >200mm | N/A |



8.1.3 SAR test configuration

Tablet Mode

| Test Configurations | Rear | Edge1 | Edge2 | Edge3 | Edge4 |
|--------------------------------|------|-------|-------|-------|-------|
| WiFi Main 802.11 b | YES | YES | No | No | No |
| WiFi Main 802.11 g | YES | YES | No | No | No |
| WiFi Main 802.11 n HT20 | YES | YES | No | No | No |
| WiFi Main 802.11 a_5.2GHz | YES | YES | No | No | No |
| WiFi Main 802.11 a_5.3GHz | YES | YES | No | No | No |
| WiFi Main 802.11 a_5.5GHz | YES | YES | No | No | No |
| WiFi Main 802.11 a_5.8GHz | YES | YES | No | No | No |
| WiFi Main 802.11 n HT20_5.2GHz | YES | YES | No | No | No |
| WiFi Main 802.11 n HT20_5.3GHz | YES | YES | No | No | No |
| WiFi Main 802.11 n HT20_5.5GHz | YES | YES | No | No | No |
| WiFi Main 802.11 n HT20_5.8GHz | YES | YES | No | No | No |
| WiFi Main 802.11 n HT40_5.2GHz | YES | YES | No | No | No |
| WiFi Main 802.11 n HT40_5.3GHz | YES | YES | No | No | No |
| WiFi Main 802.11 n HT40_5.5GHz | YES | YES | No | No | No |
| WiFi Main 802.11 n HT40_5.8GHz | YES | YES | No | No | No |
| WiFi Main 802.11 ac_5.2GHz | YES | YES | No | No | No |
| WiFi Main 802.11 ac_5.3GHz | YES | YES | No | No | No |
| WiFi Main 802.11 ac_5.5GHz | YES | YES | No | No | No |
| WiFi Main 802.11 ac_5.8GHz | YES | YES | No | No | No |

Note(s):

1. Yes = SAR is required.
2. No = SAR is not required.



| Test Configurations | Rear | Edge1 | Edge2 | Edge3 | Edge4 |
|-------------------------------|------|-------|-------|-------|-------|
| WiFi Aux 802.11 b | YES | YES | No | No | No |
| WiFi Aux 802.11 g | YES | YES | No | No | No |
| WiFi Aux 802.11 n HT20 | YES | YES | No | No | No |
| WiFi Aux 802.11 a_5.2GHz | YES | YES | No | No | No |
| WiFi Aux 802.11 a_5.3GHz | YES | YES | No | No | No |
| WiFi Aux 802.11 a_5.5GHz | YES | YES | No | No | No |
| WiFi Aux 802.11 a_5.8GHz | YES | YES | No | No | No |
| WiFi Aux 802.11 n HT20_5.2GHz | YES | YES | No | No | No |
| WiFi Aux 802.11 n HT20_5.3GHz | YES | YES | No | No | No |
| WiFi Aux 802.11 n HT20_5.5GHz | YES | YES | No | No | No |
| WiFi Aux 802.11 n HT20_5.8GHz | YES | YES | No | No | No |
| WiFi Aux 802.11 n HT40_5.2GHz | YES | YES | No | No | No |
| WiFi Aux 802.11 n HT40_5.3GHz | YES | YES | No | No | No |
| WiFi Aux 802.11 n HT40_5.5GHz | YES | YES | No | No | No |
| WiFi Aux 802.11 n HT40_5.8GHz | YES | YES | No | No | No |
| WiFi Aux 802.11 ac_5.2GHz | YES | YES | No | No | No |
| WiFi Aux 802.11 ac_5.3GHz | YES | YES | No | No | No |
| WiFi Aux 802.11 ac_5.5GHz | YES | YES | No | No | No |
| WiFi Aux 802.11 ac_5.8GHz | YES | YES | No | No | No |
| Bluetooth | No | No | No | No | No |

Note(s):

1. Yes = SAR is required.
2. No = SAR is not required.



9 Measurement Uncertainty

Measurement uncertainty for 300 MHz to 3 GHz averaged over 1 gram

| Uncertainty Component | Uncertainty | Prob. | Div. | $c_{I(1g)}$ | Std. Unc.(1-g) | v_i or v_{eff} |
|--|-------------|-------------|------------|-------------|----------------|--------------------|
| Measurement System | | | | | | |
| Probe Calibration ($k=1$) | 5.90 | Normal | 1 | 1 | 5.9 | ∞ |
| Axial Isotropy | 4.70 | Rectangular | $\sqrt{3}$ | 1 | 2.7 | ∞ |
| Hemisphericalisotropy | 9.60 | Rectangular | $\sqrt{3}$ | 0 | 0.0 | ∞ |
| Boundary Effect | 1.00 | Rectangular | $\sqrt{3}$ | 1 | 0.6 | ∞ |
| Linearity | 4.70 | Rectangular | $\sqrt{3}$ | 1 | 2.7 | ∞ |
| System Detection Limit | 1.00 | Rectangular | $\sqrt{3}$ | 1 | 0.6 | ∞ |
| Readout Electronics | 0.30 | Normal | 1 | 1 | 0.3 | ∞ |
| Response Time | 0.00 | Rectangular | $\sqrt{3}$ | 1 | 0.0 | ∞ |
| Integration Time | 0.00 | Rectangular | $\sqrt{3}$ | 1 | 0.0 | ∞ |
| RFAmbientNoise | 3.00 | Rectangular | $\sqrt{3}$ | 1 | 1.7 | ∞ |
| RF Ambient Reflections | 3.00 | Rectangular | $\sqrt{3}$ | 1 | 1.7 | ∞ |
| Probe Positioner | 0.40 | Rectangular | $\sqrt{3}$ | 1 | 0.2 | ∞ |
| Probe Positioning | 2.90 | Rectangular | $\sqrt{3}$ | 1 | 1.7 | ∞ |
| Algorithms for Max. SAR Evaluation | 1.00 | Rectangular | $\sqrt{3}$ | 1 | 0.6 | ∞ |
| Diopole | | | | | | |
| DipoleAxistoLiquidDistance | 2.00 | Normal | $\sqrt{3}$ | 1 | 1.2 | ∞ |
| InputpowerandSARdriftmeas. | 4.70 | Normal | $\sqrt{3}$ | 1 | 2.7 | ∞ |
| Phantom and Tissue Parameters | | | | | | |
| Phantom Uncertainty (shape and thickness tolerances) | 4.00 | Rectangular | $\sqrt{3}$ | 1 | 2.3 | ∞ |
| Liquid Conductivity - deviation from target values | 5.00 | Rectangular | $\sqrt{3}$ | 0.64 | 1.8 | ∞ |
| Liquid Conductivity - measurement uncertainty | -3.95 | Normal | 1 | 0.64 | -2.5 | ∞ |
| Liquid Permittivity - deviation from target values | 5.00 | Rectangular | $\sqrt{3}$ | 0.6 | 1.7 | ∞ |
| Liquid Permittivity - measurement uncertainty | 0.22 | Normal | 1 | 0.6 | 0.1 | ∞ |
| Temp. Unc. - Conductivity | 1.70 | Rectangular | $\sqrt{3}$ | 0.78 | 0.77 | ∞ |
| Temp. Unc. - Permittivity | 0.30 | Rectangular | $\sqrt{3}$ | 0.23 | 0.04 | ∞ |
| Combined Standard Uncertainty | | | | | | |
| CoverageFactorfor95% | | $kp=2$ | | | 18.65% | |
| Expanded Uncertainty | | $k=2$ | | | 1.49dB | |

Measurement uncertainty for 3 GHz to 6 GHz averaged over 1 gram

| Uncertainty Component | Uncertainty | Prob. | Div. | $c_{I(1g)}$ | Std. Unc.(1-g) | v_i or v_{eff} |
|--|-------------|-------------|------------|-------------|----------------|--------------------|
| Measurement System | | | | | | |
| Probe Calibration ($k=1$) | 5.90 | Normal | 1 | 1 | 5.9 | ∞ |
| Axial Isotropy | 4.70 | Rectangular | $\sqrt{3}$ | 1 | 2.7 | ∞ |
| Hemisphericalisotropy | 9.60 | Rectangular | $\sqrt{3}$ | 0 | 0.0 | ∞ |
| Boundary Effect | 0.90 | Rectangular | $\sqrt{3}$ | 1 | 0.5 | ∞ |
| Linearity | 3.45 | Rectangular | $\sqrt{3}$ | 1 | 2.0 | ∞ |
| System Detection Limit | 1.00 | Rectangular | $\sqrt{3}$ | 1 | 0.6 | ∞ |
| Readout Electronics | 1.00 | Normal | $\sqrt{3}$ | 1 | 1.0 | ∞ |
| Response Time | 0.80 | Rectangular | $\sqrt{3}$ | 1 | 0.5 | ∞ |
| Integration Time | 2.60 | Rectangular | $\sqrt{3}$ | 1 | 1.5 | ∞ |
| RFAmbientNoise | 3.00 | Rectangular | $\sqrt{3}$ | 1 | 1.7 | ∞ |
| RF Ambient Reflections | 3.00 | Rectangular | $\sqrt{3}$ | 1 | 1.7 | ∞ |
| Probe Positioner | 0.40 | Rectangular | $\sqrt{3}$ | 1 | 0.2 | ∞ |
| Probe Positioning | 2.90 | Rectangular | $\sqrt{3}$ | 1 | 1.7 | ∞ |
| Algorithms for Max. SAR Evaluation | 3.90 | Rectangular | $\sqrt{3}$ | 1 | 2.3 | ∞ |
| Diopole | | | | | | |
| DipoleAxistoLiquidDistance | 2.00 | Normal | $\sqrt{3}$ | 1 | 1.2 | ∞ |
| InputpowerandSARdriftmeas. | 4.70 | Normal | $\sqrt{3}$ | 1 | 2.7 | ∞ |
| Phantom and Tissue Parameters | | | | | | |
| Phantom Uncertainty (shape and thickness tolerances) | 4.00 | Rectangular | $\sqrt{3}$ | 1 | 2.3 | ∞ |
| Liquid Conductivity - deviation from target values | 5.00 | Rectangular | $\sqrt{3}$ | 0.64 | 1.8 | ∞ |
| Liquid Conductivity - measurement uncertainty | -1.02 | Normal | 1 | 0.64 | -0.7 | ∞ |
| Liquid Permittivity - deviation from target values | 5.00 | Rectangular | $\sqrt{3}$ | 0.6 | 1.7 | ∞ |
| Liquid Permittivity - measurement uncertainty | 4.17 | Normal | 1 | 0.6 | 2.5 | ∞ |
| Temp. Unc. - Conductivity | 1.70 | Rectangular | $\sqrt{3}$ | 0.78 | 0.77 | ∞ |
| Temp. Unc. - Permittivity | 0.30 | Rectangular | $\sqrt{3}$ | 0.23 | 0.04 | ∞ |
| Combined Standard Uncertainty | | | | | | |
| CoverageFactorfor95% | | $kp=2$ | | | 19.17% | |
| Expanded Uncertainty | | $k=2$ | | | 1.52dB | |



10 Exposure Limit

(A). Limits for Occupational/Controlled Exposure (W/kg)

| <u>Whole-Body</u> | <u>Partial-Body</u> | <u>Hands, Wrists, Feet and Ankles</u> |
|-------------------|---------------------|---------------------------------------|
| 0.4 | 8.0 | 2.0 |

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

| <u>Whole-Body</u> | <u>Partial-Body</u> | <u>Hands, Wrists, Feet and Ankles</u> |
|-------------------|---------------------|---------------------------------------|
| 0.08 | 1.6 | 4.0 |

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE
GENERAL POPULATION/UNCONTROLLED EXPOSURE
PARTIAL BODY LIMIT
1.6 W/kg



11 Tissue Dielectric Properties

11.1 Test Liquid Confirmation

Simulating Liquids Parameter Check

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values

The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below 5% may not be easily achieved at certain frequencies.

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE 1528 2013 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in IEEE 1528 2013 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE 1528 2013

| Target Frequency (MHz) | Head | | Body | |
|---------------------------|--------------|----------------|--------------|----------------|
| | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) |
| 150 | 52.3 | 0.76 | 61.9 | 0.80 |
| 300 | 45.3 | 0.87 | 58.2 | 0.92 |
| 450 | 43.5 | 0.87 | 56.7 | 0.94 |
| 835 | 41.5 | 0.90 | 55.2 | 0.97 |
| 900 | 41.5 | 0.97 | 55.0 | 1.05 |
| 915 | 41.5 | 0.98 | 55.0 | 1.06 |
| 1450 | 40.5 | 1.20 | 54.0 | 1.30 |
| 1610 | 40.3 | 1.29 | 53.8 | 1.40 |
| 1800 – 2000 | 40.0 | 1.40 | 53.3 | 1.52 |
| 2450 | 39.2 | 1.80 | 52.7 | 1.95 |
| 3000 | 38.5 | 2.40 | 52.0 | 2.73 |
| 5000 | 36.2 | 4.45 | 49.3 | 5.07 |
| 5100 | 36.1 | 4.55 | 49.1 | 5.18 |
| 5200 | 36.0 | 4.66 | 49.0 | 5.30 |
| 5300 | 35.9 | 4.76 | 48.9 | 5.42 |
| 5400 | 35.8 | 4.86 | 48.7 | 5.53 |
| 5500 | 35.6 | 4.96 | 48.6 | 5.65 |
| 5600 | 35.5 | 5.07 | 48.5 | 5.77 |
| 5700 | 35.4 | 5.17 | 48.3 | 5.88 |
| 5800 | 35.3 | 5.27 | 48.2 | 6.00 |



11.2 Typical Composition of Ingredients for Liquid Tissue Phantoms

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

| Ingredients (% by weight) | Frequency (MHz) | | | | | | | | | |
|------------------------------|-----------------|-------|-------|------|-------|-------|-------|------|------|------|
| | 450 | | 835 | | 915 | | 1900 | | 2450 | |
| Tissue Type | Head | Body | Head | Body | Head | Body | Head | Body | Head | Body |
| Water | 38.56 | 51.16 | 41.45 | 52.4 | 41.05 | 56.0 | 54.9 | 40.4 | 62.7 | 73.2 |
| Salt (NaCl) | 3.95 | 1.49 | 1.45 | 1.4 | 1.35 | 0.76 | 0.18 | 0.5 | 0.5 | 0.04 |
| Sugar | 56.32 | 46.78 | 56.0 | 45.0 | 56.5 | 41.76 | 0.0 | 58.0 | 0.0 | 0.0 |
| HEC | 0.98 | 0.52 | 1.0 | 1.0 | 1.0 | 1.21 | 0.0 | 1.0 | 0.0 | 0.0 |
| Bactericide | 0.19 | 0.05 | 0.1 | 0.1 | 0.1 | 0.27 | 0.0 | 0.1 | 0.0 | 0.0 |
| Triton X-100 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 36.8 | 0.0 |
| DGBE | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 44.92 | 0.0 | 0.0 | 26.7 |
| Dielectric Constant | 43.42 | 58.0 | 42.54 | 56.1 | 42.0 | 56.8 | 39.9 | 54.0 | 39.8 | 52.5 |
| Conductivity (S/m) | 0.85 | 0.83 | 0.91 | 0.95 | 1.0 | 1.07 | 1.42 | 1.45 | 1.88 | 1.78 |

alt: 99⁺% Pure Sodium Chloride

Sugar: 98⁺% Pure Sucrose

Water: De-ionized, 16 MΩ⁺ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99⁺% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra-pure): Polyethylene glycol mono [4-(1, 1, 3, 3-tetramethylbutyl)phenyl]ether

Simulating Liquids for 5 GHz, Manufactured by SPEAG

| Ingredients | (% by weight) |
|--------------------|---------------|
| Water | 78 |
| Mineral oil | 11 |
| Emulsifiers | 9 |
| Additives and Salt | 2 |



11.3 Simulating Liquids Parameter Check Results

| Date | Band | Freq(MHz) | Measured | | | Standard | | Δ | | Limit(%) |
|-----------|-----------|-----------|----------|-------|------|----------|------|---------|--------|----------|
| | | | e' (εr) | e'' | σ | e' (εr) | σ | e' (εr) | σ | |
| 2015/1/17 | Body 5000 | 5180 | 51.06 | 18.15 | 5.22 | 49.02 | 5.28 | 4.16% | -1.02% | ±5 |
| | | 5200 | 51.04 | 18.19 | 5.25 | 49.00 | 5.30 | 4.17% | -0.86% | ±5 |
| | | 5220 | 51.00 | 18.17 | 5.27 | 48.98 | 5.32 | 4.12% | -1.00% | ±5 |
| | | 5240 | 50.96 | 18.19 | 5.30 | 48.96 | 5.35 | 4.09% | -0.97% | ±5 |
| | | 5260 | 50.91 | 18.21 | 5.32 | 48.94 | 5.37 | 4.03% | -0.96% | ±5 |
| | | 5280 | 50.87 | 18.24 | 5.35 | 48.92 | 5.40 | 3.98% | -0.83% | ±5 |
| | | 5300 | 50.83 | 18.30 | 5.39 | 48.90 | 5.42 | 3.95% | -0.60% | ±5 |
| | | 5320 | 50.80 | 18.30 | 5.41 | 48.86 | 5.44 | 3.98% | -0.64% | ±5 |
| | | 5500 | 50.45 | 18.44 | 5.63 | 48.60 | 5.65 | 3.80% | -0.27% | ±5 |
| | | 5520 | 50.44 | 18.47 | 5.66 | 48.58 | 5.67 | 3.83% | -0.16% | ±5 |
| | | 5540 | 50.40 | 18.48 | 5.69 | 48.56 | 5.70 | 3.80% | -0.16% | ±5 |
| | | 5560 | 50.39 | 18.49 | 5.71 | 48.54 | 5.72 | 3.80% | -0.16% | ±5 |
| | | 5580 | 50.35 | 18.53 | 5.74 | 48.52 | 5.75 | 3.78% | -0.05% | ±5 |
| | | 5600 | 50.29 | 18.52 | 5.76 | 48.50 | 5.77 | 3.70% | -0.14% | ±5 |
| | | 5620 | 50.25 | 18.55 | 5.79 | 48.46 | 5.79 | 3.69% | 0.01% | ±5 |
| | | 5640 | 50.22 | 18.56 | 5.82 | 48.42 | 5.81 | 3.73% | 0.03% | ±5 |
| | | 5660 | 50.18 | 18.59 | 5.84 | 48.38 | 5.84 | 3.73% | 0.14% | ±5 |
| | | 5680 | 50.19 | 18.60 | 5.87 | 48.34 | 5.86 | 3.83% | 0.18% | ±5 |
| | | 5700 | 50.13 | 18.62 | 5.90 | 48.30 | 5.88 | 3.79% | 0.30% | ±5 |
| | | 5745 | 50.04 | 18.65 | 5.95 | 48.26 | 5.93 | 3.70% | 0.30% | ±5 |
| | | 5765 | 50.01 | 18.65 | 5.97 | 48.24 | 5.96 | 3.68% | 0.26% | ±5 |
| | | 5785 | 49.99 | 18.70 | 6.01 | 48.22 | 5.98 | 3.67% | 0.47% | ±5 |
| | | 5805 | 49.95 | 18.74 | 6.04 | 48.19 | 6.01 | 3.66% | 0.63% | ±5 |
| | | 5825 | 49.93 | 18.74 | 6.07 | 48.15 | 6.03 | 3.70% | 0.59% | ±5 |
| 2015/1/20 | Body 2450 | 2412 | 52.87 | 13.72 | 1.84 | 52.75 | 1.91 | 0.22% | -3.95% | ±5 |
| | | 2437 | 52.76 | 13.81 | 1.87 | 52.72 | 1.94 | 0.09% | -3.47% | ±5 |
| | | 2442 | 52.75 | 13.83 | 1.88 | 52.71 | 1.94 | 0.08% | -3.44% | ±5 |
| | | 2462 | 52.70 | 13.91 | 1.90 | 52.68 | 1.97 | 0.02% | -3.30% | ±5 |
| | | 2472 | 52.67 | 13.95 | 1.92 | 52.67 | 1.98 | 0.00% | -3.30% | ±5 |



12 System Performance Check

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications. The system performance check results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The DASY4/DASY5 system with an E-field probe EX3DV4 SN: 3554 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15 mm (below 1 GHz) and 10 mm (above 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 10mm was aligned with the dipole.
- Special 7x7x7 fine cube was chosen for cube integration ($dx=dy= 5 \text{ mm}$, $dz= 5 \text{ mm}$).
- Distance between probe sensors and phantom surface was set to 3.0 mm.
- The dipole input power (forward power) was $100 \text{ mW} \pm 3\%$.
- The results are normalized to 1 W input power.

Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

| System Dipole | Serial No. | Cal. Date | Freq. (MHz) | Target SAR Values (W/kg) | | |
|---------------|------------|------------|-------------|--------------------------|------|------|
| | | | | 1g/10g | Head | Body |
| D2450V2 | 728 | 2014/5/20 | 2450 | 1g | 52.6 | 50.2 |
| | | | | 10g | 24.5 | 23.4 |
| D5GHzV2 | 1004 | 2014/11/20 | 5200 | 1g | 80.5 | 74.7 |
| | | | | 10g | 22.9 | 20.7 |
| D5GHzV2 | 1004 | 2014/11/20 | 5300 | 1g | 85.7 | 77.7 |
| | | | | 10g | 24.4 | 21.6 |
| D5GHzV2 | 1004 | 2014/11/20 | 5600 | 1g | 84.1 | 81.2 |
| | | | | 10g | 23.9 | 22.4 |
| D5GHzV2 | 1004 | 2014/11/20 | 5800 | 1g | 80.3 | 74.2 |
| | | | | 10g | 22.8 | 20.3 |

**12.1 System Performance Check Results**

| Date | System Dipole | | | Parameters | Target | Measured | Deviation[%] | Limited[%] |
|-----------|---------------------|------------|--------|------------|--------|----------|--------------|------------|
| | Type | Serial No. | Liquid | | | | | |
| 2015/1/17 | D5GHzV2 (5.2GHz) | 1004 | Body | 1g SAR: | 74.7 | 75.70 | 1.34 | ± 5 |
| | | | | 10g SAR: | 20.7 | 21.40 | 3.38 | ± 5 |
| 2015/1/17 | D5GHzV2 (5.3GHz) | 1004 | Body | 1g SAR: | 77.7 | 78.70 | 1.29 | ± 5 |
| | | | | 10g SAR: | 21.6 | 22.10 | 2.31 | ± 5 |
| 2015/1/17 | D5GHzV2 (5.5GHz) | 1004 | Body | 1g SAR: | 81.2 | 82.50 | 1.60 | ± 5 |
| | | | | 10g SAR: | 22.4 | 23.30 | 4.02 | ± 5 |
| 2015/1/17 | D5GHzV2 (5.8GHz) | 1004 | Body | 1g SAR: | 74.2 | 70.60 | -4.85 | ± 5 |
| | | | | 10g SAR: | 20.3 | 20.20 | -0.49 | ± 5 |
| 2015/1/20 | D2450V2 | 728 | Body | 1g SAR: | 50.2 | 48.70 | -2.99 | ± 5 |
| | | | | 10g SAR: | 23.4 | 22.70 | -2.99 | ± 5 |



13 RF Output Power Measurement

13.1 Wi-Fi (2.4 GHz Band)

Required Test Channels per KDB 248227 D01

| Mode | Band (GHz) | Freq. (MHz) | Ch # | Default Test Channels | |
|------------|------------|-------------|-----------------|-----------------------|---------|
| | | | | 802.11b | 802.11g |
| 802.11 b/g | 2.4 | 2412 | 1 [#] | ✓ | ▽ |
| | | 2437 | 6 | ✓ | ▽ |
| | | 2462 | 11 [#] | ✓ | ▽ |

Notes

✓ = "default test channels"

▽ = possible 802.11g channels with maximum average output ½ dB the "default test channels"

= when output power is reduced for channel 1 and /or 11 to meet restricted band requirements
the highest output channels closest to each of these channels should be tested.

The indicated Wi-Fi target powers in the following table are absolute maximums.

Output power table

| Band (GHz) | Mode | Data rate (Mbps) | Ch # | Freq. (MHz) | Target Pwr (dBm) | | | Tune-up Tolerance (dBm) | Maximum Tune-up Pwr (dBm) | Avg. Pwr (dBm) | | |
|------------|--------------|------------------|------|-------------|------------------|------|-------|-------------------------|---------------------------|----------------|------|-------|
| | | | | | Main | Aux | Total | | | Main | Aux | Total |
| 2.4 | 802.11b | 1 | 1 | 2412 | 14.5 | | | ±1.5 | 16.0 | 15.9 | | |
| | | | 6 | 2437 | 14.5 | | | ±1.5 | 16.0 | 16.0 | | |
| | | | 11 | 2462 | 14.5 | | | ±1.5 | 16.0 | 15.9 | | |
| | | | 1 | 2412 | | 14.5 | | ±1.5 | 16.0 | | 15.9 | |
| | | | 6 | 2437 | | 14.5 | | ±1.5 | 16.0 | | 16.0 | |
| | | | 11 | 2462 | | 14.5 | | ±1.5 | 16.0 | | 15.8 | |
| | 802.11g | 6 | 1 | 2412 | 14.5 | | | ±1.5 | 16.0 | 15.8 | | |
| | | | 6 | 2437 | 14.5 | | | ±1.5 | 16.0 | 16.0 | | |
| | | | 11 | 2462 | 14.5 | | | ±1.5 | 16.0 | 15.9 | | |
| | | | 1 | 2412 | | 14.5 | | ±1.5 | 16.0 | | 15.9 | |
| | | | 6 | 2437 | | 14.5 | | ±1.5 | 16.0 | | 16.0 | |
| | | | 11 | 2462 | | 14.5 | | ±1.5 | 16.0 | | 15.9 | |
| | 802.11n HT20 | MCS0 | 1 | 2412 | 14.5 | | | ±1.5 | 16.0 | 15.8 | | |
| | | | 6 | 2437 | 14.5 | | | ±1.5 | 16.0 | 16.0 | | |
| | | | 11 | 2462 | 14.5 | | | ±1.5 | 16.0 | 15.9 | | |
| | 802.11n HT20 | MCS0 | 1 | 2412 | | 14.5 | | ±1.5 | 16.0 | | 15.8 | |
| | | | 6 | 2437 | | 14.5 | | ±1.5 | 16.0 | | 16.0 | |
| | | | 11 | 2462 | | 14.5 | | ±1.5 | 16.0 | | 15.9 | |
| | 802.11n HT20 | MCS8 | 1 | 2412 | 13.5 | 13.5 | 16.5 | ±1.5 | 18.0 | 14.8 | 15.0 | 17.9 |
| | | | 6 | 2437 | 14.5 | 14.5 | 17.5 | ±1.5 | 19.0 | 15.9 | 16.0 | 19.0 |
| | | | 11 | 2462 | 13.0 | 13.0 | 16.0 | ±1.5 | 17.5 | 14.5 | 14.3 | 17.4 |



13.2 Wi-Fi (5 GHz Band)

Required Test Channels per KDB 248227 D01

| Mode | Band (GHz) | Freq. (MHz) | Ch # | Default Test Channels | | |
|---------|-----------------------|-------------|------|-----------------------|------|---|
| | | | | §15.247 | UNII | |
| 802.11a | UNII | 5180 | 36 | | ✓ | |
| | | 5200 | 40 | | | * |
| | | 5220 | 44 | | | * |
| | | 5240 | 48 | | ✓ | |
| | | 5260 | 52 | | ✓ | |
| | | 5280 | 56 | | | * |
| | | 5300 | 60 | | | * |
| | | 5320 | 64 | | ✓ | |
| | | 5500 | 100 | | | * |
| | | 5520 | 104 | | ✓ | |
| | | 5540 | 108 | | | * |
| | | 5560 | 112 | | | * |
| | | 5580 | 116 | | ✓ | |
| | | 5600 | 120 | | | * |
| | | 5620 | 124 | | ✓ | |
| | | 5640 | 128 | | | * |
| | | 5660 | 132 | | | * |
| | | 5680 | 136 | | ✓ | |
| | | 5700 | 140 | | | * |
| | UNII or §15.247 | 5745 | 149 | ✓ | ✓ | |
| | | 5765 | 153 | * | | * |
| | | 5785 | 157 | ✓ | | * |
| | | 5805 | 161 | * | ✓ | |
| | §15.247 | 5825 | 165 | ✓ | | |

Notes

✓ = "default test channels"

* = possible 802.11a channels with maximum average output > the "default test channels"

The indicated Wi-Fi target powers in the following table are absolute maximums



Wi-Fi 5.2GHz Band:

| Band (GHz) | Mode | Data rate (Mbps) | Ch # | Freq. (MHz) | Target Pwr (dBm) | | | Tune-up Tolerance (dBm) | Maximum Tune-up Pwr (dBm) | Avg. Pwr (dBm) | | |
|------------|----------------|------------------|------|-------------|------------------|------|-------|-------------------------|---------------------------|----------------|------|-------|
| | | | | | Main | Aux | Total | | | Main | Aux | Total |
| 5.2 | 802.11a | 6 | 36 | 5180 | 12.5 | | | ±1.5 | 14.0 | 14.0 | | |
| | | | 40 | 5200 | 12.5 | | | ±1.5 | 14.0 | 13.9 | | |
| | | | 44 | 5220 | 12.5 | | | ±1.5 | 14.0 | 14.0 | | |
| | | | 48 | 5240 | 12.5 | | | ±1.5 | 14.0 | 13.9 | | |
| | | | 36 | 5180 | | 12.5 | | ±1.5 | 14.0 | | 13.9 | |
| | | | 40 | 5200 | | 12.5 | | ±1.5 | 14.0 | | 14.0 | |
| | | | 44 | 5220 | | 12.5 | | ±1.5 | 14.0 | | 14.0 | |
| | | | 48 | 5240 | | 12.5 | | ±1.5 | 14.0 | | 14.0 | |
| | 802.11n (HT20) | MCS0 | 36 | 5180 | 12.5 | | | ±1.5 | 14.0 | 13.8 | | |
| | | | 40 | 5200 | 12.5 | | | ±1.5 | 14.0 | 13.9 | | |
| | | | 44 | 5220 | 12.5 | | | ±1.5 | 14.0 | 13.9 | | |
| | | | 48 | 5240 | 12.5 | | | ±1.5 | 14.0 | 13.8 | | |
| | | | 36 | 5180 | | 12.5 | | ±1.5 | 14.0 | | 13.9 | |
| | | | 40 | 5200 | | 12.5 | | ±1.5 | 14.0 | | 13.9 | |
| | | | 44 | 5220 | | 12.5 | | ±1.5 | 14.0 | | 13.8 | |
| | | | 48 | 5240 | | 12.5 | | ±1.5 | 14.0 | | 14.0 | |
| | 802.11n (HT40) | MCS0 | 36 | 5180 | 11.0 | 11.0 | 14.0 | ±1.5 | 15.5 | 12.0 | 12.5 | 15.3 |
| | | | 40 | 5200 | 11.0 | 11.0 | 14.0 | ±1.5 | 15.5 | 12.4 | 12.5 | 15.5 |
| | | | 44 | 5220 | 11.0 | 11.0 | 14.0 | ±1.5 | 15.5 | 12.0 | 12.5 | 15.3 |
| | | | 48 | 5240 | 11.0 | 11.0 | 14.0 | ±1.5 | 15.5 | 12.0 | 12.5 | 15.3 |
| | | MCS8 | 38 | 5190 | 12.5 | | | ±1.5 | 14.0 | 13.8 | | |
| | | | 46 | 5230 | 12.5 | | | ±1.5 | 14.0 | 13.9 | | |
| | | | 38 | 5190 | | 12.5 | | ±1.5 | 14.0 | | 14.0 | |
| | | | 46 | 5230 | | 12.5 | | ±1.5 | 14.0 | | 13.9 | |
| | 802.11ac | VTH0 | 38 | 5190 | 12.0 | 12.0 | 15.0 | ±1.5 | 16.5 | 13.0 | 13.5 | 16.3 |
| | | | 46 | 5230 | 12.0 | 12.0 | 15.0 | ±1.5 | 16.5 | 12.9 | 13.5 | 16.2 |
| | | VTH8 | 42 | 5210 | 12.5 | | | ±1.5 | 14.0 | 13.8 | | |
| | | | 42 | 5210 | | 12.5 | | ±1.5 | 14.0 | | 14.0 | |
| | | | 42 | 5210 | 12.0 | 12.0 | 15.0 | ±1.5 | 16.5 | 13.2 | 13.5 | 16.4 |



Wi-Fi 5.3GHz Band:

| Band (GHz) | Mode | Data rate (Mbps) | Ch # | Freq. (MHz) | Target Pwr (dBm) | | | Tune-up Tolerance (dBm) | Maximum Tune-up Pwr (dBm) | Avg. Pwr (dBm) | | |
|------------|----------------|------------------|------|-------------|------------------|------|-------|-------------------------|---------------------------|----------------|------|-------|
| | | | | | Main | Aux | Total | | | Main | Aux | Total |
| 5.3 | 802.11a | 6 | 52 | 5260 | 12.5 | | | ±1.5 | 14.0 | 14.0 | | |
| | | | 56 | 5280 | 12.5 | | | ±1.5 | 14.0 | 13.9 | | |
| | | | 60 | 5300 | 12.5 | | | ±1.5 | 14.0 | 13.9 | | |
| | | | 64 | 5320 | 12.5 | | | ±1.5 | 14.0 | 13.9 | | |
| | | | 52 | 5260 | | 12.5 | | ±1.5 | 14.0 | | 13.9 | |
| | | | 56 | 5280 | | 12.5 | | ±1.5 | 14.0 | | 14.0 | |
| | | | 60 | 5300 | | 12.5 | | ±1.5 | 14.0 | | 13.9 | |
| | | | 64 | 5320 | | 12.5 | | ±1.5 | 14.0 | | 13.9 | |
| | 802.11n (HT20) | MCS0 | 52 | 5260 | 12.5 | | | ±1.5 | 14.0 | 13.9 | | |
| | | | 56 | 5280 | 12.5 | | | ±1.5 | 14.0 | 13.8 | | |
| | | | 60 | 5300 | 12.5 | | | ±1.5 | 14.0 | 13.8 | | |
| | | | 64 | 5320 | 12.5 | | | ±1.5 | 14.0 | 13.8 | | |
| | | | 52 | 5260 | | 12.5 | 12.5 | ±1.5 | 14.0 | | 13.8 | |
| | | | 56 | 5280 | | 12.5 | 12.5 | ±1.5 | 14.0 | | 13.9 | |
| | | | 60 | 5300 | | 12.5 | 12.5 | ±1.5 | 14.0 | | 13.8 | |
| | | | 64 | 5320 | | 12.5 | 12.5 | ±1.5 | 14.0 | | 13.8 | |
| | 802.11n (HT40) | MCS0 | 52 | 5260 | 12.5 | 12.5 | 15.5 | ±1.5 | 17.0 | 13.7 | 14.0 | 16.9 |
| | | | 56 | 5280 | 12.5 | 12.5 | 15.5 | ±1.5 | 17.0 | 13.7 | 14.0 | 16.9 |
| | | | 54 | 5270 | 13.5 | | | ±1.5 | 15.0 | 14.8 | | |
| | | | 62 | 5310 | 14.5 | | | ±1.5 | 16.0 | 15.9 | | |
| | | MCS8 | 54 | 5270 | | 13.5 | | ±1.5 | 15.0 | | 14.9 | |
| | | | 62 | 5310 | | 14.5 | | ±1.5 | 16.0 | | 15.9 | |
| | | | 54 | 5270 | 12.5 | 12.5 | 15.5 | ±1.5 | 17.0 | 13.6 | 14.0 | 16.8 |
| | | | 62 | 5310 | 12.5 | 12.5 | 15.5 | ±1.5 | 17.0 | 13.5 | 14.0 | 16.8 |
| | 802.11ac | VTH0 | 58 | 5290 | 12.5 | | | ±1.5 | 14.0 | 14.0 | | |
| | | | 58 | 5290 | | 12.5 | | ±1.5 | 14.0 | | 14.0 | |
| | | VTH8 | 58 | 5290 | 12.0 | 12.0 | 15.0 | ±1.5 | 16.5 | 13.2 | 13.5 | 16.4 |



Wi-Fi 5.5GHz Band:

| Band (GHz) | Mode | Data rate (Mbps) | Ch # | Freq. (MHz) | Target Pwr (dBm) | | | Tune-up Tolerance (dBm) | Maximum Tune-up Pwr (dBm) | Avg. Pwr (dBm) | | |
|------------|----------------|------------------|------|-------------|------------------|------|-------|-------------------------|---------------------------|----------------|-----|-------|
| | | | | | Main | Aux | Total | | | Main | Aux | Total |
| 5.5 | 802.11a | 6 | 100 | 5500 | 14.5 | | | ±1.5 | 16.0 | 15.9 | | |
| | | | 104 | 5520 | 14.5 | | | ±1.5 | 16.0 | 15.9 | | |
| | | | 108 | 5540 | 14.5 | | | ±1.5 | 16.0 | 15.8 | | |
| | | | 112 | 5560 | 14.5 | | | ±1.5 | 16.0 | 15.7 | | |
| | | | 116 | 5580 | 14.5 | | | ±1.5 | 16.0 | 15.8 | | |
| | | | 120 | 5600 | 14.5 | | | ±1.5 | 16.0 | 16.0 | | |
| | | | 124 | 5620 | 14.5 | | | ±1.5 | 16.0 | 16.0 | | |
| | | | 128 | 5640 | 14.5 | | | ±1.5 | 16.0 | 16.0 | | |
| | | | 132 | 5660 | 14.5 | | | ±1.5 | 16.0 | 16.0 | | |
| | | | 136 | 5680 | 14.5 | | | ±1.5 | 16.0 | 16.0 | | |
| | | | 140 | 5700 | 14.5 | | | ±1.5 | 16.0 | 16.0 | | |
| | 802.11n (HT20) | MCS0 | 100 | 5500 | | 14.5 | | ±1.5 | 16.0 | 15.8 | | |
| | | | 104 | 5520 | | 14.5 | | ±1.5 | 16.0 | 15.9 | | |
| | | | 108 | 5540 | | 14.5 | | ±1.5 | 16.0 | 15.7 | | |
| | | | 112 | 5560 | | 14.5 | | ±1.5 | 16.0 | 15.9 | | |
| | | | 116 | 5580 | | 14.5 | | ±1.5 | 16.0 | 16.0 | | |
| | 802.11n (HT20) | MCS0 | 120 | 5600 | | 14.5 | | ±1.5 | 16.0 | 16.0 | | |
| | | | 124 | 5620 | | 14.5 | | ±1.5 | 16.0 | 16.0 | | |
| | | | 128 | 5640 | | 14.5 | | ±1.5 | 16.0 | 16.0 | | |
| | | | 132 | 5660 | | 14.5 | | ±1.5 | 16.0 | 15.9 | | |
| | | | 136 | 5680 | | 14.5 | | ±1.5 | 16.0 | 15.9 | | |
| | | | 140 | 5700 | | 14.5 | | ±1.5 | 16.0 | 15.8 | | |
| | | | 100 | 5500 | | 14.5 | | ±1.5 | 16.0 | 15.8 | | |
| | | | 104 | 5520 | | 14.5 | | ±1.5 | 16.0 | 15.9 | | |
| | | | 108 | 5540 | | 14.5 | | ±1.5 | 16.0 | 15.9 | | |
| | | | 112 | 5560 | | 14.5 | | ±1.5 | 16.0 | 15.9 | | |
| | | | 116 | 5580 | | 14.5 | | ±1.5 | 16.0 | 15.8 | | |
| | | | 120 | 5600 | | 14.5 | | ±1.5 | 16.0 | 15.8 | | |
| | | | 124 | 5620 | | 14.5 | | ±1.5 | 16.0 | 15.9 | | |
| | | | 128 | 5640 | | 14.5 | | ±1.5 | 16.0 | 15.9 | | |
| | | | 132 | 5660 | | 14.5 | | ±1.5 | 16.0 | 15.9 | | |
| | | | 136 | 5680 | | 14.5 | | ±1.5 | 16.0 | 15.8 | | |
| | | | 140 | 5700 | | 14.5 | | ±1.5 | 16.0 | 15.8 | | |



| Band (GHz) | Mode | Data rate (Mbps) | Ch # | Freq. (MHz) | Target Pwr (dBm) | | | Tune-up Tolerance (dBm) | Maximum Tune-up Pwr (dBm) | Avg. Pwr (dBm) | | |
|------------|----------------|------------------|------|-------------|------------------|------|-------|-------------------------|---------------------------|----------------|------|-------|
| | | | | | Main | Aux | Total | | | Main | Aux | Total |
| 5.5 | 802.11n (HT20) | MCS8 | 100 | 5500 | 14.5 | 14.5 | 17.5 | ±1.5 | 19.0 | 15.9 | 16.0 | 19.0 |
| | | | 104 | 5520 | 14.5 | 14.5 | 17.5 | ±1.5 | 19.0 | 15.9 | 16.0 | 19.0 |
| | | | 108 | 5540 | 14.5 | 14.5 | 17.5 | ±1.5 | 19.0 | 15.8 | 16.0 | 18.9 |
| | | | 112 | 5560 | 14.5 | 14.5 | 17.5 | ±1.5 | 19.0 | 15.7 | 16.0 | 18.9 |
| | | | 116 | 5580 | 14.5 | 14.5 | 17.5 | ±1.5 | 19.0 | 15.7 | 16.0 | 18.9 |
| | | | 120 | 5600 | 14.5 | 14.5 | 17.5 | ±1.5 | 19.0 | 15.3 | 16.0 | 18.7 |
| | | | 124 | 5620 | 14.5 | 14.5 | 17.5 | ±1.5 | 19.0 | 15.5 | 16.0 | 18.8 |
| | | | 128 | 5640 | 14.5 | 14.5 | 17.5 | ±1.5 | 19.0 | 15.6 | 16.0 | 18.8 |
| | | | 132 | 5660 | 14.5 | 14.5 | 17.5 | ±1.5 | 19.0 | 15.7 | 16.0 | 18.9 |
| | | | 136 | 5680 | 14.5 | 14.5 | 17.5 | ±1.5 | 19.0 | 15.6 | 16.0 | 18.8 |
| | 802.11n (HT40) | MCS0 | 140 | 5700 | 14.0 | 14.0 | 17.0 | ±1.5 | 18.5 | 15.5 | 15.4 | 18.5 |
| | | | 102 | 5510 | 13.5 | | | ±1.5 | 15.0 | 14.8 | | |
| | | | 110 | 5550 | 14.5 | | | ±1.5 | 16.0 | 15.9 | | |
| | | | 118 | 5550 | 14.5 | | | ±1.5 | 16.0 | 15.9 | | |
| | | | 126 | 5630 | 14.5 | | | ±1.5 | 16.0 | 15.8 | | |
| | | | 134 | 5670 | 14.5 | | | ±1.5 | 16.0 | 15.8 | | |
| | | | 142 | 5710 | 14.5 | | | ±1.5 | 16.0 | 15.9 | | |
| | | | 102 | 5510 | | 13.5 | | ±1.5 | 15.0 | | 15.0 | |
| | | | 110 | 5550 | | 14.5 | | ±1.5 | 16.0 | | 15.8 | |
| | | | 118 | 5550 | | 14.5 | | ±1.5 | 16.0 | | 15.9 | |
| | 802.11n (HT40) | MCS8 | 126 | 5630 | | 14.5 | | ±1.5 | 16.0 | | 15.8 | |
| | | | 134 | 5670 | | 14.5 | | ±1.5 | 16.0 | | 15.9 | |
| | | | 142 | 5710 | | 14.5 | | ±1.5 | 16.0 | | 15.9 | |
| | | | 102 | 5510 | 12.5 | 12.5 | 15.5 | ±1.5 | 17.0 | 13.5 | 14.0 | 16.8 |
| | | | 110 | 5550 | 14.5 | 14.5 | 17.5 | ±1.5 | 19.0 | 15.8 | 16.0 | 18.9 |
| | | | 118 | 5550 | 14.5 | 14.5 | 17.5 | ±1.5 | 19.0 | 15.6 | 16.0 | 18.8 |
| | 802.11ac | VTH0 | 126 | 5630 | 14.5 | 14.5 | 17.5 | ±1.5 | 19.0 | 15.5 | 16.0 | 18.8 |
| | | | 134 | 5670 | 14.5 | 14.5 | 17.5 | ±1.5 | 19.0 | 15.4 | 16.0 | 18.7 |
| | | | 142 | 5710 | 14.5 | 14.5 | 17.5 | ±1.5 | 19.0 | 15.8 | 16.0 | 18.9 |
| | | | 106 | 5530 | 13.5 | | | ±1.5 | 15.0 | 14.8 | | |
| | | | 122 | 5610 | 13.5 | | | ±1.5 | 15.0 | 15.0 | | |
| | | | 138 | 5690 | 14.5 | | | ±1.5 | 16.0 | 15.9 | | |
| | | VTH8 | 106 | 5530 | | 13.5 | | ±1.5 | 15.0 | | 15.0 | |
| | | | 122 | 5610 | | 13.5 | | ±1.5 | 15.0 | | 15.0 | |
| | | | 138 | 5690 | | 14.5 | | ±1.5 | 16.0 | | 16.0 | |
| | | | 106 | 5530 | 12.0 | 12.0 | 15.0 | ±1.5 | 16.5 | 12.9 | 13.5 | 16.2 |
| | | | 122 | 5610 | 12.0 | 12.0 | 15.0 | ±1.5 | 16.5 | 13.0 | 13.5 | 16.3 |
| | | | 138 | 5690 | 14.5 | 14.5 | 17.5 | ±1.5 | 19.0 | 15.6 | 16.0 | 18.8 |



Wi-Fi 5.8GHz Band:

| Band (GHz) | Mode | Data rate (Mbps) | Ch # | Freq. (MHz) | Target Pwr (dBm) | | | Tune-up Tolerance (dBm) | Maximum Tune-up Pwr (dBm) | Avg. Pwr (dBm) | | |
|------------|----------------|------------------|------|-------------|------------------|------|-------|-------------------------|---------------------------|----------------|------|-------|
| | | | | | Main | Aux | Total | | | Main | Aux | Total |
| 5.8 | 802.11a | 6 | 149 | 5745 | 16.5 | | | ±1.5 | 18.0 | 17.8 | | |
| | | | 153 | 5765 | 16.5 | | | ±1.5 | 18.0 | 17.8 | | |
| | | | 157 | 5785 | 16.5 | | | ±1.5 | 18.0 | 17.9 | | |
| | | | 161 | 5805 | 16.5 | | | ±1.5 | 18.0 | 17.9 | | |
| | | | 165 | 5825 | 16.5 | | | ±1.5 | 18.0 | 17.8 | | |
| | | | 149 | 5745 | | 16.5 | | ±1.5 | 18.0 | | 18.0 | |
| | | | 153 | 5765 | | 16.5 | | ±1.5 | 18.0 | | 18.0 | |
| | | | 157 | 5785 | | 16.5 | | ±1.5 | 18.0 | | 18.0 | |
| | | | 161 | 5805 | | 16.5 | | ±1.5 | 18.0 | | 17.9 | |
| | | | 165 | 5825 | | 16.5 | | ±1.5 | 18.0 | | 17.8 | |
| 5.8 | 802.11n (HT20) | MCS0 | 149 | 5745 | 16.5 | | | ±1.5 | 18.0 | 17.8 | | |
| | | | 153 | 5765 | 16.5 | | | ±1.5 | 18.0 | 17.7 | | |
| | | | 157 | 5785 | 16.5 | | | ±1.5 | 18.0 | 17.8 | | |
| | | | 161 | 5805 | 16.5 | | | ±1.5 | 18.0 | 17.8 | | |
| | | | 165 | 5825 | 16.5 | | | ±1.5 | 18.0 | 17.7 | | |
| | | | 149 | 5745 | | 16.5 | | ±1.5 | 18.0 | | 17.9 | |
| | | | 153 | 5765 | | 16.5 | | ±1.5 | 18.0 | | 17.9 | |
| | | | 157 | 5785 | | 16.5 | | ±1.5 | 18.0 | | 17.9 | |
| | | | 161 | 5805 | | 16.5 | | ±1.5 | 18.0 | | 17.8 | |
| | | | 165 | 5825 | | 16.5 | | ±1.5 | 18.0 | | 17.7 | |
| | 802.11n (HT40) | MCS8 | 149 | 5745 | 16.5 | 16.5 | 19.5 | ±1.5 | 21.0 | 17.3 | 18.0 | 20.7 |
| | | | 153 | 5765 | 16.5 | 16.5 | 19.5 | ±1.5 | 21.0 | 17.5 | 18.0 | 20.8 |
| | | | 157 | 5785 | 16.5 | 16.5 | 19.5 | ±1.5 | 21.0 | 17.4 | 18.0 | 20.7 |
| | | | 161 | 5805 | 16.5 | 16.5 | 19.5 | ±1.5 | 21.0 | 17.4 | 17.9 | 20.7 |
| | | | 165 | 5825 | 16.5 | 16.5 | 19.5 | ±1.5 | 21.0 | 17.9 | 18.0 | 21.0 |
| | 802.11ac | MCS0 | 151 | 5755 | 16.5 | | | ±1.5 | 18.0 | 17.8 | | |
| | | | 159 | 5795 | 16.5 | | | ±1.5 | 18.0 | 17.9 | | |
| | | | 151 | 5755 | | 16.5 | | ±1.5 | 18.0 | | 17.8 | |
| | | | 159 | 5795 | | 16.5 | | ±1.5 | 18.0 | | 17.8 | |
| | VTH0 | MCS8 | 151 | 5755 | 12.5 | 12.5 | 15.5 | ±1.5 | 17.0 | 13.6 | 14.0 | 16.8 |
| | | | 159 | 5795 | 16.5 | 16.5 | 19.5 | ±1.5 | 21.0 | 17.0 | 18.0 | 20.5 |
| | VTH8 | 155 | 5775 | 16.0 | | | | ±1.5 | 17.5 | 17.5 | | |
| | | 155 | 5775 | | 16.0 | | | ±1.5 | 17.5 | | 17.5 | |
| | | 155 | 5775 | 12.0 | 12.0 | 15.0 | ±1.5 | 16.5 | 13.2 | 13.5 | | 16.4 |

**13.3 Bluetooth****Output power table**

| Band (GHz) | Mode | Ch # | Freq. (MHz) | Target Pwr (dBm) | Tune-up Tolerance (dBm) | Maximum Tune-up Pwr (dBm) | Measured Avg. Pwr (dBm) |
|------------|------|------|-------------|------------------|-------------------------|---------------------------|-------------------------|
| Bluetooth | DH5 | 0 | 2402 | 0.0 | ± 1.5 | 1.5 | -2.8 |
| | | 39 | 2441 | 0.0 | ± 1.5 | 1.5 | -2.6 |
| | | 78 | 2480 | 0.0 | ± 1.5 | 1.5 | -2.5 |
| Bluetooth | 3DH5 | 0 | 2402 | 0.0 | ± 1.5 | 1.5 | -2.5 |
| | | 39 | 2441 | 0.0 | ± 1.5 | 1.5 | -2.3 |
| | | 78 | 2480 | 0.0 | ± 1.5 | 1.5 | -2.1 |
| Bluetooth | BLE | 0 | 2402 | -6.0 | ± 1.5 | -4.5 | -4.5 |
| | | 19 | 2440 | -6.0 | ± 1.5 | -4.5 | -4.3 |
| | | 39 | 2480 | -6.0 | ± 1.5 | -4.5 | -4.2 |



14 SAR Measurements Results

Wi-Fi (2.4GHz Band):

| Test Mode | Mode | Test Position | Channel | Freq. (MHz) | Chain | Dist. (mm) | Power (dBm) | | Measured 1g SAR (W/kg) | Reported SAR(W/kg) | Note |
|-------------|---------|---------------|---------|-------------|-------|------------|---------------|----------|------------------------|--------------------|-------|
| | | | | | | | Tune up limit | Measured | | | |
| Tablet Mode | Rear | 802.11b | 6 | 2437 | 0 | 0 | 16.0 | 16.0 | 0.045 | 0.045 | |
| | | | 6 | 2437 | 1 | 0 | 16.0 | 16.0 | 0.039 | 0.039 | |
| | 802.11b | 6 | 2437 | 0 | 0 | 0 | 16.0 | 16.0 | 0.108 | 0.108 | |
| | | 6 | 2437 | 1 | 0 | 0 | 16.0 | 16.0 | 0.161 | 0.161 | |
| | Edge 1 | 802.11n HT20 | 6 | 2437 | 0 | 0 | 16.0 | 15.9 | 0.097 | 0.099 | |
| | | | | | 1 | 0 | 16.0 | 16.0 | 0.135 | 0.135 | |
| | 802.11b | 6 | 2437 | 1 | 0 | 0 | 16.0 | 16.0 | 0.111 | 0.111 | Ant 2 |
| | | | | | | | | | | | |

Note(s):

1. Ant 1 was performed the SAR testing. Ant 2 was performed the spot check of SAR only.
2. The antennas are spaced far apart and there is no overlap of hot spots, therefore simultaneous analysis is not required.
3. We need to choose the channel it has the highest power for each band under 802.11b/802.11n HT20 to test. Then we choose the channel(band) which is the worst case in 2.4G testing from these two result, and use it to perform 802.11b.



Wi-Fi (5GHz Band):

| Test Mode | Test Position | Mode | Channel | Freq. (MHz) | Chain | Dist. (mm) | Power (dBm) | | Measured 1g SAR (W/kg) | Reported SAR(W/kg) | Note |
|-------------|---------------|--------------|---------|-------------|-------|------------|---------------|----------|------------------------|--------------------|------|
| | | | | | | | Tune up limit | Measured | | | |
| Tablet Mode | Rear | 802.11a | 40 | 5200 | 0 | 0 | 14.0 | 14.0 | 0.020 | 0.020 | |
| | | | 56 | 5280 | 0 | 0 | 14.0 | 14.0 | 0.025 | 0.025 | |
| | | | 120 | 5600 | 0 | 0 | 16.0 | 16.0 | 0.054 | 0.054 | |
| | | | 157 | 5785 | 0 | 0 | 18.0 | 17.9 | 0.047 | 0.048 | |
| | | | 40 | 5200 | 1 | 0 | 14.0 | 14.0 | 0.005 | 0.005 | |
| | | | 56 | 5280 | 1 | 0 | 14.0 | 13.9 | 0.009 | 0.009 | |
| | | | 120 | 5600 | 1 | 0 | 16.0 | 16.0 | 0.013 | 0.013 | |
| | | | 153 | 5765 | 1 | 0 | 18.0 | 17.9 | 0.012 | 0.013 | |
| | Edge 1 | 802.11n HT40 | 40 | 5200 | 0 | 0 | 14.0 | 14.0 | 0.570 | 0.570 | |
| | | | 56 | 5280 | 0 | 0 | 14.0 | 14.0 | 0.651 | 0.651 | |
| | | | 120 | 5600 | 0 | 0 | 16.0 | 16.0 | 0.852 | 0.852 | |
| | | | 124 | 5620 | 0 | 0 | 16.0 | 16.0 | 0.724 | 0.724 | 1 |
| | | | 157 | 5785 | 0 | 0 | 18.0 | 17.9 | 0.763 | 0.781 | |
| | | | 40 | 5200 | 1 | 0 | 14.0 | 14.0 | 0.193 | 0.193 | |
| | | | 56 | 5280 | 1 | 0 | 14.0 | 13.9 | 0.226 | 0.231 | |
| | Edge 1 | 802.11n HT40 | 120 | 5600 | 1 | 0 | 16.0 | 16.0 | 0.389 | 0.389 | |
| | | | 153 | 5765 | 1 | 0 | 18.0 | 17.9 | 0.526 | 0.538 | |
| | | | 38 | 5190 | 0 | 0 | 13.5 | 13.0 | 0.391 | 0.439 | |
| | | | 54 | 5270 | 1 | 0 | 13.5 | 13.5 | 0.197 | 0.197 | |
| | | | 0 | 0 | 0 | 0 | 14.0 | 13.6 | 0.624 | 0.684 | |
| | | | 110 | 5550 | 1 | 0 | 14.0 | 14.0 | 0.265 | 0.265 | |
| | | | 0 | 0 | 0 | 0 | 16.0 | 15.8 | 0.991 | 1.038 | |

Note(s):

1. Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel. ≥ 0.8 W/kg and transmission band ≤ 100 MHz (Per KDB 447498 D01 v05r02 section 4.3.3)
2. The antennas are spaced far apart and there is no overlap of hot spots, therefore simultaneous analysis is not required.



| Tablet Mode | Test Position | Mode | Channel | Freq. (MHz) | Chain | Dist. (mm) | Power (dBm) | | Measured 1g SAR (W/kg) | Reported SAR(W/kg) | Note |
|-------------|---------------|--------------|---------|-------------|-------|------------|---------------|----------|------------------------|--------------------|-------|
| | | | | | | | Tune up limit | Measured | | | |
| Tablet Mode | Edge 1 | 802.11ac | 42 | 5210 | 0 | 0 | 14.0 | 13.8 | 0.654 | 0.685 | |
| | | | 58 | 5290 | 0 | 0 | 14.0 | 14.0 | 0.622 | 0.622 | |
| | | | 138 | 5690 | 0 | 0 | 16.0 | 16.0 | 0.695 | 0.695 | |
| | | | 155 | 5775 | 0 | 0 | 17.5 | 17.5 | 0.782 | 0.782 | |
| | | | 42 | 5210 | 1 | 0 | 14.0 | 14.0 | 0.220 | 0.220 | |
| | | | 58 | 5290 | 1 | 0 | 14.0 | 14.0 | 0.239 | 0.239 | |
| | | | 138 | 5690 | 1 | 0 | 16.0 | 16.0 | 0.386 | 0.386 | |
| | | | 155 | 5775 | 1 | 0 | 17.5 | 17.5 | 0.524 | 0.524 | |
| Tablet Mode | Edge 1 | 802.11n HT40 | 118 | 5590 | 0 | 0 | 16.0 | 15.6 | 1.090 | 1.195 | 2 |
| Tablet Mode | Edge 1 | 802.11n HT40 | | | 1 | 0 | 16.0 | 16.0 | 0.521 | 0.521 | 2 |
| Tablet Mode | Edge 1 | 802.11n HT40 | 118 | 5590 | 0 | 0 | 16.0 | 15.6 | 1.070 | 1.173 | Ant 2 |
| Tablet Mode | Edge 1 | 802.11n HT40 | | | 1 | 0 | 16.0 | 16.0 | 0.496 | 0.496 | Ant 2 |

Note(s):

1. Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel. ≥ 0.8 W/kg and transmission band ≤ 100 MHz (Per KDB 447498 D01 v05r02 section 4.3.3)
2. Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR values are < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03)
 - 2.1 Original SAR = 1.02 therefore two times repeat SAR is required.
 - 2.2 Repeat SAR = 1.09kg < 1.45 W/kg
 - 2.3 SAR variation= 6.8< 20%
3. The antennas are spaced far apart and there is no overlap of hot spots, therefore simultaneous analysis is not required.
4. We need to choose the channel it has the highest power for each band under 802.11a/ 802.11n HT40/802.11ac to test. Then we choose the channel(band) which is the worst case in 5G testing from these three result, and use it to perform 802.11a.



15 Summary of Highest SAR Values

Results for highest reported SAR values for each frequency band and mode

| Technology/Band | Test configuration | Mode | Highest Reported 1g-SAR (W/kg) |
|-----------------|--------------------|--------------|--------------------------------|
| Wi-Fi 2.4 GHz | Tablet@Edge 1 | 802.11b | 0.161 |
| Wi-Fi 5.2 GHz | Tablet@Edge 1 | 802.11ac | 0.685 |
| Wi-Fi 5.3 GHz | Tablet@Edge 1 | 802.11n HT40 | 0.684 |
| Wi-Fi 5.5 GHz | Tablet@Edge 1 | 802.11n HT40 | 1.195 |
| Wi-Fi 5.8 GHz | Tablet@Edge 1 | 802.11n HT40 | 1.061 |



16 Equipment List & Calibration Status

| Name of Equipment | Manufacturer | Type/Model | Serial Number | Calibration Cycle(year) | Calibration Due |
|------------------------------------|-----------------|-------------|-----------------|-------------------------|-----------------|
| S-Parameter Network Analyzer | Agilent | E5071C | MY46213916 | 1 | 2015/6/25 |
| Electronic Probe kit | Hewlett Packard | 85070D | N/A | N/A | N/A |
| Power Meter | Agilent | 4416 | GB41291611 | 1 | 2015/9/4 |
| Power Sensor | Agilent | 8481H | MY41091956 | 1 | 2015/9/4 |
| Data Acquisition Electronics (DAE) | SPEAG | DAE4 | 558 | 1 | 2015/7/21 |
| Dosimetric E-Field Probe | SPEAG | EX3DV4 | 3554 | 1 | 2015/9/23 |
| 2450 MHz System Validation Dipole | SPEAG | D2450V2 | 728 | 1 | 2015/5/19 |
| 5GHz System Validation Dipole | SPEAG | D5GHzV2 | 1004 | 1 | 2015/11/19 |
| Robot | Staubli | RX90L | F02/5T69A1/A/01 | N/A | N/A |
| Amplifier | Mini-Circuit | ZVE-8G | 665500309 | N/A | N/A |
| Amplifier | Mini-Circuit | ZHL-1724HLN | D072602#2 | N/A | N/A |



17 Facilities

All measurement facilities used to collect the measurement data are located at

- No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang, Taoyuan Hsien, Taiwan, R.O.C.
- No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
- No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

18 Reference

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environmental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commision, O_ce of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645{652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz - 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM _ 97, Dubrovnik, October 15{17, 1997, pp. 120{124.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23{25 June, 1996, pp. 172{175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard K. uhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions onMicrowave Theory and Techniques, vol. 44, no. 10, pp. 1865{1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Receipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992..Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10



19 Attachments

| Exhibit | Content |
|---------|--------------------------------------|
| 1 | System Performance Check Plots |
| 2 | SAR test plots for Wi-Fi 2.4GHz Band |
| 3 | SAR test plots for Wi-Fi 5 GHz Band |
| 4 | SAR_Probe_EX3DV4_sn3554 |
| 5 | SAR_DAE4_sn558 |
| 6 | SAR_Dipole_D2450v2_sn728 |
| 7 | SAR_Dipole_D5GHzv2_sn1004 |
| 8 | T150109W06-SF PHOTOS |

END OF REPORT