

§15.247 (d) - 100 KHZ BANDWIDTH OF BAND EDGES

Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required.

Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment

Manufacturer	Description	Model No.	Serial No.	Calibration Date
HP	Spectrum Analyzer	8565EC	3946A00131	2004-08-06
HP	Plotter	7475A	2517A05739	N/R

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions


Temperature:	22° C
Relative Humidity:	59%
ATM Pressure:	1020 mbar

*The testing was performed by Jerry Wang on 2005-06-08.

Plots of 100kHz Bandwidth of Band Edge


Please refer the following plots.

Base:

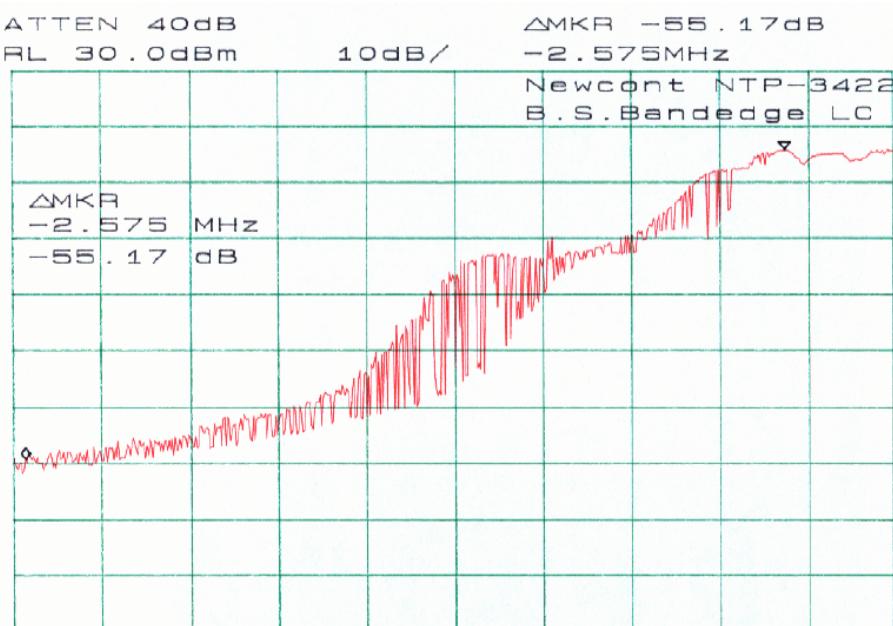

START 2.399000GHz STOP 2.402000GHz
 *RBW 100kHz VBW 100kHz SWP 50.0ms



Jmugd-6-8

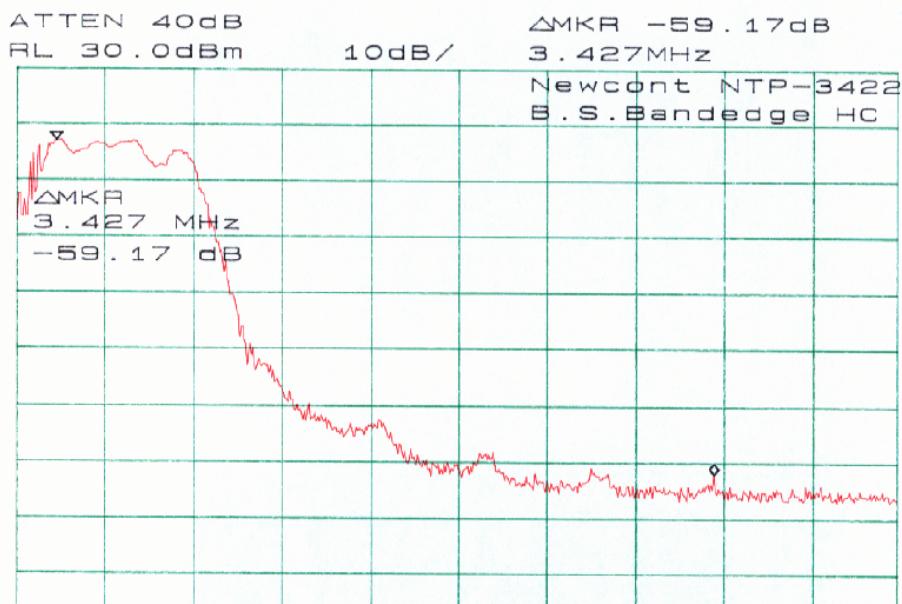

START 2.479000GHz STOP 2.483600GHz
 *RBW 100kHz VBW 100kHz *SWP 50.0ms

Jmugd-6-8

Handset:

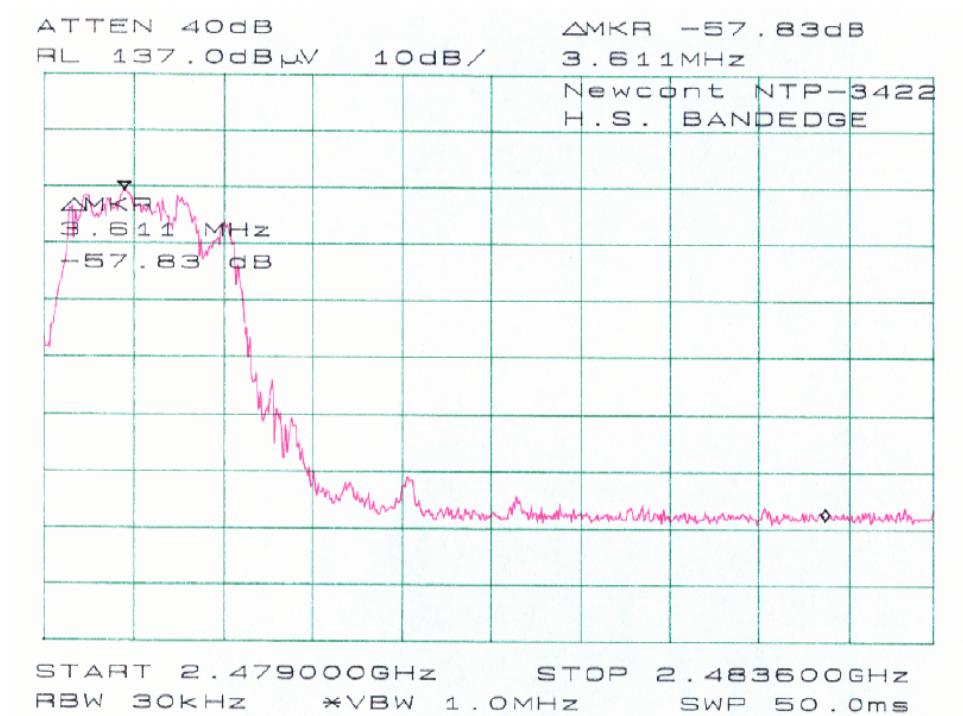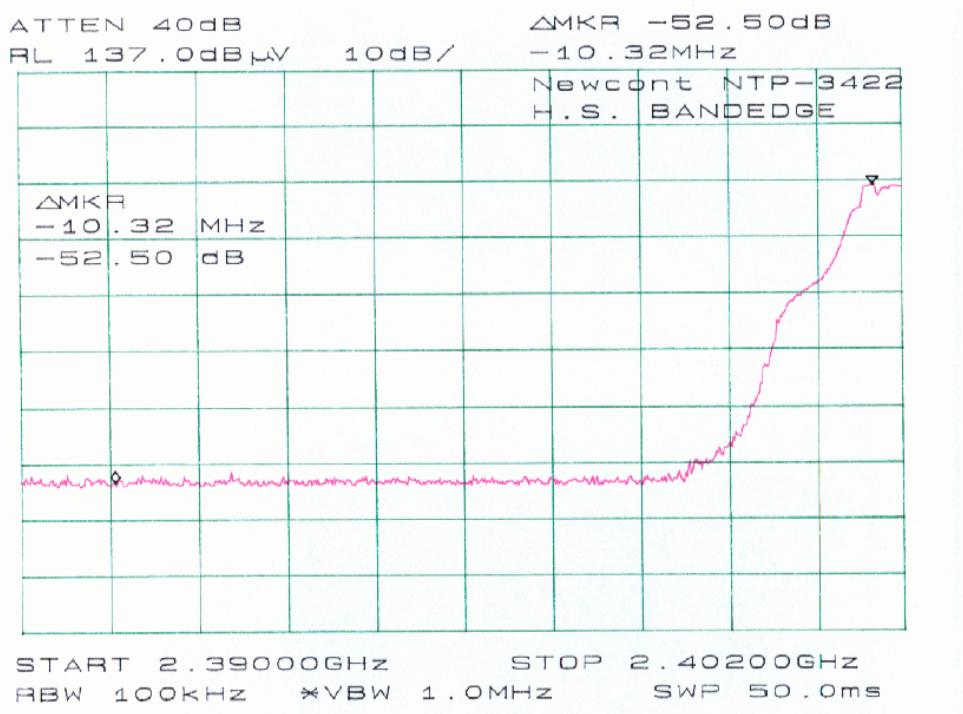

§2.1051 - SPURIOUS EMISSION AT ANTENNA PORT

Standard Applicable

According to §2.1051, the radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in §2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on a bench without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment

Manufacturer	Description	Model No.	Serial No.	Calibration Date
HP	Spectrum Analyzer	8565EC	3946A00131	2004-08-06
HP	Plotter	7475A	2517A05739	N/R

* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions


Temperature:	22° C
Relative Humidity:	59%
ATM Pressure:	1020 mbar

*The testing was performed by Jerry Wang on 2005-06-08.


Measurement Results

Please refer to the following plots.

Base: Low Channel

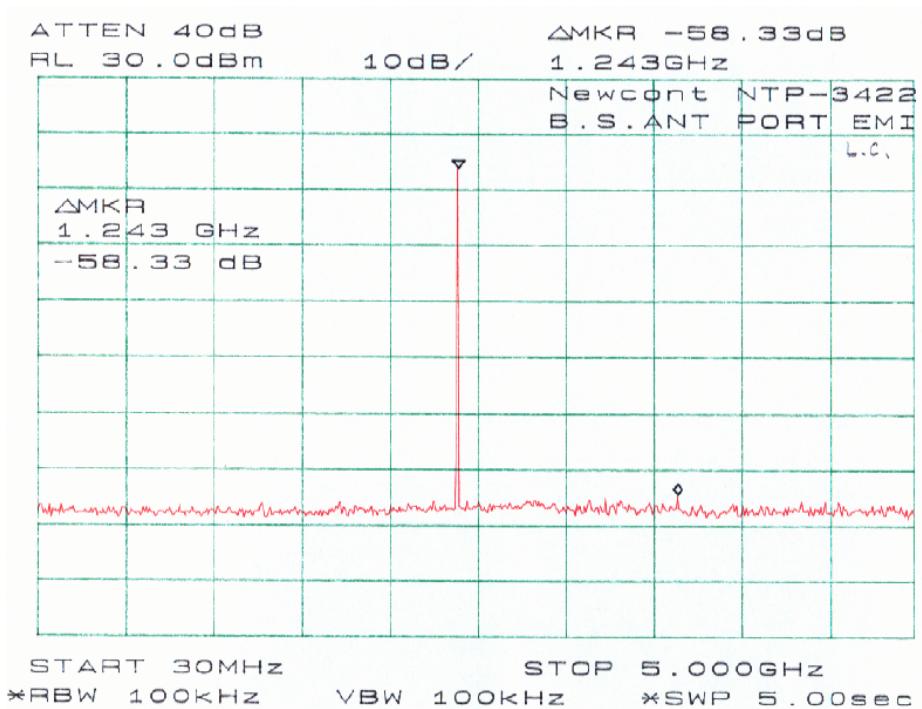

Jmgy205-6-8

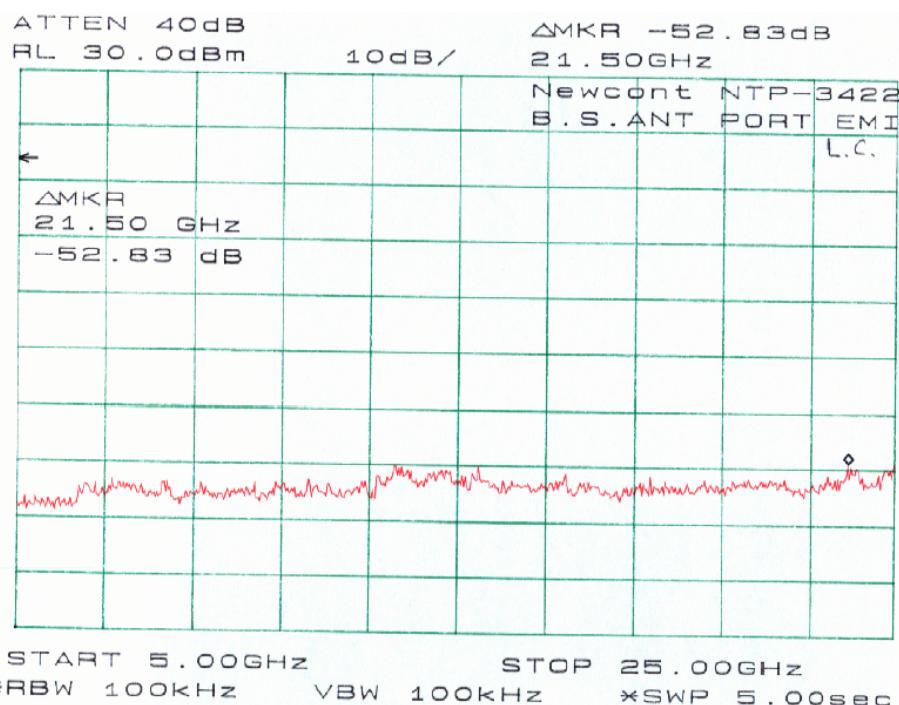

Jmgy205-6-8