



GARAGE DOOR MONITOR

Our Garage Door Monitor will notify you with a voice warning, message on the LCD display and pager alert (if properly installed).

Garage Door Voice Warnings

- "Garage Door Ajar" will announce in the Control Panel based upon your pre-selected timer setting (0-1440 minutes(24 hours))
- "Garage Door Opening " will announce in the Control Panel instantly when your Garage Door starts to open
- "Garage Door Closing" will announce in the Control Panel instantly when your Garage Door has fully closed otherwise the timer will still be active
- "Garage Door Closing Please Stand Clear " will announce in the GARAGE UNIT instantly upon downward movement of the Garage Door

SAFETY SENSORS

INTELLI-SENTRY DPS Safety Sensors when activated will send a wireless signal to the Control Panel.

Safety Sensors

CO Detector
Heat Detector
Smoke/Fire Detector

4-Way Alert

Voice, Text on LCD, Siren from Sensor and Pager Alert

GARAGE AREA

Limited to:
1 Heat Detector
2.CO Detector (When Available)

INSIDE OF HOME

Can have an unlimited number of smoke, heat or CO detectors when combined with our very practical REMOTE DETECTOR TRANSMITTER

1 or more Heat Detectors
1 or more Smoke Detectors
1 or more CO Detectors

Safety Sensor Voice Warning

"Danger CO Detected High in House" (with the Remote Detector Transmitter)etc.

INTRUSION ALERT


A nice backup to the Garage Door Monitor is the "INTRUSION ALERT" Feature. Simply attach the motion sensor to the Garage Unit and install in the Garage aligned to detect movement from any space while entering the Garage Space.

Voice Warning

:"Intrusion Alert in the Garage
"Intrusion Alert in the Control Panel in the House

Settings

- Intrusion Alert Motion Sensor activates 2.5 minutes after the Garage Door Opens
- Temporary shut-off switch on the Garage Unit if you know you'll be in the Garage Area. The system will auto-reset when door is fully closed and re-opened
-

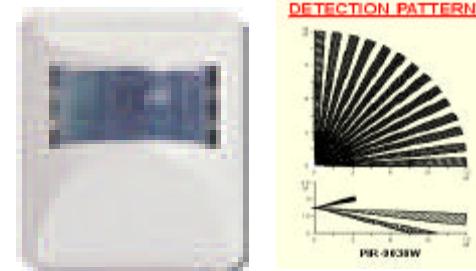

INTELLI-SENTRY DPS Door Positioning System

Operations Guide & Installation Instructions



NOVATION PRODUCTS, INC.
Garfield Heights, Ohio 44137
Phone: 1-877-Garage9
1-877-421-2439
Fax: 216-581-2582

NOVATION PRODUCTS, INC.
Garfield Heights, Ohio 44137
Phone: 1-877-Garage9
1-877-421-2439
Fax: 216-581-2582


PAGER ALERT SYSTEM

Receive a page to your pager or qualifying cellular telephone with a message indicating the particular alert.

- Program the telephone number to be dialed
- Connect a standard telephone line to the Control Panel
- Set the type of alert
- **Vacation Alert** - When the Garage Door opens an instant Pager Alert will be sent ("811" Pager Code)
- **Work Alert** - Page will be sent if the Garage Door has been open for 45 minutes or longer ("811" Pager Code)
- **Safety Alerts** - will send an instant page to a pager if any of the following sensors are activated. Please test monthly
 - CO Sensors ("911" Pager Code)
 - Smoke Sensors ("911" Pager Code)
- **Temperature Alerts** - Great for snow-birds. The Control Panel will send an instant page ("711" Pager Code) if the temperature in the house falls below 50 degrees Fahrenheit. **NO FROZEN PIPES!!!**

OTHER FEATURES

Digital Family Message Center



You no longer have to find a pencil and paper to write down a quick note to another in your household. **LEAVE IT DIGITALLY!!!**

- Record Messages up to 20 seconds on 3 mailboxes. That's up to 60 seconds of digital audio combined.
- Designate a mailbox for a person or event for example
 - Mailbox 1 = Spouse to Spouse
 - Mailbox 2 = Parents to Children or Children to Parents
 - Mailbox 3 = Emergencies

Tricks for the Digital Family Message Center

- While recording a message, to stop the recording before it automatically stops, hold the PLAY button for 4 seconds. Recording will cease.
- While playing back a message, to stop the message before it automatically resets, hold the REC button for 4 seconds. Play will stop

TEMPERATURE READINGS & CHIMES

- On the Control Panel there are 4 temperature readings. Current Indoor (upper right), current outdoor (lower left), 24 hour record high temperature lower middle and 24 hour record low temperature (lower right)
- 3 Sets of Hourly Chimes and OFF (NO CHIMES)

EASY INSTALLATION INSTRUCTIONS

To Install INTELLI-SENTRY DPS is as easy as 1-2-3.



CONTROL PANEL INSTALLATION

Step 1

Carefully remove components from the packaging and ensure all components are in the package

Step 2

Plug the Control Panel into a wall socket and begin programming. (See Programming /Mode Settings)

Step 3 - Mount the Control Panel on a convenient wall and measure 5-13/16" (14.7 cm or 147mm)and space the mounting screws accordingly or place the Control Panel on a desk/countertop

Step 4

Plug a standard modular telephone plug into the bottom of the control panel to enable the Pager Alert System. Control Panel is fully installed!!!



GARAGE UNIT INSTALLATION

Step 1

Attach the sensors to the terminal block according to the diagram provided.

Step 2

Install the sensors in the proper position in the Garage (Magnetic, Motion, COor Heat/Smoke, Shut-off Switch or House (Safety Sensors)

Step 3

Mount the Garage Unit on a convenient wall and measure 4-15/16" (12.5cm or 125 mm). Plug the Garage Unit into an electrical outlet

REMOTE DETECTOR TRANSMITTER INSTALLATION



Step 1

Install 4 AA Alkaline Batteries (not included) into the transmitter box and install the supplied 9V battery into the safety detectors (CO, SMOKE or HEAT). Mount the base of the detectors to the ceiling or wall.

Step 2

Attach the cable from the remote detector transmitter to the bottom side of the safety detectors. Keep in mind that one cable is for the CO & one for the esmoke/heat detectors. If the wrong message is played when installed, PLEASE SWITCH THE DETECTOR S TO THE OTHER CABLE.

Step 3

Mount the Remote Detector Transmitter on a convenient wall or ceiling and measure 4" (10.2cm or 102mm).

PROGRAMMING/MODE SETTINGS SCREENS

Main LCD Display & Miscellaneous Settings

12:02 AM 75F 52 \$ 53 / 52 F	Set Time ? Press MODE/SET
Up Down Changes 12:09 A	SET F or C? Press MODE/SET

GARAGE DOOR SETTINGS

Set door timer? Press MODE/SET	Up Down Changes 0003
-----------------------------------	-------------------------

PAGER ALERT SETTINGS

Up Down Changes 1-555-555-5555	Set Alert Type Press MODE/SET
Alert Type Vacation	Alert Type Work

OTHER MISCELLANEOUS SETTINGS

Up Down Changes 	Set Chime ? Press MODE/SET
---------------------	-------------------------------

Programming INTELLI-SENTRY DPS could'nt be easier. The main screen is the screen when the Garage Door is fully closed which shows the

1. Current Indoor Temperature - Upper Right
2. Current Outdoor Temperature - Lower Left
3. 24 Hr Record High Temperature - Lower Middle
4. 24 Hr Record Low Temperature - Lower Right

PROGRAMMING BUTTON OPERATIONS

To Toggle between Modes

Continue to press the up arrow





To Change a Setting

Move the cursor and use the up & down arrow to increase or decrease a particular value


To Activate a Setting

After inputting the value or selection - ACTIVATE BY PRESSING MODE


AND THAT'S IT!!! AREN'T YOU GLAD!!!

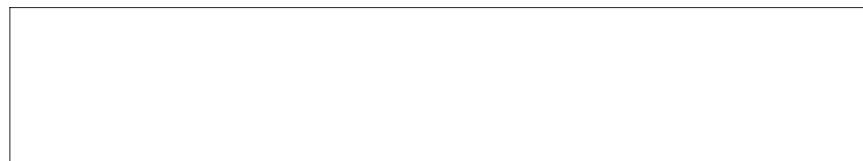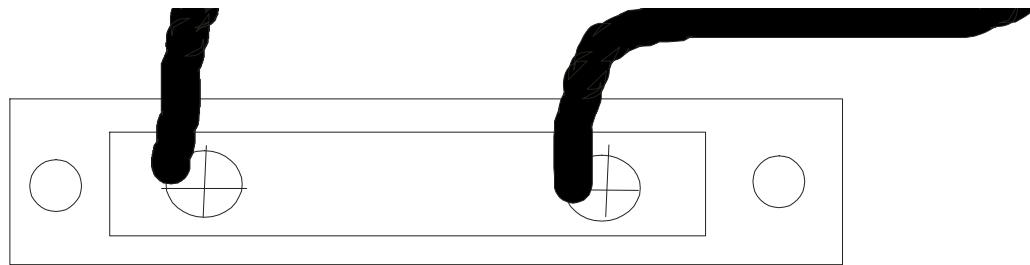


Magnetic Sensor (Contacts 5 & 7)

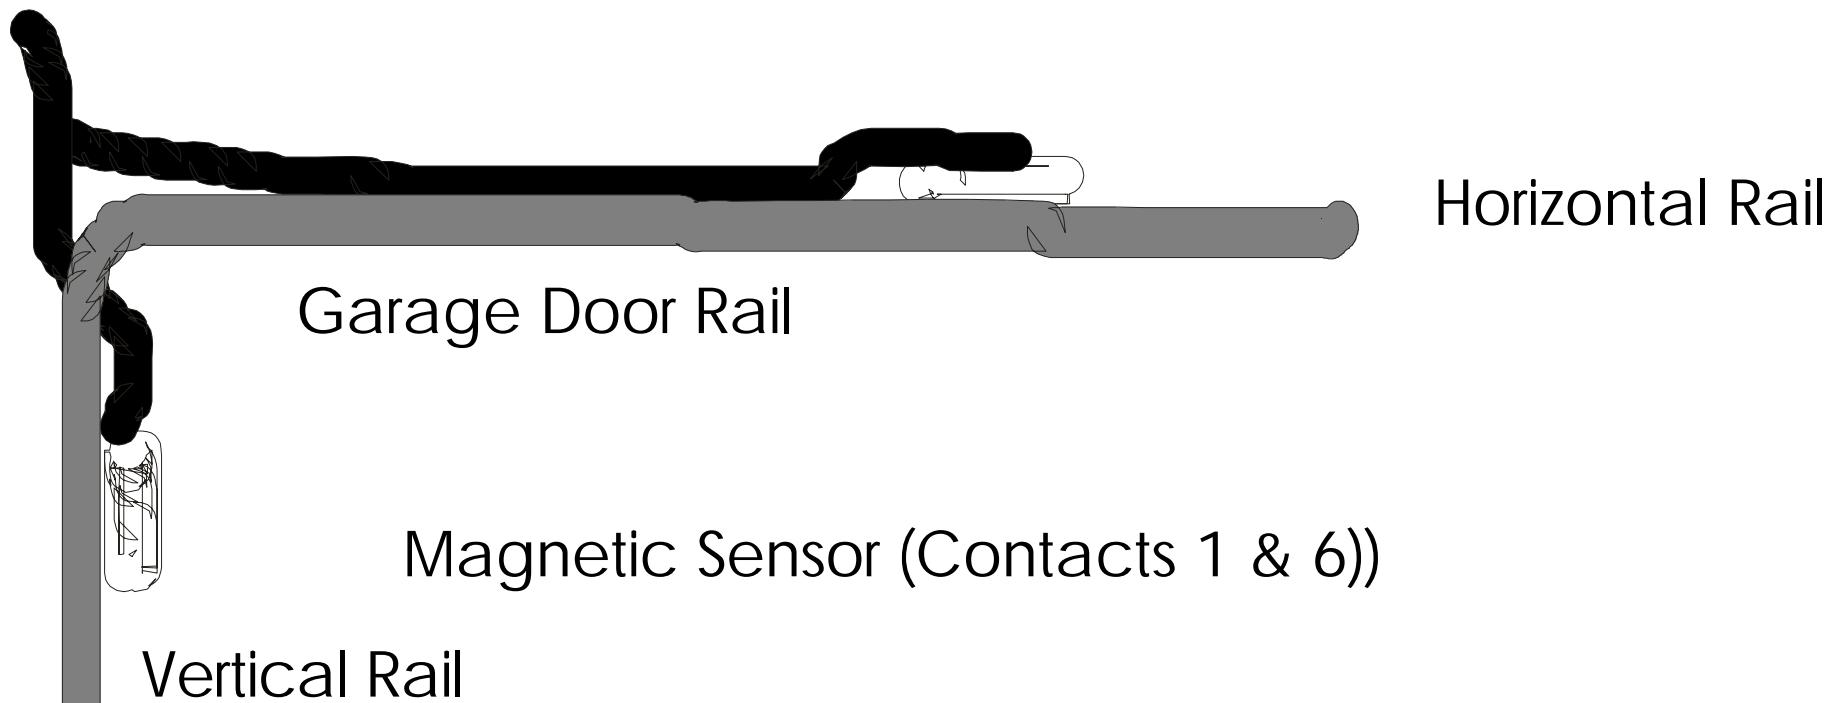




Magnetic Sensor (Contacts 5 & 7)

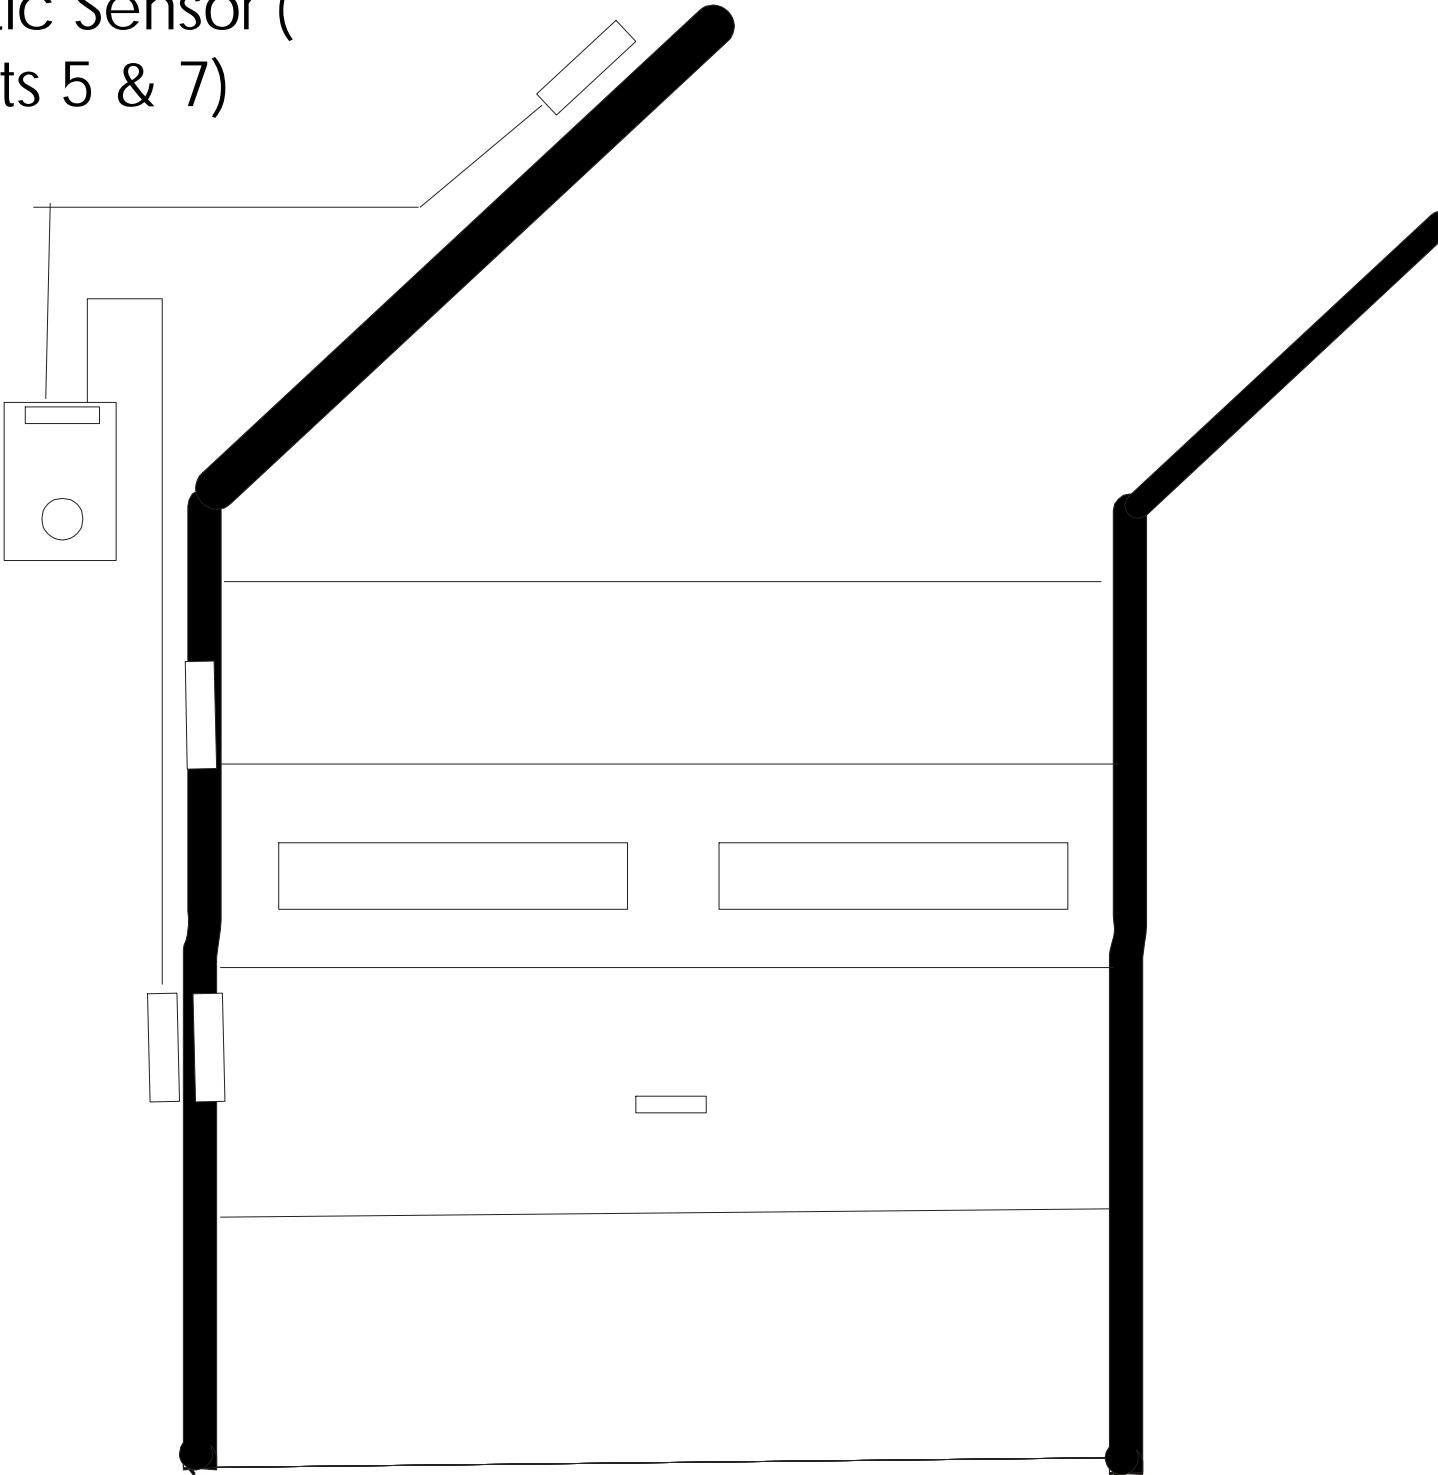

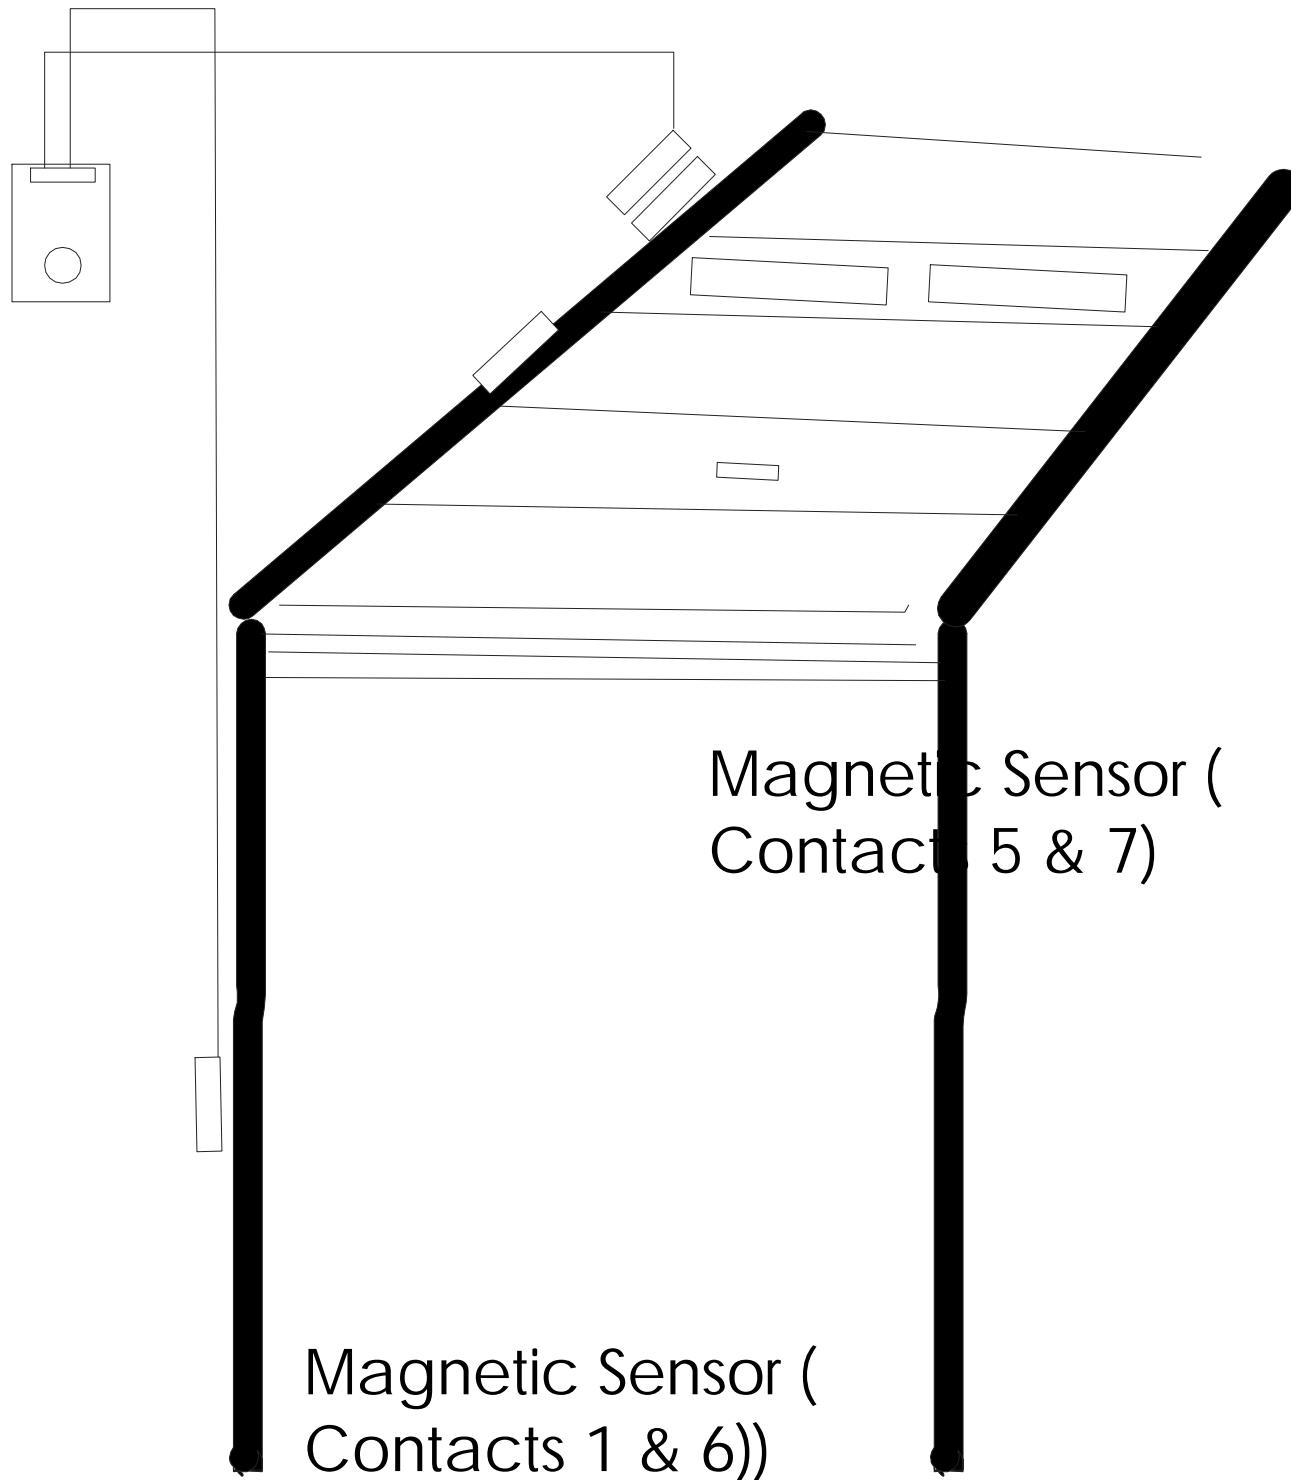

MAGNETIC SENSOR INSTALLATION ILLUSTRATION

(see sensor locations in the circles based upon Garage Door Location)

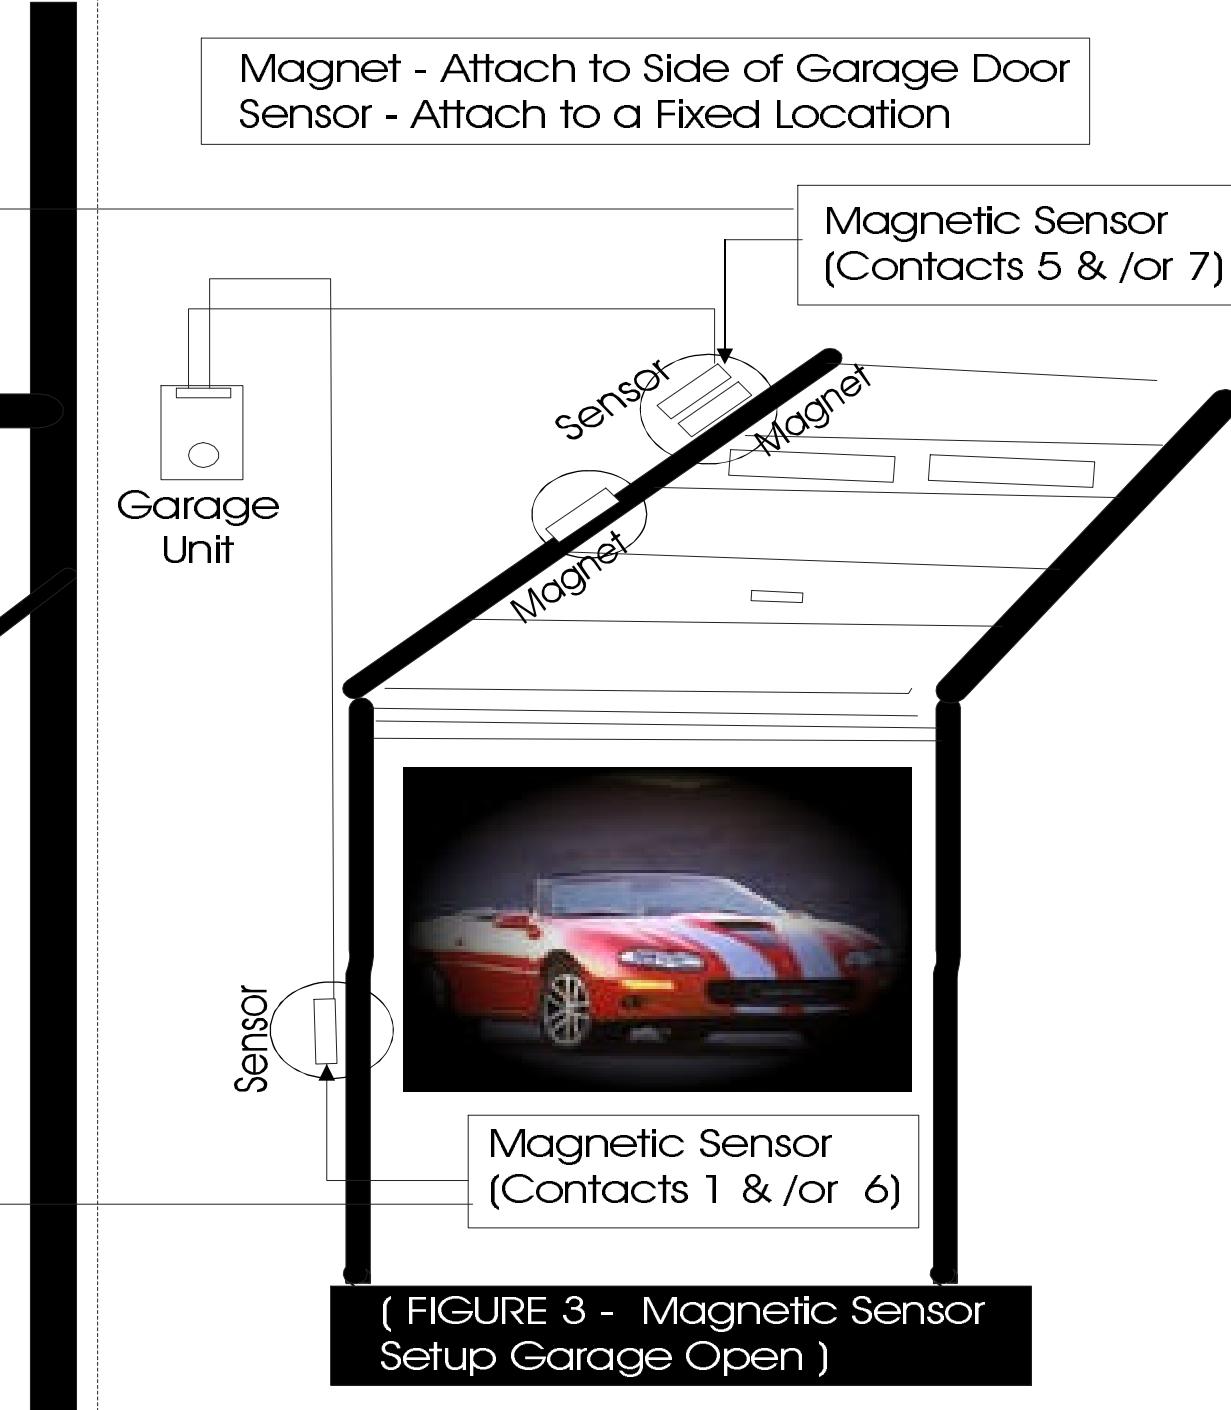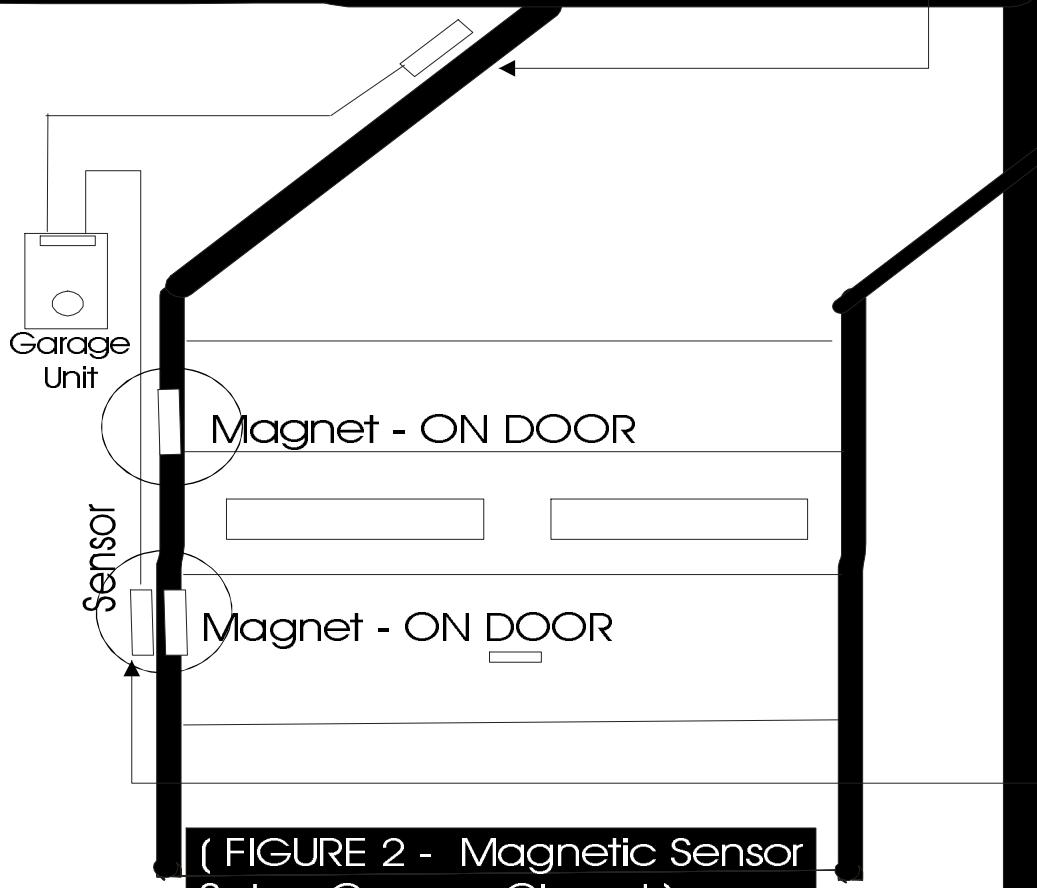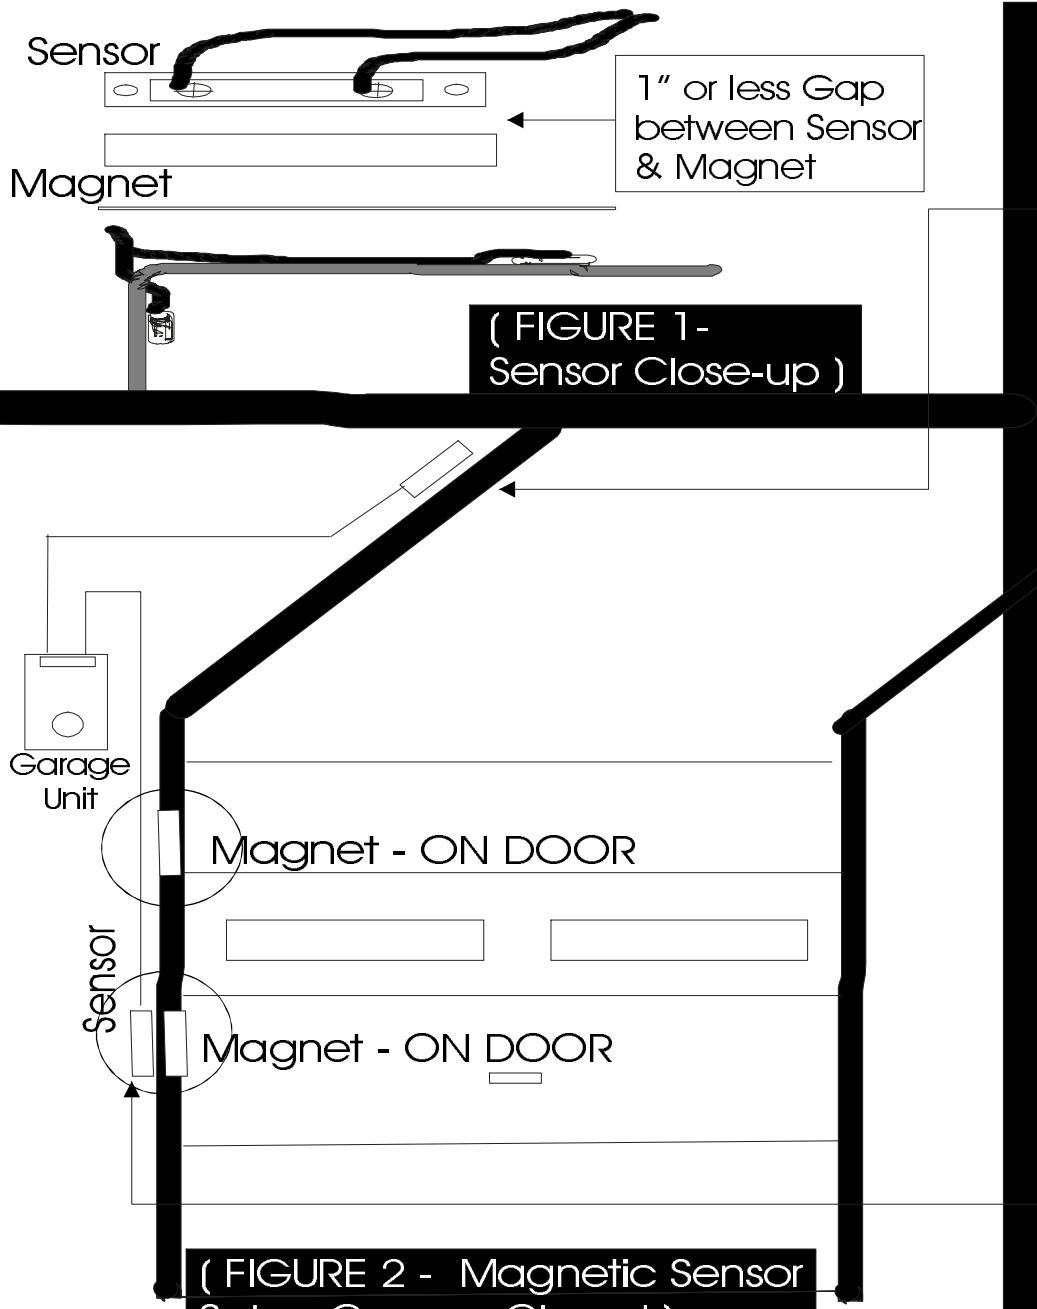

PROGRAMMING INTELLI-SENTRY DPS

It could not be easier. The main screen is the screen when the Garage Door is fully closed which shows the

1. Current Indoor Temperature - Upper Right
2. Current Outdoor Temperature - Lower Left
3. 24 Hr Record High Temperature - Lower Middle
4. 24 Hr Record Low Temperature - Lower Right

PROGRAMMING BUTTON OPERATIONS



To Toggle between Modes

Continue to press the up arrow

To Change a Setting

Move the cursor and use the up & down arrow to increase or decrease a particular value

To Activate a Setting

After inputting the value or selection -
ACTIVATE BY PRESSING MODE

**AND THAT'S IT!!! AREN'T YOU
GLAD!!!**

Trade Name Model Number
INTELLI-SENTRY DPS GM-300-433SENTRY



Tested To Comply
With FCC Standards

FOR HOME OR OFFICE USE

PART 15 STATEMENT

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.

CHANGES OR MODIFICATIONS NOT EXPRESSLY APPROVED BY THE PARTY RESPONSIBLE FOR COMPLIANCE COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.



CERTIFIED FOR ELECTRICAL SHOCK
AND ELECTRICAL FIRE HAZARD ONLY
LA CERTIFICATION ACNOR COUVRE
UNIQUEMENT LES RISQUES DE CHOC
ELECTRIQUE ET D'INCENDIE
D'ORIGINE ELECTRIQUE.



INTELLI- SENTRY DPS

Door Positioning System

Operations Guide & Installation Instructions



NOVATION PRODUCTS, INC.
Garfield Heights, Ohio 44137
www.novationproducts.com
customerservice@novationproducts.com