


频 率 范 围(Frequency Range)	2400-2500MHz
增 益 (Gain)	2.5dBi
电压驻波比 (VSWR)	<2.0
极 化 (Polarzation)	Linear.Vertical
最 大 功 率 (Mae power rating)	50W
特 性 阻 抗 (Lmpedance)	50Ω
机 械 特 性 规 格	
Mechanical Specifications	
接头种类(Connector Type)	SMA
重 量 (Weight)	6G
外观颜色 (Coaxial Cable Color)	Black
辐射材料 (Radiator Material)	Copper
Operating temperature and humidity	-25℃-+75℃




总长48MM


金色SMA-JW

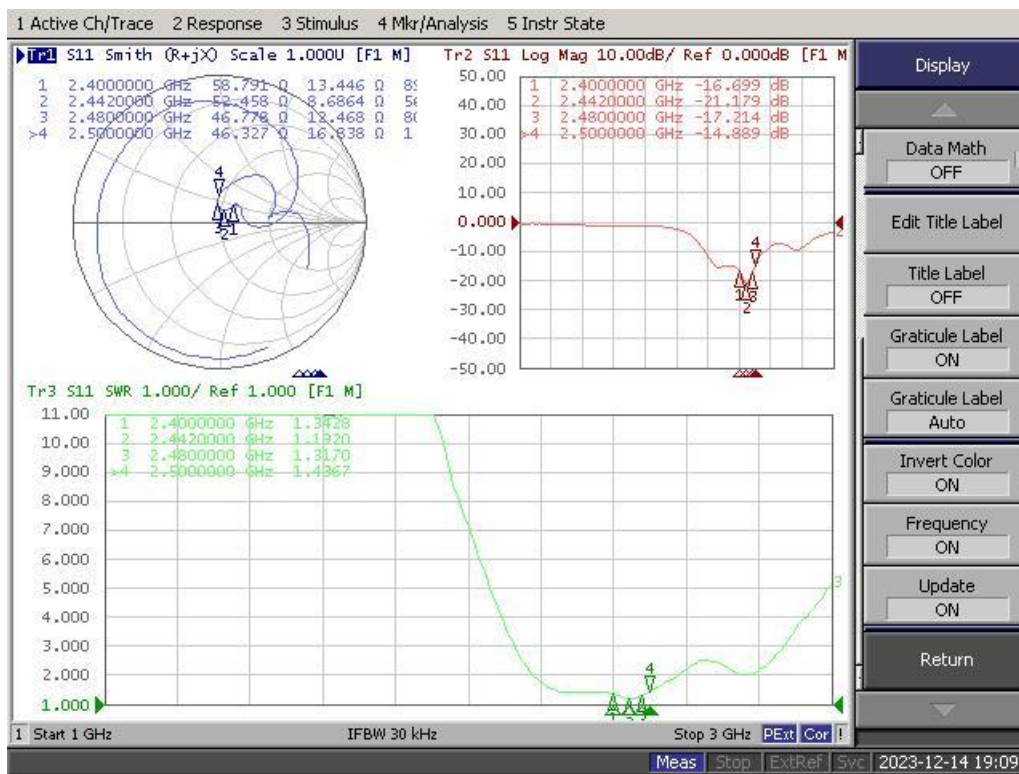


2D、3DRadiation Pattern

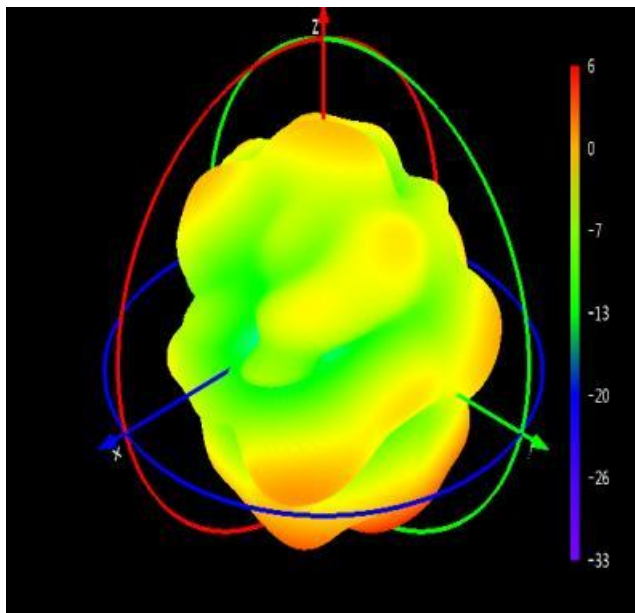


$\Phi=0$ Freq=2440MHz

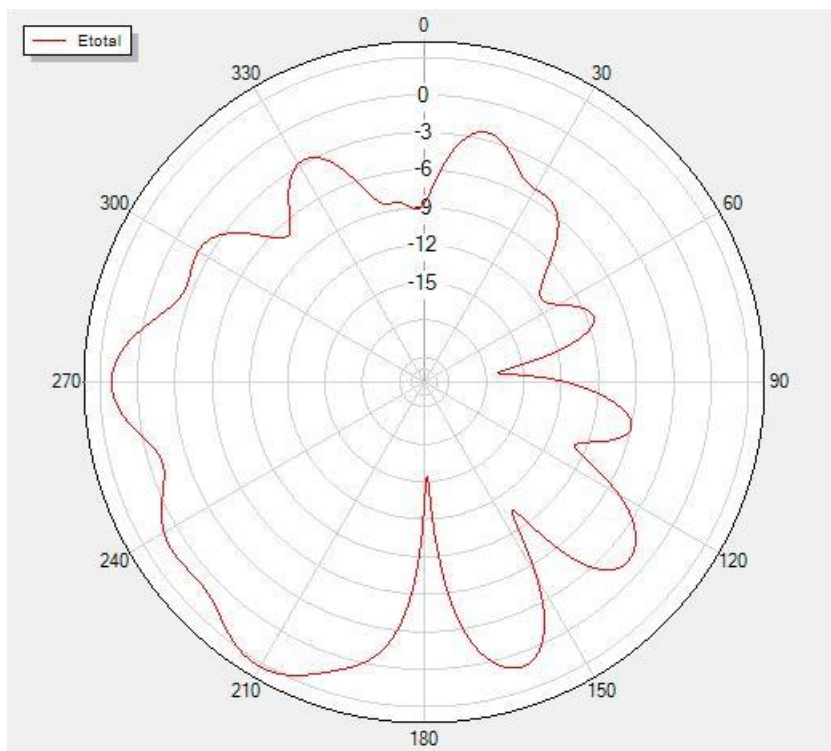

$\Theta=90$ Freq=2440MHz

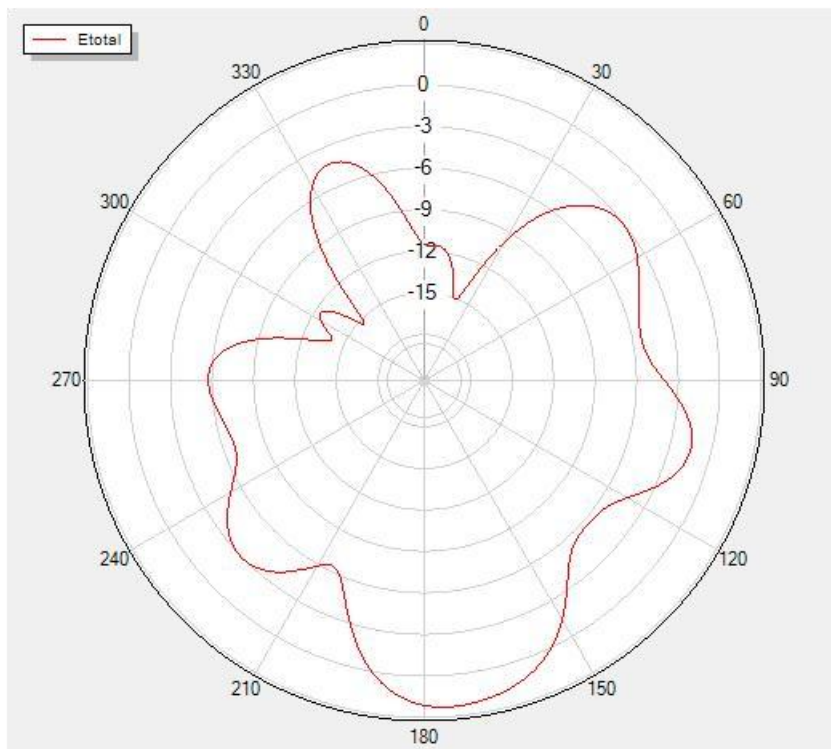

Phi=90 Freq=2440MHz

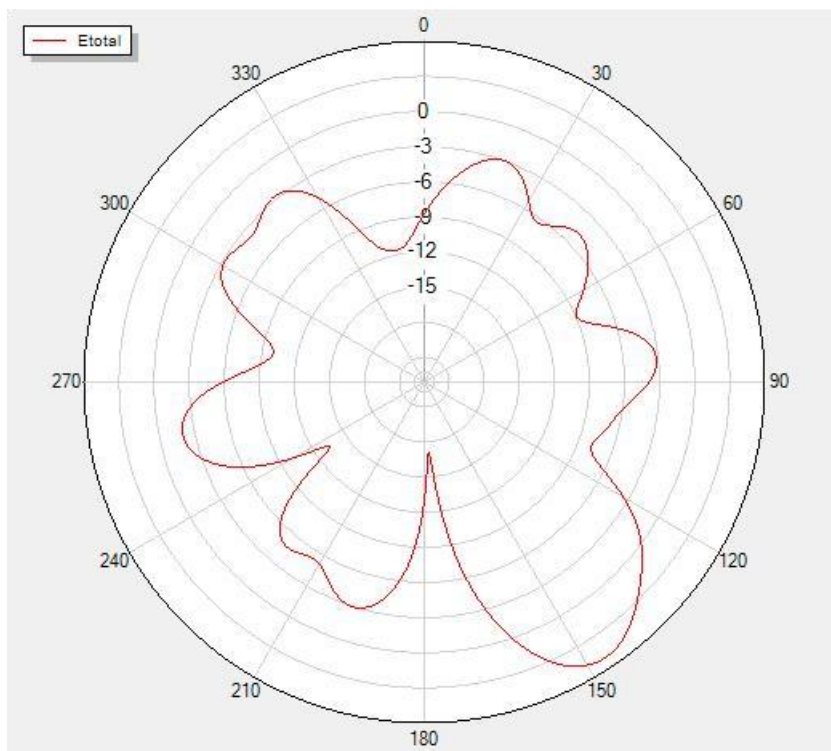

天线增益与效率

Frequency	Efficiency(%)	Gain.(dBi)
2400MHz	52.43	2.5
2410MHz	53.90	2.44
2420MHz	54.45	2.15
2430MHz	54.22	1.87
2440MHz	53.35	1.52
2450MHz	52.70	1.24
2460MHz	51.93	1.00
2470MHz	51.10	1.64
2480MHz	50.25	1.56