


Appendix A. Test Result of AC Power Line Conducted Emission

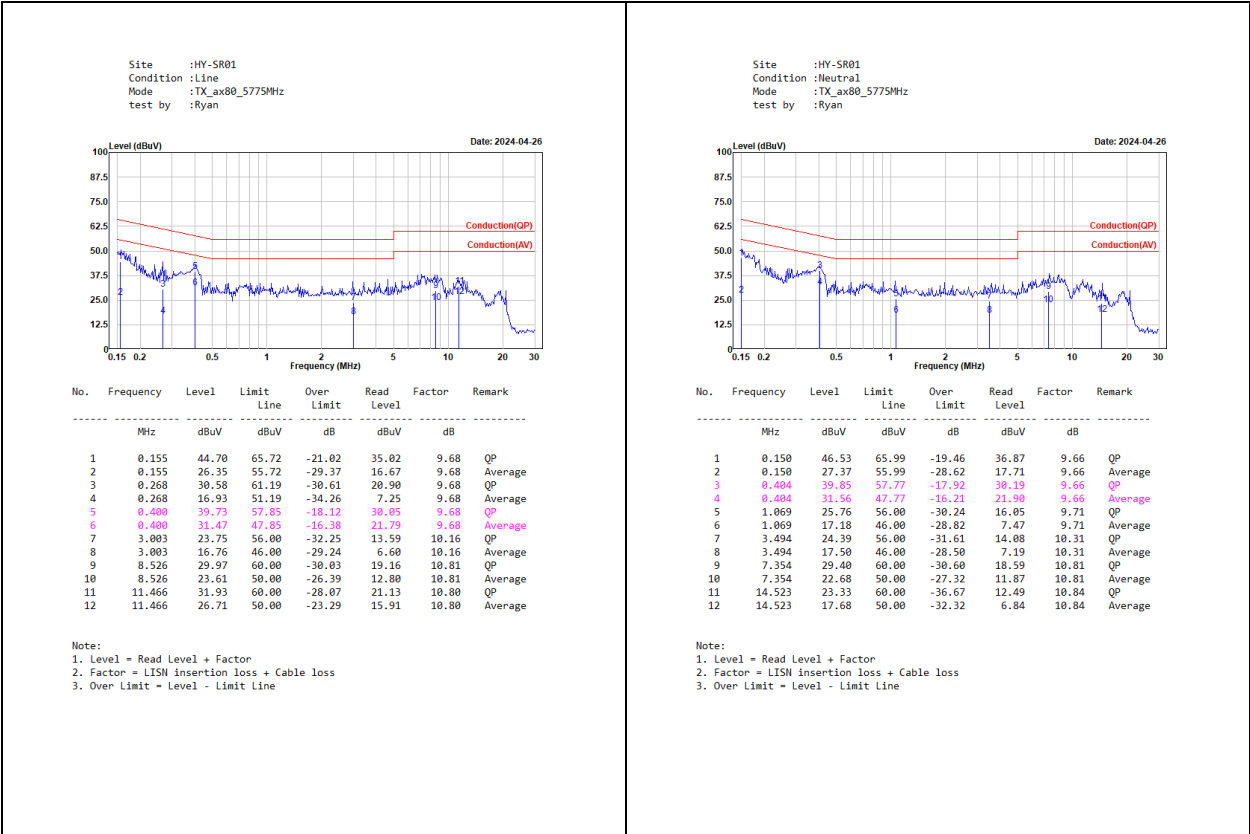

Appendix B. Test Result of Emission Bandwidth

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
802.11a	5180	16.78	--	19.14	--
	5220	16.82	--	19.66	--
	5240	16.86	--	20.37	--
Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11a	5745	16.86	--	16.30	0.50
	5785	16.74	--	16.30	0.50
	5825	16.62	--	16.30	0.50

Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	26dB Bandwidth (MHz)		Limit (MHz)
		Chain A	Chain B		Chain A	Chain B	
802.11ac (20 MHz)	5180	17.62	17.94	--	19.70	19.98	--
	5220	17.78	17.94	--	22.25	19.86	--
	5240	17.74	17.78	--	19.66	20.05	--
Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
		Chain A	Chain B		Chain A	Chain B	
802.11ac (20 MHz)	5745	17.90	18.22	--	16.26	15.70	0.50
	5785	18.10	21.25	--	16.34	15.70	0.50
	5825	17.86	22.85	--	17.58	16.34	0.50

Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	26dB Bandwidth (MHz)		Limit (MHz)
		Chain A	Chain B		Chain A	Chain B	
802.11ac (40 MHz)	5190	36.36	36.28	--	63.53	39.72	--
	5230	36.12	36.04	--	39.88	39.64	--
Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
		Chain A	Chain B		Chain A	Chain B	
802.11ac (40 MHz)	5755	36.12	36.60	--	35.72	35.16	0.50
	5795	36.28	48.43	--	35.72	26.29	0.50


Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	26dB Bandwidth (MHz)		Limit (MHz)
		Chain A	Chain B		Chain A	Chain B	
802.11ac (80 MHz)	5210	74.96	75.76	--	80.55	81.03	--
Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
		Chain A	Chain B		Chain A	Chain B	
802.11ac (80 MHz)	5775	75.60	76.88	--	74.00	63.93	0.50


Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	26dB Bandwidth (MHz)		Limit (MHz)
		Chain A	Chain B		Chain A	Chain B	
802.11ax (20 MHz)	5180	18.86	19.26	--	20.53	21.01	--
	5220	18.90	19.06	--	22.77	20.73	--
	5240	18.90	19.02	--	21.29	21.33	--
Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
		Chain A	Chain B		Chain A	Chain B	
802.11ax (20 MHz)	5745	19.14	19.22	--	18.78	16.14	0.50
	5785	19.46	21.37	--	18.58	16.26	0.50
	5825	19.18	21.85	--	18.94	14.70	0.50

Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	26dB Bandwidth (MHz)		Limit (MHz)
		Chain A	Chain B		Chain A	Chain B	
802.11ax (40 MHz)	5190	37.64	37.96	--	46.19	40.59	--
	5230	37.64	37.88	--	39.80	40.51	--
Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
		Chain A	Chain B		Chain A	Chain B	
802.11ax (40 MHz)	5755	37.80	37.96	--	36.52	35.16	0.50
	5795	37.88	46.67	--	37.64	34.28	0.50

Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	26dB Bandwidth (MHz)		Limit (MHz)
		Chain A	Chain B		Chain A	Chain B	
802.11ax (80 MHz)	5210	77.04	77.36	--	81.19	81.19	--
Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
		Chain A	Chain B		Chain A	Chain B	
802.11ax (80 MHz)	5775	77.52	89.35	--	76.40	66.33	0.50

For 6dB Bandwidth:

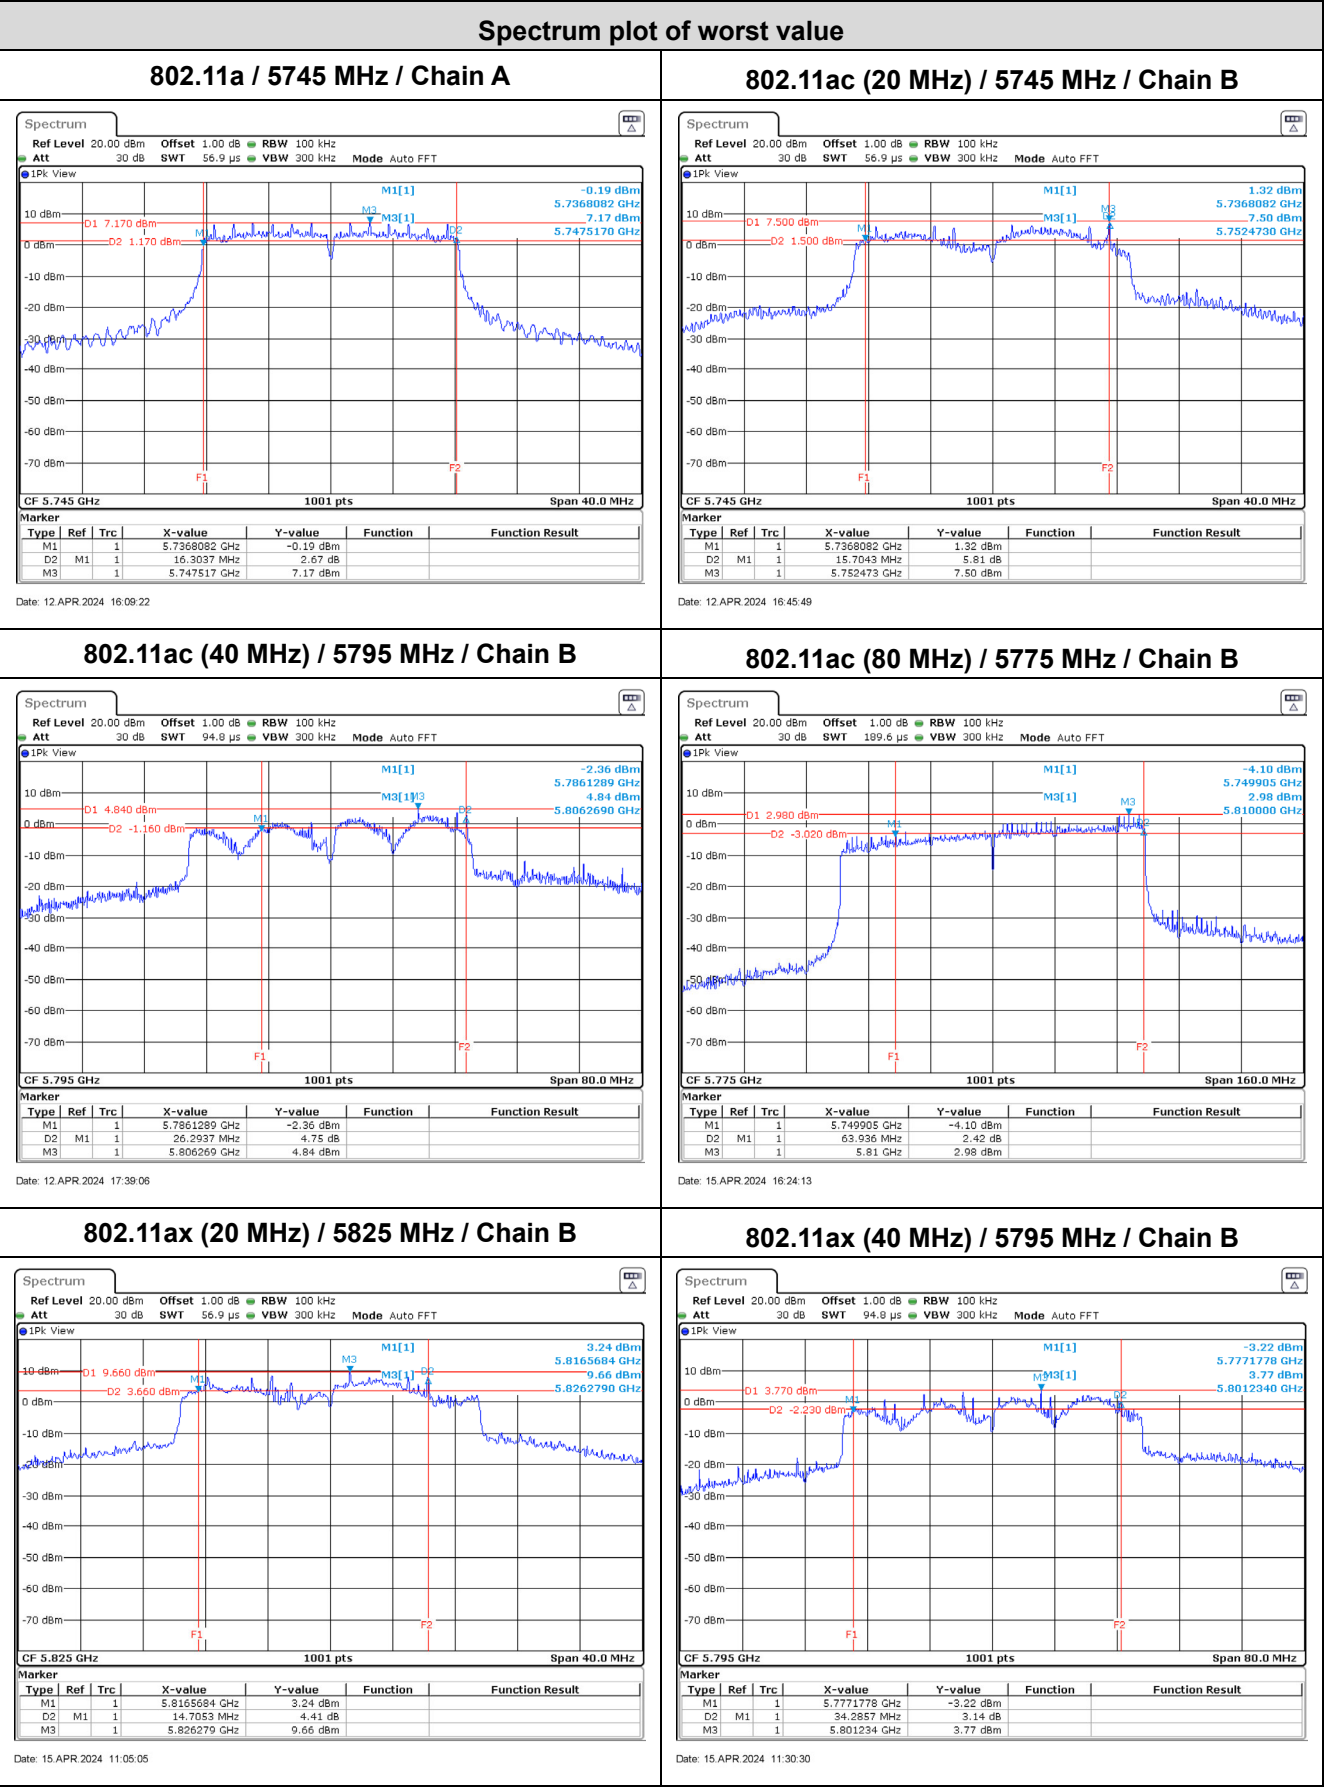

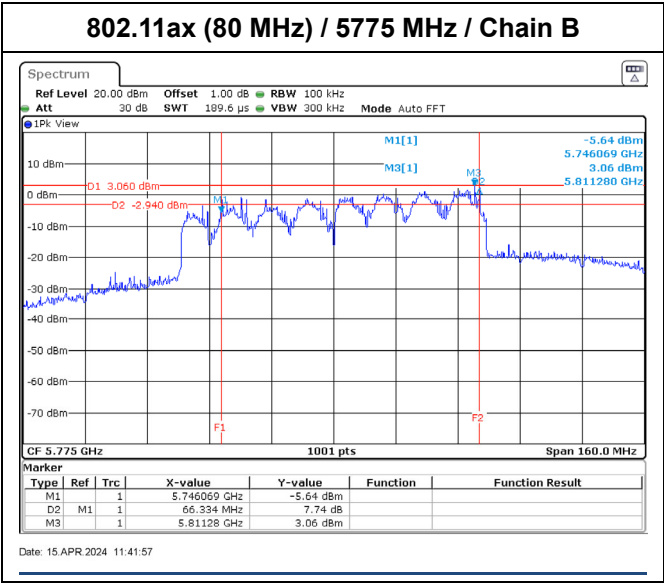

Appendix C. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log (BW)	
802.11a	5180	--	18.04	--	18.04	30	--	Pass
	5220	--	18.62	--	18.62	30	--	Pass
	5240	--	18.90	--	18.90	30	--	Pass
	5745	--	17.77	--	17.77	30	--	Pass
	5785	--	18.68	--	18.68	30	--	Pass
	5825	--	19.00	--	19.00	30	--	Pass

Note:

1. Output Power (dBm) = Chain A Power + Duty factor.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ac (20 MHz)	5180	--	17.26	17.12	--	20.20	30	--	Pass
	5220	--	18.96	18.20	--	21.61	30	--	Pass
	5240	--	19.10	18.11	--	21.64	30	--	Pass
	5745	--	17.22	16.33	--	19.81	30	--	Pass
	5785	--	17.52	15.76	--	19.74	30	--	Pass
	5825	--	19.50	18.46	--	22.02	30	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ac (40 MHz)	5190	--	16.40	16.24	--	19.33	30	--	Pass
	5230	--	18.93	17.90	--	21.46	30	--	Pass
	5755	--	18.98	18.65	--	21.83	30	--	Pass
	5795	--	19.10	17.05	--	21.21	30	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ac (80 MHz)	5210	--	15.48	15.20	--	18.35	30	--	Pass
	5775	--	17.58	16.64	--	20.15	30	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (20 MHz)	5180	--	16.84	16.72	--	19.79	30	--	Pass
	5220	--	18.96	18.22	--	21.62	30	--	Pass
	5240	--	19.26	18.16	--	21.76	30	--	Pass
	5745	--	17.92	16.87	--	20.44	30	--	Pass
	5785	--	19.32	17.58	--	21.55	30	--	Pass
	5825	--	19.72	18.82	--	22.30	30	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (40 MHz)	5190	--	16.32	16.12	--	19.23	30	--	Pass
	5230	--	19.05	18.10	--	21.61	30	--	Pass
	5755	--	18.12	17.65	--	20.90	30	--	Pass
	5795	--	19.15	16.80	--	21.14	30	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (80 MHz)	5210	--	15.50	15.16	--	18.34	30	--	Pass
	5775	--	16.62	16.00	--	19.33	30	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.


Appendix D. Test Result of Maximum Power Spectral Density

Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11a	5180	A	8.79	0.00	8.79	<17.00	Pass
	5220	A	8.44	0.00	8.44	<17.00	Pass
	5240	A	9.05	0.00	9.05	<17.00	Pass

Note: Total PSD/MHz (dBm) = PSD/MHz (dBm) + Duty factor

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11a	5745	A	4.68	0.00	4.68	<30.00	Pass
	5785	A	4.33	0.00	4.33	<30.00	Pass
	5825	A	4.77	0.00	4.77	<30.00	Pass

Note: Total PSD(dBm) = PSD(dBm) + Duty factor

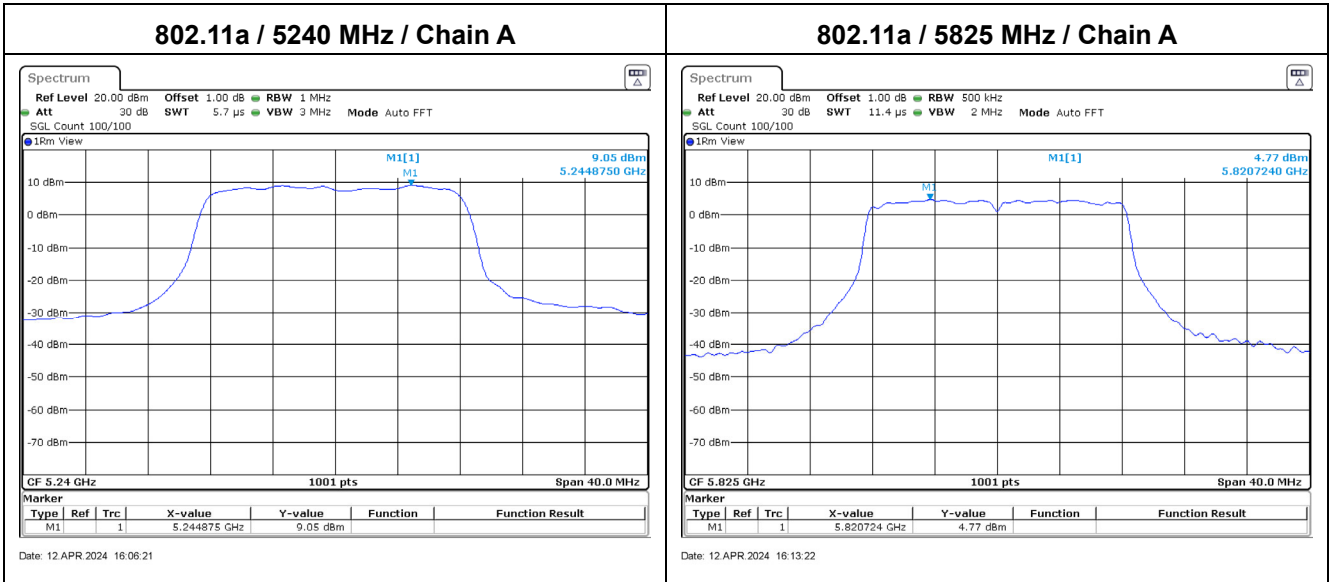


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ac (20 MHz)	5180	A	9.25	0.00	11.56	<15.34	Pass
		B	7.72				
	5220	A	9.19	0.00	11.55	<15.34	Pass
		B	7.78				
	5240	A	9.70	0.00	11.94	<15.34	Pass
		B	8.00				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ac (20 MHz)	5745	A	5.34	0.00	8.20	<27.43	Pass
		B	5.04				
	5785	A	5.04	0.00	7.91	<27.43	Pass
		B	4.75				
	5825	A	4.91	0.00	9.02	<27.43	Pass
		B	6.89				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

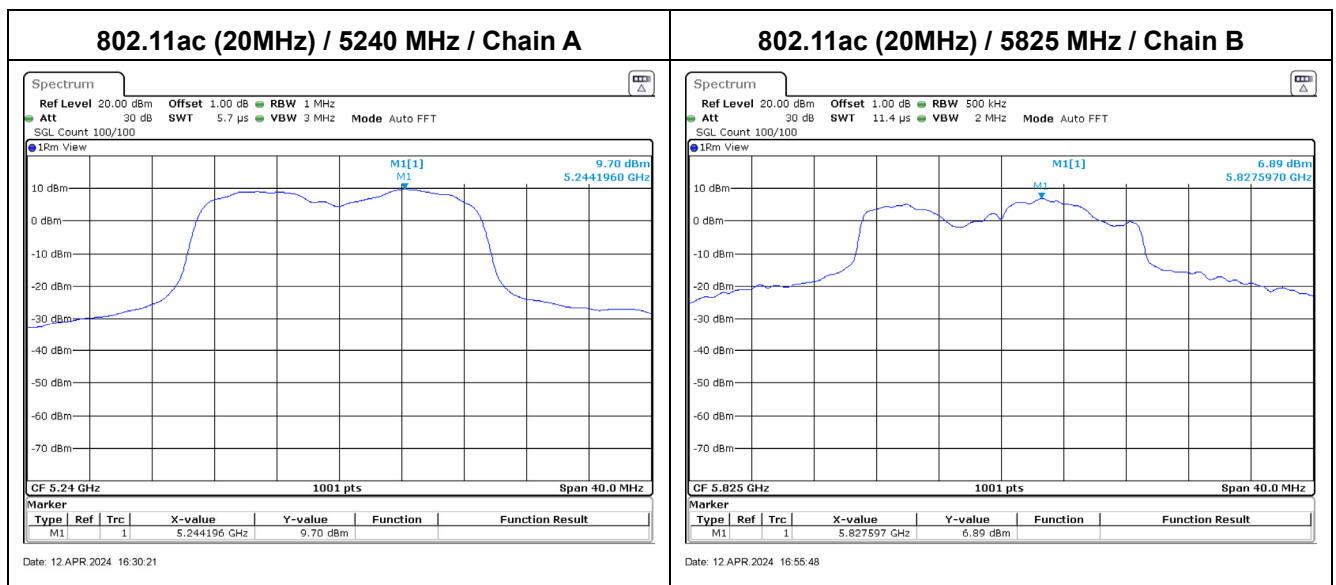


Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ac (40 MHz)	5190	A	6.91	0.00	9.04	<15.34	Pass
		B	4.93				
	5230	A	6.40	0.00	8.72	<15.34	Pass
		B	4.88				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ac (40 MHz)	5755	A	2.48	0.00	5.72	<27.43	Pass
		B	2.92				
	5795	A	2.01	0.00	5.44	<27.43	Pass
		B	2.81				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

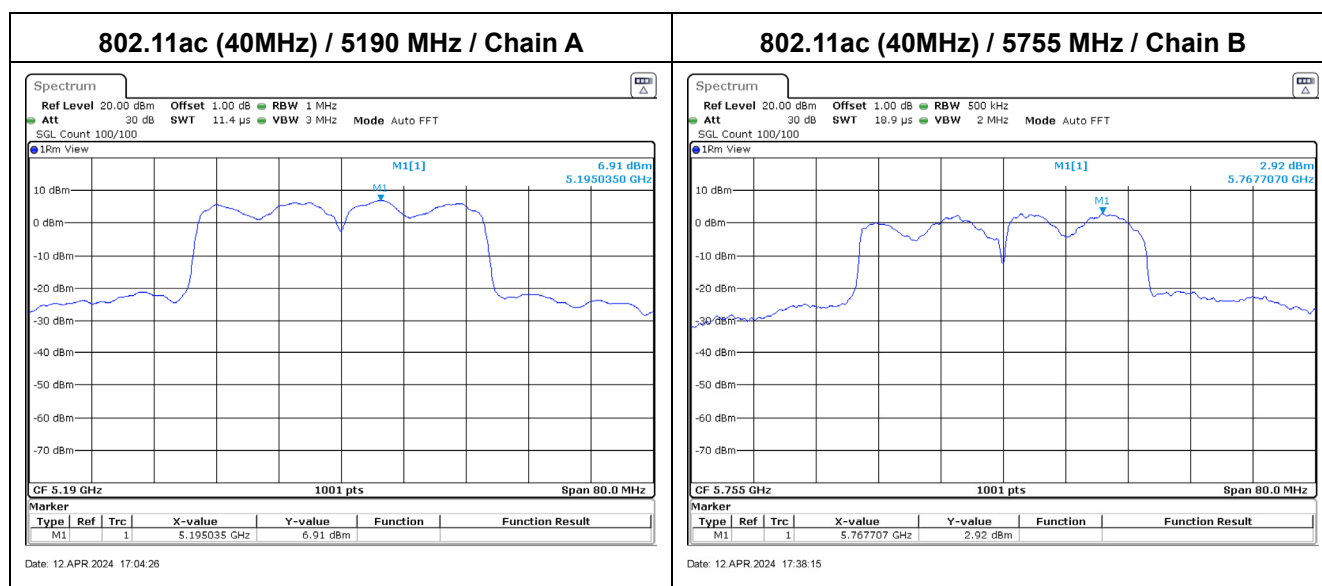


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ac (80 MHz)	5210	A	3.41	0.00	5.78	<15.34	Pass
		B	2.01				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ac (80 MHz)	5775	A	-0.94	0.00	2.39	<27.43	Pass
		B	-0.33				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

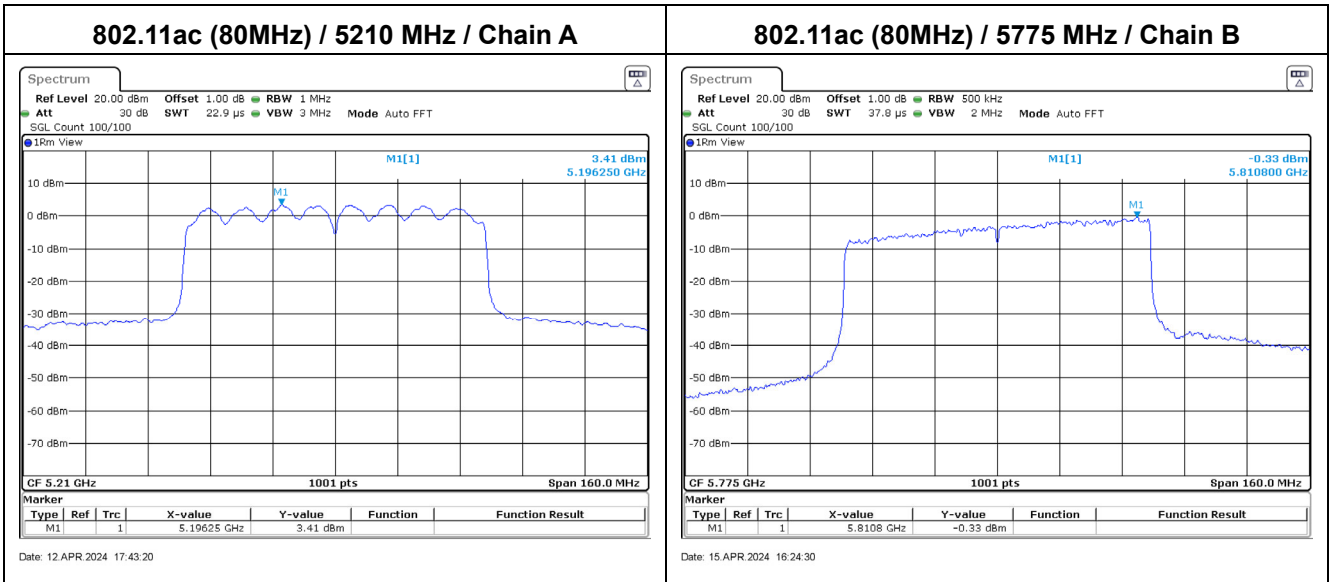


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5180	A	8.64	0.00	10.97	<15.34	Pass
		B	7.16				
	5220	A	8.91	0.00	11.10	<15.34	Pass
		B	7.08				
	5240	A	8.90	0.00	11.01	<15.34	Pass
		B	6.85				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5745	A	5.10	0.00	7.83	<27.43	Pass
		B	4.52				
	5785	A	5.49	0.00	7.50	<27.43	Pass
		B	3.18				
	5825	A	4.69	0.00	8.98	<27.43	Pass
		B	6.95				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

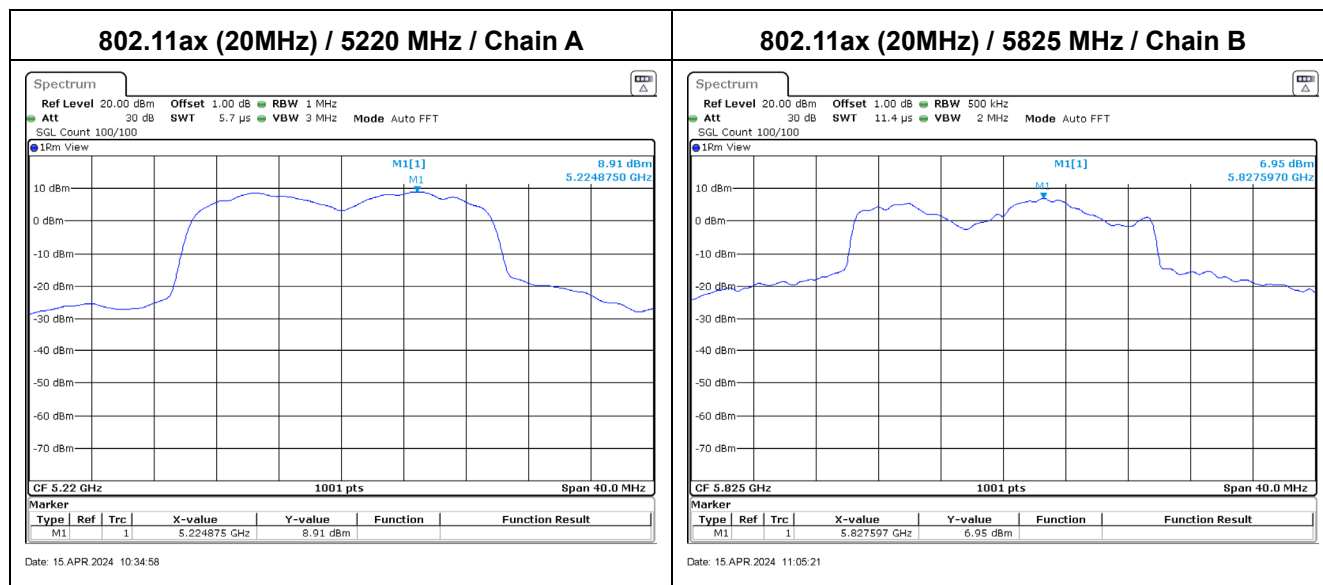


Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5190	A	6.60	0.00	8.62	<15.34	Pass
		B	4.32				
	5230	A	6.71	0.00	8.78	<15.34	Pass
		B	4.56				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5755	A	2.13	0.00	5.44	<27.43	Pass
		B	2.71				
	5795	A	1.56	0.00	4.36	<27.43	Pass
		B	1.13				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

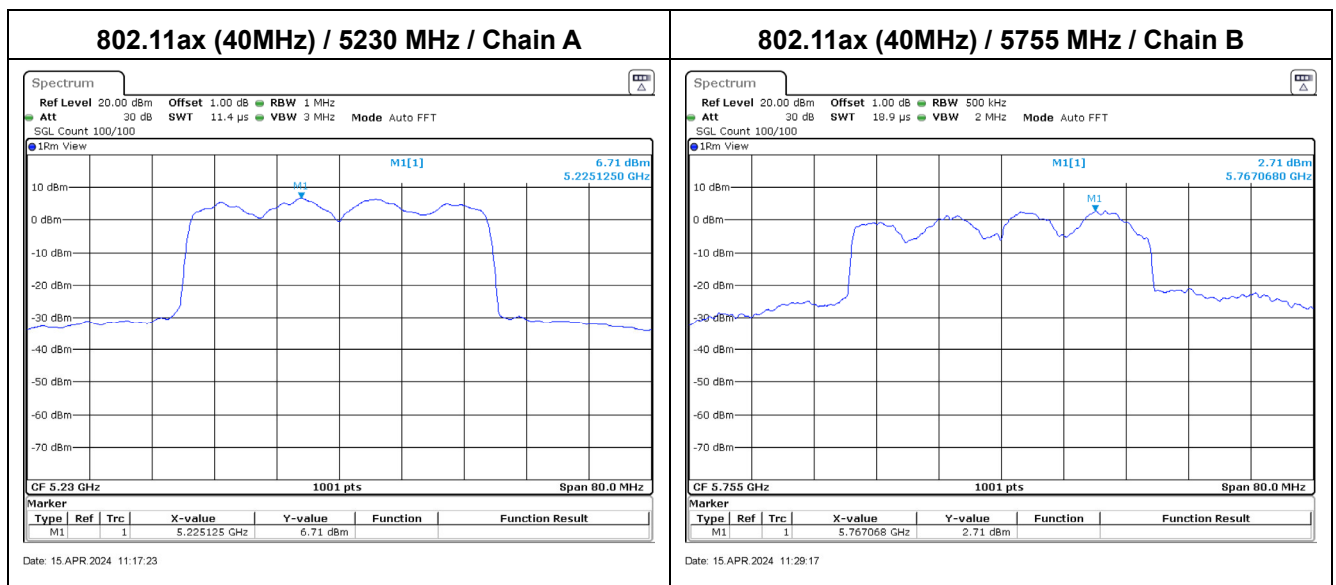


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5210	A	3.71	0.00	6.05	<15.34	Pass
		B	2.24				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.


Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5775	A	-0.65	0.00	3.36	<27.43	Pass
		B	1.17				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

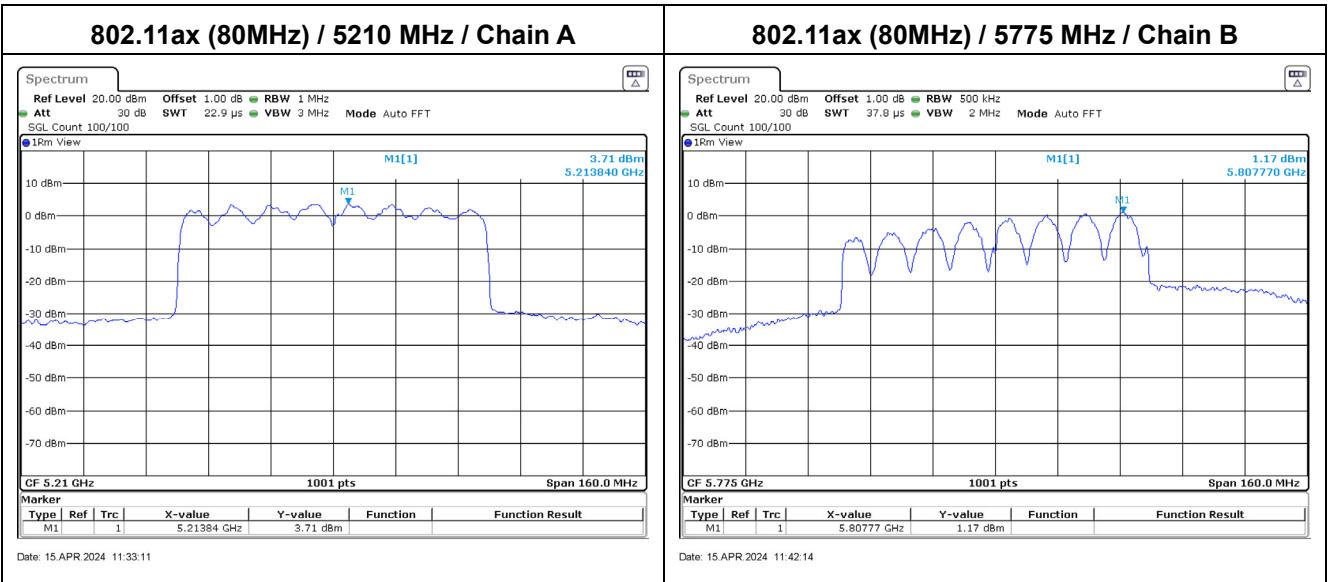

Appendix E. Test Result of Transmitter Radiated Spurious Emission

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5180MHz
Test BY :Peter

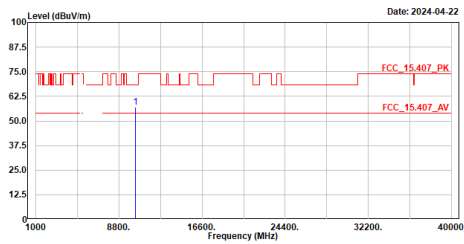


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10360.000	57.06	68.22	-11.16	66.30	-9.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5180MHz
Test BY :Peter

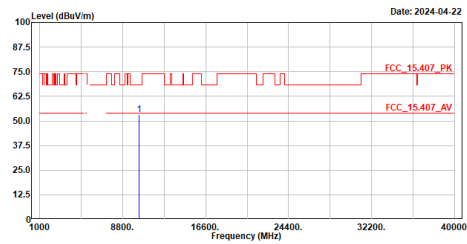


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10360.000	53.28	68.22	-14.94	62.52	-9.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5220MHz
Test BY :Peter

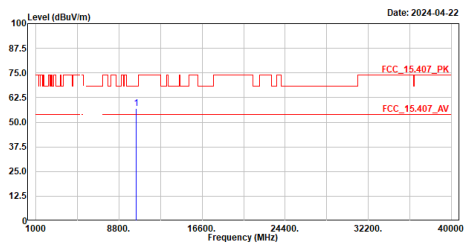


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10440.000	57.12	68.22	-11.10	66.49	-9.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5220MHz
Test BY :Peter

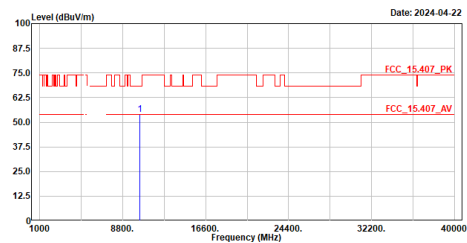


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10440.000	54.13	68.22	-14.09	63.50	-9.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5240MHz
Test BY :Peter

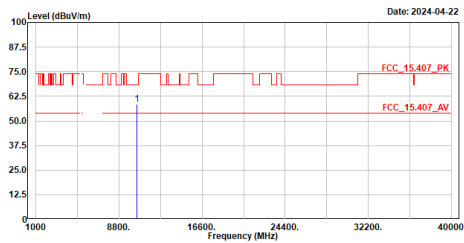


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10480.000	58.59	68.22	-9.63	67.92	-9.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5240MHz
Test BY :Peter

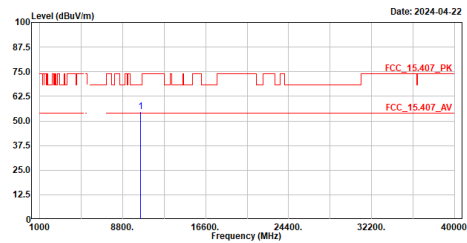


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10480.000	54.89	68.22	-13.33	64.22	-9.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5745MHz
Test BY :Caster

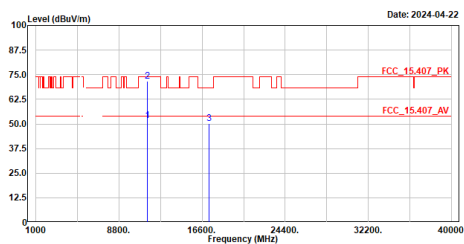


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11490.000	51.63	54.00	-2.37	58.73	-7.10	Average
2	11490.000	71.72	74.00	-2.28	78.82	-7.10	Peak
3	17235.000	50.03	68.22	-18.19	50.56	-0.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5745MHz
Test BY :Caster

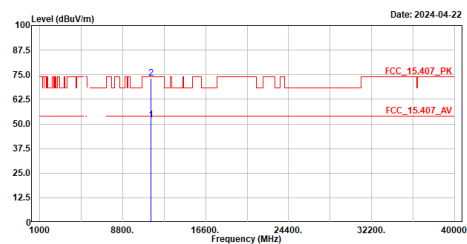


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11490.000	52.07	54.00	-1.93	59.17	-7.10	Average
2	11490.000	73.21	74.00	-0.79	80.31	-7.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5785MHz
Test BY :Caster

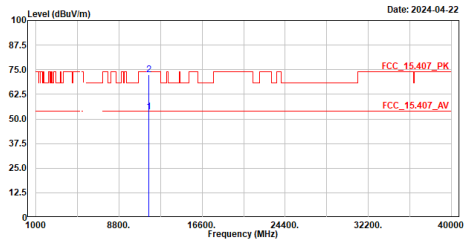


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	53.44	54.00	-0.56	60.63	-7.19	Average
2	11570.000	72.55	74.00	-1.45	79.74	-7.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5785MHz
Test BY :Caster

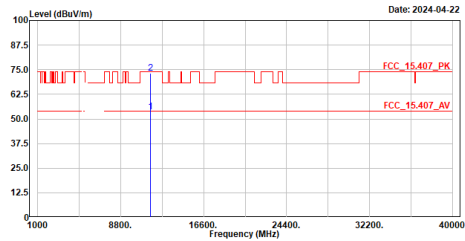


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	53.46	54.00	-0.54	60.65	-7.19	Average
2	11570.000	73.39	74.00	-0.61	80.58	-7.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5825MHz
Test BY :Caster

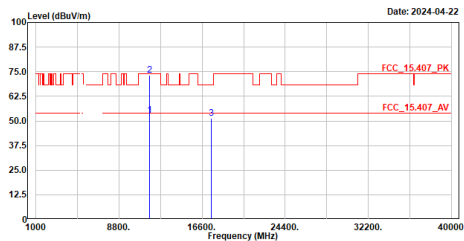


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	52.70	54.00	-1.30	59.88	-7.18	Average
2	11650.000	73.02	74.00	-0.98	80.20	-7.18	Peak
3	17475.000	51.41	68.22	-16.81	51.62	-0.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5825MHz
Test BY :Caster

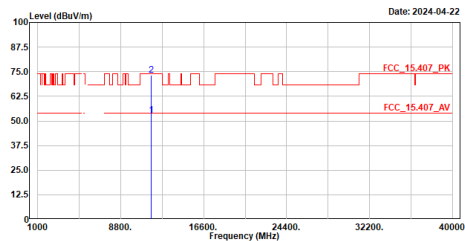


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	52.92	54.00	-1.08	60.10	-7.18	Average
2	11650.000	73.24	74.00	-0.76	80.42	-7.18	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5180MHz
Test BY :Rock

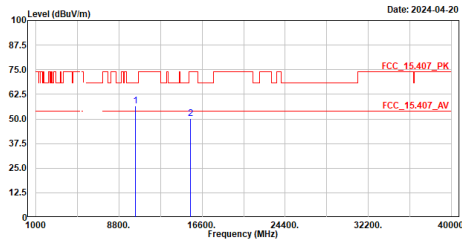


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10360.000	56.46	68.22	-11.76	65.70	-9.24	Peak
2	15540.000	50.20	74.00	-23.80	51.49	-1.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5180MHz
Test BY :Rock

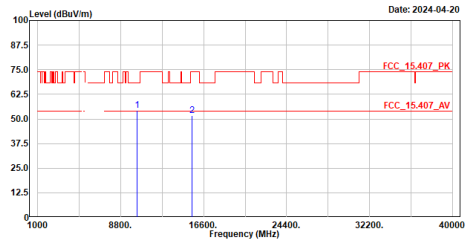


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10360.000	54.23	68.22	-13.99	63.47	-9.24	Peak
2	15540.000	51.57	74.00	-22.43	52.86	-1.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5220MHz
Test BY :Rock

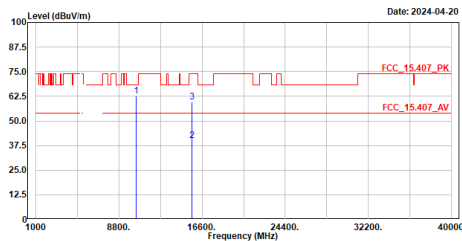


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10440.000	62.71	68.22	-5.51	72.08	-9.37	Peak
2	15660.000	39.88	54.00	-14.12	41.07	-1.19	Average
3	15660.000	59.74	74.00	-14.26	60.93	-1.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5220MHz
Test BY :Rock

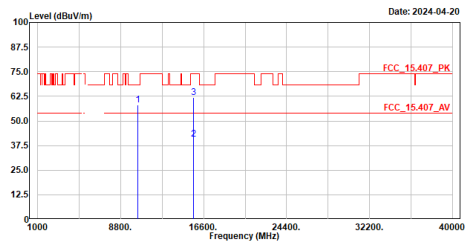


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10440.000	58.02	68.22	-10.20	67.39	-9.37	Peak
2	15660.000	40.74	54.00	-13.26	41.93	-1.19	Average
3	15660.000	61.74	74.00	-12.26	62.93	-1.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5240MHz
Test BY :Rock

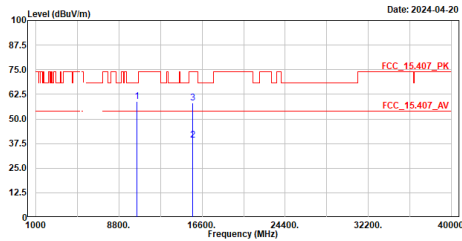


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10480.000	58.92	68.22	-9.30	68.25	-9.33	Peak
2	15720.000	39.08	54.00	-14.92	40.16	-1.08	Average
3	15720.000	58.02	74.00	-15.98	59.10	-1.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5240MHz
Test BY :Rock

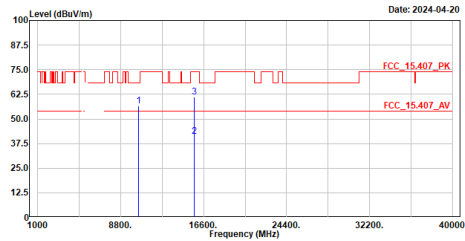


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10480.000	56.74	68.22	-11.48	66.07	-9.33	Peak
2	15720.000	41.04	54.00	-12.96	42.12	-1.08	Average
3	15720.000	61.08	74.00	-12.92	62.16	-1.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5745MHz
Test BY :Rock

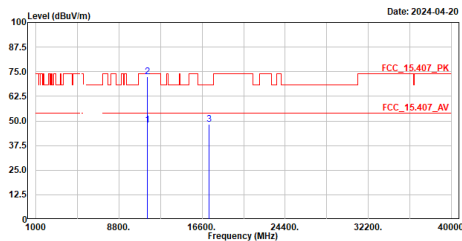


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11490.000	48.07	54.00	-5.93	55.17	-7.10	Average
2	11490.000	72.36	74.00	-1.64	79.46	-7.10	Peak
3	17235.000	48.16	68.22	-20.06	48.69	-0.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5745MHz
Test BY :Rock

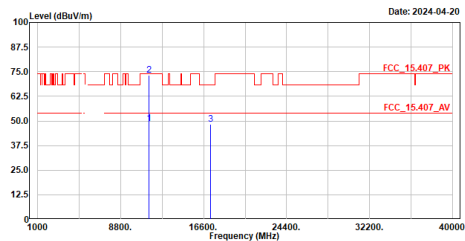


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11490.000	48.73	54.00	-5.27	55.83	-7.10	Average
2	11490.000	73.08	74.00	-0.92	80.18	-7.10	Peak
3	17235.000	48.16	68.22	-20.06	48.69	-0.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5785MHz
Test BY :Rock

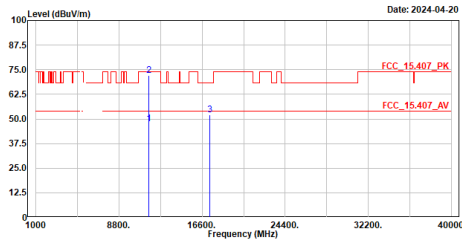


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	47.68	54.00	-6.32	54.87	-7.19	Average
2	11570.000	71.98	74.00	-2.02	79.17	-7.19	Peak
3	17355.000	51.96	68.22	-16.26	52.39	-0.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5785MHz
Test BY :Rock

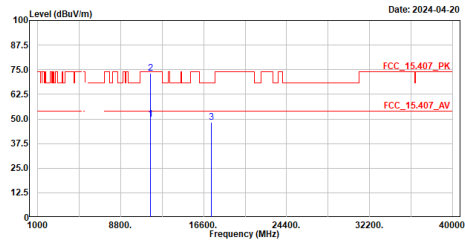


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	49.97	54.00	-4.03	57.16	-7.19	Average
2	11570.000	73.29	74.00	-0.71	80.48	-7.19	Peak
3	17355.000	48.33	68.22	-19.89	48.76	-0.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5825MHz
Test BY :Rock

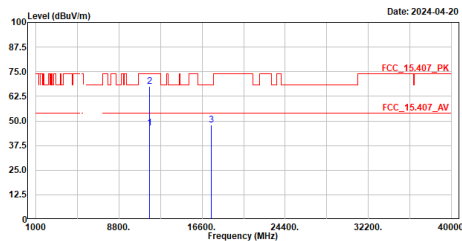


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	46.29	54.00	-7.71	53.47	-7.18	Average
2	11650.000	67.72	74.00	-6.28	74.90	-7.18	Peak
3	17475.000	48.03	68.22	-20.19	48.24	-0.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5825MHz
Test BY :Rock

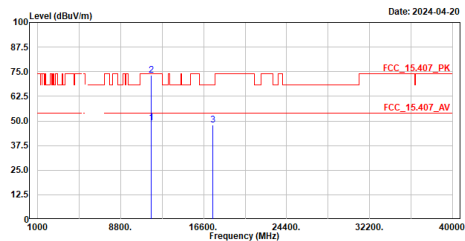


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	48.99	54.00	-5.01	56.17	-7.18	Average
2	11650.000	73.34	74.00	-0.66	80.52	-7.18	Peak
3	17475.000	47.75	68.22	-20.47	47.96	-0.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5190MHz
Test BY :Rock

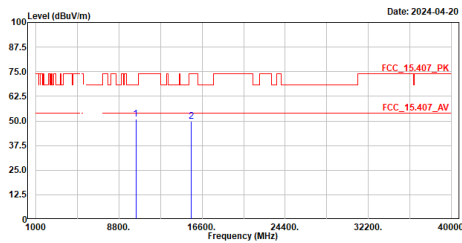


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10390.000	50.91	68.22	-17.31	60.23	-9.32	Peak
2	15570.000	49.96	74.00	-24.04	51.23	-1.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5190MHz
Test BY :Rock

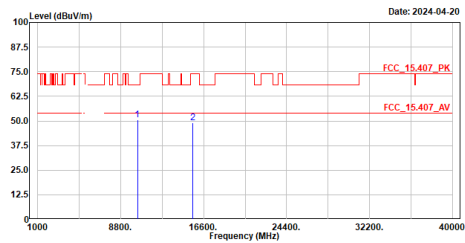


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10390.000	50.38	68.22	-17.84	59.70	-9.32	Peak
2	15570.000	48.99	74.00	-25.01	50.26	-1.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5230MHz
Test BY :Rock

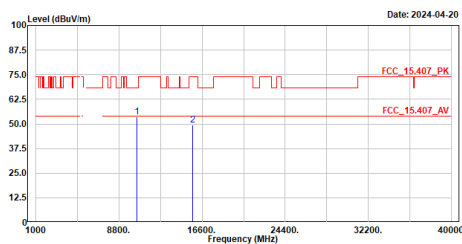


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10460.000	53.65	68.22	-14.57	63.00	-9.35	Peak
2	15690.000	49.61	74.00	-24.39	50.76	-1.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5230MHz
Test BY :Rock

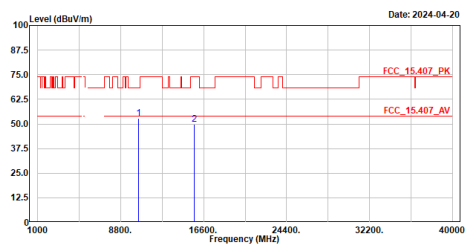


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10460.000	52.95	68.22	-15.27	62.30	-9.35	Peak
2	15690.000	49.98	74.00	-24.02	51.13	-1.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5755MHz
Test BY :Rock

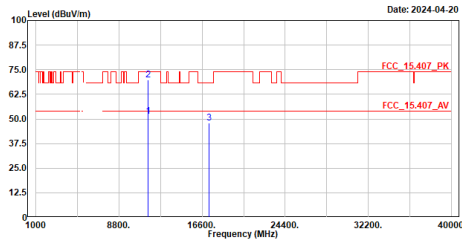


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11510.000	51.44	54.00	-2.56	58.55	-7.11	Average
2	11510.000	69.87	74.00	-4.13	76.98	-7.11	Peak
3	17265.000	47.77	68.22	-20.45	48.26	-0.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5755MHz
Test BY :Rock

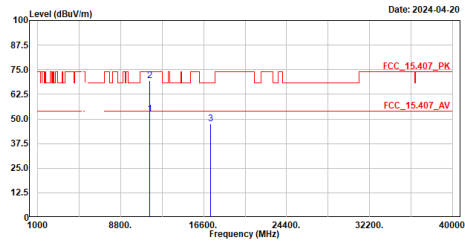


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11510.000	52.57	54.00	-1.43	59.68	-7.11	Average
2	11510.000	69.44	74.00	-4.56	76.55	-7.11	Peak
3	17265.000	47.73	68.22	-20.49	48.22	-0.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5795MHz
Test BY :Rock

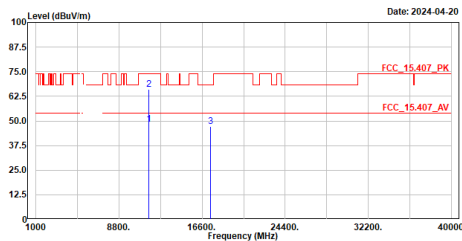


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11590.000	48.18	54.00	-5.82	55.42	-7.24	Average
2	11590.000	66.20	74.00	-7.80	73.44	-7.24	Peak
3	17385.000	47.31	68.22	-20.91	47.67	-0.36	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5795MHz
Test BY :Rock

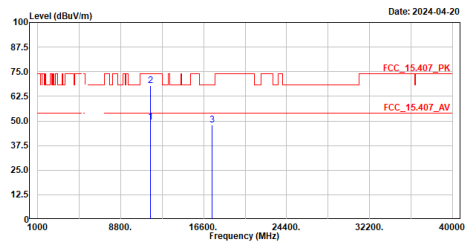


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11590.000	49.59	54.00	-4.41	56.83	-7.24	Average
2	11590.000	67.75	74.00	-6.25	74.99	-7.24	Peak
3	17385.000	47.86	68.22	-20.36	48.22	-0.36	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5210MHz
Test BY :Rock

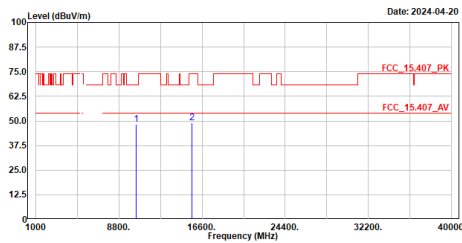


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10420.000	48.18	68.22	-20.04	57.56	-9.38	Peak
2	15630.000	49.11	74.00	-24.89	50.32	-1.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac80_5210MHz
Test BY :Rock

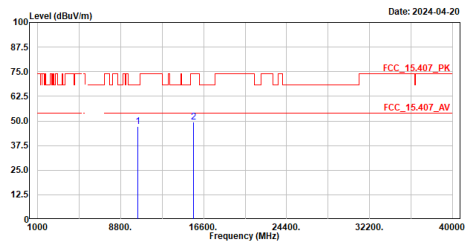


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10420.000	47.12	68.22	-21.10	56.50	-9.38	Peak
2	15630.000	49.44	74.00	-24.56	50.65	-1.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5775MHz
Test BY :Rock

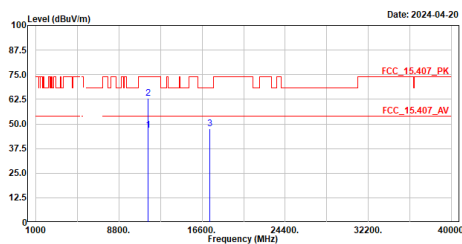


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11550.000	46.84	54.00	-7.16	53.98	-7.14	Average
2	11550.000	62.98	74.00	-11.02	70.12	-7.14	Peak
3	17325.000	47.60	68.22	-20.62	48.06	-0.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac80_5775MHz
Test BY :Rock

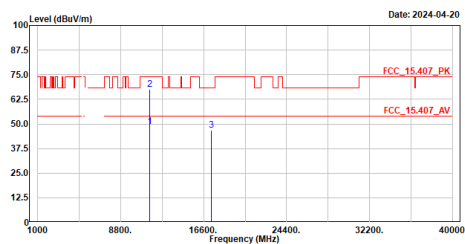


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11550.000	48.53	54.00	-5.47	55.67	-7.14	Average
2	11550.000	67.44	74.00	-6.56	74.58	-7.14	Peak
3	17325.000	46.75	68.22	-21.47	47.21	-0.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_5180MHz
Test BY :Rock

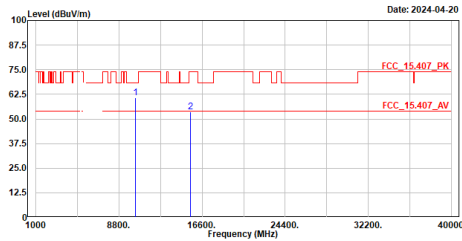


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10360.000	60.89	68.22	-7.33	70.13	-9.24	Peak
2	15540.000	53.66	74.00	-20.34	54.95	-1.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_5180MHz
Test BY :Rock

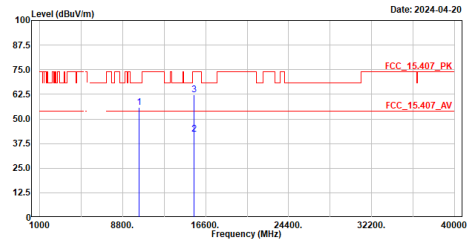


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10360.000	55.74	68.22	-12.48	64.98	-9.24	Peak
2	15540.000	42.14	54.00	-11.86	43.43	-1.29	Average
3	15540.000	62.17	74.00	-11.83	63.46	-1.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_5220MHz
Test BY :Rock

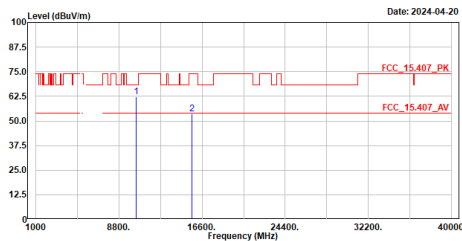


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10440.000	62.42	68.22	-5.80	71.79	-9.37	Peak
2	15660.000	53.63	74.00	-20.37	54.82	-1.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_5220MHz
Test BY :Rock

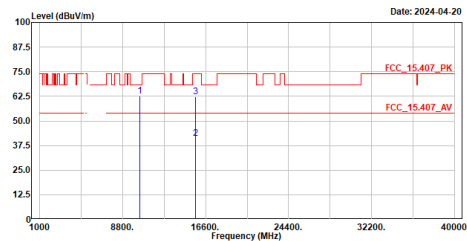


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10440.000	62.82	68.22	-5.40	72.19	-9.37	Peak
2	15660.000	41.03	54.00	-12.97	42.22	-1.19	Average
3	15660.000	62.17	74.00	-11.83	63.36	-1.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_5240MHz
Test BY :Rock

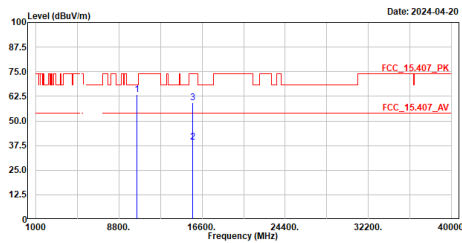


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10480.000	63.44	68.22	-4.78	72.77	-9.33	Peak
2	15720.000	39.14	54.00	-14.86	40.22	-1.08	Average
3	15720.000	59.28	74.00	-14.72	60.36	-1.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_5240MHz
Test BY :Rock

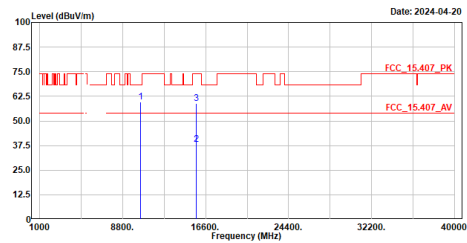


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10480.000	59.68	68.22	-8.54	69.01	-9.33	Peak
2	15720.000	38.15	54.00	-15.85	39.23	-1.08	Average
3	15720.000	58.97	74.00	-15.03	60.05	-1.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_5745MHz
Test BY :Peter

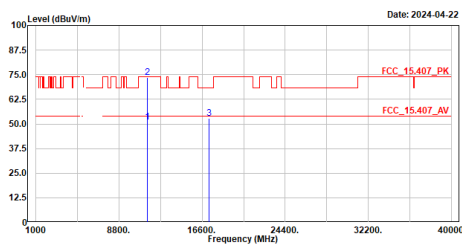


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11490.000	50.90	54.00	-3.10	58.00	-7.10	Average
2	11490.000	73.45	74.00	-0.55	80.55	-7.10	Peak
3	17235.000	52.79	68.22	-15.43	53.32	-0.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_5745MHz
Test BY :Peter

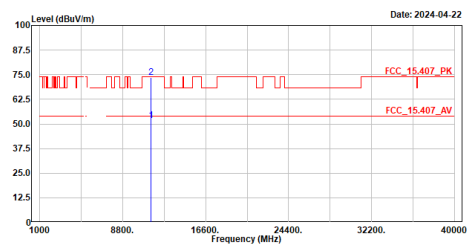


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11490.000	51.54	54.00	-2.46	58.64	-7.10	Average
2	11490.000	73.46	74.00	-0.54	80.56	-7.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_5785MHz
Test BY :Peter

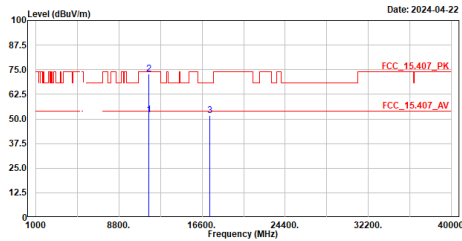


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	51.90	54.00	-2.10	59.09	-7.19	Average
2	11570.000	72.77	74.00	-1.23	79.96	-7.19	Peak
3	17355.000	51.58	68.22	-16.64	52.01	-0.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_5785MHz
Test BY :Peter

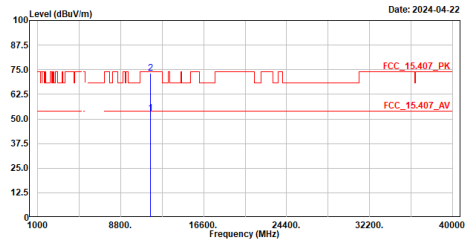


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	52.90	54.00	-1.10	60.09	-7.19	Average
2	11570.000	73.33	74.00	-0.67	80.52	-7.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_5825MHz
Test BY :Peter

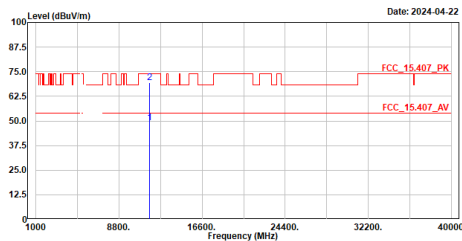


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	49.17	54.00	-4.83	56.35	-7.18	Average
2	11650.000	69.50	74.00	-4.50	76.68	-7.18	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_5825MHz
Test BY :Peter

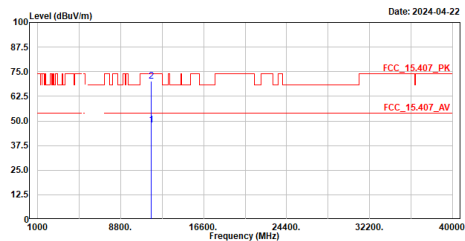


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	47.87	54.00	-6.13	55.05	-7.18	Average
2	11650.000	70.27	74.00	-3.73	77.45	-7.18	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_5190MHz
Test BY :Peter

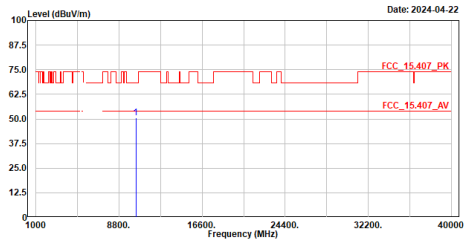


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10380.000	50.45	68.22	-17.77	59.77	-9.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_5190MHz
Test BY :Peter

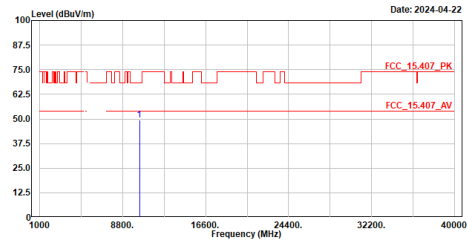


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10380.000	49.61	68.22	-18.61	58.93	-9.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_5230MHz
Test BY :Peter

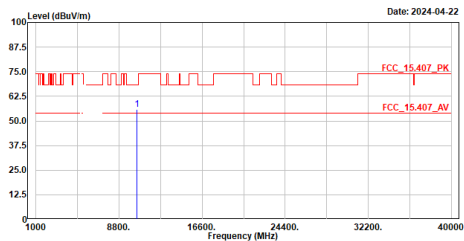


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10460.000	55.96	68.22	-12.26	65.31	-9.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_5230MHz
Test BY :Peter

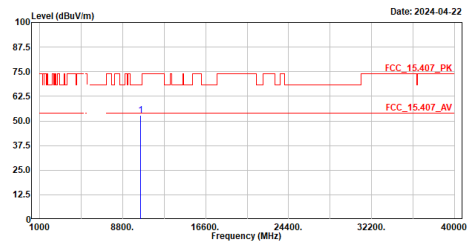


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10460.000	52.68	68.22	-15.54	62.03	-9.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_5755MHz
Test BY :Peter

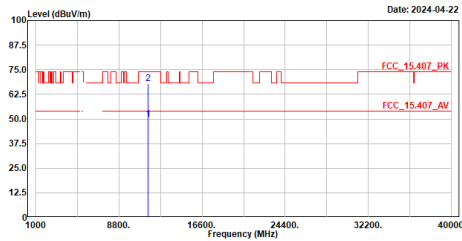


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11510.000	49.97	54.00	-4.03	57.08	-7.11	Average
2	11510.000	68.02	74.00	-5.98	75.13	-7.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_5755MHz
Test BY :Peter

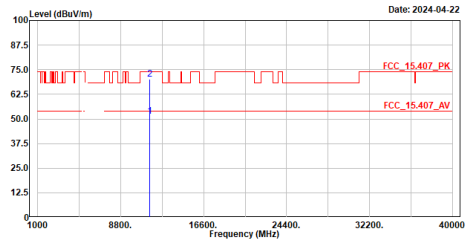


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11510.000	51.31	54.00	-2.69	58.42	-7.11	Average
2	11510.000	70.03	74.00	-3.97	77.14	-7.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_5795MHz
Test BY :Peter

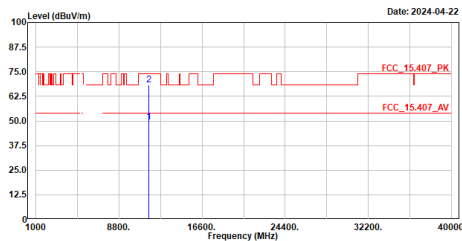


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11590.000	49.58	54.00	-4.42	56.82	-7.24	Average
2	11590.000	68.35	74.00	-5.65	75.59	-7.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_5795MHz
Test BY :Peter

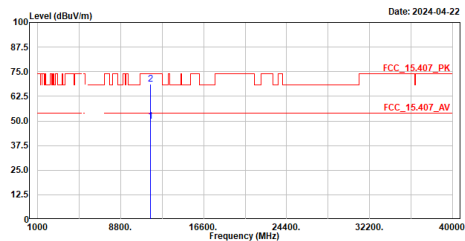


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11590.000	49.72	54.00	-4.28	56.96	-7.24	Average
2	11590.000	68.80	74.00	-5.20	76.04	-7.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax80_5210MHz
Test BY :Peter

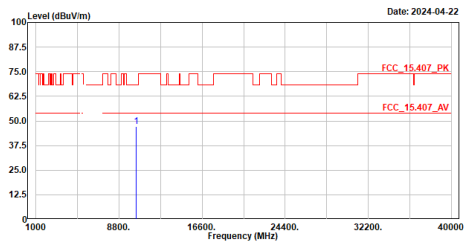


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10420.000	47.11	68.22	-21.11	56.49	-9.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax80_5210MHz
Test BY :Peter

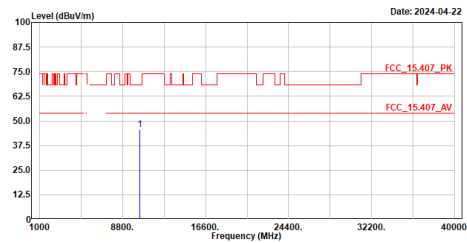


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10420.000	45.78	68.22	-22.44	55.16	-9.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax80_5775MHz
Test BY :Peter

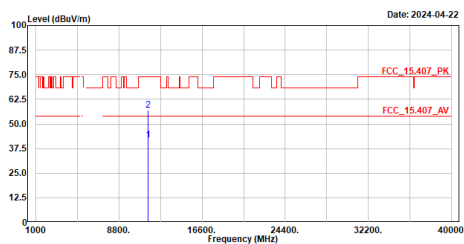


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11550.000	41.99	54.00	-12.01	49.13	-7.14	Average
2	11550.000	56.87	74.00	-17.13	64.01	-7.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax80_5775MHz
Test BY :Peter

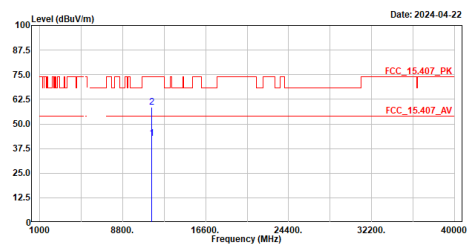


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11550.000	42.61	54.00	-11.39	49.75	-7.14	Average
2	11550.000	58.45	74.00	-15.55	65.59	-7.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax80_5775MHz
Test BY :Cater

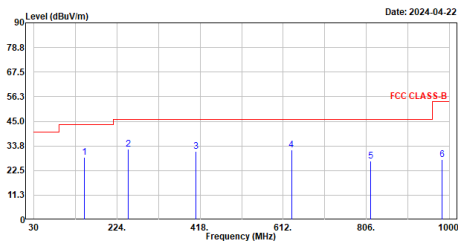

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	147.370	28.60	43.50	-14.90	52.46	-23.86	QP
2	250.190	32.36	46.00	-13.64	57.18	-24.82	QP
3	408.300	31.23	46.00	-14.77	51.21	-19.98	QP
4	631.400	31.78	46.00	-14.22	46.81	-15.03	QP
5	816.670	26.85	46.00	-19.15	39.25	-12.40	QP
6	982.540	27.63	54.00	-26.37	38.37	-10.74	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax80_5775MHz
Test BY :Cater

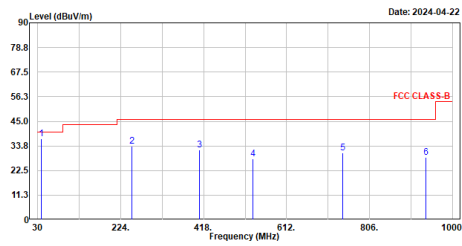

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	38.730	36.86	40.00	-3.14	61.10	-24.24	QP
2	250.190	33.79	46.00	-12.21	58.61	-24.82	QP
3	408.300	31.85	46.00	-14.15	51.83	-19.98	QP
4	532.460	27.91	46.00	-18.09	45.27	-17.36	QP
5	742.950	30.72	46.00	-15.28	43.90	-13.18	QP
6	937.920	28.52	46.00	-17.48	39.35	-10.83	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5180MHz
Test BY :Cater

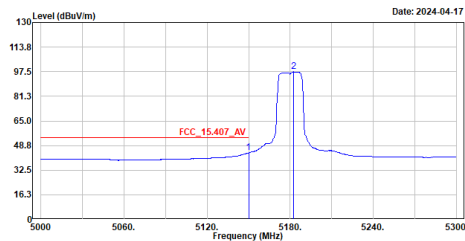

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	43.99	54.00	-10.01	29.59	14.40	Average
2	5182.700	97.38	-----	-----	82.91	14.47	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5180MHz
Test BY :Cater

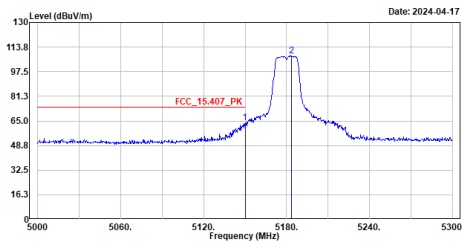

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	63.77	74.00	-10.23	49.37	14.40	Peak
2	5183.600	107.88	-----	-----	93.40	14.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5180MHz
Test BY :Caster

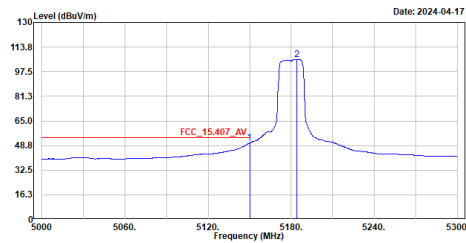


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	50.34	54.00	-3.66	35.94	14.40	Average
2	5183.900	105.57	-----	-----	91.09	14.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5180MHz
Test BY :Caster

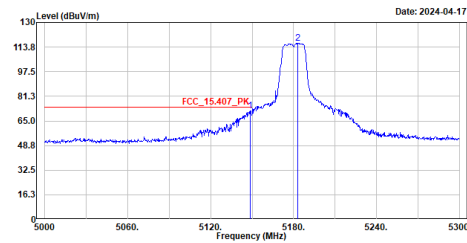


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5148.800	71.63	74.00	-2.37	57.23	14.40	Peak
2	5183.000	116.17	-----	-----	101.70	14.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5745MHz
Test BY :Caster

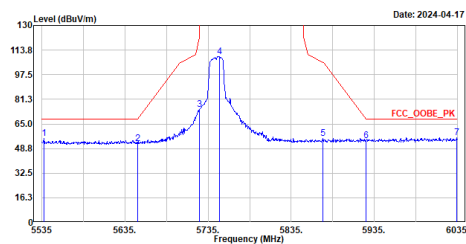


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5537.500	55.33	68.22	-12.89	39.89	15.44	Peak
2	5650.000	51.80	68.23	-16.43	36.14	15.66	Peak
3	5725.000	74.68	122.20	-47.52	58.56	16.12	Peak
4	5748.500	109.38	-----	-----	93.15	16.23	Peak
5	5873.500	55.48	105.62	-50.14	39.17	16.31	Peak
6	5925.000	54.05	68.23	-14.18	37.67	16.38	Peak
7	6034.500	55.93	68.22	-12.29	39.32	16.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_a_5745MHz
Test BY :Caster

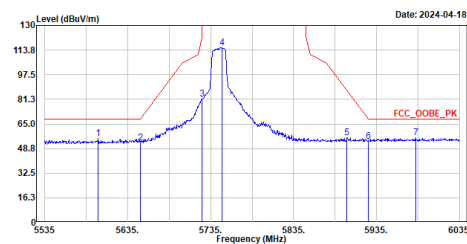


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5599.500	55.20	68.22	-13.02	39.87	15.33	Peak
2	5650.000	52.62	68.23	-15.61	36.96	15.66	Peak
3	5725.000	81.60	122.20	-40.60	65.48	16.12	Peak
4	5748.500	115.42	-----	-----	99.19	16.23	Peak
5	5899.500	55.88	87.08	-31.20	39.51	16.37	Peak
6	5925.000	53.62	68.23	-14.61	37.24	16.38	Peak
7	5982.000	56.04	68.22	-12.18	39.60	16.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5625MHz
Test BY :Caster

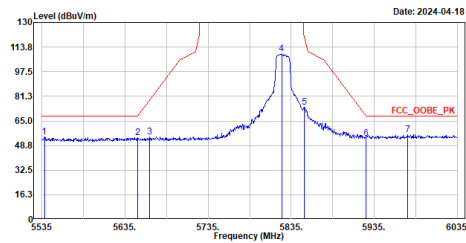


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5538.000	54.39	68.22	-13.83	38.96	15.43	Peak
2	5650.000	53.98	68.23	-14.25	38.32	15.66	Peak
3	5665.000	54.66	79.32	-24.66	38.90	15.76	Peak
4	5823.500	109.22	-----	-----	92.92	16.30	Peak
5	5850.500	73.97	121.06	-47.09	57.72	16.25	Peak
6	5925.000	53.69	68.23	-14.54	37.31	16.38	Peak
7	5975.500	55.93	68.22	-12.29	39.51	16.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_a_5625MHz
Test BY :Caster

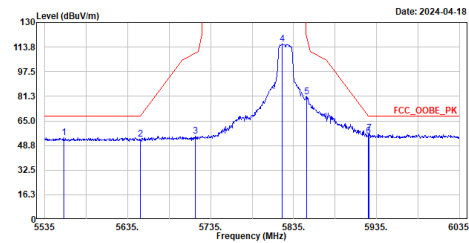


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5558.000	54.10	68.22	-14.12	38.70	15.40	Peak
2	5650.000	52.91	68.23	-15.32	37.25	15.66	Peak
3	5716.500	55.13	109.82	-54.69	39.05	16.08	Peak
4	5821.500	115.63	-----	-----	99.32	16.31	Peak
5	5850.500	80.94	121.06	-40.12	64.69	16.25	Peak
6	5925.000	54.82	68.23	-13.41	38.44	16.38	Peak
7	5926.000	56.81	68.22	-11.41	40.43	16.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac20_5180MHz
Test BY :Caster

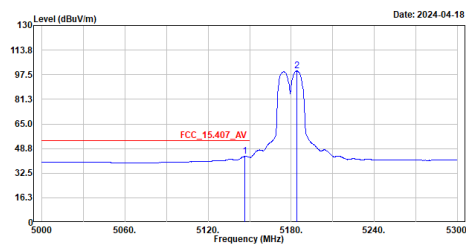


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5146.700	43.61	54.00	-10.39	29.21	14.40	Average
2	5184.200	99.97	-----	-----	85.49	14.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac20_5180MHz
Test BY :Caster

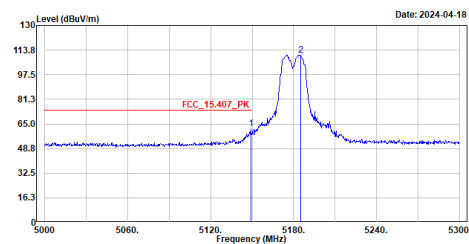


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.100	61.79	74.00	-12.21	47.39	14.40	Peak
2	5185.400	110.56	-----	-----	96.08	14.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5180MHz
Test BY :Caster

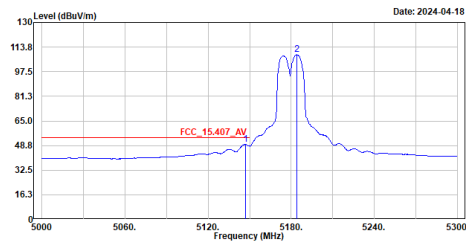


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5147.300	49.53	54.00	-4.47	35.13	14.40	Average
2	5183.900	108.66	-----	-----	94.18	14.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5180MHz
Test BY :Caster

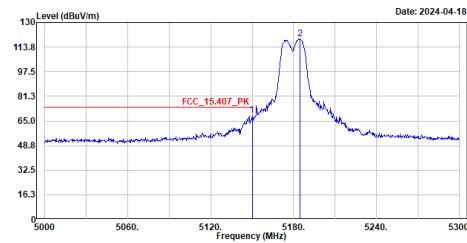


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5150.000	68.48	74.00	-5.52	54.08	14.40	Peak
2	5184.500	119.00	-----	-----	104.52	14.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac20_5745MHz
Test BY :Caster

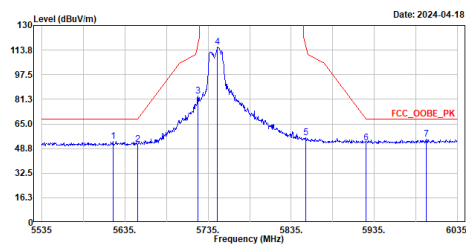


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5620.500	53.30	68.22	-14.92	37.84	15.46	Peak
2	5650.000	51.59	68.23	-16.64	35.93	15.66	Peak
3	5722.500	83.40	116.50	-33.10	67.29	16.11	Peak
4	5746.500	115.83	-----	-----	99.60	16.23	Peak
5	5852.500	55.99	116.50	-60.51	39.73	16.26	Peak
6	5925.000	52.71	68.23	-15.52	36.33	16.38	Peak
7	5997.500	54.82	68.22	-13.40	38.34	16.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac20_5745MHz
Test BY :Caster

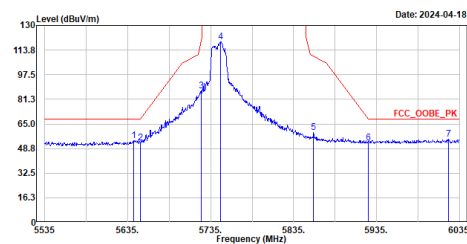

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5642.000	54.12	68.22	-14.10	38.51	15.61	Peak
2	5650.000	52.28	68.23	-15.95	36.62	15.66	Peak
3	5724.000	86.97	119.92	-32.95	70.85	16.12	Peak
4	5747.000	119.34	-----	-----	103.11	16.23	Peak
5	5859.000	59.17	109.68	-50.51	42.90	16.27	Peak
6	5925.000	52.49	68.23	-15.74	36.11	16.38	Peak
7	6021.500	54.94	68.22	-13.28	38.38	16.56	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

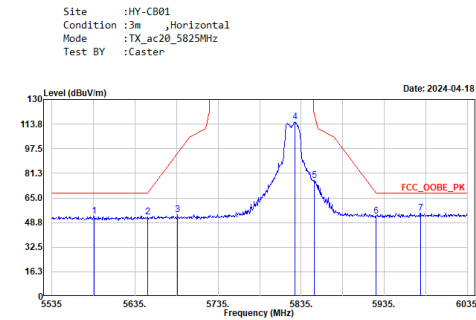


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5585.500	52.92	68.22	-15.30	37.61	15.31	Peak
2	5650.000	52.36	68.23	-15.87	36.70	15.66	Peak
3	5686.500	54.02	95.22	-41.20	38.11	15.91	Peak
4	5827.500	115.04	-----	-----	98.76	16.28	Peak
5	5851.000	76.67	119.92	-43.25	60.42	16.25	Peak
6	5925.000	52.80	68.23	-15.43	36.42	16.38	Peak
7	5978.500	54.90	68.22	-13.32	38.47	16.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

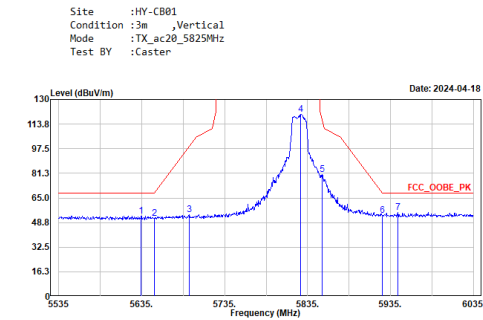


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5634.500	53.10	68.22	-15.12	37.54	15.56	Peak
2	5650.000	51.63	68.23	-16.60	35.97	15.66	Peak
3	5692.000	54.17	99.28	-45.11	38.23	15.94	Peak
4	5827.000	120.03	-----	-----	103.74	16.29	Peak
5	5852.500	80.42	116.50	-36.08	64.16	16.26	Peak
6	5925.000	53.45	68.23	-14.78	37.07	16.38	Peak
7	5943.500	55.40	68.22	-12.82	39.04	16.36	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

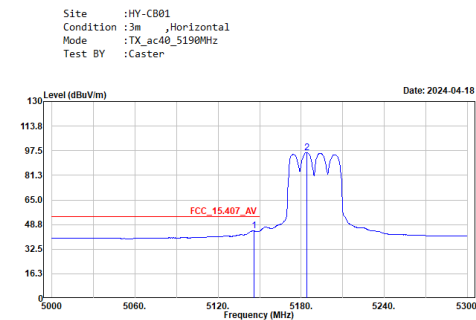

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5145.800	44.53	54.00	-9.47	30.13	14.40	Average
2	5183.900	96.28	-----	-----	81.80	14.48	Average


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

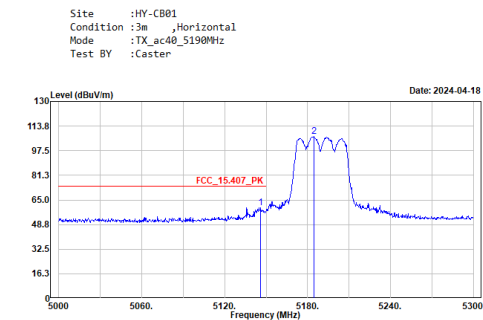

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5145.800	59.70	74.00	-14.30	45.30	14.40	Peak
2	5184.500	106.73	-----	-----	92.25	14.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac40_5190MHz
Test BY :Caster

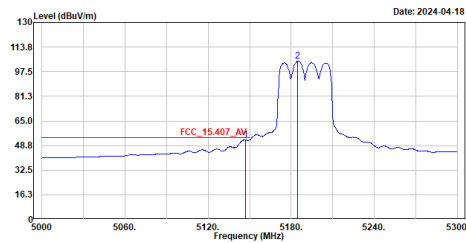


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5147.000	52.48	54.00	-1.52	38.08	14.40	Average
2	5184.800	104.44	-----	-----	89.96	14.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac40_5190MHz
Test BY :Caster

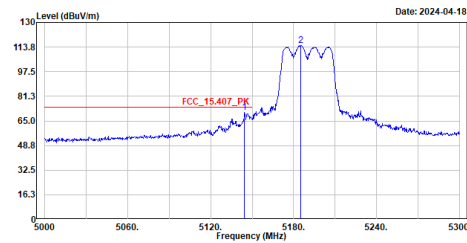


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5144.600	70.49	74.00	-3.51	56.10	14.39	Peak
2	5185.400	115.02	-----	-----	100.54	14.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac40_5755MHz
Test BY :Caster

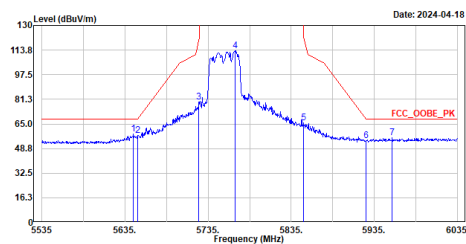


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5645.000	58.40	68.22	-9.82	42.77	15.63	Peak
2	5650.000	57.60	68.23	-10.63	41.94	15.66	Peak
3	5724.000	79.50	119.92	-40.42	63.38	16.12	Peak
4	5767.500	113.38	-----	-----	97.08	16.30	Peak
5	5850.000	65.74	122.20	-56.46	49.49	16.25	Peak
6	5925.000	53.96	68.23	-14.27	37.58	16.38	Peak
7	5956.500	55.96	68.22	-12.26	39.59	16.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac40_5755MHz
Test BY :Caster

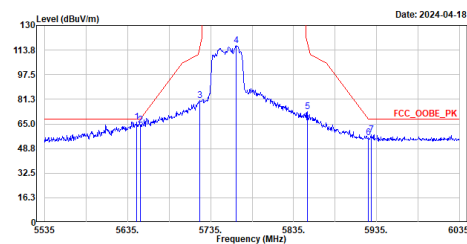


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5646.000	66.23	68.22	-1.99	50.59	15.64	Peak
2	5650.000	64.46	68.23	-3.77	48.80	15.66	Peak
3	5722.000	80.48	115.36	-34.88	64.37	16.11	Peak
4	5766.000	116.99	-----	-----	100.70	16.29	Peak
5	5851.500	73.21	118.78	-45.57	56.95	16.26	Peak
6	5925.000	55.98	68.23	-12.25	39.60	16.38	Peak
7	5929.000	57.90	68.22	-10.32	41.52	16.38	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

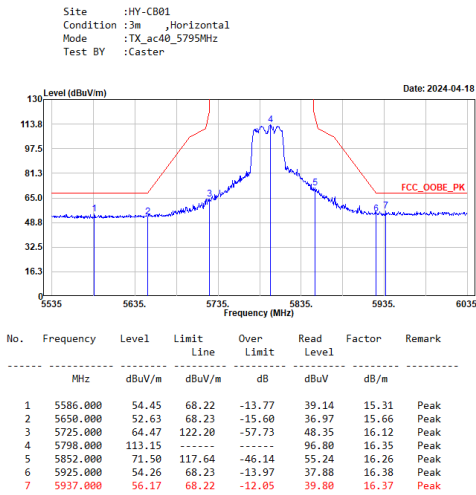


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

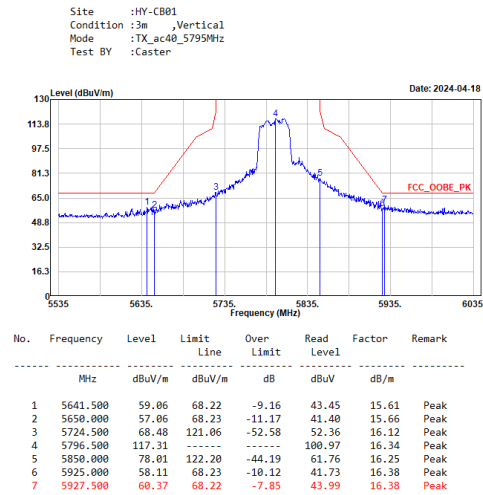

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

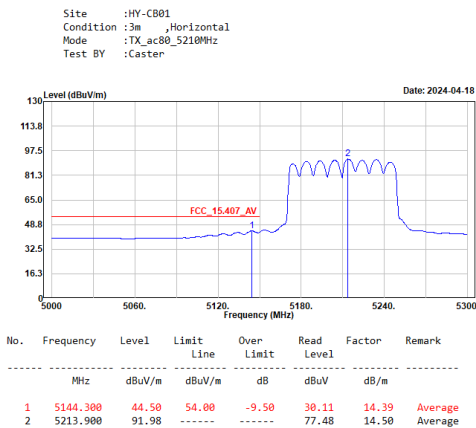


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

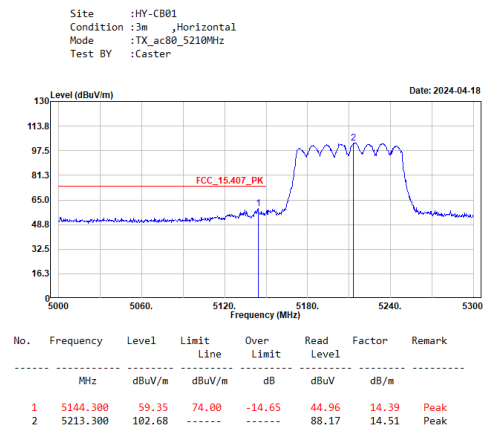

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test BY :Caster

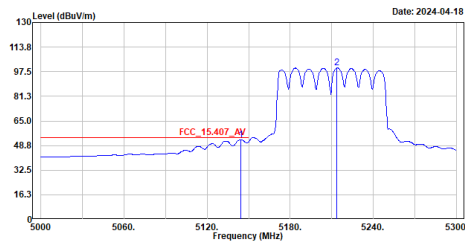


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5144.300	52.63	54.00	-1.37	38.24	14.39	Average
2	5213.900	99.93	-----	-----	85.43	14.50	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test BY :Caster

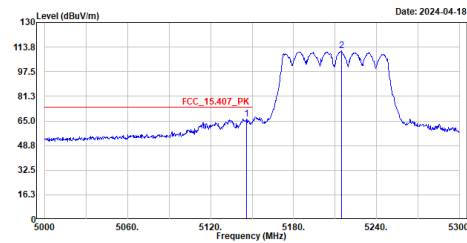


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5146.100	66.30	74.00	-7.70	51.90	14.40	Peak
2	5214.500	111.43	-----	-----	96.93	14.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5775MHz
Test BY :Caster

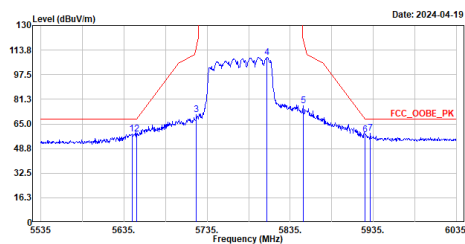


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5644.500	58.21	68.22	-10.01	42.58	15.63	Peak
2	5650.000	58.15	68.23	-10.08	42.49	15.66	Peak
3	5722.000	71.10	115.36	-44.26	54.99	16.11	Peak
4	5807.000	108.97	-----	-----	92.63	16.34	Peak
5	5890.500	76.94	121.06	-44.12	60.69	16.25	Peak
6	5925.000	58.11	68.23	-10.12	41.73	16.38	Peak
7	5931.500	59.08	68.22	-9.14	42.70	16.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac80_5775MHz
Test BY :Caster

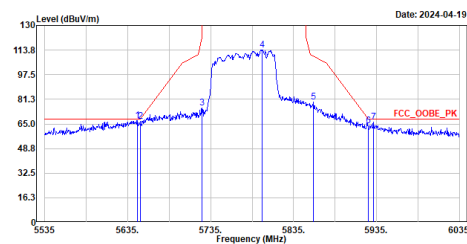


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5646.500	67.18	68.22	-1.04	51.54	15.64	Peak
2	5650.000	66.92	68.23	-1.31	51.26	15.66	Peak
3	5724.500	75.60	121.06	-45.46	59.48	16.12	Peak
4	5797.000	113.89	-----	-----	97.55	16.34	Peak
5	5899.000	79.61	109.68	-30.07	63.34	16.27	Peak
6	5925.000	63.95	68.23	-4.28	47.57	16.38	Peak
7	5931.500	66.40	68.22	-1.82	50.02	16.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax20_5180MHz
Test BY :Rock

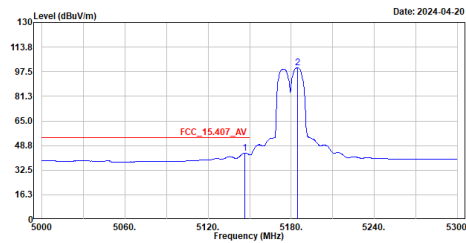


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5146.700	43.82	54.00	-10.18	29.42	14.40	Average
2	5184.500	100.24	-----	-----	85.76	14.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax20_5180MHz
Test BY :Rock

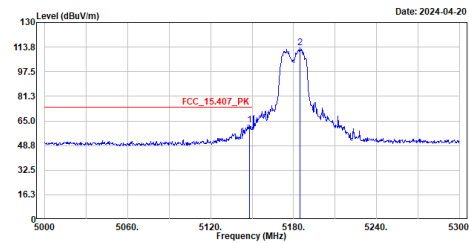


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5148.200	62.48	74.00	-11.52	48.08	14.40	Peak
2	5184.500	113.40	-----	-----	98.92	14.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax20_5180MHz
Test BY :Rock

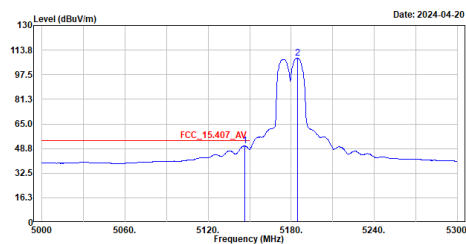


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5146.400	50.45	54.00	-3.55	36.05	14.40	Average
2	5184.500	108.44	-----	-----	93.96	14.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax20_5180MHz
Test BY :Rock

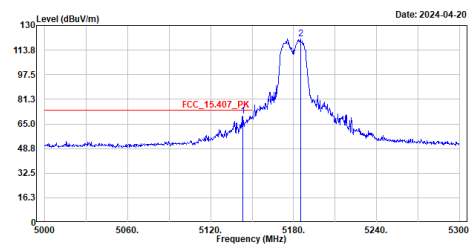

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5143.400	70.13	74.00	-3.87	55.74	14.39	Peak
2	5185.100	121.30	-----	-----	106.82	14.48	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

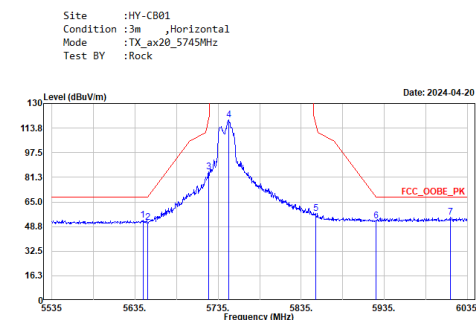

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5644.500	53.06	68.22	-15.16	37.43	15.63	Peak
2	5650.000	51.52	68.23	-16.71	35.86	15.66	Peak
3	5724.000	85.06	119.92	-34.86	68.94	16.12	Peak
4	5747.500	119.01	-----	-----	102.78	16.23	Peak
5	5852.500	57.60	116.50	-58.90	41.34	16.26	Peak
6	5925.000	52.43	68.23	-15.80	36.05	16.38	Peak
7	6014.500	54.98	68.22	-13.24	38.44	16.54	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

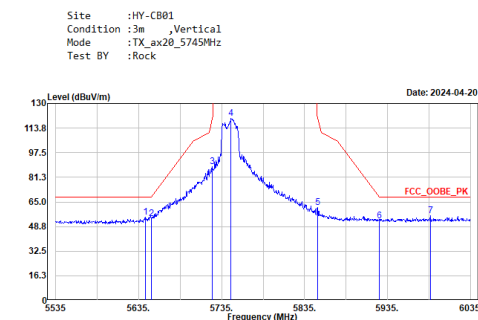

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5643.500	54.82	68.22	-13.40	39.20	15.62	Peak
2	5650.000	54.11	68.23	-14.12	38.45	15.66	Peak
3	5724.000	88.09	119.92	-31.83	71.97	16.12	Peak
4	5746.500	120.25	-----	-----	104.02	16.23	Peak
5	5850.500	61.33	121.06	-59.73	45.08	16.25	Peak
6	5925.000	52.42	68.23	-15.81	36.04	16.38	Peak
7	5986.500	55.89	68.22	-12.33	39.44	16.45	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

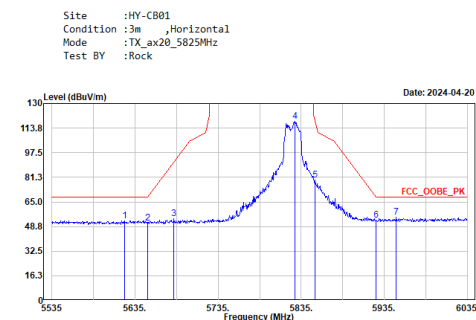

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5622.500	52.68	68.22	-15.54	37.21	15.47	Peak
2	5650.000	51.17	68.23	-17.06	35.51	15.66	Peak
3	5682.000	54.05	91.89	-37.84	38.17	15.88	Peak
4	5827.500	118.03	-----	-----	101.75	16.28	Peak
5	5851.500	79.34	118.78	-39.44	63.08	16.26	Peak
6	5925.000	53.19	68.23	-15.04	36.81	16.38	Peak
7	5949.500	54.81	68.22	-13.41	38.46	16.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

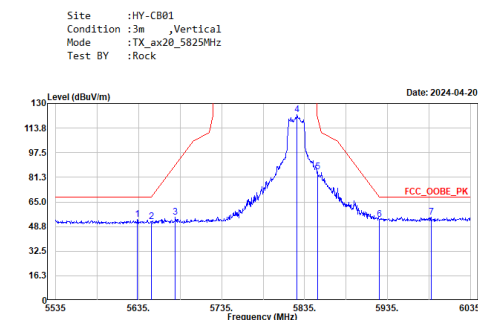


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5633.500	53.47	68.22	-14.75	37.92	15.55	Peak
2	5650.000	51.87	68.23	-16.36	36.21	15.66	Peak
3	5679.000	54.78	89.67	-34.89	38.93	15.85	Peak
4	5826.000	122.50	-----	-----	106.21	16.29	Peak
5	5850.500	84.69	121.06	-36.37	68.44	16.25	Peak
6	5925.000	53.28	68.23	-14.95	36.90	16.38	Peak
7	5987.500	54.85	68.22	-13.37	38.40	16.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax40_5190MHz
Test BY :Rock

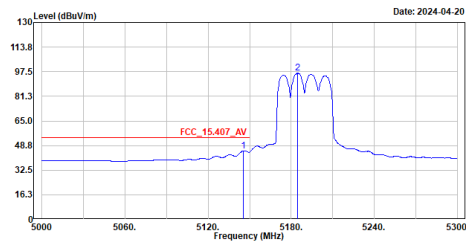


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5145.200	45.11	54.00	-8.89	30.71	14.40	Average
2	5184.800	96.47	-----	-----	81.99	14.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax40_5190MHz
Test BY :Rock

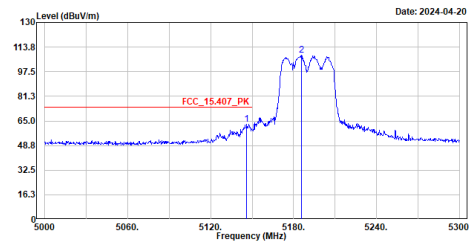


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5146.100	62.82	74.00	-11.18	48.42	14.40	Peak
2	5185.700	108.62	-----	-----	94.14	14.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax40_5190MHz
Test BY :Rock

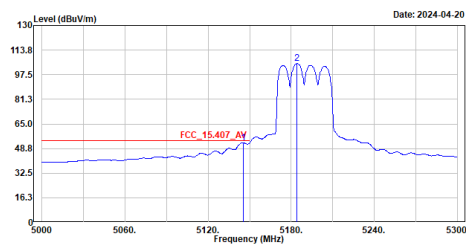


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5145.200	52.71	54.00	-1.29	38.31	14.40	Average
2	5184.200	104.85	-----	-----	90.37	14.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax40_5190MHz
Test BY :Rock

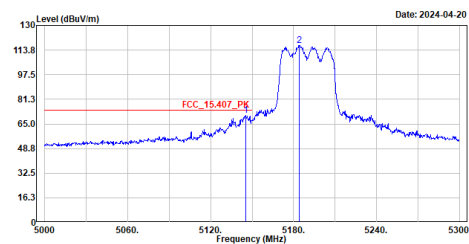


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5145.500	70.64	74.00	-3.36	56.24	14.40	Peak
2	5183.900	116.90	-----	-----	102.42	14.48	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

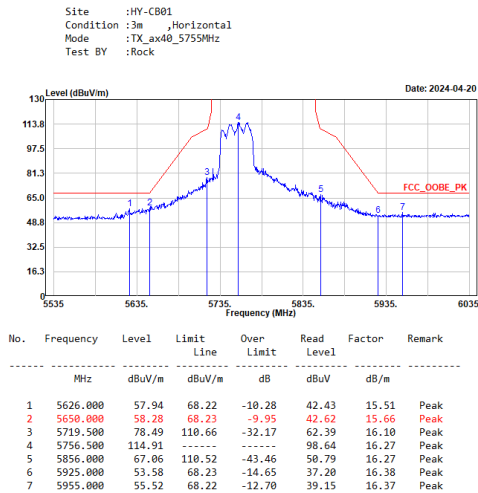


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

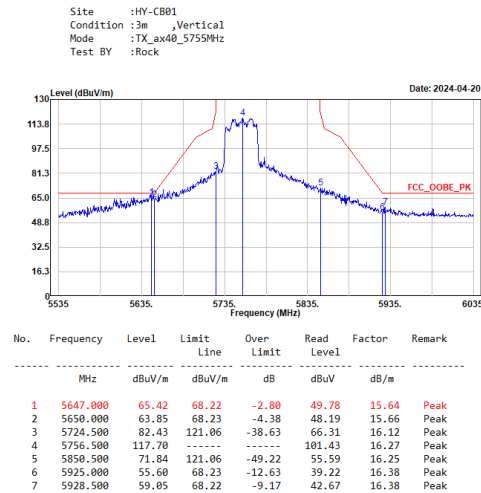

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

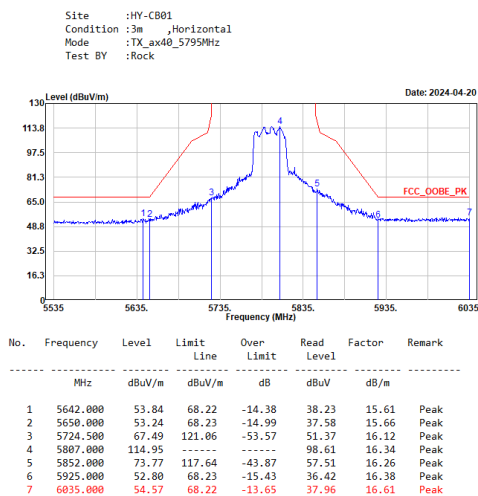


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

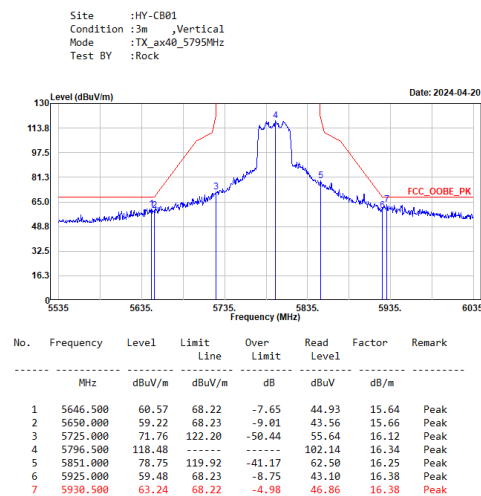

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax80_5210MHz
Test BY :Rock

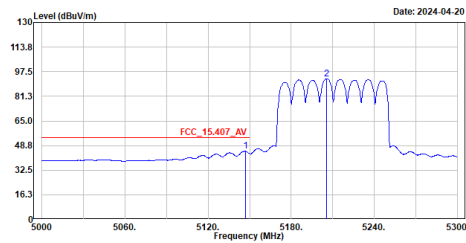


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5147.600	44.98	54.00	-9.02	30.58	14.40	Average
2	5285.800	92.92	-----	-----	78.40	14.52	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax80_5210MHz
Test BY :Rock

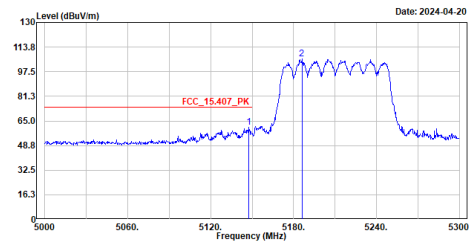


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5147.600	60.83	74.00	-13.17	46.43	14.40	Peak
2	5186.000	105.94	-----	-----	91.46	14.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax80_5210MHz
Test BY :Rock

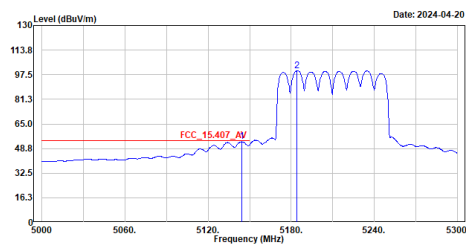


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5144.600	53.23	54.00	-0.77	38.84	14.39	Average
2	5184.200	100.21	-----	-----	85.73	14.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax80_5210MHz
Test BY :Rock

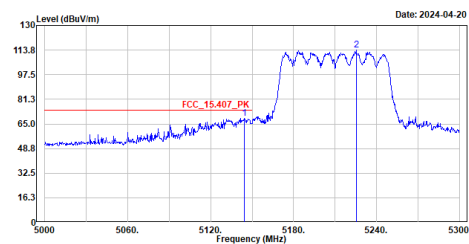


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5144.600	68.75	74.00	-5.25	54.36	14.39	Peak
2	5225.300	113.57	-----	-----	99.07	14.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax80_5775MHz
Test BY :Rock

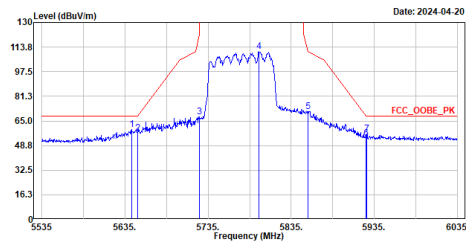

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5643.000	59.31	68.22	-8.91	43.69	15.62	Peak
2	5650.000	56.76	68.23	-11.47	41.10	15.66	Peak
3	5725.000	67.65	122.20	-54.55	51.53	16.12	Peak
4	5796.000	110.71	-----	-----	94.37	16.34	Peak
5	5855.500	71.28	110.66	-39.38	55.02	16.26	Peak
6	5925.000	53.70	68.23	-14.53	37.32	16.38	Peak
7	5926.000	56.17	68.22	-12.05	39.79	16.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax80_5775MHz
Test BY :Rock

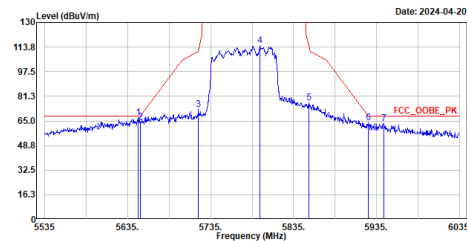


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5648.000	67.08	68.22	-1.14	51.43	15.65	Peak
2	5650.000	64.37	68.23	-3.86	48.71	15.66	Peak
3	5720.500	72.45	111.94	-39.49	56.35	16.10	Peak
4	5794.500	114.57	-----	-----	98.23	16.34	Peak
5	5853.500	77.20	114.22	-37.02	60.94	16.26	Peak
6	5925.000	64.01	68.23	-4.22	47.63	16.38	Peak
7	5943.500	63.34	68.22	-4.88	46.98	16.36	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Band Edge Data_802.11a

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5240	5248.39	<5250	PASS

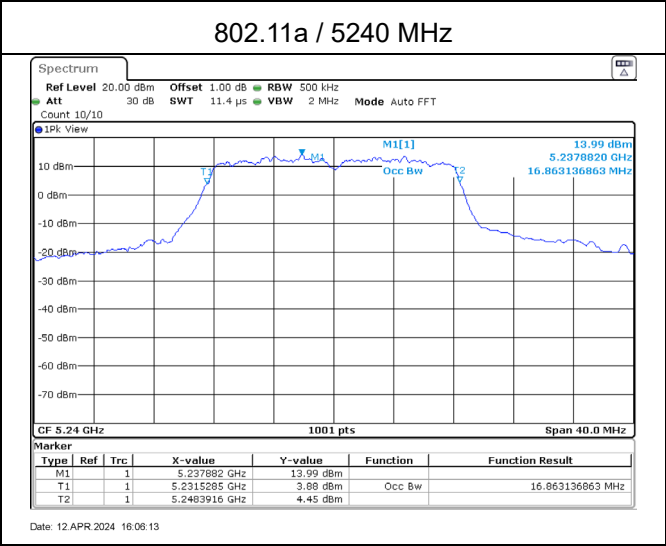


Band Edge Data_802.11ac (20MHz)

ChainA

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5240	5248.87	<5250	PASS

ChainB

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5240	5248.99	<5250	PASS

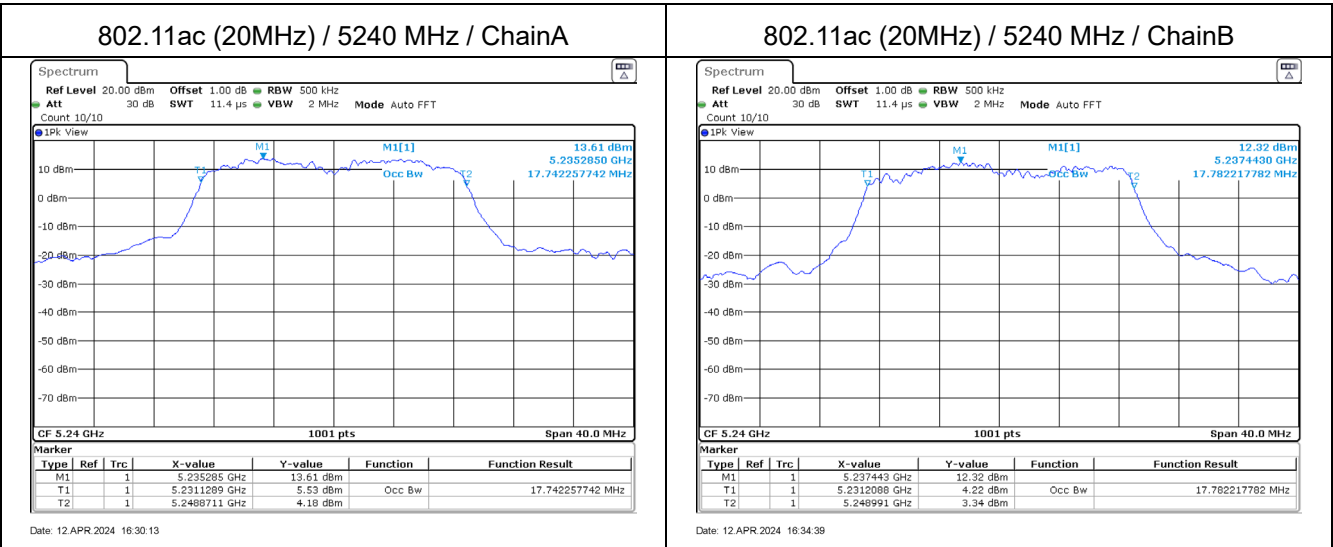


Band Edge Data_802.11ac (40MHz)

ChainA

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5230	5248.06	<5250	PASS

ChainB

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5230	5248.14	<5250	PASS

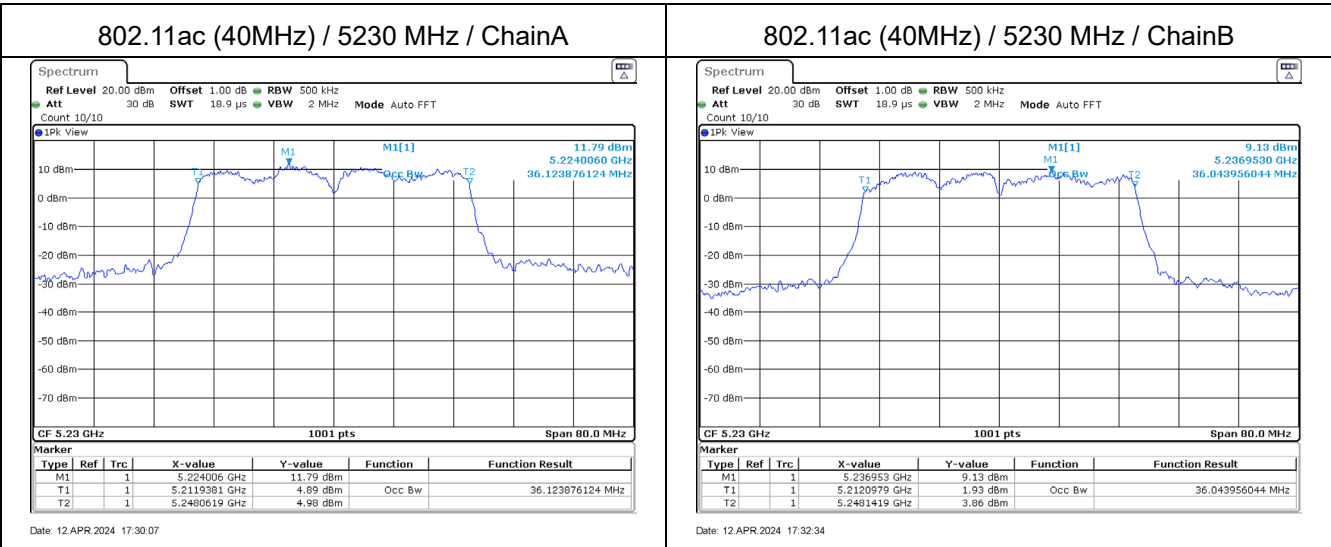


Band Edge Data_802.11ac (80MHz)

ChainA

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5210	5247.56	<5250	PASS

ChainB

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5210	5247.72	<5250	PASS

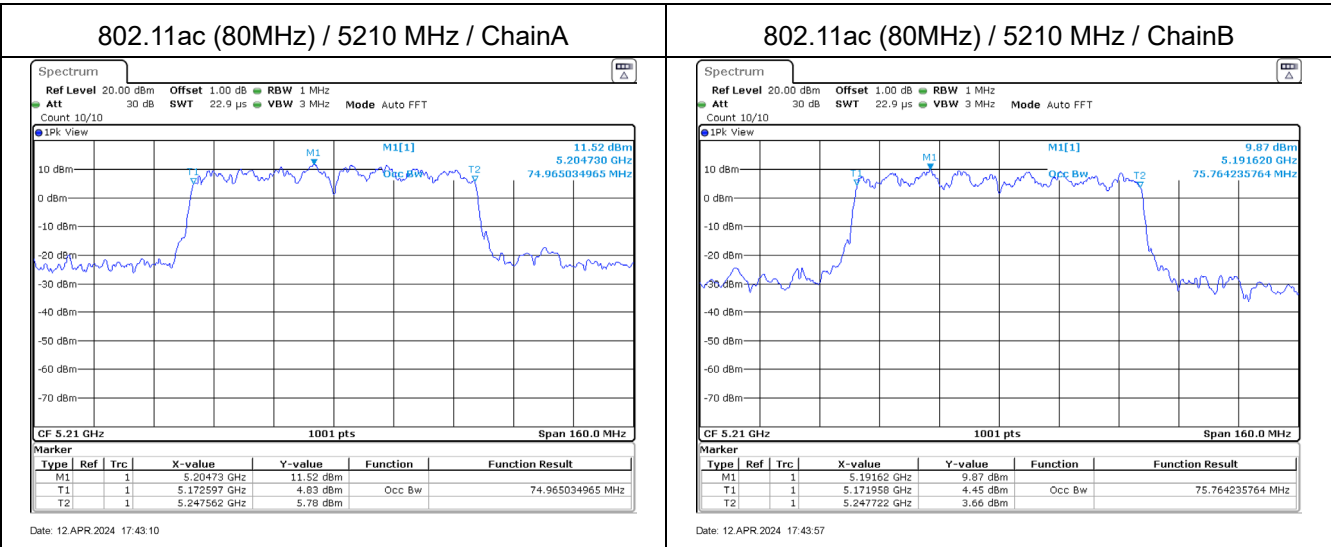


Band Edge Data_802.11ax (20MHz)

ChainA

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5240	5249.47	<5250	PASS

ChainB

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5240	5249.55	<5250	PASS

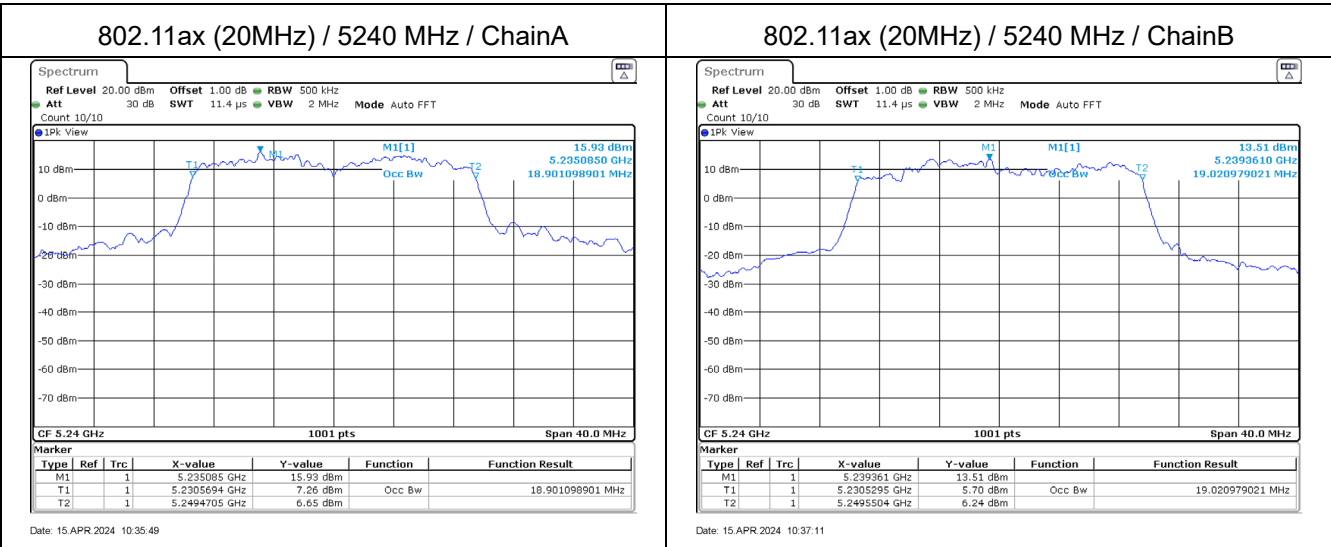


Band Edge Data_802.11ax (40MHz)

ChainA

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5230	5248.78	<5250	PASS

ChainB

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5230	5248.94	<5250	PASS

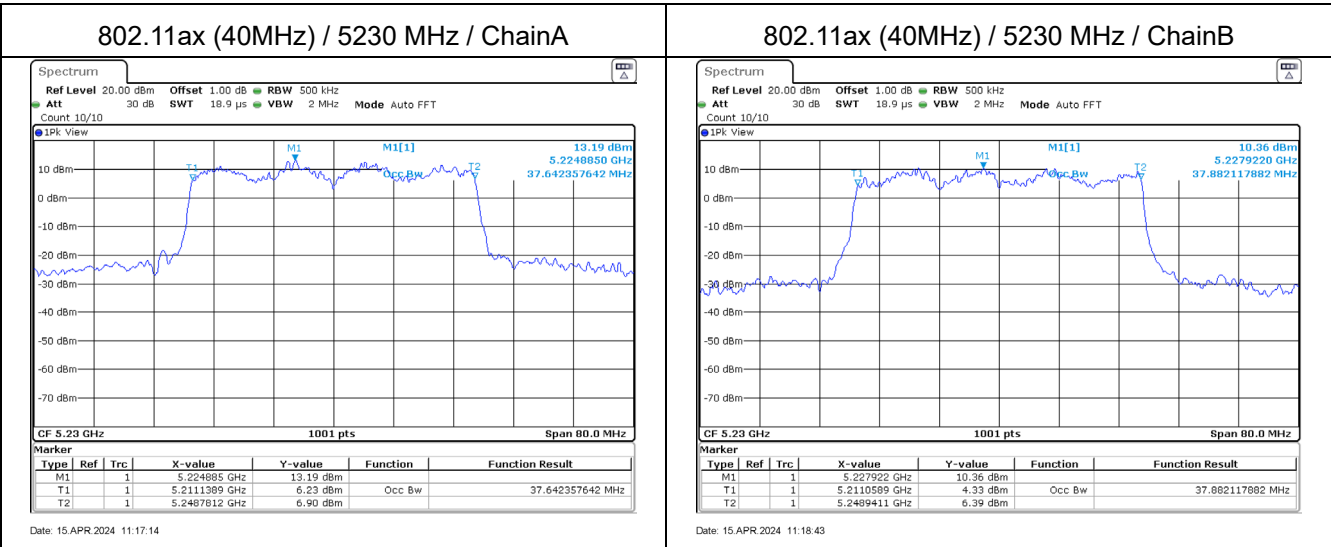


Band Edge Data_802.11ax (80MHz)

ChainA

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5210	5248.52	<5250	PASS

ChainB

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5210	5248.68	<5250	PASS

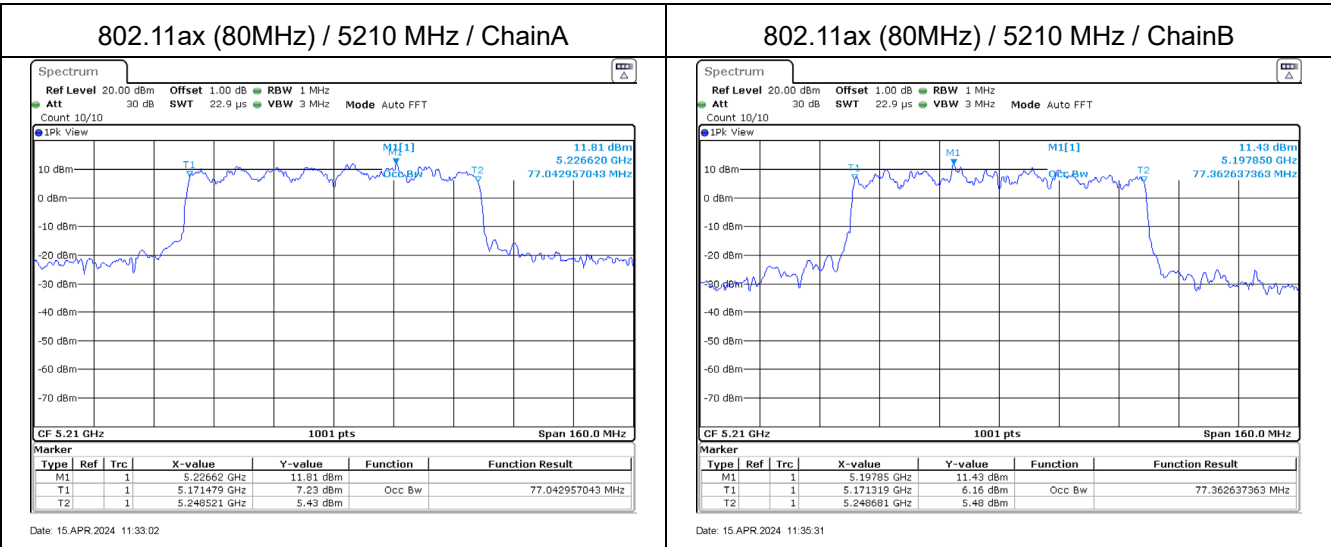

Co-Location


Site :HY-CB01

Condition :3m ,Horizontal

Mode :SGNR_N2_20M_IRB MID_CH372000+ax20_5745MHz

Test BY :Peter

Date: 2024-05-10

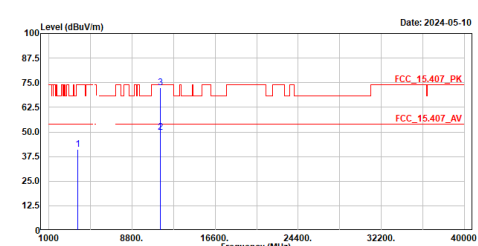

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	3720.000	41.08	74.00	-32.92	57.19	-16.11	Peak
2	11490.000	49.99	54.00	-4.01	57.09	-7.10	Average
3	11490.000	72.60	74.00	-1.40	79.70	-7.10	Peak

Note:

1. Level = Read Level + Factor

2. Factor = Antenna Factor + Cable Loss - Preamp Factor

3. Over Limit = Level - Limit Line

4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01

Condition :3m ,Vertical

Mode :SGNR_N2_20M_IRB MID_CH372000+ax20_5745MHz

Test BY :Peter

Date: 2024-05-10

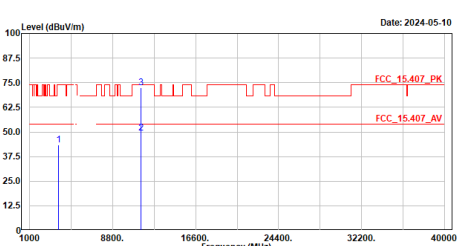

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	3720.000	43.49	74.00	-30.51	59.60	-16.11	Peak
2	11490.000	49.37	54.00	-4.63	56.47	-7.10	Average
3	11490.000	72.49	74.00	-1.51	79.59	-7.10	Peak

Note:

1. Level = Read Level + Factor

2. Factor = Antenna Factor + Cable Loss - Preamp Factor

3. Over Limit = Level - Limit Line

4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01

Condition :3m ,HORIZONTAL

Mode :SGNR_N2_20M_IRB MID_CH372000+ax20_5745MHz

Test BY :Peter

Date: 2024-05-10

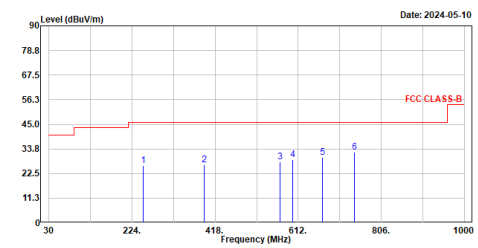

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	250.190	26.04	46.00	-19.96	50.86	-24.82	QP
2	392.780	26.43	46.00	-19.57	46.79	-20.36	QP
3	570.290	28.02	46.00	-17.98	44.26	-16.24	QP
4	599.390	28.98	46.00	-17.02	44.30	-15.32	QP
5	668.260	29.85	46.00	-16.15	44.44	-14.59	QP
6	742.950	32.30	46.00	-13.70	45.48	-13.18	QP

Note:

1. Level = Read Level + Factor

2. Factor = Antenna Factor + Cable Loss - Preamp Factor

3. Over Limit = Level - Limit Line

4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB01

Condition :3m ,VERTICAL

Mode :SGNR_N2_20M_IRB MID_CH372000+ax20_5745MHz

Test BY :Peter

Date: 2024-05-10

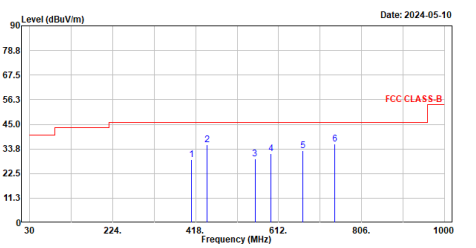

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	408.300	28.93	46.00	-17.07	48.91	-19.98	QP
2	445.160	35.51	46.00	-10.49	54.41	-18.90	QP
3	556.710	29.35	46.00	-16.65	46.18	-16.83	QP
4	594.540	31.46	46.00	-14.54	47.01	-15.55	QP
5	668.260	32.96	46.00	-13.04	47.55	-14.59	QP
6	742.950	36.11	46.00	-9.89	49.29	-13.18	QP

Note:

1. Level = Read Level + Factor

2. Factor = Antenna Factor + Cable Loss - Preamp Factor

3. Over Limit = Level - Limit Line

4. The emission under 30MHz was not included since the emission levels are very low against the limit.