

## II. Preliminary

### 1. Making Calls

#### <Off-hook state>

- Pick up the handset. You will hear the dial tone.
- In the "No Service" state, you cannot make calls.
- Dial the telephone number and press [SEND] key to make a call.
- If you want to make a call to the last dialed number, hold the handset and then just press [SEND].
- If you do not [SEND] after dialing the number, the call will be made automatically 8 seconds later.
- Speak on the telephone.
- Place the handset on-hook to terminate the call.

\* You can adjust the handset volume using [UP]/[DOWN] during the call.  
In the off-hook state, all buttons except the [MENU] are available.

#### <On-hook state>

- Press two times [RECALL] to choose the telephone number you already made a call before and hook off the handset to make a call.
- Or dial the telephone number when your handset is placed on-hook, and then pick up the handset to make a call.
- Speak on the telephone.
- Place the handset on-hook to terminate the call.

\* You can press [SEND] before pick up the handset to make a call.

#### <Calling to stored number>

- Press [RECALL].
- Search for the number you want by using [UP]/[DOWN].
- Pick up the handset.
- Press [SEND] or wait for 8 seconds.

\* Modifying the phone number during dialing.  
Modifying one digit : Press [CLEAR].  
To try to Call again : Press [END].

## 2. To End a Call

- Replace the handset or press [END].

## 3. Redial

You can easily make a call to the last dialed telephone number.

- Pick up the handset and press [SEND].
- When the call is connected, you can speak on the telephone.
- Place the handset on-hook to terminate the call.

## 4. Receiving Calls

- When your phone rings, pick up the handset.
- If the handset is already up, press any keys.
  - \* Caller ID is displayed when the phone rings.

## 5. Using Memory Functions

### 5-1. Storing Numbers In Memory


You can store up to 99 telephone numbers from 01 to 99.

To make a call to the stored telephone number, you have to store the telephone number in specified address.

- Enter number.
- Press [MENU].
- Enter Name.


- \* If you want a small letter, press [RECALL].
- \* If you want a space, press [#].

- Press the key until the last spell of the name is entered.
- Press [MENU].
- Enter Memory location by pressing 2 digits or [UP]/[DOWN].
- Press [MENU].
- Select whether you make the phone number to be secret by pressing [UP]/[DOWN] or [RECALL].
- Press [MENU].

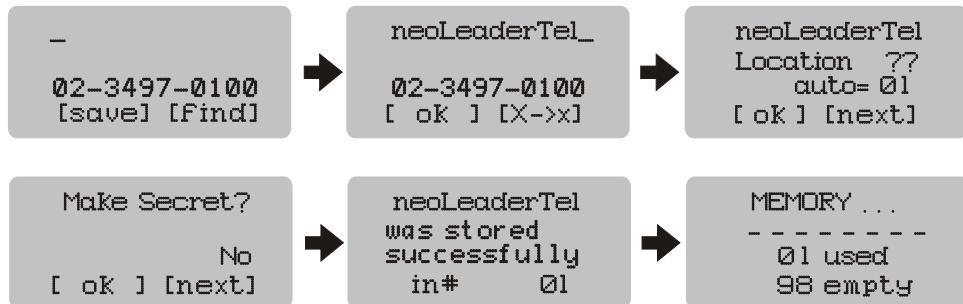

### \* Overwriting

- Press the phone number.
- Press **[MENU]**.
- Input the name.
- Press **[MENU]**.
- Enter Memory location you want to overwrite by pressing 2 digits.
- Press **[MENU]**.
- Select whether you make the phone number to be secret by pressing **[UP]/[DOWN]**.
- Press **[MENU]**.

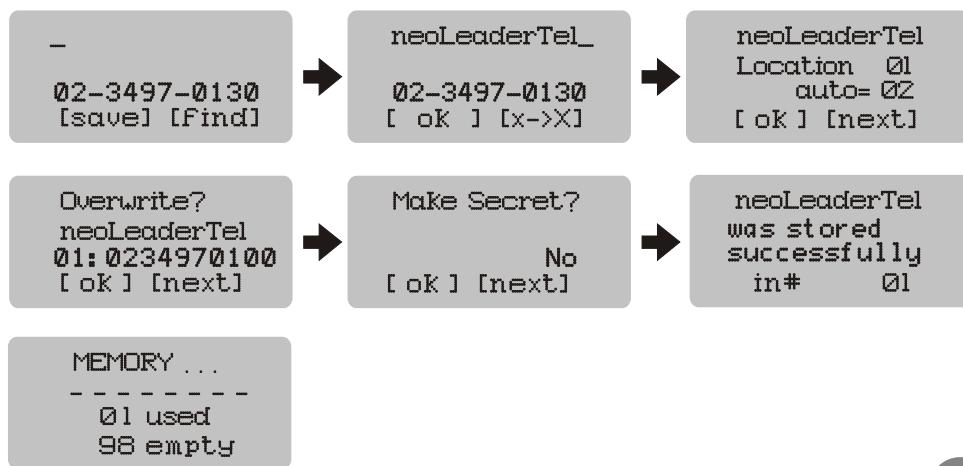


## 5-2. Erasing the Number In Memory

If you want to erase the number in memory,

- Press [RECALL].
- Press [MENU].
- Choose the stored number you want to erase by pressing [RECALL], or entering the full name or 1~3 letters in head of the name and then press [RECALL].
- Select the number by using [UP]/[DOWN].
- Press [MENU] to select number.
- Press [RECALL] to erase the number.
- Press [MENU].
- Press [END].

\* If you want to erase the number additionally, you can repeat same process before pressing [END].

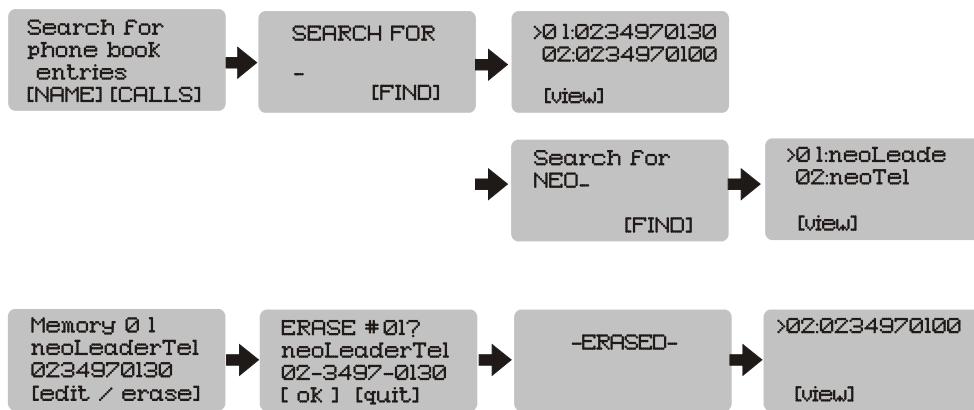

### 5-3. One-touch Dialing

You can make a call by pressing just 1 digit.

<Off-hook state>

- Pick up the handset.
- Press and hold 1 digit, the memory location number stored in 01~09.

<On-hook state>

- Press [ON-HOOK].
- Press and hold 1 digit, the memory location number stored in 01~09.
- Pick up the handset.

\* One touch dialing is restricted, if one-touch dial is disabled in MENU[66].

### 5-4. Two-touch Dialing

You can make a call by pressing just 2 digits.

<Off-hook state>

- Pick up the handset.
- Press first digit of the memory location number and press hold second digit stored in 10~99.

<On-hook state>

- Press [ON-HOOK].
- Press first digit of the memory location number and press hold second digit stored in 10~99.
- Pick up the handset.

\* Two- touch dialing is restricted, if one-touch dial is disabled in MENU[66].

## 5-5. Redialing For Last Call Numbers

<Off-hook state>

- Pick up the handset.
- Press [SEND].

<On-hook state>

- Press [ON-HOOK].
- Press [SEND].
- Pick up the handset.

\* You can search for the last incoming/outgoing call numbers and call to the chosen phone number.

- Press [RECALL].
- Press [RECALL].
- To view the last call number, scroll by using [UP]/[DOWN].
- Press [SEND].



## 5-6. Searching For Memories

- Press [RECALL].
- Scroll by [UP]/[DOWN] to choose the memory location.
- You can search for the memory numbers and call to the chosen number by pressing [SEND].

