

FCC Radio Test Report

FCC ID: QISALP-LX9

This report concerns (check one): ☒ Original Grant ☐ Class I Change ☐ Class II Change

Project No. : 1708C104
Equipment : Smart Phone
Model Name : ALP-L29
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : Aug. 10, 2017
Date of Test : Aug. 10, 2017~Sep. 11, 2017
Issued Date : Sep. 12, 2017
Tested by : BTL Inc.

Testing Engineer

: Shawn Xiao
(Shawn Xiao)

Technical Manager

: David Mao
(David Mao)

Authorized Signatory

: Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

NVLAP[®]
Lab Code: 200788-01

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.5 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 EUT TEST CONDITIONS	13
4.1.7 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 RADIATED EMISSION LIMITS	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	15
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 EUT TEST CONDITIONS	17
4.2.7 TEST RESULTS (9K TO 30MHz)	18
4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	18
4.2.9 TEST RESULTS (ABOVE 1000 MHz)	18
5 . MEASUREMENT INSTRUMENTS LIST	19
APPENDIX A - CONDUCTED EMISSION	21
APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)	30
APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)	47
APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)	240

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1708C104	Original Issue.	Sep. 12, 2017

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI N/A
Model Name : ALP-L29
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Factory : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Test : Aug. 10, 2017~Sep. 11, 2017
Test Sample : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1708C104) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E(15.407)			
Standard(s) Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	Radiated Emissions	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.
BTL's test firm number for FCC: 854385

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	1.94

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz~30MHz	V	3.79
		9kHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.60
		200MHz ~ 1,000MHz	V	3.86
		200MHz ~ 1,000MHz	H	3.94
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone	
Brand Name	HUAWEI	
Model Name	ALP-L29	
Mode Different	N/A	
Product Description	Operation Frequency	UNII-1: 5150-5250MHz UNII-2A: 5250-5350MHz UNII-2C: 5470-5725MHz UNII-3: 5725-5850MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	433.3 Mbps
Power Source	#1 Supplied from AC/DC adapter. #2 Battery Supplied.	
Power Rating	#1 Input: 100-240V~50/60Hz 0.75A Output: 5V  2A or 5V  5A or 5V  4.5A #2  3.82V 3900mA	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
132	5660				
136	5680				
140	5700				

UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				


3. Antenna Specification:

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	-0.26
2	N/A	N/A	Internal	N/A	-0.4

4. The EUT contains following accessory devices.

Item	Mfr/Brand	Model.
Battery	Sunwoda Electronic Co., LTD	HB436486ECW
	SCUD (FUJIAN) Electronics Co., Ltd	HB436486ECW
	Desay Battery Co., Ltd.	HB436486ECW
USB Cable	LUXSHARE-ICT Co., Ltd.	L99UC018-CS-H
	Chang Shu Honglin Technology Co.,Ltd.	130-27309
Adapter	DONGGUAN PHITEK ELECTRONICS CO.,LTD	HW-050450A00 (AU)
	SHENZHEN HUNTKEY ELECTRONIC CO.,LTD.	
	Salcomp (Shenzhen)Co.,Ltd	
Adapter	DONGGUAN PHITEK ELECTRONICS CO.,LTD	HW-050450E00 (EU) HW-050450B00 (UK) HW-050450U00 (US)
	SHENZHEN HUNTKEY ELECTRONIC CO.,LTD.	
	Salcomp (Shenzhen)Co.,Ltd	
	HUAWEI Technologies Co., Ltd.	
Earphone	JIANGXI LIANCHUANG HONGSHENG ELECTRONIC CO., LTD	MEMD1632B580C00
	BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD	1311-3291-3.5mm-229
	Goer Tek Inc	NA12
	MERRY ELECTRONICS (SHENZHEN) CO., LTD.	EMC309-001

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

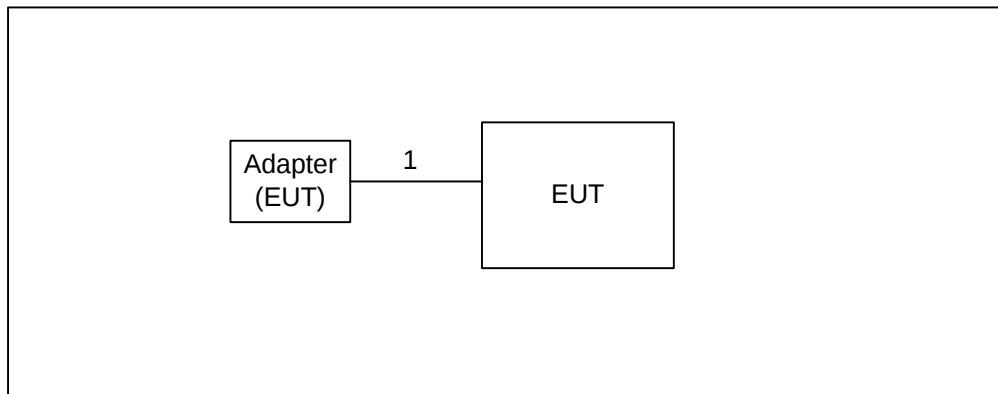

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1m	USB cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

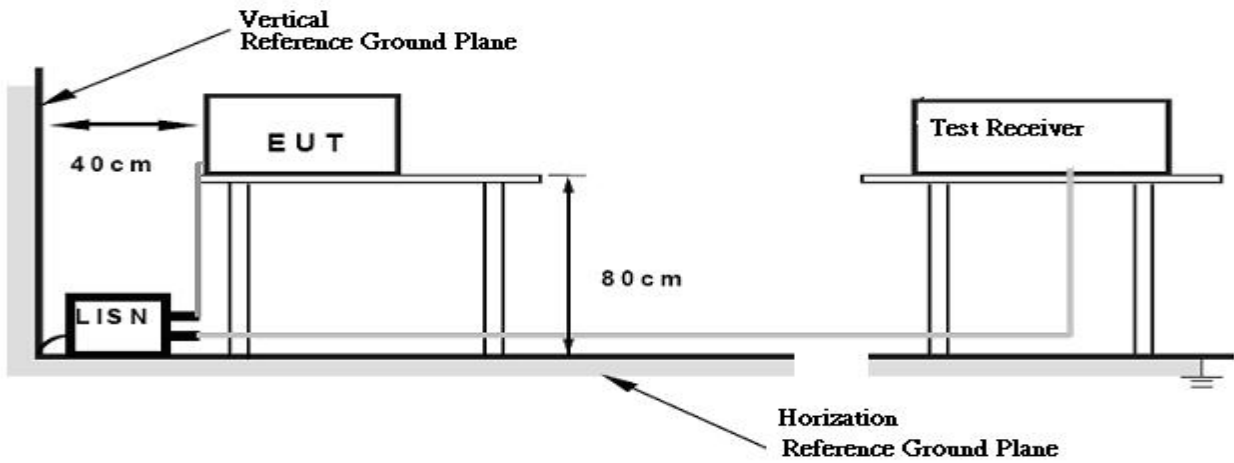

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 53% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Appendix A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150kHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequencies (MHz)	EIRP Limit (dBm)	Band edge at 3m (dBμV/m)	Harmonic at 1.5m (dBμV/m)
5150-5250	-27	68.3	74.3 (Note 3)
5250-5350	-27	68.3	74.3 (Note 3)
5470-5725	-27	68.3	74.3 (Note 3)
5725-5850	-27(Note 2)	68.3	74.3 (Note 3)
	10(Note 2)	105.3	111.3(Note 3)
	15.6(Note 2)	110.9	116.9(Note 3)
	27(Note 2)	122.3	128.3(Note 3)

Note:

- The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength: $E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}$, where P is the eirp (Watts)
- According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.
- $$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

$$20\log d_{\text{limit}}/d_{\text{measure}} = 20\log 3/1.5 = 6\text{dB}.$$

4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A)Radiated Emission Test Set-Up Frequency Below 1GHz

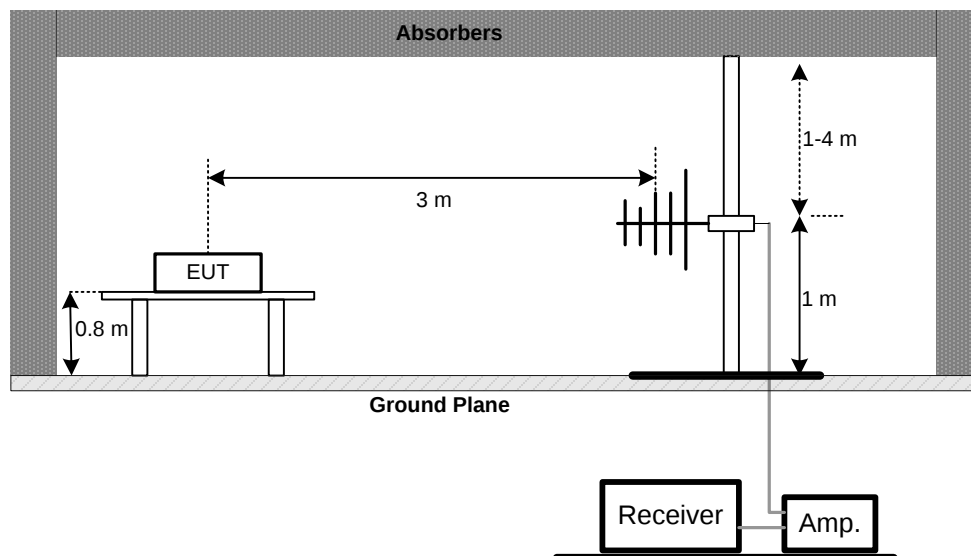


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz


Band edge

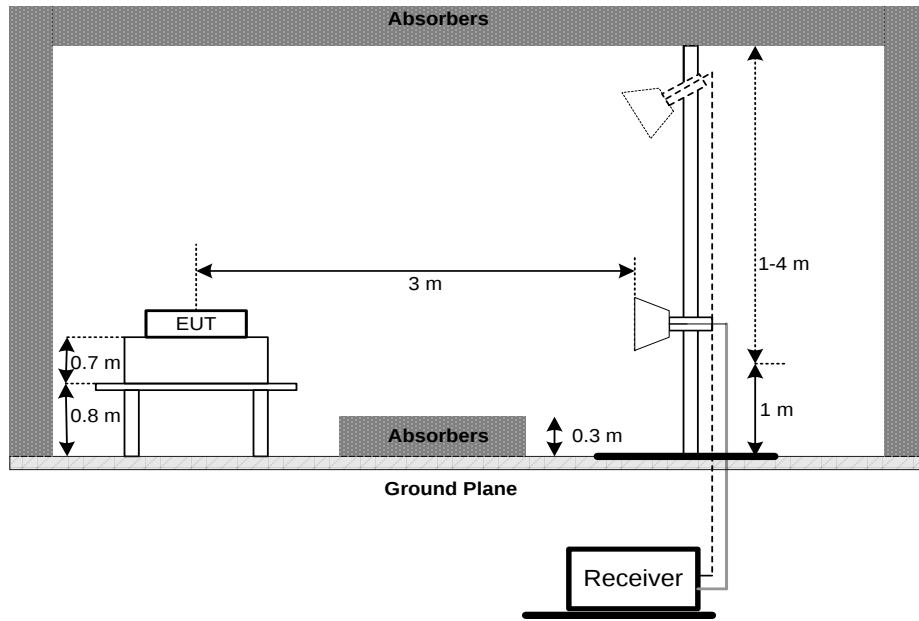

Harmonic

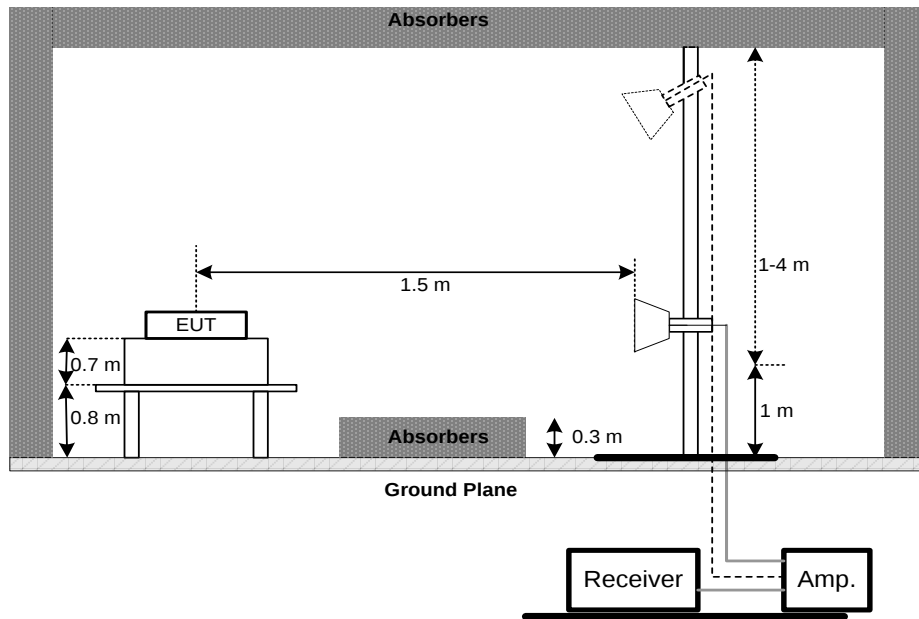

(C) Radiated emissions below 30MHz

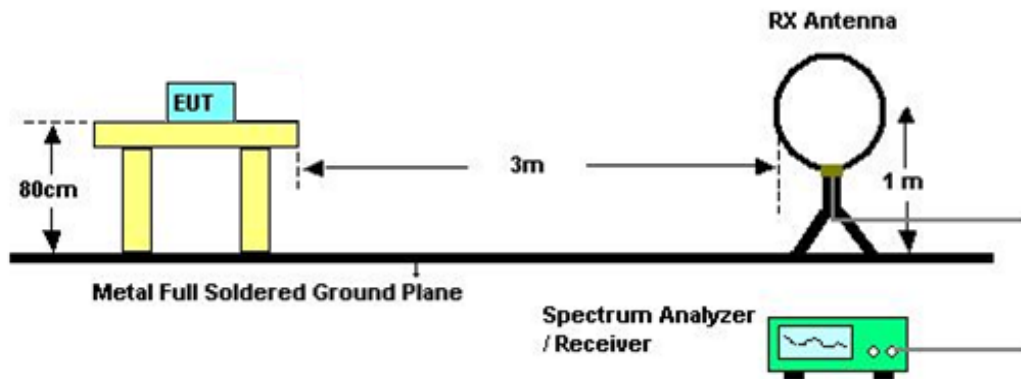

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9K TO 30MHz)

Please refer to the Appendix B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)

Please refer to the Appendix C.

4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Appendix D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	50Ω Terminator	SHX	TF2-3G-A	8122901	Mar. 26, 2018
2	TWO-LINE V-NETWORK	R&S	ENV216	100526	Mar. 26, 2018
3	EMI Test Receiver	R&S	ESR3	101862	Sep. 03, 2018
4	Artificial-Mains Network	SCHWARZBECK	NSLK 8127	8127685	Sep. 03, 2018
5	Cable	N/A	RG400 12m	N/A	Mar. 09, 2018
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1 -01	N/A	N/A


Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018
2	Amplifier	HP	8447D	2944A09673	Oct. 20, 2017
3	Receiver	Agilent	N9038A	MY5213003 9	Sep. 03, 2018
4	Cable	emci	LMR-400(30MHz-1GHz)(8m+5m)	N/A	Jun. 26, 2018
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF78020841 6	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	Amplifier	Agilent	8449B	3008A02274	Mar. 09, 2018
9	Receiver	Agilent	N9038A	MY5213003 9	Sep. 03, 2018
10	Antenna	EM	EM-6876-1	230	Jul. 07, 2018
11	Controller	CT	SC100	N/A	N/A
12	Controller	MF	MF-7802	MF78020841 6	N/A
13	Cable	emci	EMC104-SM-S M-12000(12m)	N/A	Jul. 05, 2018
14	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 24, 2018
15	Spectrum Analyzer	R&S	FSP40	100185	Sep. 03, 2018
16	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 26, 2018
17	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

APPENDIX A - CONDUCTED EMISSION

Test Mode: TX MODE_Adapter: PHITEK

Line

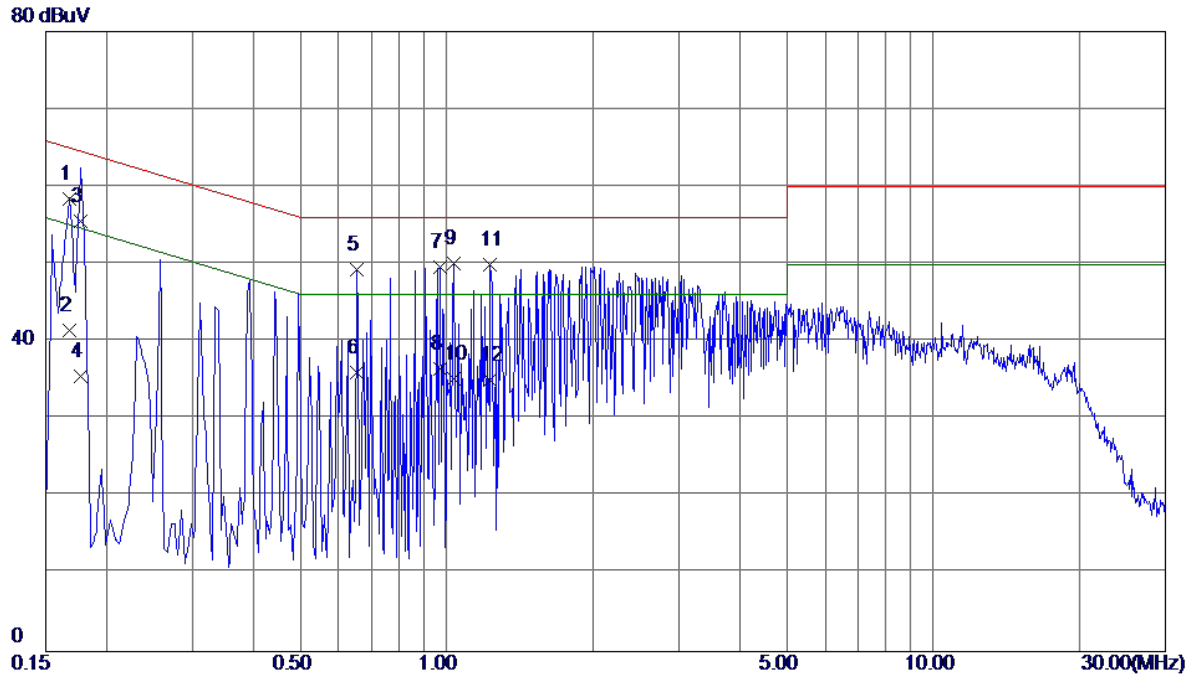


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1680	48.70	9.78	58.48	65.06	-6.58	Peak	
2	0.1680	31.70	9.78	41.48	55.06	-13.58	AVG	
3	0.1770	45.70	9.78	55.48	64.63	-9.15	QP	
4	0.1770	25.80	9.78	35.58	54.63	-19.05	AVG	
5	0.6540	39.39	9.82	49.21	56.00	-6.79	Peak	
6	0.6540	26.20	9.82	36.02	46.00	-9.98	AVG	
7	0.9690	39.69	9.84	49.53	56.00	-6.47	Peak	
8	0.9690	26.61	9.84	36.45	46.00	-9.55	AVG	
9 *	1.0320	40.20	9.85	50.05	56.00	-5.95	Peak	
10	1.0320	25.39	9.85	35.24	46.00	-10.76	AVG	
11	1.2300	40.07	9.88	49.95	56.00	-6.05	Peak	
12	1.2300	25.20	9.88	35.08	46.00	-10.92	AVG	

Note : The test result has included the cable loss.

Test Mode: TX MODE_Adapter: PHITEK

Neutral

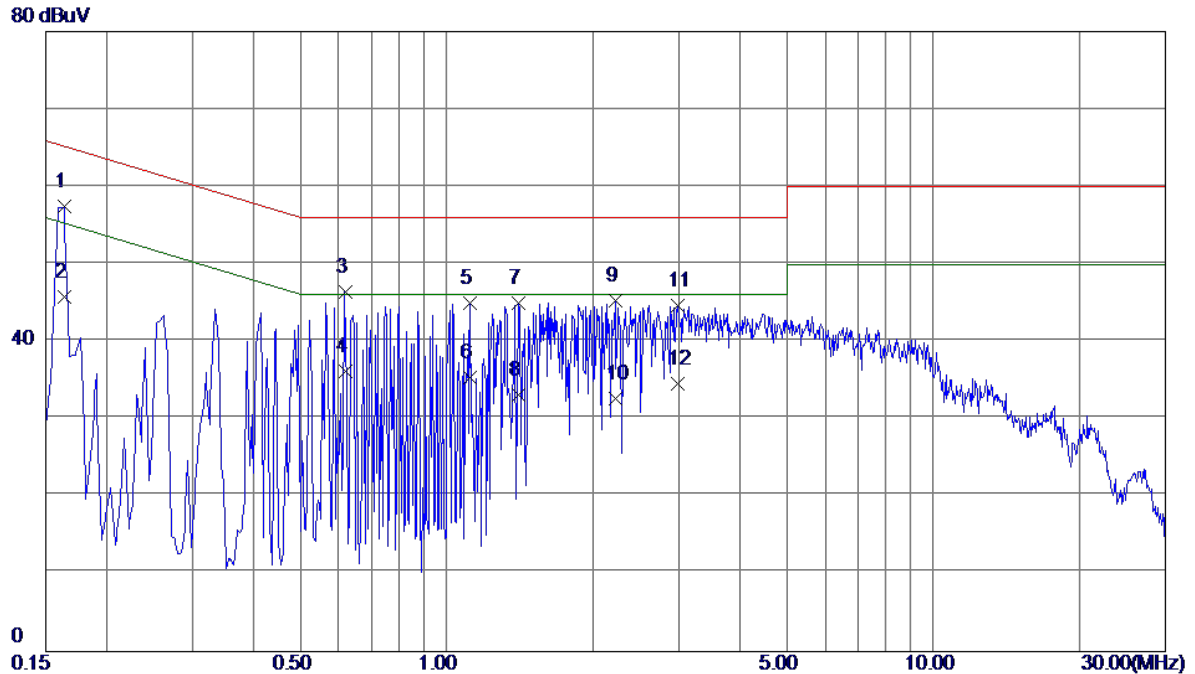


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1635	47.71	9.68	57.39	65.28	-7.89	Peak	
2	0.1635	36.10	9.68	45.78	55.28	-9.50	AVG	
3	0.6180	36.65	9.71	46.36	56.00	-9.64	Peak	
4	0.6180	26.40	9.71	36.11	46.00	-9.89	AVG	
5	1.1174	35.16	9.75	44.91	56.00	-11.09	Peak	
6	1.1174	25.60	9.75	35.35	46.00	-10.65	AVG	
7	1.4055	35.14	9.78	44.92	56.00	-11.08	Peak	
8	1.4055	23.40	9.78	33.18	46.00	-12.82	AVG	
9	2.2244	35.40	9.86	45.26	56.00	-10.74	Peak	
10	2.2244	22.80	9.86	32.66	46.00	-13.34	AVG	
11	2.9805	34.72	9.90	44.62	56.00	-11.38	Peak	
12	2.9805	24.70	9.90	34.60	46.00	-11.40	AVG	

Note : The test result has included the cable loss.

Test Mode: TX MODE_Adapter: HUNTKEY

Line

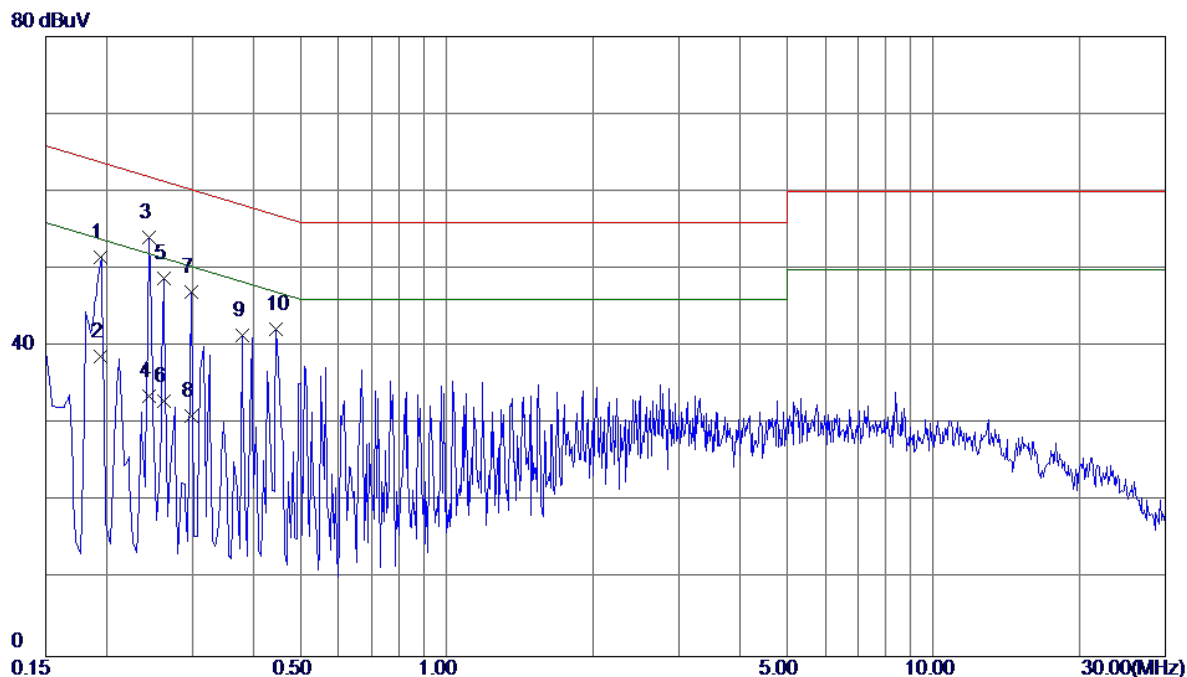


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1949	41.75	9.76	51.51	63.83	-12.32	Peak	
2	0.1949	28.90	9.76	38.66	53.83	-15.17	AVG	
3 *	0.2445	44.27	9.76	54.03	61.94	-7.91	Peak	
4	0.2445	23.90	9.76	33.66	51.94	-18.28	AVG	
5	0.2625	39.01	9.76	48.77	61.35	-12.58	Peak	
6	0.2625	23.20	9.76	32.96	51.35	-18.39	AVG	
7	0.2985	37.22	9.76	46.98	60.28	-13.30	Peak	
8	0.2985	21.31	9.76	31.07	50.28	-19.21	AVG	
9	0.3795	31.61	9.79	41.40	58.29	-16.89	Peak	
10	0.4470	32.39	9.80	42.19	56.93	-14.74	Peak	

Note : The test result has included the cable loss.

Test Mode: TX MODE_Adapter: HUNTKEY

Neutral

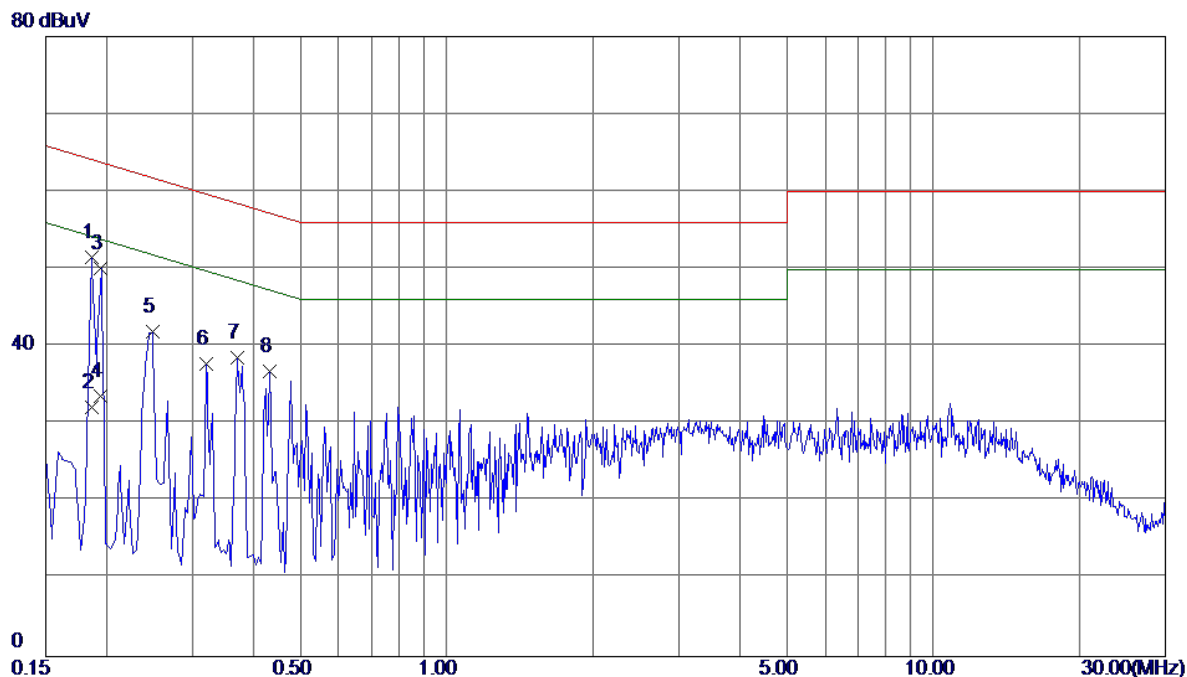


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1860	41.81	9.69	51.50	64.21	-12.71	Peak	
2	0.1860	22.41	9.69	32.10	54.21	-22.11	AVG	
3	0.1949	40.36	9.69	50.05	63.83	-13.78	Peak	
4	0.1949	23.84	9.69	33.53	53.83	-20.30	AVG	
5	0.2490	32.18	9.67	41.85	61.79	-19.94	Peak	
6	0.3209	28.03	9.69	37.72	59.68	-21.96	Peak	
7	0.3704	28.87	9.69	38.56	58.49	-19.93	Peak	
8	0.4335	27.06	9.69	36.75	57.19	-20.44	Peak	

Note : The test result has included the cable loss.

Test Mode: TX MODE_Adapter: Salcomp

Line

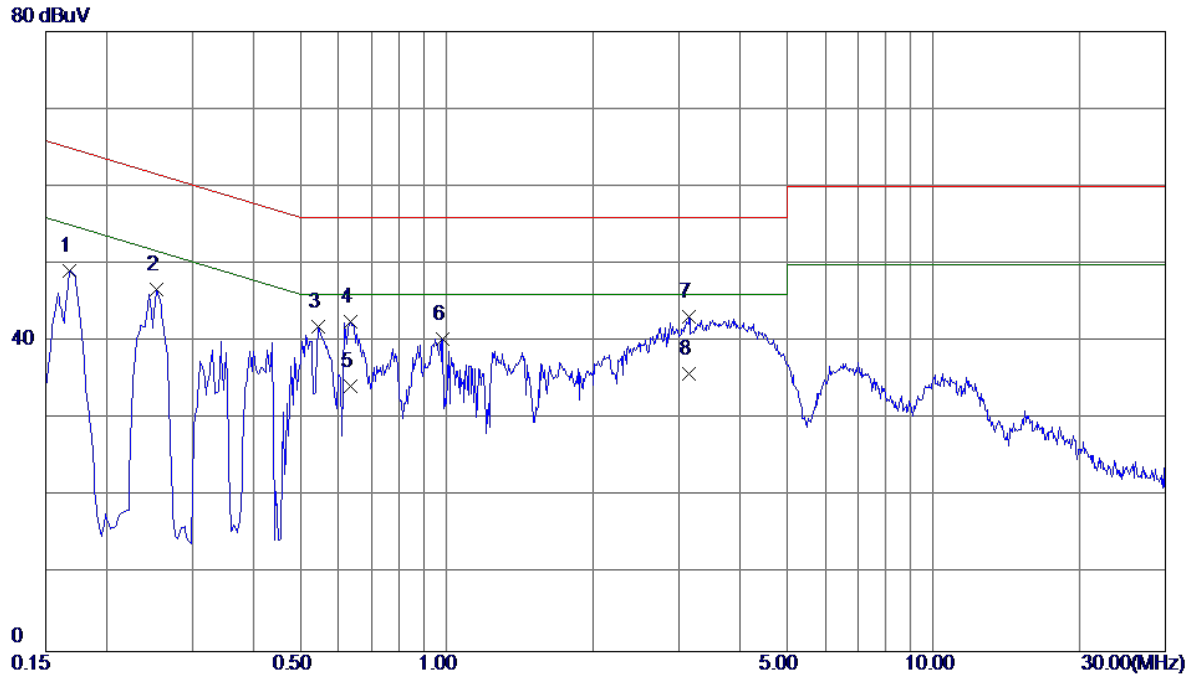


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1680	39.36	9.78	49.14	65.06	-15.92	Peak	
2	0.2535	36.92	9.76	46.68	61.64	-14.96	Peak	
3	0.5460	32.07	9.80	41.87	56.00	-14.13	Peak	
4	0.6360	32.71	9.81	42.52	56.00	-13.48	Peak	
5	0.6360	24.50	9.81	34.31	46.00	-11.69	AVG	
6	0.9825	30.49	9.84	40.33	56.00	-15.67	Peak	
7	3.1470	33.13	10.00	43.13	56.00	-12.87	Peak	
8 *	3.1470	25.78	10.00	35.78	46.00	-10.22	AVG	

Note : The test result has included the cable loss.

Test Mode: TX MODE_Adapter: Salcomp

Neutral

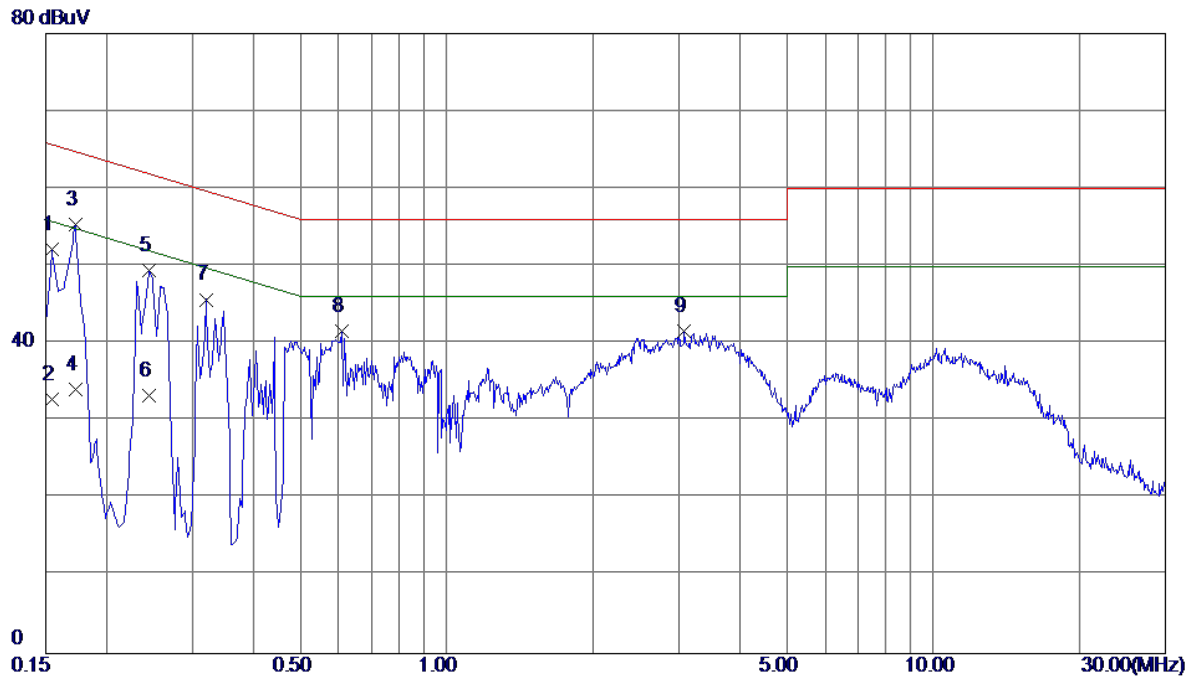


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1545	42.47	9.68	52.15	65.75	-13.60	Peak	
2	0.1545	23.10	9.68	32.78	55.75	-22.97	AVG	
3 *	0.1725	45.75	9.68	55.43	64.84	-9.41	Peak	
4	0.1725	24.40	9.68	34.08	54.84	-20.76	AVG	
5	0.2445	39.69	9.68	49.37	61.94	-12.57	Peak	
6	0.2445	23.53	9.68	33.21	51.94	-18.73	AVG	
7	0.3209	35.99	9.69	45.68	59.68	-14.00	Peak	
8	0.6090	31.92	9.71	41.63	56.00	-14.37	Peak	
9	3.0795	31.66	9.90	41.56	56.00	-14.44	Peak	

Note : The test result has included the cable loss.

Test Mode: TX MODE_Adapter:HUAWEI

Line

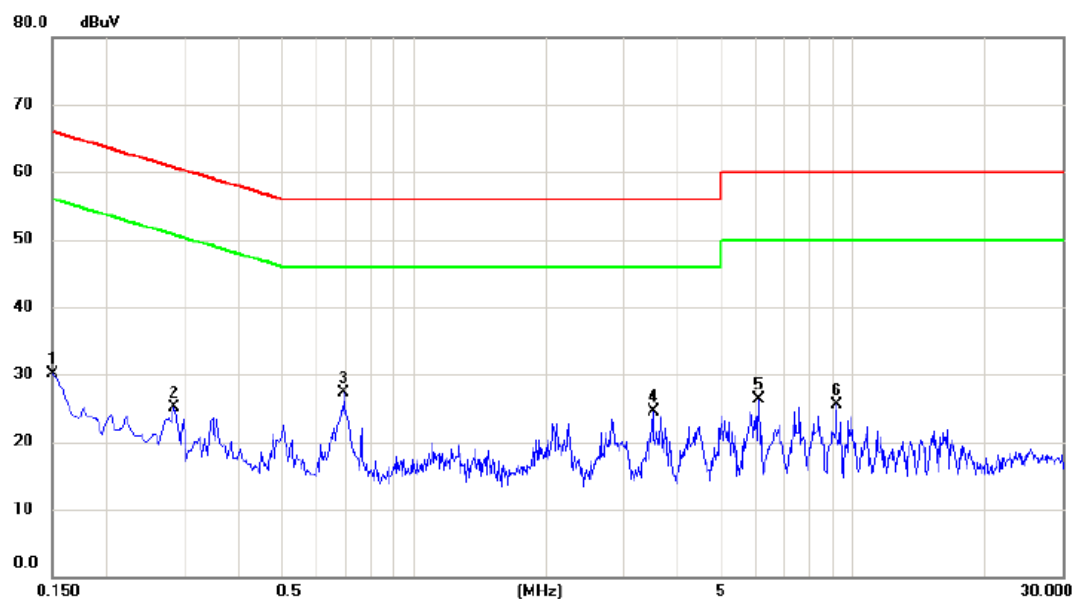


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	20.22	9.79	30.01	66.00	-35.99	peak	
2		0.2850	15.25	9.76	25.01	60.67	-35.66	peak	
3	*	0.6945	17.45	9.82	27.27	56.00	-28.73	peak	
4		3.5070	14.48	10.01	24.49	56.00	-31.51	peak	
5		6.1125	16.24	10.14	26.38	60.00	-33.62	peak	
6		9.1590	15.19	10.28	25.47	60.00	-34.53	peak	

Note : The test result has included the cable loss.

Test Mode: TX MODE_ Adapter:HUAWEI

Neutral

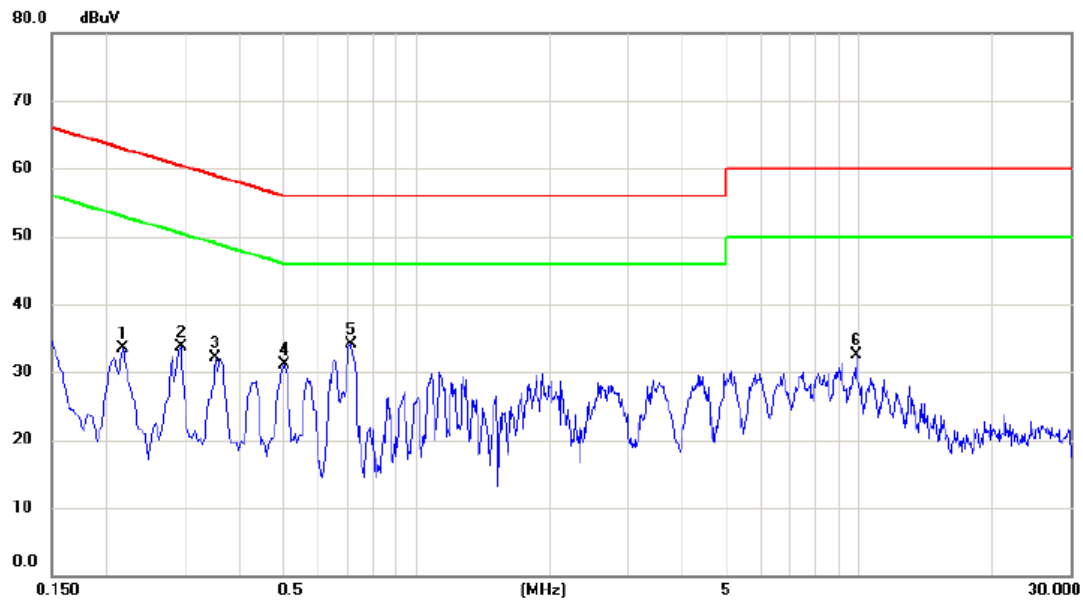


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2175	23.87	9.68	33.55	62.91	-29.36	peak	
2	0.2940	24.07	9.68	33.75	60.41	-26.66	peak	
3	0.3525	22.35	9.70	32.05	58.90	-26.85	peak	
4	0.5055	21.34	9.70	31.04	56.00	-24.96	peak	
5 *	0.7125	24.43	9.72	34.15	56.00	-21.85	peak	
6	9.8925	22.15	10.27	32.42	60.00	-27.58	peak	

Note : The test result has included the cable loss.

APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX MODE_Adapter: PHITEK


Ant 0°

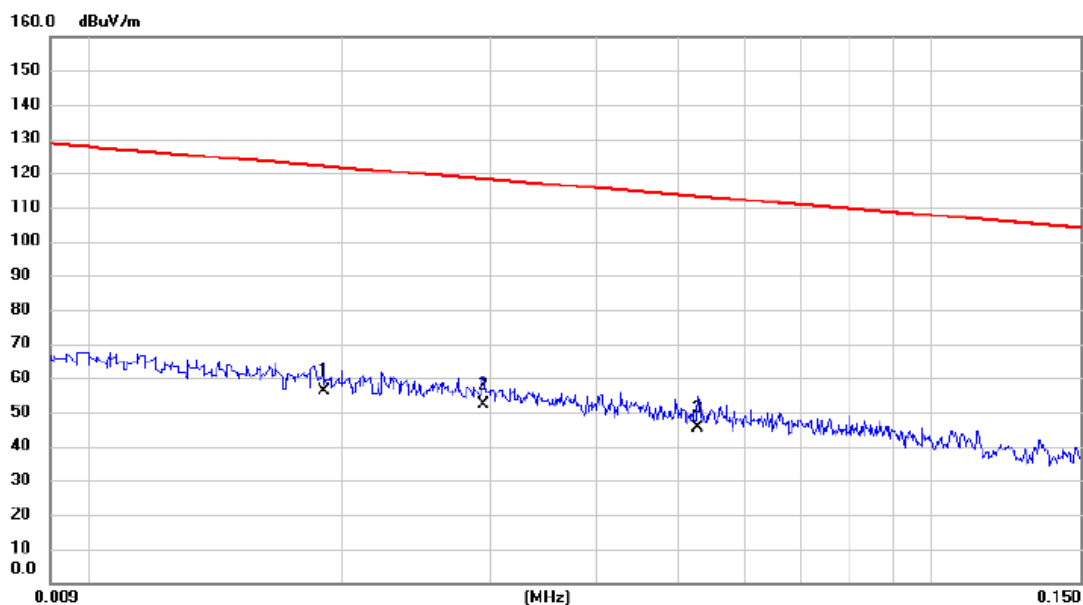

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.019	36.58	19.75	56.33	122.03	-65.70	AVG	
2		0.029	32.67	19.34	52.01	118.24	-66.23	AVG	
3		0.053	26.57	18.66	45.23	113.15	-67.92	AVG	

Test Mode: TX MODE_Adapter: PHITEK


Ant 0°

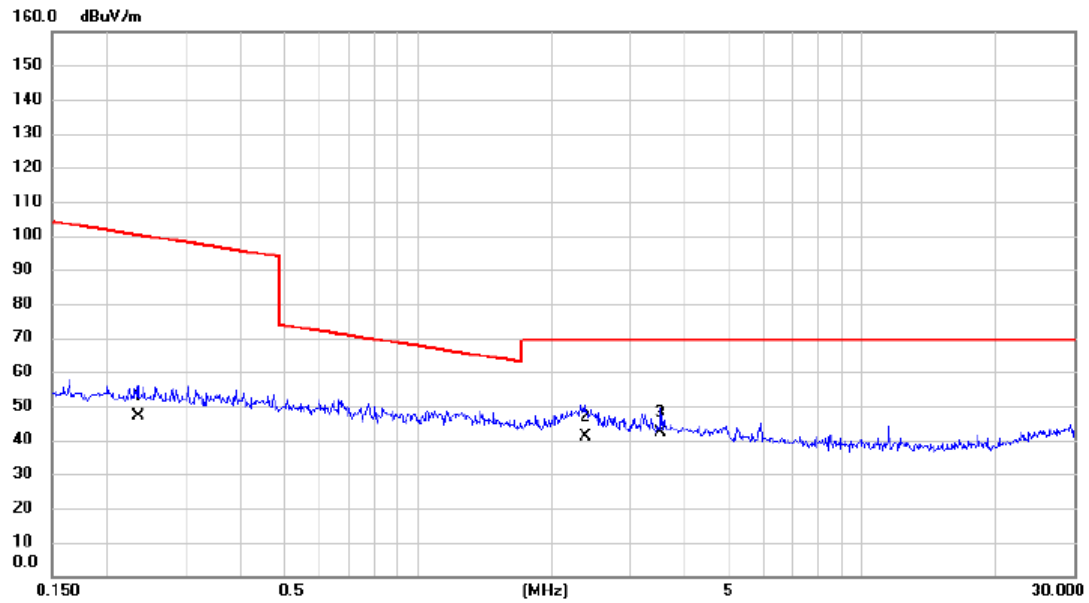

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.234	30.46	16.70	47.16	100.22	-53.06	AVG	
2	2.384	25.76	15.40	41.16	69.54	-28.38	QP	
3 *	3.528	26.94	15.08	42.02	69.54	-27.52	QP	

Test Mode: TX MODE_Adapter: PHITEK


Ant 90°

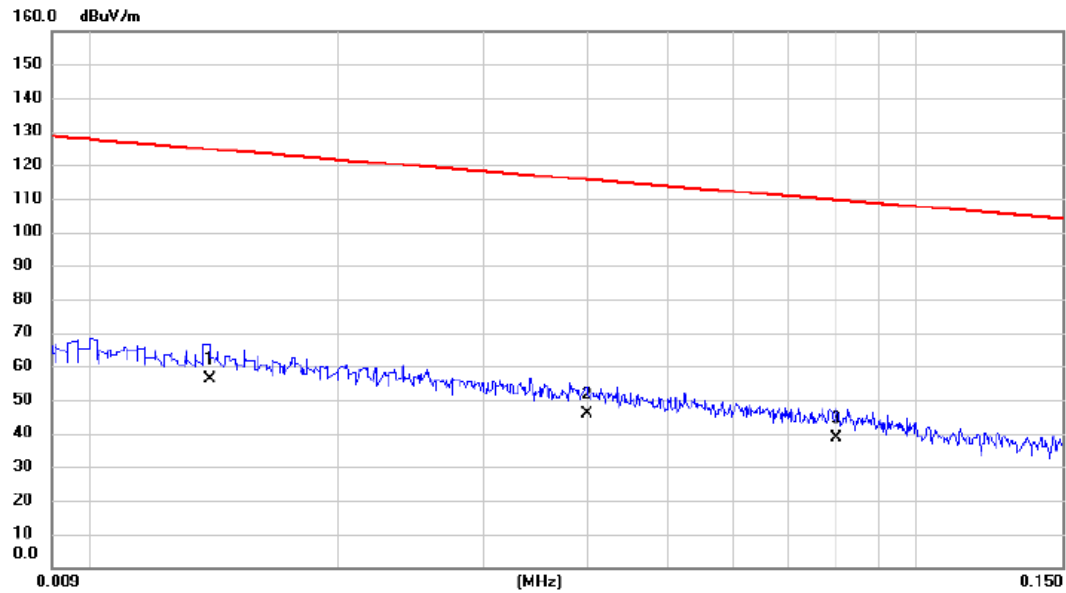

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.014	35.70	20.40	56.10	124.68	-68.58	AVG	
2		0.040	26.64	19.02	45.66	115.56	-69.90	AVG	
3		0.080	20.43	18.11	38.54	109.53	-70.99	AVG	

Test Mode: TX MODE_Adapter: PHITEK


Ant 90°

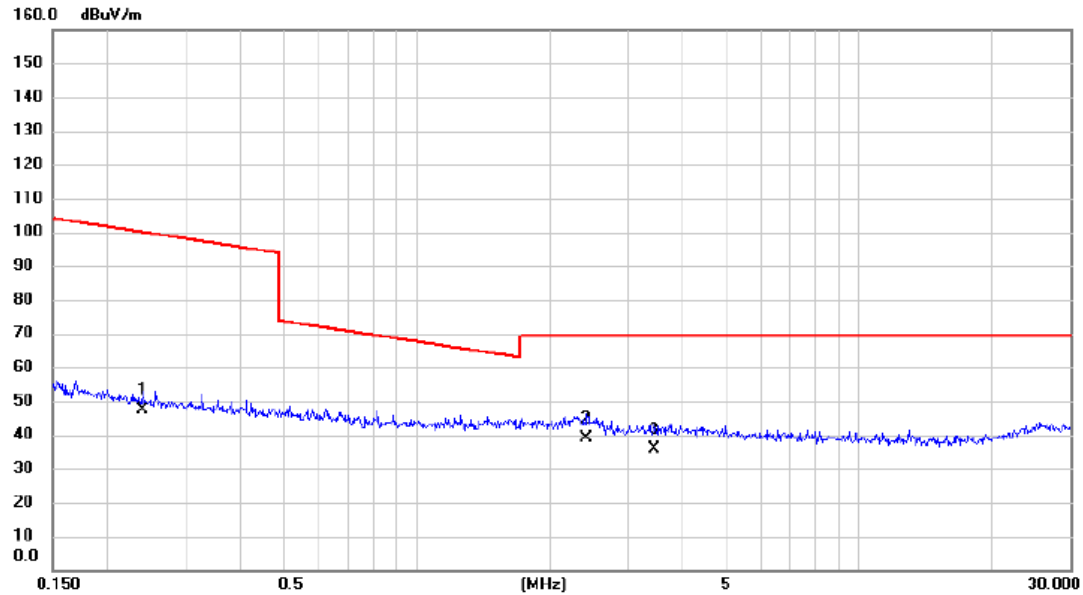

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.240	30.58	16.69	47.27	99.99	-52.72	AVG	
2	*	2.422	23.49	15.39	38.88	69.54	-30.66	QP	
3		3.454	20.84	15.10	35.94	69.54	-33.60	QP	

Test Mode: TX MODE_Adapter: HUNTKEY


Ant 0°

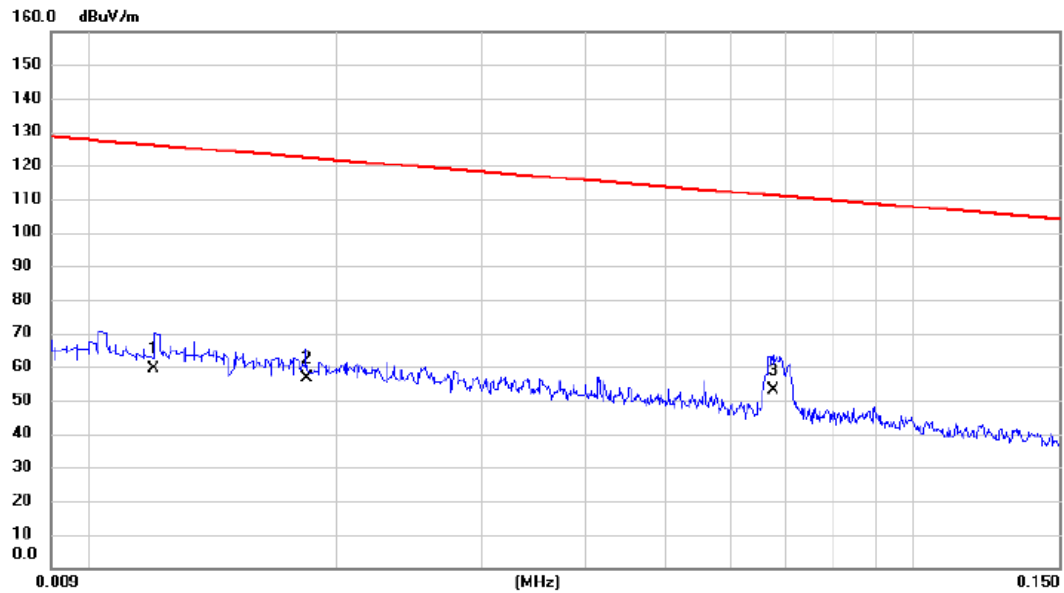

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.012	38.55	20.66	59.21	126.02	-66.81	AVG	
2		0.018	36.97	19.83	56.80	122.31	-65.51	AVG	
3	*	0.068	34.69	18.38	53.07	110.99	-57.92	AVG	

Test Mode: TX MODE_Adapter: HUNTKEY


Ant 0°

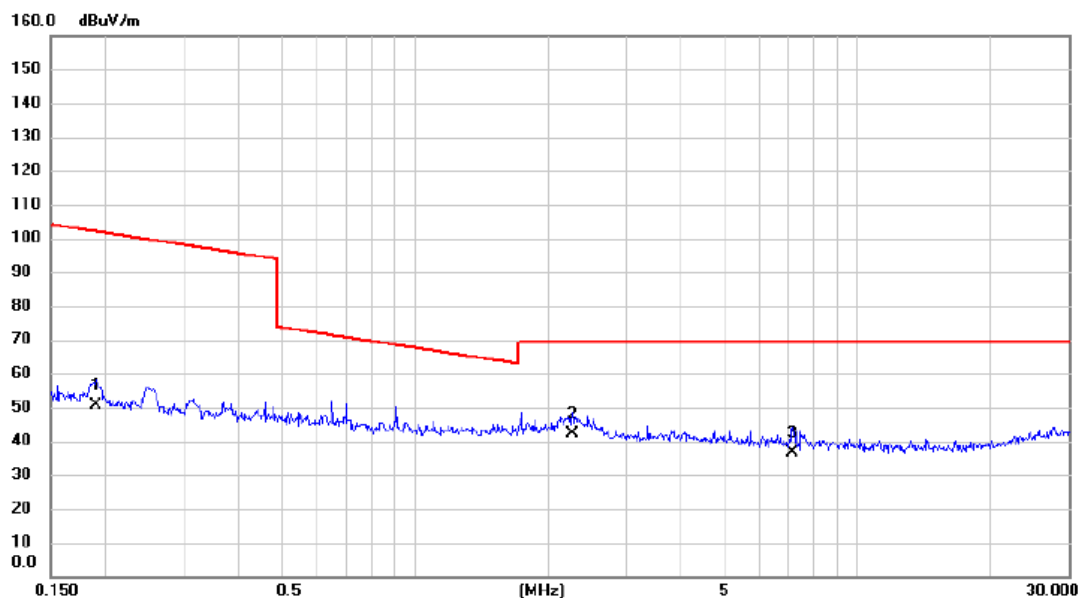

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.190	33.69	16.83	50.52	102.01	-51.49	AVG	
2	*	2.273	26.57	15.44	42.01	69.54	-27.53	QP	
3		7.137	22.63	14.10	36.73	69.54	-32.81	QP	

Test Mode: TX MODE_Adapter: HUNTKEY


Ant 90°

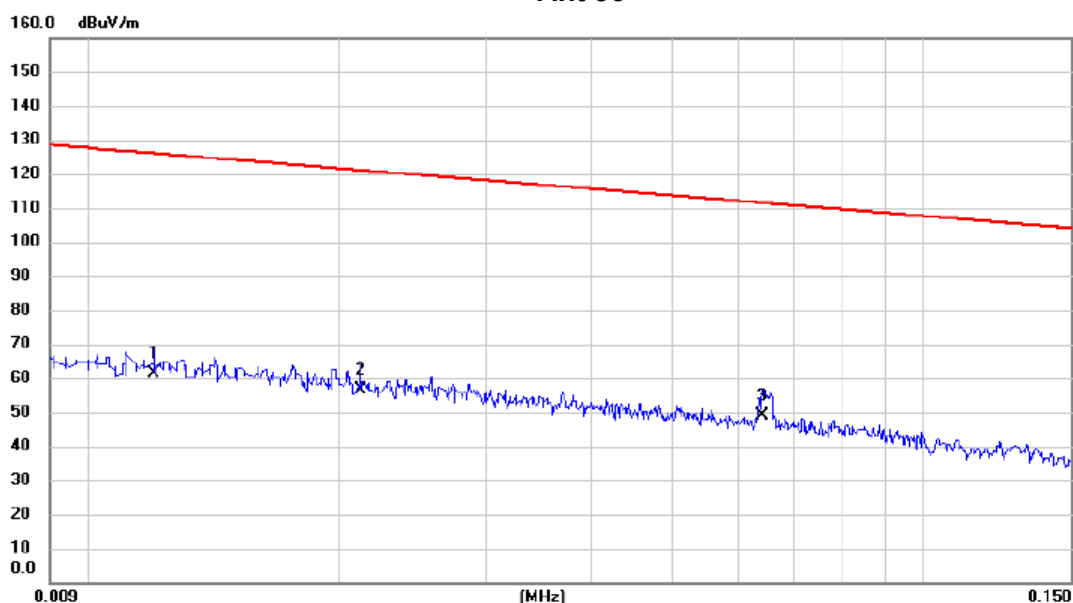

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.012	40.65	20.66	61.31	126.02	-64.71	AVG	
2		0.021	36.84	19.58	56.42	121.08	-64.66	AVG	
3	*	0.064	30.49	18.45	48.94	111.47	-62.53	AVG	


Test Mode: TX MODE_Adapter: HUNTKEY

Ant 90°

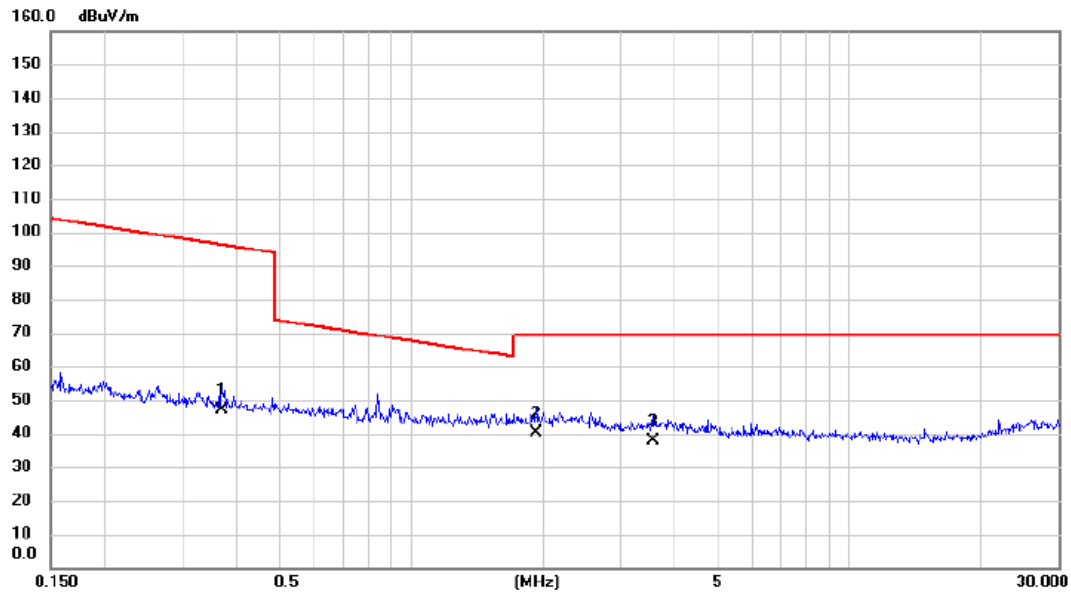

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.369	30.59	16.56	47.15	96.26	-49.11	AVG	
2	*	1.928	24.63	15.54	40.17	69.54	-29.37	QP	
3		3.565	22.73	15.07	37.80	69.54	-31.74	QP	


Test Mode: TX MODE_Adapter: Salcomp

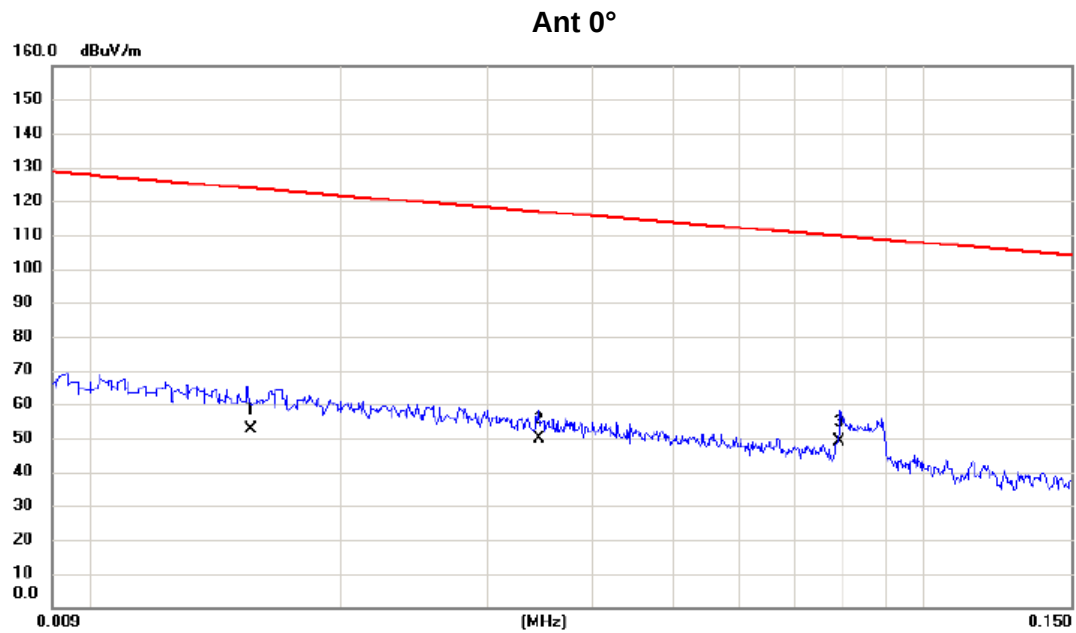

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0156	32.25	20.19	52.44	123.74	-71.30	AVG	
2		0.0345	30.49	19.18	49.67	116.85	-67.18	AVG	
3	*	0.0792	30.68	18.13	48.81	109.63	-60.82	AVG	

Test Mode: TX MODE_Adapter: Salcomp


Ant 0°

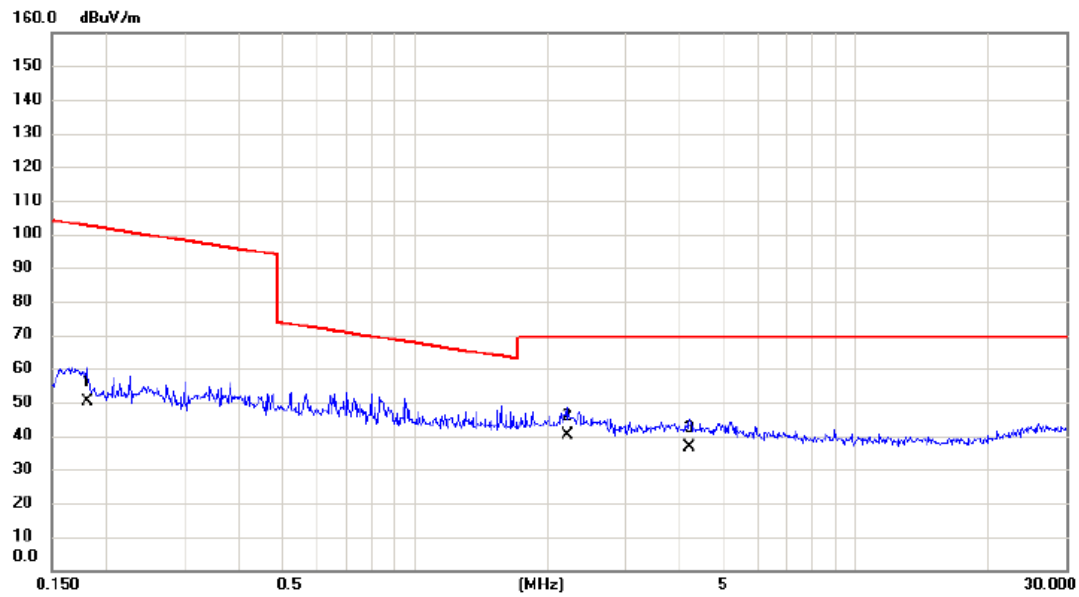

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.1806	33.21	16.86	50.07	102.47	-52.40	AVG	
2	*	2.2132	24.59	15.45	40.04	69.54	-29.50	QP	
3		4.2018	21.87	14.83	36.70	69.54	-32.84	QP	

Test Mode: TX MODE_Adapter: Salcomp


Ant 90°

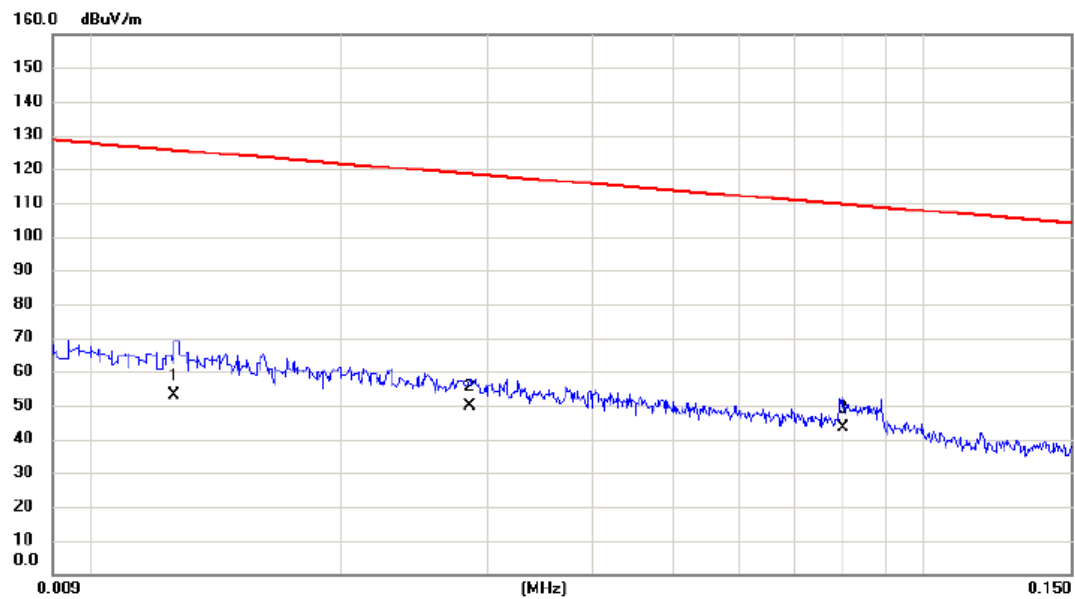

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0126	32.40	20.58	52.98	125.60	-72.62	AVG	
2		0.0285	30.59	19.37	49.96	118.51	-68.55	AVG	
3	*	0.0801	25.48	18.11	43.59	109.53	-65.94	AVG	

Test Mode: TX MODE_Adapter: Salcomp


Ant 90°

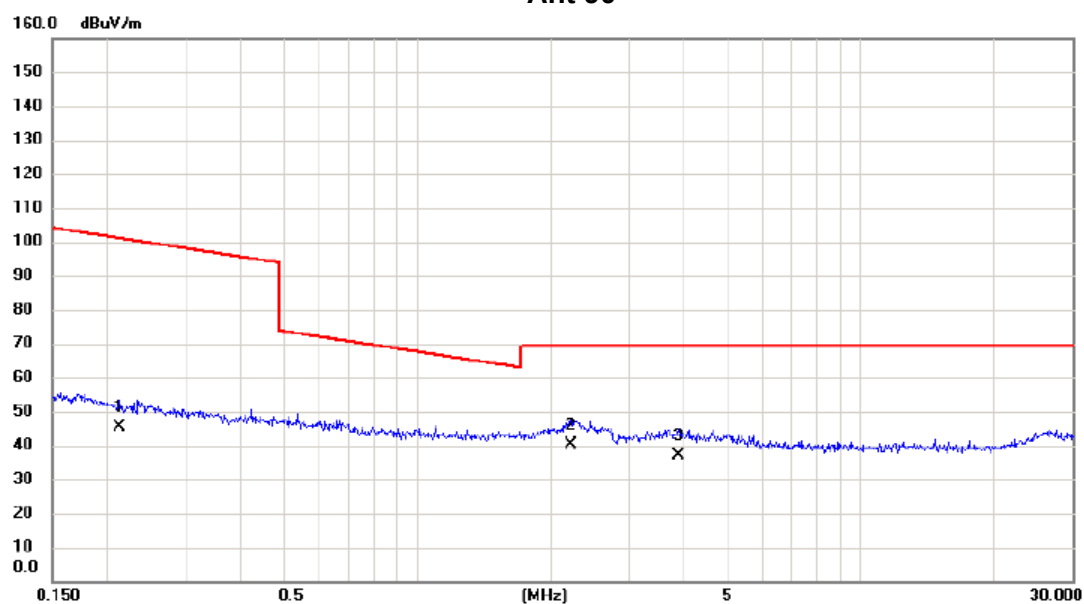

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2128	28.49	16.76	45.25	101.05	-55.80	AVG	
2	*	2.2132	24.73	15.45	40.18	69.54	-29.36	QP	
3		3.8808	21.89	14.99	36.88	69.54	-32.66	QP	

Test Mode: TX MODE_ Adapter:HUAWEI


Ant 0°

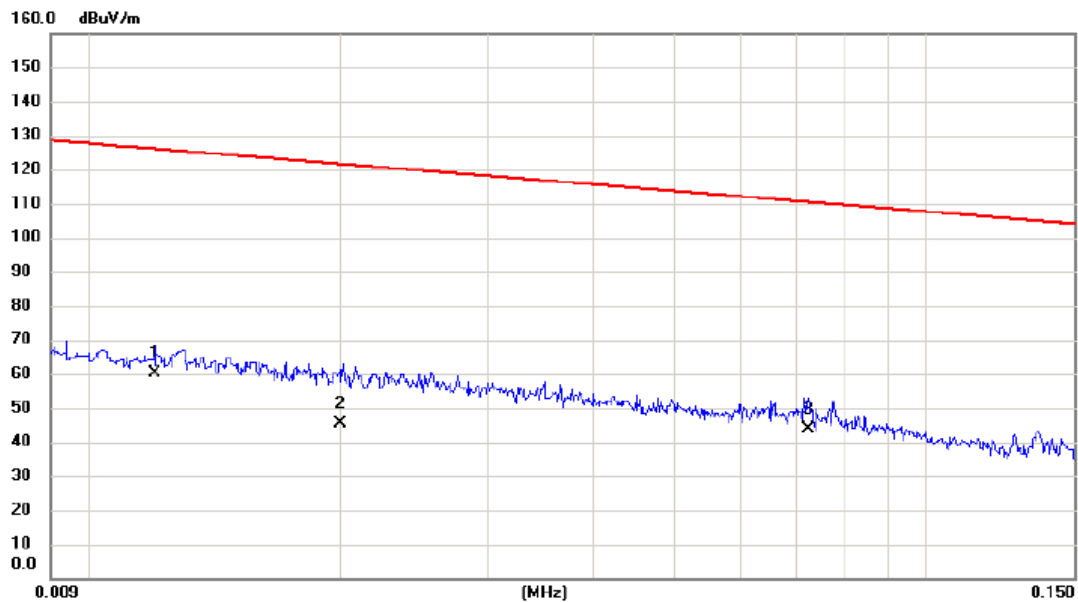

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0120	39.48	20.66	60.14	126.02	-65.88	AVG	
2		0.0200	25.76	19.62	45.38	121.58	-76.20	AVG	
3		0.0724	25.63	18.28	43.91	110.41	-66.50	AVG	

Test Mode: TX MODE_Adapter:HUAWEI


Ant 0°

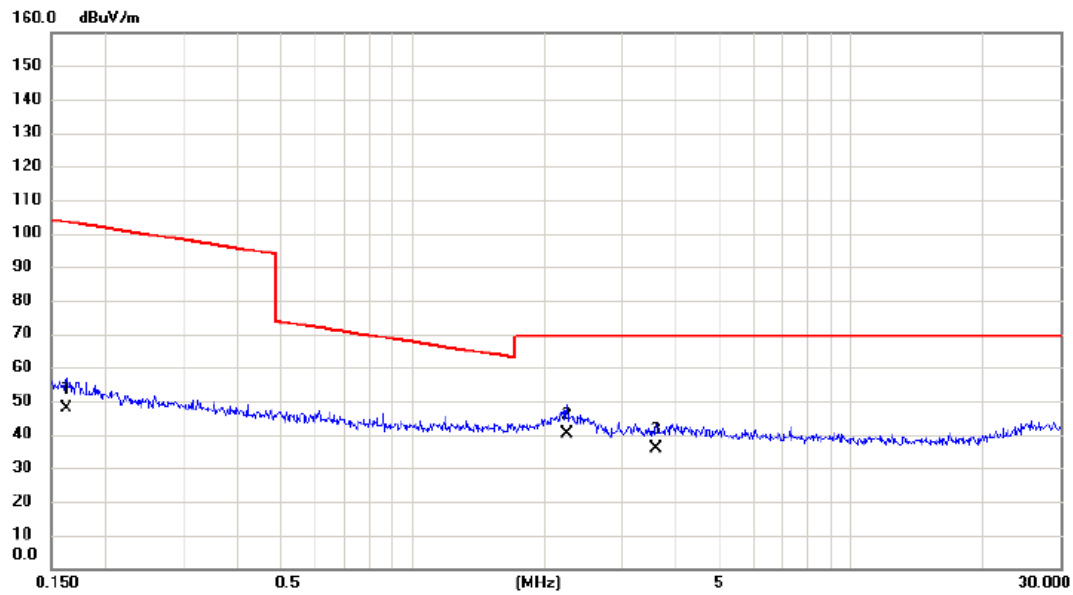

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.1624	30.85	16.91	47.76	103.40	-55.64	AVG	
2	*	2.2486	24.69	15.44	40.13	69.54	-29.41	QP	
3		3.5843	20.57	15.06	35.63	69.54	-33.91	QP	

Test Mode: TX MODE_Adapter:HUAWEI


Ant 90°

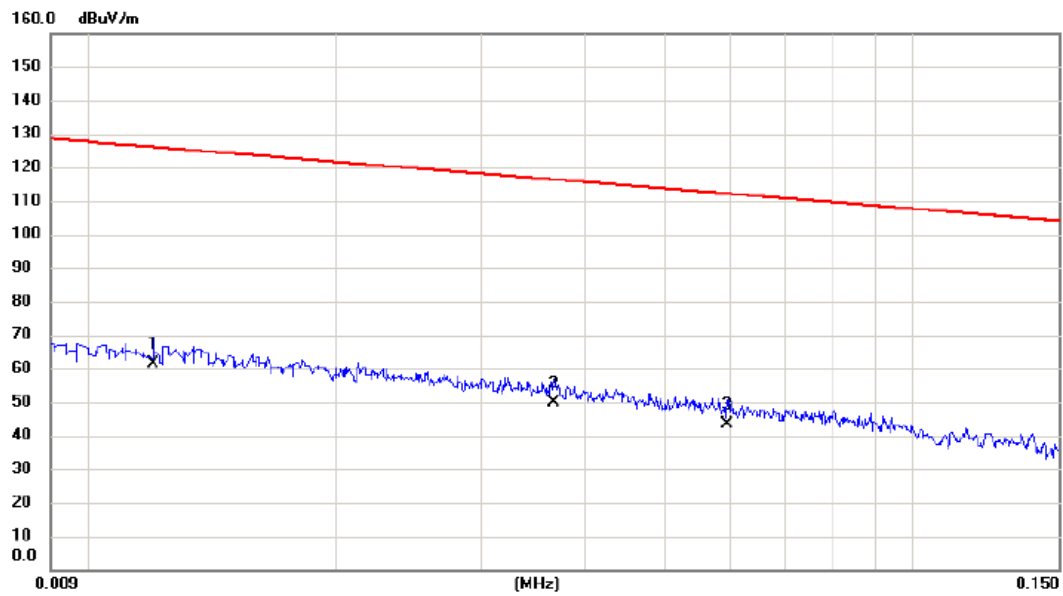

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0120	40.86	20.66	61.52	126.02	-64.50	AVG	
2		0.0367	30.64	19.12	49.76	116.31	-66.55	AVG	
3		0.0594	24.69	18.54	43.23	112.13	-68.90	AVG	

Test Mode: TX MODE_Adapter:HUAWEI

Ant 90°

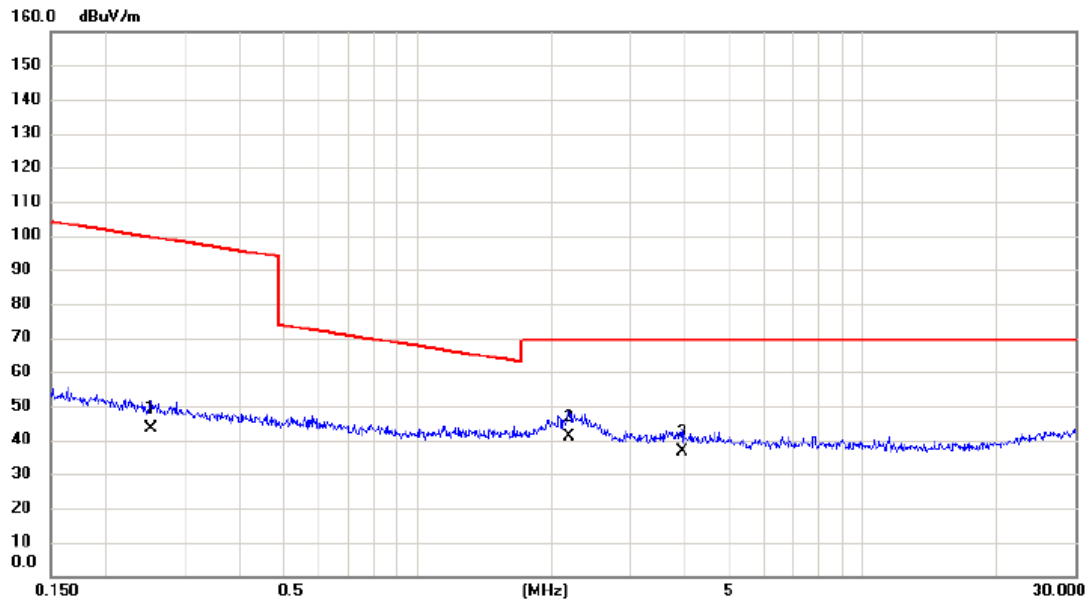


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2521	26.59	16.66	43.25	99.57	-56.32	AVG	
2	*	2.1898	25.74	15.45	41.19	69.54	-28.35	QP	
3		3.9430	21.63	14.97	36.60	69.54	-32.94	QP	

APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)

ANT 1

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: PHITEK


Vertical

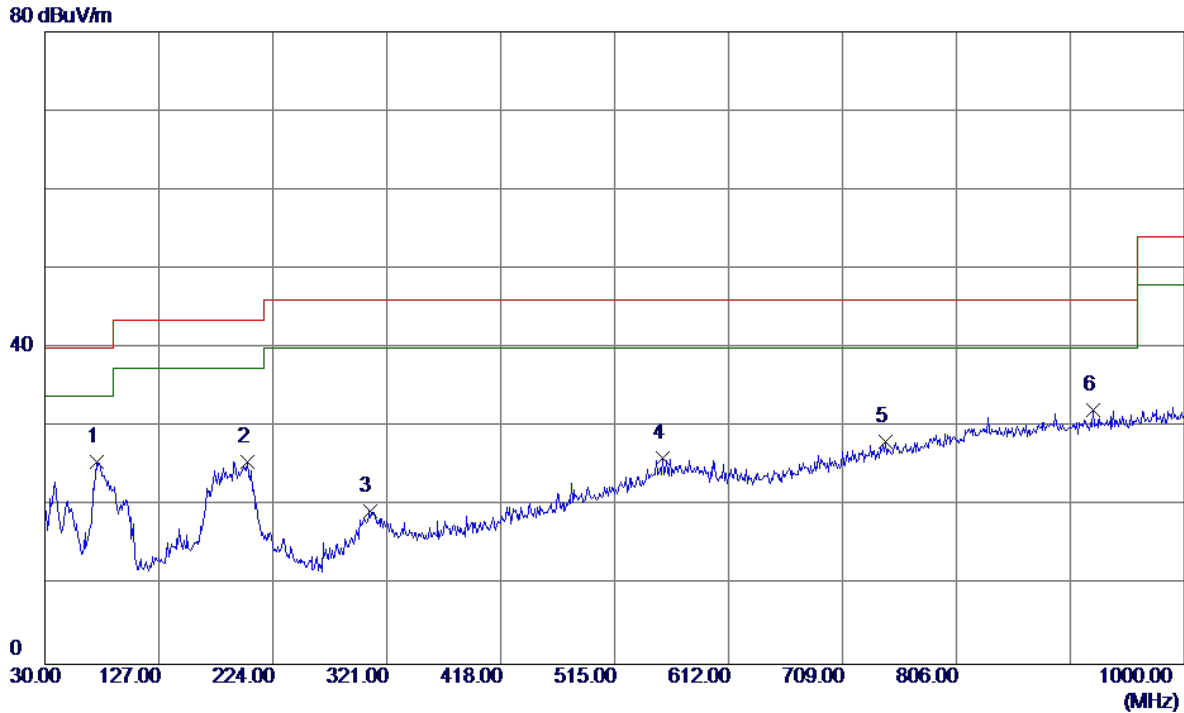

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	74.6200	42.65	-17.04	25.61	40.00	-14.39	Peak	
2	202.6600	39.47	-13.81	25.66	43.50	-17.84	Peak	
3	306.4500	32.02	-12.72	19.30	46.00	-26.70	Peak	
4	555.7400	33.65	-7.57	26.08	46.00	-19.92	Peak	
5	745.8600	30.66	-2.57	28.09	46.00	-17.91	Peak	
6 *	922.4000	30.65	1.46	32.11	46.00	-13.89	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: PHITEK

Horizontal

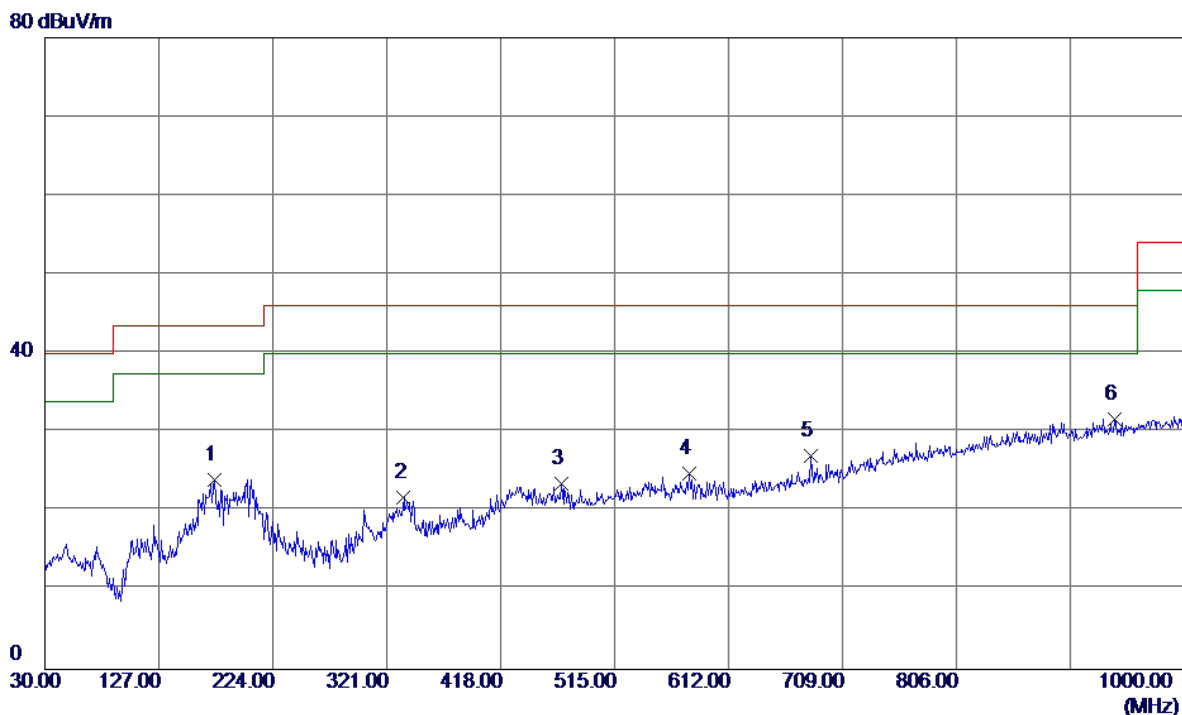


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	174.5300	36.18	-12.20	23.98	43.50	-19.52	Peak	
2	335.5500	33.94	-12.21	21.73	46.00	-24.27	Peak	
3	469.4100	33.05	-9.47	23.58	46.00	-22.42	Peak	
4	579.0200	31.79	-6.96	24.83	46.00	-21.17	Peak	
5	681.8400	31.51	-4.50	27.01	46.00	-18.99	Peak	
6 *	940.8300	29.87	1.82	31.69	46.00	-14.31	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: PHITEK

Vertical


80 dBuV/m

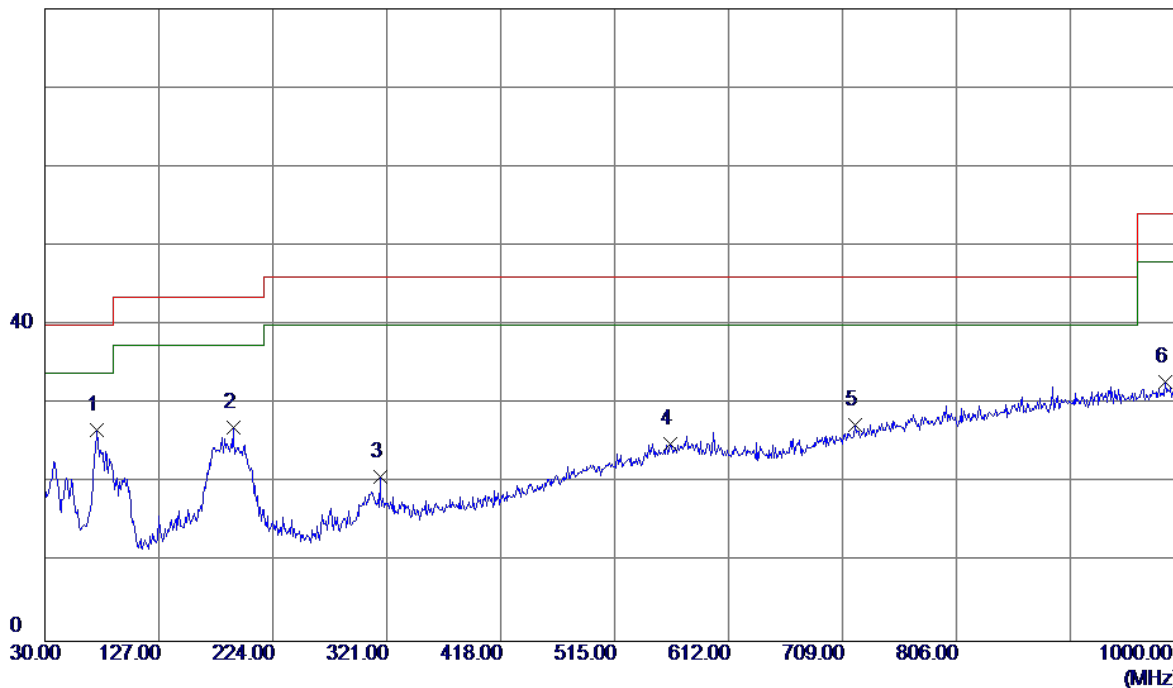

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	74.6200	43.79	-17.04	26.75	40.00	-13.25	Peak	
2	190.0500	39.94	-12.85	27.09	43.50	-16.41	Peak	
3	315.1800	33.42	-12.56	20.86	46.00	-25.14	Peak	
4	562.5300	32.30	-7.39	24.91	46.00	-21.09	Peak	
5	719.6700	30.76	-3.35	27.41	46.00	-18.59	Peak	
6	983.5100	30.20	2.64	32.84	54.00	-21.16	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: PHITEK


Horizontal

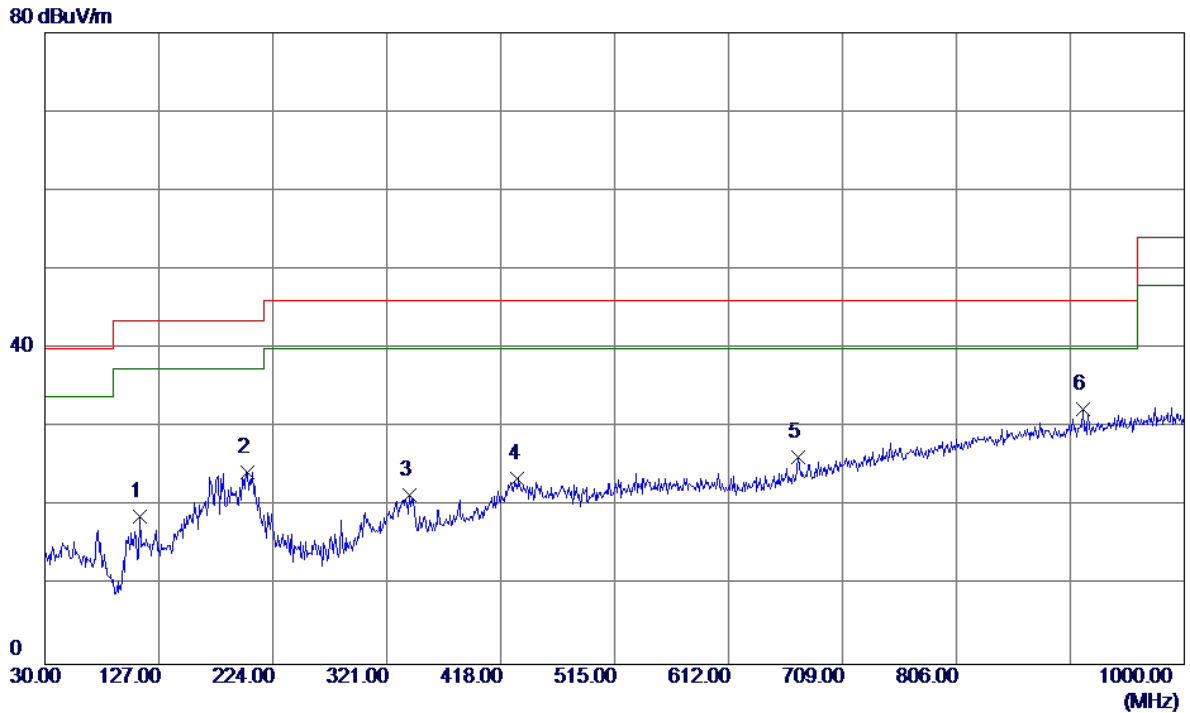

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	110.5100	34.82	-16.15	18.67	43.50	-24.83	Peak	
2	202.6600	38.20	-13.81	24.39	43.50	-19.11	Peak	
3	340.4000	33.50	-12.12	21.38	46.00	-24.62	Peak	
4	432.5500	33.96	-10.44	23.52	46.00	-22.48	Peak	
5	671.1700	31.13	-4.83	26.30	46.00	-19.70	Peak	
6 *	913.6700	31.08	1.29	32.37	46.00	-13.63	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: PHITEK


Vertical

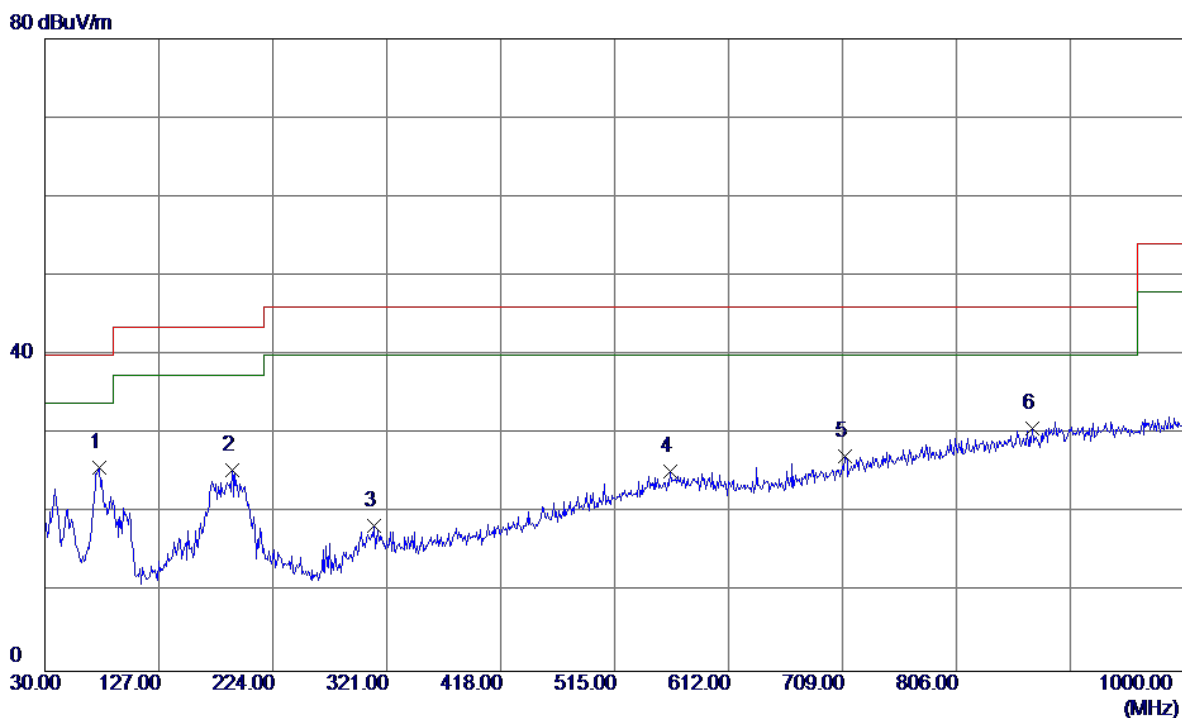

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	76.5600	43.15	-17.44	25.71	40.00	-14.29	Peak	
2	189.0800	38.24	-12.77	25.47	43.50	-18.03	Peak	
3	310.3299	30.98	-12.65	18.33	46.00	-27.67	Peak	
4	562.5300	32.63	-7.39	25.24	46.00	-20.76	Peak	
5	710.9400	30.86	-3.61	27.25	46.00	-18.75	Peak	
6	870.9900	30.32	0.43	30.75	46.00	-15.25	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: PHITEK

Horizontal

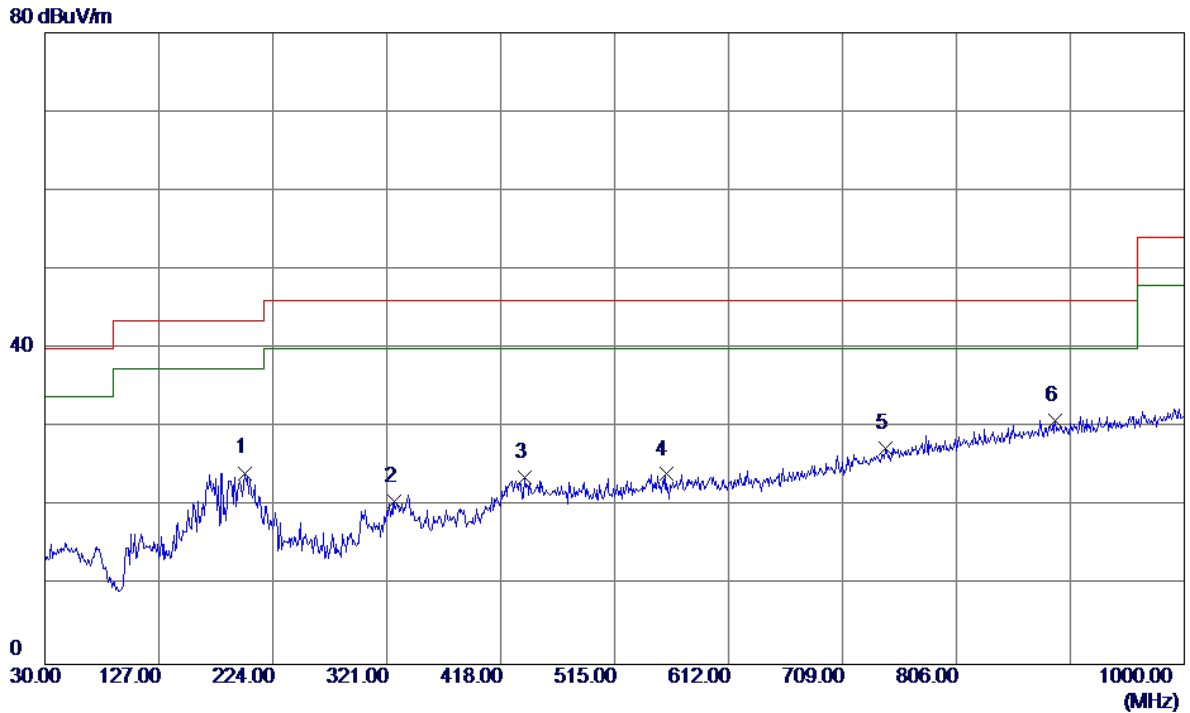


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	200.7200	38.01	-13.77	24.24	43.50	-19.26	Peak	
2	327.7900	33.01	-12.34	20.67	46.00	-25.33	Peak	
3	438.3700	34.02	-10.27	23.75	46.00	-22.25	Peak	
4	558.6500	31.57	-7.49	24.08	46.00	-21.92	Peak	
5	745.8600	29.97	-2.57	27.40	46.00	-18.60	Peak	
6 *	890.3900	30.09	0.83	30.92	46.00	-15.08	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: PHITEK

Vertical

80 dBuV/m

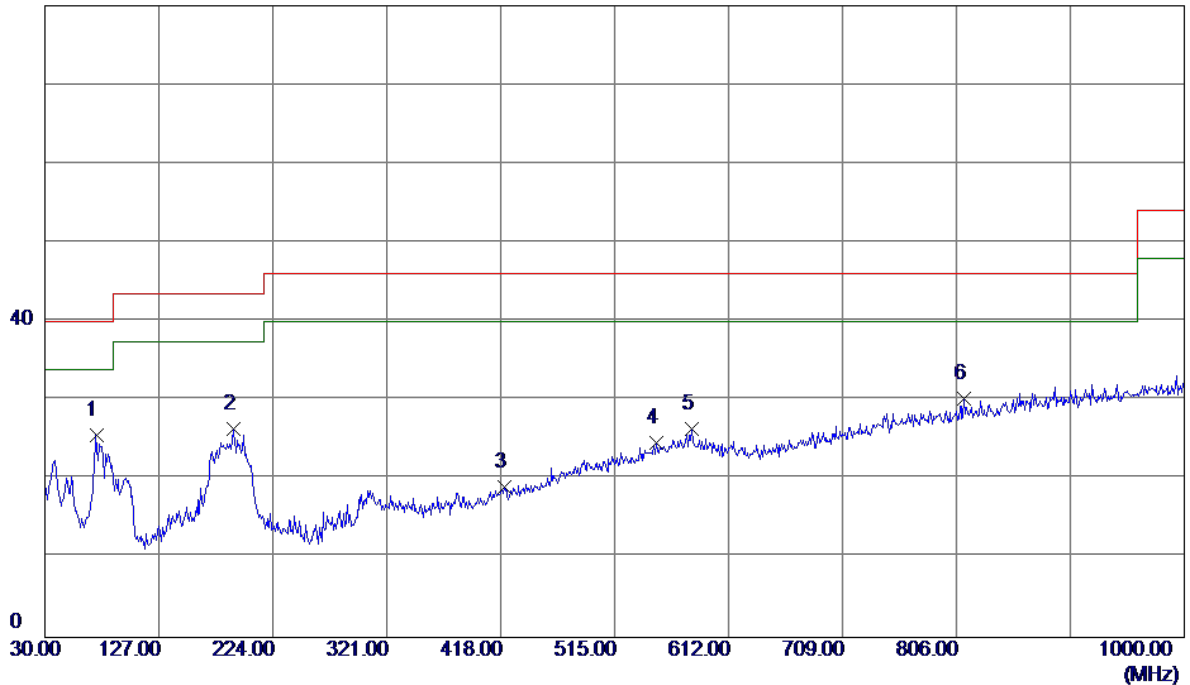


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	73.6500	42.51	-16.93	25.58	40.00	-14.42	Peak	
2	190.0500	39.22	-12.85	26.37	43.50	-17.13	Peak	
3	420.9100	29.74	-10.77	18.97	46.00	-27.03	Peak	
4	550.8900	32.37	-7.69	24.68	46.00	-21.32	Peak	
5	580.9600	33.34	-6.91	26.43	46.00	-19.57	Peak	
6	812.7900	31.28	-1.01	30.27	46.00	-15.73	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: PHITEK

Horizontal


80 dBuV/m

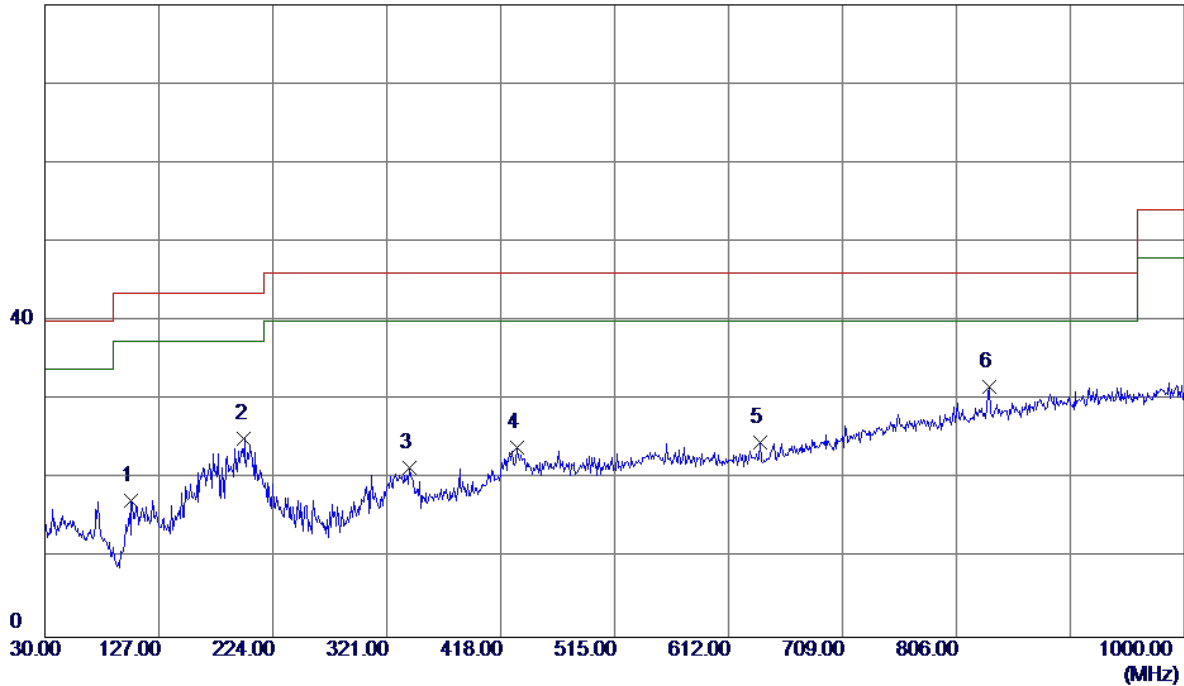

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	103.7200	34.27	-17.00	17.27	43.50	-26.23	Peak	
2	199.7500	38.89	-13.73	25.16	43.50	-18.34	Peak	
3	340.4000	33.50	-12.12	21.38	46.00	-24.62	Peak	
4	431.5800	34.49	-10.46	24.03	46.00	-21.97	Peak	
5	639.1599	30.39	-5.68	24.71	46.00	-21.29	Peak	
6 *	834.1300	32.11	-0.43	31.68	46.00	-14.32	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: PHITEK


Vertical

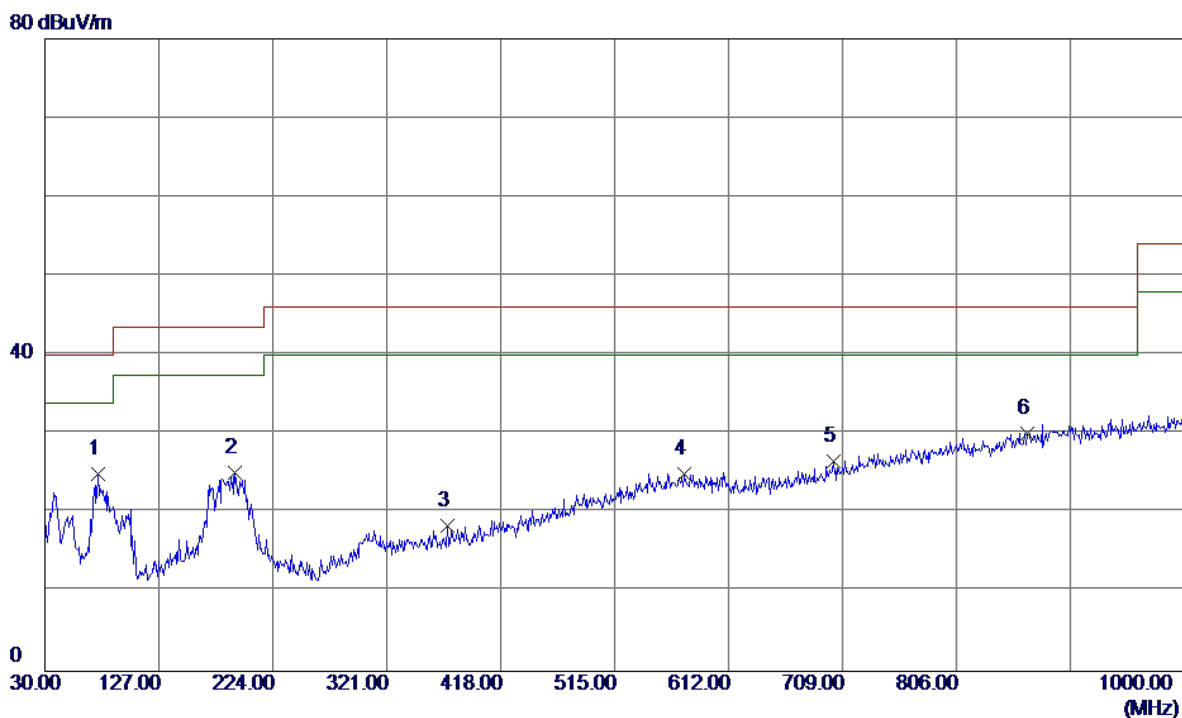

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	75.5899	42.20	-17.22	24.98	40.00	-15.02	Peak	
2	191.9900	38.13	-13.03	25.10	43.50	-18.40	Peak	
3	372.4100	30.16	-11.69	18.47	46.00	-27.53	Peak	
4	574.1700	32.10	-7.09	25.01	46.00	-20.99	Peak	
5	701.2400	30.39	-3.90	26.49	46.00	-19.51	Peak	
6	866.1400	29.80	0.33	30.13	46.00	-15.87	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: PHITEK


Horizontal

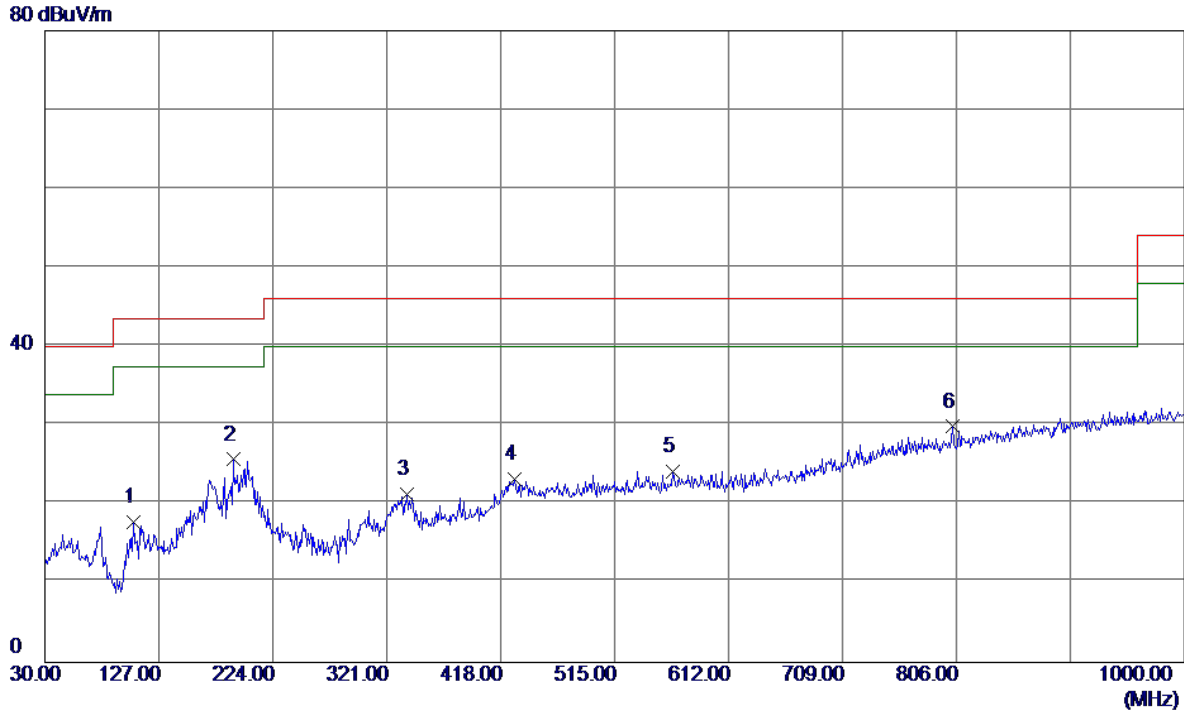

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	105.6600	34.47	-16.75	17.72	43.50	-25.78	Peak	
2	190.0500	38.53	-12.85	25.68	43.50	-17.82	Peak	
3	338.4600	33.45	-12.16	21.29	46.00	-24.71	Peak	
4	429.6400	33.74	-10.52	23.22	46.00	-22.78	Peak	
5	564.4699	31.55	-7.34	24.21	46.00	-21.79	Peak	
6 *	803.0900	31.12	-1.28	29.84	46.00	-16.16	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: PHITEK


Vertical

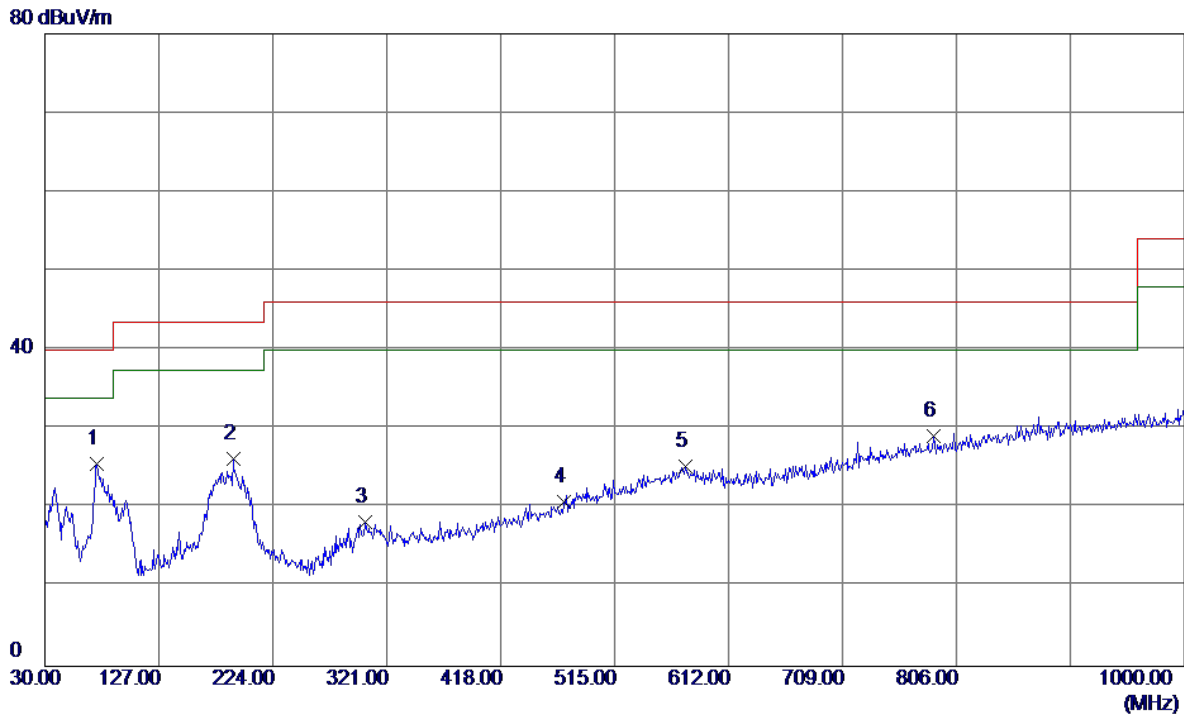

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	74.6200	42.62	-17.04	25.58	40.00	-14.42	Peak	
2	190.0500	39.08	-12.85	26.23	43.50	-17.27	Peak	
3	302.5700	31.07	-12.78	18.29	46.00	-27.71	Peak	
4	472.3200	30.28	-9.40	20.88	46.00	-25.12	Peak	
5	575.1400	32.27	-7.06	25.21	46.00	-20.79	Peak	
6	786.6000	30.80	-1.65	29.15	46.00	-16.85	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: PHITEK


Horizontal

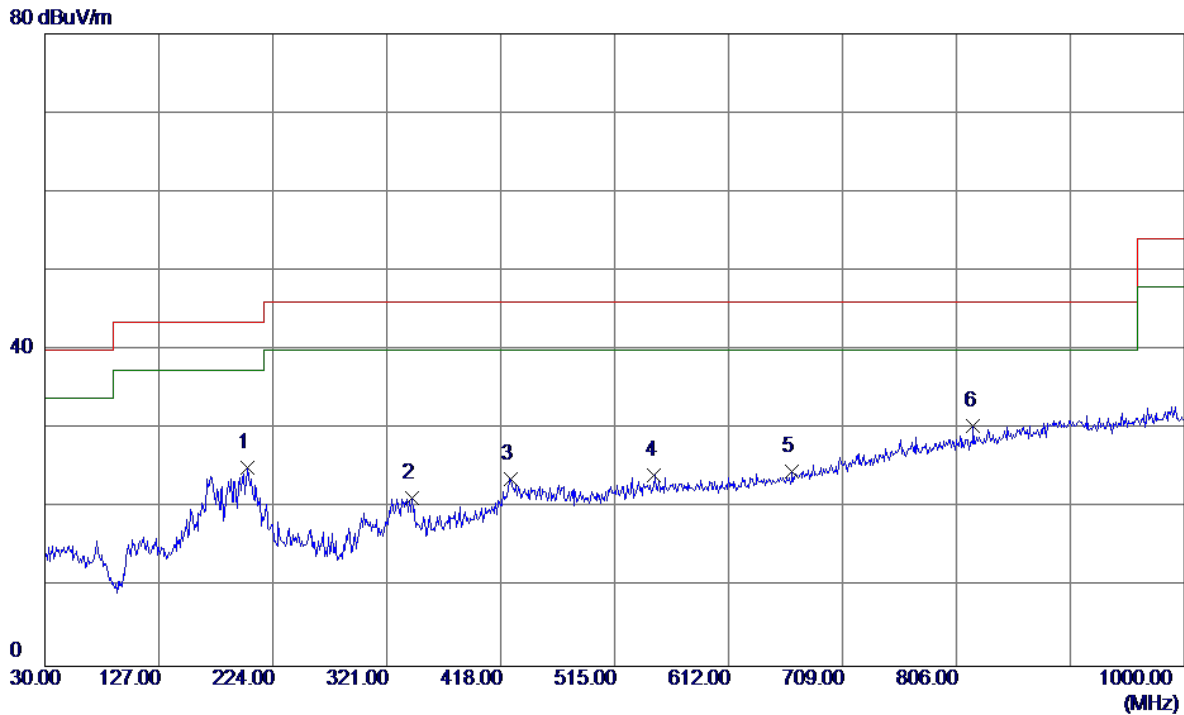

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	202.6600	38.86	-13.81	25.05	43.50	-18.45	Peak	
2	342.3400	33.33	-12.09	21.24	46.00	-24.76	Peak	
3	426.7300	34.33	-10.60	23.73	46.00	-22.27	Peak	
4	548.9500	31.84	-7.74	24.10	46.00	-21.90	Peak	
5	666.3200	29.55	-4.97	24.58	46.00	-21.42	Peak	
6 *	820.5500	31.23	-0.80	30.43	46.00	-15.57	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: PHITEK


Vertical

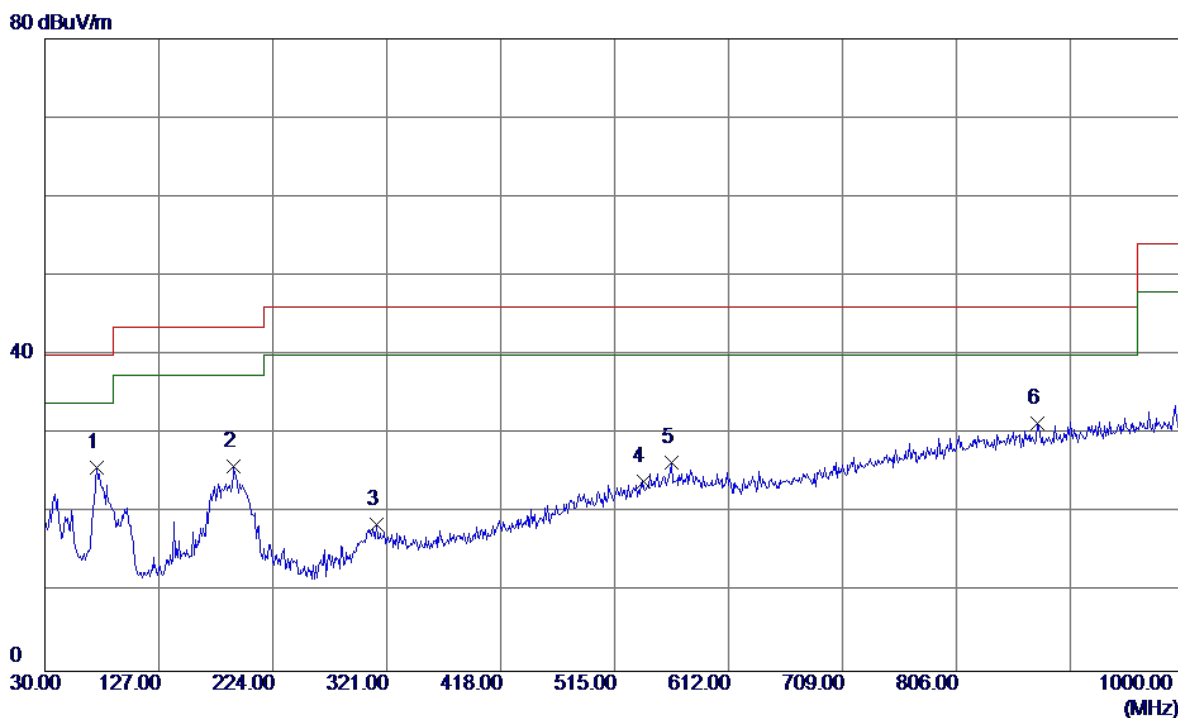

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	74.6200	42.87	-17.04	25.83	40.00	-14.17	Peak	
2	191.0200	38.86	-12.94	25.92	43.50	-17.58	Peak	
3	312.2700	31.24	-12.62	18.62	46.00	-27.38	Peak	
4	539.2500	31.88	-7.93	23.95	46.00	-22.05	Peak	
5	563.5000	33.71	-7.37	26.34	46.00	-19.66	Peak	
6	874.8700	30.83	0.51	31.34	46.00	-14.66	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: PHITEK


Horizontal

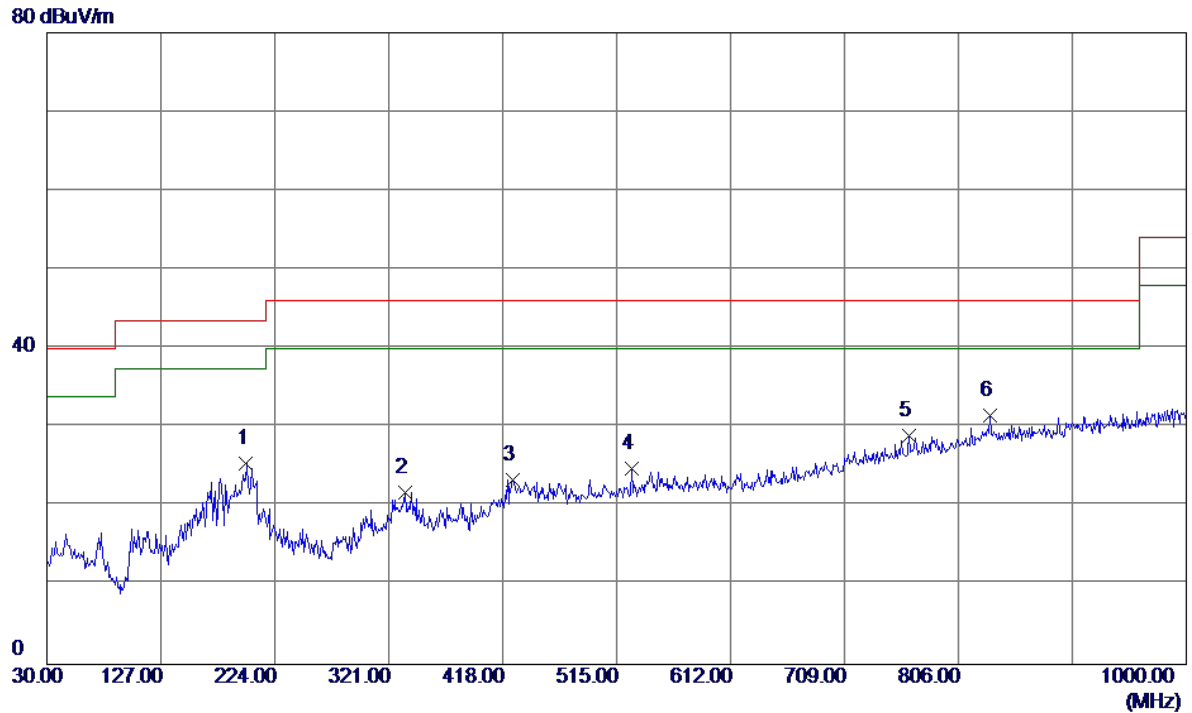

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	199.7500	39.19	-13.73	25.46	43.50	-18.04	Peak	
2	334.5799	33.98	-12.22	21.76	46.00	-24.24	Peak	
3	426.7300	33.92	-10.60	23.32	46.00	-22.68	Peak	
4	527.6100	32.98	-8.17	24.81	46.00	-21.19	Peak	
5	764.2900	31.06	-2.13	28.93	46.00	-17.07	Peak	
6 *	833.1599	32.00	-0.46	31.54	46.00	-14.46	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: PHITEK


Vertical

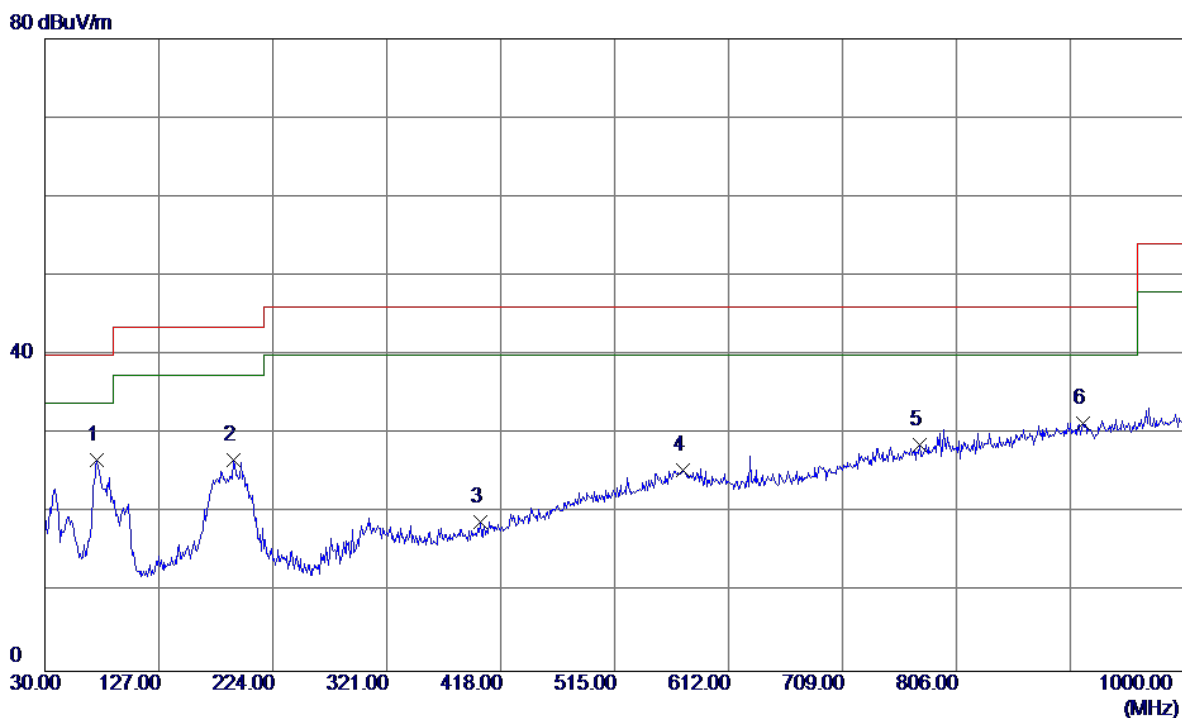

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	74.6200	43.74	-17.04	26.70	40.00	-13.30	Peak	
2	190.0500	39.62	-12.85	26.77	43.50	-16.73	Peak	
3	400.5400	30.25	-11.34	18.91	46.00	-27.09	Peak	
4	573.2000	32.55	-7.11	25.44	46.00	-20.56	Peak	
5	774.9600	30.59	-1.90	28.69	46.00	-17.31	Peak	
6	913.6700	30.12	1.29	31.41	46.00	-14.59	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: PHITEK


Horizontal

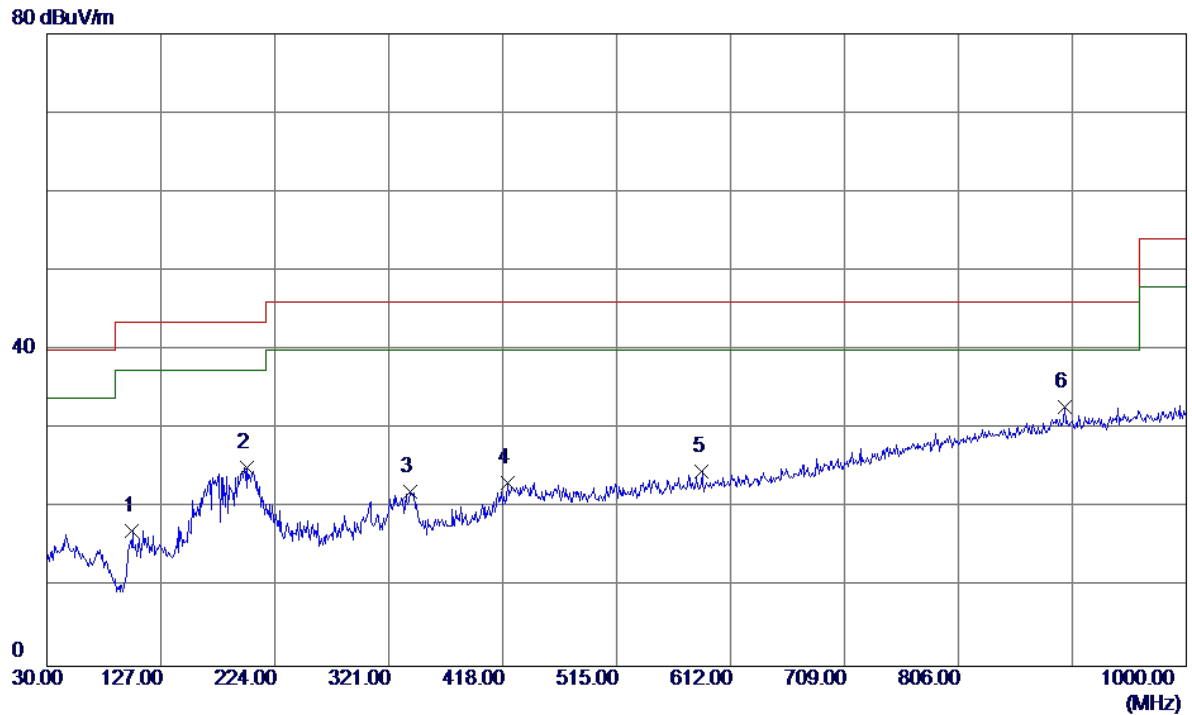

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	102.7500	34.23	-17.12	17.11	43.50	-26.39	Peak	
2	200.7200	38.92	-13.77	25.15	43.50	-18.35	Peak	
3	339.4300	34.29	-12.14	22.15	46.00	-23.85	Peak	
4	421.8800	33.95	-10.74	23.21	46.00	-22.79	Peak	
5	587.7500	31.40	-6.74	24.66	46.00	-21.34	Peak	
6 *	896.2100	31.80	0.95	32.75	46.00	-13.25	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: HUNTKEY


Vertical

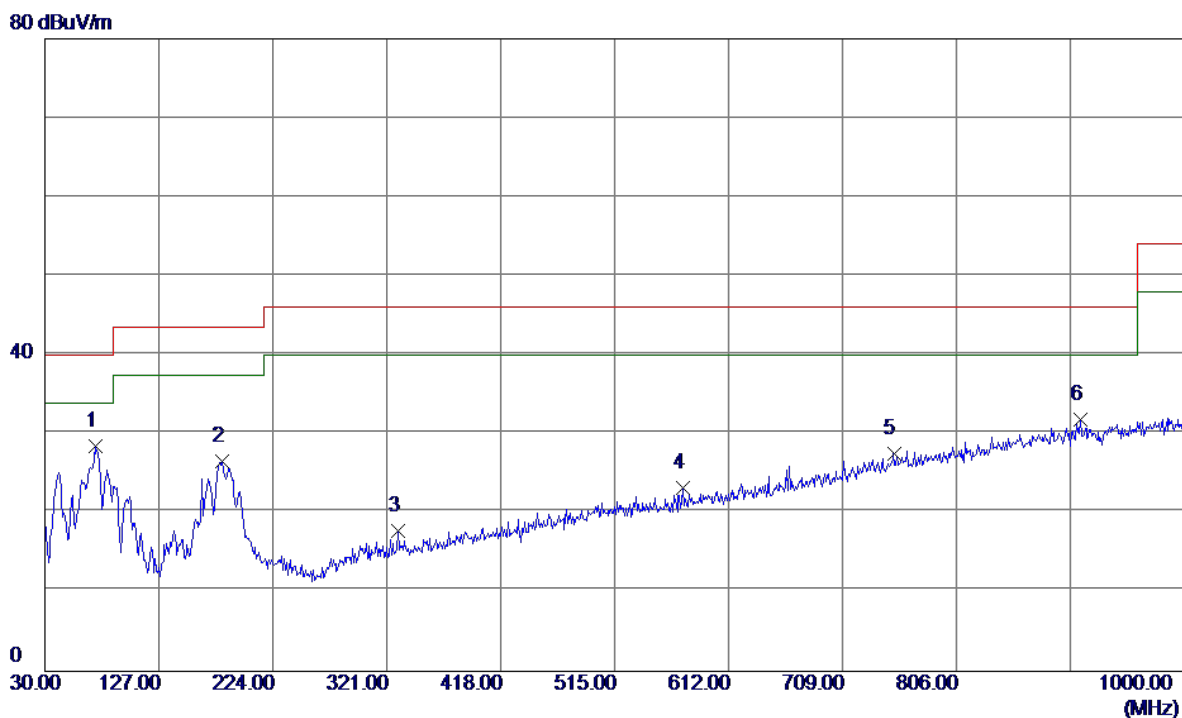

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	72.6800	45.29	-16.82	28.47	40.00	-11.53	Peak	
2	181.3200	38.67	-12.15	26.52	43.50	-16.98	Peak	
3	330.7000	30.01	-12.29	17.72	46.00	-28.28	Peak	
4	573.2000	30.24	-7.11	23.13	46.00	-22.87	Peak	
5	752.6500	29.86	-2.39	27.47	46.00	-18.53	Peak	
6	911.7300	30.56	1.26	31.82	46.00	-14.18	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: HUNTKEY


Horizontal

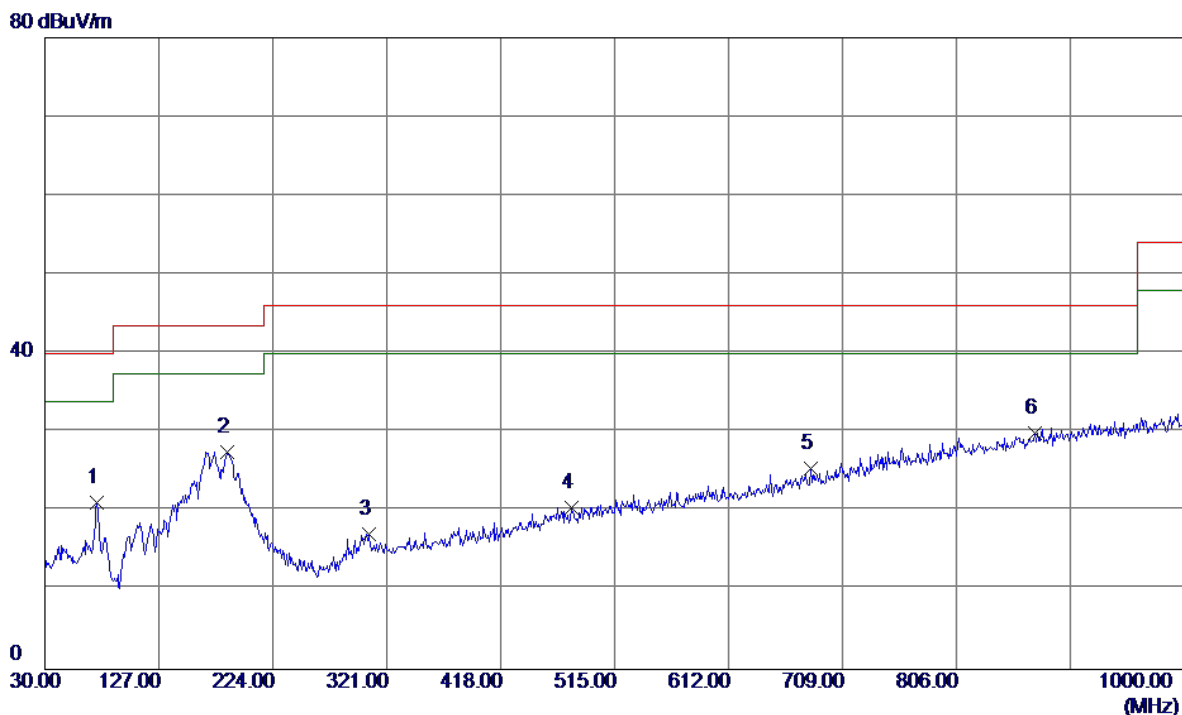

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	74.6200	38.18	-17.04	21.14	40.00	-18.86	Peak	
2 *	185.2000	40.01	-12.46	27.55	43.50	-15.95	Peak	
3	305.4800	29.87	-12.73	17.14	46.00	-28.86	Peak	
4	478.1400	29.78	-9.25	20.53	46.00	-25.47	Peak	
5	681.8400	29.89	-4.50	25.39	46.00	-20.61	Peak	
6	872.9300	29.42	0.47	29.89	46.00	-16.11	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz _Adapter: HUNTKEY


Vertical

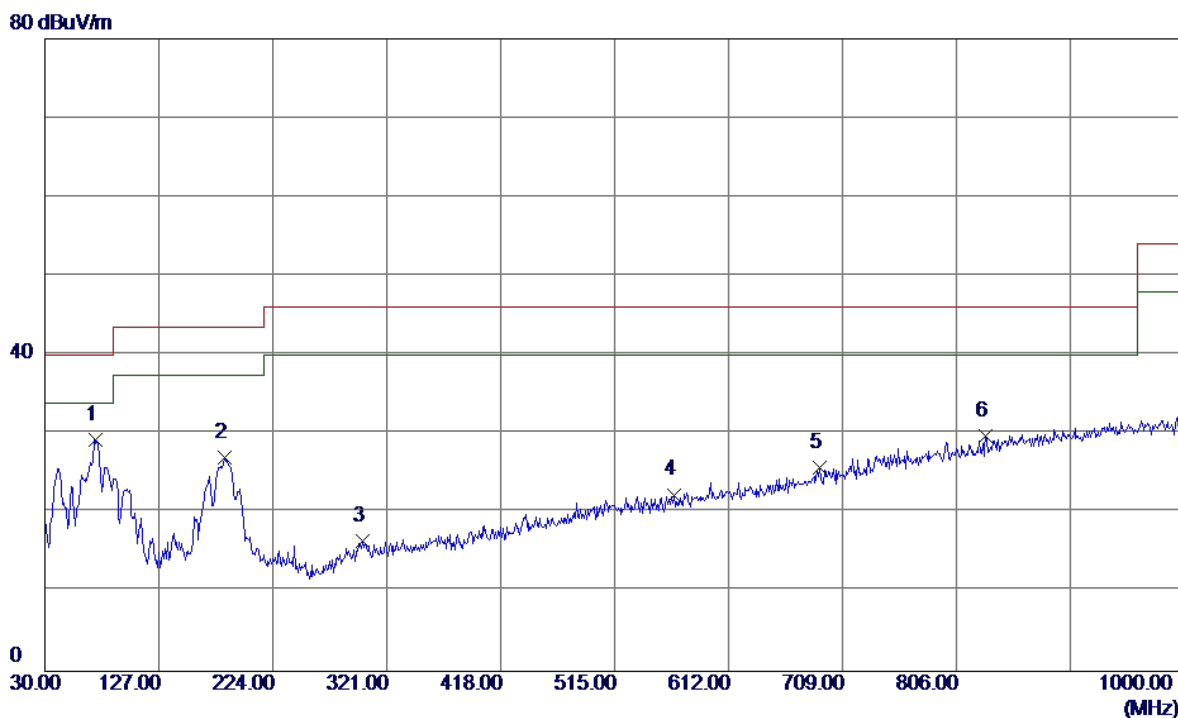

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	72.6800	46.08	-16.82	29.26	40.00	-10.74	Peak	
2	183.2600	39.32	-12.30	27.02	43.50	-16.48	Peak	
3	300.6300	29.28	-12.82	16.46	46.00	-29.54	Peak	
4	565.4400	29.64	-7.32	22.32	46.00	-23.68	Peak	
5	689.6000	30.00	-4.26	25.74	46.00	-20.26	Peak	
6	831.2199	30.34	-0.51	29.83	46.00	-16.17	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: HUNTKEY

Horizontal

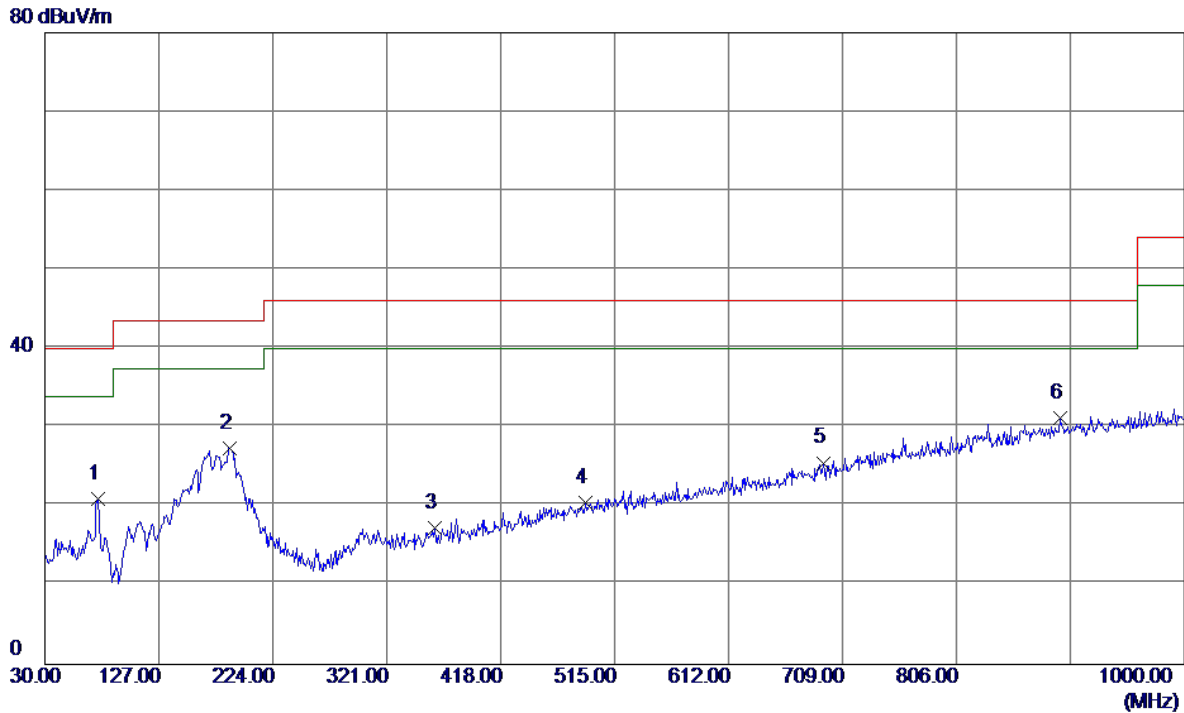


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	75.5899	38.24	-17.22	21.02	40.00	-18.98	Peak	
2	187.1400	40.00	-12.61	27.39	43.50	-16.11	Peak	
3	361.7400	29.15	-11.82	17.33	46.00	-28.67	Peak	
4	489.7800	29.48	-8.97	20.51	46.00	-25.49	Peak	
5	692.5100	29.69	-4.17	25.52	46.00	-20.48	Peak	
6 *	894.2700	30.24	0.91	31.15	46.00	-14.85	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: HUNTKEY

Vertical


80 dBuV/m

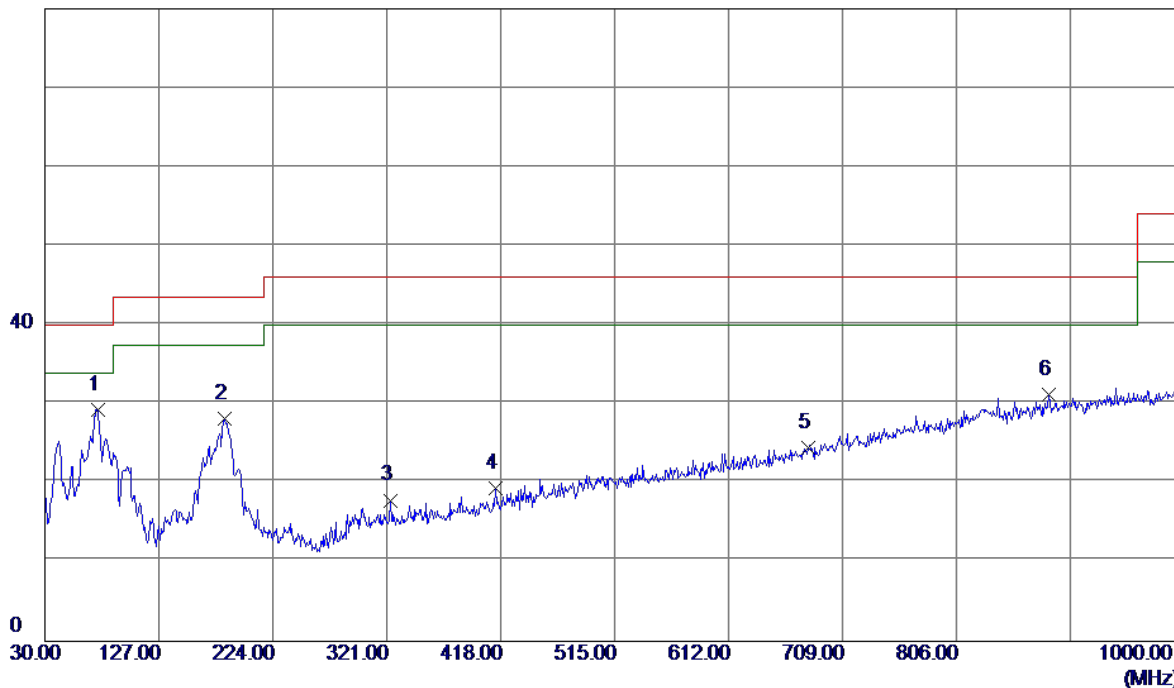

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	75.5899	46.52	-17.22	29.30	40.00	-10.70	Peak	
2	183.2600	40.53	-12.30	28.23	43.50	-15.27	Peak	
3	323.9100	30.25	-12.41	17.84	46.00	-28.16	Peak	
4	414.1200	30.37	-10.96	19.41	46.00	-26.59	Peak	
5	679.9000	29.01	-4.56	24.45	46.00	-21.55	Peak	
6	884.5700	30.45	0.71	31.16	46.00	-14.84	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: HUNTKEY

Horizontal

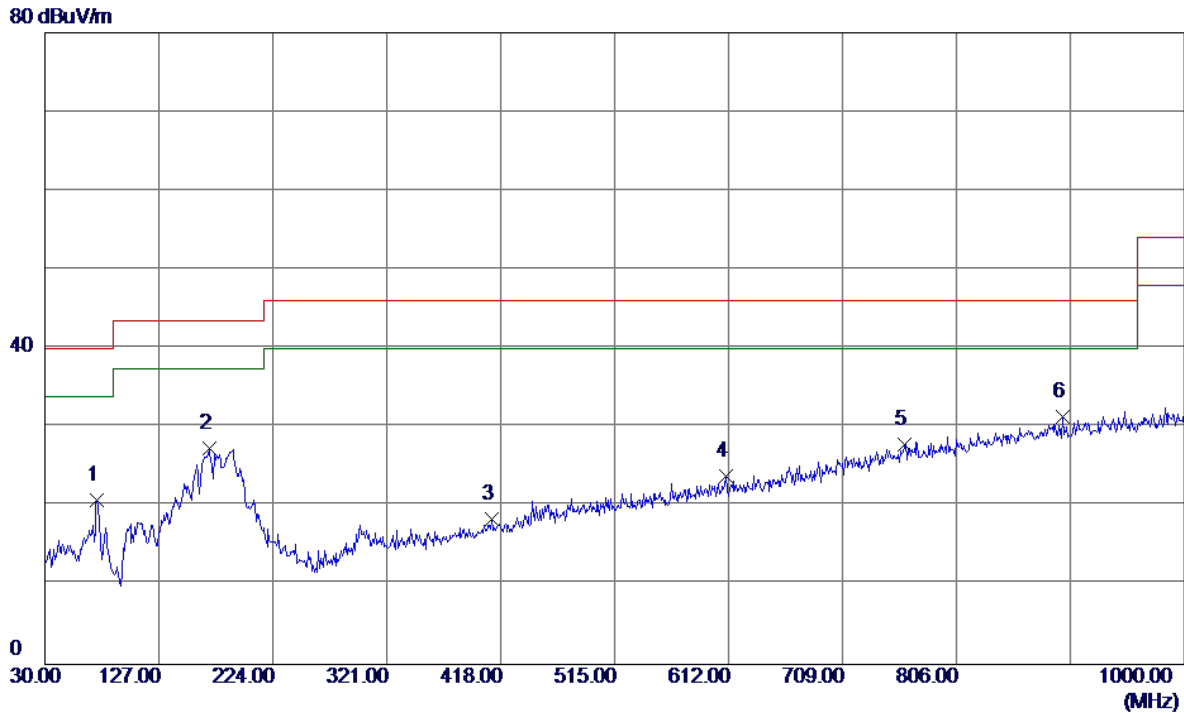


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	74.6200	37.81	-17.04	20.77	40.00	-19.23	Peak	
2	169.6799	39.76	-12.35	27.41	43.50	-16.09	Peak	
3	410.2400	29.51	-11.07	18.44	46.00	-27.56	Peak	
4	610.0600	30.00	-6.23	23.77	46.00	-22.23	Peak	
5	761.3800	30.05	-2.20	27.85	46.00	-18.15	Peak	
6 *	896.2100	30.35	0.95	31.30	46.00	-14.70	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz _Adapter: HUNTKEY

Vertical

80 dBuV/m

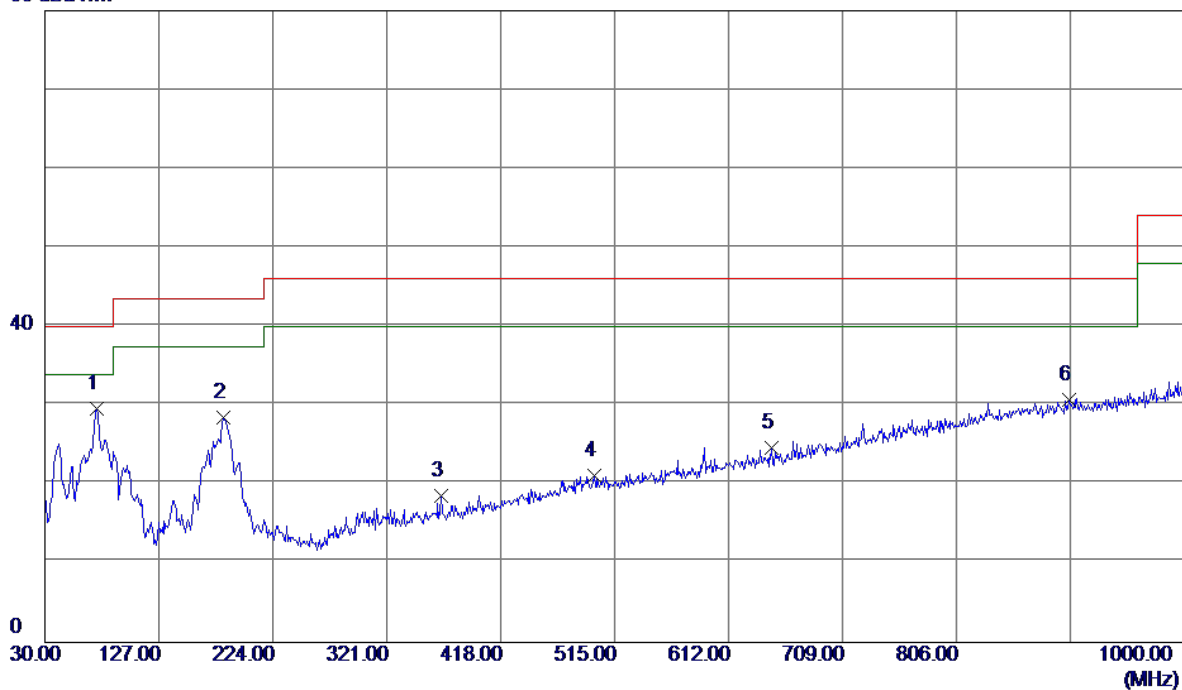


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	74.6200	46.57	-17.04	29.53	40.00	-10.47	Peak	
2	182.2899	40.68	-12.22	28.46	43.50	-15.04	Peak	
3	367.5600	30.36	-11.75	18.61	46.00	-27.39	Peak	
4	497.5400	29.85	-8.78	21.07	46.00	-24.93	Peak	
5	648.8600	30.15	-5.50	24.65	46.00	-21.35	Peak	
6	902.0300	29.64	1.07	30.71	46.00	-15.29	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz _Adapter: HUNTKEY

Horizontal


80 dBuV/m

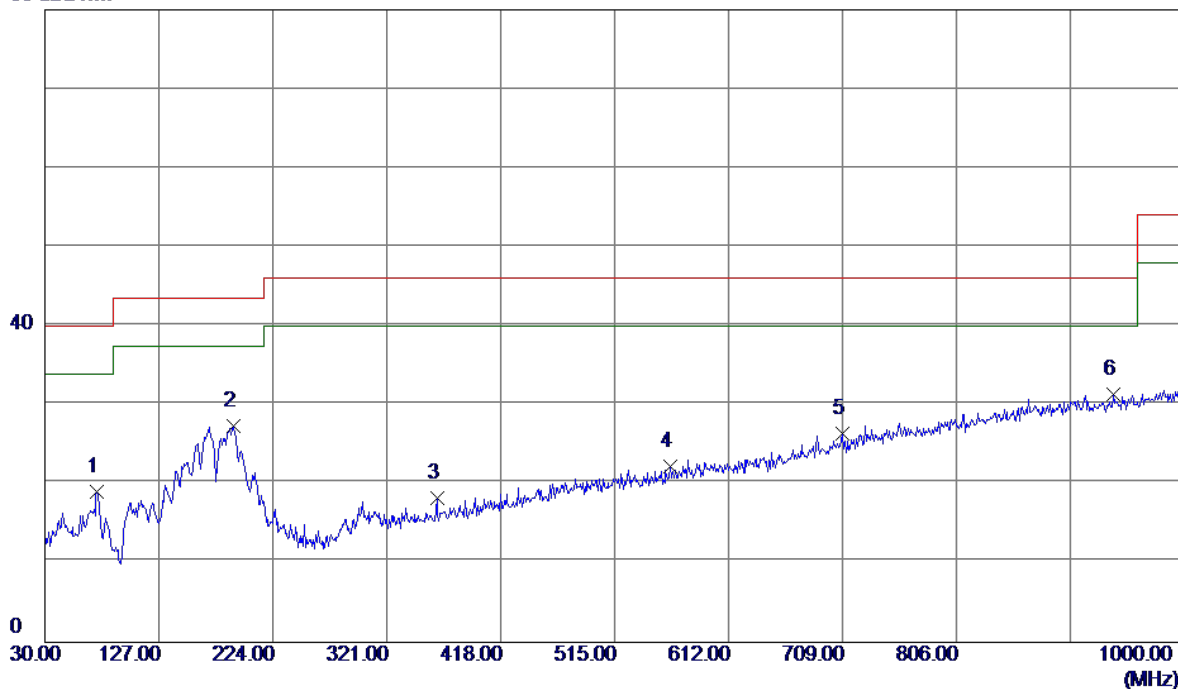

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	74.6200	36.09	-17.04	19.05	40.00	-20.95	Peak	
2	190.0500	40.15	-12.85	27.30	43.50	-16.20	Peak	
3	363.6800	30.00	-11.79	18.21	46.00	-27.79	Peak	
4	562.5300	29.67	-7.39	22.28	46.00	-23.72	Peak	
5	709.0000	30.10	-3.67	26.43	46.00	-19.57	Peak	
6 *	939.8600	29.62	1.80	31.42	46.00	-14.58	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: HUNTKEY


Vertical

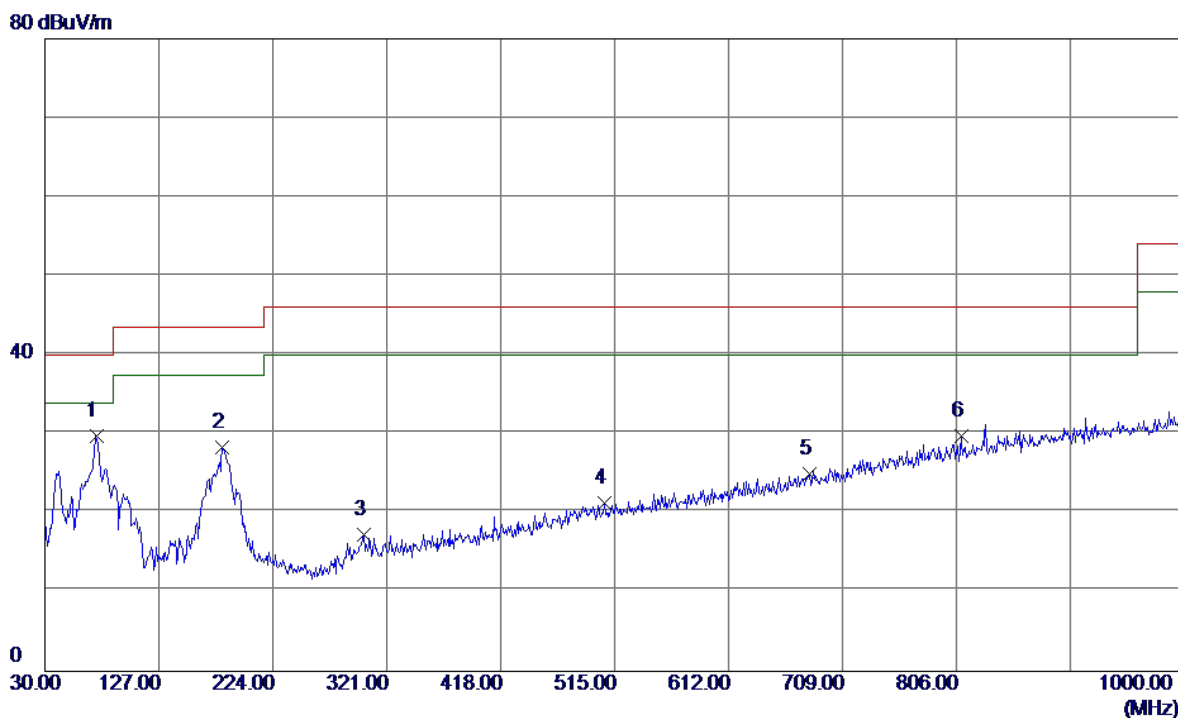

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	73.6500	46.68	-16.93	29.75	40.00	-10.25	Peak	
2	181.3200	40.44	-12.15	28.29	43.50	-15.21	Peak	
3	301.6000	30.11	-12.80	17.31	46.00	-28.69	Peak	
4	506.2700	29.80	-8.59	21.21	46.00	-24.79	Peak	
5	680.8700	29.42	-4.53	24.89	46.00	-21.11	Peak	
6	809.8800	30.82	-1.09	29.73	46.00	-16.27	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: HUNTKEY


Horizontal

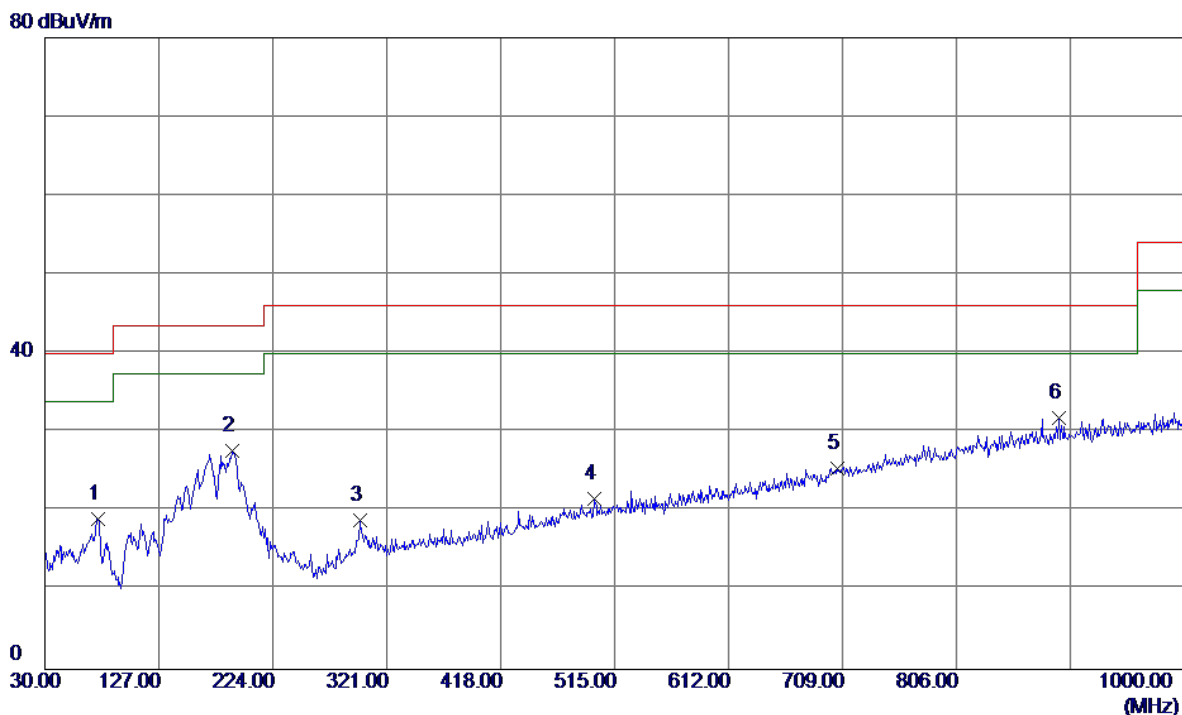

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	75.5899	36.32	-17.22	19.10	40.00	-20.90	Peak	
2	189.0800	40.42	-12.77	27.65	43.50	-15.85	Peak	
3	298.6900	31.89	-13.01	18.88	46.00	-27.12	Peak	
4	497.5400	30.36	-8.78	21.58	46.00	-24.42	Peak	
5	705.1200	29.23	-3.79	25.44	46.00	-20.56	Peak	
6 *	893.3000	30.95	0.89	31.84	46.00	-14.16	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: HUNTKEY

Vertical

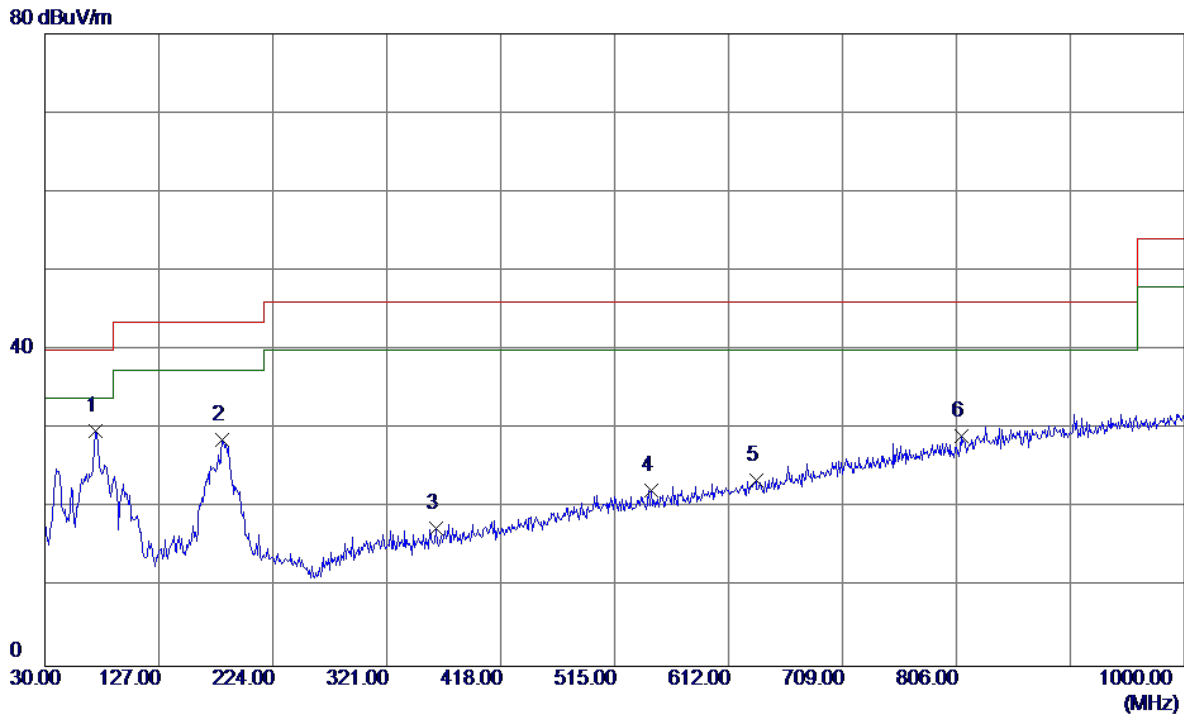


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	72.6800	46.62	-16.82	29.80	40.00	-10.20	Peak	
2	181.3200	40.77	-12.15	28.62	43.50	-14.88	Peak	
3	362.7100	29.25	-11.80	17.45	46.00	-28.55	Peak	
4	546.0400	30.03	-7.79	22.24	46.00	-23.76	Peak	
5	635.2800	29.28	-5.75	23.53	46.00	-22.47	Peak	
6	809.8800	30.26	-1.09	29.17	46.00	-16.83	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: HUNTKEY

Horizontal


80 dBuV/m

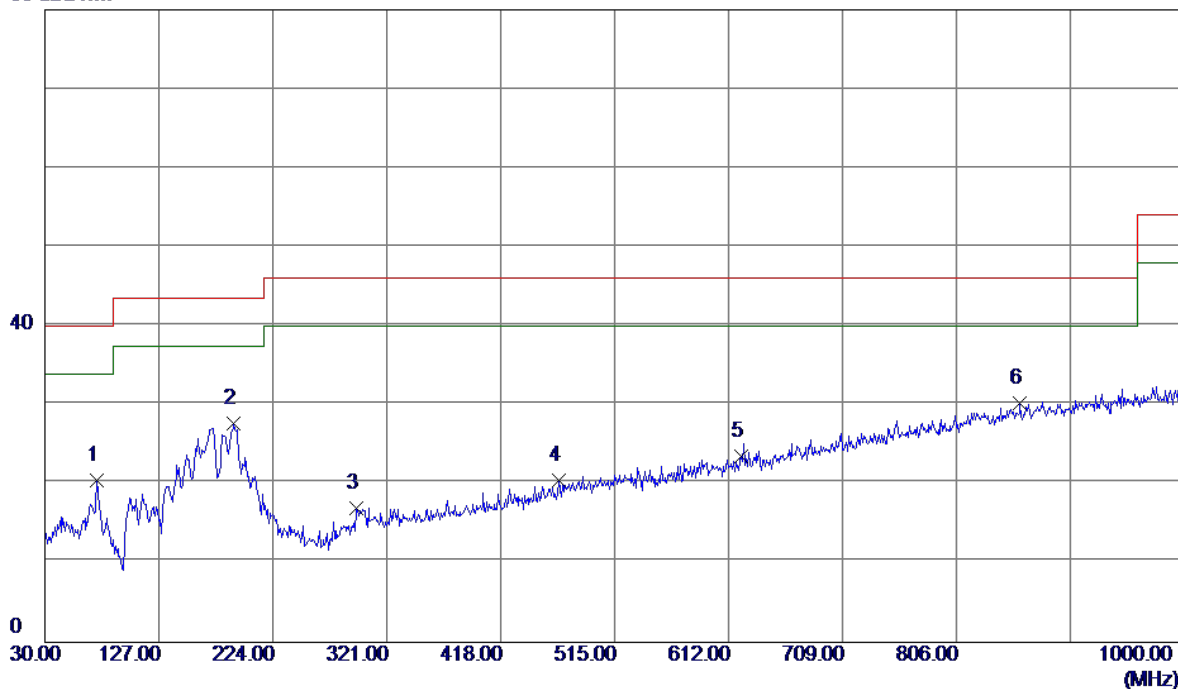

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	74.6200	37.53	-17.04	20.49	40.00	-19.51	Peak	
2	191.0200	40.55	-12.94	27.61	43.50	-15.89	Peak	
3	294.8100	30.50	-13.54	16.96	46.00	-29.04	Peak	
4	467.4700	30.02	-9.51	20.51	46.00	-25.49	Peak	
5	622.6700	29.52	-5.99	23.53	46.00	-22.47	Peak	
6 *	860.3200	30.09	0.21	30.30	46.00	-15.70	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz _Adapter: HUNTKEY


Vertical

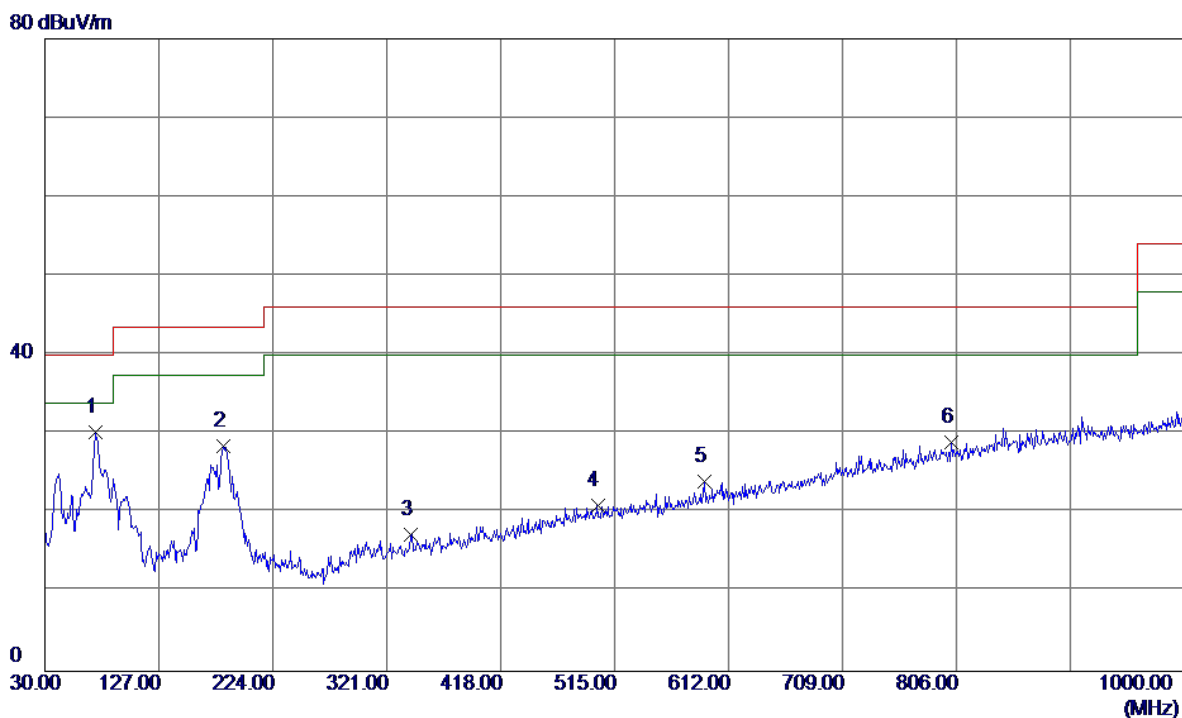

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	72.6800	47.07	-16.82	30.25	40.00	-9.75	Peak	
2	182.2899	40.73	-12.22	28.51	43.50	-14.99	Peak	
3	341.3700	29.34	-12.11	17.23	46.00	-28.77	Peak	
4	500.4500	29.64	-8.71	20.93	46.00	-25.07	Peak	
5	591.6300	30.66	-6.64	24.02	46.00	-21.98	Peak	
6	802.1200	30.28	-1.30	28.98	46.00	-17.02	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: HUNTKEY


Horizontal

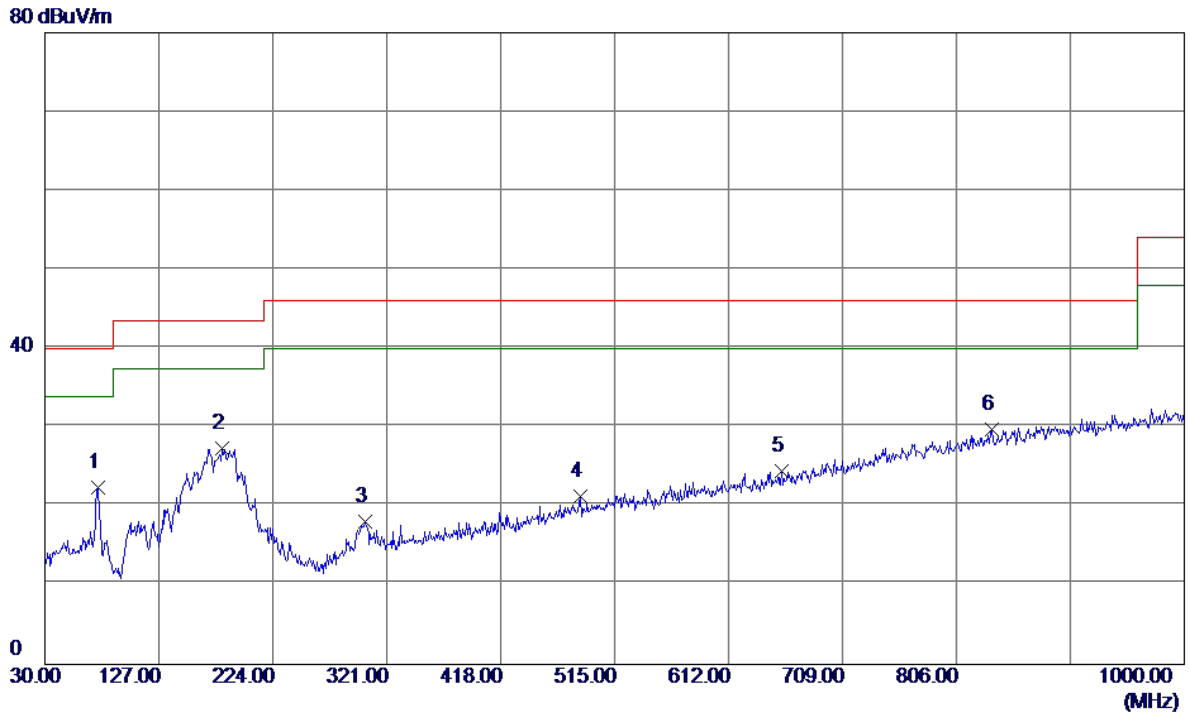

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	75.5899	39.58	-17.22	22.36	40.00	-17.64	Peak	
2 *	181.3200	39.44	-12.15	27.29	43.50	-16.21	Peak	
3	302.5700	30.90	-12.78	18.12	46.00	-27.88	Peak	
4	485.9000	30.35	-9.06	21.29	46.00	-24.71	Peak	
5	657.5900	29.65	-5.24	24.41	46.00	-21.59	Peak	
6	836.0700	30.09	-0.38	29.71	46.00	-16.29	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: HUNTKEY

Vertical

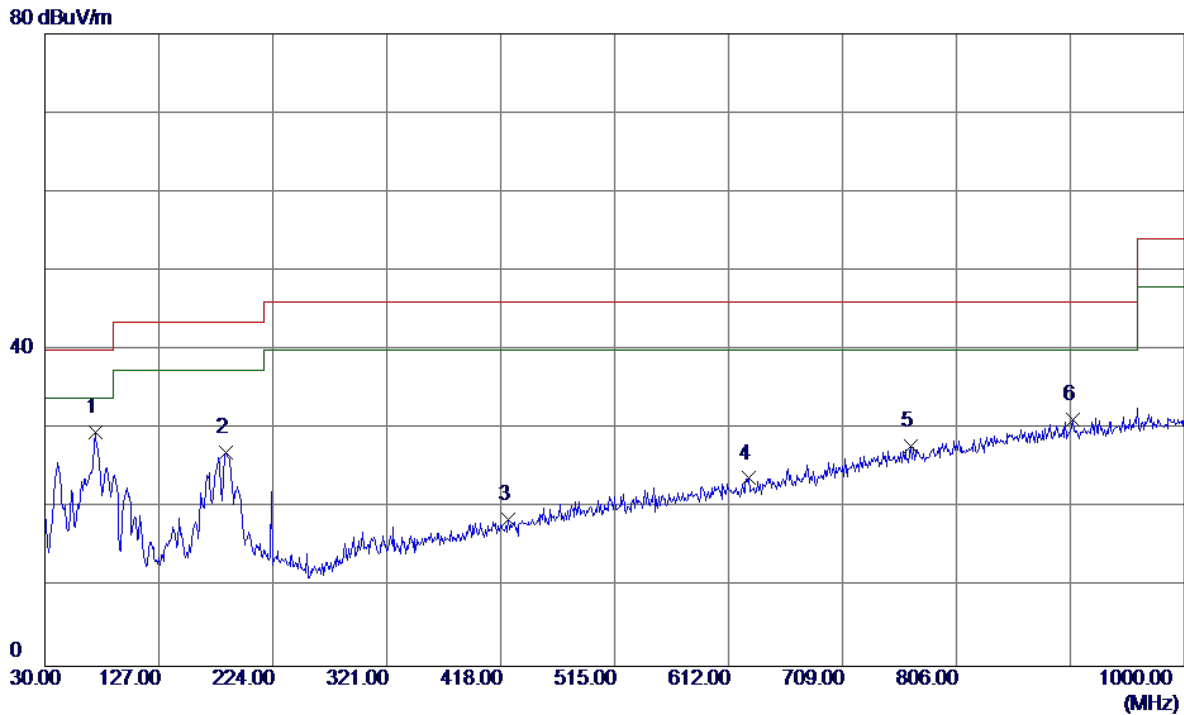


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	72.6800	46.43	-16.82	29.61	40.00	-10.39	Peak	
2	184.2300	39.48	-12.38	27.10	43.50	-16.40	Peak	
3	424.7900	29.21	-10.66	18.55	46.00	-27.45	Peak	
4	629.4600	29.62	-5.86	23.76	46.00	-22.24	Peak	
5	767.2000	29.84	-2.07	27.77	46.00	-18.23	Peak	
6	904.9400	30.09	1.13	31.22	46.00	-14.78	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz _Adapter: HUNTKEY

Horizontal


80 dBuV/m

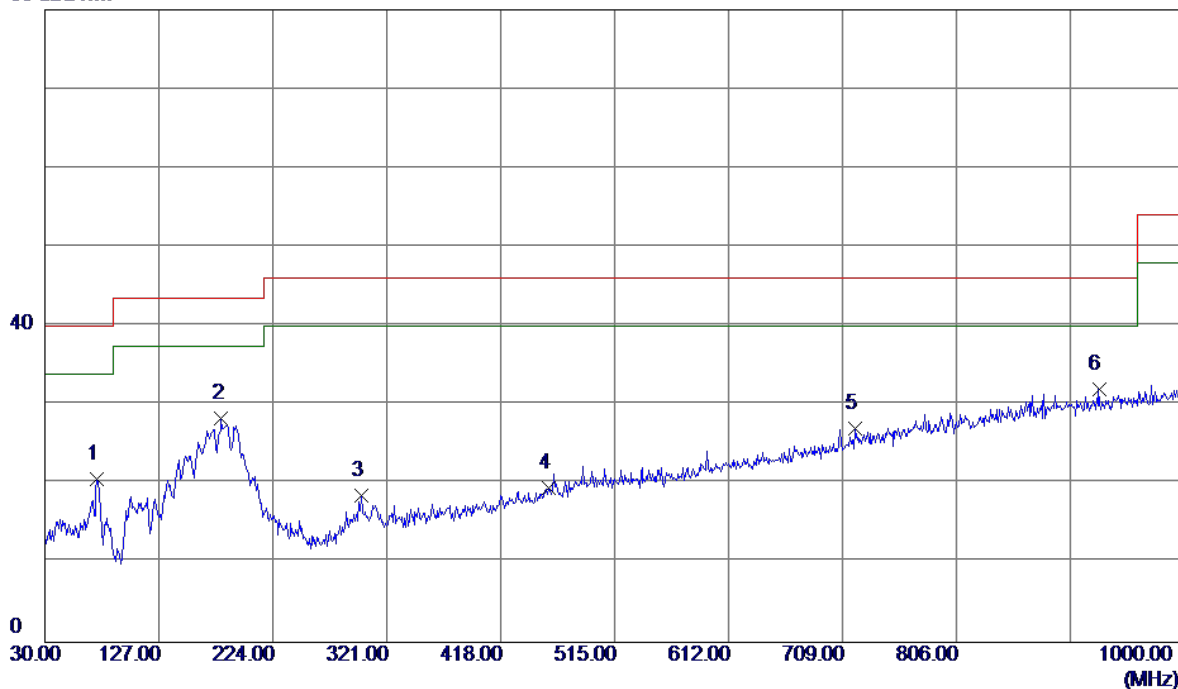

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	74.6200	37.75	-17.04	20.71	40.00	-19.29	Peak	
2	180.3500	40.33	-12.07	28.26	43.50	-15.24	Peak	
3	299.6600	31.48	-12.88	18.60	46.00	-27.40	Peak	
4	458.7400	29.25	-9.73	19.52	46.00	-26.48	Peak	
5	719.6700	30.36	-3.35	27.01	46.00	-18.99	Peak	
6 *	927.2500	30.44	1.56	32.00	46.00	-14.00	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: Salcomp


Vertical

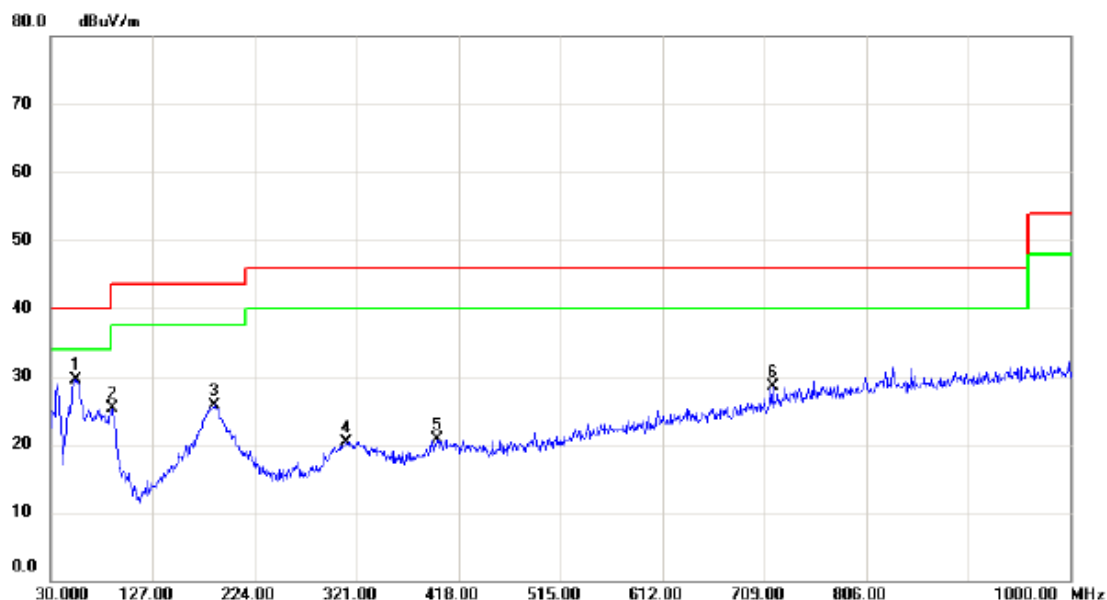

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	54.250	43.38	-13.95	29.43	40.00	-10.57	peak	
2		88.200	43.80	-18.56	25.24	43.50	-18.26	peak	
3		186.170	38.34	-12.54	25.80	43.50	-17.70	peak	
4		311.300	32.92	-12.62	20.30	46.00	-25.70	peak	
5		397.630	32.13	-11.38	20.75	46.00	-25.25	peak	
6		716.760	31.93	-3.44	28.49	46.00	-17.51	peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: Salcomp


Horizontal

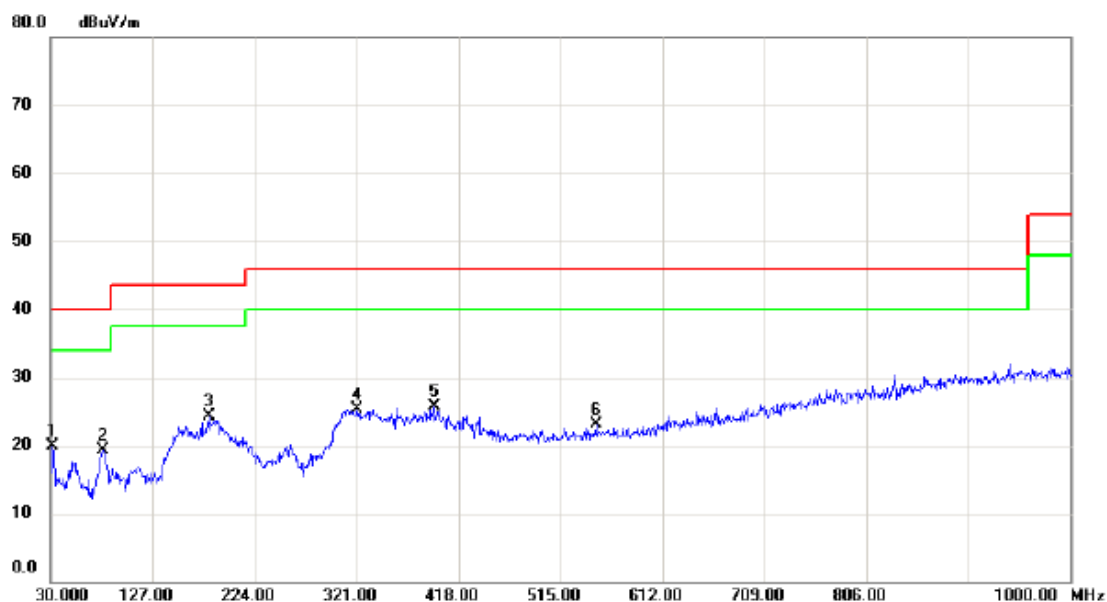

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.940	34.93	-15.04	19.89	40.00	-20.11	peak	
2		79.470	37.43	-18.11	19.32	40.00	-20.68	peak	
3	*	180.350	36.28	-12.07	24.21	43.50	-19.29	peak	
4		321.000	37.84	-12.47	25.37	46.00	-20.63	peak	
5		394.720	37.22	-11.42	25.80	46.00	-20.20	peak	
6		548.950	30.91	-7.73	23.18	46.00	-22.82	peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: Salcomp


Vertical

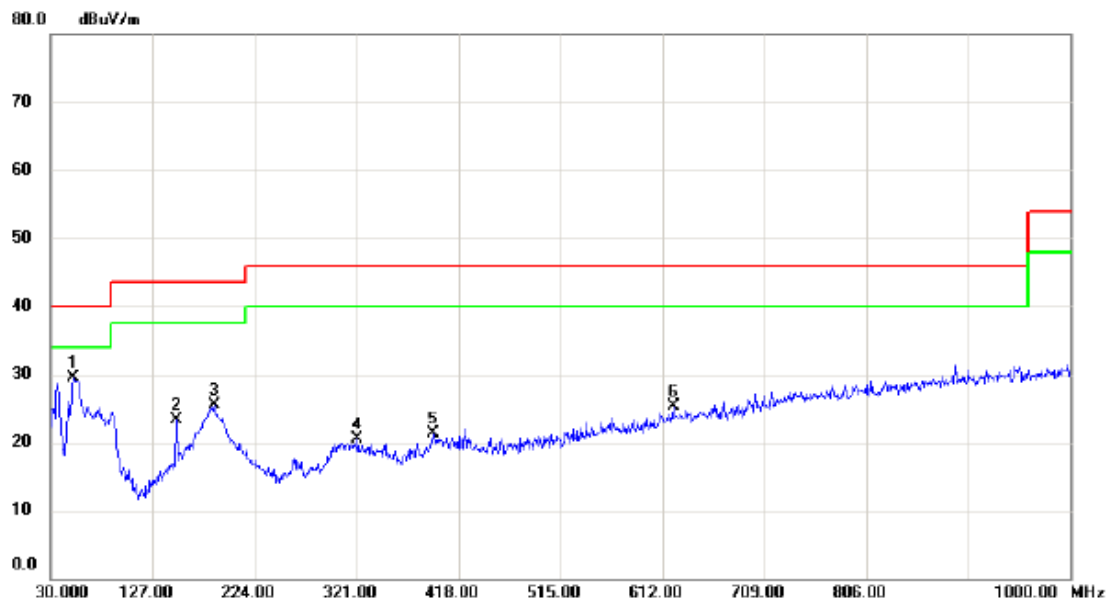

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	51.340	43.20	-13.70	29.50	40.00	-10.50	peak	
2		149.310	36.81	-13.57	23.24	43.50	-20.26	peak	
3		185.200	37.88	-12.46	25.42	43.50	-18.08	peak	
4		321.970	32.91	-12.44	20.47	46.00	-25.53	peak	
5		393.750	32.82	-11.43	21.39	46.00	-24.61	peak	
6		622.670	31.23	-5.99	25.24	46.00	-20.76	peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: Salcomp

Horizontal

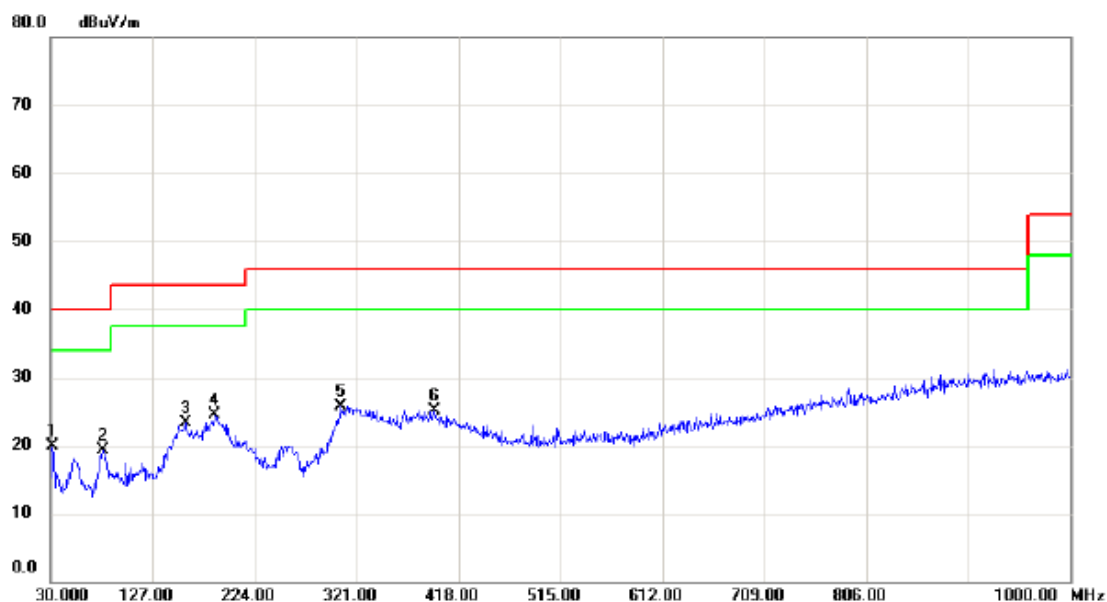

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.940	34.95	-15.04	19.91	40.00	-20.09	peak	
2		79.470	37.43	-18.11	19.32	40.00	-20.68	peak	
3		158.040	36.43	-13.04	23.39	43.50	-20.11	peak	
4	*	186.170	37.07	-12.54	24.53	43.50	-18.97	peak	
5		306.450	38.39	-12.72	25.67	46.00	-20.33	peak	
6		394.720	36.52	-11.42	25.10	46.00	-20.90	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: Salcomp


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	55.220	43.32	-13.94	29.38	40.00	-10.62	peak	
2		77.530	43.22	-17.66	25.56	40.00	-14.44	peak	
3		188.110	37.61	-12.70	24.91	43.50	-18.59	peak	
4		301.600	33.18	-12.80	20.38	46.00	-25.62	peak	
5		403.450	32.05	-11.26	20.79	46.00	-25.21	peak	
6		616.850	30.93	-6.09	24.84	46.00	-21.16	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: Salcomp

Horizontal

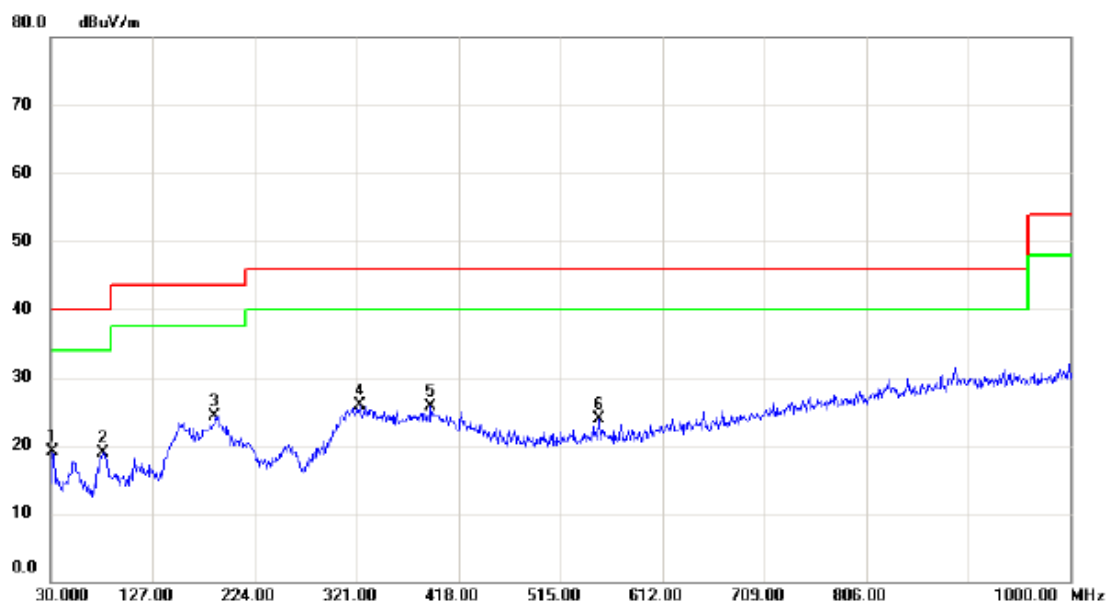

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.940	34.15	-15.04	19.11	40.00	-20.89	peak	
2		79.470	37.07	-18.11	18.96	40.00	-21.04	peak	
3	*	186.170	36.85	-12.54	24.31	43.50	-19.19	peak	
4		323.910	38.26	-12.41	25.85	46.00	-20.15	peak	
5		391.810	37.22	-11.45	25.77	46.00	-20.23	peak	
6		551.860	31.61	-7.67	23.94	46.00	-22.06	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: Salcomp


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	52.310	43.59	-13.79	29.80	40.00	-10.20	peak	
2		89.170	42.94	-18.61	24.33	43.50	-19.17	peak	
3		187.140	37.95	-12.61	25.34	43.50	-18.16	peak	
4		314.210	32.43	-12.59	19.84	46.00	-26.16	peak	
5		426.730	31.87	-10.61	21.26	46.00	-24.74	peak	
6		773.020	31.27	-1.95	29.32	46.00	-16.68	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: Salcomp


Horizontal

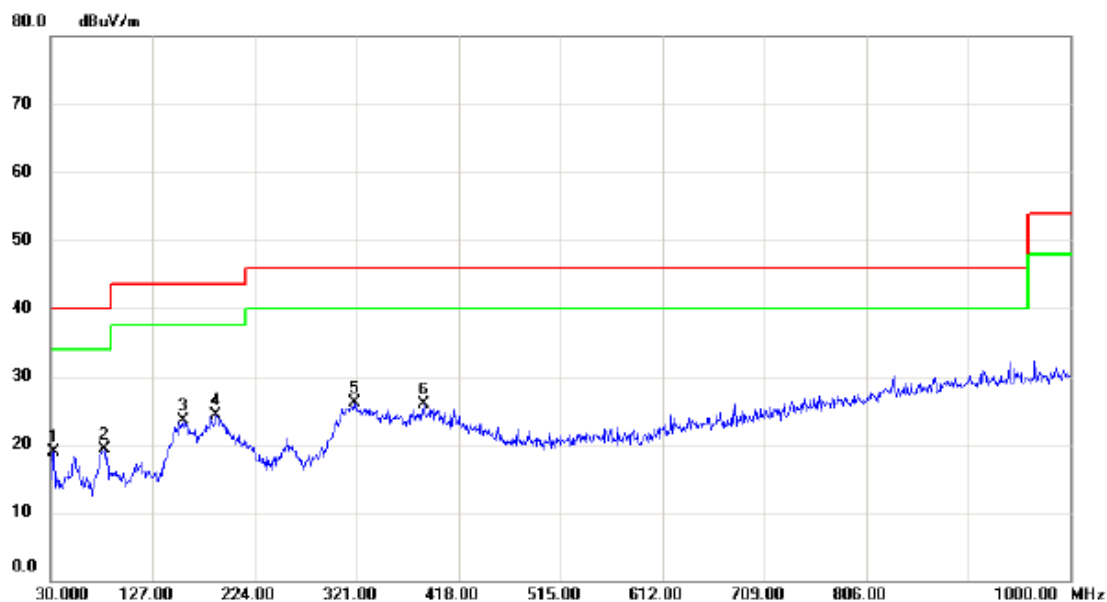

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		32.910	33.78	-14.89	18.89	40.00	-21.11	peak	
2		80.440	37.57	-18.26	19.31	40.00	-20.69	peak	
3		156.100	36.68	-13.16	23.52	43.50	-19.98	peak	
4	*	187.140	36.92	-12.61	24.31	43.50	-19.19	peak	
5		319.060	38.57	-12.49	26.08	46.00	-19.92	peak	
6		385.020	37.50	-11.54	25.96	46.00	-20.04	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: Salcomp


Vertical

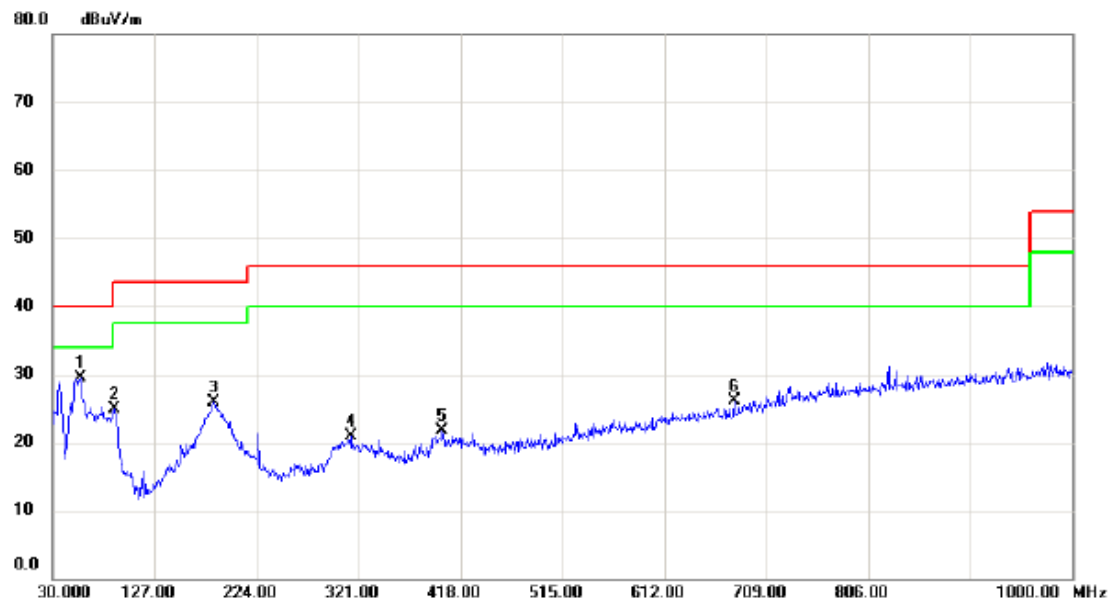

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	56.190	43.37	-13.96	29.41	40.00	-10.59	peak	
2		89.170	43.45	-18.61	24.84	43.50	-18.66	peak	
3		183.260	38.27	-12.30	25.97	43.50	-17.53	peak	
4		313.240	33.46	-12.60	20.86	46.00	-25.14	peak	
5		400.540	33.05	-11.34	21.71	46.00	-24.29	peak	
6		677.960	30.82	-4.62	26.20	46.00	-19.80	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: Salcomp


Horizontal

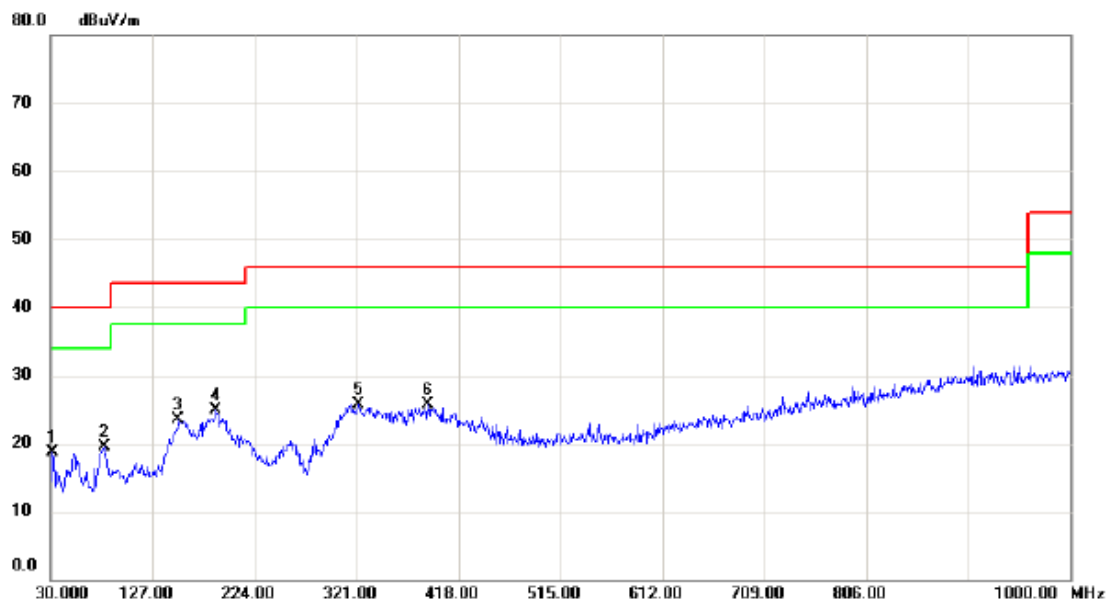

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.940	33.71	-15.04	18.67	40.00	-21.33	peak	
2		80.440	37.70	-18.26	19.44	40.00	-20.56	peak	
3		151.250	36.96	-13.45	23.51	43.50	-19.99	peak	
4	*	187.140	37.42	-12.61	24.81	43.50	-18.69	peak	
5		322.940	38.18	-12.43	25.75	46.00	-20.25	peak	
6		388.900	37.30	-11.50	25.80	46.00	-20.20	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: Salcomp


Vertical

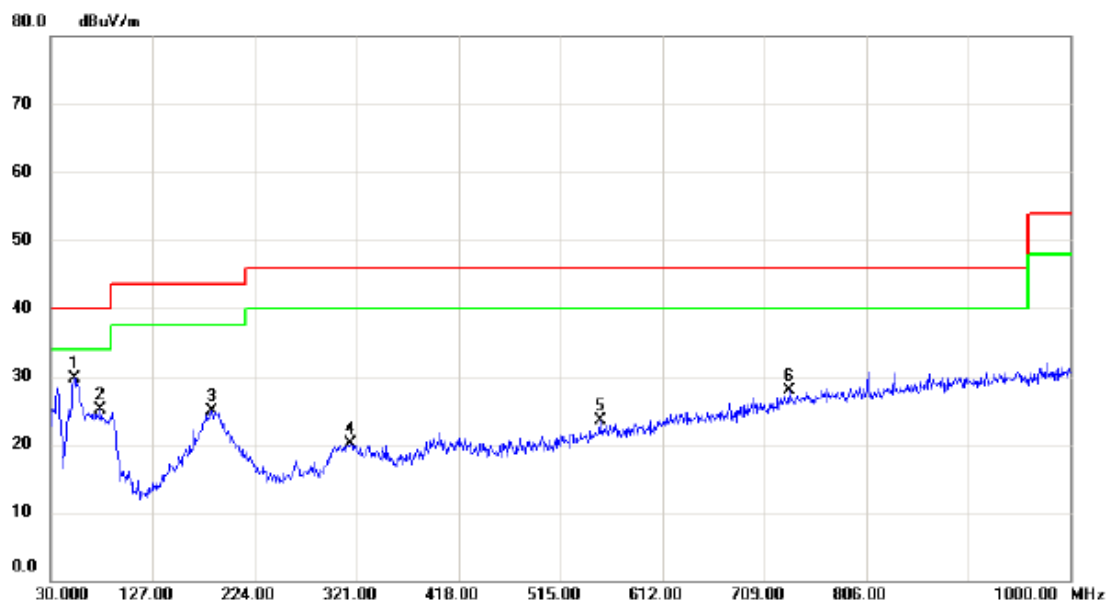

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	52.310	43.49	-13.79	29.70	40.00	-10.30	peak	
2		77.530	42.67	-17.66	25.01	40.00	-14.99	peak	
3		183.260	37.23	-12.30	24.93	43.50	-18.57	peak	
4		315.180	32.72	-12.56	20.16	46.00	-25.84	peak	
5		552.830	31.21	-7.64	23.57	46.00	-22.43	peak	
6		732.280	30.82	-2.98	27.84	46.00	-18.16	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: Salcomp


Horizontal

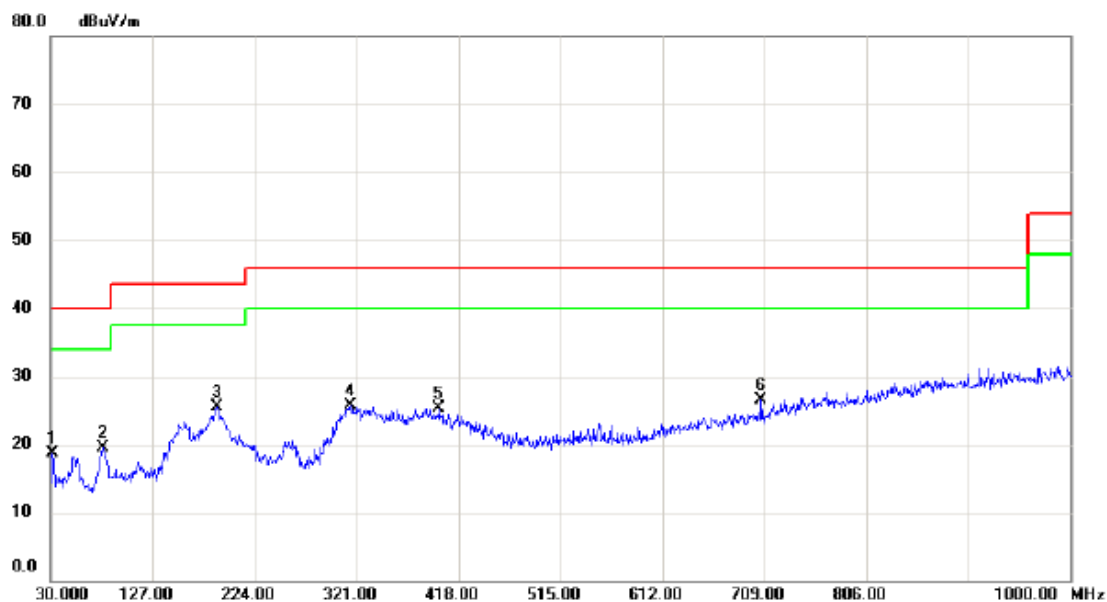

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		31.940	33.69	-15.04	18.65	40.00	-21.35	peak	
2		79.470	37.67	-18.11	19.56	40.00	-20.44	peak	
3	*	188.110	38.30	-12.70	25.60	43.50	-17.90	peak	
4		315.180	38.19	-12.56	25.63	46.00	-20.37	peak	
5		399.570	36.74	-11.37	25.37	46.00	-20.63	peak	
6		706.090	30.25	-3.75	26.50	46.00	-19.50	peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: Salcomp


Vertical

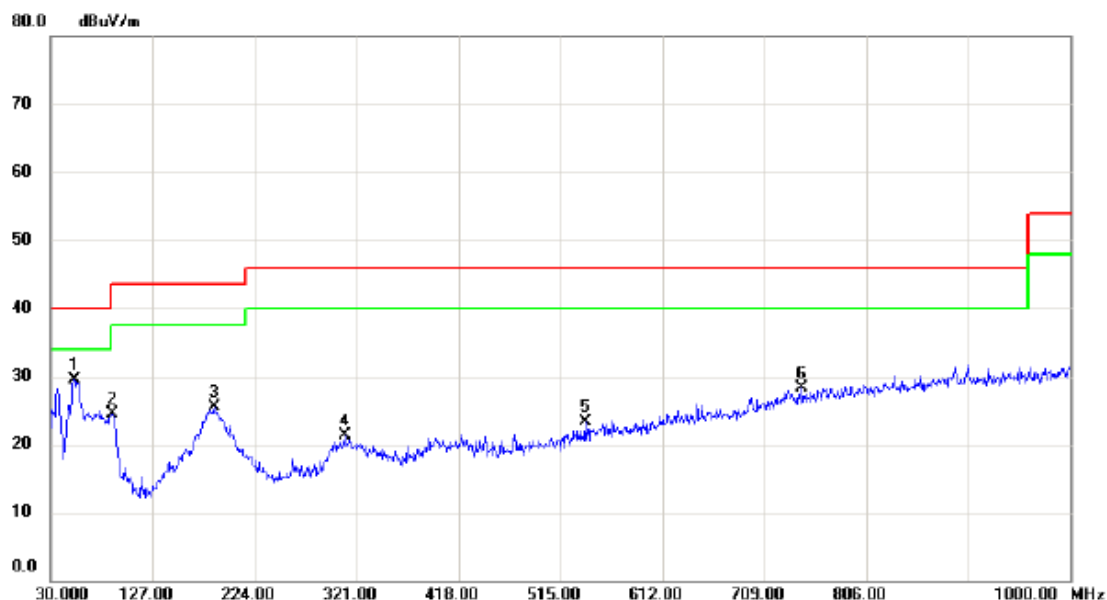

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	52.310	43.34	-13.79	29.55	40.00	-10.45	peak	
2		88.200	43.07	-18.56	24.51	43.50	-18.99	peak	
3		185.200	37.91	-12.46	25.45	43.50	-18.05	peak	
4		309.360	33.92	-12.66	21.26	46.00	-24.74	peak	
5		538.280	31.25	-7.95	23.30	46.00	-22.70	peak	
6		744.890	30.80	-2.59	28.21	46.00	-17.79	peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: Salcomp


Horizontal

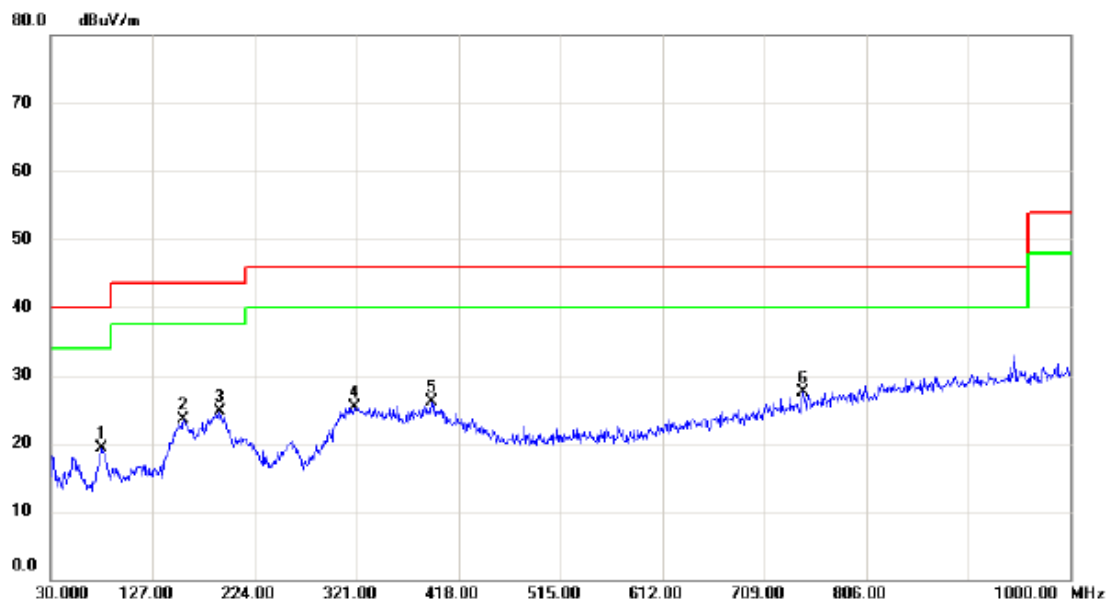

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		78.500	37.13	-17.89	19.24	40.00	-20.76	peak	
2		156.100	36.68	-13.16	23.52	43.50	-19.98	peak	
3		191.020	37.59	-12.94	24.65	43.50	-18.85	peak	
4		319.060	37.80	-12.49	25.31	46.00	-20.69	peak	
5		392.780	37.63	-11.45	26.18	46.00	-19.82	peak	
6	*	745.860	30.06	-2.57	27.49	46.00	-18.51	peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: Salcomp


Vertical

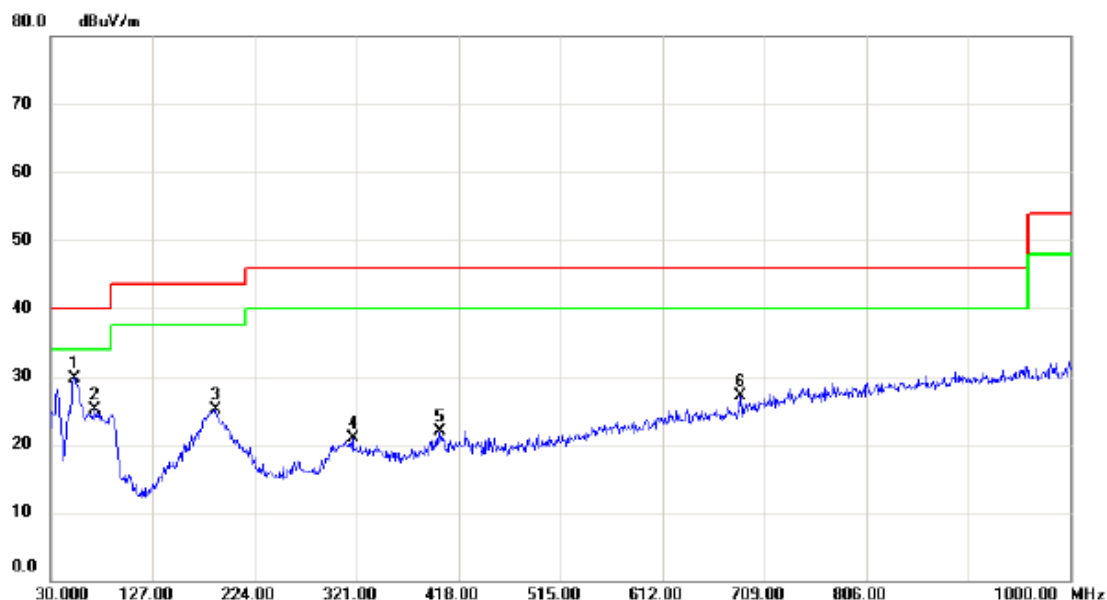

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	52.332	43.52	-13.79	29.73	40.00	-10.27	peak	
2		71.752	41.73	-16.72	25.01	40.00	-14.99	peak	
3		187.297	37.80	-12.63	25.17	43.50	-18.33	peak	
4		317.407	33.45	-12.52	20.93	46.00	-25.07	peak	
5		400.911	33.19	-11.34	21.85	46.00	-24.15	peak	
6		686.376	31.48	-4.35	27.13	46.00	-18.87	peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: Salcomp

Horizontal

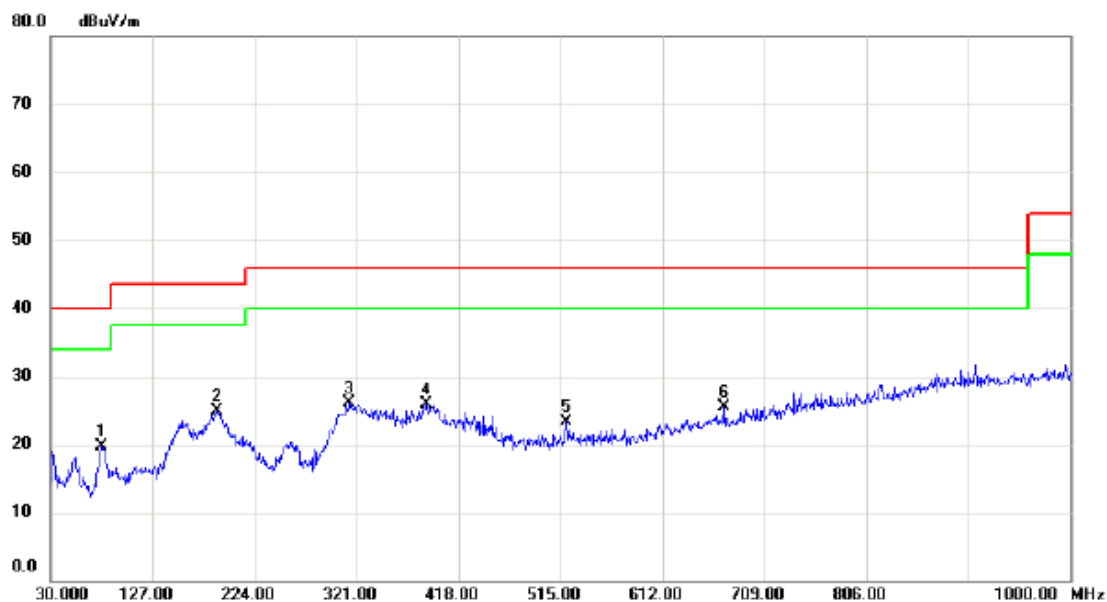

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		78.500	37.54	-17.89	19.65	40.00	-20.35	peak	
2	*	188.110	37.68	-12.70	24.98	43.50	-18.52	peak	
3		314.210	38.72	-12.59	26.13	46.00	-19.87	peak	
4		387.930	37.42	-11.51	25.91	46.00	-20.09	peak	
5		520.820	31.52	-8.31	23.21	46.00	-22.79	peak	
6		671.170	30.39	-4.83	25.56	46.00	-20.44	peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: HUAWEI


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	56.190	45.25	-13.96	31.29	40.00	-8.71	peak	
2		190.050	37.54	-12.86	24.68	43.50	-18.82	peak	
3		415.090	28.74	-10.93	17.81	46.00	-28.19	peak	
4		500.450	28.92	-8.71	20.21	46.00	-25.79	peak	
5		624.610	29.02	-5.96	23.06	46.00	-22.94	peak	
6		749.740	29.62	-2.46	27.16	46.00	-18.84	peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: HUAWEI


Horizontal

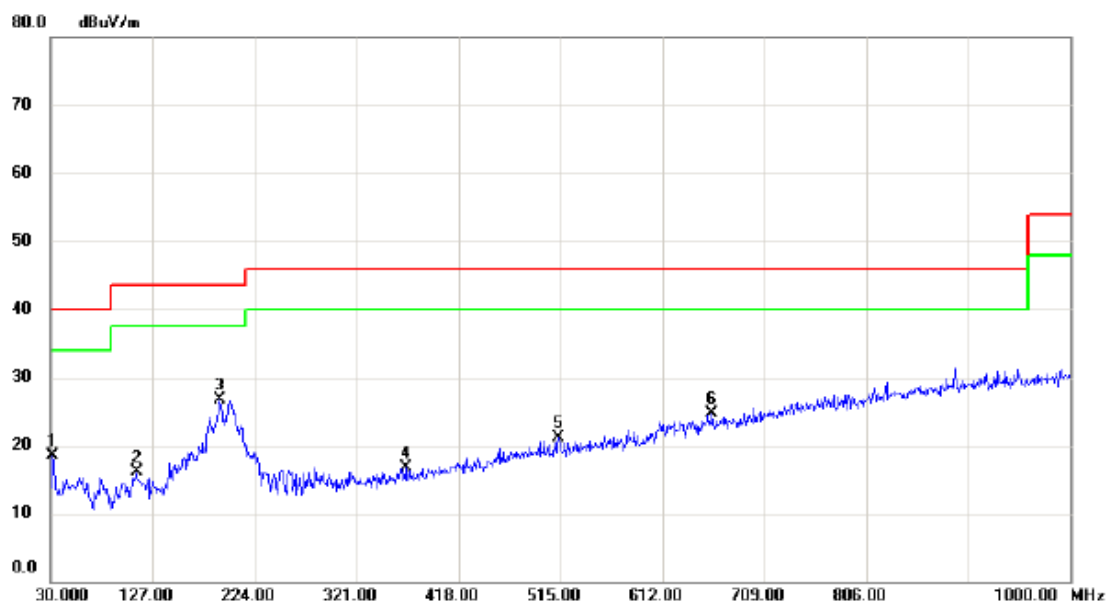

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.940	33.47	-15.04	18.43	40.00	-21.57	peak	
2		111.480	32.24	-16.08	16.16	43.50	-27.34	peak	
3	*	191.020	39.58	-12.94	26.64	43.50	-16.86	peak	
4		368.530	28.51	-11.73	16.78	46.00	-29.22	peak	
5		513.060	29.49	-8.45	21.04	46.00	-24.96	peak	
6		659.530	29.79	-5.18	24.61	46.00	-21.39	peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: HUAWEI


Vertical

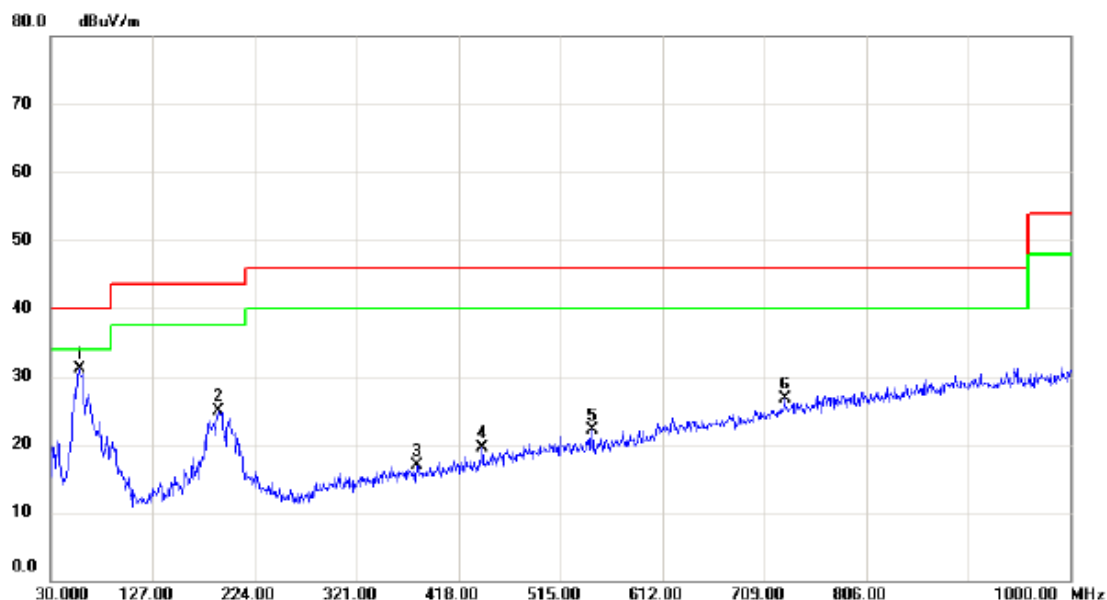

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.160	45.21	-14.04	31.17	40.00	-8.83	peak	
2		190.050	37.85	-12.86	24.99	43.50	-18.51	peak	
3		378.230	28.60	-11.62	16.98	46.00	-29.02	peak	
4		440.310	29.65	-10.21	19.44	46.00	-26.56	peak	
5		545.070	29.97	-7.81	22.16	46.00	-23.84	peak	
6		728.400	29.80	-3.09	26.71	46.00	-19.29	peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: HUAWEI

Horizontal

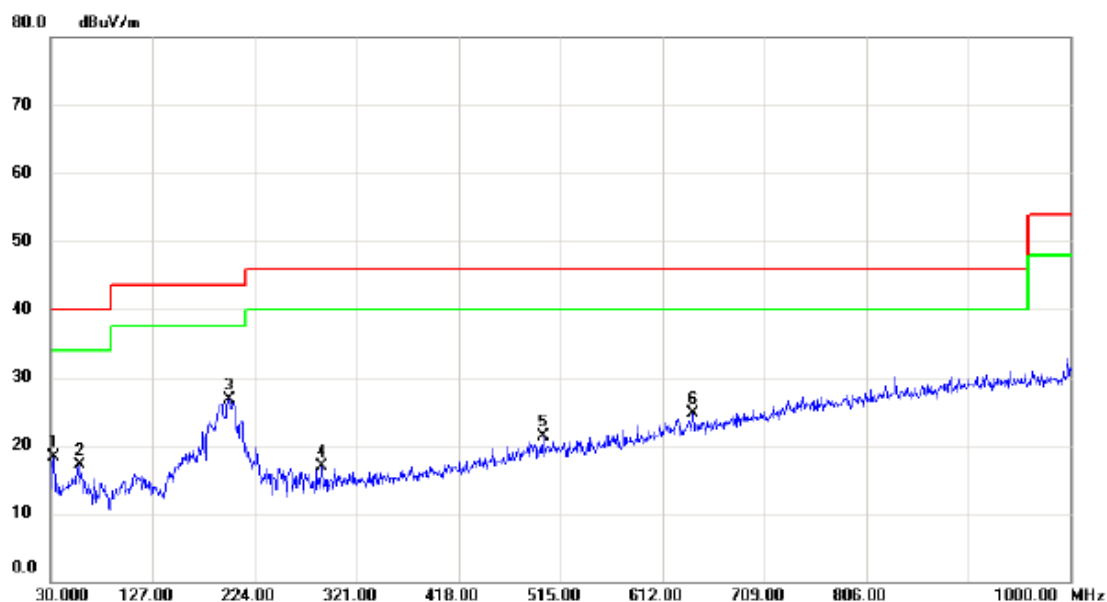

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		32.910	33.10	-14.89	18.21	40.00	-21.79	peak	
2		58.130	31.26	-14.13	17.13	40.00	-22.87	peak	
3	*	199.750	40.46	-13.72	26.74	43.50	-16.76	peak	
4		288.020	31.12	-14.31	16.81	46.00	-29.19	peak	
5		498.510	29.97	-8.76	21.21	46.00	-24.79	peak	
6		641.100	30.26	-5.64	24.62	46.00	-21.38	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: HUAWEI


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.160	45.45	-14.04	31.41	40.00	-8.59	peak	
2		191.990	38.15	-13.02	25.13	43.50	-18.37	peak	
3		287.050	30.63	-14.37	16.26	46.00	-29.74	peak	
4		491.720	30.01	-8.93	21.08	46.00	-24.92	peak	
5		607.150	30.30	-6.29	24.01	46.00	-21.99	peak	
6		664.380	29.72	-5.04	24.68	46.00	-21.32	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: HUAWEI


Horizontal

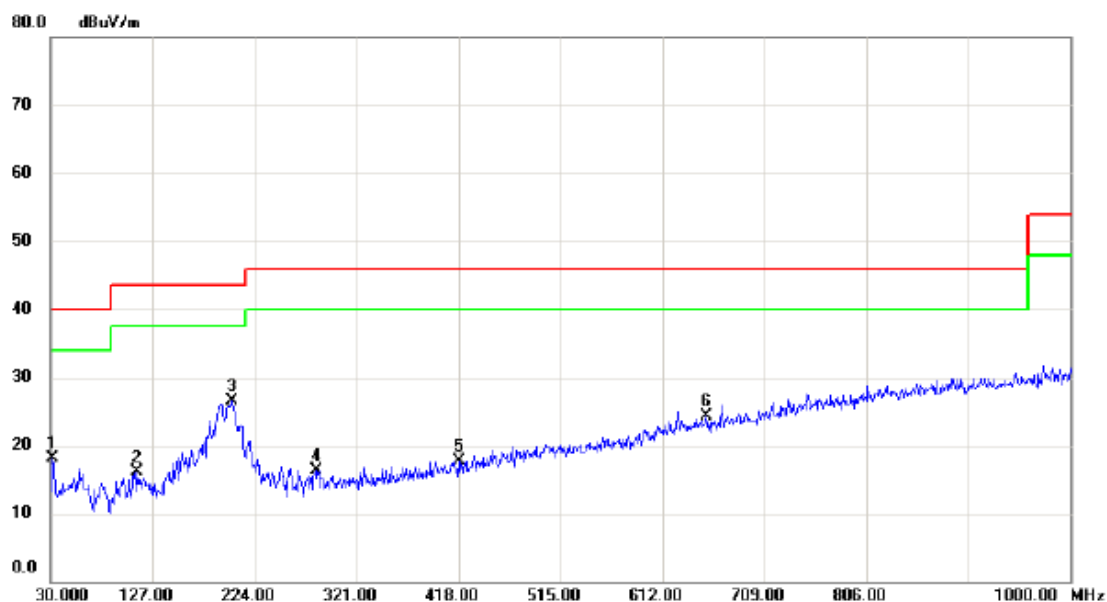

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.940	33.12	-15.04	18.08	40.00	-21.92	peak	
2		111.480	32.17	-16.08	16.09	43.50	-27.41	peak	
3	*	202.660	40.31	-13.81	26.50	43.50	-17.00	peak	
4		282.200	30.92	-14.64	16.28	46.00	-29.72	peak	
5		418.000	28.52	-10.85	17.67	46.00	-28.33	peak	
6		653.710	29.67	-5.35	24.32	46.00	-21.68	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: HUAWEI


Vertical

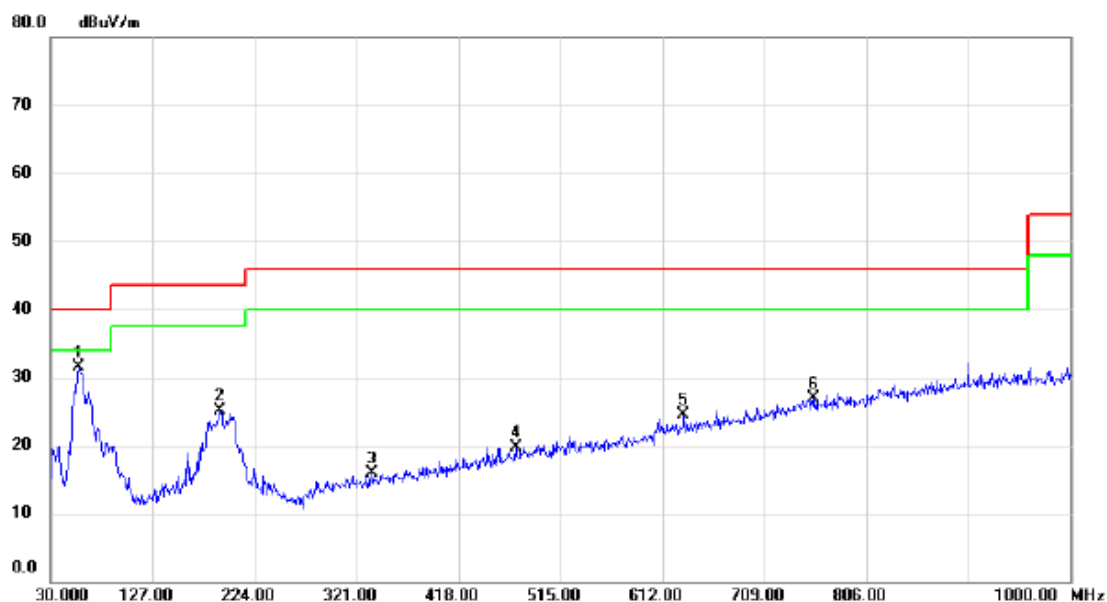

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	56.190	45.42	-13.96	31.46	40.00	-8.54	peak	
2		191.020	38.10	-12.94	25.16	43.50	-18.34	peak	
3		335.550	28.08	-12.21	15.87	46.00	-30.13	peak	
4		472.320	29.18	-9.40	19.78	46.00	-26.22	peak	
5		632.370	30.39	-5.81	24.58	46.00	-21.42	peak	
6		756.530	29.28	-2.31	26.97	46.00	-19.03	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: HUAWEI


Horizontal

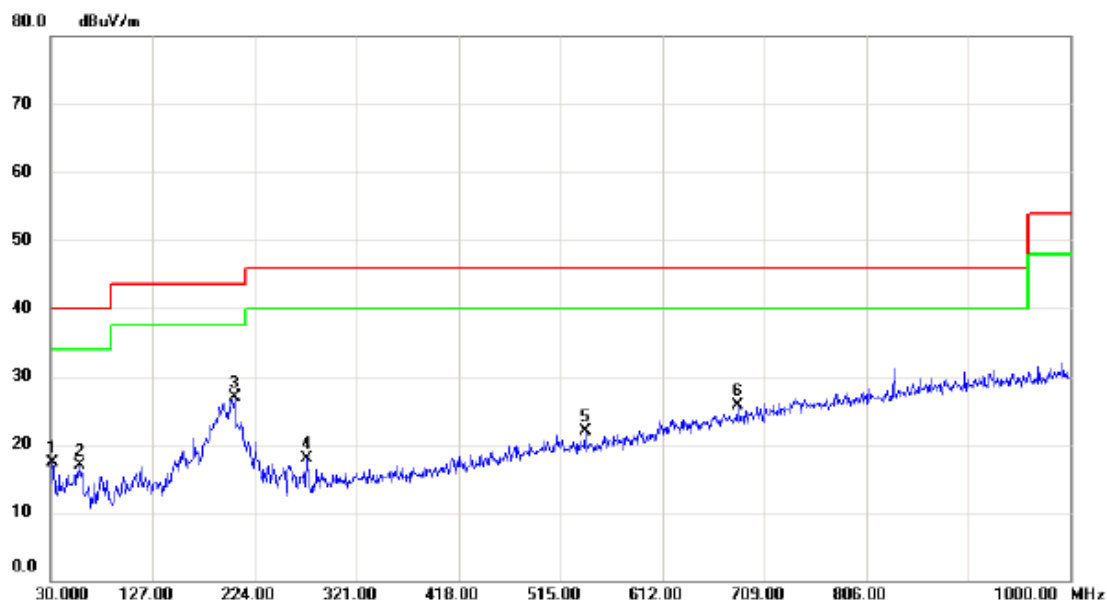

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		31.940	32.37	-15.04	17.33	40.00	-22.67	peak	
2		58.130	31.02	-14.13	16.89	40.00	-23.11	peak	
3	*	204.600	40.81	-13.86	26.95	43.50	-16.55	peak	
4		273.470	33.28	-15.47	17.81	46.00	-28.19	peak	
5		538.280	29.83	-7.95	21.88	46.00	-24.12	peak	
6		683.780	30.07	-4.43	25.64	46.00	-20.36	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: HUAWEI


Vertical

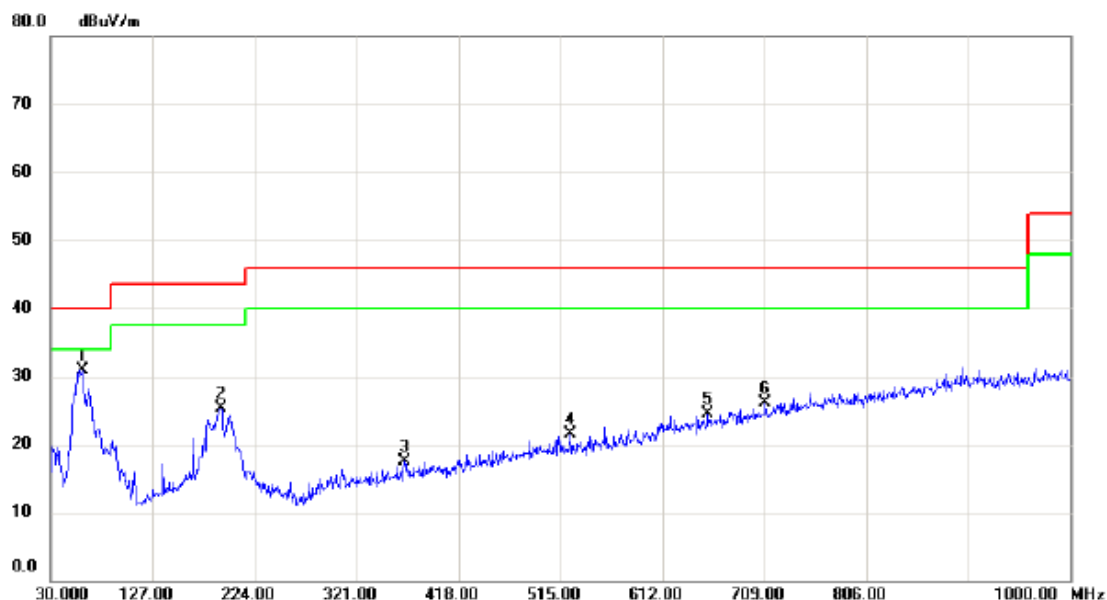

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	60.070	45.31	-14.32	30.99	40.00	-9.01	peak	
2		191.990	38.25	-13.02	25.23	43.50	-18.27	peak	
3		366.590	29.32	-11.76	17.56	46.00	-28.44	peak	
4		524.700	29.64	-8.23	21.41	46.00	-24.59	peak	
5		655.650	29.77	-5.30	24.47	46.00	-21.53	peak	
6		709.970	29.70	-3.64	26.06	46.00	-19.94	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: HUAWEI


Horizontal

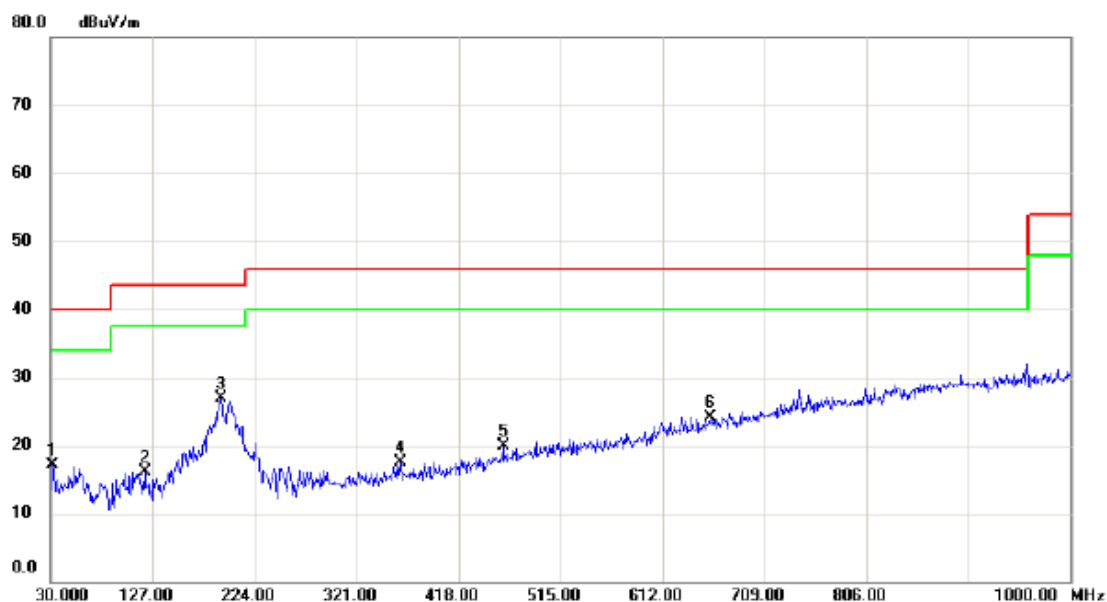

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.940	32.24	-15.04	17.20	40.00	-22.80	peak	
2		119.240	31.49	-15.45	16.04	43.50	-27.46	peak	
3	*	191.990	39.96	-13.02	26.94	43.50	-16.56	peak	
4		362.710	29.37	-11.80	17.57	46.00	-28.43	peak	
5		460.680	29.67	-9.68	19.99	46.00	-26.01	peak	
6		657.590	29.30	-5.24	24.06	46.00	-21.94	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: HUAWEI


Vertical

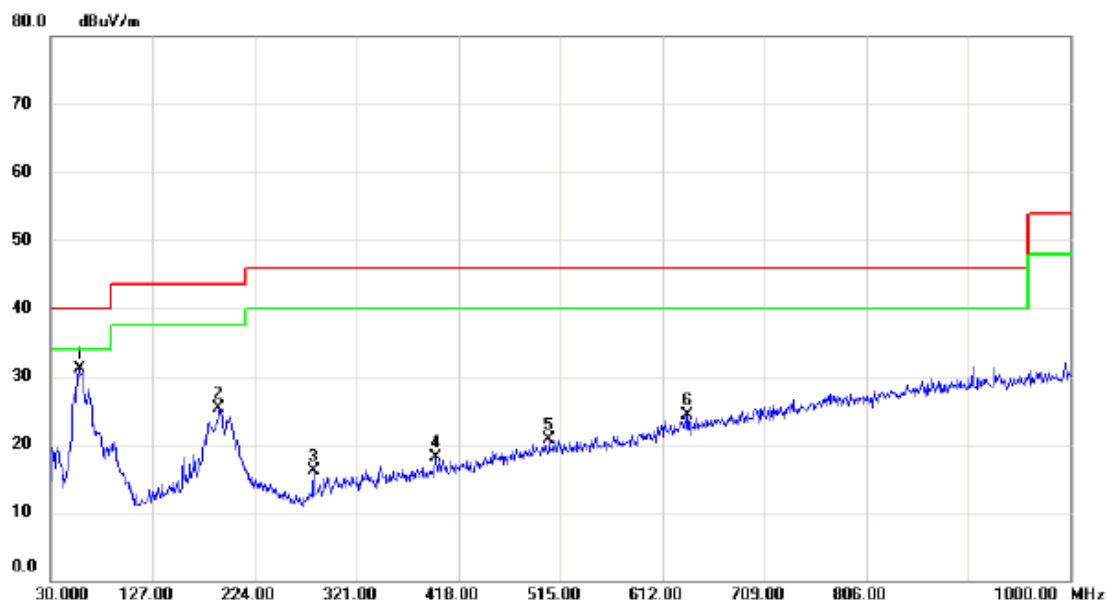

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.160	45.11	-14.04	31.07	40.00	-8.93	peak	
2		190.050	38.26	-12.86	25.40	43.50	-18.10	peak	
3		280.260	30.78	-14.76	16.02	46.00	-29.98	peak	
4		396.660	29.48	-11.40	18.08	46.00	-27.92	peak	
5		504.330	29.25	-8.63	20.62	46.00	-25.38	peak	
6		636.250	30.01	-5.73	24.28	46.00	-21.72	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: HUAWEI

Horizontal

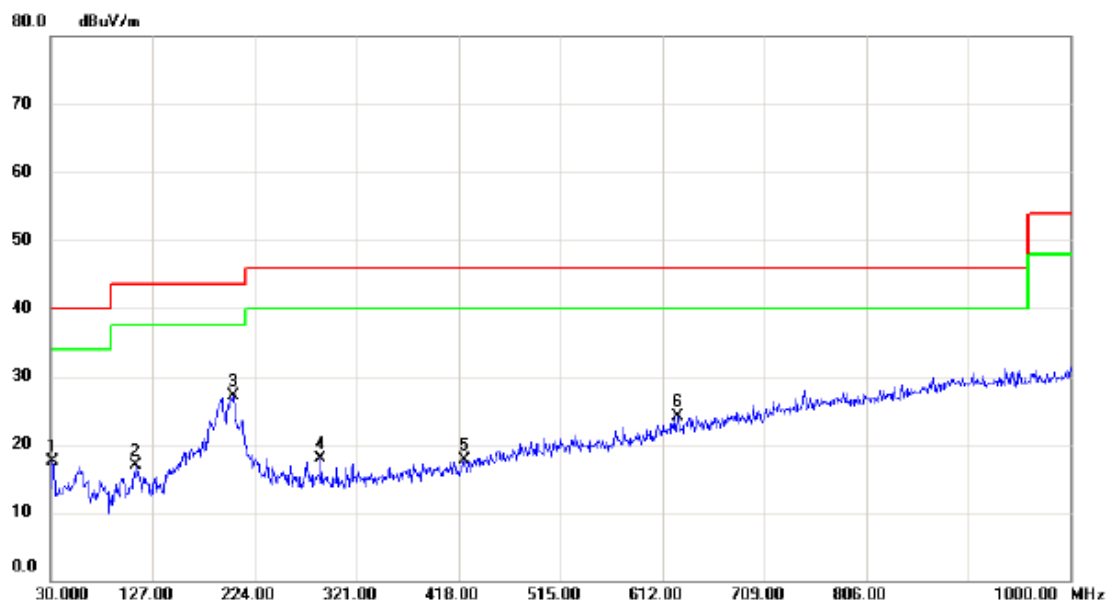

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.940	32.57	-15.04	17.53	40.00	-22.47	peak	
2		110.510	33.03	-16.15	16.88	43.50	-26.62	peak	
3	*	203.630	40.87	-13.83	27.04	43.50	-16.46	peak	
4		287.050	32.21	-14.37	17.84	46.00	-28.16	peak	
5		423.820	28.30	-10.69	17.61	46.00	-28.39	peak	
6		626.550	30.11	-5.92	24.19	46.00	-21.81	peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: HUAWEI


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.160	45.19	-14.04	31.15	40.00	-8.85	peak	
2		190.050	38.91	-12.86	26.05	43.50	-17.45	peak	
3		308.390	28.95	-12.68	16.27	46.00	-29.73	peak	
4		408.300	29.71	-11.12	18.59	46.00	-27.41	peak	
5		553.800	29.67	-7.61	22.06	46.00	-23.94	peak	
6		620.730	29.63	-6.02	23.61	46.00	-22.39	peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: HUAWEI


Horizontal

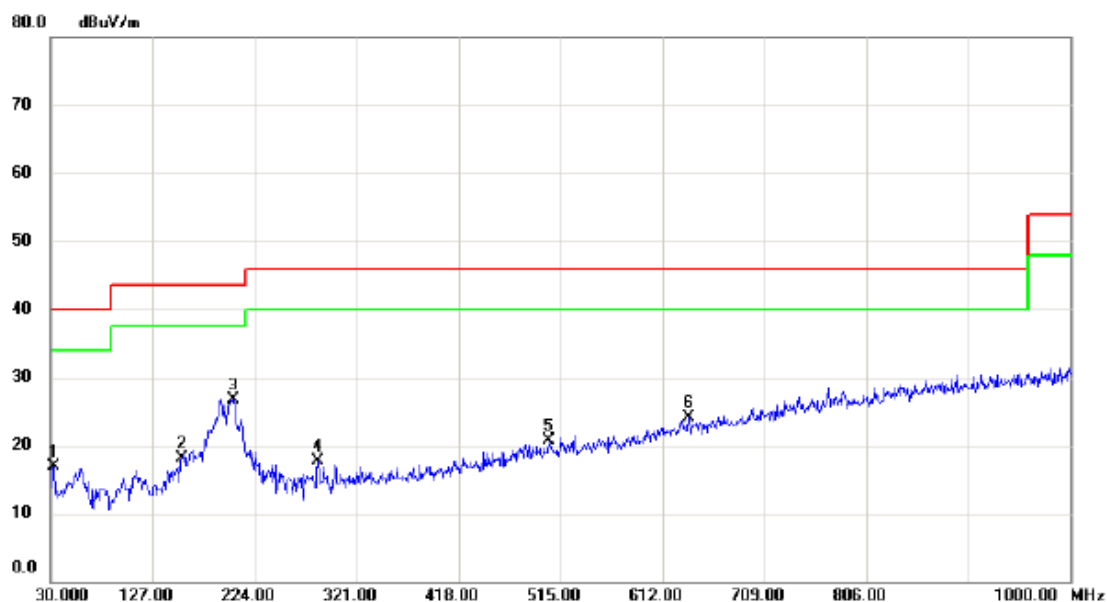

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		32.910	31.86	-14.89	16.97	40.00	-23.03	peak	
2		154.160	31.34	-13.28	18.06	43.50	-25.44	peak	
3	*	203.630	40.57	-13.83	26.74	43.50	-16.76	peak	
4		284.140	32.16	-14.53	17.63	46.00	-28.37	peak	
5		504.330	29.37	-8.63	20.74	46.00	-25.26	peak	
6		637.220	29.77	-5.72	24.05	46.00	-21.95	peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: HUAWEI


Vertical

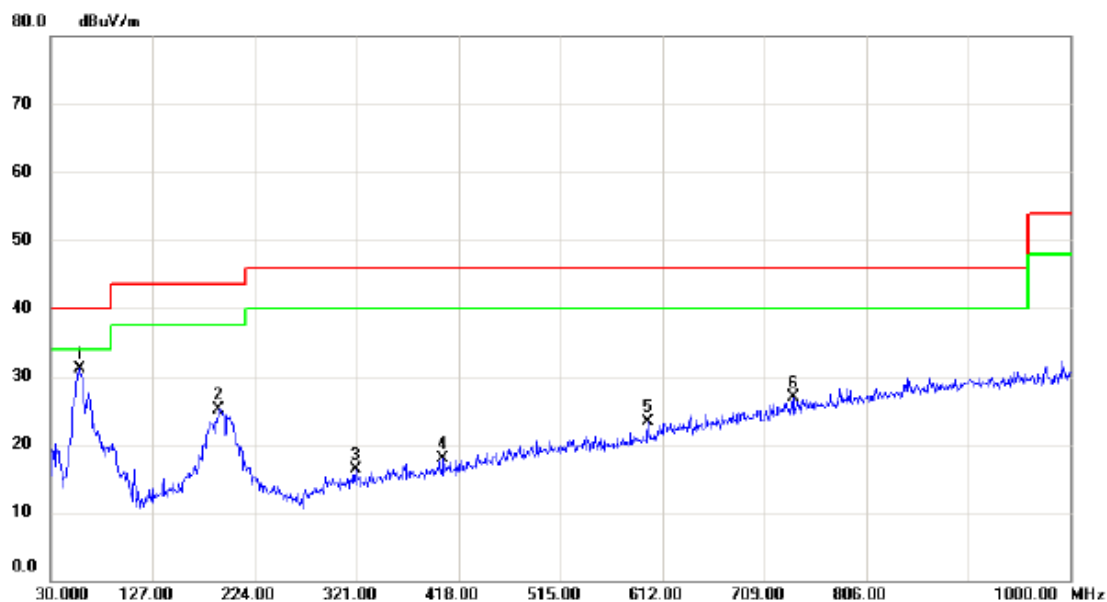

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.160	45.11	-14.04	31.07	40.00	-8.93	peak	
2		190.050	37.98	-12.86	25.12	43.50	-18.38	peak	
3		320.030	28.80	-12.48	16.32	46.00	-29.68	peak	
4		403.450	29.13	-11.26	17.87	46.00	-28.13	peak	
5		598.420	29.71	-6.47	23.24	46.00	-22.76	peak	
6		736.160	29.83	-2.85	26.98	46.00	-19.02	peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: HUAWEI

Horizontal

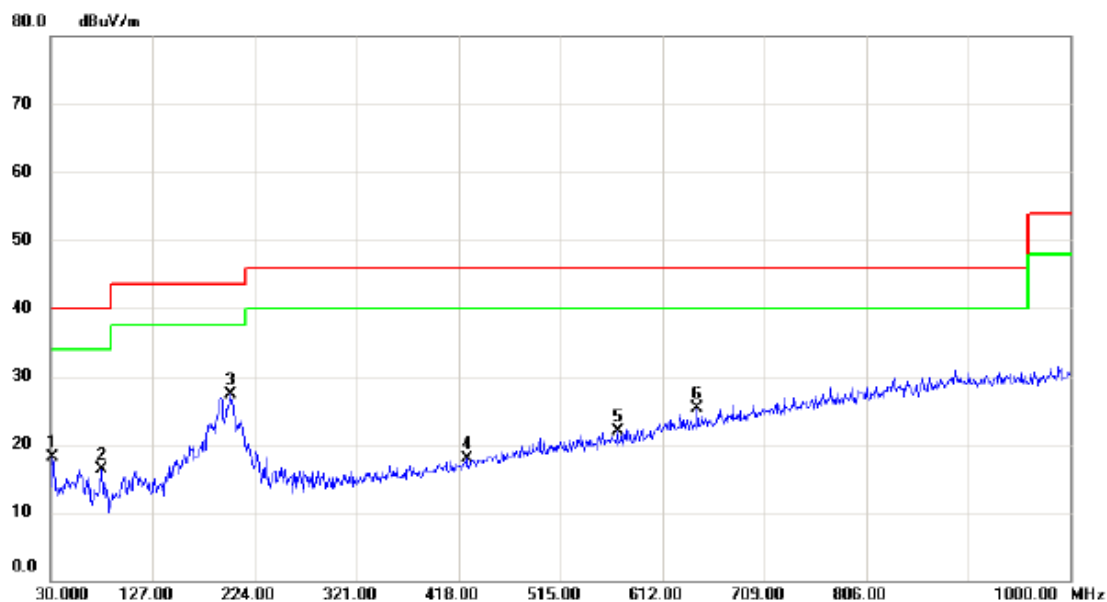

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.940	33.17	-15.04	18.13	40.00	-21.87	peak	
2		78.500	34.17	-17.89	16.28	40.00	-23.72	peak	
3	*	200.720	41.05	-13.77	27.28	43.50	-16.22	peak	
4		425.760	28.58	-10.63	17.95	46.00	-28.05	peak	
5		569.320	29.05	-7.22	21.83	46.00	-24.17	peak	
6		644.980	30.97	-5.57	25.40	46.00	-20.60	peak	

ANT 2

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: PHITEK


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		35.820	36.33	-14.51	21.82	40.00	-18.18	peak	
2	*	56.190	36.95	-13.96	22.99	40.00	-17.01	peak	
3		77.530	38.40	-17.66	20.74	40.00	-19.26	peak	
4		186.170	36.52	-12.54	23.98	43.50	-19.52	peak	
5		315.180	31.75	-12.56	19.19	46.00	-26.81	peak	
6		587.750	34.28	-6.73	27.55	46.00	-18.45	peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: PHITEK


Horizontal

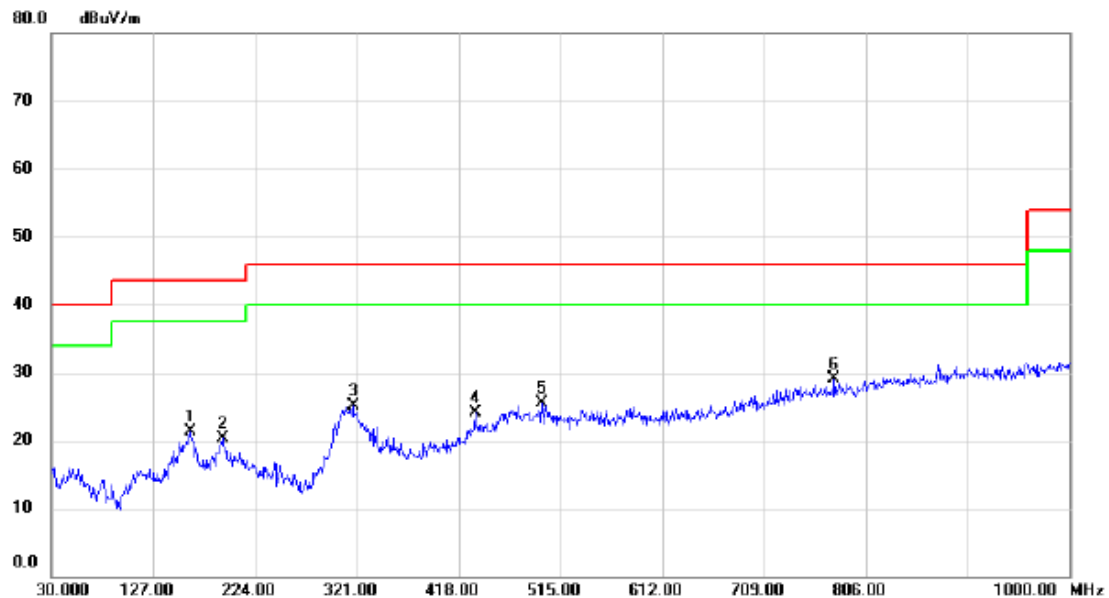

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		161.920	34.05	-12.81	21.24	43.50	-22.26	peak	
2		192.960	33.47	-13.12	20.35	43.50	-23.15	peak	
3		317.120	37.55	-12.53	25.02	46.00	-20.98	peak	
4		433.520	34.59	-10.41	24.18	46.00	-21.82	peak	
5		497.540	34.25	-8.77	25.48	46.00	-20.52	peak	
6 *		775.930	31.02	-1.89	29.13	46.00	-16.87	peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: PHITEK


Vertical

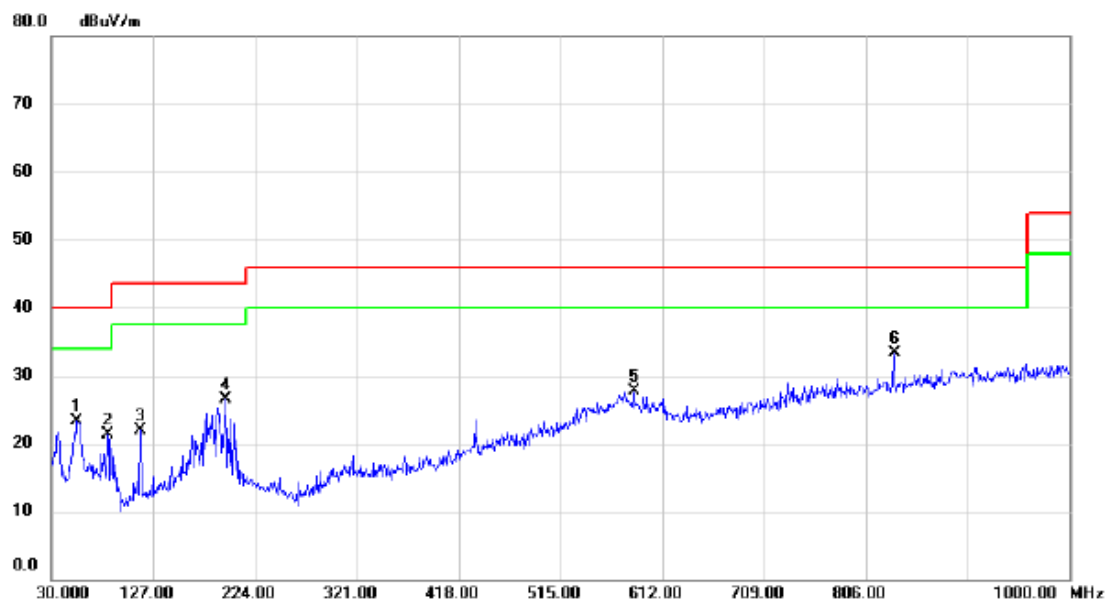

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		54.250	37.20	-13.95	23.25	40.00	-16.75	peak	
2		83.350	39.59	-18.34	21.25	40.00	-18.75	peak	
3		114.390	37.70	-15.84	21.86	43.50	-21.64	peak	
4		195.870	39.92	-13.38	26.54	43.50	-16.96	peak	
5		584.840	34.47	-6.81	27.66	46.00	-18.34	peak	
6	*	833.160	33.78	-0.46	33.32	46.00	-12.68	peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: PHITEK


Horizontal

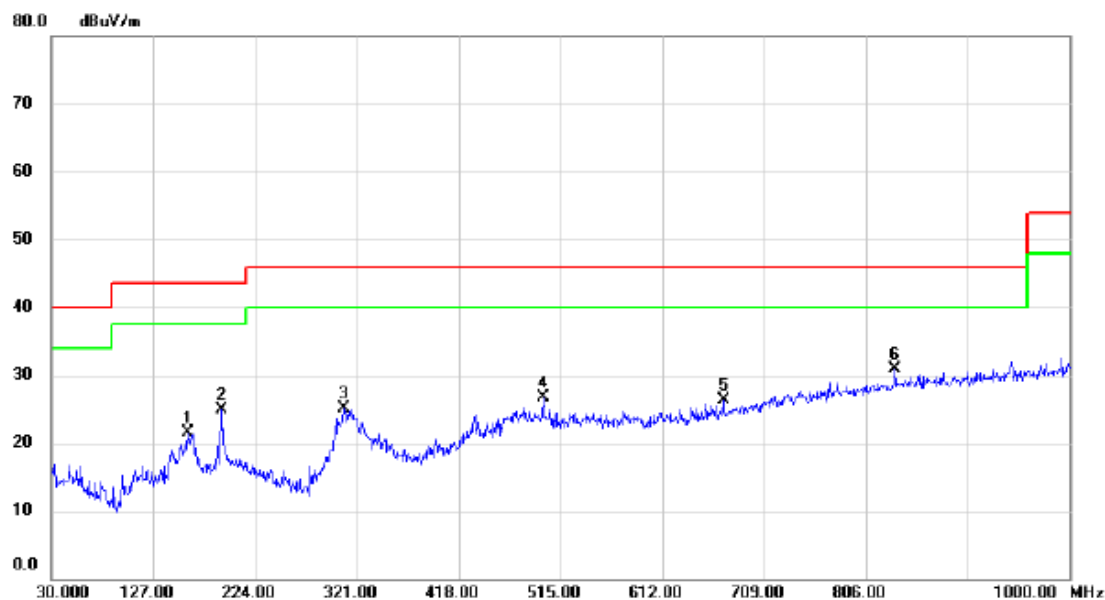

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		159.980	34.46	-12.93	21.53	43.50	-21.97	peak	
2		191.990	37.89	-13.02	24.87	43.50	-18.63	peak	
3		308.390	37.81	-12.68	25.13	46.00	-20.87	peak	
4		498.510	35.52	-8.76	26.76	46.00	-19.24	peak	
5		670.200	31.12	-4.85	26.27	46.00	-19.73	peak	
6	*	834.130	31.39	-0.44	30.95	46.00	-15.05	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: PHITEK


Vertical

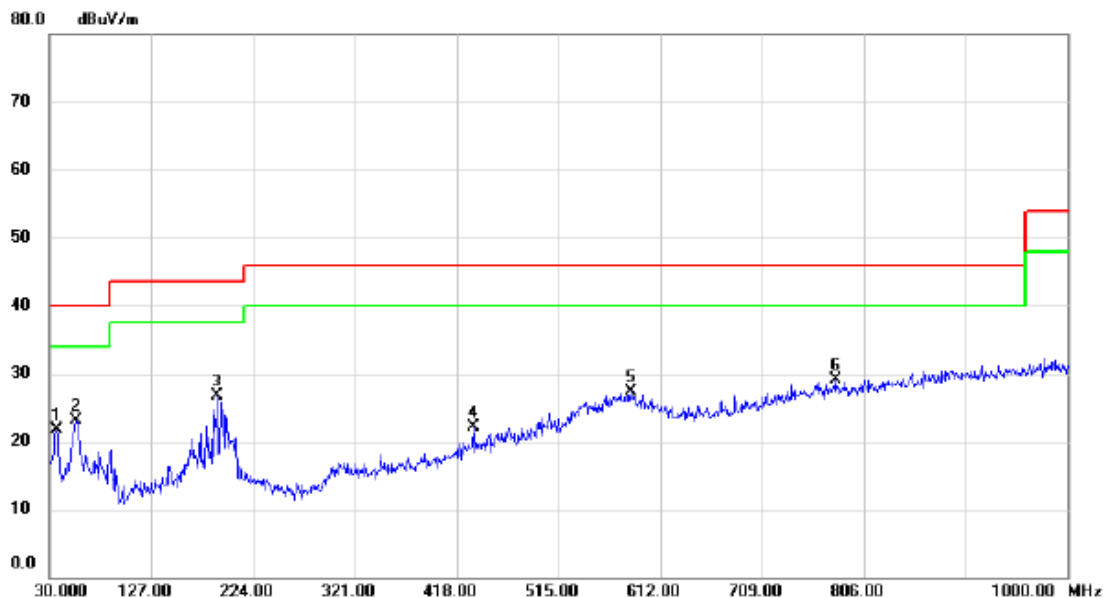

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		36.790	36.15	-14.41	21.74	40.00	-18.26	peak	
2		55.220	37.09	-13.94	23.15	40.00	-16.85	peak	
3	*	190.050	39.61	-12.86	26.75	43.50	-16.75	peak	
4		433.520	32.44	-10.41	22.03	46.00	-23.97	peak	
5		583.870	34.06	-6.84	27.22	46.00	-18.78	peak	
6		778.840	31.01	-1.82	29.19	46.00	-16.81	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: PHITEK

Horizontal

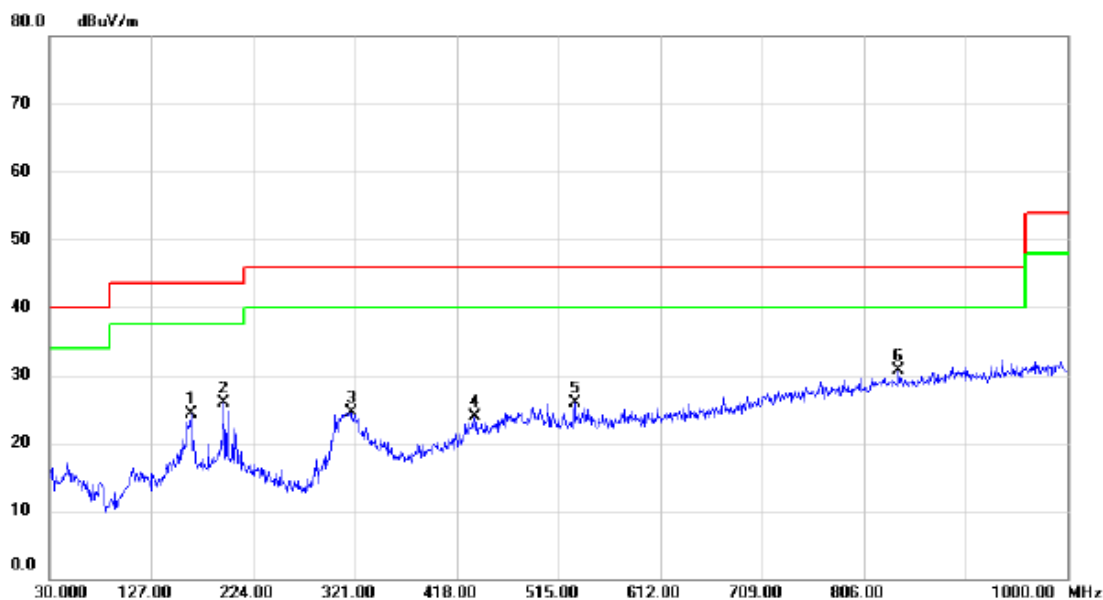

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		164.830	36.95	-12.65	24.30	43.50	-19.20	peak	
2		195.870	39.33	-13.38	25.95	43.50	-17.55	peak	
3		317.120	36.97	-12.53	24.44	46.00	-21.56	peak	
4		435.460	34.23	-10.36	23.87	46.00	-22.13	peak	
5		530.520	33.93	-8.11	25.82	46.00	-20.18	peak	
6 *		838.980	31.00	-0.30	30.70	46.00	-15.30	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: PHITEK


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		35.820	37.11	-14.51	22.60	40.00	-17.40	peak	
2	*	57.160	37.61	-14.04	23.57	40.00	-16.43	peak	
3		166.770	35.94	-12.53	23.41	43.50	-20.09	peak	
4		189.080	37.34	-12.77	24.57	43.50	-18.93	peak	
5		433.520	32.73	-10.41	22.32	46.00	-23.68	peak	
6		572.230	34.63	-7.15	27.48	46.00	-18.52	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: PHITEK


Horizontal

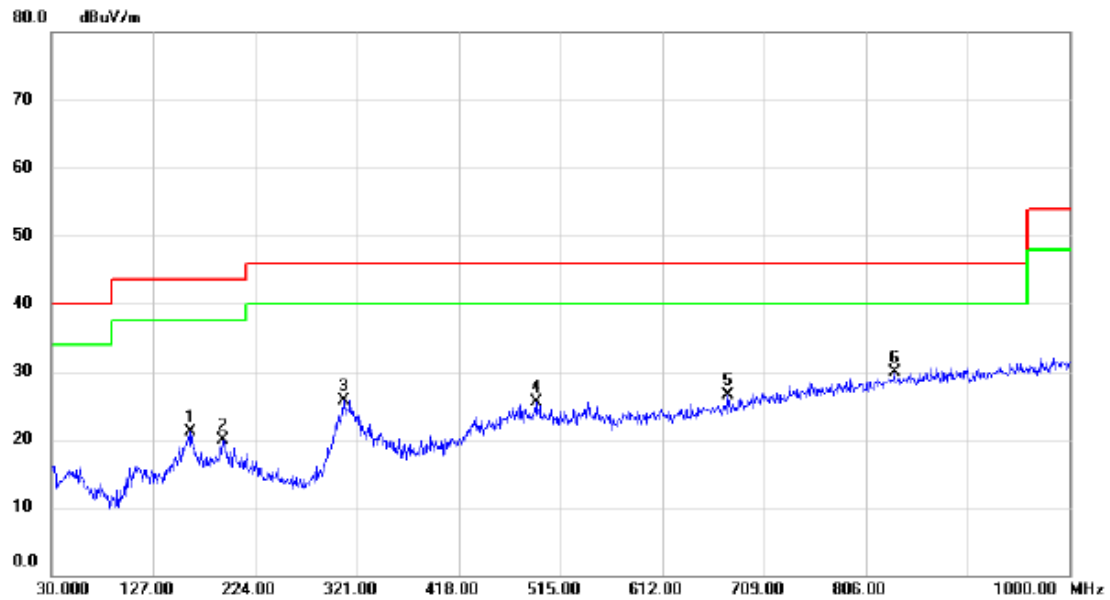

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		162.890	33.93	-12.76	21.17	43.50	-22.33	peak	
2		192.960	33.01	-13.12	19.89	43.50	-23.61	peak	
3		308.390	38.43	-12.68	25.75	46.00	-20.25	peak	
4		491.720	34.42	-8.93	25.49	46.00	-20.51	peak	
5		674.080	31.15	-4.73	26.42	46.00	-19.58	peak	
6	*	833.160	30.36	-0.46	29.90	46.00	-16.10	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: PHITEK


Vertical

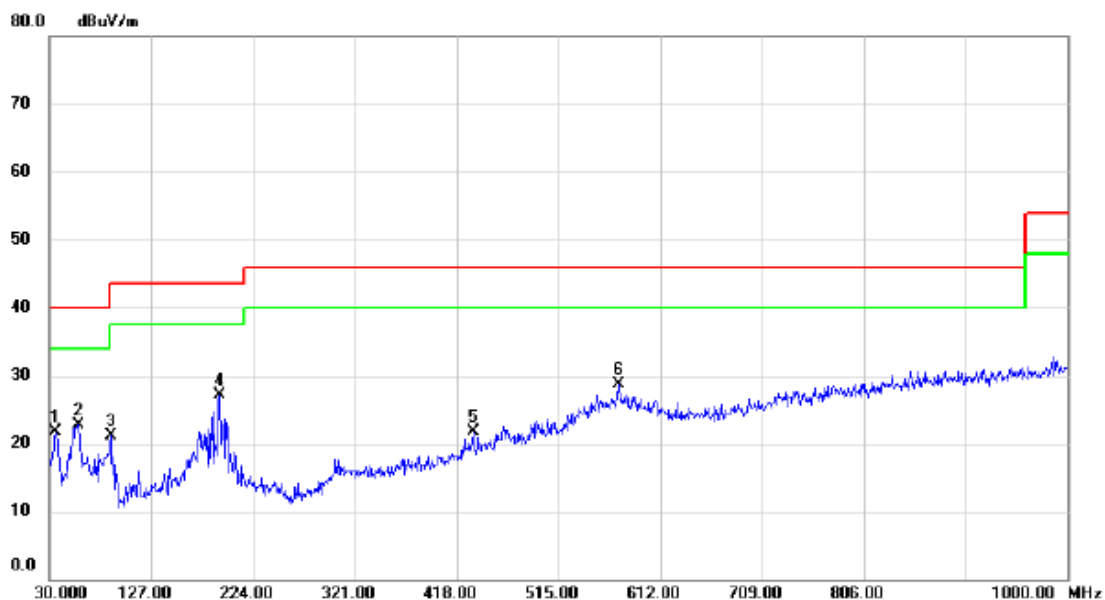

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		35.820	36.30	-14.51	21.79	40.00	-18.21	peak	
2		58.130	36.88	-14.13	22.75	40.00	-17.25	peak	
3		88.200	39.70	-18.56	21.14	43.50	-22.36	peak	
4	*	191.990	40.20	-13.02	27.18	43.50	-16.32	peak	
5		433.520	32.10	-10.41	21.69	46.00	-24.31	peak	
6		572.230	35.76	-7.15	28.61	46.00	-17.39	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: PHITEK


Horizontal

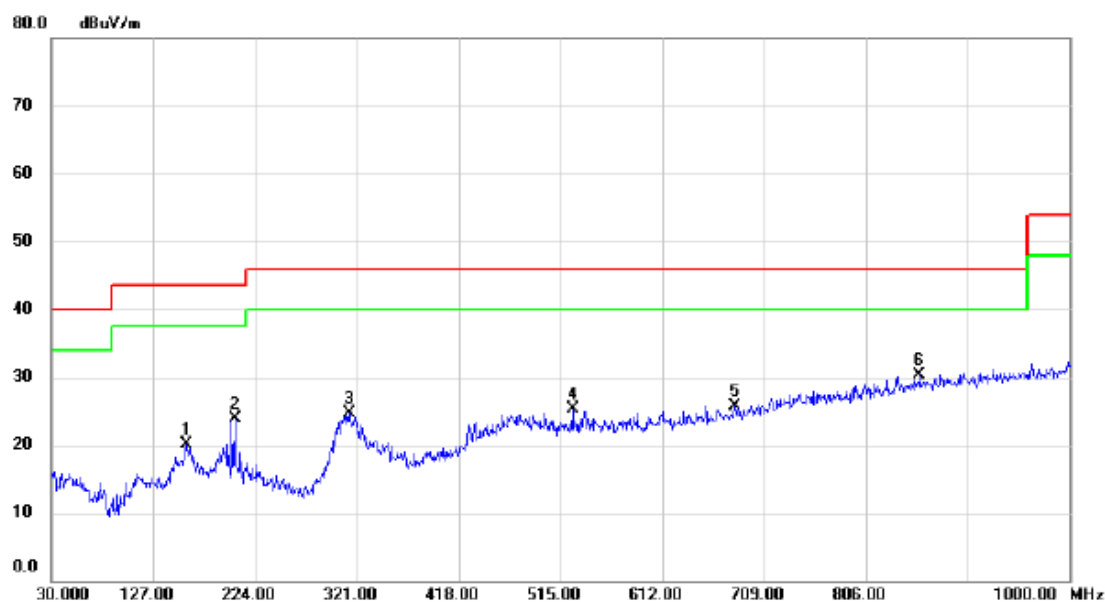

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		158.040	33.13	-13.04	20.09	43.50	-23.41	peak	
2		204.600	37.67	-13.86	23.81	43.50	-19.69	peak	
3		313.240	37.35	-12.60	24.75	46.00	-21.25	peak	
4		526.640	33.52	-8.18	25.34	46.00	-20.66	peak	
5		680.870	30.27	-4.53	25.74	46.00	-20.26	peak	
6	*	857.410	30.15	0.15	30.30	46.00	-15.70	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: PHITEK


Vertical

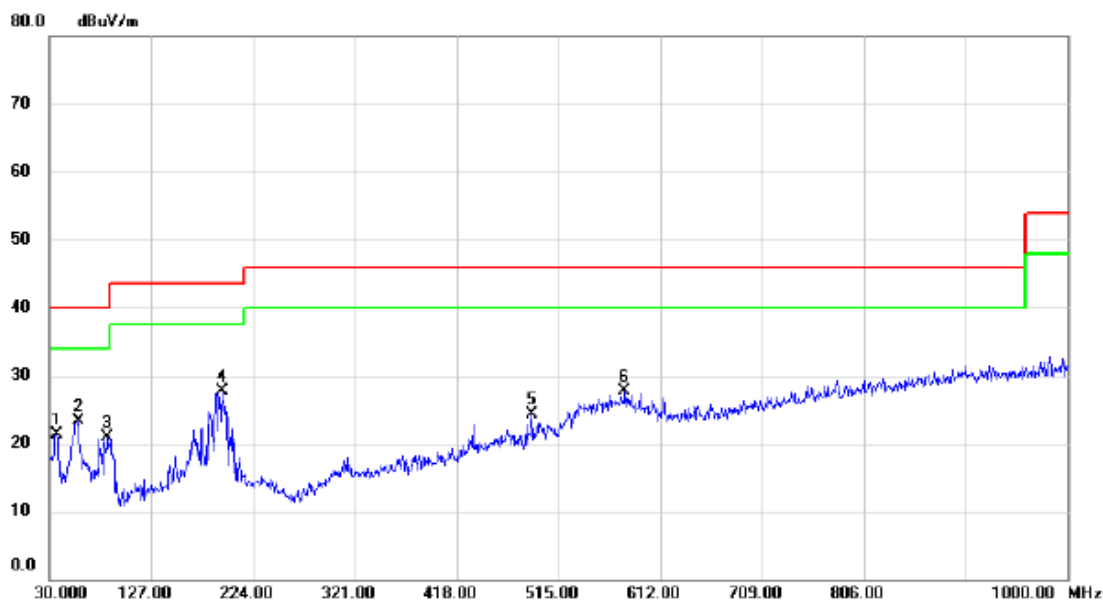

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		36.790	35.81	-14.41	21.40	40.00	-18.60	peak	
2		57.160	37.25	-14.04	23.21	40.00	-16.79	peak	
3		85.290	39.35	-18.42	20.93	40.00	-19.07	peak	
4	*	194.900	40.92	-13.29	27.63	43.50	-15.87	peak	
5		489.780	33.22	-8.98	24.24	46.00	-21.76	peak	
6		578.050	34.60	-6.99	27.61	46.00	-18.39	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: PHITEK


Horizontal

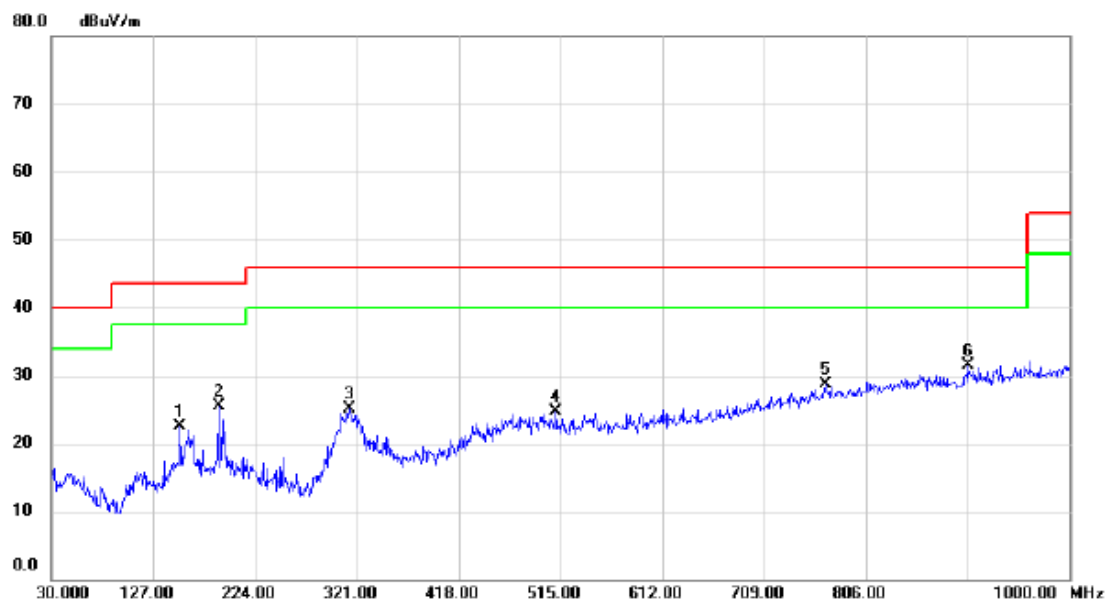

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		152.220	35.99	-13.40	22.59	43.50	-20.91	peak	
2		189.080	38.20	-12.77	25.43	43.50	-18.07	peak	
3		314.210	37.75	-12.59	25.16	46.00	-20.84	peak	
4		510.150	33.23	-8.52	24.71	46.00	-21.29	peak	
5		768.170	30.82	-2.05	28.77	46.00	-17.23	peak	
6	*	903.970	30.47	1.11	31.58	46.00	-14.42	peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: PHITEK


Vertical

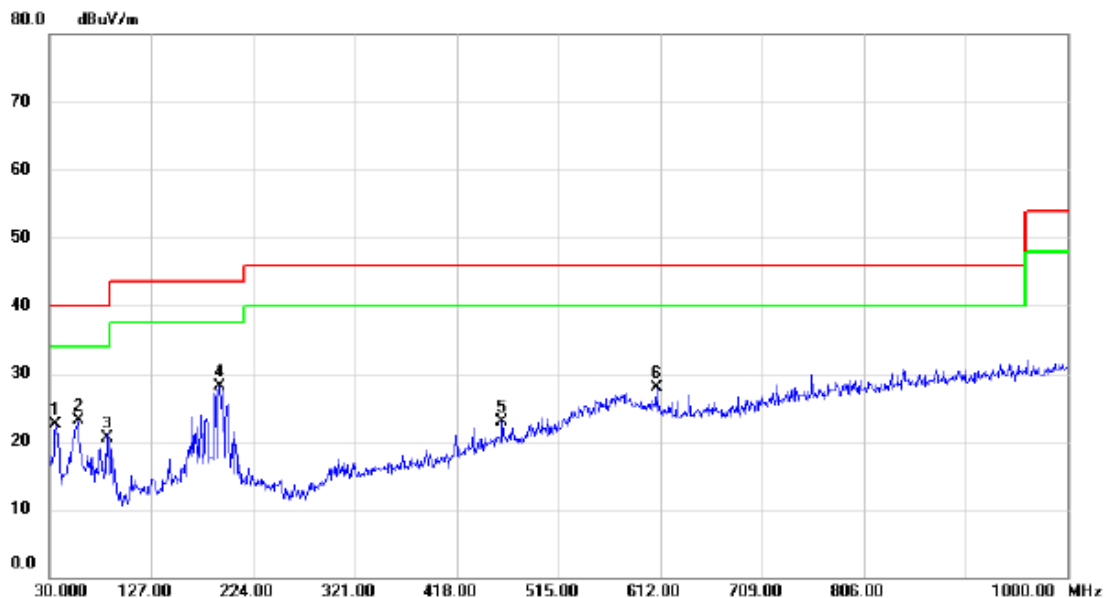

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		35.820	36.93	-14.51	22.42	40.00	-17.58	peak	
2		57.160	37.09	-14.04	23.05	40.00	-16.95	peak	
3		85.290	39.00	-18.42	20.58	40.00	-19.42	peak	
4	*	191.990	41.03	-13.02	28.01	43.50	-15.49	peak	
5		461.650	32.57	-9.66	22.91	46.00	-23.09	peak	
6		608.120	34.22	-6.27	27.95	46.00	-18.05	peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: PHITEK


Horizontal

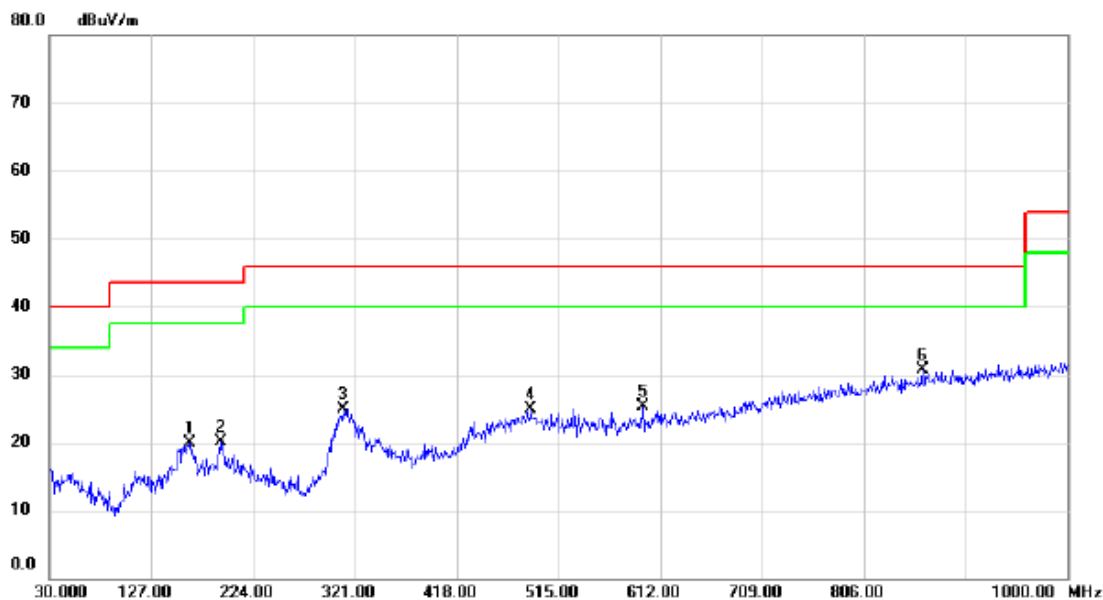

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		163.860	32.54	-12.70	19.84	43.50	-23.66	peak	
2		192.960	33.21	-13.12	20.09	43.50	-23.41	peak	
3		310.330	37.56	-12.65	24.91	46.00	-21.09	peak	
4		488.810	33.95	-8.99	24.96	46.00	-21.04	peak	
5		595.510	31.82	-6.54	25.28	46.00	-20.72	peak	
6 *		862.260	30.43	0.25	30.68	46.00	-15.32	peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: PHITEK


Vertical

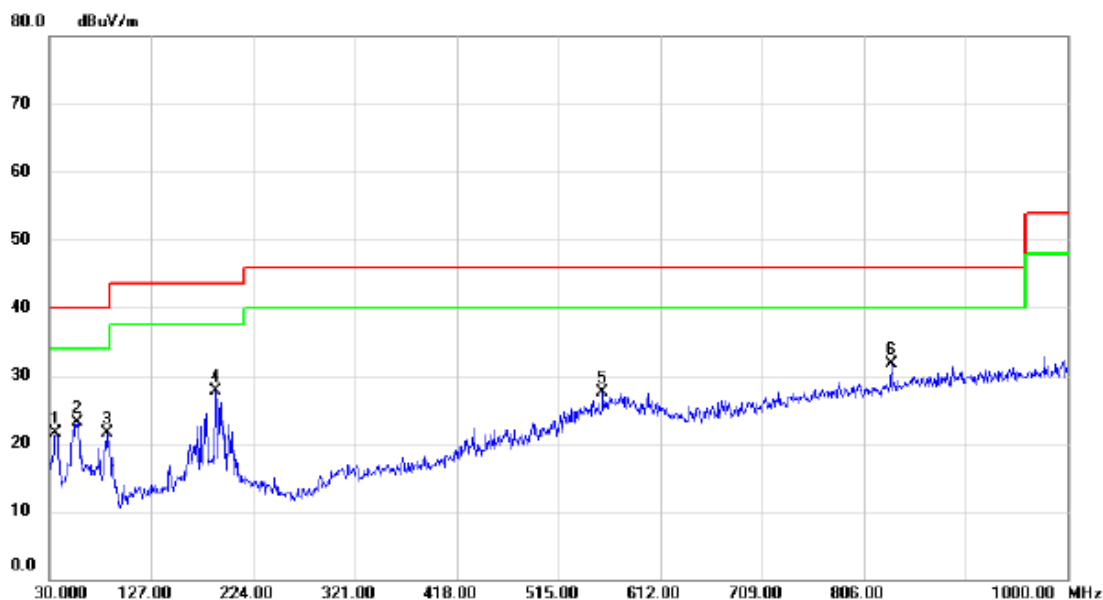

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		35.820	36.10	-14.51	21.59	40.00	-18.41	peak	
2		56.190	37.07	-13.96	23.11	40.00	-16.89	peak	
3		84.320	39.82	-18.37	21.45	40.00	-18.55	peak	
4		188.110	40.46	-12.70	27.76	43.50	-15.74	peak	
5		557.680	34.94	-7.52	27.42	46.00	-18.58	peak	
6	*	832.190	32.15	-0.49	31.66	46.00	-14.34	peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: PHITEK


Horizontal

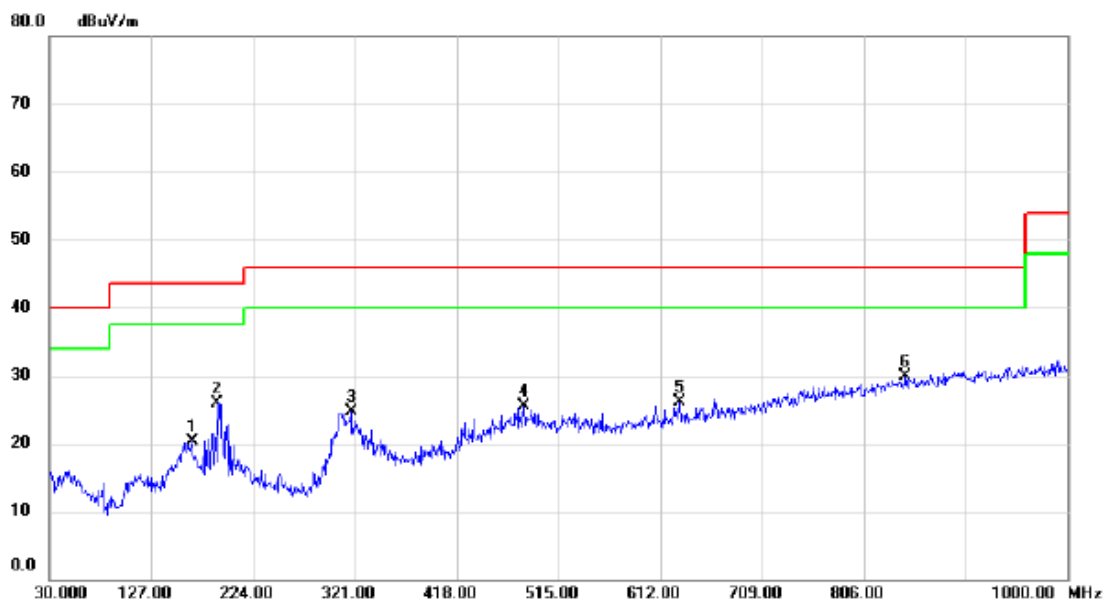

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		165.800	32.97	-12.58	20.39	43.50	-23.11	peak	
2		190.050	38.84	-12.86	25.98	43.50	-17.52	peak	
3		317.120	37.18	-12.53	24.65	46.00	-21.35	peak	
4		482.020	34.61	-9.16	25.45	46.00	-20.55	peak	
5		630.430	31.93	-5.84	26.09	46.00	-19.91	peak	
6	*	845.770	29.93	-0.11	29.82	46.00	-16.18	peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: HUNTKEY


Vertical

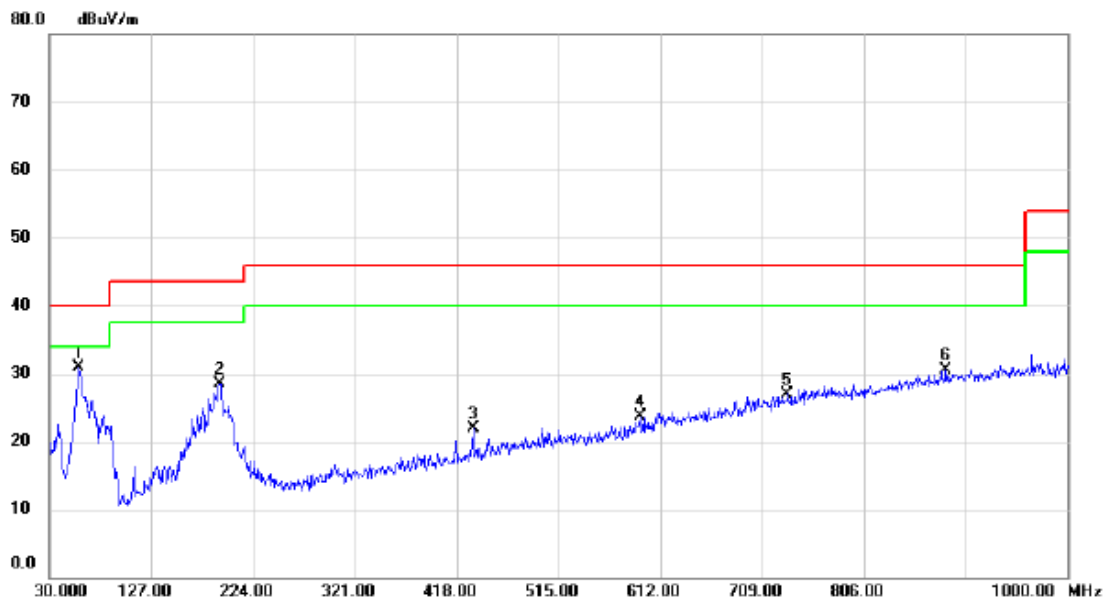

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	58.130	45.05	-14.13	30.92	40.00	-9.08	peak	
2		191.990	41.57	-13.02	28.55	43.50	-14.95	peak	
3		433.520	32.22	-10.41	21.81	46.00	-24.19	peak	
4		592.600	30.24	-6.61	23.63	46.00	-22.37	peak	
5		733.250	29.95	-2.95	27.00	46.00	-19.00	peak	
6		884.570	29.80	0.71	30.51	46.00	-15.49	peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: HUNTKEY


Horizontal

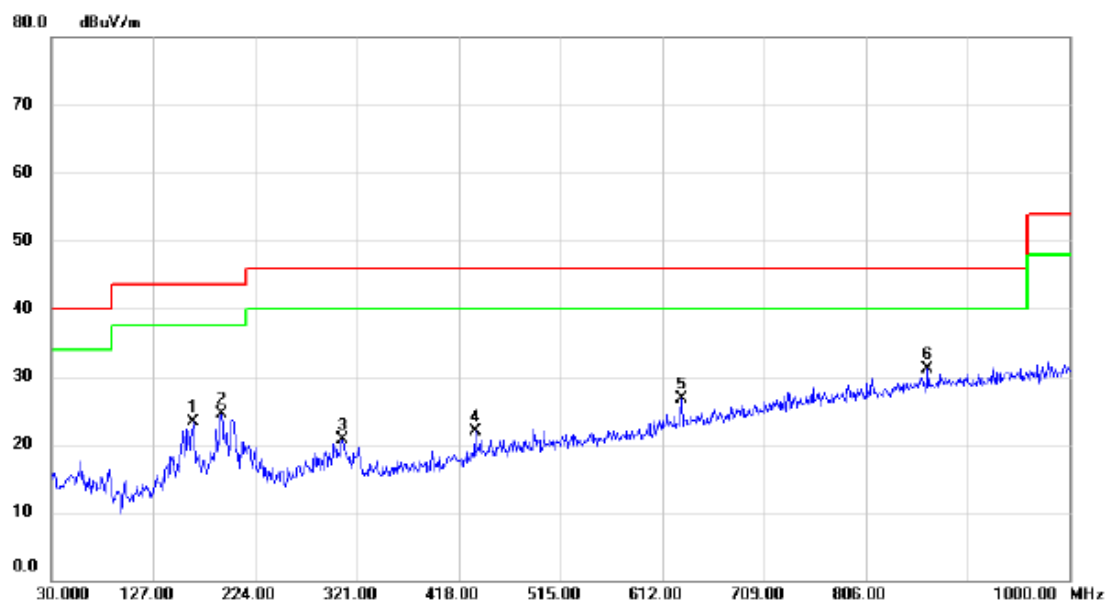

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		164.830	36.02	-12.65	23.37	43.50	-20.13	peak	
2		191.990	37.56	-13.02	24.54	43.50	-18.96	peak	
3		307.420	33.35	-12.70	20.65	46.00	-25.35	peak	
4		433.520	32.27	-10.41	21.86	46.00	-24.14	peak	
5		630.430	32.46	-5.84	26.62	46.00	-19.38	peak	
6	*	865.170	30.85	0.31	31.16	46.00	-14.84	peak	

Test Mode: UNII-1/TX A Mode 5240MHz _Adapter: HUNTKEY

Vertical

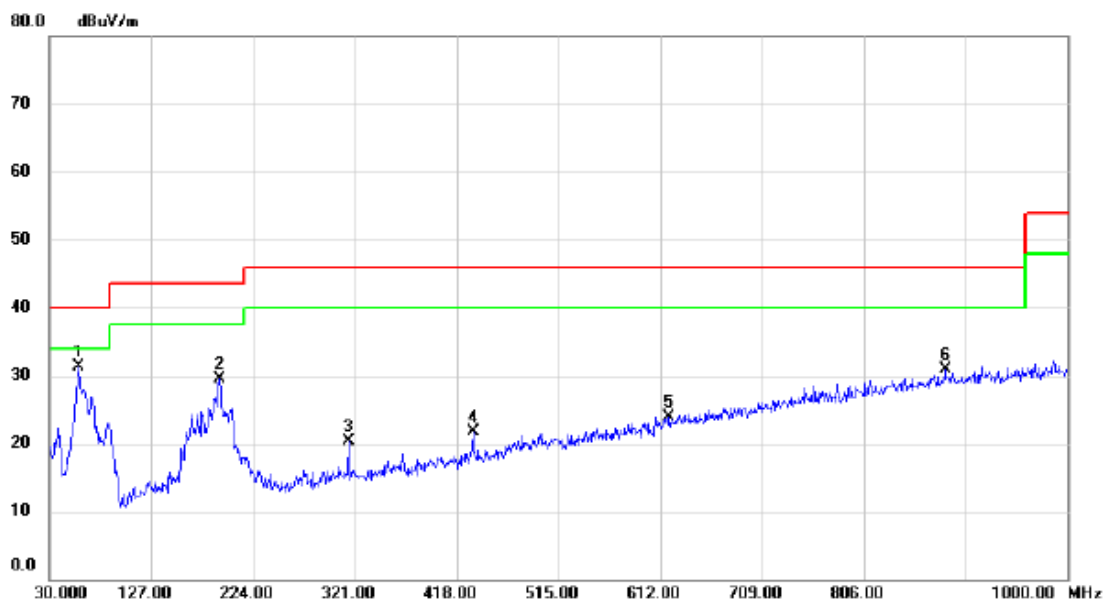

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	58.130	45.42	-14.13	31.29	40.00	-8.71	peak	
2		191.990	42.61	-13.02	29.59	43.50	-13.91	peak	
3		315.180	32.80	-12.56	20.24	46.00	-25.76	peak	
4		433.520	32.14	-10.41	21.73	46.00	-24.27	peak	
5		620.730	30.01	-6.02	23.99	46.00	-22.01	peak	
6		883.600	30.13	0.69	30.82	46.00	-15.18	peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: HUNTKEY


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		164.830	35.37	-12.65	22.72	43.50	-20.78	peak	
2		200.720	38.27	-13.77	24.50	43.50	-19.00	peak	
3		307.420	32.98	-12.70	20.28	46.00	-25.72	peak	
4		468.440	32.01	-9.49	22.52	46.00	-23.48	peak	
5		663.410	31.18	-5.06	26.12	46.00	-19.88	peak	
6	*	897.180	30.40	0.97	31.37	46.00	-14.63	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: HUNTKEY


Vertical

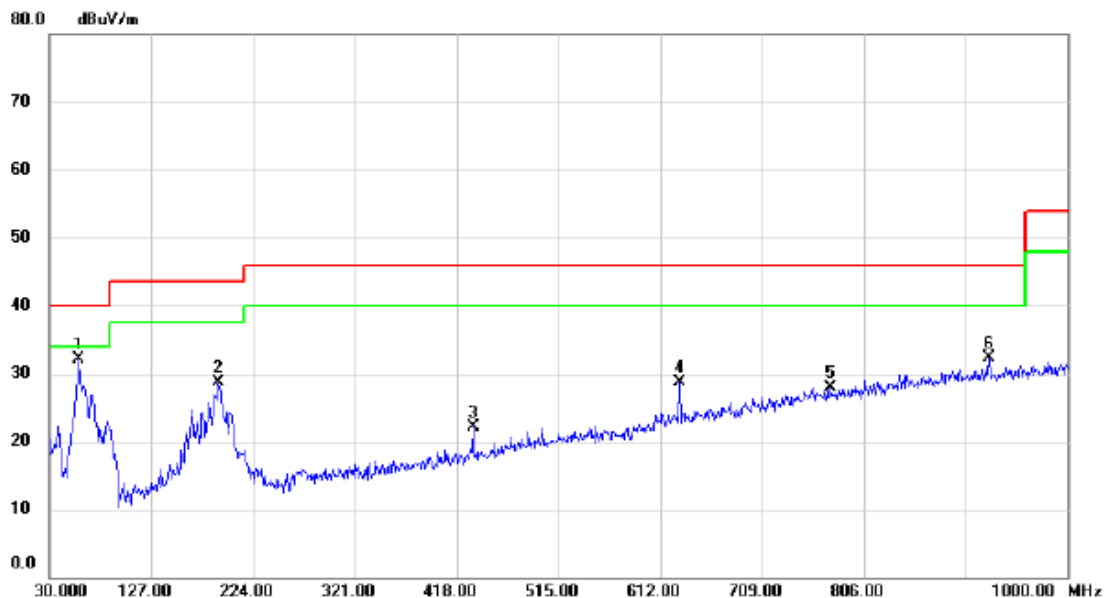

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	58.130	46.16	-14.13	32.03	40.00	-7.97	peak	
2		191.020	41.70	-12.94	28.76	43.50	-14.74	peak	
3		433.520	32.61	-10.41	22.20	46.00	-23.80	peak	
4		630.430	34.47	-5.84	28.63	46.00	-17.37	peak	
5		773.990	29.83	-1.92	27.91	46.00	-18.09	peak	
6		925.310	30.87	1.51	32.38	46.00	-13.62	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: HUNTKEY


Horizontal

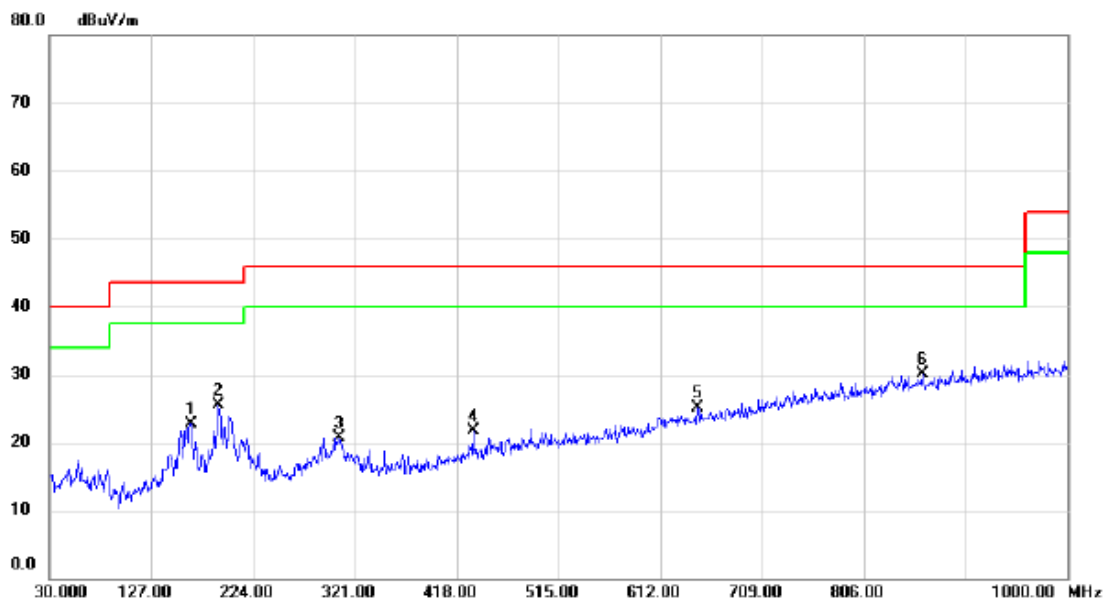

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		164.830	35.39	-12.65	22.74	43.50	-20.76	peak	
2		191.020	38.38	-12.94	25.44	43.50	-18.06	peak	
3		306.450	33.49	-12.72	20.77	46.00	-25.23	peak	
4		433.520	32.05	-10.41	21.64	46.00	-24.36	peak	
5		647.890	30.66	-5.52	25.14	46.00	-20.86	peak	
6 *		862.260	29.84	0.25	30.09	46.00	-15.91	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz _Adapter: HUNTKEY


Vertical

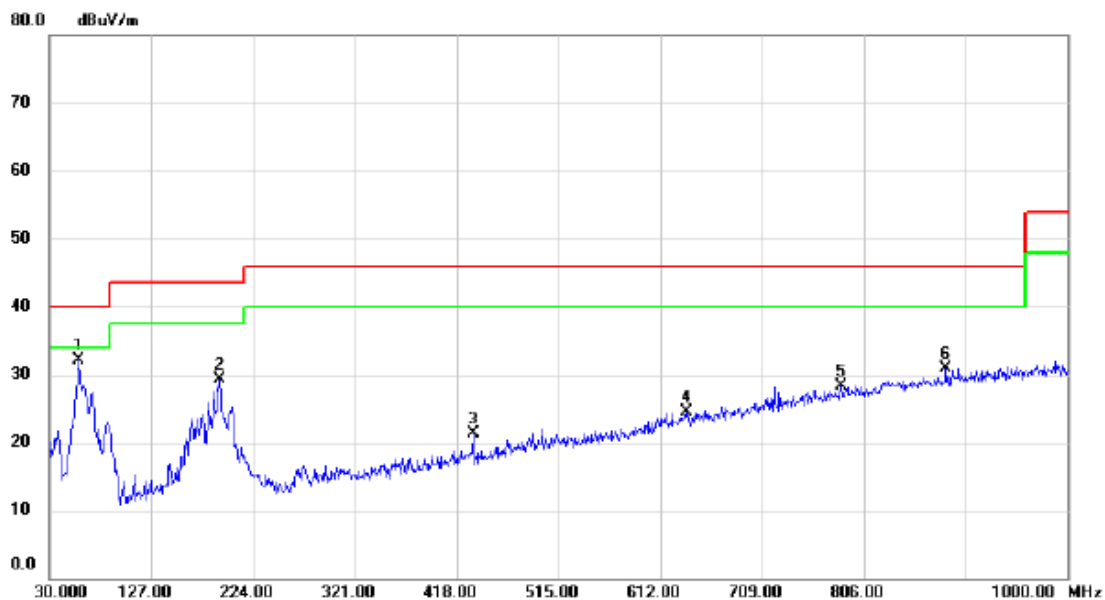

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	58.130	46.15	-14.13	32.02	40.00	-7.98	peak	
2		191.990	42.34	-13.02	29.32	43.50	-14.18	peak	
3		433.520	31.75	-10.41	21.34	46.00	-24.66	peak	
4		637.220	30.23	-5.72	24.51	46.00	-21.49	peak	
5		784.660	29.93	-1.70	28.23	46.00	-17.77	peak	
6		884.570	30.20	0.71	30.91	46.00	-15.09	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz _Adapter: HUNTKEY


Horizontal

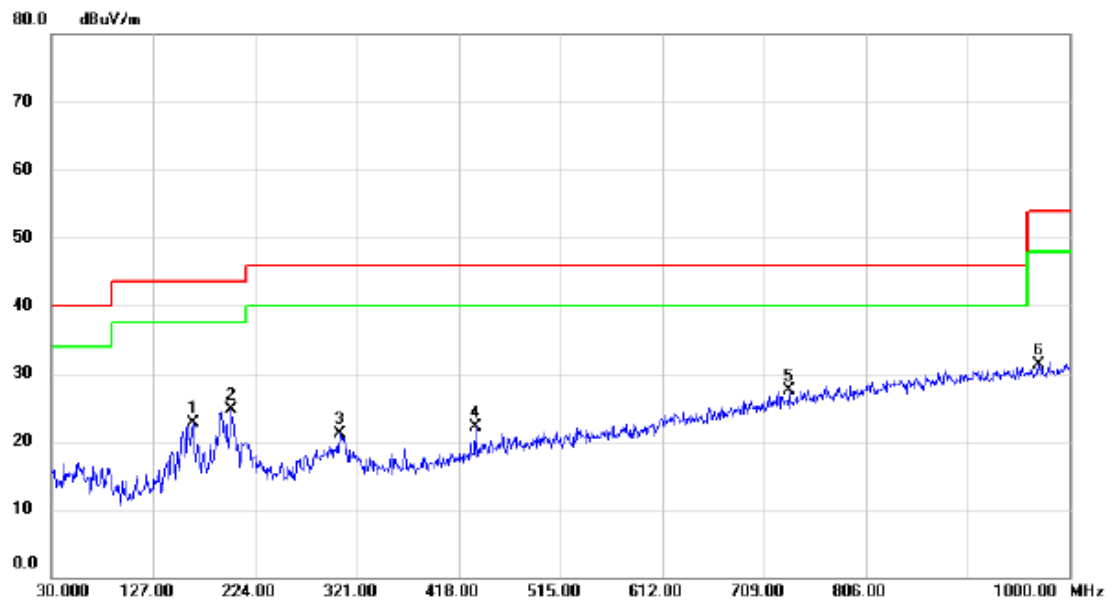

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		164.830	35.30	-12.65	22.65	43.50	-20.85	peak	
2		201.690	38.40	-13.79	24.61	43.50	-18.89	peak	
3		304.510	33.93	-12.75	21.18	46.00	-24.82	peak	
4		433.520	32.60	-10.41	22.19	46.00	-23.81	peak	
5	*	733.250	30.53	-2.95	27.58	46.00	-18.42	peak	
6		970.900	28.97	2.40	31.37	54.00	-22.63	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: HUNTKEY


Vertical

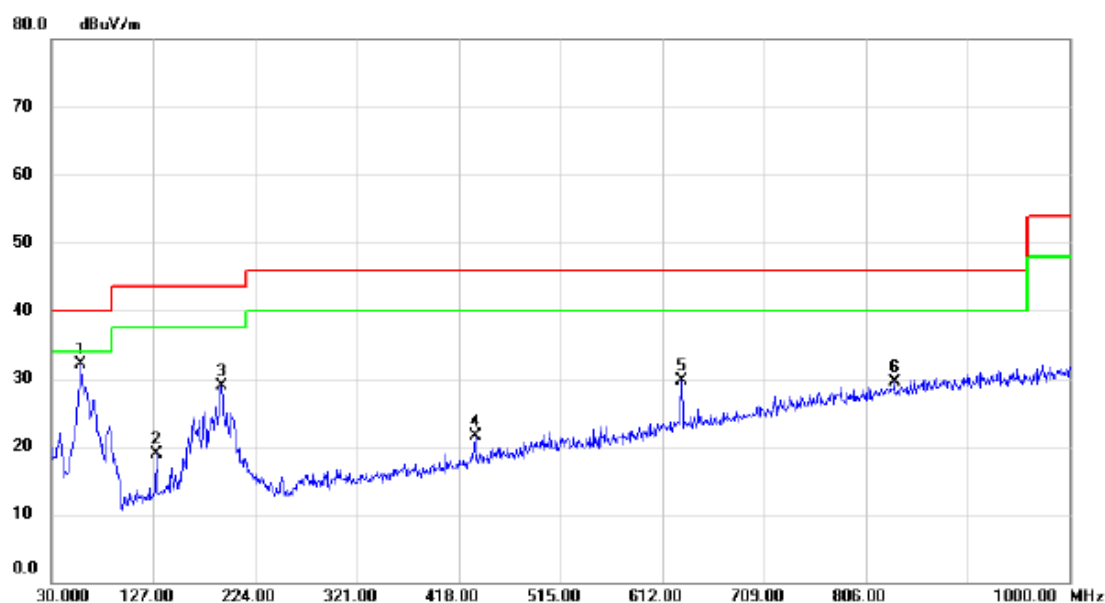

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	58.130	46.21	-14.13	32.08	40.00	-7.92	peak	
2		129.910	33.64	-14.71	18.93	43.50	-24.57	peak	
3		191.990	41.90	-13.02	28.88	43.50	-14.62	peak	
4		433.520	31.82	-10.41	21.41	46.00	-24.59	peak	
5		630.430	35.51	-5.84	29.67	46.00	-16.33	peak	
6		833.160	29.94	-0.46	29.48	46.00	-16.52	peak	


Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: HUNTKEY

Horizontal

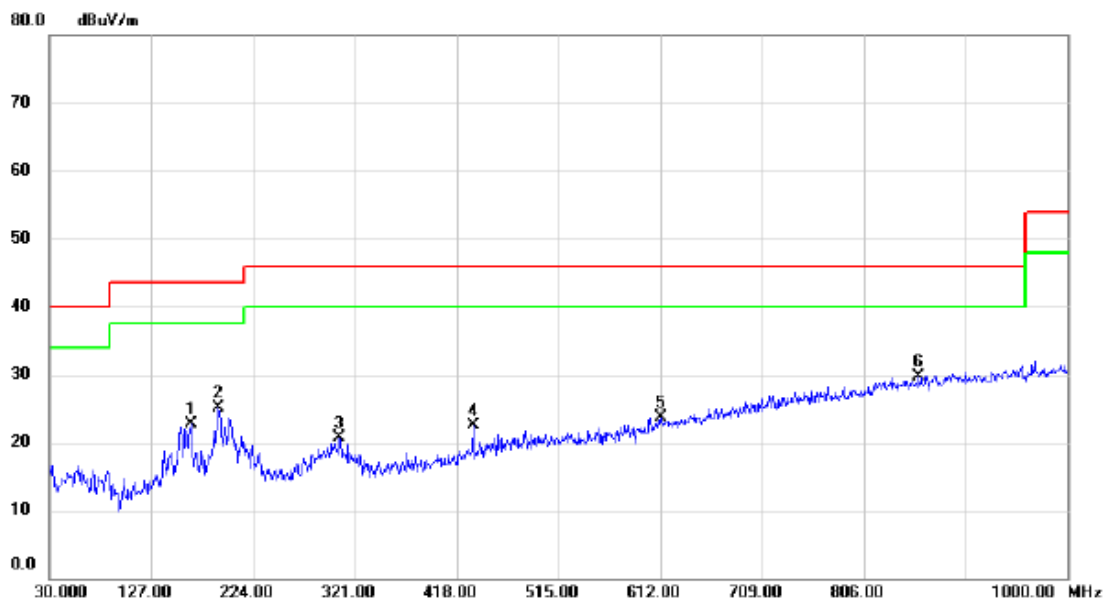

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: HUNTKEY


Vertical

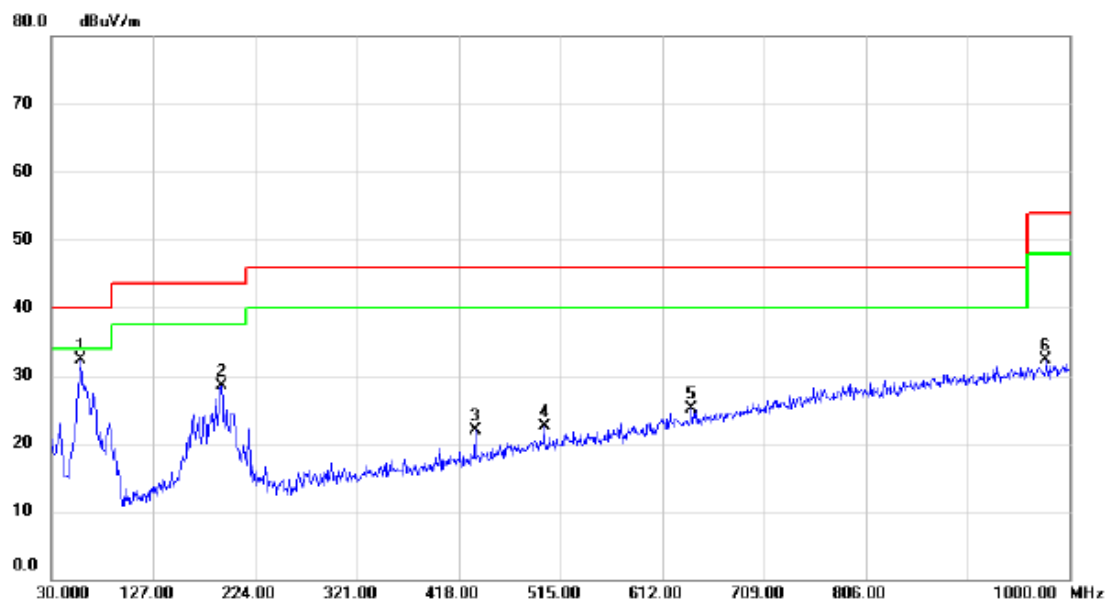

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	58.130	46.43	-14.13	32.30	40.00	-7.70	peak	
2		191.990	41.43	-13.02	28.41	43.50	-15.09	peak	
3		433.520	32.34	-10.41	21.93	46.00	-24.07	peak	
4		499.480	31.27	-8.73	22.54	46.00	-23.46	peak	
5		640.130	30.71	-5.67	25.04	46.00	-20.96	peak	
6		977.690	29.83	2.53	32.36	54.00	-21.64	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: HUNTKEY


Horizontal

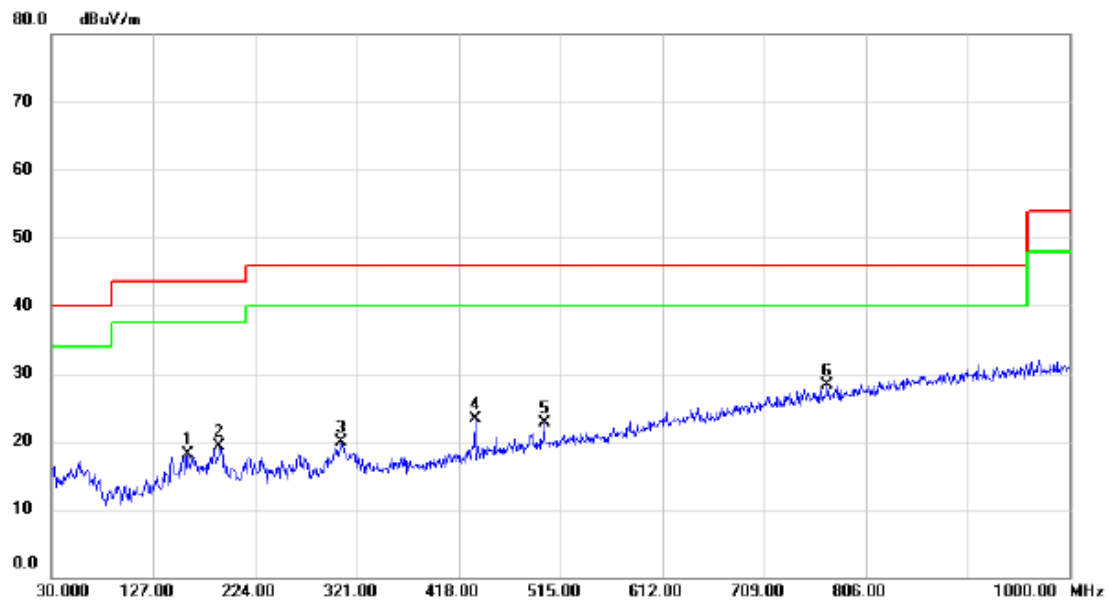

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		159.980	30.96	-12.93	18.03	43.50	-25.47	peak	
2		190.050	32.07	-12.86	19.21	43.50	-24.29	peak	
3		306.450	32.67	-12.72	19.95	46.00	-26.05	peak	
4		433.520	33.69	-10.41	23.28	46.00	-22.72	peak	
5		499.480	31.46	-8.73	22.73	46.00	-23.27	peak	
6	*	769.140	30.28	-2.03	28.25	46.00	-17.75	peak	

Test Mode: UNII-3/TX A Mode 5745MHz _Adapter: HUNTKEY


Vertical

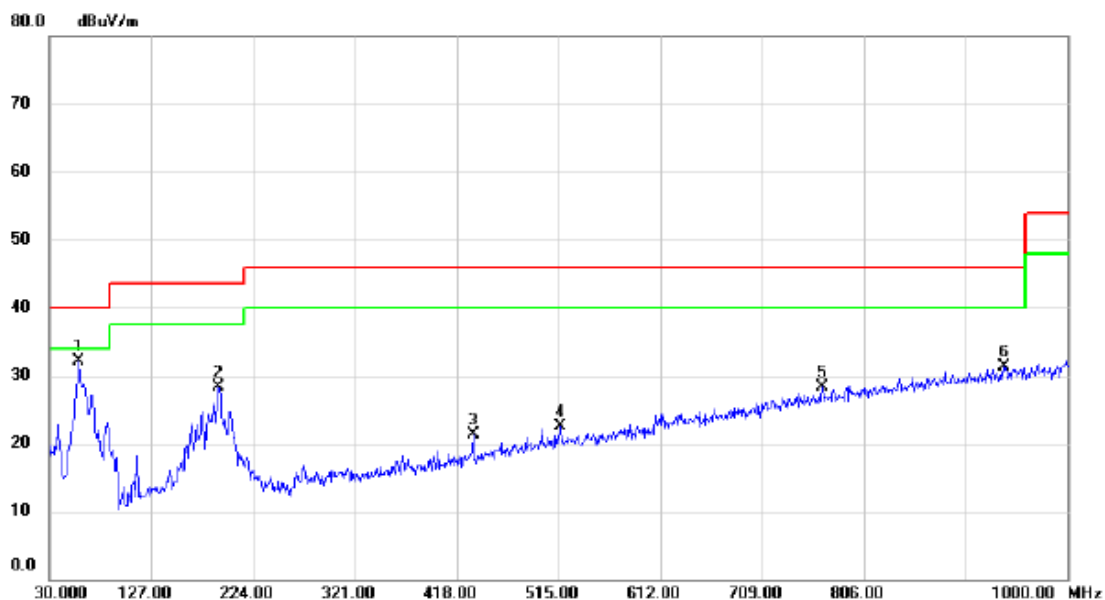

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	58.130	46.14	-14.13	32.01	40.00	-7.99	peak	
2		191.020	41.15	-12.94	28.21	43.50	-15.29	peak	
3		433.520	31.70	-10.41	21.29	46.00	-24.71	peak	
4		516.940	30.86	-8.39	22.47	46.00	-23.53	peak	
5		766.230	30.40	-2.09	28.31	46.00	-17.69	peak	
6		939.860	29.55	1.81	31.36	46.00	-14.64	peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: HUNTKEY

Horizontal

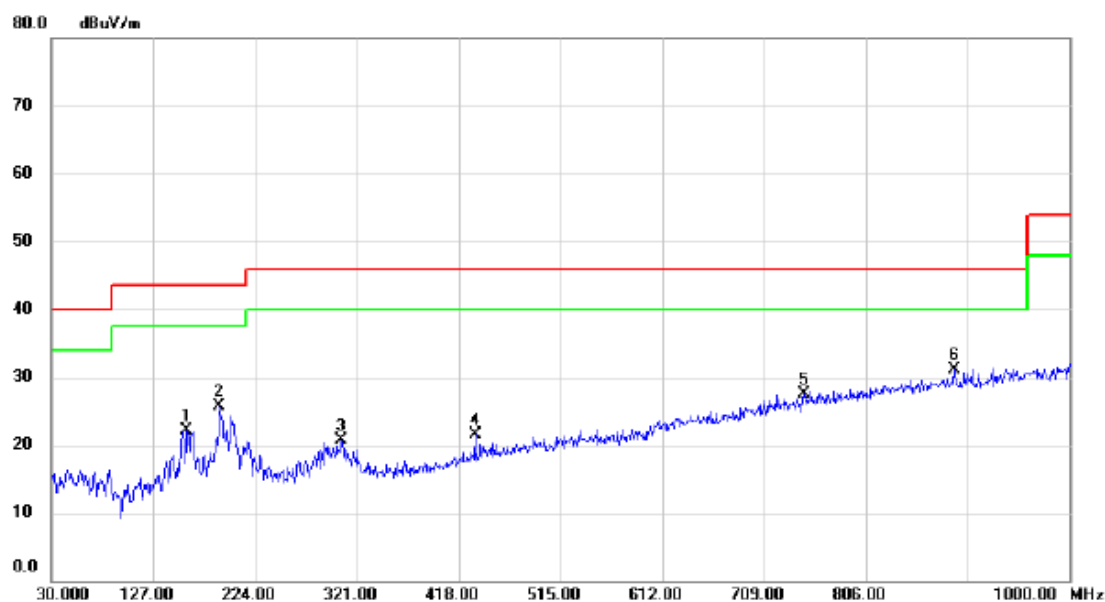

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		159.010	35.07	-12.99	22.08	43.50	-21.42	peak	
2		190.050	38.54	-12.86	25.68	43.50	-17.82	peak	
3		306.450	33.49	-12.72	20.77	46.00	-25.23	peak	
4		433.520	32.01	-10.41	21.60	46.00	-24.40	peak	
5		746.830	30.13	-2.54	27.59	46.00	-18.41	peak	
6	*	890.390	30.26	0.84	31.10	46.00	-14.90	peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: HUNTKEY

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	58.130	46.37	-14.13	32.24	40.00	-7.76	peak	
2		191.990	41.40	-13.02	28.38	43.50	-15.12	peak	
3		255.040	31.17	-15.30	15.87	46.00	-30.13	peak	
4		433.520	32.37	-10.41	21.96	46.00	-24.04	peak	
5		540.220	29.91	-7.91	22.00	46.00	-24.00	peak	
6		719.670	31.06	-3.35	27.71	46.00	-18.29	peak	

Test Mode: UNII-3/TX A Mode 5825MHz _Adapter: HUNTKEY


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		154.160	36.08	-13.28	22.80	43.50	-20.70	peak	
2		191.990	37.95	-13.02	24.93	43.50	-18.57	peak	
3		307.420	34.17	-12.70	21.47	46.00	-24.53	peak	
4		433.520	32.55	-10.41	22.14	46.00	-23.86	peak	
5		608.120	31.00	-6.27	24.73	46.00	-21.27	peak	
6	*	827.340	30.71	-0.61	30.10	46.00	-15.90	peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: Salcomp


Vertical

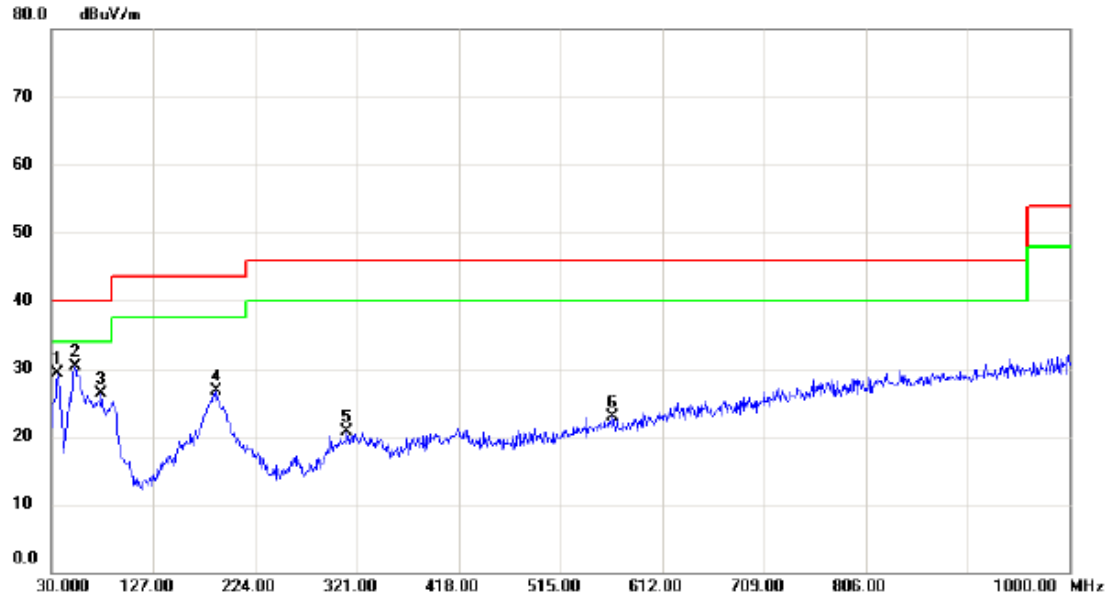

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		35.820	43.72	-14.51	29.21	40.00	-10.79	peak	
2	*	52.310	44.04	-13.79	30.25	40.00	-9.75	peak	
3		77.530	43.98	-17.66	26.32	40.00	-13.68	peak	
4		187.140	39.26	-12.61	26.65	43.50	-16.85	peak	
5		311.300	33.35	-12.62	20.73	46.00	-25.27	peak	
6		564.470	30.27	-7.34	22.93	46.00	-23.07	peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: Salcomp

Horizontal

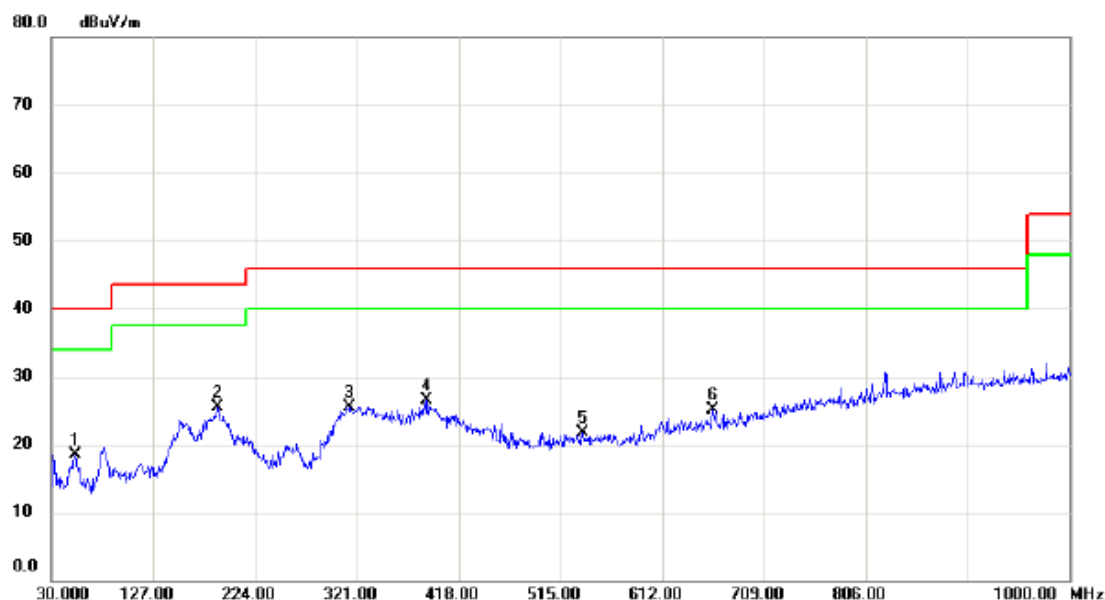

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		52.310	32.26	-13.79	18.47	40.00	-21.53	peak	
2	*	188.110	38.17	-12.70	25.47	43.50	-18.03	peak	
3		313.240	38.17	-12.60	25.57	46.00	-20.43	peak	
4		387.930	37.98	-11.51	26.47	46.00	-19.53	peak	
5		536.340	29.61	-7.99	21.62	46.00	-24.38	peak	
6		660.500	30.17	-5.15	25.02	46.00	-20.98	peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: Salcomp


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		35.820	44.01	-14.51	29.50	40.00	-10.50	peak	
2	*	52.310	44.01	-13.79	30.22	40.00	-9.78	peak	
3		187.140	38.88	-12.61	26.27	43.50	-17.23	peak	
4		312.270	33.40	-12.61	20.79	46.00	-25.21	peak	
5		413.150	32.97	-10.99	21.98	46.00	-24.02	peak	
6		641.100	30.50	-5.64	24.86	46.00	-21.14	peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: Salcomp


Horizontal

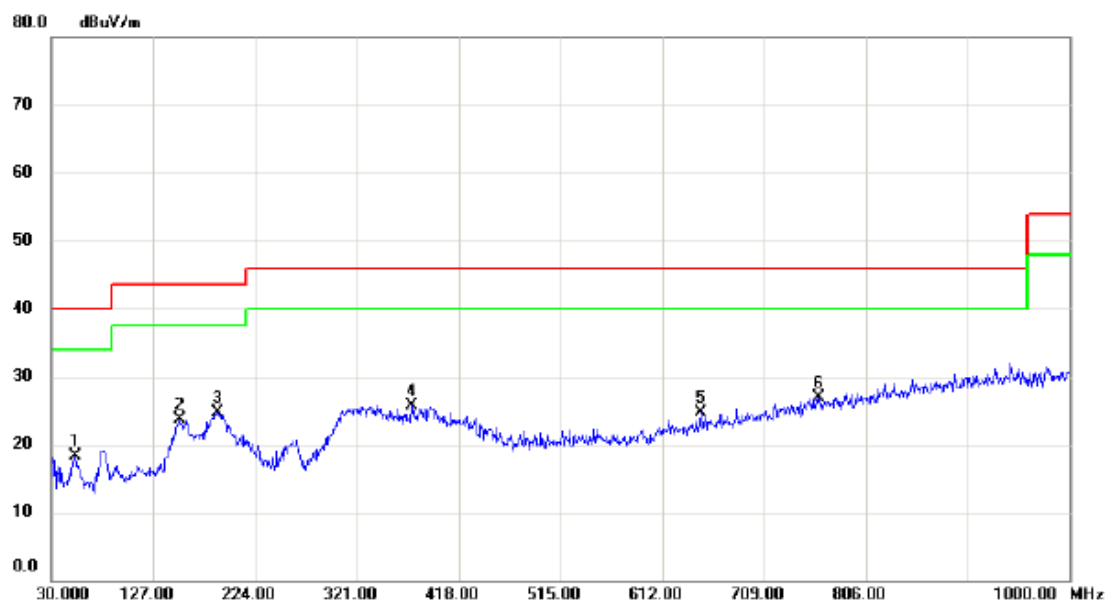

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		52.310	32.16	-13.79	18.37	40.00	-21.63	peak	
2		152.220	37.02	-13.40	23.62	43.50	-19.88	peak	
3	*	188.110	37.32	-12.70	24.62	43.50	-18.88	peak	
4		373.380	37.38	-11.67	25.71	46.00	-20.29	peak	
5		648.860	30.31	-5.51	24.80	46.00	-21.20	peak	
6		761.380	29.01	-2.20	26.81	46.00	-19.19	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: Salcomp


Vertical

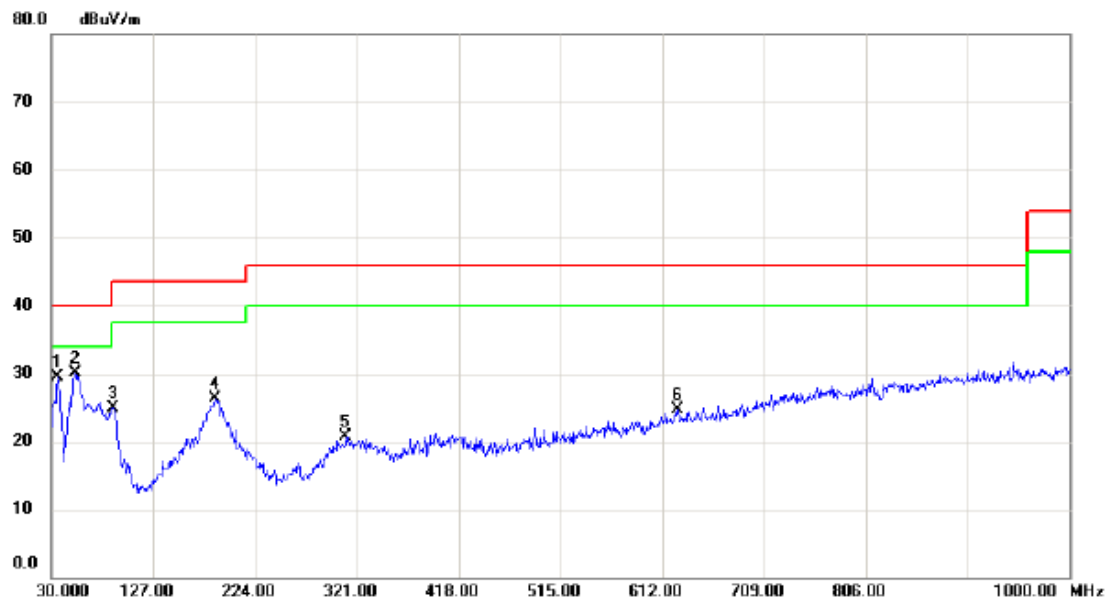

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		35.820	44.01	-14.51	29.50	40.00	-10.50	peak	
2	*	52.310	43.92	-13.79	30.13	40.00	-9.87	peak	
3		88.200	43.53	-18.56	24.97	43.50	-18.53	peak	
4		185.200	38.85	-12.46	26.39	43.50	-17.11	peak	
5		310.330	33.45	-12.65	20.80	46.00	-25.20	peak	
6		626.550	30.70	-5.92	24.78	46.00	-21.22	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: Salcomp


Horizontal

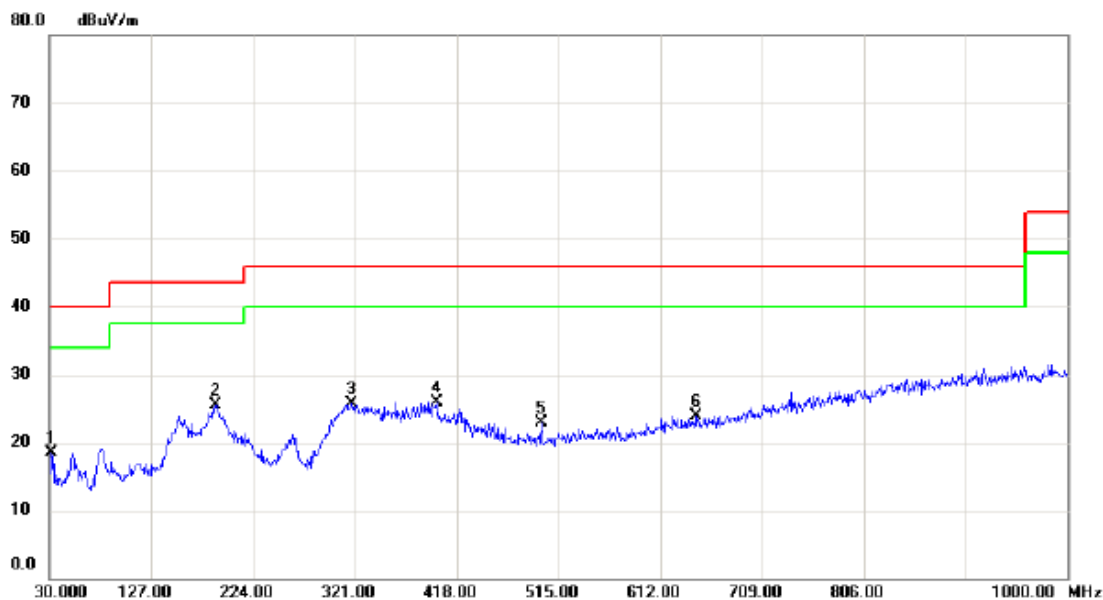

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.940	33.55	-15.04	18.51	40.00	-21.49	peak	
2	*	188.110	38.30	-12.70	25.60	43.50	-17.90	peak	
3		318.090	38.17	-12.52	25.65	46.00	-20.35	peak	
4		398.600	37.36	-11.38	25.98	46.00	-20.02	peak	
5		498.510	31.60	-8.76	22.84	46.00	-23.16	peak	
6		646.920	29.49	-5.53	23.96	46.00	-22.04	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: Salcomp


Vertical

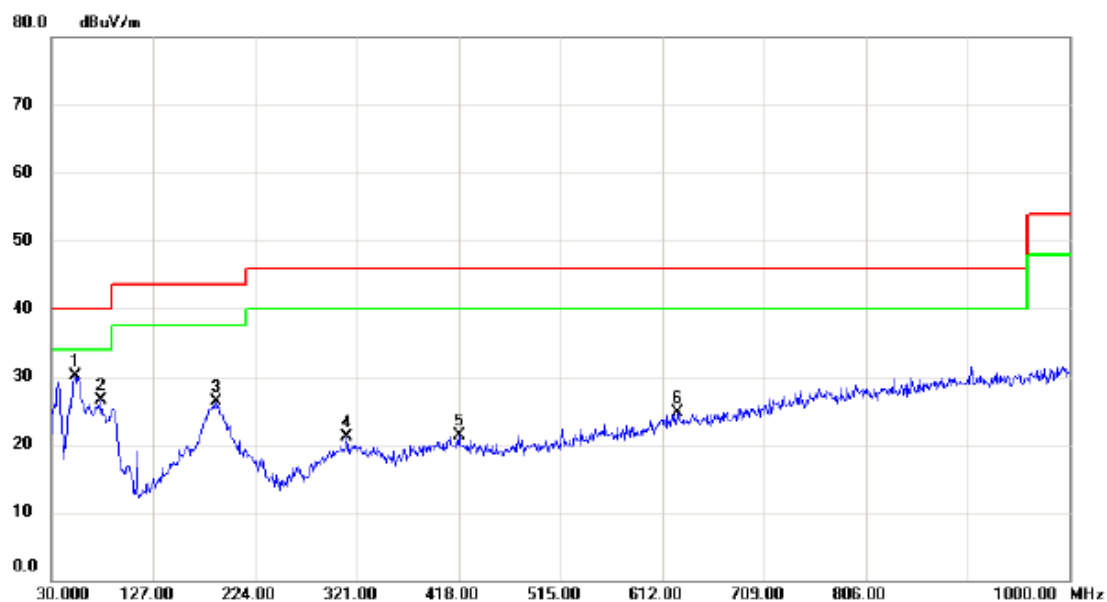

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	52.310	43.84	-13.79	30.05	40.00	-9.95	peak	
2		77.530	44.18	-17.66	26.52	40.00	-13.48	peak	
3		187.140	38.99	-12.61	26.38	43.50	-17.12	peak	
4		311.300	33.76	-12.62	21.14	46.00	-24.86	peak	
5		418.000	32.06	-10.85	21.21	46.00	-24.79	peak	
6		626.550	30.56	-5.92	24.64	46.00	-21.36	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: Salcomp

Horizontal

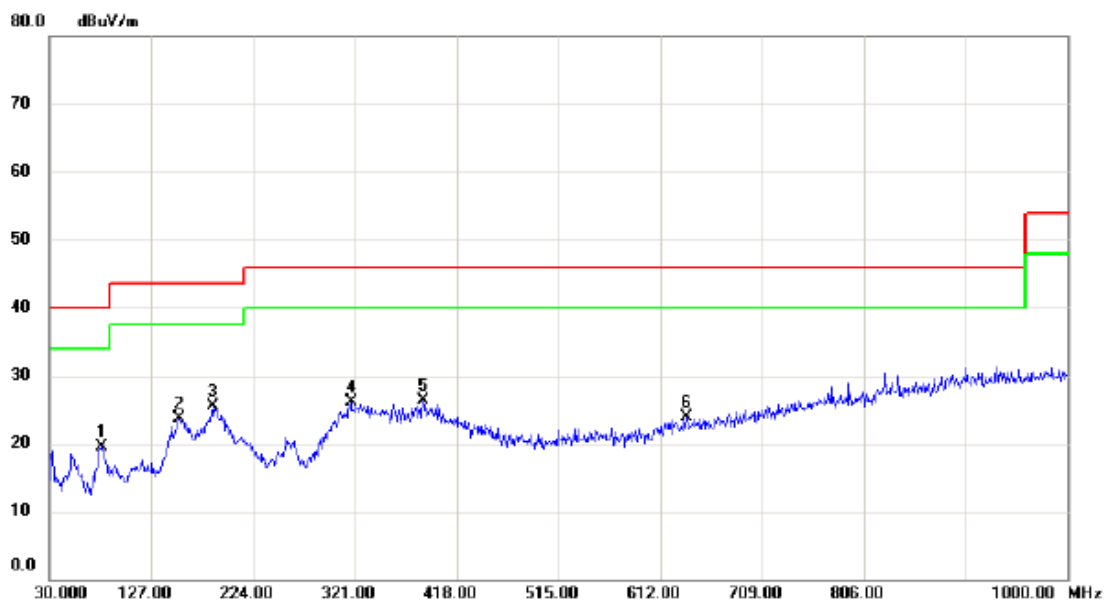

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		79.470	37.68	-18.11	19.57	40.00	-20.43	peak	
2		153.190	37.06	-13.33	23.73	43.50	-19.77	peak	
3	*	185.200	37.93	-12.46	25.47	43.50	-18.03	peak	
4		317.120	38.73	-12.53	26.20	46.00	-19.80	peak	
5		385.990	37.77	-11.53	26.24	46.00	-19.76	peak	
6		637.220	29.58	-5.72	23.86	46.00	-22.14	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: Salcomp

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	52.310	44.24	-13.79	30.45	40.00	-9.55	peak	
2		183.260	38.19	-12.30	25.89	43.50	-17.61	peak	
3		316.150	33.35	-12.55	20.80	46.00	-25.20	peak	
4		421.880	33.15	-10.74	22.41	46.00	-23.59	peak	
5		639.160	30.42	-5.68	24.74	46.00	-21.26	peak	
6		772.050	29.70	-1.97	27.73	46.00	-18.27	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: Salcomp


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		79.470	37.76	-18.11	19.65	40.00	-20.35	peak	
2		158.040	36.08	-13.04	23.04	43.50	-20.46	peak	
3	*	190.050	38.46	-12.86	25.60	43.50	-17.90	peak	
4		316.150	38.94	-12.55	26.39	46.00	-19.61	peak	
5		384.050	37.71	-11.55	26.16	46.00	-19.84	peak	
6		642.070	29.39	-5.63	23.76	46.00	-22.24	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: Salcomp


Vertical

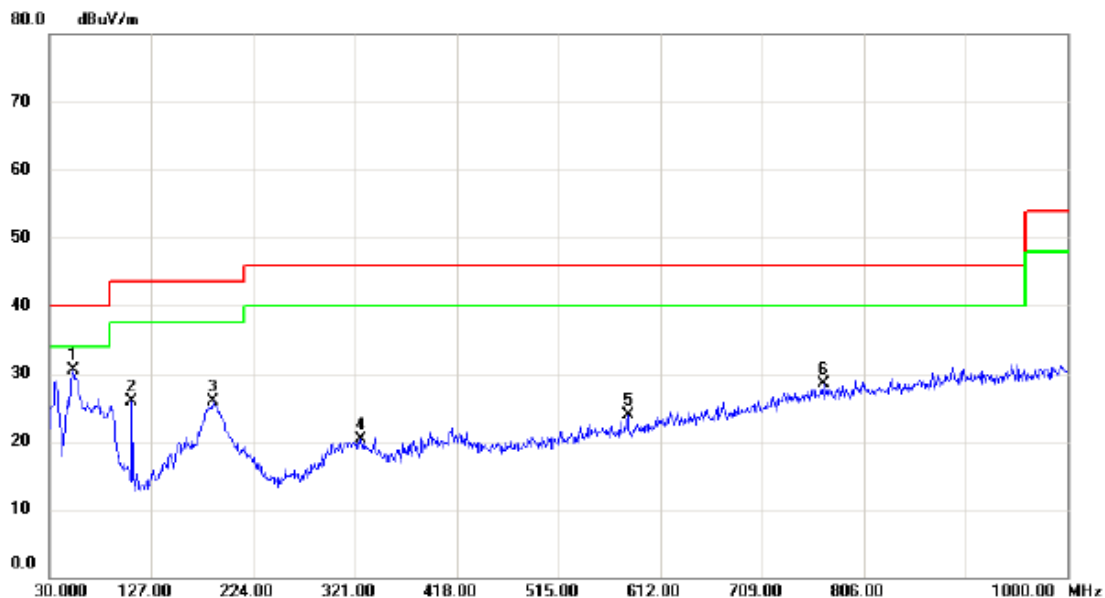

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	52.310	44.24	-13.79	30.45	40.00	-9.55	peak	
2		108.570	42.24	-16.38	25.86	43.50	-17.64	peak	
3		185.200	38.37	-12.46	25.91	43.50	-17.59	peak	
4		326.820	32.70	-12.36	20.34	46.00	-25.66	peak	
5		580.960	30.75	-6.92	23.83	46.00	-22.17	peak	
6		767.200	30.51	-2.06	28.45	46.00	-17.55	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: Salcomp

Horizontal

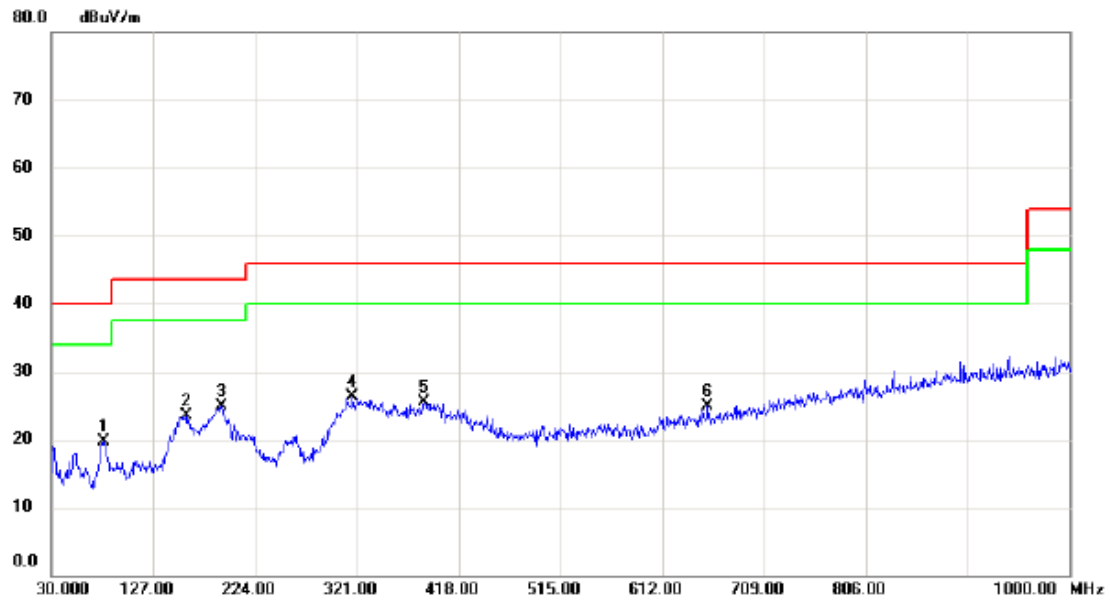

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		79.470	37.84	-18.11	19.73	40.00	-20.27	peak	
2		158.040	36.59	-13.04	23.55	43.50	-19.95	peak	
3	*	191.990	37.85	-13.02	24.83	43.50	-18.67	peak	
4		316.150	38.94	-12.55	26.39	46.00	-19.61	peak	
5		385.020	37.07	-11.54	25.53	46.00	-20.47	peak	
6		655.650	30.11	-5.30	24.81	46.00	-21.19	peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: Salcomp


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	52.310	44.02	-13.79	30.23	40.00	-9.77	peak	
2		77.530	43.37	-17.66	25.71	40.00	-14.29	peak	
3		187.140	38.17	-12.61	25.56	43.50	-17.94	peak	
4		304.510	33.48	-12.75	20.73	46.00	-25.27	peak	
5		413.150	33.46	-10.99	22.47	46.00	-23.53	peak	
6		638.190	31.39	-5.70	25.69	46.00	-20.31	peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: Salcomp


Horizontal

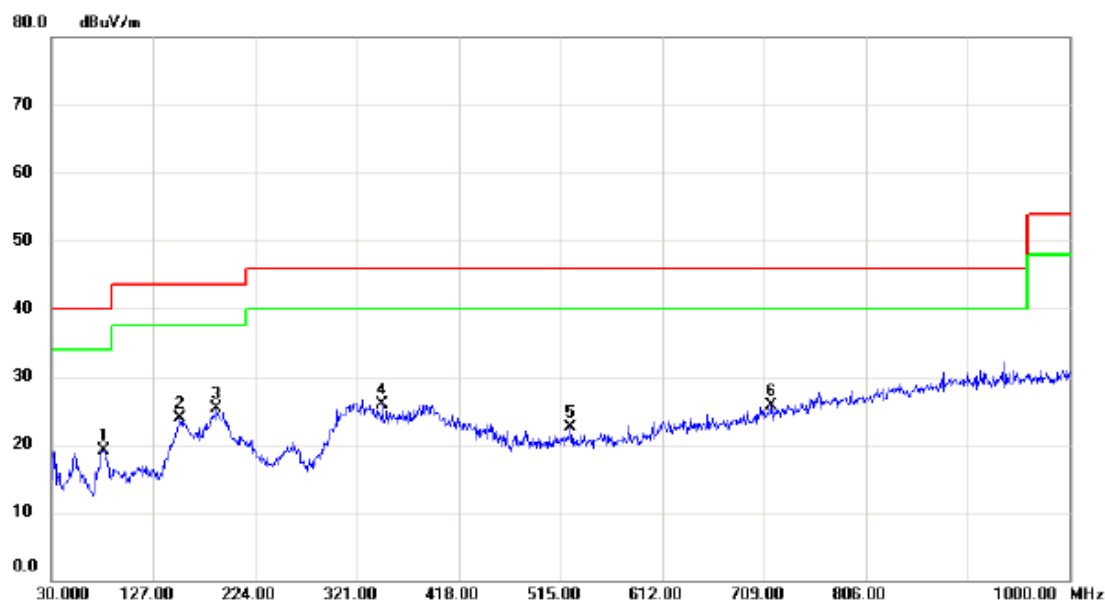

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		79.470	37.25	-18.11	19.14	40.00	-20.86	peak	
2		152.220	37.36	-13.40	23.96	43.50	-19.54	peak	
3	*	187.140	37.99	-12.61	25.38	43.50	-18.12	peak	
4		345.250	37.85	-12.03	25.82	46.00	-20.18	peak	
5		524.700	30.78	-8.23	22.55	46.00	-23.45	peak	
6		715.790	29.14	-3.47	25.67	46.00	-20.33	peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: Salcomp


Vertical

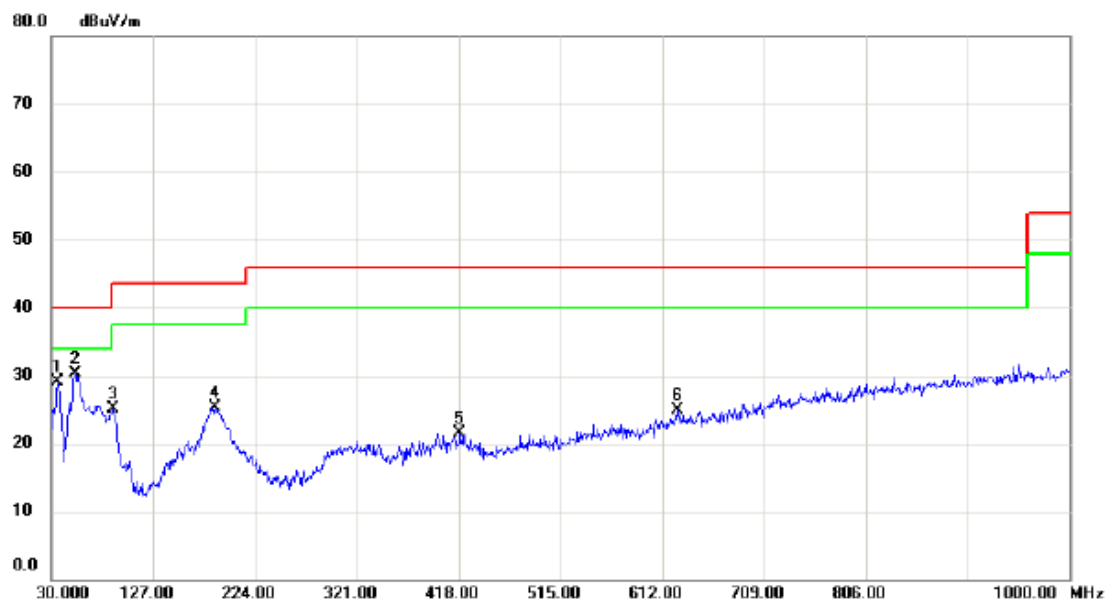

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		35.820	43.65	-14.51	29.14	40.00	-10.86	peak	
2	*	52.310	44.12	-13.79	30.33	40.00	-9.67	peak	
3		88.200	43.63	-18.56	25.07	43.50	-18.43	peak	
4		185.200	37.79	-12.46	25.33	43.50	-18.17	peak	
5		418.970	32.33	-10.82	21.51	46.00	-24.49	peak	
6		626.550	30.78	-5.92	24.86	46.00	-21.14	peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: Salcomp


Horizontal

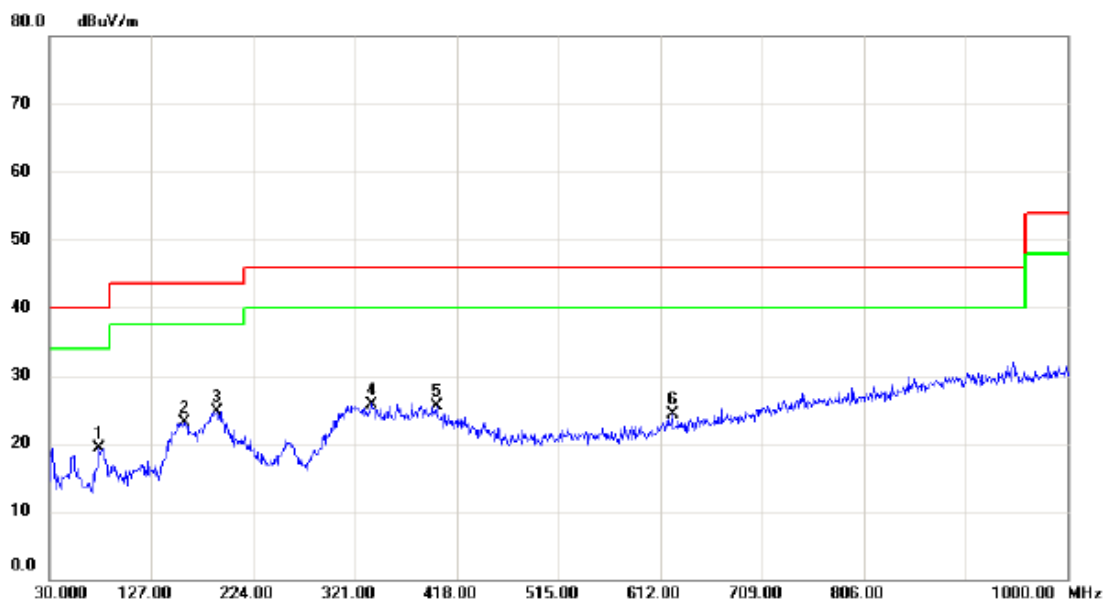

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		77.530	37.00	-17.66	19.34	40.00	-20.66	peak	
2		159.010	36.09	-12.99	23.10	43.50	-20.40	peak	
3	*	189.080	37.54	-12.77	24.77	43.50	-18.73	peak	
4		336.520	37.99	-12.19	25.80	46.00	-20.20	peak	
5		398.600	36.80	-11.38	25.42	46.00	-20.58	peak	
6		623.640	30.27	-5.97	24.30	46.00	-21.70	peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: HUAWEI


Vertical

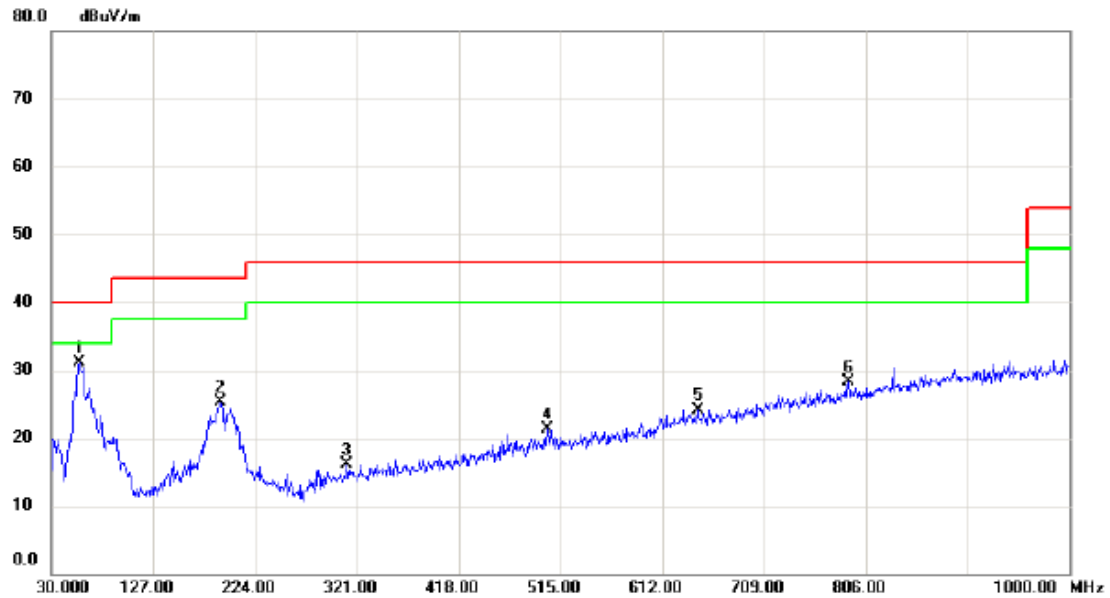

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	56.190	45.04	-13.96	31.08	40.00	-8.92	peak	
2		191.020	38.15	-12.94	25.21	43.50	-18.29	peak	
3		311.300	28.66	-12.62	16.04	46.00	-29.96	peak	
4		502.390	30.06	-8.68	21.38	46.00	-24.62	peak	
5		645.950	29.70	-5.56	24.14	46.00	-21.86	peak	
6		789.510	29.86	-1.59	28.27	46.00	-17.73	peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: HUAWEI

Horizontal

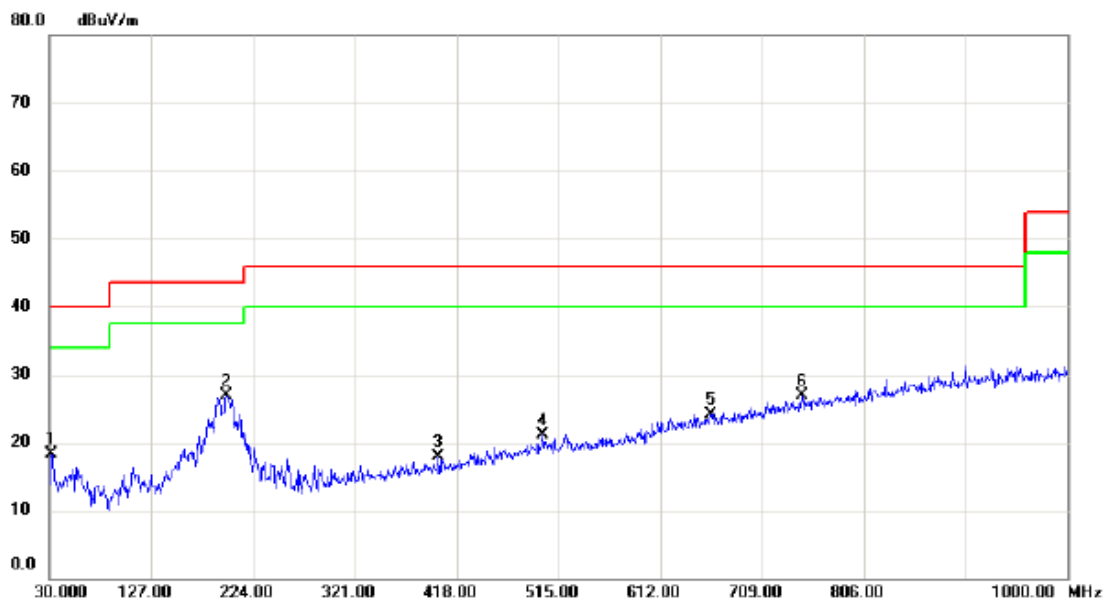

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.940	33.42	-15.04	18.38	40.00	-21.62	peak	
2	*	198.780	40.48	-13.64	26.84	43.50	-16.66	peak	
3		400.540	29.25	-11.34	17.91	46.00	-28.09	peak	
4		500.450	29.83	-8.71	21.12	46.00	-24.88	peak	
5		660.500	29.31	-5.15	24.16	46.00	-21.84	peak	
6		746.830	29.50	-2.54	26.96	46.00	-19.04	peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: HUAWEI


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	56.190	44.98	-13.96	31.02	40.00	-8.98	peak	
2		190.050	38.55	-12.86	25.69	43.50	-17.81	peak	
3		345.250	28.83	-12.03	16.80	46.00	-29.20	peak	
4		490.750	29.82	-8.94	20.88	46.00	-25.12	peak	
5		593.570	29.46	-6.59	22.87	46.00	-23.13	peak	
6		733.250	29.00	-2.95	26.05	46.00	-19.95	peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: HUAWEI


Horizontal

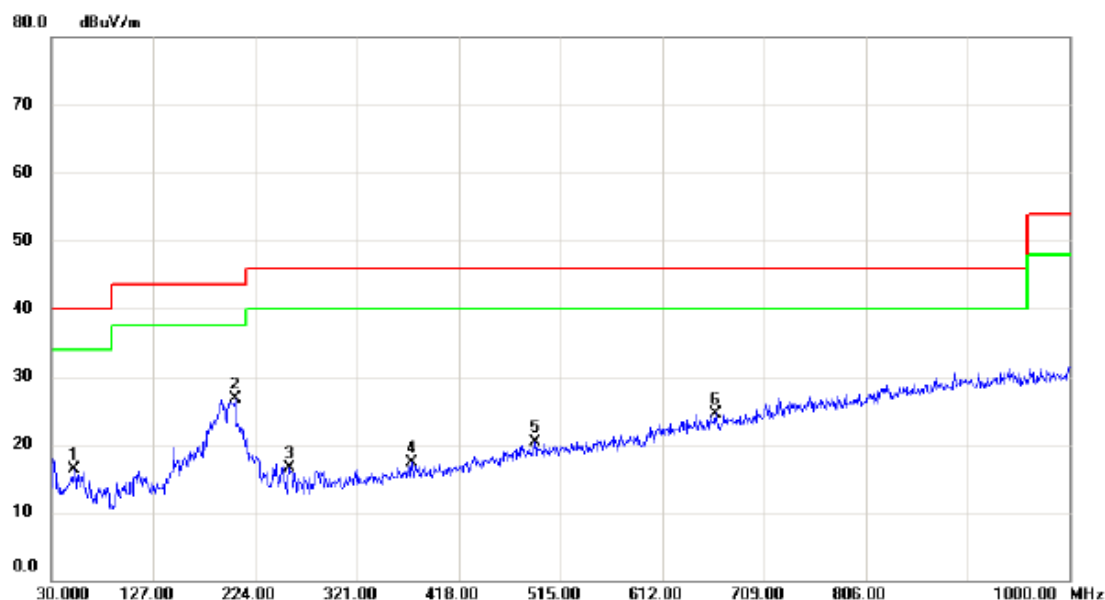

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		51.340	30.05	-13.70	16.35	40.00	-23.65	peak	
2	*	204.600	40.50	-13.86	26.64	43.50	-16.86	peak	
3		256.980	32.03	-15.46	16.57	46.00	-29.43	peak	
4		373.380	28.94	-11.67	17.27	46.00	-28.73	peak	
5		490.750	29.22	-8.94	20.28	46.00	-25.72	peak	
6		662.440	29.70	-5.10	24.60	46.00	-21.40	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: HUAWEI


Vertical

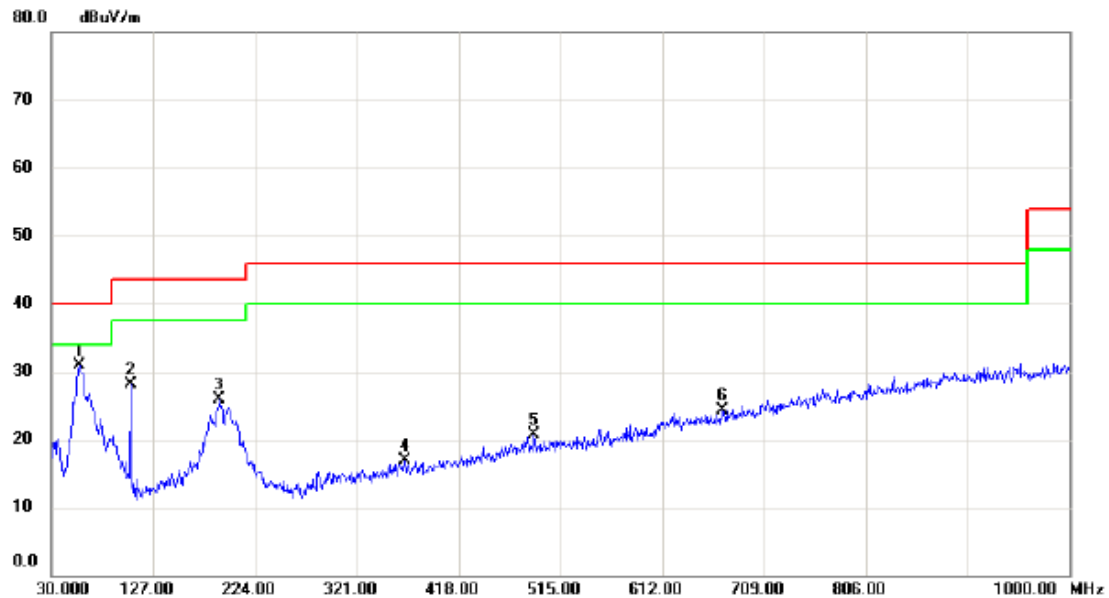

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	56.190	44.91	-13.96	30.95	40.00	-9.05	peak	
2		105.660	44.78	-16.75	28.03	43.50	-15.47	peak	
3		190.050	38.78	-12.86	25.92	43.50	-17.58	peak	
4		366.590	28.74	-11.76	16.98	46.00	-29.02	peak	
5		489.780	29.63	-8.98	20.65	46.00	-25.35	peak	
6		669.230	29.23	-4.89	24.34	46.00	-21.66	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: HUAWEI


Horizontal

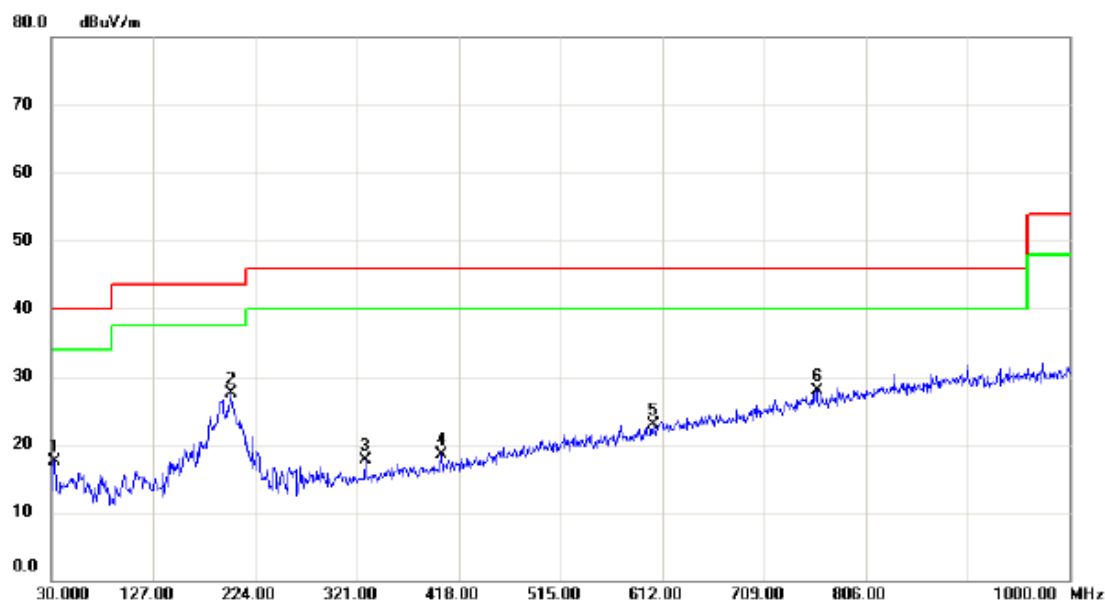

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		32.910	32.30	-14.89	17.41	40.00	-22.59	peak	
2	*	200.720	41.26	-13.77	27.49	43.50	-16.01	peak	
3		328.760	30.06	-12.33	17.73	46.00	-28.27	peak	
4		401.510	29.80	-11.31	18.49	46.00	-27.51	peak	
5		603.270	29.21	-6.35	22.86	46.00	-23.14	peak	
6		759.440	30.12	-2.24	27.88	46.00	-18.12	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: HUAWEI


Vertical

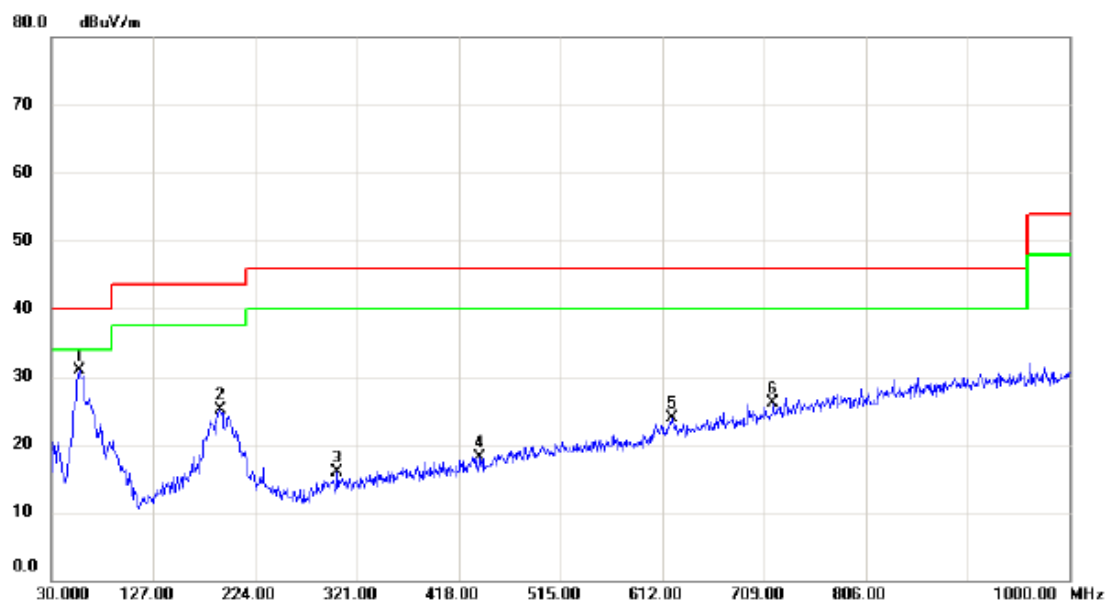

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	56.190	44.88	-13.96	30.92	40.00	-9.08	peak	
2		191.020	38.09	-12.94	25.15	43.50	-18.35	peak	
3		302.570	28.63	-12.79	15.84	46.00	-30.16	peak	
4		438.370	28.42	-10.27	18.15	46.00	-27.85	peak	
5		621.700	29.96	-6.01	23.95	46.00	-22.05	peak	
6		717.730	29.59	-3.41	26.18	46.00	-19.82	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: HUAWEI


Horizontal

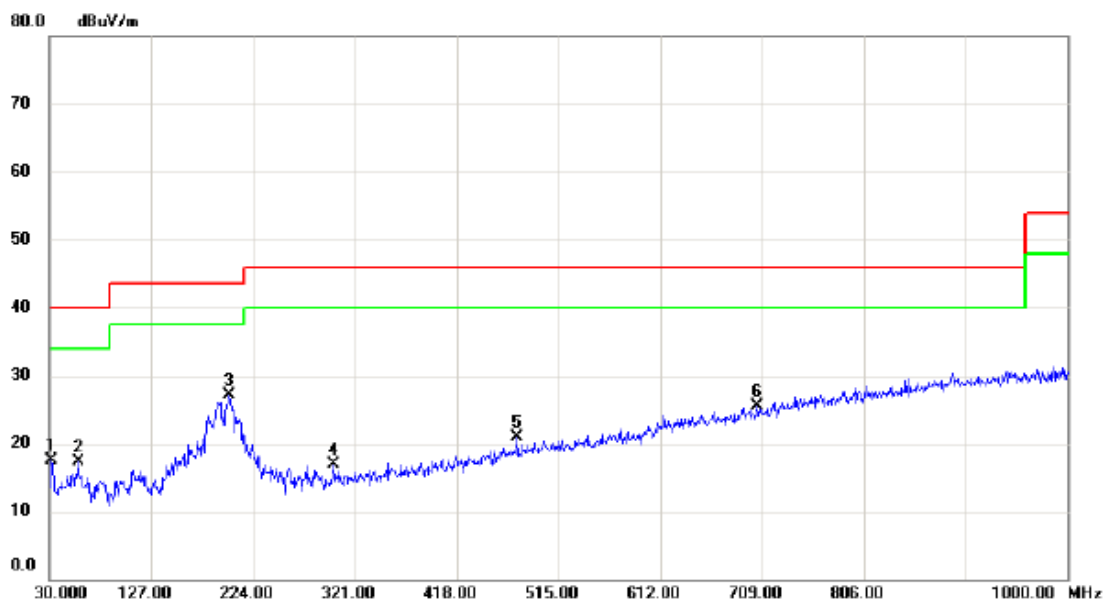

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.940	32.60	-15.04	17.56	40.00	-22.44	peak	
2		57.160	31.41	-14.04	17.37	40.00	-22.63	peak	
3	*	200.720	40.95	-13.77	27.18	43.50	-16.32	peak	
4		300.630	29.71	-12.82	16.89	46.00	-29.11	peak	
5		475.230	30.26	-9.32	20.94	46.00	-25.06	peak	
6		704.150	29.26	-3.81	25.45	46.00	-20.55	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: HUAWEI


Vertical

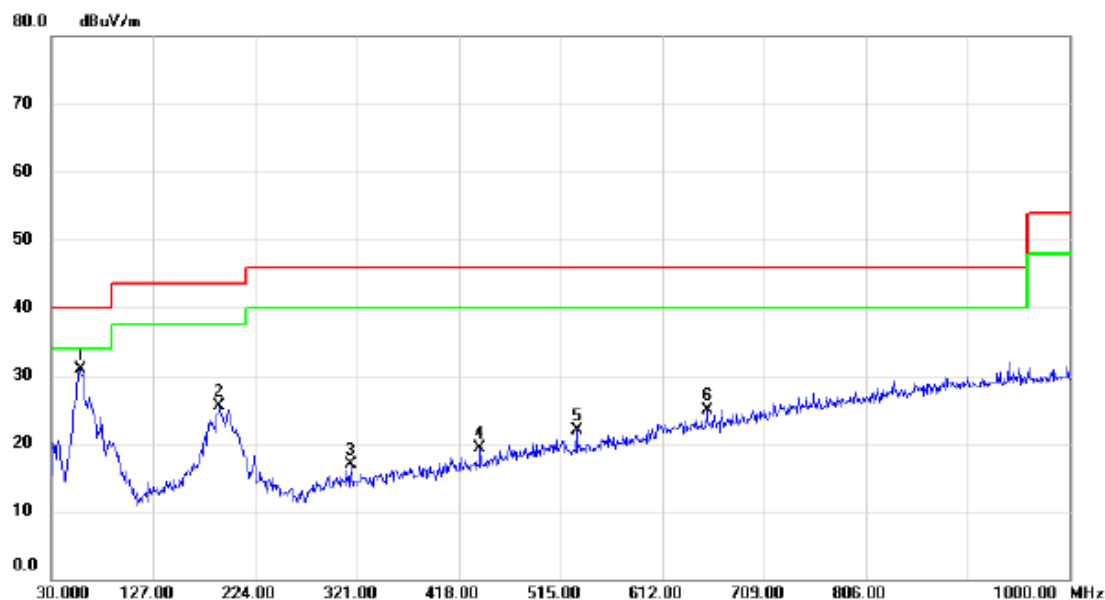

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.160	45.03	-14.04	30.99	40.00	-9.01	peak	
2		190.050	38.27	-12.86	25.41	43.50	-18.09	peak	
3		315.180	29.56	-12.56	17.00	46.00	-29.00	peak	
4		438.370	29.51	-10.27	19.24	46.00	-26.76	peak	
5		530.520	30.11	-8.11	22.00	46.00	-24.00	peak	
6		654.680	30.28	-5.33	24.95	46.00	-21.05	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: HUAWEI


Horizontal

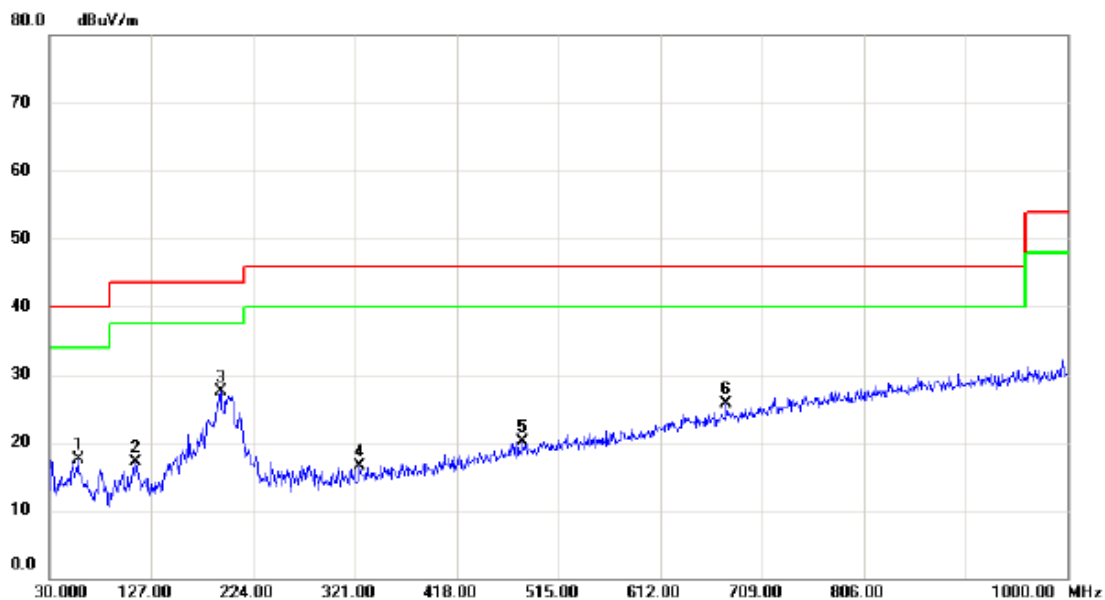

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		57.160	31.46	-14.04	17.42	40.00	-22.58	peak	
2		111.480	33.28	-16.08	17.20	43.50	-26.30	peak	
3	*	192.960	40.71	-13.12	27.59	43.50	-15.91	peak	
4		325.850	28.84	-12.37	16.47	46.00	-29.53	peak	
5		481.050	29.31	-9.18	20.13	46.00	-25.87	peak	
6		675.050	30.50	-4.71	25.79	46.00	-20.21	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: HUAWEI


Vertical

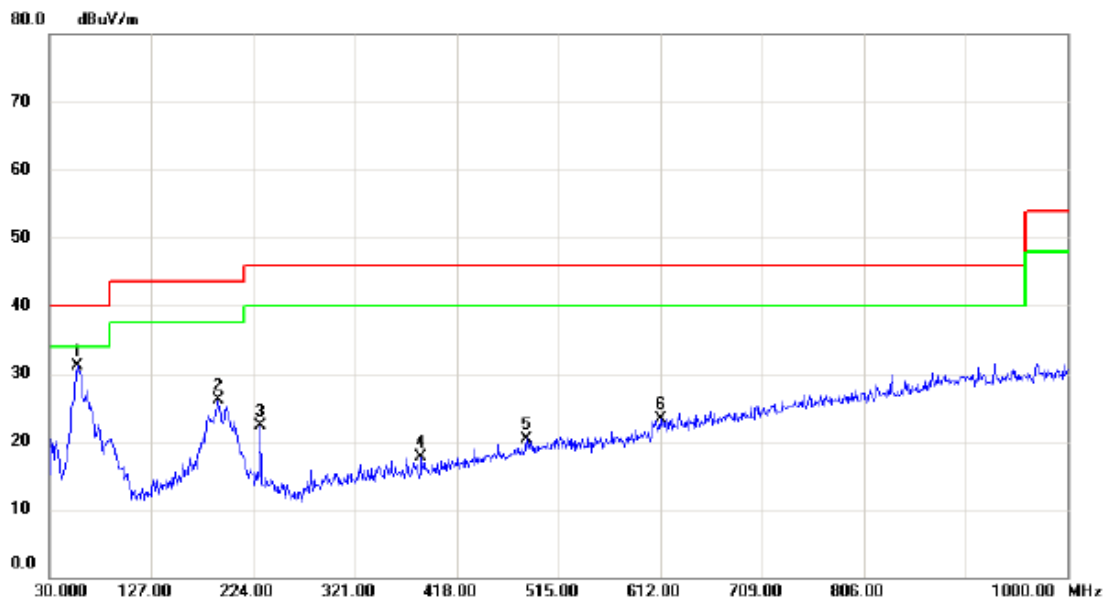

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	56.190	45.07	-13.96	31.11	40.00	-8.89	peak	
2		191.020	39.03	-12.94	26.09	43.50	-17.41	peak	
3		230.790	36.53	-14.14	22.39	46.00	-23.61	peak	
4		384.050	29.26	-11.55	17.71	46.00	-28.29	peak	
5		483.960	29.51	-9.11	20.40	46.00	-25.60	peak	
6		612.000	29.51	-6.19	23.32	46.00	-22.68	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: HUAWEI


Horizontal

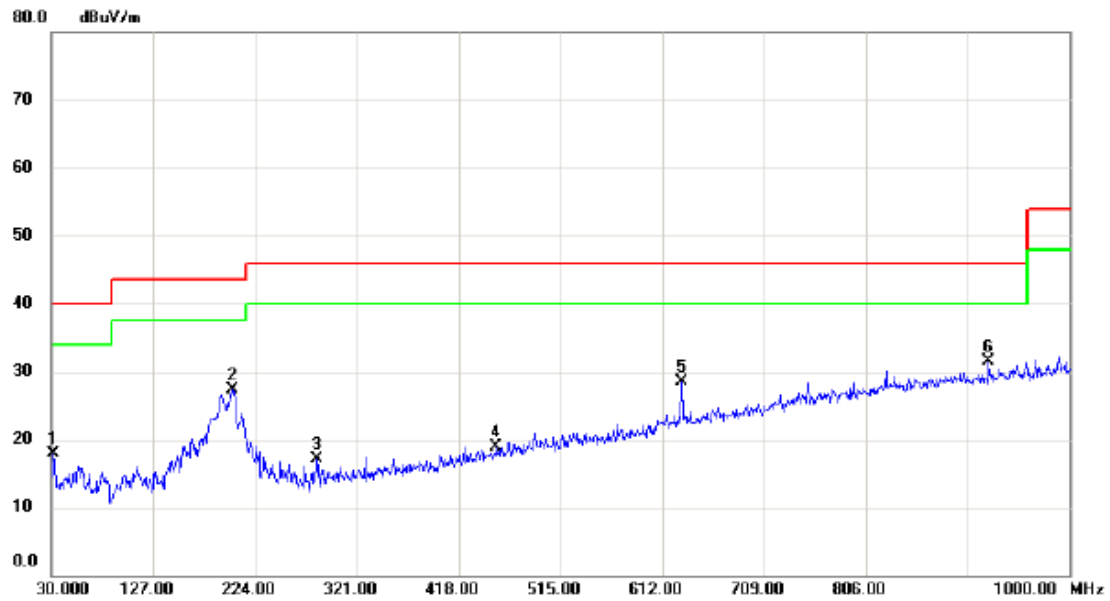

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.940	32.99	-15.04	17.95	40.00	-22.05	peak	
2		202.660	41.10	-13.81	27.29	43.50	-16.21	peak	
3		283.170	31.72	-14.59	17.13	46.00	-28.87	peak	
4		453.890	28.80	-9.84	18.96	46.00	-27.04	peak	
5		630.430	34.40	-5.84	28.56	46.00	-17.44	peak	
6	*	923.370	30.05	1.48	31.53	46.00	-14.47	peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: HUAWEI


Vertical

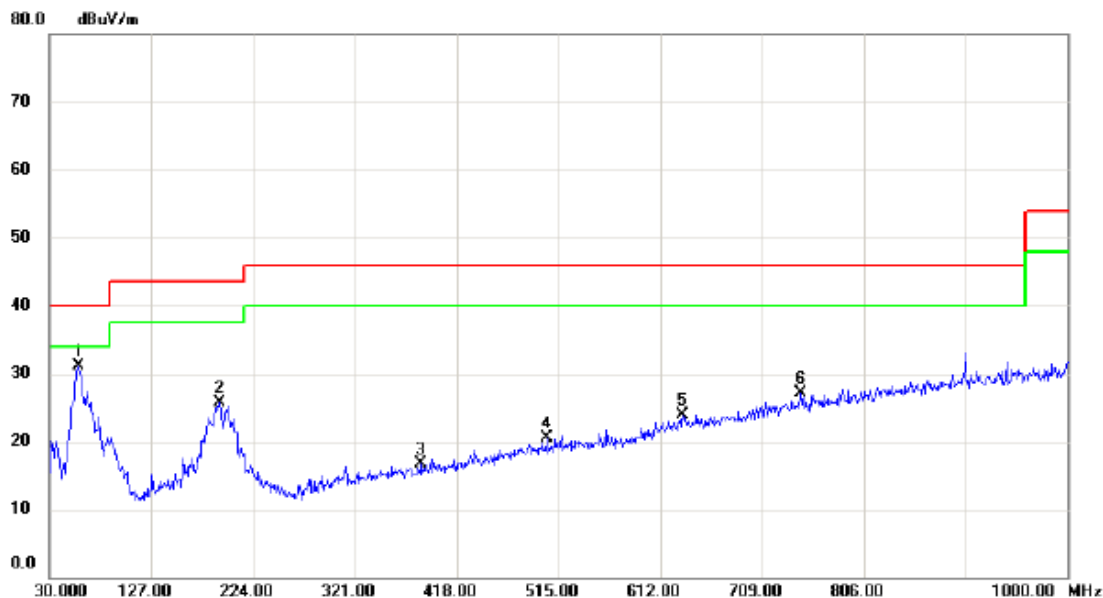

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.160	45.18	-14.04	31.14	40.00	-8.86	peak	
2		191.990	38.73	-13.02	25.71	43.50	-17.79	peak	
3		384.050	28.24	-11.55	16.69	46.00	-29.31	peak	
4		504.330	29.22	-8.63	20.59	46.00	-25.41	peak	
5		633.340	29.75	-5.79	23.96	46.00	-22.04	peak	
6		745.860	29.76	-2.57	27.19	46.00	-18.81	peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: HUAWEI


Horizontal

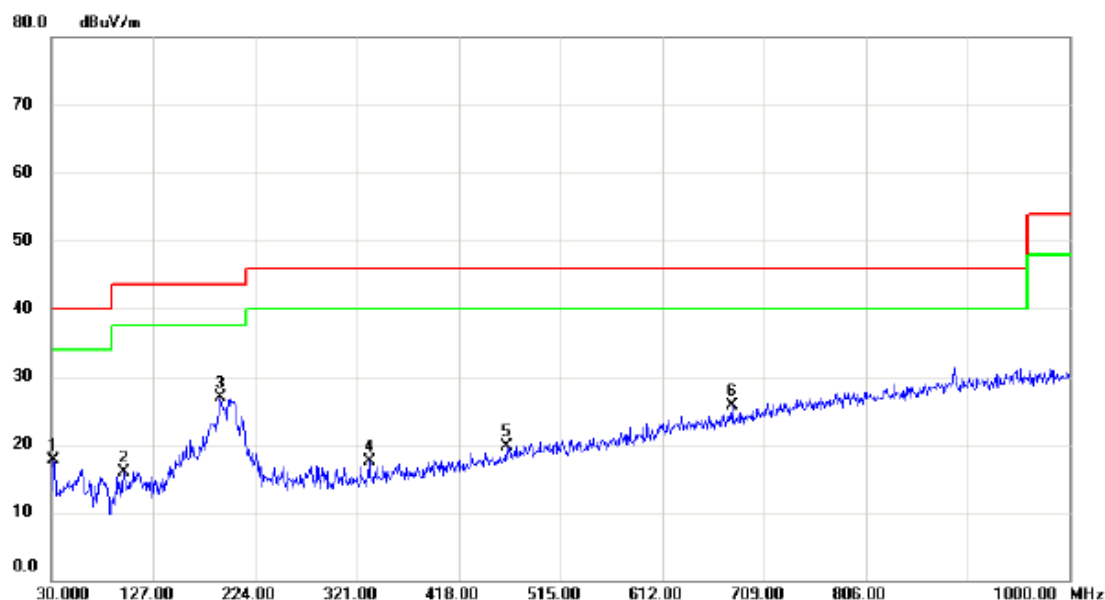

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.940	32.78	-15.04	17.74	40.00	-22.26	peak	
2		98.870	33.71	-17.78	15.93	43.50	-27.57	peak	
3	*	191.020	39.93	-12.94	26.99	43.50	-16.51	peak	
4		332.640	29.81	-12.26	17.55	46.00	-28.45	peak	
5		463.590	29.36	-9.61	19.75	46.00	-26.25	peak	
6		678.930	30.31	-4.59	25.72	46.00	-20.28	peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: HUAWEI


Vertical

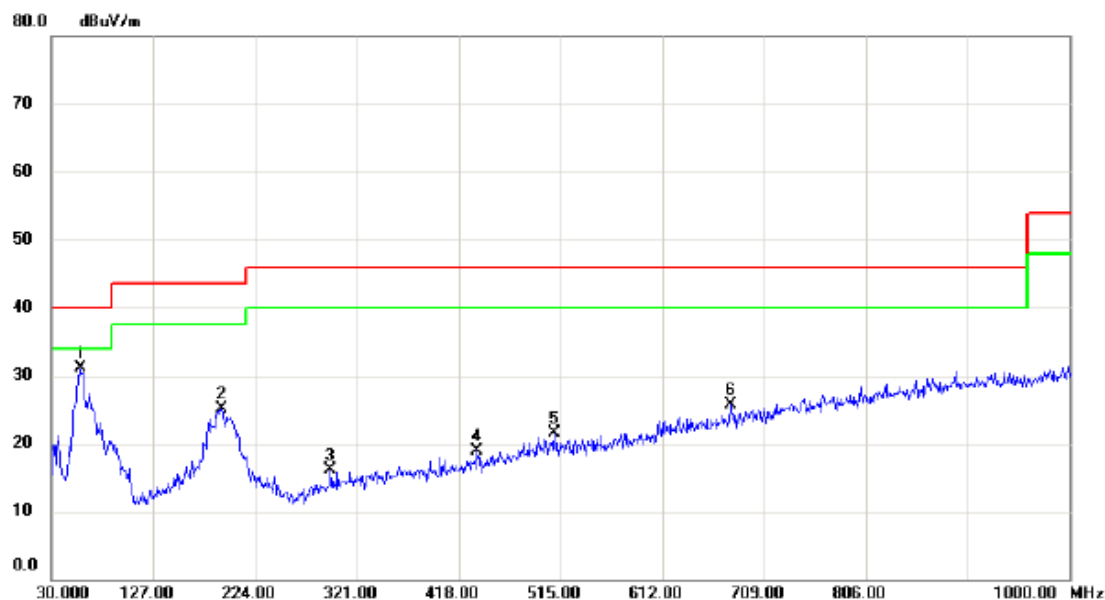

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.160	45.08	-14.04	31.04	40.00	-8.96	peak	
2		191.990	38.07	-13.02	25.05	43.50	-18.45	peak	
3		295.780	29.57	-13.41	16.16	46.00	-29.84	peak	
4		435.460	29.24	-10.36	18.88	46.00	-27.12	peak	
5		509.180	29.99	-8.53	21.46	46.00	-24.54	peak	
6		676.990	30.34	-4.65	25.69	46.00	-20.31	peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: HUAWEI

Horizontal

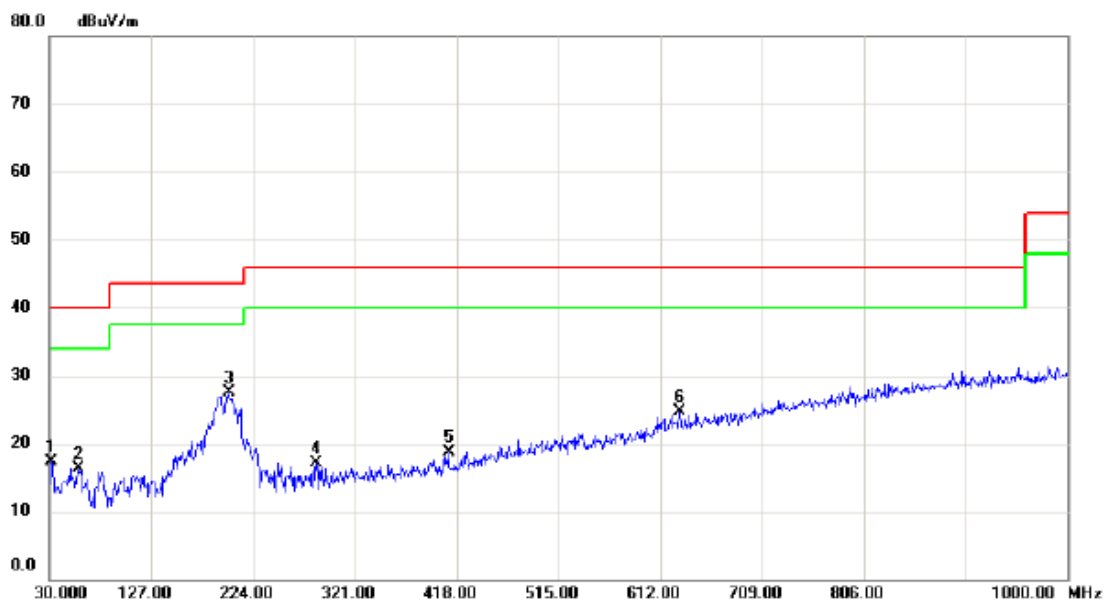


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.940	32.43	-15.04	17.39	40.00	-22.61	peak	
2		58.130	30.44	-14.13	16.31	40.00	-23.69	peak	
3	*	200.720	41.27	-13.77	27.50	43.50	-16.00	peak	
4		284.140	31.59	-14.53	17.06	46.00	-28.94	peak	
5		410.240	29.77	-11.06	18.71	46.00	-27.29	peak	
6		630.430	30.45	-5.84	24.61	46.00	-21.39	peak	

MIMO

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: PHITEK


Vertical

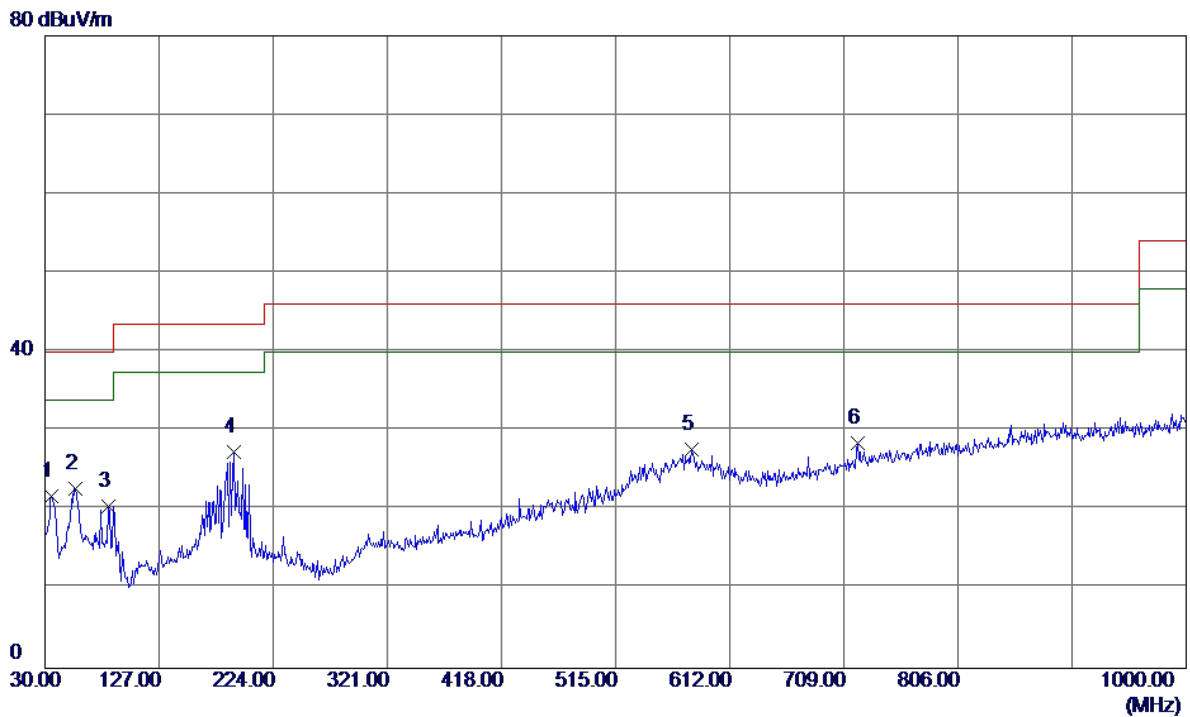

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	35.8200	36.31	-14.51	21.80	40.00	-18.20	Peak	
2	56.1900	36.65	-13.95	22.70	40.00	-17.30	Peak	
3	84.3200	38.86	-18.37	20.49	40.00	-19.51	Peak	
4 *	191.0200	40.34	-12.94	27.40	43.50	-16.10	Peak	
5	579.9900	34.64	-6.94	27.70	46.00	-18.30	Peak	
6	720.6400	31.78	-3.32	28.46	46.00	-17.54	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: PHITEK


Horizontal

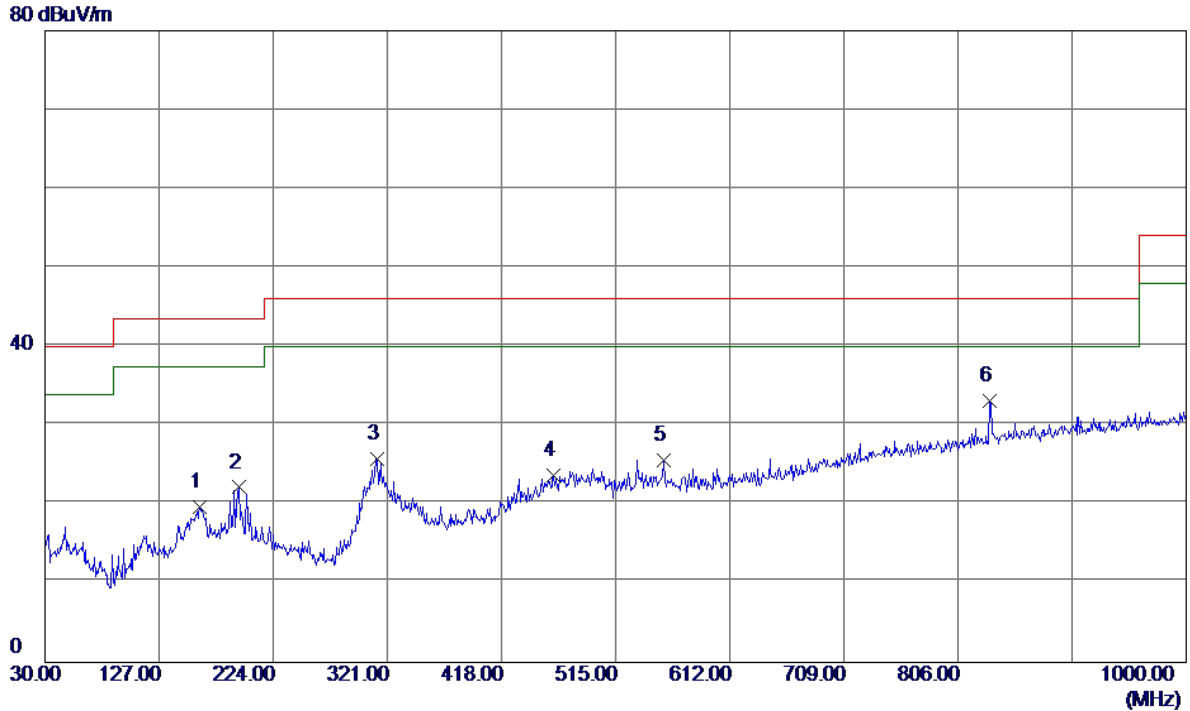

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	161.9200	32.51	-12.82	19.69	43.50	-23.81	Peak	
2	194.9000	35.45	-13.29	22.16	43.50	-21.34	Peak	
3	312.2700	38.39	-12.62	25.77	46.00	-20.23	Peak	
4	462.6200	33.38	-9.63	23.75	46.00	-22.25	Peak	
5	555.7400	33.21	-7.57	25.64	46.00	-20.36	Peak	
6 *	833.1599	33.62	-0.46	33.16	46.00	-12.84	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: PHITEK


Vertical

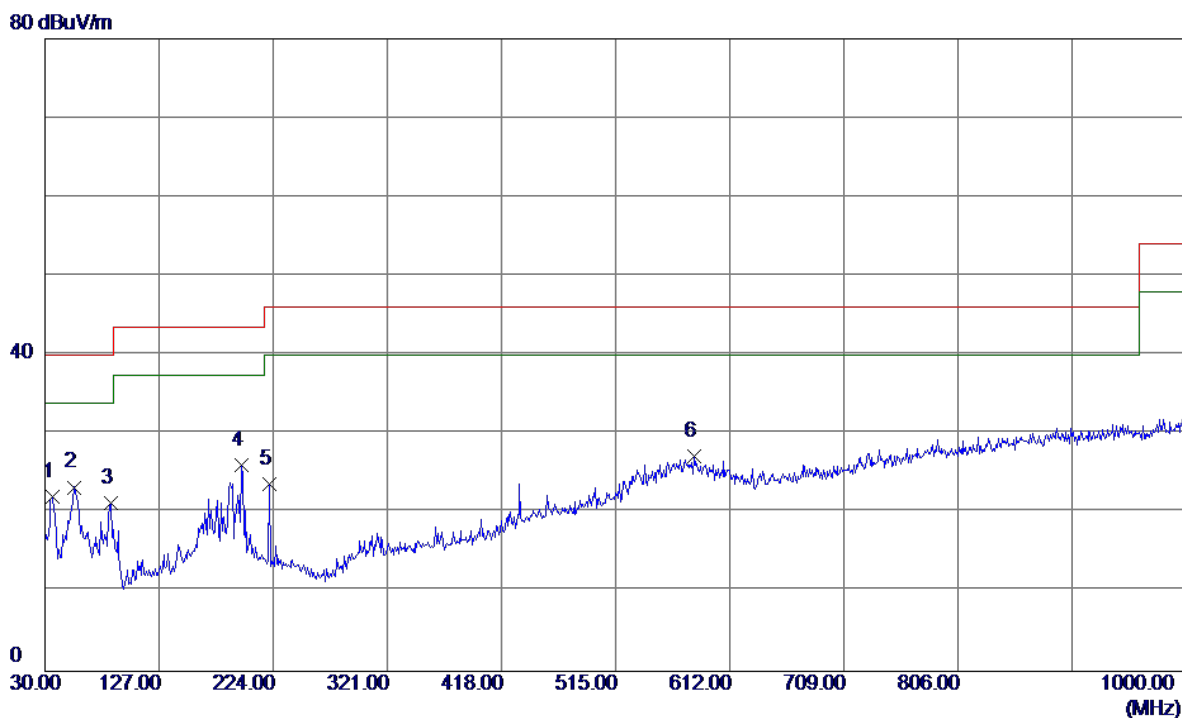

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	36.7900	36.53	-14.41	22.12	40.00	-17.88	Peak	
2 *	55.2200	37.22	-13.94	23.28	40.00	-16.72	Peak	
3	86.2600	39.69	-18.46	21.23	40.00	-18.77	Peak	
4	196.8400	39.59	-13.46	26.13	43.50	-17.37	Peak	
5	221.0900	37.57	-13.93	23.64	46.00	-22.36	Peak	
6	581.9300	34.14	-6.89	27.25	46.00	-18.75	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz _Adapter: PHITEK


Horizontal

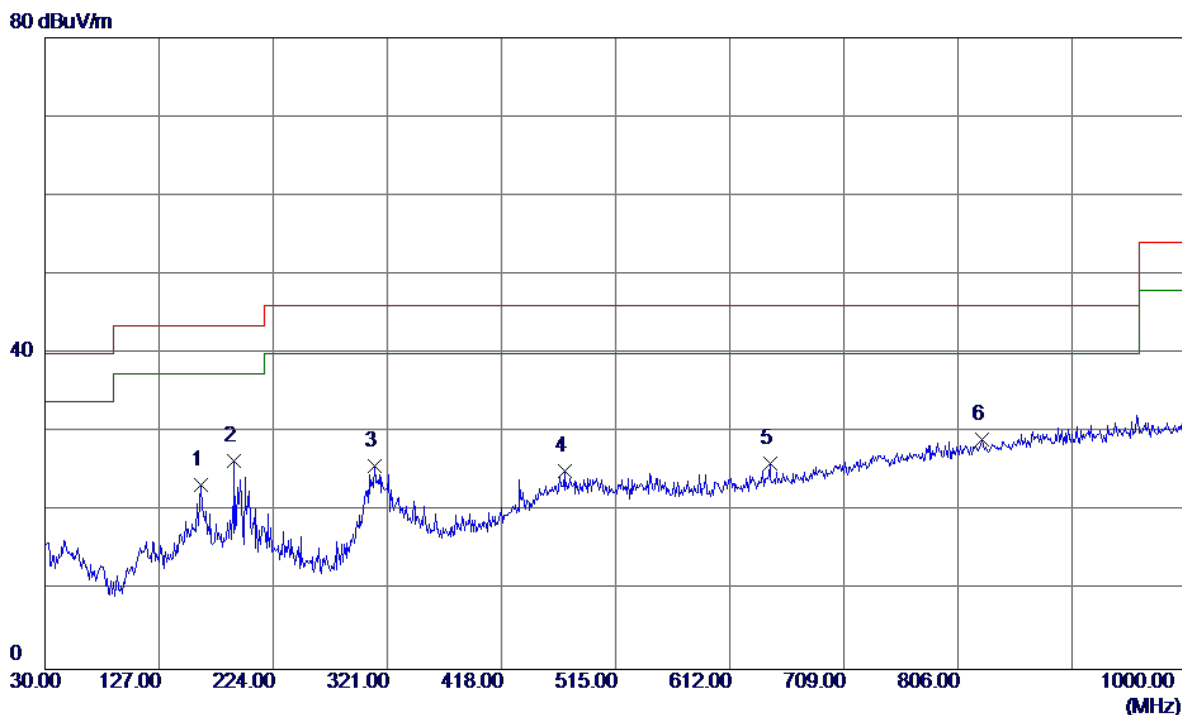

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	162.8900	36.16	-12.76	23.40	43.50	-20.10	Peak	
2	191.0200	39.31	-12.94	26.37	43.50	-17.13	Peak	
3	310.3299	38.47	-12.65	25.82	46.00	-20.18	Peak	
4	471.3500	34.52	-9.42	25.10	46.00	-20.90	Peak	
5	645.9500	31.57	-5.55	26.02	46.00	-19.98	Peak	
6 *	826.3700	29.74	-0.64	29.10	46.00	-16.90	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: PHITEK


Vertical

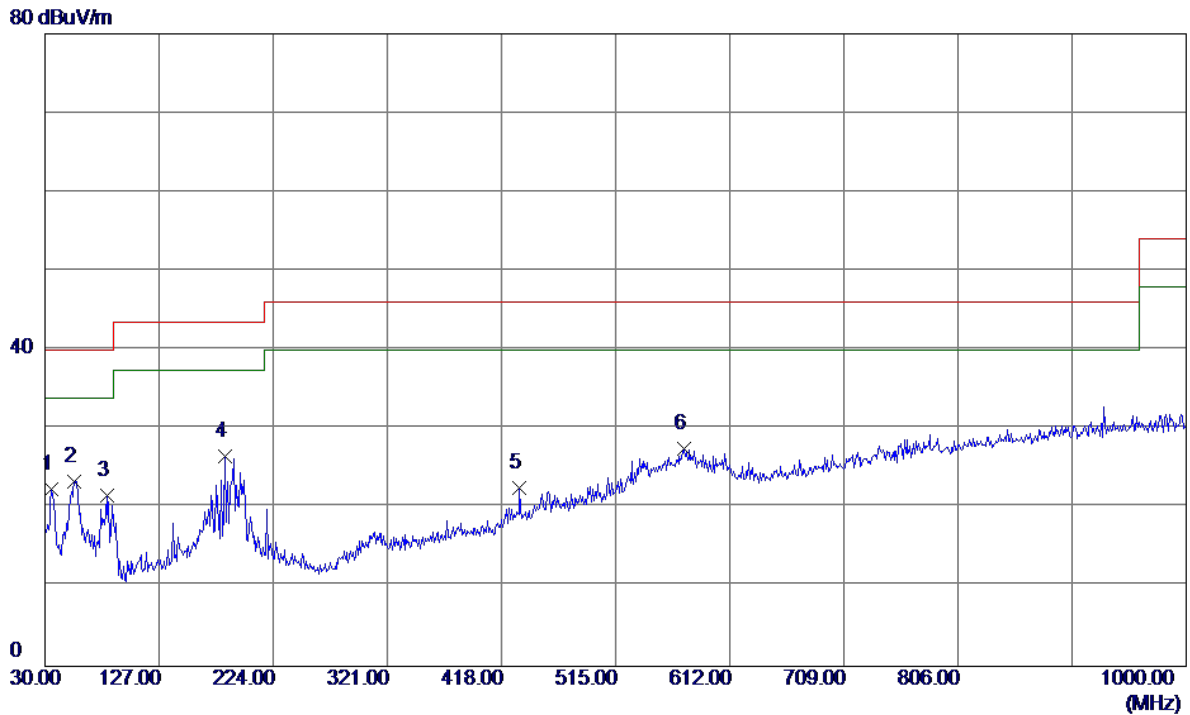

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	35.8200	36.97	-14.51	22.46	40.00	-17.54	Peak	
2 *	55.2200	37.33	-13.94	23.39	40.00	-16.61	Peak	
3	82.3800	39.85	-18.31	21.54	40.00	-18.46	Peak	
4	183.2600	38.79	-12.30	26.49	43.50	-17.01	Peak	
5	433.5200	33.04	-10.41	22.63	46.00	-23.37	Peak	
6	573.2000	34.62	-7.11	27.51	46.00	-18.49	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: PHITEK

Horizontal

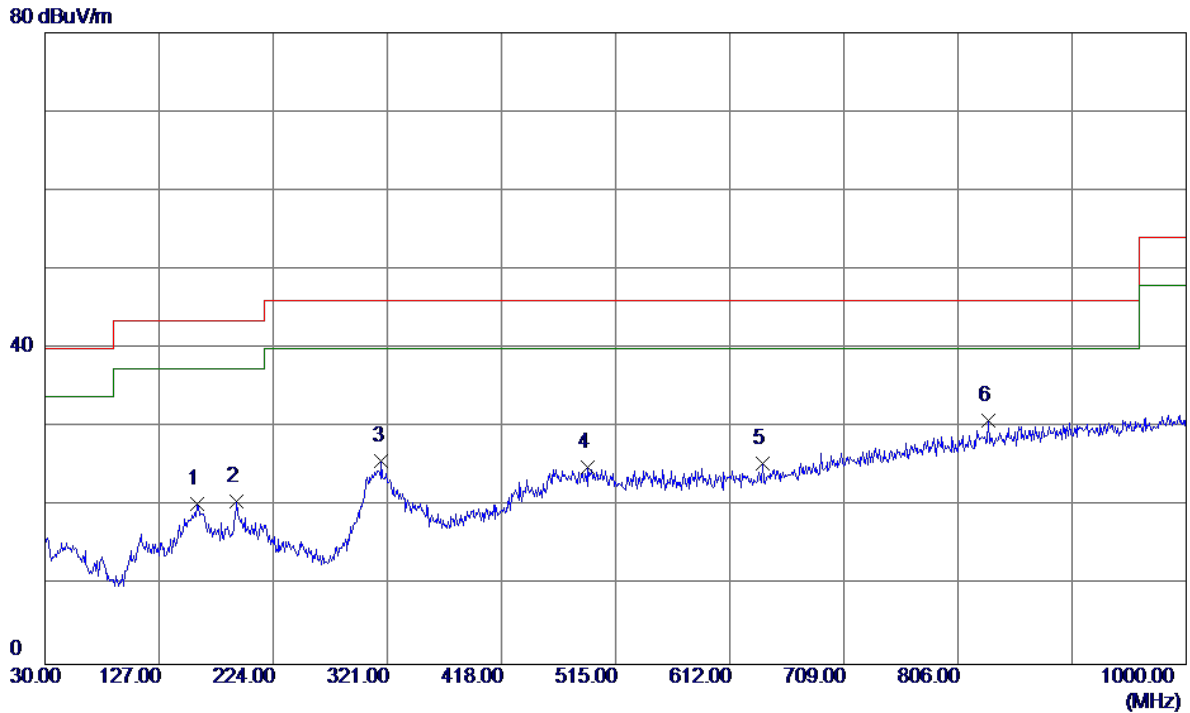


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	159.0100	33.34	-12.99	20.35	43.50	-23.15	Peak	
2	192.9600	33.76	-13.11	20.65	43.50	-22.85	Peak	
3	316.1500	38.31	-12.55	25.76	46.00	-20.24	Peak	
4	491.7200	33.91	-8.92	24.99	46.00	-21.01	Peak	
5	640.1300	31.16	-5.66	25.50	46.00	-20.50	Peak	
6 *	832.1900	31.41	-0.48	30.93	46.00	-15.07	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: PHITEK

Vertical


80 dBuV/m

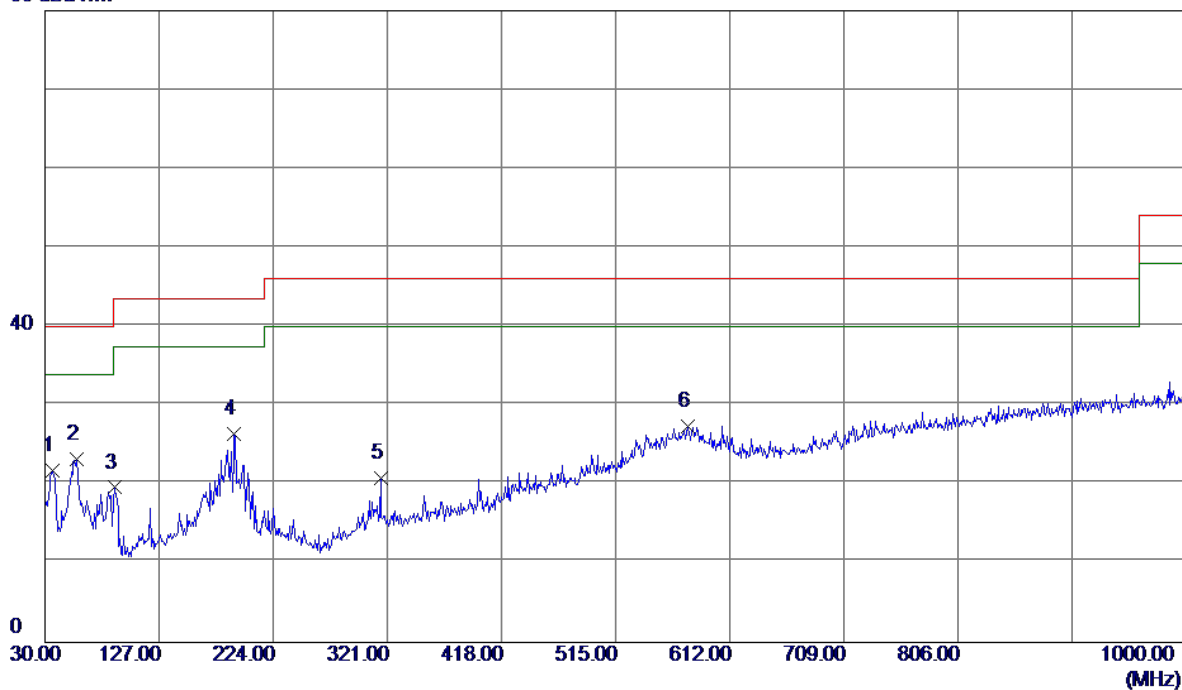

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	36.7900	36.24	-14.41	21.83	40.00	-18.17	Peak	
2 *	57.1600	37.19	-14.04	23.15	40.00	-16.85	Peak	
3	89.1700	38.21	-18.61	19.60	43.50	-23.90	Peak	
4	191.0200	39.30	-12.94	26.36	43.50	-17.14	Peak	
5	315.1800	33.38	-12.56	20.82	46.00	-25.18	Peak	
6	576.1100	34.43	-7.04	27.39	46.00	-18.61	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: PHITEK

Horizontal

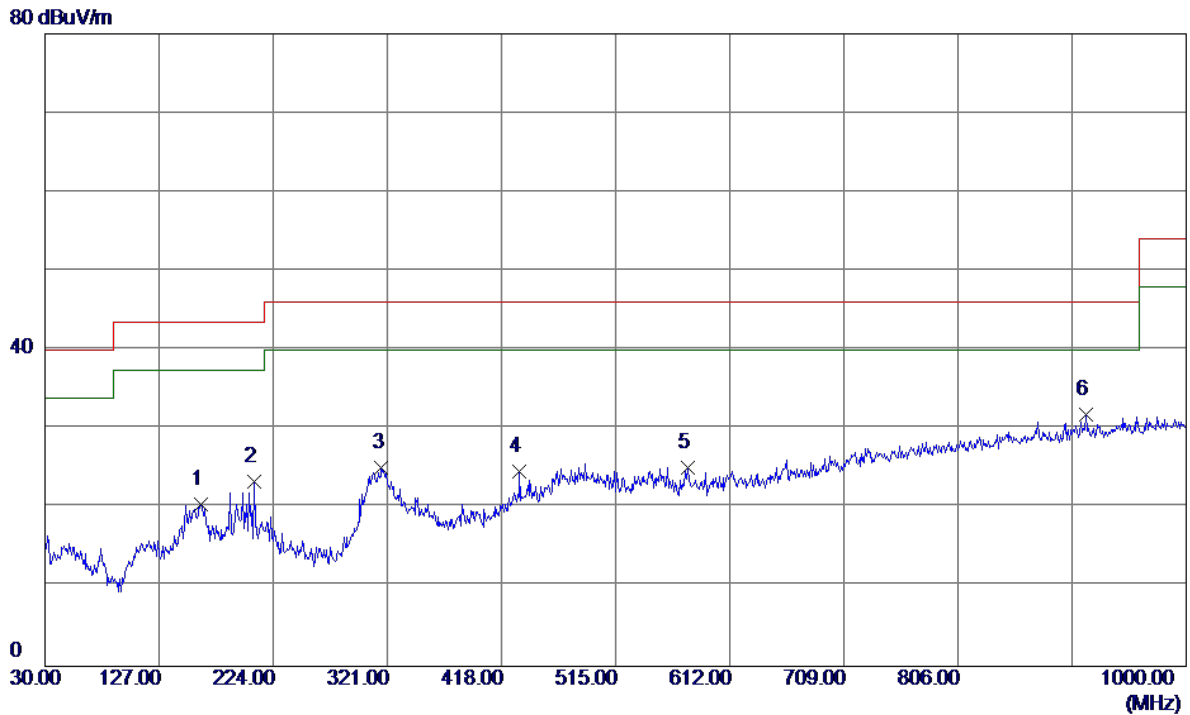


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	162.8900	33.26	-12.76	20.50	43.50	-23.00	Peak	
2	207.5100	37.21	-13.92	23.29	43.50	-20.21	Peak	
3	316.1500	37.61	-12.55	25.06	46.00	-20.94	Peak	
4	433.5200	35.03	-10.41	24.62	46.00	-21.38	Peak	
5	576.1100	32.18	-7.04	25.14	46.00	-20.86	Peak	
6 *	914.6400	30.48	1.31	31.79	46.00	-14.21	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: PHITEK

Vertical


80 dBuV/m

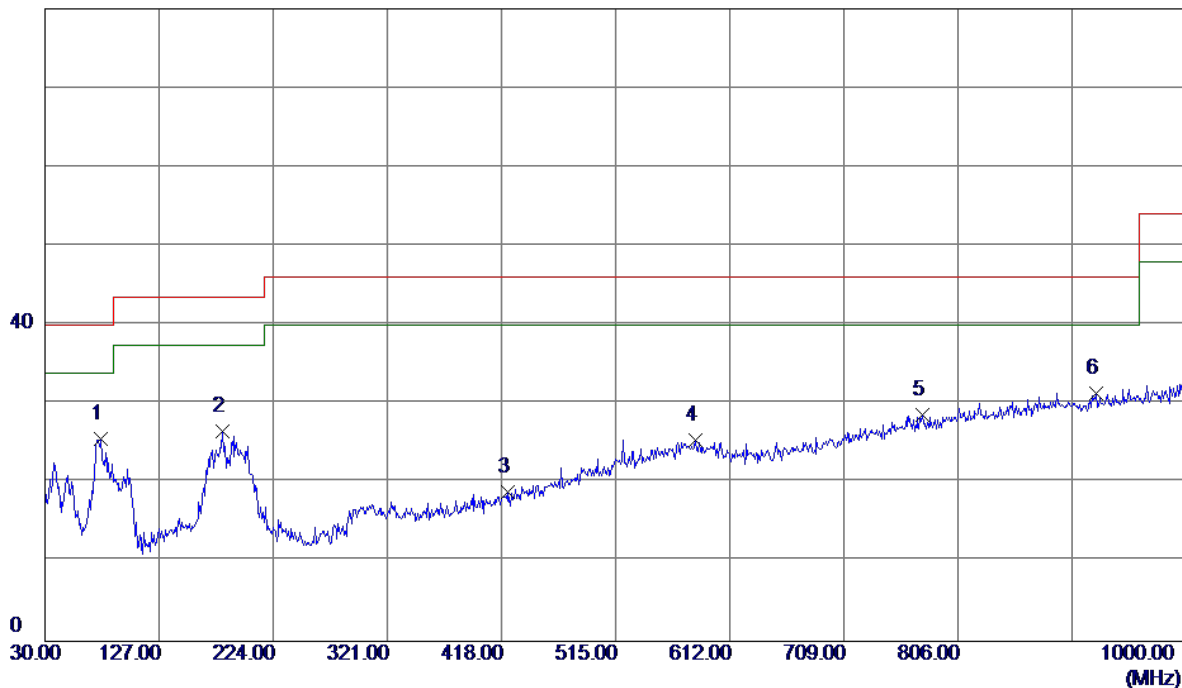

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	77.5300	43.20	-17.67	25.53	40.00	-14.47	Peak	
2	181.3200	38.77	-12.15	26.62	43.50	-16.88	Peak	
3	423.8200	29.62	-10.68	18.94	46.00	-27.06	Peak	
4	582.9000	32.31	-6.86	25.45	46.00	-20.55	Peak	
5	775.9300	30.45	-1.88	28.57	46.00	-17.43	Peak	
6	923.3700	29.95	1.48	31.43	46.00	-14.57	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: PHITEK


Horizontal

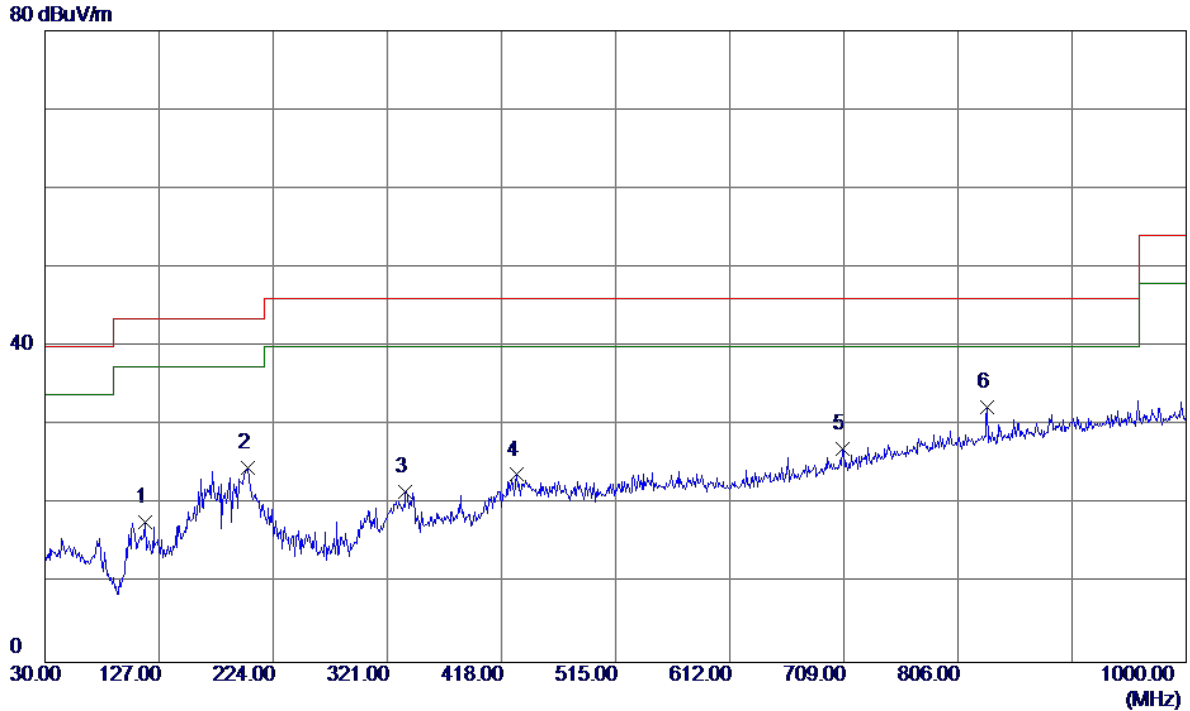

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	115.3600	33.57	-15.77	17.80	43.50	-25.70	Peak	
2	202.6600	38.46	-13.81	24.65	43.50	-18.85	Peak	
3	336.5200	33.83	-12.19	21.64	46.00	-24.36	Peak	
4	430.6100	34.25	-10.49	23.76	46.00	-22.24	Peak	
5	708.0300	30.68	-3.70	26.98	46.00	-19.02	Peak	
6 *	831.2199	32.87	-0.51	32.36	46.00	-13.64	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: PHITEK


Vertical

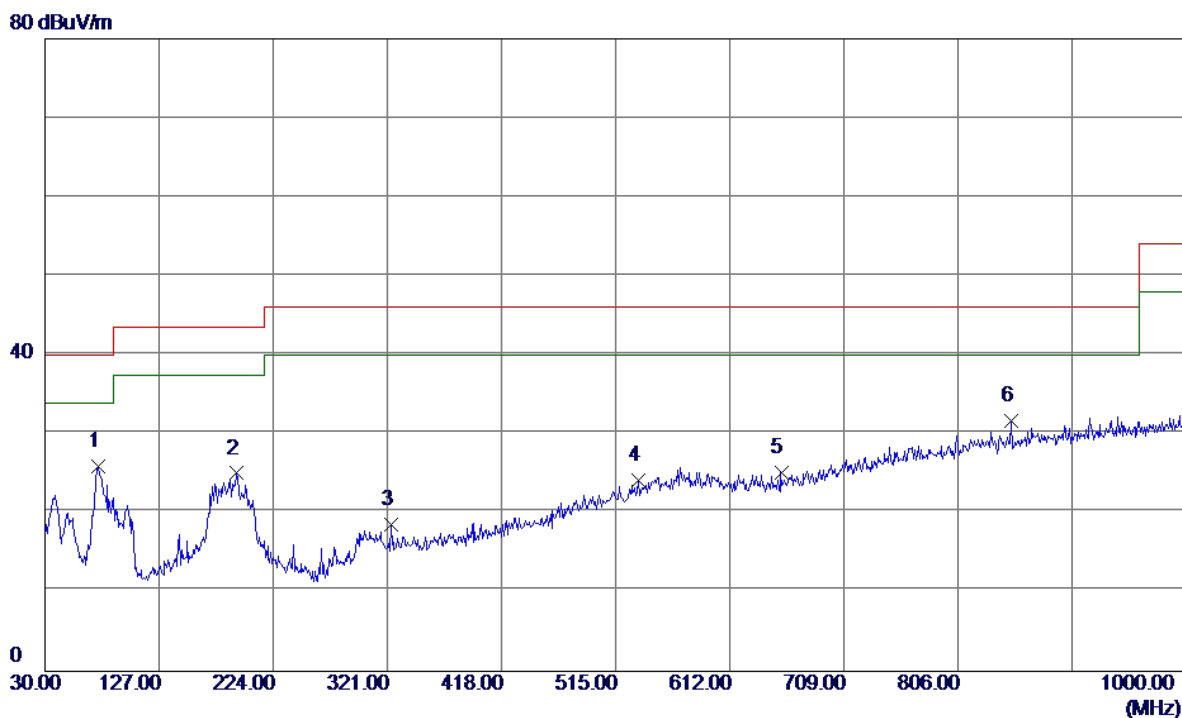

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	75.5899	43.17	-17.22	25.95	40.00	-14.05	Peak	
2	192.9600	38.15	-13.11	25.04	43.50	-18.46	Peak	
3	323.9100	30.97	-12.41	18.56	46.00	-27.44	Peak	
4	534.4000	32.15	-8.03	24.12	46.00	-21.88	Peak	
5	655.6500	30.36	-5.30	25.06	46.00	-20.94	Peak	
6	851.5900	31.63	0.03	31.66	46.00	-14.34	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: PHITEK


Horizontal

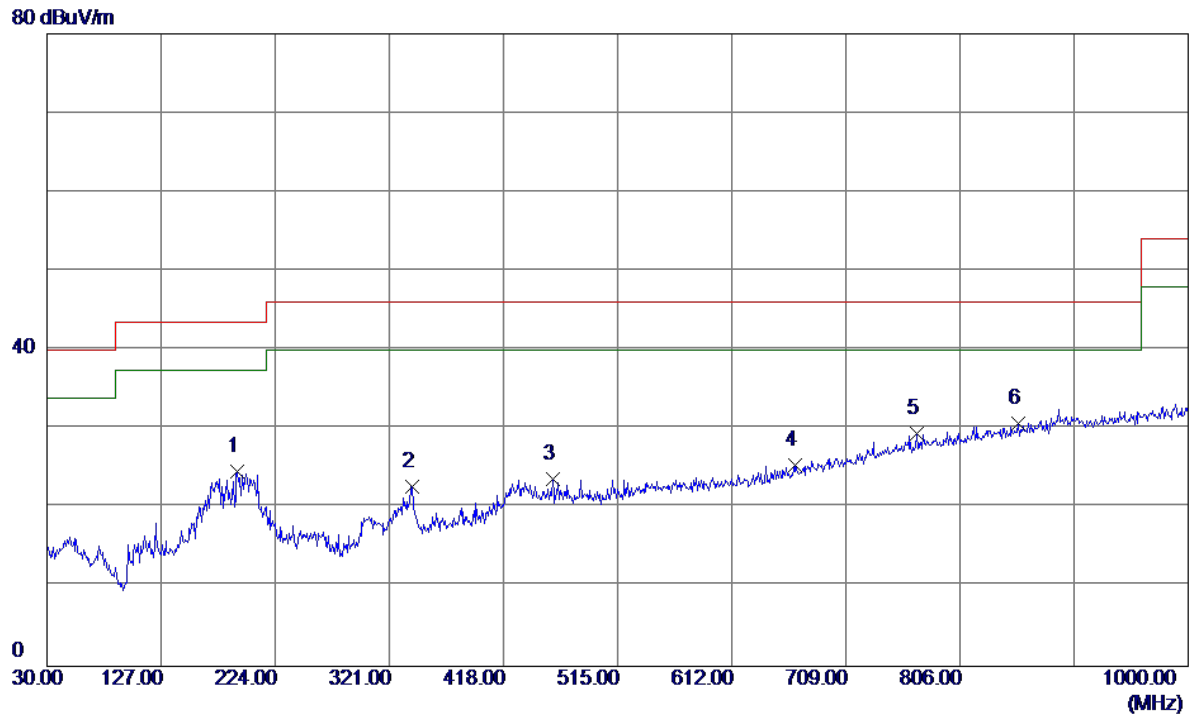

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	191.9900	37.62	-13.03	24.59	43.50	-18.91	Peak	
2	340.4000	34.91	-12.12	22.79	46.00	-23.21	Peak	
3	459.7100	33.45	-9.70	23.75	46.00	-22.25	Peak	
4	666.3200	30.39	-4.97	25.42	46.00	-20.58	Peak	
5	769.1400	31.52	-2.03	29.49	46.00	-16.51	Peak	
6 *	855.4700	30.67	0.11	30.78	46.00	-15.22	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: PHITEK


Vertical

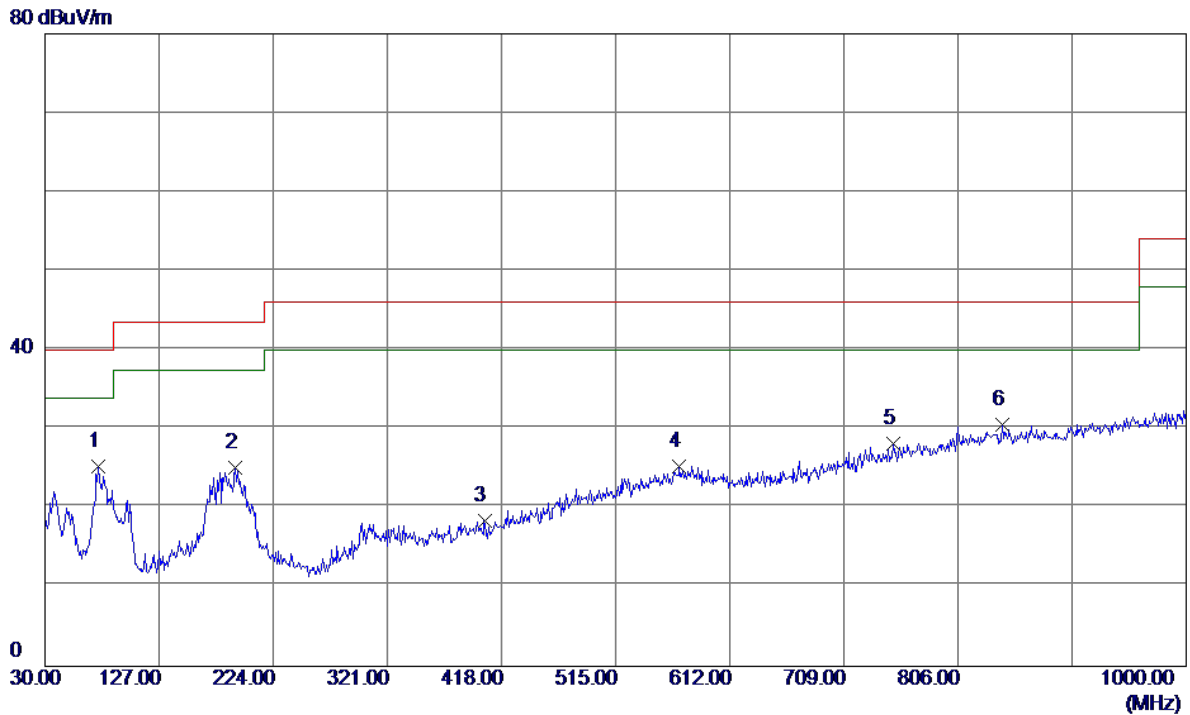

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	75.5899	42.49	-17.22	25.27	40.00	-14.73	Peak	
2	191.9900	38.18	-13.03	25.15	43.50	-18.35	Peak	
3	403.4500	29.64	-11.26	18.38	46.00	-27.62	Peak	
4	569.3200	32.55	-7.21	25.34	46.00	-20.66	Peak	
5	750.7100	30.60	-2.43	28.17	46.00	-17.83	Peak	
6	843.8300	30.77	-0.17	30.60	46.00	-15.40	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz _Adapter: PHITEK


Horizontal

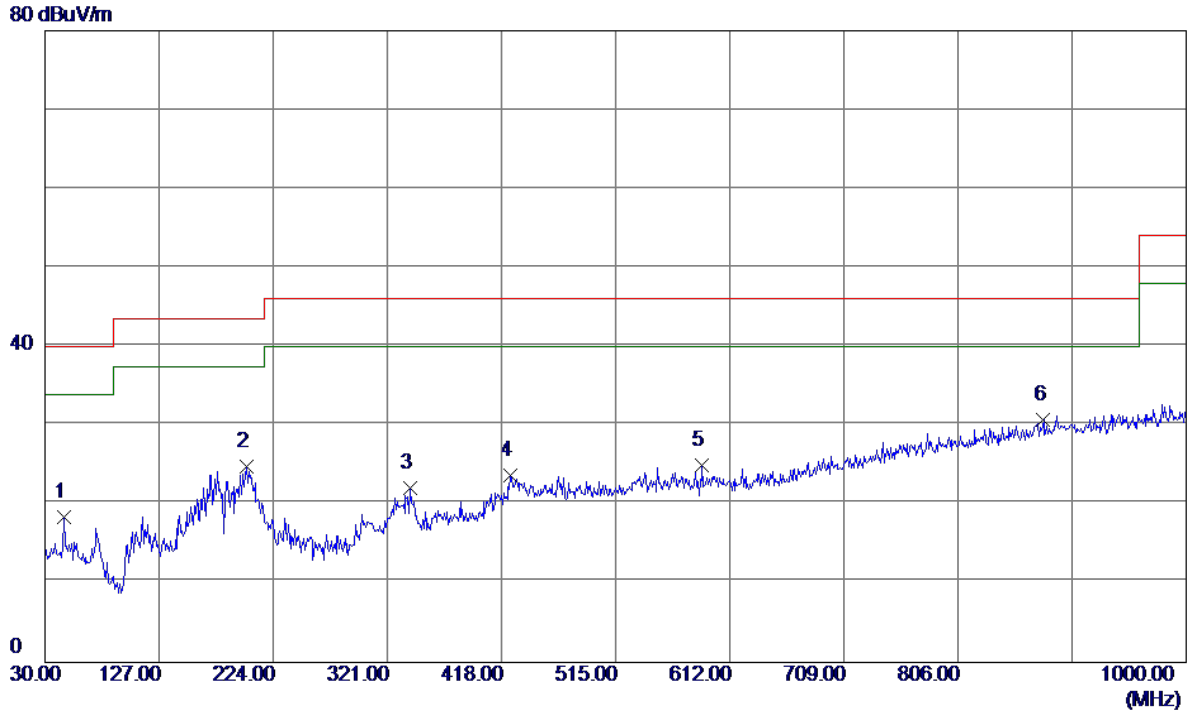

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	46.4900	31.38	-12.98	18.40	40.00	-21.60	Peak	
2	201.6900	38.60	-13.79	24.81	43.50	-18.69	Peak	
3	340.4000	34.16	-12.12	22.04	46.00	-23.96	Peak	
4	425.7600	34.38	-10.63	23.75	46.00	-22.25	Peak	
5	588.7199	31.74	-6.71	25.03	46.00	-20.97	Peak	
6 *	878.7500	30.12	0.59	30.71	46.00	-15.29	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: PHITEK

Vertical

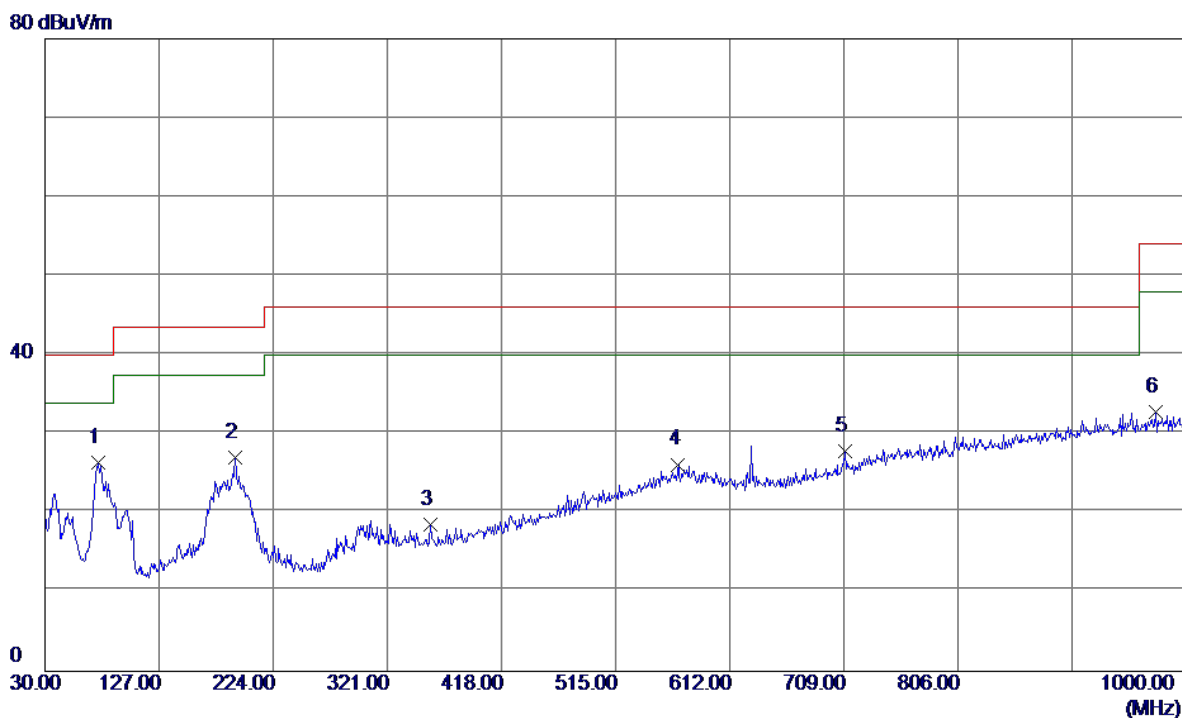


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	75.5899	43.67	-17.22	26.45	40.00	-13.55	Peak	
2	191.9900	40.01	-13.03	26.98	43.50	-16.52	Peak	
3	357.8599	30.46	-11.86	18.60	46.00	-27.40	Peak	
4	568.3500	33.40	-7.24	26.16	46.00	-19.84	Peak	
5	709.9699	31.54	-3.64	27.90	46.00	-18.10	Peak	
6	973.8100	30.30	2.45	32.75	54.00	-21.25	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: PHITEK

Horizontal

80 dBuV/m

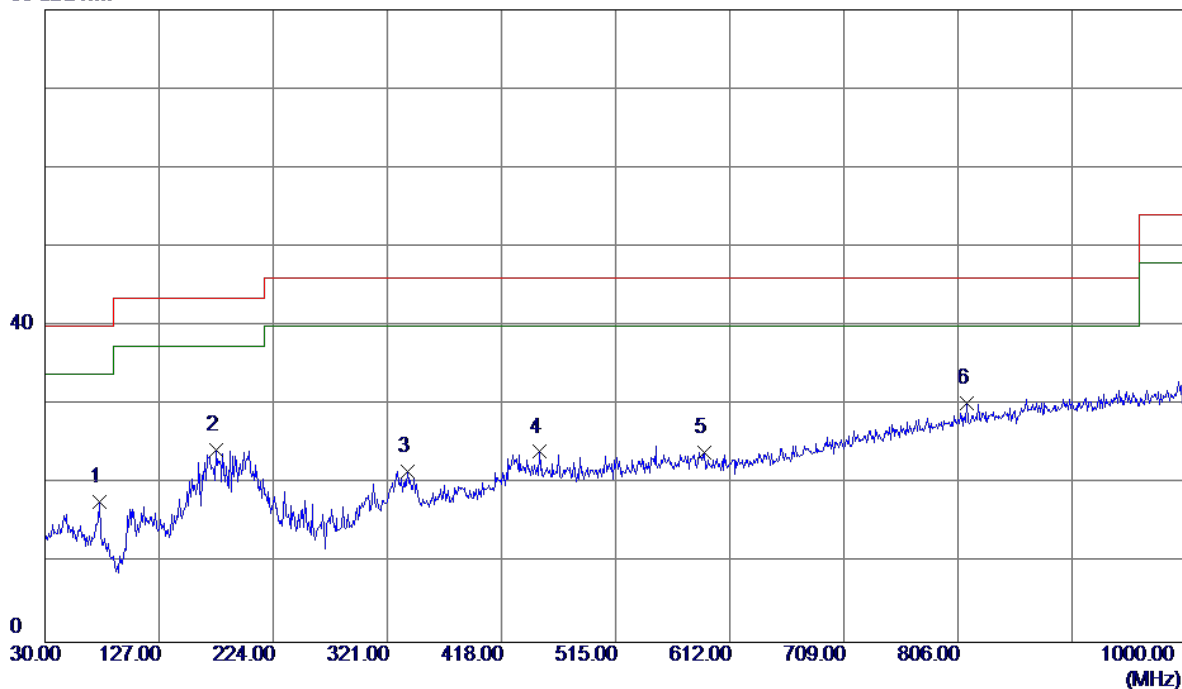


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	76.5600	35.19	-17.44	17.75	40.00	-22.25	Peak	
2	175.5000	36.51	-12.17	24.34	43.50	-19.16	Peak	
3	338.4600	33.82	-12.16	21.66	46.00	-24.34	Peak	
4	450.0100	34.02	-9.94	24.08	46.00	-21.92	Peak	
5	590.6599	30.72	-6.66	24.06	46.00	-21.94	Peak	
6 *	813.7600	31.23	-0.99	30.24	46.00	-15.76	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: HUNTKEY

Vertical


80 dBuV/m

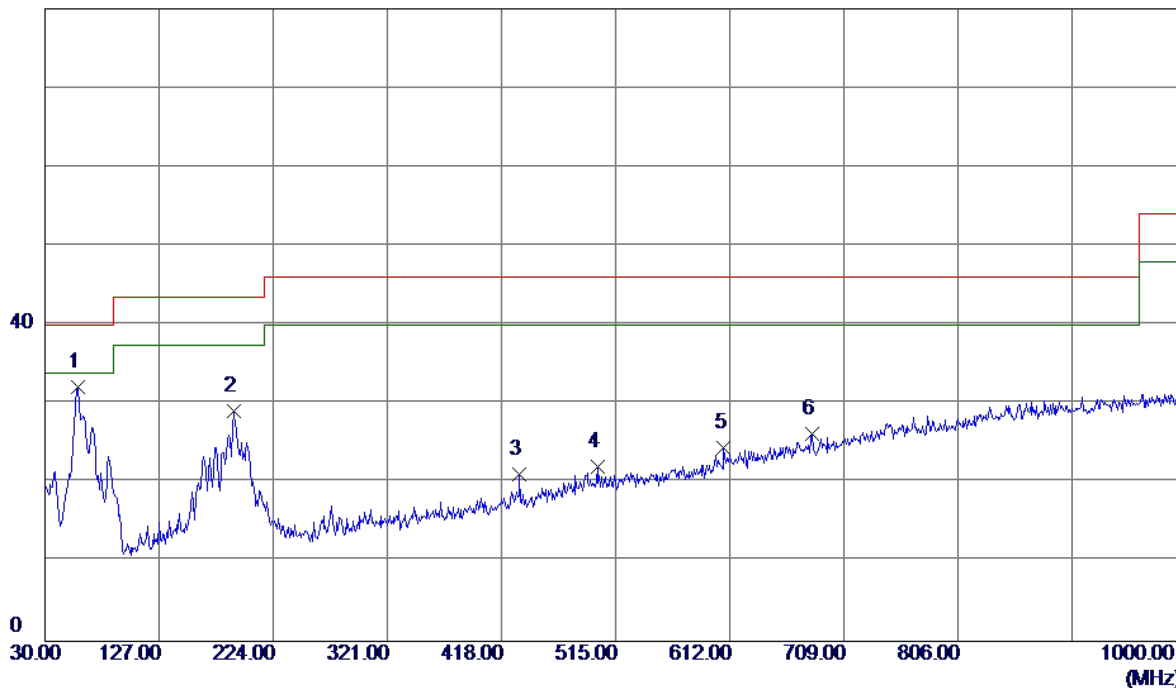

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	58.1300	46.32	-14.13	32.19	40.00	-7.81	Peak	
2	190.0500	41.95	-12.85	29.10	43.50	-14.40	Peak	
3	433.5200	31.46	-10.41	21.05	46.00	-24.95	Peak	
4	499.4800	30.84	-8.73	22.11	46.00	-23.89	Peak	
5	607.1500	30.78	-6.28	24.50	46.00	-21.50	Peak	
6	681.8400	30.77	-4.50	26.27	46.00	-19.73	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: HUNTKEY


Horizontal

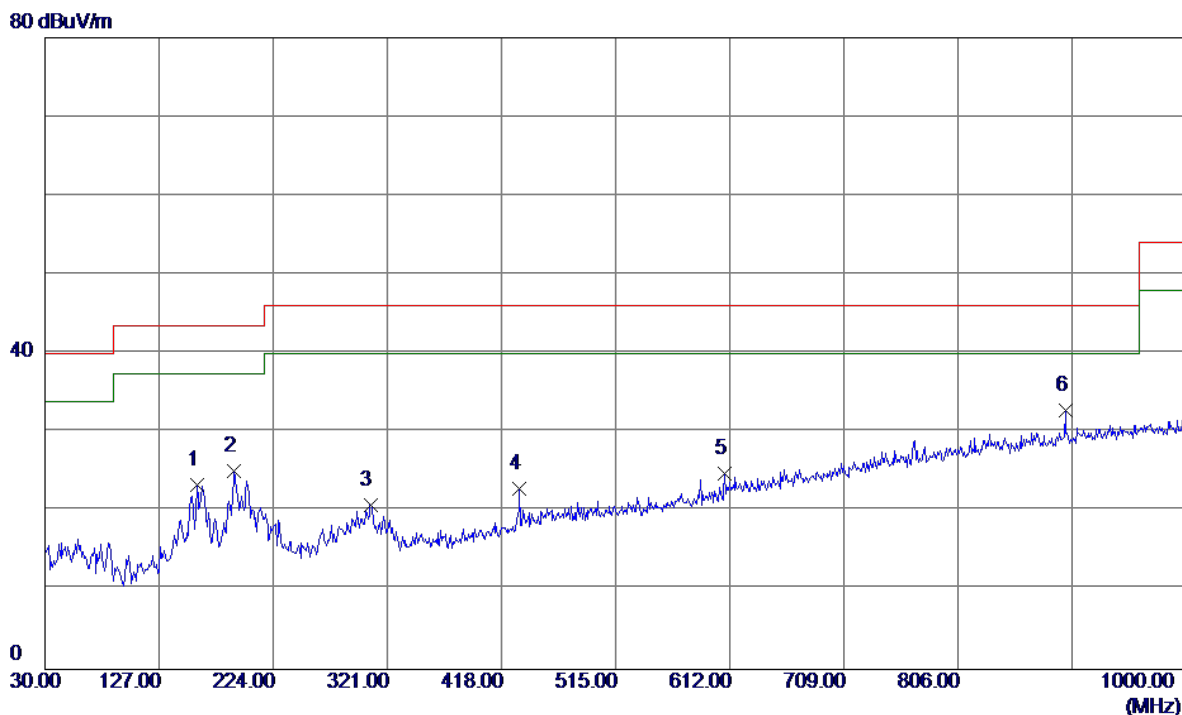

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	159.0100	36.41	-12.99	23.42	43.50	-20.08	Peak	
2	191.0200	38.11	-12.94	25.17	43.50	-18.33	Peak	
3	306.4500	33.53	-12.72	20.81	46.00	-25.19	Peak	
4	433.5200	33.36	-10.41	22.95	46.00	-23.05	Peak	
5	608.1200	31.06	-6.27	24.79	46.00	-21.21	Peak	
6 *	897.1800	31.79	0.97	32.76	46.00	-13.24	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: HUNTKEY


Vertical

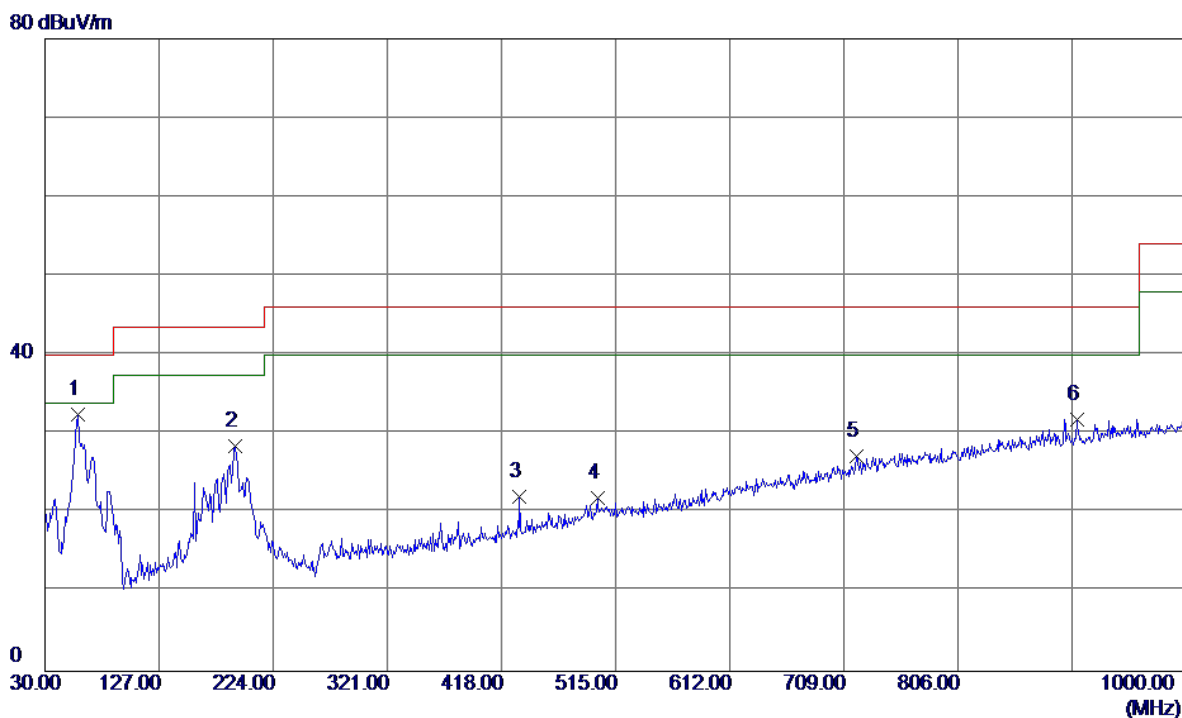

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	58.1300	46.58	-14.13	32.45	40.00	-7.55	Peak	
2	191.9900	41.46	-13.03	28.43	43.50	-15.07	Peak	
3	433.5200	32.48	-10.41	22.07	46.00	-23.93	Peak	
4	499.4800	30.70	-8.73	21.97	46.00	-24.03	Peak	
5	719.6700	30.50	-3.35	27.15	46.00	-18.85	Peak	
6	906.8800	30.73	1.16	31.89	46.00	-14.11	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: HUNTKEY

Horizontal

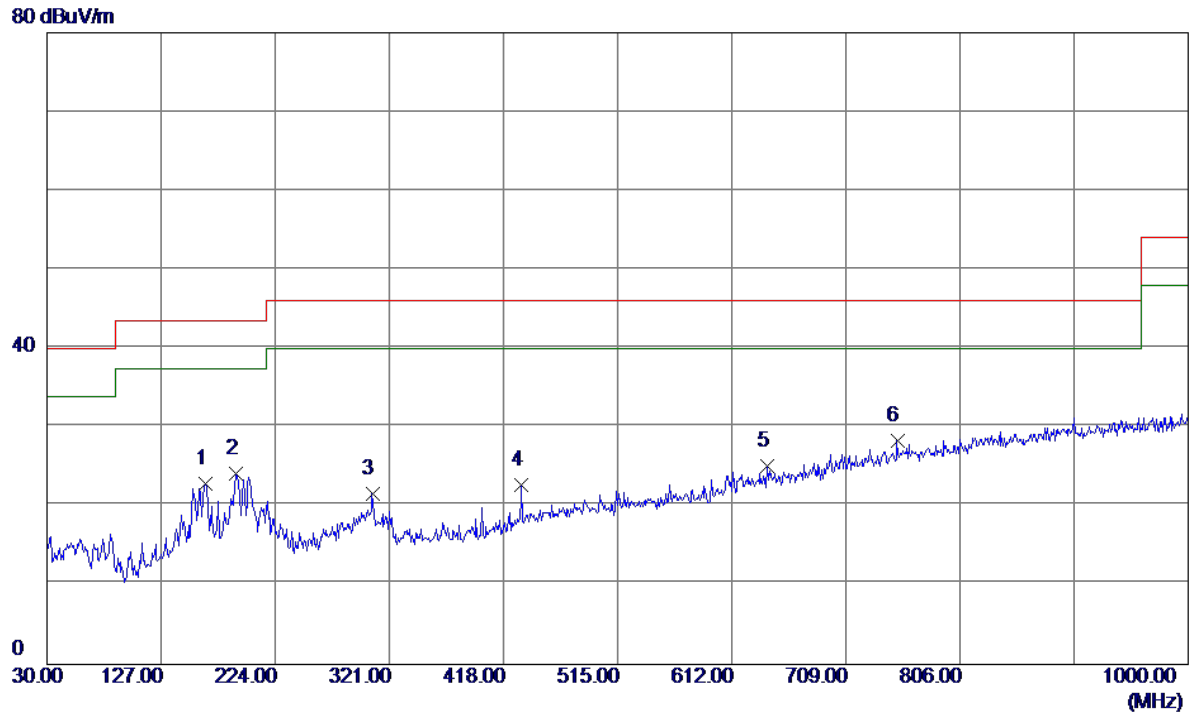


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	164.8300	35.57	-12.64	22.93	43.50	-20.57	Peak	
2	191.0200	37.08	-12.94	24.14	43.50	-19.36	Peak	
3	306.4500	34.26	-12.72	21.54	46.00	-24.46	Peak	
4	433.5200	33.06	-10.41	22.65	46.00	-23.35	Peak	
5	642.0700	30.69	-5.62	25.07	46.00	-20.93	Peak	
6 *	752.6500	30.65	-2.39	28.26	46.00	-17.74	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: HUNTKEY

Vertical


80 dBuV/m

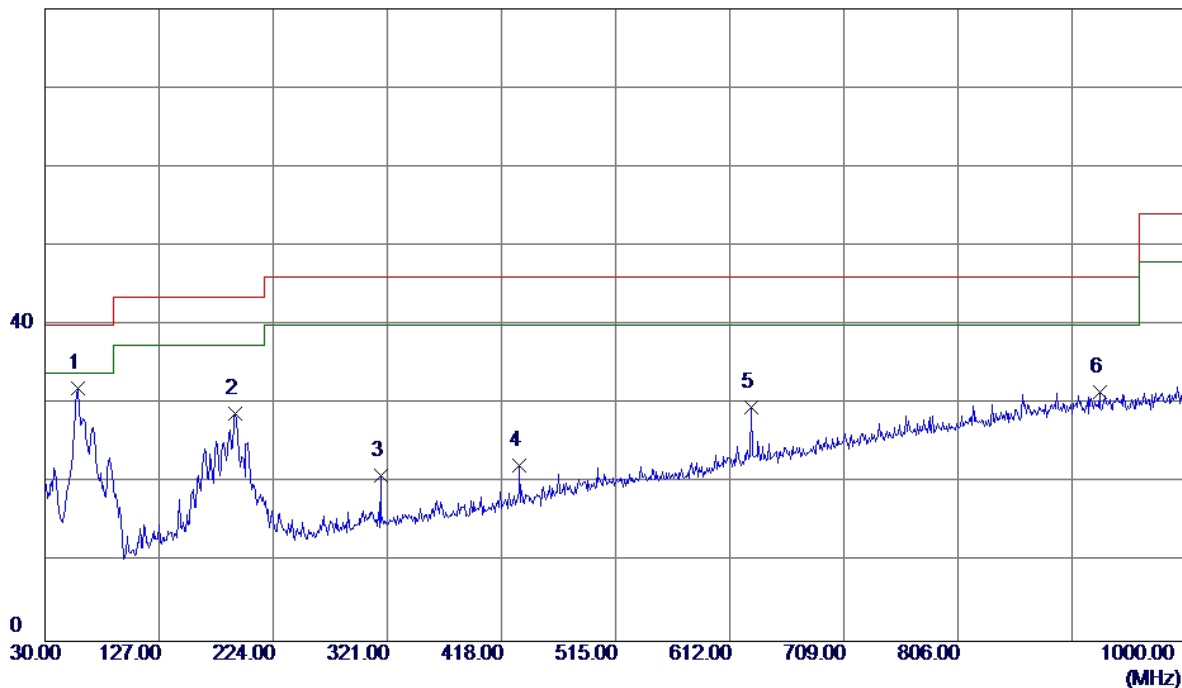

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	58.1300	46.15	-14.13	32.02	40.00	-7.98	Peak	
2	191.9900	41.89	-13.03	28.86	43.50	-14.64	Peak	
3	315.1800	33.47	-12.56	20.91	46.00	-25.09	Peak	
4	433.5200	32.66	-10.41	22.25	46.00	-23.75	Peak	
5	630.4300	35.48	-5.84	29.64	46.00	-16.36	Peak	
6	926.2800	30.02	1.54	31.56	46.00	-14.44	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: HUNTKEY

Horizontal

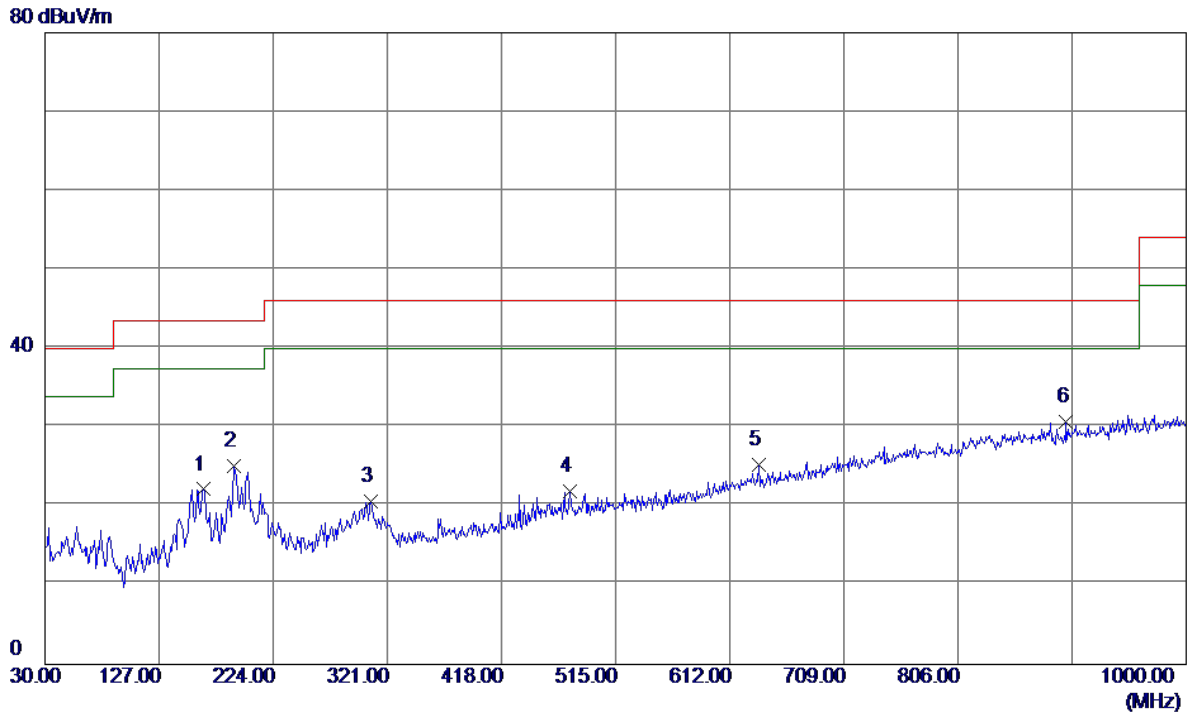


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	164.8300	34.80	-12.64	22.16	43.50	-21.34	Peak	
2	191.0200	38.06	-12.94	25.12	43.50	-18.38	Peak	
3	307.4200	33.35	-12.70	20.65	46.00	-25.35	Peak	
4	476.2000	31.22	-9.30	21.92	46.00	-24.08	Peak	
5	637.2199	30.95	-5.72	25.23	46.00	-20.77	Peak	
6 *	898.1500	29.80	0.99	30.79	46.00	-15.21	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: HUNTKEY

Vertical

80 dBuV/m

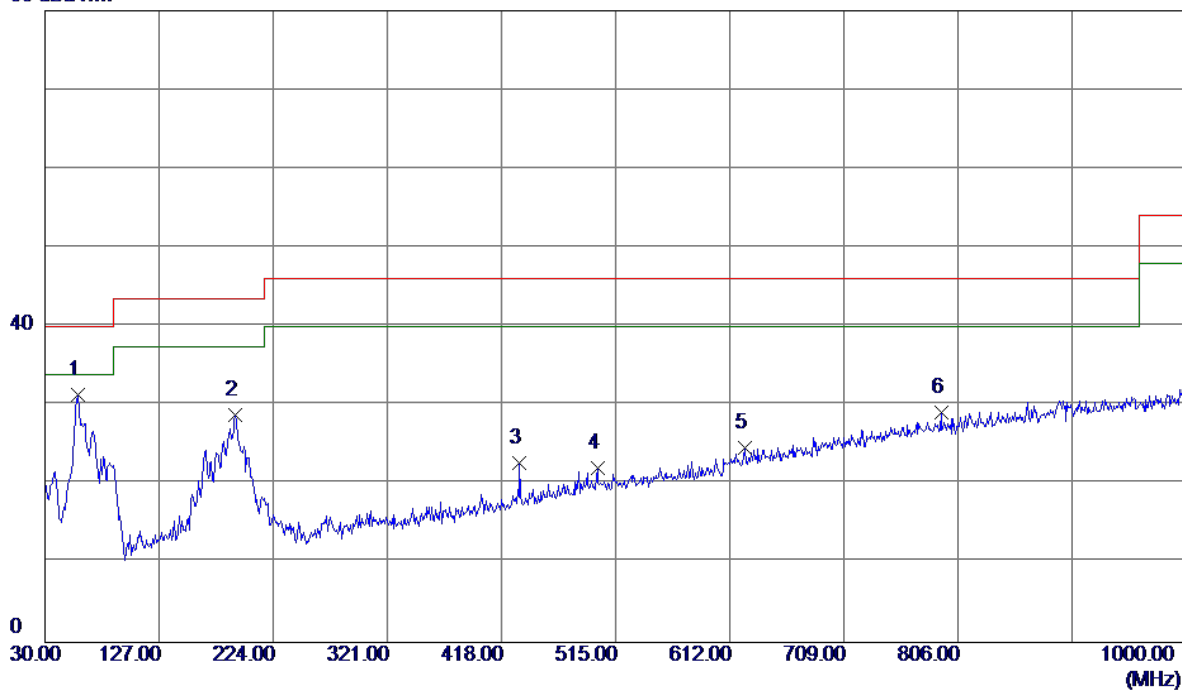


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	58.1300	45.42	-14.13	31.29	40.00	-8.71	Peak	
2	191.9900	41.85	-13.03	28.82	43.50	-14.68	Peak	
3	433.5200	33.20	-10.41	22.79	46.00	-23.21	Peak	
4	499.4800	30.87	-8.73	22.14	46.00	-23.86	Peak	
5	624.6100	30.61	-5.95	24.66	46.00	-21.34	Peak	
6	791.4500	30.65	-1.55	29.10	46.00	-16.90	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: HUNTKEY

Horizontal


80 dBuV/m

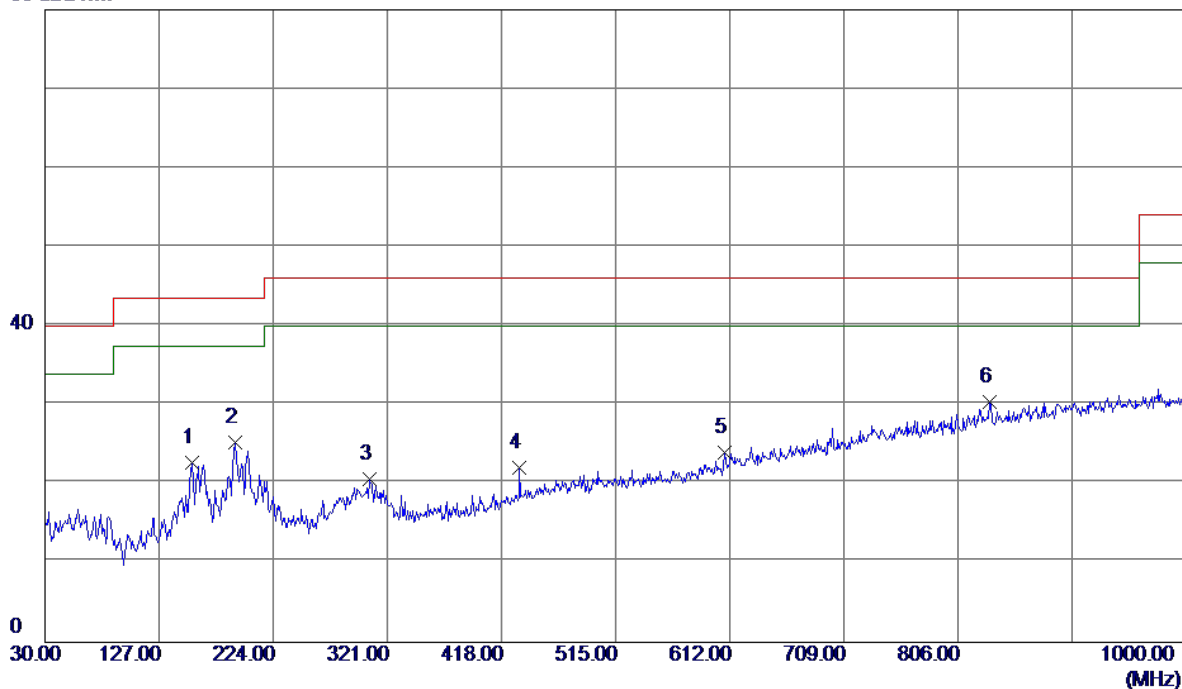

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	155.1300	35.98	-13.22	22.76	43.50	-20.74	Peak	
2	191.9900	38.37	-13.03	25.34	43.50	-18.16	Peak	
3	305.4800	33.34	-12.73	20.61	46.00	-25.39	Peak	
4	433.5200	32.50	-10.41	22.09	46.00	-23.91	Peak	
5	608.1200	30.30	-6.27	24.03	46.00	-21.97	Peak	
6 *	833.1599	30.80	-0.46	30.34	46.00	-15.66	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: HUNTKEY

Vertical

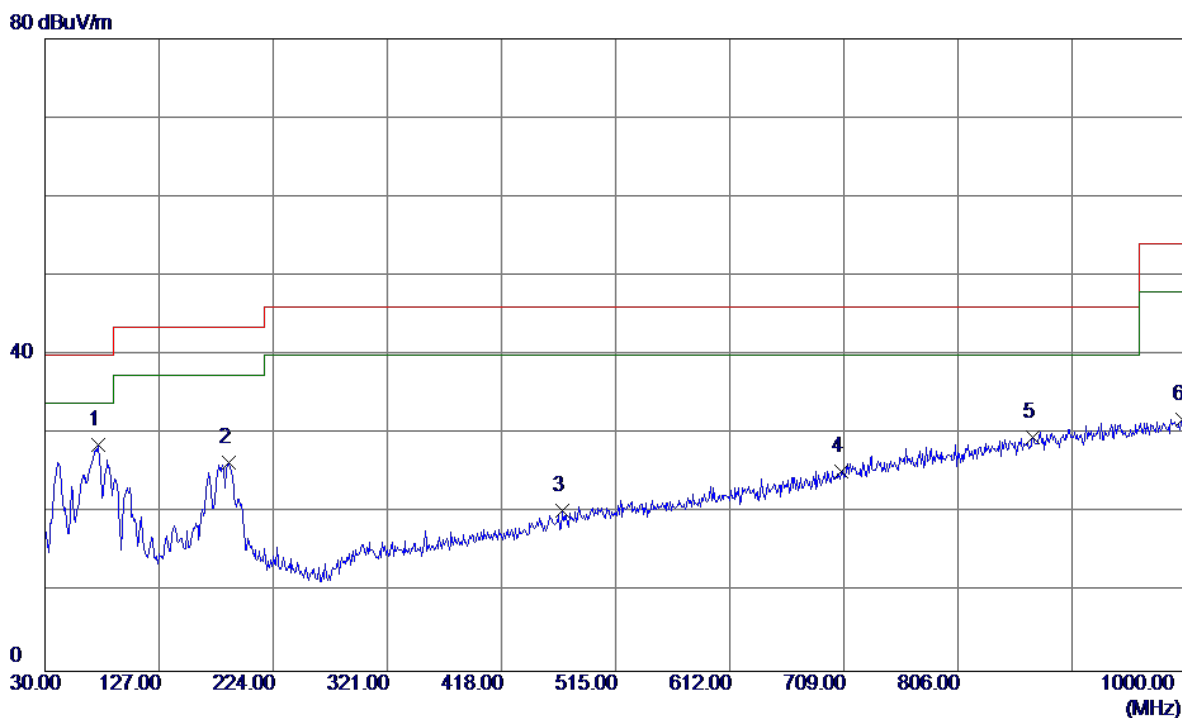

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	75.5899	45.90	-17.22	28.68	40.00	-11.32	Peak	
2	186.1700	38.95	-12.54	26.41	43.50	-17.09	Peak	
3	469.4100	29.74	-9.47	20.27	46.00	-25.73	Peak	
4	707.0600	29.07	-3.73	25.34	46.00	-20.66	Peak	
5	870.0200	29.15	0.41	29.56	46.00	-16.44	Peak	
6	997.0900	29.00	2.90	31.90	54.00	-22.10	Peak	