

承 认 书

Acknowledgment Form

客户名称Customer Name: 金致卓 Jinzhizhuo

客户料号Customer Part Number: _____

我司型号Model Number: RC-G25-4.1UH-3200GS-8MM

送样日期Sample Delivery Date: 2024 年 2 月 22 日

供应方Supplier: 东莞市捷瑞思科技有限公司

绘制draw by	审 核checked	批 准approved
王 莉 芝	邓 祥 桂	陆 如 圣

客户承认 Customer Approved:

合 格 Qualified	不 合 格 Unqualified	承 认 Approved
备 注remark		

东莞捷瑞思科技有限公司 Dongguan Jieruisi Technology CO.,LTD.

Tel: _____



Fax: 86+13632701380

Add: 东莞大岭山镇朗湖路 96 号(金雄达科技园 L 栋 3 楼)

3rd F,Bld. L,Jinxiongda Kejiyaun, NO.96 Langhu Road,Dalingshan Zhen,Dongguan

客户名称 Customer Name	客户料号 Customer Part No.	我司型号 Part No.	版本 Version	日期 Date
金致卓 Jinzhizhuo		RC-G25-4.1UH-3200GS-8MM	A0	2024.02.22

一、平面结构图Planar Structure Diagram: 单位:MM Unit: MM

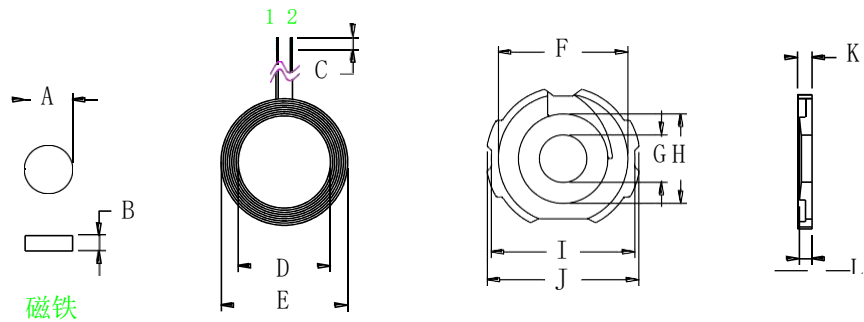

A	7.65±0.05
B	2.5±0.05
C	2±1
D	14±0.2
E	20.7±0.3
F	21±0.2
G	7.7±0.05
H	13.5±0.2
I	23.5±0.3
J	25±0.2
K	2.5±0.1
L	2.25±0.1 中柱高度
M	8±1

二、产品参数Product Parameters:

脚 位 Pin	线 径 Wire Diameter	圈 数 Turns	备 注 Remarks
1 — 2	0.08*24P	10	热风绞合线

三、技术要求Technical Requirements:

- 固定好线头线尾，防止线松断线等现象 Secure the wire ends to prevent loosening or breaking.
- 按客户要求把过长的线头剪，镀上锡，镀锡深度统一为 2±1MM Trim excessively long wires as per customer requirements, tin them, and ensure a uniform tinning depth of 2±1MM.
- 在软磁片上点上适当的白胶，贴上线圈，过程中要保证产品表面干净整洁 Dot the appropriate amount of white glue on the soft magnetic piece, attach the coil, ensuring the product surface is clean and tidy.
- 所用软磁片为带圆孔，无破损 Use soft magnetic pieces with a round

hole, undamaged.

5. 附加工序（按客户要求）：于成品中间圆孔装上 7.65x2.5mm 的磁铁并在成品背后加贴 513-18mm 的圆双面胶，后包装 Additional process (as per customer request): Install a 7.65x2.5mm magnet in the middle hole of the finished product, attach a 513-18mm round double-sided tape to the back, then package.

四、电性参数Electrical Parameters:

1. 电感值，Q 值Inductance, Q Value:

$$\text{PIN } 1 - 2 = 4.1\mu\text{H} \pm 5\%$$

$$Q \text{ 值} \geq 25$$

以上电感值以铨华 1062A 仪器，以 10KHZ/0.3Vrms 为标准或等同仪器。

Measurements taken with Quan Hua 1062A instrument at 10KHZ/0.3Vrms or equivalent.

Q 值以铨华 1062A 仪器，以 100KHZ/0.3Vrms 为标准或等同仪器 Measurements taken with Quan Hua 1062A instrument at 10KHZ/0.3Vrms or equivalent.

五、材料清单Material List:

序号 No.	名称 Name	材质 Material	供应商 Supplier	备注 Remark
1	热风绞合线 Hot air twisted wire	0.08X24P	维汉或等同 Wei Han or equivalent	
2	磁片 Magnet piece	G25 软基材 G25 soft substrate	天通或等同 Tian Tong or equivalent	
3	锡 Tin	高温环保 High temperature environment-friendly	千岛或等同 Qian Dao or equivalent	
4	白胶 White glue	BY882	宝月或等同 Bao Yue or equivalent	

5	强磁 Strong magnet	7.65*2.5(强度 大于 3200GS) 7.65*2.5 (high strength 3200GS)	联胜或等同 Lian Sheng or equivalent	Additional 附加工序, 按客户要求 processes as per customer requirements.
6	双面胶 Double-sided tape	513-18mm	鸿辉或等同 Hong Hui or equivalent	