



# TEST REPORT

No.I15N01324-EMC

for

**Huawei Technologies Co., Ltd.**

**Smart Phone**

**Model Name: HUAWEI CUN-L03,CUN-L03**

**Marketing Name: HUAWEI Y5II**

**FCC ID: QISCUN-L03**

with

**Hardware Version: Ver.A**

**Software Version: CUN-L03C464B009**

**Issued Date: 2015-12-07**

**Test Laboratory:**

**FCC 2.948 Listed: No.342690**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633, Fax:+86(0)10-62304633Email:ctl@chinattl.com, website:[www.chinattl.com](http://www.chinattl.com)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I15N01324-EMC	Rev.0	1st edition	2015-12-07



## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. TESTING LOCATION .....</b>	<b>4</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>4</b>
<b>1.3. PROJECT DATA .....</b>	<b>4</b>
<b>1.4. SIGNATURE .....</b>	<b>4</b>
<b>2. CLIENT INFORMATION .....</b>	<b>5</b>
<b>2.1. APPLICANT INFORMATION .....</b>	<b>5</b>
<b>2.2. MANUFACTURER INFORMATION .....</b>	<b>5</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
<b>3.1. ABOUT EUT .....</b>	<b>6</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT .....</b>	<b>6</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE .....</b>	<b>6</b>
<b>3.4. EUT SET-UPS .....</b>	<b>9</b>
<b>4. REFERENCE DOCUMENTS .....</b>	<b>10</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING .....</b>	<b>10</b>
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>11</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>12</b>
<b>7. TEST FACILITIES UTILIZED .....</b>	<b>13</b>
<b>ANNEX A: MEASUREMENT RESULTS.....</b>	<b>14</b>



## 1. Test Laboratory

### 1.1. Testing Location

Address: TCL International E city No. 1001 Zhongshanyuan Road, Nanshan District, Shenzhen, Guangdong, China  
Postal Code: 518048  
Telephone: +86(755)33322000  
Fax: +86(755)33322000

### 1.2. Testing Environment

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### 1.3. Project data

Testing Start Date: 2015-12-09  
Testing End Date: 2015-12-18

### 1.4. Signature

---

Liang Yong

(Prepared this test report)

---

Du Zhaoxuan

(Reviewed this test report)

---

Cao Junfei

Director of the laboratory  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Huawei Technologies Co., Ltd.  
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

### **2.2. Manufacturer Information**

Company Name: Huawei Technologies Co., Ltd.  
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Smart Phone
Model Name	HUAWEI CUN-L03,CUN-L03
Marketing Name	HUAWEI Y5II
FCC ID	QISCUN-L03
TX Band	GSM850/1900,WCDMA Band 2/4/5,FDD Band 2/4/5/7
RX Band	GSM850/1900,WCDMA Band 2/4/5,FDD Band 2/4/5/7

The Equipment Under Test (EUT) are a model of Smart Phone with integrated antenna.

The EUT supports GPRS service and EGPRS service. It has MP3, camera, USB memory, FM radio, GPS receiver, Bluetooth and WLAN functions.

Remark: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed information.

#### **3.2. Internal Identification of EUT**

<b>EUT ID*</b>	<b>SN or IMEI</b>
N0.1	866689027485278

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE**

<b>AE ID*</b>	<b>Description</b>	<b>SN</b>
AE1	Battery	/
AE2	Travel charger	/
AE3	USB cable	/

##### AE1-1

Model	HB4342A1RBC
Manufacturer	SCUD (FUJIAN) Electronics Co., Ltd.
Capacitance	2200mAh
Nominal voltage	3.8V

##### AE1-2

Model	HB4342A1RBC
Manufacturer	Sunwoda Electronic Co., LTD.
Capacitance	2200mAh
Nominal voltage	3.8V

##### AE2-1

Model	HW-050100U01
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.
Length of cable	/
SN	B66660F3G00021



AE2-2

Model HW-050100E01  
Manufacturer HUIZHOU BYD ELECTRONIC CO., LTD.  
Length of cable /  
SN B66799F5F00383

AE2-3

Model HW-050100U01  
Manufacturer SHENZHEN HUNTKEY ELECTRIC CO., LTD  
Length of cable /  
SN H666LGF4M07273

AE2-4

Model HW-050100E01  
Manufacturer SHENZHEN HUNTKEY ELECTRIC CO., LTD  
Length of cable /  
SN H667LJF7L06674

AE2-5

Model HW-050100E01  
Manufacturer Dongguan Phitek Electronics Co., Ltd  
Length of cable /  
SN P66707F9F18319

AE2-6

Model HW-050100U01  
Manufacturer Dongguan Phitek Electronics Co., Ltd  
Length of cable /  
SN P66605F7A00061

AE2-7

Model HW-050100B01  
Manufacturer HUIZHOU BYD ELECTRONIC CO., LTD.  
Length of cable /  
SN /

AE2-8

Model HW-050100A01  
Manufacturer HUIZHOU BYD ELECTRONIC CO., LTD.  
Length of cable /  
SN /

AE2-9

Model HW-050100B01  
Manufacturer SHENZHEN HUNTKEY ELECTRIC CO., LTD  
Length of cable /  
SN /



AE2-10

Model	HW-050100A01
Manufacturer	SHENZHEN HUNTKEY ELECTRIC CO., LTD
Length of cable	/
SN	/

AE2-11

Model	HW-050100B01
Manufacturer	Dongguan Phitek Electronics Co., Ltd
Length of cable	/
SN	/

AE2-12

Model	HW-050100A01
Manufacturer	Dongguan Phitek Electronics Co., Ltd
Length of cable	/
SN	/

AE3-1

Model	130-26654
Manufacturer	CHANGSHU HONGLIN TECHNOLOGY CO.,LTD.
Length of cable	95cm

AE3-2

Model	CUBB01M-HC208-DH
Manufacturer	FOXCONN INTERCONNECT TECHNOLOGY LIMITED.
Length of cable	96cm

\*AE ID: is used to identify the test sample in the lab internally.





### 3.4. EUT set-ups

<b>EUT set-up No.</b>	<b>Combination of EUT and AE</b>	<b>Remarks</b>
Set.1	EUT1+ AE1-1 + AE2-1 + AE3-1	Charging mode
Set.2	EUT1+ AE1-2 + AE2-2 + AE3-2	Charging mode
Set.3	EUT1+ AE1-1 + AE2-3 + AE3-1	Charging mode
Set.4	EUT1+ AE1-1 + AE2-4 + AE3-1	Charging mode
Set.5	EUT1+ AE1-2 + AE2-5 + AE3-2	Charging mode
Set.6	EUT1+ AE1-1 + AE2-6 + AE3-1	Charging mode
Set.7	EUT1+ AE1-1 + AE3-1	USB mode
Set.8	EUT1+ AE1-2 + AE3-2	USB mode

#### 4. Reference Documents

##### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices	10-1-2015 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	0.014MHz-1MHz,>60dB; 1MHz-1000MHz,>90dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Shielded room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. =35 %, Max. = 60 %
Shielding effectiveness	0.014MHz-1MHz,>60dB; 1MHz-1000MHz,>90dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω

**Fully-anechoic chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	0.014MHz-1MHz,>60dB; 1MHz-1000MHz,>90dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 6 GHz, 3 m distance



## 6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Radiated Emission	15.109(a)	A.1	P
2	Conducted Emission	15.107(a)	A.2	P



## 7. Test Facilities Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CALDUE DATE	CAL PERIOD
1.	Test Receiver	ESCI	100701	R&S	2016.08.10	1 year
2.	Test Receiver	ESCI	100702	R&S	2016.05.30	1 year
3.	Spectrum Analyzer	FSP 40	100378	R&S	2015.12.19	1 year
4.	BiLog Antenna	VULB9163	9163 329	Schwarzbeck	2017.01.20	3 years
5.	LISN	ESH2-Z5	100196	R&S	2016.01.13	1 year
6.	Horn Antenna	3117	00066577	ETS-Lindgren	2016.04.01	3 years
7.	Universal Radio Communication Tester	E5515C	GB44051324	Agilent	2016.05.19	1 year
8.	PC	M4099t	SA08850737	Lenovo	/	/
9.	Monitor	L1710d	0M04340B10 01010	Lenovo	/	/
10.	Printer	P1008	VNF6C12491	HP	/	/
11.	Keyboard	KB-0225	0723779	Lenovo	/	/
12.	Mouse	MO28UOL	44B39412	Lenovo	/	/

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission (§15.109(a))**

#### **Reference**

FCC: CFR Part 15.109(a)

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.1.2 EUT Operating Mode:**

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is Lenovo Thinkcentre M4099t, and the serial number of the PC is SA08850737. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

#### **A.1.3 Measurement Limit**

Limit from CFR Part 15.109(a)

Frequency range (MHz)	Field strength limit ( $\mu\text{V}/\text{m}$ )		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

\*Note: The original limit is defined at 10m test distance. This limit is calculated according to CISPR requirements.

#### **A.1.4 Test Condition**

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz (IF bandwidth)	5
Above 1000	1MHz/3MHz	15

### A.1.5 Measurement Results

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{\text{PL}}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.

Note: the result contains vertical part and Horizontal part

**RE Measurement uncertainty:** 30M-1GHz: 5.08dB (K=2);  
1GHz-18GHz: 4.56 dB (K=2)

#### Set.1 Charging mode / Peak detector

Frequency(MHz)	Result(dBuV/m)	Polarity	$A_{Rpl}$ (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
14531.000000	56.7	V	11.7	17.3	74.0
15155.000000	57.3	V	12.1	16.7	74.0
15685.000000	58.9	H	12.8	15.1	74.0
16293.000000	59.5	V	13.4	14.5	74.0
16751.000000	60.0	H	14.0	14.0	74.0
17475.000000	59.3	H	14.3	14.7	74.0

#### Set.1 Charging mode / Average detector

Frequency(MHz)	Result(dBuV/m)	Polarity	$A_{Rpl}$ (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
14523.000000	44.6	V	11.7	9.4	54.0
15149.000000	45.6	V	12.1	8.4	54.0
15761.000000	47.2	V	12.9	6.8	54.0
16220.000000	47.3	V	13.3	6.7	54.0
16779.000000	47.6	V	14.0	6.4	54.0
17281.000000	47.6	V	14.1	6.4	54.0

**Set.2 Charging mode / Peak detector**

Frequency(MHz)	Result(dBuV/m)	Polarity	A <sub>Rpl</sub> (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
14484.000000	56.0	H	11.7	18.0	74.0
15095.000000	57.3	V	12.0	16.7	74.0
15794.000000	58.8	V	13.0	15.2	74.0
16246.000000	58.3	V	13.3	15.7	74.0
16827.000000	58.7	V	14.0	15.3	74.0
17378.000000	58.3	V	14.3	15.7	74.0

**Set.2 Charging mode / Average detector**

Frequency(MHz)	Result(dBuV/m)	Polarity	A <sub>Rpl</sub> (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
14447.000000	43.8	V	11.6	10.2	54.0
15061.000000	44.8	V	12.0	9.2	54.0
15756.000000	46.5	V	12.9	7.5	54.0
16244.000000	46.3	V	13.3	7.7	54.0
16833.000000	46.7	V	14.0	7.3	54.0
17402.000000	46.6	V	14.3	7.4	54.0

**Set.3 Charging mode / Peak detector**

Frequency(MHz)	Result(dBuV/m)	Polarity	A <sub>Rpl</sub> (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
14212.000000	56.0	H	11.3	18.0	74.0
15055.000000	56.4	V	12.0	17.6	74.0
15737.000000	58.2	V	12.9	15.8	74.0
16213.000000	58.4	V	13.3	15.6	74.0
16795.000000	57.8	H	14.0	16.2	74.0
17452.000000	57.7	V	14.3	16.3	74.0

**Set.3 Charging mode / Average detector**

Frequency(MHz)	Result(dBuV/m)	Polarity	A <sub>Rpl</sub> (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
14159.000000	43.1	V	11.2	10.9	54.0
15141.000000	44.0	V	12.1	10.0	54.0
15766.000000	46.0	V	12.9	8.0	54.0
16282.000000	45.3	V	13.4	8.7	54.0
16833.000000	46.0	V	14.0	8.0	54.0
17384.000000	45.7	V	14.3	8.3	54.0



**Set.4 Charging mode / Peak detector**

Frequency(MHz)	Result(dBuV/m)	Polarity	A <sub>Rpl</sub> (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
14172.000000	55.0	V	11.3	19.0	74.0
15101.000000	55.9	V	12.0	18.1	74.0
15743.000000	56.8	V	12.9	17.2	74.0
16256.000000	56.8	V	13.3	17.2	74.0
16764.000000	57.7	H	14.0	16.3	74.0
17309.000000	57.0	V	14.2	17.0	74.0

**Set.4 Charging mode / Average detector**

Frequency(MHz)	Result(dBuV/m)	Polarity	A <sub>Rpl</sub> (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
14139.000000	42.7	V	11.2	11.3	54.0
15149.000000	43.5	V	12.1	10.5	54.0
15786.000000	45.3	V	13.0	8.7	54.0
16202.000000	44.8	V	13.3	9.2	54.0
16779.000000	45.4	V	14.0	8.6	54.0
17387.000000	45.0	V	14.3	9.0	54.0

**Set.5 Charging mode / Peak detector**

Frequency(MHz)	Result(dBuV/m)	Polarity	A <sub>Rpl</sub> (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
14150.000000	55.5	V	11.2	18.5	74.0
15132.000000	56.7	V	12.1	17.3	74.0
15537.000000	57.8	H	12.5	16.2	74.0
16269.000000	58.2	V	13.4	15.8	74.0
16818.000000	58.3	V	14.0	15.7	74.0
17363.000000	58.0	V	14.3	16.0	74.0

**Set.5 Charging mode / Average detector**

Frequency(MHz)	Result(dBuV/m)	Polarity	A <sub>Rpl</sub> (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
14522.000000	43.6	V	11.7	10.4	54.0
15140.000000	44.4	V	12.1	9.6	54.0
15781.000000	46.1	V	13.0	7.9	54.0
16235.000000	45.8	V	13.3	8.2	54.0
16815.000000	46.2	V	14.0	7.8	54.0
17394.000000	45.9	V	14.3	8.1	54.0

**Set.6 Charging mode / Peak detector**

Frequency(MHz)	Result(dBuV/m)	Polarity	A <sub>Rpl</sub> (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
14227.000000	55.3	V	11.3	18.7	74.0
15070.000000	56.9	H	12.0	17.1	74.0
15758.000000	57.4	V	12.9	16.6	74.0
16245.000000	56.9	V	13.3	17.1	74.0
16747.000000	58.1	H	14.0	15.9	74.0
17278.000000	57.8	V	14.1	16.2	74.0

**Set.6 Charging mode / Average detector**

Frequency(MHz)	Result(dBuV/m)	Polarity	A <sub>Rpl</sub> (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
14522.000000	43.1	V	11.7	10.9	54.0
15153.000000	44.1	V	12.1	9.9	54.0
15801.000000	45.7	V	13.0	8.3	54.0
16212.000000	45.3	V	13.3	8.7	54.0
16789.000000	45.7	H	14.0	8.3	54.0
17409.000000	45.5	H	14.3	8.5	54.0

**Set.7 USB mode / Peak detector**

Frequency(MHz)	Result(dBuV/m)	Polarity	A <sub>Rpl</sub> (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
14152.000000	55.0	V	11.2	19.0	74.0
15169.000000	56.8	H	12.1	17.2	74.0
15747.000000	58.5	V	12.9	15.5	74.0
16246.000000	57.6	H	13.3	16.4	74.0
16781.000000	58.3	V	14.0	15.7	74.0
17409.000000	57.7	V	14.3	16.3	74.0

**Set.7 USB mode / Average detector**

Frequency(MHz)	Result(dBuV/m)	Polarity	A <sub>Rpl</sub> (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
14522.000000	43.6	H	11.7	10.4	54.0
15124.000000	44.4	V	12.1	9.6	54.0
15753.000000	45.9	H	12.9	8.1	54.0
16196.000000	45.6	V	13.3	8.4	54.0
16781.000000	46.2	V	14.0	7.8	54.0
17353.000000	45.8	V	14.2	8.2	54.0

**Set.8 USB mode / Peak detector**

Frequency(MHz)	Result(dBuV/m)	Polarity	A <sub>Rpl</sub> (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
14075.000000	55.3	V	11.1	18.7	74.0
15143.000000	56.2	H	12.1	17.8	74.0
15651.000000	57.6	V	12.7	16.4	74.0
16214.000000	58.0	V	13.3	16.0	74.0
16909.000000	59.1	H	14.1	14.9	74.0
17328.000000	58.6	V	14.2	15.4	74.0

**Set.8 USB mode / Average detector**

Frequency(MHz)	Result(dBuV/m)	Polarity	A <sub>Rpl</sub> (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
14462.000000	43.3	H	11.6	10.7	54.0
15153.000000	44.2	V	12.1	9.8	54.0
15786.000000	45.9	H	13.0	8.1	54.0
16248.000000	45.5	V	13.3	8.5	54.0
16830.000000	46.0	V	14.0	8.0	54.0
17404.000000	45.8	V	14.3	8.2	54.0

Note: The measurement result of Set.1,Set.2,Set.3,Set.4,Set.5, Set.6, Set.7, and Set.8 showed here are worst cases of combinations of different batteries and USB cables.

Charging mode: Set 1

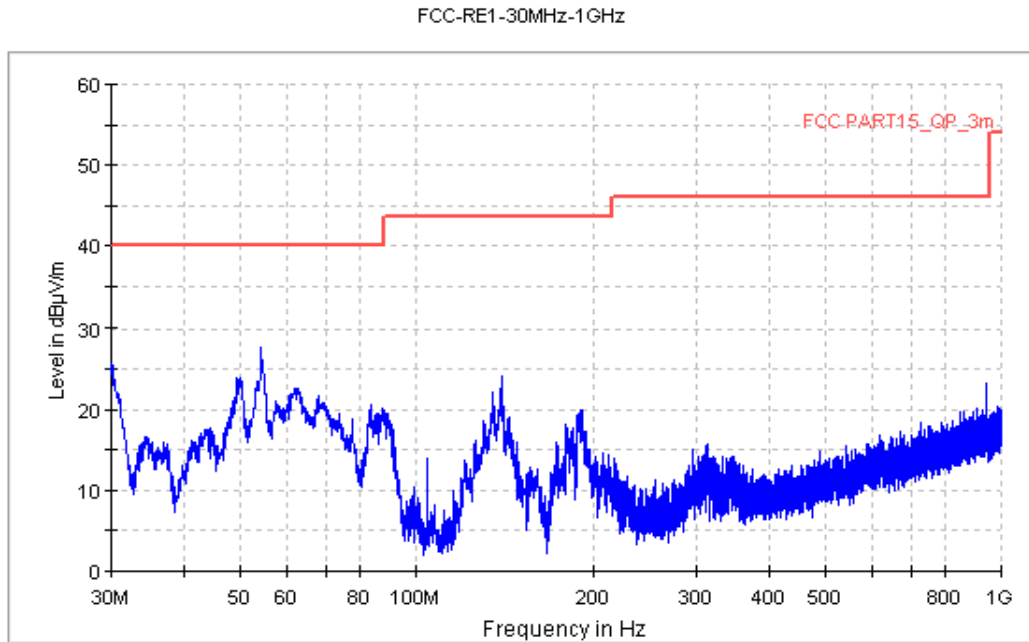


Figure A.1 Radiated Emission from 30MHz to 1GHz

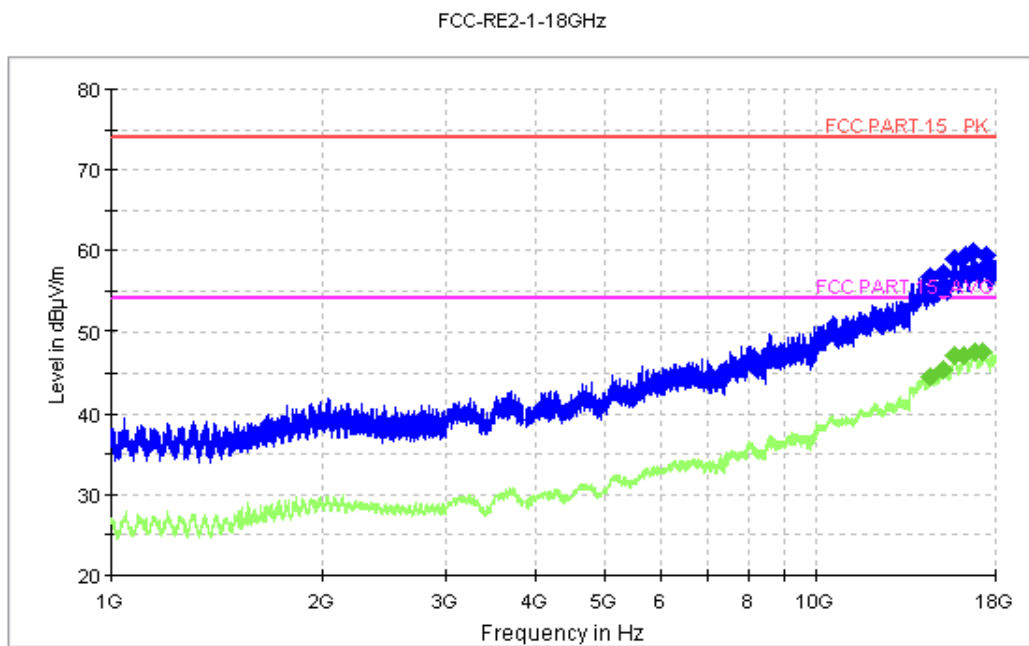


Figure A.2 Radiated Emission from 1GHz to 18GHz

Charging mode: Set 2

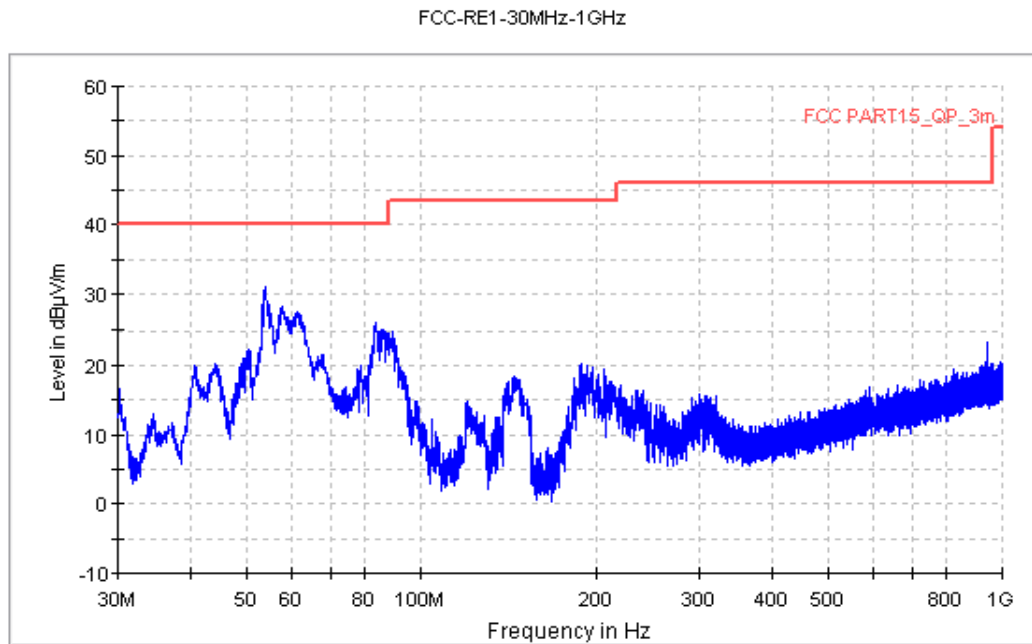


Figure A.3 Radiated Emission from 30MHz to 1GHz

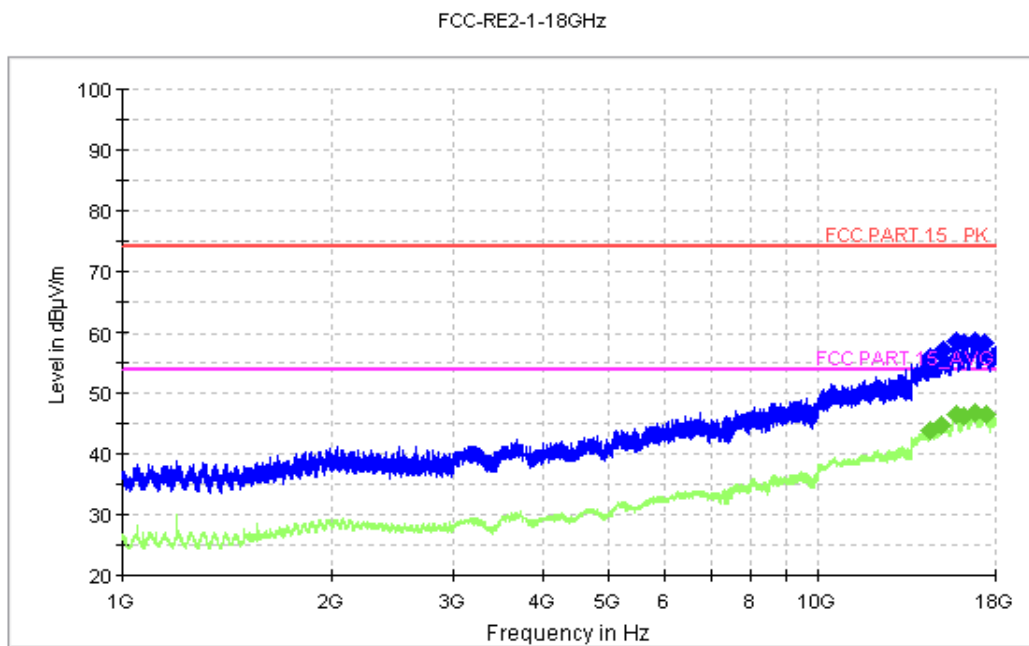


Figure A.4 Radiated Emission from 1GHz to 18GHz

Charging mode: Set 3

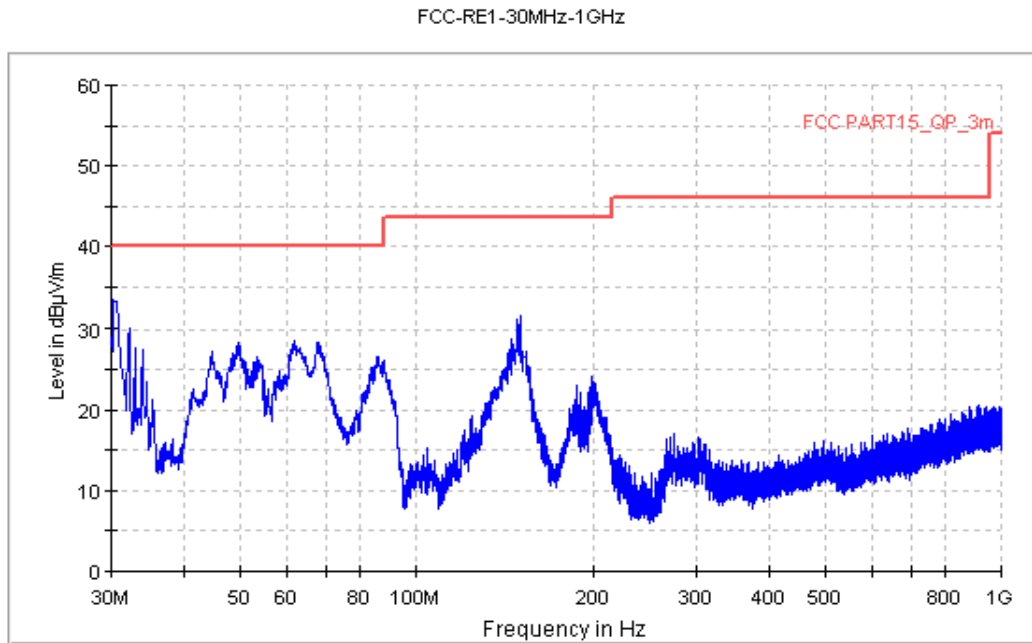


Figure A.5 Radiated Emission from 30MHz to 1GHz

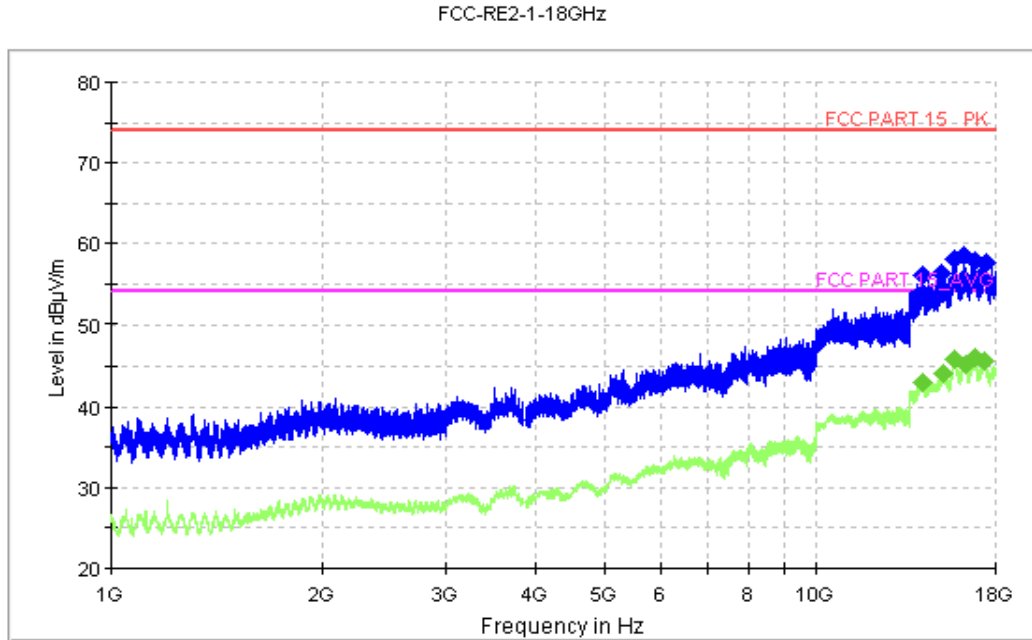


Figure A.6 Radiated Emission from 1GHz to 18GHz

Charging mode: Set 4

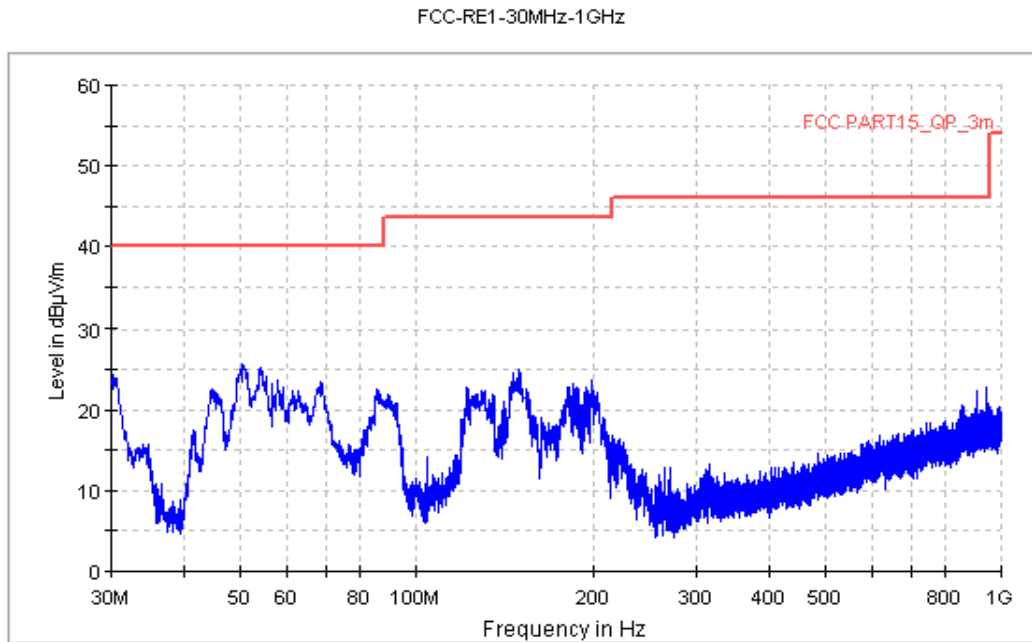


Figure A.7 Radiated Emission from 30MHz to 1GHz

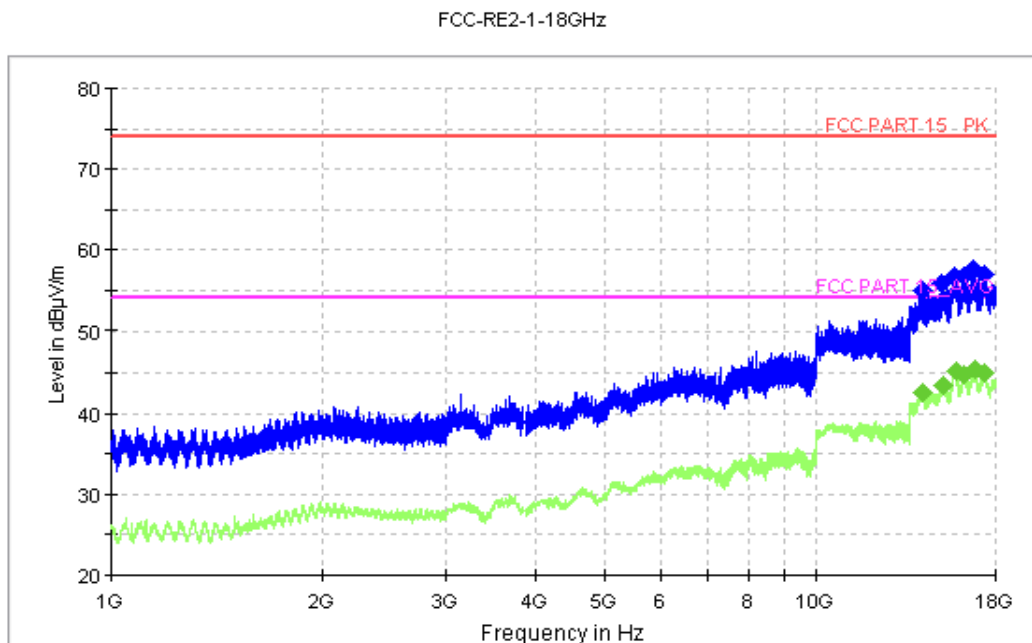


Figure A.8 Radiated Emission from 1GHz to 18GHz

Charging mode: Set 5

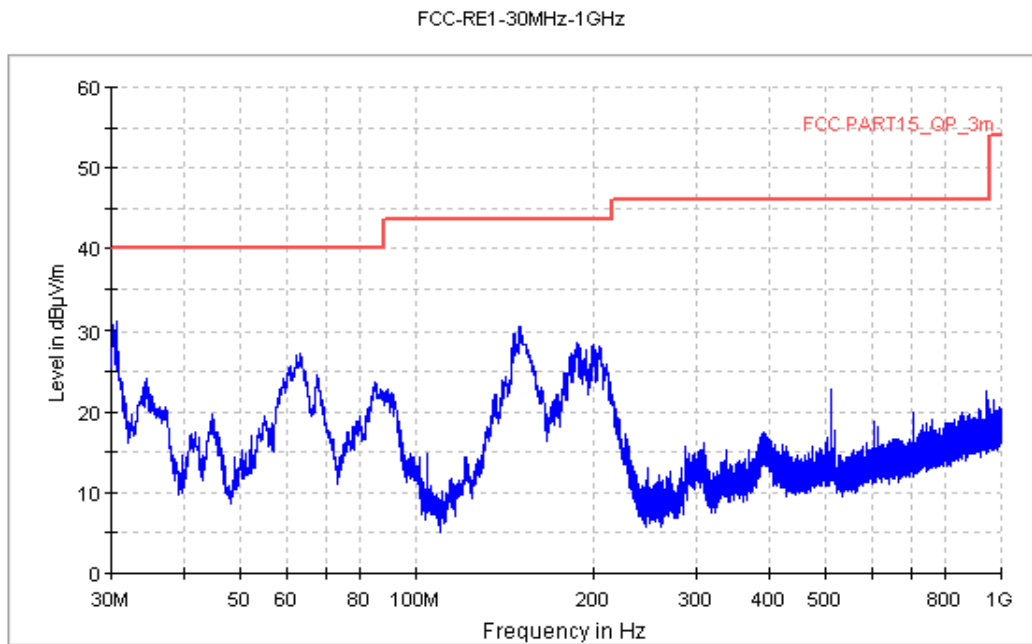


Figure A.9 Radiated Emission from 30MHz to 1GHz

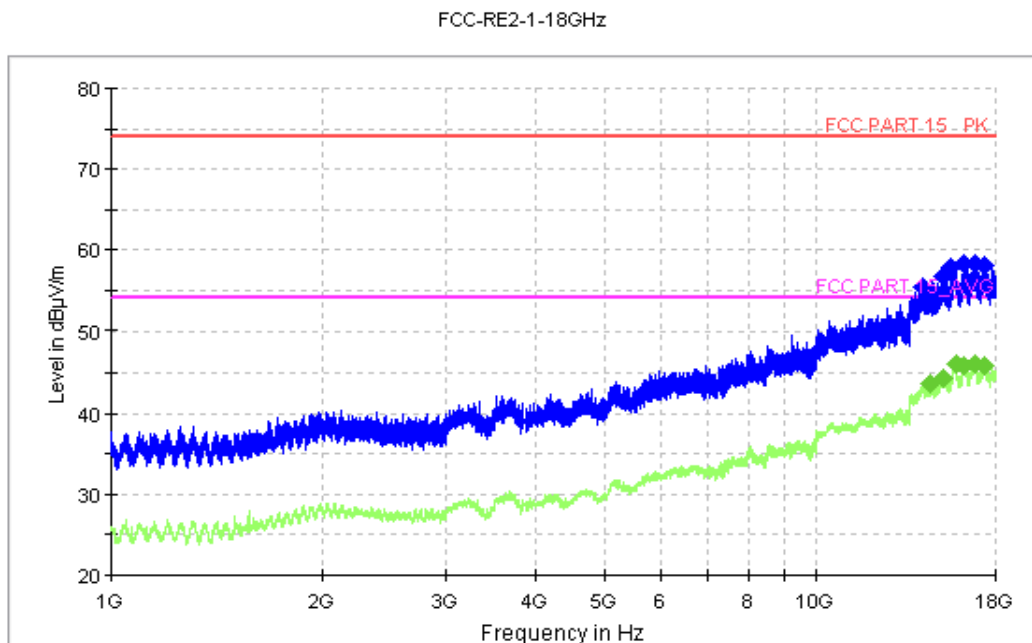


Figure A.10 Radiated Emission from 1GHz to 18GHz



Charging mode: Set 6

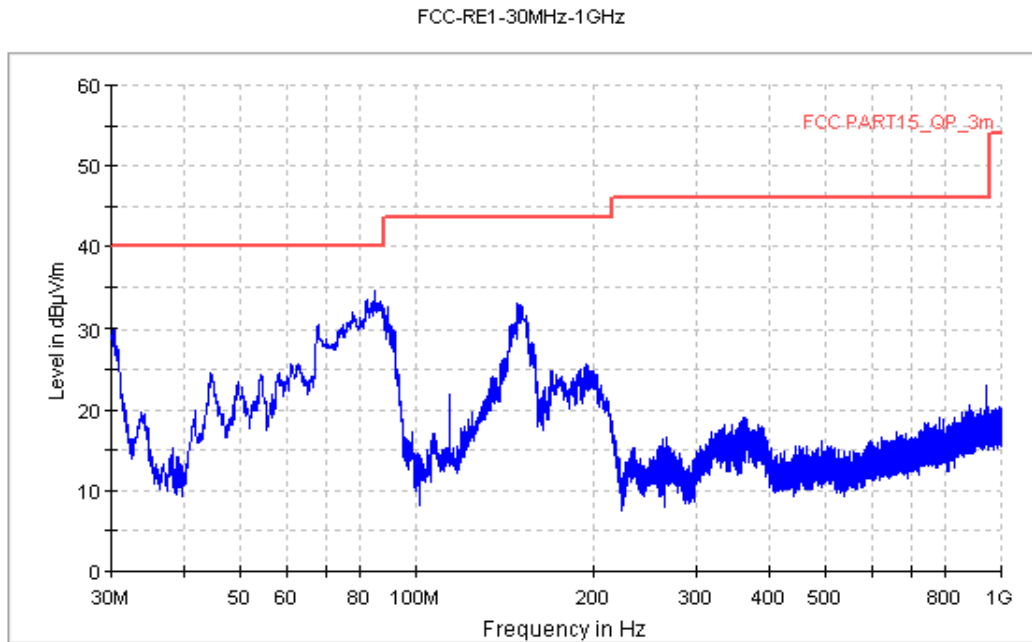


Figure A.11 Radiated Emission from 30MHz to 1GHz

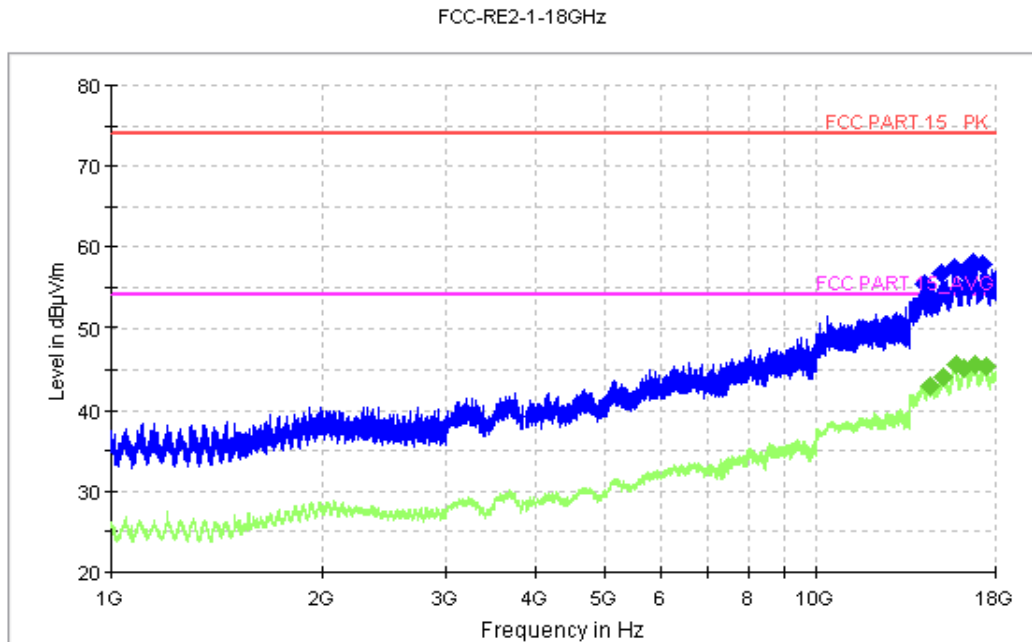


Figure A.12 Radiated Emission from 1GHz to 18GHz

USB mode: Set 7

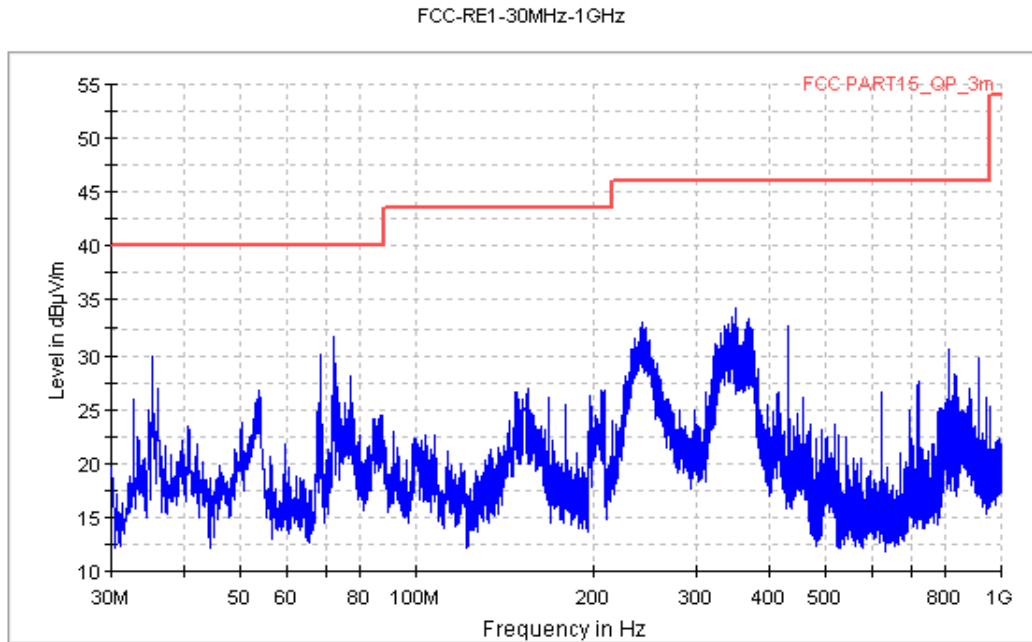


Figure A.13 Radiated Emission from 30MHz to 1GHz

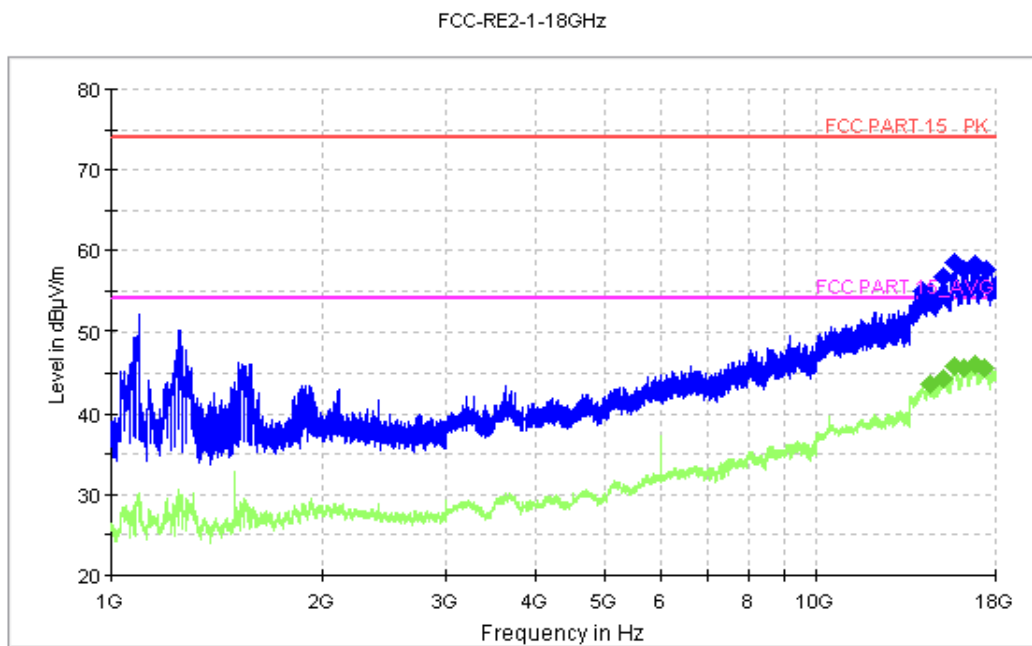


Figure A.14 Radiated Emission from 1GHz to 18GHz

USB mode: Set 8

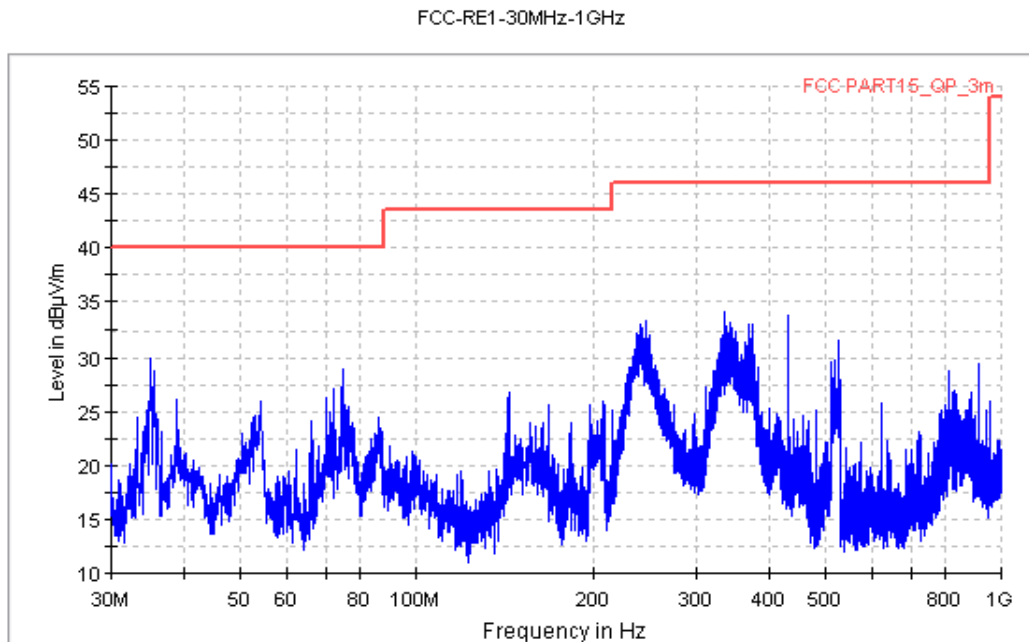


Figure A.15 Radiated Emission from 30MHz to 1GHz

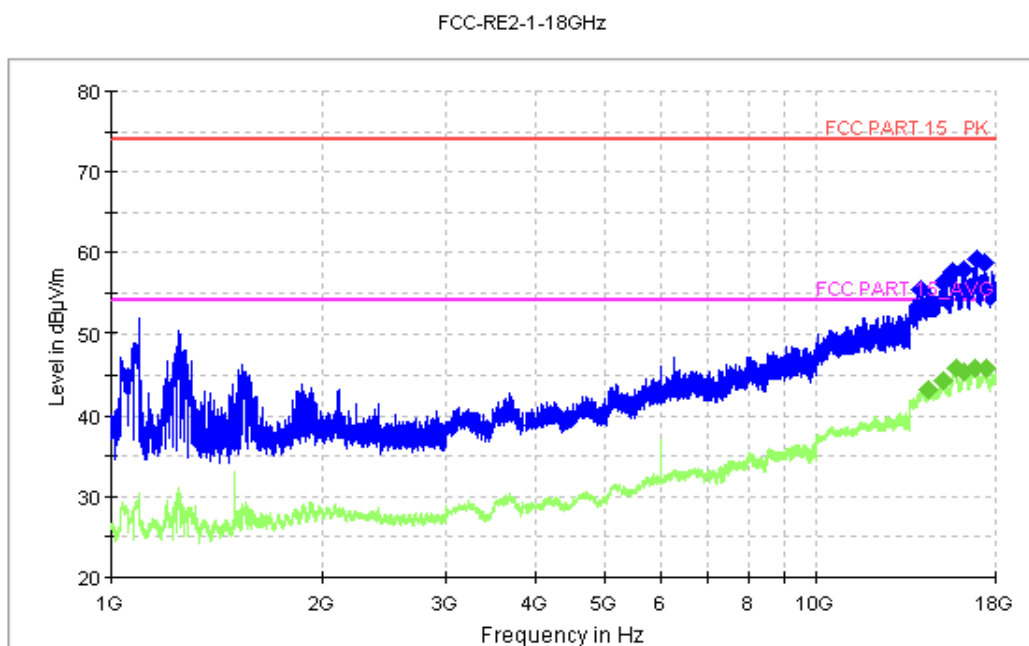


Figure A.16 Radiated Emission from 1GHz to 18GHz

## A.2 Conducted Emission (§15.107(a))

### Reference

FCC: CFR Part 15.107(a)

### A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2014, section 7.3.

### A.2.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is Lenovo Thinkcentre M4099t, and the serial number of the PC is SA08850737. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

### A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency


### A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW	Sweep Time(s)
9kHz	1

**CE Measurement uncertainty:** 2.7 dB (K=2)

**A.2.5 Measurement Results**  
**Charging mode:Set.1**

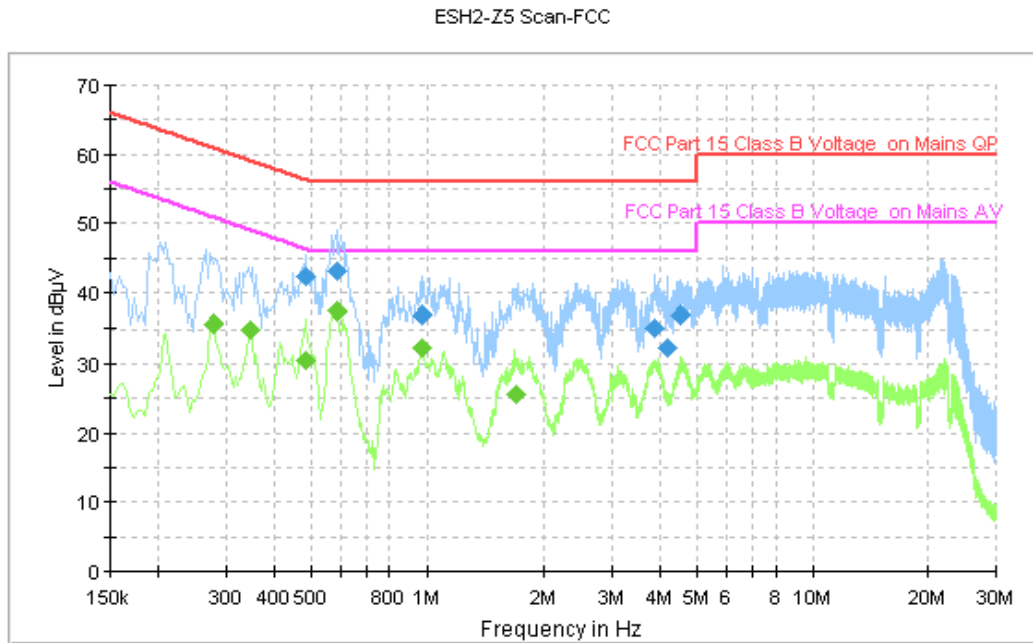

**Figure A.17 Conducted Emission**

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.482000	42.3	GND	N	10.1	14.0	56.3
0.582000	43.3	GND	N	10.1	12.7	56.0
0.974000	36.9	GND	N	10.1	19.1	56.0
3.862000	35.2	GND	N	10.2	20.8	56.0
4.178000	32.3	GND	N	10.2	23.7	56.0
4.506000	36.8	GND	L1	10.2	19.2	56.0

**Final Measurement Detector 2**

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.278000	35.7	GND	N	10.1	15.2	50.9
0.346000	35.0	GND	N	10.0	14.1	49.1
0.482000	30.4	GND	N	10.1	15.9	46.3
0.582000	37.5	GND	N	10.1	8.5	46.0
0.974000	32.2	GND	N	10.1	13.8	46.0
1.694000	25.5	GND	N	10.1	20.5	46.0

Charging mode:Set.2

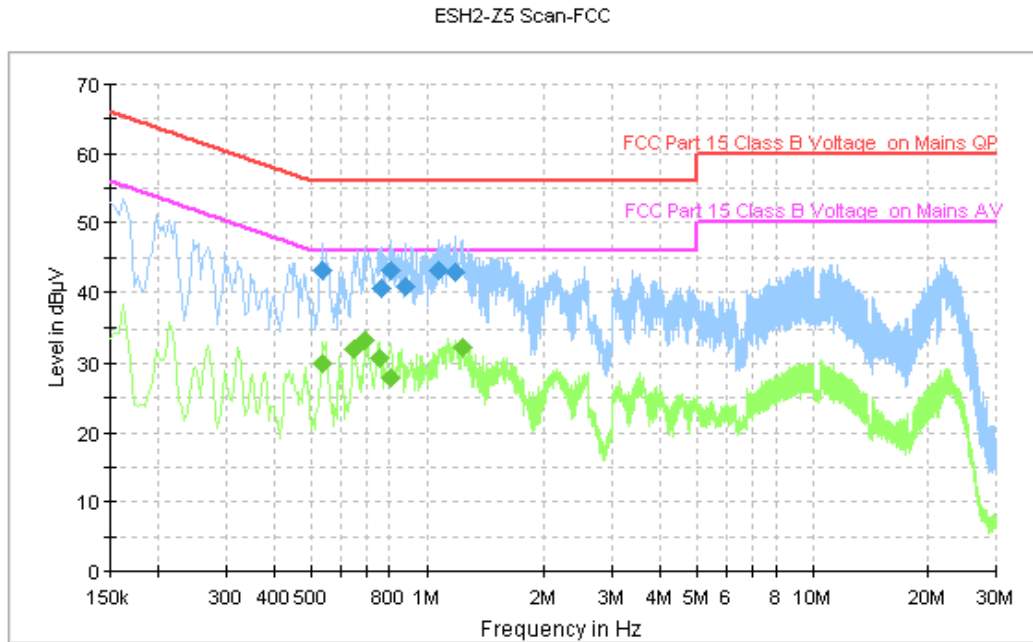


Figure A.18 Conducted Emission


Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.538000	43.1	GND	L1	10.1	12.9	56.0
0.762000	40.6	GND	L1	10.1	15.4	56.0
0.806000	43.2	GND	L1	10.1	12.8	56.0
0.878000	40.8	GND	L1	10.1	15.2	56.0
1.074000	43.2	GND	L1	10.1	12.8	56.0
1.182000	43.0	GND	L1	10.0	13.0	56.0

Final Measurement Detector 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.538000	29.9	GND	L1	10.1	16.1	46.0
0.646000	32.2	GND	L1	10.0	13.8	46.0
0.694000	33.3	GND	L1	10.0	12.7	46.0
0.754000	30.8	GND	L1	10.1	15.2	46.0
0.806000	28.0	GND	L1	10.1	18.0	46.0
1.238000	32.3	GND	L1	10.1	13.7	46.0

Charging mode:Set.3

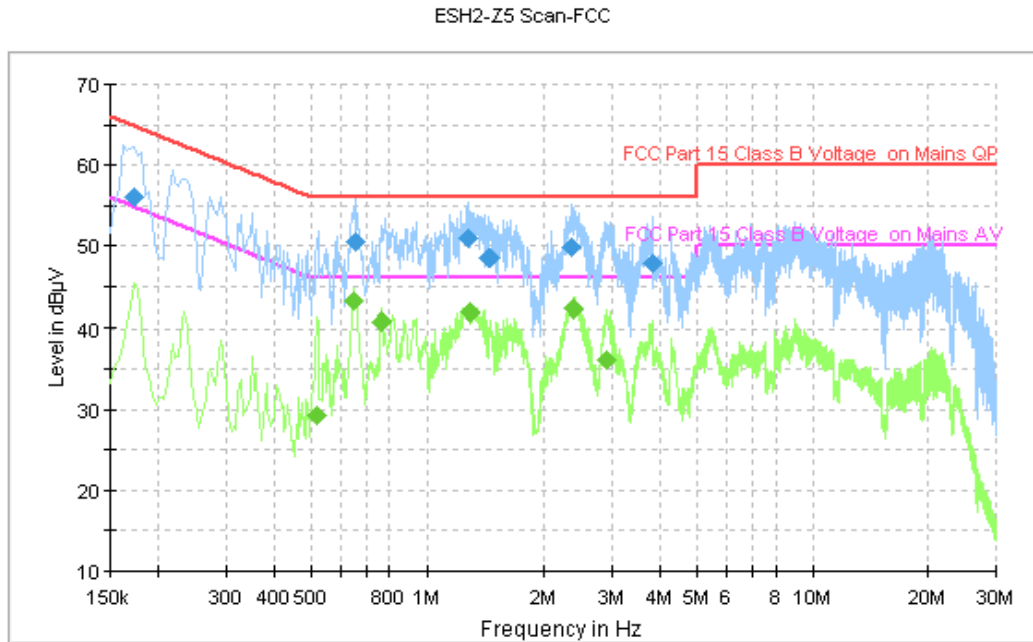

**Figure A.19 Conducted Emission**

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.174000	56.1	GND	N	10.1	8.6	64.8
0.654000	50.4	GND	L1	10.0	5.6	56.0
1.282000	50.9	GND	L1	10.1	5.1	56.0
1.450000	48.5	GND	L1	10.1	7.5	56.0
2.350000	49.8	GND	L1	10.1	6.2	56.0
3.834000	47.9	GND	L1	10.2	8.1	56.0

**Final Measurement Detector 2**

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.518000	29.2	GND	L1	10.0	16.8	46.0
0.646000	43.2	GND	L1	10.0	2.8	46.0
0.762000	40.7	GND	L1	10.1	5.3	46.0
1.298000	41.9	GND	L1	10.1	4.1	46.0
2.378000	42.4	GND	L1	10.1	3.6	46.0
2.922000	36.1	GND	L1	10.1	9.9	46.0

Charging mode:Set.4

ESH2-Z5 Scan-FCC

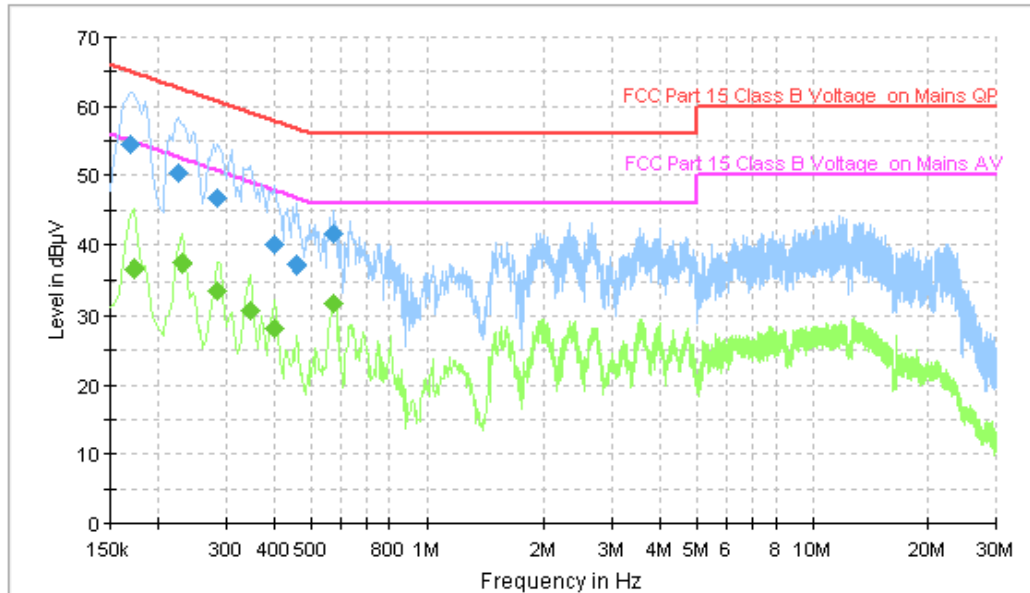


Figure A.20 Conducted Emission

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.170000	54.5	GND	L1	10.0	10.4	65.0
0.226000	50.3	GND	L1	10.0	12.3	62.6
0.286000	46.8	GND	L1	10.0	13.8	60.6
0.402000	40.1	GND	L1	10.0	17.7	57.8
0.458000	37.3	GND	L1	10.0	19.4	56.7
0.574000	41.6	GND	L1	10.1	14.4	56.0

**Final Measurement Detector 2**

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.174000	36.8	GND	L1	10.0	18.0	54.8
0.230000	37.3	GND	L1	10.0	15.1	52.4
0.286000	33.6	GND	L1	10.0	17.1	50.6
0.346000	30.8	GND	L1	10.0	18.2	49.1
0.402000	28.2	GND	L1	10.0	19.6	47.8
0.574000	31.8	GND	L1	10.1	14.2	46.0



Charging mode:Set.5

ESH2-Z5 Scan-FCC

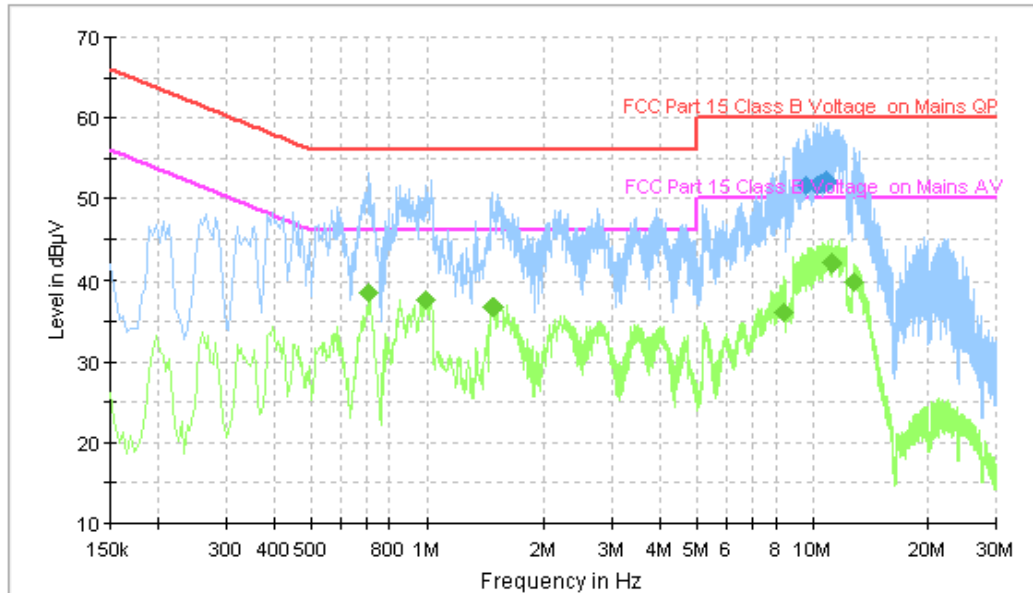


Figure A.21 Conducted Emission

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
9.602000	51.7	GND	L1	10.3	8.3	60.0
10.298000	51.7	GND	L1	10.3	8.3	60.0
10.506000	51.8	GND	L1	10.3	8.2	60.0
10.674000	51.9	GND	L1	10.4	8.1	60.0
10.866000	52.2	GND	L1	10.3	7.8	60.0
10.910000	52.2	GND	L1	10.3	7.8	60.0

**Final Measurement Detector 2**

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.706000	38.6	GND	L1	10.0	7.4	46.0
0.994000	37.6	GND	L1	10.1	8.4	46.0
1.482000	36.8	GND	L1	10.1	9.2	46.0
8.450000	36.2	GND	L1	10.3	13.8	50.0
11.170000	42.2	GND	L1	10.3	7.8	50.0
12.854000	39.9	GND	L1	10.4	10.1	50.0

Charging mode:Set.6

ESH2-Z5 Scan-FCC

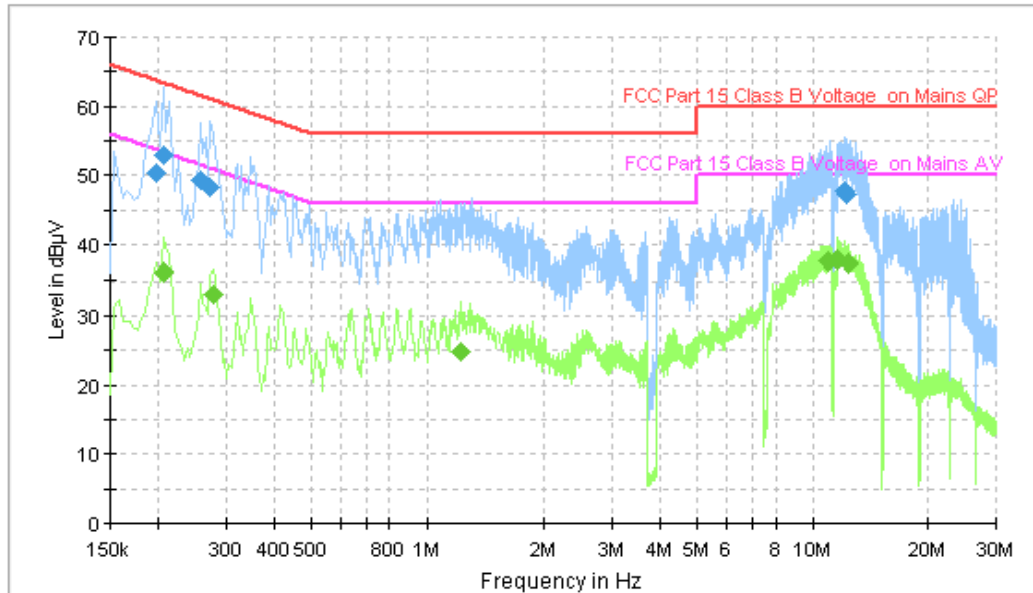


Figure A.22 Conducted Emission

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.198000	50.4	GND	N	10.1	13.3	63.7
0.206000	53.0	GND	N	10.1	10.4	63.4
0.258000	49.3	GND	N	10.1	12.2	61.5
0.274000	48.3	GND	N	10.1	12.7	61.0
12.106000	47.9	GND	L1	10.4	12.1	60.0
12.262000	47.4	GND	L1	10.4	12.6	60.0

**Final Measurement Detector 2**

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.206000	36.2	GND	N	10.1	17.2	53.4
0.278000	33.0	GND	N	10.1	17.9	50.9
1.222000	24.9	GND	L1	10.1	21.1	46.0
10.990000	37.7	GND	L1	10.3	12.3	50.0
11.638000	38.0	GND	L1	10.3	12.0	50.0
12.410000	37.6	GND	L1	10.4	12.4	50.0

USB mode:Set.7

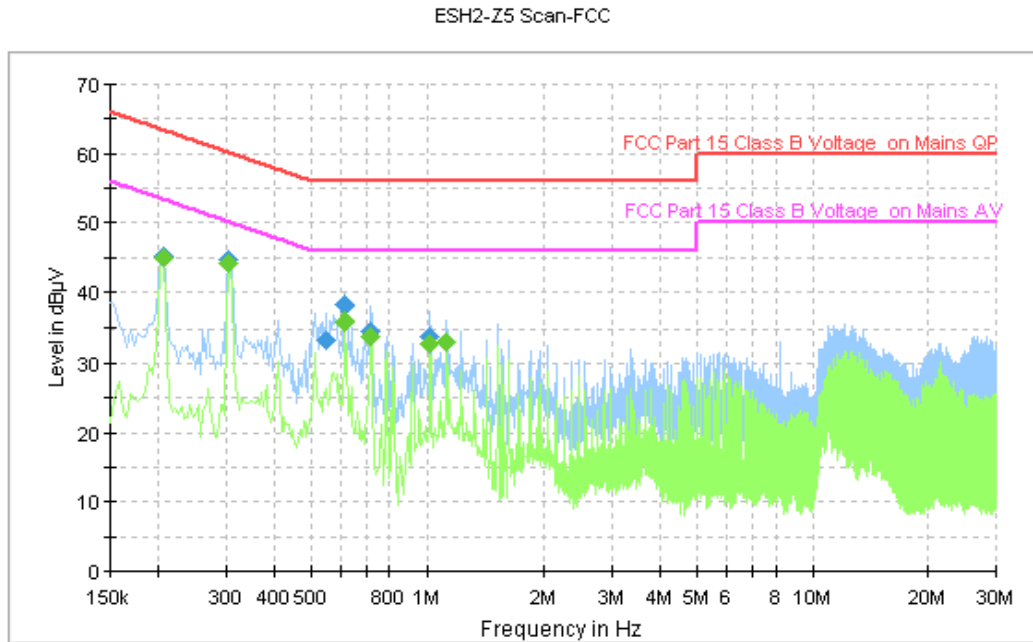


Figure A.23 Conducted Emission

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.206000	45.3	GND	N	10.1	18.1	63.4
0.306000	44.6	GND	N	10.1	15.5	60.1
0.546000	33.3	GND	N	10.1	22.7	56.0
0.614000	38.3	GND	N	10.0	17.7	56.0
0.714000	34.6	GND	N	10.0	21.4	56.0
1.022000	33.8	GND	N	10.0	22.2	56.0

**Final Measurement Detector 2**

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.206000	45.0	GND	N	10.1	8.4	53.4
0.306000	44.1	GND	N	10.1	6.0	50.1
0.614000	36.0	GND	N	10.0	10.0	46.0
0.714000	33.7	GND	N	10.0	12.3	46.0
1.022000	32.7	GND	L1	10.0	13.3	46.0
1.126000	32.9	GND	N	10.1	13.1	46.0

USB mode:Set.8

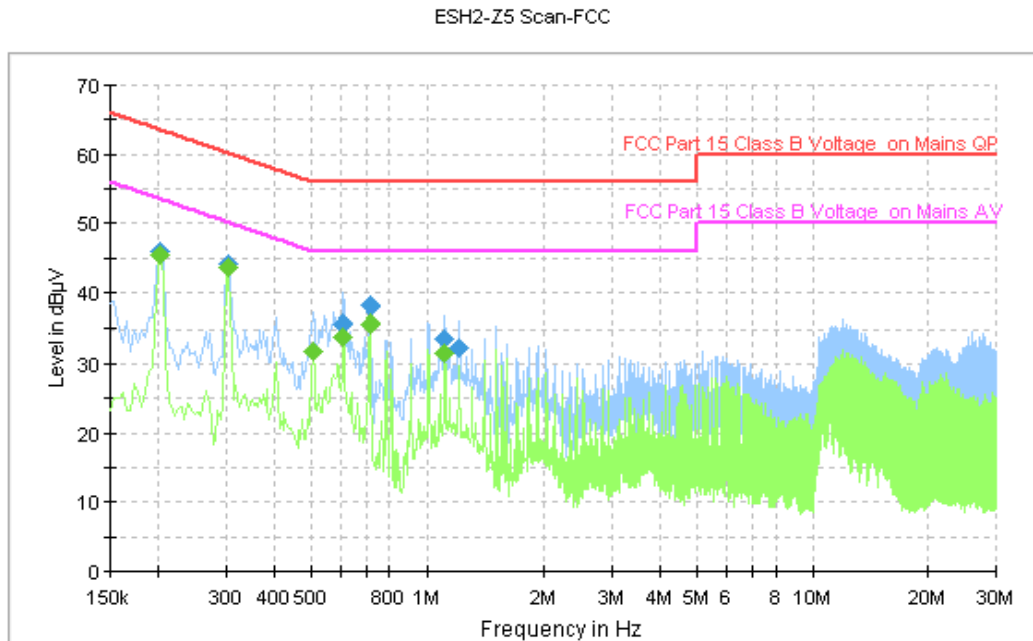


Figure A.24 Conducted Emission

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.202000	45.9	GND	N	10.1	17.6	63.5
0.306000	44.2	GND	N	10.1	15.9	60.1
0.606000	35.7	GND	N	10.1	20.3	56.0
0.710000	38.2	GND	N	10.0	17.8	56.0
1.114000	33.5	GND	N	10.1	22.5	56.0
1.218000	32.2	GND	N	10.1	23.8	56.0

**Final Measurement Detector 2**

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.202000	45.5	GND	N	10.1	8.0	53.5
0.306000	43.8	GND	N	10.1	6.3	50.1
0.506000	31.8	GND	N	10.1	14.2	46.0
0.606000	33.8	GND	N	10.1	12.2	46.0
0.710000	35.6	GND	N	10.0	10.4	46.0
1.114000	31.6	GND	N	10.1	14.4	46.0

\*\*\*END OF REPORT\*\*\*