



EMC Test Report

Product Name: HSDPA USB Stick

Model Number: E156

Report No: SYBH(R)050072008EB-1

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice 1

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has obtained the accreditation of THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION (A2LA), and Accreditation Council Certificate Number: 2174.01.
3. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
4. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-1.
5. The laboratory also has been listed by the VCCI to perform EMC measurements. The accreditation number is R2364, C2583, and T256.
6. The test report is invalid if not marked with "exclusive stamp for the test report".
7. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
8. The test report is invalid if there is any evidence of erasure and/or falsification.
9. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
10. Normally, the test report is only responsible for the samples that have undergone the test.
11. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.




Notice 2

Modification Information:

Table 1 Modification Information

Modification Information	1	
	2	
	3	<i>Not Applicable!</i>
	4	
	5	
	6	
	7	

REPORT ON	HSDPA USB Stick
	M/N: E156
REGULATION	FCC CFR47 Part 15: Subpart B; FCC CFR47 Part 22: Subpart H; FCC CFR47 Part 24: Subpart E;
START OF TEST	Jul.15, 2008
END OF TEST	Jul.25, 2008
Final Judgement:	Pass

Approver	<u>2008-12-29</u>	张兴海		
	Date	Name		Signature
Reviewer	<u>2008-12-29</u>	余辉		
	Date	Name		Signature
Operator	<u>2008-12-29</u>	张飞		
	Date	Name		Signature

REPORT BODY CONTENT

1	Status	6
1.1	Product Information.....	6
1.2	Applied Standard	6
1.3	Test Site	7
1.4	Test environment condition.....	7
2	Summary of Results	8
3	Equipment Specification	9
3.1	General Description	9
3.2	Sub-Assembly Identity	9
4	System Configuration during EMC Test.....	10
4.1	Cables Used during Test	10
4.2	Associated Equipment Used during Test	10
4.3	Test Configurations and Test Mode.....	10
4.4	Test conditions and test Connections	11
5	Electromagnetic Interference (EMI).....	13
5.1	Radiated Disturbance 30MHz to 1000MHz	13
5.2	Conducted Disturbance 0.15 MHz to 30MHz	14
5.3	Radiated Spurious Emissions.....	14
6	Main Test Instruments	17
7	System Measurement Uncertainty.....	18
8	Graph and Data of Emission Test.....	19
8.1	Radiated Disturbance	19
8.2	Conducted Disturbance	20
8.3	Radiated Spurious Emission.....	21

1 Status

1.1 Product Information

CLIENT: Huawei Technologies Co., Ltd.
ADDRESS: Bantian Longgang District Shenzhen, P.R. China
MANUFACTURING DESCRIPTION HSDPA USB Stick
MANUFACTURERS MODEL NUMBER E156

1.2 Applied Standard

FCC Measurement Specification	FCC Limits Part(s)	Description	Result
-	15.107	Conducted Emission at Power Port	PASS
-	15.109	Radiated Emission of Enclosure in Idle Mode	PASS
2.1051	22.917&24.238	Radiated Spurious Emission	PASS

1.3 Test Site

Site 1:
RELIABILITY LABORATORY OF HUAWEI TECHNOLOGIES CO., LTD

1.4 Test environment condition

Ambient temperature	20~25°C
Relative humidity	40%~52%
Atmospheric pressure	101kPa

2 Summary of Results

Table 2 below shows a brief summary of the results obtained.

Table 2 Summary of results

EUT Classification: Wireless terminal				
Test Items	Test Configuration & Test Mode	Required Performance Criteria	Result	Site
<u>Radiated Emissions</u> Enclosure Port	TC1 (TM9~TM16)	N/A	Pass	Site1
<u>Conducted Emissions</u>	TC1 (TM1~TM8)	N/A	Pass	Site1
<u>Radiated Spurious Emissions</u> Enclosure Port	TC1 (TM1~TM8)	N/A	Pass	Site1

Note:

- 1, Measurement taken is within the measurement uncertainty of measurement system.
- 2, TC = Test configuration
- 3, NT=no test. Because of not containing devices susceptible to magnetic fields, the EUT has been exempt from immunity test of power frequency magnetic field.

3 Equipment Specification

3.1 General Description

E156 HSDPA/UMTS/EDGE/GPRS/GSM dual mode 7 BAND USB Stick is subscriber equipment in the UMTS/GSM system. The WCDMA frequency is Band I、Band II and Band V. The GSM/GPRS/EDGE frequency bands include GSM850, EGSM900, DCS1800 and PCS1900, but only GSM850, PCS1900 and WCDMA850&1900 band test data are included in this report. E156 implement such functions as RF signal receiving/transmitting, HSDPA/UMTS and EDGE/GPRS/GSM protocol processing, data service etc. Externally they provide USB interface (to connect to the notebook etc.), USIM card interface, Micro SD card interface and external antenna.

3.1.1 Main Equipment Technical Data

Name	HSDPA USB Stick
Model	E156
Input Rated Voltage	5V
Rated Power	2.5 W
Dimensions	86.5 (depth) × 25.6(width) × 11.6 (height) (mm ³)
Weight	26g

Table 3 Sub-Assembly Identity

Mode		Work Frequency	
		Transmitt Frequency (MHz)	Receive Frequency (MHz)
WCDMA	BAND V	824-849	869-894
	BAND II	1850-1910	1930-1990
GSM	GSM850	824-849	869-894
	PCS1900	1850-1910	1930-1990

3.2 Sub-Assembly Identity

Table 4 Sub-Assembly Identity

Board			
Model Name	Qty.	Serial Number	Description
E156	1	DJ2AC10840700023	Main board of data card
Accessory			
Name	Qty.	Serials number	Description

4 System Configuration during EMC Test

The Equipment under Test (EUT) was functioning correctly during all tests. The EUT was installed within the test site and was configured to simulate a typical user installation.

4.1 Cables Used during Test

Table 5 Cable Used during Test

Port	Connector	Type of Cable
USB	USB	N/A

4.2 Associated Equipment Used during Test

Table 6 Associated Equipment Used during Test

Name	Model	Manufacturer	S/N	Cal Date
Radio Communication Tester	CMU200	R&S	108522	2008-9-9
Notebook	D640m	DELL	3106094190	NA
Notebook	T43	IBM	3106093834	N/A

4.3 Test Configurations and Test Mode

4.3.1 Test Configuration.

The EUT will be connected to test system (Base Station Simulator) in order to simulate normal operating conditions (with reference to the guidance given in the standard for this type of equipment).

Table 7 Configuration table

Test configuration	Test mode
TC1	TM1~TM16

TC1: EUT was powered by USB port connected to the notebook.

4.3.2 Test Mode

There were 16 test Modes. TM1 to TM16 were shown below:

- TM1: operate in traffic GPRS 1900;
- TM2: operate in traffic mode EGPRS 1900;
- TM3: operate in traffic mode GPRS 850;
- TM4: operate in traffic mode EGPRS 850;
- TM5: operate in traffic mode WCDMA BAND II ;
- TM6: operate in traffic mode HSDPA BAND II ;
- TM7: operate in traffic mode WCDMA BAND V ;
- TM8: operate in traffic mode HSDPA BAND V ;
- TM9: operate in idle mode GPRS 1900;
- TM10: operate in idle mode EGPRS 1900;
- TM11: operate in idle mode GPRS 850;
- TM12: operate in idle mode EGPRS 850;
- TM13: operate in idle mode WCDMA BAND II ;
- TM14: operate in idle mode HSDPA BAND II ;
- TM15: operate in idle mode WCDMA BAND V ;
- TM16: operate in idle mode HSDPA BAND V ;

4.4 Test conditions and test Connections

4.4.1 Test Conditions

The EUT will be connected to test system (Base Station Simulator) in order to simulate normal operating conditions (with reference to the guidance given in the standard for this type of equipment).

4.4.2 Test Connections

Traffic Mode:

The EUT is required to be in the traffic mode, a call is set up according to the generic call set up procedure and enter the EUT into loop back test mode.(GSM see ETSI TS 151.010).

For WCDMA, the following conditions shall also be met:

Logical Test Interface for details regarding generic call set-up procedure and BER, BLER test loop scenarios:

- set and send continuously up power control commands to the UE;
- The DTX shall be disabled;
- Inner Loop Power Control shall be enabled;
- transmitting and/or receiving (UL/DL) bit rate for reference test channel shall be 12.2 kbit / s.
- The EUT shall be commanded to operate at maximum transmit power;

For GSM850 and PCS1900, the following conditions shall also be met:

- The EUT shall be commanded to operate at maximum transmit power;
- The downlink RXQUAL shall be monitored.

Assign channel frequency to an appropriate channel number. Here, set the ARFCN channel number to 661 for PCS1900, and 190 to GSM850, 4132 to WCDMA 850, 9400 to WCDMA 1900.

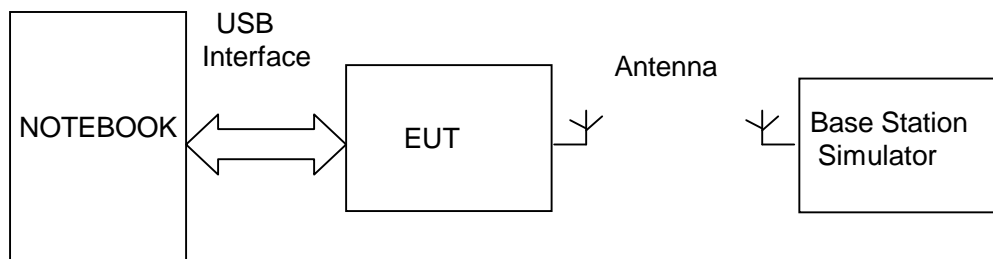


Figure 1.: TC1 (TM1-TM8)

Idle Mode:

The EUT will be connected to test system (Base Station Simulator) in order to simulate normal operating conditions (with reference to the guidance given in the standard for this type of equipment).

The EUT is required to be in the idle mode.

For WCDMA, the following conditions shall be met:

- UE shall be camped on a cell;
- UE shall perform Location Registration (LR) before the test, but not during the test;
- UE's neighbour cell list shall be empty;
- Paging repetition period and DRX cycle shall be set to minimum (shortest possible time interval).

For GSM850 and PCS1900, the following conditions shall be met::

When the EUT is required to be in the idle mode, the test system shall simulate a Base Station (BS) with Broadcast Control Channel/Common Control Channel (BCCH/CCCH) on one carrier. The EUT shall be synchronized to the BCCH, listening to the CCCH and able to respond to paging messages. Periodic Location Updating shall be disabled.

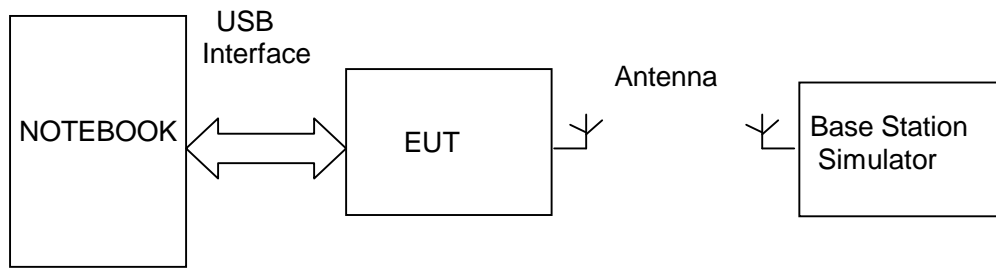


Figure 2. TC1 (TM9-TM16)

5 Electromagnetic Interference (EMI)

5.1 Radiated Disturbance 30MHz to 1000MHz

5.1.1 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2003). The test distance was 3m. The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4. The Radiated Disturbance measurements were made using a Rohde and Schwarz ESMI Test Receiver and control software ES-K1.

A preliminary scan and a final scan of the emissions were made from 30 MHz to 1GHz by using test script of software; the emissions were measured using a Quasi-Peak Detector. The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°, The receive antenna has two polarizations V and H.

Huawei Mobile Station was communicated with the BTS simulator through Air interface. The Mobile Station operated on the typical channel and the Mobile Station worked in idle mode, transmitter was not work in this test.

EUT was configured in idle mode and the test performed at worst emission state.

Measurement bandwidth: 30 MHz – 1000 MHz: 120 k Hz

Test set up figure:

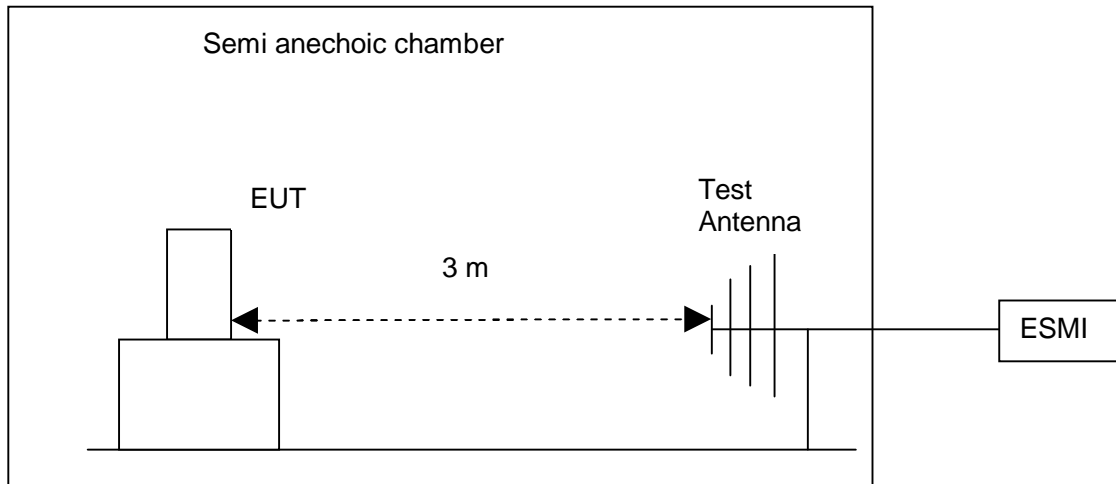


Figure 3. Test set-up

5.1.2 Test Results

The EUT has met the requirements for Radiated Emission of enclosure port.

Table 8 Test Limits

Frequency of Emission (MHz)	Radiated Limit	
	Unit($\mu\text{V}/\text{m}$)	Unit($\text{dB}\mu\text{V}/\text{m}$)
30-88	100	40
88-216	150	43.5
216-960	200	46
960-1000	500	54

5.2 Conducted Disturbance 0.15 MHz to 30MHz
5.2.1 Test Procedure

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4: 2003.

Conducted Disturbance at AC Port measurements were undertaken on the L and N Lines. The emissions were measured using a Quasi-Peak Detector and Average Detector.

Huawei Mobile Station was communicated with the BTS simulator through Air interface, the BTS simulator controls the Mobile Station to transmitter the maximum power which defined in specification of product. The Mobile Station operated on the typical channel.

Measurement bandwidth (RBW) for 150kHz to 30 MHz: 9 kHz;

Test Set-up figure:

The Mobile Station was setup in the screened chamber and operated under nominal conditions.

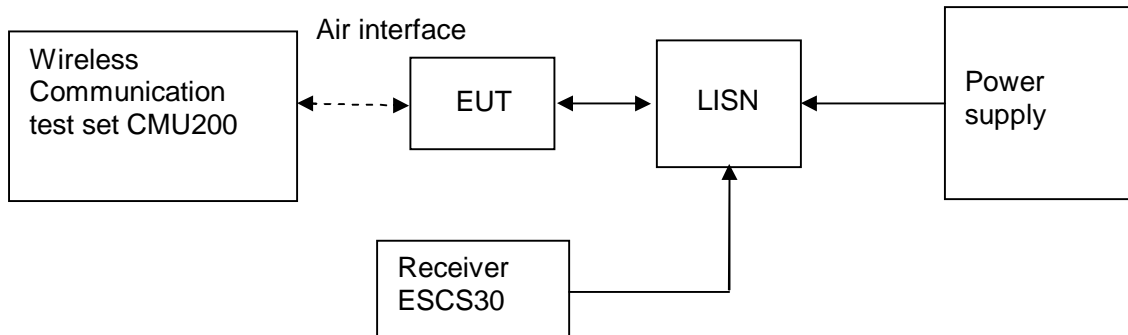


Figure 4. Test Set-up

5.2.2 Test Results

The EUT has met requirements for Conducted disturbance of power lines.

Table 9 Test Limit of DC&AC Power Port

Frequency range	150kHz~ 30MHz	
Classification	Class B	
Limit(Class B)	Voltage limits	
	QP	AV
0.15MHz~0.5MHz	66~56 dB μ V	56~46 dB μ V
0.5MHz~5MHz	56 dB μ V	46 dB μ V
5MHz~30MHz	60 dB μ V	50 dB μ V

5.3 Radiated Spurious Emissions


5.3.1 Test Procedure

A test site fulfilling the requirements of ITU-R Recommendation SM329-10 was used. The EUT was placed on a non-conducting support in the anechoic chamber and was operated from a power source via an RF filter to avoid radiation from the power leads.


Step 1:

For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP shall be measured when the transmitter is adjusted in accordance with the tune-

up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the BTS simulator via the air interface.
Test the Radiated maximum output power by the Rohde and Schwarz ESIB26 Test Receiver from test antenna.

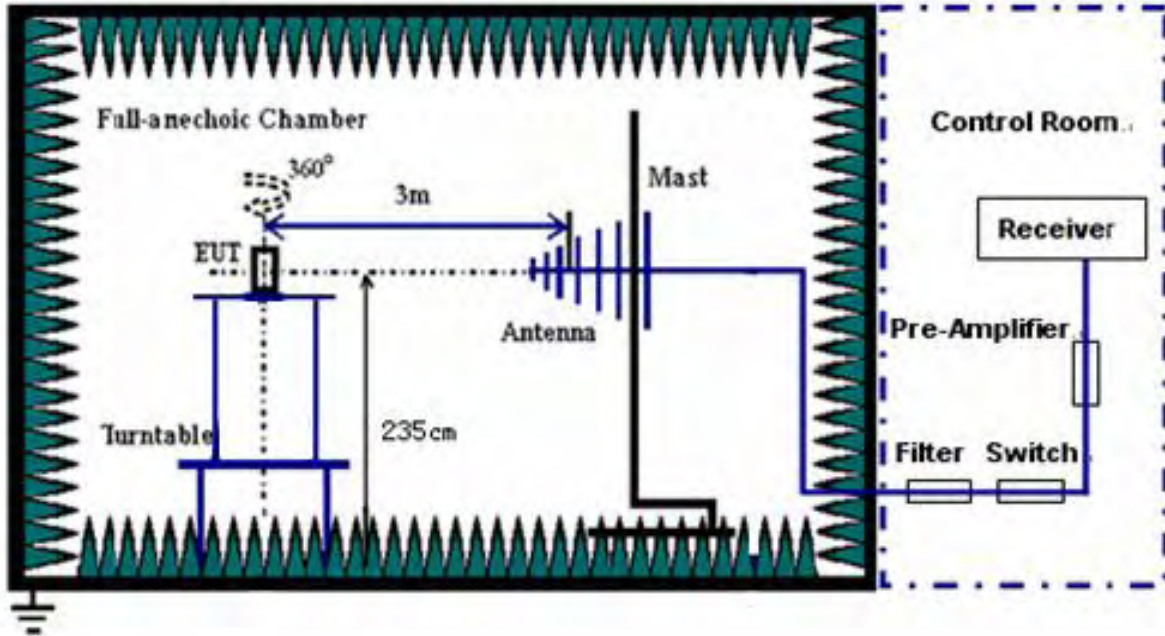

Step 2:
Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step1 on ESIB26 Test Receiver, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

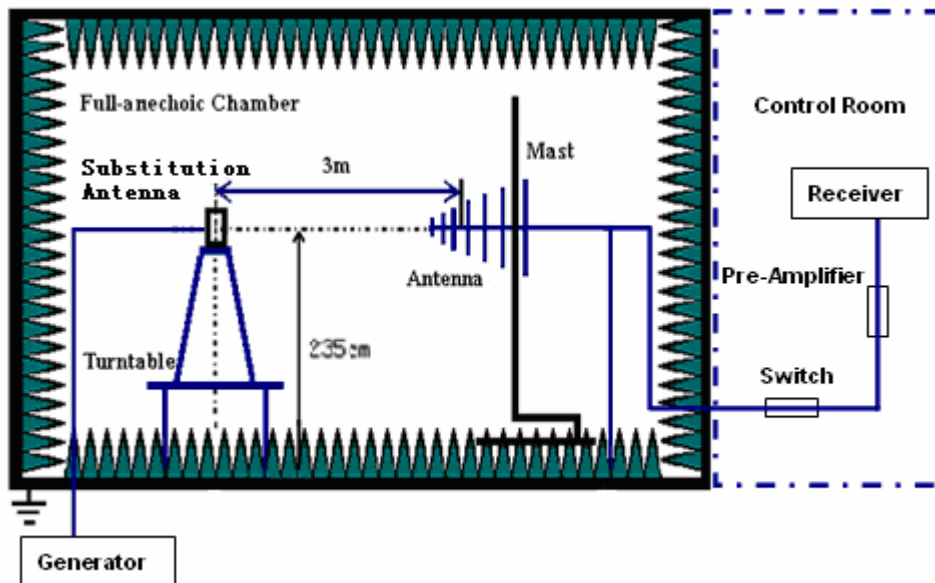

According to part 22.917, the defined measurement bandwidth as following:

22.917(b) Measurement procedure: Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;
Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;
Measurement bandwidth (RBW) for 30 MHz up to 1 GHz: 100 kHz;
Measurement bandwidth (RBW) for 1GHz up to 18 GHz: 1MHz;

Table 10 Radiated Spurious Emissions Limits

Frequency band	Minimum requirement (E.R.P) traffic mode
30MHz~18GHz	-13dBm

According to part 24.238, the defined measurement bandwidth as following:

24.238 (b) Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;
Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;
Measurement bandwidth (RBW) for 30 MHz up to 26.5 GHz: 1 MHz;

Table 11 Radiated Spurious Emissions Limits

Frequency band	Minimum requirement (E.R.P) traffic mode
30MHz~26.5GHz	-13dBm

5.3.2 Test Results

The EUT has met the requirements of FCC Part22/Part24 requirement.

6 Main Test Instruments

Table 12 Main Test Equipments

Test item	Test Instrument	Model	Manufacturer	Cal-Date	Cal Interval (month)
RE	EMI Test receiver	ESMI	R&S	April.23, 2008	12
	Broadband Antenna	CBL 6112B (2536)	SCHAFFNER	Jun.08, 2008	12
CE	EMI Test receiver	ESCS30	R&S	May.29, 2008	12
	Artificial Mains Network	ENV4200	R&S	May.21, 2008	12
RSE	EMI Test receiver	ESIB26	R&S	May.30.2008	12
	Horn Antenna	3117	EMCO	May.20.2008	12
	Broadband Antenna	CBL 6112B (2747)	SCHAFFNER	Oct.17, 2008	12
	Horn Antenna	3160	EMCO	May.20.2008	12
Software Information					
Test Item	Software Name	Manufacturer	Version		
RE/CE	ES-K1	R&S	1.7.1		
RSE	EMC32	R&S	V5.10.99		

7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:


Table 13 System Measurement Uncertainty

	Items	Extended Uncertainty
RE	Field strength (dB μ V/m)	U=4.6dB; k=2(30MHz-1GHz)
RSE	ERP (dBm)	U=2.2dB; k=2
CE	Disturbance Voltage (dB μ V)	U=3.3dB; k=2

8 Graph and Data of Emission Test

8.1 Radiated Disturbance

This test was carried out in all the test modes, Here only the worst test result was shown.

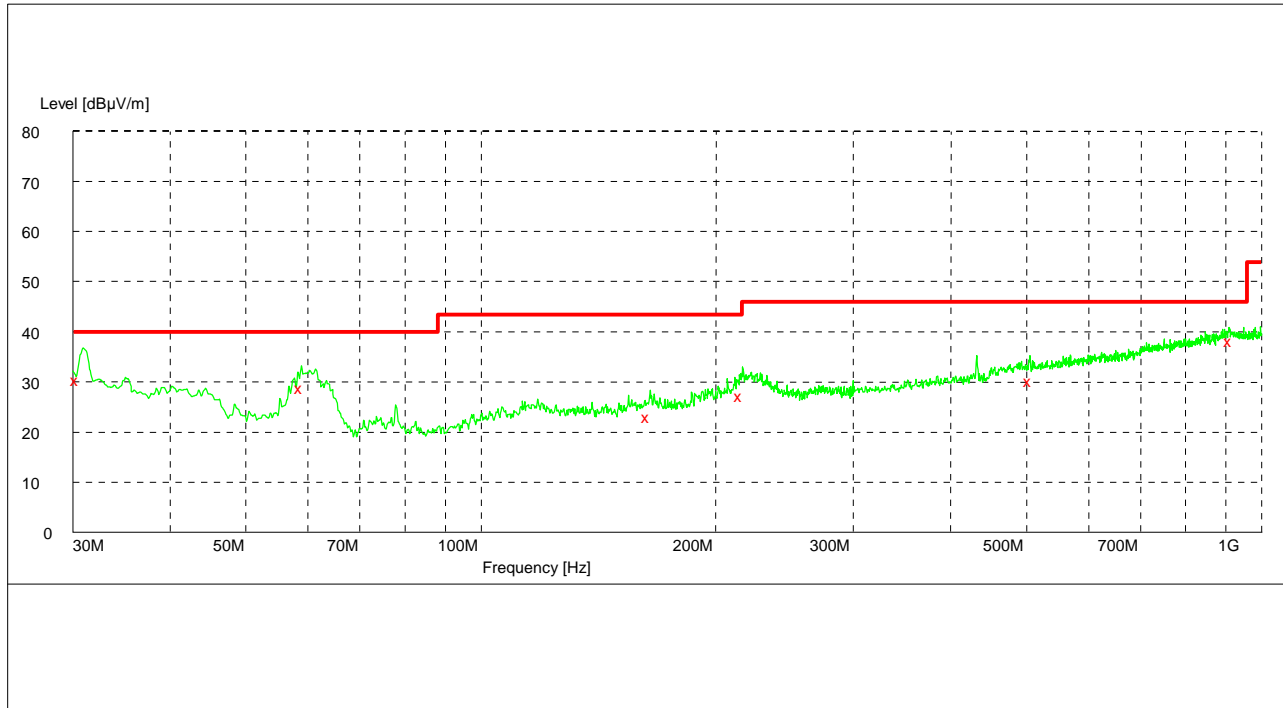


MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
30.480000	30.50	-6.2	40.0	9.5	100.0	36.00	VERTICAL
58.980000	29.00	-18.5	40.0	11.0	100.0	13.00	VERTICAL
164.280000	23.10	-14.6	43.5	20.4	100.0	0.00	VERTICAL
216.000000	27.40	-13.4	43.5	16.1	100.0	21.00	VERTICAL
506.640000	30.40	-5.6	46.0	15.6	100.0	152.00	VERTICAL
914.880000	38.50	0.4	46.0	7.5	106.0	139.00	VERTICAL

8.2 Conducted Disturbance

This test was carried out in all the test modes, Here only the worst test result was shown.

8.2.1 AC Power Port Test Data

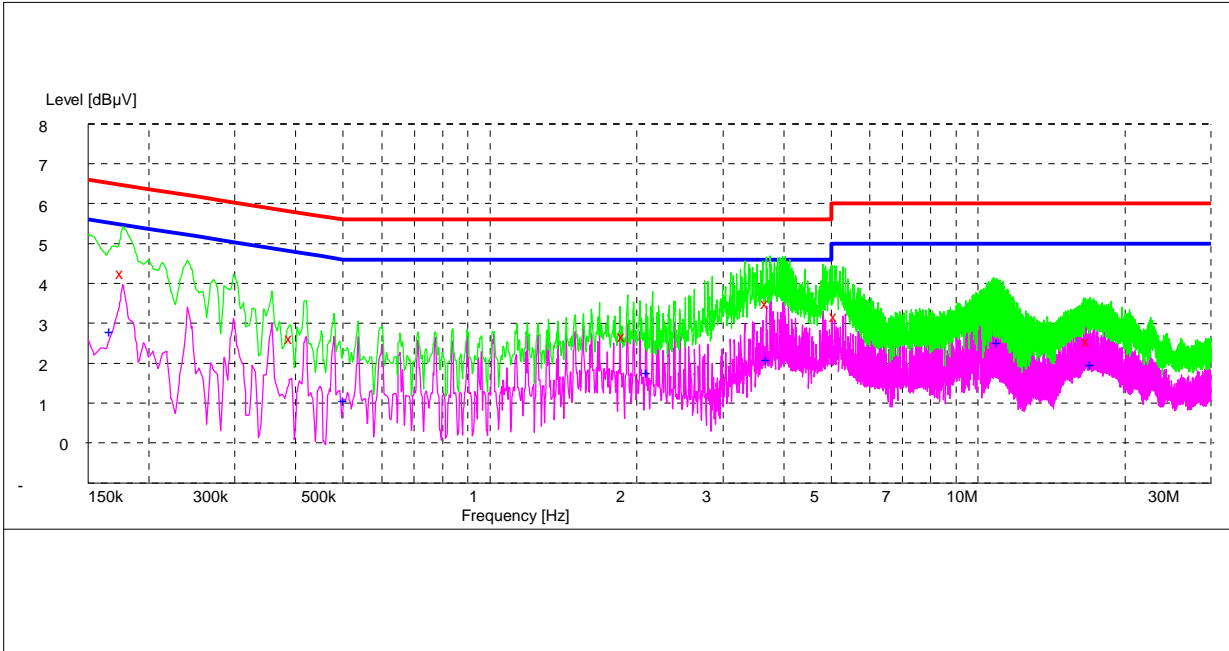

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.177000	43.00	10.1	65	22.0	L3	FLO
0.393000	26.80	10.0	58	31.2	N	FLO
1.891500	27.20	10.1	56	28.8	N	FLO
3.723000	35.50	10.1	56	20.5	L3	FLO
5.131500	32.30	10.1	60	27.7	N	FLO
16.854000	26.10	10.3	60	33.9	L3	FLO


MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.168000	28.70	10.0	55	26.3	L3	FLO
0.505500	11.30	10.0	46	34.7	N	FLO
2.116500	18.30	10.1	46	27.7	N	FLO
3.727500	21.60	10.1	46	24.4	N	FLO
11.049000	25.70	10.1	50	24.3	N	FLO
17.173500	20.20	10.3	50	29.8	L3	FLO


8.3 Radiated Spurious Emission

8.3.1 For GPRS 850


Traffic Mode (9kHz-30MHz)

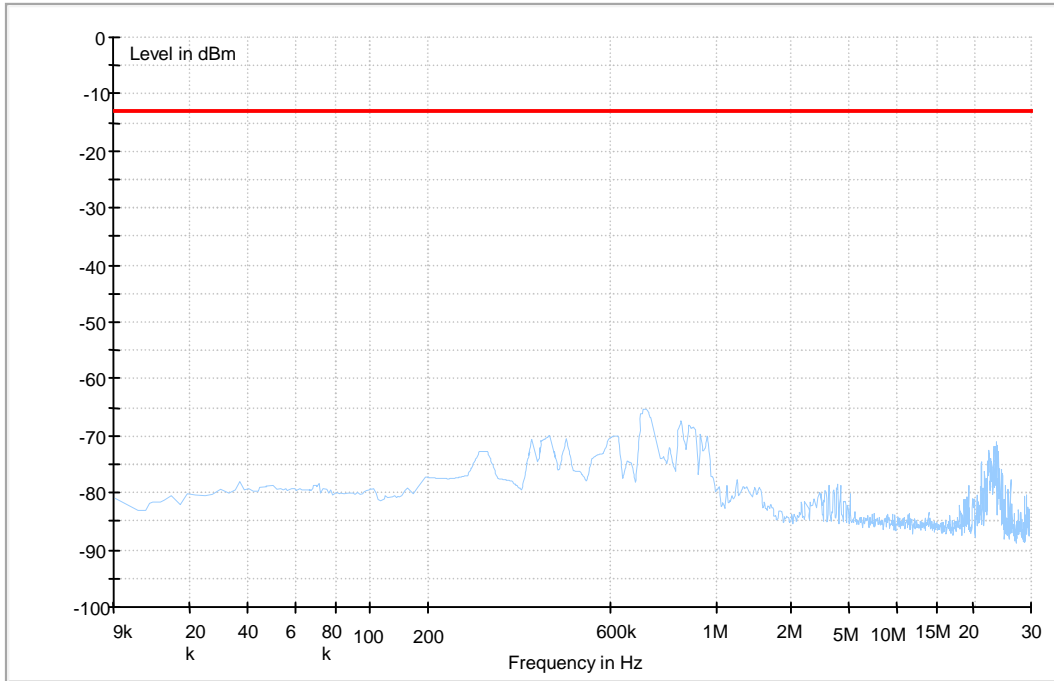

Traffic Mode (30MHz-2GHz)

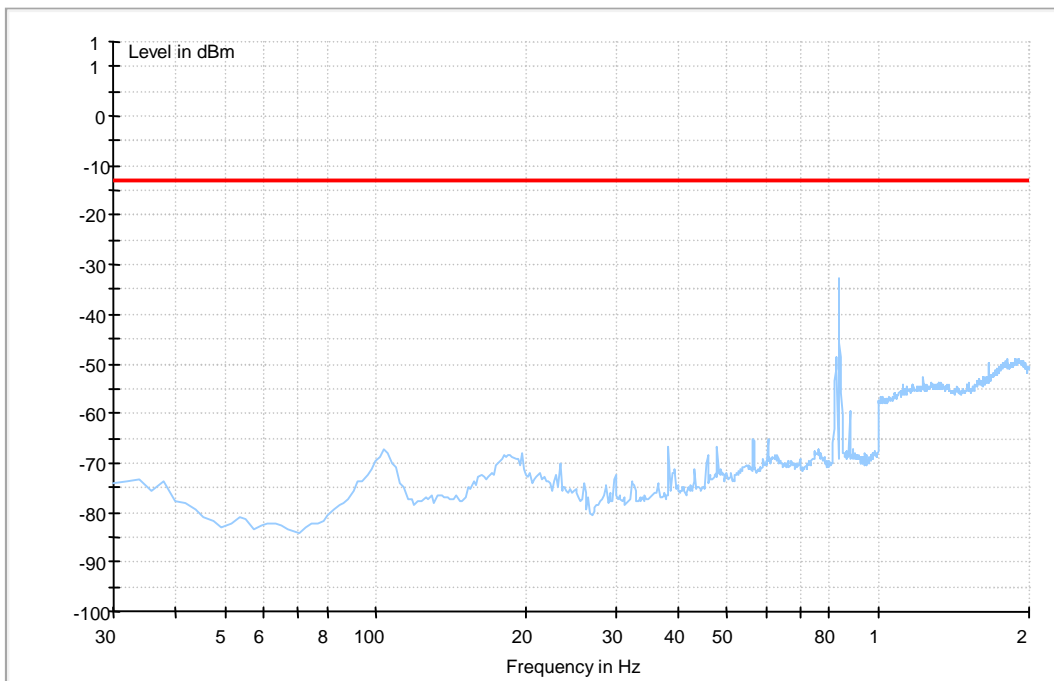

Traffic Mode (2GHz-18GHz)

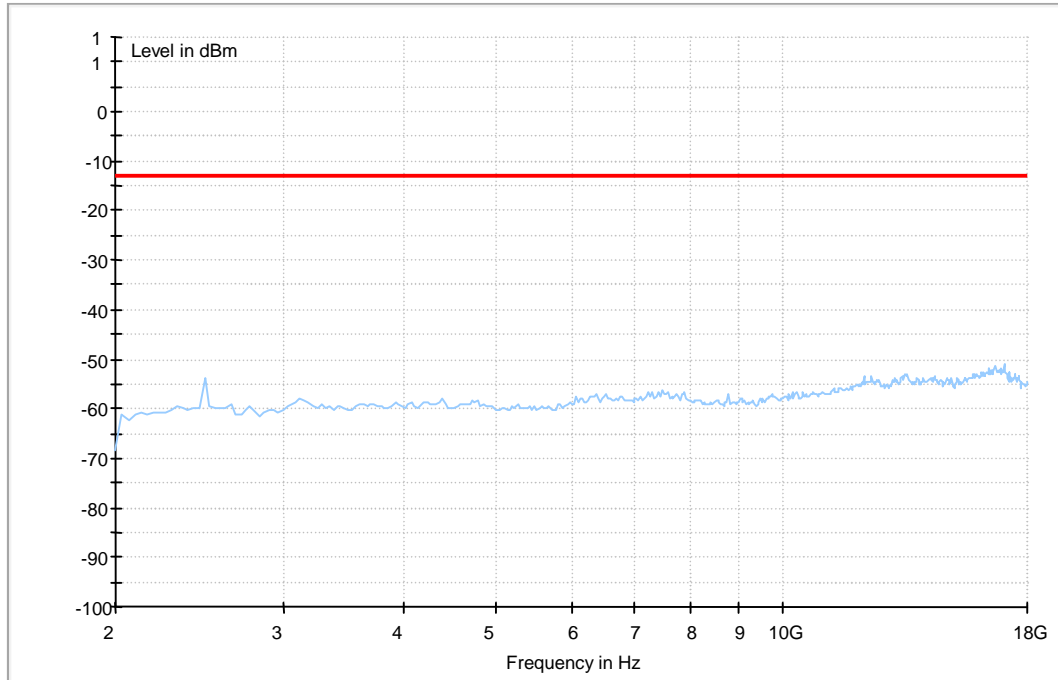

Substitution test result:

Table 1

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	Result


Note: For get the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$ERP [dBm] = SGP [dBm] - Cable Loss [dB] + Gain [dBd]$$


SGP: Signal Generator Level

When the margin of the test frequency less than 20dBm, substitution method test to the frequency.


8.3.2 For EGPRS 850 Traffic Mode (9kHz-30MHz)

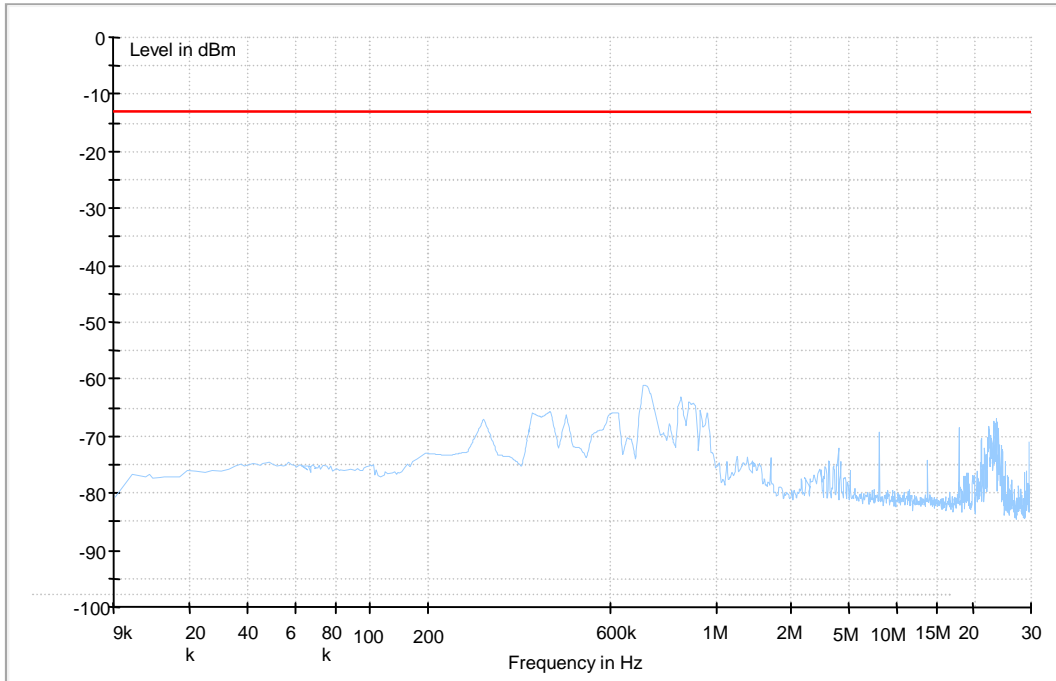

Traffic Mode (30MHz-2GHz)

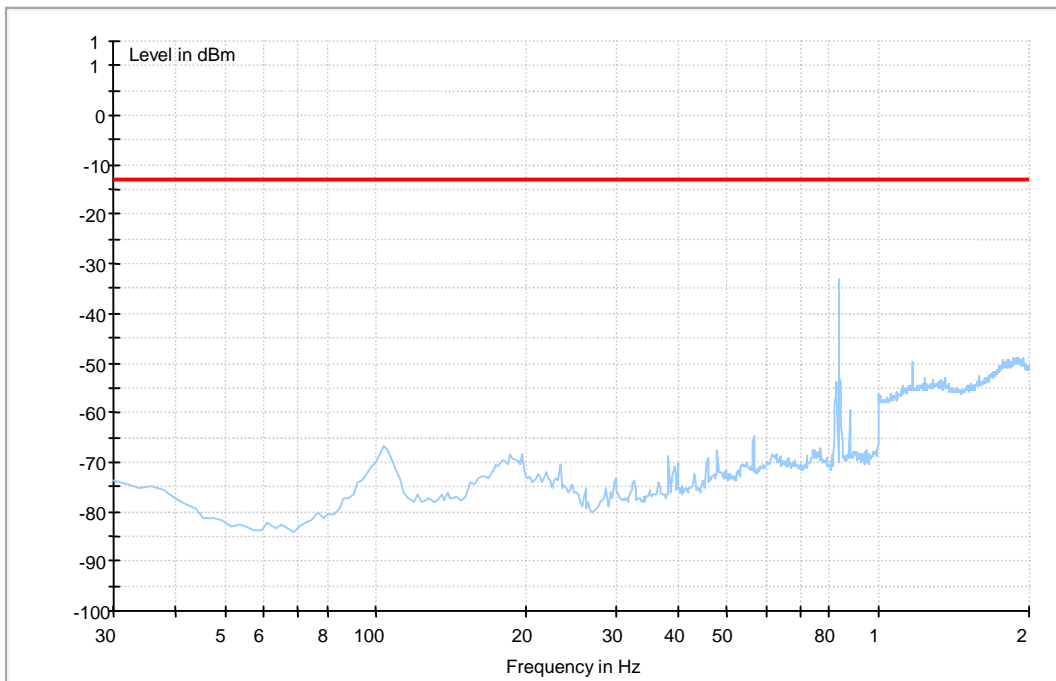

Traffic Mode (2GHz-18GHz)

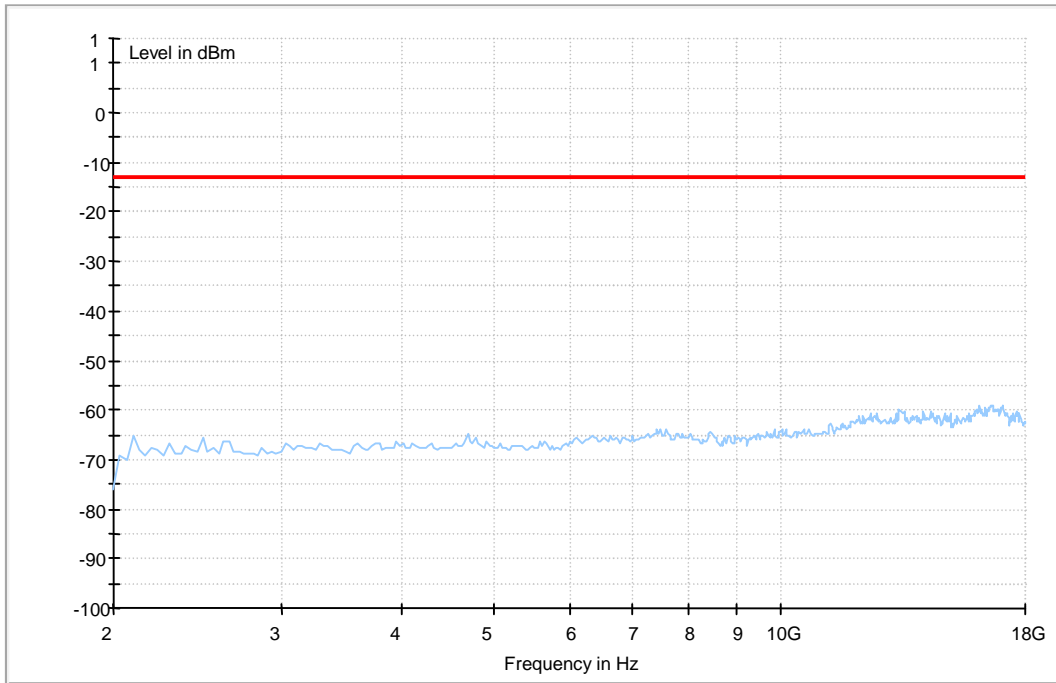

Substitution test result:

Table 1

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	Result


Note: For get the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$ERP [dBm] = SGP [dBm] - Cable Loss [dB] + Gain [dBd]$$


SGP: Signal Generator Level

When the margin of the test frequency less then 20dbBm, substitution method test to the frequency.


8.3.3 For GPRS 1900 Traffic Mode (9kHz-30MHz)

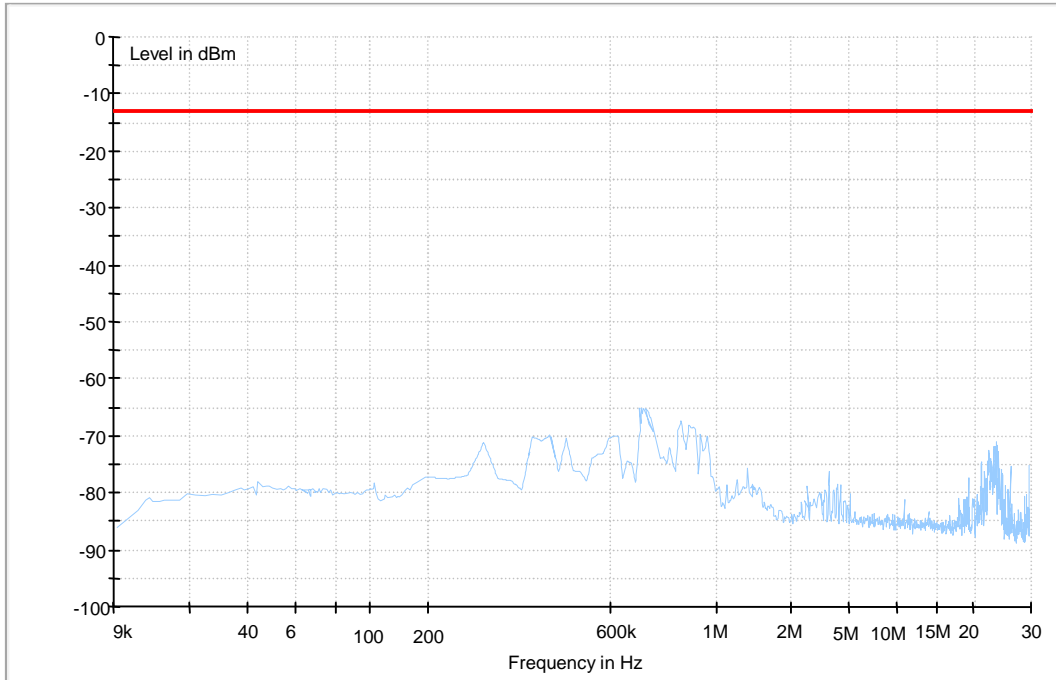


Traffic Mode (30MHz-2GHz)

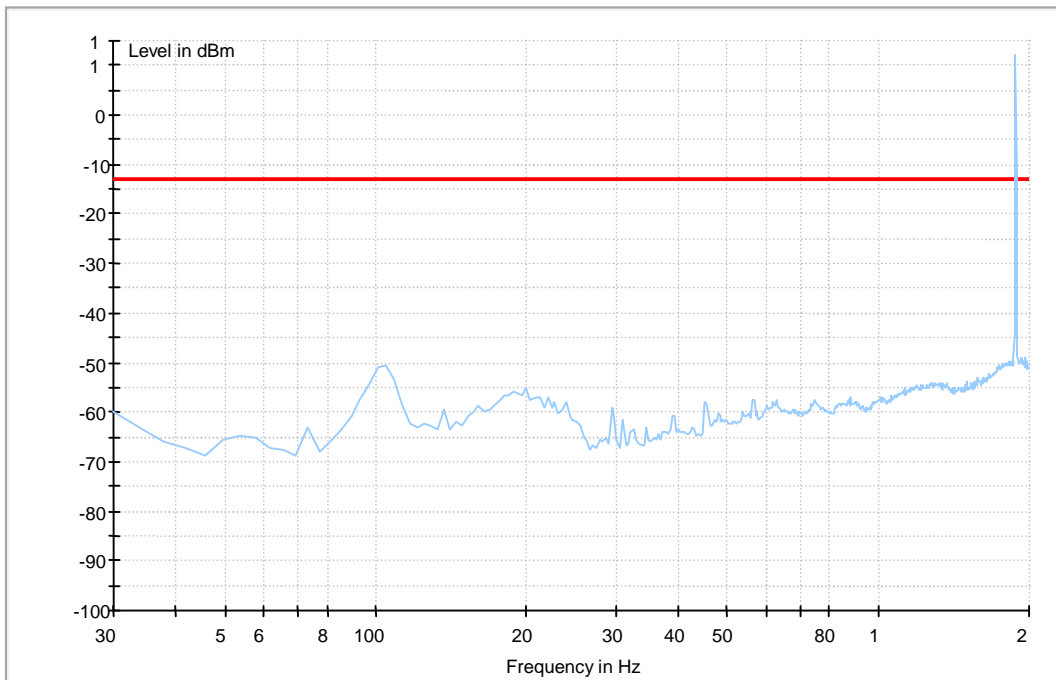

Traffic Mode (2GHz-18GHz)

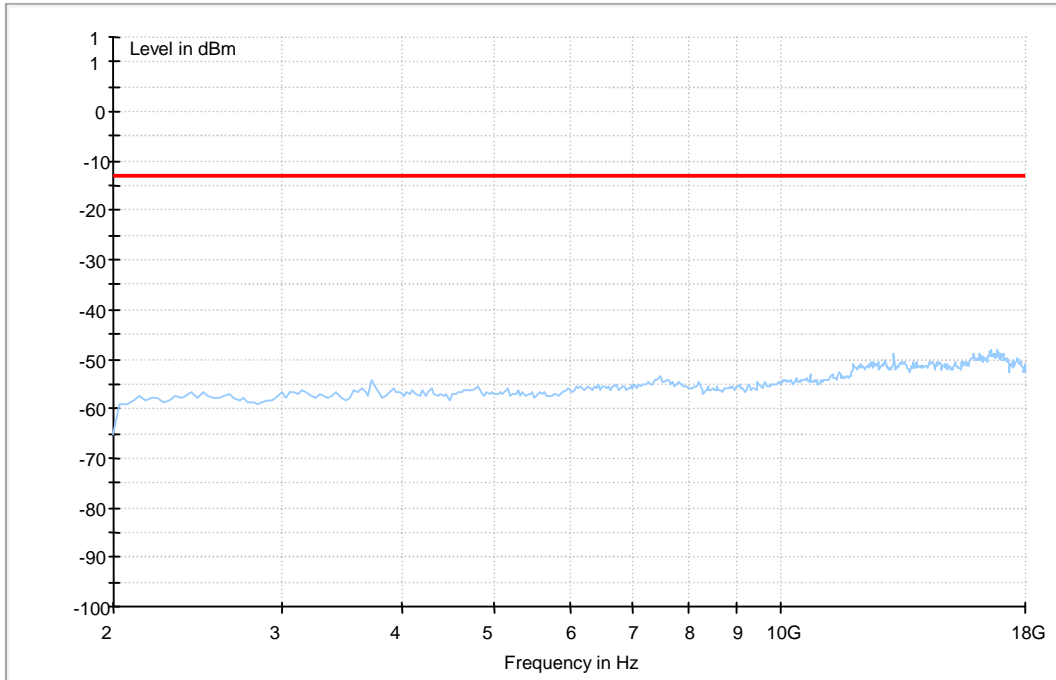

Traffic Mode (18GHz-26.5GHz)

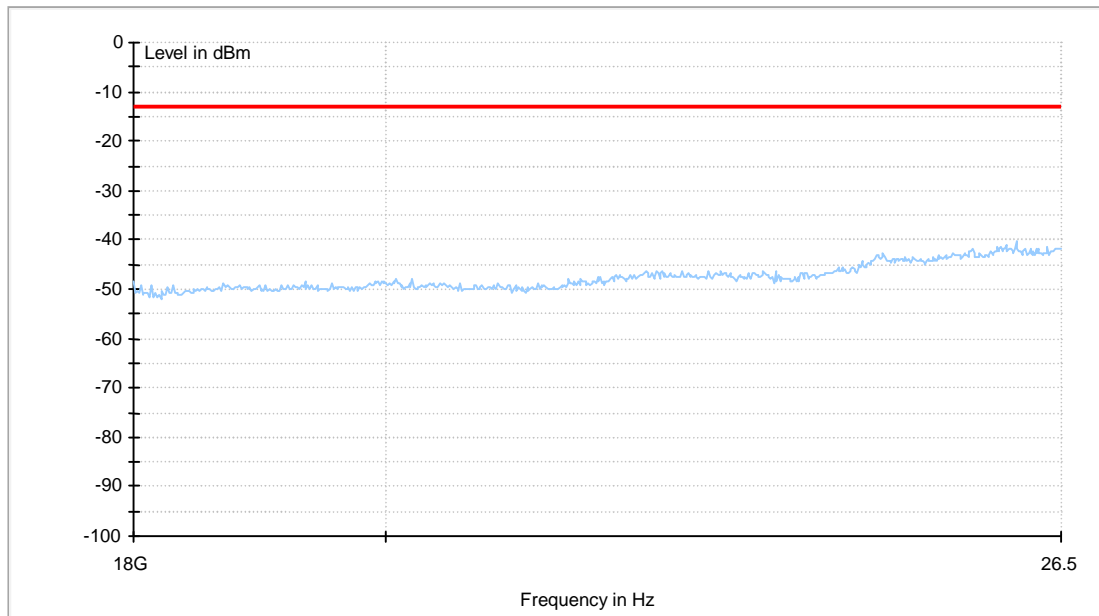

Substitution test result:

Table 1

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	Result


Note: For get the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$


SGP: Signal Generator Level

When the margin of the test frequency less then 20dbm, substitution method test to the frequency.


8.3.4 For EGPRS 1900 Traffic Mode (9kHz-30MHz)

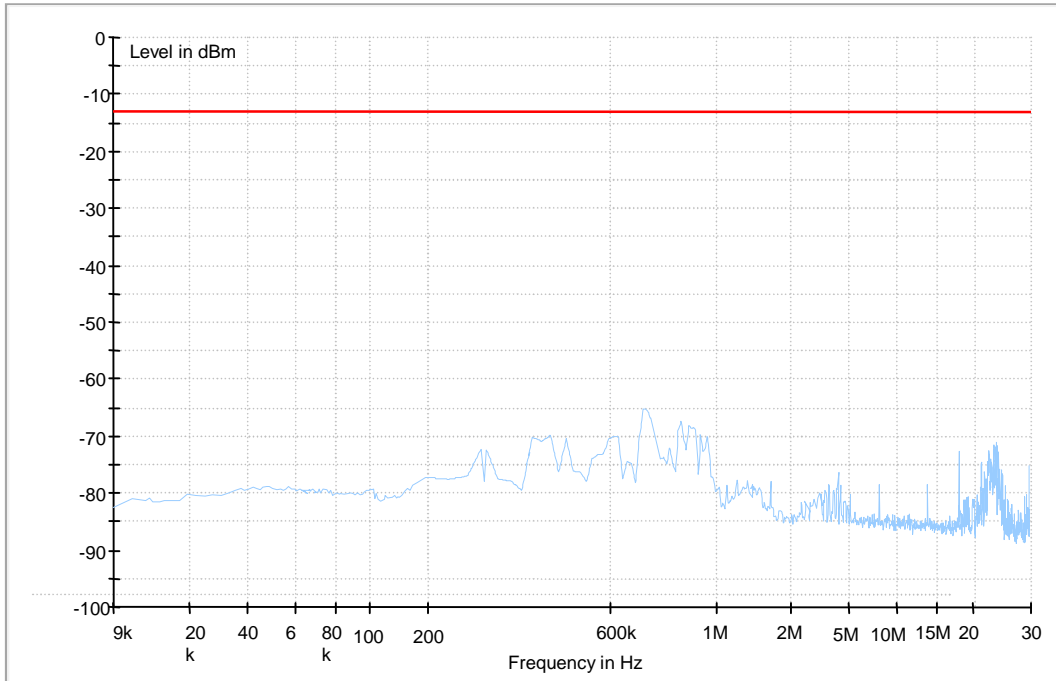


Traffic Mode (30MHz-2GHz)

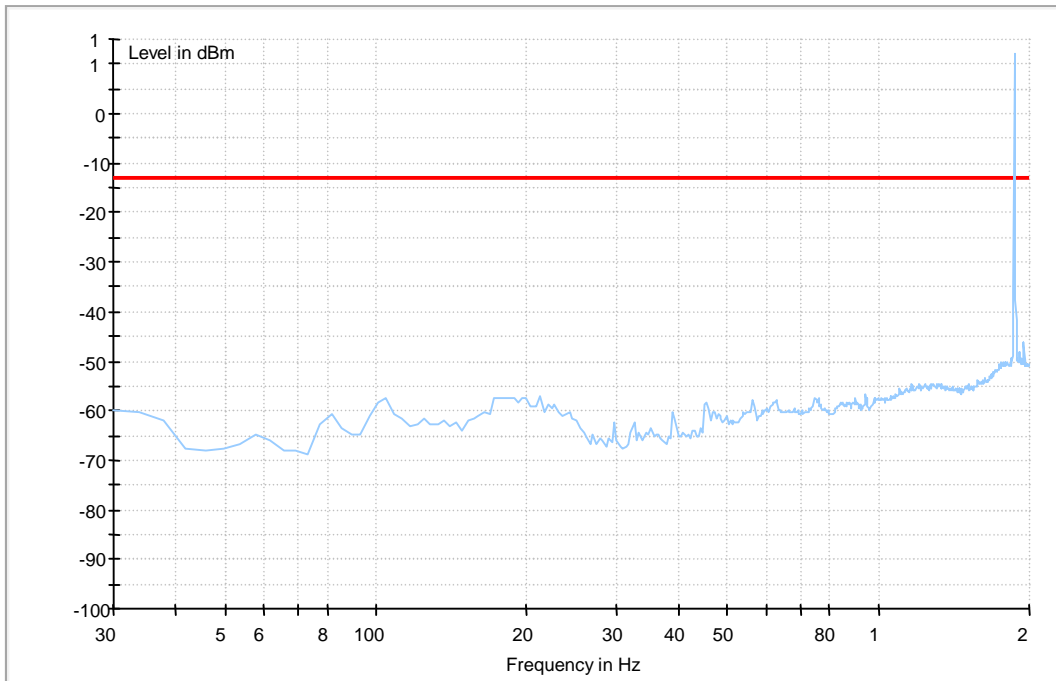

Traffic Mode (2GHz-18GHz)

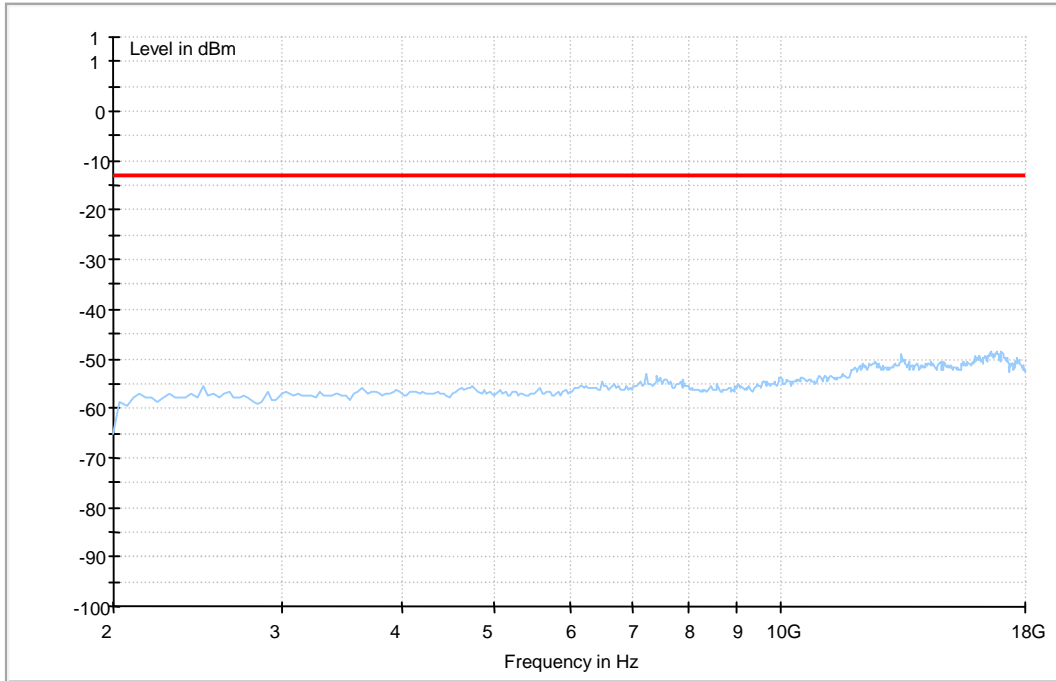

Traffic Mode (18GHz-26.5GHz)

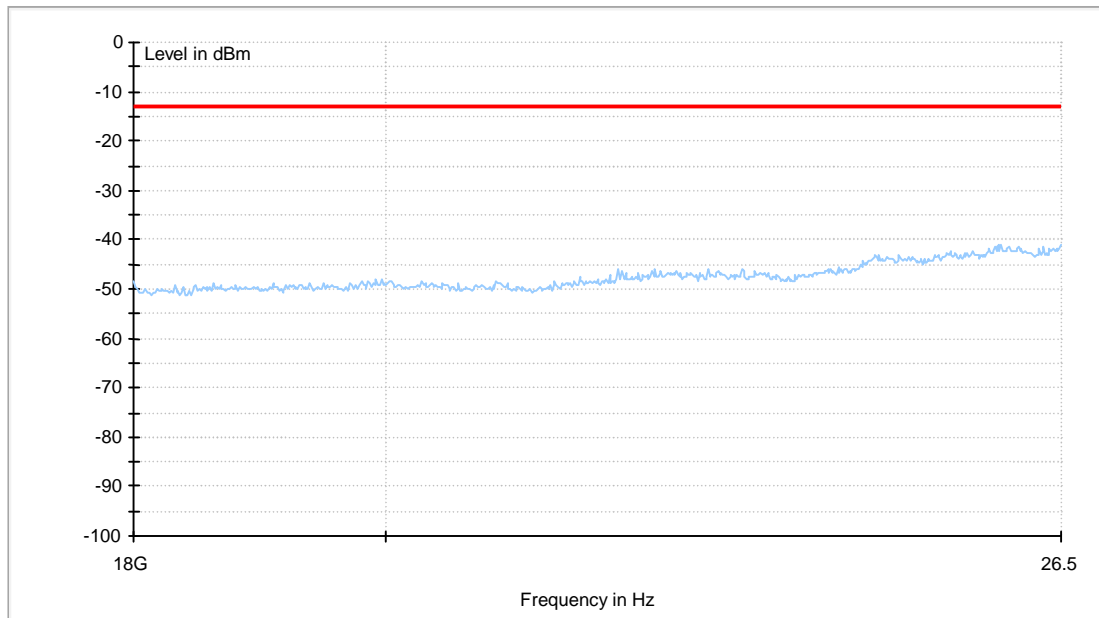

Substitution test result:

Table 1

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	Result

Note: For get the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,


$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

SGP: Signal Generator Level


When the margin of the test frequency less then 20dbm, substitution method test to the frequency.

8.3.5 For WCDMA BAND V


Traffic Mode (9kHz-30MHz)

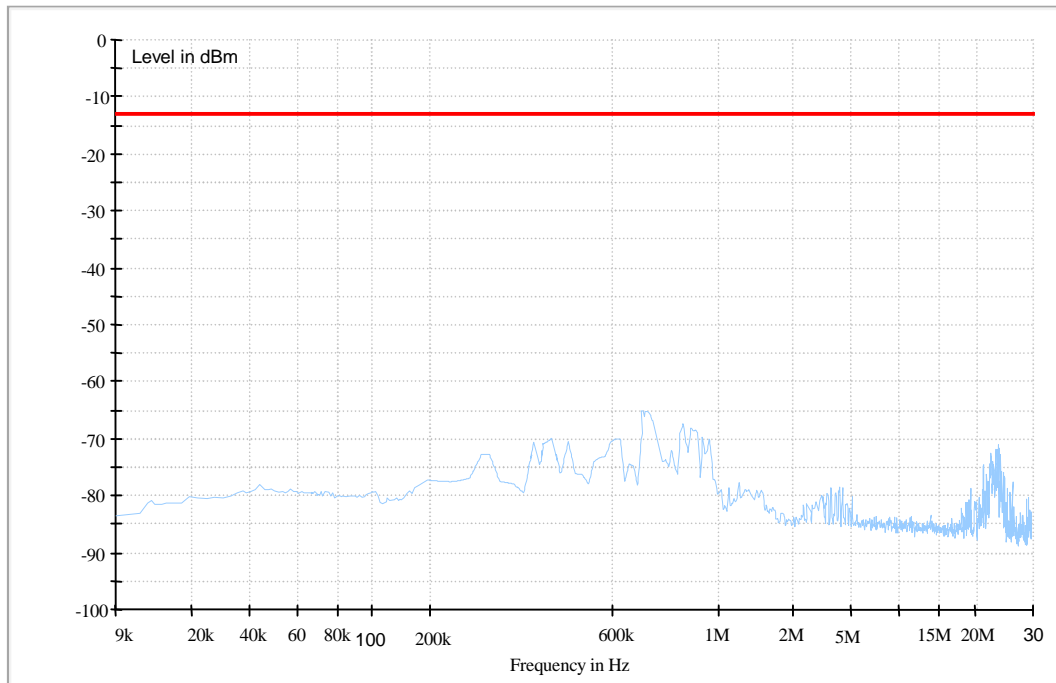

Traffic Mode (30MHz-2GHz)

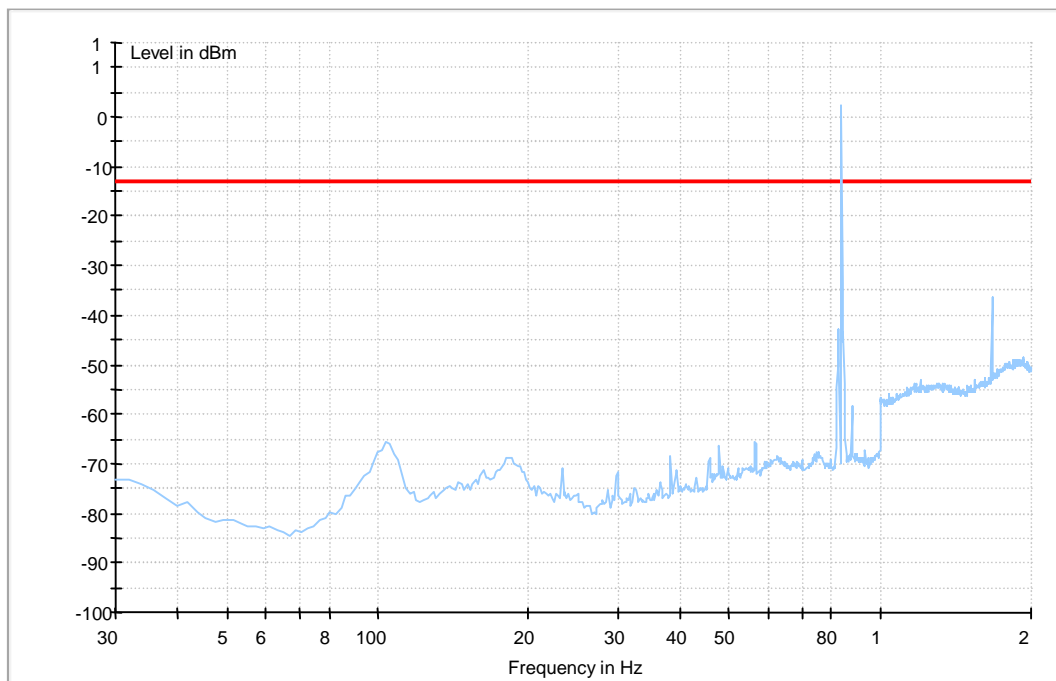

Traffic Mode (2GHz-18GHz)

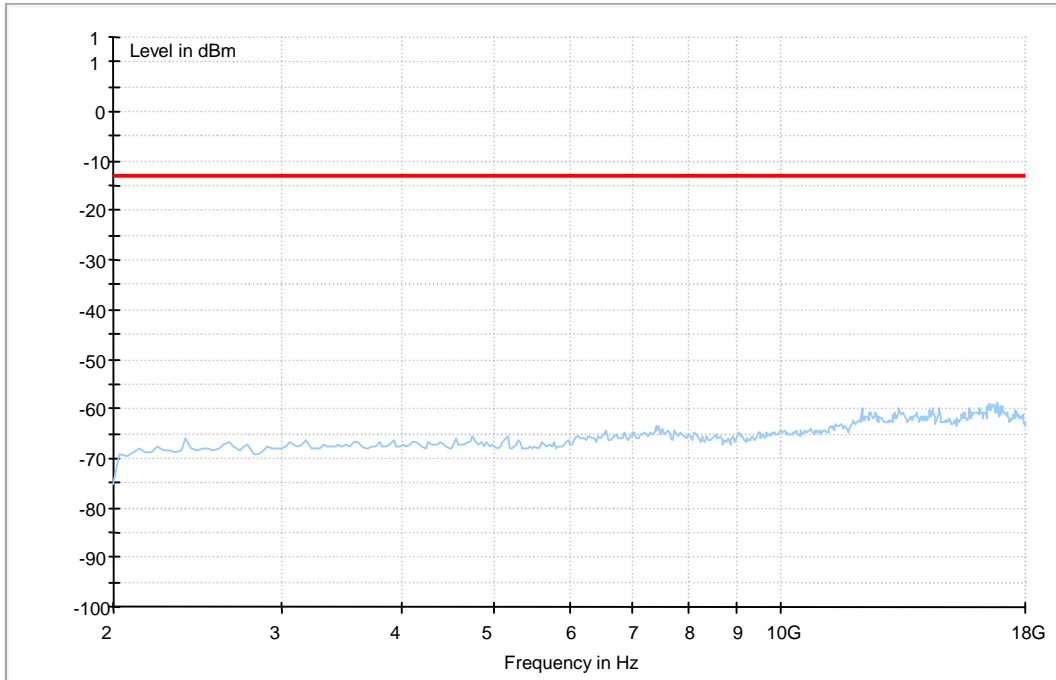

Substitution test result:

Table 1

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	Result


Note: For get the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$ERP [dBm] = SGP [dBm] - Cable Loss [dB] + Gain [dBd]$$


SGP: Signal Generator Level

When the margin of the test frequency less then 20dbBm, substitution method test to the frequency.


8.3.6 For HSDPA BAND V Traffic Mode (9kHz-30MHz)

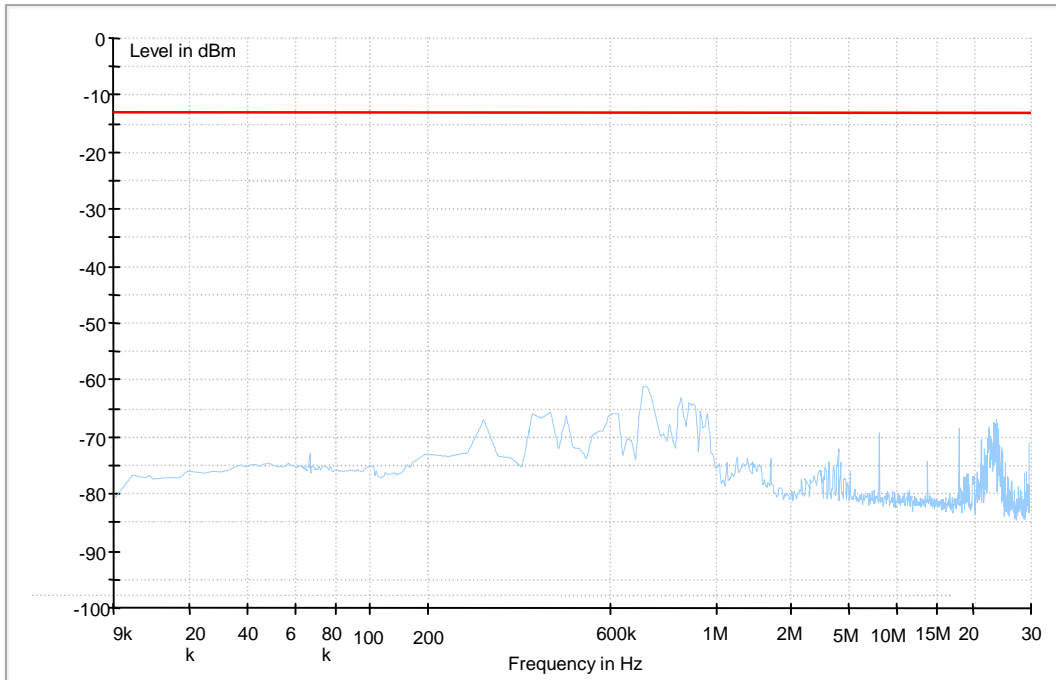

Traffic Mode (30MHz-2GHz)

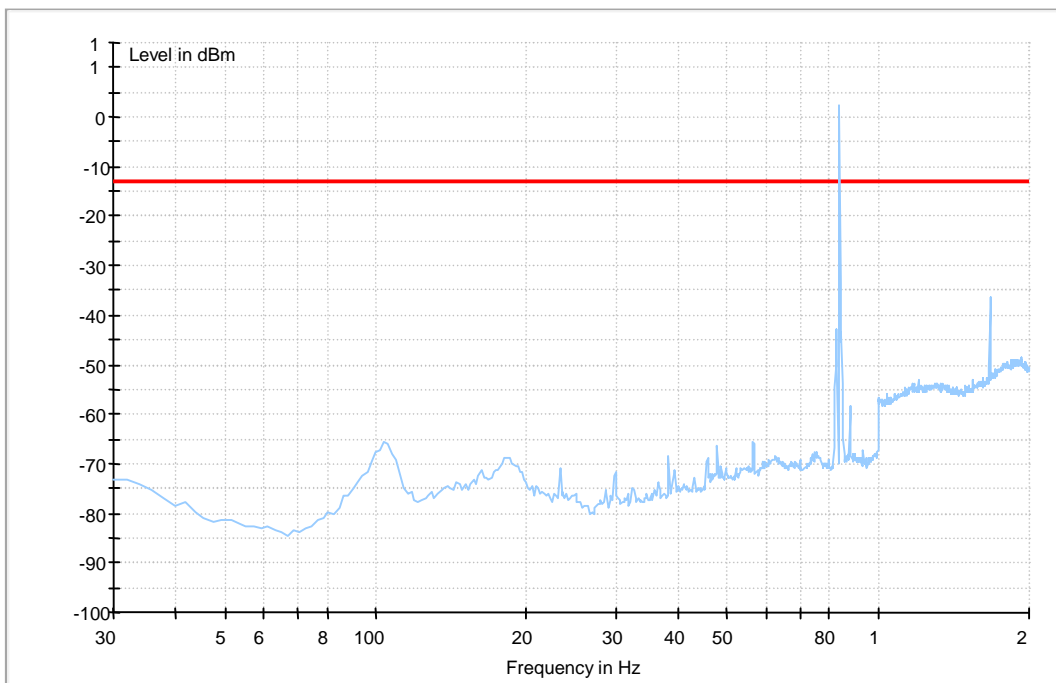

Traffic Mode (2GHz-18GHz)

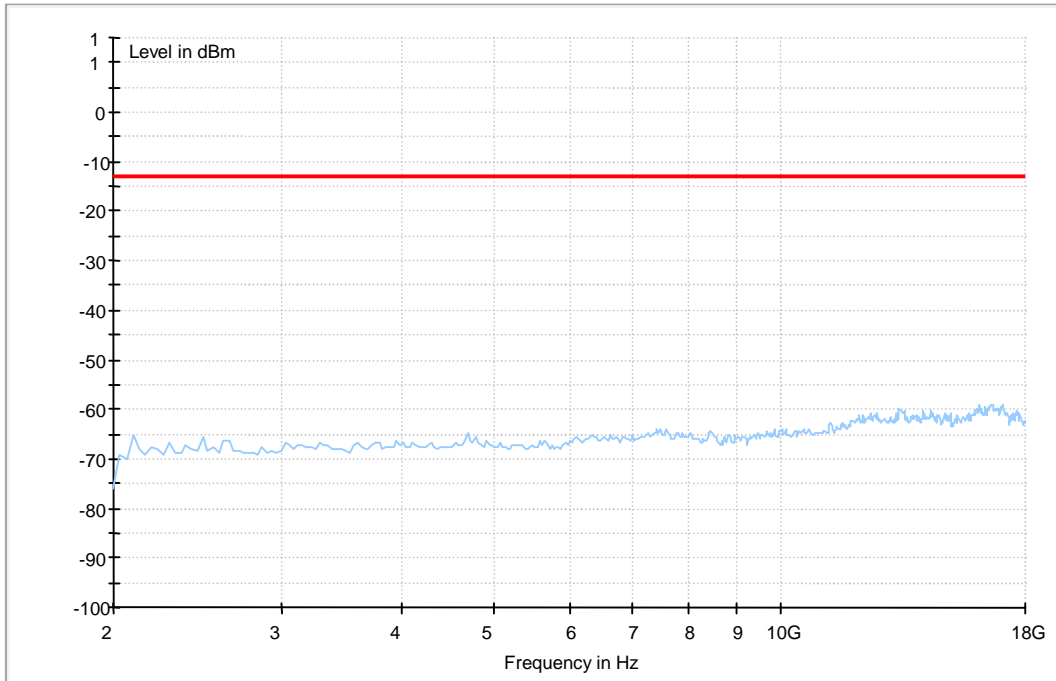

Substitution test result:

Table 1

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	Result


Note: For get the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$


SGP: Signal Generator Level

When the margin of the test frequency less then 20dbBm, substitution method test to the frequency.


8.3.7 For WCDMA BAND II Traffic Mode (9kHz-30MHz)

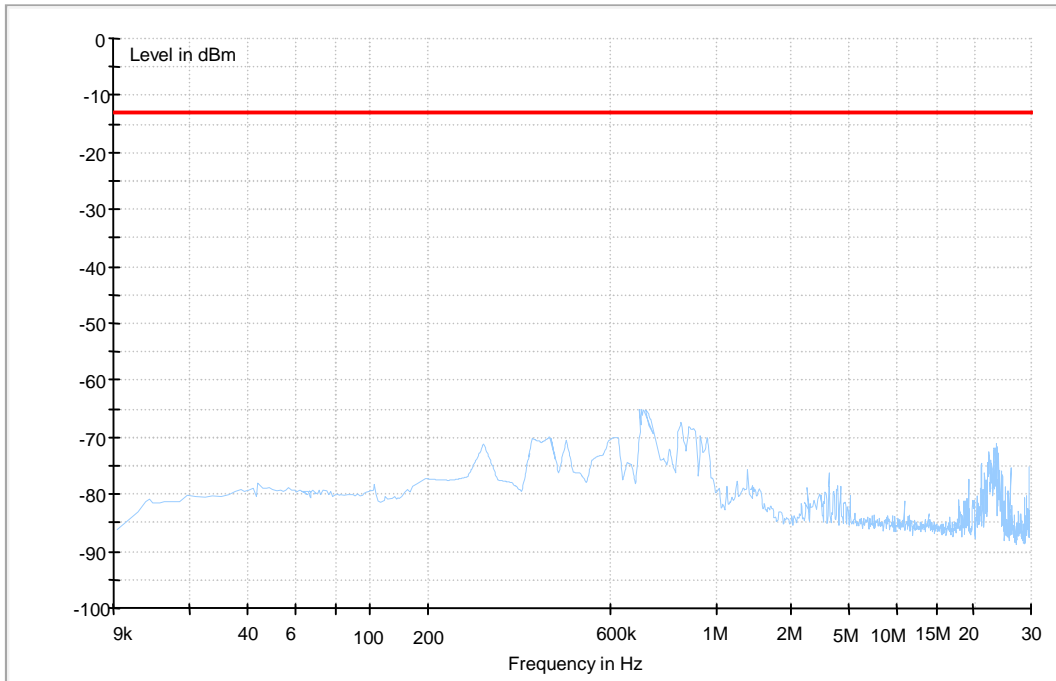


Traffic Mode (30MHz-2GHz)

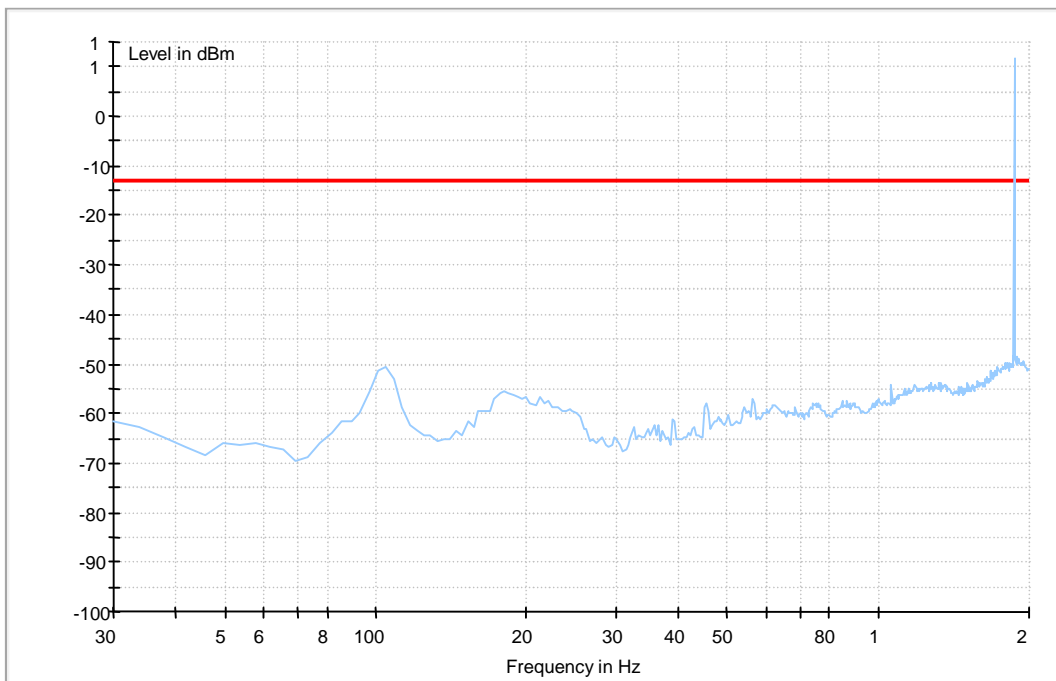

Traffic Mode (2GHz-18GHz)

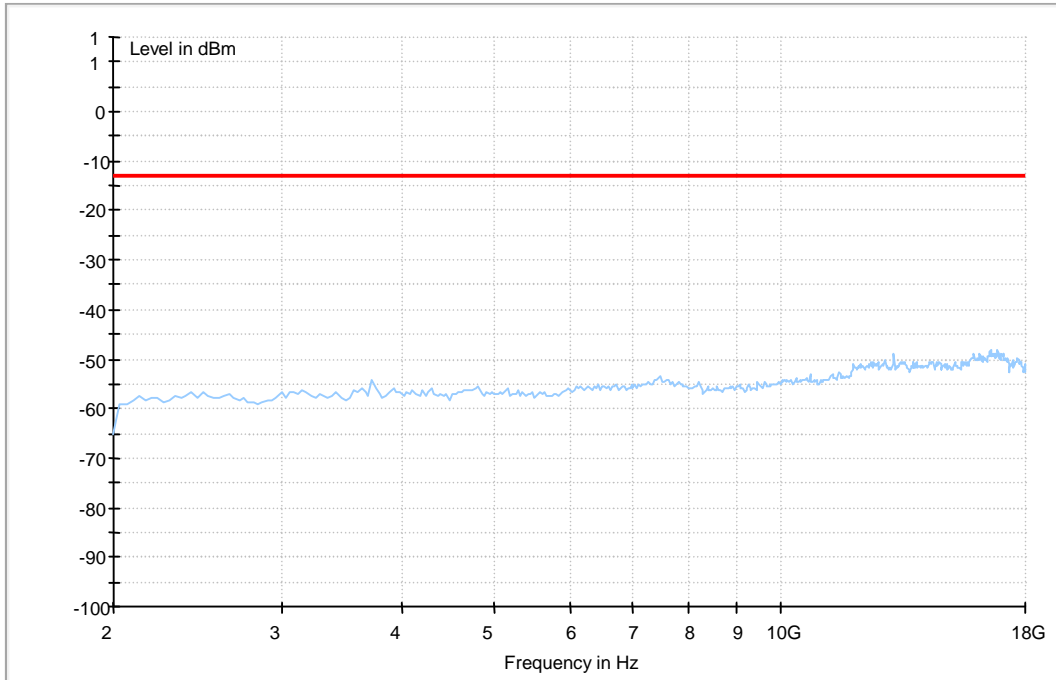

Traffic Mode (18GHz-26.5GHz)

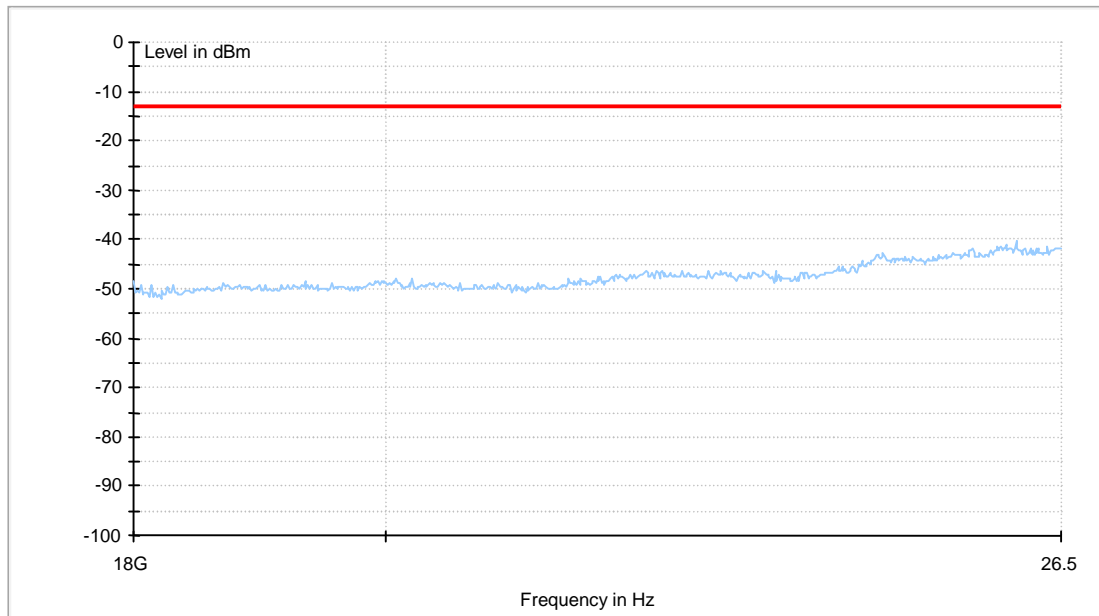

Substitution test result:

Table 1

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	Result


Note: For get the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$


SGP: Signal Generator Level

When the margin of the test frequency less then 20dbm, substitution method test to the frequency.


8.3.8 For HSDPA BAND II Traffic Mode (9kHz-30MHz)

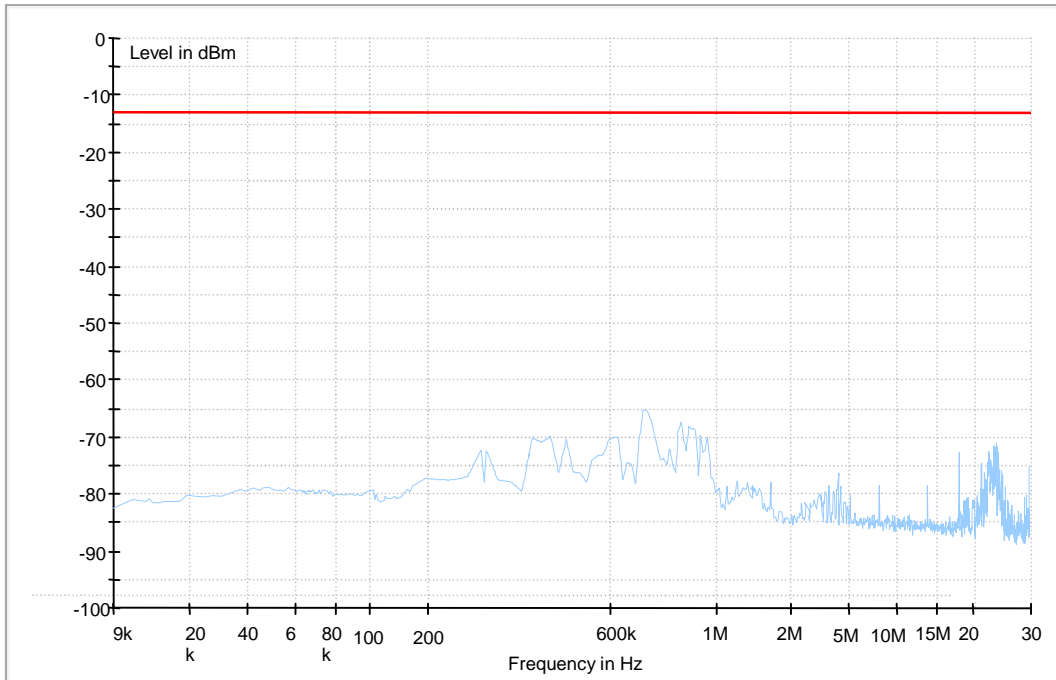


Traffic Mode (30MHz-2GHz)

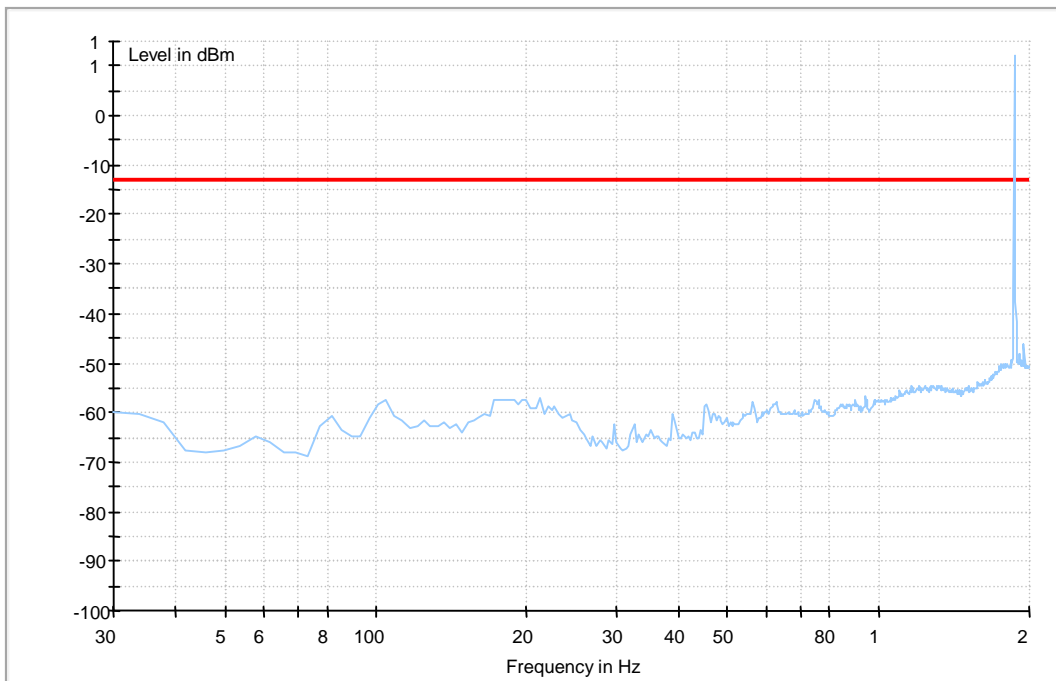

Traffic Mode (2GHz-18GHz)

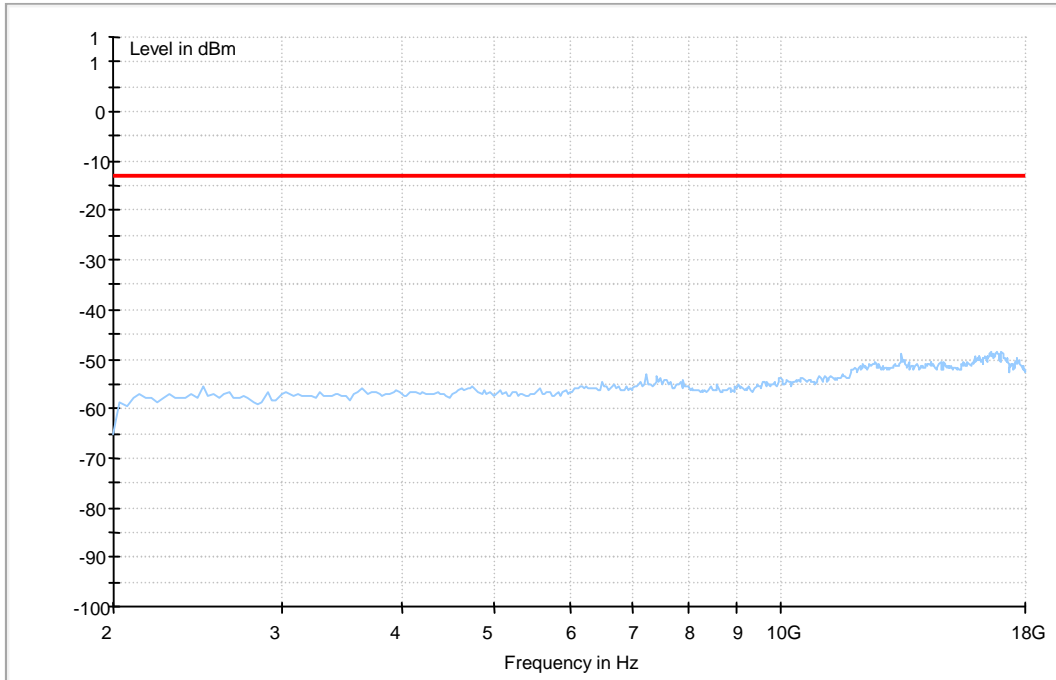

Traffic Mode (18GHz-26.5GHz)

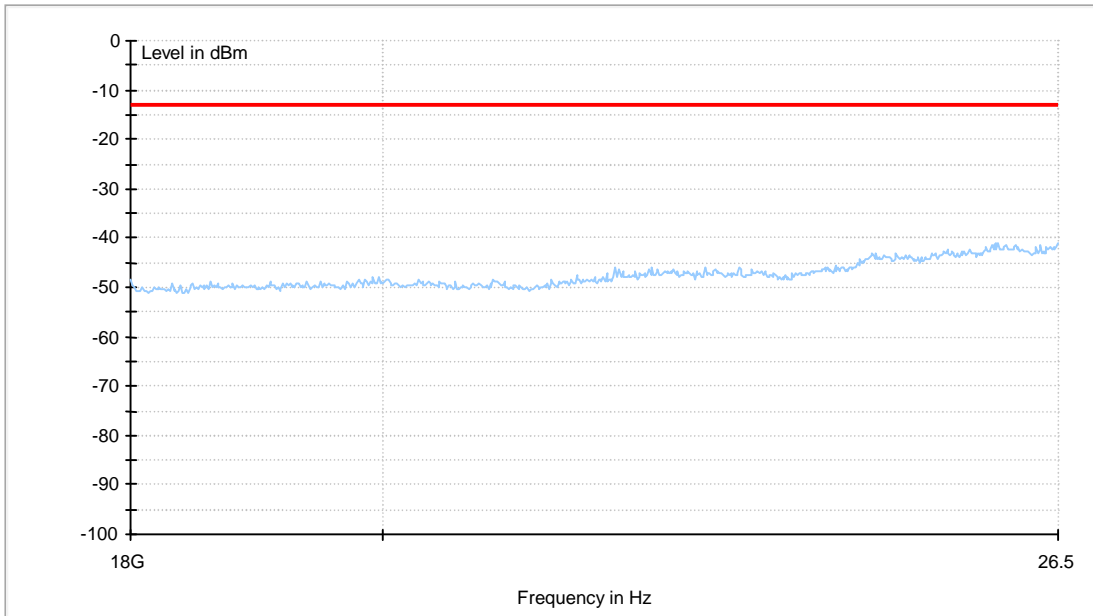

Substitution test result:

Table 1

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	Result

Note: For get the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

SGP: Signal Generator Level

When the margin of the test frequency less then 20dbBm, substitution method test to the frequency.

END