



FCC TEST REPORT

FCC ID: 2A636-X-G4

Product Name	:	tablet
Model Name	:	X-G4、XS9、SEI7、V10、Mate9、MX2、Mate8、Mate9 pro、QK1、GK2、P10、HT10、TX22、KQ22、V11、P60、M1、X13、T14
Brand Name	:	ZONMAI、AUZMAI、BNHGK
Report No.	:	PTC22032504301E-FC02
Sample ID	:	PTC22032504301E-01#
Prepared for		
Shenzhen Shiouyuan Electronic Commerce Co., Ltd.		
Room 302, No. 12, North District, Jingle New Village, Jingyuan, Longhua Street, Shenzhen		
Prepared by		
Precise Testing & Certification Co., Ltd.		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China		



1 TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Shiouyuan Electronic Commerce Co., Ltd.

Address : Room 302, No. 12, North District, Jingle New Village, Jingyuan, Longhua Street, Shenzhen

Manufacture's name : Shenzhen Shiouyuan Electronic Commerce Co., Ltd.

Address : Room 302, No. 12, North District, Jingle New Village, Jingyuan, Longhua Street, Shenzhen

Product name : tablet

Model name : X-G4, XS9, SEI7, V10, Mate9, MX2, Mate8, Mate9 pro, QK1, GK2, P10, HT10, TX22, KQ22, V11, P60, M1, X13, T14

Standards : FCC CFR47 Part 15 Section 15.247

Test procedure : ANSI C63.10:2013

Test Date : Apr. 22, 2022 to May. 24, 2022

Date of Issue : May. 25, 2022

Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

Leo Yang / Engineer

Technical Manager:

Ronnie Liu / Manager



Contents

	Page
1 TEST RESULT CERTIFICATION.....	2
2 TEST SUMMARY.....	5
3 TEST FACILITY.....	6
4 GENERAL INFORMATION.....	7
4.1 GENERAL DESCRIPTION OF E.U.T.....	7
4.2 TEST MODE.....	8
5 EQUIPMENT DURING TEST.....	10
5.1 EQUIPMENTS LIST.....	10
5.2 MEASUREMENT UNCERTAINTY.....	12
5.3 DESCRIPTION OF SUPPORT UNITS.....	13
6 CONDUCTED EMISSION.....	14
6.1 E.U.T. OPERATION.....	14
6.2 EUT SETUP.....	14
6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	15
6.4 MEASUREMENT PROCEDURE:.....	15
6.5 CONDUCTED EMISSION LIMIT.....	15
6.6 MEASUREMENT DESCRIPTION.....	15
6.7 CONDUCTED EMISSION TEST RESULT.....	15
7 RADIATED SPURIOUS EMISSIONS.....	18
7.1 EUT OPERATION.....	18
7.2 TEST SETUP.....	19
7.3 SPECTRUM ANALYZER SETUP.....	20
7.4 TEST PROCEDURE.....	21
7.5 SUMMARY OF TEST RESULTS.....	22
8 MAXIMUM PEAK OUTPUT POWER TEST.....	29
8.1 TEST STANDARD AND LIMIT.....	29
8.2 TEST SETUP.....	29
8.3 TEST PROCEDURE.....	29
8.4 TEST DATA.....	29



9 20DB OCCUPY BANDWIDTH TEST.....	34
9.1 TEST STANDARD.....	34
9.2 TEST SETUP.....	34
9.3 TEST PROCEDURE.....	34
9.4 TEST DATA.....	34
10 CARRIER FREQUENCY SEPARATION TEST.....	39
10.1 TEST STANDARD AND LIMIT.....	39
10.2 TEST SETUP.....	39
10.3 TEST PROCEDURE.....	39
10.4 TEST DATA.....	39
11 NUMBER OF HOPPING CHANNEL TEST.....	44
11.1 TEST STANDARD AND LIMIT.....	44
11.2 TEST SETUP.....	44
11.3 TEST PROCEDURE.....	44
11.4 TEST DATA.....	45
12 DWELL TIME TEST.....	47
12.1 TEST STANDARD AND LIMIT.....	47
12.2 TEST SETUP.....	47
12.3 TEST PROCEDURE.....	47
12.4 TEST DATA.....	48
13 100KHZ BANDWIDTH OF FREQUENCY BAND EDGE REQUIREMENT.....	52
13.1 TEST STANDARD AND LIMIT.....	52
13.2 TEST SETUP.....	52
13.3 TEST PROCEDURE.....	52
13.4 TEST DATA.....	53
14 ANTENNA REQUIREMENT.....	62
14.1 TEST STANDARD AND REQUIREMENT.....	62
14.2 ANTENNA CONNECTED CONSTRUCTION.....	62
15 TEST SETUP PHOTOGRAPH.....	63
16 E.U.T. PHOTOGRAPH.....	64



2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(3)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	PASS



Report No.: PTC22032504301E-FC02

3 TEST FACILITY

Precise Testing & Certification Co., Ltd.

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A-1

Designation Number: CN1219



4 General Information

4.1 General Description of E.U.T.

Product Name	:	tablet
Model Name	:	X-G4、XS9、SEI7、V10、Mate9、MX2、Mate8、Mate9 pro、QK1、GK2、P10、HT10、TX22、KQ22、V11、P60、M1、X13、T14
Bluetooth Version	:	BT 5.0 BDR+EDR
Operating frequency	:	2402-2480MHz
Numbers of Channel	:	79 channels
Antenna Type	:	FPCB Antenna
Antenna Gain	:	0.5 dBi
Type of Modulation	:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Power supply	:	Lion battery 3.8V input DC 5V 2A
Hardware Version	:	WT_F30_6762_MB_V3.0
Software Version	:	V1.0



4.2 Test Mode

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK, $\pi/4$ -DQPSK, 8DPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-



Report No.: PTC22032504301E-FC02

Channel	Frequency(MHz)
0	2402
39	2441
78	2480



5 Equipment During Test

5.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Last calibration	Calibration Due	Calibration period
MXA Signal Analyzer	Agilent	N9020A	MY56070279	Aug. 21, 2021	Aug. 20, 2022	1 year
Coaxial Cable	CDS	79254	46107086	Aug. 21, 2021	Aug. 20, 2022	1 year
Power Meter	Anritsu	ML2495A	0949003	Aug. 21, 2021	Aug. 20, 2022	1 year
Power Sensor	Anritsu	MA2411B	0917017	Aug. 21, 2021	Aug. 20, 2022	1 year
Spectrum Analyzer	Rohde&Schwarz	FSU26	1166.1660.26	Aug. 21, 2021	Aug. 20, 2022	1 year

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Last calibration	Calibration Due	Calibration period
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	Aug. 21, 2021	Aug. 20, 2022	1 year
Loop Antenna	Schwarzbeck	FMZB 1519	012	Aug. 21, 2021	Aug. 20, 2022	1 year
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	Aug. 21, 2021	Aug. 20, 2022	1 year
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	Aug. 21, 2021	Aug. 20, 2022	1 year
Cable	Schwarzbeck	PLF-100	549489	Aug. 21, 2021	Aug. 20, 2022	1 year
Spectrum Analyzer	Agilent	E4407B	MY45109572	Aug. 21, 2021	Aug. 20, 2022	1 year
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	Aug. 21, 2021	Aug. 20, 2022	1 year
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	Aug. 21, 2021	Aug. 20, 2022	1 year
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-181	Aug. 21, 2021	Aug. 20, 2022	1 year
Amplifier	SCHWARZBECK	BBV 9721	9721-205	Aug. 21, 2021	Aug. 20, 2022	1 year



Report No.: PTC22032504301E-FC02

Cable	H+S	CBL-26	N/A	Aug. 21, 2021	Aug. 20, 2022	1 year
RF Cable	R&S	R204	R21X	Aug. 21, 2021	Aug. 20, 2022	1 year

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Last calibration	Calibration Due	Calibration period
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	Aug. 21, 2021	Aug. 20, 2022	1 year
Artificial Mains Network	Rohde&Schwarz	L2-16B	000WX31025	Aug. 21, 2021	Aug. 20, 2022	1 year
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	Aug. 21, 2021	Aug. 20, 2022	1 year



5.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(9KHz~30MHz)	$\pm 2.54\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	



Report No.: PTC22032504301E-FC02

5.3 Description of Support Units

Equipment	Model No.	Series No.
Adapter	XSC-0502000SU Input:100-240V~, 0.4A, 50-60Hz Output : DC 5V, 2A	N/A

6 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207
 Test Method: : ANSI C63.10:2013
 Test Result: : PASS
 Frequency Range: : 150kHz to 30MHz
 Class/Severity: : Class B
 Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)


6.1 E.U.T. Operation

Operating Environment :


Temperature: : 23.2°C
 Humidity: : 51 % RH
 Atmospheric Pressure: : 101.12 kPa
 Test Voltage : AC 120V/60Hz

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013

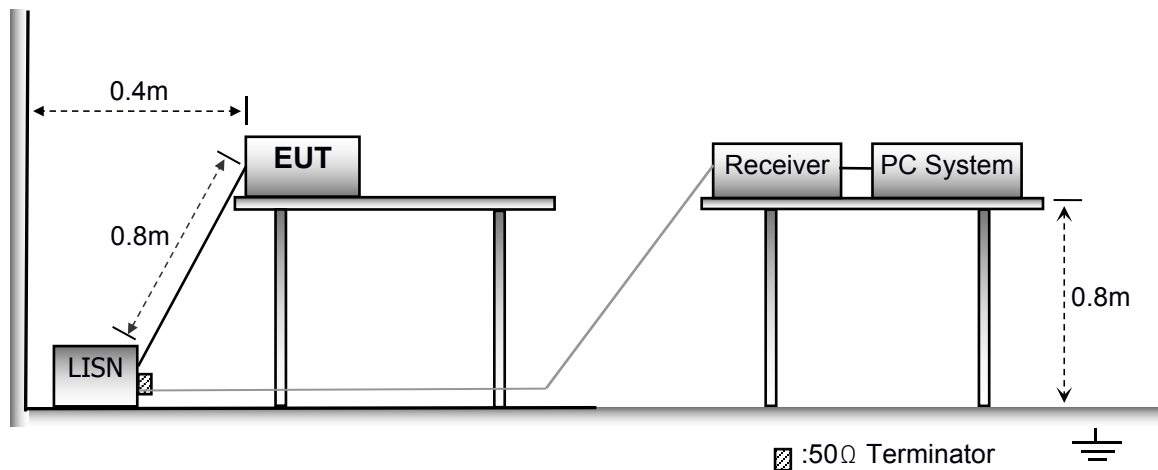

6.3 Test SET-UP (Block Diagram of Configuration)

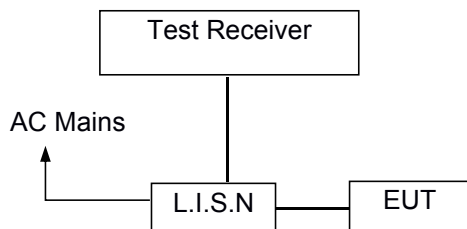

6.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

6.6 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.7 Conducted Emission Test Result

Pass

Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode (GFSK) are recorded in the following pages and the others modulation methods do not exceed the limits.


Line -120V/60Hz:

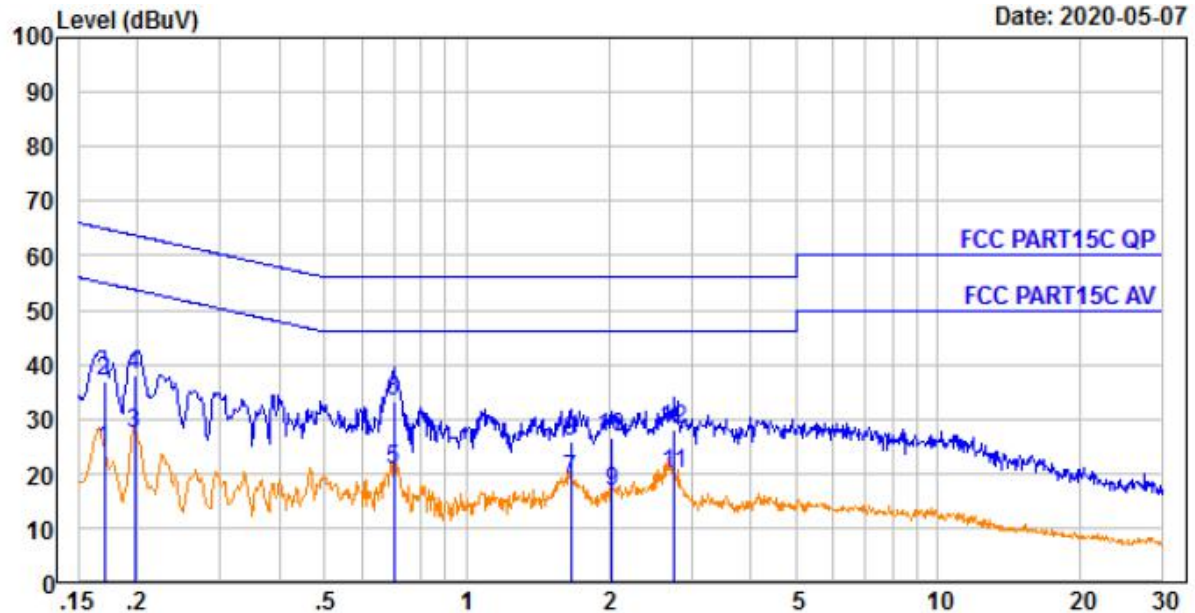

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBμV	Emission Level dBμV	Limit dBμV	Over Limit dB	Remark
1.	0.170	0.24	9.59	14.60	24.43	54.94	-30.51	Average
2.	0.170	0.24	9.59	27.04	36.87	64.94	-28.07	QP
3.	0.198	0.28	9.59	17.61	27.48	53.71	-26.23	Average
4.	0.198	0.28	9.59	28.10	37.97	63.71	-25.74	QP
5.	0.701	0.44	9.61	10.52	20.57	46.00	-25.43	Average
6.	0.701	0.44	9.61	23.20	33.25	56.00	-22.75	QP
7.	1.662	0.47	9.61	8.77	18.85	46.00	-27.15	Average
8.	1.662	0.47	9.61	15.68	25.76	56.00	-30.24	QP
9.	2.033	0.47	9.61	6.46	16.54	46.00	-29.46	Average
10.	2.033	0.47	9.61	16.62	26.70	56.00	-29.30	QP
11.	2.765	0.47	9.63	9.68	19.78	46.00	-26.22	Average
12.	2.765	0.47	9.63	18.03	28.13	56.00	-27.87	QP



Neutral -120V/60Hz:

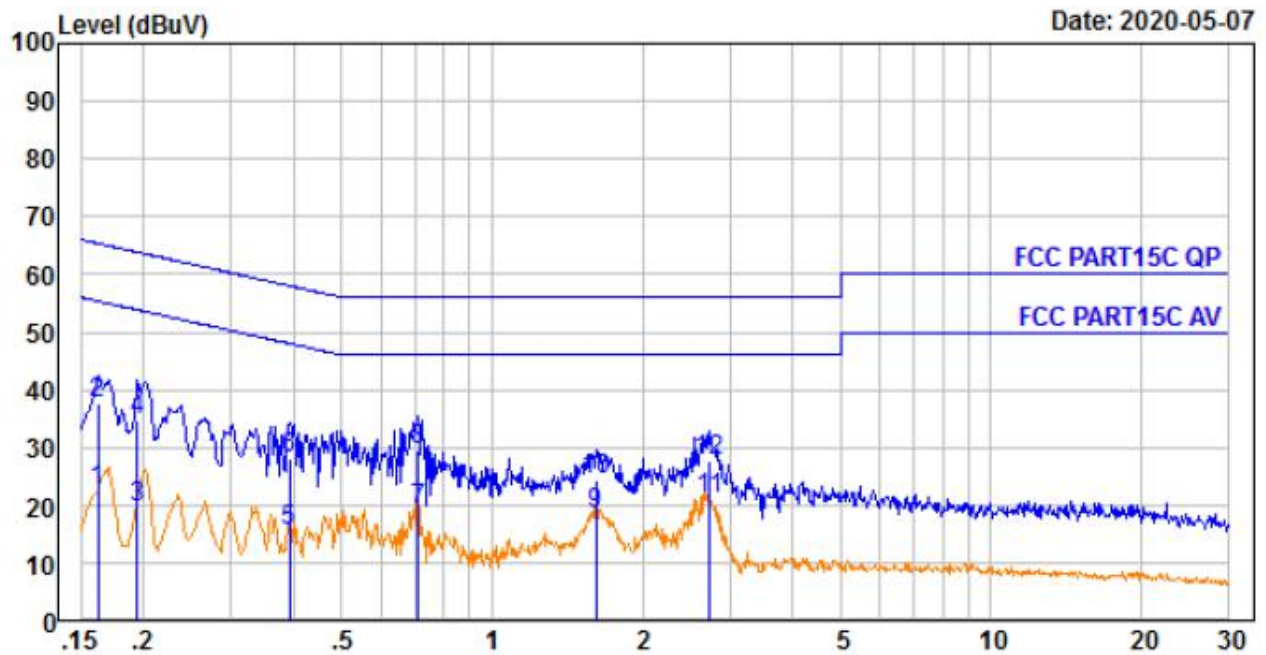

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBμV	Emission Level dBμV	Limit dBμV	Over Limit dB	Remark
1.	0.162	0.23	9.60	12.50	22.33	55.34	-33.01	Average
2.	0.162	0.23	9.60	27.98	37.81	65.34	-27.53	QP
3.	0.194	0.27	9.61	9.66	19.54	53.84	-34.30	Average
4.	0.194	0.27	9.61	24.62	34.50	63.84	-29.34	QP
5.	0.393	0.40	9.62	5.43	15.45	47.99	-32.54	Average
6.	0.393	0.40	9.62	17.91	27.93	57.99	-30.06	QP
7.	0.712	0.44	9.64	9.16	19.24	46.00	-26.76	Average
8.	0.712	0.44	9.64	19.60	29.68	56.00	-26.32	QP
9.	1.619	0.47	9.64	8.27	18.38	46.00	-27.62	Average
10.	1.619	0.47	9.64	14.35	24.46	56.00	-31.54	QP
11.	2.736	0.47	9.65	10.86	20.98	46.00	-25.02	Average
12.	2.736	0.47	9.65	17.56	27.68	56.00	-28.32	QP



7 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
Test Method : ANSI C63.10:2013
Test Result : PASS
Measurement Distance : 3m
Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation


Operating Environment :

Temperature : 24.5 °C
Humidity : 55.5% RH
Atmospheric Pressure : 101.3kPa
Test Voltage : AC 120V60Hz


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

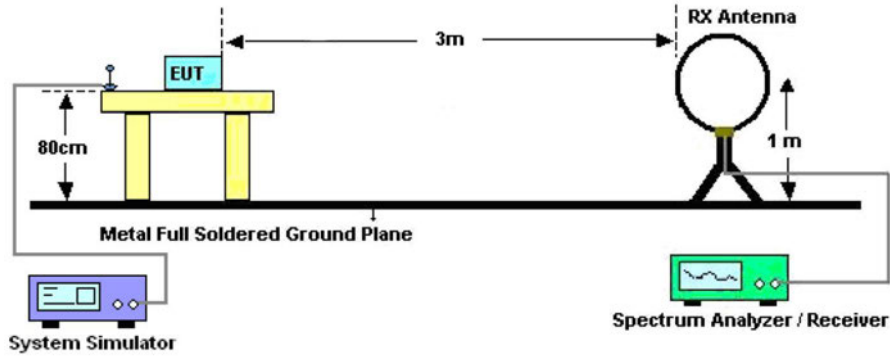

The test setup for emission measurement from 30 MHz to 1 GHz.

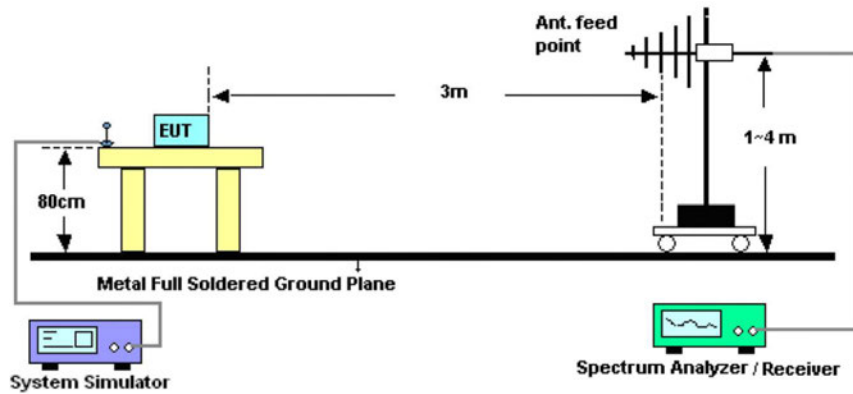

The test setup for emission measurement above 1 GHz.

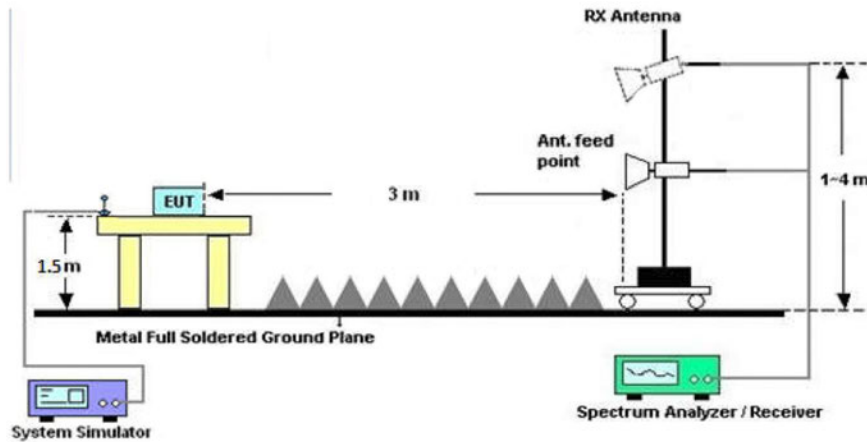



7.3 Spectrum Analyzer Setup

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

7.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



7.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor = $40 \log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

Please refer to the following test plots, both of AC 240V 50Hz and 120V 60Hz are test and AC 120V 60Hz is worst case. All the modulation modes were tested the data of the worst mode Low Channel (2402MHz) Worst case GFSK for record:


Test plot for Horizontal

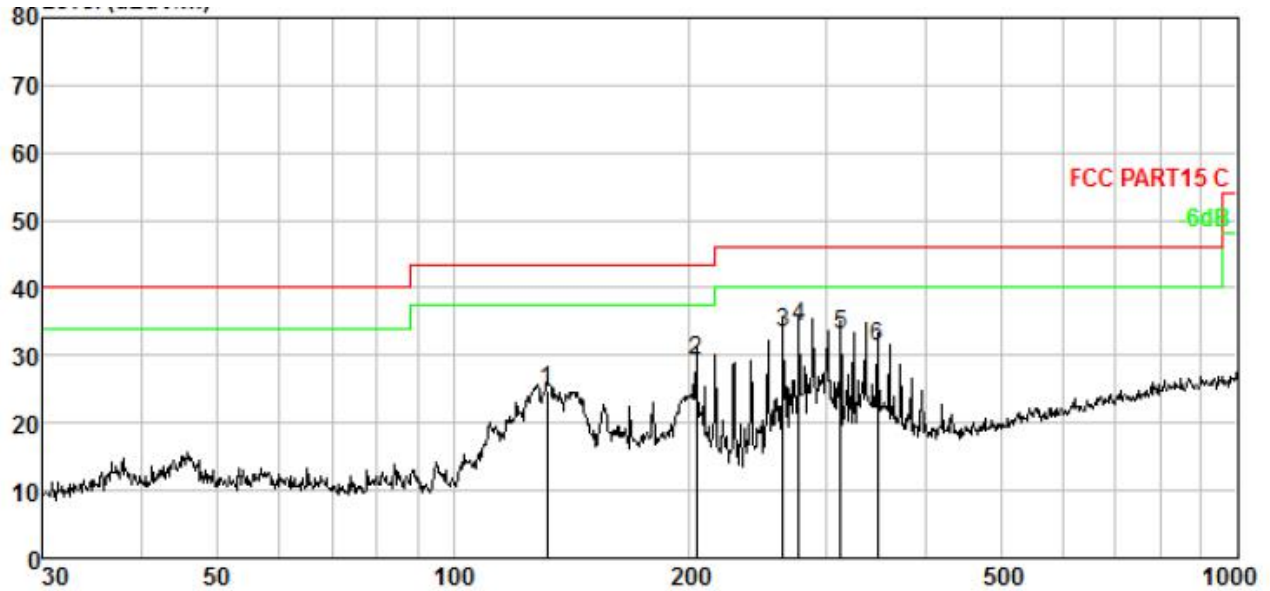

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	131.758	3.75	12.79	38.22	30.01	24.75	43.50	-18.75	QP
2.	204.238	4.50	11.14	43.74	30.05	29.33	43.50	-14.17	QP
3.	263.819	4.94	12.71	45.99	30.23	33.41	46.00	-12.59	QP
4.	276.124	5.02	12.88	46.47	30.26	34.11	46.00	-11.89	QP
5.	312.179	5.23	13.51	44.82	30.37	33.19	46.00	-12.81	QP
6.	348.027	5.42	14.36	42.01	30.52	31.27	46.00	-14.73	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

Test plot for Vertical

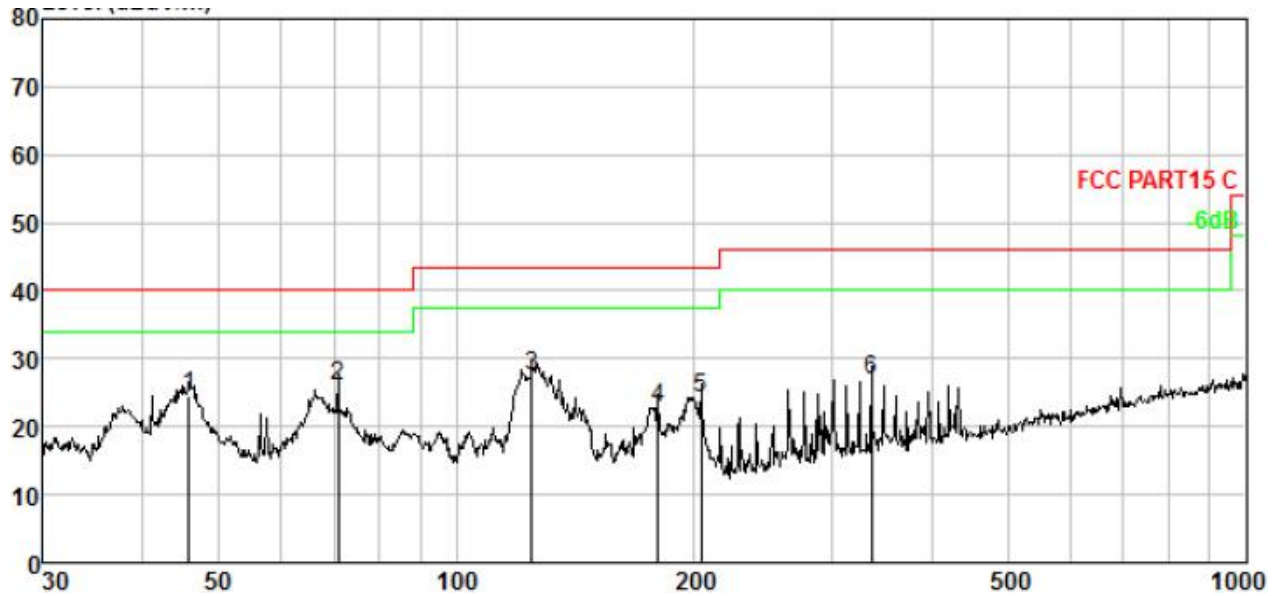

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	45.855	1.93	12.26	40.17	29.92	24.44	40.00	-15.56	QP
2.	70.832	2.68	9.98	43.16	29.96	25.86	40.00	-14.14	QP
3.	124.569	3.65	12.32	41.61	30.01	27.57	43.50	-15.93	QP
4.	180.017	4.28	12.50	35.97	30.03	22.72	43.50	-20.78	QP
5.	204.238	4.50	11.14	38.57	30.05	24.16	43.50	-19.34	QP
6.	336.035	5.36	14.08	37.94	30.47	26.91	46.00	-19.09	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

**Test Frequency 1GHz-25GHz**

Test Mode: CH00					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	35.74	34.04	6.58	34.09	42.27	74.00	-31.73	V
7206.00	30.79	37.11	7.73	34.50	41.13	74.00	-32.87	V
9608.00	30.55	39.31	9.23	34.79	44.30	74.00	-29.70	V
4804.00	39.71	34.04	6.58	34.09	46.24	74.00	-27.76	H
7206.00	32.41	37.11	7.73	34.50	42.75	74.00	-31.25	H
9608.00	29.82	39.31	9.23	34.79	43.57	74.00	-30.43	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	24.85	34.04	6.58	34.09	31.38	54.00	-22.62	V
7206.00	19.66	37.11	7.73	34.50	30.00	54.00	-24.00	V
9608.00	18.83	39.31	9.23	34.79	32.58	54.00	-21.42	V
4804.00	28.91	34.04	6.58	34.09	35.44	54.00	-18.56	H
7206.00	21.73	37.11	7.73	34.50	32.07	54.00	-21.93	H
9608.00	18.43	39.31	9.23	34.79	32.18	54.00	-21.82	H



Report No.: PTC22032504301E-FC02

Test Mode: CH39					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4882.00	35.76	34.38	6.69	34.09	42.74	74.00	-31.26	V
7323.00	30.81	37.22	7.78	34.53	41.28	74.00	-32.72	V
9764.00	30.56	39.46	9.35	34.80	44.57	74.00	-29.43	V
4882.00	39.73	34.38	6.69	34.09	46.71	74.00	-27.29	H
7323.00	32.43	37.22	7.78	34.53	42.90	74.00	-31.10	H
9764.00	29.83	39.46	9.35	34.80	43.84	74.00	-30.16	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4882.00	24.87	34.38	6.69	34.09	31.85	54.00	-22.15	V
7323.00	19.67	37.22	7.78	34.53	30.14	54.00	-23.86	V
9764.00	18.84	39.46	9.35	34.80	32.85	54.00	-21.15	V
4882.00	28.93	34.38	6.69	34.09	35.91	54.00	-18.09	H
7323.00	21.74	37.22	7.78	34.53	32.21	54.00	-21.79	H
9764.00	18.45	39.46	9.35	34.80	32.46	54.00	-21.54	H



Test Mode: CH78					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	35.59	34.72	6.79	34.09	43.01	74.00	-30.99	V
7440.00	30.69	37.34	7.82	34.57	41.28	74.00	-32.72	V
9920.00	30.46	39.62	9.46	34.81	44.73	74.00	-29.27	V
4960.00	39.53	34.72	6.79	34.09	46.95	74.00	-27.05	H
7440.00	32.30	37.34	7.82	34.57	42.89	74.00	-31.11	H
9920.00	29.72	39.62	9.46	34.81	43.99	74.00	-30.01	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	24.76	34.72	6.79	34.09	32.18	54.00	-21.82	V
7440.00	19.60	37.34	7.82	34.57	30.19	54.00	-23.81	V
9920.00	18.78	39.62	9.46	34.81	33.05	54.00	-20.95	V
4960.00	28.81	34.72	6.79	34.09	36.23	54.00	-17.77	H
7440.00	21.66	37.34	7.82	34.57	32.25	54.00	-21.75	H
9920.00	18.37	39.62	9.46	34.81	32.64	54.00	-21.36	H

Note: 1. The testing has been conformed to 10*2480MHz=24800MHz.

2. All other emissions more than 30dB below the limit.

3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

**Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz**

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK, Hopping)mode have been tested, and the worst result(GFSK, Hopping) was report as below

Test Mode: Low Channel 2402MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2390.00	45.58	29.15	3.41	34.01	44.13	74.00	-29.87	H	Peak
2400.00	62.75	29.16	3.43	34.01	61.33	74.00	-12.67	H	Peak
2390.00	46.38	29.15	3.41	34.01	44.93	74.00	-29.07	V	Peak
2400.00	65.08	29.16	3.43	34.01	63.66	74.00	-10.34	V	Peak
2390.00	35.52	29.15	3.41	34.01	34.07	54.00	-19.93	H	AV
2400.00	46.92	29.16	3.43	34.01	45.50	54.00	-8.51	H	AV
2390.00	35.65	29.15	3.41	34.01	34.20	54.00	-19.80	V	AV
2400.00	48.82	29.16	3.43	34.01	47.40	54.00	-6.60	V	AV


Test Mode: High Channel 2480MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2483.50	48.00	29.28	3.53	34.03	46.78	74.00	-27.22	H	Peak
2500.00	46.66	29.30	3.56	34.03	45.49	74.00	-28.51	H	Peak
2483.50	49.30	29.28	3.53	34.03	48.08	74.00	-25.92	V	Peak
2500.00	47.92	29.30	3.56	34.03	46.75	74.00	-27.25	V	Peak
2483.50	38.38	29.28	3.53	34.03	37.16	54.00	-16.84	H	AV
2500.00	35.99	29.30	3.56	34.03	34.82	54.00	-19.18	H	AV
2483.50	39.81	29.28	3.53	34.03	38.59	54.00	-15.41	V	AV
2500.00	36.14	29.30	3.56	34.03	34.97	54.00	-19.03	V	AV

8 Maximum Peak Output Power Test

8.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	125mW

8.2 Test Setup



8.3 Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
- Spectrum Setting:
 - RBW > the 20 dB bandwidth of the emission being measured
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - VBW ≥ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold


8.4 Test Data

Test Item	:	Max. peak output power	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 3.8V Battery inside	Temperature	:	24.5°C
Test Result	:	PASS	Humidity	:	55%RH



Channel Frequency (MHz)	Peak Power output (dBm)	Limit (dBm)	Results	Modulation
2402	4.037	20.96	PASS	BDR
2441	4.066	20.96	PASS	BDR
2480	3.815	20.96	PASS	BDR
2402	3.316	20.96	PASS	EDR
2441	3.442	20.96	PASS	EDR
2480	3.147	20.96	PASS	EDR


Remark: The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of (8DPSK) is attached in the following pages.

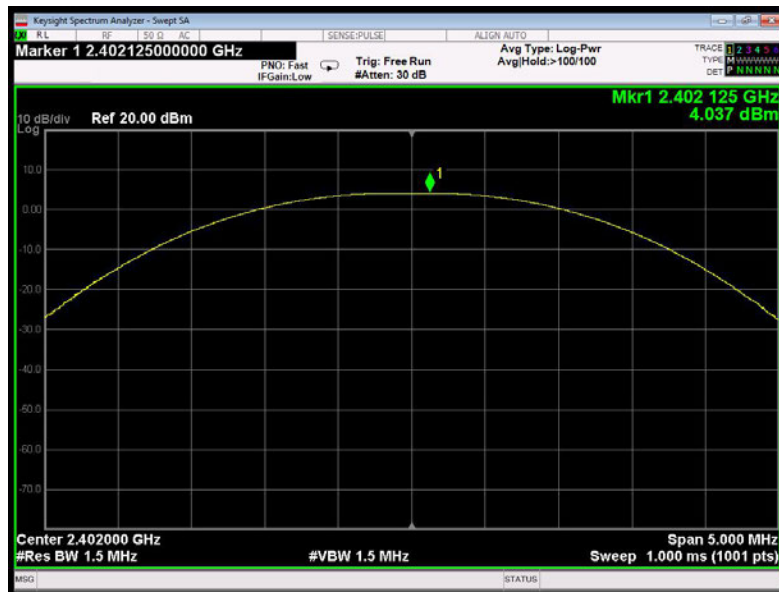


Test Mode: BDR---Low



Report No.: PTC22032504301E-FC02

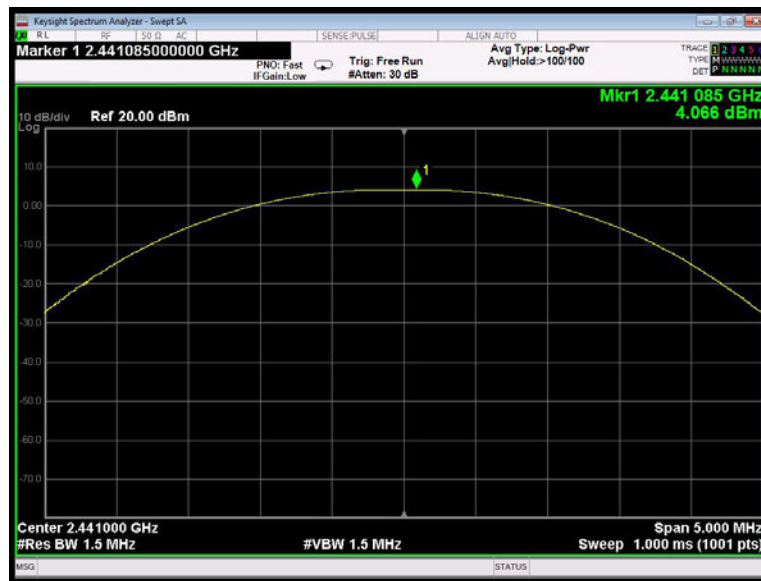


Test Mode: BDR---Middle

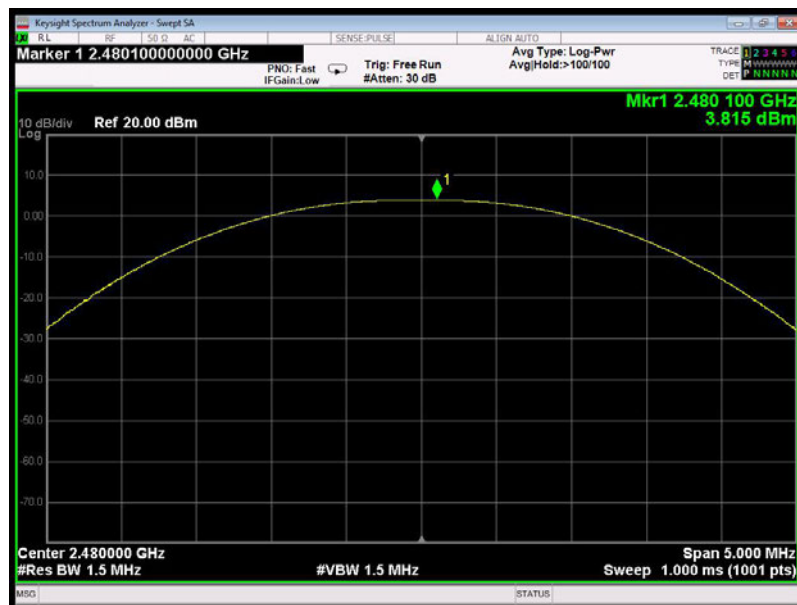

Test Mode: BDR---High




Report No.: PTC22032504301E-FC02

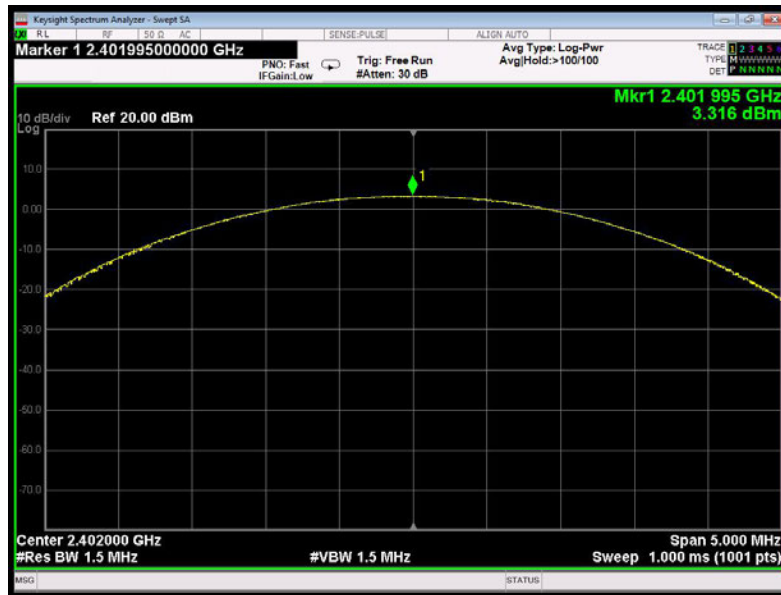

Test Mode: EDR---Low



Report No.: PTC22032504301E-FC02

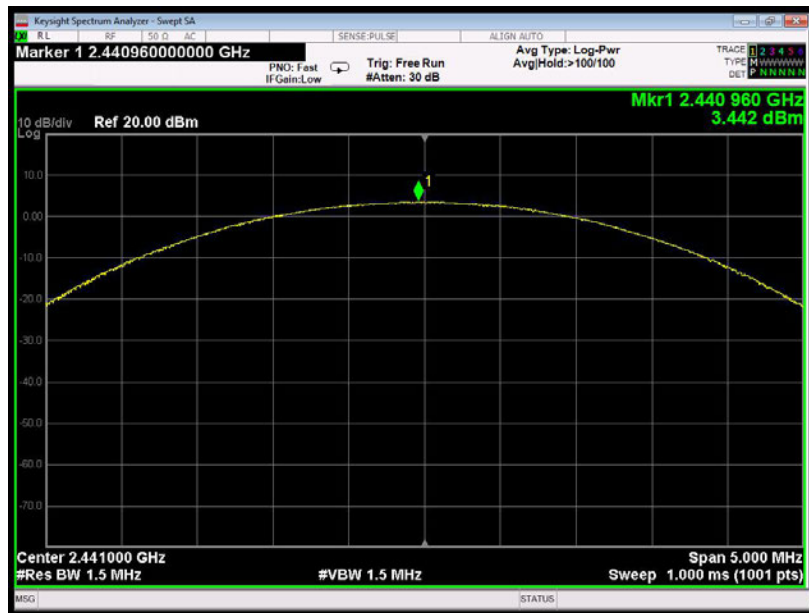

Test Mode: EDR---Middle




Test Mode: EDR---High

9 20DB Occupy Bandwidth Test

9.1 Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

9.2 Test Setup



9.3 Test Procedure

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.


9.4 Test Data

Test Item	: 20dB BW	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.8V Battery inside	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH



Channel	Frequency(MHz)	20dB Down BW(kHz)	Modulation Mode
Low	2402	936.7	BDR
Middle	2441	932.3	BDR
High	2480	926.6	BDR
Low	2402	1266	EDR
Middle	2441	1263	EDR
High	2480	1265	EDR


Remark: The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of (8DPSK) is attached in the following pages.

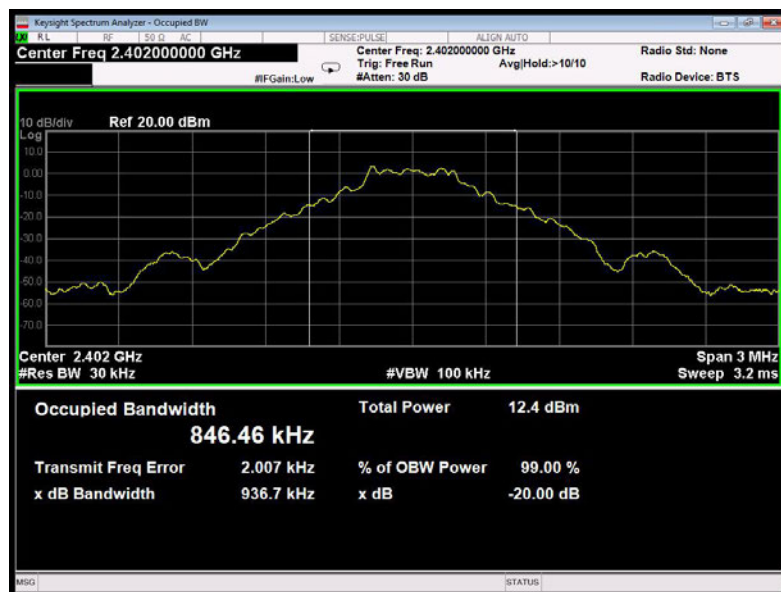

Test Mode: BDR---Low




Report No.: PTC22032504301E-FC02

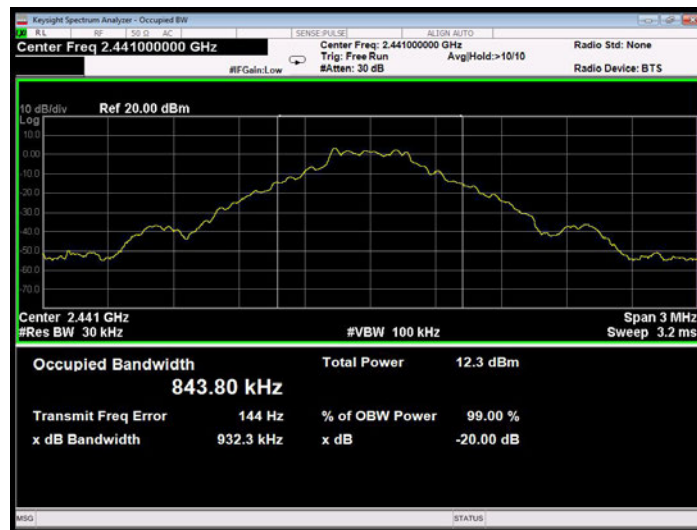


Test Mode: BDR---Middle




Report No.: PTC22032504301E-FC02

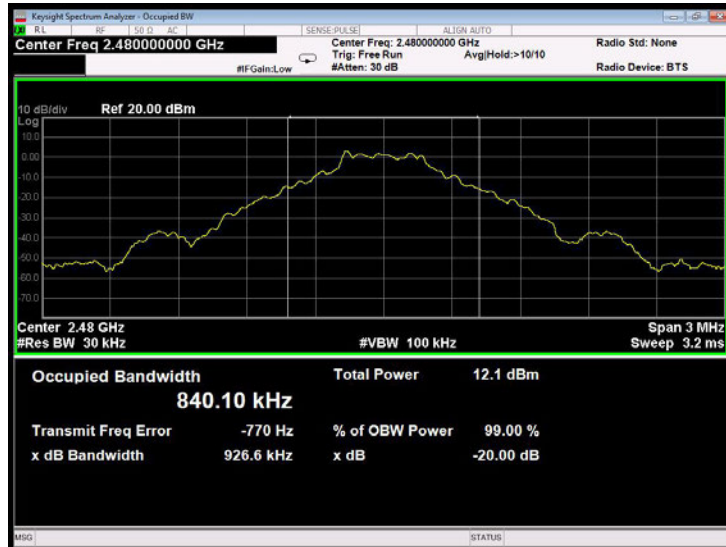


Test Mode: BDR---High

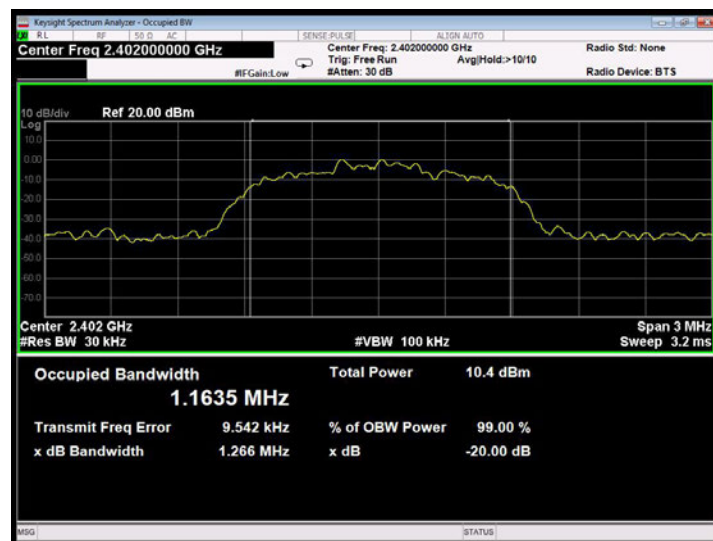

Test Mode: EDR---Low

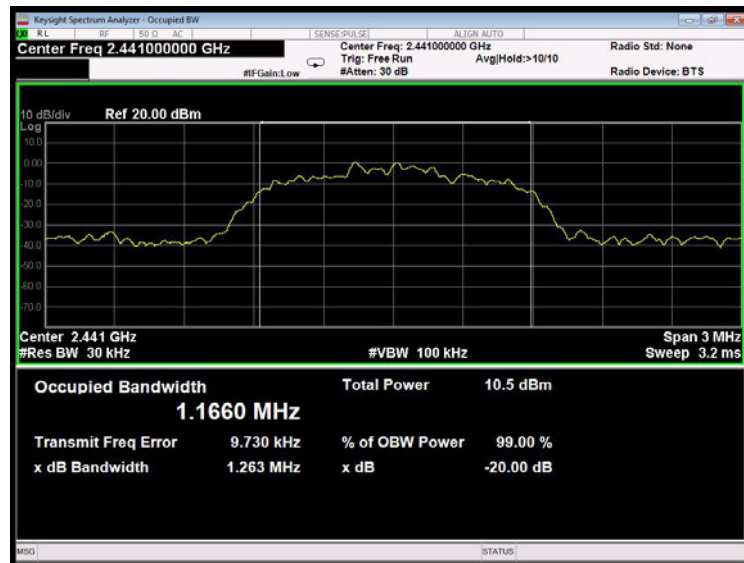

Test Mode: EDR---Middle

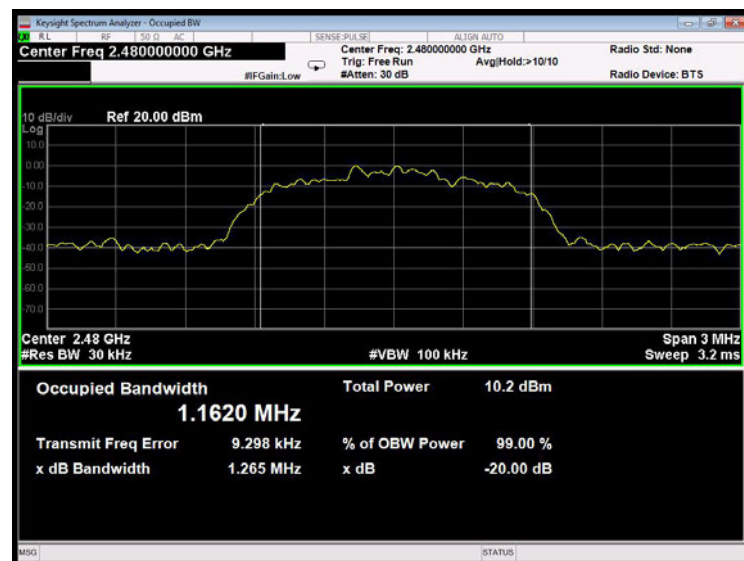

Test Mode: EDR---High




10 Carrier Frequency Separation Test

10.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

10.2 Test Setup



10.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

10.4 Test Data

Test Item	:	Frequency Separation	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 3.8V Battery inside	Temperature	:	24.5°C
Test Result	:	PASS	Humidity	:	55%RH



Channel	Frequency (MHz)	Separation Read Value (kHz)	Limit (kHz)	Modulation Mode
Low	2402	1002	624.5	BDR
Middle	2441	1002	621.5	BDR
High	2480	1002	617.7	BDR
Low	2402	1002	844.0	EDR
Middle	2441	1002	842.0	EDR
High	2480	1002	843.3	EDR

Remark: 1. The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of (8DPSK) is attached in the following pages.

2. The limit of mode (EDR) is 2/3 of 20dB BW.



Test Mode: BDR---Low



Report No.: PTC22032504301E-FC02



Test Mode: BDR---Middle



Report No.: PTC22032504301E-FC02



Test Mode: BDR---High



Test Mode: EDR---Low



Report No.: PTC22032504301E-FC02



Test Mode: EDR---Middle



Test Mode: EDR--High




11 Number of Hopping Channel Test

11.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>15 channels

11.2 Test Setup



11.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:


1. Span= the frequency band of operation
2. Set the RBW = 100kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.



11.4 Test Data


Test Item	: Number of Hopping Frequency	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.8V Battery inside	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480MHz	79	> 15
Remark: The EDR was tested on (π /4DQPSK, 8DPSK) modes, only the worst data of (8DPSK) is attached in the following pages.		

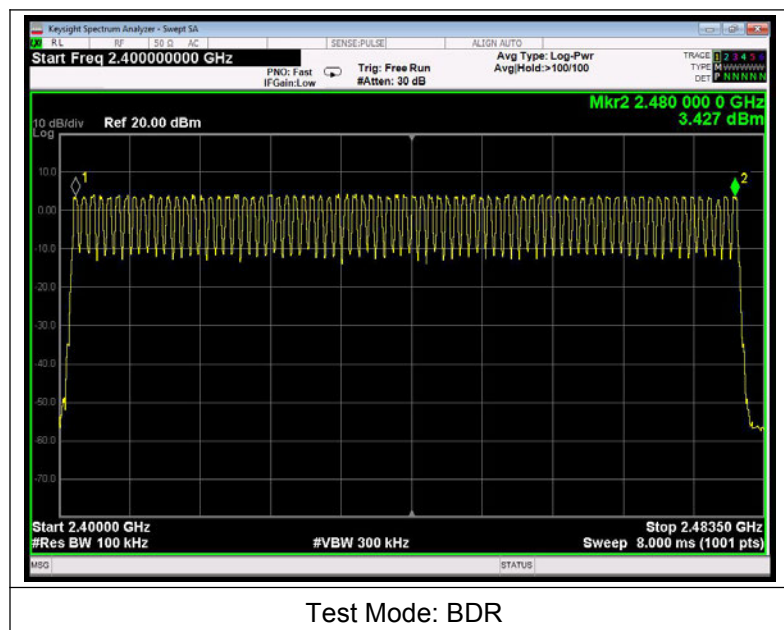



Report No.: PTC22032504301E-FC02

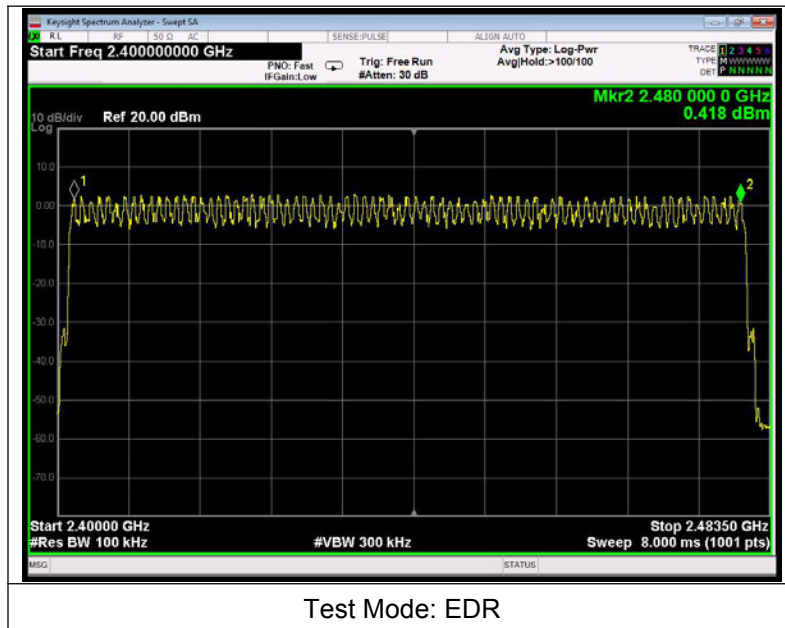




12 Dwell Time Test

12.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

12.2 Test Setup



12.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 1 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.



12.4 Test Data

Test Item	: Time of Occupancy	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.8V Battery inside	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH

Package Type	Pulse width (ms)	Time slot length(ms)	Dwell time (ms)	Limit (s)	Modulation
DH1	0.368	time slot length *1600/2 /79 * 31.6	117.76	0.4	BDR
DH3	1.625	time slot length *1600/4 /79 * 31.6	260.00	0.4	BDR
DH5	2.872	time slot length *1600/6 /79 * 31.6	306.35	0.4	BDR
3DH1	0.374	time slot length *1600/2 /79 * 31.6	119.68	0.4	EDR
3DH3	1.625	time slot length *1600/4 /79 * 31.6	260.00	0.4	EDR
3DH5	2.880	time slot length *1600/6 /79 * 31.6	307.20	0.4	EDR

Remark: The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of (8DPSK) is attached in the following pages.



Test Mode: BDR---DH1




Report No.: PTC22032504301E-FC02




Test Mode: BDR---DH3



Report No.: PTC22032504301E-FC02

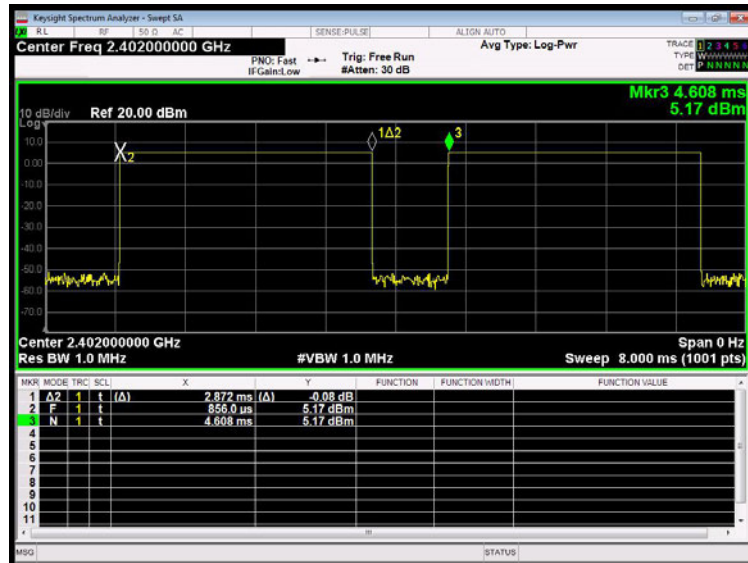

Test Mode: BDR---DH5

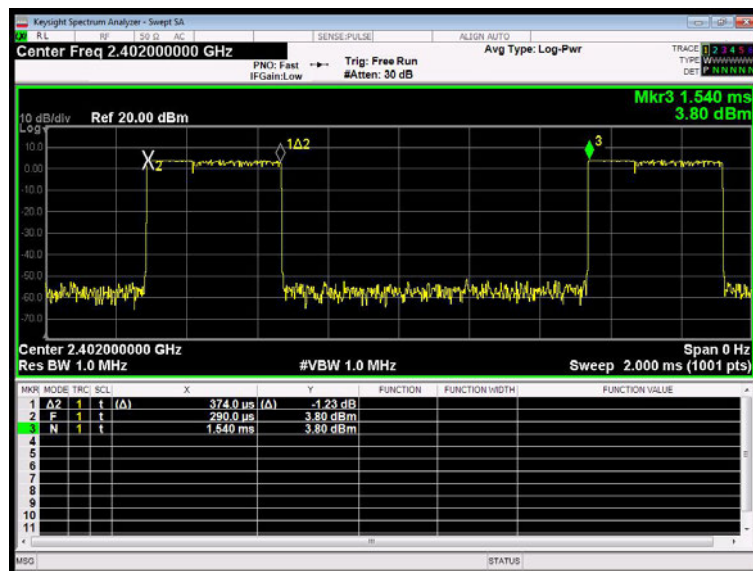


Test Mode: EDR---3DH1



Report No.: PTC22032504301E-FC02



Test Mode: EDR---3DH3

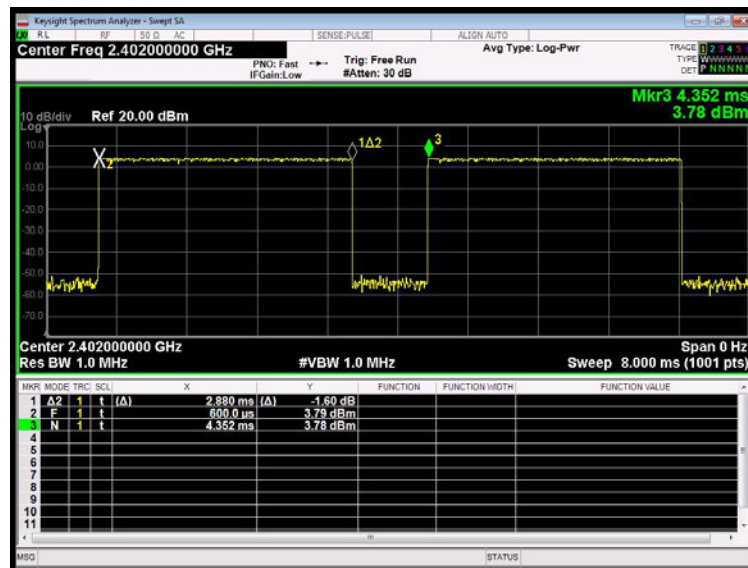


Test Mode: EDR---3DH5

13 100kHz Bandwidth of Frequency Band Edge Requirement

13.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

13.2 Test Setup



13.3 Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:

1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.




13.4 Test Data

Test Item	: Band edge	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.8V Battery inside	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH

Remark: The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of ($\pi/4$ DQPSK) is attached in the following pages.


For Hopping Mode $\pi/4$ DQPSK

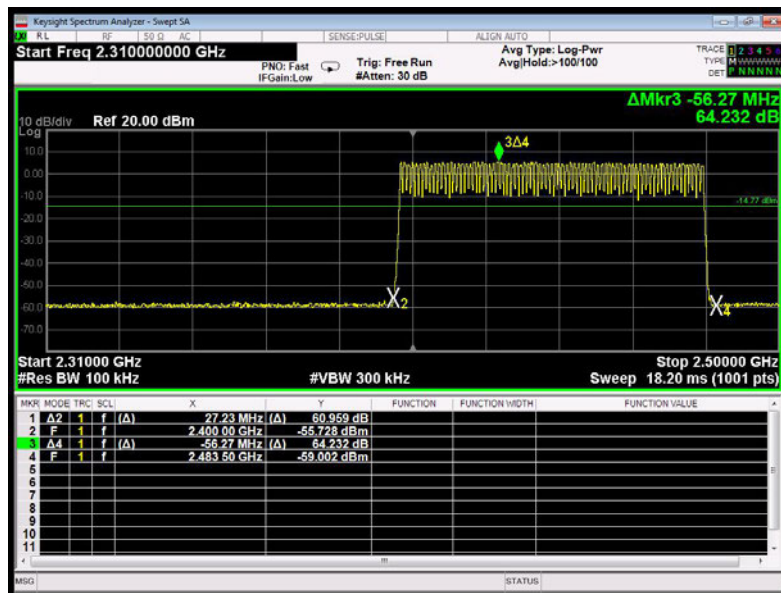

BDR mode



Report No.: PTC22032504301E-FC02

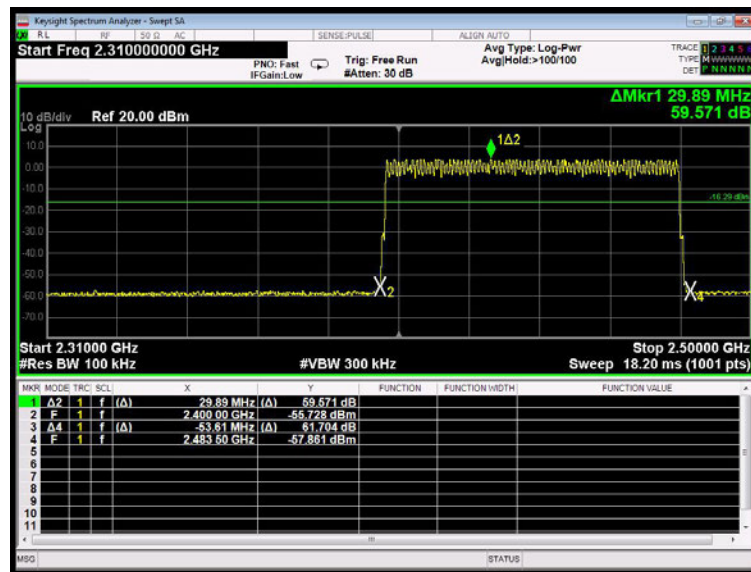

EDR mode


For Hopping Mode GFSK



BDR



Report No.: PTC22032504301E-FC02

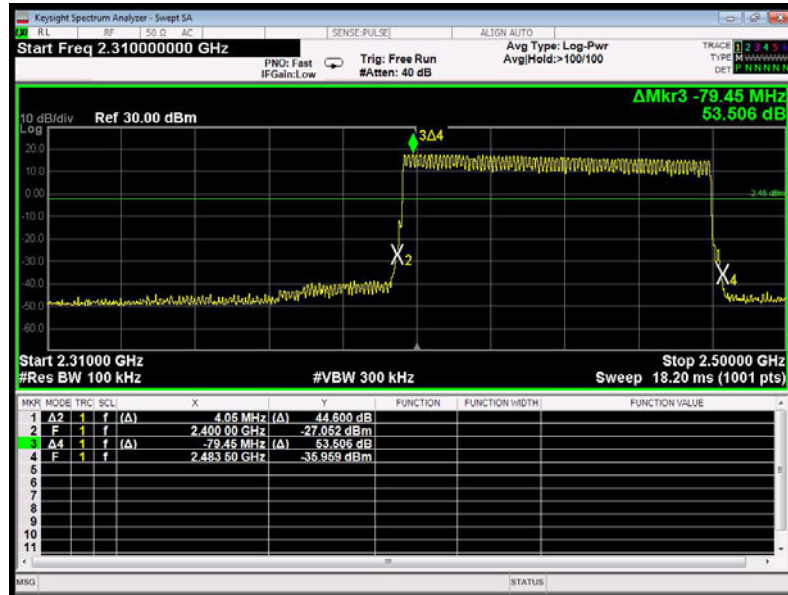


EDR


For Hopping Mode 8DPSK



Report No.: PTC22032504301E-FC02

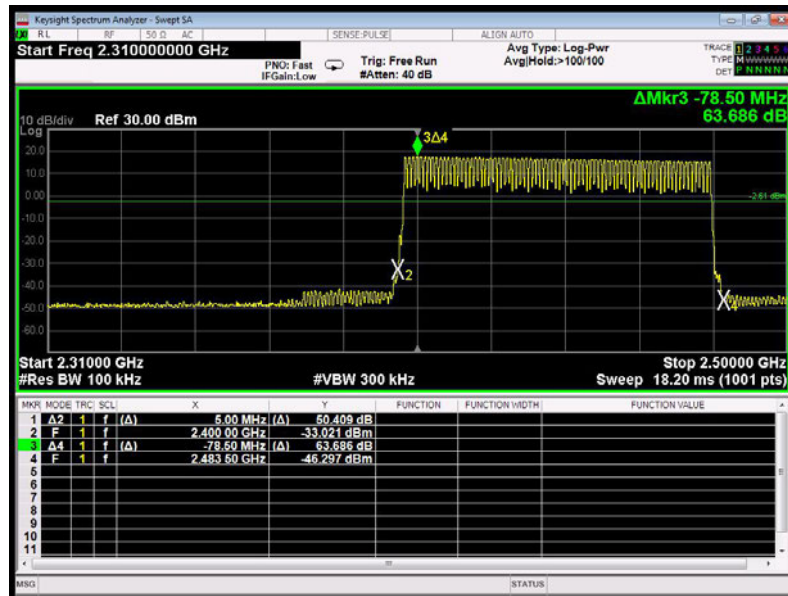


BDR

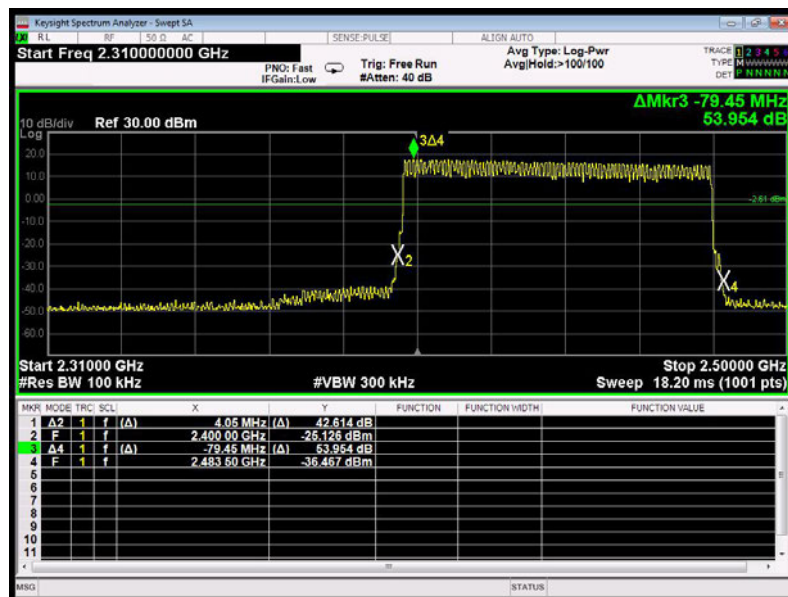


EDR

For Non-Hopping Mode

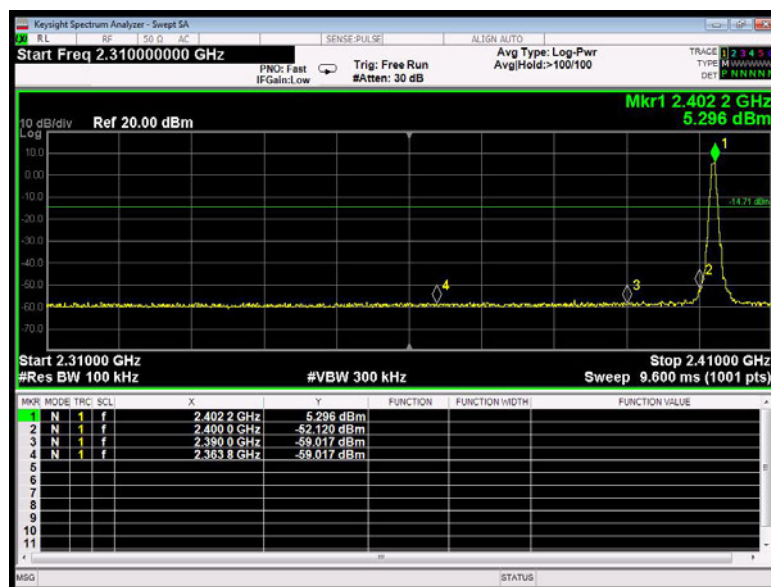


BDR mode -- Lowest

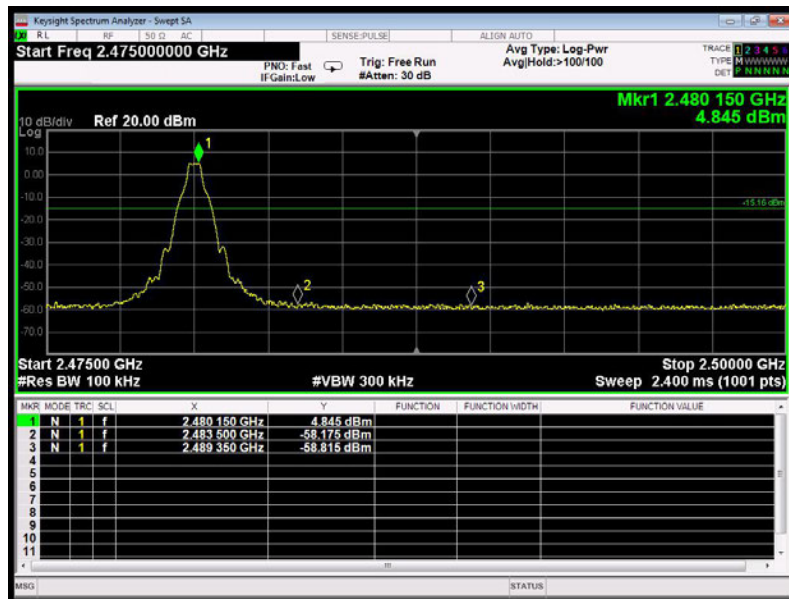

BDR mode -- Highest


For Non-Hopping Mode

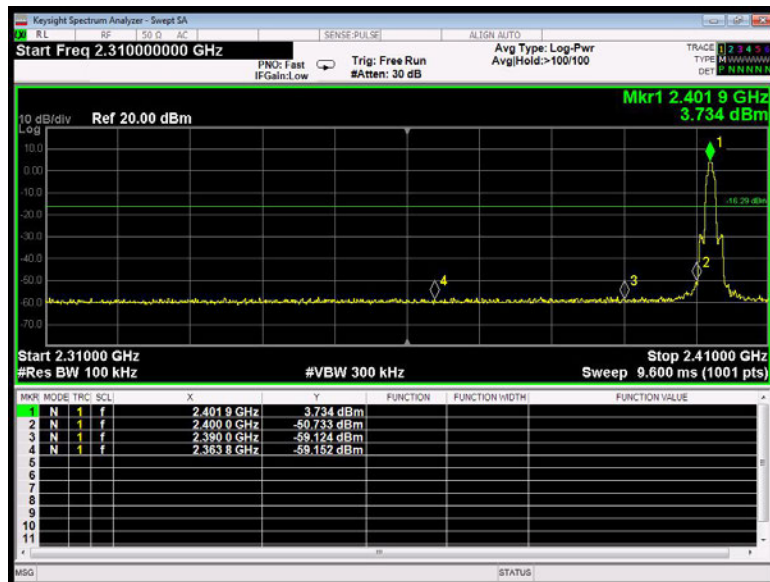

EDR mode -- Lowest



Report No.: PTC22032504301E-FC02

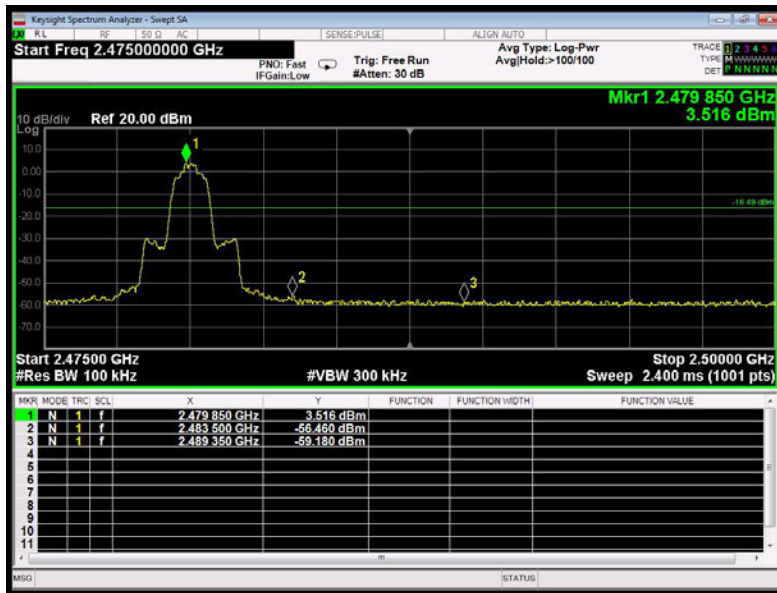


EDR mode -- Highest


Conducted Emission Method




Test Mode: BDR---Low

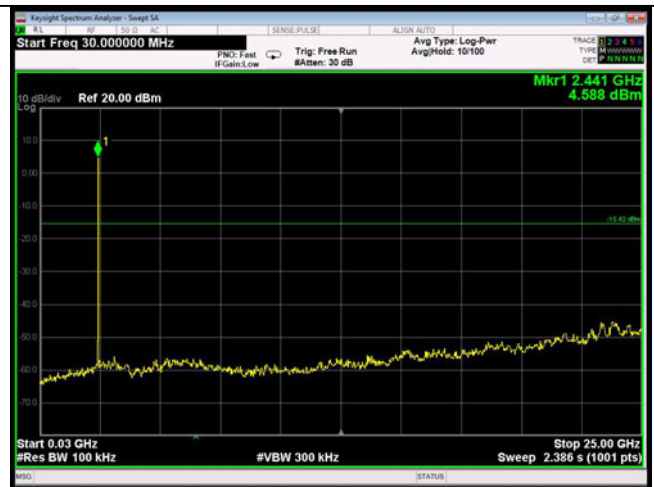

Test Mode: BDR---Mid

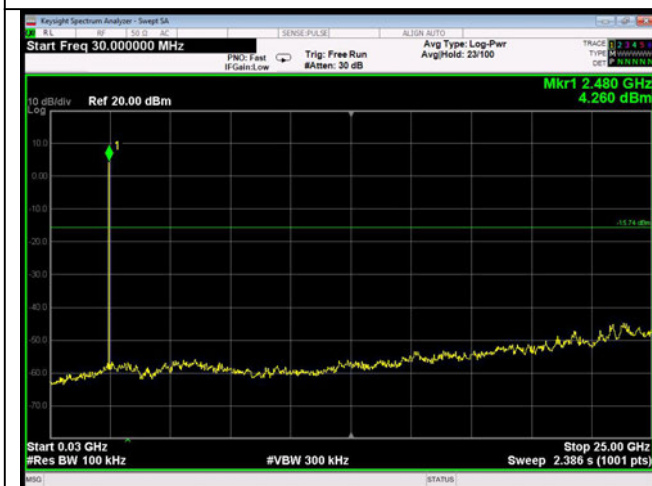


Test Mode: BDR---High

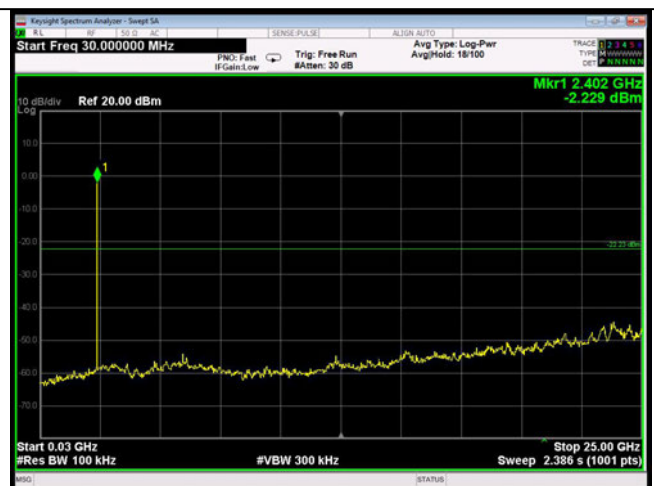

Test Mode: EDR---Low



Report No.: PTC22032504301E-FC02

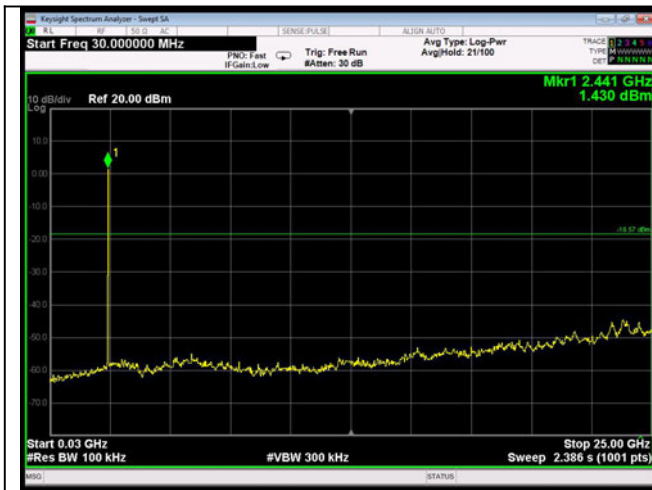

Test Mode: EDR--Mid



Test Mode: EDR--High



14 Antenna Requirement

14.1 Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

14.2 Antenna Connected Construction

The antenna is PCB Antenna which permanently attached, and the best case gain of the antenna is 0.5 dBi. It complies with the standard requirement.


15 TEST SETUP PHOTOGRAPH

Conduction emission



Radiated emission

30MHz-1GHz

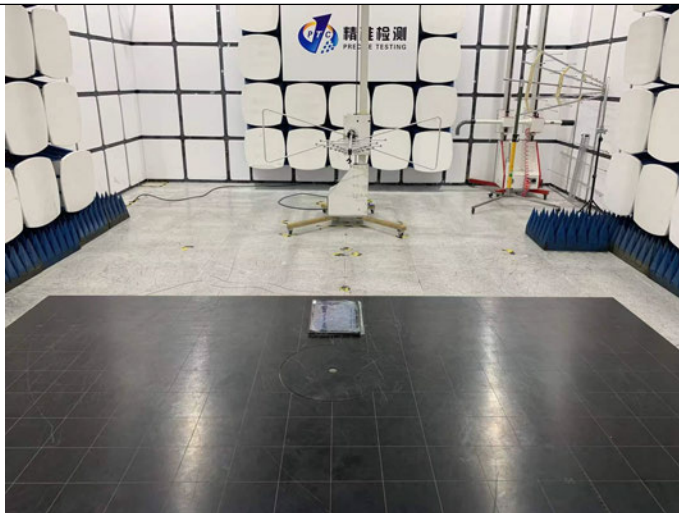



16 E.U.T. PHOTOGRAPH

Please reference "EUT photos"

----- End of Report -----