

# FCC Test Report

## FCC ID: QISLUA-L03

**Project No.** : 1601C010  
**Equipment** : Smart Phone  
**Model Name** : HUAWEI LUA-L03  
**Applicant** : Huawei Technologies Co., Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

**Date of Receipt** : Jan. 04, 2016  
**Date of Test** : Jan. 04, 2016 ~ Jan. 15, 2016  
**Issued Date** : Jan. 18, 2016  
**Tested by** : BTL Inc.

**Testing Engineer** : Pike Lee  
(Pike Lee)

**Technical Manager** : Jeff Yang  
(Jeff Yang)

**Authorized Signatory** : Andy Chiu  
(Andy Chiu)

# **B T L I N C .**

B1, No. 37, Lane 365, Yang-Guang St.,  
Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



0659

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>1 . CERTIFICATION</b>	<b>5</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
<b>3 . GENERAL INFORMATION</b>	<b>8</b>
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	12
<b>4 . EMC EMISSION TEST</b>	<b>13</b>
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	15
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)	18
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	18
<b>5 . MEASUREMENT INSTRUMENTS LIST</b>	<b>19</b>
<b>6 . EUT TEST PHOTO</b>	<b>20</b>
<b>ATTACHMENT A - CONDUCTED EMISSION</b>	<b>26</b>
<b>ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>	<b>51</b>
<b>ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)</b>	<b>76</b>

## REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1601C010	Original Issue.	Jan. 18, 2016

## 1. CERTIFICATION

Equipment : Smart Phone  
Brand Name : HUAWEI  
Model Name : HUAWEI LUA-L03  
Applicant : Huawei Technologies Co., Ltd.  
Manufacturer : Huawei Technologies Co., Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen China  
Date of Test : Jan. 04, 2016 ~ Jan. 15, 2016  
Test Sample : Engineering Sample  
Standard(s) : FCC Part 15, Subpart B  
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1601C010) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	<b>NOTE (2)</b>

**NOTE:**

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is 2500MHz ~ 2570MHz which exceeds 108 MHz, so the test will be performed.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of 1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.).

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%**.

### A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
C02	CISPR	150 KHz~30MHz	2.59

### B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
CB08 (3m)	CISPR	30MHz ~ 200MHz	V	3.06
		30MHz ~ 200MHz	H	2.58
		200MHz ~ 1,000MHz	V	3.50
		200MHz ~ 1,000MHz	H	3.10

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
CB08 (3m)	CISPR	1GHz ~ 6GHz	V	4.14
		1GHz ~ 6GHz	H	4.14
		6GHz ~ 18GHz	V	5.34
		6GHz ~ 18GHz	H	5.34

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Brand Name	HUAWEI
Model Name	HUAWEI LUA-L03
Model Difference	N/A
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) HUIZHOU BYD ELECTRONIC CO., LTD. (2) Shenzhen Huntkey Electric Co., Ltd. (3) DONG GUAN PHITEK ELECTRONICS CO., LTD. Model: HW-050100U01 #2 Supplied from battery.
Power Rating	#1 I/P: 100V~240V~ 50/60 Hz,0.1A O/P: 5V $\equiv$ 1A #2 DC 3.8V
HW Version	VER.A
SW Version	LUA-L03C00B005

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2.

Item	Mfr/Brand	Model.
USB Cable	HONGLIN TECHNOLOGY CO.,LTD.	130-26654
	FOXCONN	CUBB01M-HC208-DH
Earphone	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	MEMD1632B580A00
	BOLUO COUNTY QUANCHENG ELECTRONIC	1311-3291-3.5mm-178
	GOERTEK INC.	HA1-3
	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	MEMD1532B528000
	BOLUO COUNTY QUANCHENG ELECTRONIC	1293#+3283#
Battery	Tianjin Lishen Battery Joint-Stock Co.,Ltd.	HB505076RBC
	BYD LITHIUM BATTERY Co., LTD.	
	Sunwoda Electronic Co., LTD	
	SCUD (FUJIAN) Electronics Co., Ltd	

<p>3.</p> <p>TX Frequency</p>	<p>GSM 850: 824MHz to 849MHz            GSM 1900: 1850MHz to 1910MHz            WCDMA Band 2: 1850MHz to 1910MHz            WCDMA Band 4: 1710MHz ~ 1755MHz            WCDMA Band 5: 824MHz ~ 849MHz            LTE Band 2: 1850 MHz ~ 1910 MHz            LTE Band 4: 1710 MHz ~ 1755 MHz            LTE Band 5: 824MHz ~ 849MHz            LTE Band 7: 2500MHz ~ 2570MHz            LTE Band 28: 703MHz ~ 748MHz            BT/WIFI: 2400MHz ~ 2483.5MHz</p>
<p>RX Frequency</p>	<p>GSM 850: 869MHz to 894MHz            GSM 1900: 1930MHz to 1990MHz            WCDMA Band 2: 1930MHz to 1990MHz            WCDMA Band 4: 2110MHz ~ 2155MHz            WCDMA Band 5: 869MHz ~ 894MHz            LTE Band 2: 1930 MHz ~ 1990 MHz            LTE Band 4: 2110MHz ~ 2155MHz            LTE Band 5: 869MHz ~ 894MHz            LTE Band 7: 2620MHz ~ 2690MHz            LTE Band 28: 758MHz ~ 803MHz            BT/WIFI: 2400MHz ~ 2483.5MHz            GPS: 1575.42 MHz</p>

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Mode 2	Adapter+Idle+BT+wifi+Gps+playing+speaker
Mode 3	Adapter+Idle+BT+wifi+Gps+Camera on
Mode 4	Adapter+GSM+BT+wifi+Gps
Mode 5	Adapter+WCDMA+BT+wifi+Gps
Mode 6	Adapter+LTE+BT+wifi+Gps
Mode 7	USB copy(EUT with PC)+BT+WIFI+GPS


The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Mode 2	Adapter+Idle+BT+wifi+Gps+playing+speaker
Mode 3	Adapter+Idle+BT+wifi+Gps+Camera on
Mode 4	Adapter+GSM+BT+wifi+Gps
Mode 5	Adapter+WCDMA+BT+wifi+Gps
Mode 6	Adapter+LTE+BT+wifi+Gps
Mode 7	USB copy(EUT with PC)+BT+WIFI+GPS


For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Mode 2	Adapter+Idle+BT+wifi+Gps+playing+speaker
Mode 3	Adapter+Idle+BT+wifi+Gps+Camera on
Mode 4	Adapter+GSM+BT+wifi+Gps
Mode 5	Adapter+WCDMA+BT+wifi+Gps
Mode 6	Adapter+LTE+BT+wifi+Gps
Mode 7	USB copy(EUT with PC)+BT+WIFI+GPS

### 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

#### Mode 1-6

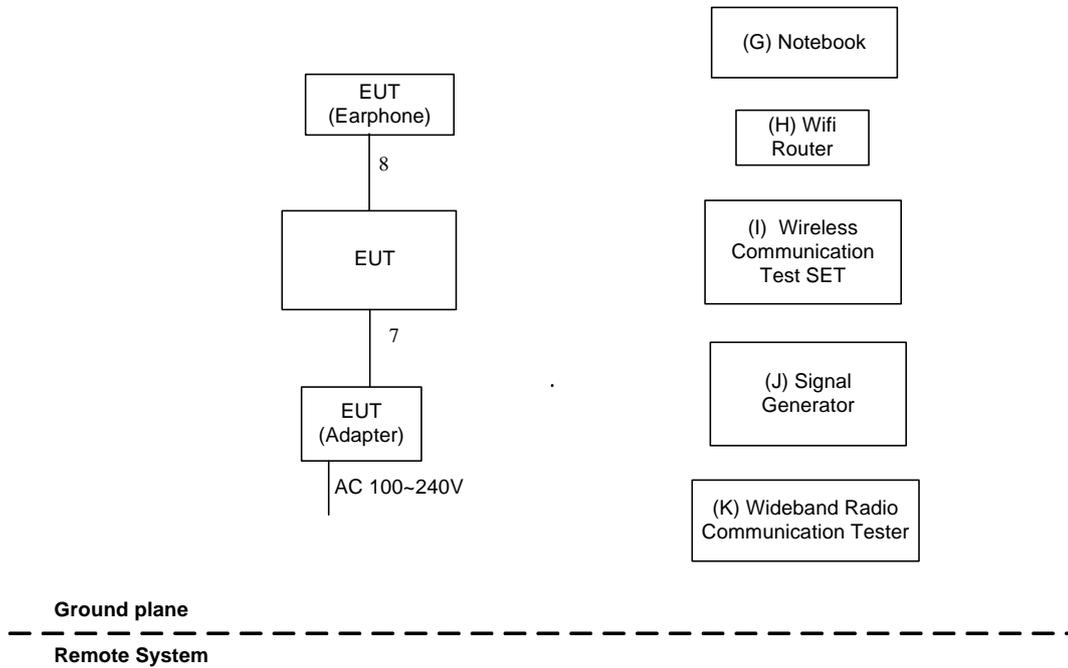

#### Mode 7

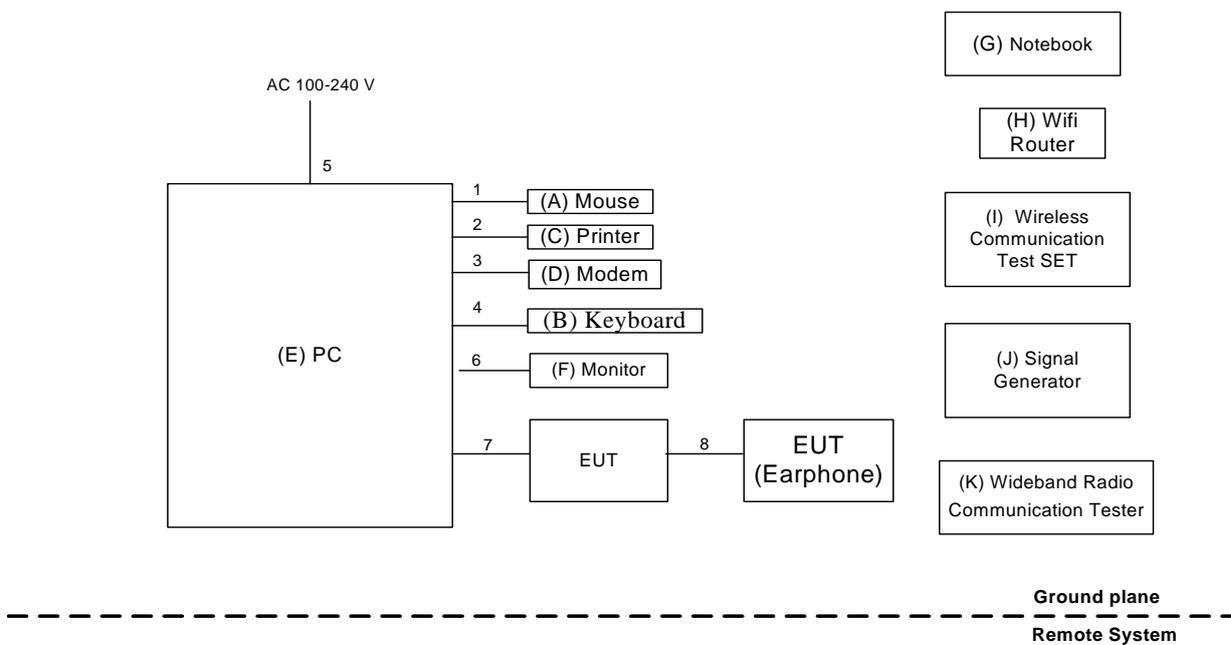

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB mouse	DELL	MS111-P	DOC	CN011D3V71581279 OLOT
B	USB keyboard	DELL	KB212-B	DOC	CN0HTXH97158125 004DXA01
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	PC	DELL	DCSM 745	DOC	G7K832X
F	LCD monitor	DELL	E177FPc	DOC	CNOFJ179-64180-6 AG-1WNS
G	Notebook	hp	hstnn-169c-3	DOC	CNU02203XG
H	Router	TP-LINK	TL-WR1041N	DOC	N/A
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183
J	Signal Generator	Agilent	E4438C	N/A	MY49071316
K	Wideband Radio Communication Tester	RS	CMW500	N/A	122125

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.2m	Earphone Cable

Note:

(1) For detachable type I/O cable should be specified the length m in 『Length』 column.

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value – Limit Value


#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

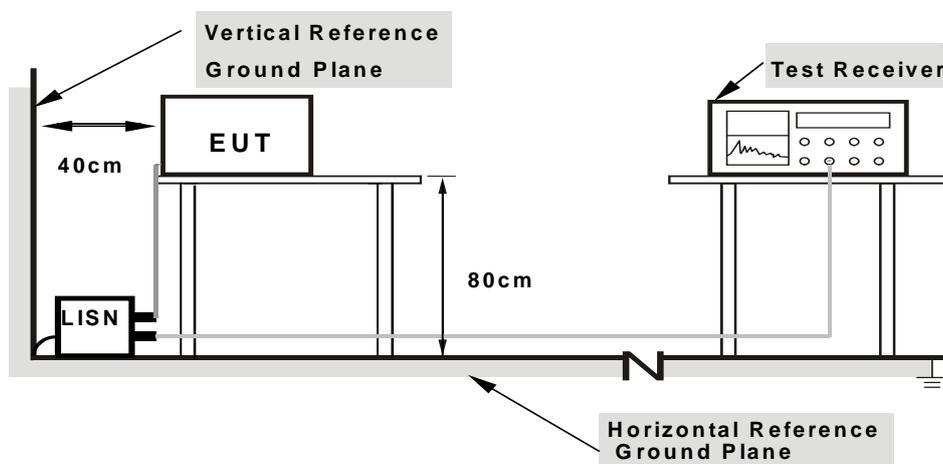

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

#### 4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 25°C Relative Humidity: 53%

#### Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

#### Below 1 GHz

#### Measurement Method and Applied Limits:

##### ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

##### CISPR 22 or CAN/CSA-CISPR 22-10:

Frequency (MHz)	Class A (at 10m)		Class B (at 10m)	
	dBuV/m		dBuV/m	
30 - 230	40		30	
230 - 1000	47		37	

#### Above 1 GHz

#### Measurement Method and Applied Limits:

##### ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

### FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

#### NOTE:

- (1) The limit for radiated test was performed according to as following:  
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).  
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
Margin Level = Measurement Value - Limit Value

#### **4.2.2 TEST PROCEDURE**


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### **4.2.3 DEVIATION FROM TEST STANDARD**


No deviation

#### 4.2.4 TEST SETUP

##### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz

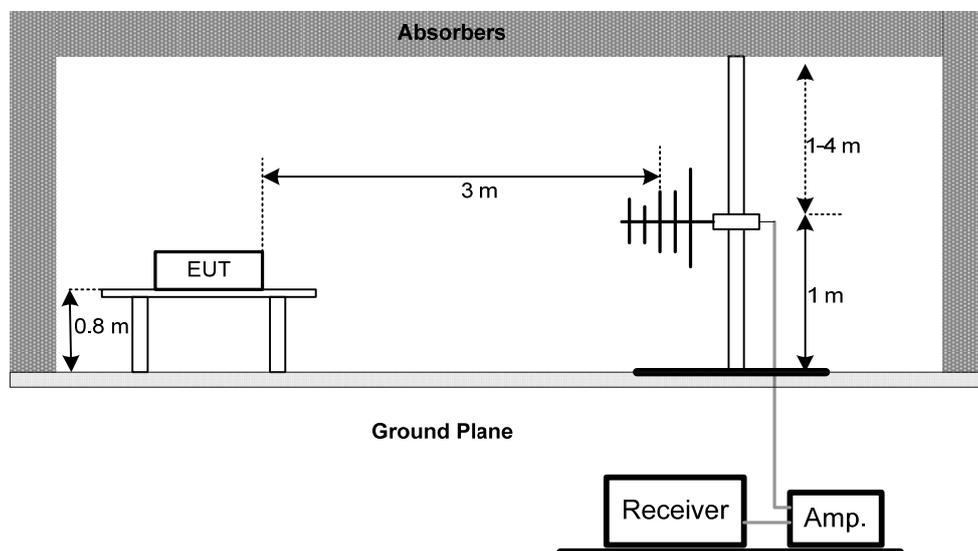

##### (B) Radiated Emission Test Set-Up Frequency Above 1 GHz

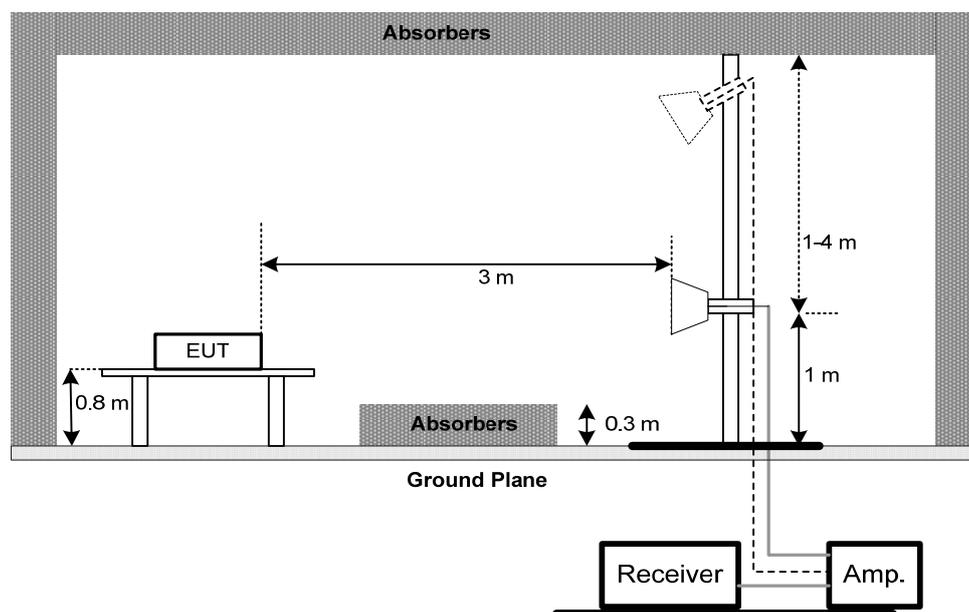

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### **4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)**

Please refer to the Attachment B.

Temperature: 21°C Relative Humidity: 51%

#### **4.2.7 TEST RESULTS (ABOVE 1000 MHZ)**

Please refer to the Attachment C

Temperature: 22°C Relative Humidity: 56%

Remark :

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (2) Data of measurement within this frequency range shown “ \* ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

## 5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100087	Nov. 21, 2016
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2016
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A


Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-352	Jul. 08, 2016
2	Pre-Amplifier	Anritsu	MH648A	M92649	Apr. 16, 2016
3	Test Cable	TIMES	LMR-400	12M	May 12, 2016
4	Test Cable	TIMES	LMR-400	3M	May 12, 2016
5	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
6	Horn Antenna (1G)	Schwarzbeck	BBHA 9120 D	9120D-325	Jan. 10, 2017
7	Pre_Amplifier	Agilent	8449B	3008A01714	Apr. 14, 2016
8	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	1M	May 11, 2016
9	Microflex Cable	AISI	S104-SMAP-1	10M	May 13, 2016
10	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	3M	May 11, 2016
11	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 12, 2016
12	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

## ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK


## Line

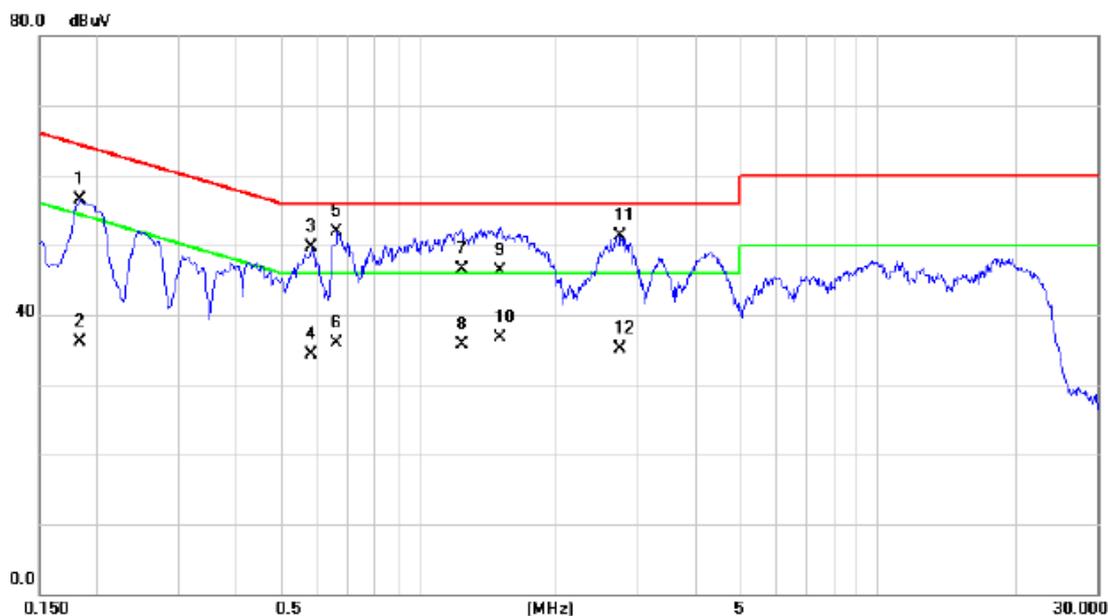

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1838	46.77	9.65	56.42	64.31	-7.89	QP	
2	0.1838	26.45	9.65	36.10	54.31	-18.21	AVG	
3	0.5865	39.84	9.86	49.70	56.00	-6.30	QP	
4	0.5865	24.49	9.86	34.35	46.00	-11.65	AVG	
5 *	0.6675	42.07	9.74	51.81	56.00	-4.19	QP	
6	0.6675	26.15	9.74	35.89	46.00	-10.11	AVG	
7	1.2458	36.79	9.71	46.50	56.00	-9.50	QP	
8	1.2458	25.99	9.71	35.70	46.00	-10.30	AVG	
9	1.5090	36.58	9.74	46.32	56.00	-9.68	QP	
10	1.5090	26.88	9.74	36.62	46.00	-9.38	AVG	
11	2.7645	41.39	9.82	51.21	56.00	-4.79	QP	
12	2.7645	25.36	9.82	35.18	46.00	-10.82	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK


## Neutral

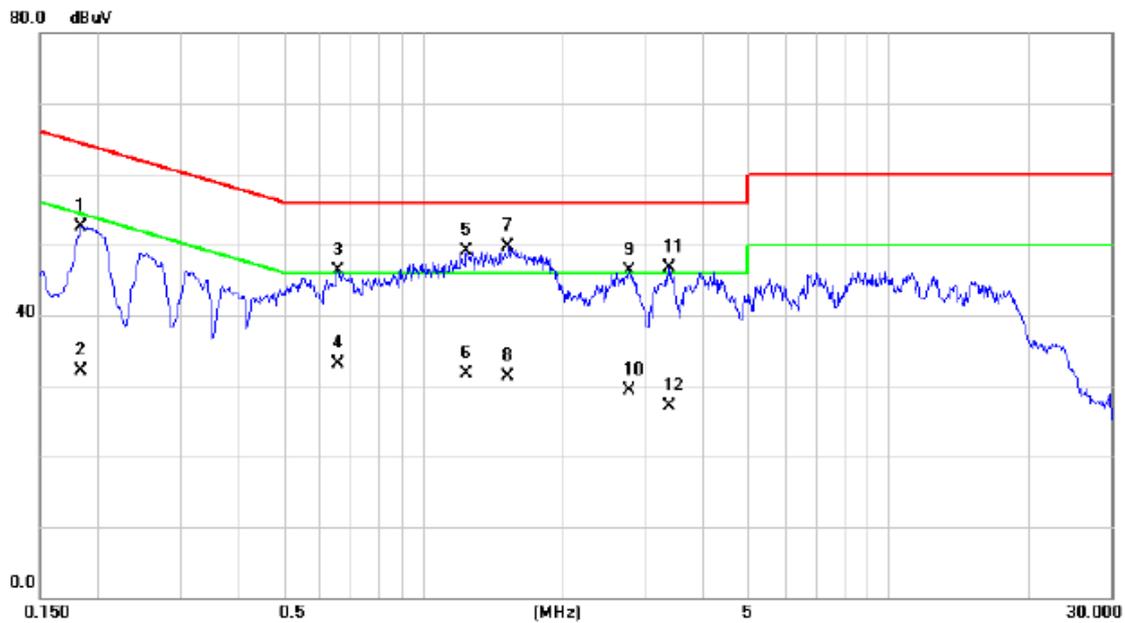

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1838	42.92	9.65	52.57	64.31	-11.74	QP	
2		0.1838	22.55	9.65	32.20	54.31	-22.11	AVG	
3		0.6561	36.46	9.76	46.22	56.00	-9.78	QP	
4		0.6561	23.43	9.76	33.19	46.00	-12.81	AVG	
5		1.2368	39.39	9.71	49.10	56.00	-6.90	QP	
6		1.2368	21.99	9.71	31.70	46.00	-14.30	AVG	
7	*	1.5270	40.03	9.74	49.77	56.00	-6.23	QP	
8		1.5270	21.49	9.74	31.23	46.00	-14.77	AVG	
9		2.7735	36.39	9.82	46.21	56.00	-9.79	QP	
10		2.7735	19.51	9.82	29.33	46.00	-16.67	AVG	
11		3.3810	36.87	9.85	46.72	56.00	-9.28	QP	
12		3.3810	17.22	9.85	27.07	46.00	-18.93	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00

## Line

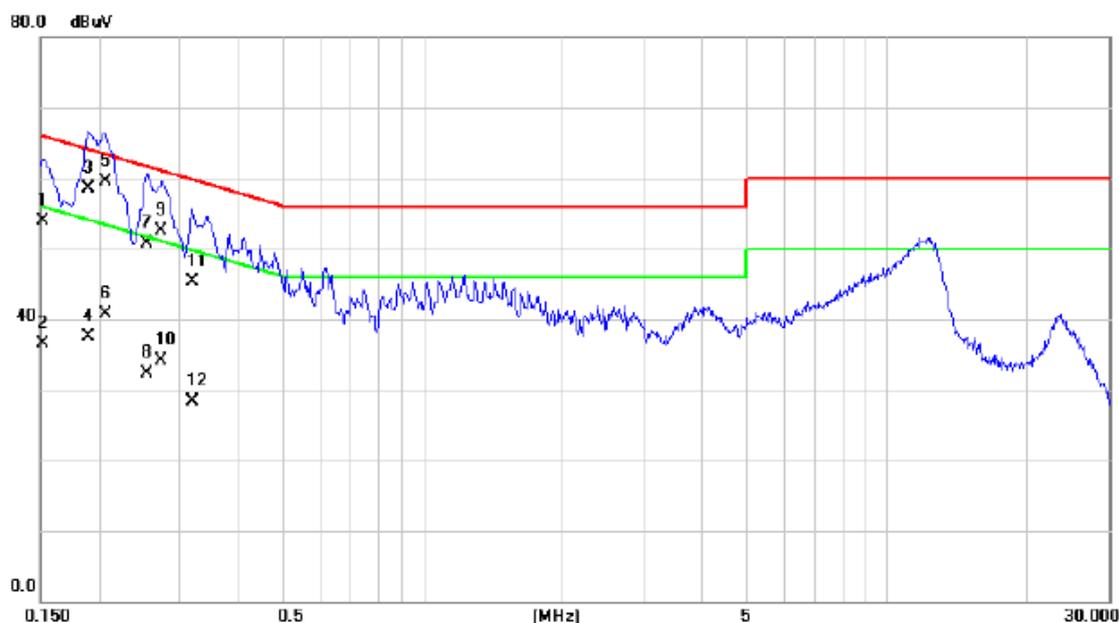

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	44.22	9.65	53.87	65.88	-12.01	QP	
2		0.1522	26.82	9.65	36.47	55.88	-19.41	AVG	
3		0.1905	48.85	9.65	58.50	64.01	-5.51	QP	
4		0.1905	27.85	9.65	37.50	54.01	-16.51	AVG	
5	*	0.2063	49.75	9.66	59.41	63.35	-3.94	QP	
6		0.2063	30.95	9.66	40.61	53.35	-12.74	AVG	
7		0.2535	41.02	9.71	50.73	61.64	-10.91	QP	
8		0.2535	22.52	9.71	32.23	51.64	-19.41	AVG	
9		0.2737	42.81	9.73	52.54	61.00	-8.46	QP	
10		0.2737	24.31	9.73	34.04	51.00	-16.96	AVG	
11		0.3187	35.58	9.79	45.37	59.74	-14.37	QP	
12		0.3187	18.48	9.79	28.27	49.74	-21.47	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


## Neutral



No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Margin		
		MHz	dBuV	Factor	dBuV	dBuV	dB	Detector	Comment
1		0.1522	49.90	9.65	59.55	65.88	-6.33	QP	
2		0.1522	23.44	9.65	33.09	55.88	-22.79	AVG	
3		0.1905	45.26	9.65	54.91	64.01	-9.10	QP	
4		0.1905	23.56	9.65	33.21	54.01	-20.80	AVG	
5		0.2063	47.15	9.66	56.81	63.35	-6.54	QP	
6		0.2063	27.45	9.66	37.11	53.35	-16.24	AVG	
7		0.2535	38.81	9.71	48.52	61.64	-13.12	QP	
8		0.2535	17.41	9.71	27.12	51.64	-24.52	AVG	
9	*	0.2737	46.66	9.73	56.39	61.00	-4.61	QP	
10		0.2737	21.99	9.73	31.72	51.00	-19.28	AVG	
11		11.6678	44.02	10.09	54.11	60.00	-5.89	QP	
12		11.6678	23.12	10.09	33.21	50.00	-16.79	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


### Line

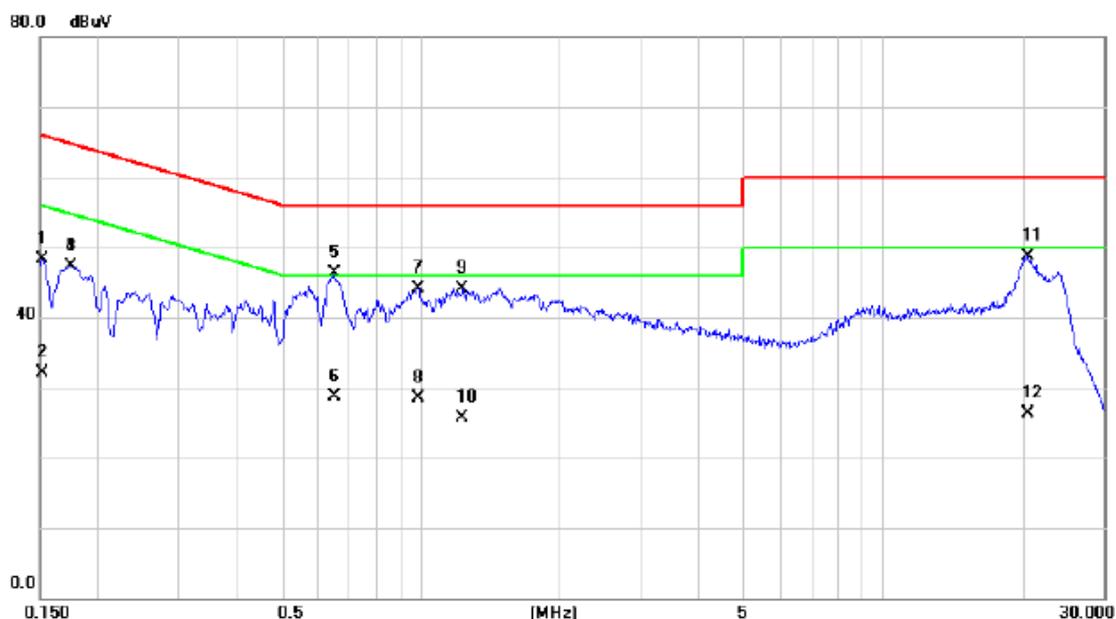

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1522	38.66	9.65	48.31	65.88	-17.57	QP	
2	0.1522	22.52	9.65	32.17	55.88	-23.71	AVG	
3	0.1748	37.74	9.65	47.39	64.73	-17.34	QP	
4 *	0.1748	37.74	9.65	47.39	54.73	-7.34	AVG	
5	0.6495	36.46	9.77	46.23	56.00	-9.77	QP	
6	0.6495	19.00	9.77	28.77	46.00	-17.23	AVG	
7	0.9870	34.44	9.70	44.14	56.00	-11.86	QP	
8	0.9870	18.78	9.70	28.48	46.00	-17.52	AVG	
9	1.2345	34.45	9.71	44.16	56.00	-11.84	QP	
10	1.2345	16.00	9.71	25.71	46.00	-20.29	AVG	
11	20.6138	38.23	10.53	48.76	60.00	-11.24	QP	
12	20.6138	15.76	10.53	26.29	50.00	-23.71	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


## Neutral

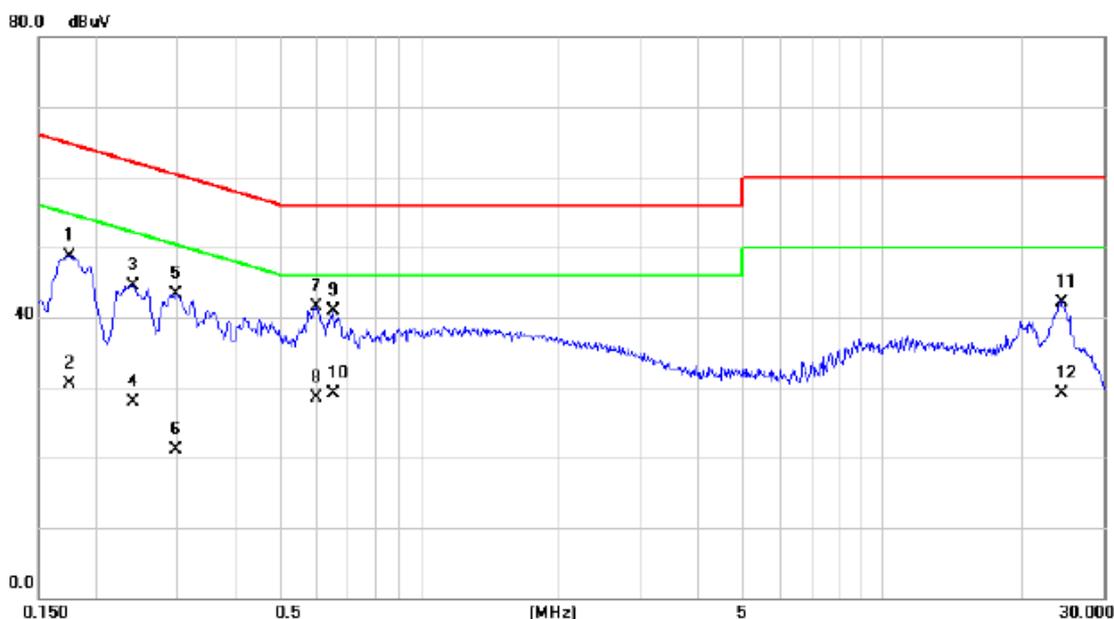

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1748	39.15	9.65	48.80	64.73	-15.93	QP	
2		0.1748	20.85	9.65	30.50	54.73	-24.23	AVG	
3		0.2400	34.85	9.69	44.54	62.10	-17.56	QP	
4		0.2400	18.13	9.69	27.82	52.10	-24.28	AVG	
5		0.2985	33.56	9.77	43.33	60.28	-16.95	QP	
6		0.2985	11.36	9.77	21.13	50.28	-29.15	AVG	
7	*	0.5977	31.73	9.84	41.57	56.00	-14.43	QP	
8		0.5977	18.74	9.84	28.58	46.00	-17.42	AVG	
9		0.6495	31.08	9.77	40.85	56.00	-15.15	QP	
10		0.6495	19.31	9.77	29.08	46.00	-16.92	AVG	
11		24.3308	31.77	10.43	42.20	60.00	-17.80	QP	
12		24.3308	18.64	10.43	29.07	50.00	-20.93	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1532B528000


## Line

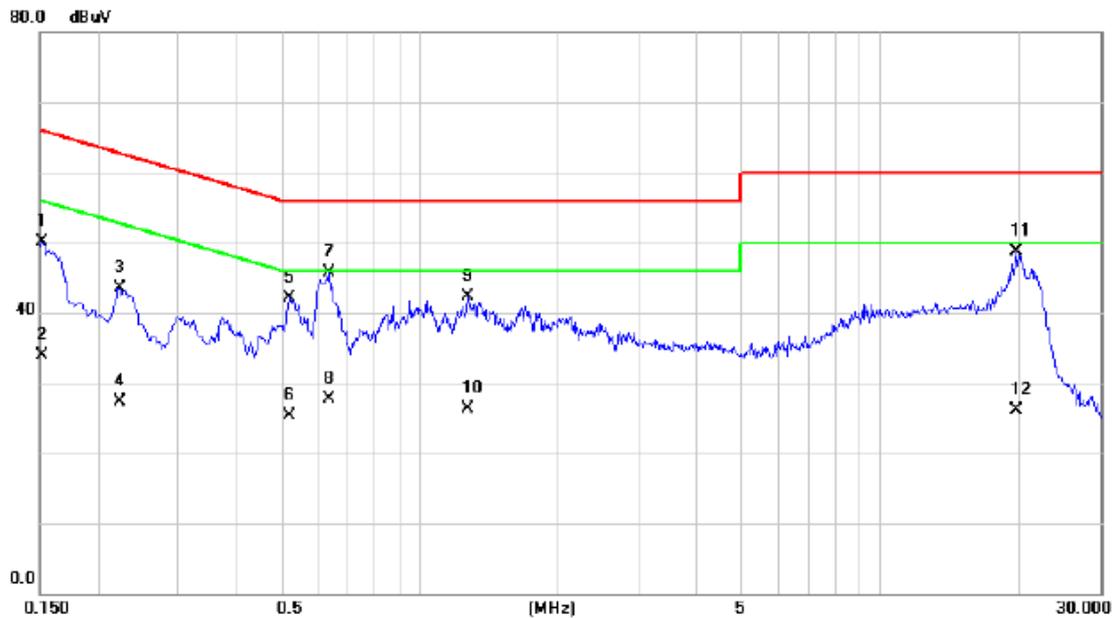

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1522	40.42	9.65	50.07	65.88	-15.81	QP	
2	0.1522	24.32	9.65	33.97	55.88	-21.91	AVG	
3	0.2242	33.87	9.68	43.55	62.66	-19.11	QP	
4	0.2242	17.64	9.68	27.32	52.66	-25.34	AVG	
5	0.5231	32.25	9.95	42.20	56.00	-13.80	QP	
6	0.5231	15.27	9.95	25.22	46.00	-20.78	AVG	
7 *	0.6360	35.96	9.79	45.75	56.00	-10.25	QP	
8	0.6360	17.98	9.79	27.77	46.00	-18.23	AVG	
9	1.2725	32.55	9.72	42.27	56.00	-13.73	QP	
10	1.2725	16.58	9.72	26.30	46.00	-19.70	AVG	
11	19.7317	38.19	10.53	48.72	60.00	-11.28	QP	
12	19.7317	15.54	10.53	26.07	50.00	-23.93	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1532B528000


## Neutral

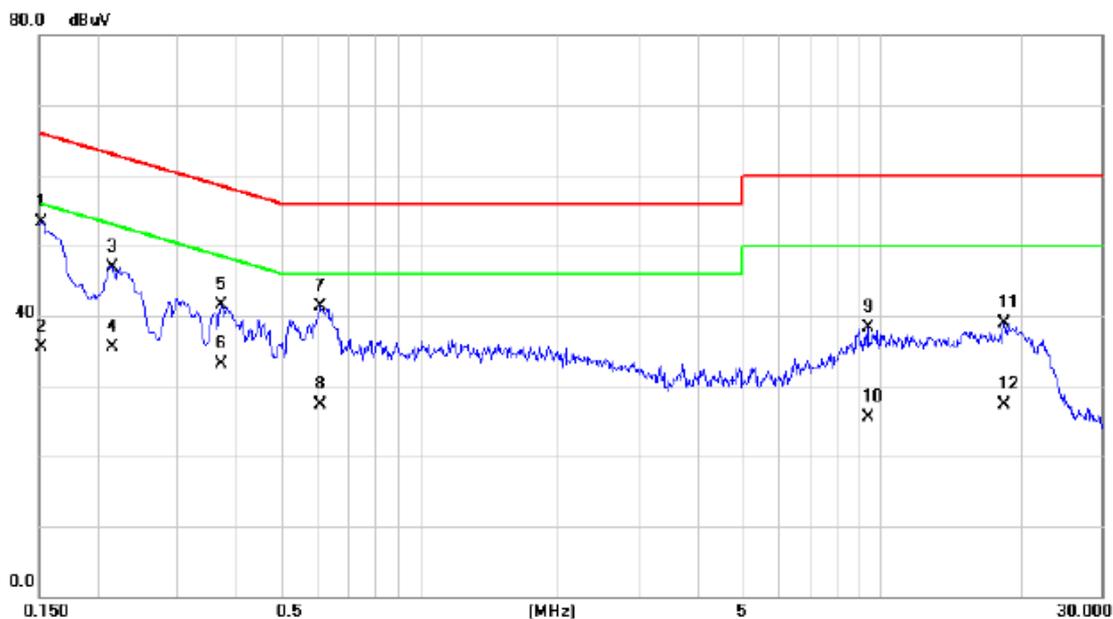

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1522	43.72	9.65	53.37	65.88	-12.51	QP	
2		0.1522	25.84	9.65	35.49	55.88	-20.39	AVG	
3		0.2152	37.30	9.67	46.97	63.00	-16.03	QP	
4		0.2152	25.84	9.67	35.51	53.00	-17.49	AVG	
5		0.3725	31.68	9.84	41.52	58.44	-16.92	QP	
6		0.3725	23.20	9.84	33.04	48.44	-15.40	AVG	
7		0.6110	31.46	9.82	41.28	56.00	-14.72	QP	
8		0.6110	17.46	9.82	27.28	46.00	-18.72	AVG	
9		9.3750	28.15	10.06	38.21	60.00	-21.79	QP	
10		9.3750	15.40	10.06	25.46	50.00	-24.54	AVG	
11		18.5502	28.45	10.43	38.88	60.00	-21.12	QP	
12		18.5502	16.85	10.43	27.28	50.00	-22.72	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Line

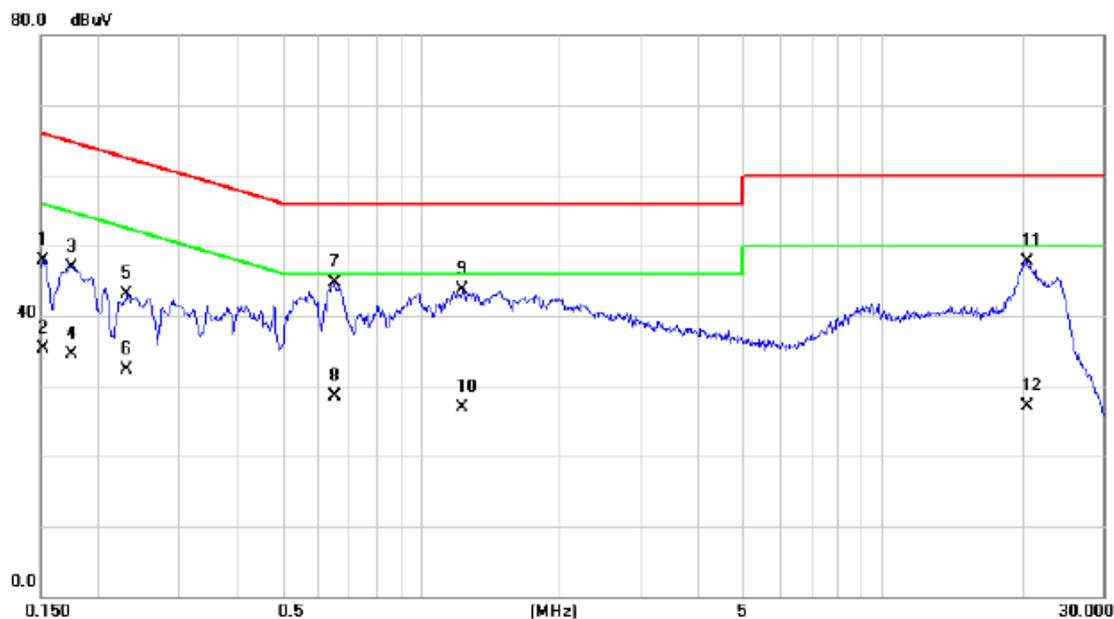

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	38.16	9.65	47.81	65.88	-18.07	QP	
2		0.1522	25.62	9.65	35.27	55.88	-20.61	AVG	
3		0.1746	37.24	9.65	46.89	64.74	-17.85	QP	
4		0.1746	24.84	9.65	34.49	54.74	-20.25	AVG	
5		0.2310	33.37	9.68	43.05	62.41	-19.36	QP	
6		0.2310	22.64	9.68	32.32	52.41	-20.09	AVG	
7	*	0.6492	34.96	9.77	44.73	56.00	-11.27	QP	
8		0.6492	18.80	9.77	28.57	46.00	-17.43	AVG	
9		1.2343	33.95	9.71	43.66	56.00	-12.34	QP	
10		1.2343	17.20	9.71	26.91	46.00	-19.09	AVG	
11		20.6137	37.23	10.53	47.76	60.00	-12.24	QP	
12		20.6137	16.56	10.53	27.09	50.00	-22.91	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Neutral

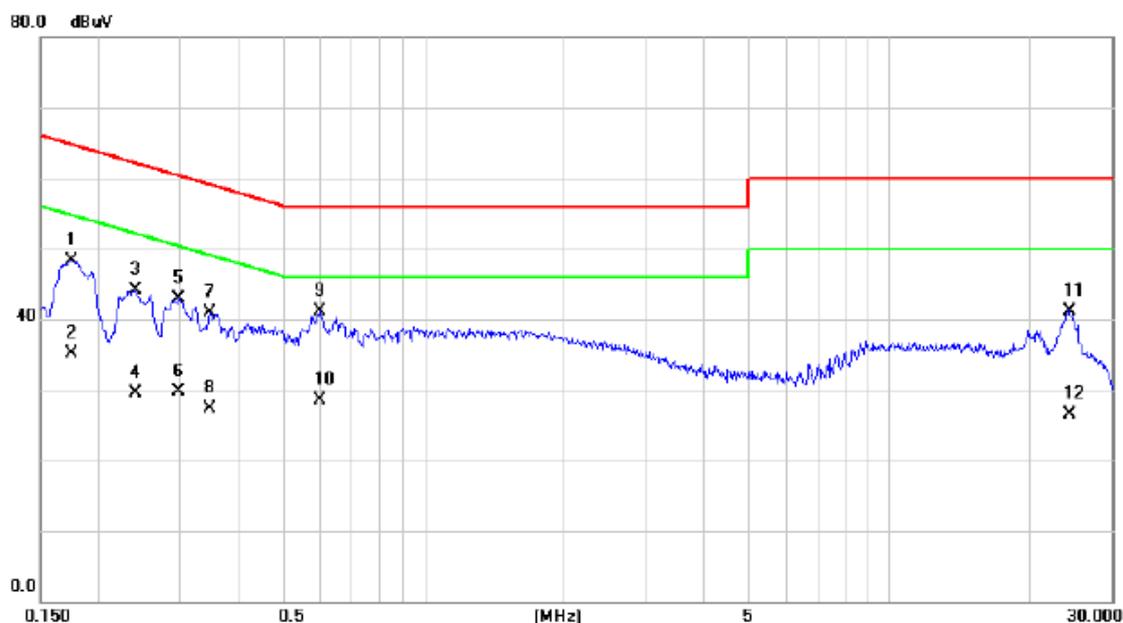

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1746	38.65	9.65	48.30	64.74	-16.44	QP	
2		0.1746	25.55	9.65	35.20	54.74	-19.54	AVG	
3		0.2400	34.35	9.69	44.04	62.10	-18.06	QP	
4		0.2400	19.83	9.69	29.52	52.10	-22.58	AVG	
5		0.2983	33.07	9.76	42.83	60.29	-17.46	QP	
6		0.2983	19.97	9.76	29.73	50.29	-20.56	AVG	
7		0.3480	31.01	9.82	40.83	59.01	-18.18	QP	
8		0.3480	17.41	9.82	27.23	49.01	-21.78	AVG	
9	*	0.5977	31.23	9.84	41.07	56.00	-14.93	QP	
10		0.5977	18.74	9.84	28.58	46.00	-17.42	AVG	
11		24.3306	30.77	10.43	41.20	60.00	-18.80	QP	
12		24.3306	16.14	10.43	26.57	50.00	-23.43	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


### Line

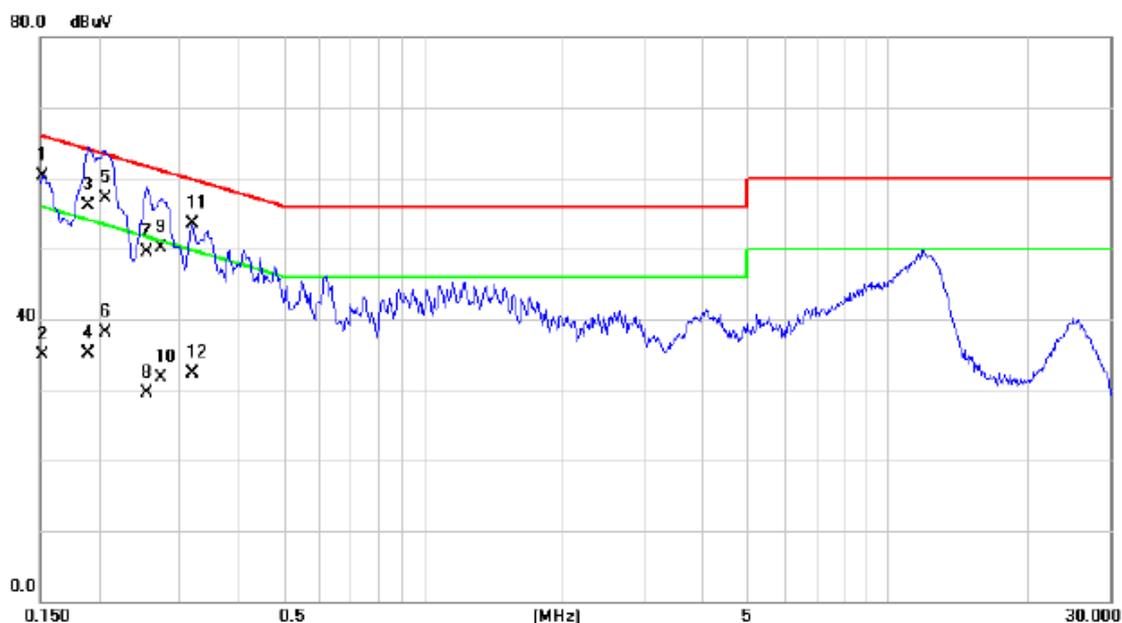

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1522	50.67	9.65	60.32	65.88	-5.56	QP	
2		0.1522	25.22	9.65	34.87	55.88	-21.01	AVG	
3		0.1905	46.55	9.65	56.20	64.01	-7.81	QP	
4		0.1905	25.55	9.65	35.20	54.01	-18.81	AVG	
5		0.2063	47.45	9.66	57.11	63.35	-6.24	QP	
6		0.2063	28.45	9.66	38.11	53.35	-15.24	AVG	
7		0.2535	39.72	9.71	49.43	61.64	-12.21	QP	
8		0.2535	19.72	9.71	29.43	51.64	-22.21	AVG	
9		0.2737	40.31	9.73	50.04	61.00	-10.96	QP	
10		0.2737	22.01	9.73	31.74	51.00	-19.26	AVG	
11		0.3187	43.63	9.79	53.42	59.74	-6.32	QP	
12		0.3187	22.48	9.79	32.27	49.74	-17.47	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


## Neutral

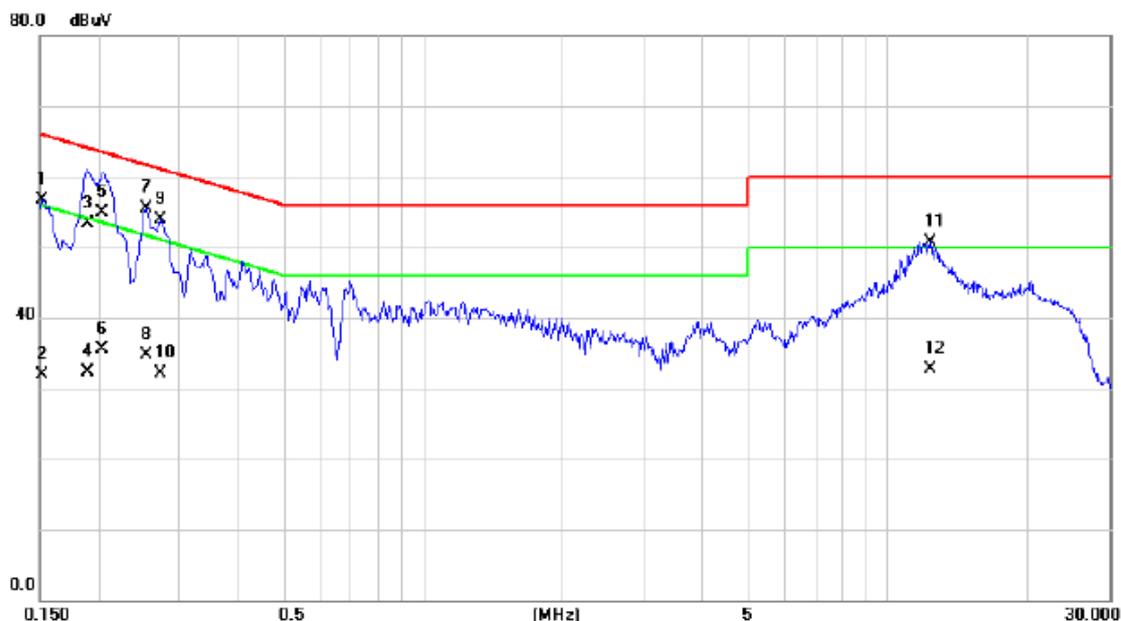

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	47.04	9.65	56.69	65.88	-9.19	QP	
2		0.1522	22.24	9.65	31.89	55.88	-23.99	AVG	
3		0.1905	43.66	9.65	53.31	64.01	-10.70	QP	
4		0.1905	22.56	9.65	32.21	54.01	-21.80	AVG	
5		0.2040	45.26	9.65	54.91	63.45	-8.54	QP	
6		0.2040	25.76	9.65	35.41	53.45	-18.04	AVG	
7	*	0.2535	45.81	9.71	55.52	61.64	-6.12	QP	
8		0.2535	25.01	9.71	34.72	51.64	-16.92	AVG	
9		0.2737	44.12	9.73	53.85	61.00	-7.15	QP	
10		0.2737	22.39	9.73	32.12	51.00	-18.88	AVG	
11		12.4395	40.63	10.10	50.73	60.00	-9.27	QP	
12		12.4395	22.55	10.10	32.65	50.00	-17.35	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


## Line

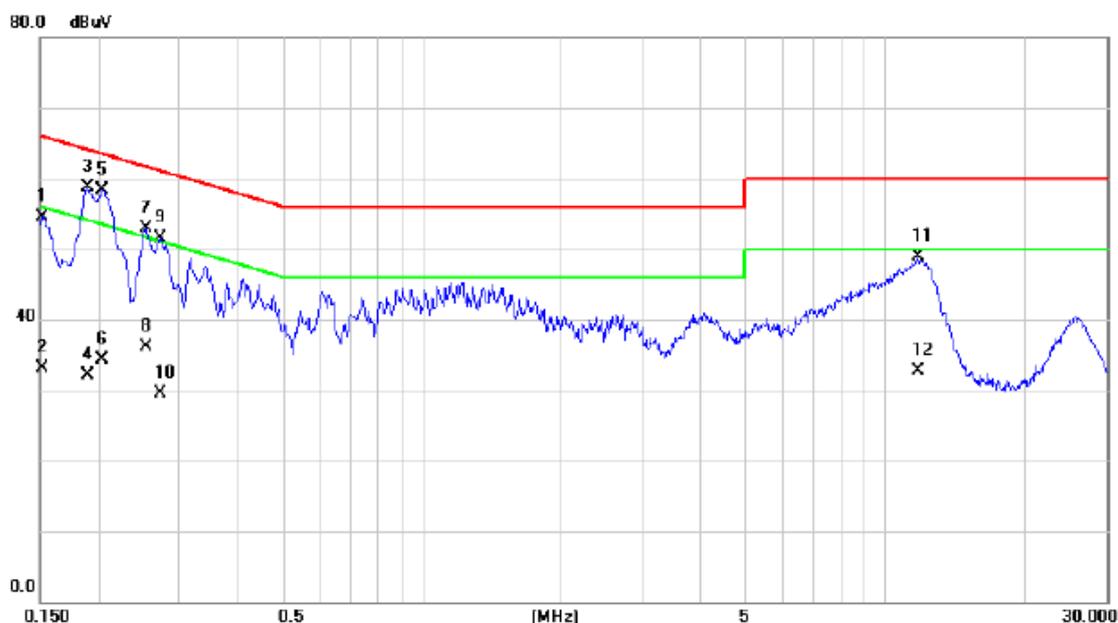

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	44.94	9.65	54.59	65.88	-11.29	QP	
2		0.1522	23.42	9.65	33.07	55.88	-22.81	AVG	
3		0.1905	49.01	9.65	58.66	64.01	-5.35	QP	
4		0.1905	22.55	9.65	32.20	54.01	-21.81	AVG	
5	*	0.2040	48.73	9.65	58.38	63.45	-5.07	QP	
6		0.2040	24.56	9.65	34.21	53.45	-19.24	AVG	
7		0.2535	43.13	9.71	52.84	61.64	-8.80	QP	
8		0.2535	26.32	9.71	36.03	51.64	-15.61	AVG	
9		0.2737	41.77	9.73	51.50	61.00	-9.50	QP	
10		0.2737	19.71	9.73	29.44	51.00	-21.56	AVG	
11		11.7645	38.88	10.09	48.97	60.00	-11.03	QP	
12		11.7645	22.55	10.09	32.64	50.00	-17.36	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


## Neutral

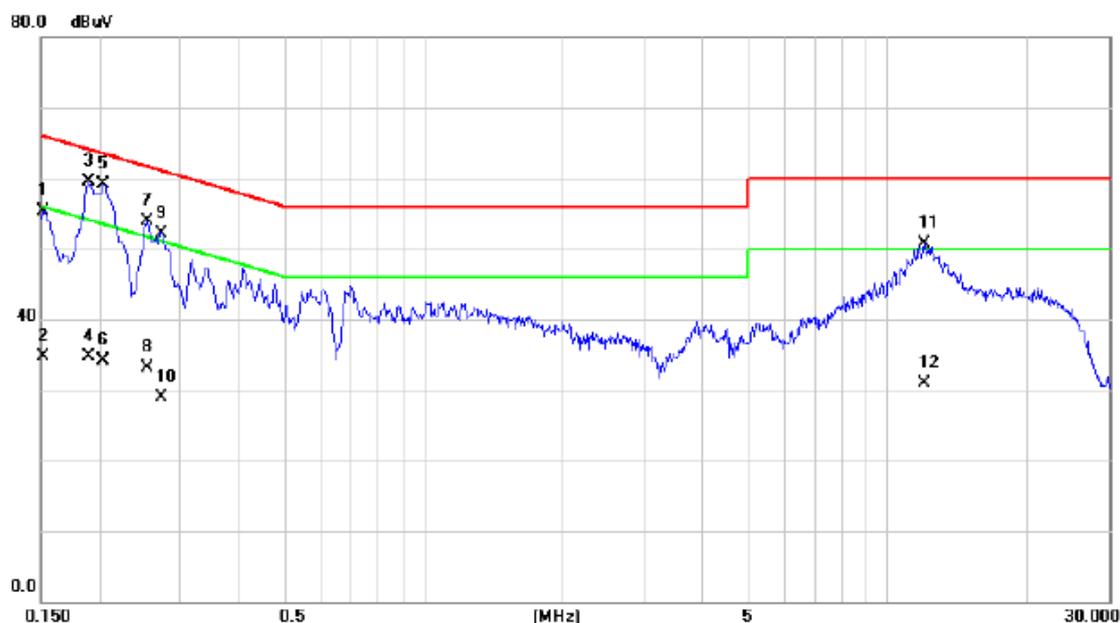

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	45.73	9.65	55.38	65.88	-10.50	QP	
2		0.1522	25.04	9.65	34.69	55.88	-21.19	AVG	
3		0.1905	49.91	9.65	59.56	64.01	-4.45	QP	
4		0.1905	25.06	9.65	34.71	54.01	-19.30	AVG	
5	*	0.2040	49.39	9.65	59.04	63.45	-4.41	QP	
6		0.2040	24.36	9.65	34.01	53.45	-19.44	AVG	
7		0.2535	44.20	9.71	53.91	61.64	-7.73	QP	
8		0.2535	23.31	9.71	33.02	51.64	-18.62	AVG	
9		0.2744	42.30	9.73	52.03	60.98	-8.95	QP	
10		0.2744	19.09	9.73	28.82	50.98	-22.16	AVG	
11		12.0233	40.61	10.09	50.70	60.00	-9.30	QP	
12		12.0233	20.84	10.09	30.93	50.00	-19.07	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


## Line

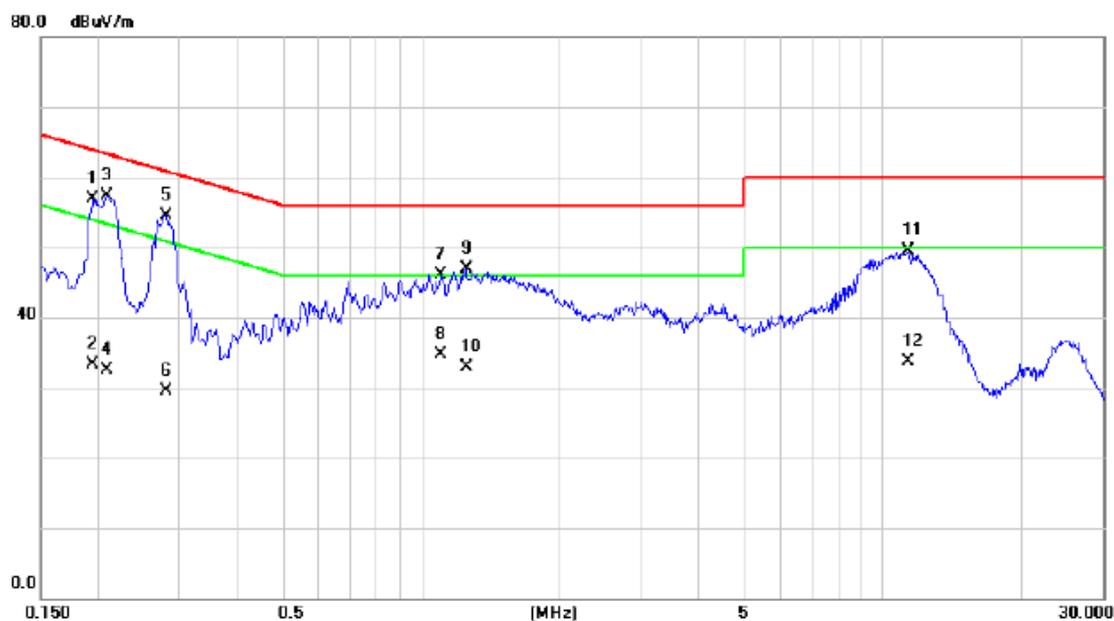

No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.1950	47.19	9.65	56.84	63.82	-6.98	QP	
2		0.1950	23.56	9.65	33.21	53.82	-20.61	AVG	
3	*	0.2084	47.57	9.66	57.23	63.27	-6.04	QP	
4		0.2084	22.75	9.66	32.41	53.27	-20.86	AVG	
5		0.2802	44.73	9.75	54.48	60.81	-6.33	QP	
6		0.2802	19.80	9.75	29.55	50.81	-21.26	AVG	
7		1.1107	36.49	9.71	46.20	56.00	-9.80	QP	
8		1.1107	24.99	9.71	34.70	46.00	-11.30	AVG	
9		1.2500	37.12	9.72	46.84	56.00	-9.16	QP	
10		1.2500	23.09	9.72	32.81	46.00	-13.19	AVG	
11		11.3640	39.50	10.09	49.59	60.00	-10.41	QP	
12		11.3640	23.63	10.09	33.72	50.00	-16.28	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


## Neutral

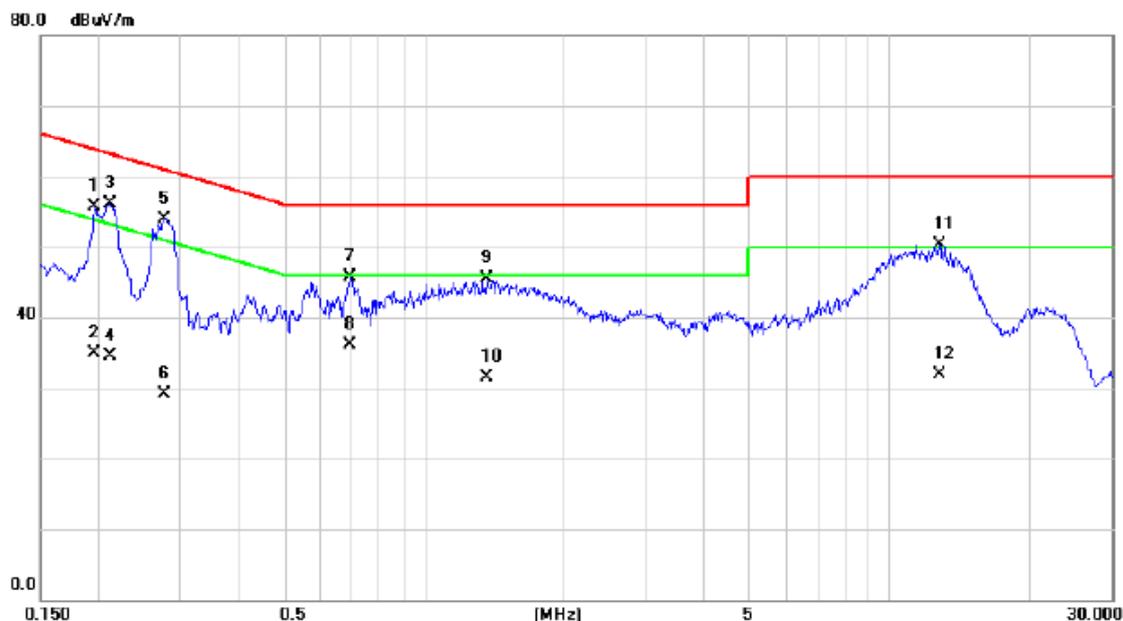

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1		0.1952	46.08	9.65	55.73	63.81	-8.08	QP	
2		0.1952	25.16	9.65	34.81	53.81	-19.00	AVG	
3		0.2106	46.40	9.66	56.06	63.18	-7.12	QP	
4		0.2106	24.75	9.66	34.41	53.18	-18.77	AVG	
5	*	0.2760	44.18	9.74	53.92	60.94	-7.02	QP	
6		0.2760	19.39	9.74	29.13	50.94	-21.81	AVG	
7		0.6944	36.03	9.70	45.73	56.00	-10.27	QP	
8		0.6944	26.39	9.70	36.09	46.00	-9.91	AVG	
9		1.3670	35.71	9.73	45.44	56.00	-10.56	QP	
10		1.3670	21.79	9.73	31.52	46.00	-14.48	AVG	
11		12.8445	40.25	10.10	50.35	60.00	-9.65	QP	
12		12.8445	21.77	10.10	31.87	50.00	-18.13	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


## Line

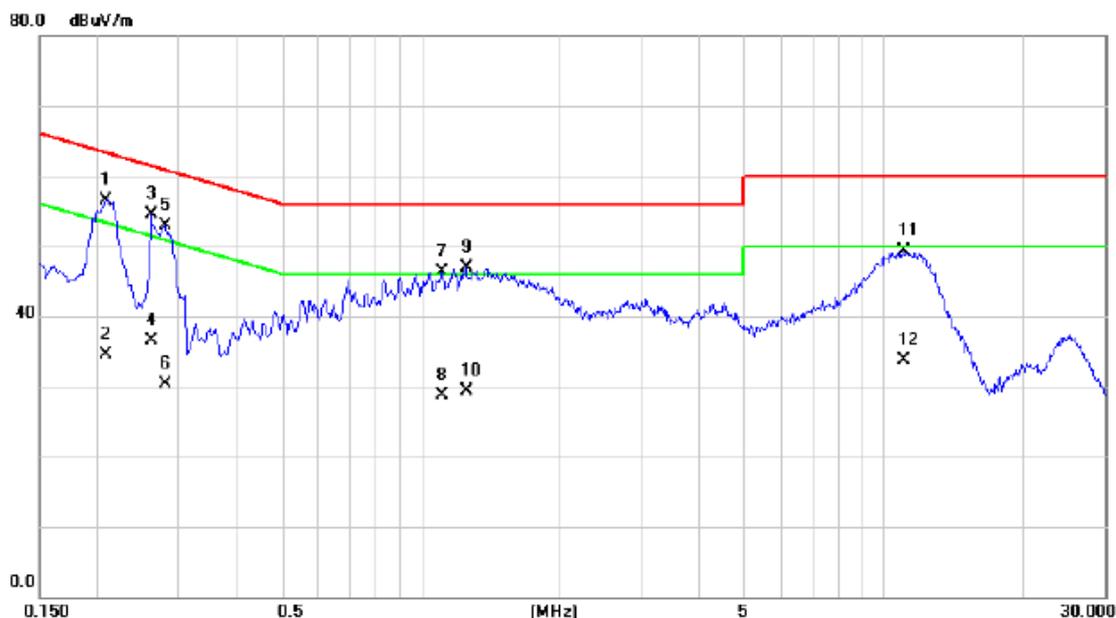

No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.2084	46.82	9.66	56.48	63.27	-6.79	QP	
2		0.2084	24.85	9.66	34.51	53.27	-18.76	AVG	
3		0.2600	44.85	9.71	54.56	61.43	-6.87	QP	
4		0.2600	26.73	9.71	36.44	51.43	-14.99	AVG	
5		0.2802	43.15	9.75	52.90	60.81	-7.91	QP	
6		0.2802	20.50	9.75	30.25	50.81	-20.56	AVG	
7		1.1130	36.60	9.71	46.31	56.00	-9.69	QP	
8		1.1130	18.99	9.71	28.70	46.00	-17.30	AVG	
9		1.2522	37.10	9.72	46.82	56.00	-9.18	QP	
10		1.2522	19.49	9.72	29.21	46.00	-16.79	AVG	
11		11.0625	39.16	10.08	49.24	60.00	-10.76	QP	
12		11.0625	23.62	10.08	33.70	50.00	-16.30	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


## Neutral

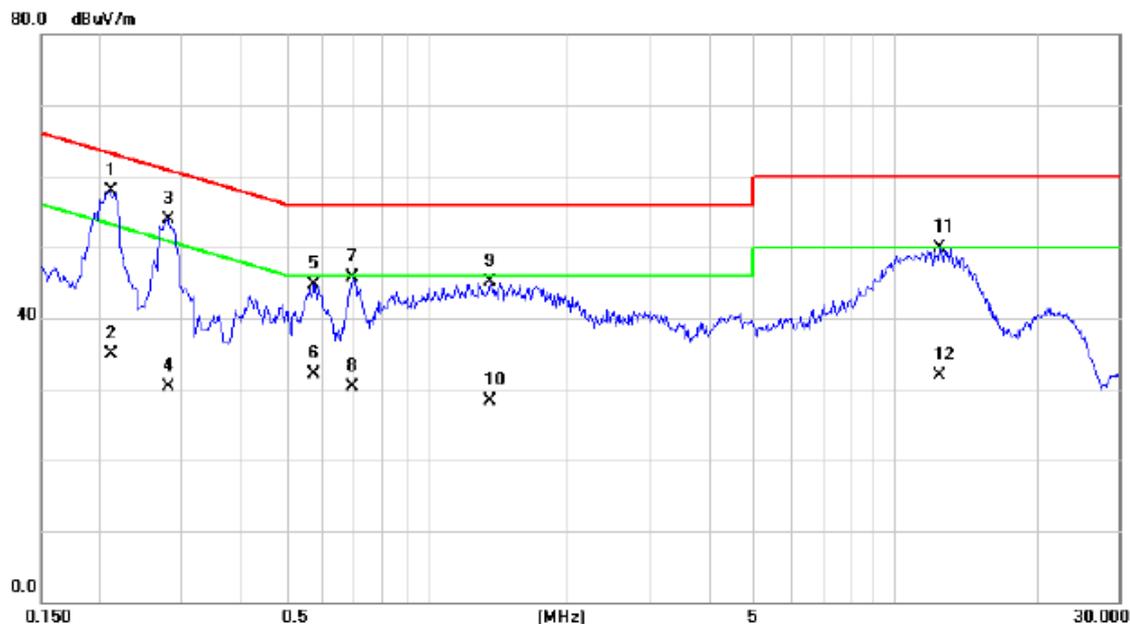

No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	*	0.2106	48.19	9.66	57.85	63.18	-5.33	QP	
2		0.2106	25.15	9.66	34.81	53.18	-18.37	AVG	
3		0.2802	44.10	9.75	53.85	60.81	-6.96	QP	
4		0.2802	20.58	9.75	30.33	50.81	-20.48	AVG	
5		0.5752	34.92	9.87	44.79	56.00	-11.21	QP	
6		0.5752	22.30	9.87	32.17	46.00	-13.83	AVG	
7		0.6944	35.95	9.70	45.65	56.00	-10.35	QP	
8		0.6944	20.59	9.70	30.29	46.00	-15.71	AVG	
9		1.3670	35.37	9.73	45.10	56.00	-10.90	QP	
10		1.3670	18.49	9.73	28.22	46.00	-17.78	AVG	
11		12.4954	39.73	10.10	49.83	60.00	-10.17	QP	
12		12.4954	21.85	10.10	31.95	50.00	-18.05	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


## Line

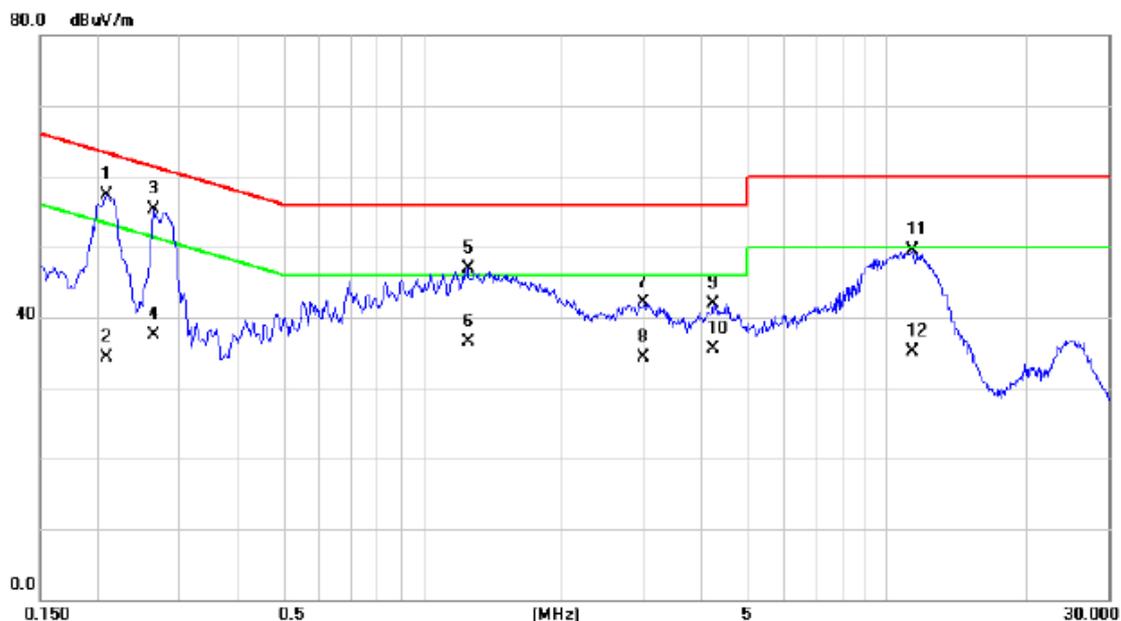

No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2084	47.57	9.66	57.23	63.27	-6.04	QP	
2		0.2084	24.55	9.66	34.21	53.27	-19.06	AVG	
3	*	0.2630	45.64	9.72	55.36	61.34	-5.98	QP	
4		0.2630	27.82	9.72	37.54	51.34	-13.80	AVG	
5		1.2500	37.12	9.72	46.84	56.00	-9.16	QP	
6		1.2500	26.79	9.72	36.51	46.00	-9.49	AVG	
7		3.0030	32.23	9.82	42.05	56.00	-13.95	QP	
8		3.0030	24.40	9.82	34.22	46.00	-11.78	AVG	
9		4.2290	32.05	9.88	41.93	56.00	-14.07	QP	
10		4.2290	25.58	9.88	35.46	46.00	-10.54	AVG	
11		11.3640	39.50	10.09	49.59	60.00	-10.41	QP	
12		11.3640	24.93	10.09	35.02	50.00	-14.98	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


## Neutral

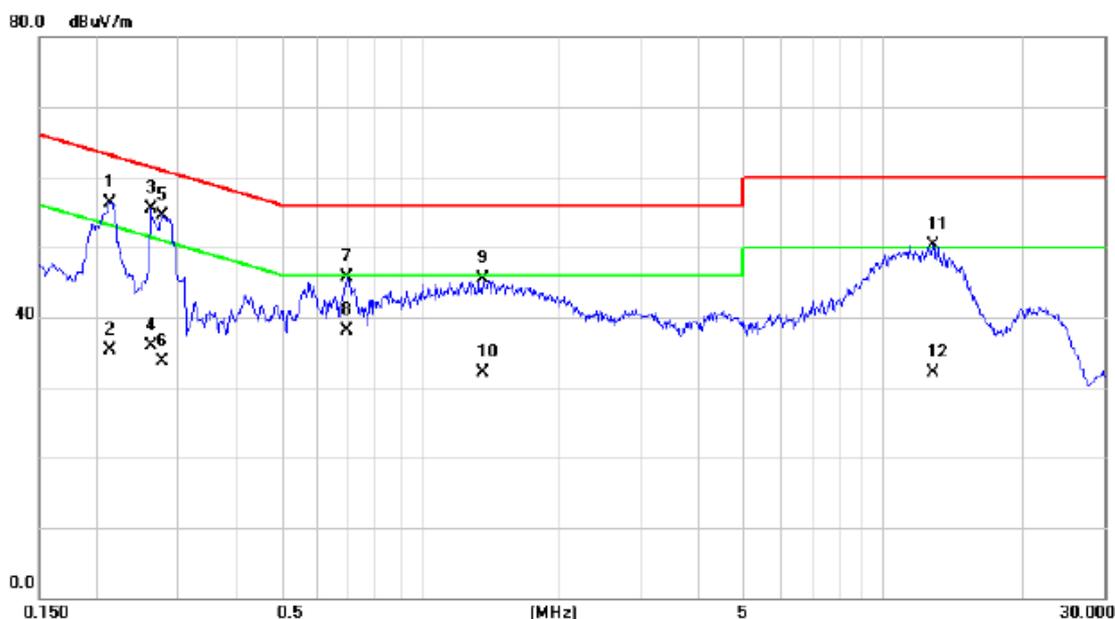

No. Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.2130	46.65	9.66	56.31	63.09	-6.78	QP	
2	0.2130	25.55	9.66	35.21	53.09	-17.88	AVG	
3 *	0.2600	45.79	9.71	55.50	61.43	-5.93	QP	
4	0.2600	26.11	9.71	35.82	51.43	-15.61	AVG	
5	0.2760	44.68	9.74	54.42	60.94	-6.52	QP	
6	0.2760	23.99	9.74	33.73	50.94	-17.21	AVG	
7	0.6944	36.03	9.70	45.73	56.00	-10.27	QP	
8	0.6944	28.39	9.70	38.09	46.00	-7.91	AVG	
9	1.3670	35.71	9.73	45.44	56.00	-10.56	QP	
10	1.3670	22.39	9.73	32.12	46.00	-13.88	AVG	
11	12.8445	40.25	10.10	50.35	60.00	-9.65	QP	
12	12.8445	21.97	10.10	32.07	50.00	-17.93	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


## Line

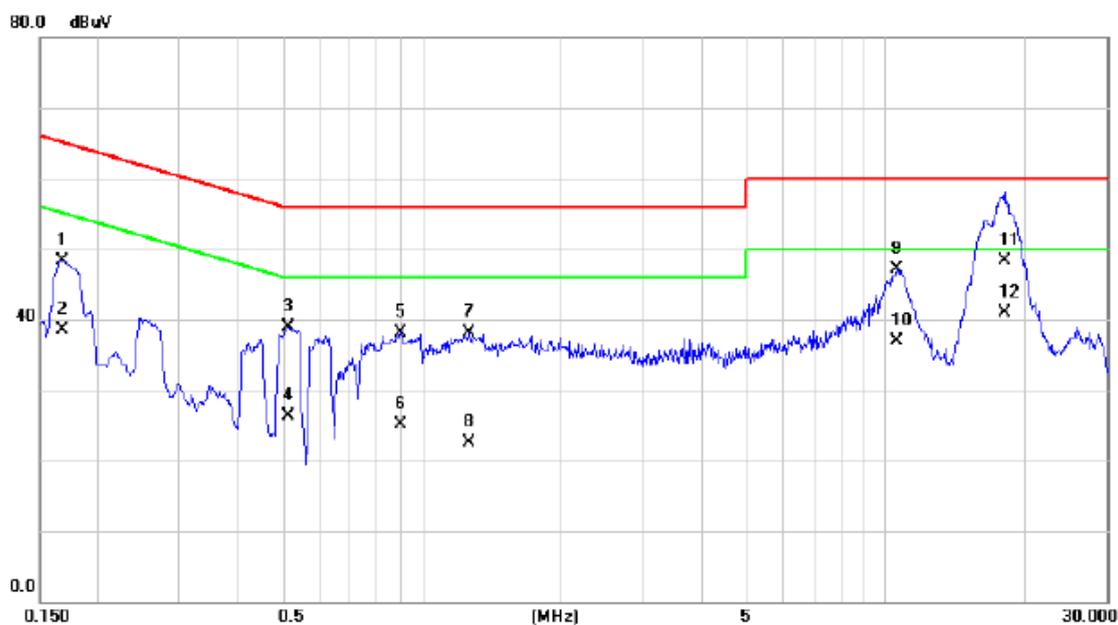

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1680	38.69	9.65	48.34	65.06	-16.72	QP	
2		0.1680	28.84	9.65	38.49	55.06	-16.57	AVG	
3		0.5167	28.98	9.96	38.94	56.00	-17.06	QP	
4		0.5167	16.26	9.96	26.22	46.00	-19.78	AVG	
5		0.9037	28.35	9.70	38.05	56.00	-17.95	QP	
6		0.9037	15.45	9.70	25.15	46.00	-20.85	AVG	
7		1.2660	28.41	9.72	38.13	56.00	-17.87	QP	
8		1.2660	12.79	9.72	22.51	46.00	-23.49	AVG	
9		10.6058	36.94	10.08	47.02	60.00	-12.98	QP	
10		10.6058	26.90	10.08	36.98	50.00	-13.02	AVG	
11		18.0915	37.95	10.39	48.34	60.00	-11.66	QP	
12	*	18.0915	30.55	10.39	40.94	50.00	-9.06	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


### Neutral

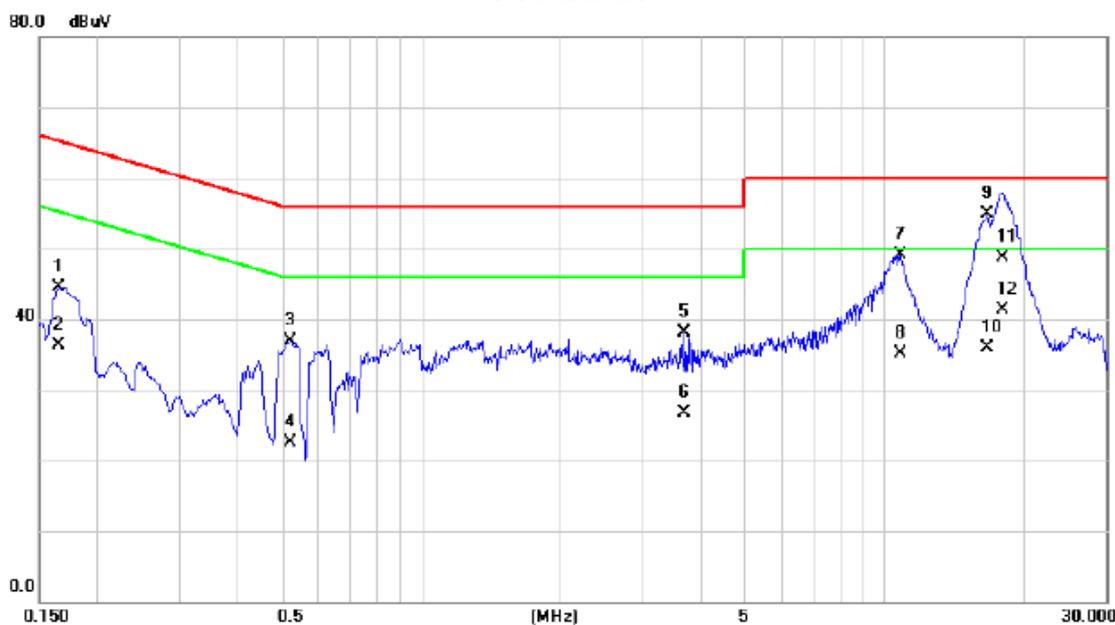

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1657	34.86	9.65	44.51	65.17	-20.66	QP	
2		0.1657	26.75	9.65	36.40	55.17	-18.77	AVG	
3		0.5234	26.92	9.95	36.87	56.00	-19.13	QP	
4		0.5234	12.60	9.95	22.55	46.00	-23.45	AVG	
5		3.7072	28.33	9.86	38.19	56.00	-17.81	QP	
6		3.7072	16.86	9.86	26.72	46.00	-19.28	AVG	
7		10.7992	39.09	10.08	49.17	60.00	-10.83	QP	
8		10.7992	25.00	10.08	35.08	50.00	-14.92	AVG	
9	*	16.6717	44.54	10.27	54.81	60.00	-5.19	QP	
10		16.6717	25.61	10.27	35.88	50.00	-14.12	AVG	
11		17.9655	38.40	10.38	48.78	60.00	-11.22	QP	
12		17.9655	30.90	10.38	41.28	50.00	-8.72	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN


### Line

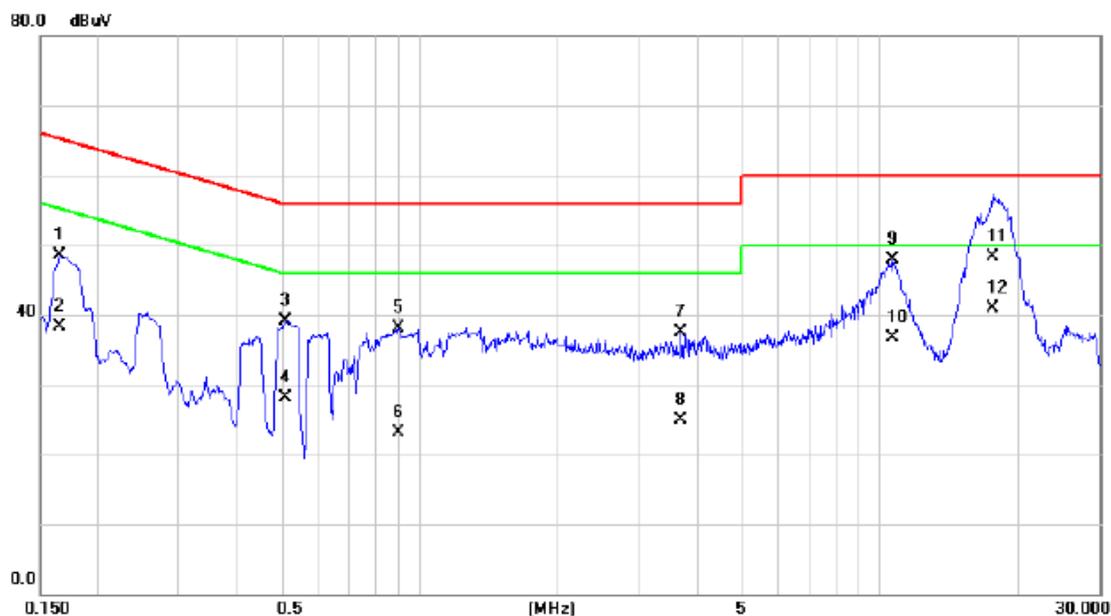

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1658	38.76	9.65	48.41	65.17	-16.76	QP	
2		0.1658	28.64	9.65	38.29	55.17	-16.88	AVG	
3		0.5122	29.13	9.97	39.10	56.00	-16.90	QP	
4		0.5122	18.05	9.97	28.02	46.00	-17.98	AVG	
5		0.9037	28.43	9.70	38.13	56.00	-17.87	QP	
6		0.9037	13.45	9.70	23.15	46.00	-22.85	AVG	
7		3.7073	27.72	9.86	37.58	56.00	-18.42	QP	
8		3.7073	15.00	9.86	24.86	46.00	-21.14	AVG	
9		10.6800	37.85	10.07	47.92	60.00	-12.08	QP	
10		10.6800	26.71	10.07	36.78	50.00	-13.22	AVG	
11		17.6528	37.87	10.36	48.23	60.00	-11.77	QP	
12	*	17.6528	30.47	10.36	40.83	50.00	-9.17	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN

### Neutral

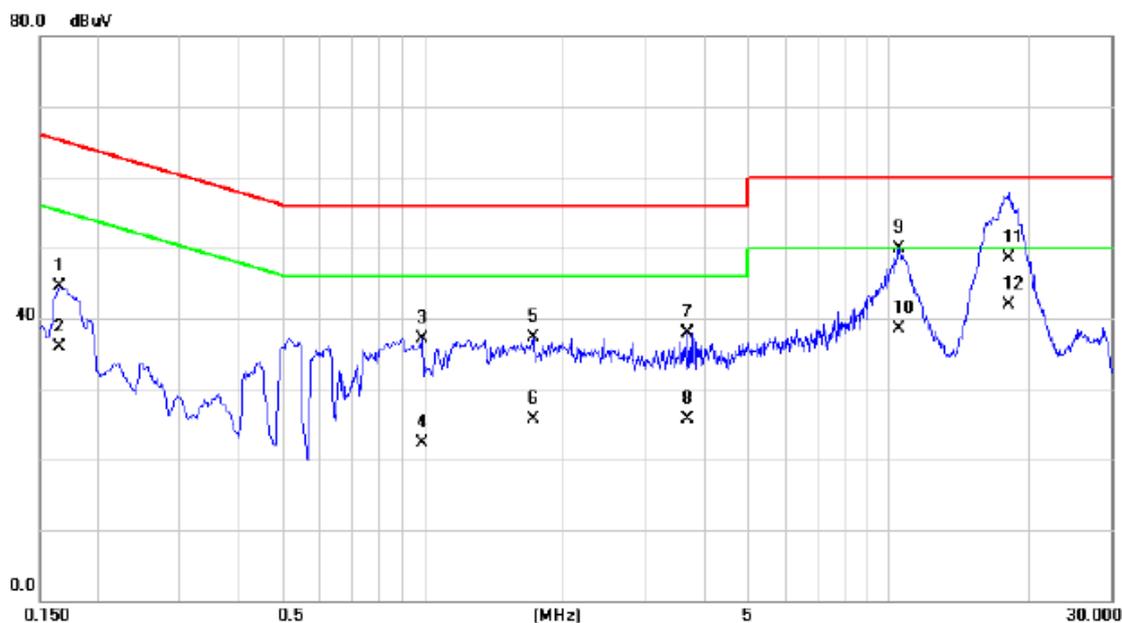

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1658	34.82	9.65	44.47	65.17	-20.70	QP	
2		0.1658	26.25	9.65	35.90	55.17	-19.27	AVG	
3		0.9960	27.40	9.70	37.10	56.00	-18.90	QP	
4		0.9960	12.59	9.70	22.29	46.00	-23.71	AVG	
5		1.7183	27.56	9.75	37.31	56.00	-18.69	QP	
6		1.7183	15.91	9.75	25.66	46.00	-20.34	AVG	
7		3.7073	28.08	9.86	37.94	56.00	-18.06	QP	
8		3.7073	15.76	9.86	25.62	46.00	-20.38	AVG	
9		10.5518	39.92	10.08	50.00	60.00	-10.00	QP	
10		10.5518	28.48	10.08	38.56	50.00	-11.44	AVG	
11		18.1568	38.18	10.40	48.58	60.00	-11.42	QP	
12	*	18.1568	31.44	10.40	41.84	50.00	-8.16	AVG	

**ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)**

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK

## Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.1600	43.17	-13.92	29.25	40.00	-10.75	QP	
2		154.1600	43.38	-12.76	30.62	43.50	-12.88	QP	
3		201.6900	39.11	-15.09	24.02	43.50	-19.48	QP	
4		131.8500	35.36	-13.27	22.09	43.50	-21.41	QP	
5		40.6700	36.08	-13.87	22.21	40.00	-17.79	QP	
6		551.8600	29.85	-5.25	24.60	46.00	-21.40	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK


## Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	154.1600	42.12	-12.76	29.36	43.50	-14.14	QP	
2		292.8700	37.03	-10.86	26.17	46.00	-19.83	QP	
3		551.8600	29.05	-5.25	23.80	46.00	-22.20	QP	
4		666.3200	29.93	-4.81	25.12	46.00	-20.88	QP	
5		806.0000	30.43	-2.31	28.12	46.00	-17.88	QP	
6		922.4000	29.71	0.16	29.87	46.00	-16.13	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00

### Vertical

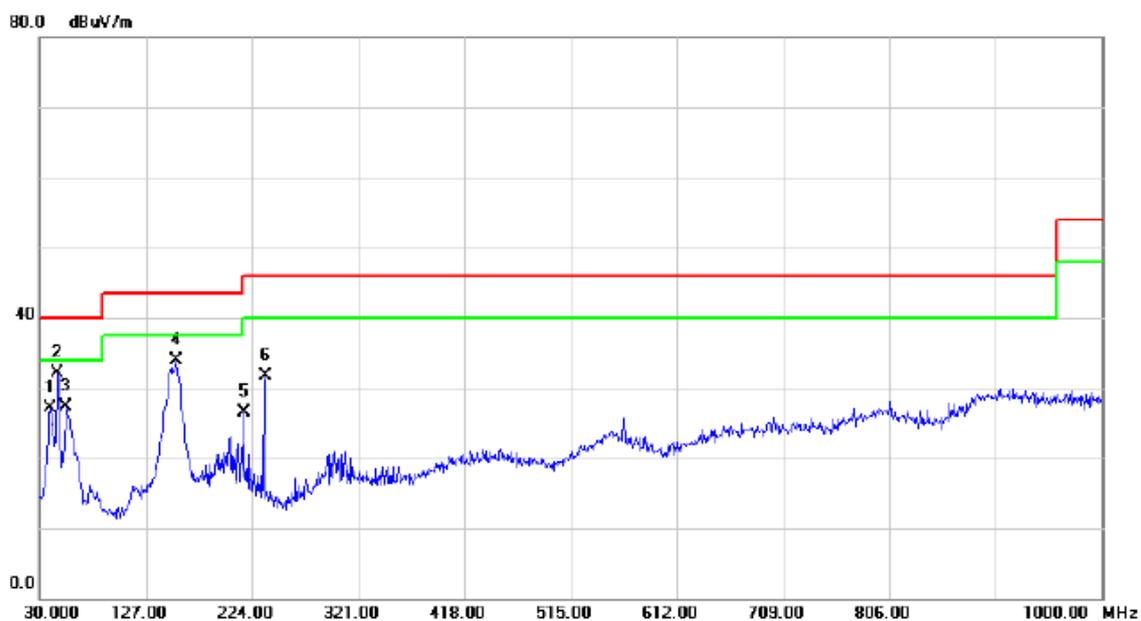

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.7000	41.16	-13.98	27.18	40.00	-12.82	QP	
2	*	46.4900	45.38	-13.32	32.06	40.00	-7.94	QP	
3		54.2500	40.89	-13.62	27.27	40.00	-12.73	QP	
4		154.1600	46.65	-12.76	33.89	43.50	-9.61	QP	
5		216.2400	40.97	-14.51	26.46	46.00	-19.54	QP	
6		235.6400	45.91	-14.23	31.68	46.00	-14.32	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


## Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		46.4900	35.18	-13.32	21.86	40.00	-18.14	QP	
2		154.1600	39.22	-12.76	26.46	43.50	-17.04	QP	
3		302.5700	39.97	-10.54	29.43	46.00	-16.57	QP	
4		554.7700	29.47	-5.40	24.07	46.00	-21.93	QP	
5		787.5700	29.95	-2.70	27.25	46.00	-18.75	QP	
6	*	946.6500	30.11	-0.15	29.96	46.00	-16.04	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


### Vertical

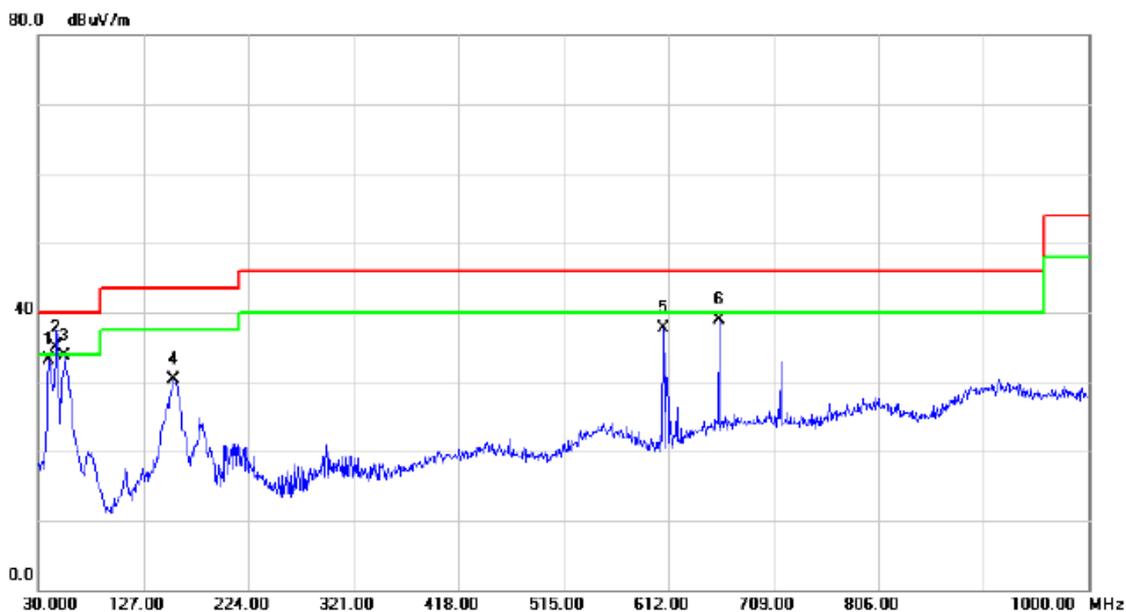

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.7000	47.03	-13.98	33.05	40.00	-6.95	QP	
2	*	46.4900	48.20	-13.32	34.88	40.00	-5.12	QP	
3		54.2500	47.33	-13.62	33.71	40.00	-6.29	QP	
4		155.1300	42.98	-12.70	30.28	43.50	-13.22	QP	
5		607.1500	45.18	-7.47	37.71	46.00	-8.29	QP	
6		658.5600	43.87	-4.95	38.92	46.00	-7.08	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


## Horizontal

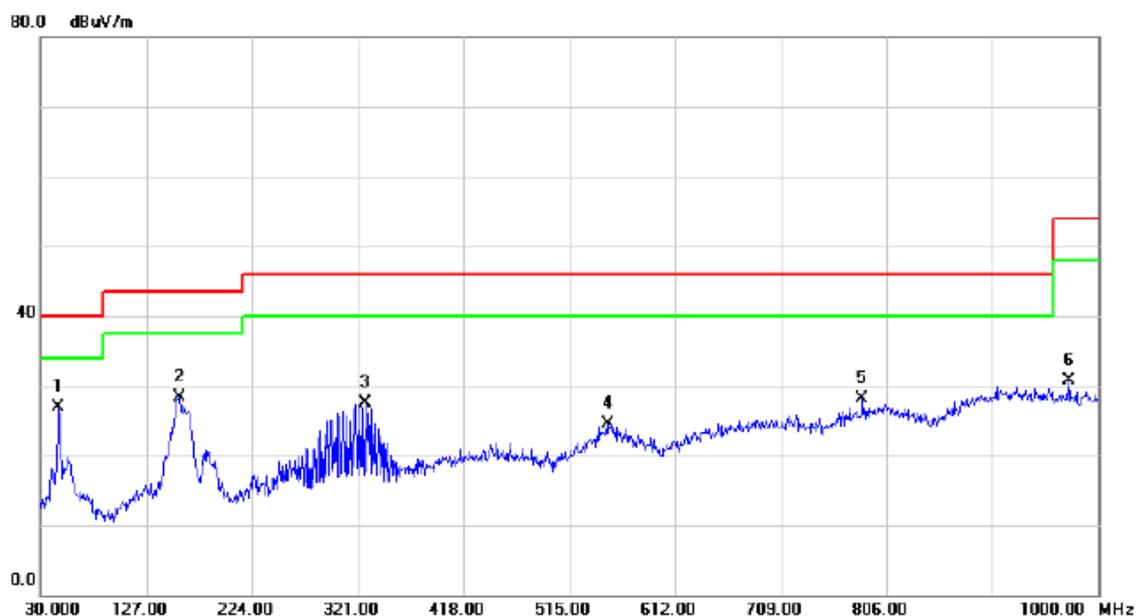

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	46.4900	40.27	-13.32	26.95	40.00	-13.05	QP	
2		157.0700	40.83	-12.59	28.24	43.50	-15.26	QP	
3		327.7900	38.46	-10.96	27.50	46.00	-18.50	QP	
4		549.9200	29.63	-5.15	24.48	46.00	-21.52	QP	
5		783.6900	31.08	-2.90	28.18	46.00	-17.82	QP	
6		973.8100	31.07	-0.27	30.80	54.00	-23.20	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150

## Vertical

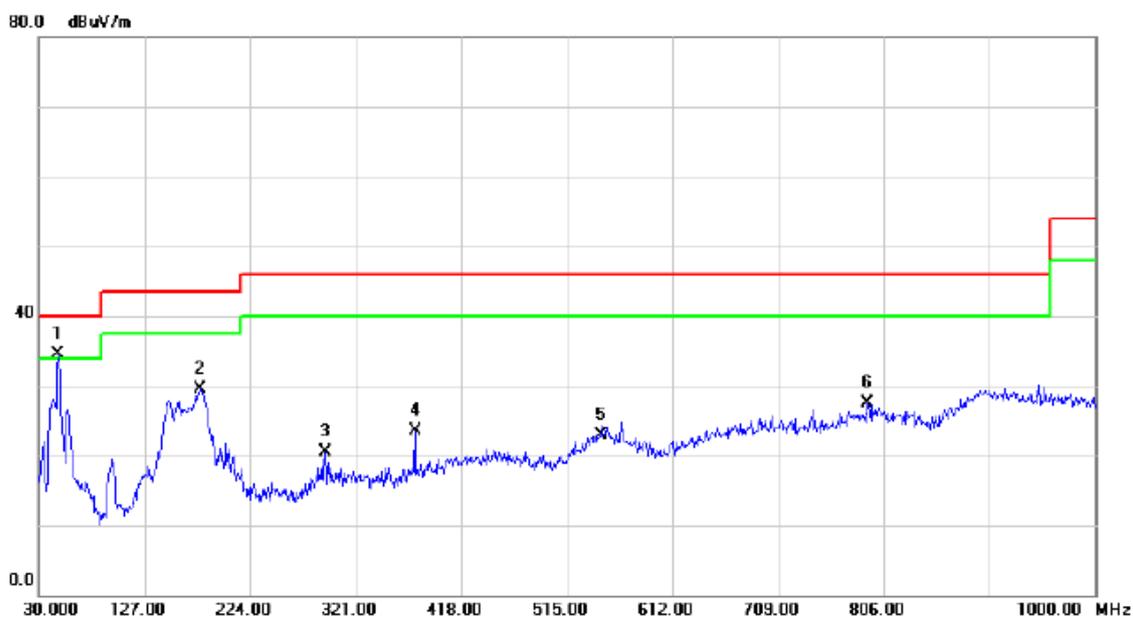

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	47.4600	48.04	-13.62	34.42	40.00	-5.58	QP	
2		178.4100	42.45	-12.93	29.52	43.50	-13.98	QP	
3		292.8700	31.29	-10.86	20.43	46.00	-25.57	QP	
4		375.3200	33.73	-10.32	23.41	46.00	-22.59	QP	
5		546.0400	28.47	-5.52	22.95	46.00	-23.05	QP	
6		790.4800	30.05	-2.56	27.49	46.00	-18.51	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		48.4300	36.22	-13.80	22.42	40.00	-17.58	QP	
2		159.0100	36.33	-12.48	23.85	43.50	-19.65	QP	
3		289.9600	34.86	-11.01	23.85	46.00	-22.15	QP	
4		548.9500	28.79	-5.24	23.55	46.00	-22.45	QP	
5		727.4300	29.30	-4.42	24.88	46.00	-21.12	QP	
6	*	903.9700	29.38	0.40	29.78	46.00	-16.22	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1532B528000


## Vertical

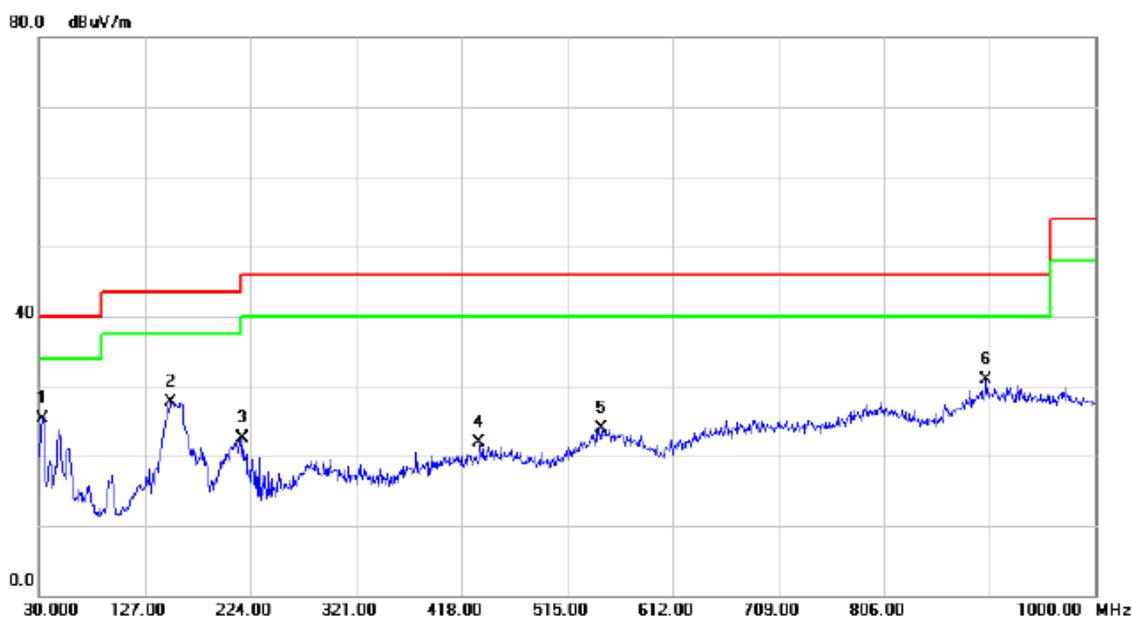

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	32.9100	39.59	-14.31	25.28	40.00	-14.72	QP	
2		150.2800	40.67	-13.00	27.67	43.50	-15.83	QP	
3		217.2100	36.90	-14.46	22.44	46.00	-23.56	QP	
4		434.4900	30.36	-8.45	21.91	46.00	-24.09	QP	
5		547.0100	29.38	-5.44	23.94	46.00	-22.06	QP	
6		900.0900	30.39	0.46	30.85	46.00	-15.15	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1532B528000


## Horizontal

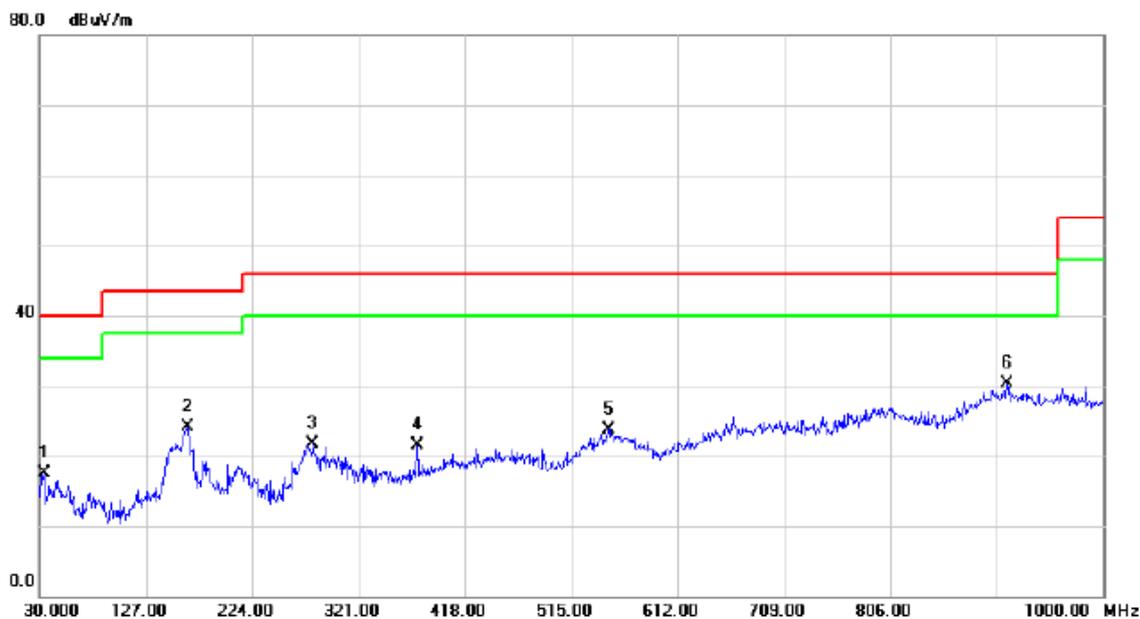

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		33.8800	31.63	-14.14	17.49	40.00	-22.51	QP	
2		164.8300	36.76	-12.65	24.11	43.50	-19.39	QP	
3		279.2900	34.14	-12.34	21.80	46.00	-24.20	QP	
4		374.3500	31.88	-10.36	21.52	46.00	-24.48	QP	
5		548.9500	29.00	-5.24	23.76	46.00	-22.24	QP	
6	*	912.7000	30.08	0.29	30.37	46.00	-15.63	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178

## Vertical

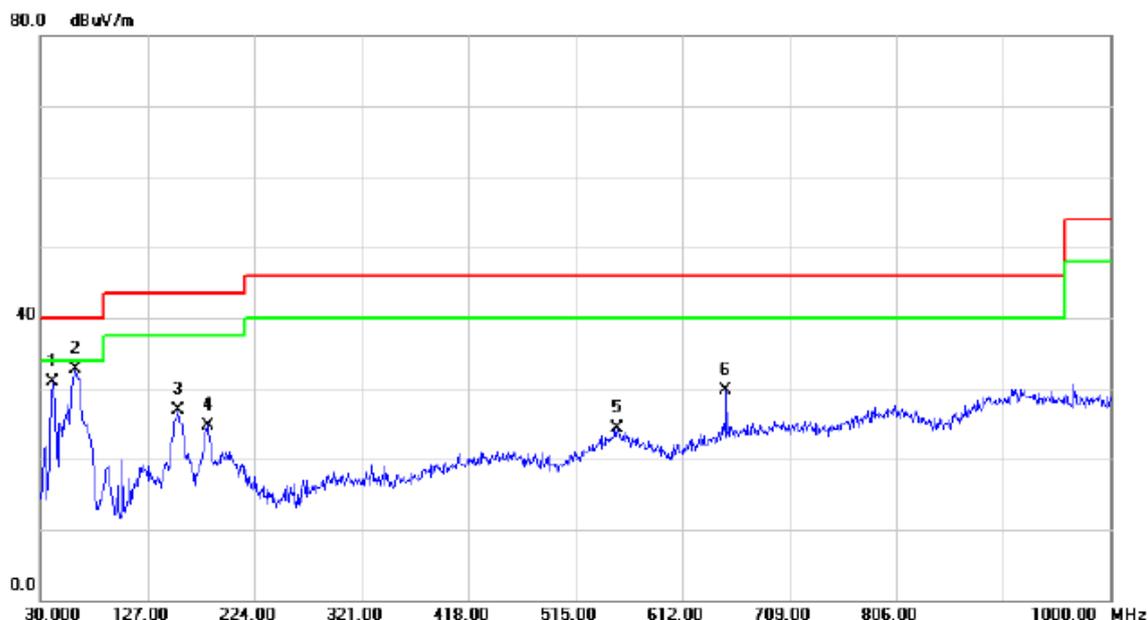

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		40.6700	44.77	-13.87	30.90	40.00	-9.10	QP	
2	*	61.0400	47.26	-14.63	32.63	40.00	-7.37	QP	
3		155.1300	39.54	-12.70	26.84	43.50	-16.66	QP	
4		181.3200	37.80	-13.13	24.67	43.50	-18.83	QP	
5		552.8300	29.54	-5.29	24.25	46.00	-21.75	QP	
6		651.7700	34.83	-5.08	29.75	46.00	-16.25	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


## Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		47.4600	33.15	-13.62	19.53	40.00	-20.47	QP	
2		332.6400	33.89	-11.05	22.84	46.00	-23.16	QP	
3		566.4100	30.31	-6.03	24.28	46.00	-21.72	QP	
4		676.9900	29.79	-4.62	25.17	46.00	-20.83	QP	
5		796.3000	29.90	-2.26	27.64	46.00	-18.36	QP	
6	*	896.2100	29.03	0.11	29.14	46.00	-16.86	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


## Vertical

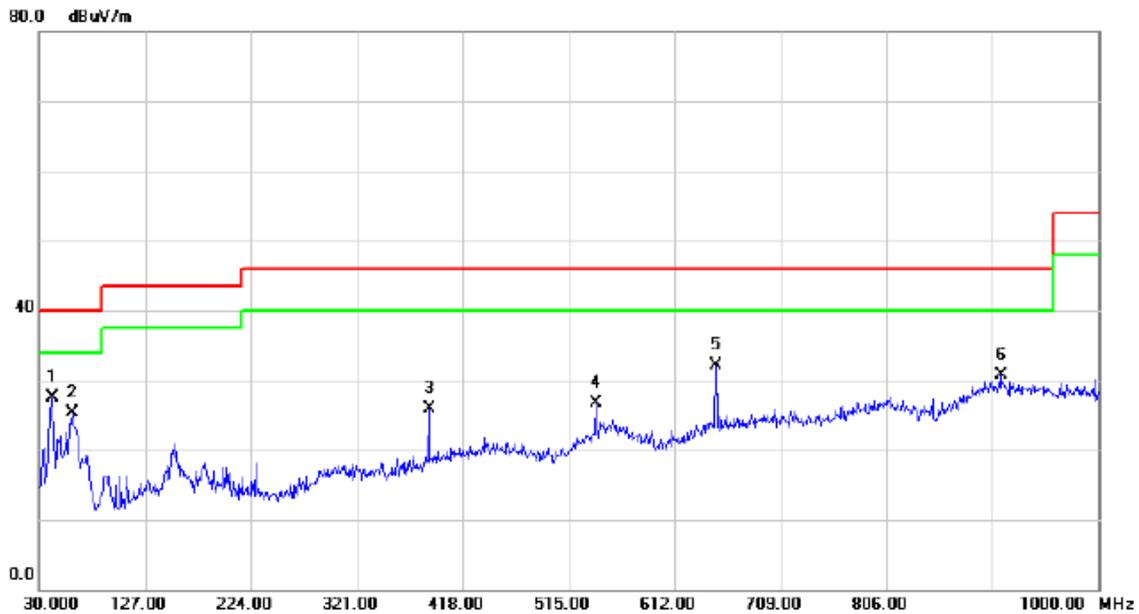

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	41.6400	41.21	-13.72	27.49	40.00	-12.51	QP	
2		60.0700	39.78	-14.55	25.23	40.00	-14.77	QP	
3		386.9600	35.70	-9.85	25.85	46.00	-20.15	QP	
4		540.2200	32.75	-6.09	26.66	46.00	-19.34	QP	
5		649.8300	37.17	-5.12	32.05	46.00	-13.95	QP	
6		910.7600	30.48	0.32	30.80	46.00	-15.20	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178

## Horizontal

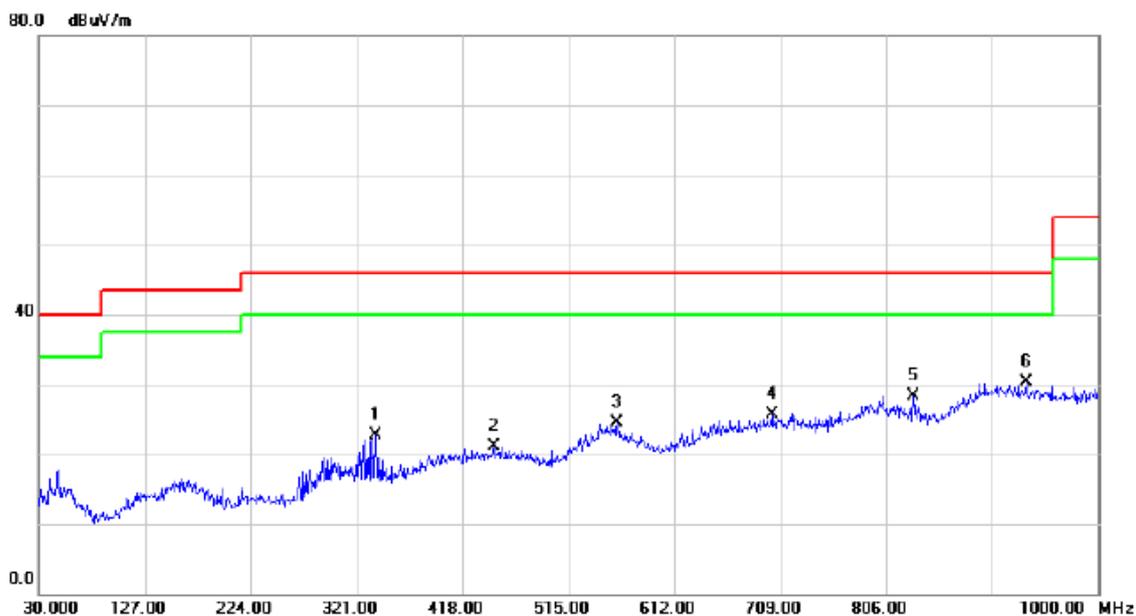

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		338.4600	33.90	-11.14	22.76	46.00	-23.24	QP	
2		447.1000	29.28	-8.13	21.15	46.00	-24.85	QP	
3		559.6200	30.15	-5.67	24.48	46.00	-21.52	QP	
4		701.2400	29.93	-4.21	25.72	46.00	-20.28	QP	
5		831.2200	31.69	-3.30	28.39	46.00	-17.61	QP	
6	*	934.0400	30.25	0.01	30.26	46.00	-15.74	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


## Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	40.6700	40.18	-13.87	26.31	40.00	-13.69	QP	
2		62.0100	40.05	-14.73	25.32	40.00	-14.68	QP	
3		460.6800	38.12	-8.46	29.66	46.00	-16.34	QP	
4		690.5700	33.33	-4.36	28.97	46.00	-17.03	QP	
5		792.4200	34.58	-2.46	32.12	46.00	-13.88	QP	
6		923.3700	30.45	0.15	30.60	46.00	-15.40	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


## Horizontal

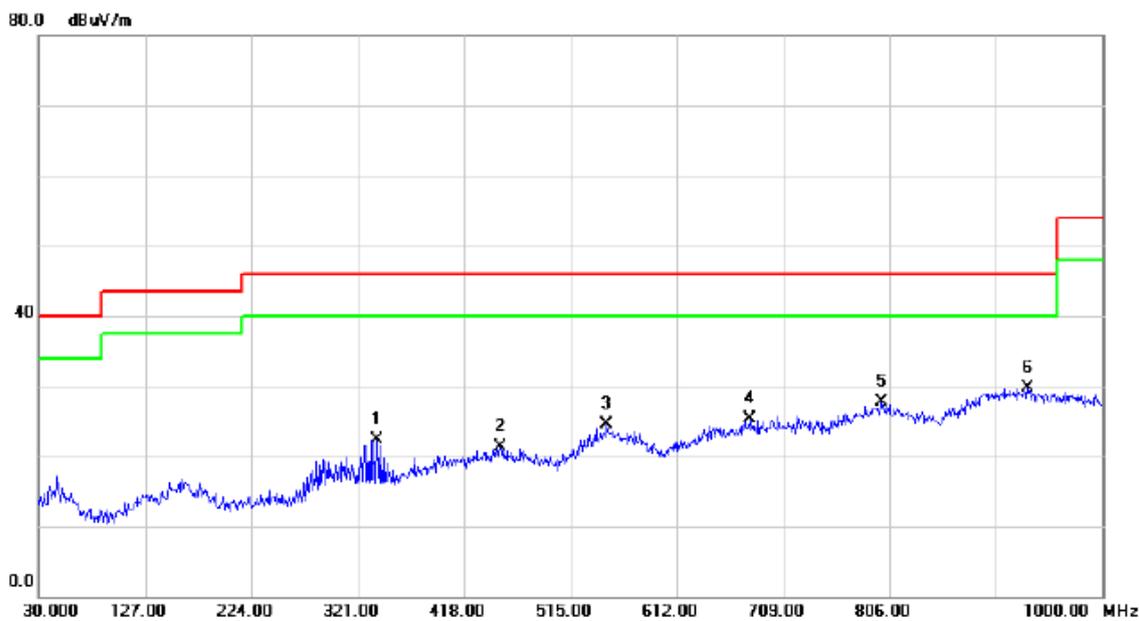

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		338.4600	33.41	-11.14	22.27	46.00	-23.73	QP	
2		450.9800	29.41	-8.09	21.32	46.00	-24.68	QP	
3		547.9800	29.78	-5.33	24.45	46.00	-21.55	QP	
4		678.9300	29.86	-4.58	25.28	46.00	-20.72	QP	
5		799.2100	29.82	-2.11	27.71	46.00	-18.29	QP	
6	*	932.1000	29.74	0.04	29.78	46.00	-16.22	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178

### Vertical

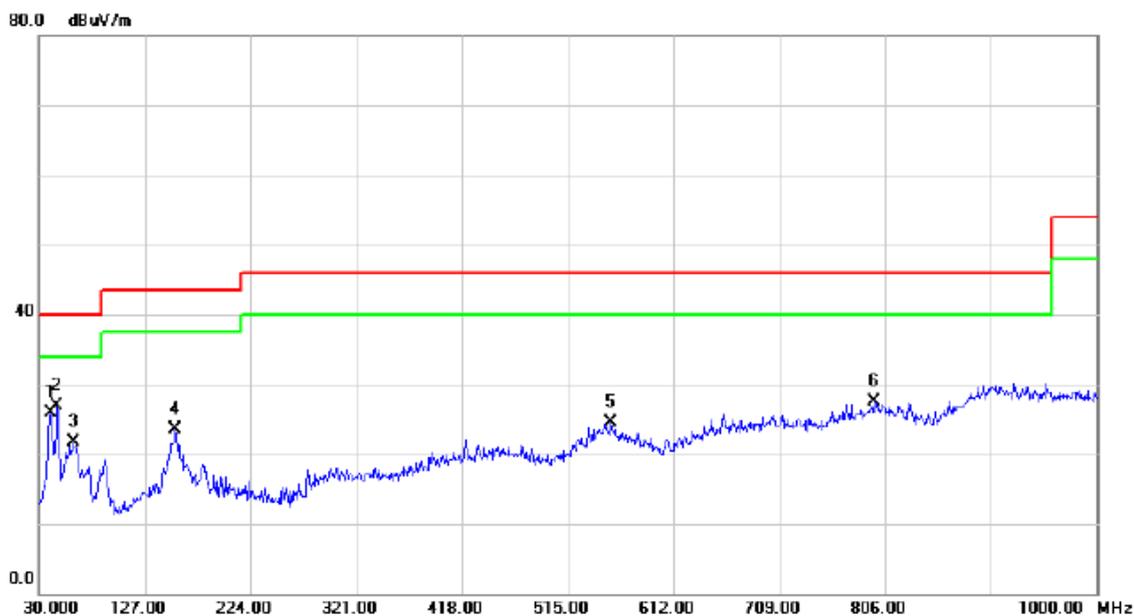

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		40.6700	39.72	-13.87	25.85	40.00	-14.15	QP	
2	*	46.4900	40.15	-13.32	26.83	40.00	-13.17	QP	
3		61.0400	36.36	-14.63	21.73	40.00	-18.27	QP	
4		155.1300	36.14	-12.70	23.44	43.50	-20.06	QP	
5		554.7700	29.84	-5.40	24.44	46.00	-21.56	QP	
6		796.3000	29.69	-2.26	27.43	46.00	-18.57	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178

## Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		323.9100	32.17	-10.89	21.28	46.00	-24.72	QP	
2		424.7900	30.47	-8.70	21.77	46.00	-24.23	QP	
3		554.7700	29.25	-5.40	23.85	46.00	-22.15	QP	
4		689.6000	30.31	-4.38	25.93	46.00	-20.07	QP	
5		812.7900	30.70	-2.57	28.13	46.00	-17.87	QP	
6	*	896.2100	33.15	0.11	33.26	46.00	-12.74	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178

## Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		40.6700	39.44	-13.87	25.57	40.00	-14.43	QP	
2	*	60.0700	43.10	-14.55	28.55	40.00	-11.45	QP	
3		153.1900	35.54	-12.82	22.72	43.50	-20.78	QP	
4		552.8300	29.46	-5.29	24.17	46.00	-21.83	QP	
5		800.1800	30.24	-2.08	28.16	46.00	-17.84	QP	
6		896.2100	29.60	0.11	29.71	46.00	-16.29	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


## Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		151.2500	30.10	-12.93	17.17	43.50	-26.33	QP	
2		329.7300	33.22	-11.00	22.22	46.00	-23.78	QP	
3		552.8300	30.15	-5.29	24.86	46.00	-21.14	QP	
4		677.9600	30.45	-4.59	25.86	46.00	-20.14	QP	
5		804.0600	29.75	-2.22	27.53	46.00	-18.47	QP	
6	*	934.0400	30.60	0.01	30.61	46.00	-15.39	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


## Vertical

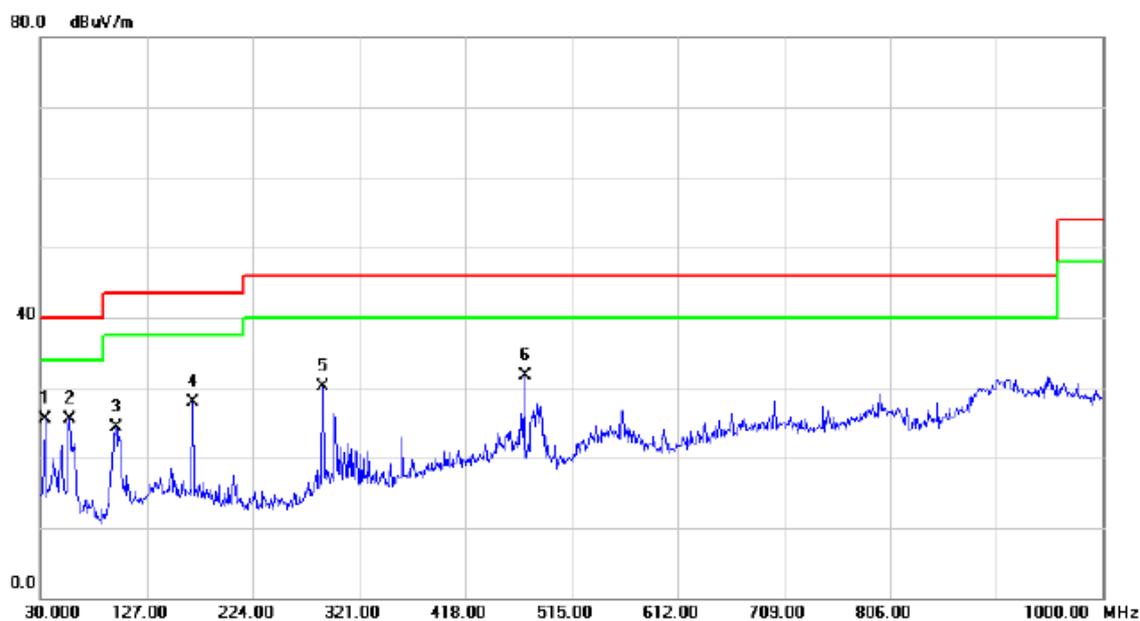

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		33.8800	39.71	-14.14	25.57	40.00	-14.43	QP	
2		56.1900	39.47	-13.88	25.59	40.00	-14.41	QP	
3		98.8700	40.54	-16.15	24.39	43.50	-19.11	QP	
4		168.7100	40.80	-12.82	27.98	43.50	-15.52	QP	
5		288.0200	41.32	-11.25	30.07	46.00	-15.93	QP	
6	*	472.3200	40.68	-8.92	31.76	46.00	-14.24	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


## Horizontal

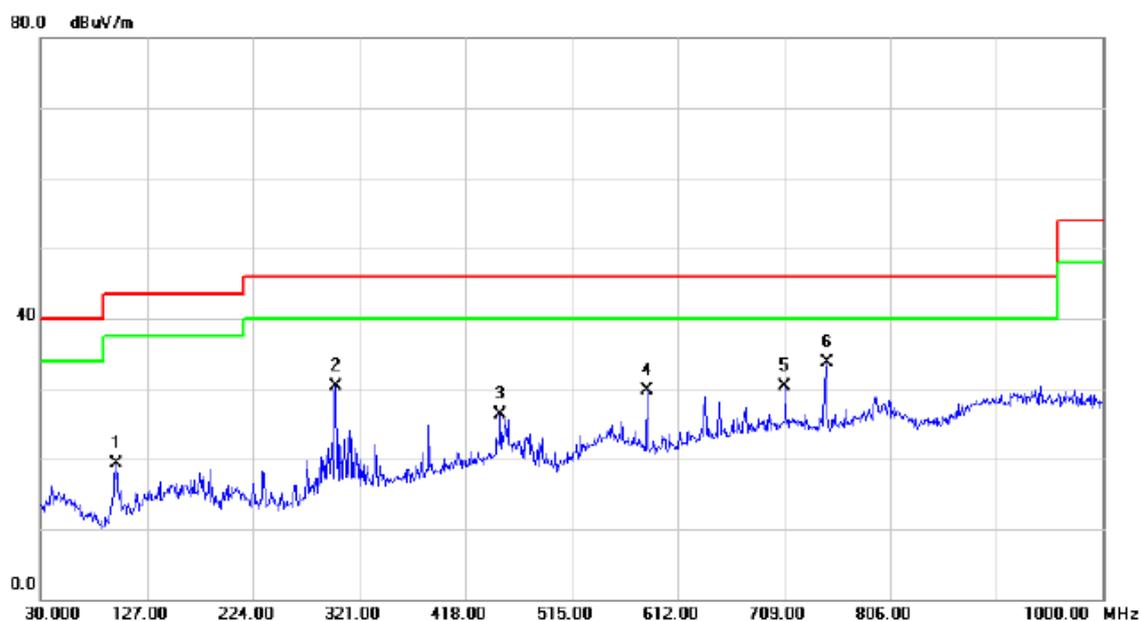

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		98.8700	35.46	-16.15	19.31	43.50	-24.19	QP	
2		299.6600	40.82	-10.51	30.31	46.00	-15.69	QP	
3		450.0100	34.36	-8.05	26.31	46.00	-19.69	QP	
4		583.8700	36.72	-6.98	29.74	46.00	-16.26	QP	
5		709.9700	34.59	-4.28	30.31	46.00	-15.69	QP	
6	*	747.8000	38.21	-4.58	33.63	46.00	-12.37	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN


## Vertical

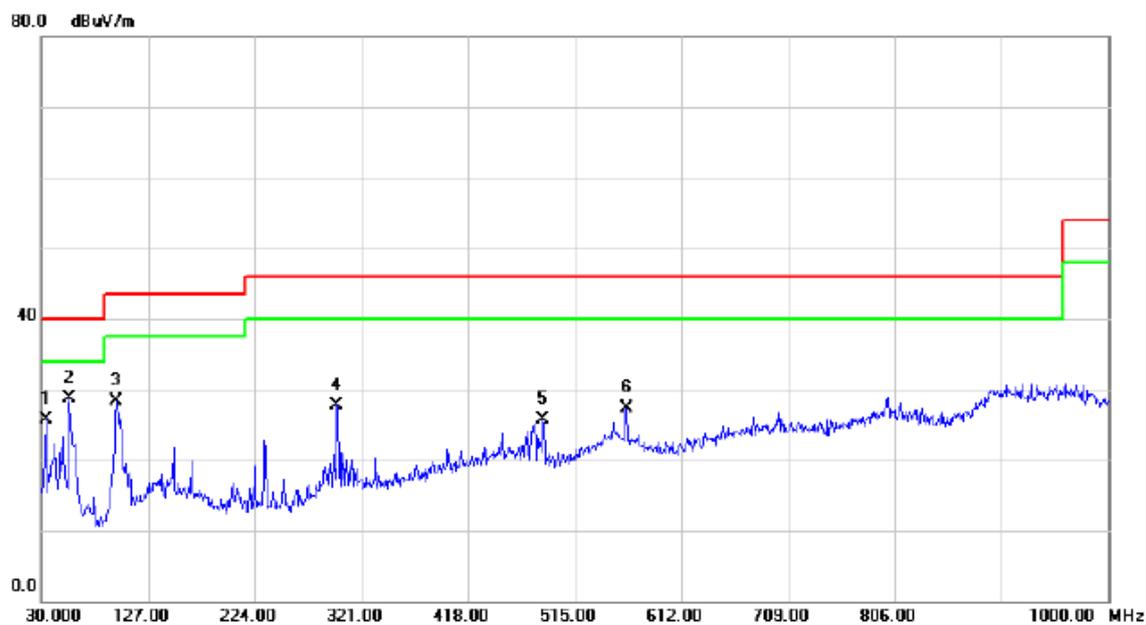

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		33.8800	39.94	-14.14	25.80	40.00	-14.20	QP	
2	*	55.2200	42.44	-13.76	28.68	40.00	-11.32	QP	
3		97.9000	44.57	-16.29	28.28	43.50	-15.22	QP	
4		298.6900	38.22	-10.56	27.66	46.00	-18.34	QP	
5		485.9000	35.11	-9.44	25.67	46.00	-20.33	QP	
6		562.5300	33.13	-5.82	27.31	46.00	-18.69	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN

## Horizontal

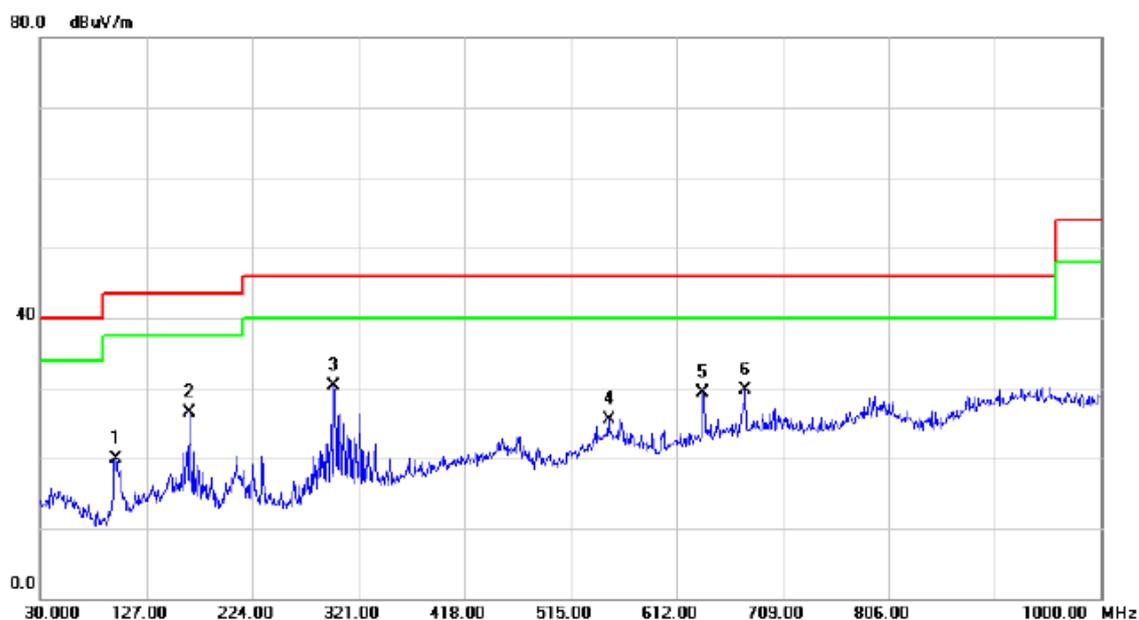


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		98.8700	36.14	-16.15	19.99	43.50	-23.51	QP	
2		165.8000	39.22	-12.68	26.54	43.50	-16.96	QP	
3	*	298.6900	40.85	-10.56	30.29	46.00	-15.71	QP	
4		549.9200	30.73	-5.15	25.58	46.00	-20.42	QP	
5		635.2800	35.13	-5.92	29.21	46.00	-16.79	QP	
6		675.0500	34.41	-4.65	29.76	46.00	-16.24	QP	

## **ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)**

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK


## Vertical

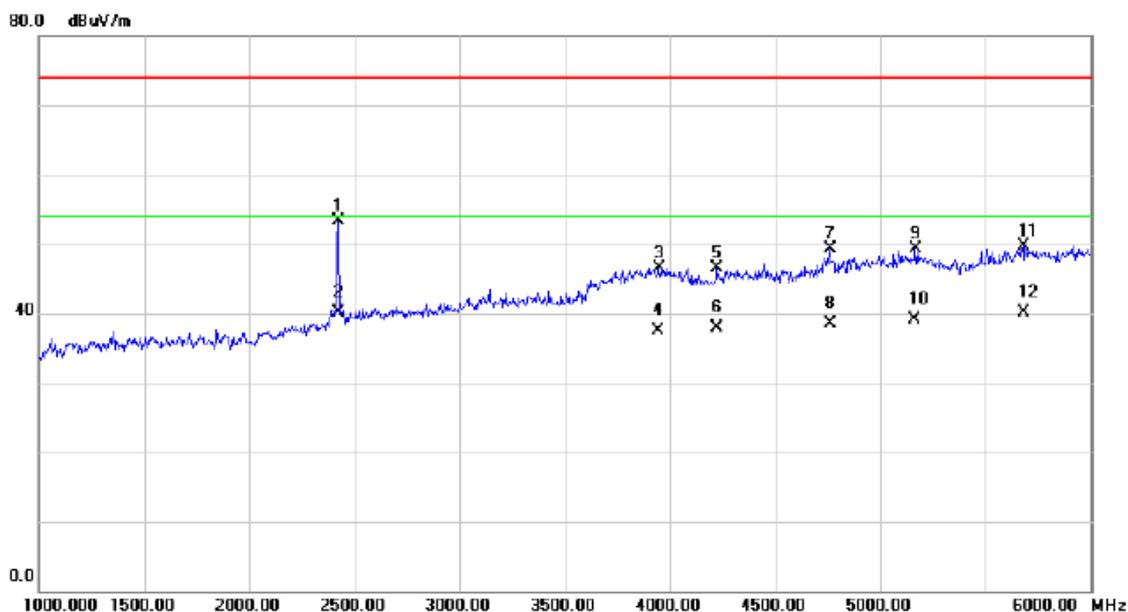

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2420.000	53.62	-0.23	53.39	74.00	-20.61	peak	
2	*	2420.000	40.43	-0.23	40.20	54.00	-13.80	AVG	
3		3947.500	40.35	6.24	46.59	74.00	-27.41	peak	
4		3947.500	31.32	6.24	37.56	54.00	-16.44	AVG	
5		4225.000	39.71	6.76	46.47	74.00	-27.53	peak	
6		4225.000	31.09	6.76	37.85	54.00	-16.15	AVG	
7		4762.500	41.93	7.30	49.23	74.00	-24.77	peak	
8		4762.500	31.26	7.30	38.56	54.00	-15.44	AVG	
9		5167.500	41.08	8.14	49.22	74.00	-24.78	peak	
10		5167.500	30.98	8.14	39.12	54.00	-14.88	AVG	
11		5680.000	40.37	9.36	49.73	74.00	-24.27	peak	
12		5680.000	30.76	9.36	40.12	54.00	-13.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK


## Horizontal

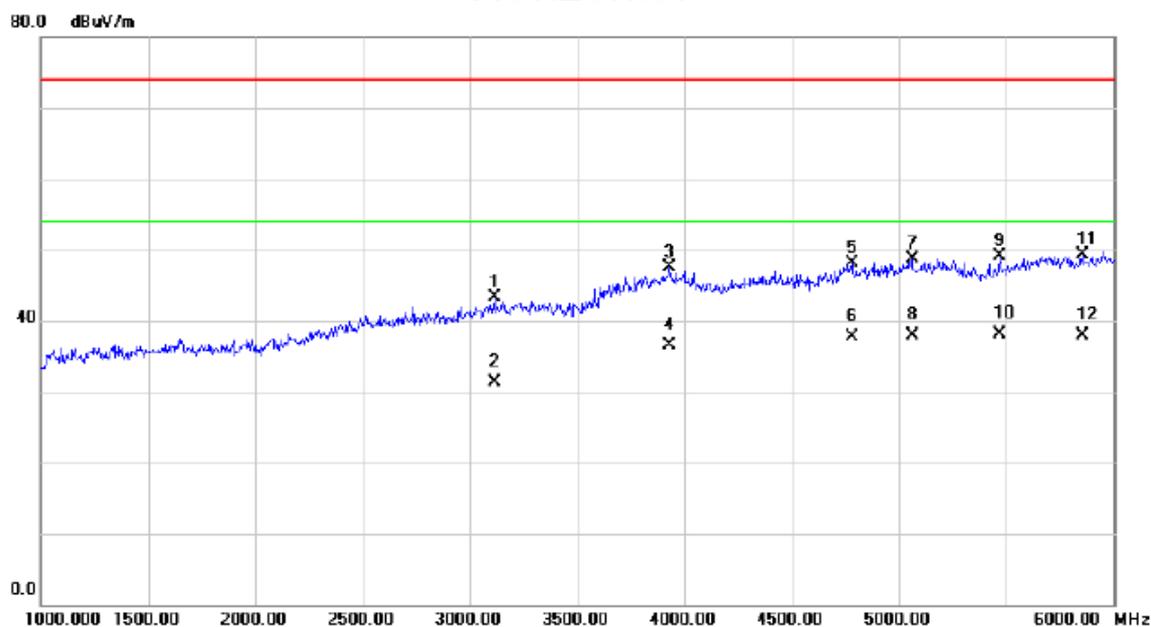

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3117.500	41.27	2.12	43.39	74.00	-30.61	peak	
2		3117.500	29.13	2.12	31.25	54.00	-22.75	AVG	
3		3930.000	41.43	6.11	47.54	74.00	-26.46	peak	
4		3930.000	30.34	6.11	36.45	54.00	-17.55	AVG	
5		4780.000	40.82	7.33	48.15	74.00	-25.85	peak	
6		4780.000	30.33	7.33	37.66	54.00	-16.34	AVG	
7		5060.000	40.94	7.82	48.76	74.00	-25.24	peak	
8		5060.000	30.16	7.82	37.98	54.00	-16.02	AVG	
9		5472.500	40.08	9.06	49.14	74.00	-24.86	peak	
10	*	5472.500	29.06	9.06	38.12	54.00	-15.88	AVG	
11		5855.000	39.69	9.57	49.26	74.00	-24.74	peak	
12		5855.000	28.42	9.57	37.99	54.00	-16.01	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


## Vertical

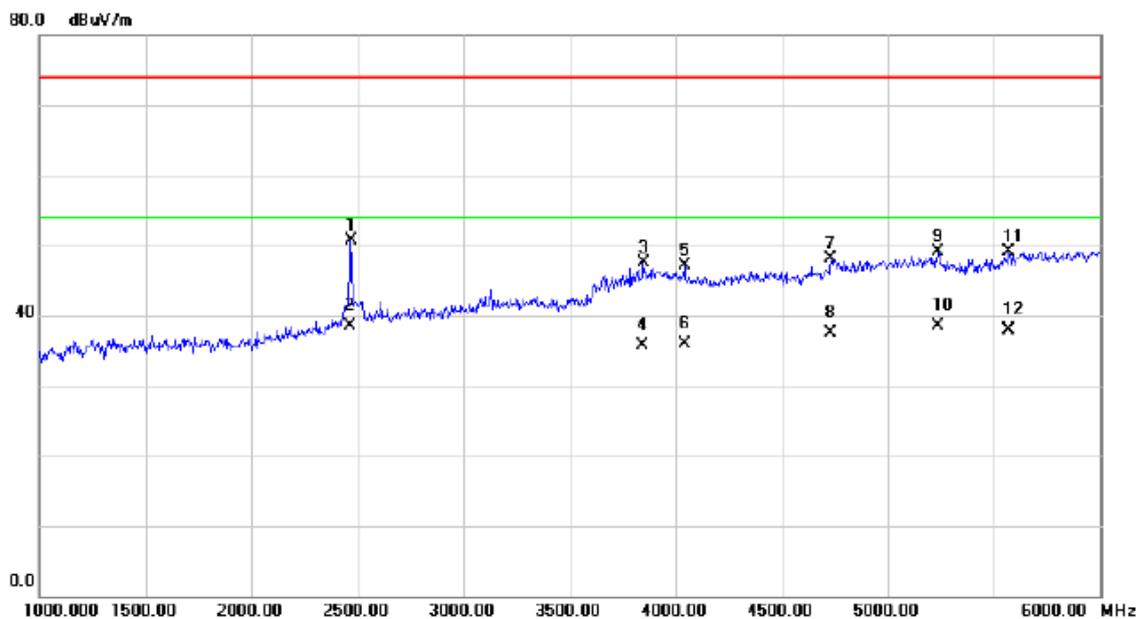

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2467.500	50.80	-0.05	50.75	74.00	-23.25	peak	
2	*	2467.500	38.51	-0.05	38.46	54.00	-15.54	AVG	
3		3847.500	41.97	5.51	47.48	74.00	-26.52	peak	
4		3847.500	30.27	5.51	35.78	54.00	-18.22	AVG	
5		4040.000	40.51	6.65	47.16	74.00	-26.84	peak	
6		4040.000	29.20	6.65	35.85	54.00	-18.15	AVG	
7		4732.500	40.89	7.25	48.14	74.00	-25.86	peak	
8		4732.500	30.20	7.25	37.45	54.00	-16.55	AVG	
9		5235.000	40.80	8.34	49.14	74.00	-24.86	peak	
10		5235.000	30.12	8.34	38.46	54.00	-15.54	AVG	
11		5572.500	39.90	9.23	49.13	74.00	-24.87	peak	
12		5572.500	28.63	9.23	37.86	54.00	-16.14	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


## Horizontal

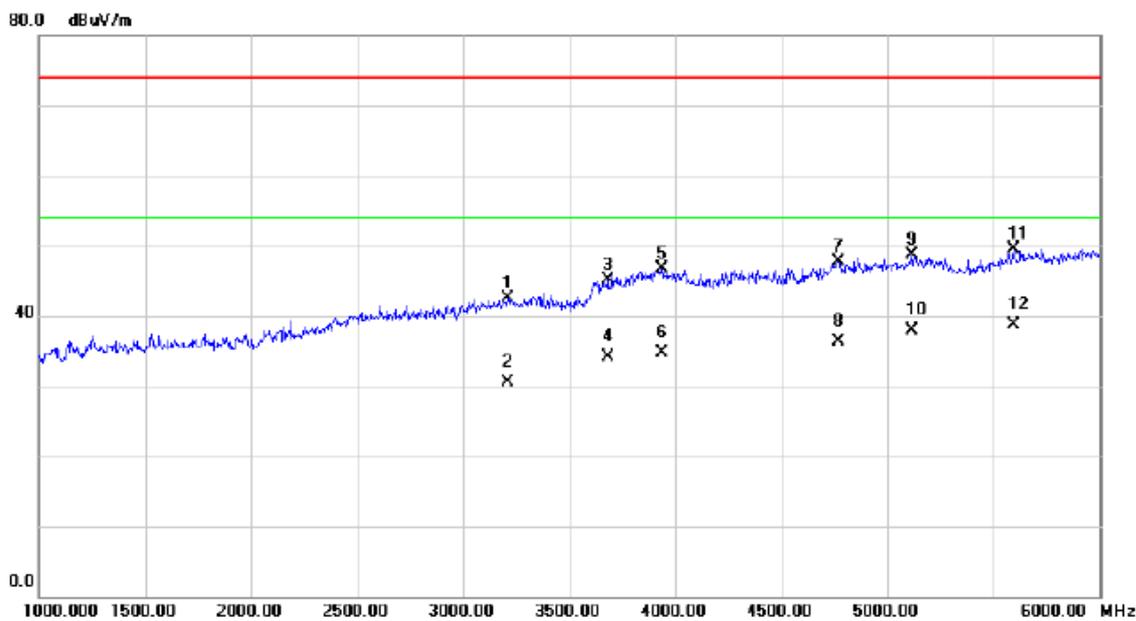

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3210.000	40.19	2.33	42.52	74.00	-31.48	peak	
2		3210.000	28.12	2.33	30.45	54.00	-23.55	AVG	
3		3680.000	40.72	4.30	45.02	74.00	-28.98	peak	
4		3680.000	29.86	4.30	34.16	54.00	-19.84	AVG	
5		3937.500	40.48	6.16	46.64	74.00	-27.36	peak	
6		3937.500	28.62	6.16	34.78	54.00	-19.22	AVG	
7		4770.000	40.45	7.31	47.76	74.00	-26.24	peak	
8		4770.000	28.92	7.31	36.23	54.00	-17.77	AVG	
9		5117.500	40.77	7.99	48.76	74.00	-25.24	peak	
10		5117.500	29.87	7.99	37.86	54.00	-16.14	AVG	
11		5595.000	40.33	9.26	49.59	74.00	-24.41	peak	
12	*	5595.000	29.50	9.26	38.76	54.00	-15.24	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


## Vertical

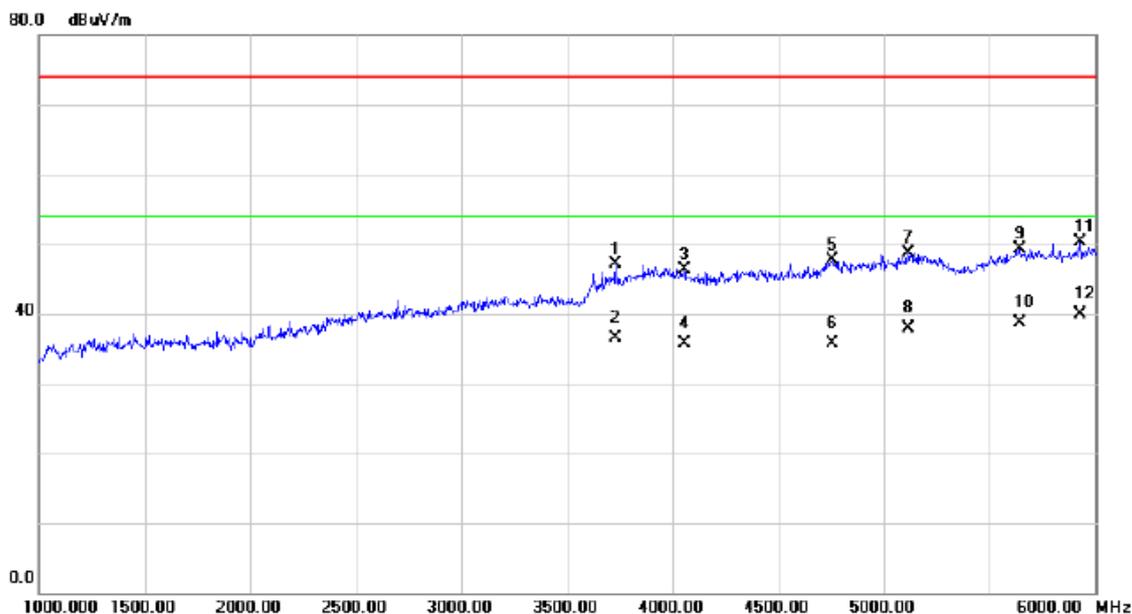

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3732.500	42.53	4.67	47.20	74.00	-26.80	peak	
2		3732.500	31.89	4.67	36.56	54.00	-17.44	AVG	
3		4057.500	39.55	6.66	46.21	74.00	-27.79	peak	
4		4057.500	29.13	6.66	35.79	54.00	-18.21	AVG	
5		4757.500	40.37	7.29	47.66	74.00	-26.34	peak	
6		4757.500	28.40	7.29	35.69	54.00	-18.31	AVG	
7		5115.000	40.77	7.99	48.76	74.00	-25.24	peak	
8		5115.000	29.85	7.99	37.84	54.00	-16.16	AVG	
9		5645.000	40.03	9.32	49.35	74.00	-24.65	peak	
10		5645.000	29.37	9.32	38.69	54.00	-15.31	AVG	
11		5932.500	40.61	9.67	50.28	74.00	-23.72	peak	
12	*	5932.500	30.19	9.67	39.86	54.00	-14.14	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


## Horizontal

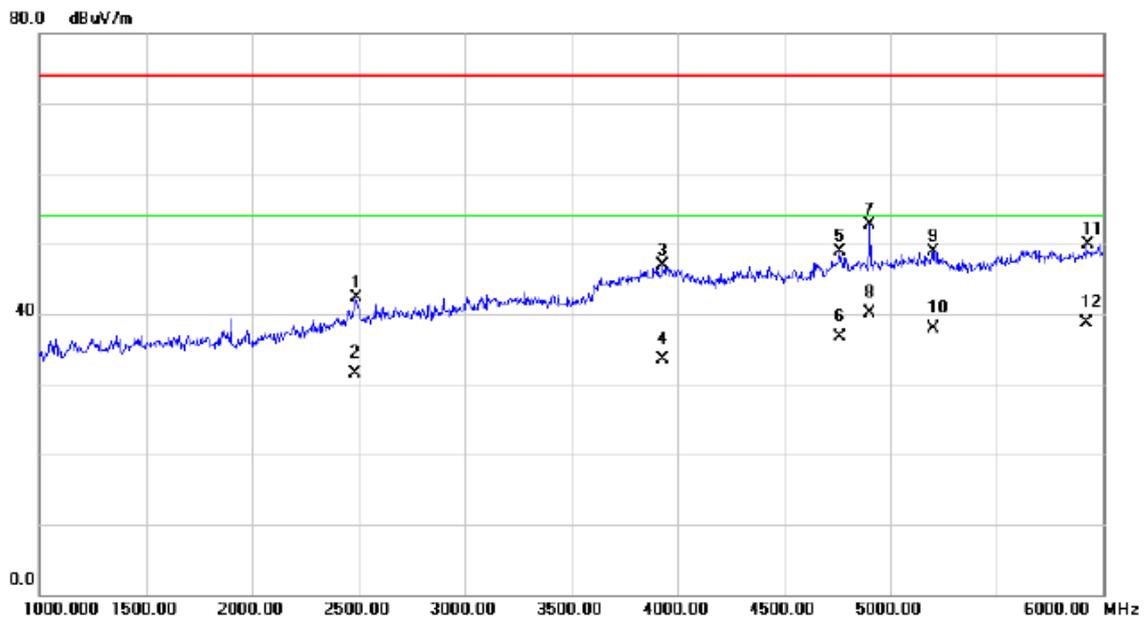

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2487.500	42.27	0.04	42.31	74.00	-31.69	peak	
2		2487.500	31.51	0.04	31.55	54.00	-22.45	AVG	
3		3930.000	40.81	6.11	46.92	74.00	-27.08	peak	
4		3930.000	27.45	6.11	33.56	54.00	-20.44	AVG	
5		4762.500	41.54	7.30	48.84	74.00	-25.16	peak	
6		4762.500	29.44	7.30	36.74	54.00	-17.26	AVG	
7		4905.000	45.18	7.50	52.68	74.00	-21.32	peak	
8	*	4905.000	32.62	7.50	40.12	54.00	-13.88	AVG	
9		5200.000	40.58	8.24	48.82	74.00	-25.18	peak	
10		5200.000	29.65	8.24	37.89	54.00	-16.11	AVG	
11		5927.500	40.21	9.66	49.87	74.00	-24.13	peak	
12		5927.500	29.11	9.66	38.77	54.00	-15.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Vertical

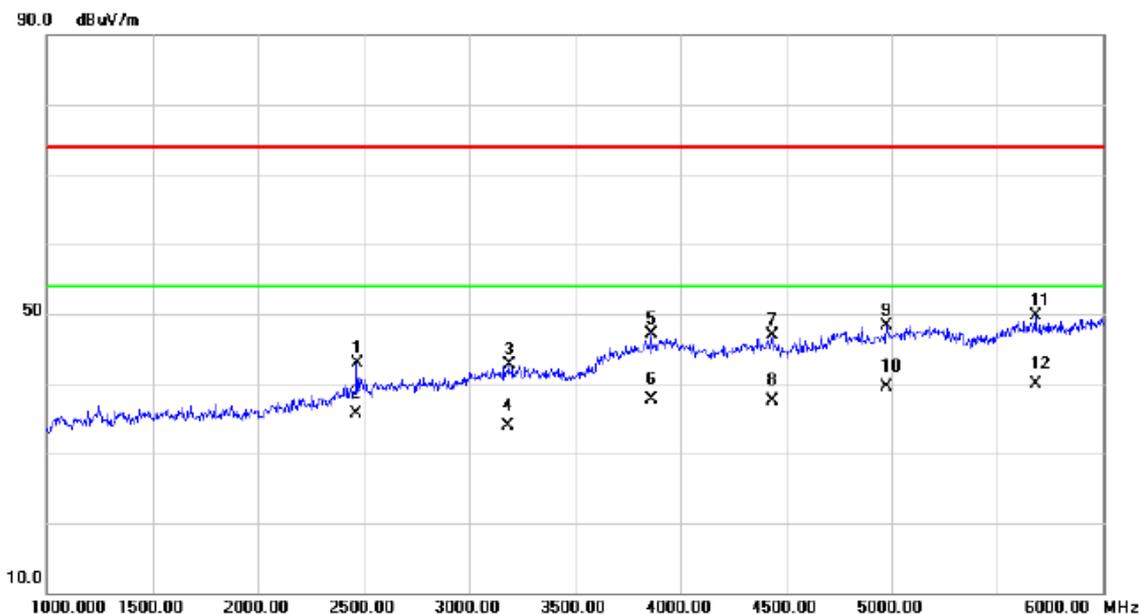

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2467.500	42.97	-0.05	42.92	74.00	-31.08	peak	
2		2467.500	35.68	-0.05	35.63	54.00	-18.37	AVG	
3		3187.500	40.52	2.28	42.80	74.00	-31.20	peak	
4		3187.500	31.57	2.28	33.85	54.00	-20.15	AVG	
5		3860.000	41.50	5.61	47.11	74.00	-26.89	peak	
6		3860.000	32.02	5.61	37.63	54.00	-16.37	AVG	
7		4435.000	39.98	6.88	46.86	74.00	-27.14	peak	
8		4435.000	30.53	6.88	37.41	54.00	-16.59	AVG	
9		4975.000	40.73	7.60	48.33	74.00	-25.67	peak	
10		4975.000	31.92	7.60	39.52	54.00	-14.48	AVG	
11		5680.000	40.40	9.36	49.76	74.00	-24.24	peak	
12	*	5680.000	30.53	9.36	39.89	54.00	-14.11	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Horizontal

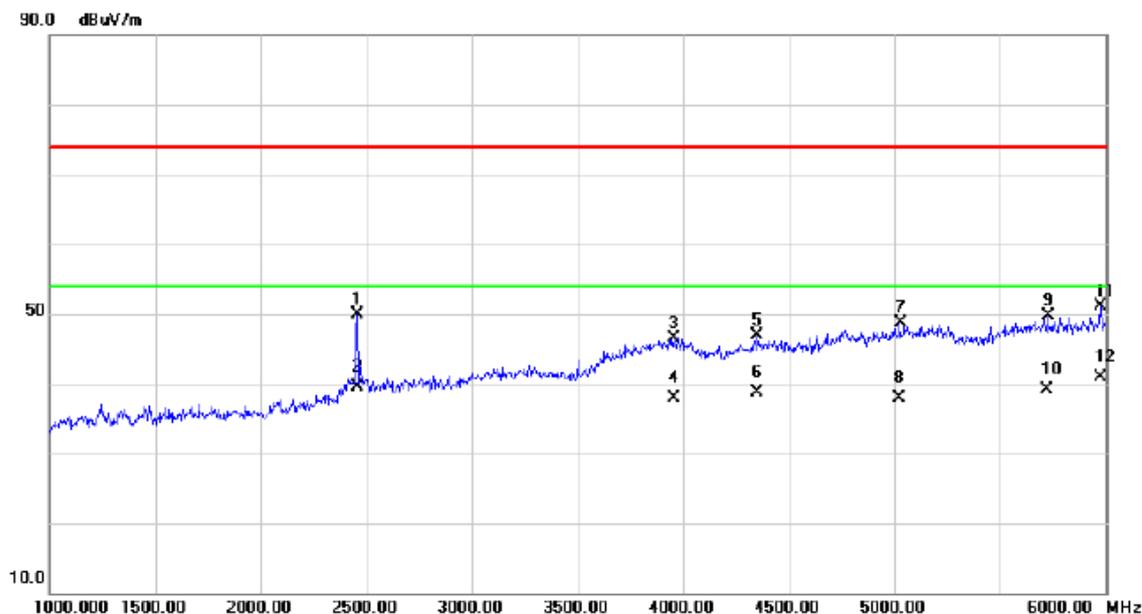

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2457.500	50.04	-0.09	49.95	74.00	-24.05	peak	
2		2457.500	39.61	-0.09	39.52	54.00	-14.48	AVG	
3		3957.500	40.28	6.31	46.59	74.00	-27.41	peak	
4		3957.500	31.54	6.31	37.85	54.00	-16.15	AVG	
5		4352.500	40.10	6.84	46.94	74.00	-27.06	peak	
6		4352.500	31.79	6.84	38.63	54.00	-15.37	AVG	
7		5027.500	41.06	7.72	48.78	74.00	-25.22	peak	
8		5027.500	30.13	7.72	37.85	54.00	-16.15	AVG	
9		5727.500	40.36	9.41	49.77	74.00	-24.23	peak	
10		5727.500	29.79	9.41	39.20	54.00	-14.80	AVG	
11		5975.000	41.42	9.71	51.13	74.00	-22.87	peak	
12	*	5975.000	31.14	9.71	40.85	54.00	-13.15	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1532B528000


## Vertical

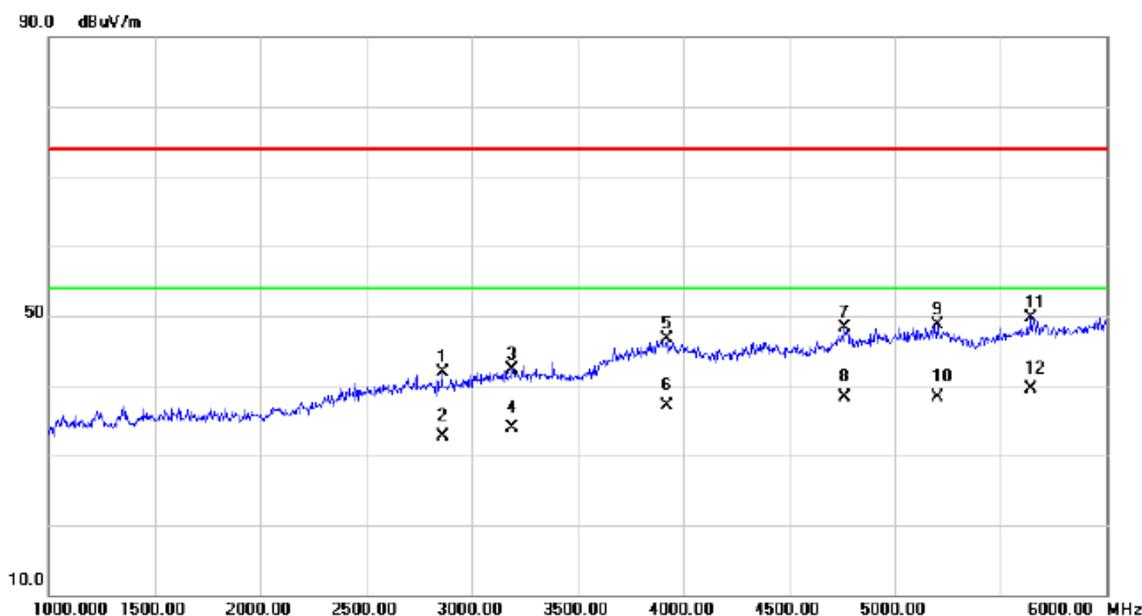

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2862.500	40.54	1.35	41.89	74.00	-32.11	peak	
2		2862.500	31.28	1.35	32.63	54.00	-21.37	AVG	
3		3190.000	40.09	2.28	42.37	74.00	-31.63	peak	
4		3190.000	31.60	2.28	33.88	54.00	-20.12	AVG	
5		3920.000	40.70	6.04	46.74	74.00	-27.26	peak	
6		3920.000	31.10	6.04	37.14	54.00	-16.86	AVG	
7		4765.000	41.05	7.30	48.35	74.00	-25.65	peak	
8		4765.000	31.05	7.30	38.35	54.00	-15.65	AVG	
9		5202.500	40.38	8.24	48.62	74.00	-25.38	peak	
10		5202.500	30.03	8.24	38.27	54.00	-15.73	AVG	
11		5642.500	40.33	9.32	49.65	74.00	-24.35	peak	
12	*	5642.500	30.26	9.32	39.58	54.00	-14.42	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1532B528000


## Horizontal

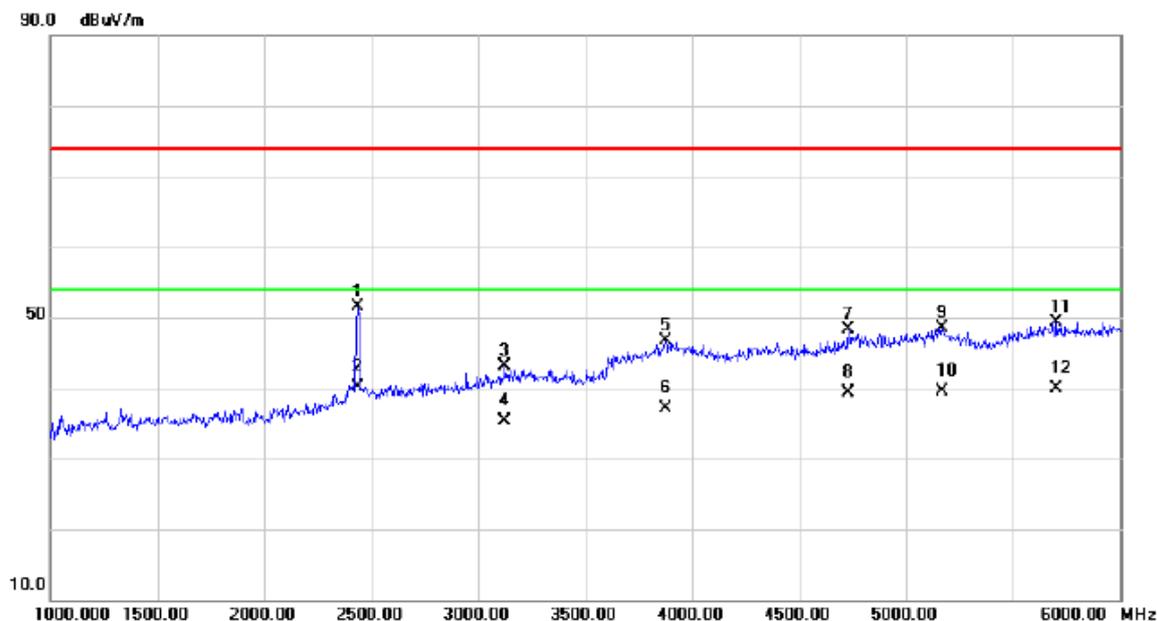

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2437.500	51.69	-0.16	51.53	74.00	-22.47	peak	
2	*	2437.500	40.36	-0.16	40.20	54.00	-13.80	AVG	
3		3125.000	40.93	2.13	43.06	74.00	-30.94	peak	
4		3125.000	33.17	2.13	35.30	54.00	-18.70	AVG	
5		3875.000	41.04	5.72	46.76	74.00	-27.24	peak	
6		3875.000	31.34	5.72	37.06	54.00	-16.94	AVG	
7		4732.500	40.96	7.25	48.21	74.00	-25.79	peak	
8		4732.500	32.05	7.25	39.30	54.00	-14.70	AVG	
9		5170.000	40.39	8.14	48.53	74.00	-25.47	peak	
10		5170.000	31.31	8.14	39.45	54.00	-14.55	AVG	
11		5705.000	39.95	9.39	49.34	74.00	-24.66	peak	
12		5705.000	30.48	9.39	39.87	54.00	-14.13	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Vertical

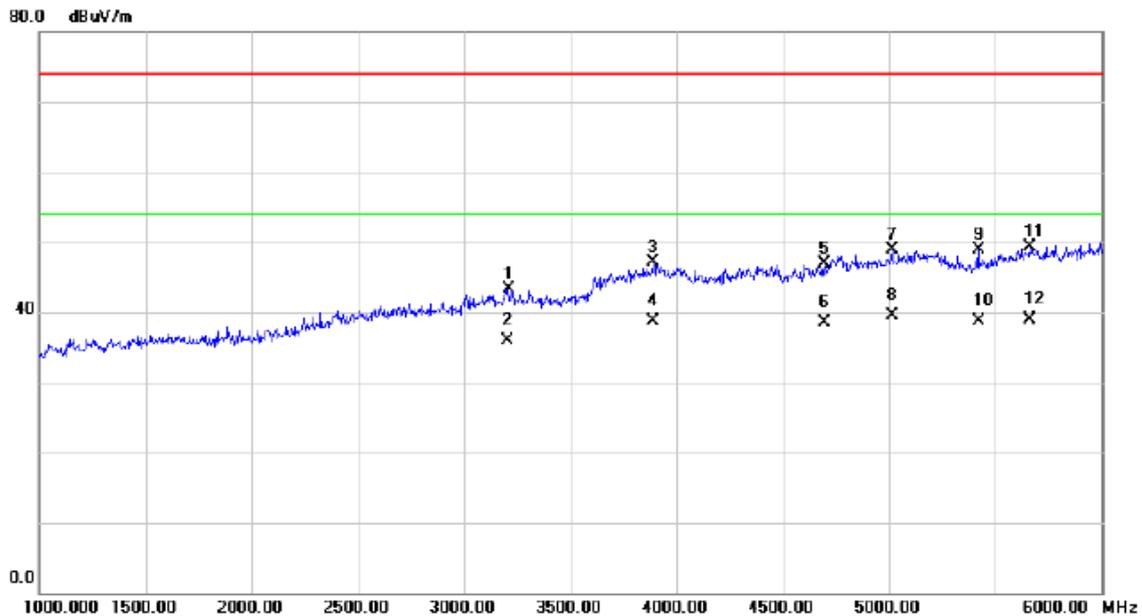

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3207.500	41.01	2.32	43.33	74.00	-30.67	peak	
2		3207.500	33.53	2.32	35.85	54.00	-18.15	AVG	
3		3892.500	41.36	5.84	47.20	74.00	-26.80	peak	
4		3892.500	32.94	5.84	38.78	54.00	-15.22	AVG	
5		4697.500	39.68	7.21	46.89	74.00	-27.11	peak	
6		4697.500	31.23	7.21	38.44	54.00	-15.56	AVG	
7		5017.500	41.12	7.69	48.81	74.00	-25.19	peak	
8	*	5017.500	31.76	7.69	39.45	54.00	-14.55	AVG	
9		5420.000	40.07	8.89	48.96	74.00	-25.04	peak	
10		5420.000	29.89	8.89	38.78	54.00	-15.22	AVG	
11		5662.500	39.99	9.34	49.33	74.00	-24.67	peak	
12		5662.500	29.54	9.34	38.88	54.00	-15.12	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150

## Horizontal

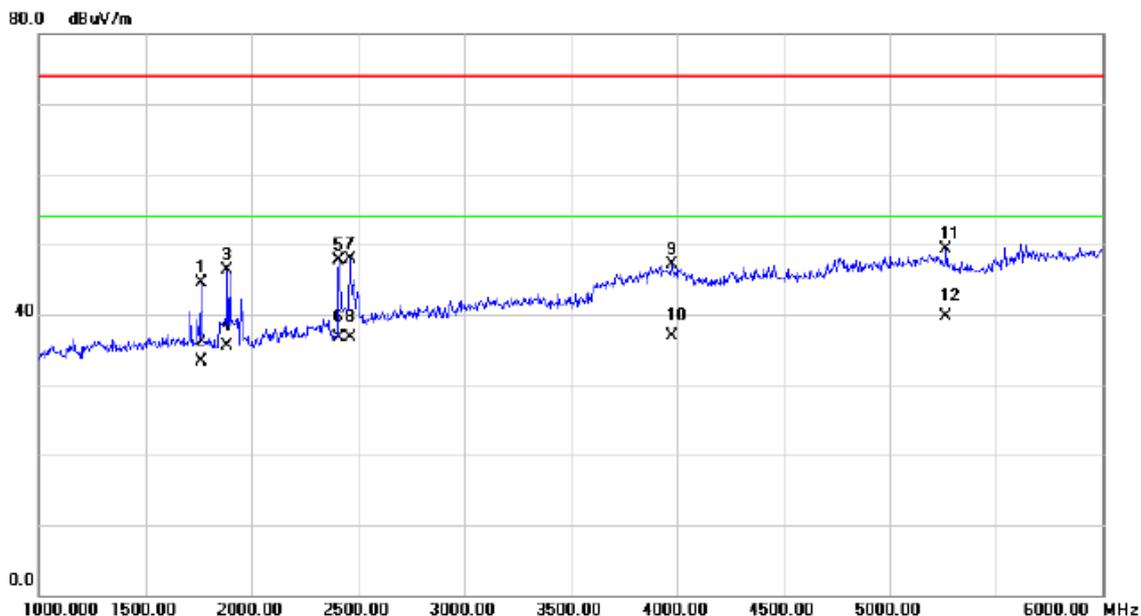

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1765.000	47.43	-2.91	44.52	74.00	-29.48	peak	
2		1765.000	36.16	-2.91	33.25	54.00	-20.75	AVG	
3		1885.000	48.75	-2.38	46.37	74.00	-27.63	peak	
4		1885.000	37.79	-2.38	35.41	54.00	-18.59	AVG	
5		2412.500	47.97	-0.27	47.70	74.00	-26.30	peak	
6		2412.500	37.02	-0.27	36.75	54.00	-17.25	AVG	
7		2462.500	47.93	-0.07	47.86	74.00	-26.14	peak	
8		2462.500	36.85	-0.07	36.78	54.00	-17.22	AVG	
9		3975.000	40.65	6.44	47.09	74.00	-26.91	peak	
10		3975.000	30.52	6.44	36.96	54.00	-17.04	AVG	
11		5265.000	40.80	8.44	49.24	74.00	-24.76	peak	
12	*	5265.000	31.19	8.44	39.63	54.00	-14.37	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1900.000	46.12	-2.31	43.81	74.00	-30.19	peak	
2		1900.000	34.20	-2.31	31.89	54.00	-22.11	AVG	
3		3937.500	40.76	6.16	46.92	74.00	-27.08	peak	
4		3937.500	29.53	6.16	35.69	54.00	-18.31	AVG	
5		4842.500	40.77	7.42	48.19	74.00	-25.81	peak	
6		4842.500	29.36	7.42	36.78	54.00	-17.22	AVG	
7		5120.000	41.07	7.99	49.06	74.00	-24.94	peak	
8	*	5120.000	30.97	7.99	38.96	54.00	-15.04	AVG	
9		5697.500	40.22	9.39	49.61	74.00	-24.39	peak	
10		5697.500	29.06	9.39	38.45	54.00	-15.55	AVG	
11		5942.500	40.30	9.68	49.98	74.00	-24.02	peak	
12		5942.500	28.18	9.68	37.86	54.00	-16.14	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Horizontal

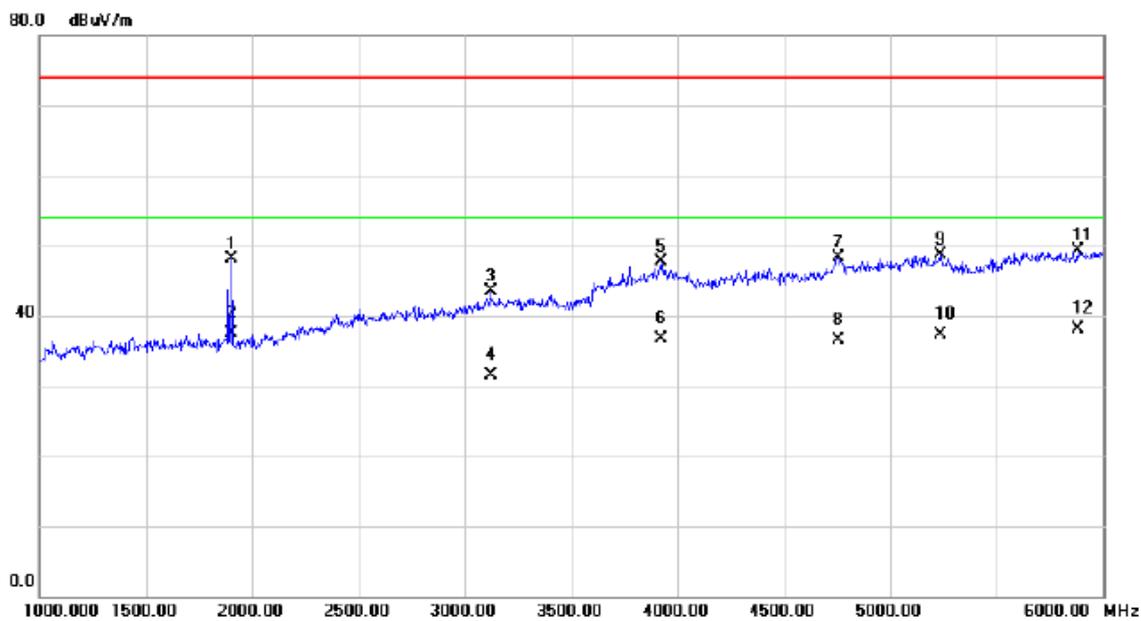

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1905.000	50.46	-2.30	48.16	74.00	-25.84	peak	
2		1905.000	39.75	-2.30	37.45	54.00	-16.55	AVG	
3		3120.000	41.38	2.12	43.50	74.00	-30.50	peak	
4		3120.000	29.37	2.12	31.49	54.00	-22.51	AVG	
5		3920.000	41.65	6.04	47.69	74.00	-26.31	peak	
6		3920.000	30.71	6.04	36.75	54.00	-17.25	AVG	
7		4757.500	41.03	7.29	48.32	74.00	-25.68	peak	
8		4757.500	29.27	7.29	36.56	54.00	-17.44	AVG	
9		5237.500	40.40	8.36	48.76	74.00	-25.24	peak	
10		5237.500	28.89	8.36	37.25	54.00	-16.75	AVG	
11		5882.500	39.79	9.61	49.40	74.00	-24.60	peak	
12	*	5882.500	28.53	9.61	38.14	54.00	-15.86	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Vertical

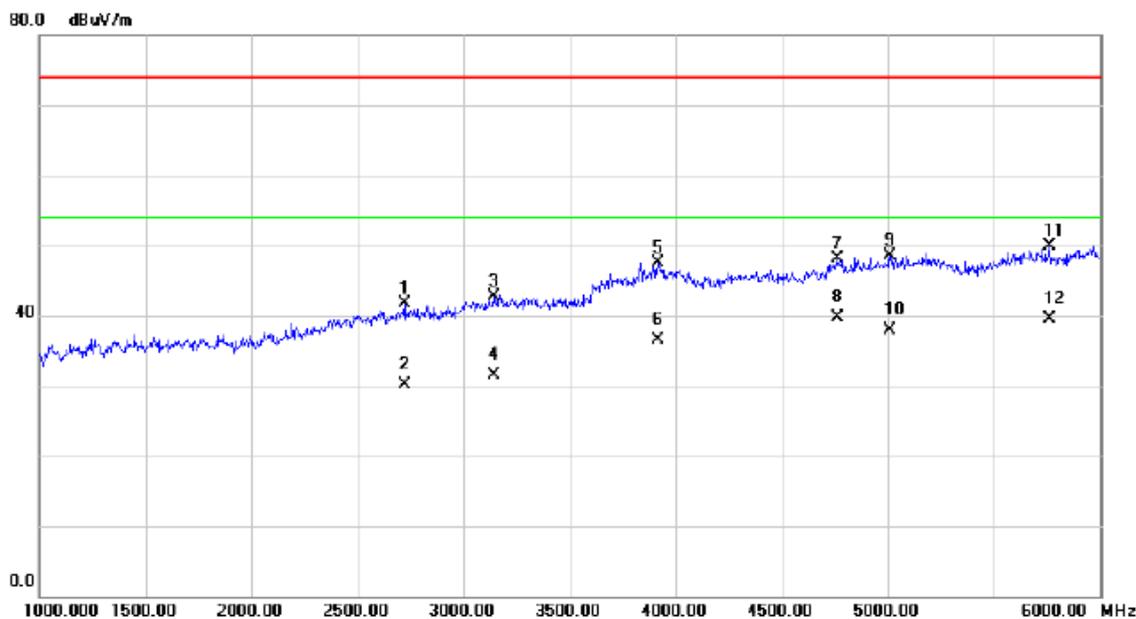

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2722.500	40.76	0.86	41.62	74.00	-32.38	peak	
2		2722.500	29.31	0.86	30.17	54.00	-23.83	AVG	
3		3142.500	40.44	2.17	42.61	74.00	-31.39	peak	
4		3142.500	29.28	2.17	31.45	54.00	-22.55	AVG	
5		3915.000	41.53	6.00	47.53	74.00	-26.47	peak	
6		3915.000	30.59	6.00	36.59	54.00	-17.41	AVG	
7		4765.000	40.83	7.30	48.13	74.00	-25.87	peak	
8	*	4765.000	32.39	7.30	39.69	54.00	-14.31	AVG	
9		5010.000	40.82	7.67	48.49	74.00	-25.51	peak	
10		5010.000	30.19	7.67	37.86	54.00	-16.14	AVG	
11		5760.000	40.42	9.46	49.88	74.00	-24.12	peak	
12		5760.000	29.99	9.46	39.45	54.00	-14.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Horizontal

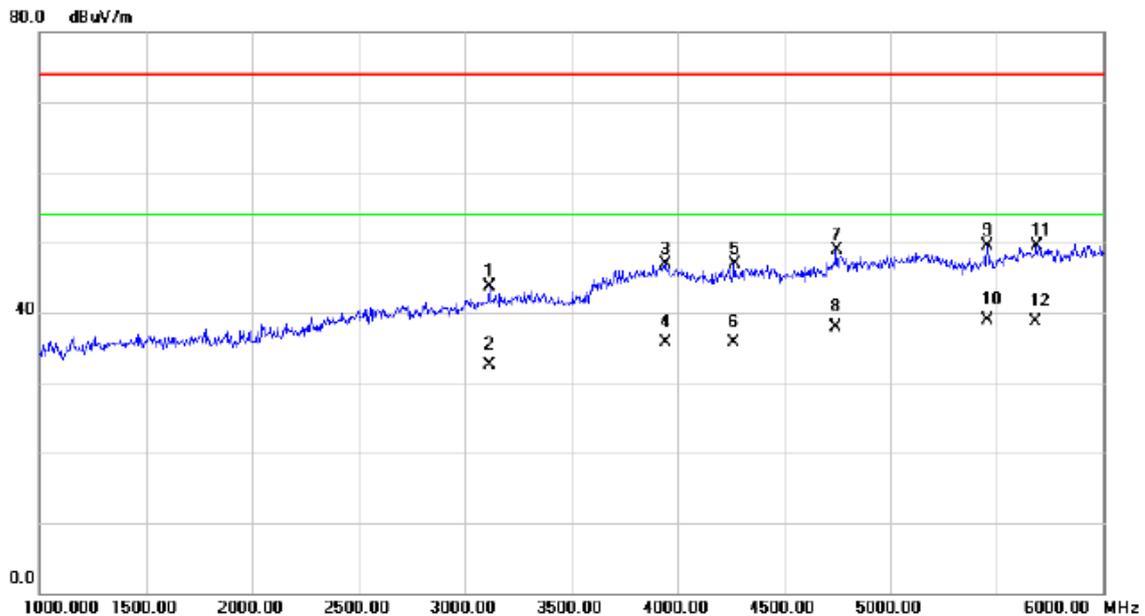

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	3115.000	41.64	2.11	43.75	74.00	-30.25	peak	
2	3115.000	30.34	2.11	32.45	54.00	-21.55	AVG	
3	3942.500	40.71	6.21	46.92	74.00	-27.08	peak	
4	3942.500	29.57	6.21	35.78	54.00	-18.22	AVG	
5	4267.500	40.03	6.78	46.81	74.00	-27.19	peak	
6	4267.500	28.91	6.78	35.69	54.00	-18.31	AVG	
7	4747.500	41.66	7.28	48.94	74.00	-25.06	peak	
8	4747.500	30.61	7.28	37.89	54.00	-16.11	AVG	
9	5457.500	40.43	9.01	49.44	74.00	-24.56	peak	
10 *	5457.500	29.95	9.01	38.96	54.00	-15.04	AVG	
11	5687.500	40.19	9.37	49.56	74.00	-24.44	peak	
12	5687.500	29.32	9.37	38.69	54.00	-15.31	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Vertical

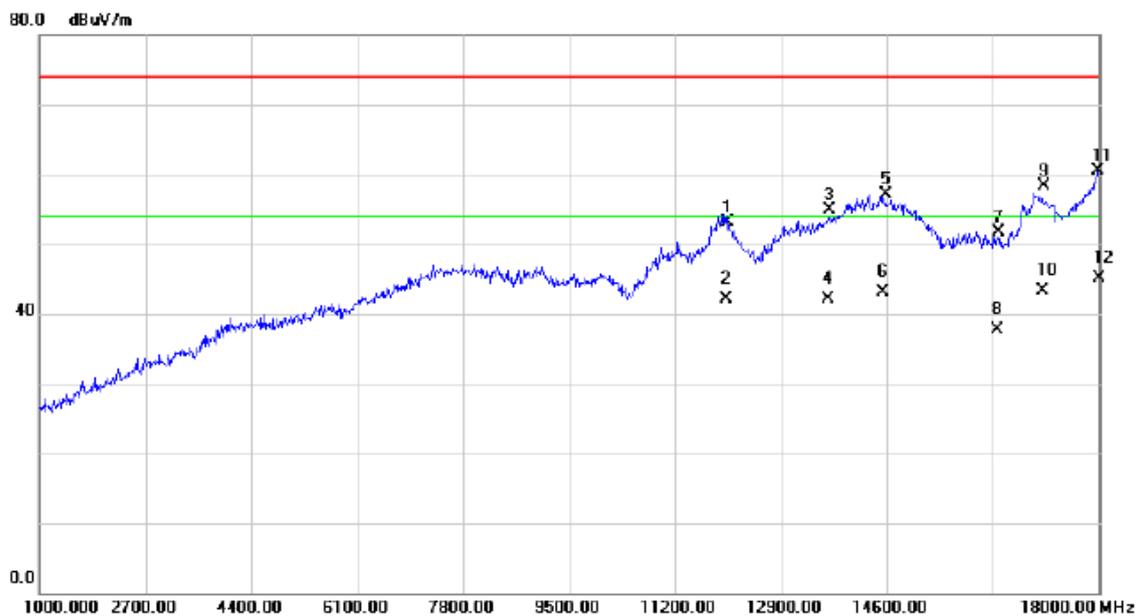

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12048.00	30.40	22.77	53.17	74.00	-20.83	peak	
2		12048.00	19.29	22.77	42.06	54.00	-11.94	AVG	
3		13680.00	31.21	23.62	54.83	74.00	-19.17	peak	
4		13680.00	18.57	23.62	42.19	54.00	-11.81	AVG	
5		14592.00	31.16	25.85	57.01	74.00	-16.99	peak	
6		14592.00	17.26	25.85	43.11	54.00	-10.89	AVG	
7		16392.00	31.16	20.51	51.67	74.00	-22.33	peak	
8		16392.00	17.13	20.51	37.64	54.00	-16.36	AVG	
9		17136.00	30.73	27.56	58.29	74.00	-15.71	peak	
10		17136.00	15.67	27.56	43.23	54.00	-10.77	AVG	
11		17994.00	27.15	33.38	60.53	74.00	-13.47	peak	
12	*	17994.00	11.67	33.38	45.05	54.00	-8.95	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Horizontal

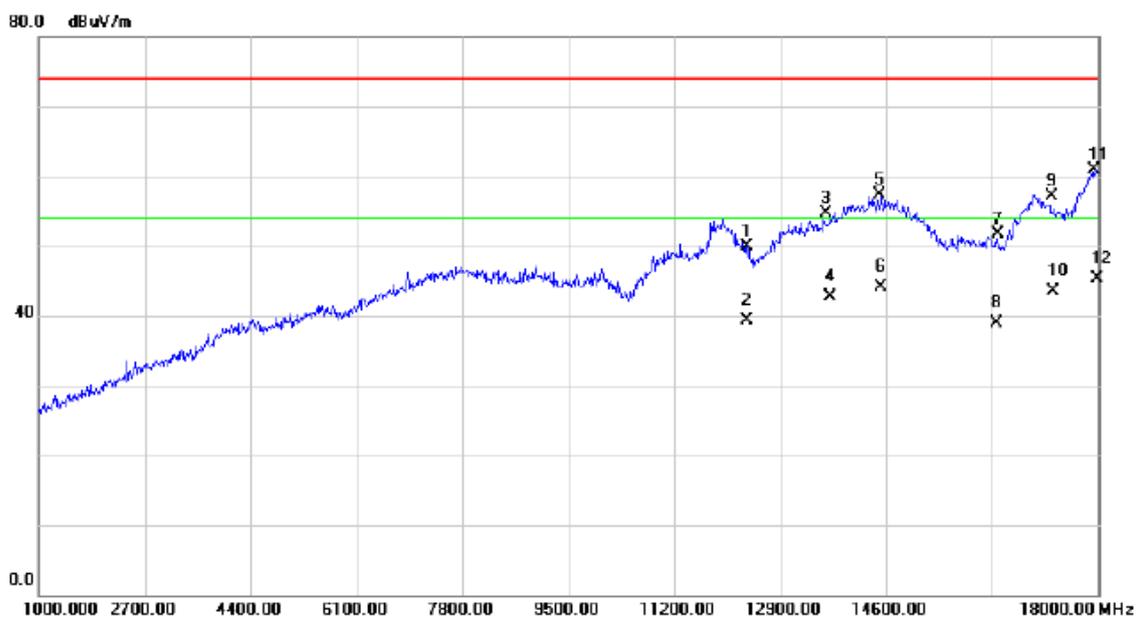

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12378.00	30.80	19.06	49.86	74.00	-24.14	peak	
2		12378.00	20.31	19.06	39.37	54.00	-14.63	AVG	
3		13644.00	31.29	23.41	54.70	74.00	-19.30	peak	
4		13644.00	19.25	23.41	42.66	54.00	-11.34	AVG	
5		14490.00	31.20	26.01	57.21	74.00	-16.79	peak	
6		14490.00	18.18	26.01	44.19	54.00	-9.81	AVG	
7		16410.00	31.17	20.51	51.68	74.00	-22.32	peak	
8		16410.00	18.41	20.51	38.92	54.00	-15.08	AVG	
9		17274.00	29.82	27.34	57.16	74.00	-16.84	peak	
10		17274.00	16.07	27.34	43.41	54.00	-10.59	AVG	
11		17934.00	28.37	32.60	60.97	74.00	-13.03	peak	
12	*	17934.00	12.73	32.60	45.33	54.00	-8.67	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Vertical

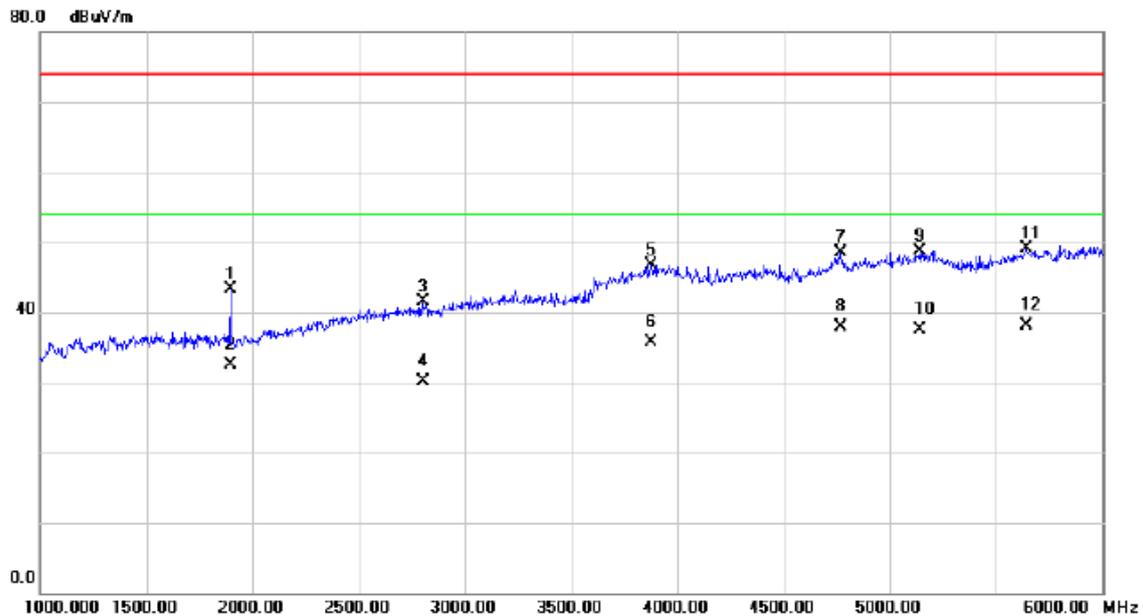

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1895.000	45.58	-2.35	43.23	74.00	-30.77	peak	
2	1895.000	34.91	-2.35	32.56	54.00	-21.44	AVG	
3	2802.500	40.28	1.15	41.43	74.00	-32.57	peak	
4	2802.500	28.99	1.15	30.14	54.00	-23.86	AVG	
5	3875.000	41.00	5.72	46.72	74.00	-27.28	peak	
6	3875.000	30.00	5.72	35.72	54.00	-18.28	AVG	
7	4770.000	41.23	7.31	48.54	74.00	-25.46	peak	
8	4770.000	30.58	7.31	37.89	54.00	-16.11	AVG	
9	5145.000	40.58	8.07	48.65	74.00	-25.35	peak	
10	5145.000	29.49	8.07	37.56	54.00	-16.44	AVG	
11	5642.500	39.84	9.32	49.16	74.00	-24.84	peak	
12 *	5642.500	28.82	9.32	38.14	54.00	-15.86	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Horizontal

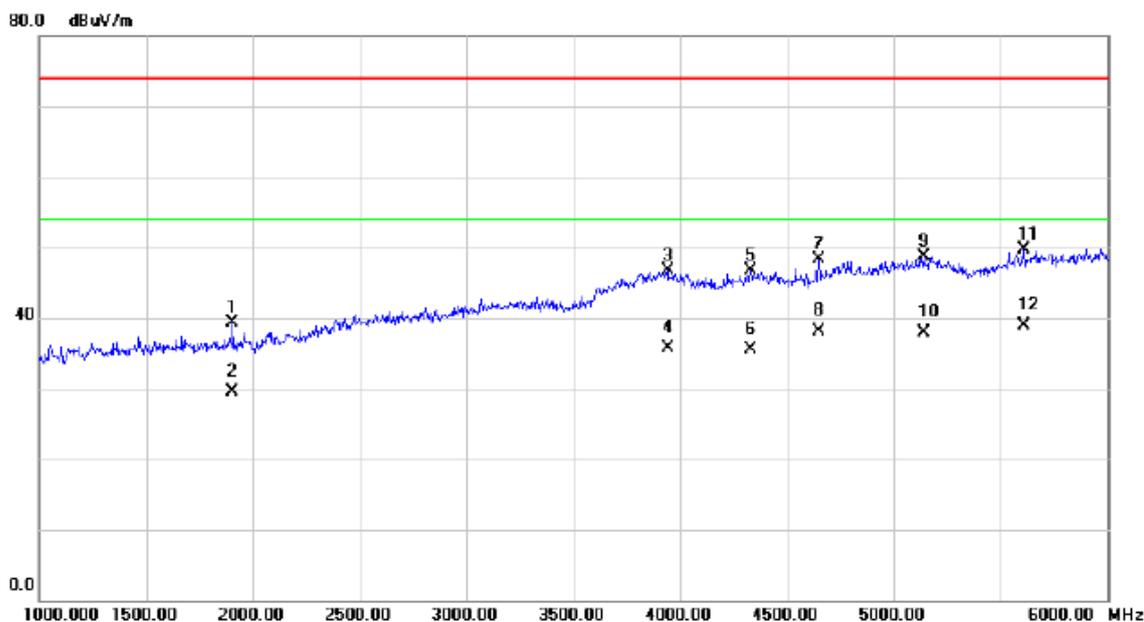

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1905.000	41.59	-2.30	39.29	74.00	-34.71	peak	
2		1905.000	31.86	-2.30	29.56	54.00	-24.44	AVG	
3		3940.000	40.55	6.19	46.74	74.00	-27.26	peak	
4		3940.000	29.50	6.19	35.69	54.00	-18.31	AVG	
5		4332.500	39.95	6.82	46.77	74.00	-27.23	peak	
6		4332.500	28.64	6.82	35.46	54.00	-18.54	AVG	
7		4652.500	41.23	7.13	48.36	74.00	-25.64	peak	
8		4652.500	30.99	7.13	38.12	54.00	-15.88	AVG	
9		5140.000	40.71	8.06	48.77	74.00	-25.23	peak	
10		5140.000	29.83	8.06	37.89	54.00	-16.11	AVG	
11		5612.500	40.35	9.27	49.62	74.00	-24.38	peak	
12	*	5612.500	29.72	9.27	38.99	54.00	-15.01	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Vertical

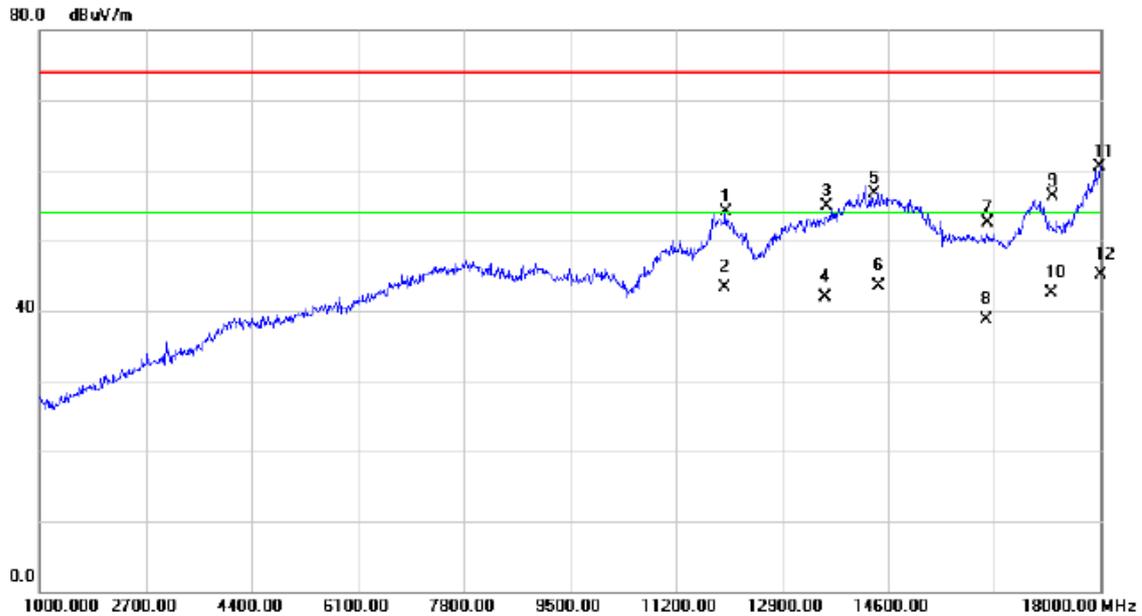

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11994.00	30.76	23.28	54.04	74.00	-19.96	peak	
2		11994.00	20.07	23.28	43.35	54.00	-10.65	AVG	
3		13620.00	31.54	23.28	54.82	74.00	-19.18	peak	
4		13620.00	18.58	23.28	41.86	54.00	-12.14	AVG	
5		14394.00	30.77	25.88	56.65	74.00	-17.35	peak	
6		14394.00	17.68	25.88	43.56	54.00	-10.44	AVG	
7		16188.00	32.09	20.50	52.59	74.00	-21.41	peak	
8		16188.00	18.15	20.50	38.65	54.00	-15.35	AVG	
9		17244.00	28.97	27.40	56.37	74.00	-17.63	peak	
10		17244.00	15.03	27.40	42.43	54.00	-11.57	AVG	
11		17988.00	27.15	33.30	60.45	74.00	-13.55	peak	
12	*	17988.00	11.88	33.30	45.18	54.00	-8.82	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Horizontal

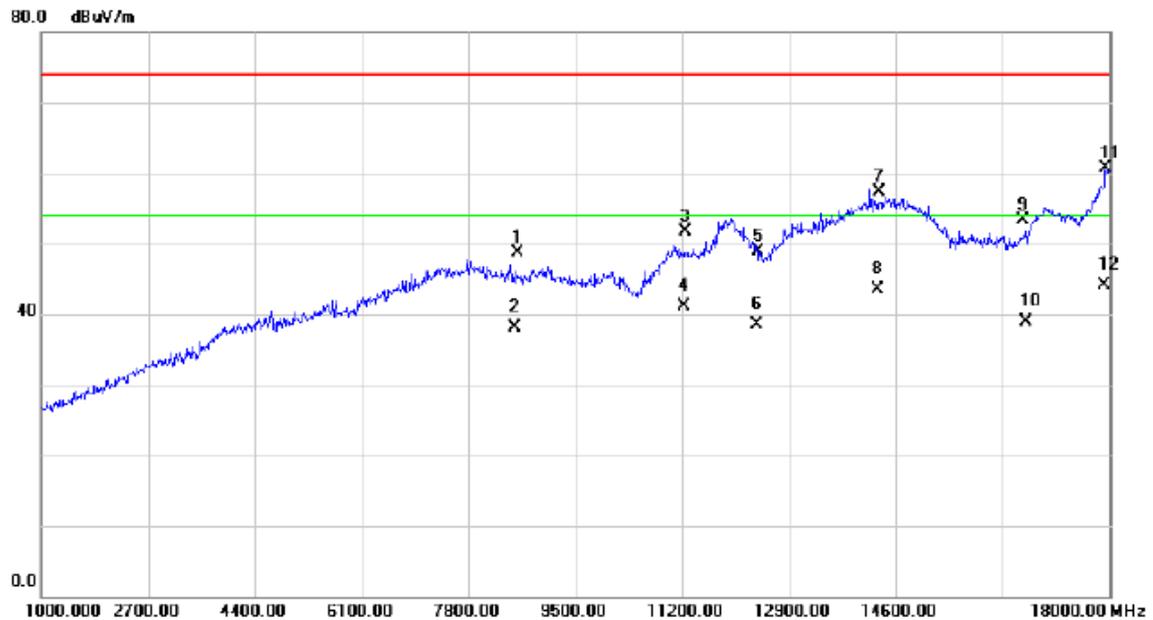

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		8580.000	33.27	15.51	48.78	74.00	-25.22	peak	
2		8580.000	22.66	15.51	38.17	54.00	-15.83	AVG	
3		11268.00	31.38	20.25	51.63	74.00	-22.37	peak	
4		11268.00	20.89	20.25	41.14	54.00	-12.86	AVG	
5		12408.00	30.26	18.72	48.98	74.00	-25.02	peak	
6		12408.00	19.75	18.72	38.47	54.00	-15.53	AVG	
7		14346.00	31.39	25.82	57.21	74.00	-16.79	peak	
8		14346.00	17.76	25.82	43.58	54.00	-10.42	AVG	
9		16632.00	30.91	22.42	53.33	74.00	-20.67	peak	
10		16632.00	16.52	22.42	38.94	54.00	-15.06	AVG	
11		17946.00	27.96	32.76	60.72	74.00	-13.28	peak	
12	*	17946.00	11.25	32.76	44.01	54.00	-9.99	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Vertical

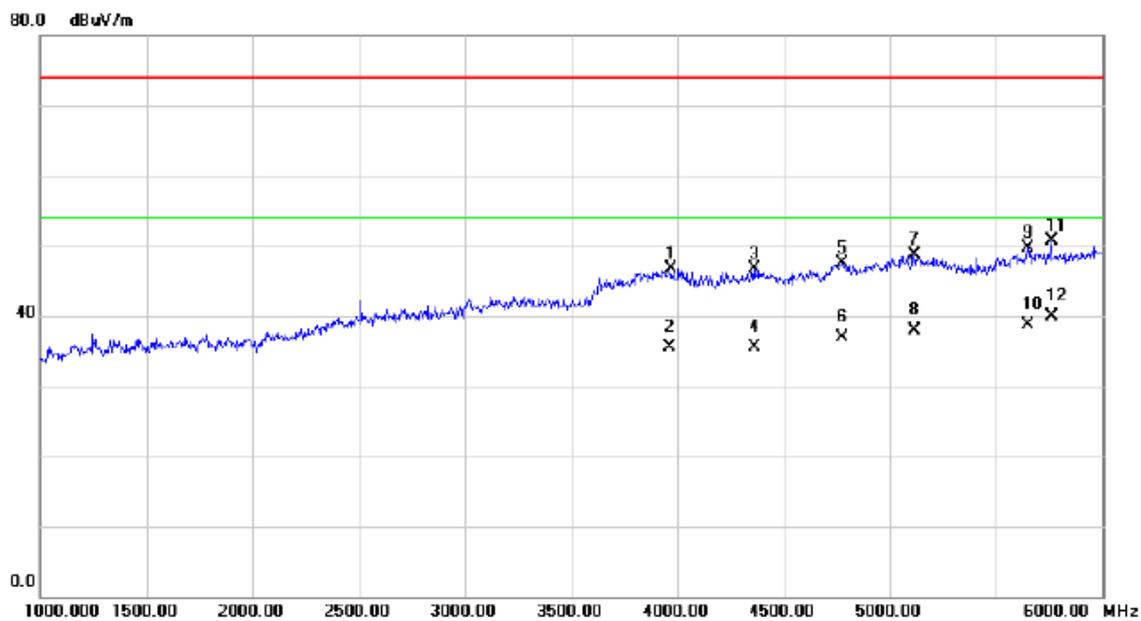

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3967.500	40.24	6.38	46.62	74.00	-27.38	peak	
2		3967.500	29.07	6.38	35.45	54.00	-18.55	AVG	
3		4362.500	39.95	6.84	46.79	74.00	-27.21	peak	
4		4362.500	28.71	6.84	35.55	54.00	-18.45	AVG	
5		4775.000	40.09	7.32	47.41	74.00	-26.59	peak	
6		4775.000	29.53	7.32	36.85	54.00	-17.15	AVG	
7		5117.500	40.77	7.99	48.76	74.00	-25.24	peak	
8		5117.500	29.97	7.99	37.96	54.00	-16.04	AVG	
9		5652.500	40.39	9.32	49.71	74.00	-24.29	peak	
10		5652.500	29.37	9.32	38.69	54.00	-15.31	AVG	
11		5760.000	41.33	9.46	50.79	74.00	-23.21	peak	
12	*	5760.000	30.42	9.46	39.88	54.00	-14.12	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Horizontal

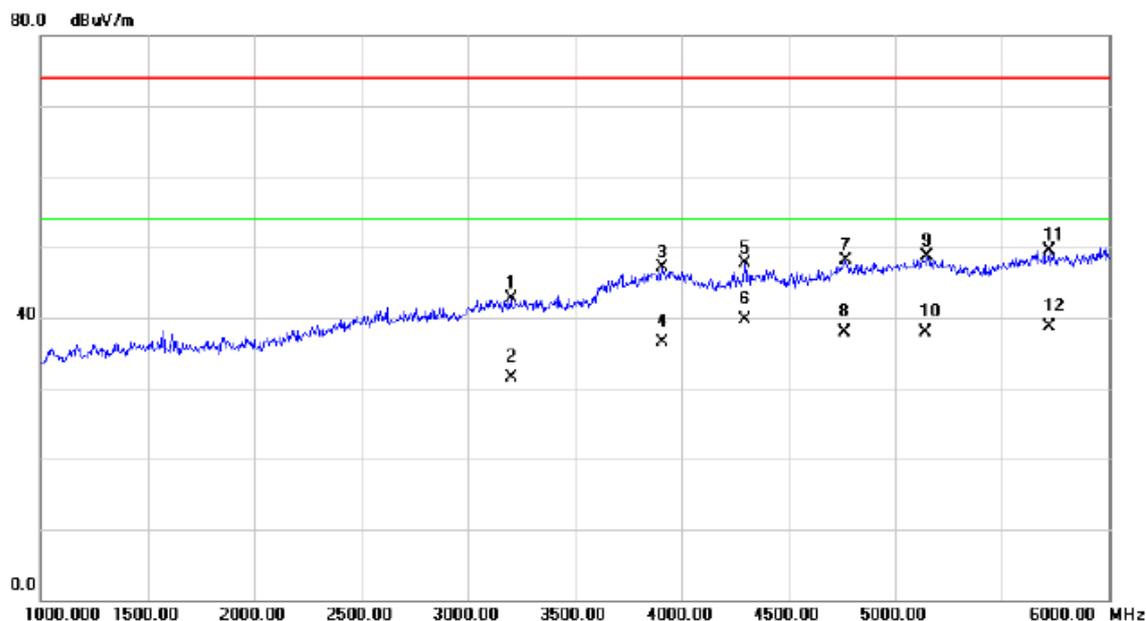

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3202.500	40.43	2.31	42.74	74.00	-31.26	peak	
2		3202.500	29.10	2.31	31.41	54.00	-22.59	AVG	
3		3910.000	41.05	5.97	47.02	74.00	-26.98	peak	
4		3910.000	30.59	5.97	36.56	54.00	-17.44	AVG	
5		4297.500	40.83	6.80	47.63	74.00	-26.37	peak	
6	*	4297.500	32.83	6.80	39.63	54.00	-14.37	AVG	
7		4767.500	40.78	7.31	48.09	74.00	-25.91	peak	
8		4767.500	30.55	7.31	37.86	54.00	-16.14	AVG	
9		5147.500	40.61	8.09	48.70	74.00	-25.30	peak	
10		5147.500	29.87	8.09	37.96	54.00	-16.04	AVG	
11		5722.500	40.10	9.41	49.51	74.00	-24.49	peak	
12		5722.500	29.22	9.41	38.63	54.00	-15.37	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Vertical

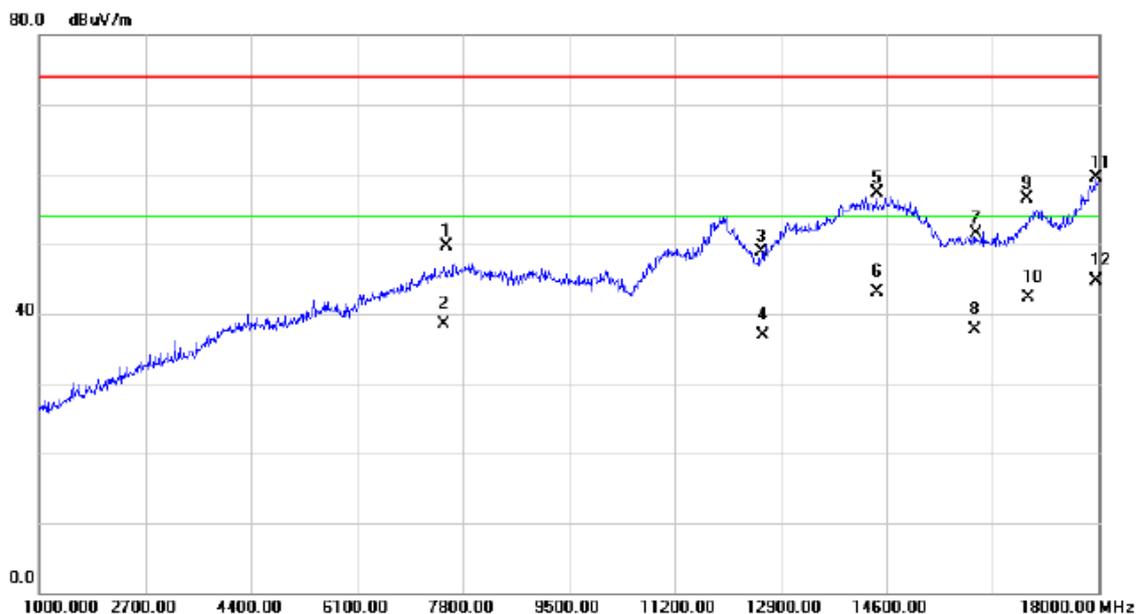

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7542.000	33.75	15.98	49.73	74.00	-24.27	peak	
2		7542.000	22.44	15.98	38.42	54.00	-15.58	AVG	
3		12600.00	30.35	18.52	48.87	74.00	-25.13	peak	
4		12600.00	18.41	18.52	36.93	54.00	-17.07	AVG	
5		14460.00	31.32	25.98	57.30	74.00	-16.70	peak	
6		14460.00	17.22	25.98	43.20	54.00	-10.80	AVG	
7		16050.00	31.08	20.51	51.59	74.00	-22.41	peak	
8		16050.00	17.21	20.51	37.72	54.00	-16.28	AVG	
9		16848.00	30.99	25.58	56.57	74.00	-17.43	peak	
10		16848.00	16.68	25.58	42.26	54.00	-11.74	AVG	
11		17970.00	26.36	33.07	59.43	74.00	-14.57	peak	
12	*	17970.00	11.72	33.07	44.79	54.00	-9.21	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+wifi+Gps
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


## Horizontal

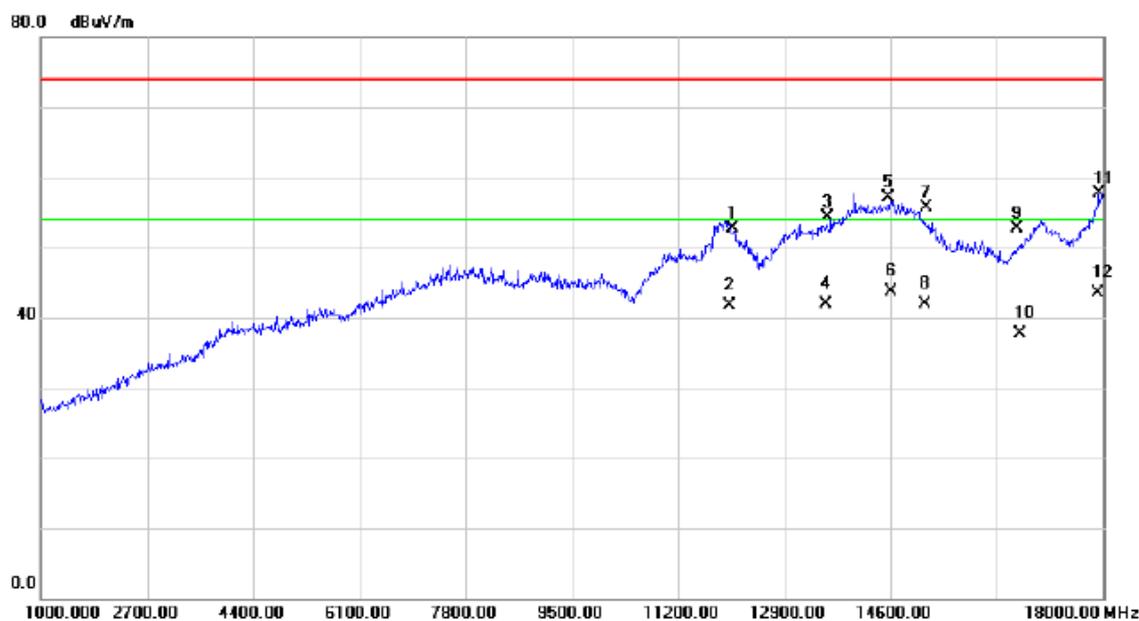

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		12078.00	30.22	22.44	52.66	74.00	-21.34	peak	
2		12078.00	19.22	22.44	41.66	54.00	-12.34	AVG	
3		13602.00	31.13	23.18	54.31	74.00	-19.69	peak	
4		13602.00	18.78	23.18	41.96	54.00	-12.04	AVG	
5		14568.00	31.17	25.89	57.06	74.00	-16.94	peak	
6	*	14568.00	17.86	25.89	43.75	54.00	-10.25	AVG	
7		15180.00	32.43	23.24	55.67	74.00	-18.33	peak	
8		15180.00	18.70	23.24	41.94	54.00	-12.06	AVG	
9		16626.00	30.35	22.34	52.69	74.00	-21.31	peak	
10		16626.00	15.44	22.34	37.78	54.00	-16.22	AVG	
11		17940.00	24.96	32.68	57.64	74.00	-16.36	peak	
12		17940.00	10.79	32.68	43.47	54.00	-10.53	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


## Vertical

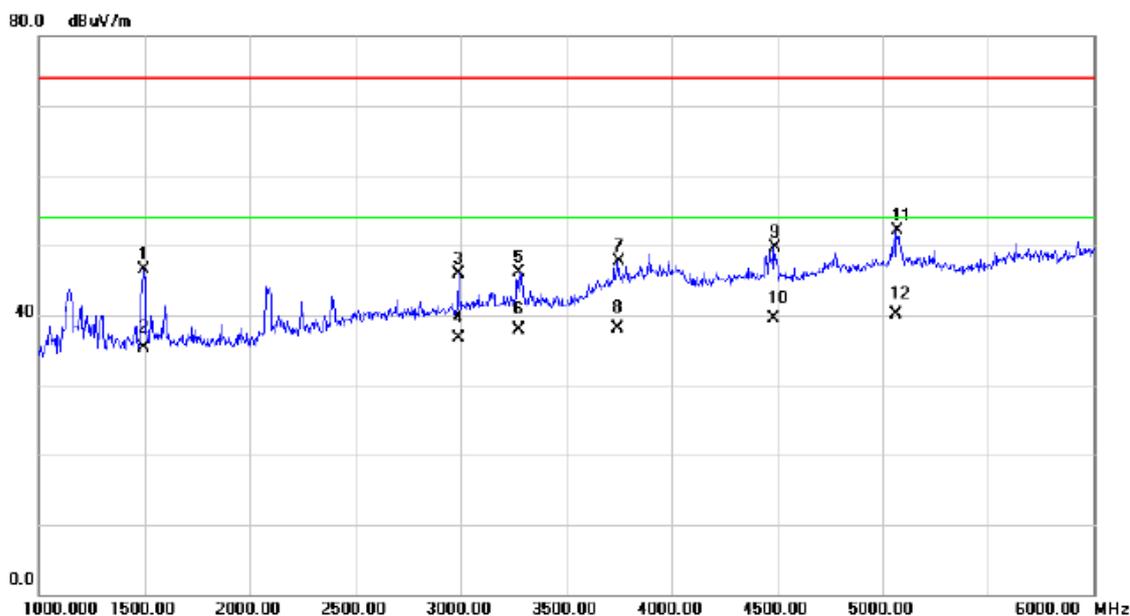

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1495.000	50.60	-4.08	46.52	74.00	-27.48	peak	
2		1495.000	39.44	-4.08	35.36	54.00	-18.64	AVG	
3		2992.500	44.14	1.81	45.95	74.00	-28.05	peak	
4		2992.500	34.97	1.81	36.78	54.00	-17.22	AVG	
5		3275.000	43.60	2.48	46.08	74.00	-27.92	peak	
6		3275.000	35.40	2.48	37.88	54.00	-16.12	AVG	
7		3747.500	42.93	4.79	47.72	74.00	-26.28	peak	
8		3747.500	33.33	4.79	38.12	54.00	-15.88	AVG	
9		4487.500	42.81	6.91	49.72	74.00	-24.28	peak	
10		4487.500	32.54	6.91	39.45	54.00	-14.55	AVG	
11		5067.500	44.25	7.84	52.09	74.00	-21.91	peak	
12	*	5067.500	32.28	7.84	40.12	54.00	-13.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN

## Horizontal

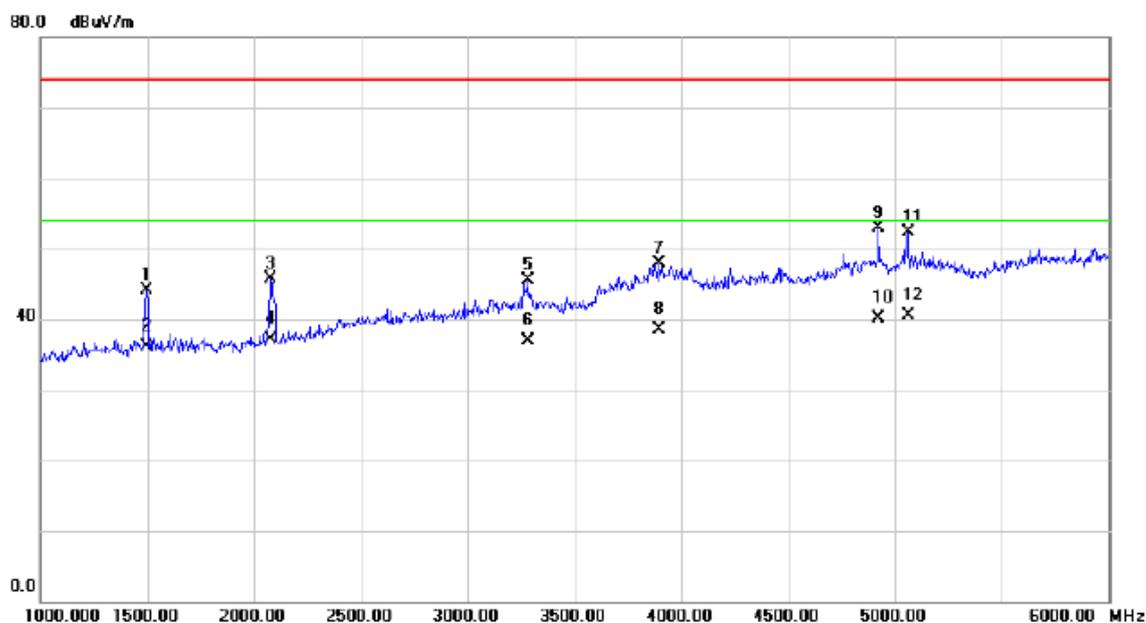

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1495.000	48.09	-4.08	44.01	74.00	-29.99	peak	
2		1495.000	40.20	-4.08	36.12	54.00	-17.88	AVG	
3		2077.500	47.27	-1.57	45.70	74.00	-28.30	peak	
4		2077.500	38.69	-1.57	37.12	54.00	-16.88	AVG	
5		3280.000	42.92	2.49	45.41	74.00	-28.59	peak	
6		3280.000	34.39	2.49	36.88	54.00	-17.12	AVG	
7		3895.000	42.05	5.86	47.91	74.00	-26.09	peak	
8		3895.000	32.59	5.86	38.45	54.00	-15.55	AVG	
9		4925.000	45.46	7.53	52.99	74.00	-21.01	peak	
10		4925.000	32.59	7.53	40.12	54.00	-13.88	AVG	
11		5062.500	44.43	7.84	52.27	74.00	-21.73	peak	
12	*	5062.500	32.57	7.84	40.41	54.00	-13.59	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN


## Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1495.000	58.45	-4.08	54.37	74.00	-19.63	peak	
2		1495.000	43.04	-4.08	38.96	54.00	-15.04	AVG	
3		1885.000	48.08	-2.38	45.70	74.00	-28.30	peak	
4		1885.000	39.16	-2.38	36.78	54.00	-17.22	AVG	
5		2082.500	46.04	-1.56	44.48	74.00	-29.52	peak	
6		2082.500	39.00	-1.56	37.44	54.00	-16.56	AVG	
7		2445.000	53.18	-0.14	53.04	74.00	-20.96	peak	
8	*	2445.000	39.26	-0.14	39.12	54.00	-14.88	AVG	
9		4462.500	44.88	6.90	51.78	74.00	-22.22	peak	
10		4462.500	31.22	6.90	38.12	54.00	-15.88	AVG	
11		5077.500	42.16	7.87	50.03	74.00	-23.97	peak	
12		5077.500	30.01	7.87	37.88	54.00	-16.12	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN

## Horizontal

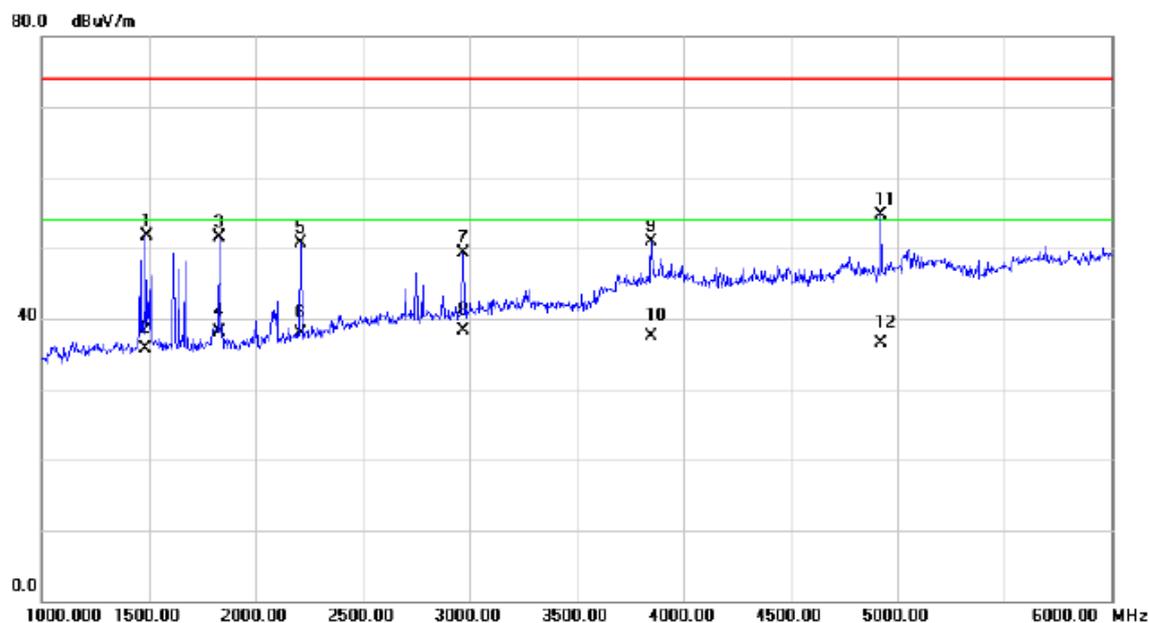

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1487.500	55.82	-4.09	51.73	74.00	-22.27	peak	
2		1487.500	39.79	-4.09	35.70	54.00	-18.30	AVG	
3		1830.000	54.19	-2.62	51.57	74.00	-22.43	peak	
4		1830.000	40.74	-2.62	38.12	54.00	-15.88	AVG	
5		2212.500	51.85	-1.05	50.80	74.00	-23.20	peak	
6		2212.500	38.93	-1.05	37.88	54.00	-16.12	AVG	
7		2972.500	47.48	1.74	49.22	74.00	-24.78	peak	
8	*	2972.500	36.65	1.74	38.39	54.00	-15.61	AVG	
9		3852.500	45.28	5.54	50.82	74.00	-23.18	peak	
10		3852.500	32.02	5.54	37.56	54.00	-16.44	AVG	
11		4925.000	47.10	7.53	54.63	74.00	-19.37	peak	
12		4925.000	28.92	7.53	36.45	54.00	-17.55	AVG	