

FCC Test Report

FCC ID: QISLUA-L23

Project No. : 1601C010A
Equipment : Smart Phone
Model Name : HUAWEI LUA-L23
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Jan. 25, 2016
Date of Test : Jan. 25, 2016 ~ Feb. 05, 2016
Issued Date : Feb. 15, 2016
Tested by : BTL Inc.

Testing Engineer : Pike Lee
(Pike Lee)

Technical Manager : Jeff Yang
(Jeff Yang)

Authorized Signatory : Andy Chiu
(Andy Chiu)

B T L I N C .

B1, No. 37, Lane 365, Yang-Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	15
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)	18
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	18
5 . MEASUREMENT INSTRUMENTS LIST	19
6 . EUT TEST PHOTO	20
ATTACHMENT A - CONDUCTED EMISSION	26
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	53
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	80

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1601C010A	Original Issue.	Feb. 15, 2016

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : HUAWEI LUA-L23
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Factory : GUANGDONG ENOK COMMUNICATION CO.,LTD
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Date of Test : Jan. 25, 2016 ~ Feb. 05, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1601C010A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE (2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is 2500MHz ~ 2570MHz which exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U,(dB)
C05	CISPR	150 kHz ~ 30MHz	2.04

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
CB08 (3m)	CISPR	30 MHz ~ 200 MHz	V	3.06
		30 MHz ~ 200 MHz	H	2.58
		200 MHz ~ 1, 000 MHz	V	3.50
		200 MHz ~ 1, 000 MHz	H	3.10

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
CB08 (3m)	CISPR	1GHz ~ 6GHz	V	4.14
		1GHz ~ 6GHz	H	4.14
		6GHz ~ 18GHz	V	5.34
		6GHz ~ 18GHz	H	5.34

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Brand Name	HUAWEI
Model Name	HUAWEI LUA-L23
Model Difference	N/A
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) HUIZHOU BYD ELECTRONIC CO., LTD. (2) Shenzhen Huntkey Electric Co., Ltd. (3) DONG GUAN PHITEK ELECTRONICS CO., LTD. Model: HW-050100U01 #2 Supplied from battery.
Power Rating	#1 I/P: 100V~240V~ 50/60 Hz,0.2A O/P: 5V \equiv 1A #2 DC 3.8V
HW Version	VER.A
SW Version	LUA-L23C00B001

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2.

Item	Mfr/Brand	Model.
USB Cable	HONGLIN TECHNOLOGY CO.,LTD.	130-26654
	FOXCONN	CUBB01M-HC208-DH
Earphone	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	MEMD1632B580A00
	BOLUO COUNTY QUANCHENG ELECTRONIC	1311-3291-3.5mm-178
	GOERTEK INC.	HA1-3
	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	MEMD1532B528000
Battery	BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD.	1293#+3283# 3.5MM-150
	Tianjin Lishen Battery Joint-Stock Co.,Ltd.	HB505076RBC
	BYD LITHIUM BATTERY Co., LTD.	
	Sunwoda Electronic Co., LTD	
SCUD (FUJIAN) Electronics Co., Ltd		

3.

TX Frequency	<p>GSM 850: 824MHz to 849MHz GSM 1900: 1850MHz to 1910MHz WCDMA Band 2: 1850MHz to 1910MHz WCDMA Band 4: 1710MHz ~ 1755MHz WCDMA Band 5: 824MHz ~ 849MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824MHz ~ 849MHz LTE Band 7: 2500MHz ~ 2570MHz BT/WIFI: 2400MHz ~ 2483.5MHz</p>
RX Frequency	<p>GSM 850: 869MHz to 894MHz GSM 1900: 1930MHz to 1990MHz WCDMA Band 2: 1930MHz to 1990MHz WCDMA Band 4: 2110MHz ~ 2155MHz WCDMA Band 5: 869MHz ~ 894MHz LTE Band 2: 1930 MHz ~ 1990 MHz LTE Band 4: 2110MHz ~ 2155MHz LTE Band 5: 869MHz ~ 894MHz LTE Band 7: 2620MHz ~ 2690MHz BT/WIFI: 2400MHz ~ 2483.5MHz GPS: 1575.42 MHz</p>

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Mode 2	Adapter+Idle+BT+wifi+GPS+playing+speaker
Mode 3	Adapter+Idle+BT+wifi+GPS+Camera on
Mode 4	Adapter+GSM+BT+wifi+GPS+SIM 1
Mode 5	Adapter+GSM+BT+wifi+GPS+SIM 2
Mode 6	Adapter+WCDMA+BT+wifi+GPS+SIM 1
Mode 7	Adapter+WCDMA+BT+wifi+GPS+SIM 2
Mode 8	Adapter+LTE+BT+wifi+GPS+SIM 1
Mode 9	Adapter+LTE+BT+wifi+GPS+SIM 2
Mode 10	USB copy(EUT with PC)+BT+WIFI+GPS


The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Mode 2	Adapter+Idle+BT+wifi+GPS+playing+speaker
Mode 3	Adapter+Idle+BT+wifi+GPS+Camera on
Mode 4	Adapter+GSM+BT+wifi+GPS+SIM 1
Mode 5	Adapter+GSM+BT+wifi+GPS+SIM 2
Mode 6	Adapter+WCDMA+BT+wifi+GPS+SIM 1
Mode 8	Adapter+LTE+BT+wifi+GPS+SIM 1
Mode 10	USB copy(EUT with PC)+BT+WIFI+GPS


For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Mode 2	Adapter+Idle+BT+wifi+GPS+playing+speaker
Mode 3	Adapter+Idle+BT+wifi+GPS+Camera on
Mode 4	Adapter+GSM+BT+wifi+GPS+SIM 1
Mode 5	Adapter+GSM+BT+wifi+GPS+SIM 2
Mode 7	Adapter+WCDMA+BT+wifi+GPS+SIM 2
Mode 9	Adapter+LTE+BT+wifi+GPS+SIM 2
Mode 10	USB copy(EUT with PC)+BT+WIFI+GPS

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Mode 1-9

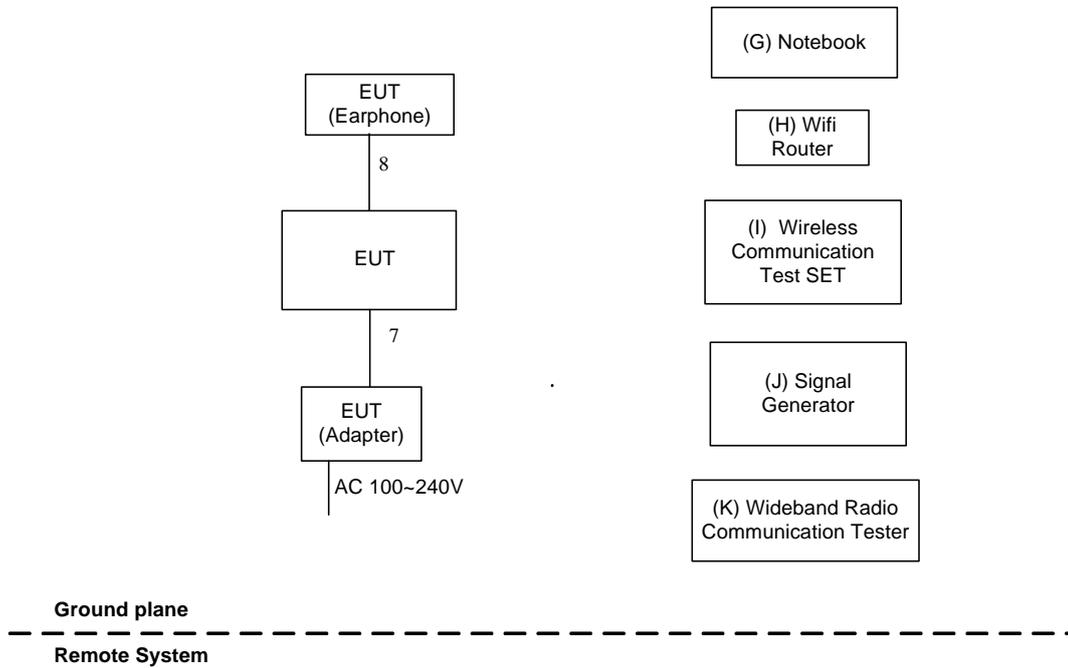

Mode 10

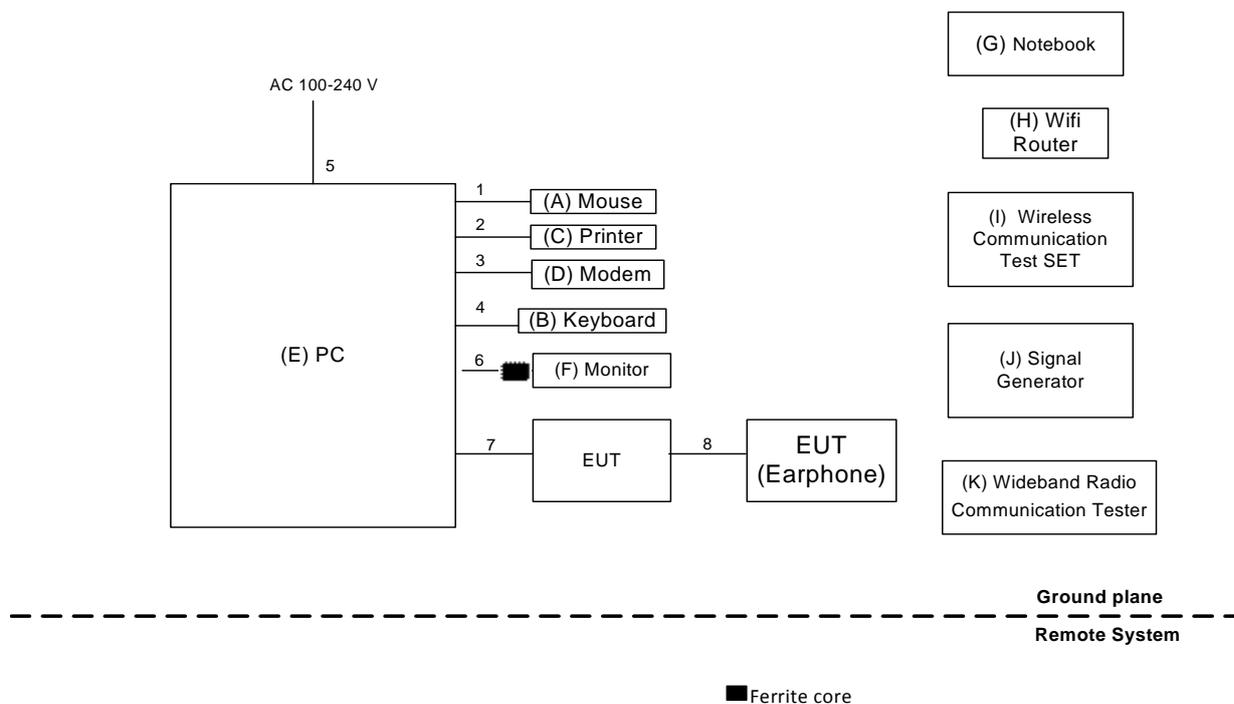

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB mouse	DELL	MS111-P	DOC	CN011D3V71581279 OLOT
B	USB keyboard	DELL	KB212-B	DOC	CN0HTXH97158125 004DXA01
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	PC	DELL	DCSM 745	DOC	G7K832X
F	LCD monitor	DELL	E177FPc	DOC	CNOFJ179-64180-6 AG-1WNS
G	Notebook	hp	hstnn-169c-3	DOC	CNU02203XG
H	Router	TP-LINK	TL-WR1041N	DOC	N/A
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183
J	Signal Generator	Agilent	E4438C	N/A	MY49071316
K	Wideband Radio Communication Tester	RS	CMW500	N/A	122125

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.2m	Earphone Cable

Note:

(1) For detachable type I/O cable should be specified the length m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value – Limit Value


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

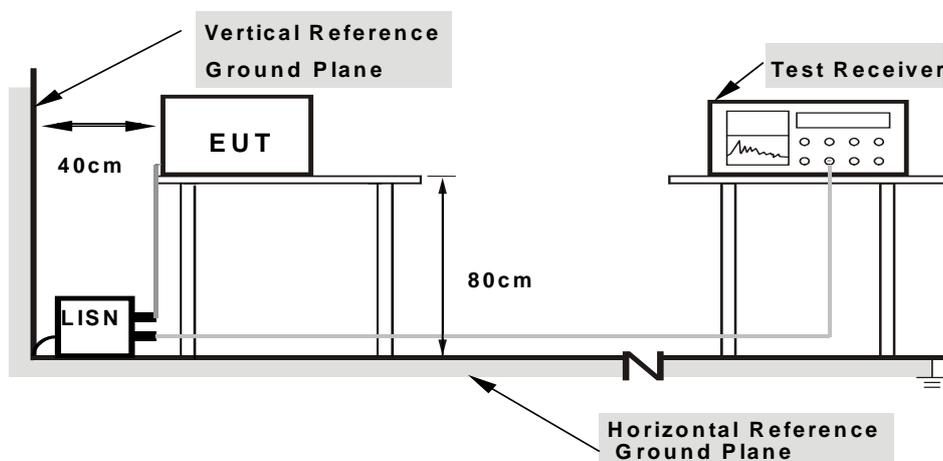

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 25°C Relative Humidity: 53%

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

CISPR 22 or CAN/CSA-CISPR 22-10:

Frequency (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	
30 - 230	40	30
230 - 1000	47	37

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

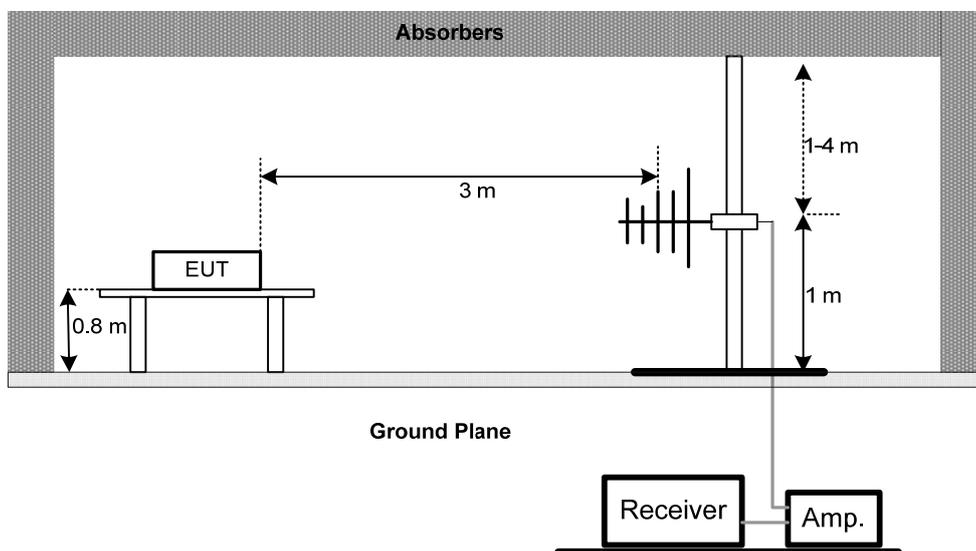

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

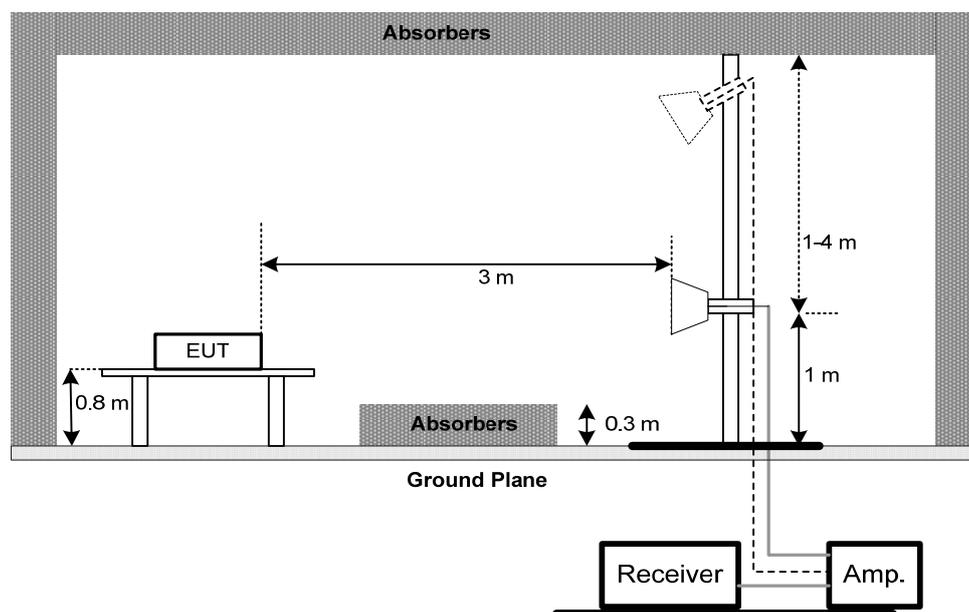

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment B.

Temperature: 21°C Relative Humidity: 51%

4.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C

Temperature: 22°C Relative Humidity: 56%

Remark :

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (2) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Feb. 01, 2017
2	Test Cable	TIMES	CFD300-NL	C05	Jun. 14, 2016
3	EMI Test Receiver	R&S	ESR3	101854	Dec. 10, 2016
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A


Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-641	Sep. 10, 2016
2	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-642	Sep. 10, 2016
3	Attenuator	Inmet	AT-N0507	01	Sep. 10, 2016
4	Attenuator	Inmet	AT-N0508	02	Sep. 10, 2016
5	Pre-Amplifier	EMCI	EMC9135	980281	Oct. 05, 2016
6	Pre-Amplifier	EMCI	EMC9135	980282	Oct. 05, 2016
7	Test Cable	EMCI	EMC8D-NM-NM-800	150102	Jan. 22, 2017
8	Test Cable	EMCI	EMC8D-NM-NM-800	150103	Jan. 22, 2017
9	Test Cable	EMCI	EMC8D-NM-NM-5000	150105	Jan. 22, 2017
10	Test Cable	EMCI	EMC8D-NM-NM-5000	150106	Jan. 22, 2017
11	Test Cable	EMCI	EMC8D-NM-NM-10000	150107	Jan. 22, 2017
12	Test Cable	EMCI	EMC8D-NM-NM-20000	150116	Jan. 22, 2017
13	EXA Spectrum Analyzer	Keysight Technologies	N9010A	MY54200483	Sep. 21, 2016
14	EMI Receiver	Keysight Technologies	N9038A	MY54130009	Oct. 02, 2016
15	Horn Antenna	Schwarzbeck	BBHA-9120D	120D-1297	Aug. 03, 2016
16	Pre-Amplifier	Agilent	8449B	3008A02331	Jan. 22, 2017
17	Test Cable	EMCI	EMC104-SM-SM-800	150110	Jan. 22, 2017
18	Test Cable	EMCI	EMC104-SM-SM-15000	150111	Jan. 22, 2017
19	Test Cable	EMCI	EMC104-SM-SM-5000	141210	Jan. 22, 2017
20	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK


Line

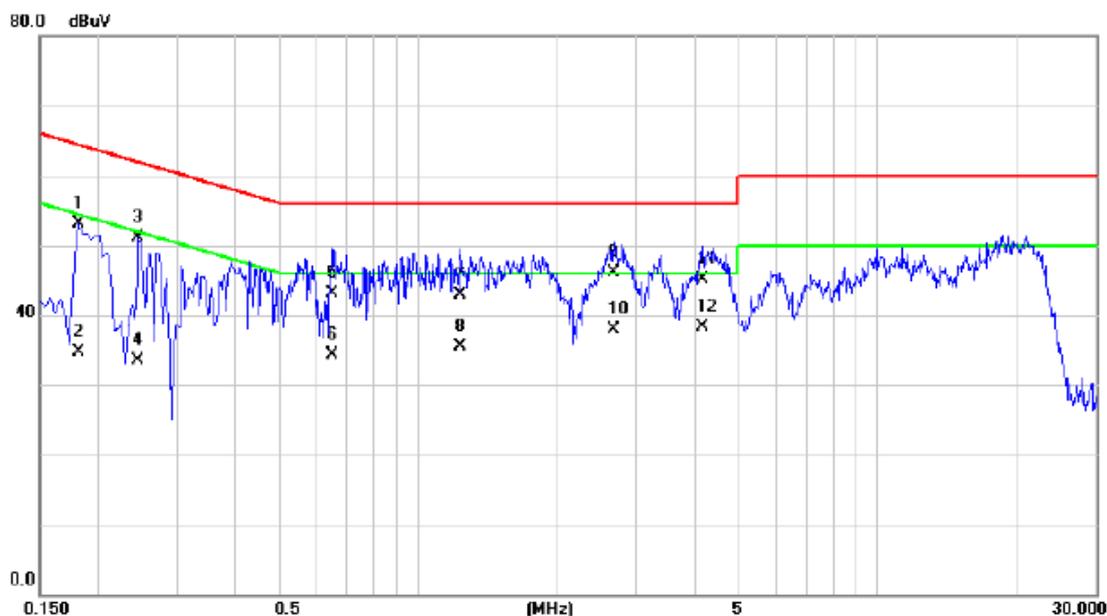

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1820	43.59	9.56	53.15	64.39	-11.24	QP	
2		0.1820	25.10	9.56	34.66	54.39	-19.73	AVG	
3		0.2460	41.42	9.61	51.03	61.89	-10.86	QP	
4		0.2460	23.80	9.61	33.41	51.89	-18.48	AVG	
5		0.6500	33.28	9.73	43.01	56.00	-12.99	QP	
6		0.6500	24.60	9.73	34.33	46.00	-11.67	AVG	
7		1.2420	33.12	9.81	42.93	56.00	-13.07	QP	
8		1.2420	25.60	9.81	35.41	46.00	-10.59	AVG	
9		2.6780	36.11	10.01	46.12	56.00	-9.88	QP	
10		2.6780	27.80	10.01	37.81	46.00	-8.19	AVG	
11		4.1700	35.12	9.97	45.09	56.00	-10.91	QP	
12	*	4.1700	28.30	9.97	38.27	46.00	-7.73	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK


Neutral

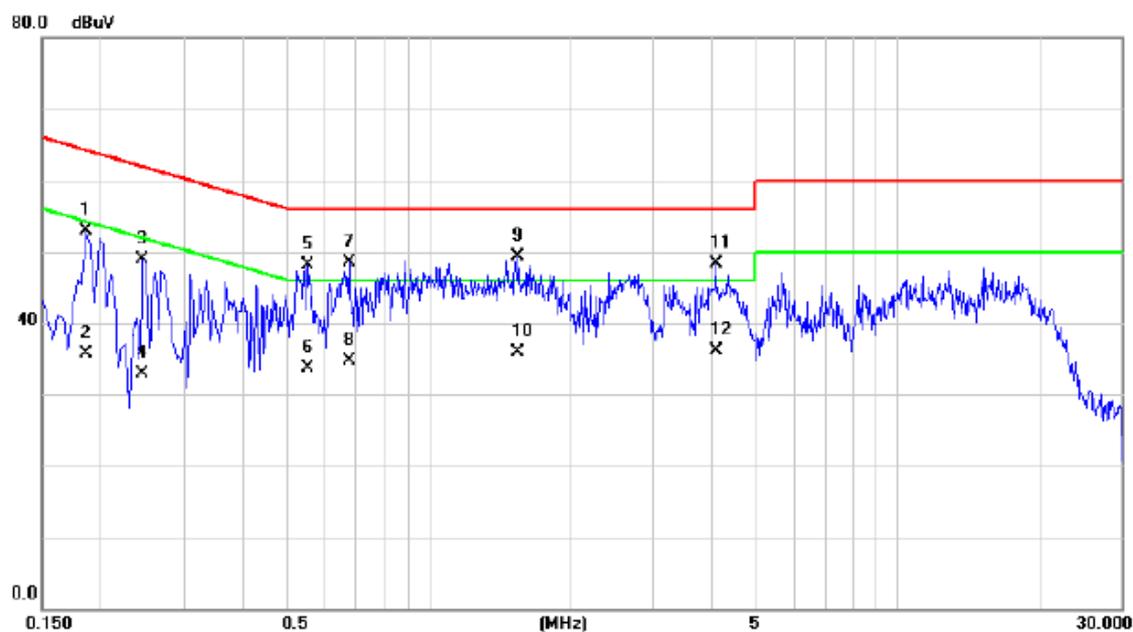

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1860	43.32	9.49	52.81	64.21	-11.40	QP	
2		0.1860	26.12	9.49	35.61	54.21	-18.60	AVG	
3		0.2460	39.46	9.51	48.97	61.89	-12.92	QP	
4		0.2460	23.45	9.51	32.96	51.89	-18.93	AVG	
5		0.5540	38.55	9.56	48.11	56.00	-7.89	QP	
6		0.5540	24.20	9.56	33.76	46.00	-12.24	AVG	
7		0.6780	38.99	9.53	48.52	56.00	-7.48	QP	
8		0.6780	25.12	9.53	34.65	46.00	-11.35	AVG	
9	*	1.5540	39.57	9.67	49.24	56.00	-6.76	QP	
10		1.5540	26.32	9.67	35.99	46.00	-10.01	AVG	
11		4.1060	38.29	9.92	48.21	56.00	-7.79	QP	
12		4.1060	26.25	9.92	36.17	46.00	-9.83	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Line

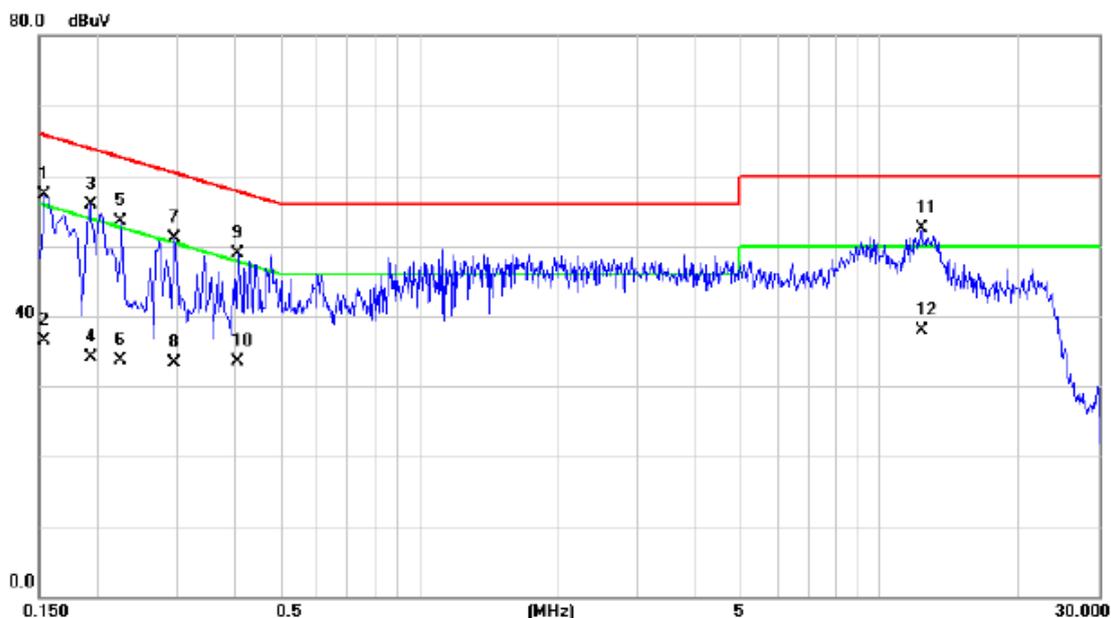

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1540	47.80	9.54	57.34	65.78	-8.44	QP	
2		0.1540	26.89	9.54	36.43	55.78	-19.35	AVG	
3		0.1940	46.37	9.57	55.94	63.86	-7.92	QP	
4		0.1940	24.63	9.57	34.20	53.86	-19.66	AVG	
5		0.2260	43.96	9.59	53.55	62.60	-9.05	QP	
6		0.2260	24.21	9.59	33.80	52.60	-18.80	AVG	
7		0.2940	41.47	9.64	51.11	60.41	-9.30	QP	
8		0.2940	23.63	9.64	33.27	50.41	-17.14	AVG	
9		0.4060	39.27	9.68	48.95	57.73	-8.78	QP	
10		0.4060	23.84	9.68	33.52	47.73	-14.21	AVG	
11	*	12.3420	42.58	9.85	52.43	60.00	-7.57	QP	
12		12.3420	27.96	9.85	37.81	50.00	-12.19	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Neutral

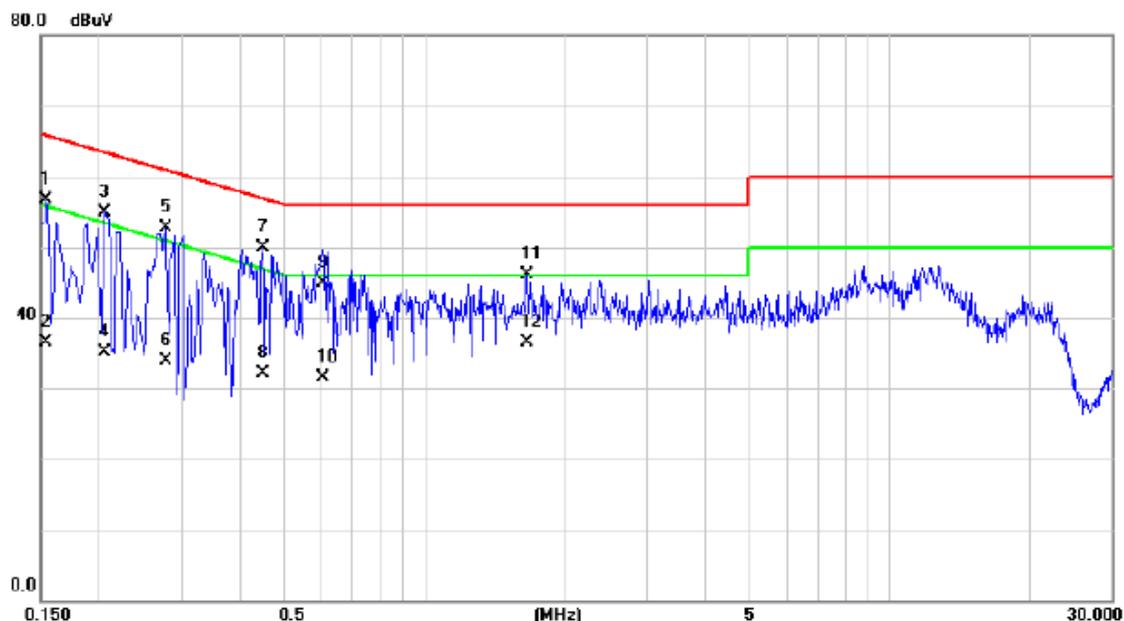

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1540	47.15	9.49	56.64	65.78	-9.14	QP	
2		0.1540	27.11	9.49	36.60	55.78	-19.18	AVG	
3		0.2060	45.33	9.50	54.83	63.37	-8.54	QP	
4		0.2060	25.63	9.50	35.13	53.37	-18.24	AVG	
5		0.2780	43.24	9.52	52.76	60.88	-8.12	QP	
6		0.2780	24.32	9.52	33.84	50.88	-17.04	AVG	
7	*	0.4500	40.36	9.55	49.91	56.88	-6.97	QP	
8		0.4500	22.63	9.55	32.18	46.88	-14.70	AVG	
9		0.6060	35.38	9.56	44.94	56.00	-11.06	QP	
10		0.6060	21.96	9.56	31.52	46.00	-14.48	AVG	
11		1.6700	36.40	9.68	46.08	56.00	-9.92	QP	
12		1.6700	26.74	9.68	36.42	46.00	-9.58	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


Line

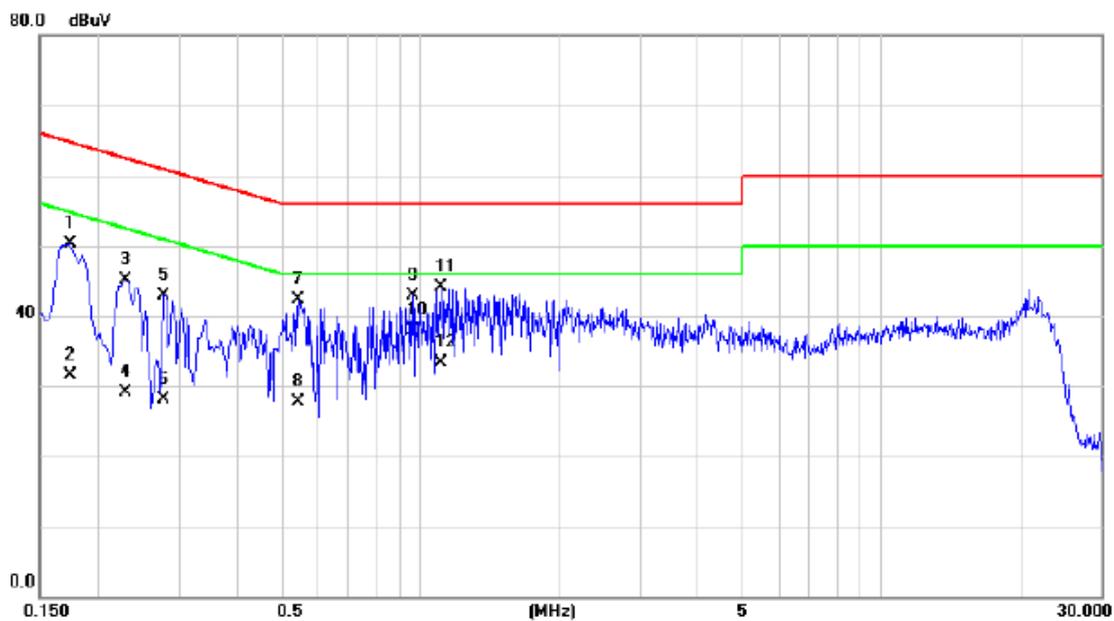

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment	dBuV	dB	Detector	Comment
1		0.1740	40.65	9.56	50.21	64.77	-14.56	QP	
2	X	0.1740	21.95	9.56	31.51	54.77	-23.26	AVG	
3	X	0.2300	35.58	9.59	45.17	62.45	-17.28	QP	
4	X	0.2300	19.50	9.59	29.09	52.45	-23.36	AVG	
5	X	0.2780	33.30	9.63	42.93	60.88	-17.95	QP	
6	X	0.2780	18.40	9.63	28.03	50.88	-22.85	AVG	
7	X	0.5460	32.59	9.70	42.29	56.00	-13.71	QP	
8	X	0.5460	17.96	9.70	27.66	46.00	-18.34	AVG	
9	X	0.9660	33.12	9.79	42.91	56.00	-13.09	QP	
10	X*	0.9660	28.14	9.79	37.93	46.00	-8.07	AVG	
11	X	1.1140	34.20	9.81	44.01	56.00	-11.99	QP	
12	X	1.1140	23.45	9.81	33.26	46.00	-12.74	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


Neutral

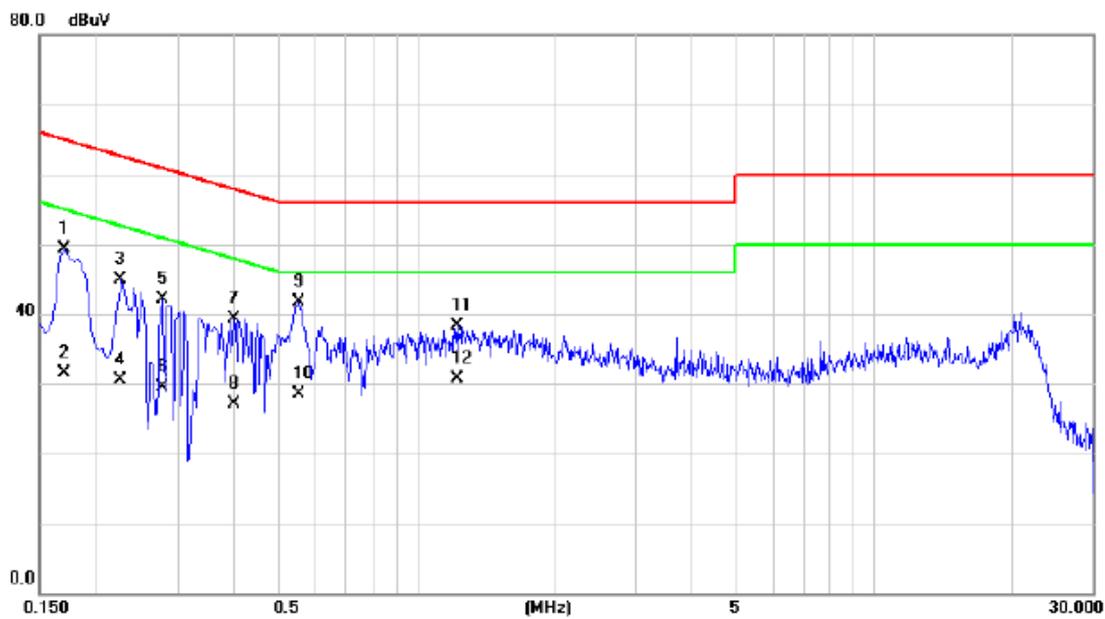

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1700	39.80	9.48	49.28	64.96	-15.68	QP	
2	0.1700	22.12	9.48	31.60	54.96	-23.36	AVG	
3	0.2260	35.46	9.51	44.97	62.60	-17.63	QP	
4	0.2260	21.01	9.51	30.52	52.60	-22.08	AVG	
5	0.2780	32.66	9.52	42.18	60.88	-18.70	QP	
6	0.2780	19.98	9.52	29.50	50.88	-21.38	AVG	
7	0.3980	29.80	9.53	39.33	57.90	-18.57	QP	
8	0.3980	17.63	9.53	27.16	47.90	-20.74	AVG	
9 *	0.5540	32.19	9.56	41.75	56.00	-14.25	QP	
10	0.5540	18.95	9.56	28.51	46.00	-17.49	AVG	
11	1.2340	28.70	9.62	38.32	56.00	-17.68	QP	
12	1.2340	21.03	9.62	30.65	46.00	-15.35	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: Lianchuang / MEMD1532B528000


Line

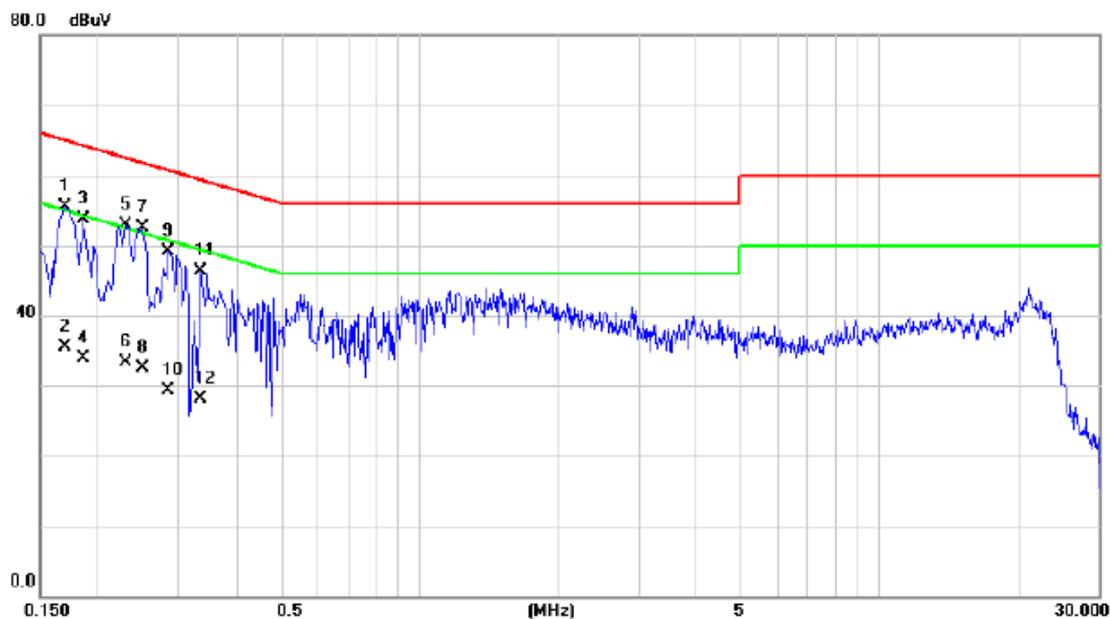

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1700	45.90	9.56	55.46	64.96	-9.50	QP	
2		0.1700	25.94	9.56	35.50	54.96	-19.46	AVG	
3		0.1860	44.06	9.57	53.63	64.21	-10.58	QP	
4		0.1860	24.32	9.57	33.89	54.21	-20.32	AVG	
5		0.2300	43.32	9.59	52.91	62.45	-9.54	QP	
6		0.2300	23.78	9.59	33.37	52.45	-19.08	AVG	
7	*	0.2500	42.88	9.61	52.49	61.76	-9.27	QP	
8		0.2500	22.84	9.61	32.45	51.76	-19.31	AVG	
9		0.2860	39.54	9.63	49.17	60.64	-11.47	QP	
10		0.2860	19.63	9.63	29.26	50.64	-21.38	AVG	
11		0.3340	36.61	9.64	46.25	59.35	-13.10	QP	
12		0.3340	18.52	9.64	28.16	49.35	-21.19	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: Lianchuang / MEMD1532B528000


Neutral

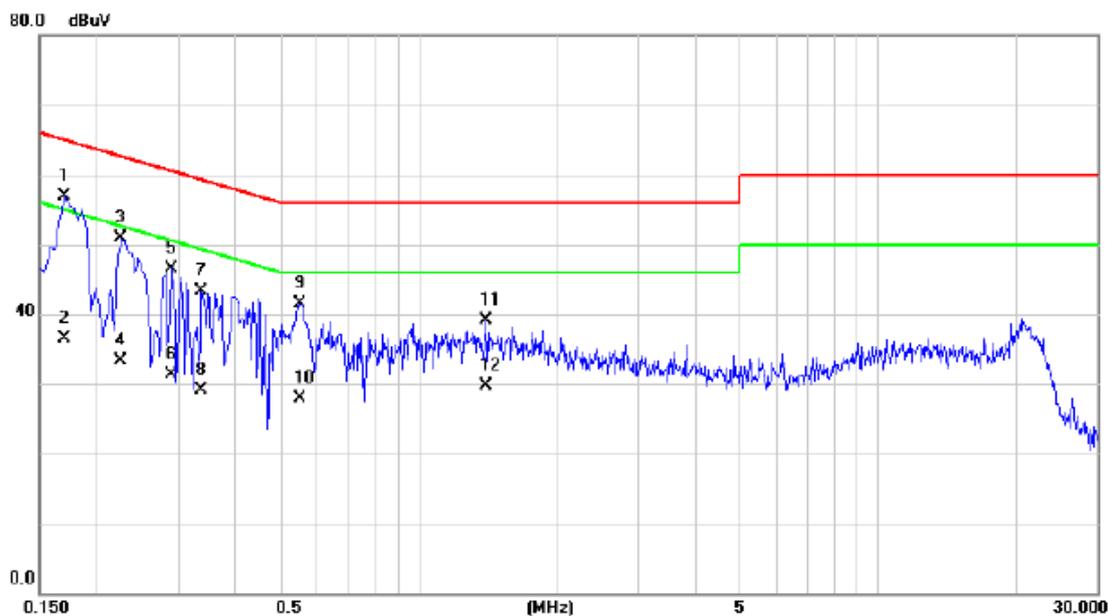

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1700	47.33	9.48	56.81	64.96	-8.15	QP	
2		0.1700	27.10	9.48	36.58	54.96	-18.38	AVG	
3		0.2260	41.30	9.51	50.81	62.60	-11.79	QP	
4		0.2260	23.85	9.51	33.36	52.60	-19.24	AVG	
5		0.2900	36.98	9.52	46.50	60.52	-14.02	QP	
6		0.2900	21.85	9.52	31.37	50.52	-19.15	AVG	
7		0.3380	33.80	9.53	43.33	59.25	-15.92	QP	
8		0.3380	19.63	9.53	29.16	49.25	-20.09	AVG	
9		0.5540	31.90	9.56	41.46	56.00	-14.54	QP	
10		0.5540	18.25	9.56	27.81	46.00	-18.19	AVG	
11		1.4100	29.45	9.65	39.10	56.00	-16.90	QP	
12		1.4100	20.10	9.65	29.75	46.00	-16.25	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Line

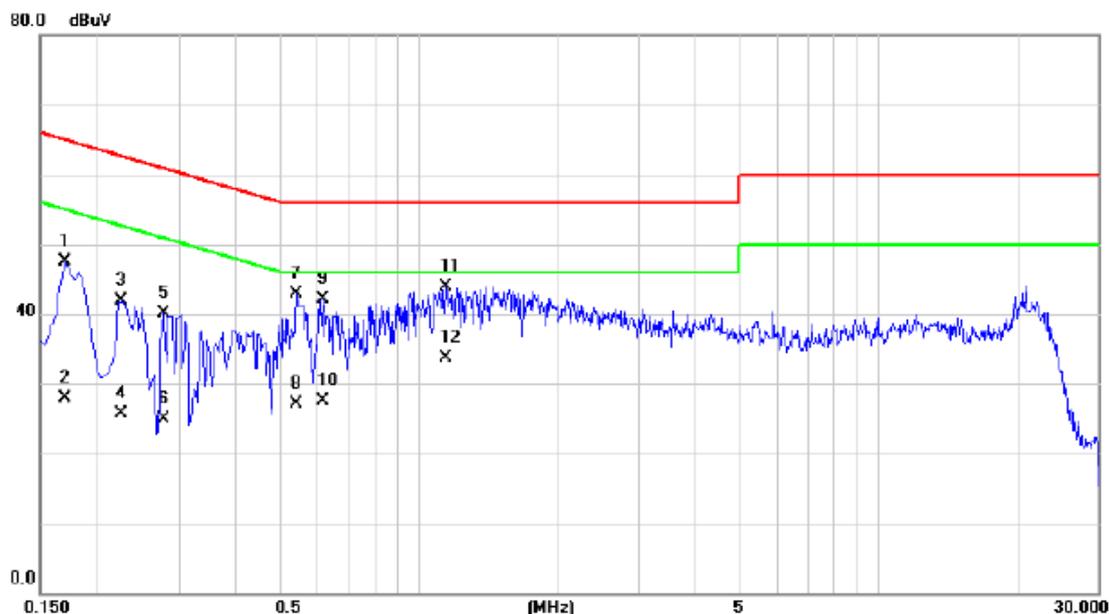

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1700	37.92	9.56	47.48	64.96	-17.48	QP	
2		0.1700	18.25	9.56	27.81	54.96	-27.15	AVG	
3		0.2260	32.27	9.59	41.86	62.60	-20.74	QP	
4		0.2260	16.20	9.59	25.79	52.60	-26.81	AVG	
5		0.2780	30.50	9.63	40.13	60.88	-20.75	QP	
6		0.2780	15.32	9.63	24.95	50.88	-25.93	AVG	
7		0.5420	33.19	9.70	42.89	56.00	-13.11	QP	
8		0.5420	17.32	9.70	27.02	46.00	-18.98	AVG	
9		0.6180	32.29	9.73	42.02	56.00	-13.98	QP	
10		0.6180	17.85	9.73	27.58	46.00	-18.42	AVG	
11	*	1.1460	34.02	9.81	43.83	56.00	-12.17	QP	
12		1.1460	23.96	9.81	33.77	46.00	-12.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Neutral

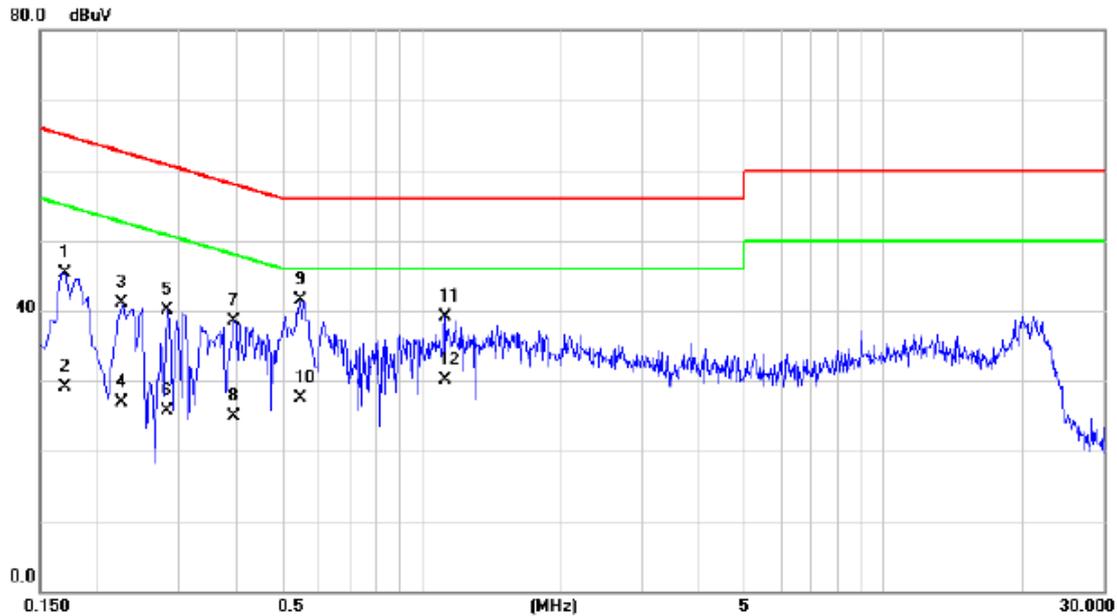

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1700	35.85	9.48	45.33	64.96	-19.63	QP	
2		0.1700	19.65	9.48	29.13	54.96	-25.83	AVG	
3		0.2260	31.67	9.51	41.18	62.60	-21.42	QP	
4		0.2260	17.36	9.51	26.87	52.60	-25.73	AVG	
5		0.2820	30.51	9.52	40.03	60.76	-20.73	QP	
6		0.2820	16.25	9.52	25.77	50.76	-24.99	AVG	
7		0.3940	29.05	9.53	38.58	57.98	-19.40	QP	
8		0.3940	15.36	9.53	24.89	47.98	-23.09	AVG	
9	*	0.5500	31.88	9.56	41.44	56.00	-14.56	QP	
10		0.5500	17.95	9.56	27.51	46.00	-18.49	AVG	
11		1.1260	29.52	9.61	39.13	56.00	-16.87	QP	
12		1.1260	20.41	9.61	30.02	46.00	-15.98	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+playing+speaker
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Line

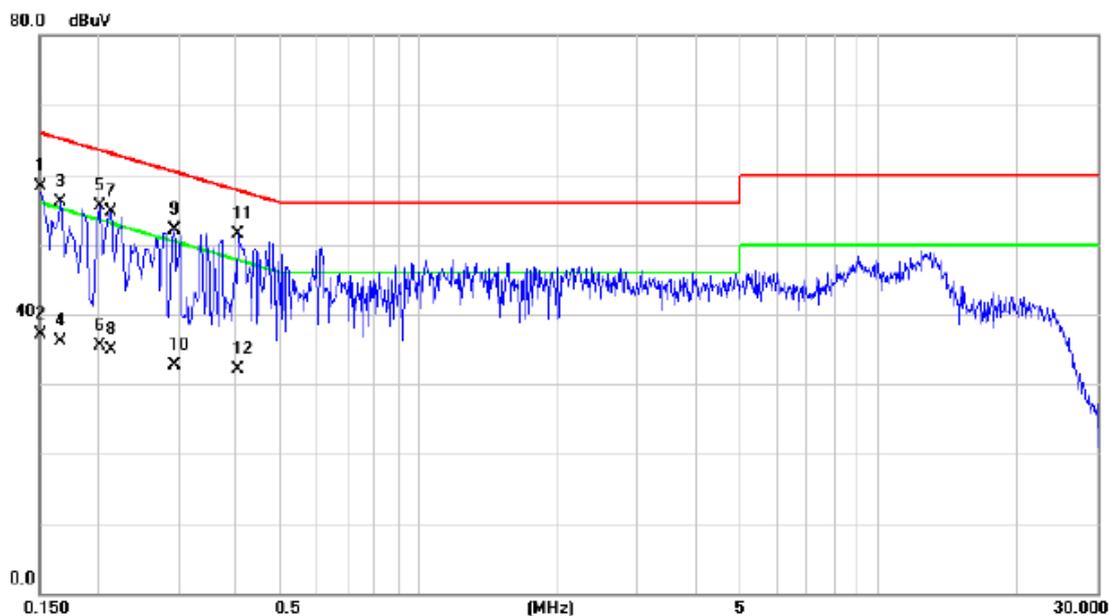

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	48.68	9.54	58.22	66.00	-7.78	QP	
2		0.1500	27.63	9.54	37.17	56.00	-18.83	AVG	
3		0.1660	46.63	9.56	56.19	65.16	-8.97	QP	
4		0.1660	26.54	9.56	36.10	55.16	-19.06	AVG	
5		0.2020	45.90	9.57	55.47	63.53	-8.06	QP	
6		0.2020	25.85	9.57	35.42	53.53	-18.11	AVG	
7		0.2140	45.11	9.58	54.69	63.05	-8.36	QP	
8		0.2140	25.36	9.58	34.94	53.05	-18.11	AVG	
9		0.2940	42.48	9.64	52.12	60.41	-8.29	QP	
10		0.2940	23.12	9.64	32.76	50.41	-17.65	AVG	
11	*	0.4060	41.80	9.68	51.48	57.73	-6.25	QP	
12		0.4060	22.45	9.68	32.13	47.73	-15.60	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+playing+speaker
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Neutral

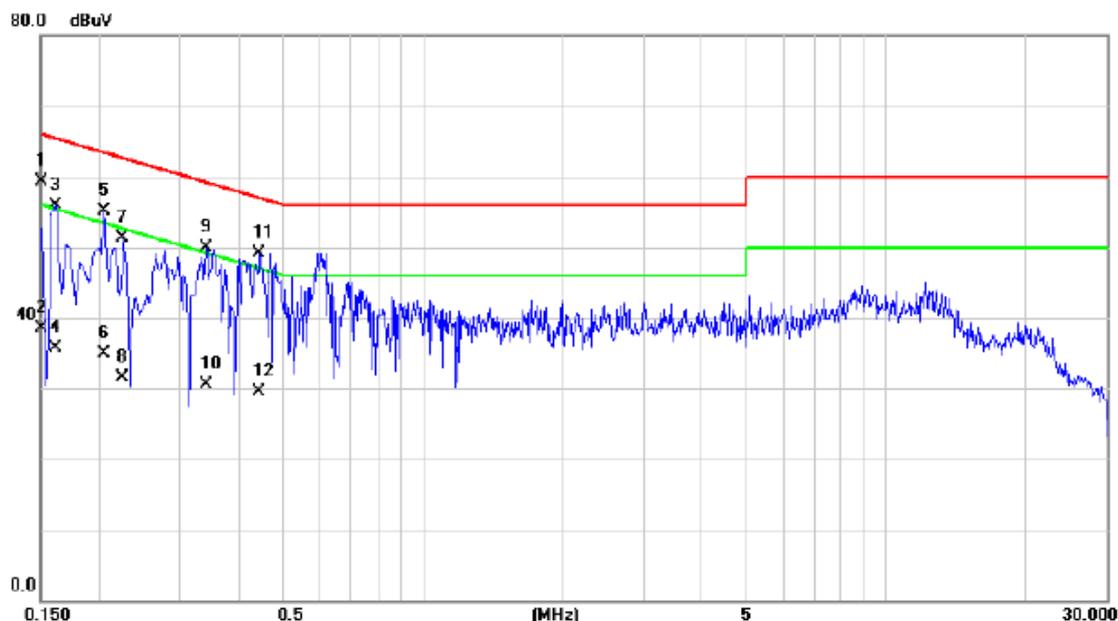

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	49.80	9.49	59.29	66.00	-6.71	QP	
2		0.1500	29.10	9.49	38.59	56.00	-17.41	AVG	
3		0.1620	46.42	9.48	55.90	65.36	-9.46	QP	
4		0.1620	26.32	9.48	35.80	55.36	-19.56	AVG	
5		0.2060	45.58	9.50	55.08	63.37	-8.29	QP	
6		0.2060	25.41	9.50	34.91	53.37	-18.46	AVG	
7		0.2260	41.83	9.51	51.34	62.60	-11.26	QP	
8		0.2260	22.04	9.51	31.55	52.60	-21.05	AVG	
9		0.3420	40.35	9.53	49.88	59.15	-9.27	QP	
10		0.3420	20.95	9.53	30.48	49.15	-18.67	AVG	
11		0.4460	39.63	9.54	49.17	56.95	-7.78	QP	
12		0.4460	19.96	9.54	29.50	46.95	-17.45	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Line

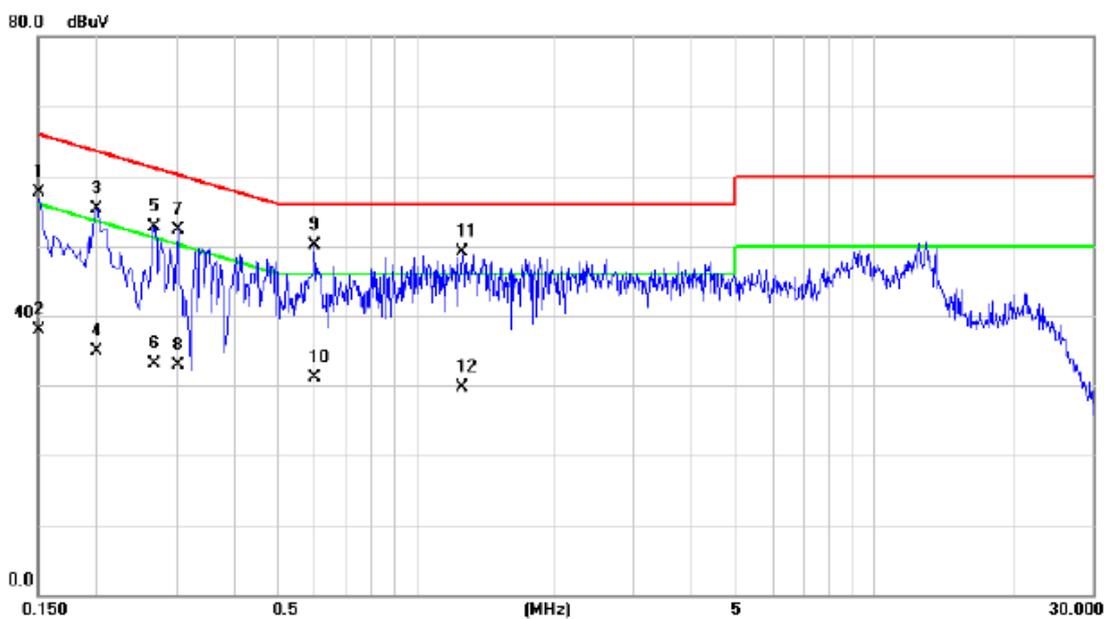

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	48.18	9.54	57.72	66.00	-8.28	QP	
2		0.1500	28.32	9.54	37.86	56.00	-18.14	AVG	
3		0.2006	45.73	9.57	55.30	63.59	-8.29	QP	
4		0.2006	25.37	9.57	34.94	53.59	-18.65	AVG	
5		0.2700	42.99	9.62	52.61	61.12	-8.51	QP	
6		0.2700	23.41	9.62	33.03	51.12	-18.09	AVG	
7		0.3020	42.60	9.64	52.24	60.19	-7.95	QP	
8		0.3020	23.21	9.64	32.85	50.19	-17.34	AVG	
9	*	0.6020	40.41	9.72	50.13	56.00	-5.87	QP	
10		0.6020	21.40	9.72	31.12	46.00	-14.88	AVG	
11		1.2660	39.28	9.82	49.10	56.00	-6.90	QP	
12		1.2660	19.97	9.82	29.79	46.00	-16.21	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Neutral

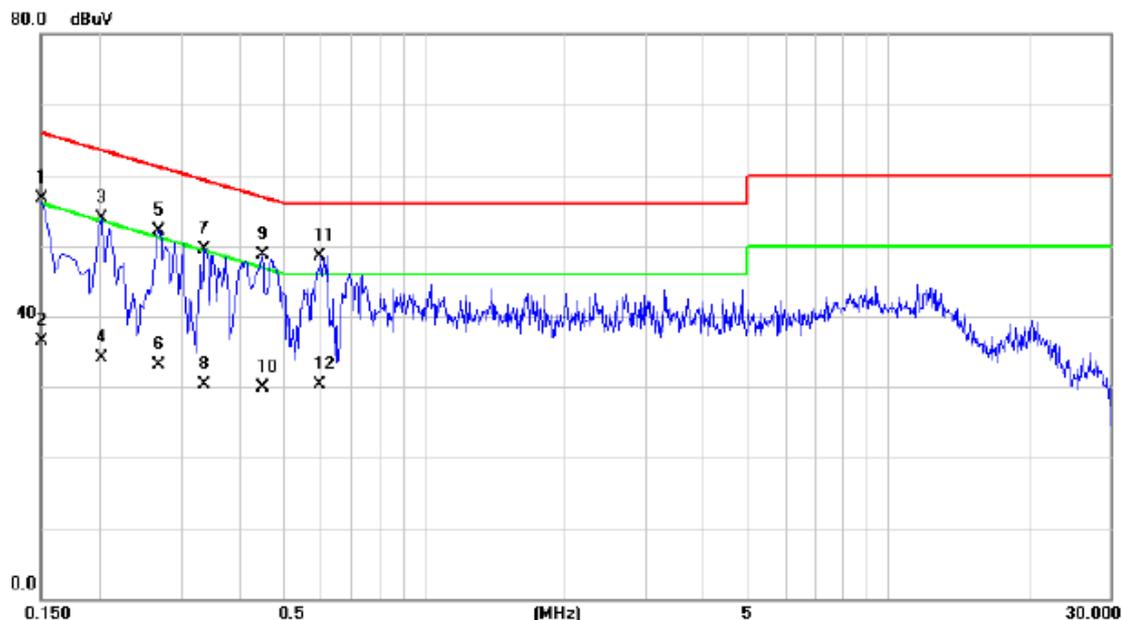

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	47.24	9.49	56.73	66.00	-9.27	QP	
2		0.1500	26.94	9.49	36.43	56.00	-19.57	AVG	
3		0.2020	44.41	9.50	53.91	63.53	-9.62	QP	
4		0.2020	24.63	9.50	34.13	53.53	-19.40	AVG	
5		0.2700	42.58	9.51	52.09	61.12	-9.03	QP	
6		0.2700	23.62	9.51	33.13	51.12	-17.99	AVG	
7		0.3380	40.00	9.53	49.53	59.25	-9.72	QP	
8		0.3380	20.84	9.53	30.37	49.25	-18.88	AVG	
9		0.4500	39.15	9.55	48.70	56.88	-8.18	QP	
10		0.4500	20.45	9.55	30.00	46.88	-16.88	AVG	
11	*	0.5980	39.03	9.56	48.59	56.00	-7.41	QP	
12		0.5980	20.75	9.56	30.31	46.00	-15.69	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+GPS+SIM 1
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Line

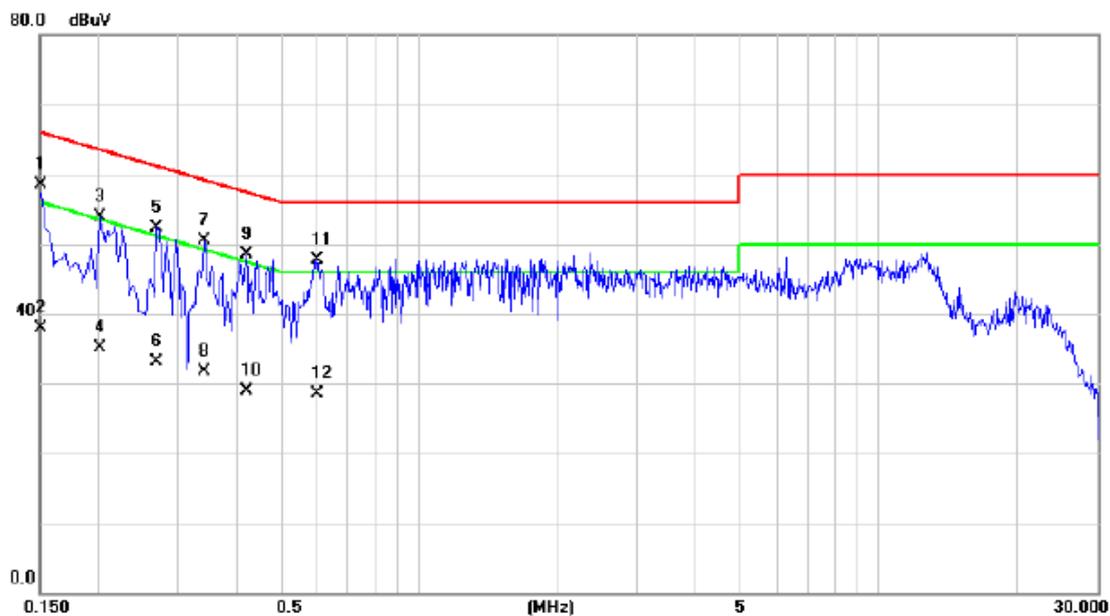

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1500	48.87	9.54	58.41	66.00	-7.59	QP	
2		0.1500	28.32	9.54	37.86	56.00	-18.14	AVG	
3		0.2020	44.26	9.57	53.83	63.53	-9.70	QP	
4		0.2020	25.63	9.57	35.20	53.53	-18.33	AVG	
5		0.2700	42.72	9.62	52.34	61.12	-8.78	QP	
6		0.2700	23.41	9.62	33.03	51.12	-18.09	AVG	
7		0.3420	40.88	9.64	50.52	59.15	-8.63	QP	
8		0.3420	22.10	9.64	31.74	49.15	-17.41	AVG	
9		0.4220	38.74	9.68	48.42	57.41	-8.99	QP	
10		0.4220	19.25	9.68	28.93	47.41	-18.48	AVG	
11		0.6020	37.89	9.72	47.61	56.00	-8.39	QP	
12		0.6020	18.78	9.72	28.50	46.00	-17.50	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+GPS+SIM 1
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Neutral

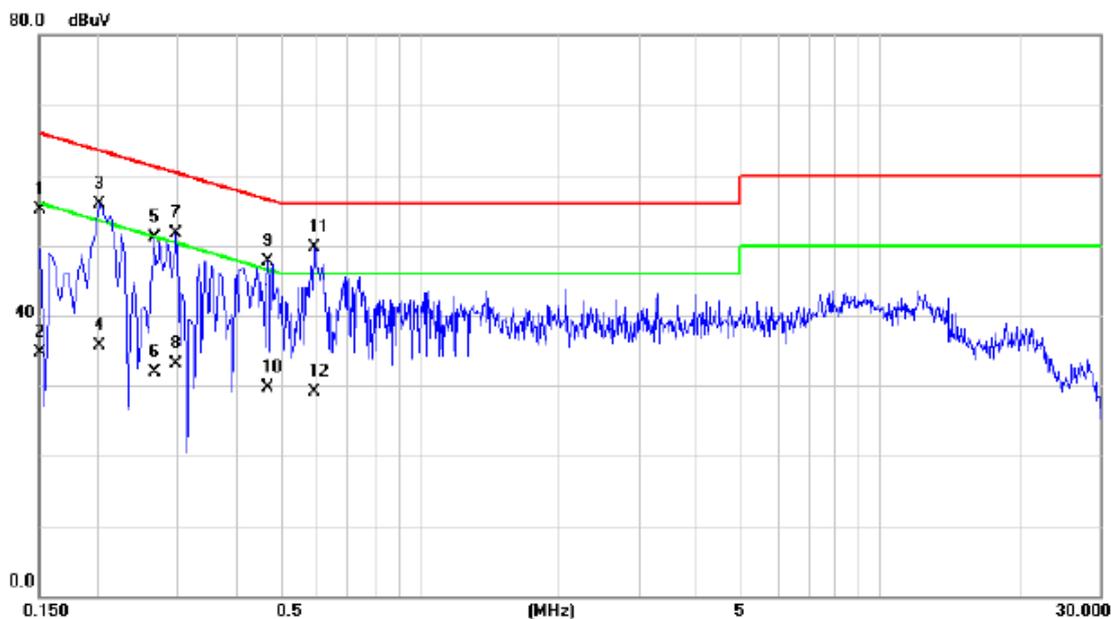

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	45.52	9.49	55.01	66.00	-10.99	QP	
2		0.1500	25.31	9.49	34.80	56.00	-21.20	AVG	
3		0.2020	46.32	9.50	55.82	63.53	-7.71	QP	
4		0.2020	26.12	9.50	35.62	53.53	-17.91	AVG	
5		0.2660	41.51	9.51	51.02	61.24	-10.22	QP	
6		0.2660	22.37	9.51	31.88	51.24	-19.36	AVG	
7		0.2980	42.09	9.52	51.61	60.30	-8.69	QP	
8		0.2980	23.61	9.52	33.13	50.30	-17.17	AVG	
9		0.4700	38.16	9.55	47.71	56.51	-8.80	QP	
10		0.4700	20.10	9.55	29.65	46.51	-16.86	AVG	
11	*	0.5940	40.23	9.56	49.79	56.00	-6.21	QP	
12		0.5940	19.63	9.56	29.19	46.00	-16.81	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Line

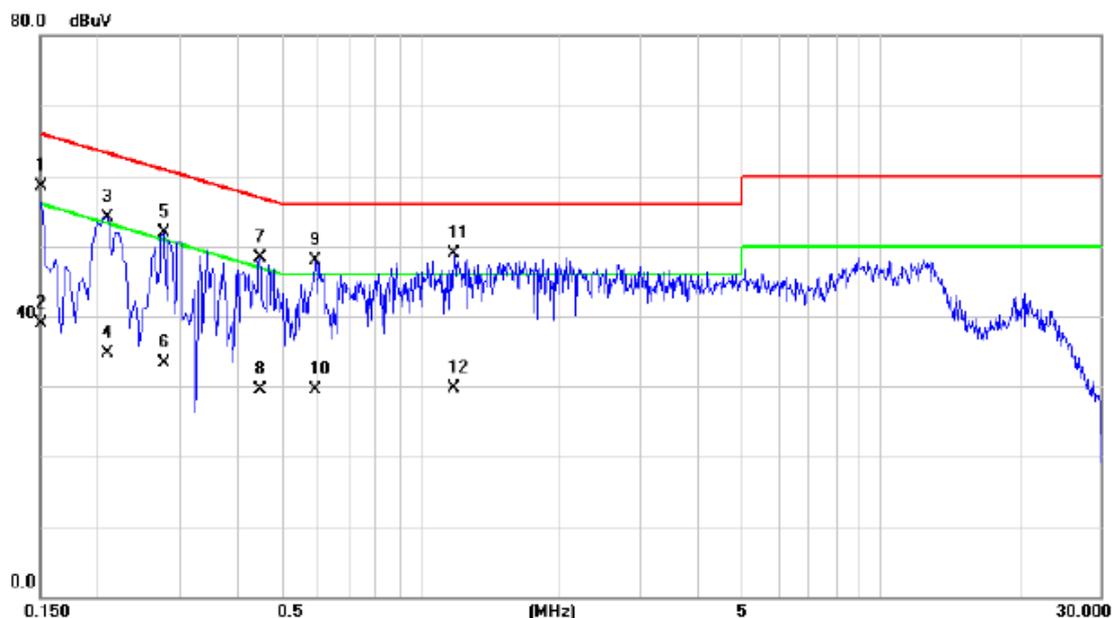

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	49.01	9.54	58.55	66.00	-7.45	QP	
2		0.1500	29.41	9.54	38.95	56.00	-17.05	AVG	
3		0.2100	44.58	9.58	54.16	63.21	-9.05	QP	
4		0.2100	25.21	9.58	34.79	53.21	-18.42	AVG	
5		0.2780	42.25	9.63	51.88	60.88	-9.00	QP	
6		0.2780	23.61	9.63	33.24	50.88	-17.64	AVG	
7		0.4500	38.63	9.68	48.31	56.88	-8.57	QP	
8		0.4500	19.84	9.68	29.52	46.88	-17.36	AVG	
9		0.5940	38.10	9.72	47.82	56.00	-8.18	QP	
10		0.5940	19.74	9.72	29.46	46.00	-16.54	AVG	
11	*	1.1900	39.08	9.81	48.89	56.00	-7.11	QP	
12		1.1900	19.89	9.81	29.70	46.00	-16.30	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Neutral

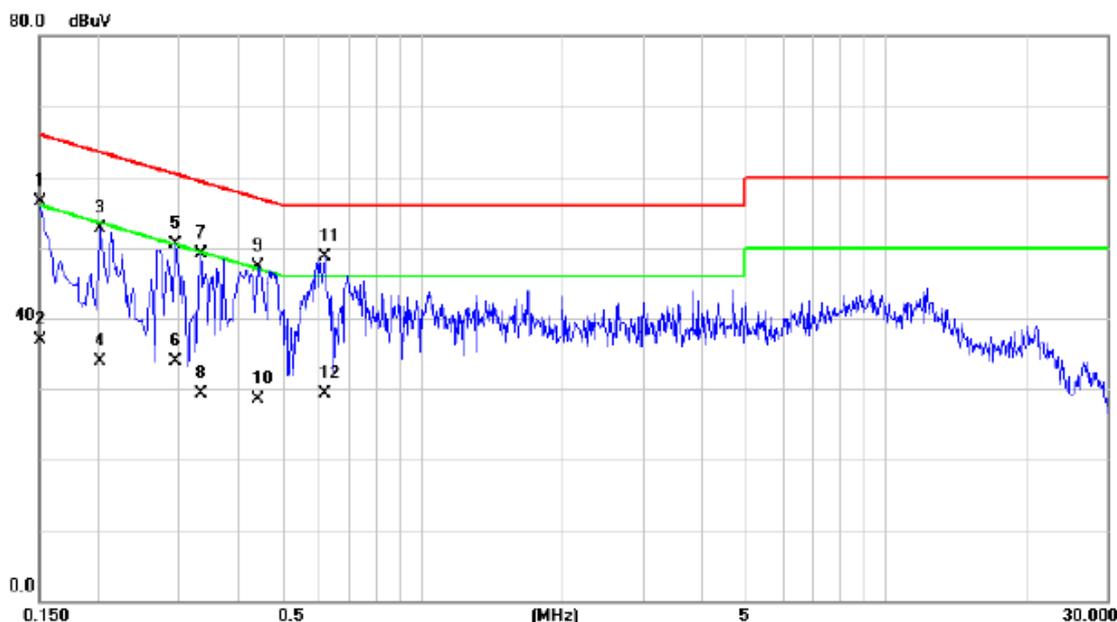

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	47.09	9.49	56.58	66.00	-9.42	QP	
2		0.1500	27.36	9.49	36.85	56.00	-19.15	AVG	
3		0.2020	43.19	9.50	52.69	63.53	-10.84	QP	
4		0.2020	24.32	9.50	33.82	53.53	-19.71	AVG	
5		0.2940	40.91	9.52	50.43	60.41	-9.98	QP	
6		0.2940	24.35	9.52	33.87	50.41	-16.54	AVG	
7		0.3340	39.66	9.53	49.19	59.35	-10.16	QP	
8		0.3340	19.85	9.53	29.38	49.35	-19.97	AVG	
9		0.4460	37.84	9.54	47.38	56.95	-9.57	QP	
10		0.4460	19.02	9.54	28.56	46.95	-18.39	AVG	
11	*	0.6180	39.05	9.56	48.61	56.00	-7.39	QP	
12		0.6180	19.75	9.56	29.31	46.00	-16.69	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+GPS+SIM 1
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Line

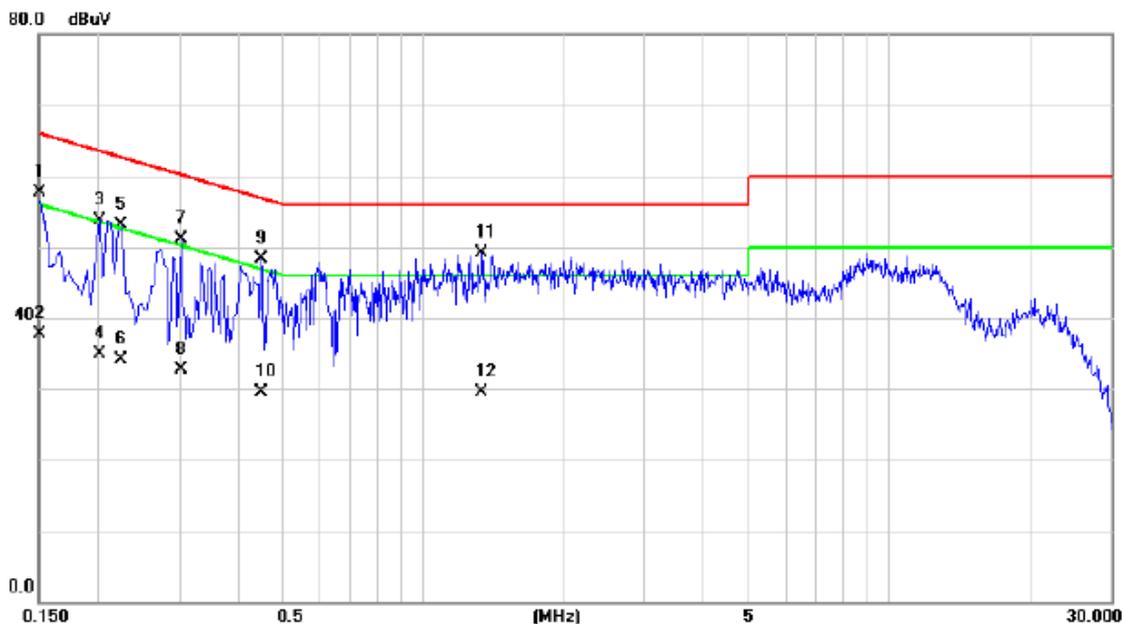

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	48.14	9.54	57.68	66.00	-8.32	QP	
2		0.1500	28.14	9.54	37.68	56.00	-18.32	AVG	
3		0.2020	44.23	9.57	53.80	63.53	-9.73	QP	
4		0.2020	25.31	9.57	34.88	53.53	-18.65	AVG	
5		0.2260	43.55	9.59	53.14	62.60	-9.46	QP	
6		0.2260	24.52	9.59	34.11	52.60	-18.49	AVG	
7		0.3020	41.43	9.64	51.07	60.19	-9.12	QP	
8		0.3020	23.04	9.64	32.68	50.19	-17.51	AVG	
9		0.4500	38.66	9.68	48.34	56.88	-8.54	QP	
10		0.4500	19.84	9.68	29.52	46.88	-17.36	AVG	
11	*	1.3380	39.20	9.83	49.03	56.00	-6.97	QP	
12		1.3380	19.74	9.83	29.57	46.00	-16.43	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+GPS+SIM 1
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Neutral

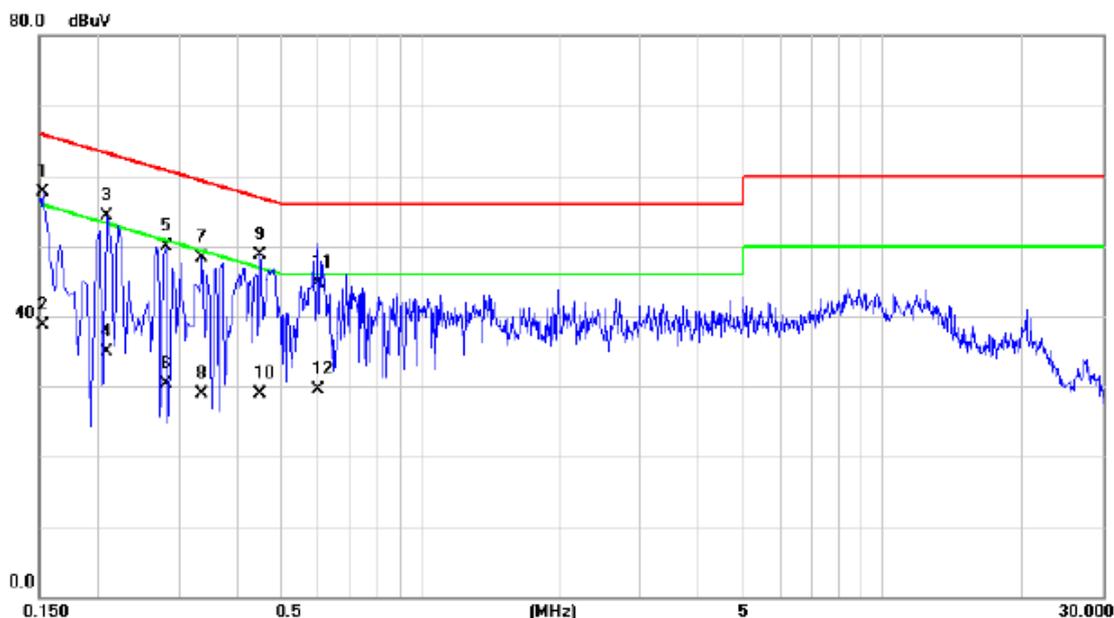

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1524	48.26	9.49	57.75	65.87	-8.12	QP	
2		0.1524	29.12	9.49	38.61	55.87	-17.26	AVG	
3		0.2100	44.78	9.50	54.28	63.21	-8.93	QP	
4		0.2100	25.32	9.50	34.82	53.21	-18.39	AVG	
5		0.2820	40.48	9.52	50.00	60.76	-10.76	QP	
6		0.2820	20.84	9.52	30.36	50.76	-20.40	AVG	
7		0.3380	38.77	9.53	48.30	59.25	-10.95	QP	
8		0.3380	19.35	9.53	28.88	49.25	-20.37	AVG	
9		0.4500	39.09	9.55	48.64	56.88	-8.24	QP	
10		0.4500	19.41	9.55	28.96	46.88	-17.92	AVG	
11		0.6020	35.21	9.56	44.77	56.00	-11.23	QP	
12		0.6020	19.99	9.56	29.55	46.00	-16.45	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+wifi+GPS+SIM 1
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Line

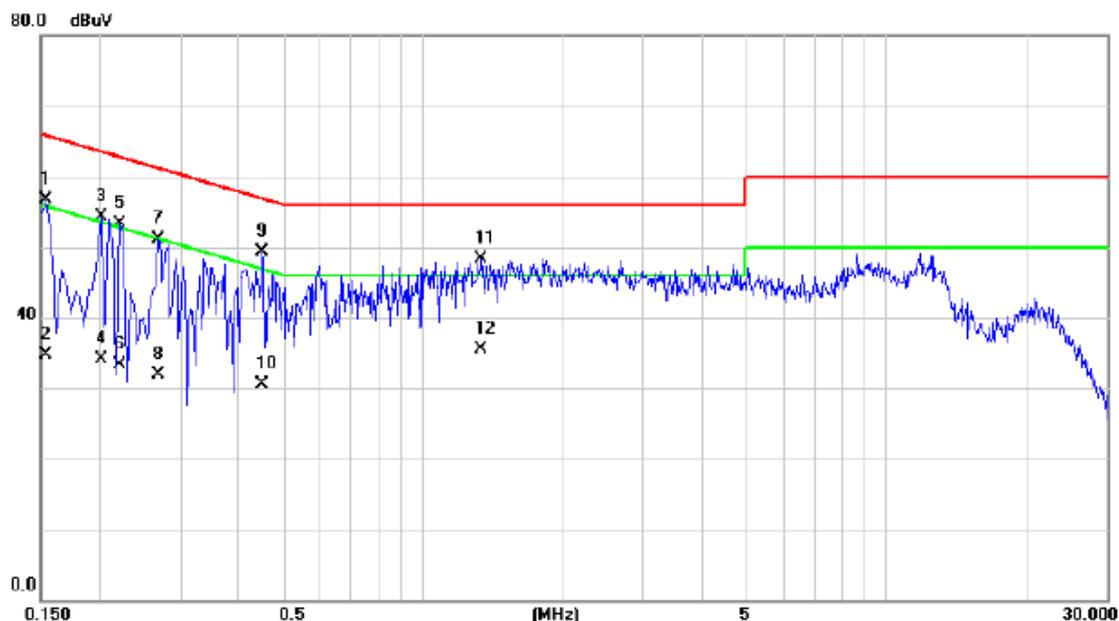

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1540	47.14	9.54	56.68	65.78	-9.10	QP	
2		0.1540	25.20	9.54	34.74	55.78	-21.04	AVG	
3		0.2020	44.66	9.57	54.23	63.53	-9.30	QP	
4		0.2020	24.60	9.57	34.17	53.53	-19.36	AVG	
5		0.2220	43.69	9.59	53.28	62.74	-9.46	QP	
6		0.2220	23.80	9.59	33.39	52.74	-19.35	AVG	
7		0.2700	41.45	9.62	51.07	61.12	-10.05	QP	
8		0.2700	22.30	9.62	31.92	51.12	-19.20	AVG	
9	*	0.4500	39.65	9.68	49.33	56.88	-7.55	QP	
10		0.4500	20.80	9.68	30.48	46.88	-16.40	AVG	
11		1.3380	38.43	9.83	48.26	56.00	-7.74	QP	
12		1.3380	25.63	9.83	35.46	46.00	-10.54	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+wifi+GPS+SIM 1
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Neutral

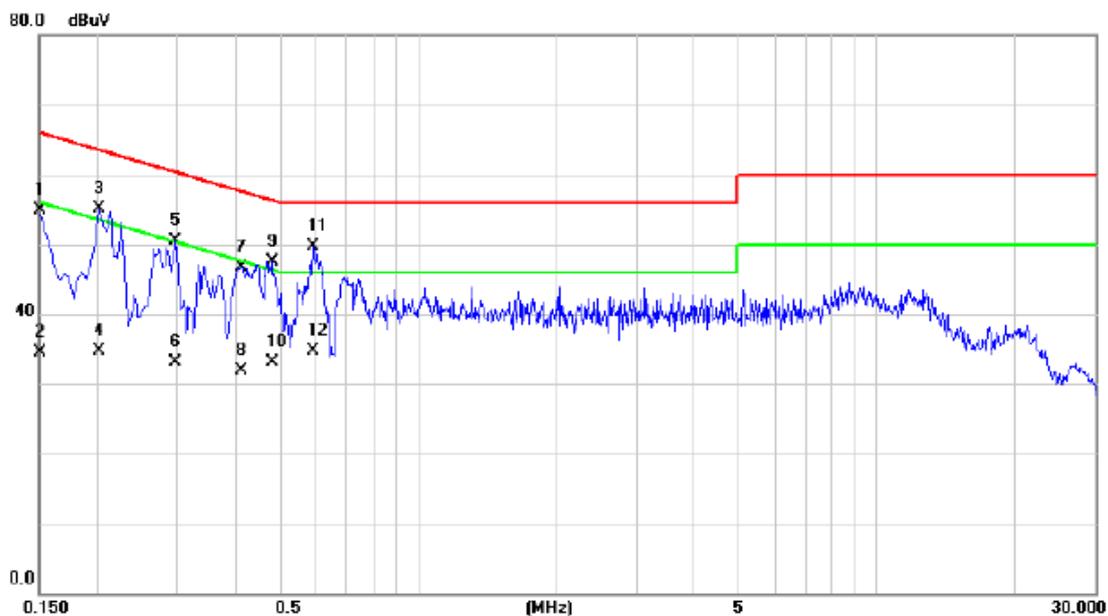

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	45.33	9.49	54.82	66.00	-11.18	QP	
2		0.1500	24.96	9.49	34.45	56.00	-21.55	AVG	
3		0.2020	45.58	9.50	55.08	63.53	-8.45	QP	
4		0.2020	25.30	9.50	34.80	53.53	-18.73	AVG	
5		0.2980	40.98	9.52	50.50	60.30	-9.80	QP	
6		0.2980	23.60	9.52	33.12	50.30	-17.18	AVG	
7		0.4140	37.26	9.53	46.79	57.57	-10.78	QP	
8		0.4140	22.30	9.53	31.83	47.57	-15.74	AVG	
9		0.4820	37.92	9.55	47.47	56.30	-8.83	QP	
10		0.4820	23.60	9.55	33.15	46.30	-13.15	AVG	
11	*	0.5940	40.11	9.56	49.67	56.00	-6.33	QP	
12		0.5940	25.10	9.56	34.66	46.00	-11.34	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


Line

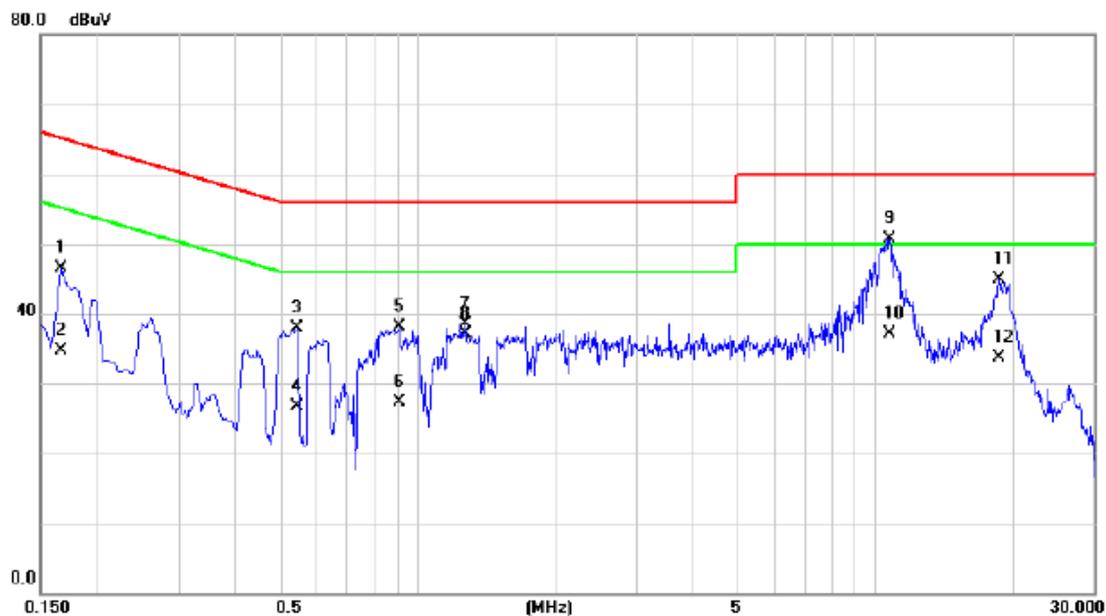

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1660	36.85	9.56	46.41	65.16	-18.75	QP	
2		0.1660	25.12	9.56	34.68	55.16	-20.48	AVG	
3		0.5460	28.18	9.70	37.88	56.00	-18.12	QP	
4		0.5460	17.01	9.70	26.71	46.00	-19.29	AVG	
5		0.9100	28.26	9.78	38.04	56.00	-17.96	QP	
6		0.9100	17.52	9.78	27.30	46.00	-18.70	AVG	
7		1.2740	28.64	9.82	38.46	56.00	-17.54	QP	
8	*	1.2740	27.20	9.82	37.02	46.00	-8.98	AVG	
9		10.7780	40.91	9.87	50.78	60.00	-9.22	QP	
10		10.7780	27.14	9.87	37.01	50.00	-12.99	AVG	
11		18.7020	34.97	9.84	44.81	60.00	-15.19	QP	
12		18.7020	23.77	9.84	33.61	50.00	-16.39	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


Neutral

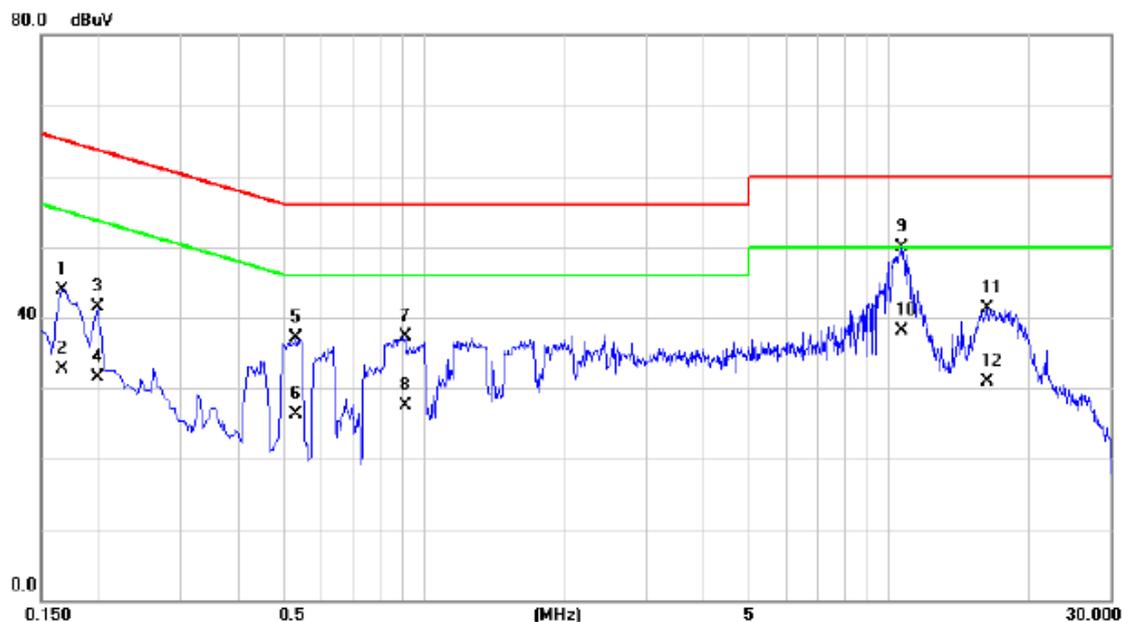

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1660	34.38	9.48	43.86	65.16	-21.30	QP	
2		0.1660	23.25	9.48	32.73	55.16	-22.43	AVG	
3		0.1980	32.08	9.50	41.58	63.69	-22.11	QP	
4		0.1980	22.10	9.50	31.60	53.69	-22.09	AVG	
5		0.5300	27.47	9.56	37.03	56.00	-18.97	QP	
6		0.5300	16.80	9.56	26.36	46.00	-19.64	AVG	
7		0.9100	27.71	9.59	37.30	56.00	-18.70	QP	
8		0.9100	17.85	9.59	27.44	46.00	-18.56	AVG	
9	*	10.6500	40.06	9.86	49.92	60.00	-10.08	QP	
10		10.6500	28.23	9.86	38.09	50.00	-11.91	AVG	
11		16.2500	31.30	9.93	41.23	60.00	-18.77	QP	
12		16.2500	20.95	9.93	30.88	50.00	-19.12	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN


Line

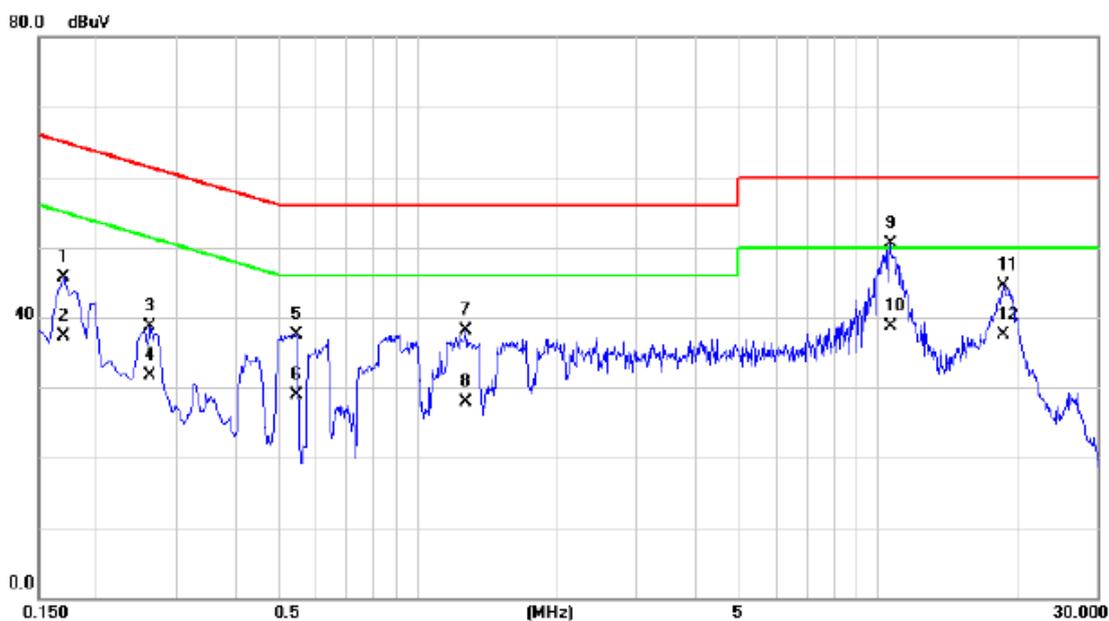

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1700	36.18	9.56	45.74	64.96	-19.22	QP	
2	0.1700	27.80	9.56	37.36	54.96	-17.60	AVG	
3	0.2620	29.08	9.62	38.70	61.37	-22.67	QP	
4	0.2620	22.00	9.62	31.62	51.37	-19.75	AVG	
5	0.5460	27.86	9.70	37.56	56.00	-18.44	QP	
6	0.5460	19.20	9.70	28.90	46.00	-17.10	AVG	
7	1.2740	28.20	9.82	38.02	56.00	-17.98	QP	
8	1.2740	18.10	9.82	27.92	46.00	-18.08	AVG	
9 *	10.6340	40.62	9.87	50.49	60.00	-9.51	QP	
10	10.6340	28.90	9.87	38.77	50.00	-11.23	AVG	
11	18.7980	34.69	9.84	44.53	60.00	-15.47	QP	
12	18.7980	27.60	9.84	37.44	50.00	-12.56	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN

Neutral

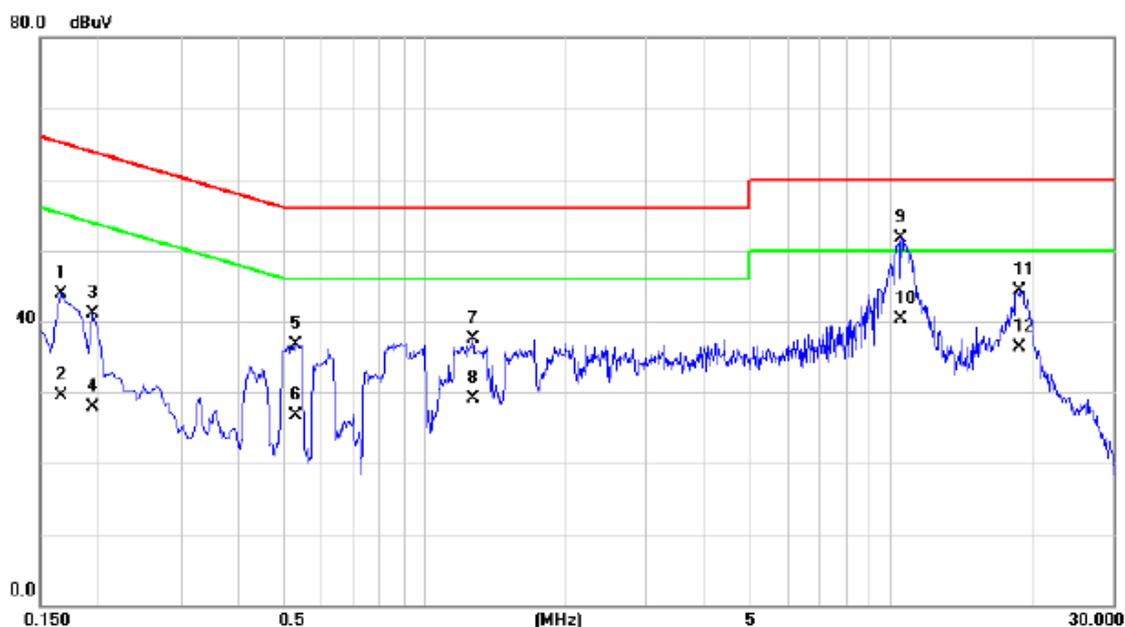


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1660	34.49	9.48	43.97	65.16	-21.19	QP	
2		0.1660	20.12	9.48	29.60	55.16	-25.56	AVG	
3		0.1940	31.60	9.50	41.10	63.86	-22.76	QP	
4		0.1940	18.36	9.50	27.86	53.86	-26.00	AVG	
5		0.5300	27.18	9.56	36.74	56.00	-19.26	QP	
6		0.5300	17.20	9.56	26.76	46.00	-19.24	AVG	
7		1.2740	27.84	9.64	37.48	56.00	-18.52	QP	
8		1.2740	19.40	9.64	29.04	46.00	-16.96	AVG	
9	*	10.5100	41.86	9.86	51.72	60.00	-8.28	QP	
10		10.5100	30.40	9.86	40.26	50.00	-9.74	AVG	
11		18.9940	34.41	9.96	44.37	60.00	-15.63	QP	
12		18.9940	26.40	9.96	36.36	50.00	-13.64	AVG	

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: HK +USB Cable: HONGLIN +Battery: Lishen + Earphone: GOERTEK


Vertical

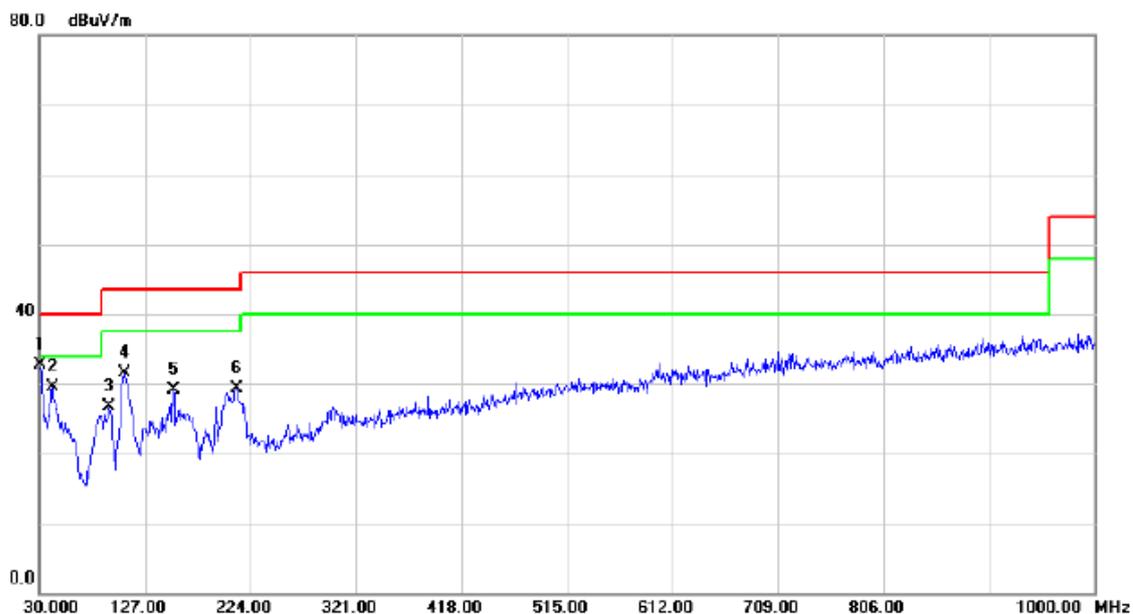

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	42.42	-9.81	32.61	40.00	-7.39	QP	
2		41.6400	45.59	-16.10	29.49	40.00	-10.51	QP	
3		94.0200	45.70	-18.98	26.72	43.50	-16.78	QP	
4		107.6000	50.12	-18.68	31.44	43.50	-12.06	QP	
5		153.1900	46.11	-16.98	29.13	43.50	-14.37	QP	
6		211.3900	44.04	-14.83	29.21	43.50	-14.29	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: HK +USB Cable: HONGLIN +Battery: Lishen + Earphone: GOERTEK


Horizontal

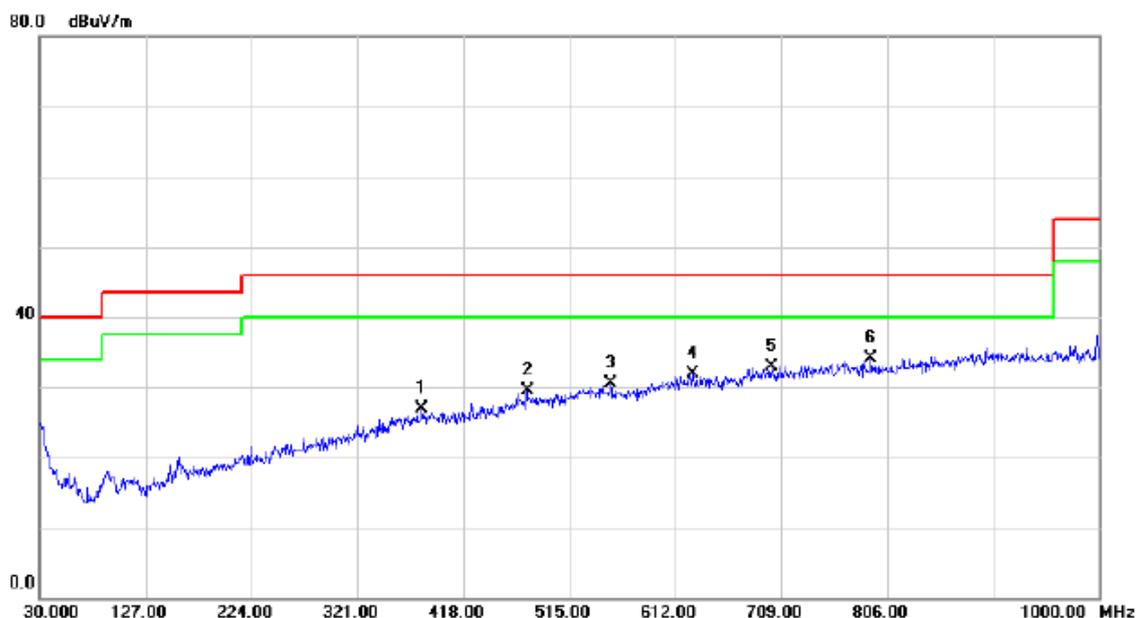

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		380.1700	34.52	-7.71	26.81	46.00	-19.19	QP	
2		476.6850	35.29	-5.72	29.57	46.00	-16.43	QP	
3		552.8300	34.98	-4.48	30.50	46.00	-15.50	QP	
4		627.5200	34.81	-2.86	31.95	46.00	-14.05	QP	
5		700.2700	34.50	-1.57	32.93	46.00	-13.07	QP	
6	*	791.4500	34.63	-0.51	34.12	46.00	-11.88	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Vertical

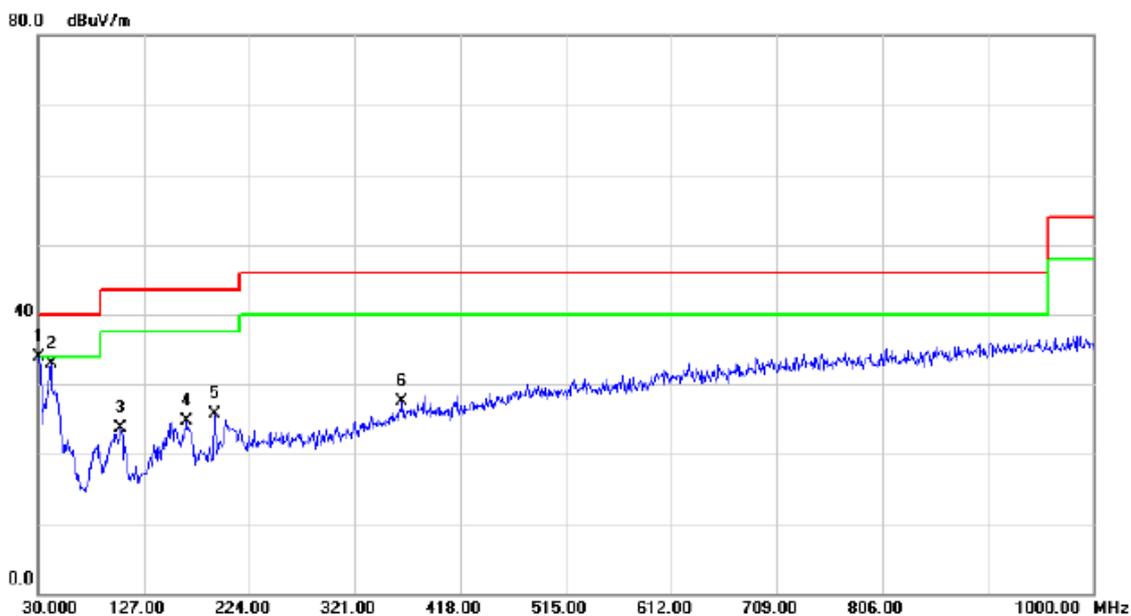

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	43.79	-9.81	33.98	40.00	-6.02	QP	
2		41.6400	48.96	-16.10	32.86	40.00	-7.14	QP	
3		105.6600	42.34	-18.58	23.76	43.50	-19.74	QP	
4		166.7700	41.06	-16.31	24.75	43.50	-18.75	QP	
5		191.9900	41.27	-15.54	25.73	43.50	-17.77	QP	
6		365.1350	35.79	-8.29	27.50	46.00	-18.50	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Horizontal

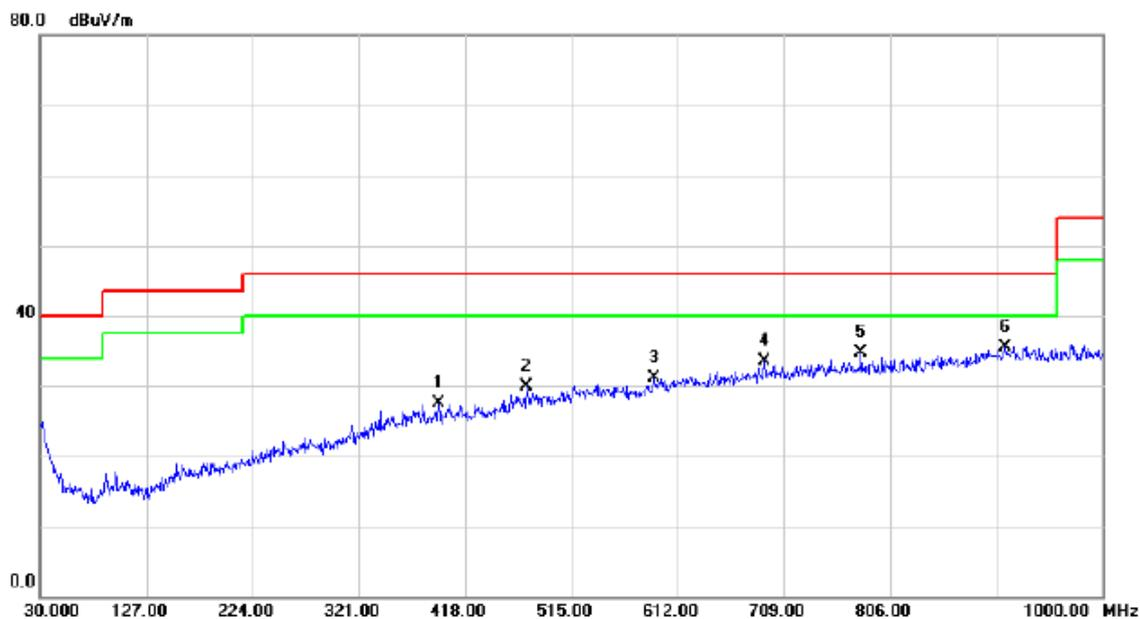

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		393.7500	35.27	-7.82	27.45	46.00	-18.55	QP	
2		474.7450	35.60	-5.73	29.87	46.00	-16.13	QP	
3		590.6600	35.11	-4.08	31.03	46.00	-14.97	QP	
4		692.0250	35.30	-1.78	33.52	46.00	-12.48	QP	
5		780.2950	35.13	-0.50	34.63	46.00	-11.37	QP	
6	*	911.7300	33.76	1.82	35.58	46.00	-10.42	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: BYD +USB Cable: HONGLIN +Battery: BYD + Earphone: Lianchuang / MEMD1532B528000


Vertical

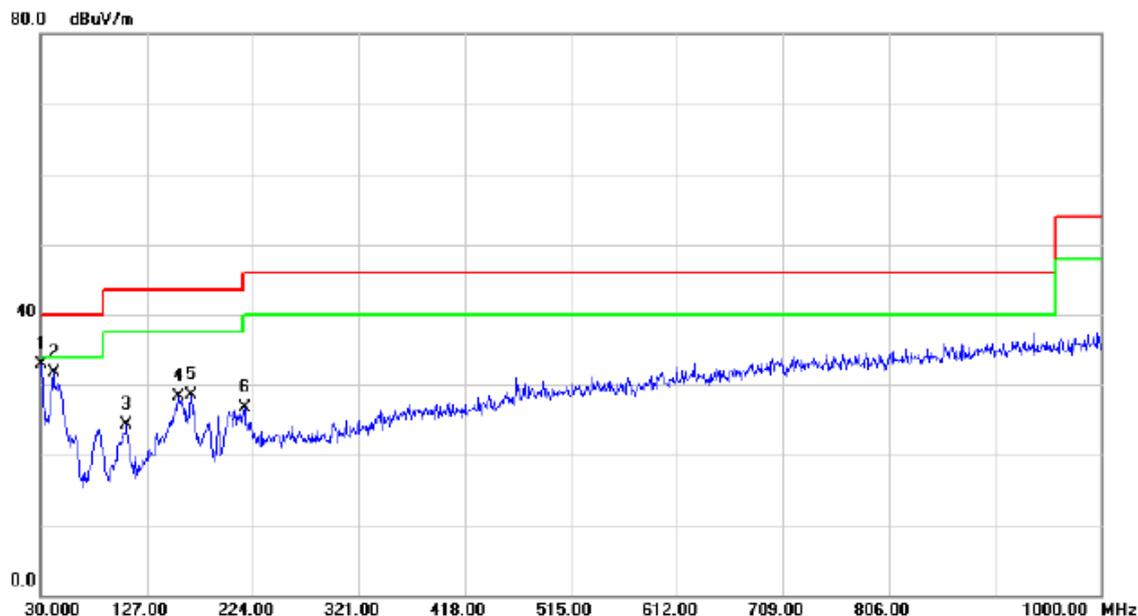

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	42.62	-9.81	32.81	40.00	-7.19	QP	
2		41.6400	47.86	-16.10	31.76	40.00	-8.24	QP	
3		108.5700	43.12	-18.74	24.38	43.50	-19.12	QP	
4		156.1000	45.01	-16.72	28.29	43.50	-15.21	QP	
5		168.2250	44.78	-16.30	28.48	43.50	-15.02	QP	
6		216.2400	41.13	-14.50	26.63	46.00	-19.37	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: BYD +USB Cable: HONGLIN +Battery: BYD + Earphone: Lianchuang / MEMD1532B528000


Horizontal

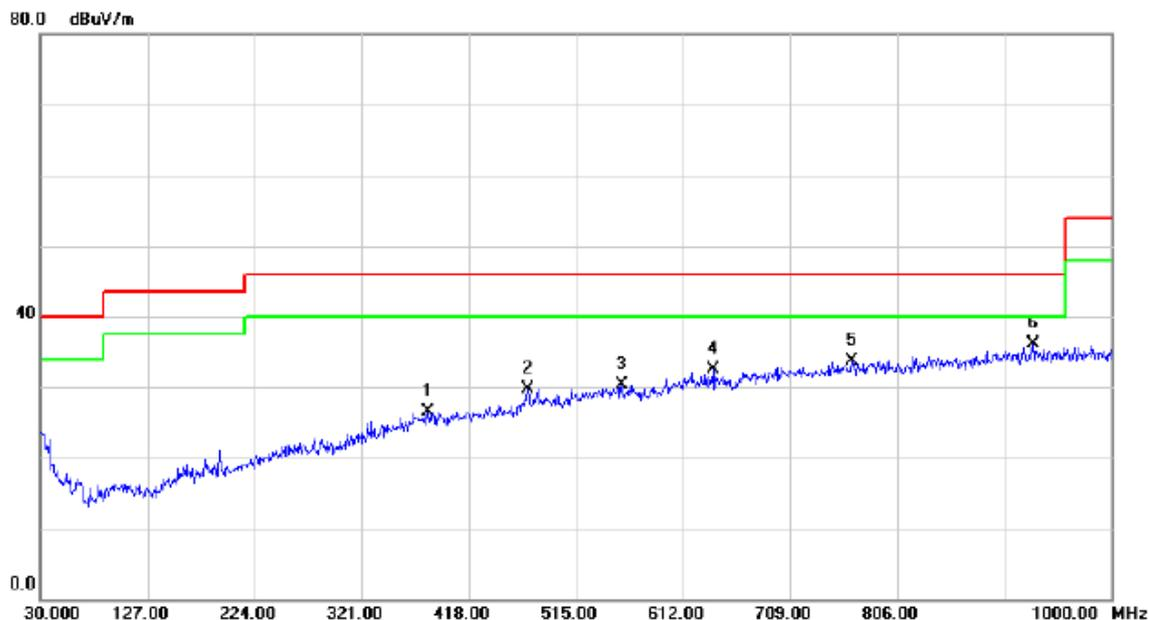

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		381.1400	34.27	-7.72	26.55	46.00	-19.45	QP	
2		471.3500	35.62	-5.94	29.68	46.00	-16.32	QP	
3		556.7100	34.84	-4.53	30.31	46.00	-15.69	QP	
4		640.1300	35.47	-3.03	32.44	46.00	-13.56	QP	
5		765.2600	34.28	-0.65	33.63	46.00	-12.37	QP	
6	*	929.1900	34.17	1.93	36.10	46.00	-9.90	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: SCUD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


Vertical

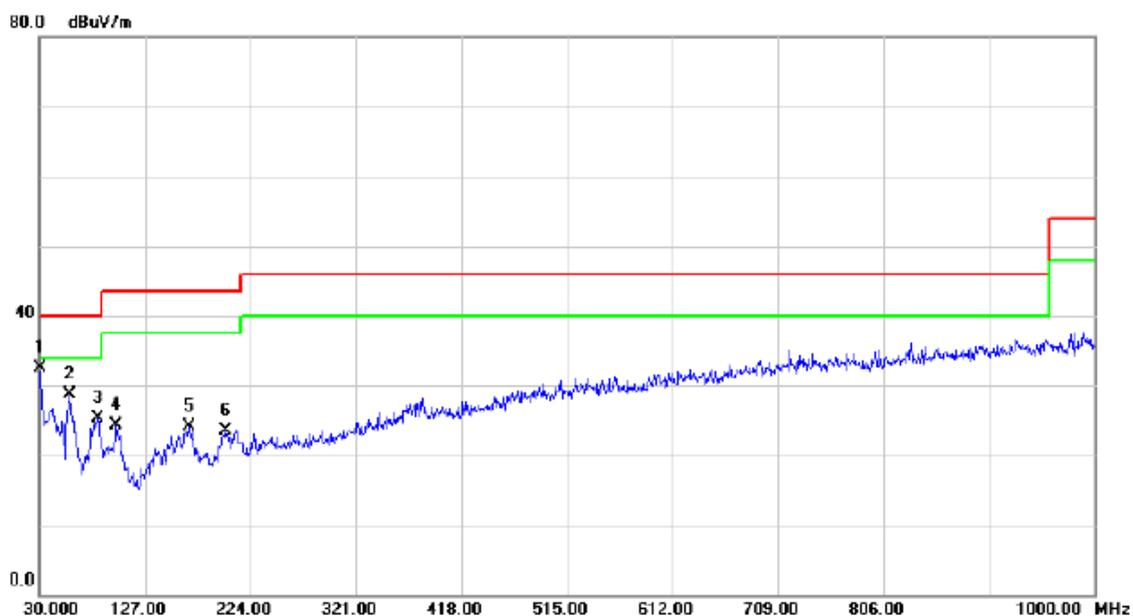

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	42.39	-9.81	32.58	40.00	-7.42	QP	
2		58.1300	48.19	-19.44	28.75	40.00	-11.25	QP	
3		83.8350	45.60	-20.22	25.38	40.00	-14.62	QP	
4		101.2950	42.59	-18.32	24.27	43.50	-19.23	QP	
5		168.2250	40.40	-16.30	24.10	43.50	-19.40	QP	
6		201.2050	39.16	-15.56	23.60	43.50	-19.90	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: SCUD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


Horizontal

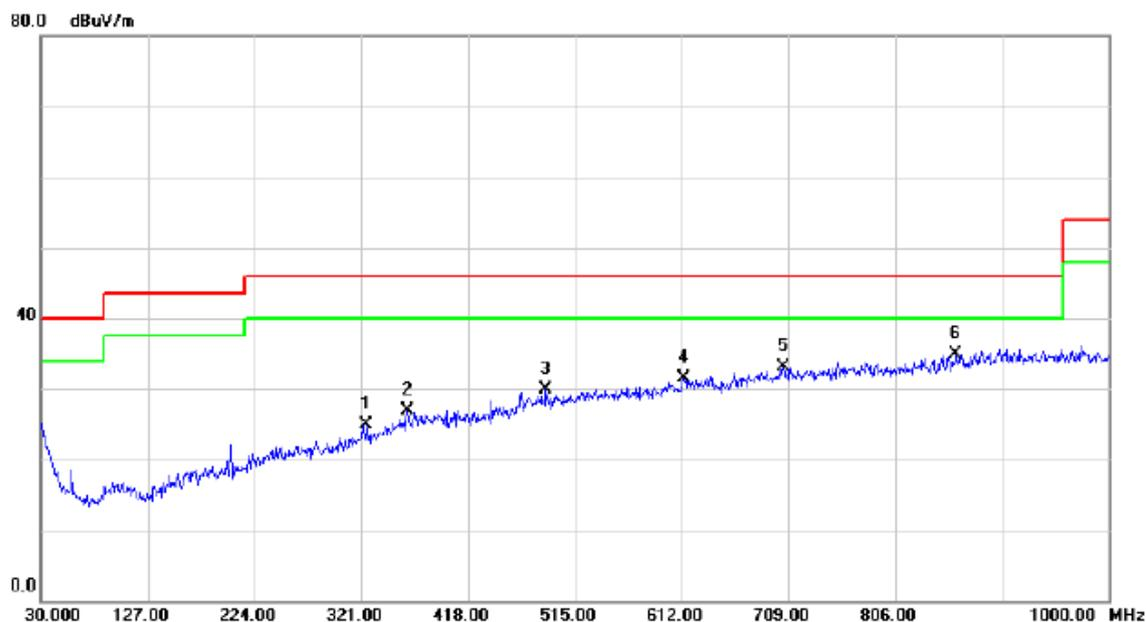

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		325.8500	34.82	-9.87	24.95	46.00	-21.05	QP	
2		362.7100	35.01	-8.16	26.85	46.00	-19.15	QP	
3		488.8100	35.61	-5.75	29.86	46.00	-16.14	QP	
4		613.9400	34.65	-3.20	31.45	46.00	-14.55	QP	
5		704.1500	34.61	-1.51	33.10	46.00	-12.90	QP	
6	*	861.2900	34.26	0.68	34.94	46.00	-11.06	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

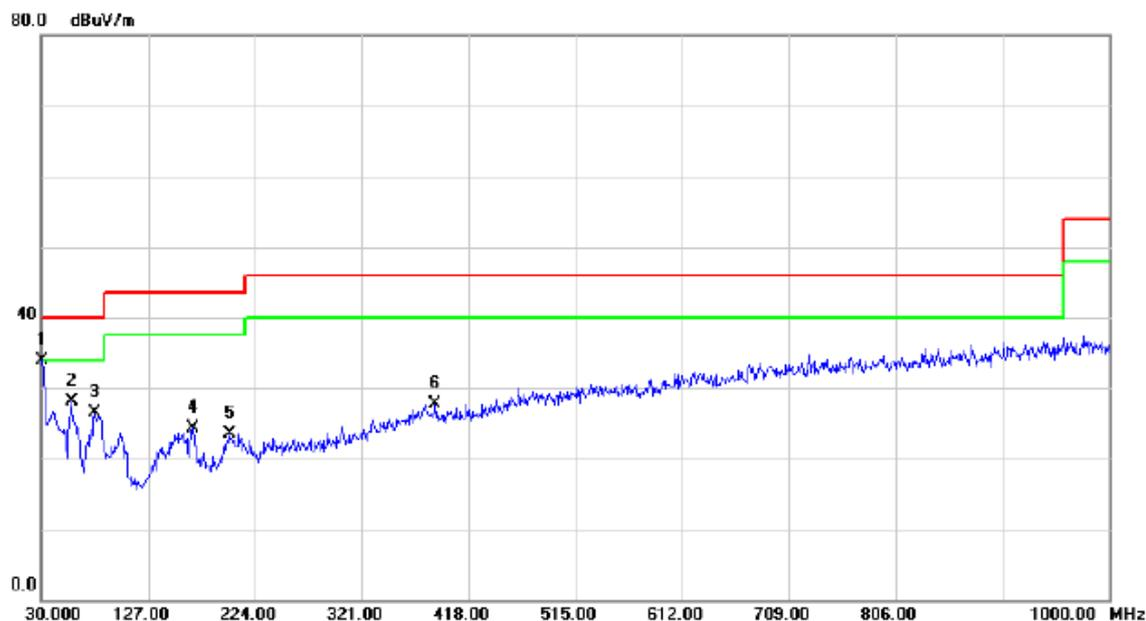

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	43.68	-9.81	33.87	40.00	-6.13	QP	
2		57.1600	47.40	-19.33	28.07	40.00	-11.93	QP	
3		78.5000	47.08	-20.64	26.44	40.00	-13.56	QP	
4		168.2250	40.63	-16.30	24.33	43.50	-19.17	QP	
5		201.2050	39.09	-15.56	23.53	43.50	-19.97	QP	
6		387.9300	35.78	-8.05	27.73	46.00	-18.27	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

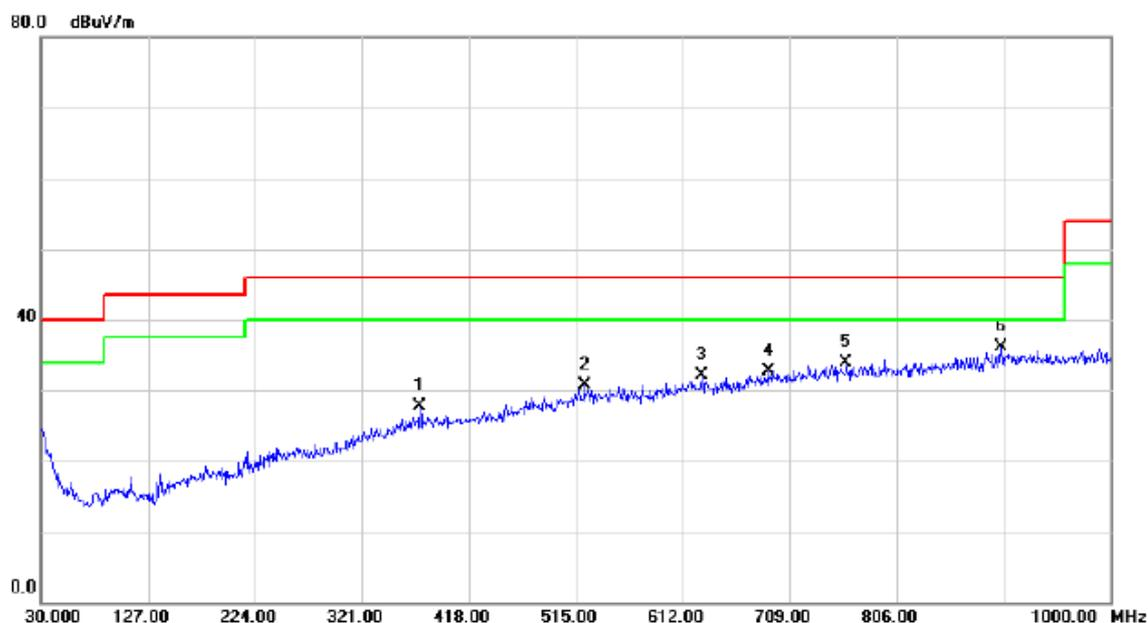

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		373.3800	35.46	-7.73	27.73	46.00	-18.27	QP	
2		522.7600	35.60	-4.85	30.75	46.00	-15.25	QP	
3		629.4600	34.96	-2.89	32.07	46.00	-13.93	QP	
4		689.6000	34.56	-1.85	32.71	46.00	-13.29	QP	
5		760.4100	34.53	-0.72	33.81	46.00	-12.19	QP	
6	*	901.5450	34.29	1.76	36.05	46.00	-9.95	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+playing+speaker
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Vertical

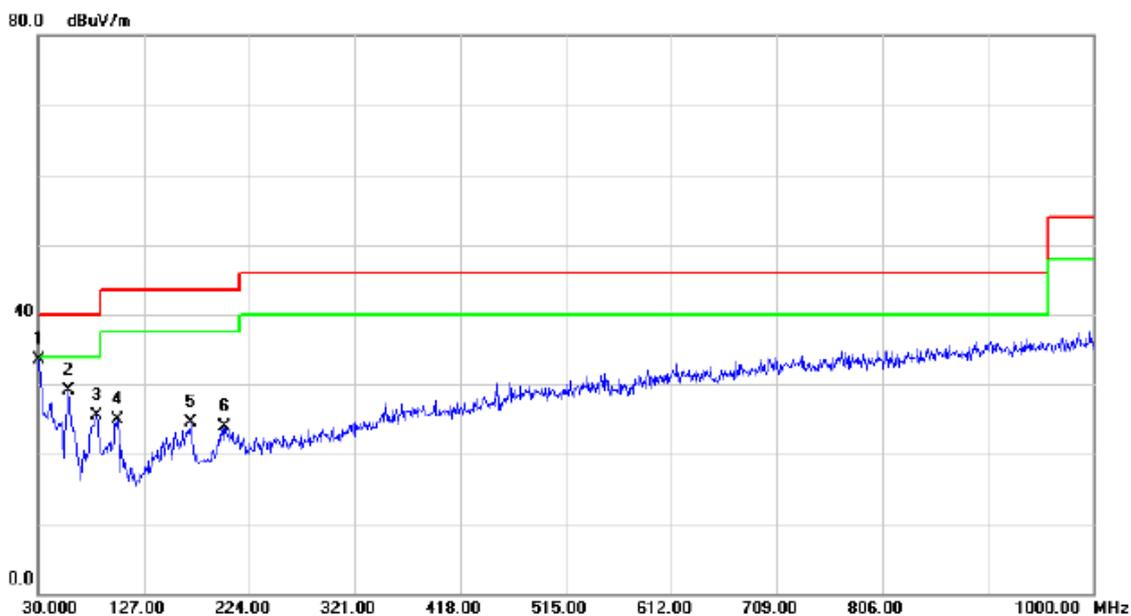

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	43.23	-9.81	33.42	40.00	-6.58	QP	
2		58.1300	48.52	-19.44	29.08	40.00	-10.92	QP	
3		83.8350	45.75	-20.22	25.53	40.00	-14.47	QP	
4		102.7500	43.26	-18.41	24.85	43.50	-18.65	QP	
5		169.6800	40.74	-16.29	24.45	43.50	-19.05	QP	
6		202.1750	39.44	-15.49	23.95	43.50	-19.55	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+playing+speaker
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Horizontal

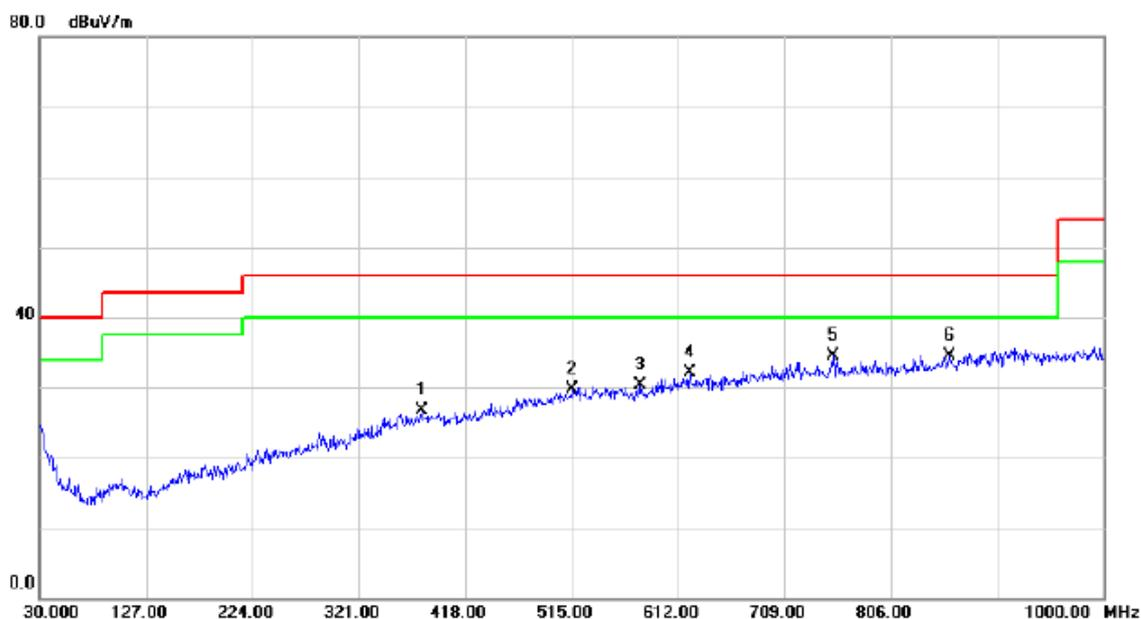

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		378.2300	34.35	-7.70	26.65	46.00	-19.35	QP	
2		515.9700	34.92	-5.13	29.79	46.00	-16.21	QP	
3		578.0500	34.86	-4.63	30.23	46.00	-15.77	QP	
4		622.6700	34.94	-2.90	32.04	46.00	-13.96	QP	
5		753.6200	35.30	-0.82	34.48	46.00	-11.52	QP	
6	*	859.3500	33.90	0.63	34.53	46.00	-11.47	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Vertical

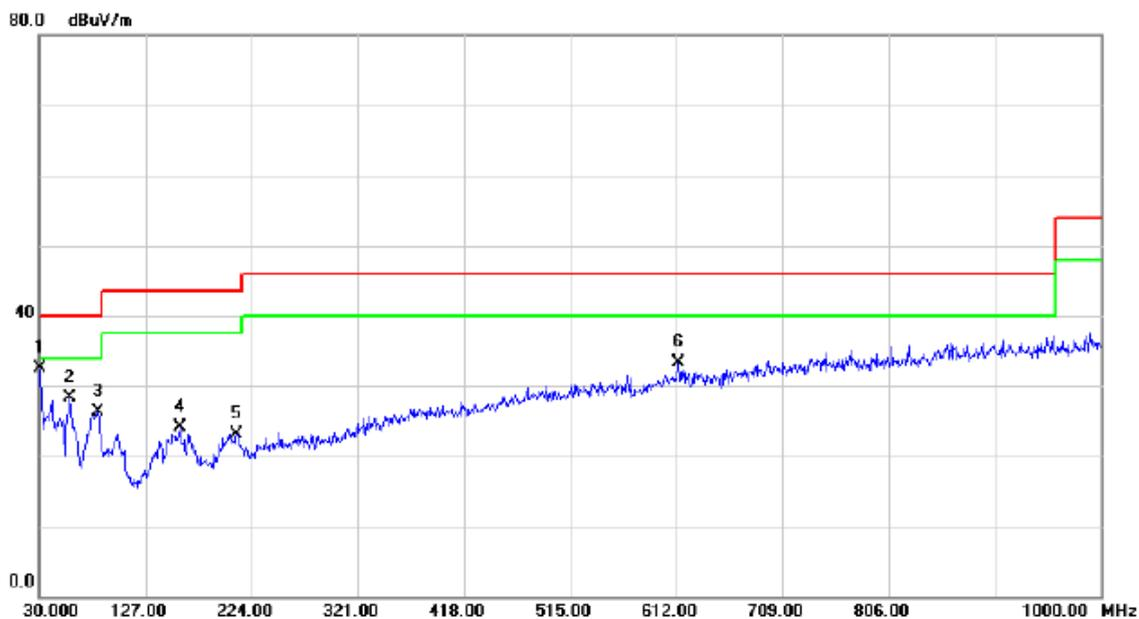

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	42.41	-9.81	32.60	40.00	-7.40	QP	
2		58.1300	47.73	-19.44	28.29	40.00	-11.71	QP	
3		83.8350	46.48	-20.22	26.26	40.00	-13.74	QP	
4		158.5250	40.57	-16.50	24.07	43.50	-19.43	QP	
5		210.4200	37.94	-14.89	23.05	43.50	-20.45	QP	
6		614.4250	37.00	-3.61	33.39	46.00	-12.61	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Horizontal

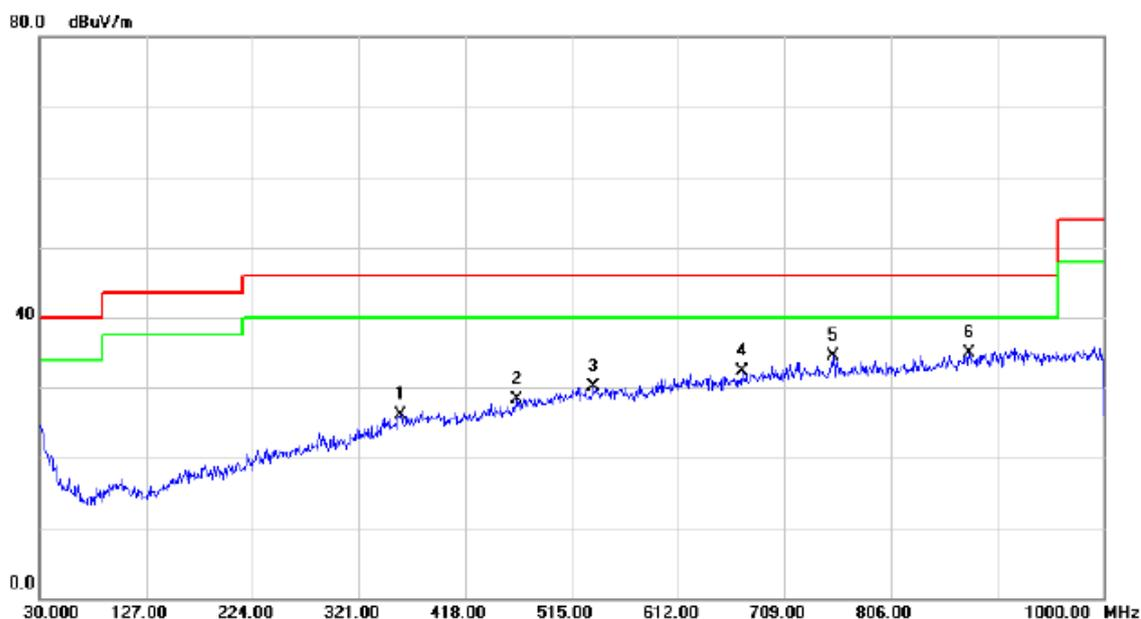

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		358.8300	34.38	-8.32	26.06	46.00	-19.94	QP	
2		465.5300	34.66	-6.29	28.37	46.00	-17.63	QP	
3		535.3700	34.73	-4.64	30.09	46.00	-15.91	QP	
4		670.2000	34.67	-2.40	32.27	46.00	-13.73	QP	
5		753.6200	35.30	-0.82	34.48	46.00	-11.52	QP	
6	*	877.7800	33.86	1.04	34.90	46.00	-11.10	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+GPS+SIM 1
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Vertical

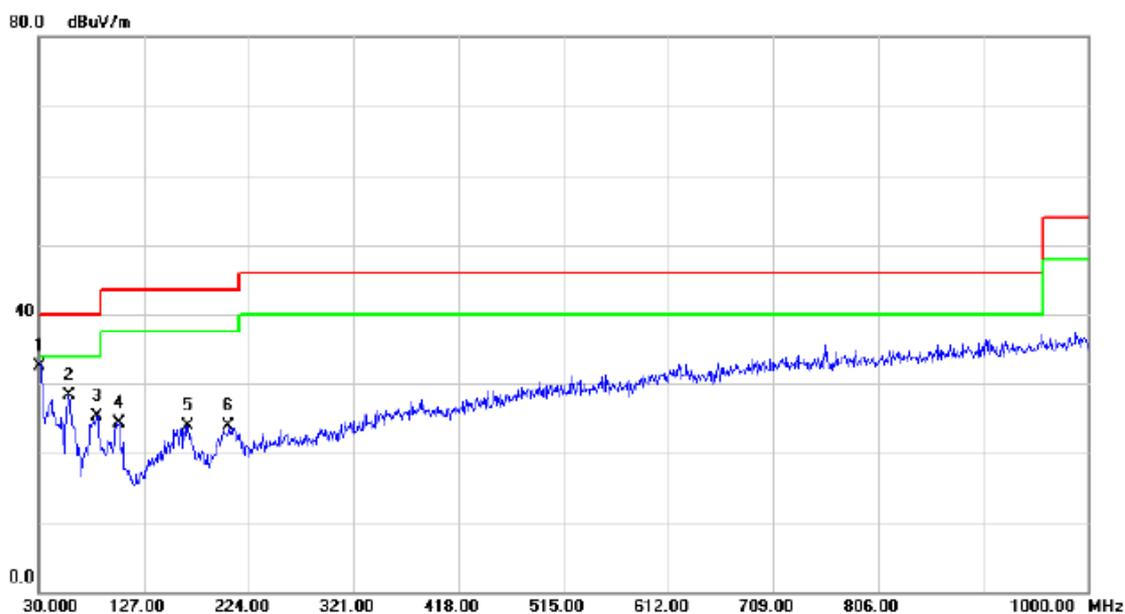

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	42.37	-9.81	32.56	40.00	-7.44	QP	
2		58.6150	47.81	-19.49	28.32	40.00	-11.68	QP	
3		83.8350	45.56	-20.22	25.34	40.00	-14.66	QP	
4		103.7200	42.84	-18.46	24.38	43.50	-19.12	QP	
5		168.2250	40.28	-16.30	23.98	43.50	-19.52	QP	
6		206.0550	39.03	-15.21	23.82	43.50	-19.68	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+GPS+SIM 1
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Horizontal

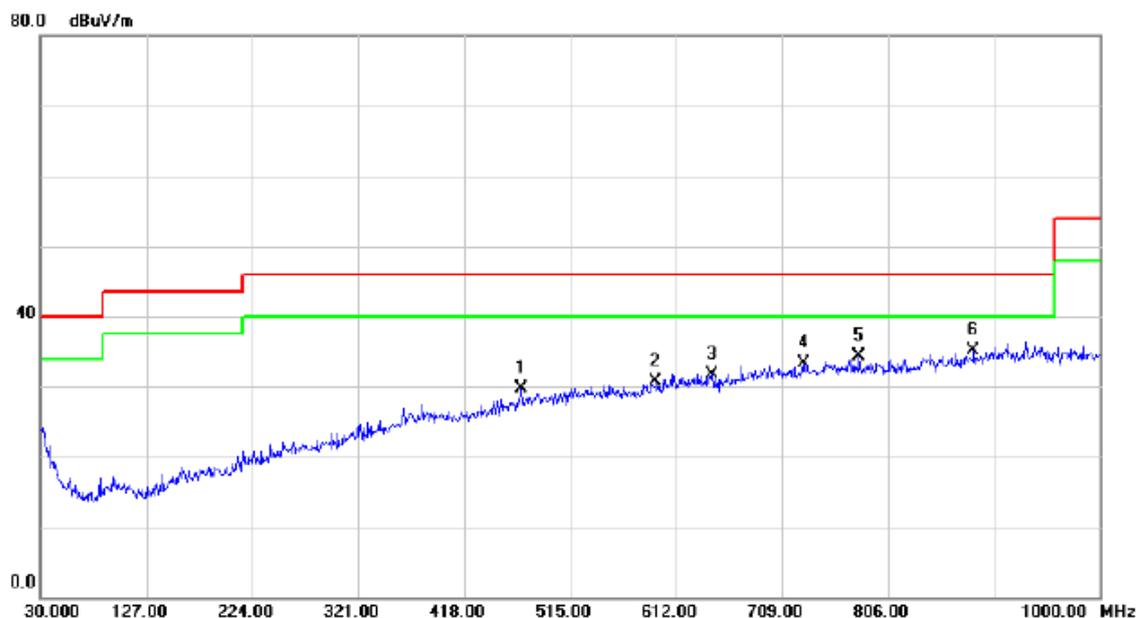

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		470.3800	35.77	-6.00	29.77	46.00	-16.23	QP	
2		593.5700	34.62	-3.95	30.67	46.00	-15.33	QP	
3		644.9800	34.79	-3.11	31.68	46.00	-14.32	QP	
4		728.4000	34.36	-1.14	33.22	46.00	-12.78	QP	
5		779.8100	34.74	-0.50	34.24	46.00	-11.76	QP	
6	*	884.5700	33.84	1.25	35.09	46.00	-10.91	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000

Vertical

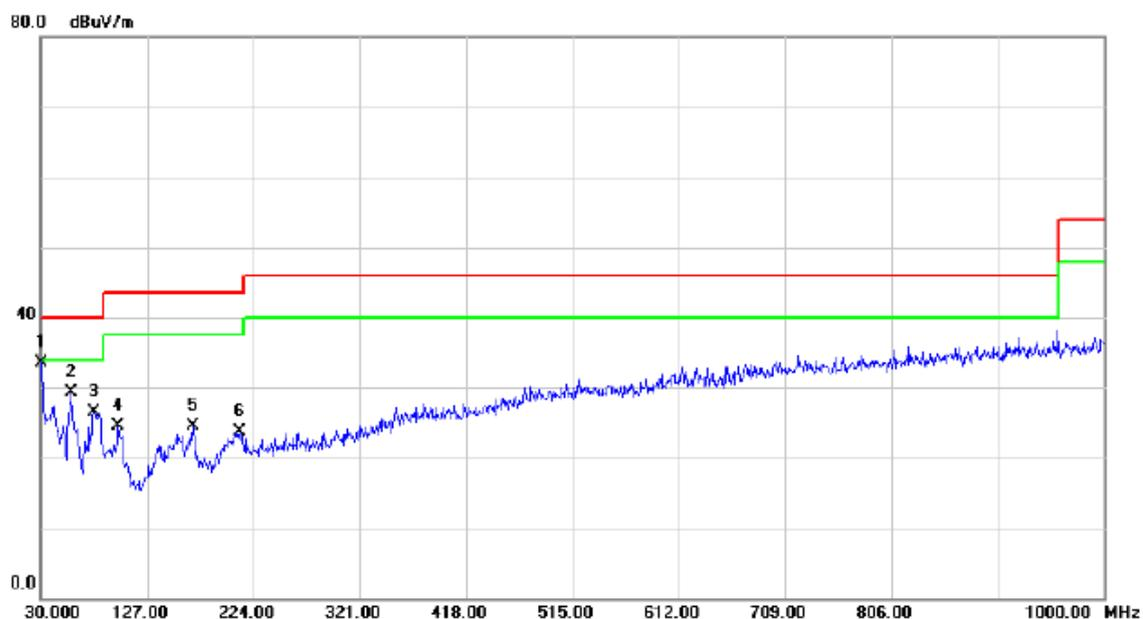

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	43.25	-9.81	33.44	40.00	-6.56	QP	
2		58.1300	48.80	-19.44	29.36	40.00	-10.64	QP	
3		78.5000	47.20	-20.64	26.56	40.00	-13.44	QP	
4		100.8100	42.78	-18.30	24.48	43.50	-19.02	QP	
5		169.1950	40.84	-16.29	24.55	43.50	-18.95	QP	
6		211.8750	38.53	-14.80	23.73	43.50	-19.77	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		302.5700	34.63	-11.11	23.52	46.00	-22.48	QP	
2		390.8400	34.10	-7.80	26.30	46.00	-19.70	QP	
3		477.1700	34.60	-5.72	28.88	46.00	-17.12	QP	
4		616.8500	34.36	-3.10	31.26	46.00	-14.74	QP	
5		733.2500	35.03	-1.08	33.95	46.00	-12.05	QP	
6	*	894.2700	34.15	1.57	35.72	46.00	-10.28	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Vertical

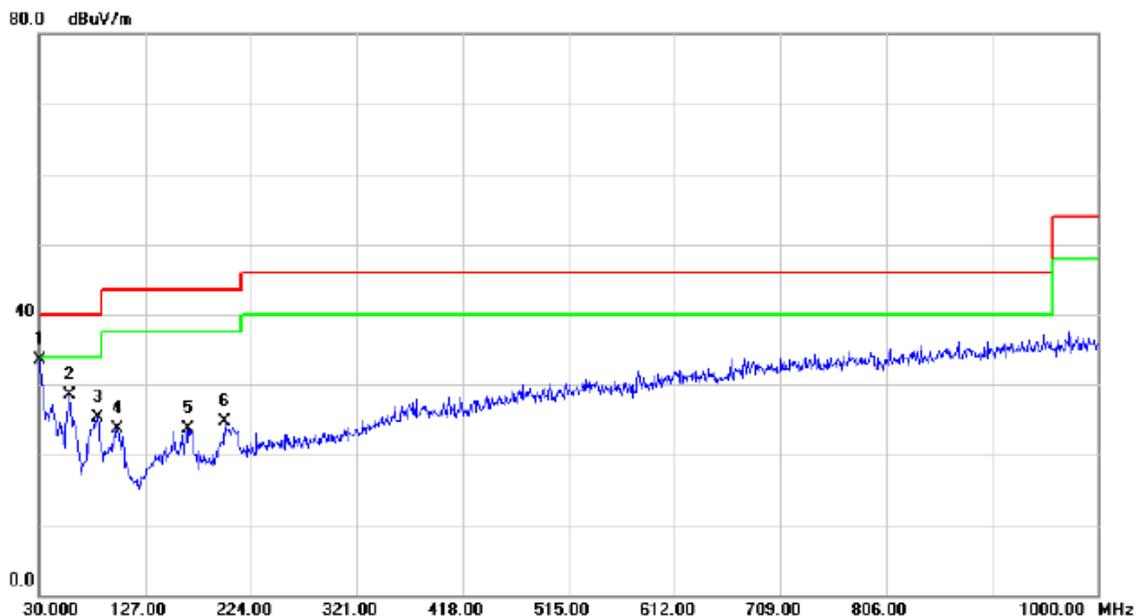

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	43.40	-9.81	33.59	40.00	-6.41	QP	
2		58.1300	47.89	-19.44	28.45	40.00	-11.55	QP	
3		83.8350	45.45	-20.22	25.23	40.00	-14.77	QP	
4		102.2650	42.12	-18.38	23.74	43.50	-19.76	QP	
5		165.8000	40.01	-16.32	23.69	43.50	-19.81	QP	
6		199.7500	40.36	-15.64	24.72	43.50	-18.78	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Horizontal

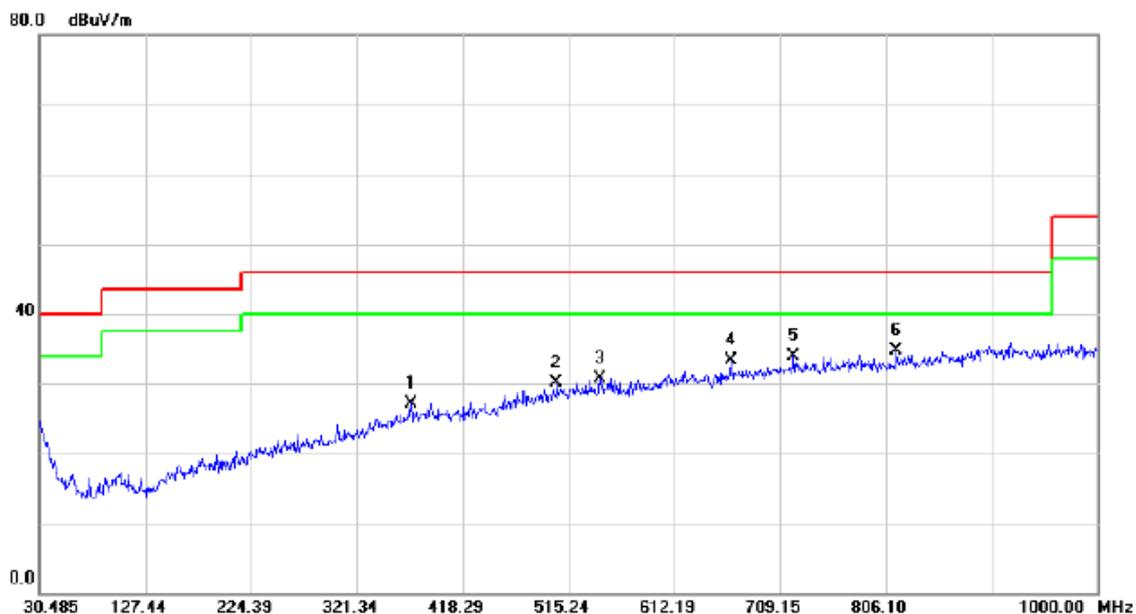

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		370.4700	35.05	-7.85	27.20	46.00	-18.80	QP	
2		504.3300	35.68	-5.61	30.07	46.00	-15.93	QP	
3		544.1000	35.31	-4.52	30.79	46.00	-15.21	QP	
4		664.3800	35.94	-2.63	33.31	46.00	-12.69	QP	
5		721.6100	35.23	-1.23	34.00	46.00	-12.00	QP	
6	*	815.7000	34.94	-0.19	34.75	46.00	-11.25	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Vertical

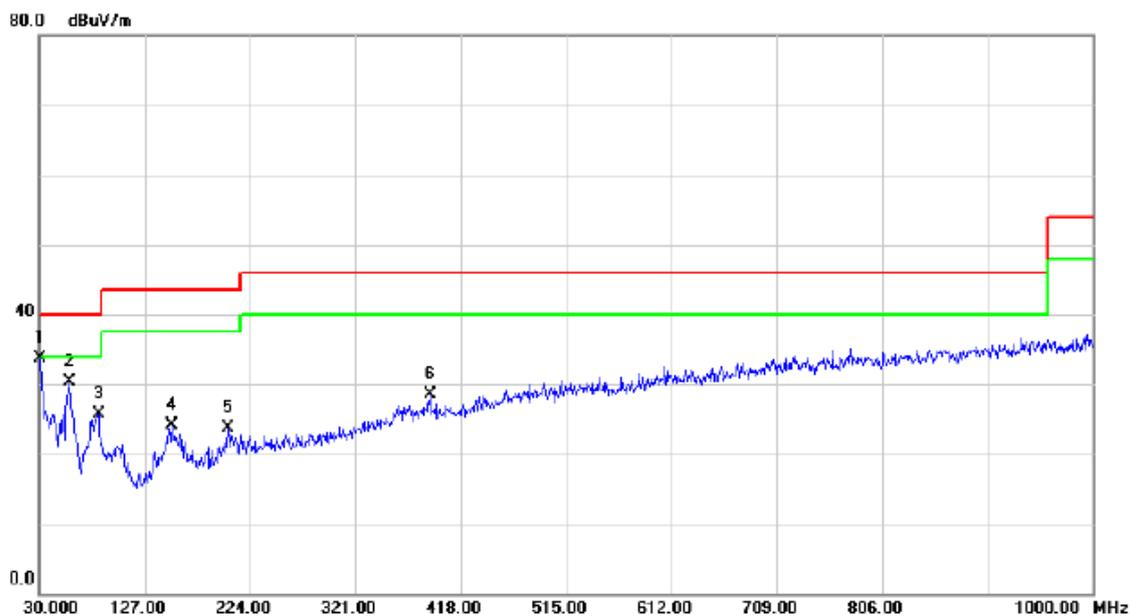

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	43.57	-9.81	33.76	40.00	-6.24	QP	
2		58.1300	49.73	-19.44	30.29	40.00	-9.71	QP	
3		84.3200	45.84	-20.15	25.69	40.00	-14.31	QP	
4		152.2200	41.25	-17.07	24.18	43.50	-19.32	QP	
5		203.6300	39.05	-15.39	23.66	43.50	-19.84	QP	
6		390.3550	36.66	-8.07	28.59	46.00	-17.41	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Horizontal

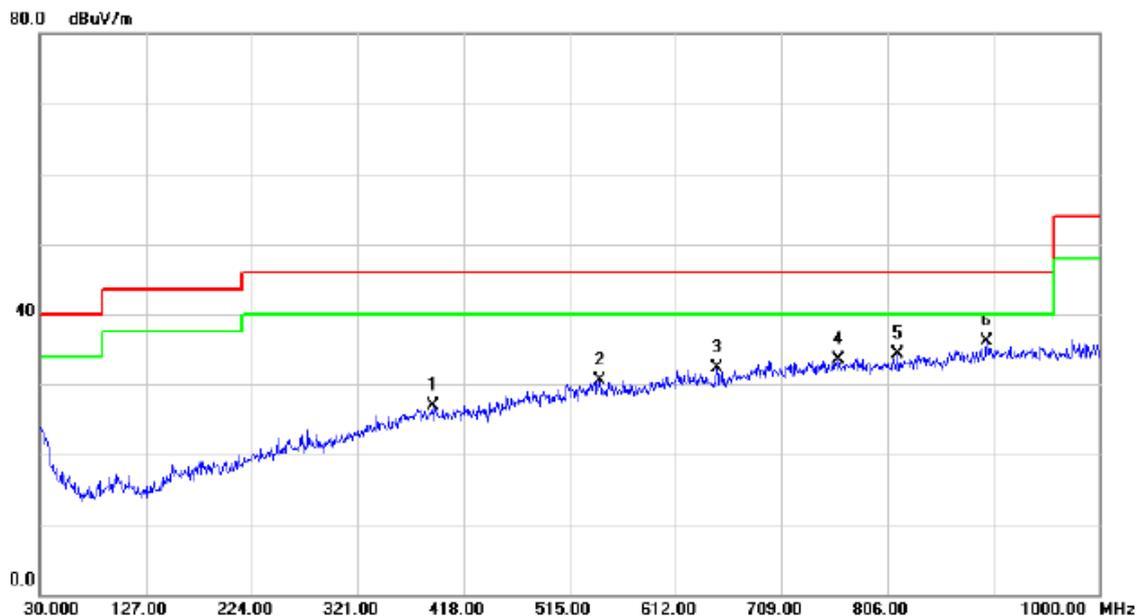

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		389.8700	34.75	-7.79	26.96	46.00	-19.04	QP	
2		543.1300	35.09	-4.54	30.55	46.00	-15.45	QP	
3		649.8300	35.57	-3.18	32.39	46.00	-13.61	QP	
4		761.3800	34.13	-0.71	33.42	46.00	-12.58	QP	
5		815.7000	34.57	-0.19	34.38	46.00	-11.62	QP	
6	*	897.1800	34.34	1.67	36.01	46.00	-9.99	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


Vertical

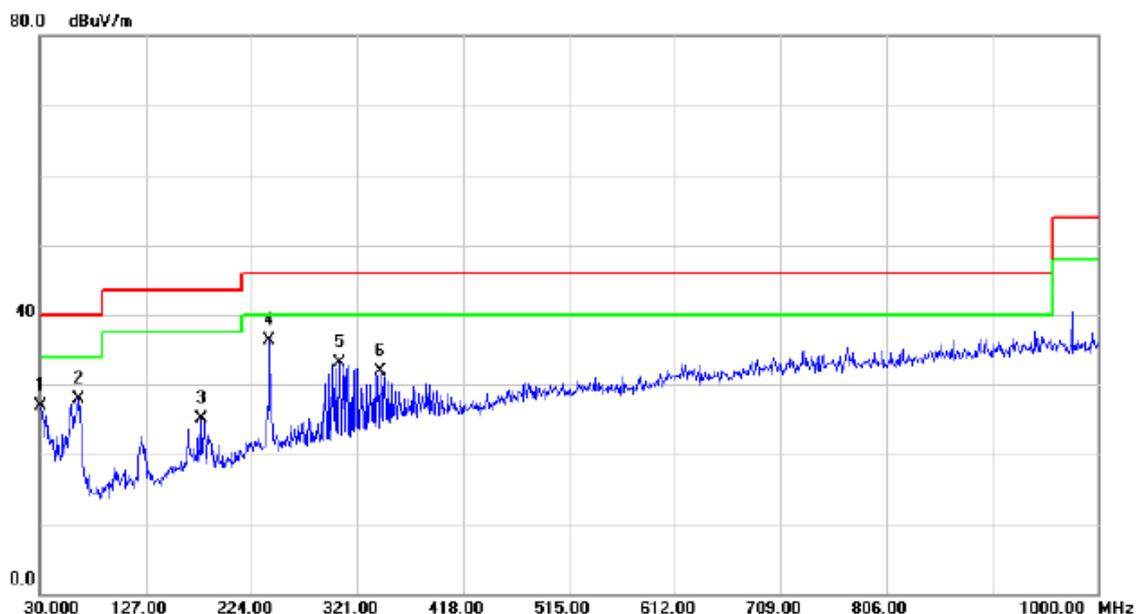

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	36.66	-9.81	26.85	40.00	-13.15	QP	
2		65.8900	48.02	-20.07	27.95	40.00	-12.05	QP	
3		177.9250	40.84	-15.80	25.04	43.50	-18.46	QP	
4	*	240.4900	49.41	-13.03	36.38	46.00	-9.62	QP	
5		304.9950	44.44	-11.27	33.17	46.00	-12.83	QP	
6		342.8250	41.25	-9.32	31.93	46.00	-14.07	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


Horizontal

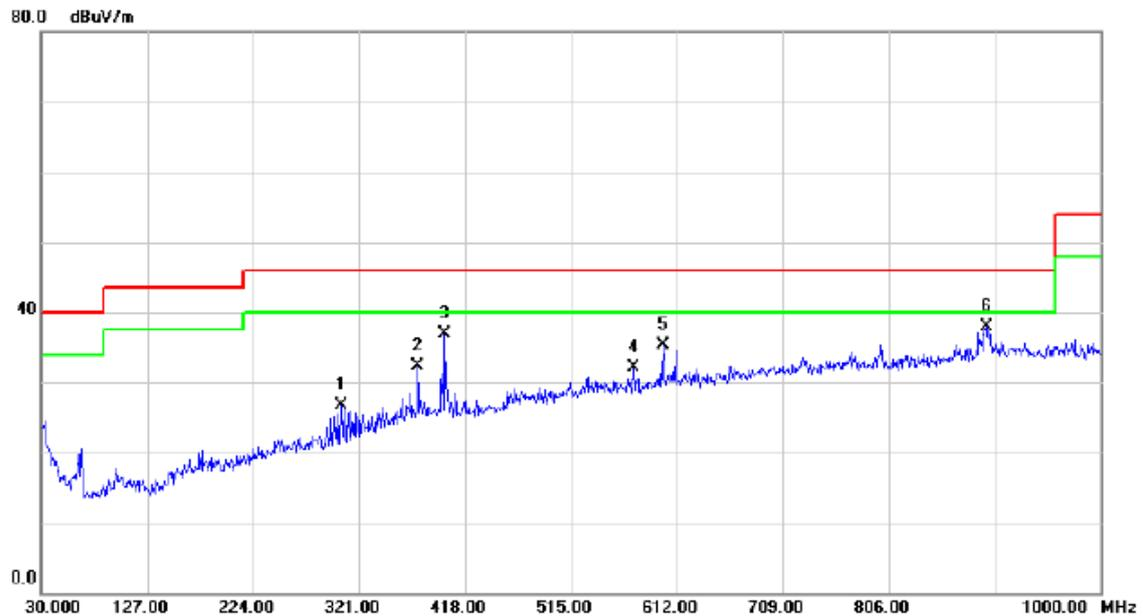

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		304.5100	37.61	-11.00	26.61	46.00	-19.39	QP	
2		374.3500	40.07	-7.70	32.37	46.00	-13.63	QP	
3		399.5700	44.68	-7.86	36.82	46.00	-9.18	QP	
4		572.2300	36.75	-4.73	32.02	46.00	-13.98	QP	
5		599.3900	39.06	-3.70	35.36	46.00	-10.64	QP	
6	*	895.2400	36.26	1.61	37.87	46.00	-8.13	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN


Vertical

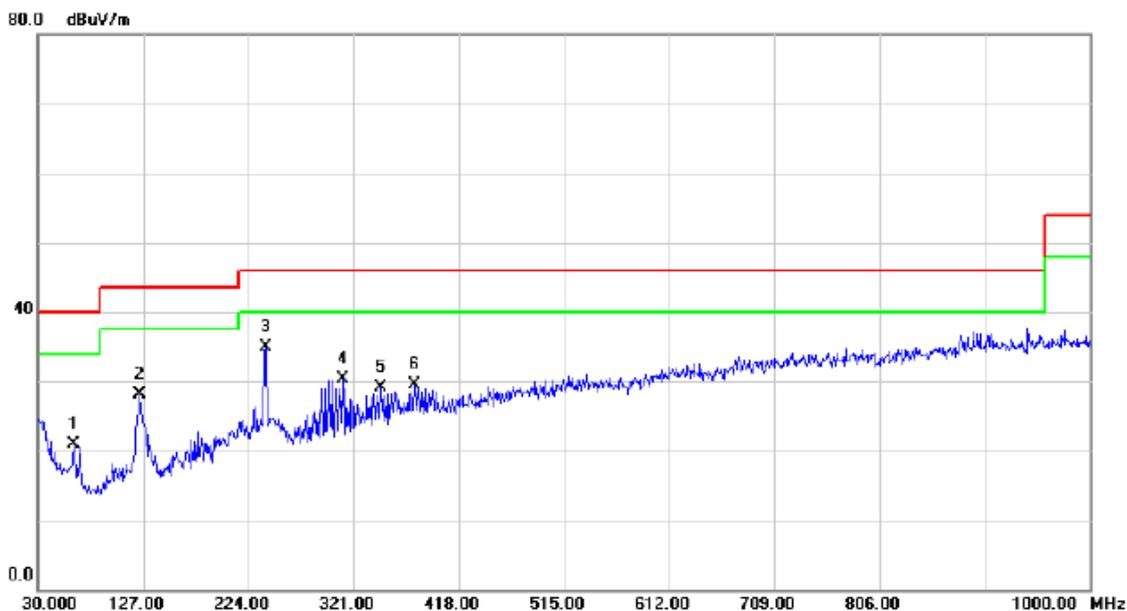

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		63.4650	40.70	-19.89	20.81	40.00	-19.19	QP	
2		124.0900	47.60	-19.45	28.15	43.50	-15.35	QP	
3	*	240.9750	47.87	-13.01	34.86	46.00	-11.14	QP	
4		311.3000	41.34	-10.96	30.38	46.00	-15.62	QP	
5		346.2200	38.22	-9.14	29.08	46.00	-16.92	QP	
6		377.7450	37.46	-7.90	29.56	46.00	-16.44	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN

Horizontal

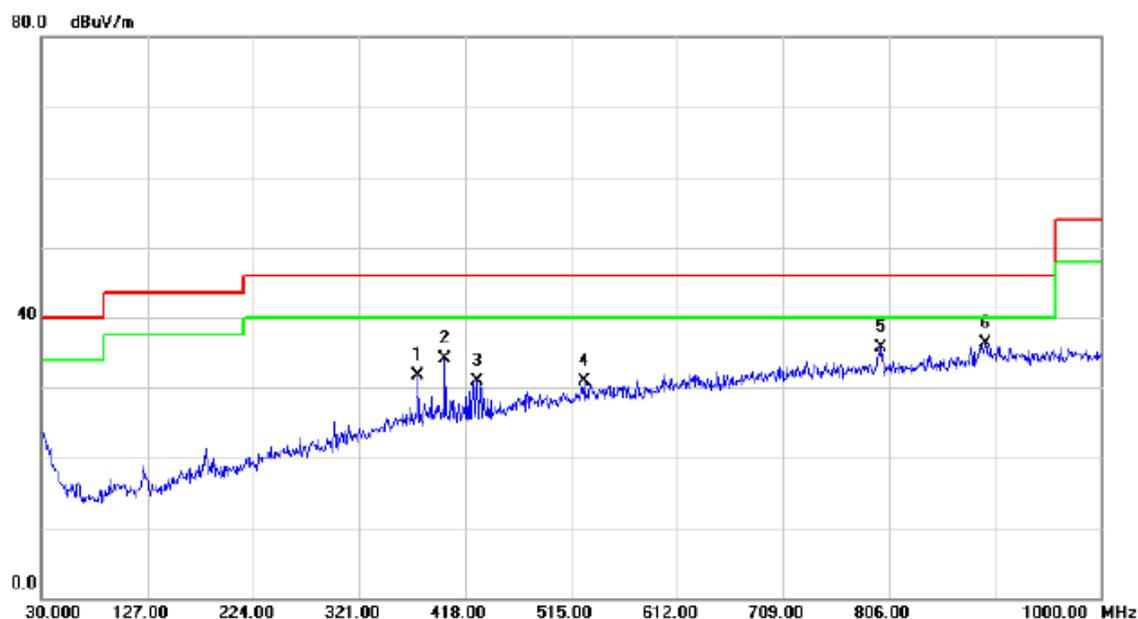


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		374.3500	39.44	-7.70	31.74	46.00	-14.26	QP	
2		399.5700	41.89	-7.86	34.03	46.00	-11.97	QP	
3		428.6700	38.50	-7.59	30.91	46.00	-15.09	QP	
4		527.6100	35.62	-4.74	30.88	46.00	-15.12	QP	
5		799.2100	36.19	-0.51	35.68	46.00	-10.32	QP	
6	*	894.2700	34.71	1.57	36.28	46.00	-9.72	QP	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: HK +USB Cable: HONGLIN +Battery: Lishen + Earphone: GOERTEK


Vertical

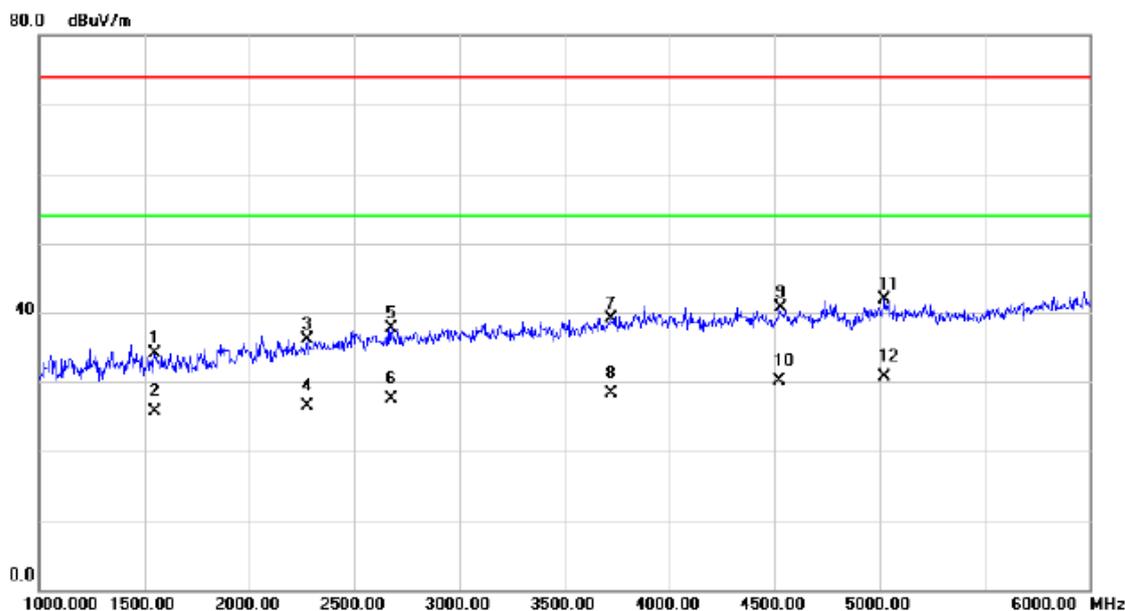

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1550.000	37.88	-3.69	34.19	74.00	-39.81	peak	
2		1550.000	29.31	-3.69	25.62	54.00	-28.38	AVG	
3		2277.500	37.61	-1.55	36.06	74.00	-37.94	peak	
4		2277.500	28.03	-1.55	26.48	54.00	-27.52	AVG	
5		2675.000	37.50	0.30	37.80	74.00	-36.20	peak	
6		2675.000	27.24	0.30	27.54	54.00	-26.46	AVG	
7		3725.000	35.33	3.83	39.16	74.00	-34.84	peak	
8		3725.000	24.57	3.83	28.40	54.00	-25.60	AVG	
9		4527.500	34.89	5.75	40.64	74.00	-33.36	peak	
10		4527.500	24.41	5.75	30.16	54.00	-23.84	AVG	
11		5025.000	34.52	7.32	41.84	74.00	-32.16	peak	
12	*	5025.000	23.38	7.32	30.70	54.00	-23.30	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: HK +USB Cable: HONGLIN +Battery: Lishen + Earphone: GOERTEK


Horizontal

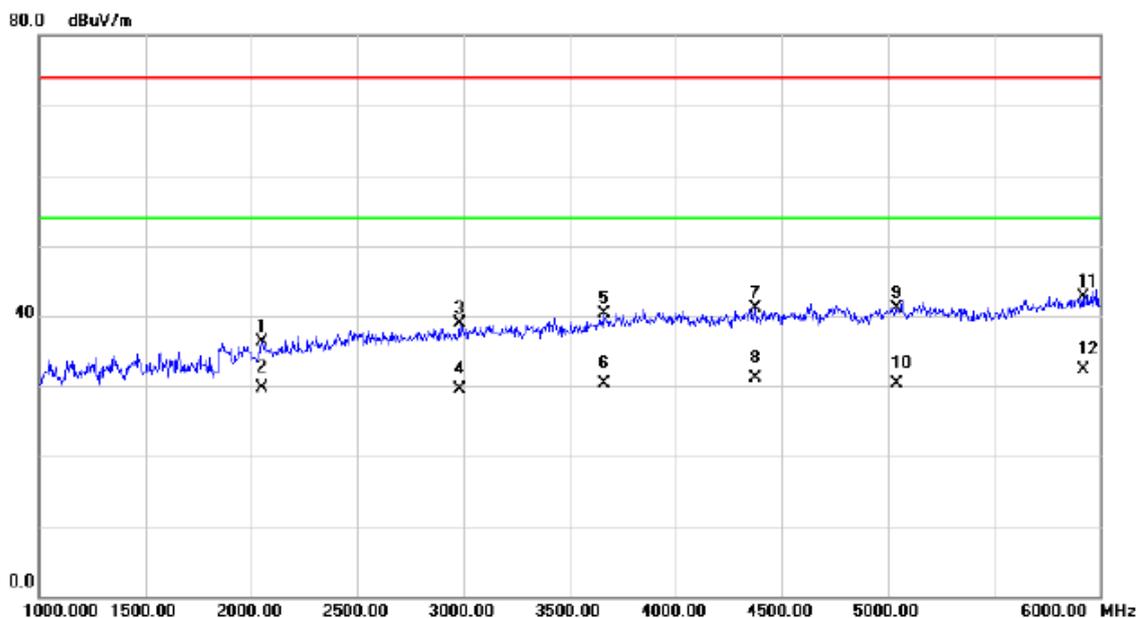

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2052.500	39.02	-2.78	36.24	74.00	-37.76	peak	
2		2052.500	32.40	-2.78	29.62	54.00	-24.38	AVG	
3		2980.000	37.59	1.40	38.99	74.00	-35.01	peak	
4		2980.000	28.06	1.40	29.46	54.00	-24.54	AVG	
5		3662.500	36.67	3.58	40.25	74.00	-33.75	peak	
6		3662.500	26.63	3.58	30.21	54.00	-23.79	AVG	
7		4375.000	35.53	5.48	41.01	74.00	-32.99	peak	
8		4375.000	25.56	5.48	31.04	54.00	-22.96	AVG	
9		5042.500	33.81	7.36	41.17	74.00	-32.83	peak	
10		5042.500	22.91	7.36	30.27	54.00	-23.73	AVG	
11		5922.500	32.97	9.69	42.66	74.00	-31.34	peak	
12	*	5922.500	22.54	9.69	32.23	54.00	-21.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Vertical

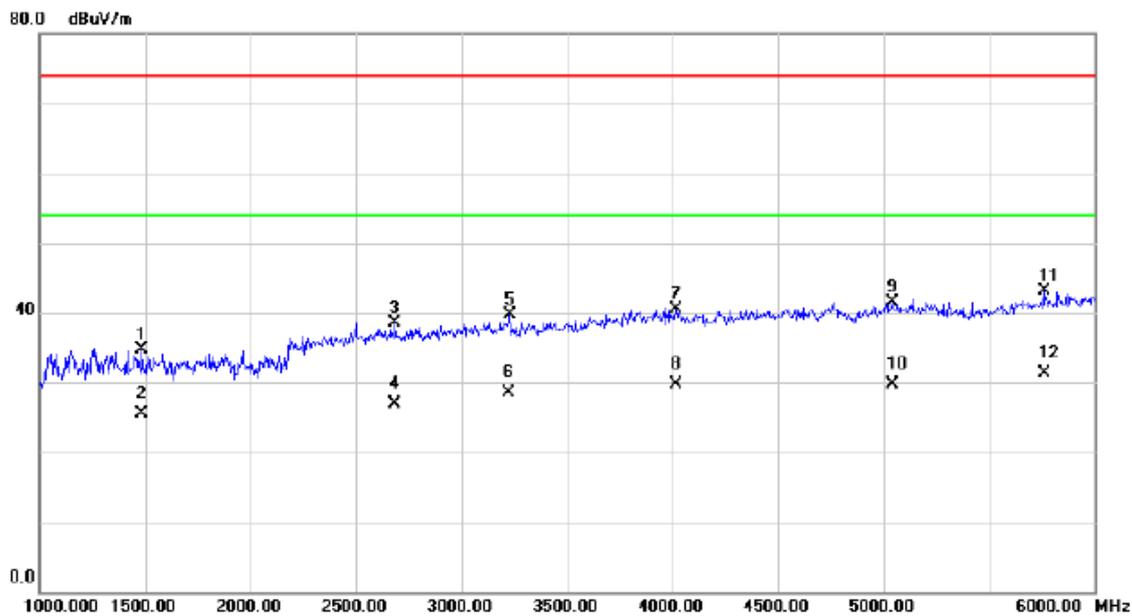

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1485.000	38.59	-3.81	34.78	74.00	-39.22	peak	
2		1485.000	29.26	-3.81	25.45	54.00	-28.55	AVG	
3		2685.000	38.25	0.33	38.58	74.00	-35.42	peak	
4		2685.000	26.51	0.33	26.84	54.00	-27.16	AVG	
5		3227.500	37.61	2.14	39.75	74.00	-34.25	peak	
6		3227.500	26.32	2.14	28.46	54.00	-25.54	AVG	
7		4017.500	35.62	4.94	40.56	74.00	-33.44	peak	
8		4017.500	24.81	4.94	29.75	54.00	-24.25	AVG	
9		5045.000	34.24	7.36	41.60	74.00	-32.40	peak	
10		5045.000	22.32	7.36	29.68	54.00	-24.32	AVG	
11		5760.000	34.08	9.03	43.11	74.00	-30.89	peak	
12	*	5760.000	22.21	9.03	31.24	54.00	-22.76	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Horizontal

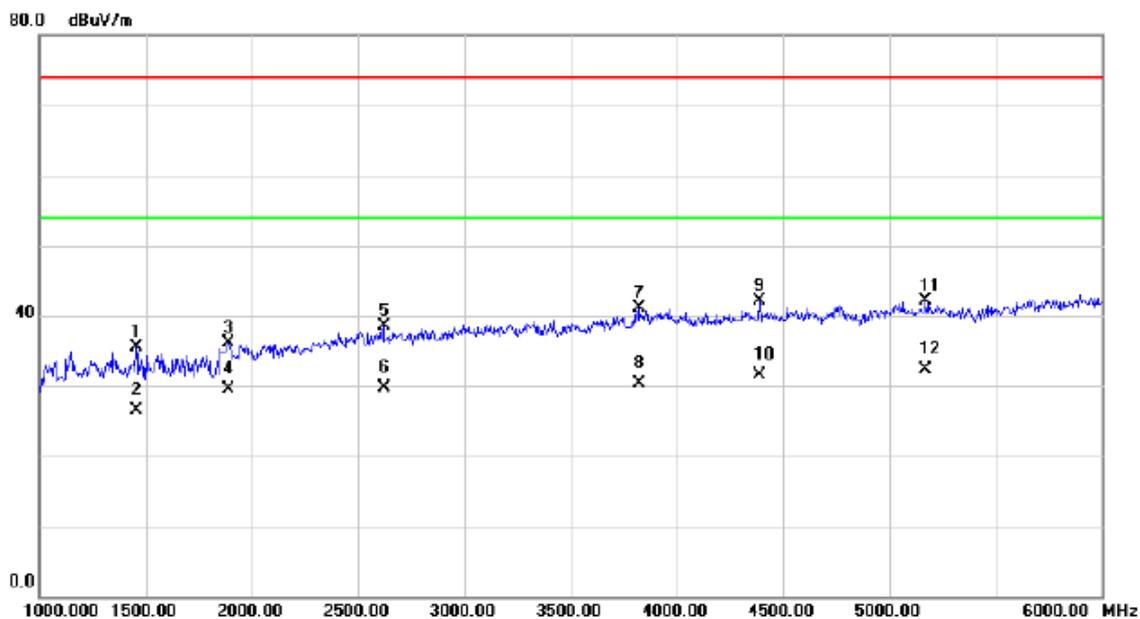

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1455.000	39.38	-3.90	35.48	74.00	-38.52	peak	
2		1455.000	30.47	-3.90	26.57	54.00	-27.43	AVG	
3		1890.000	39.41	-3.22	36.19	74.00	-37.81	peak	
4		1890.000	32.73	-3.22	29.51	54.00	-24.49	AVG	
5		2622.500	38.41	0.11	38.52	74.00	-35.48	peak	
6		2622.500	29.65	0.11	29.76	54.00	-24.24	AVG	
7		3822.500	36.81	4.21	41.02	74.00	-32.98	peak	
8		3822.500	26.05	4.21	30.26	54.00	-23.74	AVG	
9		4390.000	36.60	5.50	42.10	74.00	-31.90	peak	
10		4390.000	26.04	5.50	31.54	54.00	-22.46	AVG	
11		5170.000	34.51	7.54	42.05	74.00	-31.95	peak	
12	*	5170.000	24.79	7.54	32.33	54.00	-21.67	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: BYD +USB Cable: HONGLIN +Battery: BYD + Earphone: Lianchuang / MEMD1532B528000


Vertical

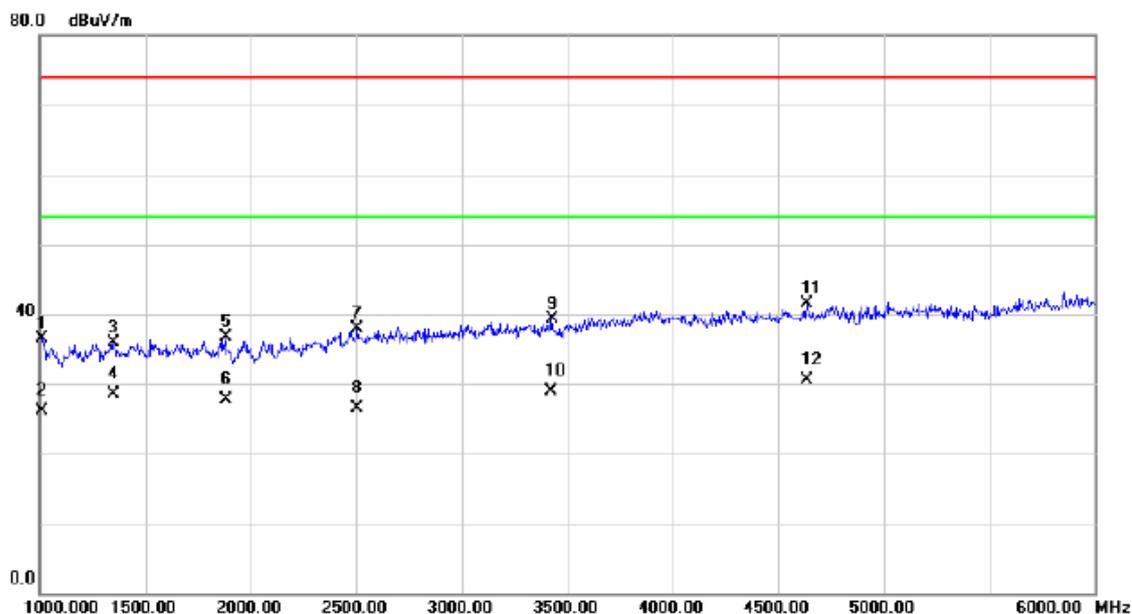

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1012.500	41.83	-5.30	36.53	74.00	-37.47	peak	
2		1012.500	31.43	-5.30	26.13	54.00	-27.87	AVG	
3		1352.500	40.23	-4.23	36.00	74.00	-38.00	peak	
4		1352.500	32.65	-4.23	28.42	54.00	-25.58	AVG	
5		1882.500	39.89	-3.23	36.66	74.00	-37.34	peak	
6		1882.500	30.85	-3.23	27.62	54.00	-26.38	AVG	
7		2505.000	38.24	-0.32	37.92	74.00	-36.08	peak	
8		2505.000	26.86	-0.32	26.54	54.00	-27.46	AVG	
9		3427.500	36.55	2.72	39.27	74.00	-34.73	peak	
10		3427.500	26.18	2.72	28.90	54.00	-25.10	AVG	
11		4637.500	35.47	6.11	41.58	74.00	-32.42	peak	
12	*	4637.500	24.43	6.11	30.54	54.00	-23.46	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: BYD +USB Cable: HONGLIN +Battery: BYD + Earphone: Lianchuang / MEMD1532B528000


Horizontal

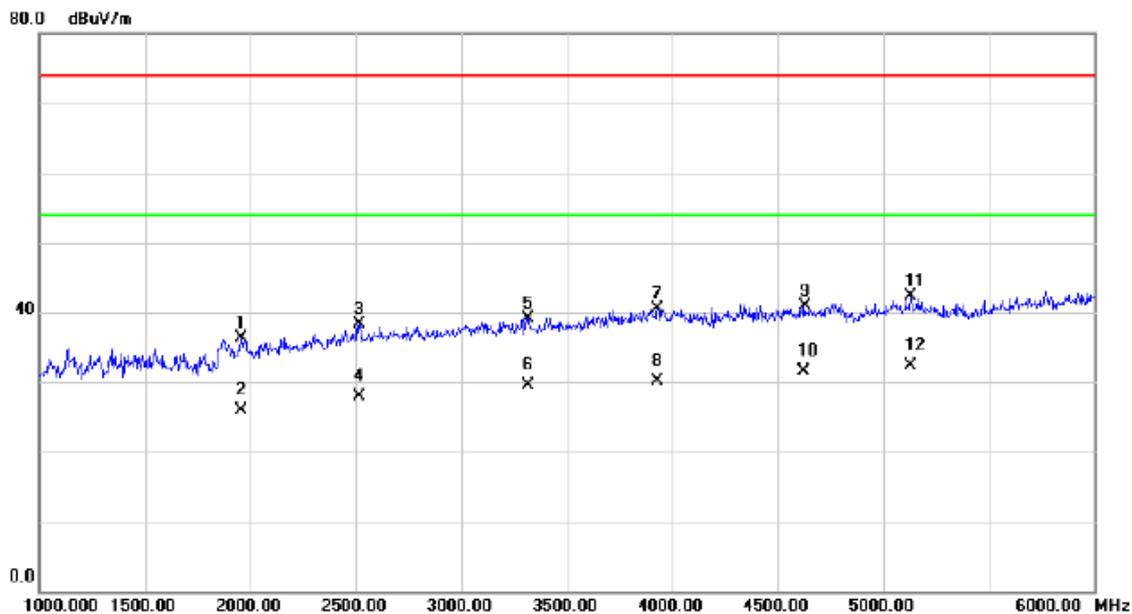

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1955.000	39.44	-3.12	36.32	74.00	-37.68	peak	
2		1955.000	29.12	-3.12	26.00	54.00	-28.00	AVG	
3		2517.500	38.48	-0.26	38.22	74.00	-35.78	peak	
4		2517.500	28.10	-0.26	27.84	54.00	-26.16	AVG	
5		3315.000	36.75	2.40	39.15	74.00	-34.85	peak	
6		3315.000	27.16	2.40	29.56	54.00	-24.44	AVG	
7		3932.500	35.80	4.65	40.45	74.00	-33.55	peak	
8		3932.500	25.50	4.65	30.15	54.00	-23.85	AVG	
9		4627.500	34.93	6.07	41.00	74.00	-33.00	peak	
10		4627.500	25.35	6.07	31.42	54.00	-22.58	AVG	
11		5132.500	34.90	7.47	42.37	74.00	-31.63	peak	
12	*	5132.500	24.86	7.47	32.33	54.00	-21.67	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: SCUD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


Vertical

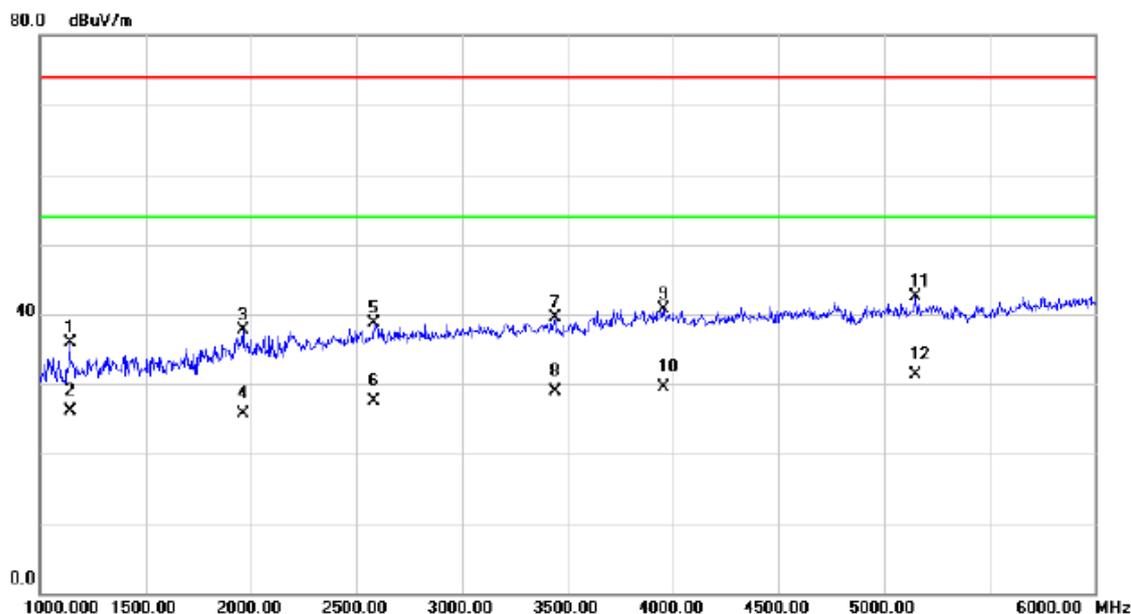

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1140.000	40.76	-4.89	35.87	74.00	-38.13	peak	
2		1140.000	31.03	-4.89	26.14	54.00	-27.86	AVG	
3		1962.500	40.75	-3.12	37.63	74.00	-36.37	peak	
4		1962.500	28.74	-3.12	25.62	54.00	-28.38	AVG	
5		2580.000	38.69	-0.04	38.65	74.00	-35.35	peak	
6		2580.000	27.50	-0.04	27.46	54.00	-26.54	AVG	
7		3440.000	36.69	2.76	39.45	74.00	-34.55	peak	
8		3440.000	26.11	2.76	28.87	54.00	-25.13	AVG	
9		3955.000	36.05	4.75	40.80	74.00	-33.20	peak	
10		3955.000	24.71	4.75	29.46	54.00	-24.54	AVG	
11		5152.500	34.96	7.50	42.46	74.00	-31.54	peak	
12	*	5152.500	23.90	7.50	31.40	54.00	-22.60	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: SCUD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


Horizontal

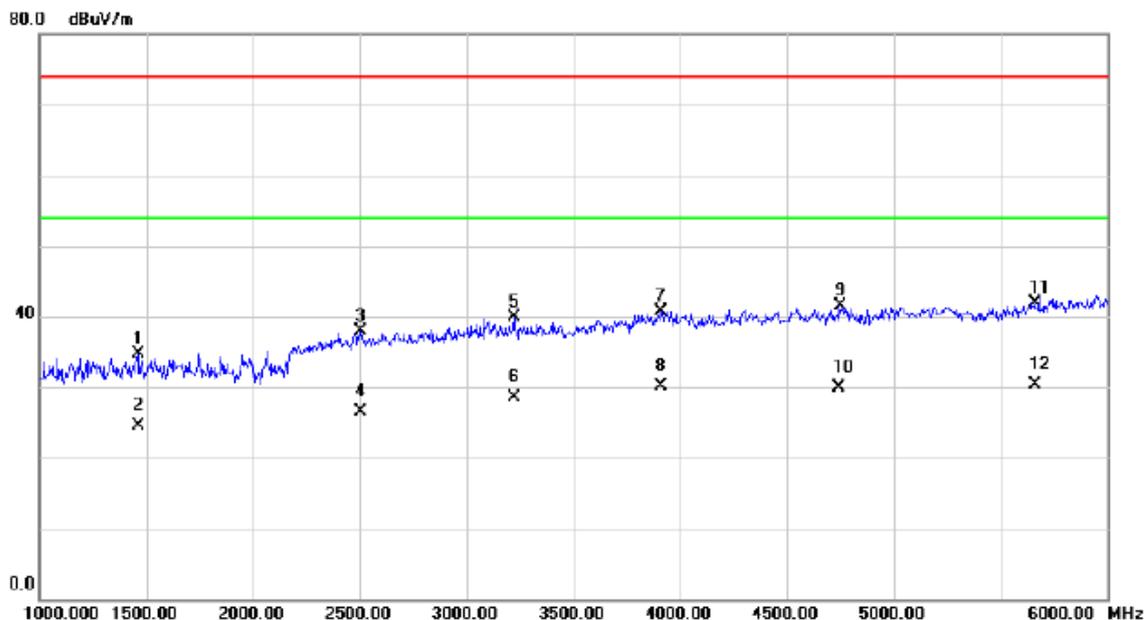

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1462.500	38.55	-3.89	34.66	74.00	-39.34	peak	
2	1462.500	28.46	-3.89	24.57	54.00	-29.43	AVG	
3	2500.000	38.28	-0.34	37.94	74.00	-36.06	peak	
4	2500.000	26.92	-0.34	26.58	54.00	-27.42	AVG	
5	3220.000	37.85	2.12	39.97	74.00	-34.03	peak	
6	3220.000	26.34	2.12	28.46	54.00	-25.54	AVG	
7	3912.500	36.19	4.58	40.77	74.00	-33.23	peak	
8	3912.500	25.54	4.58	30.12	54.00	-23.88	AVG	
9	4747.500	35.14	6.46	41.60	74.00	-32.40	peak	
10	4747.500	23.43	6.46	29.89	54.00	-24.11	AVG	
11	5662.500	33.19	8.65	41.84	74.00	-32.16	peak	
12 *	5662.500	21.59	8.65	30.24	54.00	-23.76	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

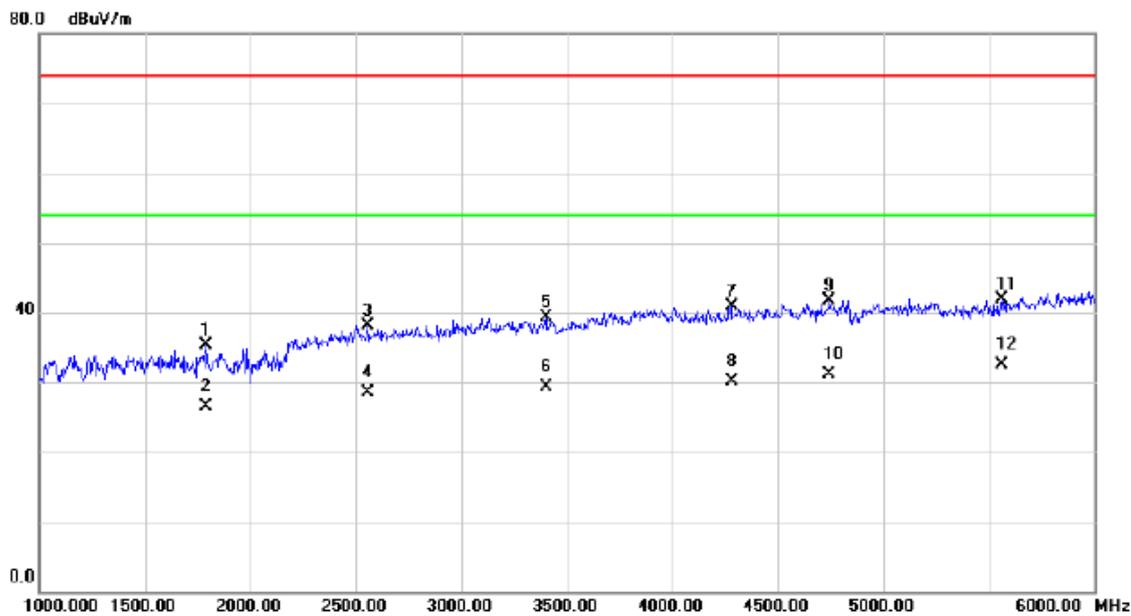

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1790.000	38.62	-3.36	35.26	74.00	-38.74	peak	
2		1790.000	29.90	-3.36	26.54	54.00	-27.46	AVG	
3		2555.000	38.25	-0.14	38.11	74.00	-35.89	peak	
4		2555.000	28.61	-0.14	28.47	54.00	-25.53	AVG	
5		3400.000	36.73	2.64	39.37	74.00	-34.63	peak	
6		3400.000	26.59	2.64	29.23	54.00	-24.77	AVG	
7		4280.000	35.67	5.33	41.00	74.00	-33.00	peak	
8		4280.000	24.82	5.33	30.15	54.00	-23.85	AVG	
9		4745.000	35.30	6.46	41.76	74.00	-32.24	peak	
10		4745.000	24.59	6.46	31.05	54.00	-22.95	AVG	
11		5562.500	33.66	8.24	41.90	74.00	-32.10	peak	
12	*	5562.500	24.23	8.24	32.47	54.00	-21.53	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+GPS+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

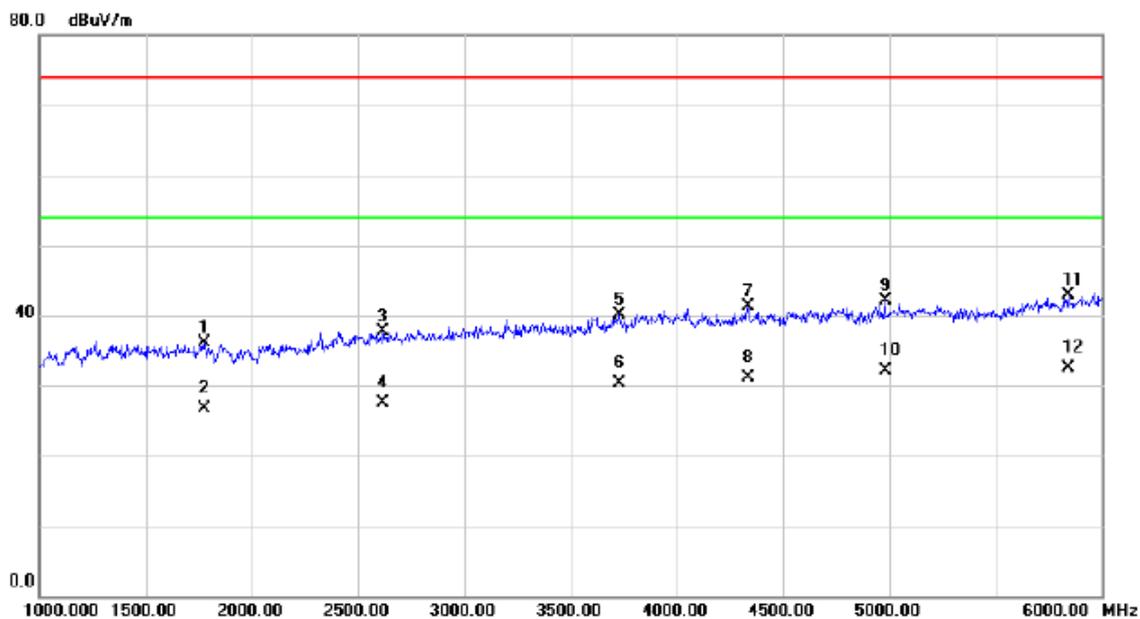

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1775.000	39.50	-3.38	36.12	74.00	-37.88	peak	
2		1775.000	30.13	-3.38	26.75	54.00	-27.25	AVG	
3		2615.000	37.63	0.08	37.71	74.00	-36.29	peak	
4		2615.000	27.38	0.08	27.46	54.00	-26.54	AVG	
5		3730.000	36.18	3.86	40.04	74.00	-33.96	peak	
6		3730.000	26.35	3.86	30.21	54.00	-23.79	AVG	
7		4337.500	35.79	5.42	41.21	74.00	-32.79	peak	
8		4337.500	25.60	5.42	31.02	54.00	-22.98	AVG	
9		4980.000	34.96	7.23	42.19	74.00	-31.81	peak	
10		4980.000	24.92	7.23	32.15	54.00	-21.85	AVG	
11		5840.000	33.55	9.36	42.91	74.00	-31.09	peak	
12	*	5840.000	23.11	9.36	32.47	54.00	-21.53	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+playing+speaker
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

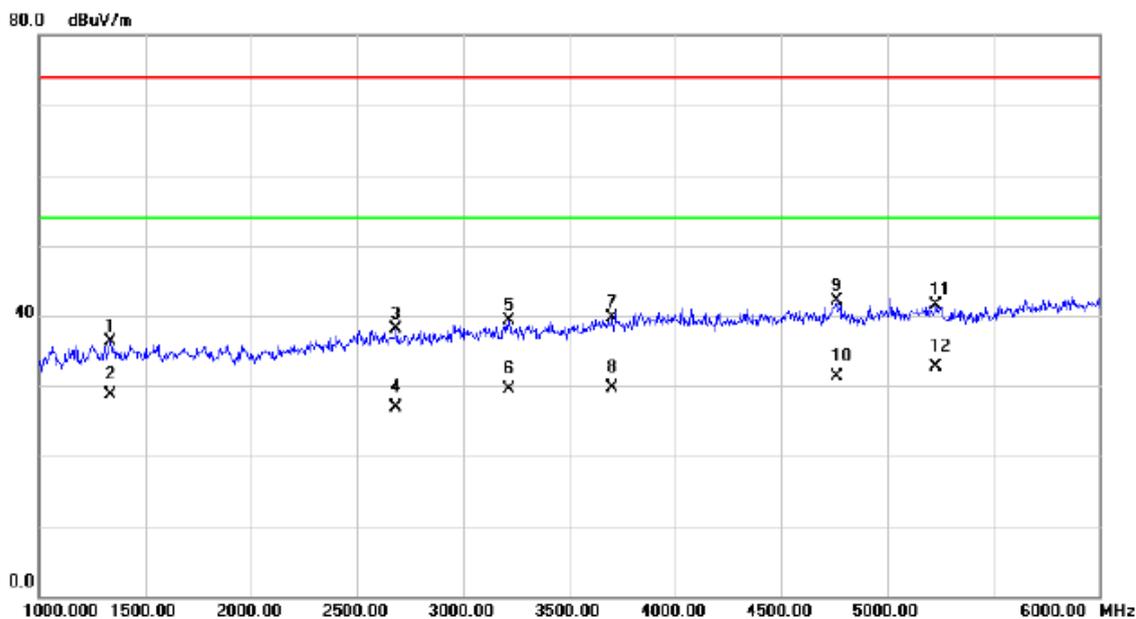

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1335.000	40.61	-4.28	36.33	74.00	-37.67	peak	
2		1335.000	32.90	-4.28	28.62	54.00	-25.38	AVG	
3		2685.000	37.70	0.33	38.03	74.00	-35.97	peak	
4		2685.000	26.67	0.33	27.00	54.00	-27.00	AVG	
5		3217.500	37.23	2.10	39.33	74.00	-34.67	peak	
6		3217.500	27.48	2.10	29.58	54.00	-24.42	AVG	
7		3705.000	35.87	3.76	39.63	74.00	-34.37	peak	
8		3705.000	25.92	3.76	29.68	54.00	-24.32	AVG	
9		4760.000	35.57	6.50	42.07	74.00	-31.93	peak	
10		4760.000	24.73	6.50	31.23	54.00	-22.77	AVG	
11		5230.000	33.88	7.61	41.49	74.00	-32.51	peak	
12	*	5230.000	25.05	7.61	32.66	54.00	-21.34	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+playing+speaker
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

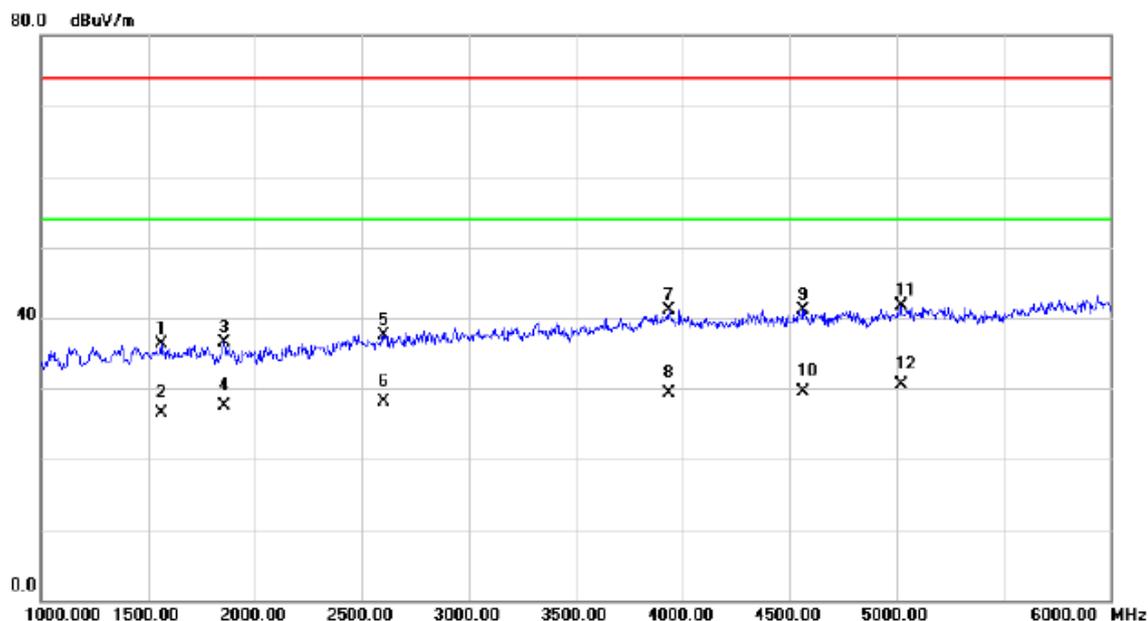

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1560.000	39.88	-3.67	36.21	74.00	-37.79	peak	
2		1560.000	30.24	-3.67	26.57	54.00	-27.43	AVG	
3		1857.500	39.69	-3.26	36.43	74.00	-37.57	peak	
4		1857.500	30.71	-3.26	27.45	54.00	-26.55	AVG	
5		2602.500	37.41	0.04	37.45	74.00	-36.55	peak	
6		2602.500	28.16	0.04	28.20	54.00	-25.80	AVG	
7		3937.500	36.47	4.67	41.14	74.00	-32.86	peak	
8		3937.500	24.63	4.67	29.30	54.00	-24.70	AVG	
9		4565.000	35.33	5.87	41.20	74.00	-32.80	peak	
10		4565.000	23.70	5.87	29.57	54.00	-24.43	AVG	
11		5022.500	34.43	7.32	41.75	74.00	-32.25	peak	
12	*	5022.500	23.18	7.32	30.50	54.00	-23.50	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

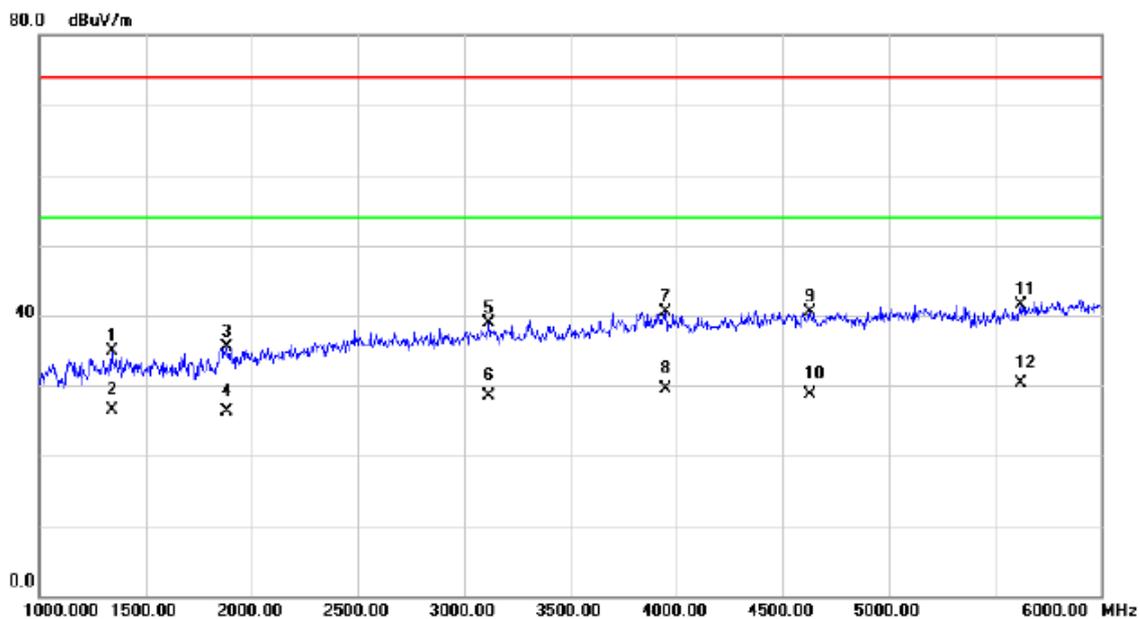

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1342.500	39.21	-4.26	34.95	74.00	-39.05	peak	
2		1342.500	30.80	-4.26	26.54	54.00	-27.46	AVG	
3		1880.000	38.81	-3.22	35.59	74.00	-38.41	peak	
4		1880.000	29.54	-3.22	26.32	54.00	-27.68	AVG	
5		3115.000	37.09	1.81	38.90	74.00	-35.10	peak	
6		3115.000	26.66	1.81	28.47	54.00	-25.53	AVG	
7		3950.000	35.82	4.72	40.54	74.00	-33.46	peak	
8		3950.000	24.73	4.72	29.45	54.00	-24.55	AVG	
9		4632.500	34.41	6.09	40.50	74.00	-33.50	peak	
10		4632.500	22.67	6.09	28.76	54.00	-25.24	AVG	
11		5625.000	33.08	8.49	41.57	74.00	-32.43	peak	
12	*	5625.000	21.75	8.49	30.24	54.00	-23.76	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

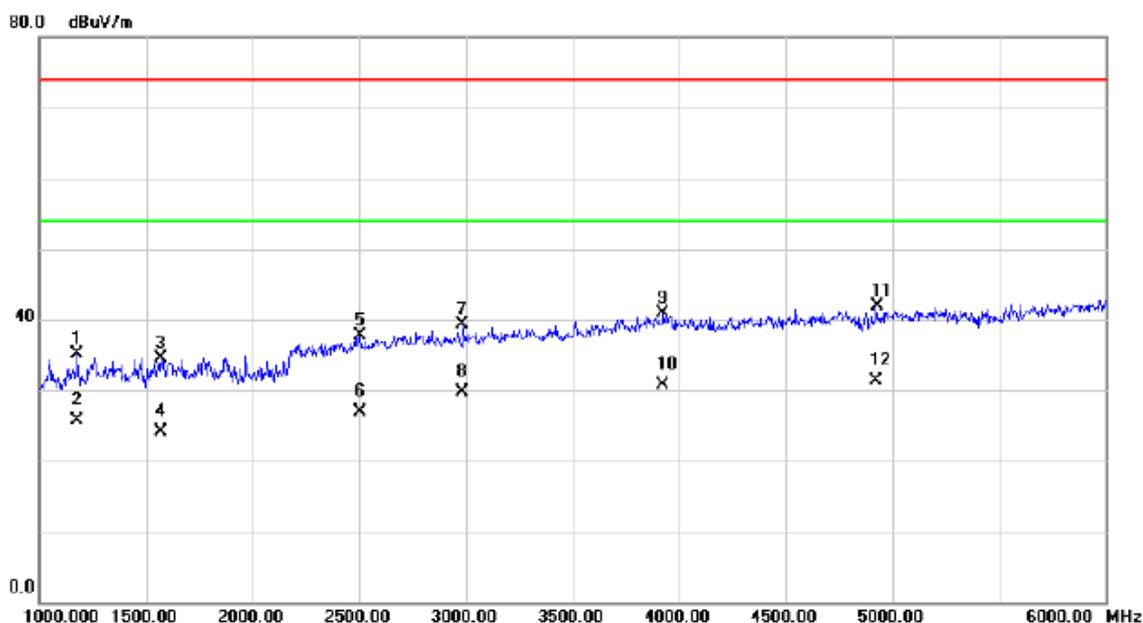

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1175.000	39.98	-4.78	35.20	74.00	-38.80	peak	
2	1175.000	30.42	-4.78	25.64	54.00	-28.36	AVG	
3	1570.000	38.25	-3.67	34.58	74.00	-39.42	peak	
4	1570.000	27.85	-3.67	24.18	54.00	-29.82	AVG	
5	2502.500	38.06	-0.32	37.74	74.00	-36.26	peak	
6	2502.500	27.19	-0.32	26.87	54.00	-27.13	AVG	
7	2985.000	37.88	1.42	39.30	74.00	-34.70	peak	
8	2985.000	28.31	1.42	29.73	54.00	-24.27	AVG	
9	3925.000	36.21	4.63	40.84	74.00	-33.16	peak	
10	3925.000	25.99	4.63	30.62	54.00	-23.38	AVG	
11	4927.500	34.80	7.06	41.86	74.00	-32.14	peak	
12 *	4927.500	24.16	7.06	31.22	54.00	-22.78	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+GPS+SIM 1
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

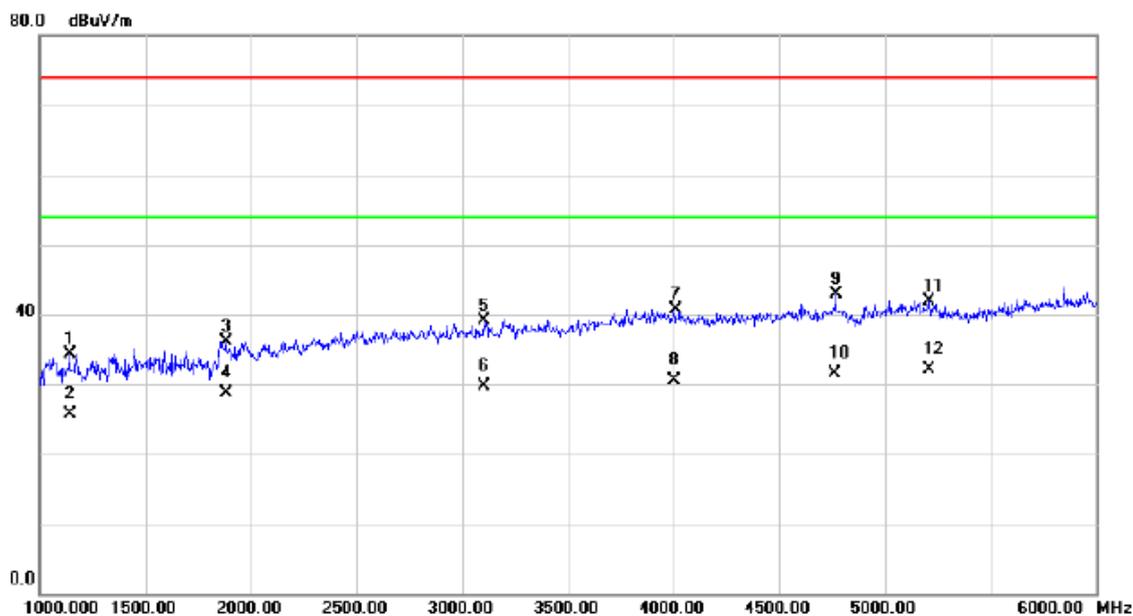

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1142.500	39.12	-4.89	34.23	74.00	-39.77	peak	
2		1142.500	30.53	-4.89	25.64	54.00	-28.36	AVG	
3		1882.500	39.33	-3.23	36.10	74.00	-37.90	peak	
4		1882.500	31.93	-3.23	28.70	54.00	-25.30	AVG	
5		3105.000	37.36	1.79	39.15	74.00	-34.85	peak	
6		3105.000	27.83	1.79	29.62	54.00	-24.38	AVG	
7		4007.500	35.74	4.93	40.67	74.00	-33.33	peak	
8		4007.500	25.49	4.93	30.42	54.00	-23.58	AVG	
9		4767.500	36.44	6.53	42.97	74.00	-31.03	peak	
10		4767.500	25.04	6.53	31.57	54.00	-22.43	AVG	
11		5212.500	34.36	7.59	41.95	74.00	-32.05	peak	
12	*	5212.500	24.46	7.59	32.05	54.00	-21.95	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+GPS+SIM 1
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

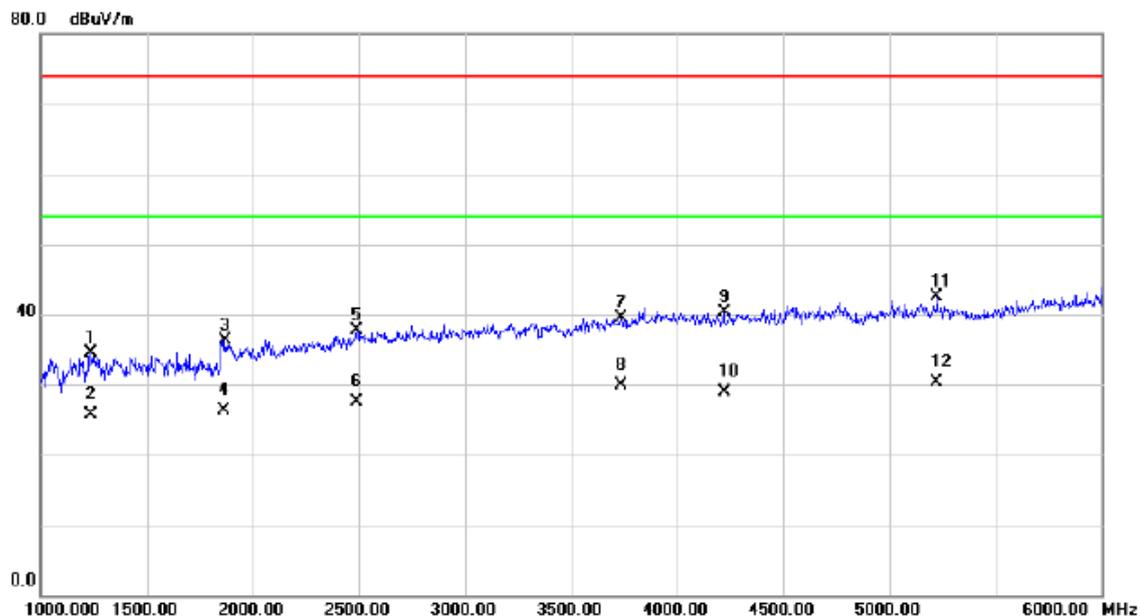

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1235.000	39.13	-4.60	34.53	74.00	-39.47	peak	
2		1235.000	30.24	-4.60	25.64	54.00	-28.36	AVG	
3		1867.500	39.58	-3.24	36.34	74.00	-37.66	peak	
4		1867.500	29.59	-3.24	26.35	54.00	-27.65	AVG	
5		2492.500	38.10	-0.38	37.72	74.00	-36.28	peak	
6		2492.500	27.85	-0.38	27.47	54.00	-26.53	AVG	
7		3737.500	35.68	3.88	39.56	74.00	-34.44	peak	
8		3737.500	25.99	3.88	29.87	54.00	-24.13	AVG	
9		4222.500	35.05	5.24	40.29	74.00	-33.71	peak	
10		4222.500	23.76	5.24	29.00	54.00	-25.00	AVG	
11		5225.000	34.96	7.60	42.56	74.00	-31.44	peak	
12	*	5225.000	22.76	7.60	30.36	54.00	-23.64	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+GPS+SIM 1
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

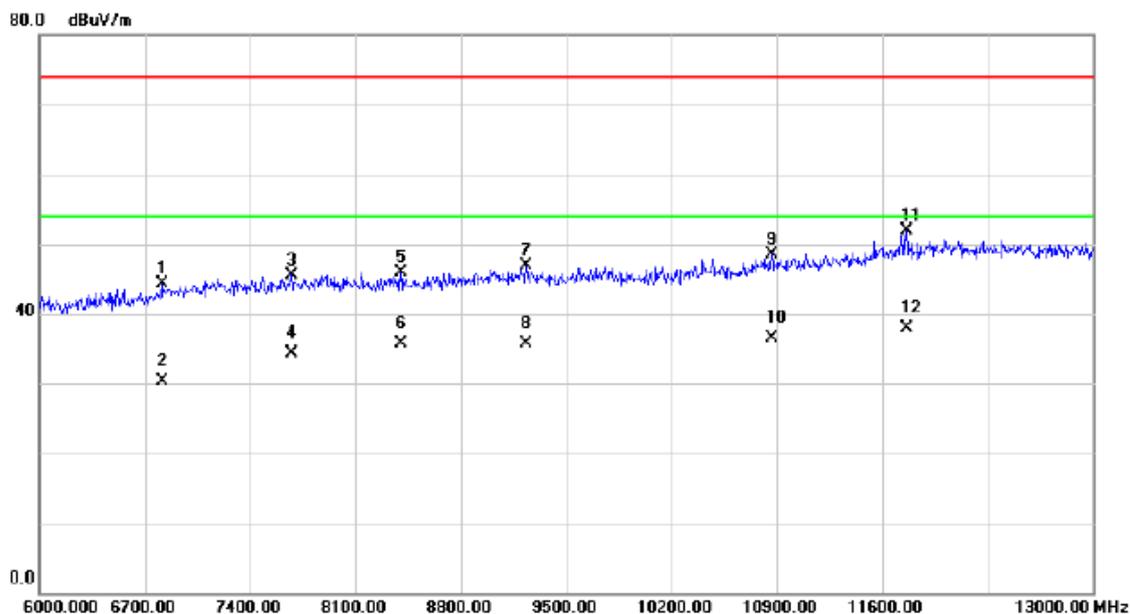

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6812.000	31.93	12.35	44.28	74.00	-29.72	peak	
2		6812.000	17.90	12.35	30.25	54.00	-23.75	AVG	
3		7673.000	31.57	14.03	45.60	74.00	-28.40	peak	
4		7673.000	20.23	14.03	34.26	54.00	-19.74	AVG	
5		8401.000	31.48	14.44	45.92	74.00	-28.08	peak	
6		8401.000	21.18	14.44	35.62	54.00	-18.38	AVG	
7		9237.500	31.48	15.37	46.85	74.00	-27.15	peak	
8		9237.500	20.30	15.37	35.67	54.00	-18.33	AVG	
9		10868.500	30.96	17.62	48.58	74.00	-25.42	peak	
10		10868.500	18.95	17.62	36.57	54.00	-17.43	AVG	
11		11761.000	31.67	20.17	51.84	74.00	-22.16	peak	
12	*	11761.000	17.83	20.17	38.00	54.00	-16.00	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+GPS+SIM 1
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

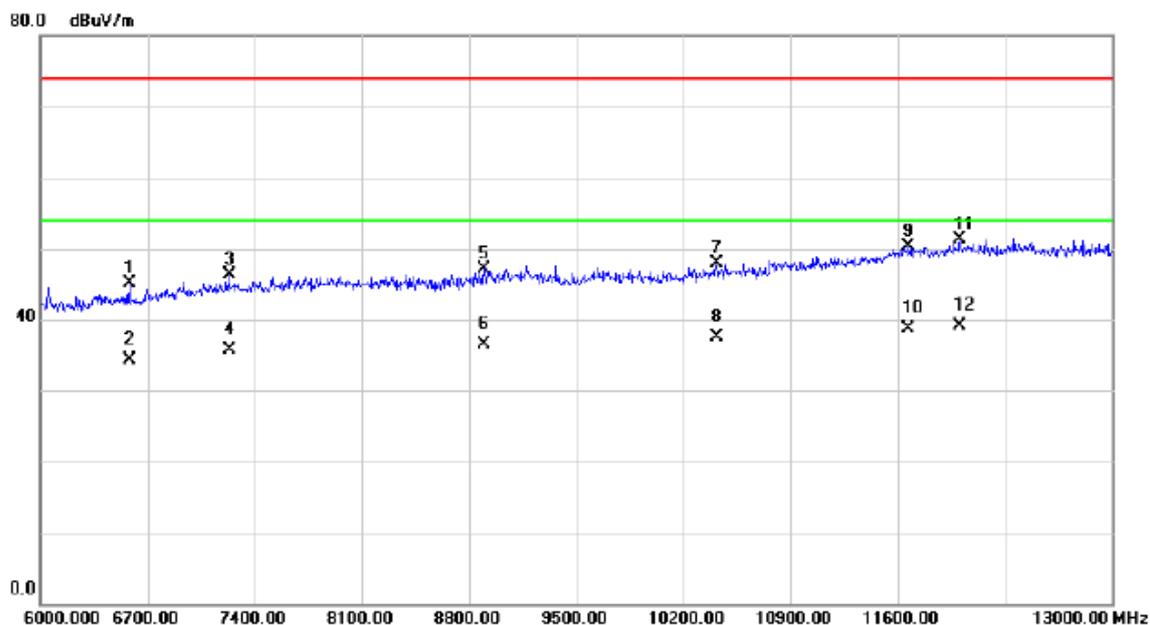

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6581.000	33.65	11.38	45.03	74.00	-28.97	peak	
2		6581.000	22.87	11.38	34.25	54.00	-19.75	AVG	
3		7232.000	32.80	13.44	46.24	74.00	-27.76	peak	
4		7232.000	22.18	13.44	35.62	54.00	-18.38	AVG	
5		8901.500	32.05	15.15	47.20	74.00	-26.80	peak	
6		8901.500	21.42	15.15	36.57	54.00	-17.43	AVG	
7		10417.00	31.47	16.46	47.93	74.00	-26.07	peak	
8		10417.00	20.99	16.46	37.45	54.00	-16.55	AVG	
9		11673.50	30.30	19.93	50.23	74.00	-23.77	peak	
10		11673.50	18.69	19.93	38.62	54.00	-15.38	AVG	
11		12006.00	30.39	20.82	51.21	74.00	-22.79	peak	
12	*	12006.00	18.30	20.82	39.12	54.00	-14.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

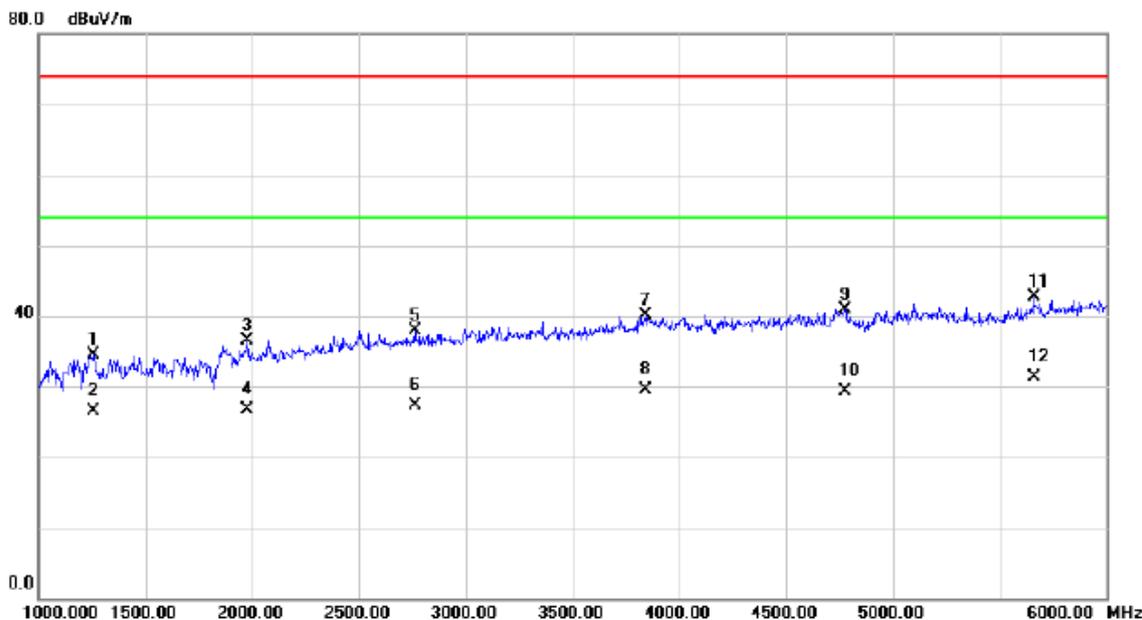

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1255.000	38.98	-4.53	34.45	74.00	-39.55	peak	
2		1255.000	31.07	-4.53	26.54	54.00	-27.46	AVG	
3		1975.000	39.59	-3.10	36.49	74.00	-37.51	peak	
4		1975.000	29.90	-3.10	26.80	54.00	-27.20	AVG	
5		2760.000	37.36	0.61	37.97	74.00	-36.03	peak	
6		2760.000	26.71	0.61	27.32	54.00	-26.68	AVG	
7		3840.000	35.76	4.28	40.04	74.00	-33.96	peak	
8		3840.000	25.17	4.28	29.45	54.00	-24.55	AVG	
9		4775.000	34.26	6.56	40.82	74.00	-33.18	peak	
10		4775.000	22.79	6.56	29.35	54.00	-24.65	AVG	
11		5660.000	34.10	8.64	42.74	74.00	-31.26	peak	
12	*	5660.000	22.60	8.64	31.24	54.00	-22.76	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

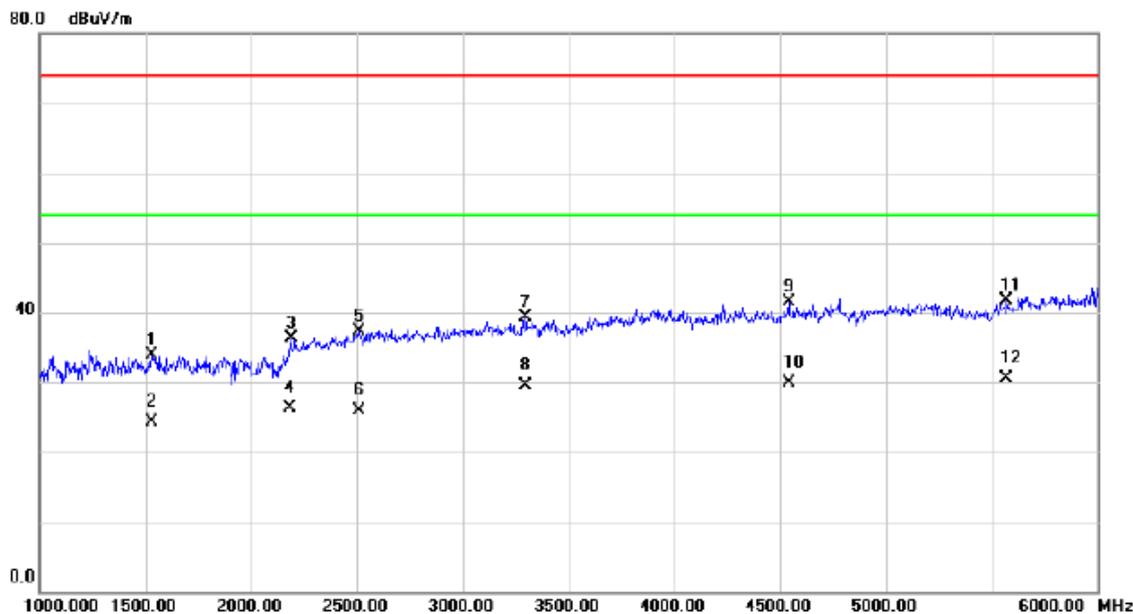

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1532.500	37.68	-3.72	33.96	74.00	-40.04	peak	
2		1532.500	27.97	-3.72	24.25	54.00	-29.75	AVG	
3		2187.500	38.30	-2.04	36.26	74.00	-37.74	peak	
4		2187.500	28.39	-2.04	26.35	54.00	-27.65	AVG	
5		2512.500	37.56	-0.29	37.27	74.00	-36.73	peak	
6		2512.500	26.16	-0.29	25.87	54.00	-28.13	AVG	
7		3295.000	36.97	2.33	39.30	74.00	-34.70	peak	
8		3295.000	27.09	2.33	29.42	54.00	-24.58	AVG	
9		4540.000	35.64	5.79	41.43	74.00	-32.57	peak	
10		4540.000	24.19	5.79	29.98	54.00	-24.02	AVG	
11		5572.500	33.36	8.29	41.65	74.00	-32.35	peak	
12	*	5572.500	22.25	8.29	30.54	54.00	-23.46	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

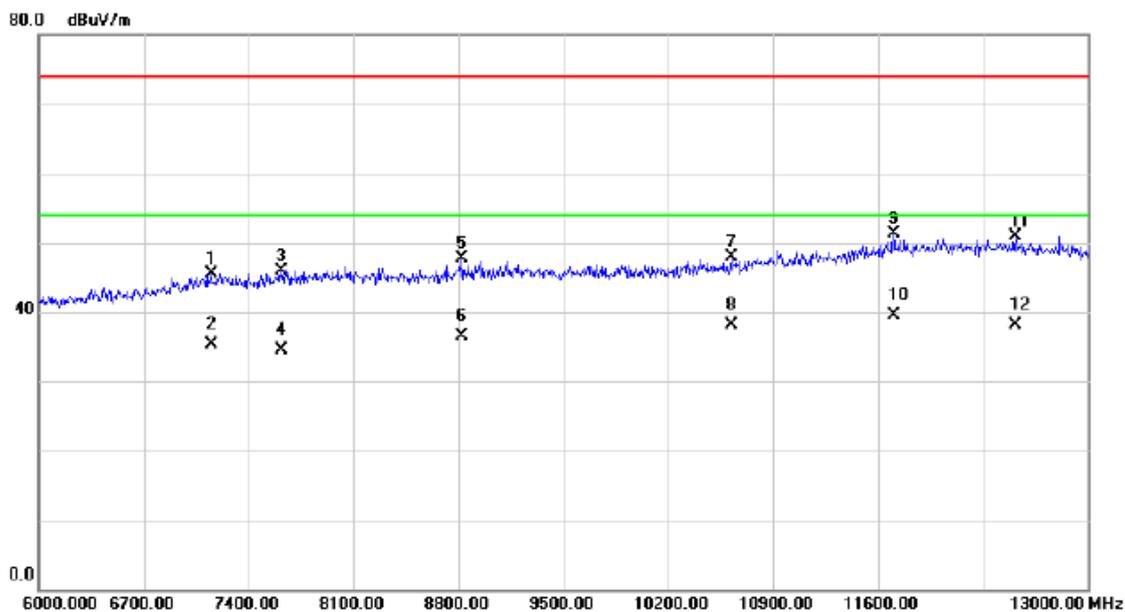

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7148.000	32.20	13.34	45.54	74.00	-28.46	peak	
2		7148.000	21.90	13.34	35.24	54.00	-18.76	AVG	
3		7620.500	32.03	13.96	45.99	74.00	-28.01	peak	
4		7620.500	20.61	13.96	34.57	54.00	-19.43	AVG	
5		8824.500	32.63	15.02	47.65	74.00	-26.35	peak	
6		8824.500	21.55	15.02	36.57	54.00	-17.43	AVG	
7		10620.00	31.02	16.98	48.00	74.00	-26.00	peak	
8		10620.00	21.18	16.98	38.16	54.00	-15.84	AVG	
9		11705.00	31.28	20.02	51.30	74.00	-22.70	peak	
10	*	11705.00	19.52	20.02	39.54	54.00	-14.46	AVG	
11		12520.50	29.98	20.94	50.92	74.00	-23.08	peak	
12		12520.50	17.12	20.94	38.06	54.00	-15.94	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

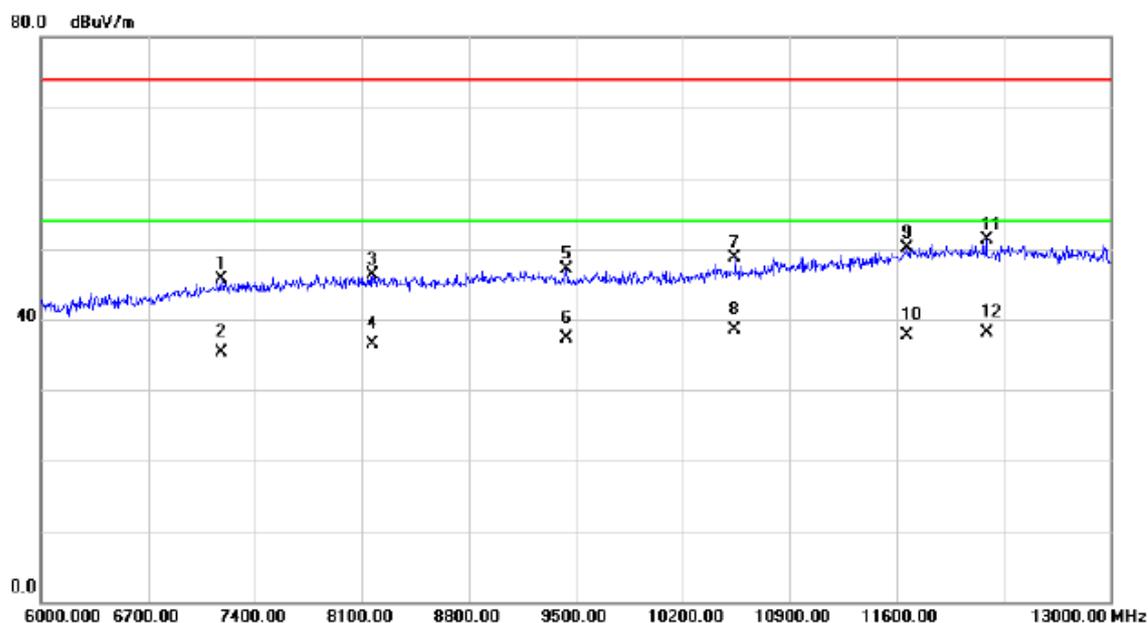

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7179.500	32.37	13.38	45.75	74.00	-28.25	peak	
2		7179.500	21.86	13.38	35.24	54.00	-18.76	AVG	
3		8173.500	31.80	14.46	46.26	74.00	-27.74	peak	
4		8173.500	21.96	14.46	36.42	54.00	-17.58	AVG	
5		9440.500	31.60	15.42	47.02	74.00	-26.98	peak	
6		9440.500	21.84	15.42	37.26	54.00	-16.74	AVG	
7		10543.00	31.88	16.78	48.66	74.00	-25.34	peak	
8	*	10543.00	21.76	16.78	38.54	54.00	-15.46	AVG	
9		11670.00	30.11	19.92	50.03	74.00	-23.97	peak	
10		11670.00	17.70	19.92	37.62	54.00	-16.38	AVG	
11		12188.00	30.45	20.85	51.30	74.00	-22.70	peak	
12		12188.00	17.31	20.85	38.16	54.00	-15.84	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

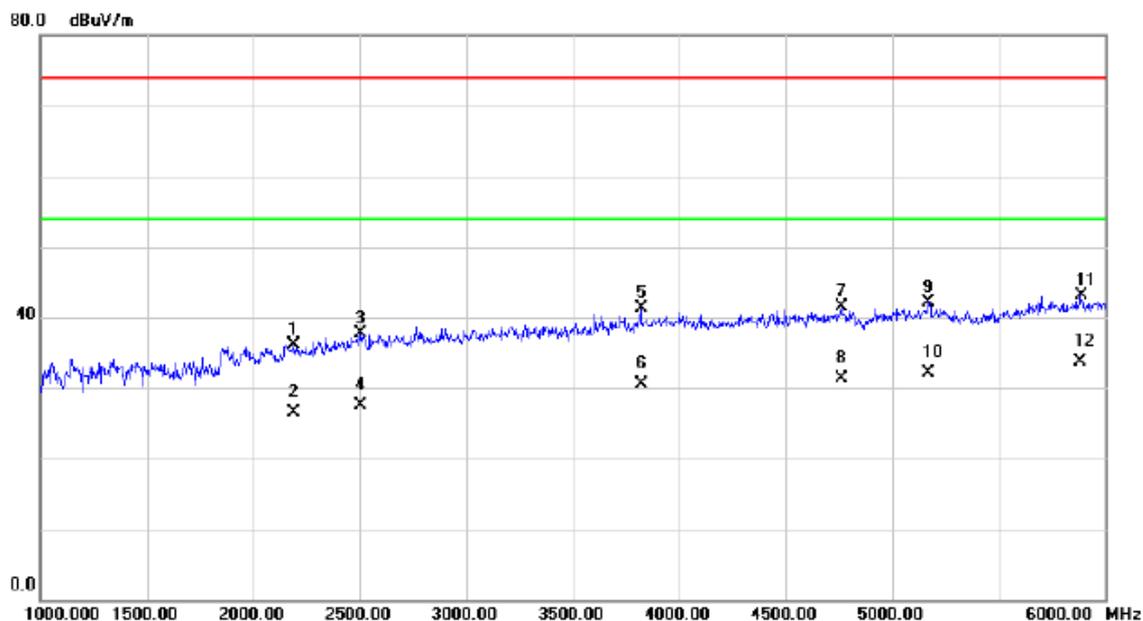

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2190.000	38.10	-2.02	36.08	74.00	-37.92	peak	
2		2190.000	28.59	-2.02	26.57	54.00	-27.43	AVG	
3		2500.000	38.05	-0.34	37.71	74.00	-36.29	peak	
4		2500.000	27.77	-0.34	27.43	54.00	-26.57	AVG	
5		3820.000	37.20	4.20	41.40	74.00	-32.60	peak	
6		3820.000	26.30	4.20	30.50	54.00	-23.50	AVG	
7		4762.500	34.97	6.51	41.48	74.00	-32.52	peak	
8		4762.500	24.73	6.51	31.24	54.00	-22.76	AVG	
9		5170.000	34.63	7.54	42.17	74.00	-31.83	peak	
10		5170.000	24.52	7.54	32.06	54.00	-21.94	AVG	
11		5887.500	33.62	9.55	43.17	74.00	-30.83	peak	
12	*	5887.500	24.09	9.55	33.64	54.00	-20.36	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

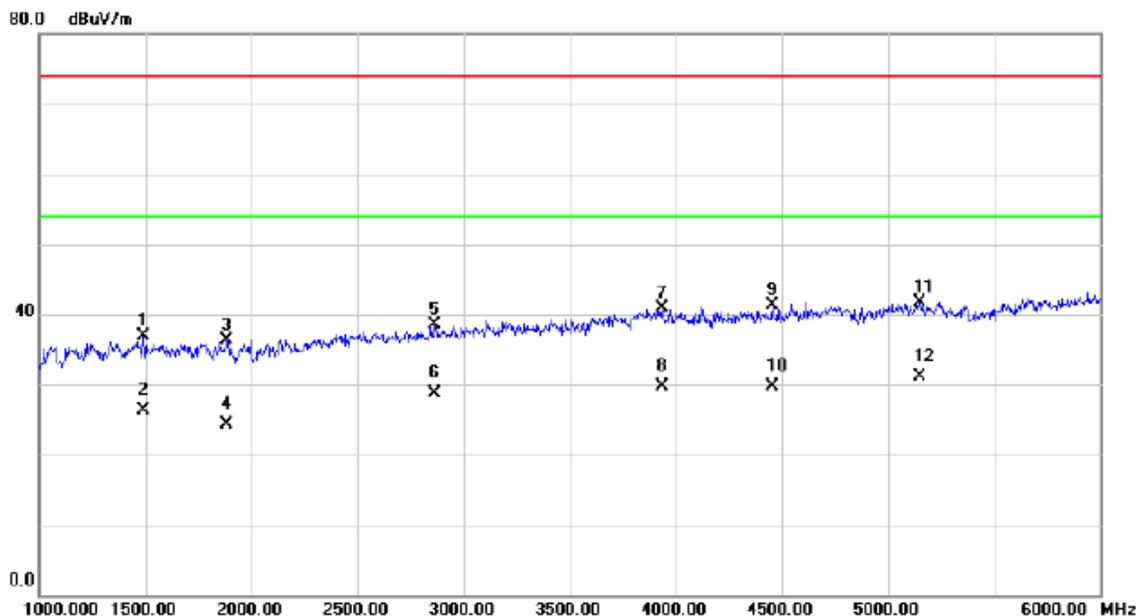

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1492.500	40.74	-3.78	36.96	74.00	-37.04	peak	
2		1492.500	30.13	-3.78	26.35	54.00	-27.65	AVG	
3		1885.000	39.60	-3.22	36.38	74.00	-37.62	peak	
4		1885.000	27.46	-3.22	24.24	54.00	-29.76	AVG	
5		2865.000	37.44	0.98	38.42	74.00	-35.58	peak	
6		2865.000	27.64	0.98	28.62	54.00	-25.38	AVG	
7		3937.500	36.29	4.67	40.96	74.00	-33.04	peak	
8		3937.500	25.09	4.67	29.76	54.00	-24.24	AVG	
9		4455.000	35.70	5.59	41.29	74.00	-32.71	peak	
10		4455.000	24.10	5.59	29.69	54.00	-24.31	AVG	
11		5150.000	34.17	7.50	41.67	74.00	-32.33	peak	
12	*	5150.000	23.54	7.50	31.04	54.00	-22.96	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

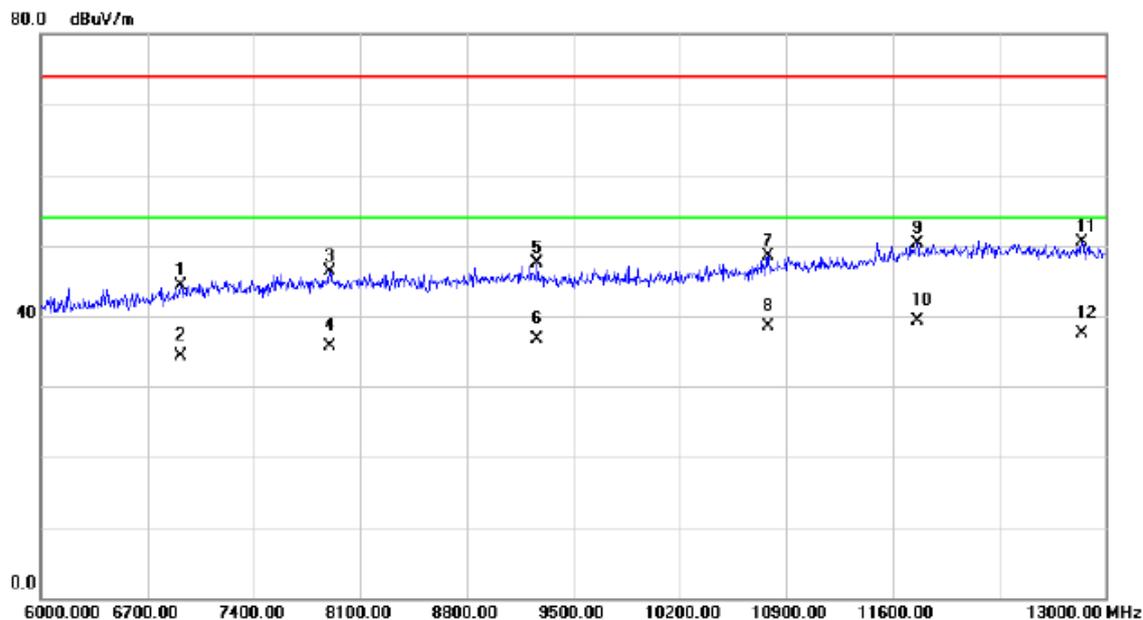

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6920.500	31.45	12.82	44.27	74.00	-29.73	peak	
2		6920.500	21.44	12.82	34.26	54.00	-19.74	AVG	
3		7900.500	31.92	14.35	46.27	74.00	-27.73	peak	
4		7900.500	21.27	14.35	35.62	54.00	-18.38	AVG	
5		9262.000	32.13	15.37	47.50	74.00	-26.50	peak	
6		9262.000	21.37	15.37	36.74	54.00	-17.26	AVG	
7		10781.00	31.05	17.40	48.45	74.00	-25.55	peak	
8		10781.00	21.06	17.40	38.46	54.00	-15.54	AVG	
9		11764.50	30.19	20.18	50.37	74.00	-23.63	peak	
10	*	11764.50	19.12	20.18	39.30	54.00	-14.70	AVG	
11		12849.50	29.08	21.36	50.44	74.00	-23.56	peak	
12		12849.50	16.20	21.36	37.56	54.00	-16.44	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

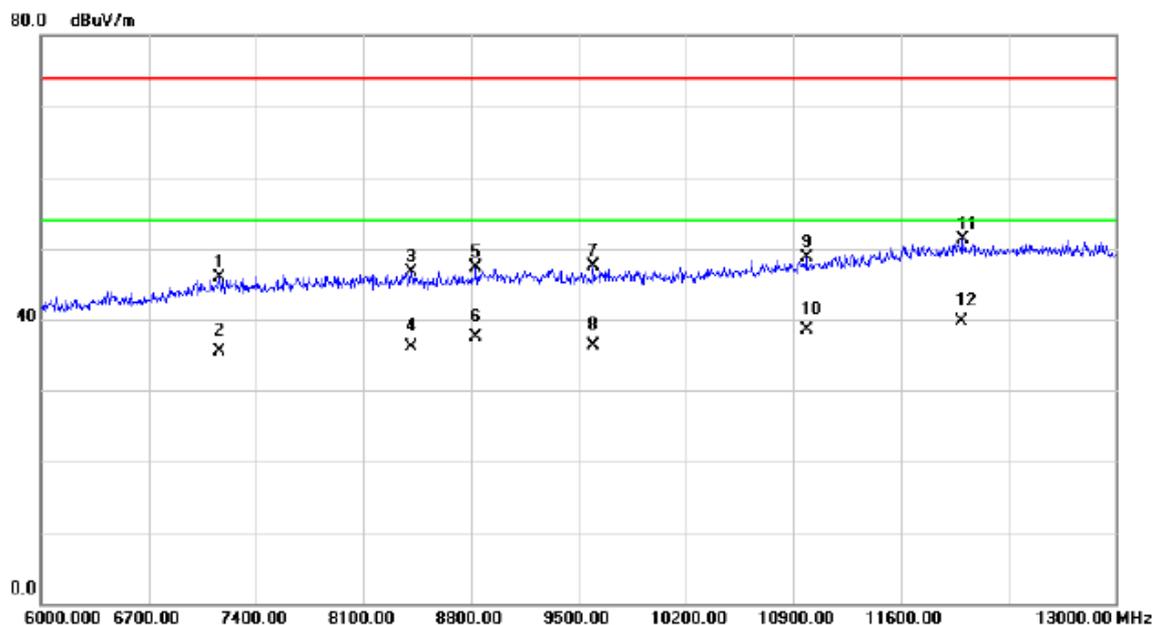

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7165.500	32.56	13.36	45.92	74.00	-28.08	peak	
2		7165.500	22.06	13.36	35.42	54.00	-18.58	AVG	
3		8411.500	32.32	14.44	46.76	74.00	-27.24	peak	
4		8411.500	21.72	14.44	36.16	54.00	-17.84	AVG	
5		8835.000	32.24	15.03	47.27	74.00	-26.73	peak	
6		8835.000	22.53	15.03	37.56	54.00	-16.44	AVG	
7		9601.500	32.01	15.42	47.43	74.00	-26.57	peak	
8		9601.500	20.80	15.42	36.22	54.00	-17.78	AVG	
9		10984.00	30.87	17.92	48.79	74.00	-25.21	peak	
10		10984.00	20.57	17.92	38.49	54.00	-15.51	AVG	
11		12002.50	30.54	20.82	51.36	74.00	-22.64	peak	
12	*	12002.50	18.94	20.82	39.76	54.00	-14.24	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

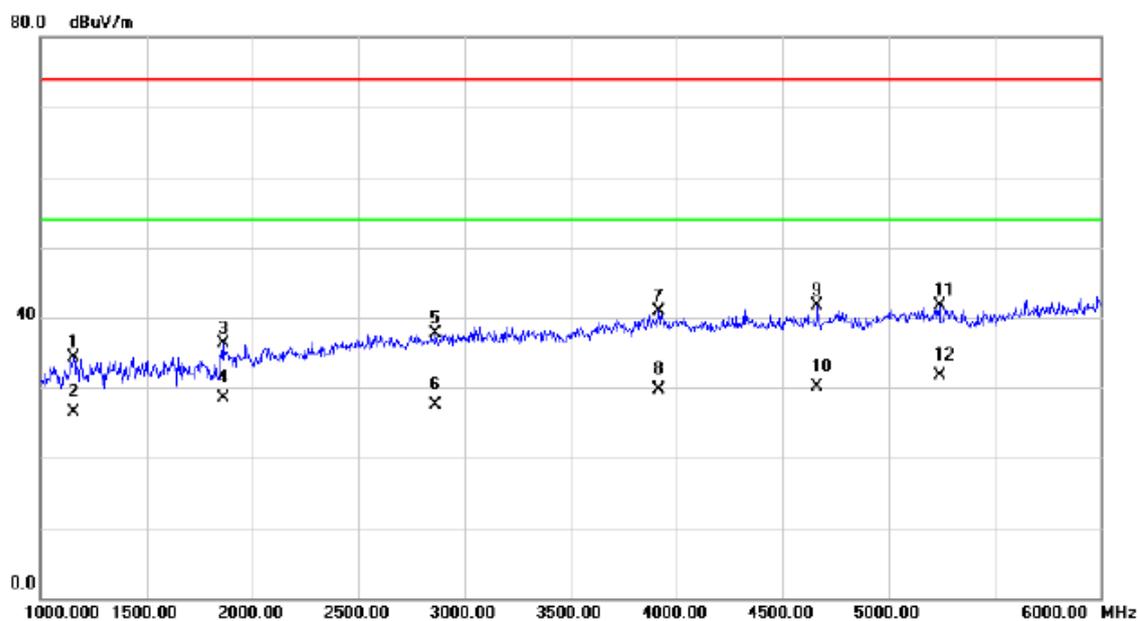

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1155.000	39.20	-4.85	34.35	74.00	-39.65	peak	
2		1155.000	31.42	-4.85	26.57	54.00	-27.43	AVG	
3		1862.500	39.47	-3.26	36.21	74.00	-37.79	peak	
4		1862.500	31.72	-3.26	28.46	54.00	-25.54	AVG	
5		2865.000	36.76	0.98	37.74	74.00	-36.26	peak	
6		2865.000	26.46	0.98	27.44	54.00	-26.56	AVG	
7		3917.500	36.28	4.60	40.88	74.00	-33.12	peak	
8		3917.500	25.02	4.60	29.62	54.00	-24.38	AVG	
9		4665.000	35.48	6.20	41.68	74.00	-32.32	peak	
10		4665.000	23.92	6.20	30.12	54.00	-23.88	AVG	
11		5240.000	34.07	7.64	41.71	74.00	-32.29	peak	
12	*	5240.000	23.98	7.64	31.62	54.00	-22.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

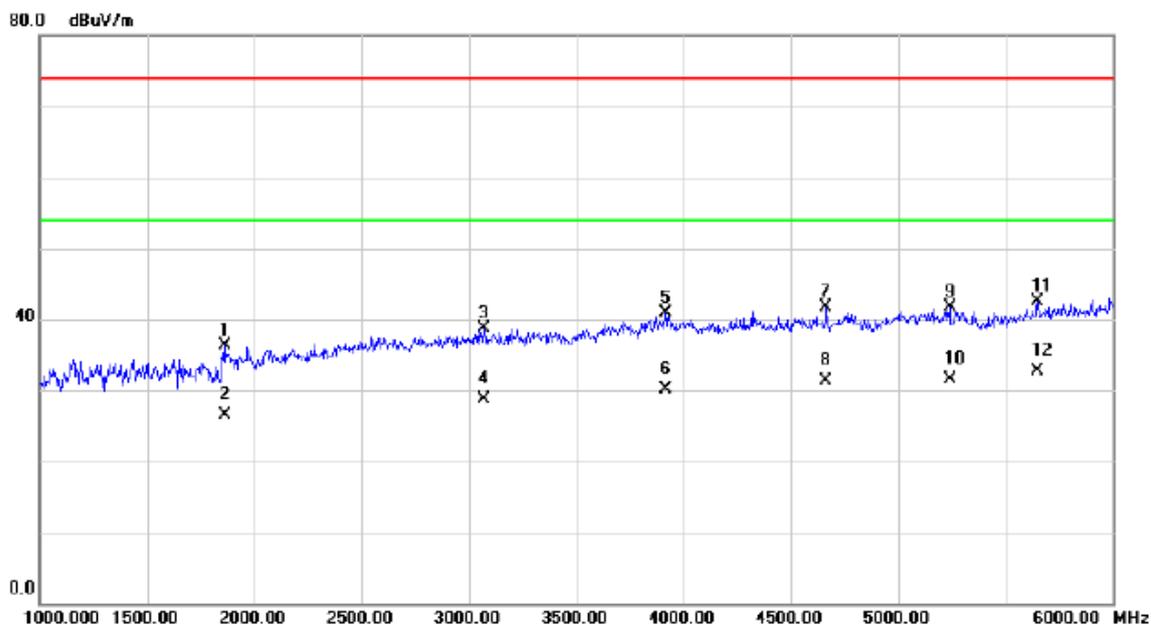

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1862.500	39.47	-3.26	36.21	74.00	-37.79	peak	
2		1862.500	29.80	-3.26	26.54	54.00	-27.46	AVG	
3		3072.500	37.07	1.68	38.75	74.00	-35.25	peak	
4		3072.500	26.94	1.68	28.62	54.00	-25.38	AVG	
5		3917.500	36.28	4.60	40.88	74.00	-33.12	peak	
6		3917.500	25.54	4.60	30.14	54.00	-23.86	AVG	
7		4665.000	35.48	6.20	41.68	74.00	-32.32	peak	
8		4665.000	25.02	6.20	31.22	54.00	-22.78	AVG	
9		5240.000	34.07	7.64	41.71	74.00	-32.29	peak	
10		5240.000	23.82	7.64	31.46	54.00	-22.54	AVG	
11		5650.000	33.82	8.60	42.42	74.00	-31.58	peak	
12	*	5650.000	24.15	8.60	32.75	54.00	-21.25	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

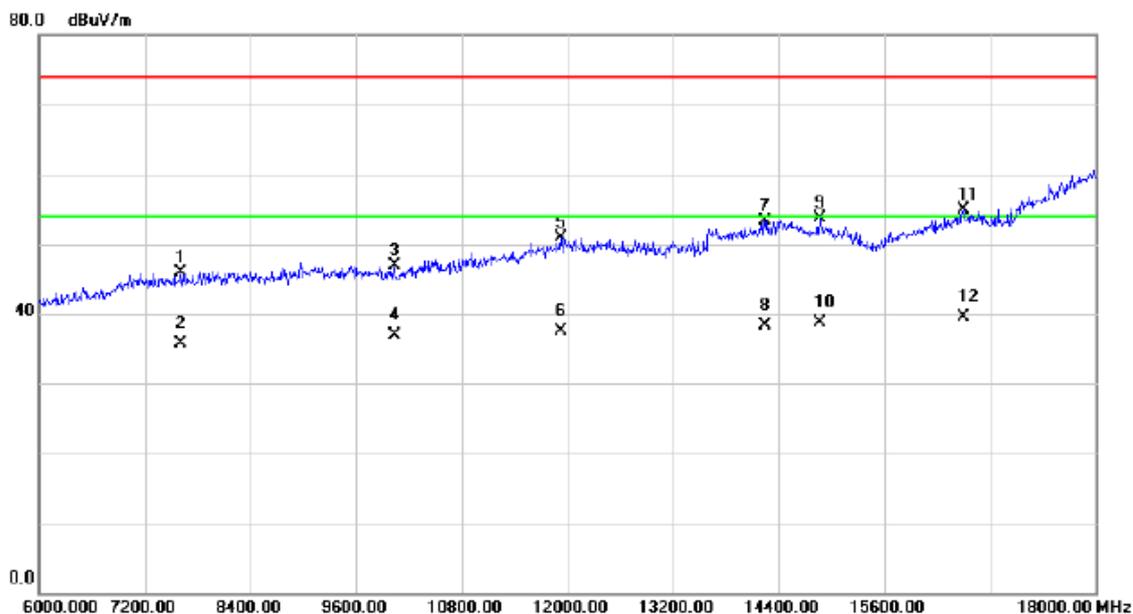

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7614.000	31.88	13.94	45.82	74.00	-28.18	peak	
2		7614.000	21.68	13.94	35.62	54.00	-18.38	AVG	
3		10032.00	31.53	15.47	47.00	74.00	-27.00	peak	
4		10032.00	21.37	15.47	36.84	54.00	-17.16	AVG	
5		11934.00	30.32	20.63	50.95	74.00	-23.05	peak	
6		11934.00	16.91	20.63	37.54	54.00	-16.46	AVG	
7		14244.00	30.42	22.98	53.40	74.00	-20.60	peak	
8		14244.00	15.41	22.98	38.39	54.00	-15.61	AVG	
9		14868.00	30.71	23.06	53.77	74.00	-20.23	peak	
10		14868.00	15.69	23.06	38.75	54.00	-15.25	AVG	
11		16500.00	30.38	24.49	54.87	74.00	-19.13	peak	
12	*	16500.00	14.98	24.49	39.47	54.00	-14.53	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+wifi+GPS+SIM 2
Note:	Adapter: PHITEK +USB Cable: HONGLIN + Battery: Sunwoda + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

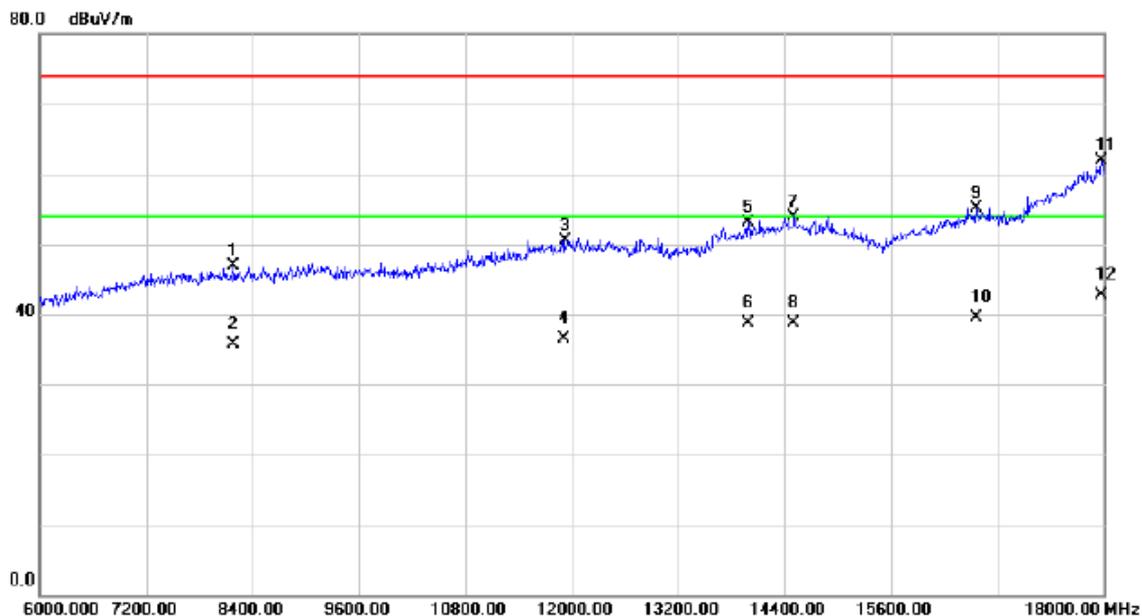

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		8184.000	32.41	14.46	46.87	74.00	-27.13	peak	
2		8184.000	21.16	14.46	35.62	54.00	-18.38	AVG	
3		11922.00	29.98	20.61	50.59	74.00	-23.41	peak	
4		11922.00	15.87	20.61	36.48	54.00	-17.52	AVG	
5		13992.00	30.62	22.52	53.14	74.00	-20.86	peak	
6		13992.00	16.23	22.52	38.75	54.00	-15.25	AVG	
7		14508.00	30.38	23.43	53.81	74.00	-20.19	peak	
8		14508.00	15.25	23.43	38.68	54.00	-15.32	AVG	
9		16566.00	30.43	24.63	55.06	74.00	-18.94	peak	
10		16566.00	14.79	24.63	39.42	54.00	-14.58	AVG	
11		17982.00	30.36	31.47	61.83	74.00	-12.17	peak	
12	*	17982.00	11.18	31.47	42.65	54.00	-11.35	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


Vertical

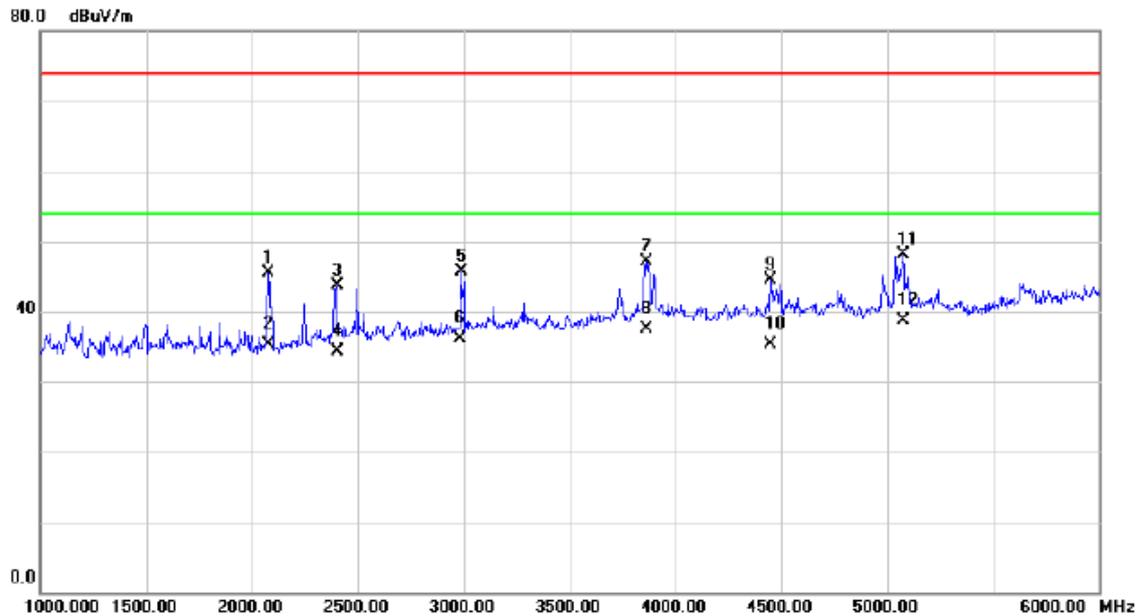

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2075.000	48.17	-2.65	45.52	74.00	-28.48	peak	
2		2075.000	37.91	-2.65	35.26	54.00	-18.74	AVG	
3		2400.000	44.50	-0.88	43.62	74.00	-30.38	peak	
4		2400.000	35.14	-0.88	34.26	54.00	-19.74	AVG	
5		2987.500	44.37	1.43	45.80	74.00	-28.20	peak	
6		2987.500	34.70	1.43	36.13	54.00	-17.87	AVG	
7		3862.500	42.66	4.37	47.03	74.00	-26.97	peak	
8		3862.500	33.20	4.37	37.57	54.00	-16.43	AVG	
9		4450.000	38.89	5.58	44.47	74.00	-29.53	peak	
10		4450.000	29.68	5.58	35.26	54.00	-18.74	AVG	
11		5077.500	40.66	7.40	48.06	74.00	-25.94	peak	
12	*	5077.500	31.22	7.40	38.62	54.00	-15.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


Horizontal

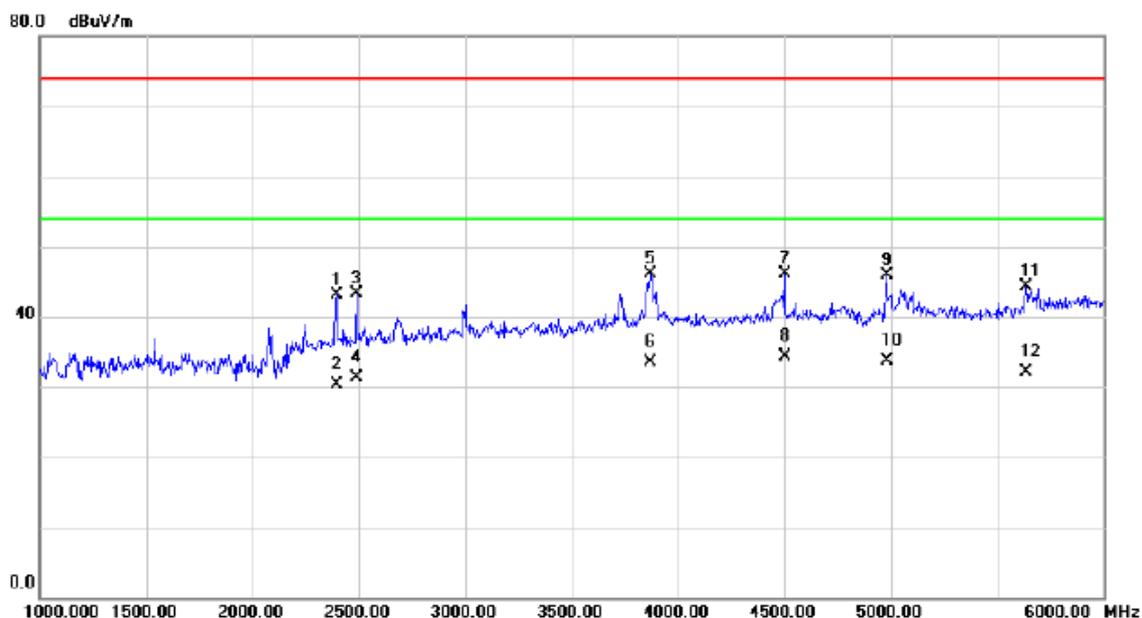

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2397.500	44.04	-0.89	43.15	74.00	-30.85	peak	
2		2397.500	31.15	-0.89	30.26	54.00	-23.74	AVG	
3		2490.000	43.66	-0.39	43.27	74.00	-30.73	peak	
4		2490.000	31.63	-0.39	31.24	54.00	-22.76	AVG	
5		3872.500	41.67	4.41	46.08	74.00	-27.92	peak	
6		3872.500	29.11	4.41	33.52	54.00	-20.48	AVG	
7		4500.000	40.39	5.65	46.04	74.00	-27.96	peak	
8	*	4500.000	28.56	5.65	34.21	54.00	-19.79	AVG	
9		4982.500	38.65	7.24	45.89	74.00	-28.11	peak	
10		4982.500	26.38	7.24	33.62	54.00	-20.38	AVG	
11		5637.500	35.79	8.55	44.34	74.00	-29.66	peak	
12		5637.500	23.53	8.55	32.08	54.00	-21.92	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN


Vertical

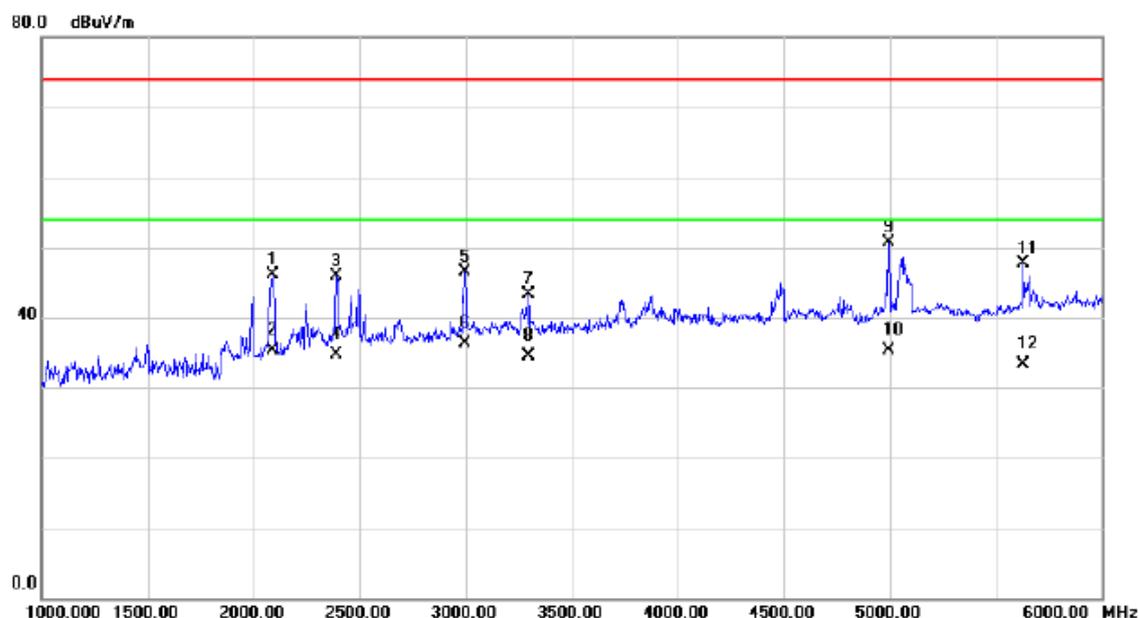

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2090.000	48.73	-2.57	46.16	74.00	-27.84	peak	
2		2090.000	37.82	-2.57	35.25	54.00	-18.75	AVG	
3		2392.500	46.77	-0.92	45.85	74.00	-28.15	peak	
4		2392.500	35.54	-0.92	34.62	54.00	-19.38	AVG	
5		2995.000	45.10	1.46	46.56	74.00	-27.44	peak	
6	*	2995.000	34.79	1.46	36.25	54.00	-17.75	AVG	
7		3295.000	40.96	2.33	43.29	74.00	-30.71	peak	
8		3295.000	32.24	2.33	34.57	54.00	-19.43	AVG	
9		4995.000	43.43	7.28	50.71	74.00	-23.29	peak	
10		4995.000	27.95	7.28	35.23	54.00	-18.77	AVG	
11		5630.000	39.19	8.52	47.71	74.00	-26.29	peak	
12		5630.000	24.74	8.52	33.26	54.00	-20.74	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN

Horizontal

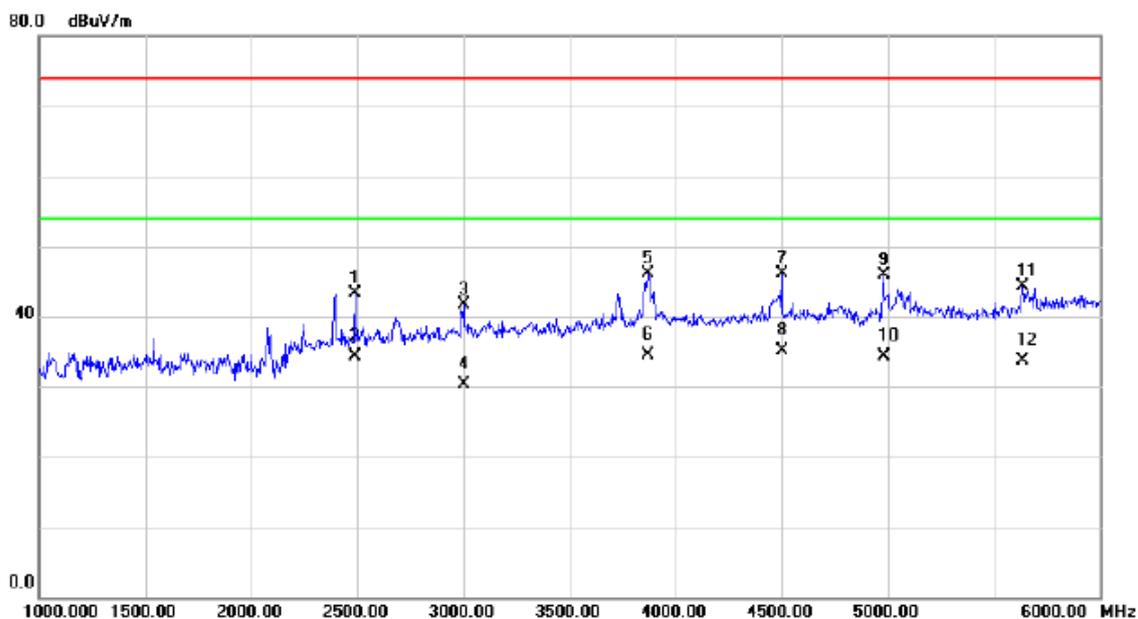

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2490.000	43.66	-0.39	43.27	74.00	-30.73	peak	
2	2490.000	34.65	-0.39	34.26	54.00	-19.74	AVG	
3	3000.000	40.26	1.47	41.73	74.00	-32.27	peak	
4	3000.000	28.78	1.47	30.25	54.00	-23.75	AVG	
5	3872.500	41.67	4.41	46.08	74.00	-27.92	peak	
6	3872.500	30.11	4.41	34.52	54.00	-19.48	AVG	
7	4500.000	40.39	5.65	46.04	74.00	-27.96	peak	
8 *	4500.000	29.47	5.65	35.12	54.00	-18.88	AVG	
9	4982.500	38.65	7.24	45.89	74.00	-28.11	peak	
10	4982.500	27.02	7.24	34.26	54.00	-19.74	AVG	
11	5637.500	35.79	8.55	44.34	74.00	-29.66	peak	
12	5637.500	25.07	8.55	33.62	54.00	-20.38	AVG	