

FCC SAR Test Report

FCC ID: QISLUA-L23

Project No. : 1601C010A
Equipment : Smart Phone
Model Name : HUAWEI LUA-L23
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Jan. 07, 2016(LUA-L03); Jan. 26, 2016(LUA-L23)
Date of Test : Jan. 08, 2016 ~ Jan. 28, 2016(LUA-L03);
Jan. 26, 2016 ~ Feb. 22, 2016(LUA-L23);
Issued Date : Feb. 28, 2016
Tested by : BTL Inc.

PREPARED BY : 
(Super Jiang/ Technical Engineer)

APPROVED BY : 
(Steven Lu / Technical Manager)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**), or National Institute of Standards and Technology (**NIST**) .

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . GENERAL SUMMARY	6
2 . RF EMISSIONS MEASUREMENT	7
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 STATEMENT OF COMPLIANCE	8
3.2 GENERAL DESCRIPTION OF EUT	9
3.3 LABORATORY ENVIRONMENT	11
3.4 MAIN TEST INSTRUMENTS	12
4 .SAR MEASUREMENTS SYSTEM CONFIGURATION	13
4.1 SAR MEASUREMENT SET-UP	13
4.2 DASY5E-FIELDPROBESYSTEM	14
5 . SYSTEM VERIFICATION PROCEDURE	22
5.1 TISSUE VERIFICATION	22
5.2 SYSTEM CHECK	24
5.3 SYSTEM CHECK PROCEDURE	25
6 .SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	26
6.1 SAR MEASUREMENT VARIABILITY	26
6.2 SAR MEASUREMENT UNCERTAINTY	26
7 . OPERATIONAL CONDITIONS DURING TEST	27
7.1 SAR TEST CONFIGURATION	27
7.1 .1 GSM TEST CONFIGURATION	27
7.1.2 WCDMA TEST CONFIGURATION	28
7.1.3 LTE TEST CONFIGURATION	34
7.1.4 WIFI TEST CONFIGURATION	36
7.2 TEST POSITION	37
7.2.1 HEAD	37
7.2.2 BODY	37
8 .TEST RESULT	38
8.1 CONDUCTED POWER RESULTS	38

Table of Contents	Page
8.2 SAR TEST RESULTS	55
8.3 MULTIPLE TRANSMITTER EVALUATION	71
APPENDIX	76
1. TEST LAYOUT	76
Appendix A. SAR Plots of System Verification	
Appendix B. SAR Plots of SAR Measurement	
Appendix C. Calibration Certificate for Probe and Dipole	
Appendix D. Photographs of the Test Set-Up	

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCC SAR-1-1601C010	Original Issue	Feb. 15, 2016
BTL-FCC SAR-1-1601C010A	Compared with previous report (BTL-FCC SAR-1-1601C010), the differences please see the table below.	Feb. 28, 2016

Note: According to the differences description below, HUAWEI LUA-L23 shares the same test datas of HUAWEI LUA-L03. In addition, all the worst cases are evaluated and recorded in this test report. And the new added SIM2 Card of HUAWEI LUA-L23 is evaluated in the worst case and recorded in this test report.

The differences between HUAWEI LUA-L03 and HUAWEI LUA-L23 are shown as follows:

Project ID	1601C010	1601C010A
Model	HUAWEI LUA-L03	HUAWEI LUA-L23
Brand	HUAWEI	HUAWEI
	HUAWEI trade mark	HUAWEI trade mark
2G Frequency	GSM/GPRS/EDEG 850/900/1800/1900(Only GSM850/1900 test data included in this report)	GSM/GPRS/EDEG 850/900/1800/1900(Only GSM850/1900 test data included in this report)
3G Frequency	WCDMA:B1/B2/B4/B5(Only B2/B4/B5 test data included in this report)	WCDMA:B1/B2/B4/B5(Only B2/B4/B5 test data included in this report)
4G Frequency	FDD-LTE:B2/B4/B5/B7/B28(Only B2/B4/B5/B7 test data included in this report)	FDD-LTE:B2/B4/B5/B7/B28(Only B2/B4/B5/B7 test data included in this report.)
Hardware version	VER.A	VER.A
Software version	LUA-L03C00B005	LUA-L23C00B001
SIM Card	Single	Double (Hardware: the dual SIM card slot is added. Others remain the same.)
Dimensions	The same	The same
Appearance	The same	The same
main antenna	The same	The same
BT/Wi-Fi antenna	The same	The same
GPS antenna	The same	The same
PA(GSM)	The same(SKY77916)	The same(SKY77916)
PA(WCDMA/FDD)	The same(SKY77643)	The same(SKY77643)

1. GENERAL SUMMARY

Equipment	Smart Phone
Brand Name	HUAWEI
Model Name	HUAWEI LUA-L23
Model difference	N/A
Manufacturer	Huawei Technologies Co., Ltd.
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China
Standard(s)	ANSI Std C95.1-1992 Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.(IEEE Std C95.1-1991) IEEE Std 1528-2013 Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques KDB941225 D01 3G SAR Procedures v03r01 KDB941225 D05 SAR for LTE Devices v02r05 KDB941225 D06 Hotspot Mode V02r01 KDB447498 D01 General RF Exposure Guidance v06 KDB648474 D04 Handset SAR v01r03 KDB248227 D01 802. 11 Wi-Fi SAR v02r02 KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04 KDB865664 D02 SAR Reporting v01r02 KDB690783 D01 SAR Listings on Grants v01r03

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCC SAR-1-1601C010A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. RF EMISSIONS MEASUREMENT

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **SAR room** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town,Dong Guan, China.523792

2.2 MEASUREMENT UNCERTAINTY

Note: Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04,when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

3. GENERAL INFORMATION

3.1 STATEMENT OF COMPLIANCE

Equipment Class	Mode	Highest Head SAR-1g (W/kg)	Highest Body-worn(15mm) SAR-1g(W/kg)	Highest Hotspot(10mm) SAR-1g(W/kg)
PCE	GSM850	0.39	0.55	1.06
	GSM1900	0.44	0.26	0.74
	WCDMA Band 2	0.68	0.41	0.62
	WCDMA Band 4	0.76	0.58	1.17
	WCDMA Band 5	0.37	0.51	0.60
	LTE Band 2	0.66	0.40	0.60
	LTE Band 4	0.61	0.58	1.04
	LTE Band 5	0.44	0.60	0.67
	LTE Band 7	0.17	0.61	1.34
DTS	2.4G WLAN	0.98	0.09	0.18
The highest simultaneous SAR value is 1.52 W/kg per KDB690783 D01				

Note:

1)* For body-worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The device is in compliance with Specific Absorption Rate (SAR) for general population uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI/IEEE C95.1:1992, the NCRP Report Number 86 for uncontrolled environment, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 .

3.2 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone		
Model Name	HUAWEI LUA-L23		
IMEI Code	IMEI1:869824020000645 IMEI2: 869824020005446		
S/N	PBX9KA95C2200024		
HW Version	VER.A		
SW Version	LUA-L23C00B001		
Modulation	GSM(GMSK/8PSK),WCDMA(QPSK/16QAM),LTE(QPSK/16QAM), WiFi(DSSS/OFDM),BT(GFSK/π /4-DQPSK/8-DPSK)		
Operation Frequency Range(s)	Band	TX (MHz)	RX (MHz)
	GSM850	824-849	869-894
	GSM1900	1850-1910	1930-1990
	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 4	1710-1755	2110-2155
	WCDMA Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620-2690
	Bluetooth	2400 ~2483.5	
	WIFI	2412 ~2462	
GPRS/EDGE Multislot Class(12)	Max Number of Timeslots in Uplink:		4
	Max Number of Timeslots in Downlink:		4
	Max Total Timeslot:		5
GSM Device class	Class B		
HSDPA UE Category	14		
HSUPA UE Category	7		
DC-HSDPA UE Category	24		
Power Class:	4,tested with power level 5(GSM850)		
	1,tested with power level 0(GSM1900)		
	3, tested with power control "all 1"(WCDMA Band 2/4/5)		
	3, tested with power control "all Max" (LTE Band 2/4/5/7)		
Test Channels (low-mid-high):	128-190-251 (GSM850)		
	512-661-810 (GSM1900)		
	9262-9400-9538(WCDMA Band 2)		
	1312-1413-1513 (WCDMA Band 4)		
	4132-4182-4233 (WCDMA Band 5)		
	18607-18900-19193(LTE Band 2 BW=1.4MHz)		
	18615-18900-19185(LTE Band 2 BW=3MHz)		
	18625-18900-19175(LTE Band 2 BW=5MHz)		
	18650-18900-19150(LTE Band 2 BW=10MHz)		
	18675-18900-19125(LTE Band 2 BW=15MHz)		
	18700-18900-19100(LTE Band 2 BW=20MHz)		
	19957-20175-20393(LTE Band 4 BW=1.4MHz)		
	19965-20175-20385(LTE Band 4 BW=3MHz)		
	19975-20175-20375(LTE Band 4 BW=5MHz)		
	20000-20175-20350(LTE Band 4 BW=10MHz)		
	20025-20175-20325(LTE Band 4 BW=15MHz)		
	20050-20175-20300(LTE Band 4 BW=20MHz)		
	20407-20525-20643(LTE Band 5 BW=1.4MHz)		
	20415-20525-20635(LTE Band 5 BW=3MHz)		

	20425-20525-20625(LTE Band 5 BW=5MHz)
	20450-20525-20600(LTE Band 5 BW=10MHz)
	20775-21100-21425(LTE Band 7 BW=5MHz)
	20800-21100-21400(LTE Band 7 BW=10MHz)
	20825-21100-21375(LTE Band 7 BW=15MHz)
	20850-21100-21350(LTE Band 7 BW=20MHz)
	1-6 -11 (2.4G WIFI 802.11b/g/n HT20)
	3-6 - 9 (2.4G WIFI 802.11n HT40)
Antenna Gain	BT/2.4G WiFi: 0.52dBi
	GSM1900/ WCDMA/LTE Band 2: 0.41dBi
	WCDMA/LTE Band 4: 1.17dBi
	GSM850/ WCDMA/LTE Band 5: 1.33dBi
	LTE Band 7: 0.73dBi
Other Information	
Battery	Huawei Technologies Co., Ltd. Battery Model: HB505076RBC Nominal Voltage:  +3.8V Charging Voltage:  +4.35V
	1. SCUD (FUJIAN) Electronics Co., Ltd Rated capacity: 2150mAh/8.2Wh 2. Sunwoda Electronic Co., LTD Rated capacity: 2150mAh/8.2Wh 3. Tianjin Lishen Battery Joint-Stock Co.,Ltd. Rated capacity: 2100mAh/8.0Wh 4. BYD LITHIUM BATTERY Co., LTD. Rated capacity: 2100mAh/8.0Wh
Earphone	1. Jiangxi Lianchuang Hongsheng Electronic Co., LTD. Model: MEMD1632B580A00 2. BOLUO COUNTY QUANCHENG ELECTRONIC Model: 1311-3291-3.5mm-178 3. GOERTEK INC. Model: HA1-3 4. Jiangxi Lianchuang Hongsheng Electronic Co., LTD. Model: MEMD1532B528000 5. BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD. Model: 1293#+3283#3.5MM-150

3.3 LABORATORY ENVIRONMENT

Temperature	Min. = 18°C, Max. = 25°C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

3.4 MAIN TEST INSTRUMENTS

Item	Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Interval
1	Data Acquisition Electronics	Speag	DAE4	1390	Sep. 18, 2015	1 Year
2	E-field Probe	Speag	EX3DV4	3932	Jan. 30, 2015	1 Year
3	E-field Probe	Speag	EX3DV4	3661	Apr. 24, 2016	1 Year
4	System Validation Dipole	Speag	D835V2	4d160	Sep. 30, 2015	1 Year
5	System Validation Dipole	Speag	D1750V2	1101	Sep. 22, 2015	1 Year
6	System Validation Dipole	Speag	D1900V2	5d179	Sep. 29, 2015	1 Year
7	System Validation Dipole	Speag	D2450V2	919	Sep. 28, 2015	1 Year
8	System Validation Dipole	Speag	D2600V2	1067	Sep. 28, 2015	1 Year
9	Twin Sam Phantom	Speag	Twin Sam Phantom V5.0	1784	N/A	N/A
10	Twin Sam Phantom	Speag	Twin Sam Phantom V5.0	1896	N/A	N/A
11	8960 Series 10 Wireless Com Test set	Agilent	E5515E	MY52112163	Aug. 03, 2015	1 Year
12	CMW500-Wideband Radio Communication Tester	RS	CMW500	152366	Jan.27, 2015	1Year
13	CMW500-Wideband Radio Communication Tester	RS	CMW500	153083	May.06,2015	1 Year
14	Power Amplifier	Mini-Circuits	ZHL-42W+	QA1333003	Mar. 09, 2015	1 Year
15	Power Amplifier	Mini-Circuits	ZVE-8G+	520701341	Mar. 09, 2015	1 Year
16	ENA Network Analyzer	Agilent	E5071C	MY46102965	Mar. 29, 2015	1 Year
17	MXG Analog Signal Generator	Agilent	N5181A	MY49060710	Nov. 02, 2015	1 Year
18	P-series power meter	Agilent	N1911A	MY45100473	Mar. 29, 2015	1 Year
19	wideband power sensor	Agilent	N1921A	MY51100041	Mar. 29, 2015	1 Year
20	Power Meter	Anritsu	ML2487A	6K00004714	Mar. 16, 2015	1 Year
21	Power Meter Sensor	Anritsu	MA2491A	34138	Mar. 16, 2015	1 Year
22	Dielectric Assessment Kit	Speag	DAK-3.5	1226	Aug. 04, 2015	1 Year
23	Low pass filter	Mini-Circuits	SLP-2950+	M108294	Mar. 29, 2015	1 Year
24	Attenuator	Mini-Circuits	VAT-10+	31317-1	Mar. 29, 2015	1 Year
25	Attenuator	Mini-Circuits	VAT-10+	31317-2	Mar. 29, 2015	1 Year
26	Attenuator	MEB	300-affn-03	314	Mar. 29, 2015	1 Year
27	Dual directional coupler	Agilent	777D	50208	Mar. 29, 2015	1 Year

Remark: " N/A" denotes no model name, serial No. or calibration specified.
All calibration period of equipment list is one year.


4.SAR MEASUREMENTS SYSTEM CONFIGURATION

4.1SAR MEASUREMENT SET-UP

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

4.1.1Test Setup Layout

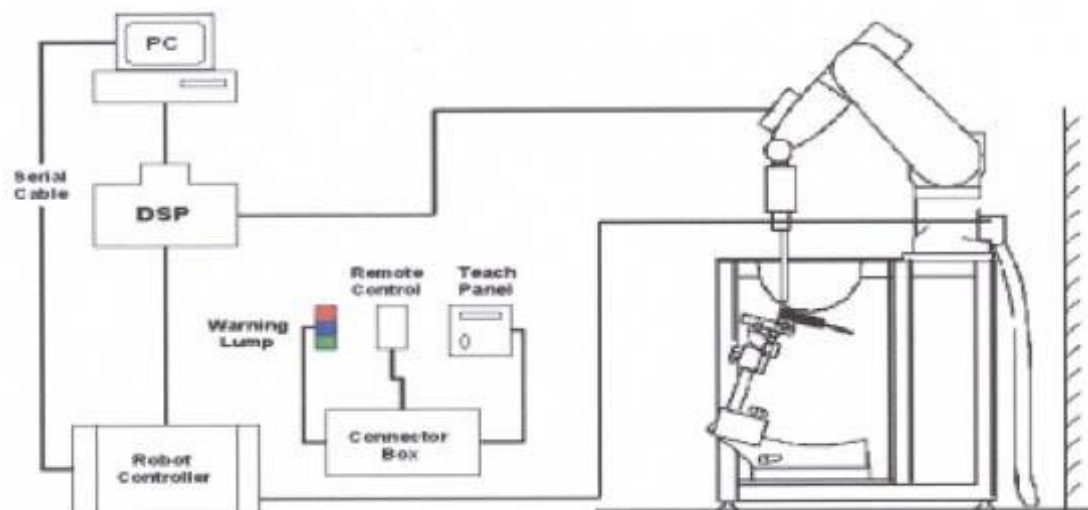

4.2 DASY5 E-FIELD PROBE SYSTEM

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

4.2.1 EX3DV4 PROBE SPECIFICATION

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm



EX3DV4 E-field Probe

4.2.2E-FIELD PROBE CALIBRATION

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

Or
$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where: σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m^3).

4.2.3 OTHER TEST EQUIPMENT

4.2.3.1. Device Holder for Transmitters

Construction: Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices (e.g., laptops, cameras, etc.) It is light weight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.

Material: POM, Acrylic glass, Foam

4.2.3.2 Phantom

Model	ELI4 Phantom	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Shell Thickness	2±0.1 mm	
Filling Volume	Approx. 30 liters	
Dimensions	Length: 600 mm ; Width: 190mm Height: adjustable feet	
Available	Special	

Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Shell Thickness	2 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000mm; Width: 500mm Height: adjustable feet	
Available	Special	

4.2.4 SCANNING PROCEDURE

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. $\pm 5\%$.

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

- Area Scan

The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement.

Standard grid spacing for head measurements is 15 mm in x- and y- dimension ($\leq 2\text{GHz}$), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.

- Zoom Scan

A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} - \leq 8\text{mm}$, 2-4GHz - $\leq 5\text{ mm}$ and 4-6 GHz - $\leq 4\text{mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$, 3-4 GHz - $\leq 4\text{mm}$ and 4-6GHz - $\leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximun Zoom Scan spatial resolution ($\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$)	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{\text{Zoom}}(n)$	$\Delta z_{\text{Zoom}}(1)^*$	$\Delta z_{\text{Zoom}}(n>1)^*$	
$\leq 2\text{GHz}$	$\leq 15\text{mm}$	$\leq 8\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 30\text{mm}$
2-3GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 30\text{mm}$
3-4GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 28\text{mm}$
4-5GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 2.5\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 25\text{mm}$
5-6GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 2\text{mm}$	$\leq 2\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 22\text{mm}$

4.2.5 SPATIAL PEAK SAR EVALUATION

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points(with 8mm horizontal resolution) or 7 x 7 x 7 points(with 5mm horizontal resolution) or 8 x 8 x 7 points(with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting "Graph Evaluated".
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

4.2.6 DATA STORAGE AND EVALUATION

4.2.5.1 Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

4.4.2 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity	Normi, a_{i0} , a_{i1} , a_{i2}
	Conversion factor	ConvF _i
	Diode compression point	Dcp _i
Device parameters:	Frequency	f
	Crest factor	cf
Media parameters:	Conductivity	
	Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multi meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With	V_i = compensated signal of channel i	(i = x, y, z)
	U_i = input signal of channel i	(i = x, y, z)
	cf = crest factor of exciting field	(DASY parameter)
	dcp _i = diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$$

$$\text{H-field probes: } H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i ($i = x, y, z$)

Norm_i = sensor sensitivity of channel i ($i = x, y, z$)
[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}})^2 \cdot \sigma / (\rho \cdot 1000)$$

With SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m
= conductivity in [mho/m] or [Siemens/m]
= equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \text{ or } P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

With P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total field strength in V/m

H_{tot} = total magnetic field strength in A/m

5. SYSTEM VERIFICATION PROCEDURE

5.1 TISSUE VERIFICATION

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
Head 835	0.2	-	0.2	1.5	57.0	-	41.1	-
Head 1750	-	47.0	-	0.4	-	-	52.6	-
Head 1900	-	44.5	-	0.2	-	-	55.3	-
Head 2450	-	45.0	-	0.1	-	-	54.9	-
Head 2600	-	45.1	-	0.1	-	-	54.8	-

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
Body 835	0.2	-	0.2	0.9	48.5	-	50.2	-
Body 1750	-	31.0	-	0.2	-	-	68.8	-
Body 1900	-	29.5	-	0.3	-	-	70.2	-
Body 2450	-	31.4	-	0.1	-	-	68.5	-
Body 2600	-	31.8	-	0.1	-	-	68.1	-

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M + resistivity
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue Verification									
Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Targeted Conductivity (σ)	Targeted Permittivity (ϵ_r)	Deviation Conductivity (σ) (%)	Deviation Permittivity (ϵ_r) (%)	Date
Head	835	22.1	0.902	42.400	0.90	41.5	0.19	2.17	Jan. 16, 2016
Head	835	22.2	0.927	42.670	0.90	41.5	3.00	2.82	Jan. 26, 2016
Head	1750	22.4	1.379	39.470	1.37	40.1	0.66	-1.57	Jan. 18, 2016
Head	1750	22.1	1.410	41.120	1.37	40.1	2.92	2.54	Jan. 28, 2016
Head	1900	22.2	1.423	39.390	1.40	40.0	1.64	-1.53	Jan. 19, 2016
Head	1900	22.3	1.383	38.930	1.40	40.0	-1.21	-2.68	Jan. 26, 2016
Head	2450	22.3	1.850	38.880	1.80	39.2	2.78	-0.82	Jan. 19, 2016
Head	2450	22.5	1.782	39.282	1.80	39.2	-1.00	0.21	Jan. 26, 2016
Head	2600	22.4	1.983	38.010	1.96	39.0	1.17	-2.54	Jan. 28, 2016
Head	2600	22.1	2.012	38.670	1.96	39.0	2.65	-0.85	Feb. 22, 2016
Body	835	22.1	0.973	54.290	0.97	55.2	0.30	-1.65	Jan. 15, 2016
Body	835	22.2	0.943	54.470	0.97	55.2	-2.78	-1.32	Jan. 28, 2016
Body	1750	22.4	1.461	54.190	1.49	53.4	-1.95	1.48	Jan. 17, 2016
Body	1750	22.5	1.501	54.070	1.49	53.4	0.74	1.25	Jan. 28, 2016
Body	1900	22.3	1.550	52.040	1.52	53.3	1.97	-2.36	Jan. 16, 2016
Body	1900	22.1	1.527	52.130	1.52	53.3	0.46	-2.20	Jan. 28, 2016
Body	2450	22.2	1.995	53.100	1.95	52.7	2.31	0.76	Jan. 16, 2016
Body	2450	22.4	1.977	53.312	1.95	52.7	1.38	1.16	Jan. 28, 2016
Body	2600	22.3	2.200	52.400	2.16	52.5	1.85	-0.19	Jan. 28, 2016
Body	2600	22.2	2.125	51.980	2.16	52.5	-1.62	-0.99	Feb. 22, 2016

Note:

- 1)The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2)KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3)The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

5.2 SYSTEM CHECK


The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests.

System Check	Date	Frequency (MHz)	Targeted SAR-1g (W/kg)	Measured SAR-1g (W/kg)	normalized SAR-1g (W/kg)	Deviation (%)	Dipole S/N
Head	Jan. 16, 2016	835	9.50	2.39	9.56	0.63	4d160
Head	Jan. 26, 2016	835	9.50	2.46	9.84	3.58	4d160
Head	Jan. 18, 2016	1750	36.60	8.96	35.84	-2.08	1101
Head	Jan. 28, 2016	1750	36.60	8.98	35.92	-1.86	1101
Head	Jan. 19, 2016	1900	39.70	10.02	40.08	0.96	5d179
Head	Jan. 26, 2016	1900	39.70	9.76	39.04	-1.66	5d179
Head	Jan. 19, 2016	2450	52.00	12.88	51.52	-0.92	919
Head	Jan. 26, 2016	2450	52.00	12.73	50.92	-2.08	919
Head	Jan. 28, 2016	2600	56.80	14.05	56.20	-1.06	1067
Head	Feb. 22, 2016	2600	56.80	14.32	57.28	0.85	1067
Body	Jan. 15, 2016	835	9.52	2.42	9.68	1.68	4d160
Body	Jan. 28, 2016	835	9.52	2.39	9.56	0.42	4d160
Body	Jan. 17, 2016	1750	35.70	9.28	37.12	3.98	1101
Body	Jan. 28, 2016	1750	35.70	9.24	36.96	3.53	1101
Body	Jan. 16, 2016	1900	39.60	9.91	39.64	0.10	5d179
Body	Jan. 28, 2016	1900	39.60	9.42	37.68	-4.85	5d179
Body	Jan. 16, 2016	2450	51.10	13.30	53.20	4.11	919
Body	Jan. 28, 2016	2450	51.10	12.20	48.80	-4.50	919
Body	Jan. 28, 2016	2600	54.10	13.10	52.40	-3.14	1067
Body	Feb. 22, 2016	2600	54.10	13.50	54.00	-0.18	1067

5.3 SYSTEM CHECK PROCEDURE

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW(below 5GHz) or 100mW(above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test.

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

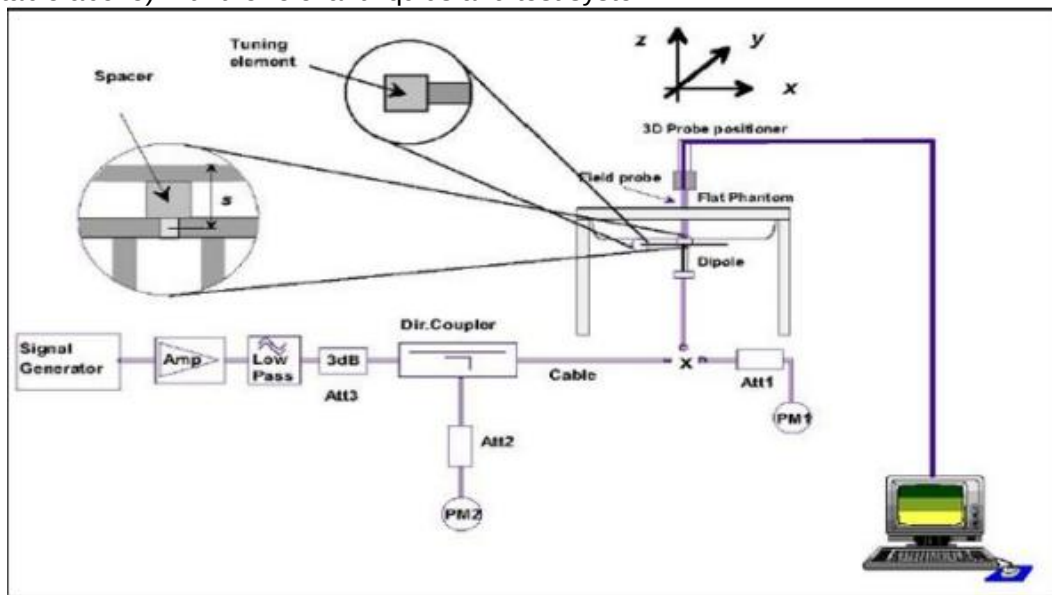

6.SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

6.1SAR MEASUREMENT VARIABILITY

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 8.2.

6.2SAR MEASUREMENT UNCERTAINTY

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis.

7. OPERATIONAL CONDITIONS DURING TEST

7.1 SAR TEST CONFIGURATION

7.1.1 GSM TEST CONFIGURATION

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using 8960 Series the power lever is set to “5” and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5. When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot.

The allowed power reduction in the multi-slot configuration is as following:

Number of timeslots in uplink assignment		Reduction of maximum output power (dB)		
Band	Time Slots	GPRS (GMSK)	EGPRS (GMSK)	EGPRS (8PSK)
GSM850	1 TX slot	0	0	5.5
	2 TX slots	0.5	0.5	6.5
	3 TX slots	2.5	2.5	8.5
	4 TX slots	3.5	3.5	9.5
GSM1900	1 TX slot	0	0	4.5
	2 TX slots	1	1	5.5
	3 TX slots	3.5	3.5	7.5
	4 TX slots	4.5	4.5	8.5

7.1.2 WCDMA TEST CONFIGURATION

1. Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the procedures description in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s" for WCDMA/HSDPA or applying the required inner loop power control procedure to maintain maximum output power while HSUPA is active. Result for all applicable physical channel configurations (DPCCH, DPDCH_n and spreading codes, HSDPA, HSPA) Should be tabulated in the SAR report. All configuration that are not supported by the DUT or cannot be measured due to technical or equipment limitation should be clearly identified.

2. WCDMA

(1). Head SAR Measurements

SAR for Head exposure configurations in voice mode is measured using a 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than ¼ dB higher than that measured in 12.2 kbps RMC. Otherwise SAR is measured on the maximum output channel in 12.2 kbps AMR with 3.4 kbps SRB (signalling radio bearer) using the exposure configuration that results in the highest SAR in 12.2 kbps RMC for that RF channel.

(2). Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all "1s". SAR for other spreading codes and multiple DPDCH_n, when supported by the EUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCH_n configuration, are less than ¼ dB higher than those measured in 12.2 kbps RMC.

3. HSDPA

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. In addition, body SAR is also measured for HSDPA when the maximum average outputs of each RF channel with HSDPA active is at ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC or the maximum SAR 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, β_{hs} for HS-DPCCH is set automatically to the correct value when ΔACK , $\Delta NACK$,

$\Delta CQI = 8$. The variation of the β_c / β_d ratio causes a power reduction at sub-tests 2 - 4.

Sub-test ^o	β_c ^o	β_d ^o	β_d (SF) ^o	β_c / β_d ^o	β_{hs} (1) ^o	CM(dB)(2) ^o	MPR (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o
Note 1: ΔACK, $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs} / \beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ Note 2: CM=1 for $\beta_c / \beta_d = 12/15$, $\beta_{hs} / \beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 3: For subtest 2 the β_c / β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$							

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Settings of required H-Set 1 QPSK acc. to 3GPP 34.121

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

HSDPA UE category

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

4. HSUPA

SAR for Body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the primary mode and the adjusted SAR is $\leq 1.2\text{W/kg}$, SAR measurement is not required for the secondary mode.

Per KDB941225 D01v03r01, the 3G SAR test reduction procedures is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the “WCDMA Handset” and „Release 5 HSDPA Data Device” sections of 3G device.

Subtests for WCDMA Release 6 HSUPA

Sub-test [⌘]	β_c [⌘]	β_d [⌘]	β_d (SF) [⌘]	β_c/β_d [⌘]	$\beta_{hs}^{(1)}$ [⌘]	β_{ec} [⌘]	β_{ed} [⌘]	β_c [⌘] (SF) [⌘]	β_{ed} [⌘] (code) [⌘]	CM ⁽²⁾ [⌘] (dB) [⌘]	MP R [⌘] (dB) [⌘]	AG ⁽⁴⁾ [⌘] Index [⌘]	E-TFC I [⌘]
1 [⌘]	11/15 ⁽³⁾ [⌘]	15/15 ⁽³⁾ [⌘]	64 [⌘]	11/15 ⁽³⁾ [⌘]	22/15 [⌘]	209/225 [⌘]	1039/225 [⌘]	4 [⌘]	1 [⌘]	1.0 [⌘]	0.0 [⌘]	20 [⌘]	75 [⌘]
2 [⌘]	6/15 [⌘]	15/15 [⌘]	64 [⌘]	6/15 [⌘]	12/15 [⌘]	12/15 [⌘]	94/75 [⌘]	4 [⌘]	1 [⌘]	3.0 [⌘]	2.0 [⌘]	12 [⌘]	67 [⌘]
3 [⌘]	15/15 [⌘]	9/15 [⌘]	64 [⌘]	15/9 [⌘]	30/15 [⌘]	30/15 [⌘]	$\beta_{ed1}:47/15$ [⌘] $\beta_{ed2}:47/15$ [⌘]	4 [⌘]	2 [⌘]	2.0 [⌘]	1.0 [⌘]	15 [⌘]	92 [⌘]
4 [⌘]	2/15 [⌘]	15/15 [⌘]	64 [⌘]	2/15 [⌘]	4/15 [⌘]	2/15 [⌘]	56/75 [⌘]	4 [⌘]	1 [⌘]	3.0 [⌘]	2.0 [⌘]	17 [⌘]	71 [⌘]
5 [⌘]	15/15 ⁽⁴⁾ [⌘]	15/15 ⁽⁴⁾ [⌘]	64 [⌘]	15/15 ⁽⁴⁾ [⌘]	30/15 [⌘]	24/15 [⌘]	134/15 [⌘]	4 [⌘]	1 [⌘]	1.0 [⌘]	0.0 [⌘]	21 [⌘]	81 [⌘]
Note 1: ΔACK , ΔNACK and $\Delta \text{CQI} = 8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference. Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$ Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$ Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g [⌘] Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value. [⌘]													

HSUPA UE category

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF4	11484	5.76
	4	4	2		20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).

5. DC-HSDPA

In DC-HSDPA implementation of this device, the uplink parameters are the same as HSDPA. No additional channels and modulations (16 QAM, and 64 QAM) are supported in uplink. The difference is only in the downlink parameters, where two carriers are supported. HSDPA settings were used on uplink.

For Rel. 8 DC-HSDPA apply the four subtests from HSDPA Release 5 except use fixed reference channel H-Set 12 for DC-HSDPA. And we can apply the same SAR test exclusion criteria used for Rel. 6 HSPA for Rel. 7 HSPA+ and Rel. 8 DC-HSDPA. That is, if the HSPA, HSPA+, or the DC-HSDPA maximum output is not more than 0.25 dB higher than WCDMA, SAR measurement for those modes is not required.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0 Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/lor	dB	-10
P-CCPCH and SCH_Ec/lor	dB	-12
PICH_Ec/lor	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/lor	dB	-5
OCNS_Ec/lor	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI"s
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Note:

1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.

2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

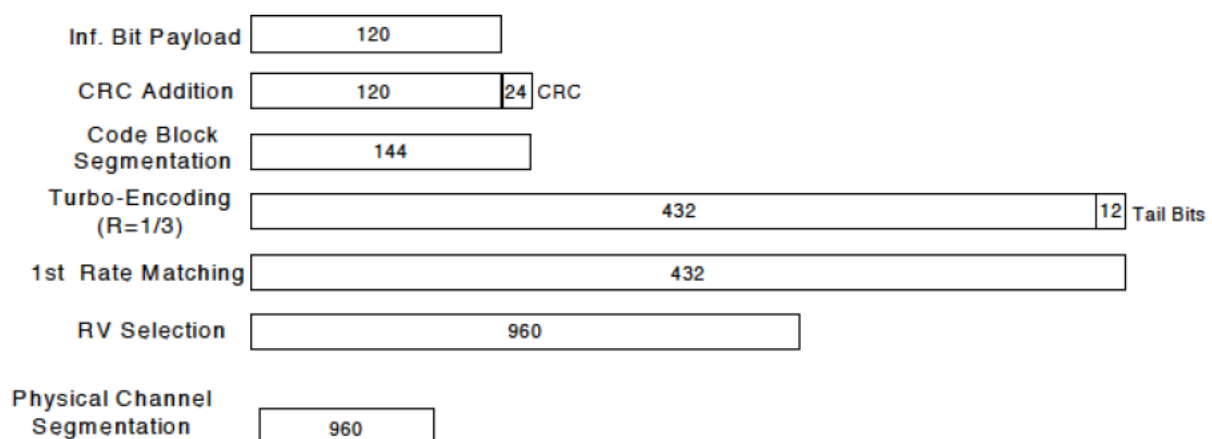


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test ^o	β_c ^o	β_d ^o	β_d (SF) ^o	β_c/β_d ^o	$\beta_{hs}(1)$ ^o	CM(dB)(2) ^o	MPR (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI=8$ $A_{hs}=\beta_{hs}/\beta_c=30/15$ $\beta_{hs}=30/15*\beta_c$
Note 2: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c=11/15$ and $\beta_d=15/15$

Up commands are set continuously to set the UE to Max power.

Note:

- 1.The Dual Carriers transmission only applies to HSDPA physical channels
- 2.The Dual Carriers belong to the same Node and are on adjacent carriers.
- 3.The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
- 4.The Dual Carriers operate in the same frequency band .
- 5.The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
- 6.The device doesn't support carrier aggregation for it just can operate in Release 8.

6. HSPA+

When the maximum average output power of each RF channel with (uplink) HSPA+ active is $\leq \frac{1}{4}$ dB higher than that measured without HSPA+ using 12.2 kbps RMC, SAR evaluation for HSPA+ is not required.

Table Sub-test1 setup for release 7 HSPA+ with 16QAM

Sub-test	β_o (Note3)	β_d	β_{HS} (Note1)	β_{eo}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

7.1.3 LTE TEST CONFIGURATION

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02r05. The CMW500 Wide Band Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames(Maximum TTI)

1. Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2. MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101:

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

3. A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of "NS_01" on the base station simulator.

4. LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

7.1.4 WIFI TEST CONFIGURATION

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal.

Mode	802.11b	802.11g	802.11n (20M)	802.11n (40M)
Power Setting	18	17/16	17/16	16.5
Duty cycle	100%			
Crest factor	1			

For the 802.11b SAR tests, a communication link is set up with the test mode software for WiFi mode test. The Absolute Radio Frequency Channel Number(ARFCN) is allocated to 1,6 and 11 respectively in the case of 2450 MHz. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate.

7.1.4.1 2.4G SAR Test Requirements

✧ 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

✧ 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

7.2 TEST POSITION

7.2.1 Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

7.2.2 Body

The size of the mobile phone is 132.7mm (length) X 65.2mm (width).

The location of the antennas inside mobile phone is shown as below picture:

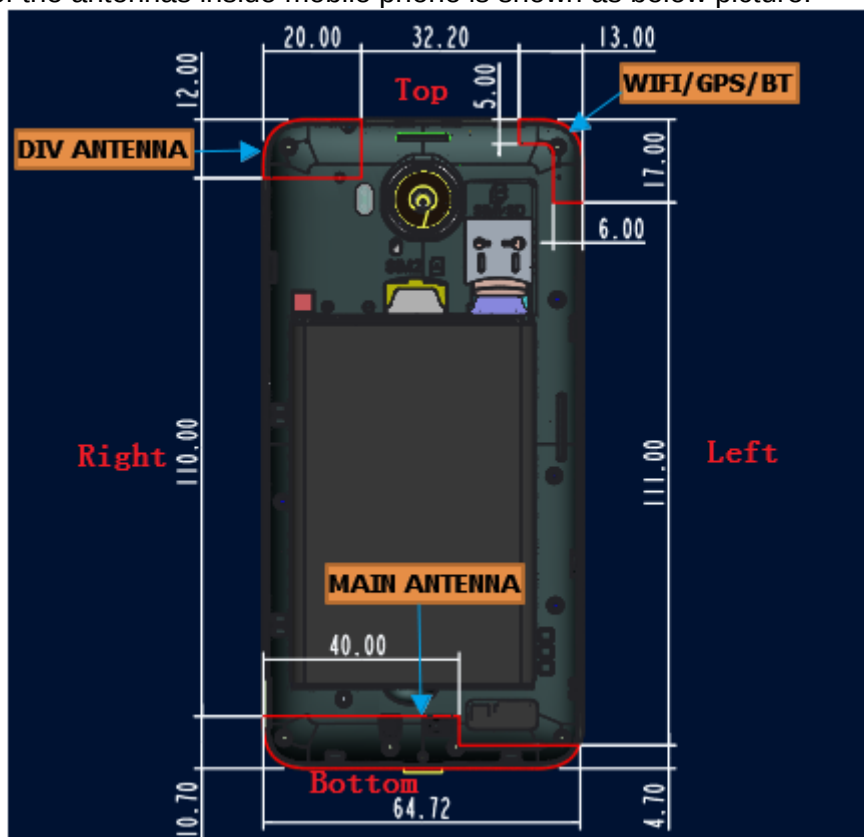


Table 7.2.2 Hotspot Side For SAR Testing

Mode	Exposure Condition	Front Side	Rear Side	Left Side	Right Side	Top Side	Bottom Side
GSM850/1900	Hotspot	YES	YES	YES	YES	NO	YES
WCDMA Band 2/4/5	Hotspot	YES	YES	YES	YES	NO	YES
LTE Band 2/4/5/7	Hotspot	YES	YES	YES	YES	NO	YES
2.4GWiFi	Hotspot	YES	YES	YES	NO	YES	NO

Note: Per KDB 941225 D06, particular DUT edges were not required to be evaluated for Hotspot SAR if the antenna-to-edge distance is greater than 2.5cm.

8.TEST RESULT

8.1CONDUCTED POWER RESULTS

8.1.1CONDUCTED POWER MEASUREMENTS OF GSM850

GSM850		Tune-up	Max Burst Average Power (dBm)			Tune-up	Max Frame Average Power (dBm)		
			128CH	190CH	251CH		128CH	190CH	251CH
			824.2MHz	836.6MHz	848.8MHz		824.2MHz	836.6MHz	848.8MHz
GSM (CS)		33.00	32.64	32.68	32.52	23.81	23.45	23.49	23.33
GPRS/ EDGE (GMSK)	1 Tx Slot	33.00	32.65	32.59	32.54	23.81	23.46	23.40	23.35
	2 Tx Slots	32.50	31.97	32.08	31.96	26.37	25.84	25.95	25.83
	3 Tx Slots	30.50	30.23	30.12	30.05	26.08	25.81	25.70	25.63
	4 Tx Slots	29.50	28.82	28.71	28.54	26.32	25.64	25.53	25.36
EDGE (8PSK)	1 Tx Slot	27.50	27.30	27.28	27.26	18.31	18.11	18.09	18.07
	2 Tx Slots	26.50	26.35	26.33	26.28	20.37	20.22	20.20	20.15
	3 Tx Slots	24.50	24.22	24.11	24.19	20.08	19.80	19.69	19.77
	4 Tx Slots	23.50	23.12	23.05	23.06	20.32	19.94	19.87	19.88

Note:

- 1) The conducted power of GSM850 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 time slots.
- 3) Per KDB941225 D01v03r01, the bolded GPRS2Tx mode was selected for SAR testing according to the highest frame –averaged output power table.
- 4) The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

Frame-averaged power=10 x log(Burst-averaged power mW x Slot used/8)

8.1.2 CONDUCTED POWER MEASUREMENTS OF GSM1900

GSM1900		Tune-up	Max Burst Average Power (dBm)			Tune-up	Max Frame Average Power (dBm)		
			512CH	661CH	810CH		512CH	661CH	810CH
			1850.2MHz	1880MHz	1909.8MHz		1850.2MHz	1880MHz	1909.8MHz
GSM (CS)		30.50	29.94	29.96	29.90	21.31	20.75	20.77	20.71
GPRS /EDGE (GMSK)	1 Tx Slot	30.50	30.00	29.87	29.62	21.31	20.81	20.68	20.43
	2 Tx Slots	29.50	28.94	28.96	28.73	23.37	22.81	22.83	22.60
	3 Tx Slots	27.00	26.45	26.61	26.51	22.58	22.03	22.19	22.09
	4 Tx Slots	26.00	25.26	25.46	25.42	22.82	22.08	22.28	22.24
EDGE (8PSK)	1 Tx Slot	26.00	25.25	25.28	25.25	16.81	16.06	16.09	16.06
	2 Tx Slots	25.00	24.26	24.30	24.21	18.87	18.13	18.17	18.08
	3 Tx Slots	23.00	22.29	22.31	22.22	18.58	17.87	17.89	17.80
	4 Tx Slots	22.00	21.56	21.39	21.10	18.82	18.38	18.21	17.92

Note:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 time slots.
- 3) Per KDB941225 D01v03r01, the bolded GPRS 2Tx mode was selected for SAR testing according to the highest frame –averaged output power table.
- 4) The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

Frame-averaged power = $10 \times \log(\text{Burst-averaged power mW} \times \text{Slot used}/8)$

8.1.3 CONDUCTED POWER MEASUREMENTS OF WCDMA1900 Band 2

WCDMA1900 (Band 2)		Tune-up	SAR Conducted Power (dBm)		
			9262CH	9400CH	9538CH
			1852.4	1880	1907.6
WCDMA	12.2kbps RMC	23.00	22.78	22.81	22.71
	64kbps RMC	23.00	22.76	22.73	22.67
	144kbps RMC	23.00	22.74	22.72	22.64
	384kbps RMC	23.00	22.72	22.73	22.68
HSDPA	Subtest 1	22.00	21.46	21.54	21.33
	Subtest 2	22.00	21.87	21.85	21.83
	Subtest 3	22.00	21.48	21.34	21.35
	Subtest 4	22.00	21.51	21.32	21.32
HSUPA	Subtest 1	21.00	20.06	19.93	19.90
	Subtest 2	21.00	19.48	19.73	19.77
	Subtest 3	22.00	20.45	20.59	20.49
	Subtest 4	21.00	19.44	19.78	19.26
	Subtest 5	22.00	20.39	20.32	20.24
DC-HSDPA	Subtest 1	22.00	21.46	21.54	21.33
	Subtest 2	22.00	21.87	21.85	21.83
	Subtest 3	22.00	21.48	21.34	21.35
	Subtest 4	22.00	21.51	21.32	21.32
HSPA+	Subtest-1(UL 16QAM)	21.00	20.40	20.23	20.37

Note:

1) The conducted power of WCDMA Band 2 is measured with RMS detector.

2) Note: Per KDB941225 D01v03r01, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

8.1.4 CONDUCTED POWER MEASUREMENTS OF WCDMA1700 Band 4

WCDMA 1700 (Band 4)		Tune-up	SAR Conducted Power (dBm)		
			1312CH	1413CH	1513CH
			1712.4	1732.6	1752.6
WCDMA	12.2kbps RMC	23.00	22.42	22.63	22.45
	64kbps RMC	23.00	22.38	22.62	22.39
	144kbps RMC	23.00	22.36	22.58	22.37
	384kbps RMC	23.00	22.40	22.51	22.42
HSDPA	Subtest 1	22.00	21.41	21.64	21.24
	Subtest 2	22.00	21.37	21.33	21.73
	Subtest 3	22.00	21.16	21.38	21.28
	Subtest 4	22.00	21.14	21.34	21.23
HSUPA	Subtest 1	21.00	19.71	20.82	19.83
	Subtest 2	21.00	19.66	19.66	19.68
	Subtest 3	21.00	20.67	20.81	20.73
	Subtest 4	21.00	19.12	19.29	19.26
	Subtest 5	21.00	20.63	20.79	20.68
DC-HSDPA	Subtest 1	22.00	21.41	21.64	21.24
	Subtest 2	22.00	21.37	21.33	21.73
	Subtest 3	22.00	21.16	21.38	21.28
	Subtest 4	22.00	21.14	21.34	21.23
HSPA+	Subtest-1(UL 16QAM)	21.00	20.13	19.73	19.63

Note:

1) The conducted power of WCDMA Band 4 is measured with RMS detector.

2) Note: Per KDB941225 D01v03r01, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

8.1.5 CONDUCTED POWER MEASUREMENTS OF WCDMA850 Band 5

WCDMA 850 (Band 5)		Tune-up	SAR Conducted Power (dBm)		
			4132CH	4182CH	4233CH
			826.4	836.4	846.6
WCDMA	12.2kbps RMC	23.00	22.67	22.83	22.66
	64kbps RMC	23.00	22.61	22.82	22.64
	144kbps RMC	23.00	22.63	22.78	22.62
	384kbps RMC	23.00	22.65	22.81	22.65
HSDPA	Subtest 1	22.00	21.74	21.56	21.71
	Subtest 2	22.00	21.55	21.28	21.37
	Subtest 3	22.00	21.08	20.81	20.89
	Subtest 4	22.00	21.06	20.70	20.87
HSUPA	Subtest 1	21.00	20.57	20.28	20.36
	Subtest 2	21.00	20.03	20.24	20.33
	Subtest 3	22.00	21.54	21.28	21.36
	Subtest 4	21.00	19.99	19.73	19.86
	Subtest 5	22.00	21.53	21.23	21.31
DC-HSDPA	Subtest 1	22.00	21.74	21.56	21.71
	Subtest 2	22.00	21.55	21.28	21.37
	Subtest 3	22.00	21.08	20.81	20.89
	Subtest 4	22.00	21.06	20.70	20.87
HSPA+	Subtest-1(UL 16QAM)	21.00	19.48	19.22	19.28

Note:

1) The conducted power of WCDMA Band 5 is measured with RMS detector.

2) Note: Per KDB941225 D01v03r01, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

8.1.6 CONDUCTED POWER MEASUREMENTS OF LTE Band 2

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					18607	18900	19193	
					1850.7	1880	1909.3	
1.4MHz	QPSK	1	0	23.00	22.34	22.49	22.36	0
		1	2	23.00	22.39	22.37	22.43	0
		1	5	23.00	22.34	22.30	22.36	0
		3	0	23.00	22.30	22.38	22.45	0
		3	1	23.00	22.26	22.44	22.40	0
		3	3	23.00	22.32	22.37	22.45	0
		6	0	22.00	21.31	21.48	21.42	1
	16QAM	1	0	22.00	21.31	21.85	21.32	1
		1	2	22.00	21.39	21.88	21.33	1
		1	5	22.00	21.31	21.84	21.30	1
		3	0	22.00	21.32	21.76	21.55	1
		3	1	22.00	21.26	21.69	21.52	1
		3	3	22.00	21.35	21.76	21.55	1
		6	0	21.00	20.40	20.45	20.54	2
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					18615	18900	19185	
					1851.5	1880	1908.5	
3MHz	QPSK	1	0	23.00	22.25	22.48	22.37	0
		1	7	23.00	22.29	22.38	22.42	0
		1	14	23.00	22.24	22.39	22.34	0
		8	0	22.00	21.34	21.54	21.46	0
		8	3	22.00	21.35	21.57	21.46	0
		8	7	22.00	21.34	21.57	21.46	0
		15	0	22.00	21.30	21.51	21.44	1
	16QAM	1	0	22.00	21.11	21.78	21.34	1
		1	7	22.00	21.22	21.42	21.44	1
		1	14	22.00	21.10	21.48	21.23	1
		8	0	21.00	20.42	20.63	20.50	1
		8	3	21.00	20.42	20.65	20.50	1
		8	7	21.00	20.44	20.64	20.48	1
		15	0	21.00	20.34	20.57	20.39	2

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					18625	18900	19175	
					1852.5	1880	1907.5	
5MHz	QPSK	1	0	23.00	22.46	22.55	22.52	0
		1	12	23.00	22.45	22.52	22.51	0
		1	24	23.00	22.43	22.48	22.47	0
		12	0	22.00	21.37	21.57	21.51	1
		12	6	22.00	21.35	21.58	21.48	1
		12	13	22.00	21.34	21.56	21.48	1
		25	0	22.00	21.31	21.50	21.42	1
	16QAM	1	0	22.00	21.44	21.50	21.48	1
		1	12	22.00	21.45	21.99	21.46	1
		1	24	22.00	21.42	21.97	21.38	1
		12	0	21.00	20.43	20.72	20.56	2
		12	6	21.00	20.43	20.73	20.54	2
		12	13	21.00	20.43	20.70	20.52	2
		25	0	21.00	20.34	20.59	20.38	2
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					18650	18900	19150	
					1855	1880	1905	
10MHz	QPSK	1	0	23.00	22.37	22.55	22.55	0
		1	24	23.00	22.33	22.49	22.50	0
		1	49	23.00	22.35	22.45	22.48	0
		25	0	22.00	21.34	21.53	21.45	1
		25	12	22.00	21.34	21.55	21.42	1
		25	25	22.00	21.36	21.55	21.44	1
		50	0	22.00	21.37	21.55	21.48	1
	16QAM	1	0	22.00	21.18	21.83	21.43	1
		1	24	22.00	21.27	21.88	21.46	1
		1	49	22.00	21.23	21.86	21.32	1
		25	0	21.00	20.34	20.57	20.55	2
		25	12	21.00	20.36	20.59	20.52	2
		25	25	21.00	20.39	20.60	20.52	2
		50	0	21.00	20.35	20.57	20.49	2

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					18675	18900	19125	
					1857.5	1880	1902.5	
15MHz	QPSK	1	0	23.00	22.41	22.56	22.61	0
		1	37	23.00	22.41	22.59	22.54	0
		1	74	23.00	22.21	22.62	22.49	0
		36	0	22.00	21.32	21.62	21.58	1
		36	19	22.00	21.29	21.64	21.58	1
		36	39	22.00	21.24	21.65	21.53	1
		75	0	22.00	21.39	21.66	21.57	1
	16QAM	1	0	22.00	21.25	21.86	21.77	1
		1	37	22.00	21.26	21.87	21.67	1
		1	74	22.00	21.26	21.85	21.62	1
		36	0	21.00	20.41	20.85	20.48	2
		36	19	21.00	20.40	20.65	20.50	2
		36	39	21.00	20.38	20.67	20.46	2
		75	0	21.00	20.42	20.64	20.52	2
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					18700	18900	19100	
					1860	1880	1900	
20MHz	QPSK	1	0	23.00	22.52	22.65	22.63	0
		1	50	23.00	22.35	21.41	22.56	0
		1	99	23.00	22.45	22.64	22.48	0
		50	0	22.00	21.40	21.67	21.50	1
		50	25	22.00	21.36	21.54	21.43	1
		50	50	22.00	21.41	21.59	21.45	1
		100	0	22.00	21.38	21.56	21.45	1
	16QAM	1	0	22.00	21.88	21.93	21.85	1
		1	50	22.00	21.91	20.49	21.77	1
		1	99	22.00	21.99	21.93	21.66	1
		50	0	21.00	20.48	20.60	20.50	2
		50	25	21.00	20.43	20.61	20.43	2
		50	50	21.00	20.49	20.63	20.44	2
		100	0	21.00	20.48	20.58	20.46	2

8.1.7 CONDUCTED POWER MEASUREMENTS OF LTE Band 4

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					19957	20175	20393	
					1710.7	1732.5	1754.3	
1.4MHz	QPSK	1	0	23.00	22.82	22.76	22.85	0
		1	2	23.00	22.88	22.83	22.95	0
		1	5	23.00	22.80	22.75	22.88	0
		3	0	23.00	21.76	21.76	21.87	0
		3	1	23.00	21.72	21.72	21.85	0
		3	3	23.00	21.77	21.76	21.89	0
		6	0	22.00	21.78	21.77	21.94	1
	16QAM	1	0	22.50	21.78	22.05	21.77	0.5
		1	2	22.50	21.86	22.09	21.85	0.5
		1	5	22.50	21.79	22.03	21.82	0.5
		3	0	22.50	21.76	21.89	21.98	0.5
		3	1	22.50	21.72	21.85	21.97	0.5
		3	3	22.50	21.78	21.87	22.00	0.5
		6	0	21.00	20.87	20.68	21.00	2
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					19965	20175	20385	
					1711.5	1732.5	1753.5	
3MHz	QPSK	1	0	23.00	22.67	22.74	22.79	0
		1	7	23.00	22.75	22.79	22.86	0
		1	14	23.00	22.68	22.74	22.81	0
		8	0	22.00	21.78	21.79	21.89	1
		8	3	22.00	21.78	21.80	21.92	1
		8	7	22.00	21.76	21.78	21.92	1
		15	0	22.00	21.71	21.70	21.83	1
	16QAM	1	0	22.00	21.44	21.23	21.76	1
		1	7	22.00	21.66	21.59	21.88	1
		1	14	22.00	21.54	21.99	21.73	1
		8	0	21.00	20.85	20.84	20.90	2
		8	3	21.00	20.87	20.86	20.93	2
		8	7	21.00	20.85	20.84	20.91	2
		15	0	21.00	20.74	20.75	20.80	2

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					19975	20175	20375	
					1712.5	1732.5	1752.5	
5MHz	QPSK	1	0	23.00	22.91	22.81	22.89	0
		1	12	23.00	22.89	22.84	22.92	0
		1	24	23.00	22.87	22.80	22.86	0
		12	0	22.00	21.79	21.78	21.87	1
		12	6	22.00	21.79	21.77	21.87	1
		12	13	22.00	21.78	21.77	21.88	1
		25	0	22.00	21.74	21.70	21.82	1
	16QAM	1	0	22.00	21.85	21.84	21.89	1
		1	12	22.00	21.91	21.59	21.91	1
		1	24	22.00	21.85	21.86	21.89	1
		12	0	21.00	20.83	20.91	20.91	2
		12	6	21.00	20.84	20.91	20.91	2
		12	13	21.00	20.83	20.89	20.91	2
		25	0	21.00	20.75	20.77	20.77	2
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					20000	20175	20350	
					1715	1732.5	1750	
10MHz	QPSK	1	0	23.00	22.83	22.86	22.75	0
		1	24	23.00	22.79	22.83	22.82	0
		1	49	23.00	22.81	22.86	22.86	0
		25	0	22.00	21.78	21.73	21.75	1
		25	12	22.00	21.76	21.73	21.76	1
		25	25	22.00	21.74	21.71	21.78	1
		50	0	22.00	21.77	21.75	21.75	1
	16QAM	1	0	22.00	21.71	21.81	21.74	1
		1	24	22.00	21.74	21.93	21.81	1
		1	49	22.00	21.68	21.95	21.75	1
		25	0	21.00	20.80	20.79	20.82	2
		25	12	21.00	20.77	20.77	20.85	2
		25	25	21.00	20.80	20.76	20.86	2
		50	0	21.00	20.78	20.77	20.80	2

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					20025	20175	20325	
					1717.5	1732.5	1747.5	
15MHz	QPSK	1	0	23.00	22.89	22.89	22.89	0
		1	37	23.00	22.80	22.85	22.89	0
		1	74	23.00	22.79	22.87	22.88	0
		36	0	22.00	21.89	21.87	21.87	1
		36	19	22.00	21.85	21.89	21.89	1
		36	39	22.00	21.84	21.83	21.94	1
		75	0	22.00	21.88	21.92	21.92	1
	16QAM	1	0	22.00	21.78	21.59	21.68	1
		1	37	22.00	21.68	21.72	21.69	1
		1	74	22.00	21.65	21.84	21.72	1
		36	0	21.00	20.84	20.38	20.79	2
		36	19	21.00	20.83	20.87	20.83	2
		36	39	21.00	20.81	20.87	20.83	2
		75	0	21.00	20.82	20.86	20.84	2
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					20050	20175	20300	
					1720	1732.5	1745	
20MHz	QPSK	1	0	23.00	22.82	22.89	22.87	0
		1	50	23.00	22.92	22.99	22.93	0
		1	99	23.00	22.87	22.89	22.89	0
		50	0	22.00	21.80	21.93	21.74	1
		50	25	22.00	21.76	21.76	21.75	1
		50	50	22.00	21.77	21.81	21.81	1
		100	0	22.00	21.77	21.79	21.76	1
	16QAM	1	0	22.50	22.37	22.23	22.11	0.5
		1	50	22.50	22.37	20.82	22.13	0.5
		1	99	22.50	22.30	22.14	22.17	0.5
		50	0	21.00	20.84	20.83	20.71	2
		50	25	21.00	20.82	20.76	20.74	2
		50	50	21.00	20.82	20.80	20.77	2
		100	0	21.00	20.82	20.77	20.75	2

8.1.8 CONDUCTED POWER MEASUREMENTS OF LTE Band 5

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					20407	20525	20643	
					824.7	836.5	848.3	
1.4MHz	QPSK	1	0	23.50	23.11	23.11	22.92	0
		1	2	23.50	23.13	23.13	23.00	0
		1	5	23.50	23.09	23.09	22.90	0
		3	0	23.50	22.10	22.17	22.28	0
		3	1	23.50	22.05	22.12	22.24	0
		3	3	23.50	22.10	22.16	22.29	0
		6	0	22.50	22.08	22.09	21.99	1
	16QAM	1	0	23.00	22.21	22.54	21.95	0.5
		1	2	23.00	22.28	22.59	21.99	0.5
		1	5	23.00	22.20	22.53	21.94	0.5
		3	0	23.00	22.23	22.45	22.16	0.5
		3	1	23.00	22.16	22.39	22.14	0.5
		3	3	23.00	22.23	22.43	22.18	0.5
		6	0	21.50	21.28	21.12	21.17	2
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					20415	20525	20635	
					825.5	836.5	847.5	
3MHz	QPSK	1	0	23.50	22.95	23.04	22.92	0
		1	7	23.50	23.03	23.08	22.95	0
		1	14	23.50	22.95	22.99	22.84	0
		8	0	22.50	22.08	22.11	22.00	1
		8	3	22.50	22.11	22.10	22.01	1
		8	7	22.50	22.06	22.08	21.97	1
		15	0	22.50	22.04	22.06	21.95	1
	16QAM	1	0	22.50	21.92	22.48	21.90	1
		1	7	22.50	22.02	22.33	22.01	1
		1	14	22.50	21.89	22.42	21.84	1
		8	0	21.50	21.24	21.28	21.04	2
		8	3	21.50	21.26	21.30	21.06	2
		8	7	21.50	21.23	21.26	21.02	2
		15	0	21.50	21.14	21.19	20.93	2

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					20425	20525	20625	
					826.5	836.5	846.5	
5MHz	QPSK	1	0	23.50	23.16	23.11	23.09	0
		1	12	23.50	23.15	23.08	23.03	0
		1	24	23.50	23.10	23.02	23.00	0
		12	0	22.50	22.08	22.13	22.01	1
		12	6	22.50	22.06	22.11	21.99	1
		12	13	22.50	22.06	22.10	21.96	1
		25	0	22.50	22.02	22.05	21.92	1
	16QAM	1	0	22.50	22.31	22.11	22.07	1
		1	12	22.50	22.27	22.26	22.01	1
		1	24	22.50	22.21	22.27	21.97	1
		12	0	21.50	21.26	21.38	21.04	2
		12	6	21.50	21.24	21.36	21.04	2
		12	13	21.50	21.23	21.35	21.01	2
		25	0	21.50	21.14	21.22	20.88	2
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					20450	20525	20600	
					829	836.5	844	
10MHz	QPSK	1	0	23.50	23.10	23.19	23.04	0
		1	24	23.50	23.01	23.09	22.99	0
		1	49	23.50	23.04	22.98	22.84	0
		25	0	23.00	22.74	22.90	22.85	1
		25	12	23.00	22.00	22.07	22.71	1
		25	25	23.00	22.03	22.02	22.69	1
		50	0	23.00	22.04	22.06	22.03	1
	16QAM	1	0	23.00	22.02	22.55	22.17	1
		1	24	23.00	22.04	22.59	22.01	1
		1	49	23.00	22.00	22.36	21.87	1
		25	0	21.50	21.13	21.25	21.13	2
		25	12	21.50	21.10	21.19	21.09	2
		25	25	21.50	21.12	21.15	21.02	2
		50	0	21.50	21.09	21.18	21.03	2

8.1.9 CONDUCTED POWER MEASUREMENTS OF LTE Band 7

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					20775	21100	21425	
					2502.5	2535	2567.5	
5MHz	QPSK	1	0	21.00	20.83	20.81	20.71	0
		1	12	21.00	20.65	20.91	20.64	0
		1	24	21.00	20.73	20.84	20.86	0
		12	0	20.50	19.82	19.93	20.29	0.5
		12	6	20.50	20.13	19.91	20.27	0.5
		12	13	20.50	20.12	19.91	20.30	0.5
		25	0	20.50	20.08	19.86	20.27	0.5
	16QAM	1	0	20.50	20.31	20.43	20.37	0.5
		1	12	20.50	20.08	20.43	20.21	0.5
		1	24	20.50	20.32	20.44	20.32	0.5
		12	0	20.00	19.03	19.12	19.38	1
		12	6	20.00	18.99	19.10	19.26	1
		12	13	20.00	19.12	19.10	19.20	1
		25	0	20.00	19.04	18.97	19.24	1
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					20800	21100	21400	
					2505	2535	2565	
10MHz	QPSK	1	0	21.00	20.84	20.84	20.85	0
		1	24	21.00	20.76	20.93	20.89	0
		1	49	21.00	20.89	20.67	20.93	0
		25	0	20.50	20.10	19.92	20.22	0.5
		25	12	20.50	20.08	19.91	20.24	0.5
		25	25	20.50	20.09	19.92	20.28	0.5
		50	0	20.50	20.10	19.93	20.27	0.5
	16QAM	1	0	20.50	19.57	20.33	20.19	0.5
		1	24	20.50	20.01	20.27	20.29	0.5
		1	49	20.50	19.96	20.35	19.74	0.5
		25	0	20.00	18.97	18.97	19.32	1
		25	12	20.00	19.09	18.94	19.35	1
		25	25	20.00	19.10	19.00	19.35	1
		50	0	20.00	19.07	18.96	19.32	1

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					20825	21100	21375	
					2507.5	2535	2562.5	
15MHz	QPSK	1	0	21.00	20.71	20.85	20.65	0
		1	37	21.00	20.63	20.70	20.63	0
		1	74	21.00	20.52	20.62	20.53	0
		36	0	20.50	20.16	20.05	20.27	0.5
		36	19	20.50	20.16	20.00	20.32	0.5
		36	39	20.50	20.10	20.02	20.36	0.5
		75	0	20.50	20.17	20.05	20.32	0.5
	16QAM	1	0	20.50	19.94	20.38	20.35	0.5
		1	37	20.50	20.03	20.29	20.25	0.5
		1	74	20.50	19.90	20.42	20.43	0.5
		36	0	20.00	19.14	19.06	19.19	1
		36	19	20.00	19.12	19.01	19.24	1
		36	39	20.00	19.07	19.06	19.29	1
		75	0	20.00	19.13	19.06	19.26	1
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	3GPP MPR
					20850	21100	21350	
					2510	2535	2560	
20MHz	QPSK	1	0	21.00	20.98	20.99	20.94	0
		1	50	21.00	20.93	20.98	20.90	0
		1	99	21.00	20.82	20.87	20.89	0
		50	0	20.50	20.15	20.04	20.40	0.5
		50	25	20.50	20.09	20.00	20.23	0.5
		50	50	20.50	20.02	20.05	20.29	0.5
		100	0	20.50	20.37	20.13	20.25	0.5
	16QAM	1	0	20.50	20.47	20.48	20.35	0.5
		1	50	20.50	20.36	20.32	20.34	0.5
		1	99	20.50	20.37	20.38	20.40	0.5
		50	0	20.00	19.16	19.03	19.16	1
		50	25	20.00	19.08	18.99	19.18	1
		50	50	20.00	19.02	19.06	19.25	1
		100	0	20.00	19.08	19.02	19.23	1

8.1.10 CONDUCTED POWER MEASUREMENTS OF WiFi 2.4G

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Power Setting	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	1	2412	1	18.00	17.00	16.27	Yes
	6	2437		18.00	17.00	16.92	Yes
	11	2462		18.00	17.00	16.67	Yes
802.11g	1	2412	6	Not Required	15.00	Not Required	No
	6	2437		Not Required	15.00	Not Required	No
	11	2462		Not Required	15.00	Not Required	No
802.11n HT20	1	2412	6.5	Not Required	15.00	Not Required	No
	6	2437		Not Required	15.00	Not Required	No
	11	2462		Not Required	15.00	Not Required	No
802.11n HT40	3	2422	13.5	Not Required	15.00	Not Required	No
	6	2437		Not Required	15.00	Not Required	No
	9	2452		Not Required	15.00	Not Required	No

Note:

- 1) The Average conducted power of WiFi is measured with RMS detector.
- 2) Per KDB248227, for WiFi 2.4GHz, the highest measured maximum output power Channel for DSSS modes(802.11b)was selected for SAR measurement.SAR for OFDM modes(2.4GHz 802.11g/n) was not required When the highest reported SAR for DSSS is adjusted by the ratio of OFDM modes(802.11g/n)to DSSS modes(802.11b)specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

8.1.11 CONDUCTED POWER MEASUREMENTS OF BT

BT MHz	Tune Up	Average Conducted Power (dBm)		
		DH5	2DH5	3DH5
CH0	8.00	6.12	5.21	5.59
CH39	8.00	6.41	6.03	5.62
CH78	8.00	6.31	5.61	5.47

BT MHz	Tune Up	Average Conducted Power (dBm)		
		CH0	CH19	CH39
BT (4.0)	-1.00	-3.53	-2.00	-2.60

Note:

1) The conducted power of BT is measured with RMS detector.

8.2 SAR TEST RESULTS

General Notes:

- 1) Per KDB447498 D01v06, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
- 2) Per KDB447498 D01v06, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/Kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/Kg, only one repeated measurement is required.
- 4) Per KDB941225 D06v02r01, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04v01r03, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is ≤ 1.2 W/kg, no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02v01r02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing.

GSM Notes:

- 1) Per KDB648474 D04v01r03, body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
- 2) Per KDB941225 D01v03r01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

WCDMA Notes:

Per KDB941225 D01v03r01, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

LTE notes:

- 1) The LTE test configurations are determined according to KDB941225 D05 SAR for LTE Devices v02r05. The general test procedures used for SAR testing can be found in Section 7.1.3.
- 2) A-MPR was disabled for all SAR test by setting NS_01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI)

WLAN Notes:

1. For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated(peak)SAR is used as the initial test position. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 for 2.4GHZ WIFI single transmission chain operations, the highest measured maximum output power Channel for DSSS was selected for SAR measurement.SAR for OFDM modes(2.4GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.1.4 for more information.

8.2.1 SAR MEASUREMENT RESULT OF HEAD

1. Head SAR test results of GSM&WCDMA

Test No.	Band	Mode	CH	Test Position	SIM	Battery	Tune up	Measured	Drift (dB)	SAR Value (W/kg)1-g	Reported SAR	Test Sample
T01	GSM850	GSM	190	Right Cheek	1	1	33	32.68	0.01	0.343	0.369	LUA-L03
T02	GSM850	GSM	190	Right Tilted	1	1	33	32.68	0.03	0.334	0.360	
T03	GSM850	GSM	190	Left Cheek	1	1	33	32.68	0.07	0.359	0.386	
T04	GSM850	GSM	190	Left Tilted	1	1	33	32.68	-0.09	0.308	0.332	
T05	GSM850	GSM	190	Left Cheek	1	2	33	32.68	-0.02	0.351	0.378	
T06	GSM850	GSM	190	Left Cheek	1	3	33	32.68	-0.08	0.349	0.376	
T07	GSM850	GSM	190	Left Cheek	1	4	33	32.68	0.04	0.346	0.372	
T111	GSM850	GSM	190	Left Cheek	1	1	33	32.68	-0.05	0.270	0.291	LUA-L23
T112	GSM850	GSM	190	Left Cheek	2	1	33	32.68	0.02	0.274	0.295	
T08	GSM1900	GSM	661	Right Cheek	1	1	30.5	29.96	-0.03	0.289	0.327	LUA-L03
T09	GSM1900	GSM	661	Right Tilted	1	1	30.5	29.96	-0.04	0.234	0.265	
T10	GSM1900	GSM	661	Left Cheek	1	1	30.5	29.96	0.09	0.359	0.407	
T11	GSM1900	GSM	661	Left Tilted	1	1	30.5	29.96	0.01	0.241	0.273	
T12	GSM1900	GSM	661	Left Cheek	1	2	30.5	29.96	0.05	0.362	0.410	
T13	GSM1900	GSM	661	Left Cheek	1	3	30.5	29.96	0.06	0.371	0.420	
T14	GSM1900	GSM	661	Left Cheek	1	4	30.5	29.96	-0.04	0.364	0.412	
T113	GSM1900	GSM	661	Left Cheek	1	3	30.5	29.96	0.06	0.339	0.384	LUA-L23
T114	GSM1900	GSM	661	Left Cheek	2	3	30.5	29.96	0.07	0.390	0.442	
T15	WCDMA B2	RMC12.2K	9400	Right Cheek	1	1	23	22.81	0.07	0.478	0.499	LUA-L03
T16	WCDMA B2	RMC12.2K	9400	Right Tilted	1	1	23	22.81	0.05	0.454	0.474	
T17	WCDMA B2	RMC12.2K	9400	Left Cheek	1	1	23	22.81	0.09	0.612	0.639	
T18	WCDMA B2	RMC12.2K	9400	Left Tilted	1	1	23	22.81	-0.06	0.432	0.451	
T19	WCDMA B2	RMC12.2K	9400	Left Cheek	1	2	23	22.81	-0.02	0.637	0.665	
T20	WCDMA B2	RMC12.2K	9400	Left Cheek	1	3	23	22.81	0.06	0.651	0.680	
T21	WCDMA B2	RMC12.2K	9400	Left Cheek	1	4	23	22.81	0.03	0.645	0.674	
T115	WCDMA B2	RMC12.2K	9400	Left Cheek	1	3	23	22.81	0.09	0.637	0.665	LUA-L23
T22	WCDMA B4	RMC12.2K	1413	Right Cheek	1	1	23	22.63	0.05	0.494	0.538	LUA-L03
T23	WCDMA B4	RMC12.2K	1413	Right Tilted	1	1	23	22.63	0.04	0.418	0.455	
T24	WCDMA B4	RMC12.2K	1413	Left Cheek	1	1	23	22.63	-0.08	0.693	0.755	
T25	WCDMA B4	RMC12.2K	1413	Left Tilted	1	1	23	22.63	0.06	0.379	0.413	
T26	WCDMA B4	RMC12.2K	1413	Left Cheek	1	2	23	22.63	0.01	0.603	0.657	

T27	WCDMA B4	RMC12.2K	1413	Left Cheek	1	3	23	22.63	0.09	0.602	0.656	
T28	WCDMA B4	RMC12.2K	1413	Left Cheek	1	4	23	22.63	-0.03	0.608	0.662	
T116	WCDMA B4	RMC12.2K	1413	Left Cheek	1	1	23	22.63	-0.08	0.684	0.745	LUA-L23
T29	WCDMA B5	RMC12.2K	4182	Right Cheek	1	1	23	22.83	0.02	0.338	0.351	LUA-L03
T30	WCDMA B5	RMC12.2K	4182	Right Tilted	1	1	23	22.83	0.03	0.297	0.309	
T31	WCDMA B5	RMC12.2K	4182	Left Cheek	1	1	23	22.83	-0.03	0.354	0.368	
T32	WCDMA B5	RMC12.2K	4182	Left Tilted	1	1	23	22.83	-0.05	0.304	0.316	
T33	WCDMA B5	RMC12.2K	4182	Left Cheek	1	2	23	22.83	0.03	0.349	0.363	
T34	WCDMA B5	RMC12.2K	4182	Left Cheek	1	3	23	22.83	0.05	0.348	0.362	
T35	WCDMA B5	RMC12.2K	4182	Left Cheek	1	4	23	22.83	-0.03	0.351	0.365	
T117	WCDMA B5	RMC12.2K	4182	Left Cheek	1	1	23	22.83	-0.03	0.341	0.355	LUA-L23

2. Head SAR test results of LTE

Test No.	Band	Mode	CH	RB	Off set	Test Position	SIM	Battery	Tune up	Measured	Drift (dB)	SAR Value (W/kg)1-g	Reported SAR	Test Sample
T200	LTE B2	QPKS20M	18900	1	0	Right Cheek		1	23	22.65	0.02	0.443	0.480	LUA-L03
T201	LTE B2	QPKS20M	18900	1	0	Right Tilted		1	23	22.65	0.04	0.351	0.380	
T202	LTE B2	QPKS20M	18900	1	0	Left Cheek		1	23	22.65	-0.01	0.613	0.664	
T203	LTE B2	QPKS20M	18900	1	0	Left Tilted		1	23	22.65	0.01	0.354	0.384	
T204	LTE B2	QPKS20M	18900	50	0	Right Cheek		1	22	21.67	-0.05	0.407	0.439	
T205	LTE B2	QPKS20M	18900	50	0	Right Tilted		1	22	21.67	-0.03	0.301	0.325	
T206	LTE B2	QPKS20M	18900	50	0	Left Cheek		1	22	21.67	0.04	0.494	0.533	
T207	LTE B2	QPKS20M	18900	50	0	Left Tilted		1	22	21.67	0.06	0.294	0.317	
T208	LTE B2	QPKS20M	18900	1	0	Left Cheek		2	23	22.65	0.09	0.594	0.644	
T209	LTE B2	QPKS20M	18900	1	0	Left Cheek		3	23	22.65	0.02	0.591	0.641	
T210	LTE B2	QPKS20M	18900	1	0	Left Cheek		4	23	22.65	0.08	0.598	0.648	
T373	LTE B2	QPSK20M	18900	1	0	Left Cheek	1	1	23	22.65	-0.01	0.607	0.658	LUA-L23
T211	LTE B4	QPKS20M	20175	1	50	Right Cheek		1	23	22.99	0.03	0.475	0.476	LUA-L03
T212	LTE B4	QPKS20M	20175	1	50	Right Tilted		1	23	22.99	0.02	0.384	0.385	
T213	LTE B4	QPKS20M	20175	1	50	Left Cheek		1	23	22.99	0.05	0.612	0.613	
T214	LTE B4	QPKS20M	20175	1	50	Left Tilted		1	23	22.99	-0.09	0.348	0.349	
T215	LTE B4	QPKS20M	20175	50	0	Right Cheek		1	22	21.93	-0.07	0.344	0.350	
T216	LTE B4	QPKS20M	20175	50	0	Right Tilted		1	22	21.93	-0.04	0.274	0.278	
T217	LTE B4	QPKS20M	20175	50	0	Left Cheek		1	22	21.93	0.05	0.493	0.501	
T218	LTE B4	QPKS20M	20175	50	0	Left Tilted		1	22	21.93	0.01	0.286	0.291	
T219	LTE B4	QPKS20M	20175	1	50	Left Cheek		2	23	22.99	0.02	0.608	0.609	
T220	LTE B4	QPKS20M	20175	1	50	Left Cheek		3	23	22.99	0.04	0.602	0.603	
T221	LTE B4	QPKS20M	20175	1	50	Left Cheek		4	23	22.99	0.08	0.605	0.606	
T374	LTE B4	QPSK20M	20175	1	50	Left Cheek	1	1	23	22.99	0.05	0.464	0.465	LUA-L23
T222	LTE B5	QPKS10M	20525	1	0	Right Cheek		1	23.5	23.19	0.02	0.357	0.383	LUA-L03
T223	LTE B5	QPKS10M	20525	1	0	Right Tilted		1	23.5	23.19	-0.04	0.312	0.335	
T224	LTE B5	QPKS10M	20525	1	0	Left Cheek		1	23.5	23.19	0.05	0.410	0.440	
T225	LTE B5	QPKS10M	20525	1	0	Left Tilted		1	23.5	23.19	-0.09	0.292	0.314	
T226	LTE B5	QPKS10M	20525	25	0	Right Cheek		1	23	22.90	0.03	0.193	0.197	
T227	LTE B5	QPKS10M	20525	25	0	Right Tilted		1	23	22.90	-0.01	0.268	0.274	
T228	LTE B5	QPKS10M	20525	25	0	Left Cheek		1	23	22.90	-0.05	0.333	0.341	
T229	LTE B5	QPKS10M	20525	25	0	Left Tilted		1	23	22.90	0.08	0.244	0.250	
T230	LTE B5	QPKS10M	20525	1	0	Left Cheek		2	23.5	23.19	-0.07	0.397	0.426	
T231	LTE B5	QPKS10M	20525	1	0	Left Cheek		3	23.5	23.19	0.02	0.392	0.421	
T232	LTE B5	QPKS10M	20525	1	0	Left Cheek		4	23.5	23.19	0.04	0.396	0.425	
T375	LTE B5	QPSK10M	20525	1	0	Left Cheek	1	1	23.5	23.19	0.05	0.316	0.339	LUA-L23

T233	LTE B7	QPKS20M	21100	1	0	Right Cheek	1	1	21	20.99	-0.01	0.123	0.123	LUA-L03
T234	LTE B7	QPKS20M	21100	1	0	Right Tilted	1	1	21	20.99	0.05	0.116	0.116	
T235	LTE B7	QPKS20M	21100	1	0	Left Cheek	1	1	21	20.99	0.09	0.157	0.157	
T236	LTE B7	QPKS20M	21100	1	0	Left Tilted	1	1	21	20.99	0.04	0.058	0.058	
T237	LTE B7	QPKS20M	21350	50	0	Right Cheek	1	1	20.5	20.40	0.03	0.103	0.105	
T238	LTE B7	QPKS20M	21350	50	0	Right Tilted	1	1	20.5	20.40	0.09	0.098	0.100	
T239	LTE B7	QPKS20M	21350	50	0	Left Cheek	1	1	20.5	20.40	0.09	0.121	0.124	
T240	LTE B7	QPKS20M	21350	50	0	Left Tilted	1	1	20.5	20.40	0.07	0.089	0.091	
T241	LTE B7	QPKS20M	21100	1	0	Left Cheek	1	2	21	20.99	0.03	0.157	0.157	
T242	LTE B7	QPKS20M	21100	1	0	Left Cheek	1	3	21	20.99	0.04	0.167	0.167	
T243	LTE B7	QPKS20M	21100	1	0	Left Cheek	1	4	21	20.99	0.05	0.158	0.158	LUA-L23
T376	LTE B7	QPSK20M	21100	1	0	Left Cheek	1	3	21	20.99	0.04	0.163	0.163	

3. Head SAR test results of WIFI

Test No.	Band	CH	Test Position	Battery	Tune up	Measured	Drift(dB)	Peak SAR of Area Scan(W/kg)	SAR Value (W/kg)1-g	Reported SAR	Test Sample
T400	802.11b	6	Right Cheek	1	17	16.92	-0.09	0.933	0.900	0.917	LUA-L03
T401	802.11b	6	Right Tilted	1	17	16.92	0.03	0.526	0.508	0.517	
T402	802.11b	6	Left Cheek	1	17	16.92	0.04	0.509	0.498	0.507	
T403	802.11b	6	Left Tilted	1	17	16.92	-0.02	0.638	0.618	0.629	
T405	802.11b	11	Right Cheek	1	17	16.67	-0.09	0.866	0.854	0.921	
T406	802.11b	6	Right Cheek	2	17	16.92	-0.01	0.828	0.807	0.822	
T407	802.11b	6	Right Cheek	3	17	16.92	0.06	0.982	0.966	0.984	
T408	802.11b	6	Right Cheek	4	17	16.92	0.06	0.836	0.817	0.832	
T409	802.11b	6	Right Cheek(1st Repeated)	3	17	16.92	-0.02	0.956	0.948	0.966	
T423	802.11b	6	Right Cheek	3	17	16.92	0.06	0.662	0.674	T410	LUA-L23

Note: Per KDB248227D01, the highest SAR measured for the initial test position or initial test configuration should be used to determine SAR test exclusion according to the sum of 1-g SAR and SAR peak to location ratio provisions in KDB 447498. In addition, a test lab may also choose to perform standalone SAR measurements for test positions and 802.11 configurations that are not required by the initial test position or initial test configuration procedures and apply the results to determine simultaneous transmission SAR test exclusion, according to sum of 1-g and SAR peak to location ratio requirements to reduce the number of simultaneous transmission SAR measurements.

8.2.2 SAR MEASUREMENT RESULT OF BODY-WORN

1. Body-worn SAR test results of GSM&WCDMA

Test No.	Band	Mode	CH	Test Position with 15mm	SIM	Battery	Tune up	Measured	Drift (dB)	SAR Value (W/kg)1-g	Reported SAR	Test Sample
T36	GSM850	GSM	190	Front Face	1	1	33	32.68	0.01	0.411	0.442	LUA-L03
T37	GSM850	GSM	190	Rear Face	1	1	33	32.68	-0.07	0.515	0.554	
T38	GSM850	GSM	190	Rear Face	1	2	33	32.68	-0.02	0.476	0.512	
T39	GSM850	GSM	190	Rear Face	1	3	33	32.68	-0.03	0.493	0.531	
T40	GSM850	GSM	190	Rear Face	1	4	33	32.68	0.04	0.507	0.546	
T118	GSM850	GSM	190	Rear Face	1	1	33	32.68	-0.08	0.512	0.551	LUA-L23
T119	GSM850	GSM	190	Rear Face	2	1	33	32.68	-0.02	0.449	0.483	
T52	GSM1900	GSM	661	Front Face	1	1	30.5	29.96	0.08	0.218	0.247	LUA-L03
T53	GSM1900	GSM	661	Rear Face	1	1	30.5	29.96	0.09	0.198	0.224	
T54	GSM1900	GSM	661	Front Face	1	2	30.5	29.96	-0.06	0.193	0.219	
T55	GSM1900	GSM	661	Front Face	1	3	30.5	29.96	-0.05	0.216	0.245	
T56	GSM1900	GSM	661	Front Face	1	4	30.5	29.96	0.02	0.203	0.230	
T122	GSM1900	GSM	661	Front Face	1	1	30.5	29.96	-0.09	0.224	0.254	LUA-L23
T123	GSM1900	GSM	661	Front Face	2	1	30.5	29.96	-0.05	0.228	0.258	
T65	WCDMA B2	RMC12.2K	9400	Front Face	1	1	23	22.81	0.04	0.390	0.407	LUA-L03
T66	WCDMA B2	RMC12.2K	9400	Rear Face	1	1	23	22.81	-0.02	0.373	0.390	
T67	WCDMA B2	RMC12.2K	9400	Front Face	1	2	23	22.81	0.08	0.364	0.380	
T68	WCDMA B2	RMC12.2K	9400	Front Face	1	3	23	22.81	0.03	0.386	0.403	
T69	WCDMA B2	RMC12.2K	9400	Front Face	1	4	23	22.81	-0.05	0.381	0.398	
T126	WCDMA B2	RMC12.2K	9400	Front Face	1	1	23	22.81	0.04	0.374	0.391	LUA-L23
T78	WCDMA B4	RMC12.2K	1413	Front Face	1	1	23	22.63	0.04	0.463	0.504	LUA-L03
T79	WCDMA B4	RMC12.2K	1413	Rear Face	1	1	23	22.63	0.09	0.536	0.584	
T80	WCDMA B4	RMC12.2K	1413	Rear Face	1	2	23	22.63	-0.02	0.524	0.571	
T81	WCDMA B4	RMC12.2K	1413	Rear Face	1	3	23	22.63	0.04	0.508	0.553	
T82	WCDMA B4	RMC12.2K	1413	Rear Face	1	4	23	22.63	0.01	0.516	0.562	
T128	WCDMA B4	RMC12.2K	1413	Rear Face	1	1	23	22.63	0.09	0.519	0.565	LUA-L23
T98	WCDMA B5	RMC12.2K	4182	Front Face	1	1	23	22.83	0.03	0.393	0.409	LUA-L03
T99	WCDMA B5	RMC12.2K	4182	Rear Face	1	1	23	22.83	-0.05	0.482	0.501	
T100	WCDMA B5	RMC12.2K	4182	Rear Face	1	2	23	22.83	-0.08	0.491	0.511	
T101	WCDMA B5	RMC12.2K	4182	Rear Face	1	3	23	22.83	-0.02	0.485	0.504	
T102	WCDMA B5	RMC12.2K	4182	Rear Face	1	4	23	22.83	-0.04	0.487	0.506	
T130	WCDMA B5	RMC12.2K	4182	Rear Face	1	2	23	22.83	-0.08	0.474	0.493	LUA-L23

2. Body-worn SAR test results of LTE

Test No.	Band	Mode	CH	RB	Off set	Test Position with 15mm	SIM	Battery	Tune up	Measure d	Drift (dB)	SAR Value (W/kg)1-g	Reported SAR	Test Sample
T255	LTE B2	QPSK20M	18900	1	0	Front Face	1	1	23	22.65	0.04	0.368	0.399	LUA-L03
T256	LTE B2	QPSK20M	18900	1	0	Rear Face	1	1	23	22.65	0.03	0.329	0.357	
T257	LTE B2	QPSK20M	18900	50	0	Front Face	1	1	22	21.67	-0.02	0.296	0.319	
T258	LTE B2	QPSK20M	18900	50	0	Rear Face	1	1	22	21.67	0.02	0.285	0.307	
T259	LTE B2	QPSK20M	18900	1	0	Front Face	1	2	23	22.65	-0.03	0.356	0.386	
T260	LTE B2	QPSK20M	18900	1	0	Front Face	1	3	23	22.65	-0.05	0.348	0.377	
T261	LTE B2	QPSK20M	18900	1	0	Front Face	1	4	23	22.65	0.02	0.357	0.387	
T378	LTE B2	QPSK20M	18900	1	0	Front Face	1	1	23	22.65	0.04	0.359	0.389	LUA-L23
T275	LTE B4	QPSK20M	20175	1	50	Front Face	1	1	23	22.99	0.01	0.529	0.530	LUA-L03
T276	LTE B4	QPSK20M	20175	1	50	Rear Face	1	1	23	22.99	0.06	0.580	0.581	
T277	LTE B4	QPSK20M	20175	50	0	Front Face	1	1	22	21.93	-0.03	0.408	0.415	
T278	LTE B4	QPSK20M	20175	50	0	Rear Face	1	1	22	21.93	0.04	0.509	0.517	
T279	LTE B4	QPSK20M	20175	1	50	Rear Face	1	2	23	22.99	-0.05	0.573	0.574	
T280	LTE B4	QPSK20M	20175	1	50	Rear Face	1	3	23	22.99	-0.02	0.562	0.563	
T281	LTE B4	QPSK20M	20175	1	50	Rear Face	1	4	23	22.99	0.02	0.558	0.559	
T380	LTE B4	QPSK20M	20175	1	50	Rear Face	1	1	23	22.99	0.06	0.532	0.533	LUA-L23
T303	LTE B5	QPSK10M	20525	1	0	Front Face	1	1	23.5	23.19	0.09	0.445	0.478	LUA-L03
T304	LTE B5	QPSK10M	20525	1	0	Rear Face	1	1	23.5	23.19	-0.06	0.555	0.596	
T305	LTE B5	QPSK10M	20525	25	0	Front Face	1	1	23	22.90	-0.03	0.383	0.392	
T306	LTE B5	QPSK10M	20525	25	0	Rear Face	1	1	23	22.90	-0.08	0.455	0.466	
T307	LTE B5	QPSK10M	20525	1	0	Rear Face	1	2	23.5	23.19	0.08	0.551	0.592	
T308	LTE B5	QPSK10M	20525	1	0	Rear Face	1	3	23.5	23.19	-0.07	0.549	0.590	
T309	LTE B5	QPSK10M	20525	1	0	Rear Face	1	4	23.5	23.19	0.04	0.547	0.587	
T382	LTE B5	QPSK10M	20525	1	0	Rear Face	1	1	23.5	23.19	-0.08	0.552	0.593	LUA-L23
T323	LTE B7	QPKS20M	21100	1	0	Front Face	1	1	21	20.99	0.08	0.284	0.285	LUA-L03
T324	LTE B7	QPKS20M	21100	1	0	Rear Face	1	1	21	20.99	0.08	0.561	0.562	
T325	LTE B7	QPKS20M	21350	50	0	Front Face	1	1	20.5	20.40	0.08	0.236	0.241	
T326	LTE B7	QPKS20M	21350	50	0	Rear Face	1	1	20.5	20.40	0.09	0.407	0.416	
T327	LTE B7	QPKS20M	21100	1	0	Rear Face	1	2	21	20.99	-0.01	0.601	0.602	
T328	LTE B7	QPKS20M	21100	1	0	Rear Face	1	3	21	20.99	0.02	0.607	0.608	
T329	LTE B7	QPKS20M	21100	1	0	Rear Face	1	4	21	20.99	-0.03	0.598	0.599	
T384	LTE B7	QPSK20M	21100	1	0	Rear Face	1	3	21	20.99	0.04	0.44	0.441	LUA-L23

3. Body-worn SAR test results of WIFI

Test No.	Band	CH	Test Position with 15mm	Battery	Tune up	Measured	Drift(dB)	Peak SAR of Area Scan(W/kg)	SAR Value (W/kg)1-g	Reported SAR	Test Sample
T410	802.11b	6	Front Face	1	17	16.92	-0.01	0.086	0.082	0.084	LUA-L03
T411	802.11b	6	Rear Face	1	17	16.92	0.01	0.090	0.089	0.091	
T412	802.11b	6	Rear Face	2	17	16.92	0.02	0.089	0.080	0.081	
T413	802.11b	6	Rear Face	3	17	16.92	-0.03	0.088	0.074	0.075	
T414	802.11b	6	Rear Face	4	17	16.92	0.04	0.084	0.070	0.071	
T424	802.11b	6	Rear Face	1	17	16.92	0.01	0.088	0.076	0.077	LUA-L23

Note: Per KDB248227D01, the highest SAR measured for the initial test position or initial test configuration should be used to determine SAR test exclusion according to the sum of 1-g SAR and SAR peak to location ratio provisions in KDB 447498. In addition, a test lab may also choose to perform standalone SAR measurements for test positions and 802.11 configurations that are not required by the initial test position or initial test configuration procedures and apply the results to determine simultaneous transmission SAR test exclusion, according to sum of 1-g and SAR peak to location ratio requirements to reduce the number of simultaneous transmission SAR measurements.

8.2.3 SAR MEASUREMENT RESULT OF HOTSPOT

1. Hotspot SAR test results of GSM&WCDMA

Test No.	Band	Mode	CH	Test Position with 10mm	SIM	Battery	Tune up	Measured	Drift (dB)	SAR Value (W/kg)1-g	Reported SAR	Test Sample
T41	GSM850	GPRS 2TX	190	Front Face	1	1	32.5	32.08	0.03	0.713	0.785	LUA-L03
T42	GSM850	GPRS 2TX	190	Rear Face	1	1	32.5	32.08	-0.02	0.938	1.033	
T43	GSM850	GPRS 2TX	190	Left Side	1	1	32.5	32.08	0.09	0.688	0.758	
T44	GSM850	GPRS 2TX	190	Right Side	1	1	32.5	32.08	-0.07	0.637	0.702	
T45	GSM850	GPRS 2TX	190	Bottom Side	1	1	32.5	32.08	-0.05	0.075	0.083	
T46	GSM850	GPRS 2TX	128	Rear Face	1	1	32.5	31.97	-0.02	0.927	1.047	
T47	GSM850	GPRS 2TX	251	Rear Face	1	1	32.5	31.96	0.07	0.937	1.061	
T48	GSM850	GPRS 2TX	190	Rear Face	1	2	32.5	32.08	0.03	0.917	1.010	
T49	GSM850	GPRS 2TX	190	Rear Face	1	3	32.5	32.08	0.02	0.915	1.008	
T50	GSM850	GPRS 2TX	190	Rear Face	1	4	32.5	32.08	-0.04	0.912	1.005	
T51	GSM850	GPRS 2TX	190	Rear Face (1st Repeated)	1	1	32.5	32.08	0.05	0.935	1.030	
T120	GSM850	GPRS 2TX	190	Rear Face	1	1	32.5	32.08	-0.04	0.785	0.865	LUA-L23
T121	GSM850	GPRS 2TX	190	Rear Face	2	1	32.5	32.08	-0.07	0.791	0.871	
T57	GSM1900	GPRS 2TX	661	Front Face	1	1	29.5	28.96	0.03	0.496	0.562	LUA-L03
T58	GSM1900	GPRS 2TX	661	Rear Face	1	1	29.5	28.96	0.01	0.521	0.590	
T59	GSM1900	GPRS 2TX	661	Left Side	1	1	29.5	28.96	-0.03	0.328	0.371	
T60	GSM1900	GPRS 2TX	661	Right Side	1	1	29.5	28.96	-0.06	0.265	0.300	
T61	GSM1900	GPRS 2TX	661	Bottom Side	1	1	29.5	28.96	0.04	0.433	0.490	
T62	GSM1900	GPRS 2TX	661	Rear Face	1	2	29.5	28.96	0.01	0.491	0.556	
T63	GSM1900	GPRS 2TX	661	Rear Face	1	3	29.5	28.96	0.05	0.497	0.563	
T64	GSM1900	GPRS 2TX	661	Rear Face	1	4	29.5	28.96	0.02	0.494	0.559	
T124	GSM1900	GPRS 2TX	661	Rear Face	1	1	29.5	28.96	0.01	0.596	0.675	LUA-L23
T125	GSM1900	GPRS 2TX	661	Rear Face	2	1	29.5	28.96	-0.08	0.649	0.735	
T70	WCDMA B2	RMC12.2K	9400	Front Face	1	1	23	22.81	0.09	0.566	0.591	LUA-L03
T71	WCDMA B2	RMC12.2K	9400	Rear Face	1	1	23	22.81	-0.02	0.595	0.622	
T72	WCDMA B2	RMC12.2K	9400	Left Side	1	1	23	22.81	-0.04	0.367	0.383	
T73	WCDMA B2	RMC12.2K	9400	Right Side	1	1	23	22.81	0.08	0.355	0.371	
T74	WCDMA B2	RMC12.2K	9400	Bottom Side	1	1	23	22.81	0.07	0.506	0.529	
T75	WCDMA B2	RMC12.2K	9400	Rear Face	1	2	23	22.81	-0.04	0.569	0.594	
T76	WCDMA B2	RMC12.2K	9400	Rear Face	1	3	23	22.81	-0.02	0.572	0.598	
T77	WCDMA B2	RMC12.2K	9400	Rear Face	1	4	23	22.81	0.05	0.576	0.602	
T127	WCDMA B2	RMC12.2K	9400	Rear Face	1	1	23	22.81	-0.02	0.580	0.606	LUA-L23
T83	WCDMA B4	RMC12.2K	1413	Front Face	1	1	23	22.63	-0.01	0.816	0.889	LUA-L03
T84	WCDMA B4	RMC12.2K	1413	Rear Face	1	1	23	22.63	0.02	0.993	1.081	
T85	WCDMA B4	RMC12.2K	1413	Left Side	1	1	23	22.63	0.04	0.356	0.388	

T86	WCDMA B4	RMC12.2K	1413	Right Side	1	1	23	22.63	-0.02	0.333	0.363	LUA-L03
T87	WCDMA B4	RMC12.2K	1413	Bottom Side	1	1	23	22.63	-0.05	0.880	0.958	
T88	WCDMA B4	RMC12.2K	1312	Front Face	1	1	23	22.42	-0.02	0.788	0.901	
T89	WCDMA B4	RMC12.2K	1513	Front Face	1	1	23	22.45	-0.04	0.872	0.990	
T90	WCDMA B4	RMC12.2K	1312	Rear Face	1	1	23	22.42	0.05	0.929	1.062	
T91	WCDMA B4	RMC12.2K	1513	Rear Face	1	1	23	22.45	0.01	1.030	1.169	
T92	WCDMA B4	RMC12.2K	1312	Bottom Side	1	1	23	22.42	-0.02	0.955	1.091	
T93	WCDMA B4	RMC12.2K	1513	Bottom Side	1	1	23	22.45	-0.04	0.923	1.048	
T94	WCDMA B4	RMC12.2K	1513	Rear Face	1	2	23	22.45	-0.02	0.989	1.123	
T95	WCDMA B4	RMC12.2K	1513	Rear Face	1	3	23	22.45	0.04	0.976	1.108	
T96	WCDMA B4	RMC12.2K	1513	Rear Face	1	4	23	22.45	0.09	0.983	1.116	
T97	WCDMA B4	RMC12.2K	1513	Rear Face(1st Repeated)	1	1	23	22.45	0.07	0.998	1.133	
T129	WCDMA B4	RMC12.2K	1513	Rear Face	1	1	23	22.45	0.01	0.994	1.128	LUA-L23
T103	WCDMA B5	RMC12.2K	4182	Front Face	1	1	23	22.83	-0.05	0.422	0.439	LUA-L03
T104	WCDMA B5	RMC12.2K	4182	Rear Face	1	1	23	22.83	-0.01	0.573	0.596	
T105	WCDMA B5	RMC12.2K	4182	Left Side	1	1	23	22.83	-0.03	0.396	0.412	
T106	WCDMA B5	RMC12.2K	4182	Right Side	1	1	23	22.83	0.05	0.355	0.369	
T107	WCDMA B5	RMC12.2K	4182	Bottom Side	1	1	23	22.83	-0.03	0.037	0.038	
T108	WCDMA B5	RMC12.2K	4182	Rear Face	1	2	23	22.83	0.02	0.545	0.567	
T109	WCDMA B5	RMC12.2K	4182	Rear Face	1	3	23	22.83	0.05	0.564	0.587	
T110	WCDMA B5	RMC12.2K	4182	Rear Face	1	4	23	22.83	-0.01	0.557	0.579	
T131	WCDMA B5	RMC12.2K	4182	Rear Face	1	1	23	22.83	-0.01	0.555	0.577	LUA-L23

2. Hotspot SAR test results of LTE

Test No.	Band	Mode	CH	RB	Off set	Test Position with 10mm	SIM	Battery	Tune up	Measured	Drift (dB)	SAR Value (W/kg)1-g	Reported SAR	Test Sample
T262	LTE B2	QPSK20M	18900	1	0	Front Face	1	1	23	22.65	0.04	0.549	0.595	LUA-L03
T263	LTE B2	QPSK20M	18900	1	0	Rear Face	1	1	23	22.65	0.04	0.554	0.600	
T264	LTE B2	QPSK20M	18900	1	0	Left Side	1	1	23	22.65	-0.01	0.316	0.343	
T265	LTE B2	QPSK20M	18900	1	0	Right Side	1	1	23	22.65	0.02	0.297	0.322	
T266	LTE B2	QPSK20M	18900	1	0	Bottom Side	1	1	23	22.65	-0.03	0.469	0.508	
T267	LTE B2	QPSK20M	18900	50	0	Front Face	1	1	22	21.67	0.07	0.430	0.464	
T268	LTE B2	QPSK20M	18900	50	0	Rear Face	1	1	22	21.67	0.01	0.436	0.470	
T269	LTE B2	QPSK20M	18900	50	0	Left Side	1	1	22	21.67	0.03	0.237	0.256	
T270	LTE B2	QPSK20M	18900	50	0	Right Side	1	1	22	21.67	0.04	0.231	0.249	
T271	LTE B2	QPSK20M	18900	50	0	Bottom Side	1	1	22	21.67	-0.09	0.370	0.399	
T272	LTE B2	QPSK20M	18900	1	0	Rear Face	1	2	23	22.65	-0.05	0.544	0.590	
T273	LTE B2	QPSK20M	18900	1	0	Rear Face	1	3	23	22.65	-0.01	0.546	0.592	
T274	LTE B2	QPSK20M	18900	1	0	Rear Face	1	4	23	22.65	0.06	0.542	0.587	
T379	LTE B2	QPSK20M	18900	1	0	Rear Face	1	1	23	22.65	0.04	0.551	0.597	LUA-L23
T282	LTE B4	QPSK20M	20175	1	50	Front Face	1	1	23	22.99	0.02	0.764	0.766	LUA-L03
T283	LTE B4	QPSK20M	20175	1	50	Rear Face	1	1	23	22.99	0.04	0.936	0.938	
T284	LTE B4	QPSK20M	20175	1	50	Left Side	1	1	23	22.99	-0.04	0.354	0.355	
T285	LTE B4	QPSK20M	20175	1	50	Right Side	1	1	23	22.99	-0.09	0.358	0.359	
T286	LTE B4	QPSK20M	20175	1	50	Bottom Side	1	1	23	22.99	0.03	1.040	1.042	
T287	LTE B4	QPSK20M	20175	50	0	Front Face	1	1	22	21.93	0.05	0.620	0.630	
T288	LTE B4	QPSK20M	20175	50	0	Rear Face	1	1	22	21.93	-0.04	0.850	0.864	
T289	LTE B4	QPSK20M	20175	50	0	Left Side	1	1	22	21.93	0.02	0.284	0.289	
T290	LTE B4	QPSK20M	20175	50	0	Right Side	1	1	22	21.93	0.06	0.289	0.294	
T291	LTE B4	QPSK20M	20175	50	0	Bottom Side	1	1	22	21.93	0.01	0.767	0.779	
T373	LTE B4	QPSK20M	20050	50	0	Rear Face	1	1	22	21.8	0.03	0.768	0.804	
T374	LTE B4	QPSK20M	20300	50	0	Rear Face	1	1	22	21.76	0.04	0.786	0.831	
T294	LTE B4	QPSK20M	20050	1	50	Rear Face	1	1	23	22.92	0.07	0.905	0.922	
T295	LTE B4	QPSK20M	20300	1	50	Rear Face	1	1	23	22.93	0.04	0.974	0.990	
T296	LTE B4	QPSK20M	20050	1	50	Bottom Side	1	1	23	22.92	-0.09	0.988	1.006	
T297	LTE B4	QPSK20M	20300	1	50	Bottom Side	1	1	23	22.93	0.03	0.878	0.892	

T298	LTE B4	QPSK20M	20175	1	50	Bottom Side	1	2	23	22.99	0.08	0.991	0.993	LUA-L03
T299	LTE B4	QPSK20M	20175	1	50	Bottom Side	1	3	23	22.99	0.05	0.989	0.991	
T300	LTE B4	QPSK20M	20175	1	50	Bottom Side	1	4	23	22.99	0.02	0.996	0.998	
T301	LTE B4	QPSK20M	20175	100	0	Bottom Side	1	1	22	21.79	0.01	0.986	1.035	
T302	LTE B4	QPSK20M	20175	1	50	Bottom Side(1st Repeated)	1	1	23	22.99	0.04	1.020	1.022	
T381	LTE B4	QPSK20M	20175	1	50	Bottom Side	1	1	23	22.99	0.03	0.896	0.898	LUA-L23
T310	LTE B5	QPSK10M	20525	1	0	Front Face	1	1	23.5	23.19	0.03	0.526	0.565	LUA-L03
T311	LTE B5	QPSK10M	20525	1	0	Rear Face	1	1	23.5	23.19	-0.08	0.620	0.666	
T312	LTE B5	QPSK10M	20525	1	0	Left Side	1	1	23.5	23.19	0.04	0.402	0.432	
T313	LTE B5	QPSK10M	20525	1	0	Right Side	1	1	23.5	23.19	0.03	0.351	0.377	
T314	LTE B5	QPSK10M	20525	1	0	Bottom Side	1	1	23.5	23.19	-0.05	0.046	0.049	
T315	LTE B5	QPSK10M	20525	25	0	Front Face	1	1	23	22.90	-0.01	0.383	0.392	
T316	LTE B5	QPSK10M	20525	25	0	Rear Face	1	1	23	22.90	-0.05	0.514	0.526	
T317	LTE B5	QPSK10M	20525	25	0	Left Side	1	1	23	22.90	0.02	0.221	0.226	
T318	LTE B5	QPSK10M	20525	25	0	Right Side	1	1	23	22.90	0.06	0.295	0.302	
T319	LTE B5	QPSK10M	20525	25	0	Bottom Side	1	1	23	22.90	0.01	0.047	0.048	
T320	LTE B5	QPSK10M	20525	1	0	Rear Face	1	2	23.5	23.19	0.02	0.618	0.664	
T321	LTE B5	QPSK10M	20525	1	0	Rear Face	1	3	23.5	23.19	0.04	0.607	0.652	
T322	LTE B5	QPSK10M	20525	1	0	Rear Face	1	4	23.5	23.19	0.07	0.602	0.647	
T383	LTE B5	QPSK10M	20525	1	0	Rear Face	1	1	23.5	23.19	-0.08	0.613	0.658	LUA-L23
T330	LTE B7	QPSK20M	21100	1	0	Front Face	1	1	21	20.99	0.02	0.680	0.682	LUA-L03
T331	LTE B7	QPSK20M	21100	1	0	Rear Face	1	1	21	20.99	0.01	1.340	1.343	
T332	LTE B7	QPSK20M	21100	1	0	Left Side	1	1	21	20.99	-0.03	0.239	0.240	
T333	LTE B7	QPSK20M	21100	1	0	Right Side	1	1	21	20.99	-0.02	0.210	0.210	
T334	LTE B7	QPSK20M	21100	1	0	Bottom Side	1	1	21	20.99	0.01	1.070	1.072	
T335	LTE B7	QPSK20M	21350	50	0	Front Face	1	1	20.5	20.40	0.05	0.519	0.531	
T336	LTE B7	QPSK20M	21350	50	0	Rear Face	1	1	20.5	20.40	0.06	0.821	0.840	
T337	LTE B7	QPSK20M	21350	50	0	Left Side	1	1	20.5	20.40	0.01	0.215	0.220	
T338	LTE B7	QPSK20M	21350	50	0	Right Side	1	1	20.5	20.40	0.03	0.207	0.212	
T339	LTE B7	QPSK20M	21350	50	0	Bottom Side	1	1	20.5	20.40	-0.09	0.999	1.022	
T340	LTE B7	QPSK20M	20850	1	0	Rear Face	1	1	21	20.98	-0.05	1.010	1.015	
T341	LTE B7	QPSK20M	21350	1	0	Rear Face	1	1	21	20.94	0.06	1.060	1.075	

T342	LTE B7	QPSK20M	20850	1	0	Bottom Side	1	1	21	20.98	0.04	1.060	1.065	LUA-L03
T343	LTE B7	QPSK20M	21350	1	0	Bottom Side	1	1	21	20.94	-0.09	1.040	1.054	
T344	LTE B7	QPSK20M	20850	50	0	Rear Face	1	1	20.5	20.34	-0.05	1.030	1.069	
T345	LTE B7	QPSK20M	21100	50	0	Rear Face	1	1	20.5	20.38	-0.02	0.895	0.920	
T346	LTE B7	QPSK20M	20850	50	0	Bottom Side	1	1	20.5	20.34	-0.03	0.992	1.029	
T347	LTE B7	QPSK20M	21100	50	0	Bottom Side	1	1	20.5	20.38	-0.04	0.972	0.999	
T348	LTE B7	QPSK20M	21100	1	0	Rear Face	1	2	21	20.99	0.04	1.270	1.273	
T349	LTE B7	QPSK20M	21100	1	0	Rear Face	1	3	21	20.99	-0.09	1.250	1.253	
T350	LTE B7	QPSK20M	21100	1	0	Rear Face	1	4	21	20.99	0.02	1.290	1.293	
T351	LTE B7	QPSK20M	20850	100	0	Rear Face	1	1	20.5	20.37	-0.05	0.997	1.027	
T352	LTE B7	QPSK20M	21100	1	0	Rear Face(1st Repeated)	1	1	21	20.99	0.04	1.320	1.323	LUA-L23
T385	LTE B7	QPSK20M	21100	1	0	Rear Face	1	1	21	20.99	0.04	1.19	1.193	

3. Hotspot SAR test results of WIFI


Test No.	Band	CH	Test Position with 10mm	Battery	Tune up	Measured	Drift(dB)	Peak SAR of Area Scan(W/kg)	SAR Value (W/kg)1-g	Reported SAR	Test Sample
T415	802.11b	6	Front Face	1	17	16.92	-0.02	0.151	0.140	0.143	LUA-L03
T416	802.11b	6	Rear Face	1	17	16.92	0.01	0.179	0.178	0.181	
T417	802.11b	6	Left Side	1	17	16.92	0.03	0.120	0.118	0.120	
T419	802.11b	6	Top Side	1	17	16.92	-0.02	0.033	0.029	0.030	
T420	802.11b	6	Rear Face	2	17	16.92	-0.06	0.175	0.164	0.167	
T421	802.11b	6	Rear Face	3	17	16.92	0.07	0.172	0.161	0.164	
T422	802.11b	6	Rear Face	4	17	16.92	-0.01	0.176	0.165	0.168	
T425	802.11b	6	Rear Face	1	17	16.92	0.01	0.177	0.173	0.180	LUA-L23

Note: Per KDB248227D01, the highest SAR measured for the initial test position or initial test configuration should be used to determine SAR test exclusion according to the sum of 1-g SAR and SAR peak to location ratio provisions in KDB 447498. In addition, a test lab may also choose to perform standalone SAR measurements for test positions and 802.11 configurations that are not required by the initial test position or initial test configuration procedures and apply the results to determine simultaneous transmission SAR test exclusion, according to sum of 1-g and SAR peak to location ratio requirements to reduce the number of simultaneous transmission SAR measurements.

8.3 MULTIPLE TRANSMITTER EVALUATION

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v06. The size of the mobile phone is 132.7mm (length)X65.2mm (width).

The location of the antennas inside mobile phone is shown as below picture:

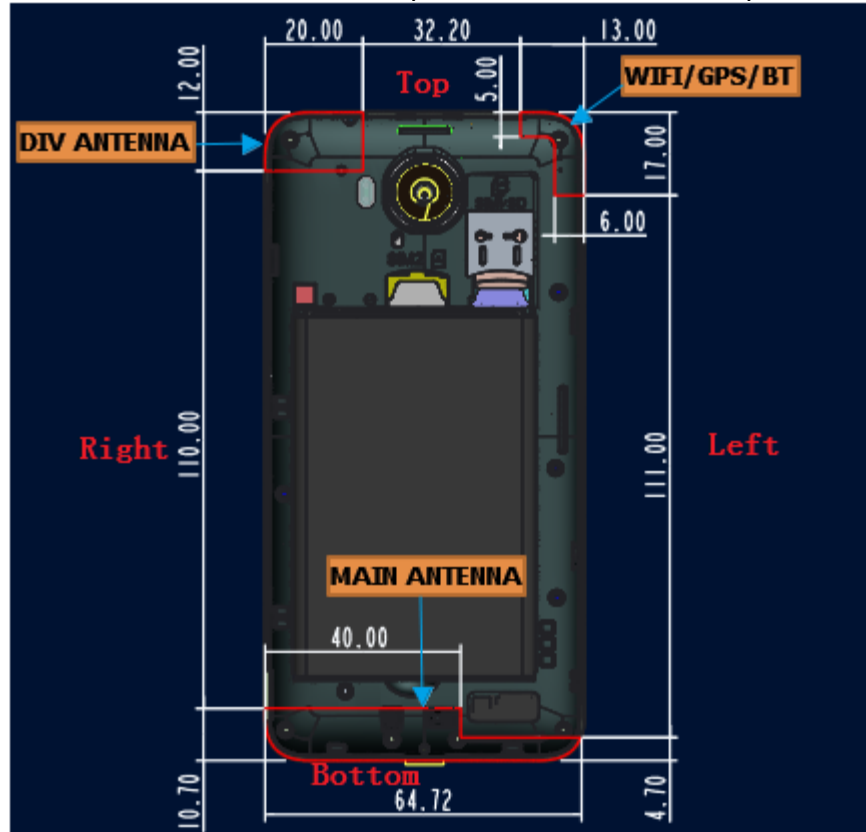

Note:

1. The Div antenna is used to improve the acceptance of performance of the main antenna, it does not have a transmitter function.
2. The equipment under test(EUT) is a Dual-SIM-Card Mobile Phone. SIM1 supports 2G/3G/LTE, and SIM2 only supports 2G.

8.3.1 STAND-ALONE SAR TEST EXCLUSION

Per FCC KDB 447498D01v06, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Standalone SAR test exclusion for BT

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
BT	Body- Worn	8	6.31	15	2.48	0.66	3	Yes

Note:

- 1)* - maximum possible output power declared by manufacturer
- 2) Held to ear configurations are not applicable to Bluetooth for this device.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances ≤ 50 mm, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

According to KDB 447498 D01, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR was estimated according to following formula to result in substantially conservative SAR values of $\leq 0.4 \text{ W/Kg}$ to determine simultaneous transmission SAR test exclusion.

$$\text{Estimated SAR} = \frac{\text{Max. Tune up Power}_{(\text{mW})}}{\text{Min. Test Separation Distance}_{(\text{mm})}} \times \frac{\sqrt{f_{(\text{GHz})}}}{7.5}$$

Estimated SAR calculation

Mode	Position	$P_{\max}$ (dBm)*	$P_{\max}$ (mW)	Distance (mm)	f (GHz)	X	Estimated SAR (W/Kg)*
BT	Front	8	6.31	15	2.48	7.5	0.088
	Rear	8	6.31	15	2.48	7.5	0.088
GSM850/ 1900	Top Side			> 50			0.4
WCDMA Band 2/4/5	Top Side			> 50			0.4
LTE Band 2/4/5/7	Top Side			> 50			0.4
2.4GWiFi	Right Side			> 50			0.4
	Bottom Side			> 50			0.4

Note: * - maximum possible output power declared by manufacturer

8.3.2 STAND-ALONE SAR TEST EXCLUSION

Per FCC KDB 447498D01v06, SAR compliance for simultaneous transmission must be considered when the maximum duration of overlapping transmissions, including network hand-offs, is greater than 30 seconds. This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis.

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Head	Body-worn	Hotspot
1	GSM (Voice) + WiFi 2.4G	Yes	Yes	N/A
2	GPRS/EDGE (DATA) + WiFi 2.4G	N/A	N/A	Yes
3	GSM(Voice) +BT	N/A	Yes	N/A
4	GPRS/EDGE(DATA)+BT	N/A	N/A	N/A
5	WCDMA(Voice)+WiFi 2.4G	Yes	Yes	N/A
6	WCDMA(DATA)+WiFi 2.4G	N/A	Yes	Yes
7	WCDMA(Voice)+BT	N/A	Yes	N/A
8	WCDMA(DATA)+BT	N/A	Yes	N/A
9	LTE(DATA)+WiFi 2.4G	Yes*	Yes*	Yes
10	LTE(DATA)+BT	N/A	Yes*	N/A

Note:

- i)* VOIP 3rd party applications may possibly be installed and used by the end user.
- ii) Wi-Fi 2.4G and Bluetooth share the same antenna and can't transmit simultaneously.
- iii) 2G&3G&4G share the same antenna and can't transmit simultaneously.
- iv) The device does not support DTM function.
- v) Held to ear configurations are not applicable to Bluetooth and therefore were not considered for simultaneous transmission.

8.3.3 SAR SUMMATION SCENARIO

About BT/ WiFi and GSM/WCDMA/LTE antenna

Test Position Reported SAR _{1g}	Head				Body-Worn		Hotspot					
	Right Cheek	Right Tilted	Left Cheek	Left Tilted	Front	Rear	Front	Rear	Left	Right	Top	Bottom
GSM850	0.369	0.360	0.386	0.332	0.442	0.554	0.785	1.061	0.758	0.702	0.400	0.083
GSM1900	0.327	0.265	0.442	0.273	0.258	0.224	0.562	0.735	0.371	0.300	0.400	0.490
WCDMA B2	0.499	0.474	0.680	0.451	0.407	0.390	0.591	0.622	0.383	0.371	0.400	0.529
WCDMA B4	0.538	0.455	0.755	0.413	0.504	0.584	0.990	1.169	0.388	0.363	0.400	1.091
WCDMA B5	0.351	0.309	0.368	0.316	0.409	0.511	0.439	0.596	0.412	0.369	0.400	0.038
LTE B2	0.480	0.380	0.664	0.384	0.399	0.357	0.595	0.600	0.343	0.322	0.400	0.508
LTE B4	0.476	0.385	0.613	0.349	0.530	0.581	0.766	0.990	0.355	0.359	0.400	1.042
LTE B5	0.383	0.335	0.440	0.314	0.478	0.596	0.565	0.666	0.432	0.377	0.400	0.049
LTE B7	0.123	0.116	0.167	0.091	0.285	0.608	0.682	1.343	0.240	0.212	0.400	1.072
BT	-	-	-	-	0.088	0.088	-	-	-	-	-	-
WiFi 2.4G	0.984	0.517	0.507	0.629	0.084	0.091	0.143	0.181	0.120	0.400	0.030	0.400
MAX Σ SAR _{1g}	1.522	0.991	1.262	1.080	0.618	0.699	1.133	1.524	0.878	1.102	0.430	1.491

MAX. Σ SAR_{1g}=1.524W/Kg<1.6 W/Kg,so the SAR to peak location separation ratio should not be considered.

APPENDIX


1. Test Layout

Specific Absorption Rate Test Layout



Liquid depth in the flat Phantom ($\geq 15\text{cm}$ depth)


Body(835MHz)

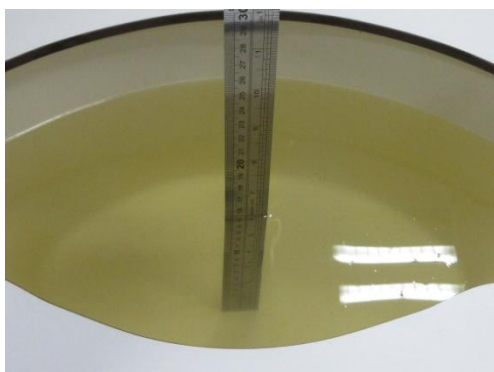

Head(835MHz)




Body(1750MHz)

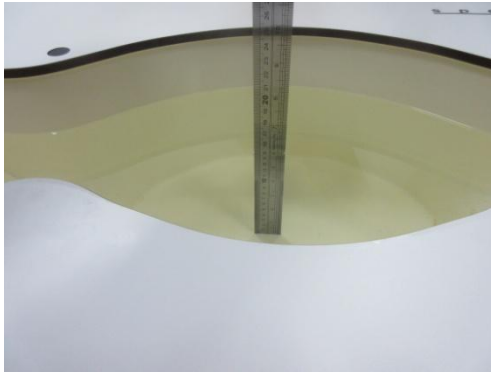

Head(1750MHz)



Body(1900MHz~2600 MHz)

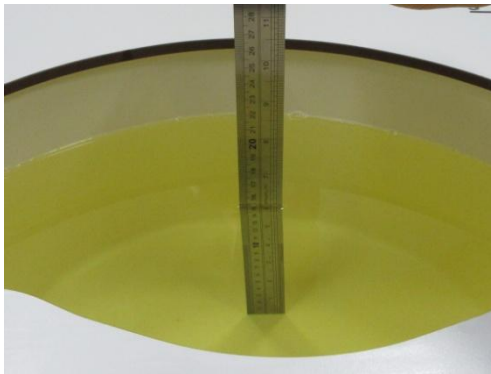

Head (1900MHz~2600 MHz)





Appendix A. SAR Plots of System Verification

The plots for system verification with largest deviation for each SAR system combination are shown as follows.



Appendix B. SAR Plots of SAR Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination are shown as follows.



Appendix C. Calibration Certificate for Probe and Dipole

The SPEAG calibration certificates are shown as follows.

Appendix D. Photographs of the Test Set-Up

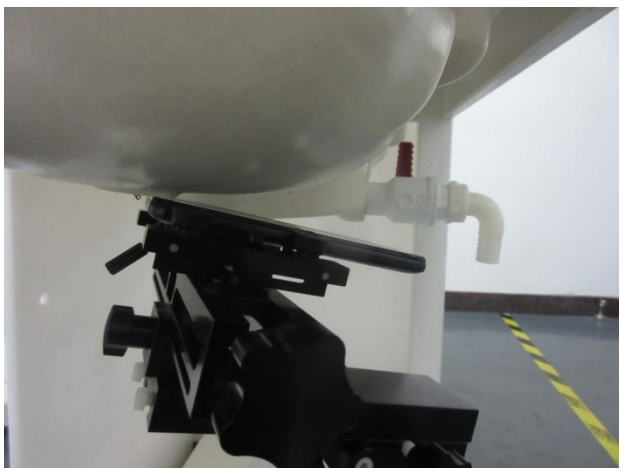
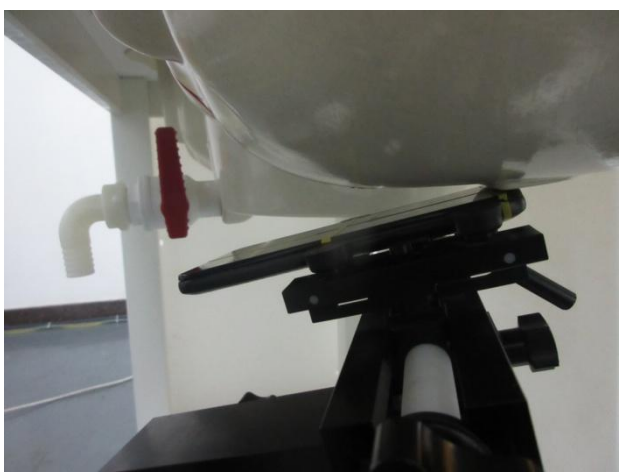
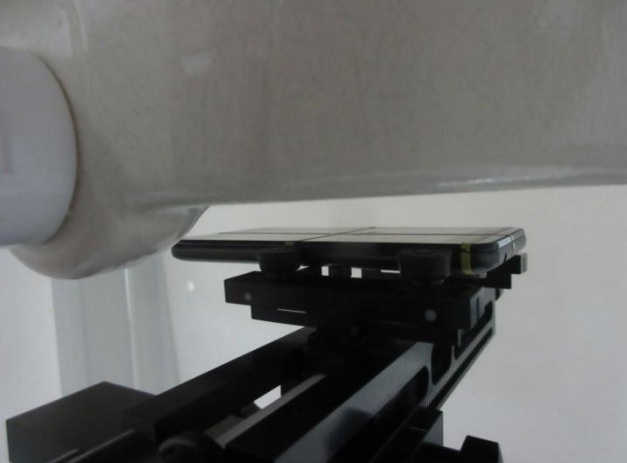
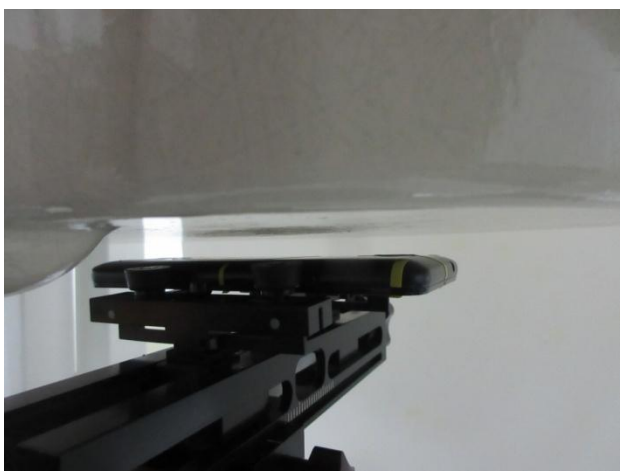
Photo 1: Right Cheek	Photo 2: Right Tilted
	
Photo 3: Left Cheek	Photo 4: Left Tilted
	
Photo 5: Front Face_15mm	Photo 6: Rear Face_15mm
	

Photo 7: Front Face_10mm	Photo 8: Rear Face_10mm
	
Photo 9: Left Side_10mm	Photo 10: Right Side_10mm
	
Photo 9: Top Side_10mm	Photo 10: Left Side_10mm
	