

D CARE AND WARNING

WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/panel PC technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.



Correct Disposal of this product. This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

The power consumption of the product in networked standby is 5.7W which all wired network ports are connected and all wireless network ports are activated.

FCC & CE RF Radiation Exposure Statement Caution: To maintain compliance with the FCC & CE's RF exposure guidelines, place the product at least 20cm from near by persons.

- Replacement of a battery with an incorrect type that can defeat a safeguard (for example, in the case of some lithium battery types);
- Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;
- Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas;
- A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas



CAUTION

Risk of explosion if the battery is replaced by an incorrect type
Wait one-half hour after switching off before handling parts

Power Adapter information:

Model No.: ADS-25D-12 12018E

Manufacturer Name: SHENZHEN HONOR ELECTRONIC CO.,LTD

INPUT: 100-240V~50/60Hz 0.7A

OUTPUT: 12V = 1.5A

NOTE: Operating Temperature: 0~40°C



99SP1001.000


AUO Display Plus America Corp.
35 Corporate Drive, Suite 170, B
urlington, MA 01803, USA
+1-781-362-4757

Quick Start Guide

This quick guide will help you go through installation quickly

Panel PC ADP-1050-H


PN10ETA01.0

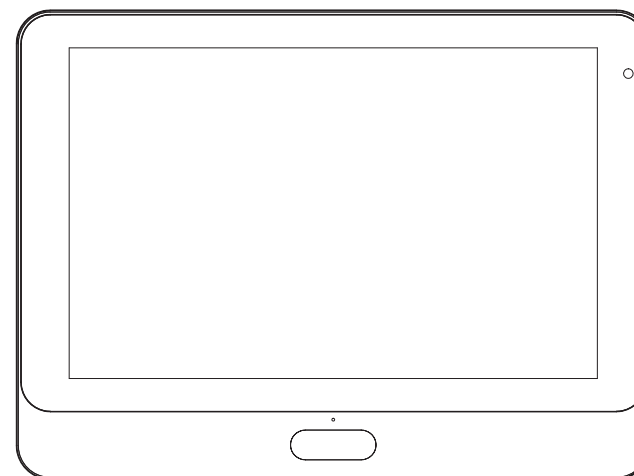


A Contents





Panel PC



Quick Start Guide




DC Power Adapter



Bracket



Tape




I/O Cover



Set screw *2

B Indication

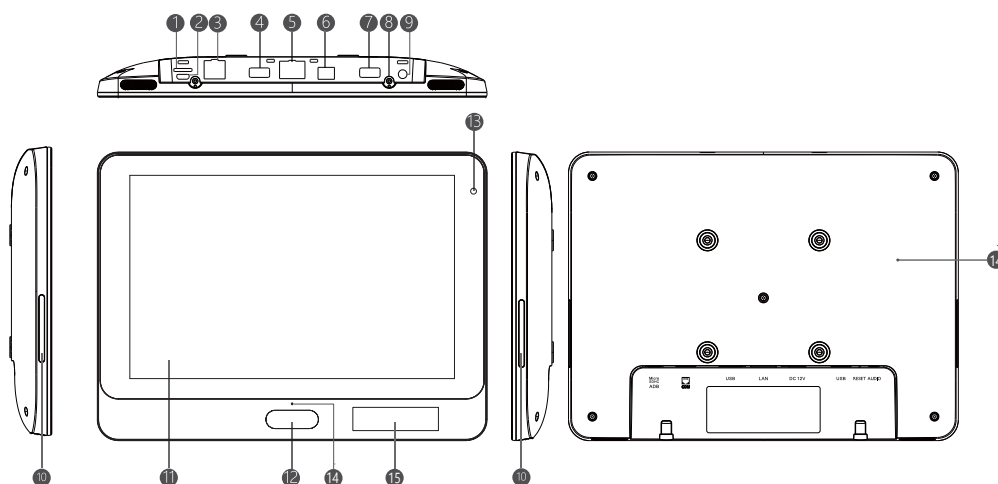

- ① Micro SDHC
- ② ADB
- ③ COM
- ④ USB
- ⑤ LAN (PoE+)


- ⑥ DC 12V
- ⑦ USB
- ⑧ Reset
- ⑨ Audio Out
- ⑩ Side indicator light bar

- ⑪ Display
- ⑫ Front indicator light bar
- ⑬ Camera
- ⑭ MIC
- ⑮ NFC

C Installation


1. Cables connection

Step 1

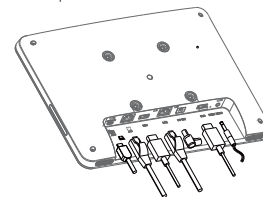


Cables connection

Step 2



I/O Cover Installation


Step 3



Fix the set screw to secure the I/O cover


2. Tape Mount

Step 1




Attach tape on the back of bracket

Step 2




Place the bracket on the back side of the panel PC

Step 3



Fasten the set screw to secure the bracket and I/O cover


Step 4



Fix the Panel PC on the surface via using tape


3. Surface Mount

Step 1




Install bracket on surface

Step 2



Assembly the Panel PC on the bracket

Step 3



Fasten the set screw to secure the bracket and I/O cover

D Notices

- * This panel PC is also compatible with VESA mounting 75mmx75mm and recommend to use M4 screws to lock. The suggested length of the M4 screw is that the thickness of VESA mounting bracket plus 8mm.
- * Please ensure the mounting surface is clean and smooth before using the tape.
- * Screw Torque < 2 kgf-cm
- * Installation height: < 2 m