

FCC Test Report

FCC ID: QISLUA-U03

Project No. : 1601C017D
Equipment : WCDMA Mobile Phone
Model Name : HUAWEI LUA-U03
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Mar. 01, 2016
Date of Test : Mar. 01, 2016 ~ Mar. 16, 2016
Issued Date : Mar. 18, 2016
Tested by : BTL Inc.

Testing Engineer : Pike Lee
(Pike Lee)

Technical Manager : Jeff Yang
(Jeff Yang)

Authorized Signatory : Andy Chiu
(Andy Chiu)

B T L I N C .

B1, No. 37, Lane 365, Yang-Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



Testing Laboratory
0659

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	15
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)	18
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	18
5 . MEASUREMENT INSTRUMENTS LIST	19
6 . EUT TEST PHOTO	20
ATTACHMENT A - CONDUCTED EMISSION	26
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	49
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	72

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1601C017D	Original Issue.	Mar. 18, 2016

1. CERTIFICATION

Equipment : WCDMA Mobile Phone
Brand Name : HUAWEI
Model Name : HUAWEI LUA-U03
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen
518129, P.R.China
Date of Test : Mar. 01, 2016 ~ Mar. 16, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1601C017D) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE (2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is 2480MHz which exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of 1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.).

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
C05	CISPR	150 KHz~30MHz	2.04

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
CB11 (3m)	CISPR	30MHz ~ 200MHz	V	3.06
		30MHz ~ 200MHz	H	2.58
		200MHz ~ 1,000MHz	V	3.50
		200MHz ~ 1,000MHz	H	3.10

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
CB11 (3m)	CISPR	1GHz ~ 6GHz	V	4.14
		1GHz ~ 6GHz	H	4.14
		6GHz ~ 18GHz	V	5.34
		6GHz ~ 18GHz	H	5.34

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	WCDMA Mobile Phone
Brand Name	HUAWEI
Model Name	HUAWEI LUA-U03
Model Difference	N/A
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) HUIZHOU BYD ELECTRONIC CO., LTD. (2) Shenzhen Huntkey Electric Co., Ltd. (3) DONG GUAN PHITEK ELECTRONICS CO., LTD. Model: HW-050100U01 #2 Supplied from battery.
Power Rating	#1 I/P: 100V~240V~ 50/60 Hz,0.1A O/P: 5V $\overline{=}$ 1A #2 DC 3.8V
HW Version	VER.A
SW Version	LUA-U23C00B001

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2.

Item	Mfr/Brand	Model.
USB Cable	HONGLIN TECHNOLOGY CO.,LTD.	130-26654
	FOXCONN	CUBB01M-HC208-DH
Earphone	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	MEMD1632B580A00
	BOLUO COUNTY QUANCHENG ELECTRONIC	1311-3291-3.5mm-178
	GOERTEK INC.	HA1-3
	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	MEMD1532B528000
Battery	BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD.	1293#+3283# 3.5MM-150
	Tianjin Lishen Battery Joint-Stock Co.,Ltd.	HB505076RBC
	BYD LITHIUM BATTERY Co., LTD.	
	Sunwoda Electronic Co., LTD	
SCUD (FUJIAN) Electronics Co., Ltd		

3.

TX Frequency	GSM 850: 824MHz to 849MHz GSM 1900: 1850MHz to 1910MHz WCDMA Band 2: 1850MHz to 1910MHz WCDMA Band 5: 824MHz ~ 849MHz BT/WIFI: 2400MHz ~ 2483.5MHz
RX Frequency	GSM 850: 869MHz to 894MHz GSM 1900: 1930MHz to 1990MHz WCDMA Band 2: 1930MHz to 1990MHz WCDMA Band 5: 869MHz ~ 894MHz BT/WIFI: 2400MHz ~ 2483.5MHz GPS: 1575.42 MHz

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Mode 2	Adapter+Idle+BT+wifi+Gps+playing+speaker
Mode 3	Adapter+Idle+BT+wifi+Gps+Camera on
Mode 4	Adapter+GSM+BT+wifi+Gps
Mode 5	Adapter+WCDMA+BT+wifi+Gps
Mode 6	USB copy(EUT with PC)+BT+WIFI+GPS


The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Mode 2	Adapter+Idle+BT+wifi+Gps+playing+speaker
Mode 3	Adapter+Idle+BT+wifi+Gps+Camera on
Mode 4	Adapter+GSM+BT+wifi+Gps
Mode 5	Adapter+WCDMA+BT+wifi+Gps
Mode 6	USB copy(EUT with PC)+BT+WIFI+GPS


For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Mode 2	Adapter+Idle+BT+wifi+Gps+playing+speaker
Mode 3	Adapter+Idle+BT+wifi+Gps+Camera on
Mode 4	Adapter+GSM+BT+wifi+Gps
Mode 5	Adapter+WCDMA+BT+wifi+Gps
Mode 6	USB copy(EUT with PC)+BT+WIFI+GPS

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Mode 1-5

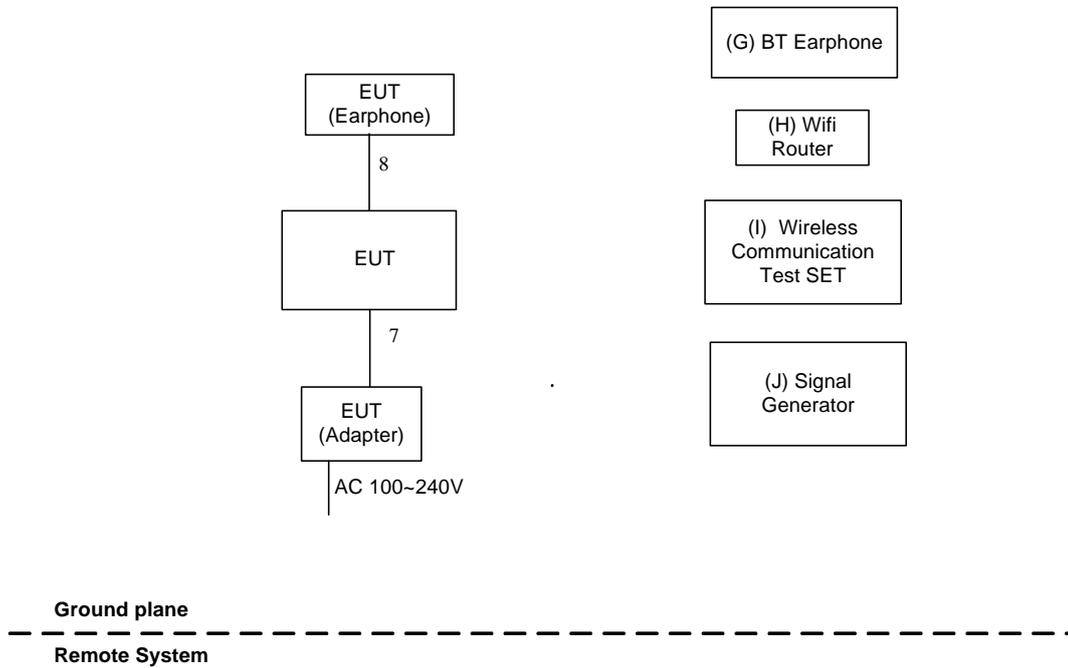

Mode 6

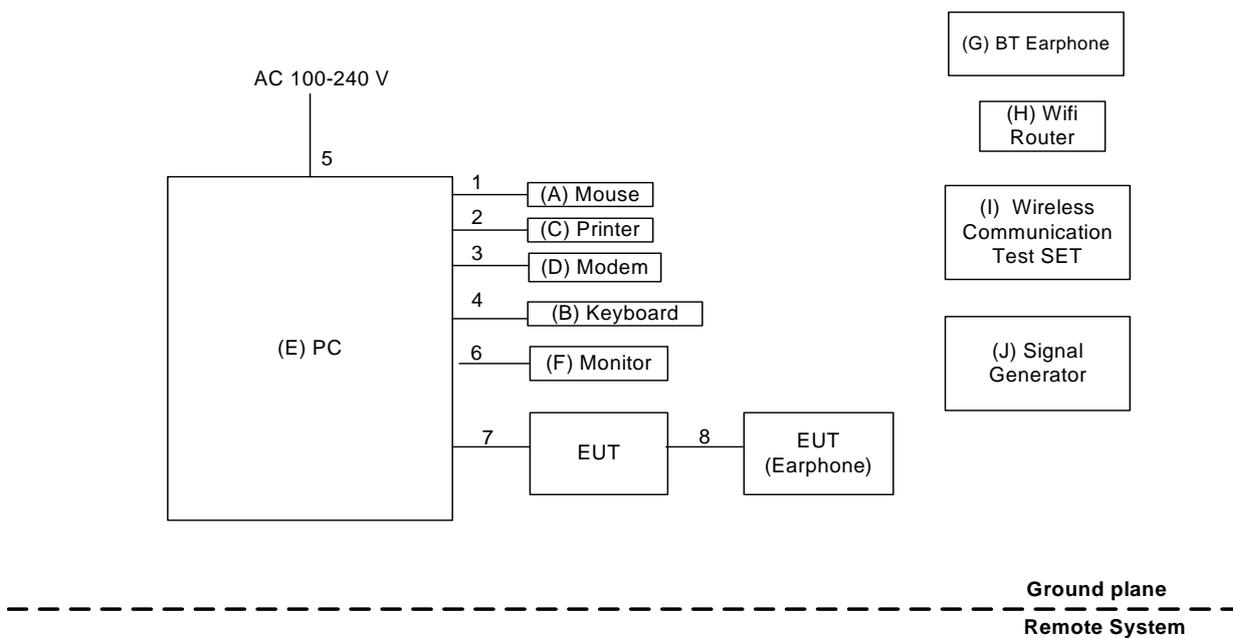

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB mouse	DELL	MS111-P	DOC	CN011D3V71581279 OLOT
B	USB keyboard	DELL	KB212-B	DOC	CN0HTXH97158125 004DXA01
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	PC	DELL	DCSM 745	DOC	G7K832X
F	LCD monitor	DELL	E177FPc	DOC	CNOFJ179-64180-6 AG-1WNS
G	BT Earphone	N/A	N/A	N/A	N/A
H	Router	TP-LINK	TL-WR1041N	DOC	N/A
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183
J	Signal Generator	Agilent	E4438C	N/A	MY49071316

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.2m	Earphone Cable

Note:

(1) For detachable type I/O cable should be specified the length m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value – Limit Value


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

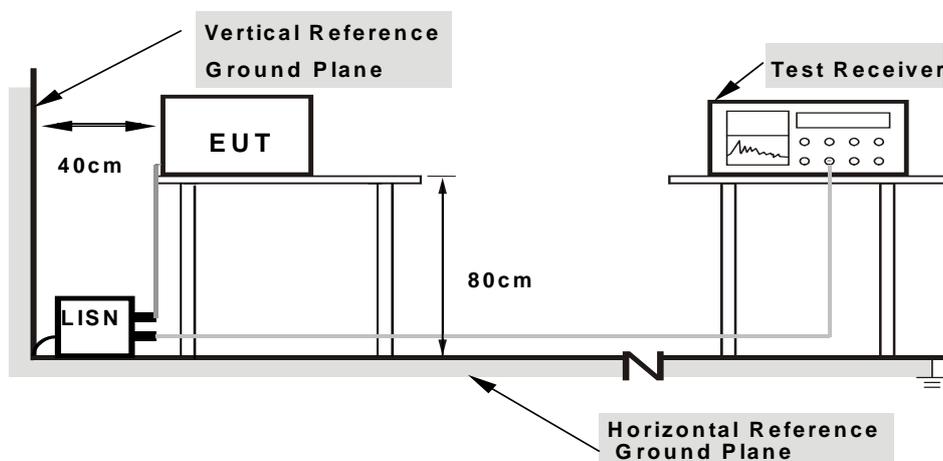

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 25°C Relative Humidity: 53%

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

CISPR 22 or CAN/CSA-CISPR 22-10:

Frequency (MHz)	Class A (at 10m)		Class B (at 10m)	
	dBuV/m		dBuV/m	
30 - 230	40		30	
230 - 1000	47		37	

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

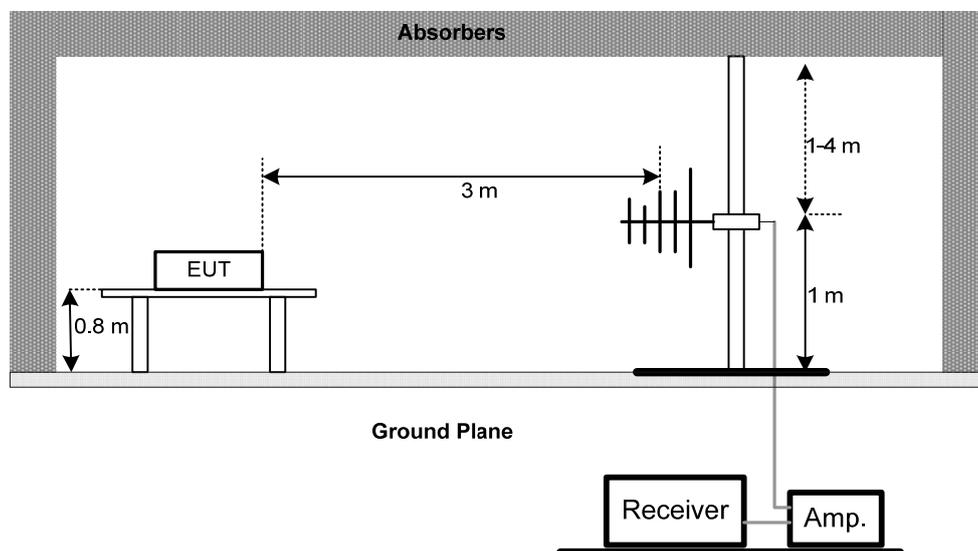

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

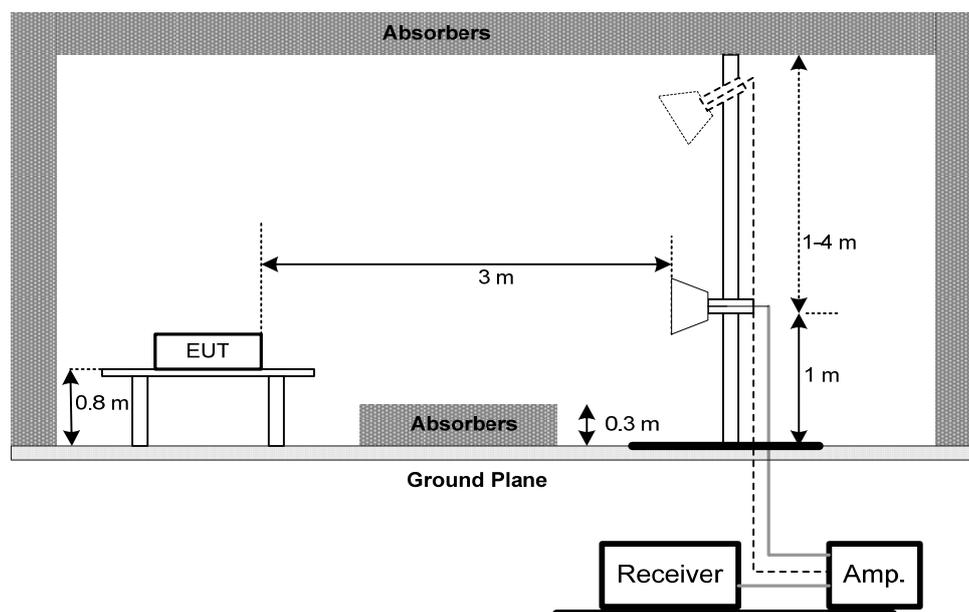

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment B.

Temperature: 21°C Relative Humidity: 51%

4.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C

Temperature: 22°C Relative Humidity: 56%

Remark :

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (2) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100087	Nov. 21, 2016
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2016
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A


Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-352	Jul. 08, 2016
2	Pre-Amplifier	Anritsu	MH648A	M92649	Apr. 16, 2016
3	Test Cable	TIMES	LMR-400	12M	May 12, 2016
4	Test Cable	TIMES	LMR-400	3M	May 12, 2016
5	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
6	Horn Antenna (1G)	Schwarzbeck	BBHA 9120 D	9120D-325	Jan. 10, 2017
7	Pre_Amplifier	Agilent	8449B	3008A01714	Apr. 14, 2016
8	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	1M	May 11, 2016
9	Microflex Cable	AISI	S104-SMAP-1	10M	May 13, 2016
10	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	3M	May 11, 2016
11	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 12, 2016
12	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK


Line

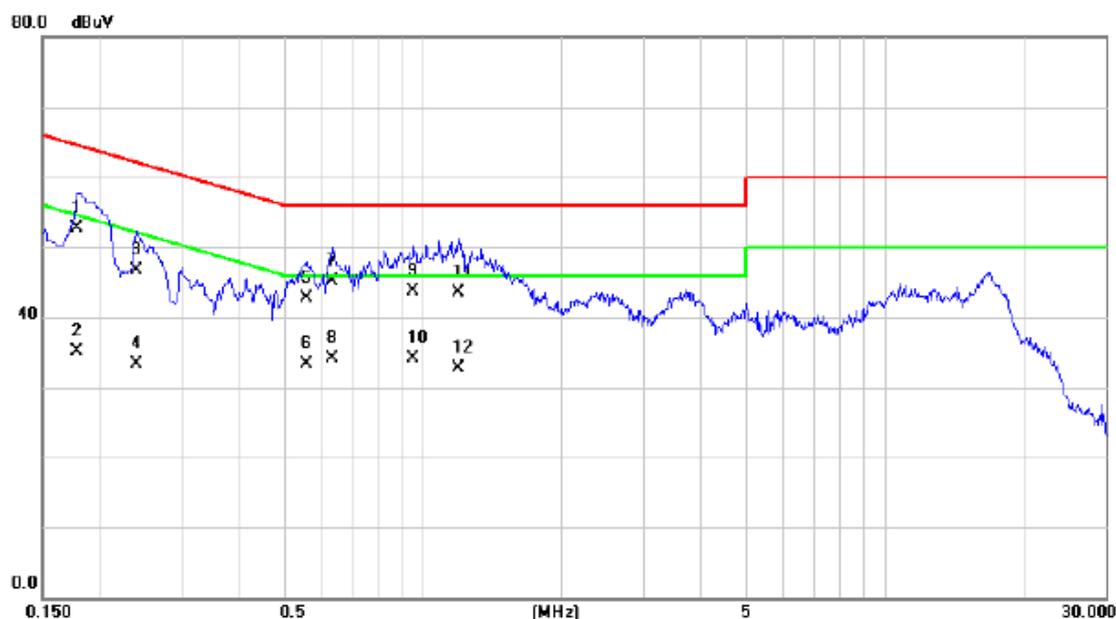

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1793	43.00	9.70	52.70	64.52	-11.82	QP	
2	X	0.1793	25.40	9.70	35.10	54.52	-19.42	AVG	
3		0.2400	37.00	9.73	46.73	62.10	-15.37	QP	
4	X	0.2400	23.60	9.73	33.33	52.10	-18.77	AVG	
5		0.5595	32.80	9.84	42.64	56.00	-13.36	QP	
6	X	0.5595	23.40	9.84	33.24	46.00	-12.76	AVG	
7	*	0.6382	35.20	9.87	45.07	56.00	-10.93	QP	
8	X	0.6382	24.30	9.87	34.17	46.00	-11.83	AVG	
9		0.9577	33.70	9.97	43.67	56.00	-12.33	QP	
10	X	0.9577	24.20	9.97	34.17	46.00	-11.83	AVG	
11		1.1962	33.50	10.02	43.52	56.00	-12.48	QP	
12	X	1.1962	22.60	10.02	32.62	46.00	-13.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK


Neutral

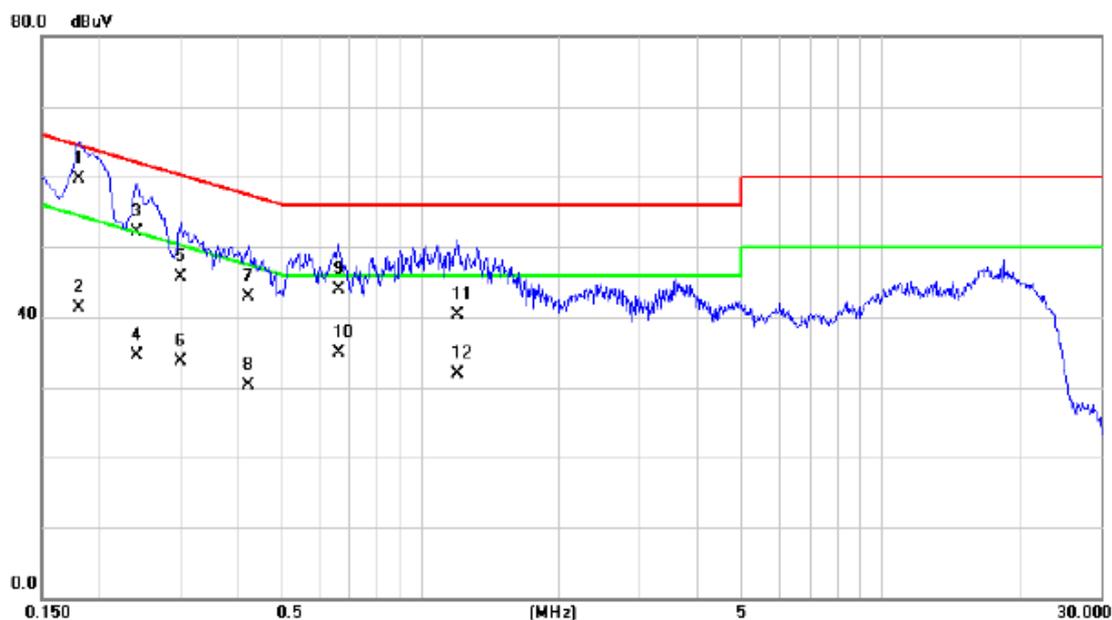

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1815	50.10	9.60	59.70	64.42	-4.72	QP	
2		0.1815	31.70	9.60	41.30	54.42	-13.12	AVG	
3		0.2423	42.40	9.62	52.02	62.02	-10.00	QP	
4		0.2423	24.90	9.62	34.52	52.02	-17.50	AVG	
5		0.3007	36.00	9.63	45.63	60.22	-14.59	QP	
6		0.3007	24.10	9.63	33.73	50.22	-16.49	AVG	
7		0.4222	33.30	9.63	42.93	57.40	-14.47	QP	
8		0.4222	20.60	9.63	30.23	47.40	-17.17	AVG	
9		0.6630	34.20	9.69	43.89	56.00	-12.11	QP	
10		0.6630	25.30	9.69	34.99	46.00	-11.01	AVG	
11		1.2075	30.60	9.80	40.40	56.00	-15.60	QP	
12		1.2075	22.20	9.80	32.00	46.00	-14.00	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Line

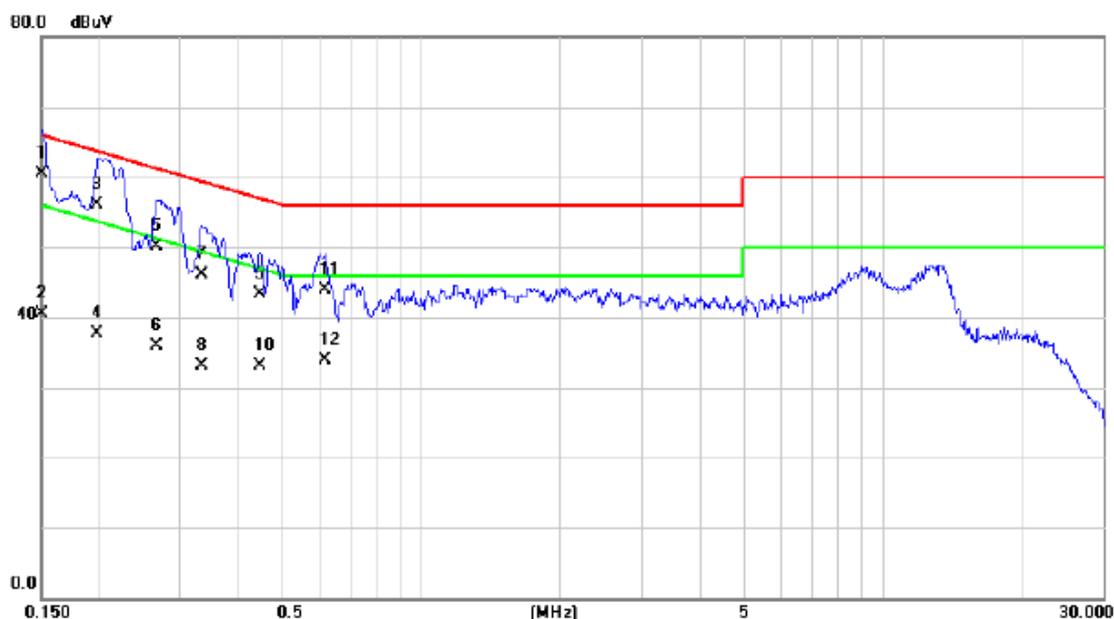

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1500	50.80	9.68	60.48	66.00	-5.52	QP	
2		0.1500	30.80	9.68	40.48	56.00	-15.52	AVG	
3		0.1995	46.30	9.71	56.01	63.63	-7.62	QP	
4		0.1995	27.90	9.71	37.61	53.63	-16.02	AVG	
5		0.2670	40.30	9.74	50.04	61.21	-11.17	QP	
6		0.2670	26.10	9.74	35.84	51.21	-15.37	AVG	
7		0.3345	36.40	9.77	46.17	59.34	-13.17	QP	
8		0.3345	23.30	9.77	33.07	49.34	-16.27	AVG	
9		0.4470	33.40	9.81	43.21	56.93	-13.72	QP	
10		0.4470	23.30	9.81	33.11	46.93	-13.82	AVG	
11		0.6180	34.10	9.87	43.97	56.00	-12.03	QP	
12		0.6180	24.00	9.87	33.87	46.00	-12.13	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1632B580A00


Neutral

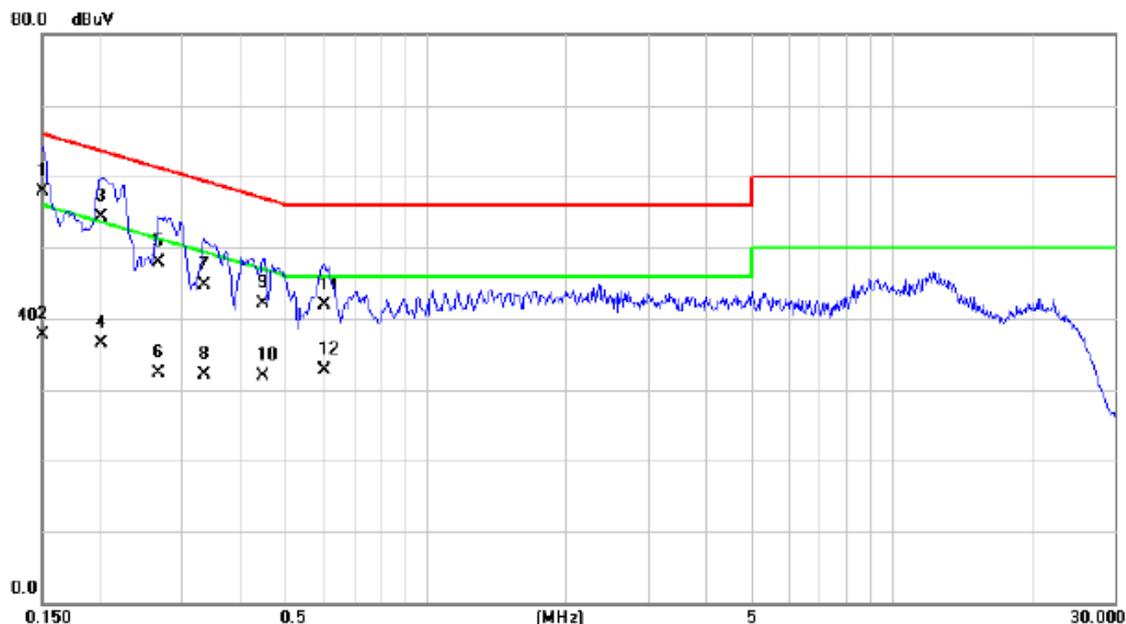

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	48.40	9.60	58.00	66.00	-8.00	QP	
2		0.1500	28.20	9.60	37.80	56.00	-18.20	AVG	
3		0.2017	44.60	9.61	54.21	63.54	-9.33	QP	
4		0.2017	26.80	9.61	36.41	53.54	-17.13	AVG	
5		0.2670	38.30	9.62	47.92	61.21	-13.29	QP	
6		0.2670	22.60	9.62	32.22	51.21	-18.99	AVG	
7		0.3345	35.00	9.63	44.63	59.34	-14.71	QP	
8		0.3345	22.40	9.63	32.03	49.34	-17.31	AVG	
9		0.4470	32.40	9.64	42.04	56.93	-14.89	QP	
10		0.4470	22.20	9.64	31.84	46.93	-15.09	AVG	
11		0.6045	32.30	9.68	41.98	56.00	-14.02	QP	
12		0.6045	23.10	9.68	32.78	46.00	-13.22	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


Line

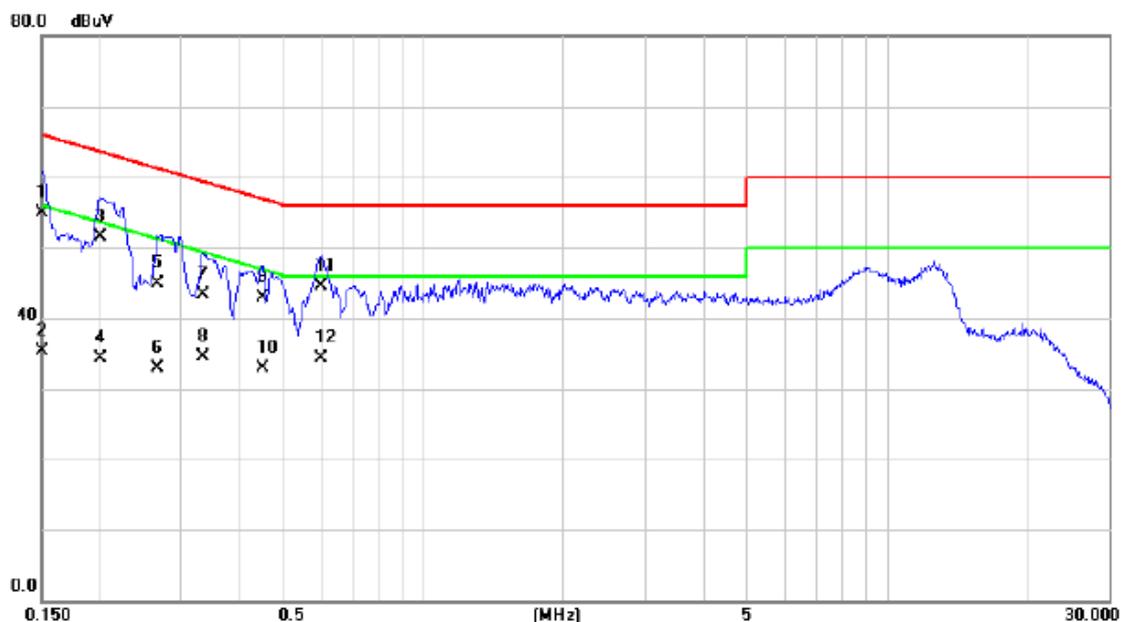

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1500	45.20	9.68	54.88	66.00	-11.12	QP	
2		0.1500	25.60	9.68	35.28	56.00	-20.72	AVG	
3		0.2017	41.70	9.71	51.41	63.54	-12.13	QP	
4		0.2017	24.50	9.71	34.21	53.54	-19.33	AVG	
5		0.2714	35.10	9.74	44.84	61.07	-16.23	QP	
6		0.2714	23.20	9.74	32.94	51.07	-18.13	AVG	
7		0.3345	33.50	9.77	43.27	59.34	-16.07	QP	
8		0.3345	24.80	9.77	34.57	49.34	-14.77	AVG	
9		0.4492	33.10	9.81	42.91	56.89	-13.98	QP	
10		0.4492	23.10	9.81	32.91	46.89	-13.98	AVG	
11		0.6022	34.60	9.86	44.46	56.00	-11.54	QP	
12		0.6022	24.40	9.86	34.26	46.00	-11.74	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


Neutral

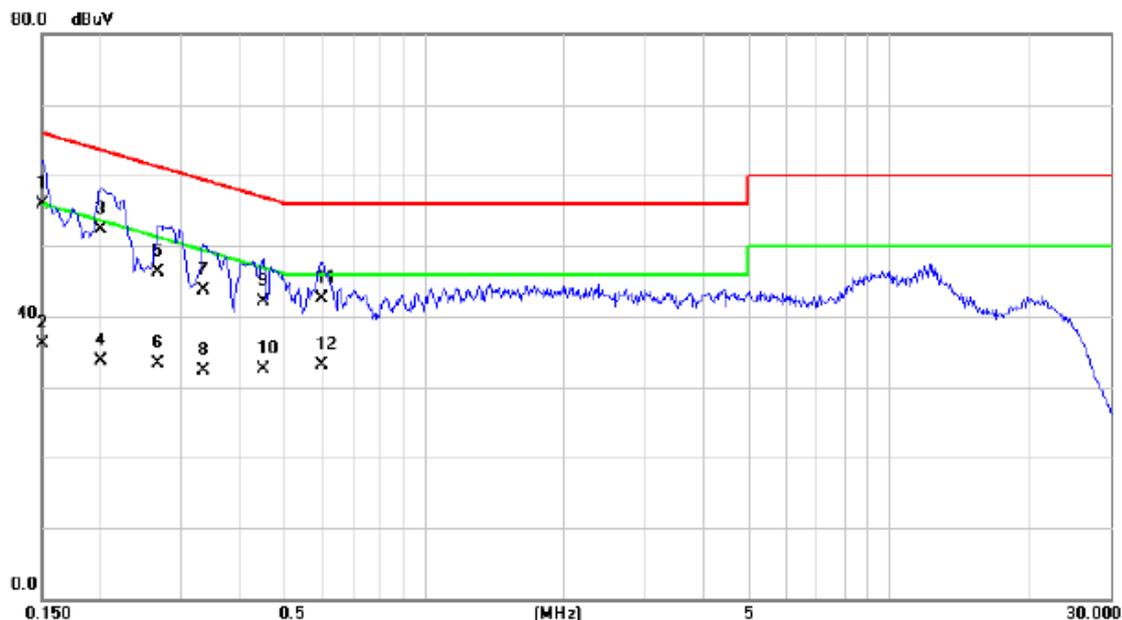

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	46.30	9.60	55.90	66.00	-10.10	QP	
2		0.1500	26.50	9.60	36.10	56.00	-19.90	AVG	
3		0.2017	42.70	9.61	52.31	63.54	-11.23	QP	
4		0.2017	24.10	9.61	33.71	53.54	-19.83	AVG	
5		0.2670	36.60	9.62	46.22	61.21	-14.99	QP	
6		0.2670	23.70	9.62	33.32	51.21	-17.89	AVG	
7		0.3345	34.10	9.63	43.73	59.34	-15.61	QP	
8		0.3345	22.60	9.63	32.23	49.34	-17.11	AVG	
9		0.4492	32.50	9.64	42.14	56.89	-14.75	QP	
10		0.4492	22.90	9.64	32.54	46.89	-14.35	AVG	
11		0.6022	32.90	9.68	42.58	56.00	-13.42	QP	
12		0.6022	23.40	9.68	33.08	46.00	-12.92	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: Lianchuang / MEMD1532B528000


Line

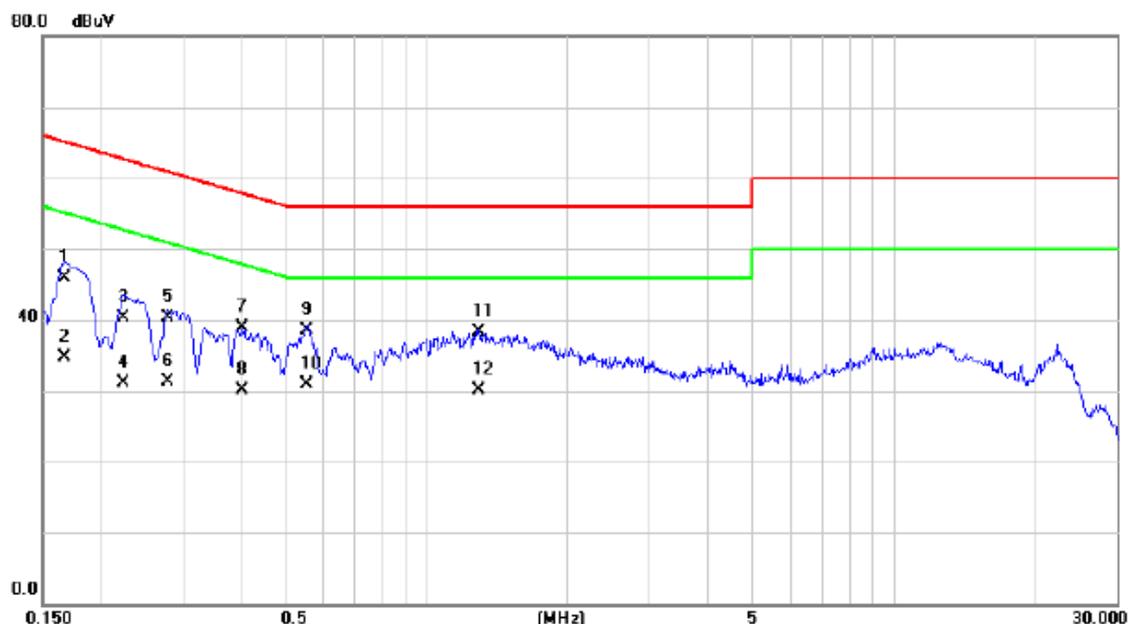

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1680	36.24	9.69	45.93	65.06	-19.13	QP	
2		0.1680	25.10	9.69	34.79	55.06	-20.27	AVG	
3		0.2243	30.60	9.72	40.32	62.66	-22.34	QP	
4		0.2243	21.30	9.72	31.02	52.66	-21.64	AVG	
5		0.2782	30.60	9.75	40.35	60.87	-20.52	QP	
6		0.2782	21.50	9.75	31.25	50.87	-19.62	AVG	
7		0.4020	29.10	9.81	38.91	57.81	-18.90	QP	
8		0.4020	20.36	9.81	30.17	47.81	-17.64	AVG	
9		0.5550	28.70	9.84	38.54	56.00	-17.46	QP	
10	*	0.5550	21.03	9.84	30.87	46.00	-15.13	AVG	
11		1.2930	28.30	10.00	38.30	56.00	-17.70	QP	
12		1.2930	20.20	10.00	30.20	46.00	-15.80	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: BYD + Earphone: Lianchuang / MEMD1532B528000


Neutral

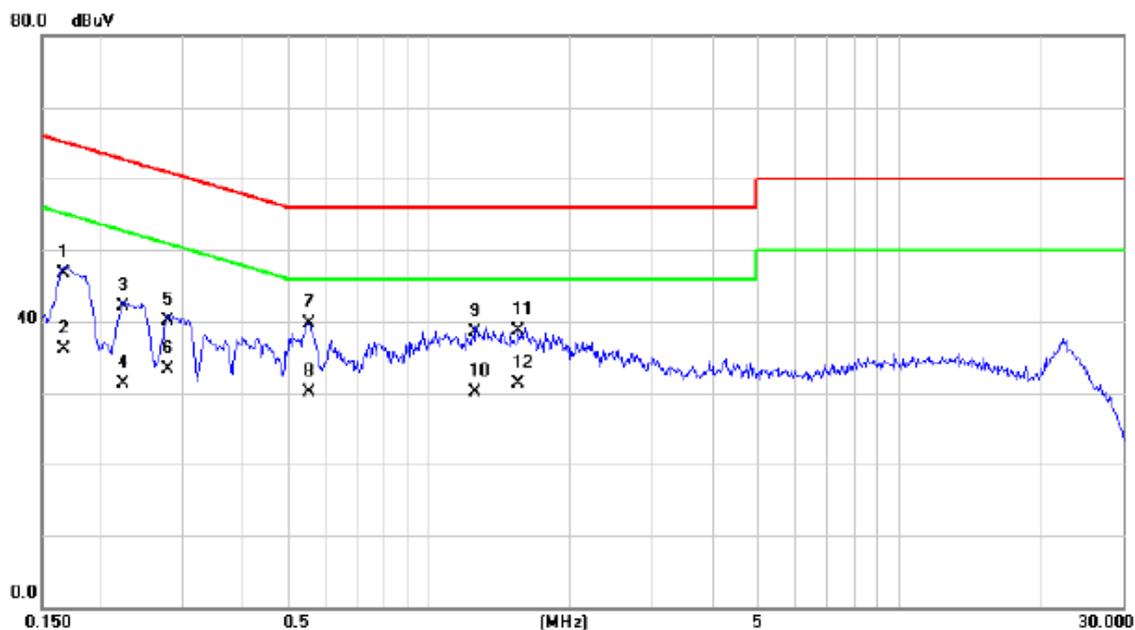

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1680	37.20	9.60	46.80	65.06	-18.26	QP	
2		0.1680	26.41	9.60	36.01	55.06	-19.05	AVG	
3		0.2243	32.40	9.61	42.01	62.66	-20.65	QP	
4		0.2243	21.60	9.61	31.21	52.66	-21.45	AVG	
5		0.2782	30.40	9.63	40.03	60.87	-20.84	QP	
6		0.2782	23.60	9.63	33.23	50.87	-17.64	AVG	
7		0.5571	30.00	9.67	39.67	56.00	-16.33	QP	
8		0.5571	20.40	9.67	30.07	46.00	-15.93	AVG	
9		1.2615	28.70	9.81	38.51	56.00	-17.49	QP	
10		1.2615	20.30	9.81	30.11	46.00	-15.89	AVG	
11		1.5494	28.90	9.83	38.73	56.00	-17.27	QP	
12	*	1.5494	21.50	9.83	31.33	46.00	-14.67	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Line

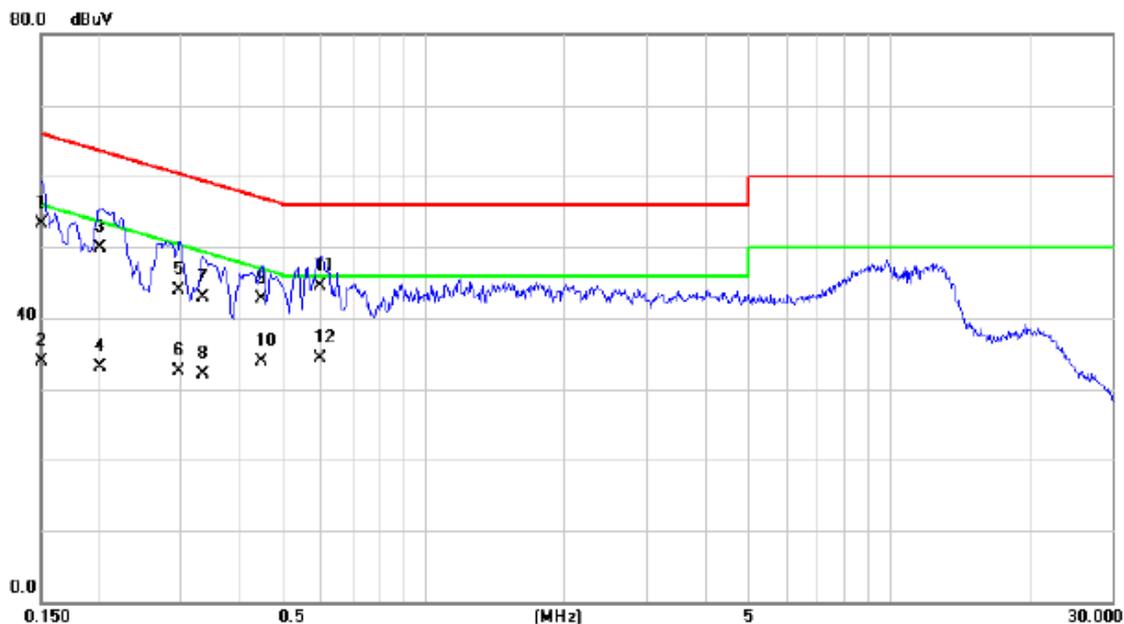

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	43.60	9.68	53.28	66.00	-12.72	QP	
2		0.1500	24.30	9.68	33.98	56.00	-22.02	AVG	
3		0.2017	40.24	9.71	49.95	63.54	-13.59	QP	
4		0.2017	23.35	9.71	33.06	53.54	-20.48	AVG	
5		0.2985	34.10	9.76	43.86	60.28	-16.42	QP	
6		0.2985	22.70	9.76	32.46	50.28	-17.82	AVG	
7		0.3345	33.20	9.77	42.97	59.34	-16.37	QP	
8		0.3345	22.30	9.77	32.07	49.34	-17.27	AVG	
9		0.4470	32.90	9.81	42.71	56.93	-14.22	QP	
10		0.4470	24.10	9.81	33.91	46.93	-13.02	AVG	
11	*	0.6000	34.70	9.86	44.56	56.00	-11.44	QP	
12		0.6000	24.50	9.86	34.36	46.00	-11.64	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Neutral

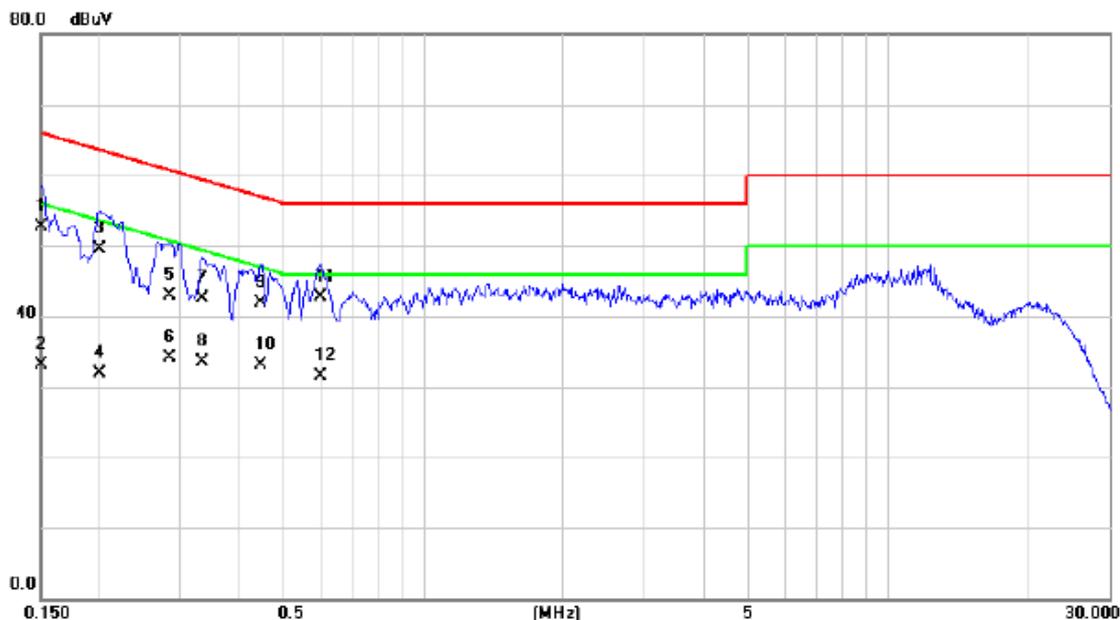

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1500	43.10	9.60	52.70	66.00	-13.30	QP	
2		0.1500	23.50	9.60	33.10	56.00	-22.90	AVG	
3		0.2017	39.80	9.61	49.41	63.54	-14.13	QP	
4		0.2017	22.30	9.61	31.91	53.54	-21.63	AVG	
5		0.2850	33.30	9.63	42.93	60.67	-17.74	QP	
6		0.2850	24.40	9.63	34.03	50.67	-16.64	AVG	
7		0.3345	32.90	9.63	42.53	59.34	-16.81	QP	
8		0.3345	23.80	9.63	33.43	49.34	-15.91	AVG	
9		0.4470	32.20	9.64	41.84	56.93	-15.09	QP	
10		0.4470	23.40	9.64	33.04	46.93	-13.89	AVG	
11		0.6022	33.00	9.68	42.68	56.00	-13.32	QP	
12		0.6022	21.90	9.68	31.58	46.00	-14.42	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Line

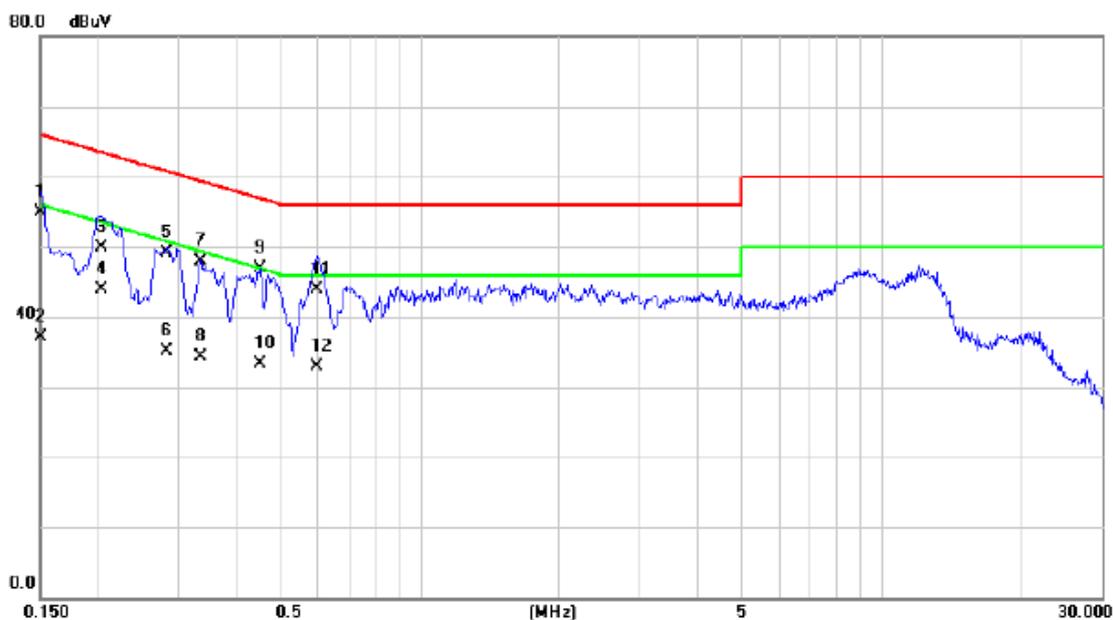

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	45.20	9.68	54.88	66.00	-11.12	QP	
2		0.1500	27.40	9.68	37.08	56.00	-18.92	AVG	
3		0.2040	40.20	9.71	49.91	63.45	-13.54	QP	
4	*	0.2040	34.10	9.71	43.81	53.45	-9.64	AVG	
5		0.2827	39.40	9.75	49.15	60.74	-11.59	QP	
6		0.2827	25.30	9.75	35.05	50.74	-15.69	AVG	
7		0.3345	38.10	9.77	47.87	59.34	-11.47	QP	
8		0.3345	24.60	9.77	34.37	49.34	-14.97	AVG	
9		0.4492	37.00	9.81	46.81	56.89	-10.08	QP	
10		0.4492	23.50	9.81	33.31	46.89	-13.58	AVG	
11		0.6000	34.10	9.86	43.96	56.00	-12.04	QP	
12		0.6000	23.00	9.86	32.86	46.00	-13.14	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Neutral

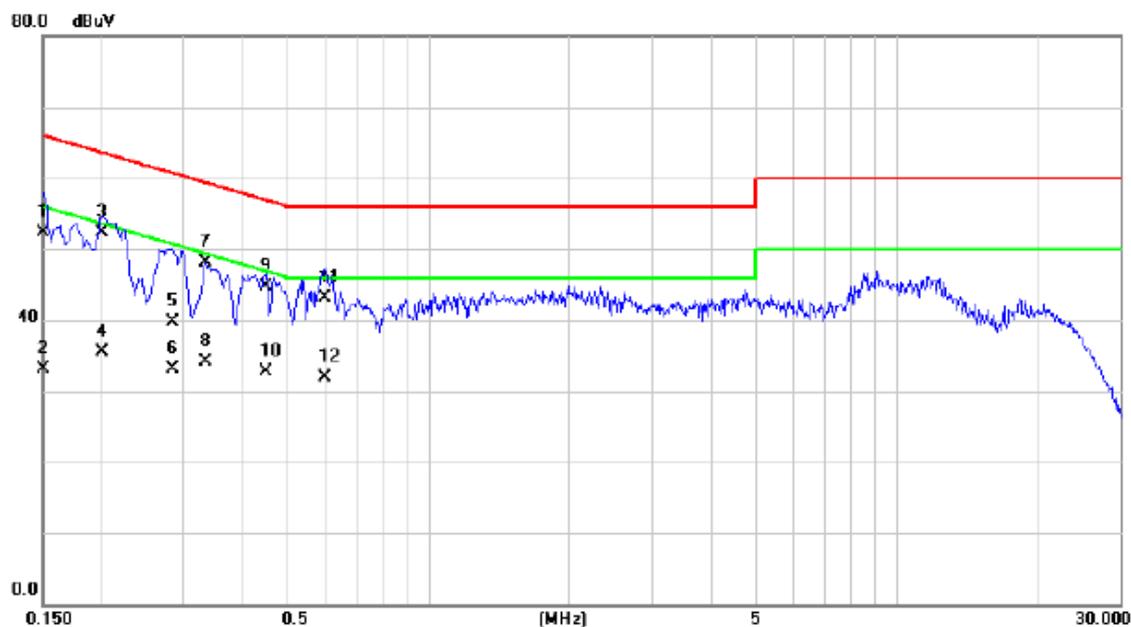

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	42.80	9.60	52.40	66.00	-13.60	QP	
2		0.1500	23.60	9.60	33.20	56.00	-22.80	AVG	
3		0.2017	42.60	9.61	52.21	63.54	-11.33	QP	
4		0.2017	25.80	9.61	35.41	53.54	-18.13	AVG	
5		0.2850	30.10	9.63	39.73	60.67	-20.94	QP	
6		0.2850	23.40	9.63	33.03	50.67	-17.64	AVG	
7	*	0.3345	38.40	9.63	48.03	59.34	-11.31	QP	
8		0.3345	24.50	9.63	34.13	49.34	-15.21	AVG	
9		0.4492	35.10	9.64	44.74	56.89	-12.15	QP	
10		0.4492	23.10	9.64	32.74	46.89	-14.15	AVG	
11		0.6022	33.40	9.68	43.08	56.00	-12.92	QP	
12		0.6022	22.20	9.68	31.88	46.00	-14.12	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Line

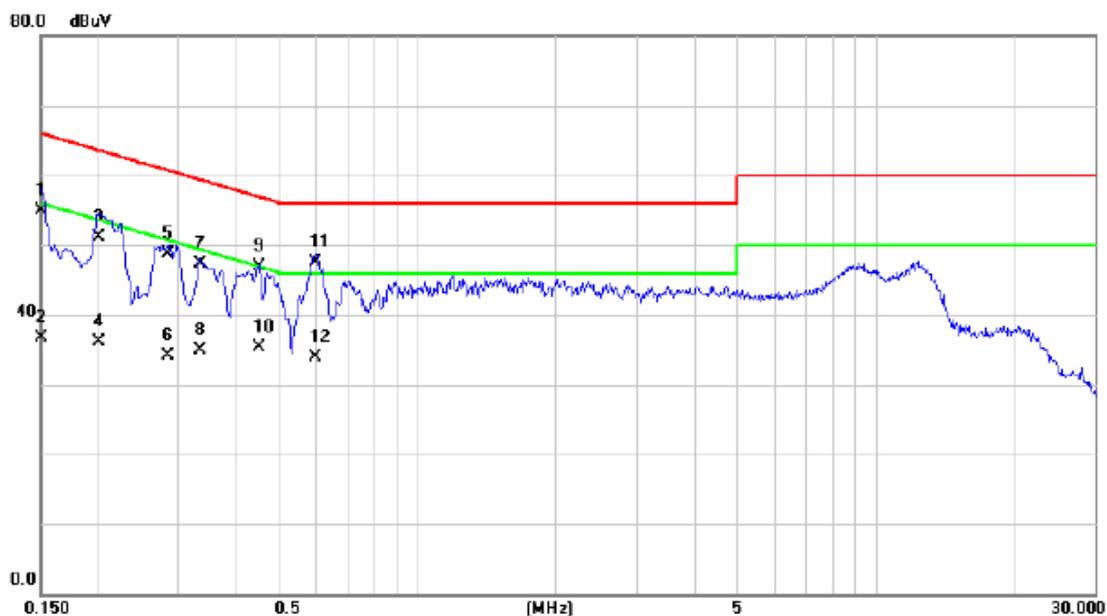

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	45.20	9.68	54.88	66.00	-11.12	QP	
2		0.1500	27.10	9.68	36.78	56.00	-19.22	AVG	
3		0.2017	41.30	9.71	51.01	63.54	-12.53	QP	
4		0.2017	26.30	9.71	36.01	53.54	-17.53	AVG	
5		0.2850	38.90	9.75	48.65	60.67	-12.02	QP	
6		0.2850	24.40	9.75	34.15	50.67	-16.52	AVG	
7		0.3345	37.50	9.77	47.27	59.34	-12.07	QP	
8		0.3345	25.10	9.77	34.87	49.34	-14.47	AVG	
9		0.4492	37.00	9.81	46.81	56.89	-10.08	QP	
10		0.4492	25.50	9.81	35.31	46.89	-11.58	AVG	
11	*	0.6000	37.60	9.86	47.46	56.00	-8.54	QP	
12		0.6000	24.10	9.86	33.96	46.00	-12.04	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Neutral

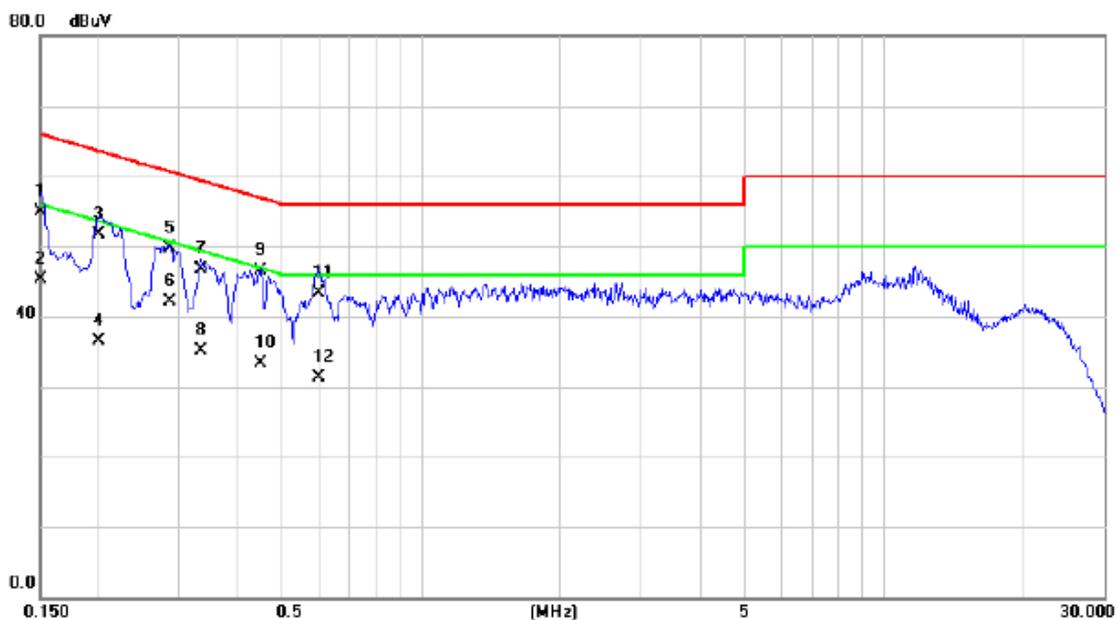

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	45.30	9.60	54.90	66.00	-11.10	QP	
2	0.1500	35.70	9.60	45.30	56.00	-10.70	AVG	
3	0.2017	42.10	9.61	51.71	63.54	-11.83	QP	
4	0.2017	26.80	9.61	36.41	53.54	-17.13	AVG	
5	0.2872	40.00	9.63	49.63	60.60	-10.97	QP	
6 *	0.2872	32.40	9.63	42.03	50.60	-8.57	AVG	
7	0.3367	37.00	9.63	46.63	59.28	-12.65	QP	
8	0.3367	25.40	9.63	35.03	49.28	-14.25	AVG	
9	0.4492	36.80	9.64	46.44	56.89	-10.45	QP	
10	0.4492	23.60	9.64	33.24	46.89	-13.65	AVG	
11	0.6022	33.60	9.68	43.28	56.00	-12.72	QP	
12	0.6022	21.60	9.68	31.28	46.00	-14.72	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Line

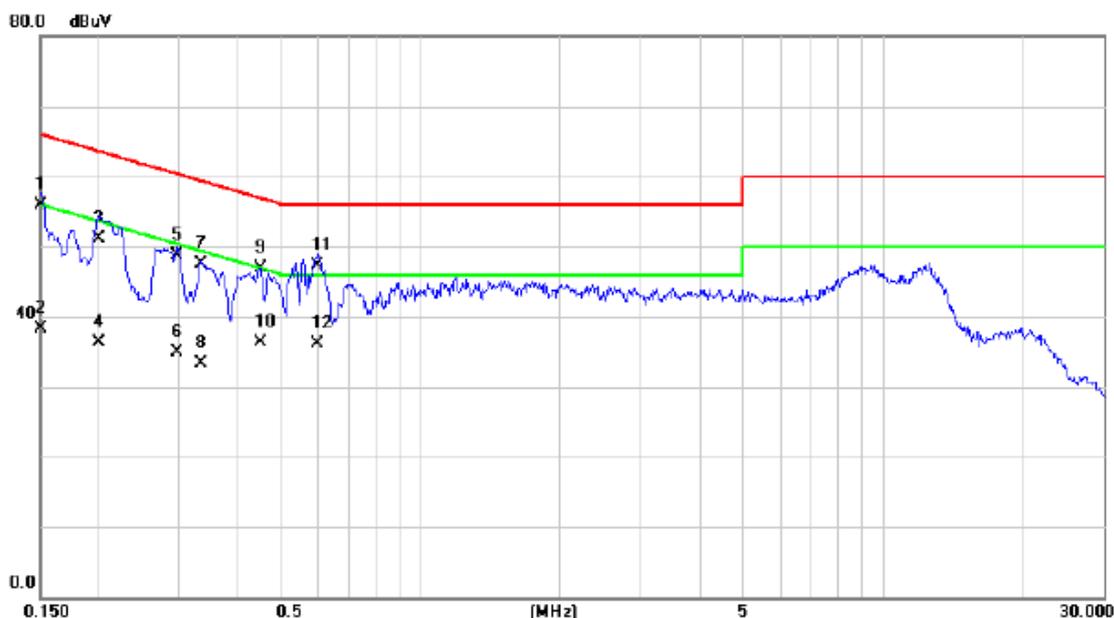

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	46.20	9.68	55.88	66.00	-10.12	QP	
2		0.1500	28.60	9.68	38.28	56.00	-17.72	AVG	
3		0.2017	41.30	9.71	51.01	63.54	-12.53	QP	
4		0.2017	26.50	9.71	36.21	53.54	-17.33	AVG	
5		0.2985	38.90	9.76	48.66	60.28	-11.62	QP	
6		0.2985	25.20	9.76	34.96	50.28	-15.32	AVG	
7		0.3345	37.80	9.77	47.57	59.34	-11.77	QP	
8		0.3345	23.60	9.77	33.37	49.34	-15.97	AVG	
9		0.4492	37.10	9.81	46.91	56.89	-9.98	QP	
10		0.4492	26.50	9.81	36.31	46.89	-10.58	AVG	
11	*	0.6000	37.40	9.86	47.26	56.00	-8.74	QP	
12		0.6000	26.30	9.86	36.16	46.00	-9.84	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Neutral

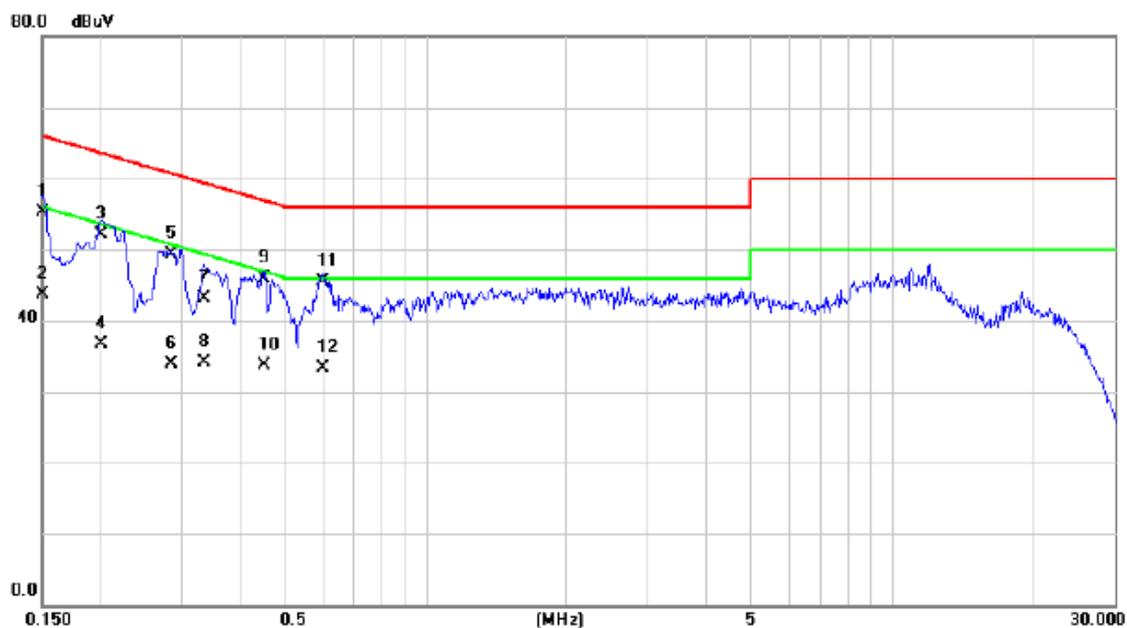

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	45.70	9.60	55.30	66.00	-10.70	QP	
2		0.1500	34.20	9.60	43.80	56.00	-12.20	AVG	
3		0.2017	42.50	9.61	52.11	63.54	-11.43	QP	
4		0.2017	27.10	9.61	36.71	53.54	-16.83	AVG	
5		0.2850	39.60	9.63	49.23	60.67	-11.44	QP	
6		0.2850	24.30	9.63	33.93	50.67	-16.74	AVG	
7		0.3345	33.50	9.63	43.13	59.34	-16.21	QP	
8		0.3345	24.50	9.63	34.13	49.34	-15.21	AVG	
9		0.4492	36.30	9.64	45.94	56.89	-10.95	QP	
10		0.4492	24.10	9.64	33.74	46.89	-13.15	AVG	
11	*	0.6022	35.80	9.68	45.48	56.00	-10.52	QP	
12		0.6022	23.70	9.68	33.38	46.00	-12.62	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Line

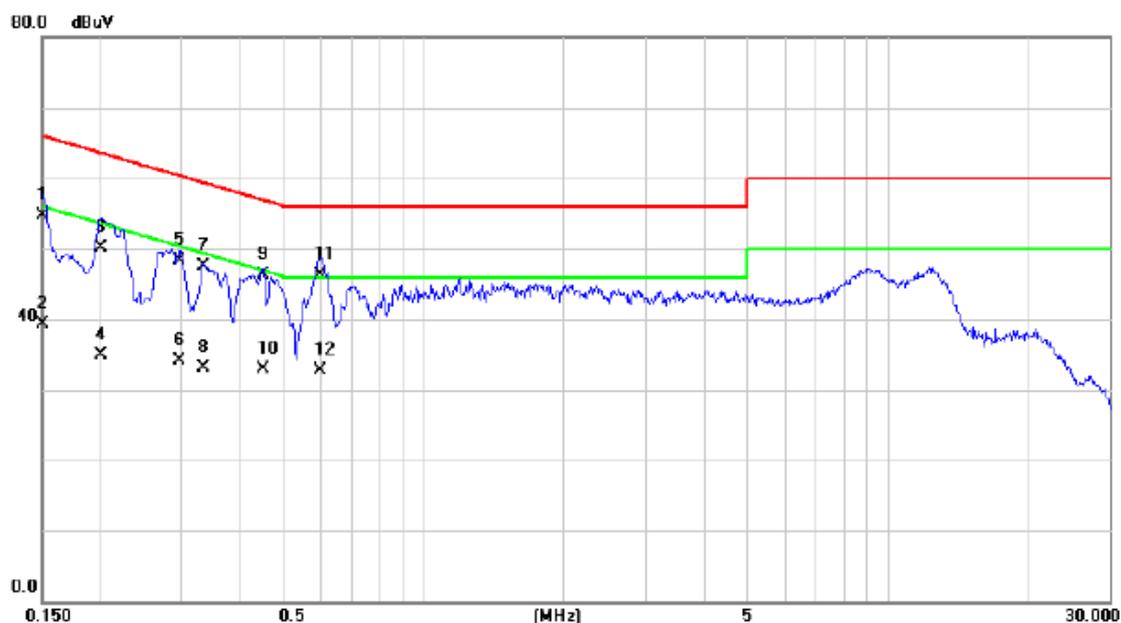

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1500	45.10	9.68	54.78	66.00	-11.22	QP	
2		0.1500	29.60	9.68	39.28	56.00	-16.72	AVG	
3		0.2017	40.30	9.71	50.01	63.54	-13.53	QP	
4		0.2017	25.10	9.71	34.81	53.54	-18.73	AVG	
5		0.2987	38.60	9.76	48.36	60.28	-11.92	QP	
6		0.2987	24.40	9.76	34.16	50.28	-16.12	AVG	
7		0.3345	37.80	9.77	47.57	59.34	-11.77	QP	
8		0.3345	23.30	9.77	33.07	49.34	-16.27	AVG	
9		0.4492	36.40	9.81	46.21	56.89	-10.68	QP	
10		0.4492	23.10	9.81	32.91	46.89	-13.98	AVG	
11	*	0.6000	36.40	9.86	46.26	56.00	-9.74	QP	
12		0.6000	22.80	9.86	32.66	46.00	-13.34	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Neutral

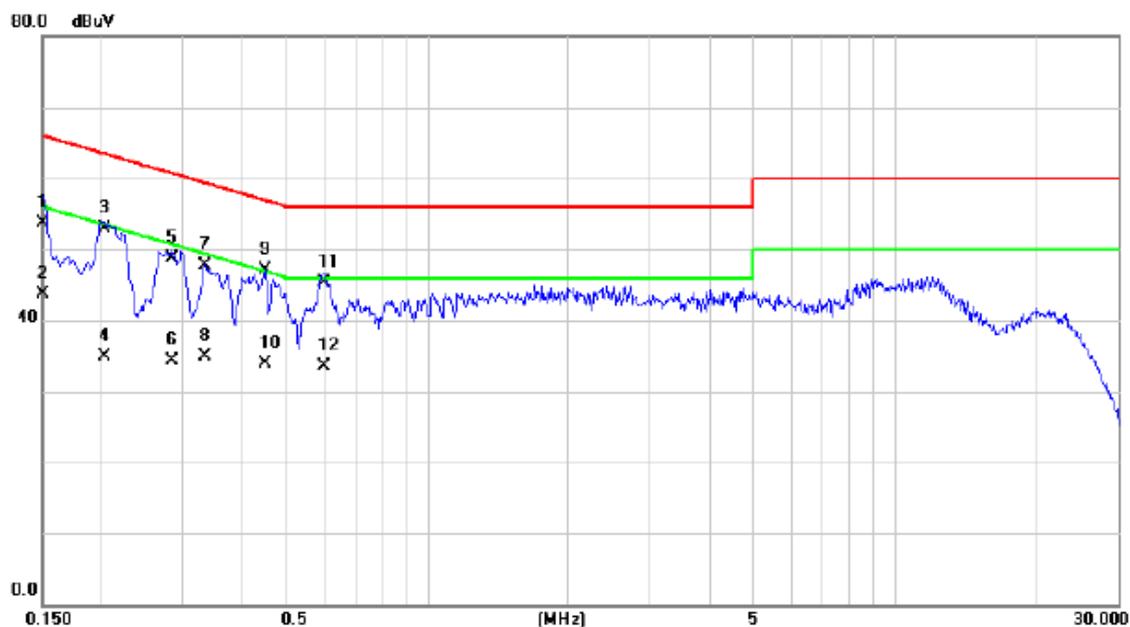

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	44.20	9.60	53.80	66.00	-12.20	QP	
2		0.1500	34.10	9.60	43.70	56.00	-12.30	AVG	
3		0.2040	43.30	9.61	52.91	63.45	-10.54	QP	
4		0.2040	25.30	9.61	34.91	53.45	-18.54	AVG	
5		0.2850	39.10	9.63	48.73	60.67	-11.94	QP	
6		0.2850	24.70	9.63	34.33	50.67	-16.34	AVG	
7		0.3345	38.00	9.63	47.63	59.34	-11.71	QP	
8		0.3345	25.30	9.63	34.93	49.34	-14.41	AVG	
9	*	0.4492	37.40	9.64	47.04	56.89	-9.85	QP	
10		0.4492	24.20	9.64	33.84	46.89	-13.05	AVG	
11		0.6022	35.60	9.68	45.28	56.00	-10.72	QP	
12		0.6022	23.80	9.68	33.48	46.00	-12.52	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


Line

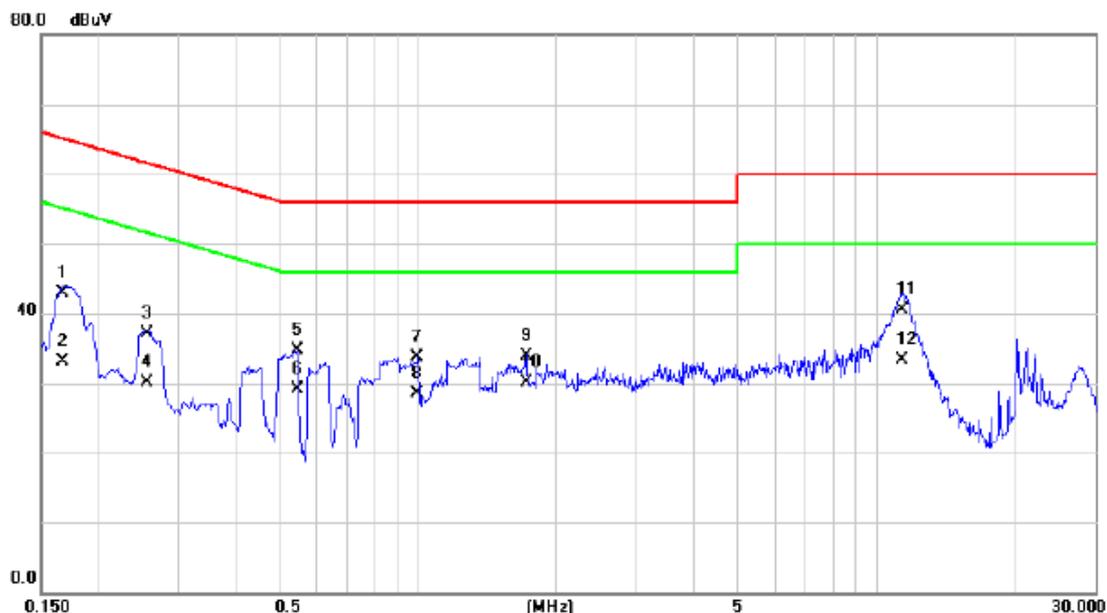

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1680	33.20	9.69	42.89	65.06	-22.17	QP	
2		0.1680	23.50	9.69	33.19	55.06	-21.87	AVG	
3		0.2558	27.40	9.73	37.13	61.57	-24.44	QP	
4		0.2558	20.30	9.73	30.03	51.57	-21.54	AVG	
5		0.5437	24.80	9.84	34.64	56.00	-21.36	QP	
6		0.5437	19.30	9.84	29.14	46.00	-16.86	AVG	
7		0.9982	23.70	9.98	33.68	56.00	-22.32	QP	
8		0.9982	18.60	9.98	28.58	46.00	-17.42	AVG	
9		1.7250	24.00	9.89	33.89	56.00	-22.11	QP	
10	*	1.7250	20.30	9.89	30.19	46.00	-15.81	AVG	
11		11.3190	30.40	10.11	40.51	60.00	-19.49	QP	
12		11.3190	23.10	10.11	33.21	50.00	-16.79	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


Neutral

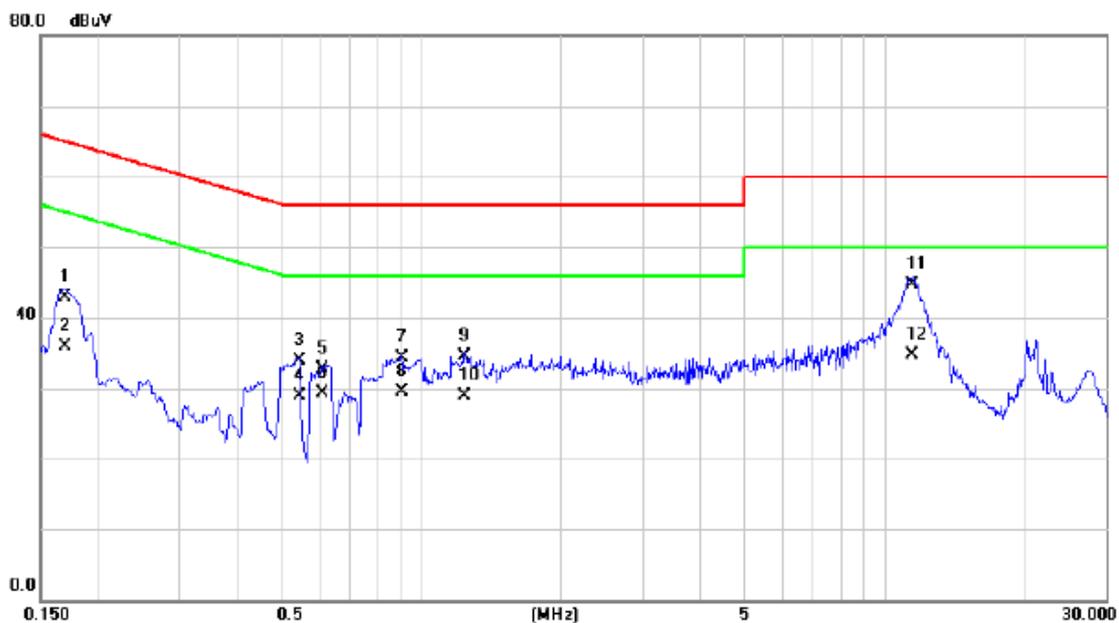

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1703	33.40	9.60	43.00	64.95	-21.95	QP	
2		0.1703	26.40	9.60	36.00	54.95	-18.95	AVG	
3		0.5437	24.30	9.66	33.96	56.00	-22.04	QP	
4		0.5437	19.20	9.66	28.86	46.00	-17.14	AVG	
5		0.6134	23.10	9.68	32.78	56.00	-23.22	QP	
6		0.6134	19.70	9.68	29.38	46.00	-16.62	AVG	
7		0.9082	24.50	9.75	34.25	56.00	-21.75	QP	
8		0.9082	19.80	9.75	29.55	46.00	-16.45	AVG	
9		1.2390	24.70	9.80	34.50	56.00	-21.50	QP	
10		1.2390	19.20	9.80	29.00	46.00	-17.00	AVG	
11	*	11.4383	34.60	10.11	44.71	60.00	-15.29	QP	
12		11.4383	24.50	10.11	34.61	50.00	-15.39	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN


Line

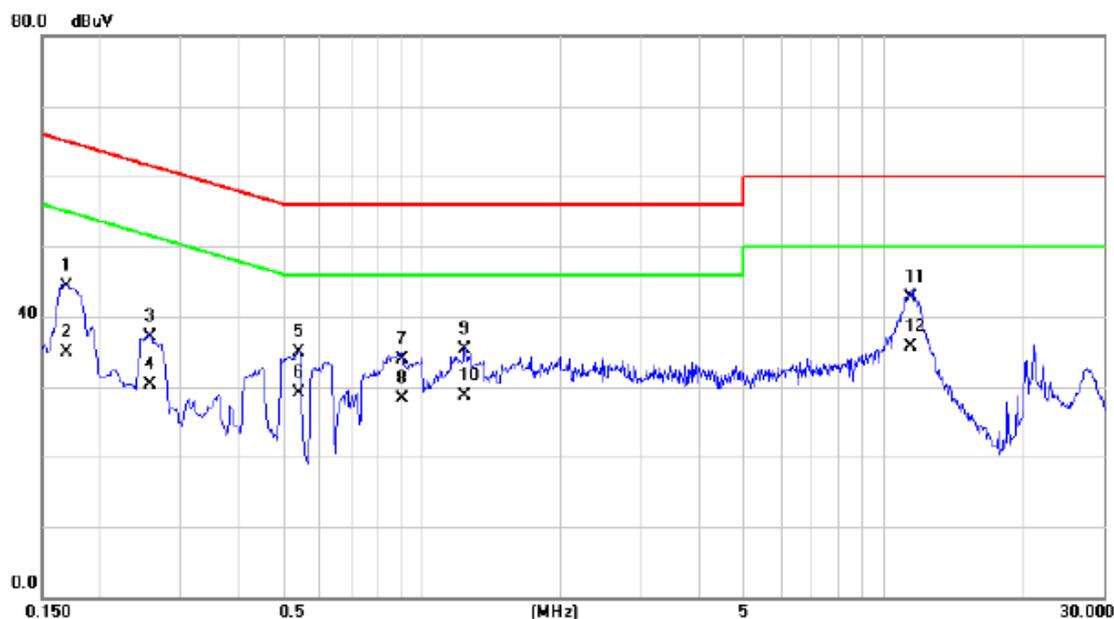

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1703	34.70	9.69	44.39	64.95	-20.56	QP	
2	0.1703	25.30	9.69	34.99	54.95	-19.96	AVG	
3	0.2580	27.40	9.73	37.13	61.50	-24.37	QP	
4	0.2580	20.60	9.73	30.33	51.50	-21.17	AVG	
5	0.5415	25.10	9.84	34.94	56.00	-21.06	QP	
6	0.5415	19.30	9.84	29.14	46.00	-16.86	AVG	
7	0.9082	24.00	9.95	33.95	56.00	-22.05	QP	
8	0.9082	18.40	9.95	28.35	46.00	-17.65	AVG	
9	1.2390	25.30	10.01	35.31	56.00	-20.69	QP	
10	1.2390	18.70	10.01	28.71	46.00	-17.29	AVG	
11	11.4855	32.60	10.12	42.72	60.00	-17.28	QP	
12 *	11.4855	25.50	10.12	35.62	50.00	-14.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN

Neutral

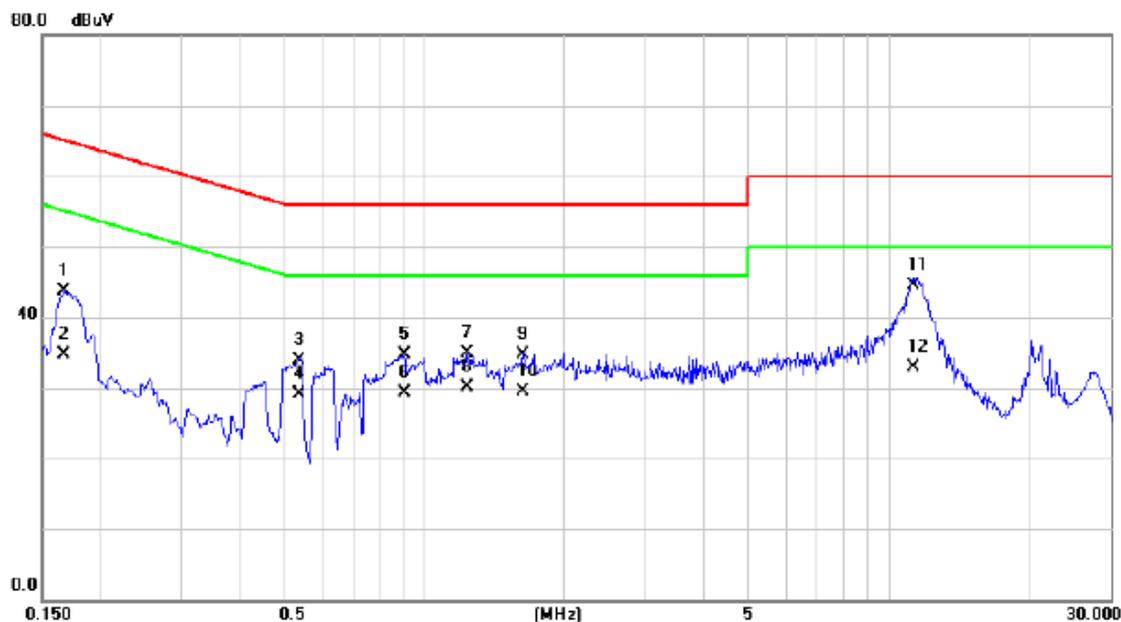


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1680	34.10	9.60	43.70	65.06	-21.36	QP	
2		0.1680	25.20	9.60	34.80	55.06	-20.26	AVG	
3		0.5392	24.30	9.66	33.96	56.00	-22.04	QP	
4		0.5392	19.50	9.66	29.16	46.00	-16.84	AVG	
5		0.9082	25.00	9.75	34.75	56.00	-21.25	QP	
6		0.9082	19.60	9.75	29.35	46.00	-16.65	AVG	
7		1.2390	25.20	9.80	35.00	56.00	-21.00	QP	
8		1.2390	20.40	9.80	30.20	46.00	-15.80	AVG	
9		1.6350	24.90	9.85	34.75	56.00	-21.25	QP	
10		1.6350	19.60	9.85	29.45	46.00	-16.55	AVG	
11	*	11.3010	34.50	10.10	44.60	60.00	-15.40	QP	
12		11.3010	22.80	10.10	32.90	50.00	-17.10	AVG	

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK


Vertical

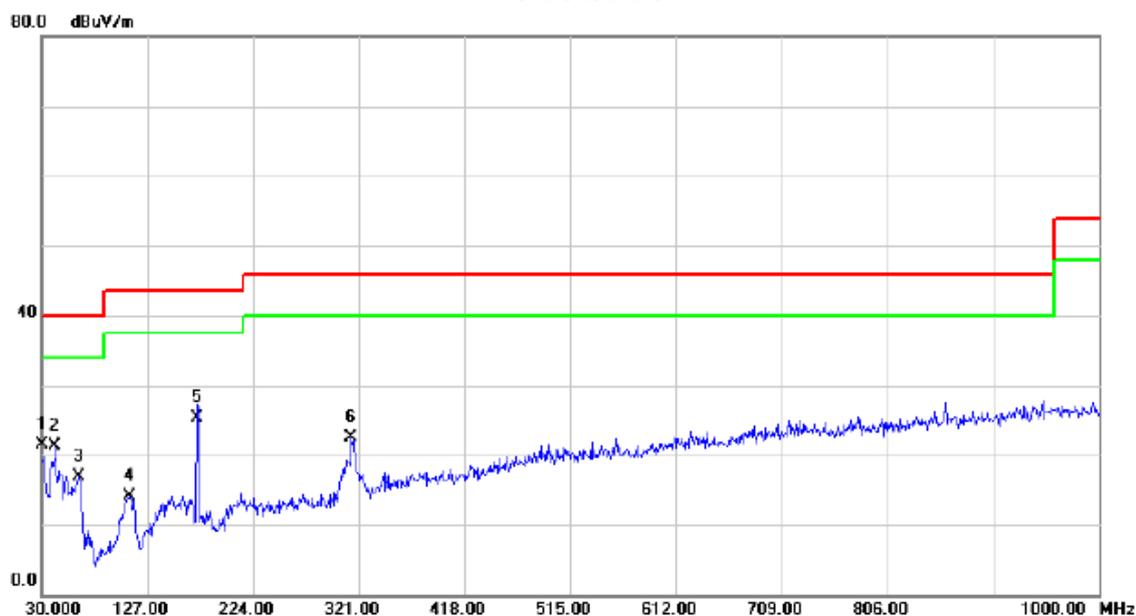

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	36.62	-15.08	21.54	40.00	-18.46	QP	
2		42.6100	35.31	-13.92	21.39	40.00	-18.61	QP	
3		63.9500	32.22	-15.34	16.88	40.00	-23.12	QP	
4		110.9950	31.24	-17.21	14.03	43.50	-29.47	QP	
5	*	173.0750	39.96	-14.73	25.23	43.50	-18.27	QP	
6		314.6950	35.57	-13.09	22.48	46.00	-23.52	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK


Horizontal

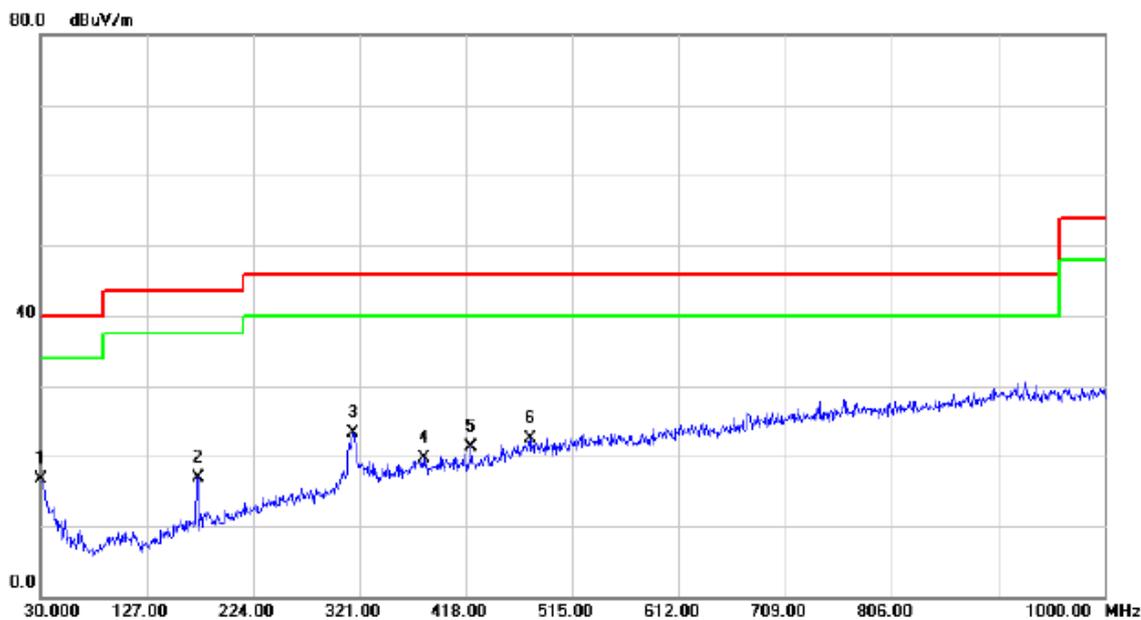

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	31.81	-15.08	16.73	40.00	-23.27	QP	
2		173.5600	31.70	-14.78	16.92	43.50	-26.58	QP	
3	*	315.1800	36.29	-13.08	23.21	46.00	-22.79	QP	
4		379.2000	31.39	-11.62	19.77	46.00	-26.23	QP	
5		422.8500	31.77	-10.44	21.33	46.00	-24.67	QP	
6		476.2000	31.92	-9.48	22.44	46.00	-23.56	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1632B580A00


Vertical

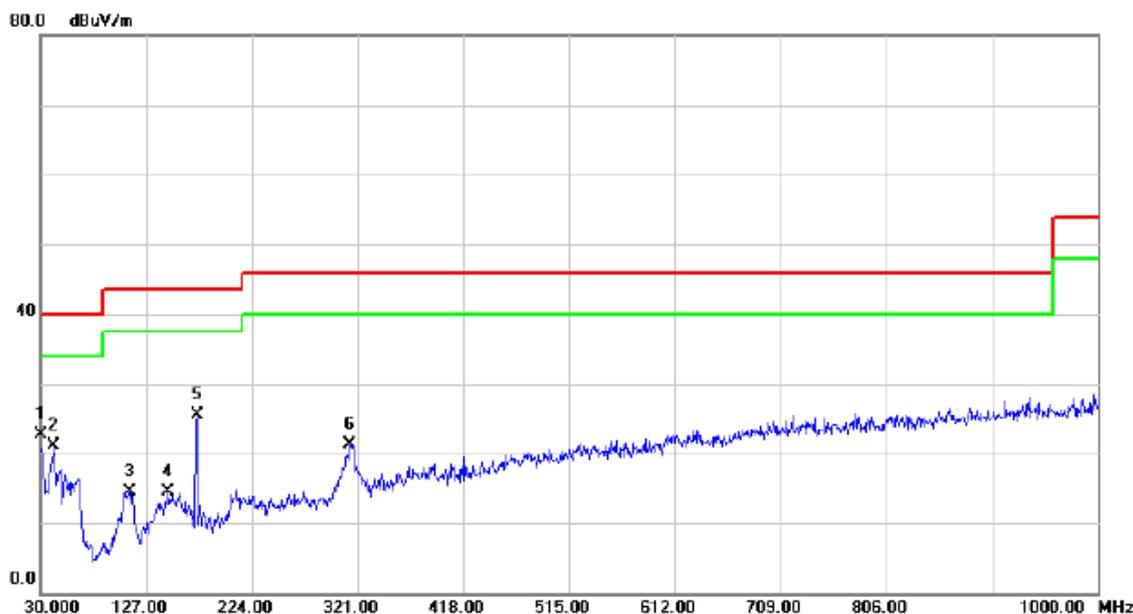

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	37.81	-15.08	22.73	40.00	-17.27	QP	
2		42.6100	34.97	-13.92	21.05	40.00	-18.95	QP	
3		111.4800	31.71	-17.16	14.55	43.50	-28.95	QP	
4		147.3700	28.57	-14.15	14.42	43.50	-29.08	QP	
5		173.5600	40.19	-14.78	25.41	43.50	-18.09	QP	
6		314.6950	34.41	-13.09	21.32	46.00	-24.68	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1632B580A00


Horizontal

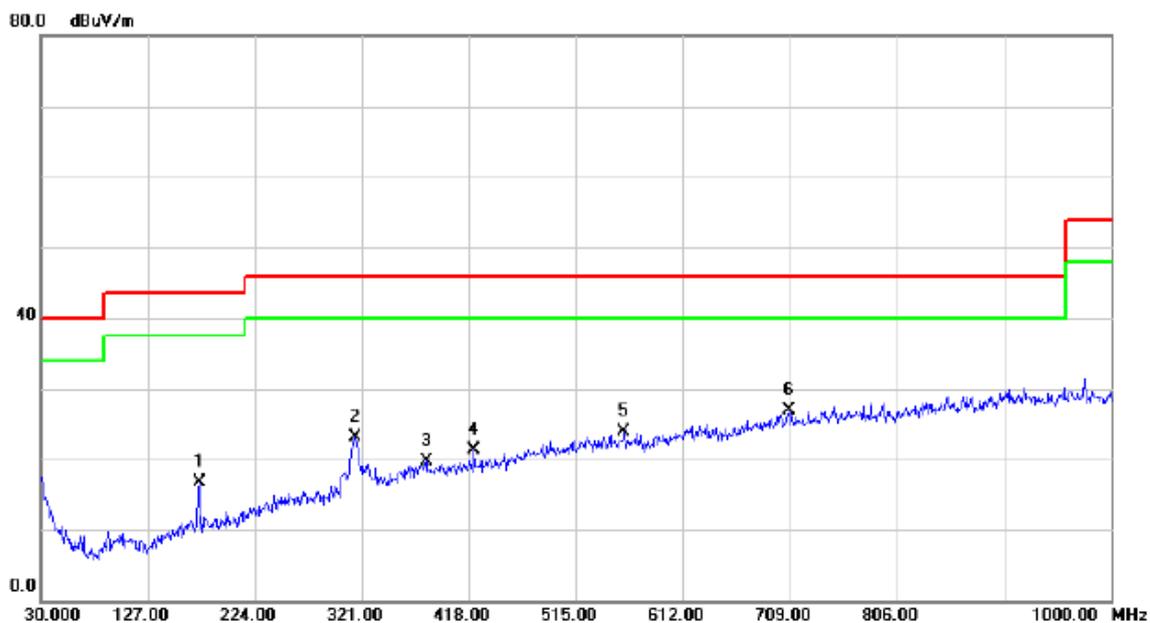

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		173.5600	31.42	-14.78	16.64	43.50	-26.86	QP	
2		315.1800	36.17	-13.08	23.09	46.00	-22.91	QP	
3		379.2000	31.28	-11.62	19.66	46.00	-26.34	QP	
4		422.8500	31.84	-10.44	21.40	46.00	-24.60	QP	
5		558.6500	31.87	-7.89	23.98	46.00	-22.02	QP	
6	*	708.5150	32.30	-5.35	26.95	46.00	-19.05	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1532B528000


Vertical

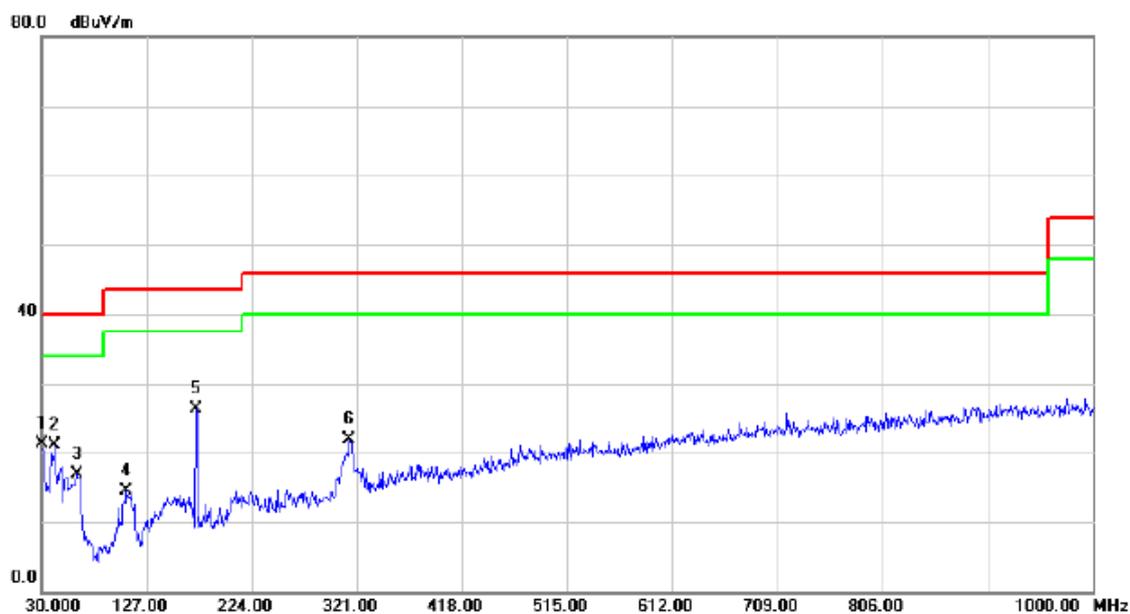

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	36.30	-15.08	21.22	40.00	-18.78	QP	
2		42.6100	35.06	-13.92	21.14	40.00	-18.86	QP	
3		63.4650	32.20	-15.27	16.93	40.00	-23.07	QP	
4		108.5700	31.99	-17.53	14.46	43.50	-29.04	QP	
5	*	173.0750	40.95	-14.73	26.22	43.50	-17.28	QP	
6		314.6950	34.95	-13.09	21.86	46.00	-24.14	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1532B528000


Horizontal

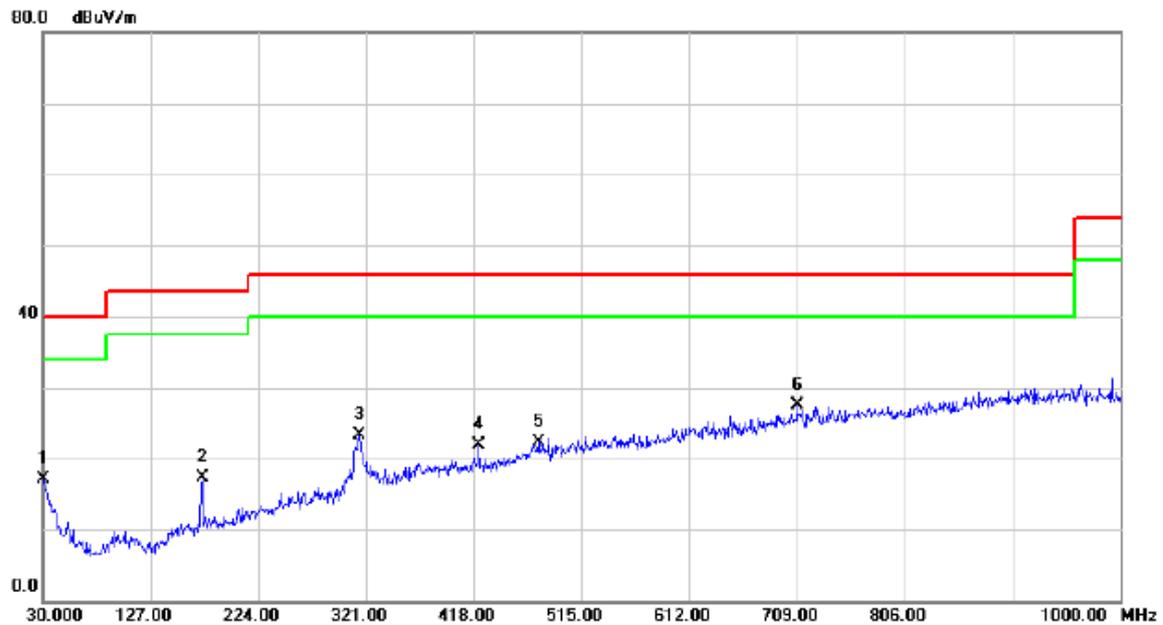

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.9700	32.28	-15.09	17.19	40.00	-22.81	QP	
2		173.5600	32.05	-14.78	17.27	43.50	-26.23	QP	
3		315.1800	36.47	-13.08	23.39	46.00	-22.61	QP	
4		422.8500	32.35	-10.44	21.91	46.00	-24.09	QP	
5		476.2000	31.69	-9.48	22.21	46.00	-23.79	QP	
6	*	709.0000	32.86	-5.35	27.51	46.00	-18.49	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: QUANCHENG / 1311-3291-3.5mm-178


Vertical

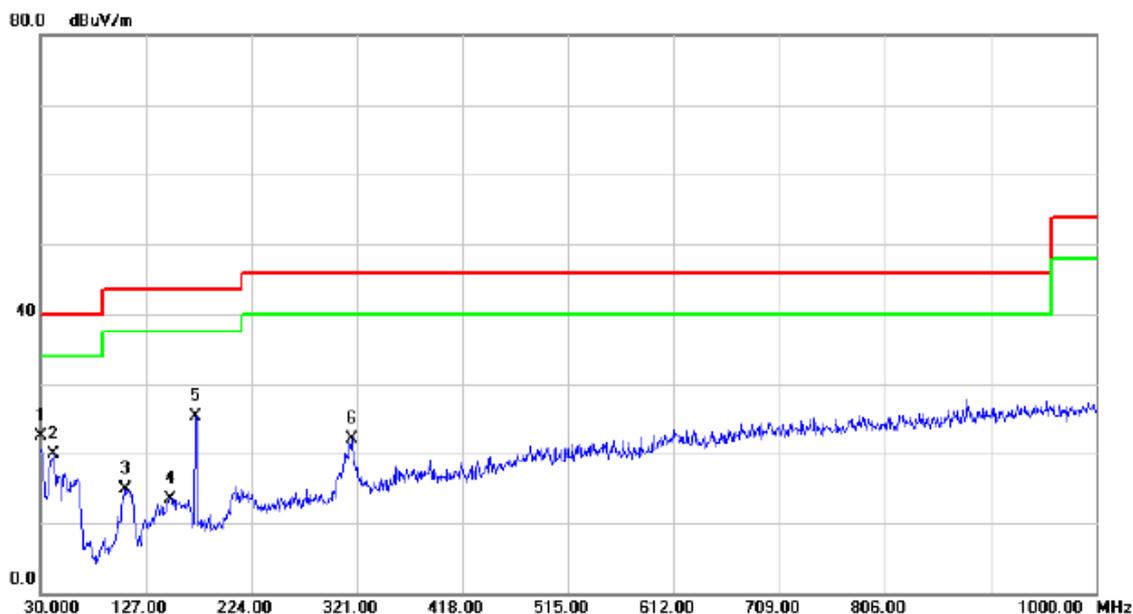

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	37.50	-15.08	22.42	40.00	-17.58	QP	
2		42.6100	33.92	-13.92	20.00	40.00	-20.00	QP	
3		109.0550	32.38	-17.46	14.92	43.50	-28.58	QP	
4		149.3100	27.61	-14.07	13.54	43.50	-29.96	QP	
5		173.0750	40.08	-14.73	25.35	43.50	-18.15	QP	
6		316.1500	35.23	-13.05	22.18	46.00	-23.82	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: QUANCHENG / 1311-3291-3.5mm-178


Horizontal

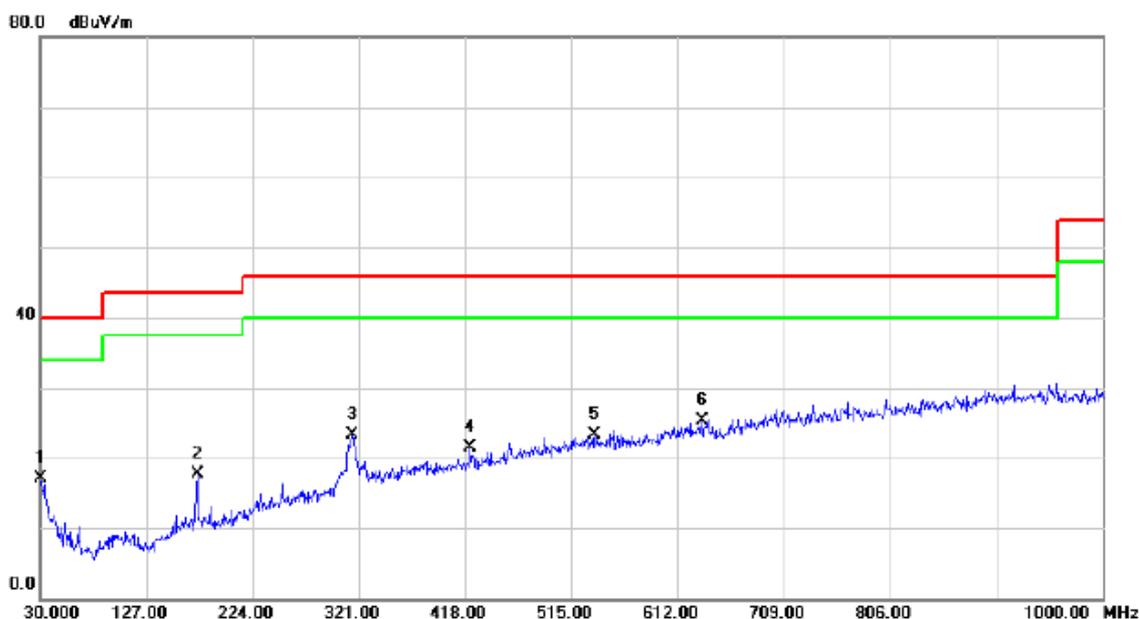

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	32.20	-15.08	17.12	40.00	-22.88	QP	
2		173.5600	32.48	-14.78	17.70	43.50	-25.80	QP	
3		315.1800	36.41	-13.08	23.33	46.00	-22.67	QP	
4		422.8500	32.03	-10.44	21.59	46.00	-24.41	QP	
5		536.3400	31.74	-8.35	23.39	46.00	-22.61	QP	
6	*	634.3100	32.43	-7.09	25.34	46.00	-20.66	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150

Vertical

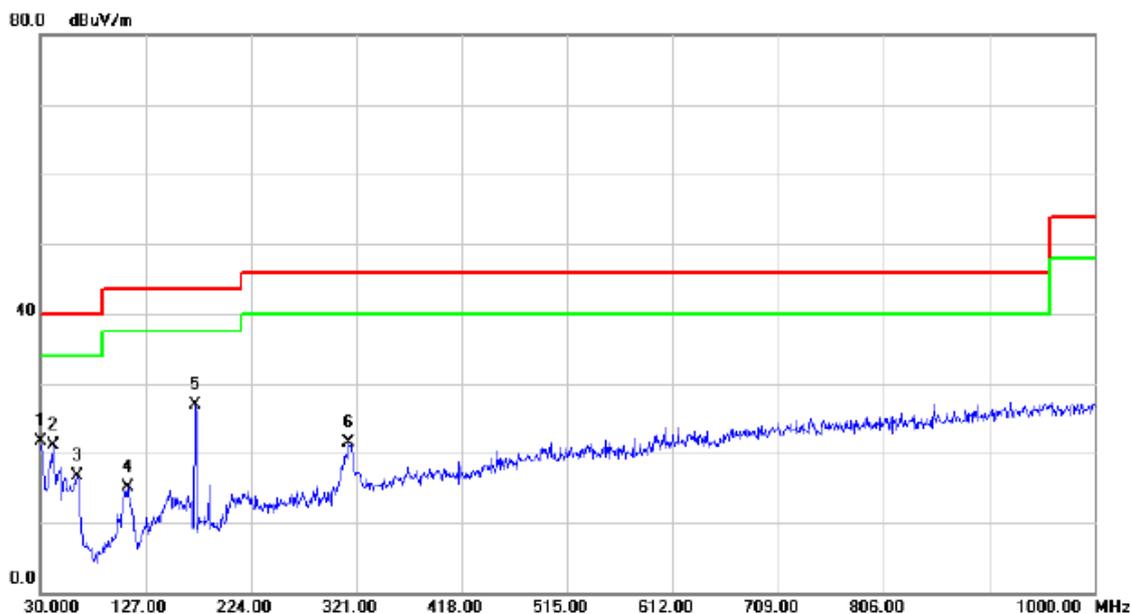

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	36.83	-15.08	21.75	40.00	-18.25	QP	
2		42.1250	35.12	-13.98	21.14	40.00	-18.86	QP	
3		63.9500	32.13	-15.34	16.79	40.00	-23.21	QP	
4		110.9950	32.36	-17.21	15.15	43.50	-28.35	QP	
5	*	173.0750	41.66	-14.73	26.93	43.50	-16.57	QP	
6		314.6950	34.58	-13.09	21.49	46.00	-24.51	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.9700	32.95	-15.09	17.86	40.00	-22.14	QP	
2		173.5600	31.60	-14.78	16.82	43.50	-26.68	QP	
3		238.5500	29.55	-15.34	14.21	46.00	-31.79	QP	
4		316.1500	36.74	-13.05	23.69	46.00	-22.31	QP	
5		349.1300	32.26	-12.26	20.00	46.00	-26.00	QP	
6		473.2900	32.16	-9.50	22.66	46.00	-23.34	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD


Vertical

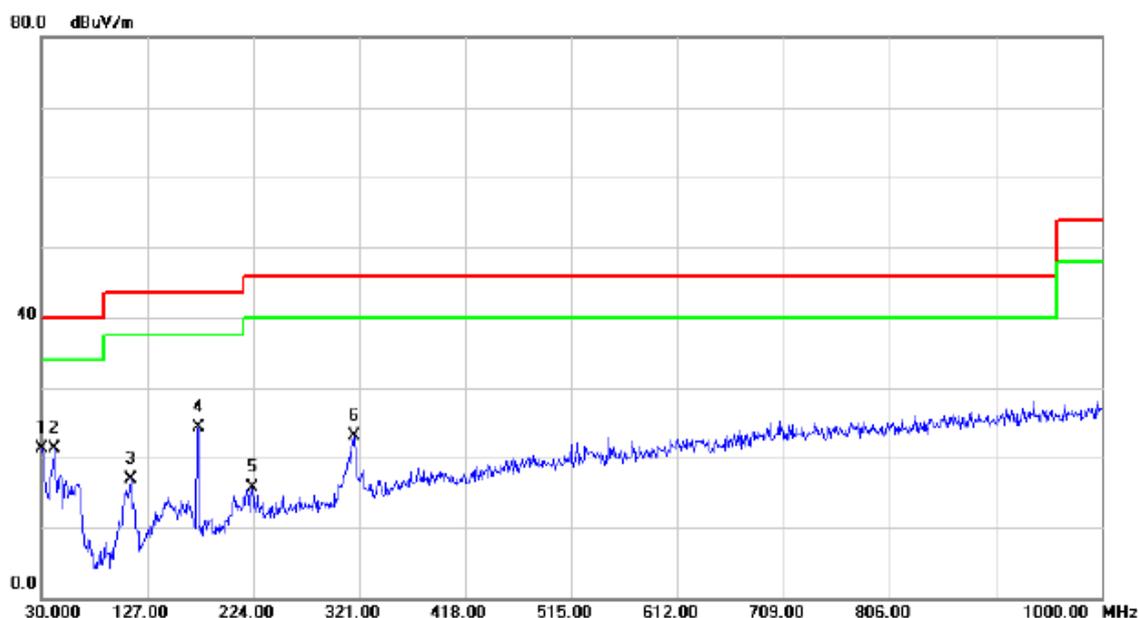

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.9700	36.45	-15.09	21.36	40.00	-18.64	QP	
2		42.6100	35.28	-13.92	21.36	40.00	-18.64	QP	
3		111.9650	34.00	-17.10	16.90	43.50	-26.60	QP	
4		173.5600	39.00	-14.78	24.22	43.50	-19.28	QP	
5		223.5150	31.95	-16.32	15.63	46.00	-30.37	QP	
6		316.1500	36.23	-13.05	23.18	46.00	-22.82	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD


Horizontal

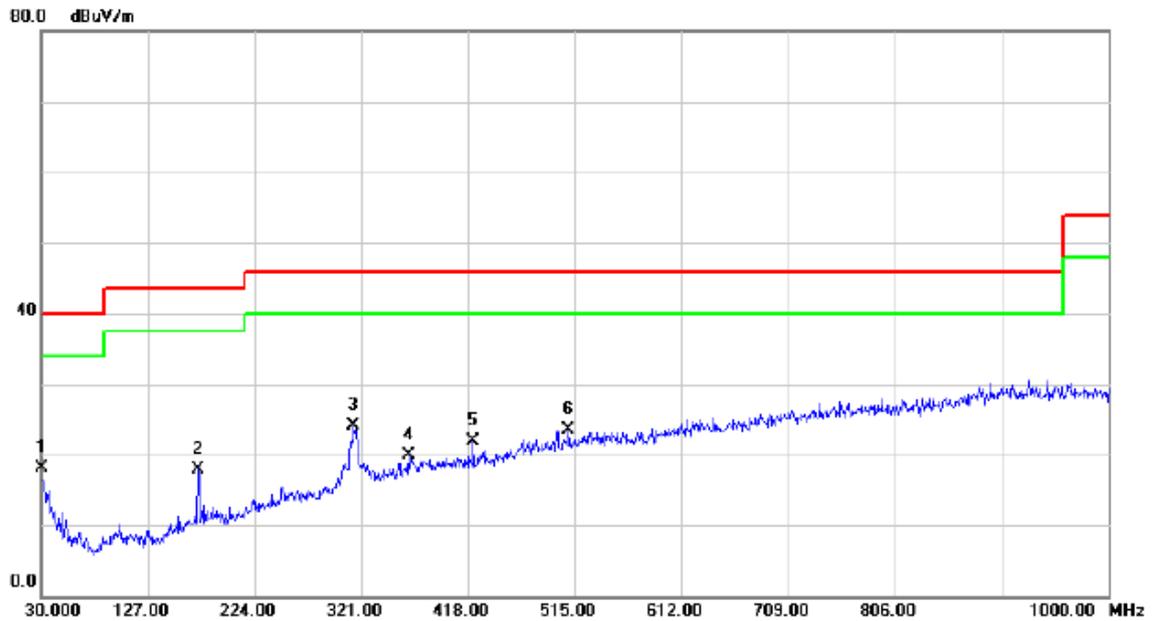

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	33.21	-15.08	18.13	40.00	-21.87	QP	
2		172.5900	32.68	-14.68	18.00	43.50	-25.50	QP	
3		314.2100	37.11	-13.10	24.01	46.00	-21.99	QP	
4		363.6800	31.99	-11.99	20.00	46.00	-26.00	QP	
5		422.8500	32.34	-10.44	21.90	46.00	-24.10	QP	
6		509.6650	32.63	-9.06	23.57	46.00	-22.43	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD

Vertical

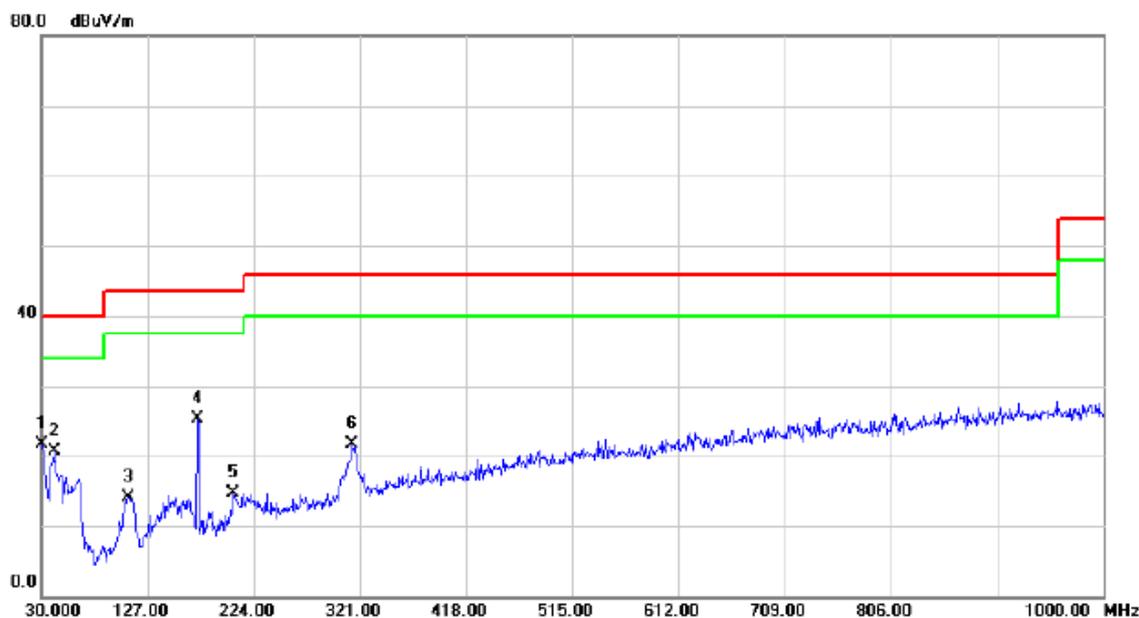

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.9700	36.73	-15.09	21.64	40.00	-18.36	QP	
2		42.6100	34.61	-13.92	20.69	40.00	-19.31	QP	
3		109.5400	31.51	-17.39	14.12	43.50	-29.38	QP	
4	*	173.0750	40.09	-14.73	25.36	43.50	-18.14	QP	
5		206.0550	31.37	-16.63	14.74	43.50	-28.76	QP	
6		314.6950	34.70	-13.09	21.61	46.00	-24.39	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	32.66	-15.08	17.58	40.00	-22.42	QP	
2		172.5900	31.81	-14.68	17.13	43.50	-26.37	QP	
3		316.1500	35.62	-13.05	22.57	46.00	-23.43	QP	
4		422.8500	31.87	-10.44	21.43	46.00	-24.57	QP	
5		528.5800	32.14	-8.55	23.59	46.00	-22.41	QP	
6	*	601.3300	32.52	-7.44	25.08	46.00	-20.92	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD


Vertical

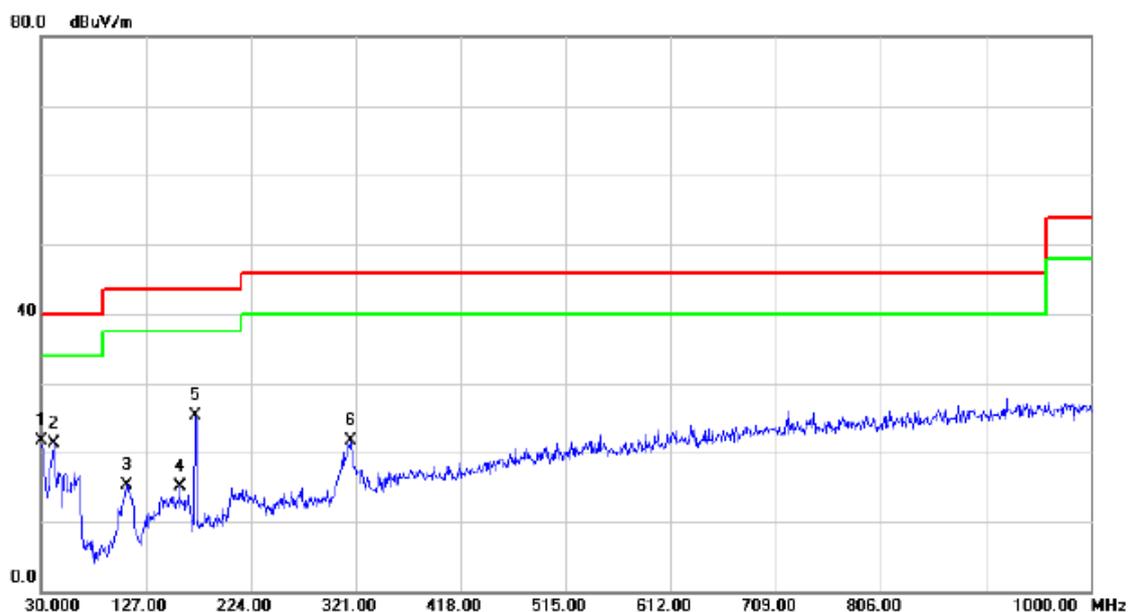

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	36.74	-15.08	21.66	40.00	-18.34	QP	
2		42.1250	35.26	-13.98	21.28	40.00	-18.72	QP	
3		110.0250	32.53	-17.32	15.21	43.50	-28.29	QP	
4		158.0400	29.09	-13.94	15.15	43.50	-28.35	QP	
5	*	173.0750	40.01	-14.73	25.28	43.50	-18.22	QP	
6		316.1500	34.67	-13.05	21.62	46.00	-24.38	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD


Horizontal

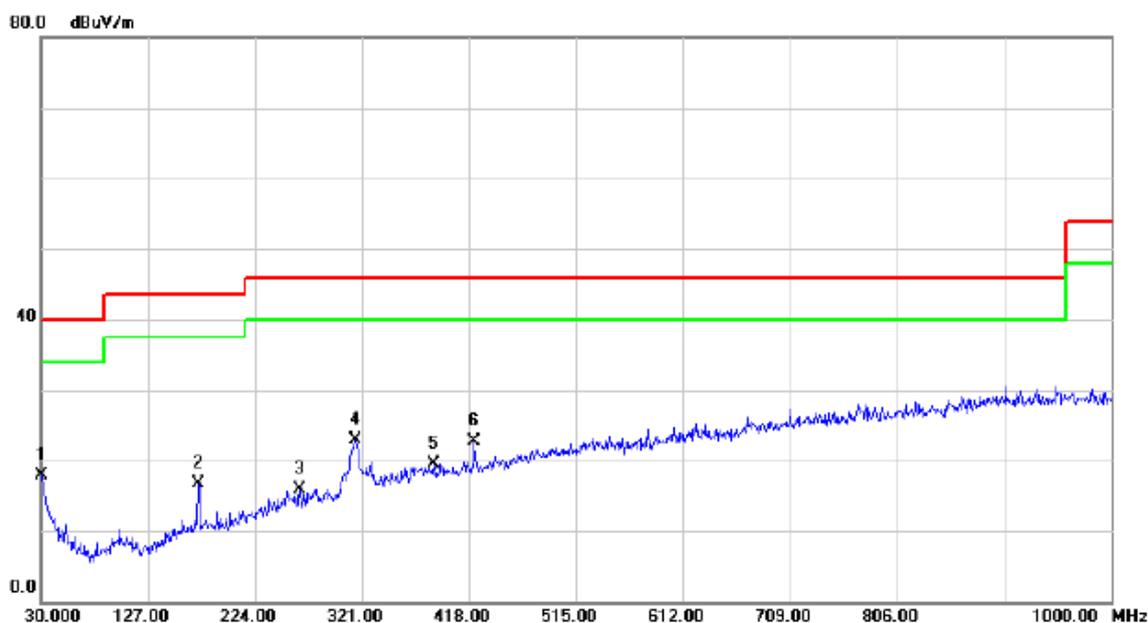

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.9700	33.05	-15.09	17.96	40.00	-22.04	QP	
2		172.5900	31.32	-14.68	16.64	43.50	-26.86	QP	
3		264.7400	30.22	-14.39	15.83	46.00	-30.17	QP	
4		315.1800	35.95	-13.08	22.87	46.00	-23.13	QP	
5		385.9900	30.91	-11.45	19.46	46.00	-26.54	QP	
6		422.8500	33.22	-10.44	22.78	46.00	-23.22	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD


Vertical

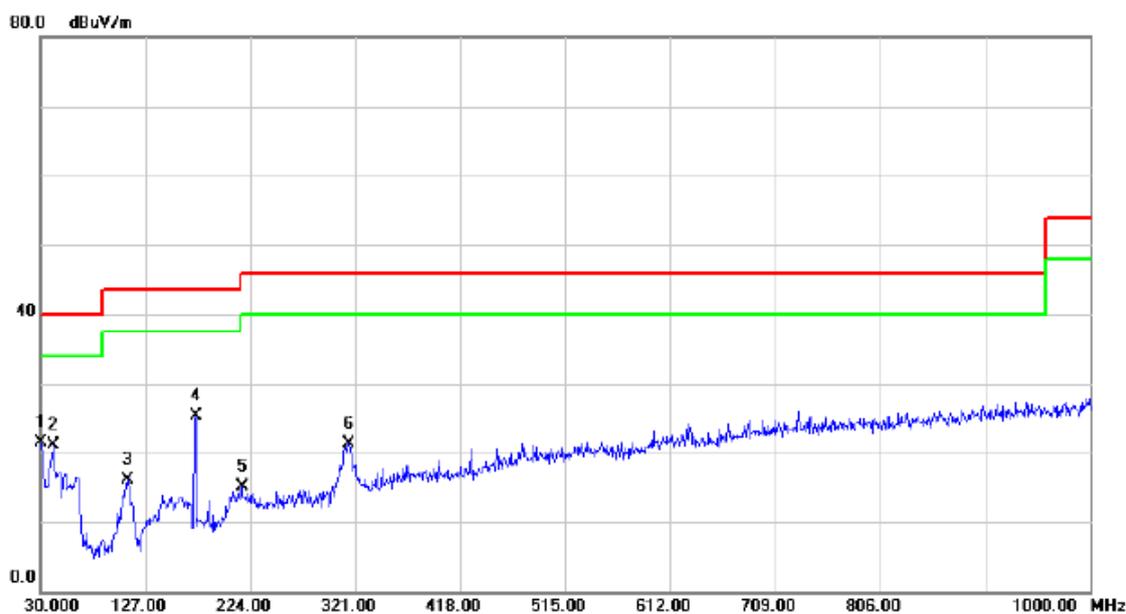

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	36.49	-15.08	21.41	40.00	-18.59	QP	
2		41.6400	35.20	-14.03	21.17	40.00	-18.83	QP	
3		110.9950	33.25	-17.21	16.04	43.50	-27.46	QP	
4	*	173.5600	40.17	-14.78	25.39	43.50	-18.11	QP	
5		216.7250	31.73	-16.58	15.15	46.00	-30.85	QP	
6		315.6650	34.40	-13.07	21.33	46.00	-24.67	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD


Horizontal

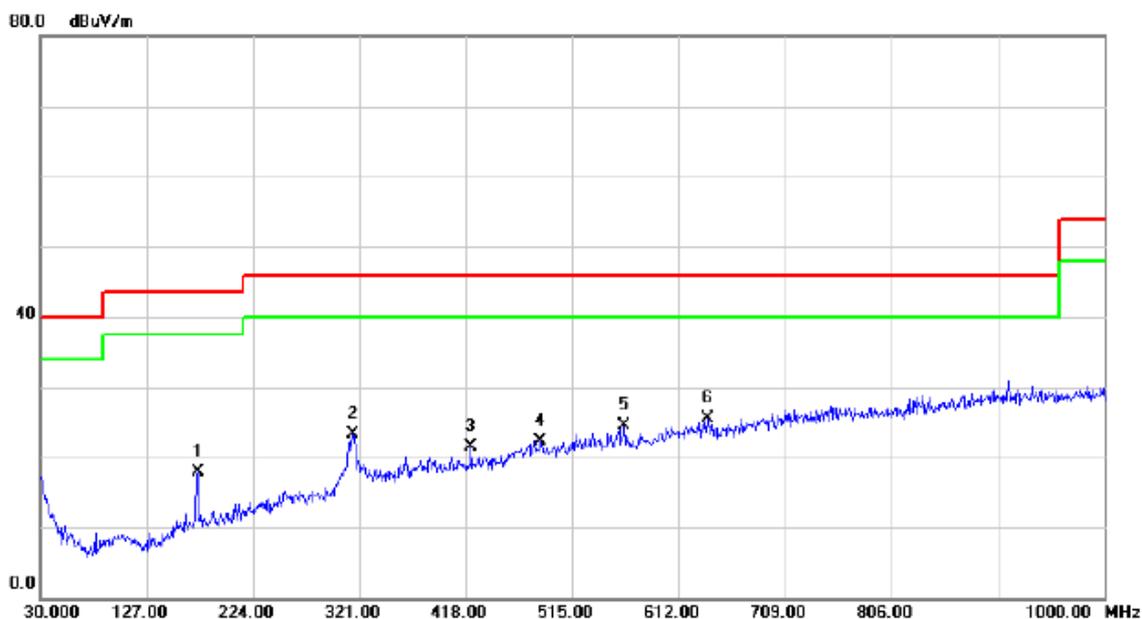

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	173.5600	32.76	-14.78	17.98	43.50	-25.52	QP	
2	315.1800	36.39	-13.08	23.31	46.00	-22.69	QP	
3	422.8500	31.88	-10.44	21.44	46.00	-24.56	QP	
4	485.9000	31.79	-9.41	22.38	46.00	-23.62	QP	
5	562.5300	32.32	-7.85	24.47	46.00	-21.53	QP	
6 *	638.1900	32.58	-7.04	25.54	46.00	-20.46	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


Vertical

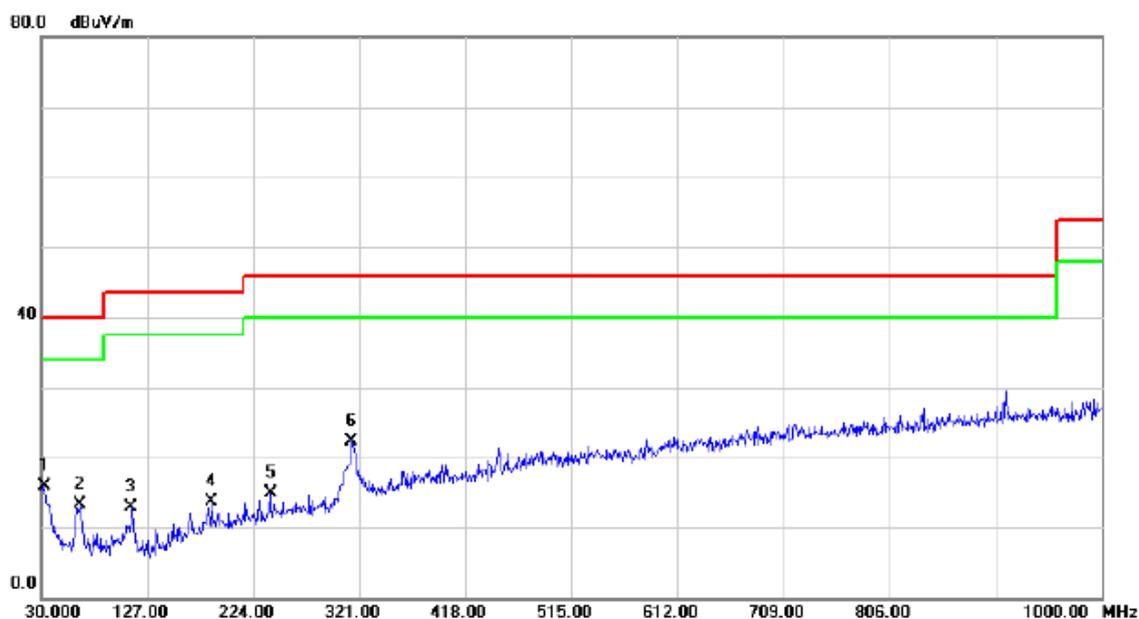

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		32.9100	30.94	-15.12	15.82	40.00	-24.18	QP	
2		65.8900	28.95	-15.63	13.32	40.00	-26.68	QP	
3		112.4500	29.93	-17.05	12.88	43.50	-30.62	QP	
4		186.1700	29.83	-16.20	13.63	43.50	-29.87	QP	
5		240.0050	30.25	-15.25	15.00	46.00	-31.00	QP	
6	*	314.6950	35.32	-13.09	22.23	46.00	-23.77	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


Horizontal

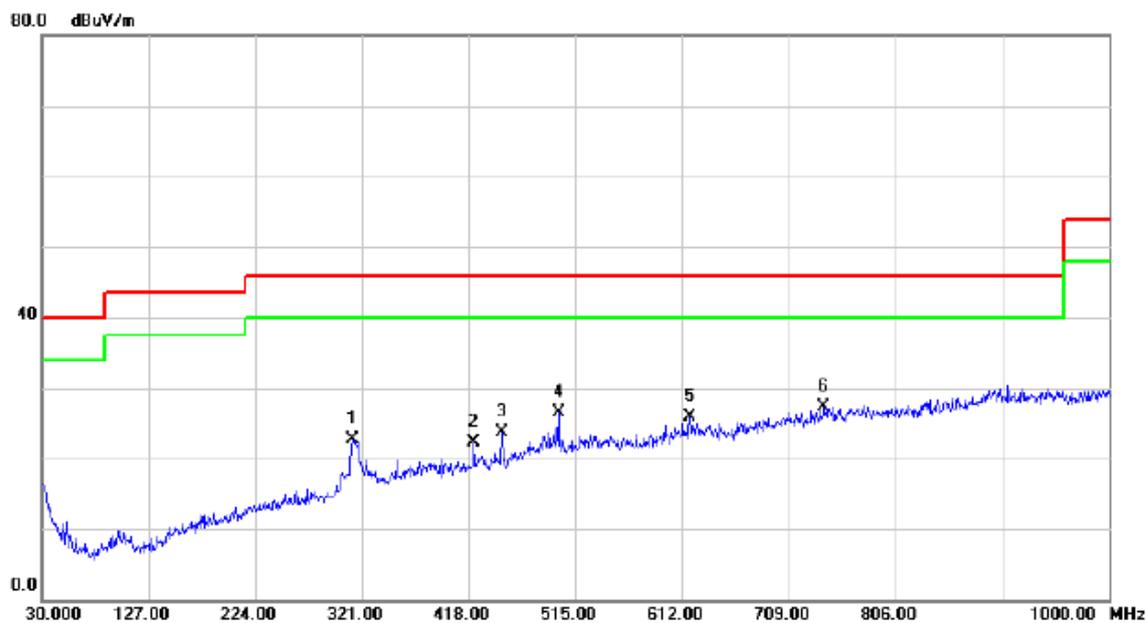

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		312.2700	35.77	-13.15	22.62	46.00	-23.38	QP	
2		422.8500	32.74	-10.44	22.30	46.00	-23.70	QP	
3		448.0700	33.41	-9.72	23.69	46.00	-22.31	QP	
4		499.4800	35.85	-9.32	26.53	46.00	-19.47	QP	
5		618.7900	33.17	-7.24	25.93	46.00	-20.07	QP	
6	*	741.0100	32.34	-5.08	27.26	46.00	-18.74	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN

Vertical

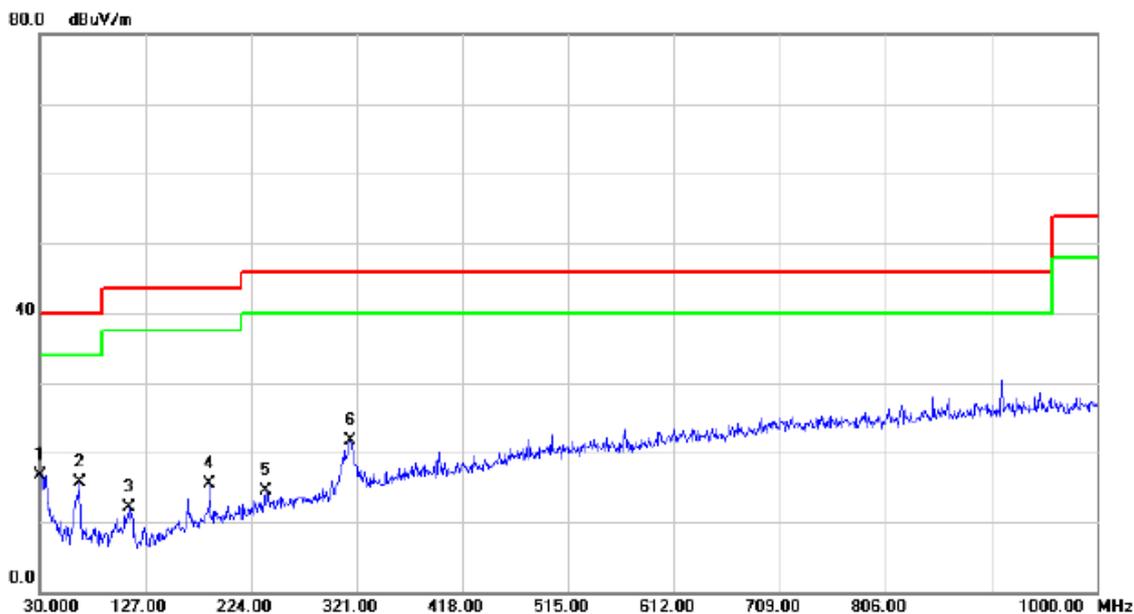

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.9700	31.83	-15.09	16.74	40.00	-23.26	QP	
2		66.8600	31.42	-15.78	15.64	40.00	-24.36	QP	
3		112.9350	29.03	-17.00	12.03	43.50	-31.47	QP	
4		186.1700	31.71	-16.20	15.51	43.50	-27.99	QP	
5		238.0650	29.91	-15.37	14.54	46.00	-31.46	QP	
6		315.6650	34.72	-13.07	21.65	46.00	-24.35	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN

Horizontal




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		186.1700	31.93	-16.20	15.73	43.50	-27.77	QP	
2		238.5500	30.58	-15.34	15.24	46.00	-30.76	QP	
3		315.1800	37.86	-13.08	24.78	46.00	-21.22	QP	
4		448.0700	33.60	-9.72	23.88	46.00	-22.12	QP	
5	*	499.4800	36.92	-9.32	27.60	46.00	-18.40	QP	
6		578.0500	32.76	-7.69	25.07	46.00	-20.93	QP	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK


Vertical

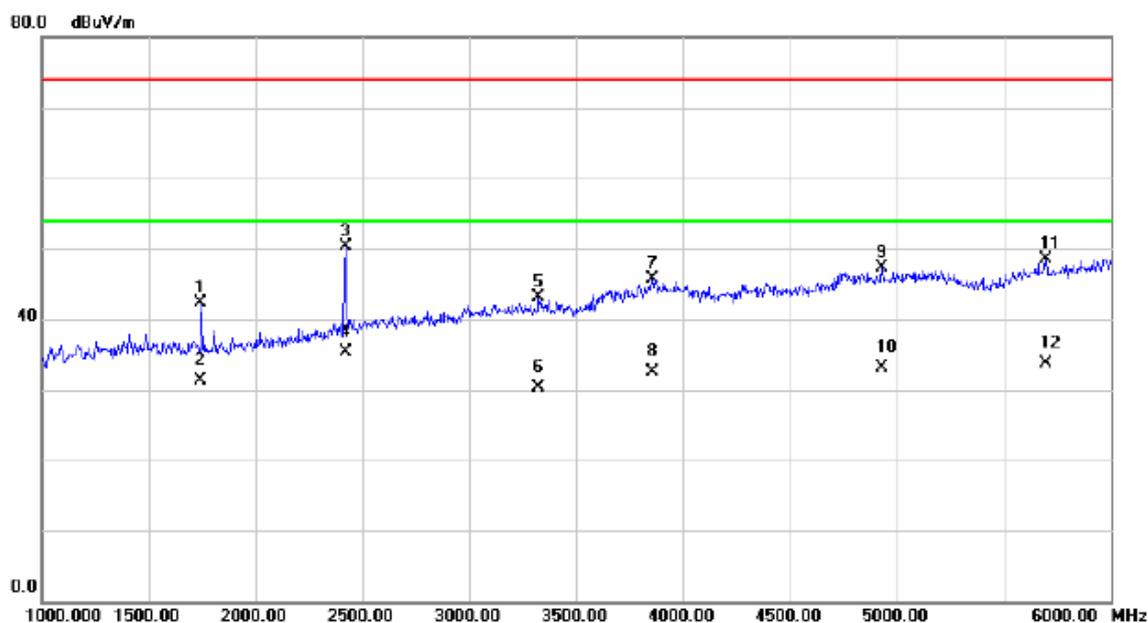

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1745.000	45.68	-3.42	42.26	74.00	-31.74	peak	
2		1745.000	34.66	-3.42	31.24	54.00	-22.76	AVG	
3		2420.000	51.12	-0.77	50.35	74.00	-23.65	peak	
4	*	2420.000	36.03	-0.77	35.26	54.00	-18.74	AVG	
5		3325.000	40.59	2.42	43.01	74.00	-30.99	peak	
6		3325.000	27.82	2.42	30.24	54.00	-23.76	AVG	
7		3855.000	41.41	4.35	45.76	74.00	-28.24	peak	
8		3855.000	28.07	4.35	32.42	54.00	-21.58	AVG	
9		4930.000	40.15	7.06	47.21	74.00	-26.79	peak	
10		4930.000	26.06	7.06	33.12	54.00	-20.88	AVG	
11		5695.000	39.79	8.77	48.56	74.00	-25.44	peak	
12		5695.000	24.93	8.77	33.70	54.00	-20.30	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK


Horizontal

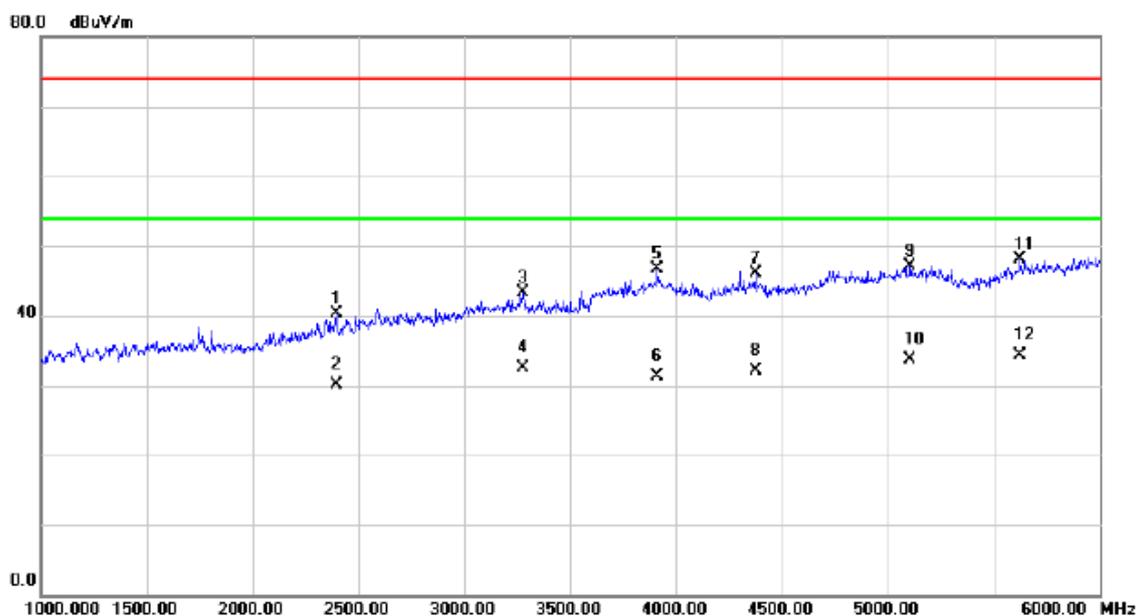

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2395.000	41.14	-0.91	40.23	74.00	-33.77	peak	
2		2395.000	31.11	-0.91	30.20	54.00	-23.80	AVG	
3		3275.000	41.08	2.27	43.35	74.00	-30.65	peak	
4		3275.000	30.16	2.27	32.43	54.00	-21.57	AVG	
5		3910.000	42.21	4.57	46.78	74.00	-27.22	peak	
6		3910.000	26.69	4.57	31.26	54.00	-22.74	AVG	
7		4375.000	40.55	5.48	46.03	74.00	-27.97	peak	
8		4375.000	26.55	5.48	32.03	54.00	-21.97	AVG	
9		5105.000	39.57	7.44	47.01	74.00	-26.99	peak	
10		5105.000	26.23	7.44	33.67	54.00	-20.33	AVG	
11		5620.000	39.71	8.47	48.18	74.00	-25.82	peak	
12	*	5620.000	25.79	8.47	34.26	54.00	-19.74	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1632B580A00


Vertical

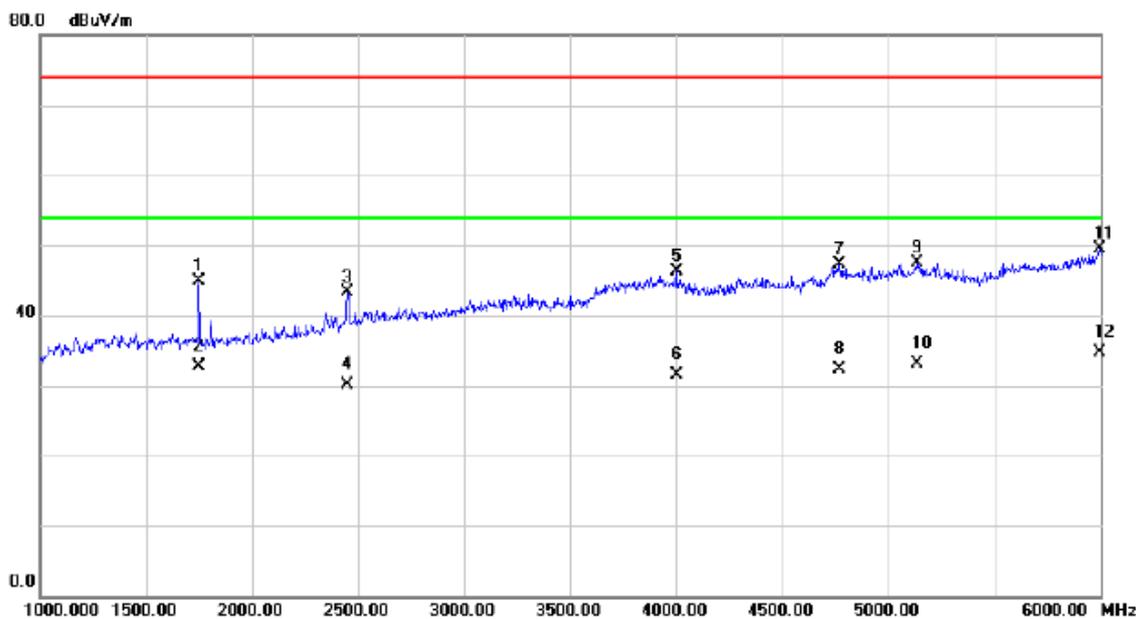

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1750.000	48.40	-3.41	44.99	74.00	-29.01	peak	
2		1750.000	36.04	-3.41	32.63	54.00	-21.37	AVG	
3		2450.000	43.82	-0.61	43.21	74.00	-30.79	peak	
4		2450.000	30.76	-0.61	30.15	54.00	-23.85	AVG	
5		4000.000	41.46	4.92	46.38	74.00	-27.62	peak	
6		4000.000	26.50	4.92	31.42	54.00	-22.58	AVG	
7		4770.000	40.84	6.54	47.38	74.00	-26.62	peak	
8		4770.000	25.82	6.54	32.36	54.00	-21.64	AVG	
9		5135.000	40.04	7.48	47.52	74.00	-26.48	peak	
10		5135.000	25.57	7.48	33.05	54.00	-20.95	AVG	
11		5995.000	39.48	9.98	49.46	74.00	-24.54	peak	
12	*	5995.000	24.75	9.98	34.73	54.00	-19.27	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1632B580A00


Horizontal

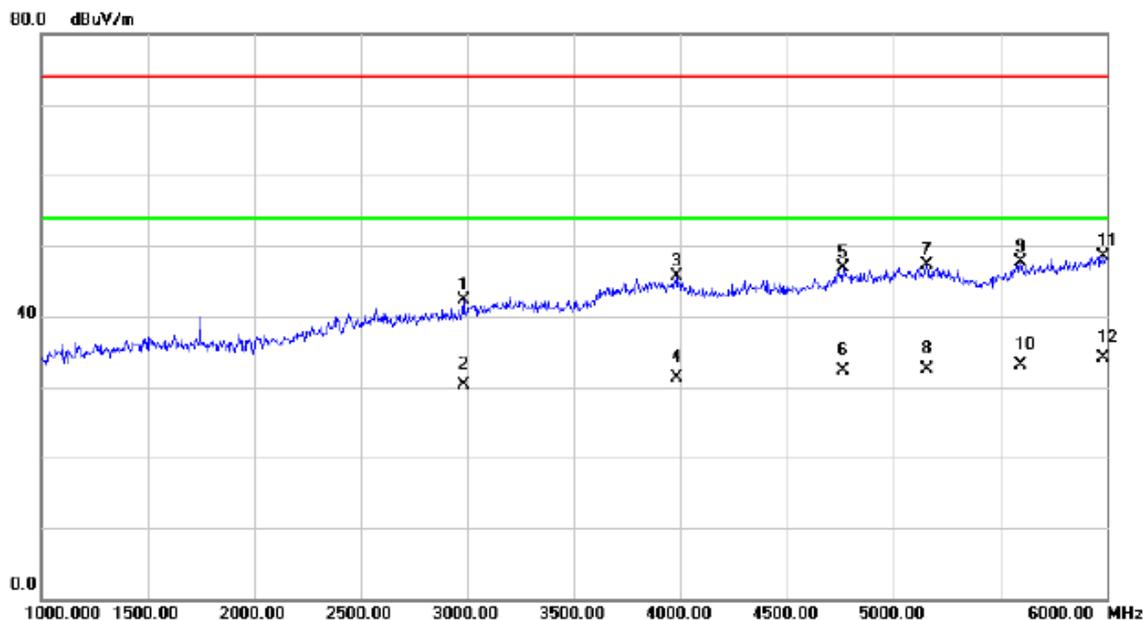

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2980.000	40.84	1.40	42.24	74.00	-31.76	peak	
2		2980.000	28.84	1.40	30.24	54.00	-23.76	AVG	
3		3985.000	40.87	4.86	45.73	74.00	-28.27	peak	
4		3985.000	26.40	4.86	31.26	54.00	-22.74	AVG	
5		4760.000	40.50	6.50	47.00	74.00	-27.00	peak	
6		4760.000	25.80	6.50	32.30	54.00	-21.70	AVG	
7		5155.000	39.71	7.50	47.21	74.00	-26.79	peak	
8		5155.000	24.92	7.50	32.42	54.00	-21.58	AVG	
9		5595.000	39.38	8.37	47.75	74.00	-26.25	peak	
10		5595.000	24.67	8.37	33.04	54.00	-20.96	AVG	
11		5985.000	38.49	9.94	48.43	74.00	-25.57	peak	
12	*	5985.000	24.18	9.94	34.12	54.00	-19.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Vertical

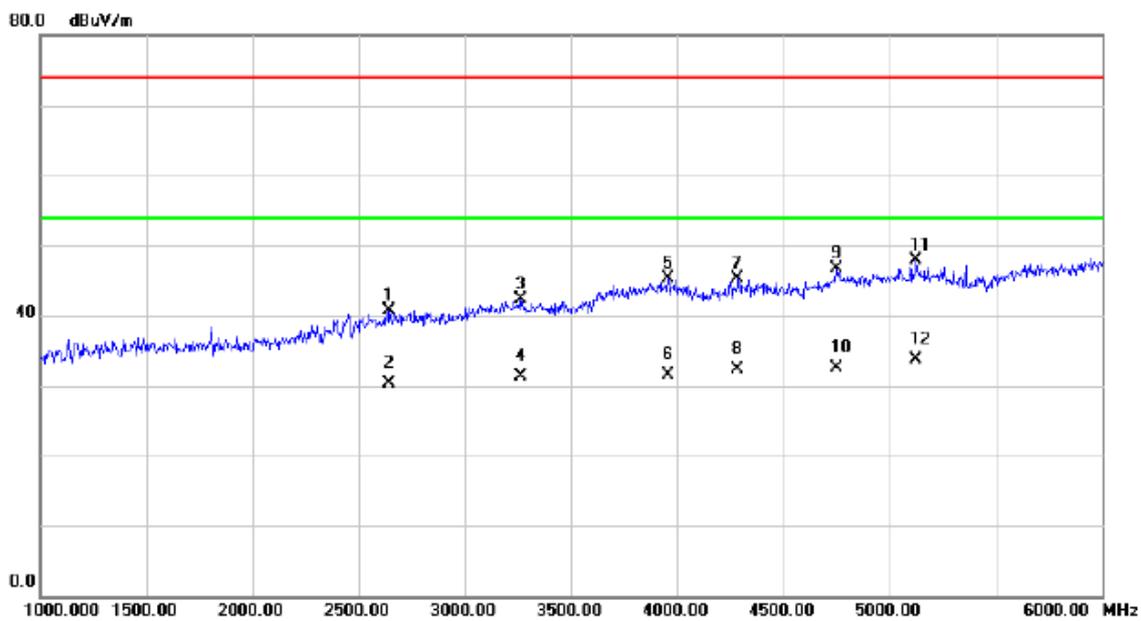

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2640.000	40.55	0.16	40.71	74.00	-33.29	peak	
2		2640.000	30.10	0.16	30.26	54.00	-23.74	AVG	
3		3265.000	40.11	2.24	42.35	74.00	-31.65	peak	
4		3265.000	29.00	2.24	31.24	54.00	-22.76	AVG	
5		3955.000	40.51	4.75	45.26	74.00	-28.74	peak	
6		3955.000	26.72	4.75	31.47	54.00	-22.53	AVG	
7		4285.000	39.97	5.34	45.31	74.00	-28.69	peak	
8		4285.000	27.02	5.34	32.36	54.00	-21.64	AVG	
9		4750.000	40.22	6.47	46.69	74.00	-27.31	peak	
10		4750.000	26.00	6.47	32.47	54.00	-21.53	AVG	
11		5125.000	40.44	7.47	47.91	74.00	-26.09	peak	
12	*	5125.000	26.16	7.47	33.63	54.00	-20.37	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Horizontal

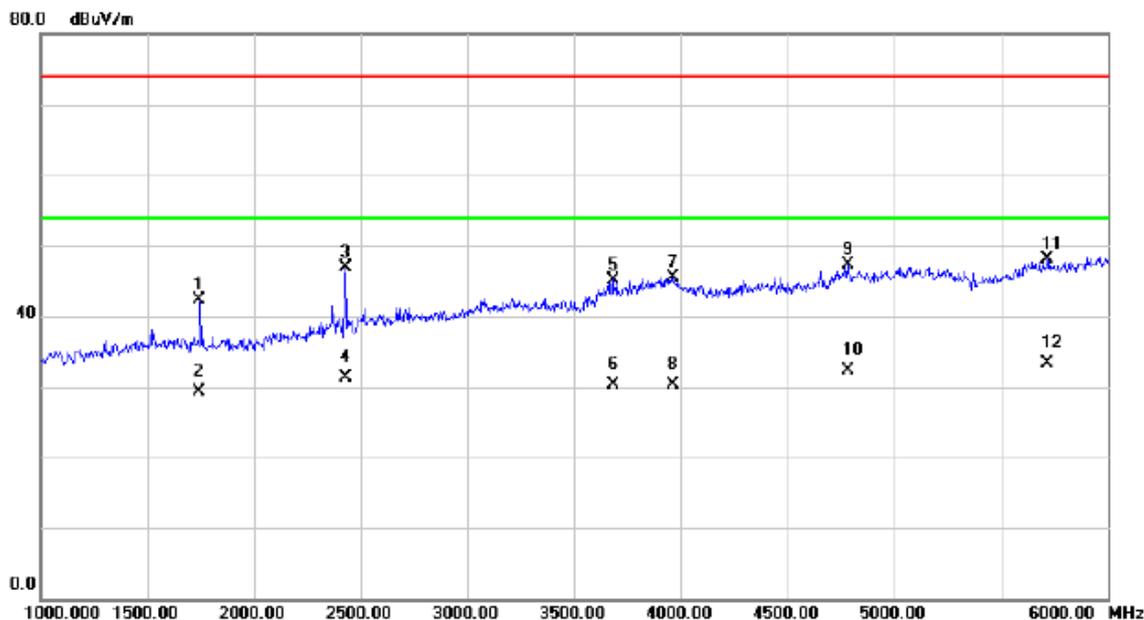

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1745.000	45.73	-3.42	42.31	74.00	-31.69	peak	
2		1745.000	32.68	-3.42	29.26	54.00	-24.74	AVG	
3		2430.000	47.66	-0.72	46.94	74.00	-27.06	peak	
4		2430.000	31.96	-0.72	31.24	54.00	-22.76	AVG	
5		3680.000	41.55	3.65	45.20	74.00	-28.80	peak	
6		3680.000	26.59	3.65	30.24	54.00	-23.76	AVG	
7		3965.000	40.81	4.78	45.59	74.00	-28.41	peak	
8		3965.000	25.62	4.78	30.40	54.00	-23.60	AVG	
9		4780.000	40.76	6.57	47.33	74.00	-26.67	peak	
10		4780.000	25.79	6.57	32.36	54.00	-21.64	AVG	
11		5715.000	39.16	8.86	48.02	74.00	-25.98	peak	
12	*	5715.000	24.38	8.86	33.24	54.00	-20.76	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


Vertical

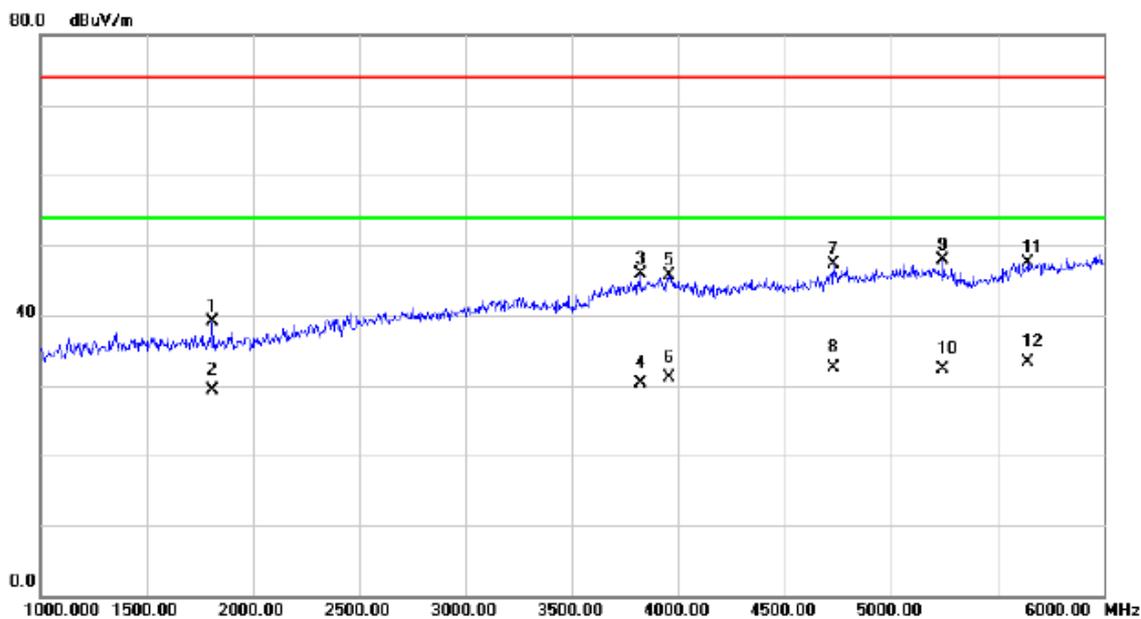

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1810.000	42.46	-3.32	39.14	74.00	-34.86	peak	
2		1810.000	32.56	-3.32	29.24	54.00	-24.76	AVG	
3		3820.000	41.74	4.20	45.94	74.00	-28.06	peak	
4		3820.000	26.04	4.20	30.24	54.00	-23.76	AVG	
5		3955.000	40.94	4.75	45.69	74.00	-28.31	peak	
6		3955.000	26.30	4.75	31.05	54.00	-22.95	AVG	
7		4730.000	40.92	6.41	47.33	74.00	-26.67	peak	
8		4730.000	26.02	6.41	32.43	54.00	-21.57	AVG	
9		5245.000	40.22	7.64	47.86	74.00	-26.14	peak	
10		5245.000	24.72	7.64	32.36	54.00	-21.64	AVG	
11		5645.000	38.88	8.58	47.46	74.00	-26.54	peak	
12	*	5645.000	24.82	8.58	33.40	54.00	-20.60	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


Horizontal

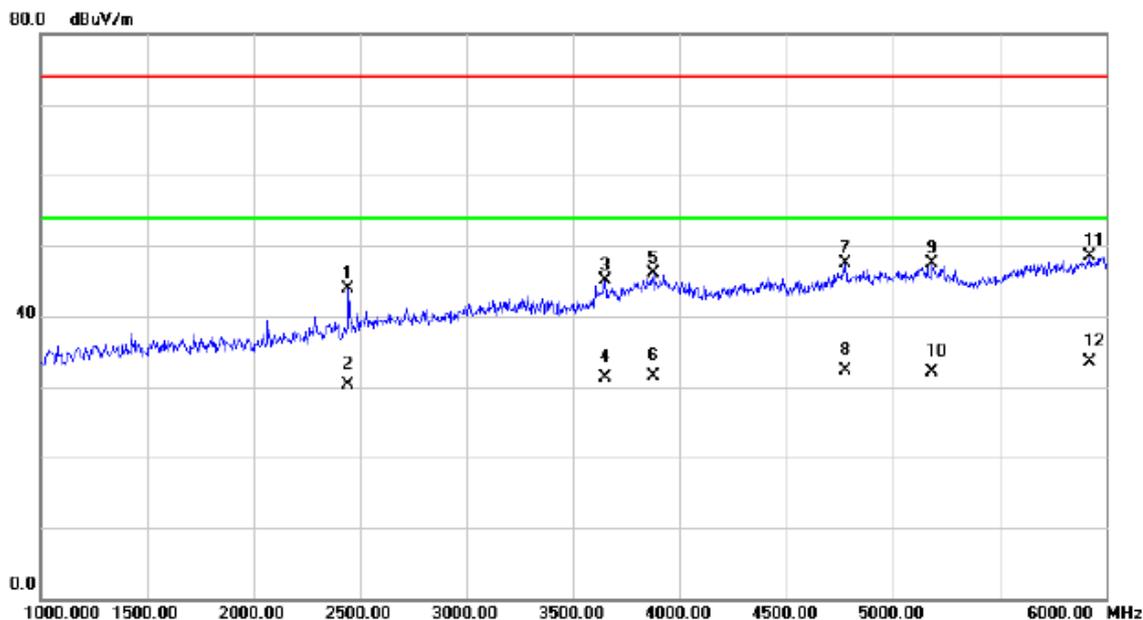

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2445.000	44.45	-0.64	43.81	74.00	-30.19	peak	
2		2445.000	30.90	-0.64	30.26	54.00	-23.74	AVG	
3		3650.000	41.48	3.53	45.01	74.00	-28.99	peak	
4		3650.000	27.71	3.53	31.24	54.00	-22.76	AVG	
5		3875.000	41.62	4.42	46.04	74.00	-27.96	peak	
6		3875.000	27.15	4.42	31.57	54.00	-22.43	AVG	
7		4775.000	40.88	6.56	47.44	74.00	-26.56	peak	
8		4775.000	25.67	6.56	32.23	54.00	-21.77	AVG	
9		5185.000	39.99	7.55	47.54	74.00	-26.46	peak	
10		5185.000	24.48	7.55	32.03	54.00	-21.97	AVG	
11		5925.000	38.85	9.70	48.55	74.00	-25.45	peak	
12	*	5925.000	23.84	9.70	33.54	54.00	-20.46	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

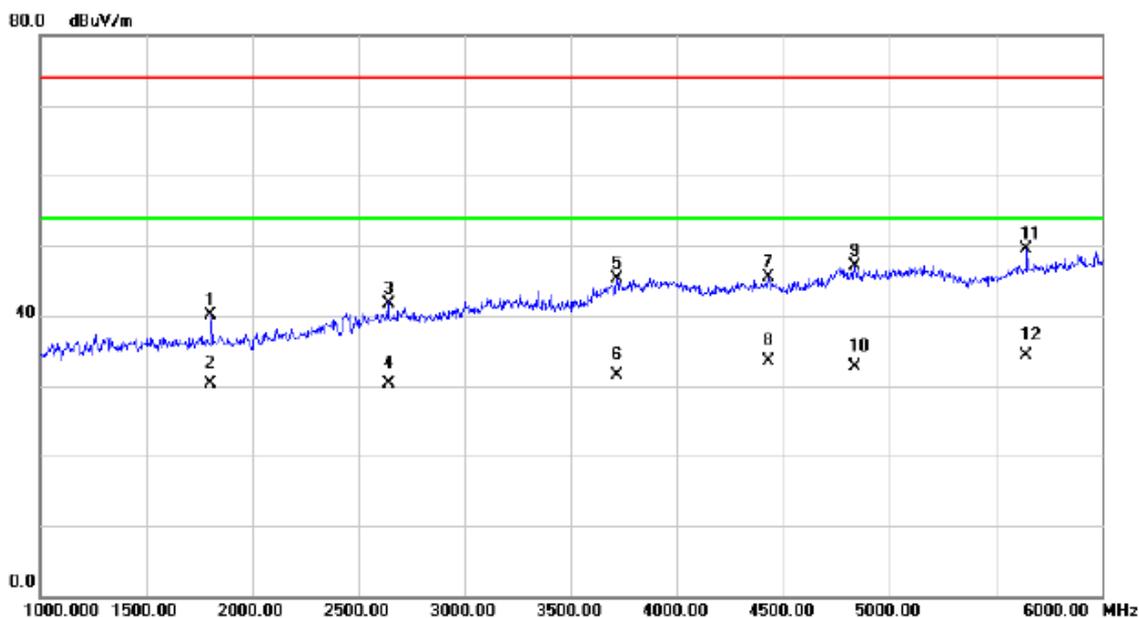

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1805.000	43.48	-3.33	40.15	74.00	-33.85	peak	
2	1805.000	33.54	-3.33	30.21	54.00	-23.79	AVG	
3	2640.000	41.64	0.16	41.80	74.00	-32.20	peak	
4	2640.000	30.10	0.16	30.26	54.00	-23.74	AVG	
5	3715.000	41.43	3.79	45.22	74.00	-28.78	peak	
6	3715.000	27.64	3.79	31.43	54.00	-22.57	AVG	
7	4430.000	39.96	5.55	45.51	74.00	-28.49	peak	
8	4430.000	28.05	5.55	33.60	54.00	-20.40	AVG	
9	4835.000	40.30	6.75	47.05	74.00	-26.95	peak	
10	4835.000	25.94	6.75	32.69	54.00	-21.31	AVG	
11	5645.000	40.90	8.58	49.48	74.00	-24.52	peak	
12 *	5645.000	25.68	8.58	34.26	54.00	-19.74	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150

Horizontal

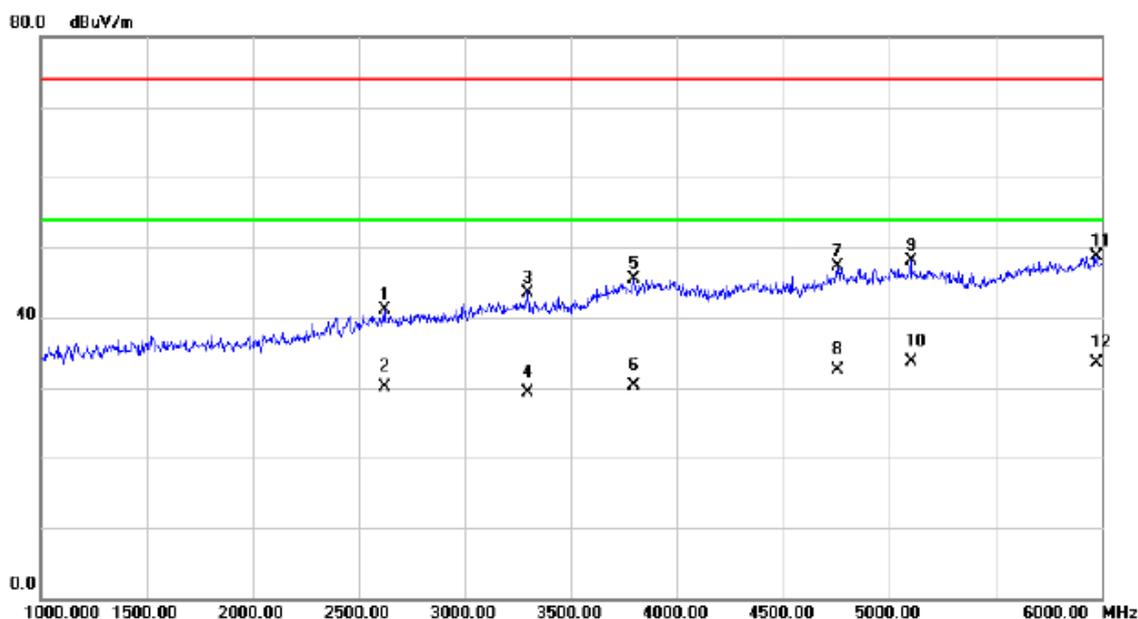

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2620.000	40.98	0.10	41.08	74.00	-32.92	peak	
2		2620.000	30.05	0.10	30.15	54.00	-23.85	AVG	
3		3295.000	41.27	2.33	43.60	74.00	-30.40	peak	
4		3295.000	26.93	2.33	29.26	54.00	-24.74	AVG	
5		3795.000	41.45	4.10	45.55	74.00	-28.45	peak	
6		3795.000	26.11	4.10	30.21	54.00	-23.79	AVG	
7		4755.000	40.87	6.48	47.35	74.00	-26.65	peak	
8		4755.000	25.99	6.48	32.47	54.00	-21.53	AVG	
9		5100.000	40.60	7.44	48.04	74.00	-25.96	peak	
10	*	5100.000	26.25	7.44	33.69	54.00	-20.31	AVG	
11		5975.000	38.84	9.90	48.74	74.00	-25.26	peak	
12		5975.000	23.66	9.90	33.56	54.00	-20.44	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Vertical



No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1805.000	43.50	-3.33	40.17	74.00	-33.83	peak	
2	1805.000	33.59	-3.33	30.26	54.00	-23.74	AVG	
3	2485.000	41.78	-0.42	41.36	74.00	-32.64	peak	
4	2485.000	31.68	-0.42	31.26	54.00	-22.74	AVG	
5	3160.000	41.22	1.94	43.16	74.00	-30.84	peak	
6	3160.000	30.69	1.94	32.63	54.00	-21.37	AVG	
7	4020.000	40.92	4.94	45.86	74.00	-28.14	peak	
8	4020.000	29.12	4.94	34.06	54.00	-19.94	AVG	
9	4380.000	40.91	5.49	46.40	74.00	-27.60	peak	
10	4380.000	28.27	5.49	33.76	54.00	-20.24	AVG	
11	5590.000	39.46	8.36	47.82	74.00	-26.18	peak	
12 *	5590.000	26.84	8.36	35.20	54.00	-18.80	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Horizontal

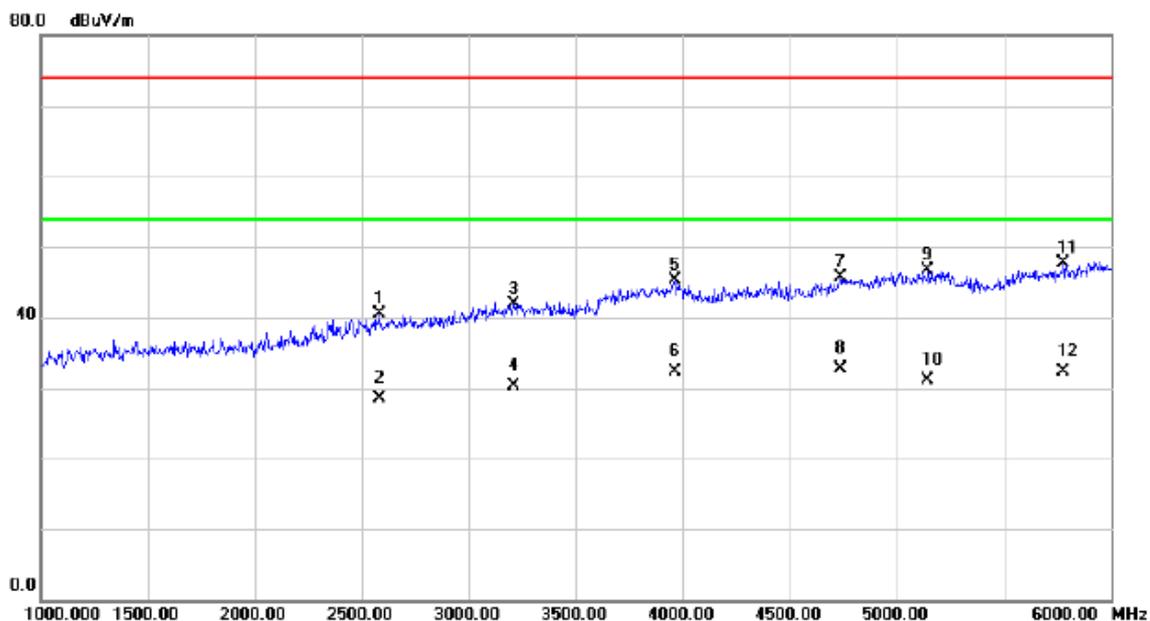

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2580.000	40.58	-0.04	40.54	74.00	-33.46	peak	
2	2580.000	28.50	-0.04	28.46	54.00	-25.54	AVG	
3	3210.000	39.84	2.08	41.92	74.00	-32.08	peak	
4	3210.000	28.17	2.08	30.25	54.00	-23.75	AVG	
5	3960.000	40.49	4.76	45.25	74.00	-28.75	peak	
6	3960.000	27.64	4.76	32.40	54.00	-21.60	AVG	
7	4735.000	39.35	6.42	45.77	74.00	-28.23	peak	
8 *	4735.000	26.28	6.42	32.70	54.00	-21.30	AVG	
9	5145.000	39.24	7.49	46.73	74.00	-27.27	peak	
10	5145.000	23.53	7.49	31.02	54.00	-22.98	AVG	
11	5775.000	38.68	9.10	47.78	74.00	-26.22	peak	
12	5775.000	23.26	9.10	32.36	54.00	-21.64	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Vertical

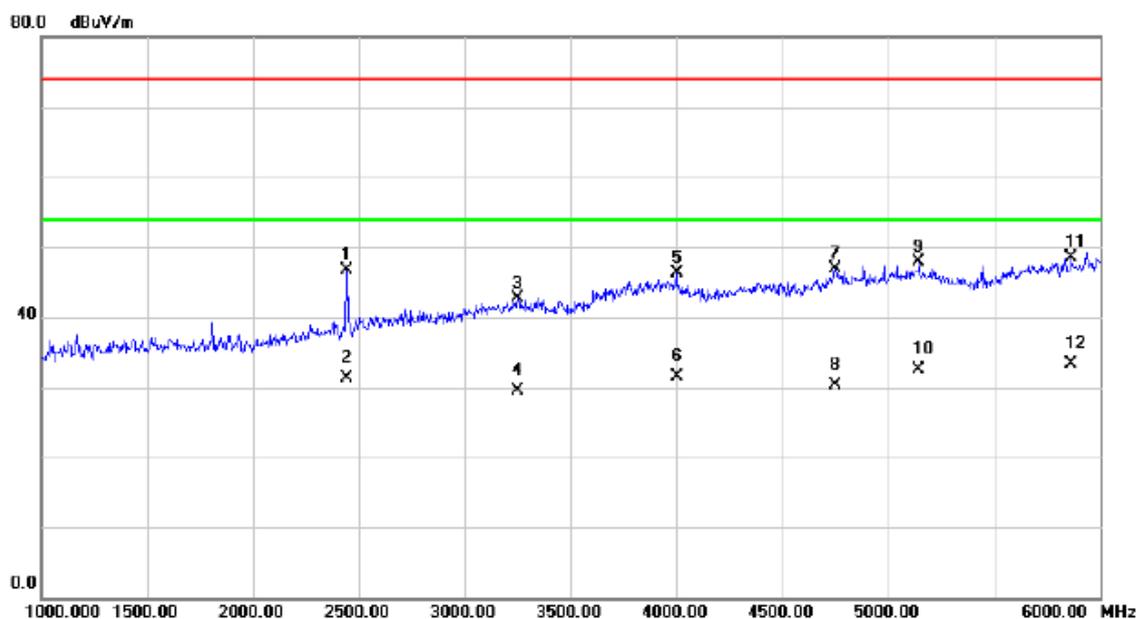

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2440.000	47.30	-0.66	46.64	74.00	-27.36	peak	
2		2440.000	31.91	-0.66	31.25	54.00	-22.75	AVG	
3		3250.000	40.41	2.20	42.61	74.00	-31.39	peak	
4		3250.000	27.37	2.20	29.57	54.00	-24.43	AVG	
5		4000.000	41.35	4.92	46.27	74.00	-27.73	peak	
6		4000.000	26.50	4.92	31.42	54.00	-22.58	AVG	
7		4750.000	40.40	6.47	46.87	74.00	-27.13	peak	
8		4750.000	23.89	6.47	30.36	54.00	-23.64	AVG	
9		5145.000	40.32	7.49	47.81	74.00	-26.19	peak	
10		5145.000	24.98	7.49	32.47	54.00	-21.53	AVG	
11		5865.000	38.98	9.46	48.44	74.00	-25.56	peak	
12	*	5865.000	23.80	9.46	33.26	54.00	-20.74	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Horizontal

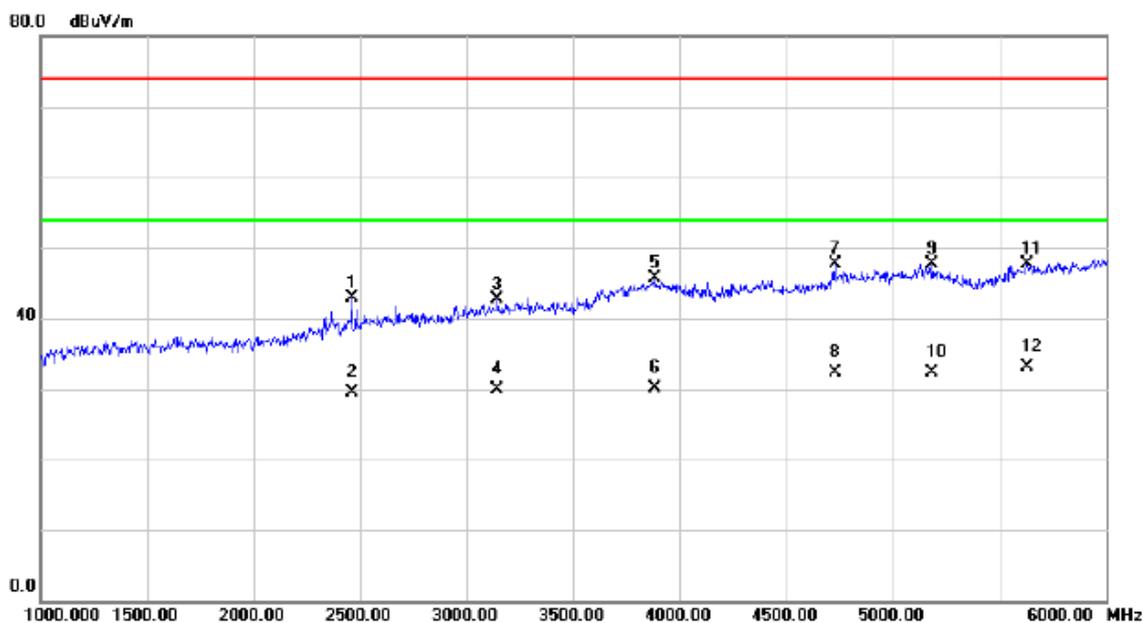

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2460.000	43.47	-0.56	42.91	74.00	-31.09	peak	
2		2460.000	30.16	-0.56	29.60	54.00	-24.40	AVG	
3		3145.000	40.77	1.89	42.66	74.00	-31.34	peak	
4		3145.000	27.98	1.89	29.87	54.00	-24.13	AVG	
5		3885.000	41.24	4.46	45.70	74.00	-28.30	peak	
6		3885.000	25.64	4.46	30.10	54.00	-23.90	AVG	
7		4730.000	41.39	6.41	47.80	74.00	-26.20	peak	
8		4730.000	25.99	6.41	32.40	54.00	-21.60	AVG	
9		5185.000	40.23	7.55	47.78	74.00	-26.22	peak	
10		5185.000	24.80	7.55	32.35	54.00	-21.65	AVG	
11		5630.000	39.21	8.52	47.73	74.00	-26.27	peak	
12	*	5630.000	24.60	8.52	33.12	54.00	-20.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Vertical

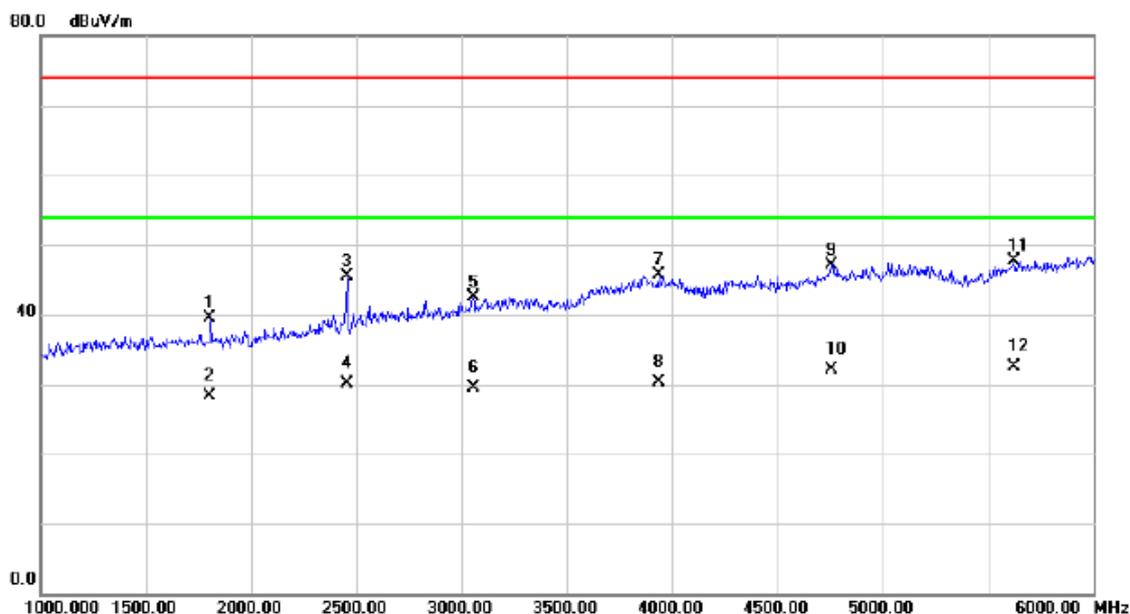

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1805.000	42.79	-3.33	39.46	74.00	-34.54	peak	
2		1805.000	31.73	-3.33	28.40	54.00	-25.60	AVG	
3		2455.000	46.03	-0.58	45.45	74.00	-28.55	peak	
4		2455.000	30.78	-0.58	30.20	54.00	-23.80	AVG	
5		3055.000	40.80	1.63	42.43	74.00	-31.57	peak	
6		3055.000	27.82	1.63	29.45	54.00	-24.55	AVG	
7		3935.000	41.06	4.66	45.72	74.00	-28.28	peak	
8		3935.000	25.57	4.66	30.23	54.00	-23.77	AVG	
9		4755.000	40.69	6.48	47.17	74.00	-26.83	peak	
10		4755.000	25.69	6.48	32.17	54.00	-21.83	AVG	
11		5625.000	39.27	8.49	47.76	74.00	-26.24	peak	
12	*	5625.000	24.05	8.49	32.54	54.00	-21.46	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Horizontal

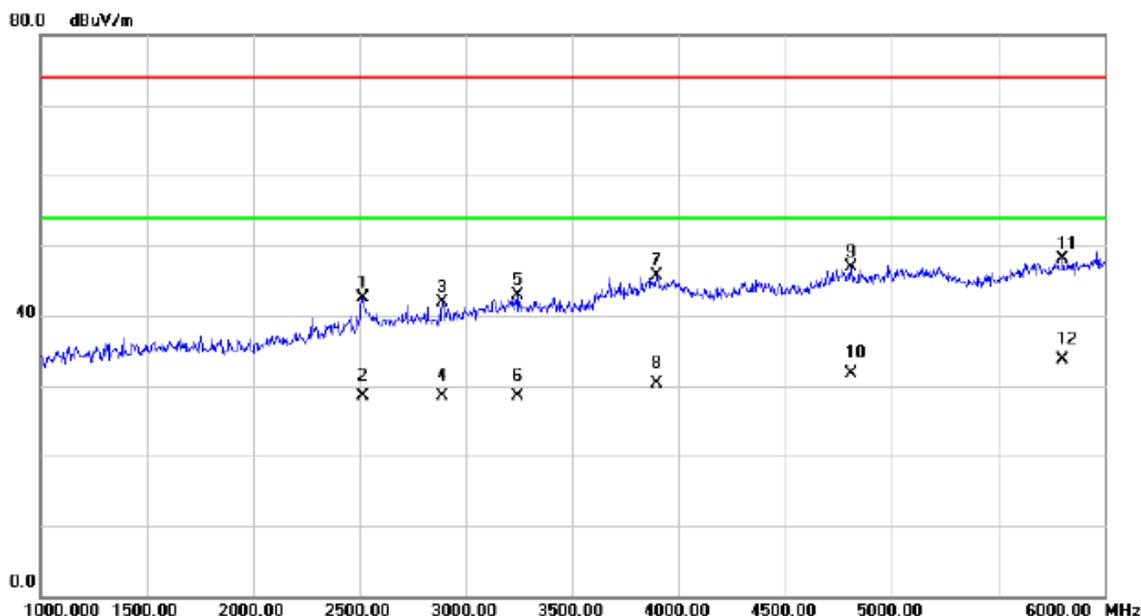

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2515.000	42.74	-0.28	42.46	74.00	-31.54	peak	
2		2515.000	28.84	-0.28	28.56	54.00	-25.44	AVG	
3		2890.000	40.84	1.06	41.90	74.00	-32.10	peak	
4		2890.000	27.36	1.06	28.42	54.00	-25.58	AVG	
5		3240.000	40.78	2.18	42.96	74.00	-31.04	peak	
6		3240.000	26.31	2.18	28.49	54.00	-25.51	AVG	
7		3895.000	41.23	4.49	45.72	74.00	-28.28	peak	
8		3895.000	25.77	4.49	30.26	54.00	-23.74	AVG	
9		4810.000	40.18	6.66	46.84	74.00	-27.16	peak	
10		4810.000	24.96	6.66	31.62	54.00	-22.38	AVG	
11		5805.000	38.97	9.22	48.19	74.00	-25.81	peak	
12	*	5805.000	24.44	9.22	33.66	54.00	-20.34	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Vertical

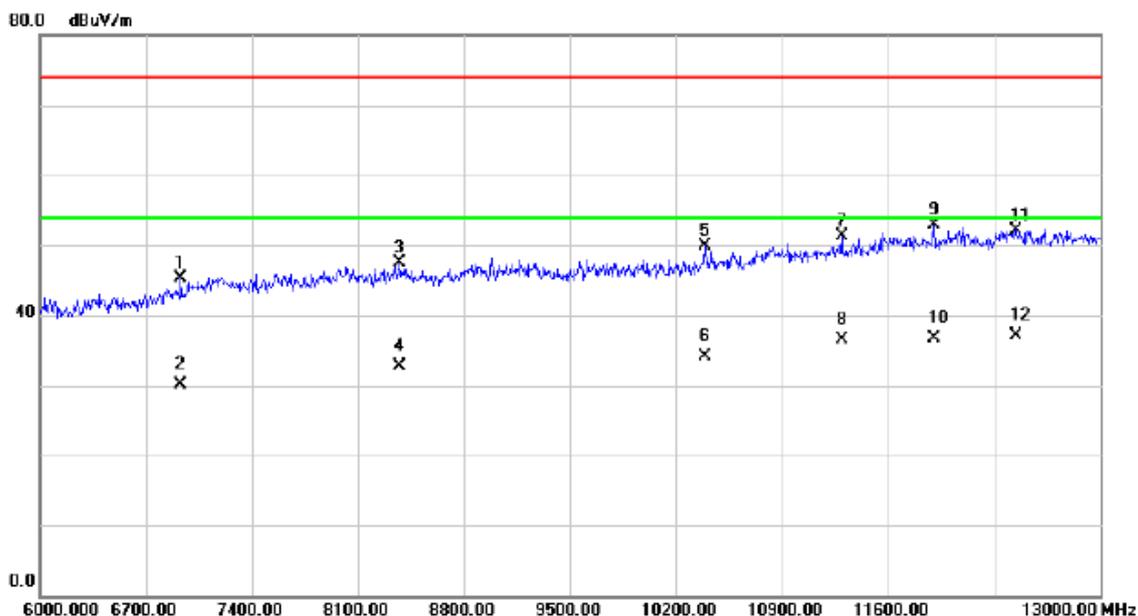

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	6931.000	32.37	12.86	45.23	74.00	-28.77	peak	
2	6931.000	17.34	12.86	30.20	54.00	-23.80	AVG	
3	8373.000	33.09	14.45	47.54	74.00	-26.46	peak	
4	8373.000	18.19	14.45	32.64	54.00	-21.36	AVG	
5	10389.00	33.47	16.38	49.85	74.00	-24.15	peak	
6	10389.00	17.74	16.38	34.12	54.00	-19.88	AVG	
7	11292.00	32.49	18.84	51.33	74.00	-22.67	peak	
8	11292.00	17.68	18.84	36.52	54.00	-17.48	AVG	
9	11901.00	32.38	20.55	52.93	74.00	-21.07	peak	
10	11901.00	16.20	20.55	36.75	54.00	-17.25	AVG	
11	12440.00	31.31	20.89	52.20	74.00	-21.80	peak	
12 *	12440.00	16.23	20.89	37.12	54.00	-16.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Horizontal

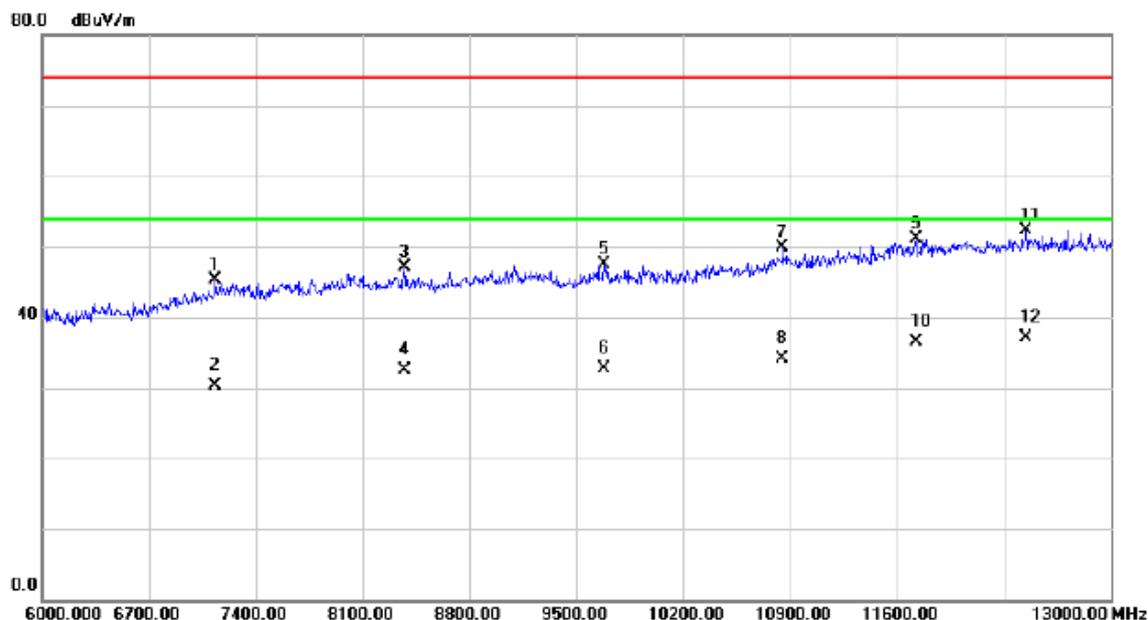

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		7134.000	31.91	13.32	45.23	74.00	-28.77	peak	
2		7134.000	16.94	13.32	30.26	54.00	-23.74	AVG	
3		8373.000	32.60	14.45	47.05	74.00	-26.95	peak	
4		8373.000	17.97	14.45	32.42	54.00	-21.58	AVG	
5		9682.000	32.07	15.41	47.48	74.00	-26.52	peak	
6		9682.000	17.22	15.41	32.63	54.00	-21.37	AVG	
7		10851.00	32.27	17.57	49.84	74.00	-24.16	peak	
8		10851.00	16.58	17.57	34.15	54.00	-19.85	AVG	
9		11726.00	31.05	20.07	51.12	74.00	-22.88	peak	
10		11726.00	16.50	20.07	36.57	54.00	-17.43	AVG	
11		12447.00	31.40	20.89	52.29	74.00	-21.71	peak	
12	*	12447.00	16.23	20.89	37.12	54.00	-16.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Vertical

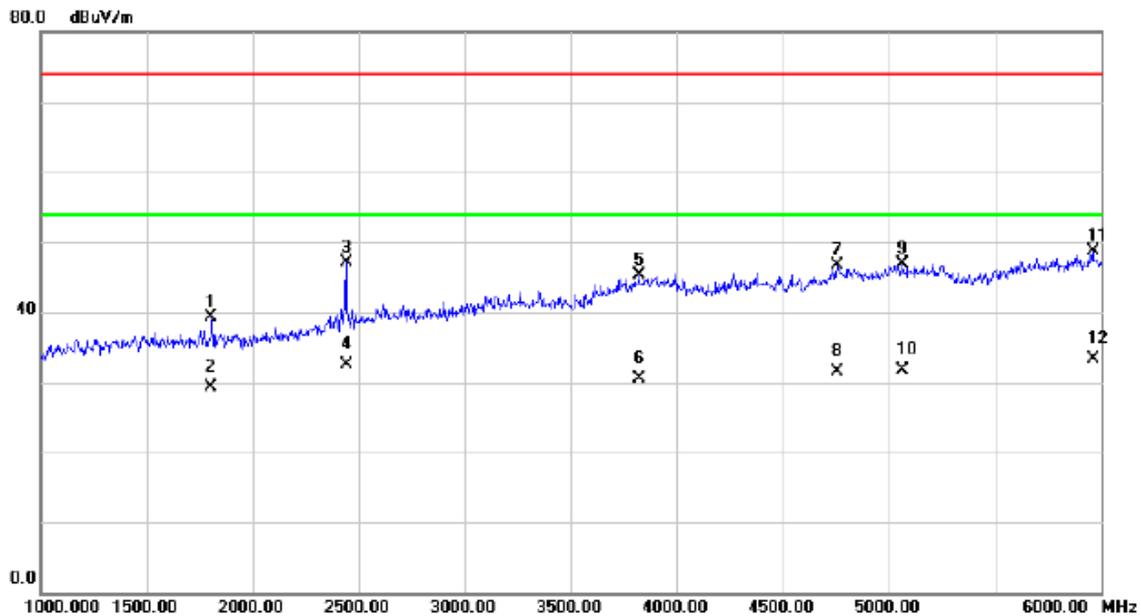

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1805.000	42.58	-3.33	39.25	74.00	-34.75	peak	
2		1805.000	32.68	-3.33	29.35	54.00	-24.65	AVG	
3		2440.000	47.78	-0.66	47.12	74.00	-26.88	peak	
4		2440.000	33.08	-0.66	32.42	54.00	-21.58	AVG	
5		3820.000	41.10	4.20	45.30	74.00	-28.70	peak	
6		3820.000	26.22	4.20	30.42	54.00	-23.58	AVG	
7		4755.000	40.22	6.48	46.70	74.00	-27.30	peak	
8		4755.000	25.08	6.48	31.56	54.00	-22.44	AVG	
9		5065.000	39.48	7.39	46.87	74.00	-27.13	peak	
10		5065.000	24.23	7.39	31.62	54.00	-22.38	AVG	
11		5960.000	38.83	9.83	48.66	74.00	-25.34	peak	
12	*	5960.000	23.45	9.83	33.28	54.00	-20.72	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Horizontal

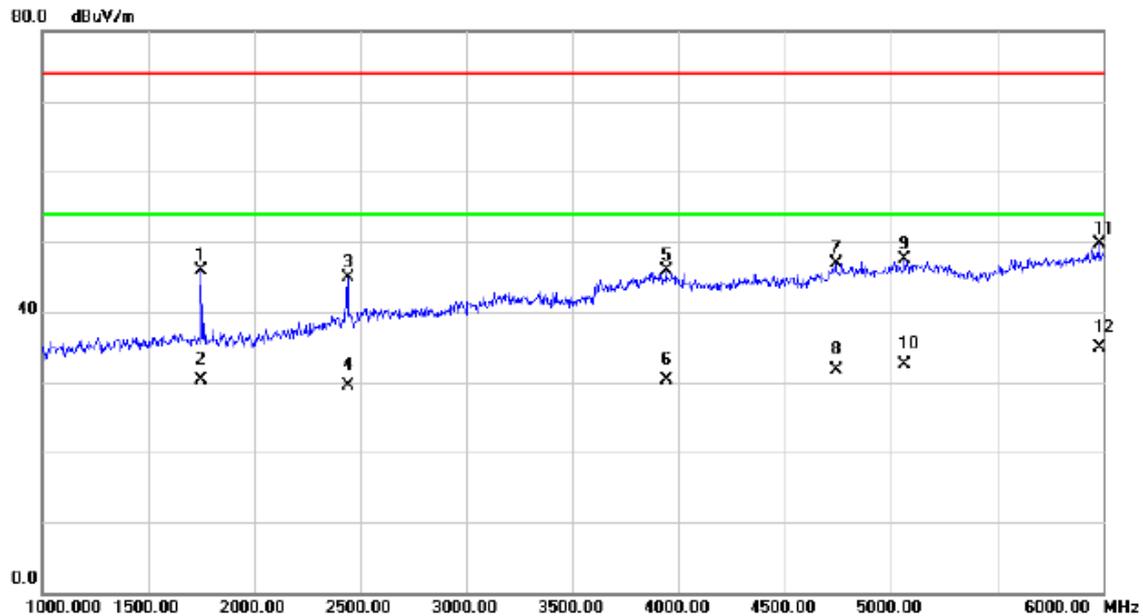

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1750.000	49.38	-3.41	45.97	74.00	-28.03	peak	
2		1750.000	33.67	-3.41	30.26	54.00	-23.74	AVG	
3		2440.000	45.59	-0.66	44.93	74.00	-29.07	peak	
4		2440.000	30.08	-0.66	29.42	54.00	-24.58	AVG	
5		3940.000	41.28	4.69	45.97	74.00	-28.03	peak	
6		3940.000	25.71	4.69	30.40	54.00	-23.60	AVG	
7		4740.000	40.51	6.44	46.95	74.00	-27.05	peak	
8		4740.000	25.18	6.44	31.62	54.00	-22.38	AVG	
9		5065.000	40.15	7.39	47.54	74.00	-26.46	peak	
10		5065.000	25.19	7.39	32.58	54.00	-21.42	AVG	
11		5980.000	39.70	9.93	49.63	74.00	-24.37	peak	
12	*	5980.000	24.93	9.93	34.86	54.00	-19.14	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Vertical

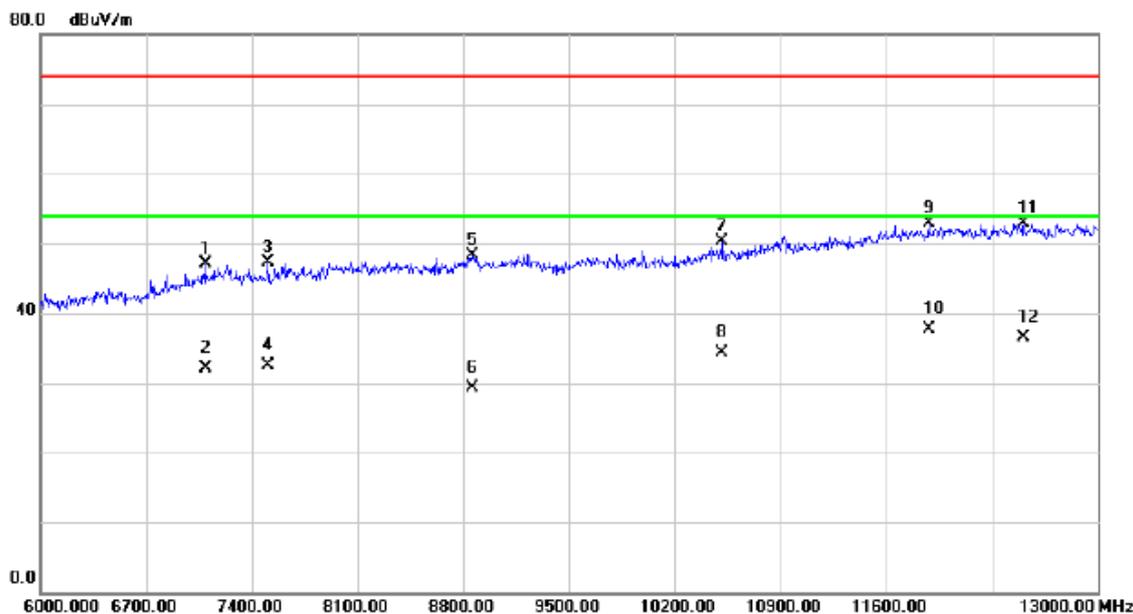

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7092.000	33.92	13.27	47.19	74.00	-26.81	peak	
2		7092.000	18.88	13.27	32.15	54.00	-21.85	AVG	
3		7505.000	33.57	13.79	47.36	74.00	-26.64	peak	
4		7505.000	18.75	13.79	32.54	54.00	-21.46	AVG	
5		8856.000	33.28	15.07	48.35	74.00	-25.65	peak	
6		8856.000	14.33	15.07	29.40	54.00	-24.60	AVG	
7		10515.00	33.56	16.70	50.26	74.00	-23.74	peak	
8		10515.00	17.56	16.70	34.26	54.00	-19.74	AVG	
9		11880.00	32.50	20.49	52.99	74.00	-21.01	peak	
10	*	11880.00	17.12	20.49	37.61	54.00	-16.39	AVG	
11		12510.00	32.07	20.91	52.98	74.00	-21.02	peak	
12		12510.00	15.68	20.91	36.59	54.00	-17.41	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen


Horizontal

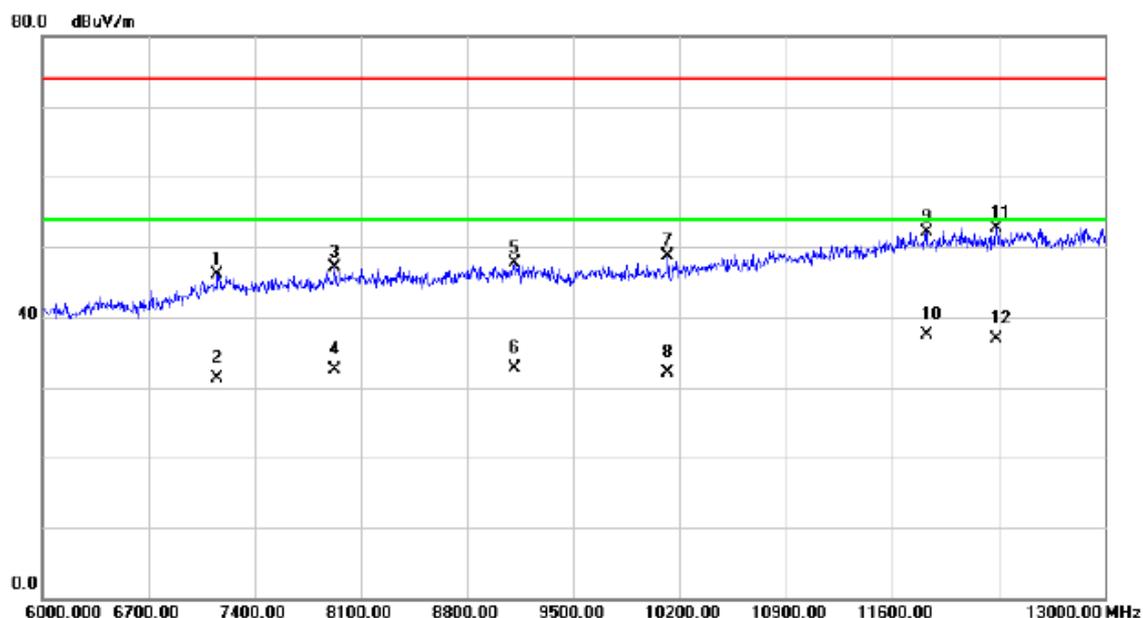

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7155.000	32.80	13.34	46.14	74.00	-27.86	peak	
2		7155.000	17.92	13.34	31.26	54.00	-22.74	AVG	
3		7925.000	32.70	14.37	47.07	74.00	-26.93	peak	
4		7925.000	18.12	14.37	32.49	54.00	-21.51	AVG	
5		9108.000	32.26	15.35	47.61	74.00	-26.39	peak	
6		9108.000	17.33	15.35	32.68	54.00	-21.32	AVG	
7		10123.00	32.91	15.71	48.62	74.00	-25.38	peak	
8		10123.00	16.41	15.71	32.12	54.00	-21.88	AVG	
9		11824.00	31.72	20.34	52.06	74.00	-21.94	peak	
10	*	11824.00	17.20	20.34	37.54	54.00	-16.46	AVG	
11		12286.00	31.83	20.87	52.70	74.00	-21.30	peak	
12		12286.00	15.97	20.87	36.84	54.00	-17.16	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


Vertical

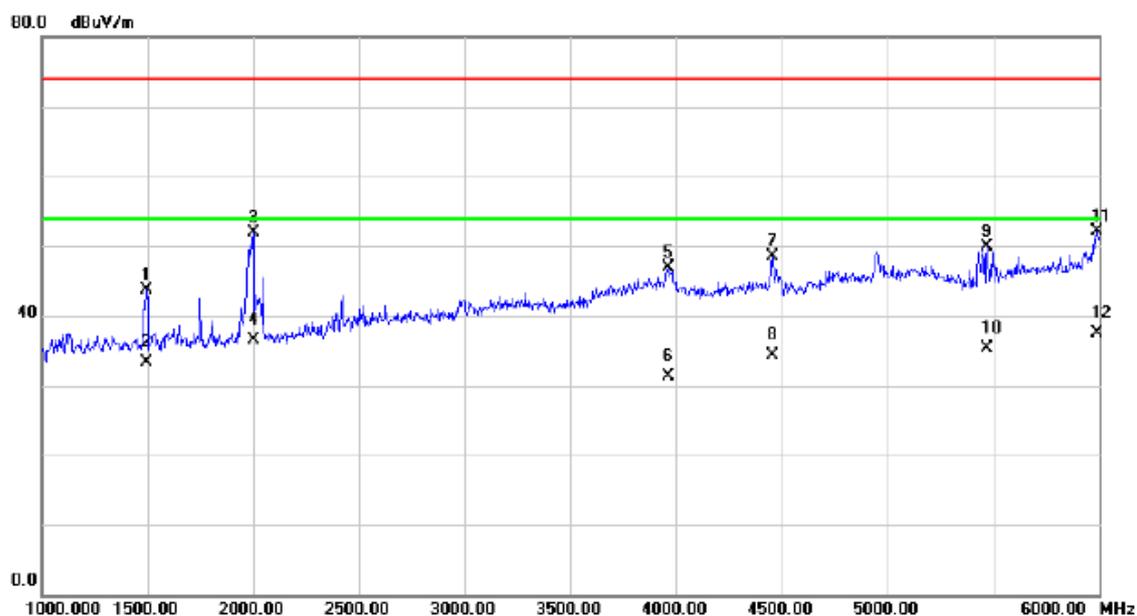

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1495.000	47.57	-3.78	43.79	74.00	-30.21	peak	
2		1495.000	37.04	-3.78	33.26	54.00	-20.74	AVG	
3		2000.000	54.99	-3.06	51.93	74.00	-22.07	peak	
4		2000.000	39.63	-3.06	36.57	54.00	-17.43	AVG	
5		3965.000	42.05	4.78	46.83	74.00	-27.17	peak	
6		3965.000	26.46	4.78	31.24	54.00	-22.76	AVG	
7		4455.000	43.00	5.59	48.59	74.00	-25.41	peak	
8		4455.000	28.63	5.59	34.22	54.00	-19.78	AVG	
9		5470.000	42.05	7.95	50.00	74.00	-24.00	peak	
10		5470.000	27.41	7.95	35.36	54.00	-18.64	AVG	
11		5990.000	42.10	9.96	52.06	74.00	-21.94	peak	
12	*	5990.000	27.49	9.96	37.45	54.00	-16.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


Horizontal

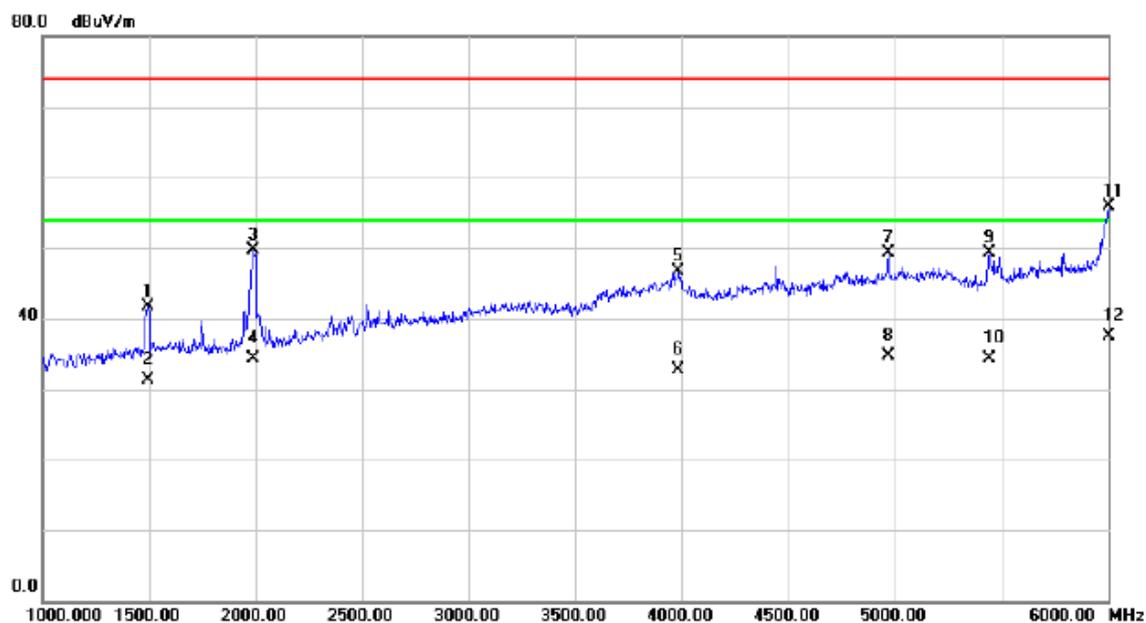

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1495.000	45.46	-3.78	41.68	74.00	-32.32	peak	
2		1495.000	35.03	-3.78	31.25	54.00	-22.75	AVG	
3		1990.000	52.71	-3.08	49.63	74.00	-24.37	peak	
4		1990.000	37.34	-3.08	34.26	54.00	-19.74	AVG	
5		3985.000	41.92	4.86	46.78	74.00	-27.22	peak	
6		3985.000	27.77	4.86	32.63	54.00	-21.37	AVG	
7		4970.000	42.11	7.20	49.31	74.00	-24.69	peak	
8		4970.000	27.55	7.20	34.75	54.00	-19.25	AVG	
9		5440.000	41.30	7.92	49.22	74.00	-24.78	peak	
10		5440.000	26.40	7.92	34.32	54.00	-19.68	AVG	
11		6000.000	45.96	10.00	55.96	74.00	-18.04	peak	
12	*	6000.000	27.56	10.00	37.56	54.00	-16.44	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN


Vertical

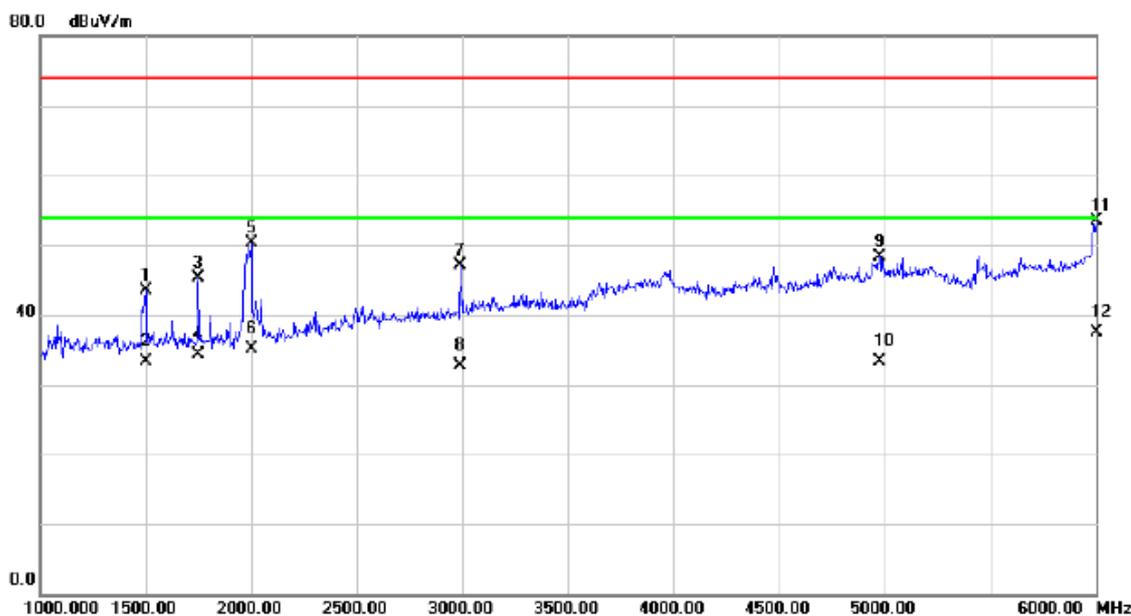

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1500.000	47.29	-3.76	43.53	74.00	-30.47	peak	
2		1500.000	37.02	-3.76	33.26	54.00	-20.74	AVG	
3		1750.000	48.76	-3.41	45.35	74.00	-28.65	peak	
4		1750.000	37.66	-3.41	34.25	54.00	-19.75	AVG	
5		2000.000	53.31	-3.06	50.25	74.00	-23.75	peak	
6		2000.000	38.18	-3.06	35.12	54.00	-18.88	AVG	
7		2990.000	45.62	1.43	47.05	74.00	-26.95	peak	
8		2990.000	31.20	1.43	32.63	54.00	-21.37	AVG	
9		4975.000	41.12	7.21	48.33	74.00	-25.67	peak	
10		4975.000	26.02	7.21	33.23	54.00	-20.77	AVG	
11		6000.000	43.55	10.00	53.55	74.00	-20.45	peak	
12	*	6000.000	27.42	10.00	37.42	54.00	-16.58	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN

Horizontal

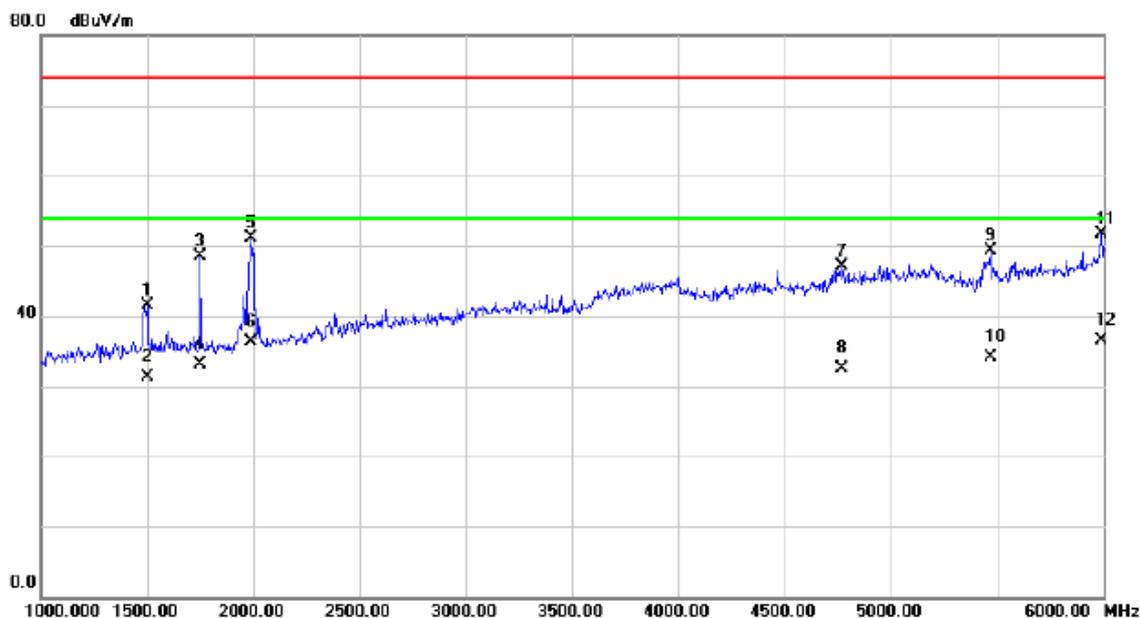

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1500.000	45.19	-3.76	41.43	74.00	-32.57	peak	
2		1500.000	35.02	-3.76	31.26	54.00	-22.74	AVG	
3		1750.000	51.94	-3.41	48.53	74.00	-25.47	peak	
4		1750.000	36.47	-3.41	33.06	54.00	-20.94	AVG	
5		1990.000	54.26	-3.08	51.18	74.00	-22.82	peak	
6		1990.000	39.32	-3.08	36.24	54.00	-17.76	AVG	
7		4770.000	40.59	6.54	47.13	74.00	-26.87	peak	
8		4770.000	25.88	6.54	32.42	54.00	-21.58	AVG	
9		5470.000	41.32	7.95	49.27	74.00	-24.73	peak	
10		5470.000	26.18	7.95	34.13	54.00	-19.87	AVG	
11		5990.000	41.65	9.96	51.61	74.00	-22.39	peak	
12	*	5990.000	26.63	9.96	36.59	54.00	-17.41	AVG	