

FCC Test Report

FCC ID: QISLUA-U23

Project No. : 1601C017A
Equipment : WCDMA Mobile Phone
Model Name : HUAWEI LUA-U23
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Jan. 05, 2016
Date of Test : Jan. 05, 2016 ~ Jan. 15, 2016
Issued Date : Jan. 18, 2016
Tested by : BTL Inc.

Testing Engineer : Pike Lee
(Pike Lee)

Technical Manager : Jeff Yang
(Jeff Yang)

Authorized Signatory : Andy Chiu
(Andy Chiu)

B T L I N C .

B1, No. 37, Lane 365, Yang-Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	15
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)	18
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	18
5 . MEASUREMENT INSTRUMENTS LIST	19
6 . EUT TEST PHOTO	20
ATTACHMENT A - CONDUCTED EMISSION	26
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	49
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	72

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1601C017A	Original Issue.	Jan. 18, 2016

1. CERTIFICATION

Equipment : WCDMA Mobile Phone
Brand Name : HUAWEI
Model Name : HUAWEI LUA-U23
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen
518129, P.R.China
Date of Test : Jan. 05, 2016 ~ Jan. 15, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1601C017A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE (2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is 2480MHz which exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of 1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.).

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
C02	CISPR	150 KHz~30MHz	2.59

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
CB08 (3m)	CISPR	30MHz ~ 200MHz	V	3.06
		30MHz ~ 200MHz	H	2.58
		200MHz ~ 1,000MHz	V	3.50
		200MHz ~ 1,000MHz	H	3.10

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
CB08 (3m)	CISPR	1GHz ~ 6GHz	V	4.14
		1GHz ~ 6GHz	H	4.14
		6GHz ~ 18GHz	V	5.34
		6GHz ~ 18GHz	H	5.34

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	WCDMA Mobile Phone
Brand Name	HUAWEI
Model Name	HUAWEI LUA-U23
Model Difference	N/A
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) HUIZHOU BYD ELECTRONIC CO., LTD. (2) Shenzhen Huntkey Electric Co., Ltd. (3) DONG GUAN PHITEK ELECTRONICS CO., LTD. Model: HW-050100U01 #2 Supplied from battery.
Power Rating	#1 I/P: 100V~240V~ 50/60 Hz,0.1A O/P: 5V $\overline{=}$ 1A #2 DC 3.8V
HW Version	VER.A
SW Version	LUA-U23C00B001

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- 2.

Item	Mfr/Brand	Model.
USB Cable	HONGLIN TECHNOLOGY CO.,LTD.	130-26654
	FOXCONN	CUBB01M-HC208-DH
Earphone	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	MEMD1632B580A00
	BOLUO COUNTY QUANCHENG ELECTRONIC	1311-3291-3.5mm-178
	GOERTEK INC.	HA1-3
	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	MEMD1532B528000
	BOLUO COUNTY QUANCHENG ELECTRONIC	1293#+3283#
Battery	Tianjin Lishen Battery Joint-Stock Co.,Ltd.	HB505076RBC
	BYD LITHIUM BATTERY Co., LTD.	
	Sunwoda Electronic Co., LTD	
	SCUD (FUJIAN) Electronics Co., Ltd	

3.

TX Frequency	GSM 850: 824MHz to 849MHz GSM 1900: 1850MHz to 1910MHz WCDMA Band 2: 1850MHz to 1910MHz WCDMA Band 5: 824MHz ~ 849MHz BT/WIFI: 2400MHz ~ 2483.5MHz
RX Frequency	GSM 850: 869MHz to 894MHz GSM 1900: 1930MHz to 1990MHz WCDMA Band 2: 1930MHz to 1990MHz WCDMA Band 5: 869MHz ~ 894MHz BT/WIFI: 2400MHz ~ 2483.5MHz GPS: 1575.42 MHz

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Mode 2	Adapter+Idle+BT+wifi+Gps+playing+speaker
Mode 3	Adapter+Idle+BT+wifi+Gps+Camera on
Mode 4	Adapter+GSM+BT+wifi+Gps
Mode 5	Adapter+WCDMA+BT+wifi+Gps
Mode 6	USB copy(EUT with PC)+BT+WIFI+GPS


The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Mode 2	Adapter+Idle+BT+wifi+Gps+playing+speaker
Mode 3	Adapter+Idle+BT+wifi+Gps+Camera on
Mode 4	Adapter+GSM+BT+wifi+Gps
Mode 5	Adapter+WCDMA+BT+wifi+Gps
Mode 6	USB copy(EUT with PC)+BT+WIFI+GPS


For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Mode 2	Adapter+Idle+BT+wifi+Gps+playing+speaker
Mode 3	Adapter+Idle+BT+wifi+Gps+Camera on
Mode 4	Adapter+GSM+BT+wifi+Gps
Mode 5	Adapter+WCDMA+BT+wifi+Gps
Mode 6	USB copy(EUT with PC)+BT+WIFI+GPS

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Mode 1-5

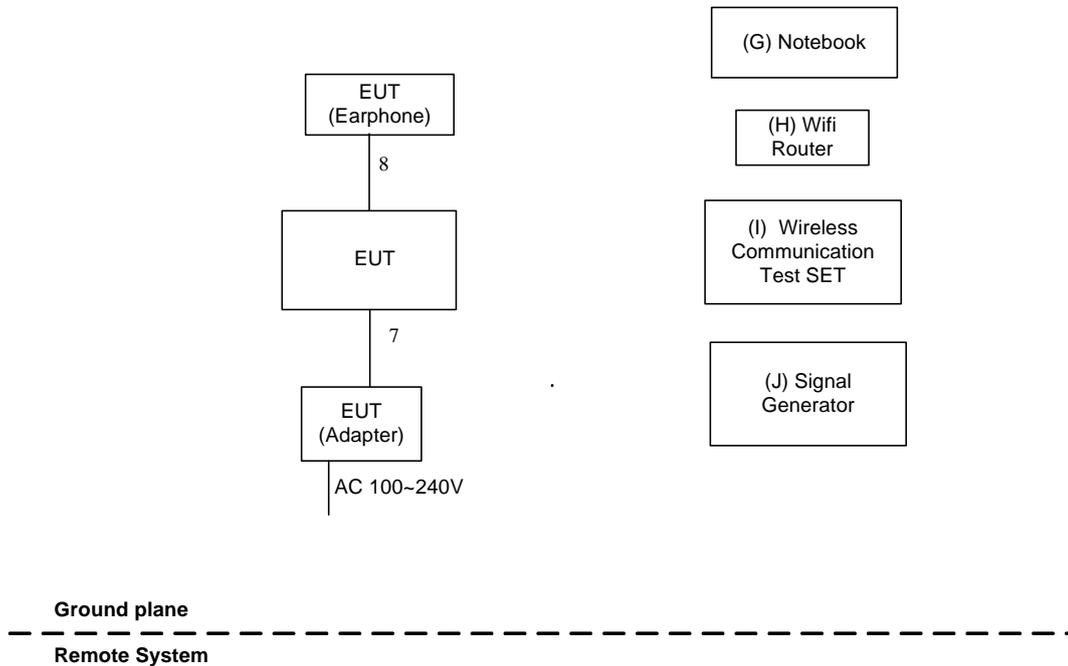

Mode 6

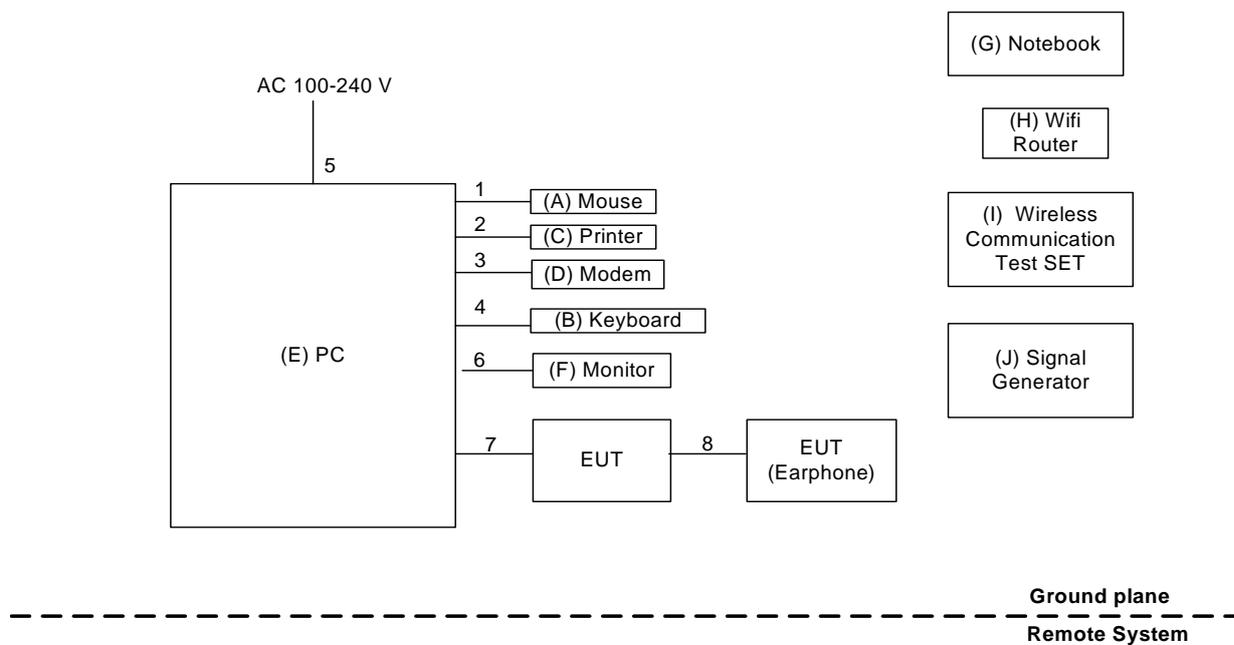

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB mouse	DELL	MS111-P	DOC	CN011D3V71581279 OLOT
B	USB keyboard	DELL	KB212-B	DOC	CN0HTXH97158125 004DXA01
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	PC	DELL	DCSM 745	DOC	G7K832X
F	LCD monitor	DELL	E177FPc	DOC	CNOFJ179-64180-6 AG-1WNS
G	Notebook	hp	hstnn-169c-3	DOC	CNU02203XG
H	Router	TP-LINK	TL-WR1041N	DOC	N/A
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183
J	Signal Generator	Agilent	E4438C	N/A	MY49071316

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.2m	Earphone Cable

Note:

(1) For detachable type I/O cable should be specified the length m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value – Limit Value


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

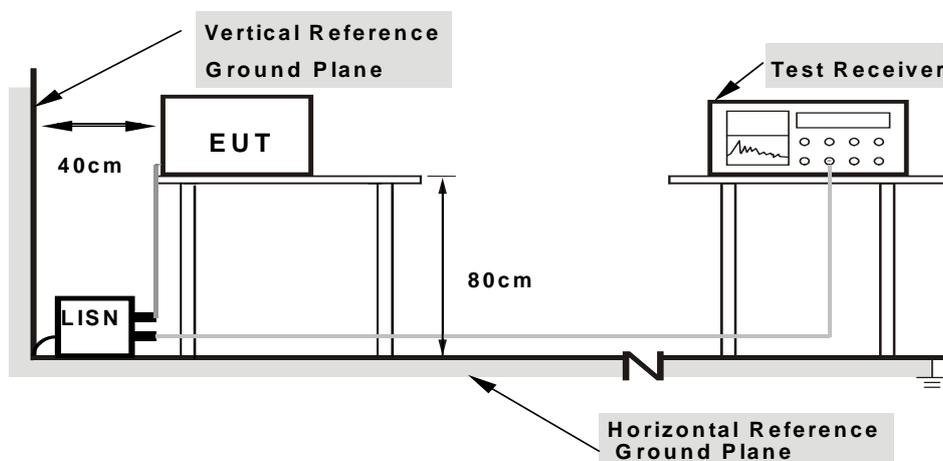

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 25°C Relative Humidity: 53%

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

CISPR 22 or CAN/CSA-CISPR 22-10:

Frequency (MHz)	Class A (at 10m)		Class B (at 10m)	
	dBuV/m		dBuV/m	
30 - 230	40		30	
230 - 1000	47		37	

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

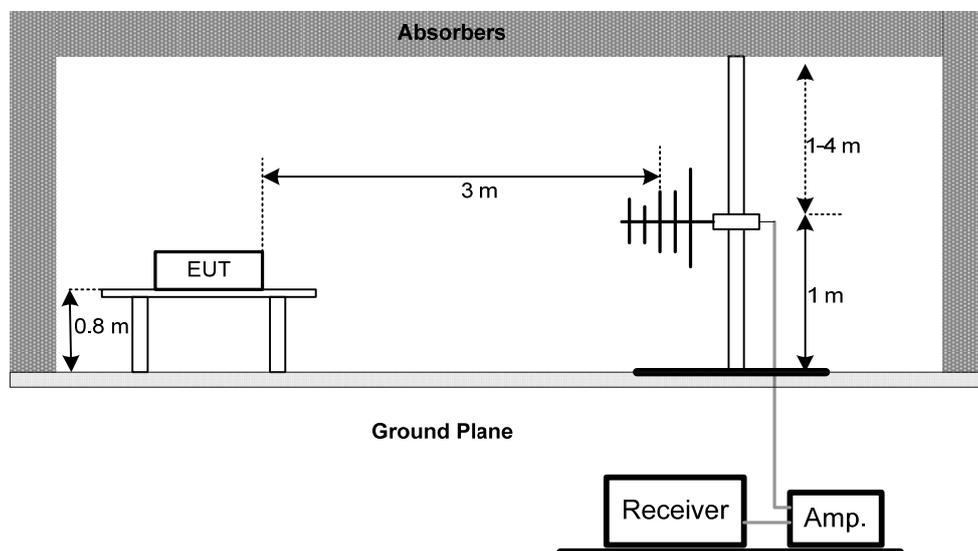

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

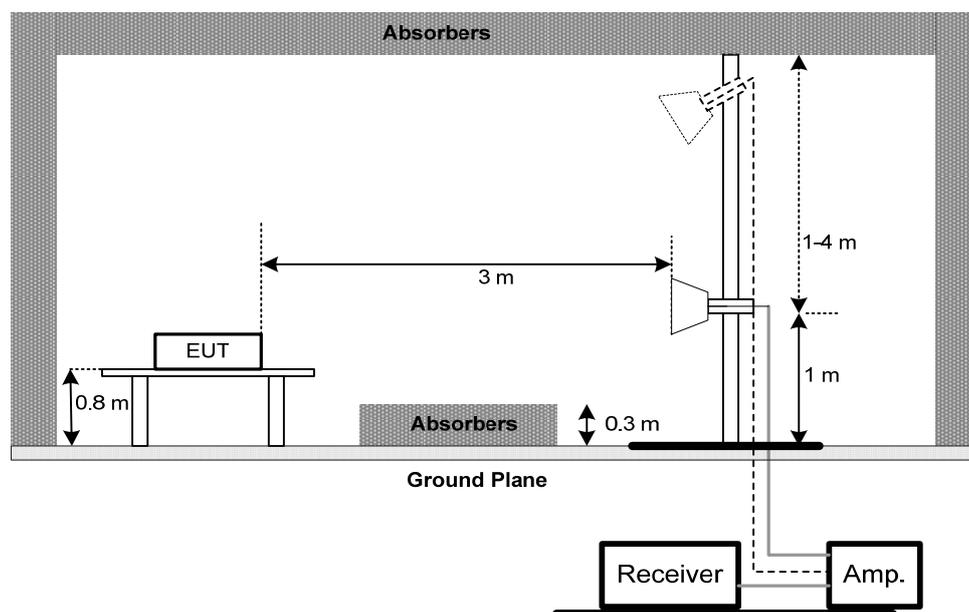

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment B.

Temperature: 21°C Relative Humidity: 51%

4.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C

Temperature: 22°C Relative Humidity: 56%

Remark :

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (2) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100087	Nov. 21, 2016
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2016
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A


Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-352	Jul. 08, 2016
2	Pre-Amplifier	Anritsu	MH648A	M92649	Apr. 16, 2016
3	Test Cable	TIMES	LMR-400	12M	May 12, 2016
4	Test Cable	TIMES	LMR-400	3M	May 12, 2016
5	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
6	Horn Antenna (1G)	Schwarzbeck	BBHA 9120 D	9120D-325	Jan. 11, 2016
7	Pre_Amplifier	Agilent	8449B	3008A01714	Apr. 14, 2016
8	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	1M	May 11, 2016
9	Microflex Cable	AISI	S104-SMAP-1	10M	May 13, 2016
10	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	3M	May 11, 2016
11	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 12, 2016
12	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK


Line

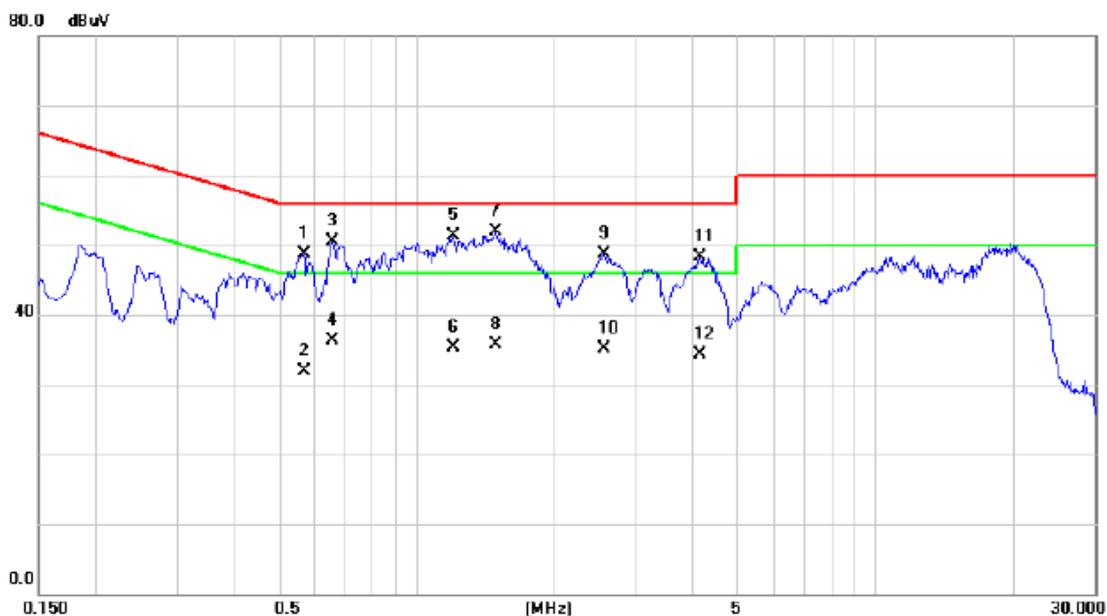

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.5685	38.80	9.84	48.64	56.00	-7.36	QP	
2	0.5685	22.00	9.84	31.84	46.00	-14.16	AVG	
3	0.6561	40.59	9.89	50.48	56.00	-5.52	QP	
4	0.6561	26.50	9.89	36.39	46.00	-9.61	AVG	
5	1.2007	41.26	10.02	51.28	56.00	-4.72	QP	
6	1.2007	25.30	10.02	35.32	46.00	-10.68	AVG	
7 *	1.4888	41.95	9.92	51.87	56.00	-4.13	QP	
8	1.4888	25.70	9.92	35.62	46.00	-10.38	AVG	
9	2.5620	38.83	9.93	48.76	56.00	-7.24	QP	
10	2.5620	25.20	9.93	35.13	46.00	-10.87	AVG	
11	4.1460	38.54	9.73	48.27	56.00	-7.73	QP	
12	4.1460	24.50	9.73	34.23	46.00	-11.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK


Neutral

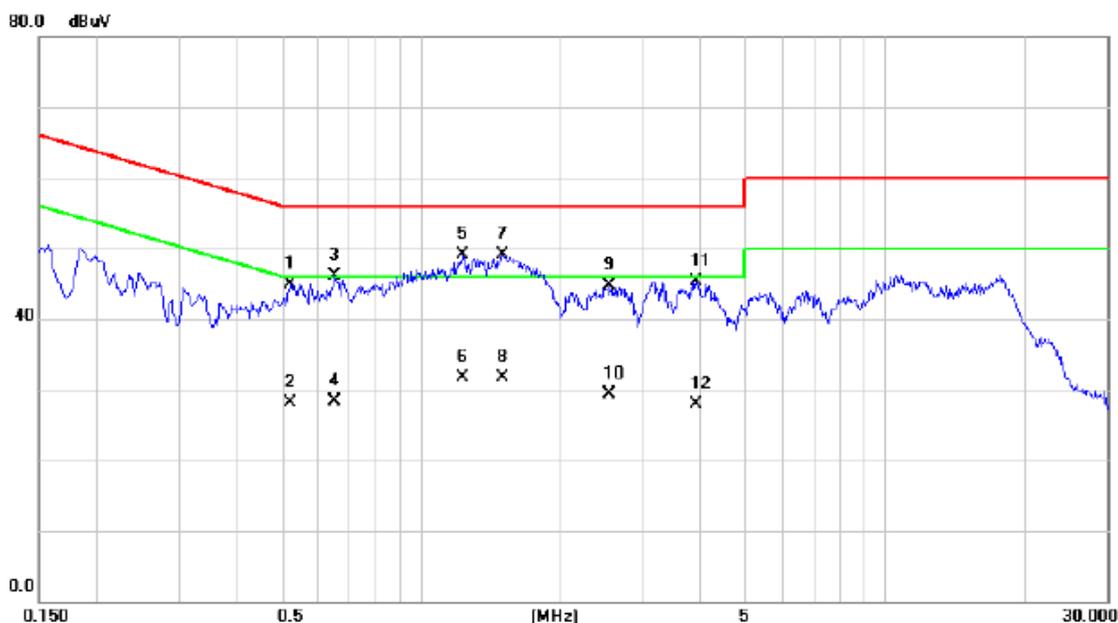

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5235	35.18	9.65	44.83	56.00	-11.17	QP	
2		0.5235	18.50	9.65	28.15	46.00	-17.85	AVG	
3		0.6540	36.34	9.69	46.03	56.00	-9.97	QP	
4		0.6540	18.60	9.69	28.29	46.00	-17.71	AVG	
5		1.2300	39.21	9.80	49.01	56.00	-6.99	QP	
6		1.2300	22.00	9.80	31.80	46.00	-14.20	AVG	
7	*	1.5023	39.33	9.82	49.15	56.00	-6.85	QP	
8		1.5023	21.80	9.82	31.62	46.00	-14.38	AVG	
9		2.5440	34.88	9.86	44.74	56.00	-11.26	QP	
10		2.5440	19.50	9.86	29.36	46.00	-16.64	AVG	
11		3.9098	35.30	9.96	45.26	56.00	-10.74	QP	
12		3.9098	17.90	9.96	27.86	46.00	-18.14	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1632B580A00


Line

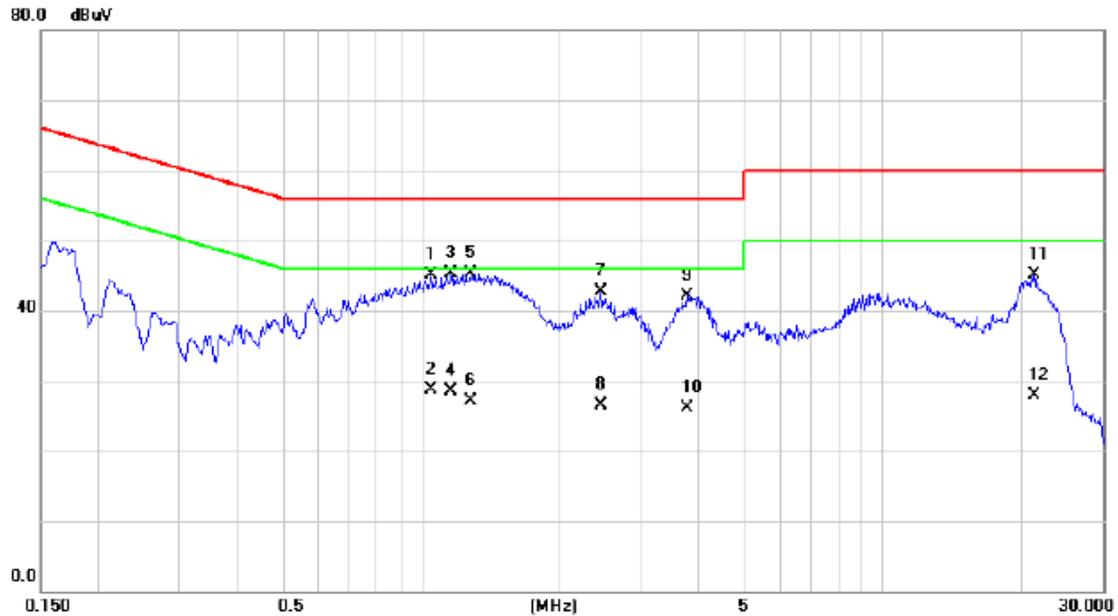

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		1.0500	35.14	9.99	45.13	56.00	-10.87	QP	
2		1.0500	18.70	9.99	28.69	46.00	-17.31	AVG	
3		1.1647	35.23	10.01	45.24	56.00	-10.76	QP	
4		1.1647	18.40	10.01	28.41	46.00	-17.59	AVG	
5	*	1.2818	35.37	10.00	45.37	56.00	-10.63	QP	
6		1.2818	17.20	10.00	27.20	46.00	-18.80	AVG	
7		2.4540	32.69	9.94	42.63	56.00	-13.37	QP	
8		2.4540	16.50	9.94	26.44	46.00	-19.56	AVG	
9		3.7703	32.31	9.86	42.17	56.00	-13.83	QP	
10		3.7703	16.20	9.86	26.06	46.00	-19.94	AVG	
11		21.2618	34.62	10.40	45.02	60.00	-14.98	QP	
12		21.2618	17.50	10.40	27.90	50.00	-22.10	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1632B580A00


Neutral

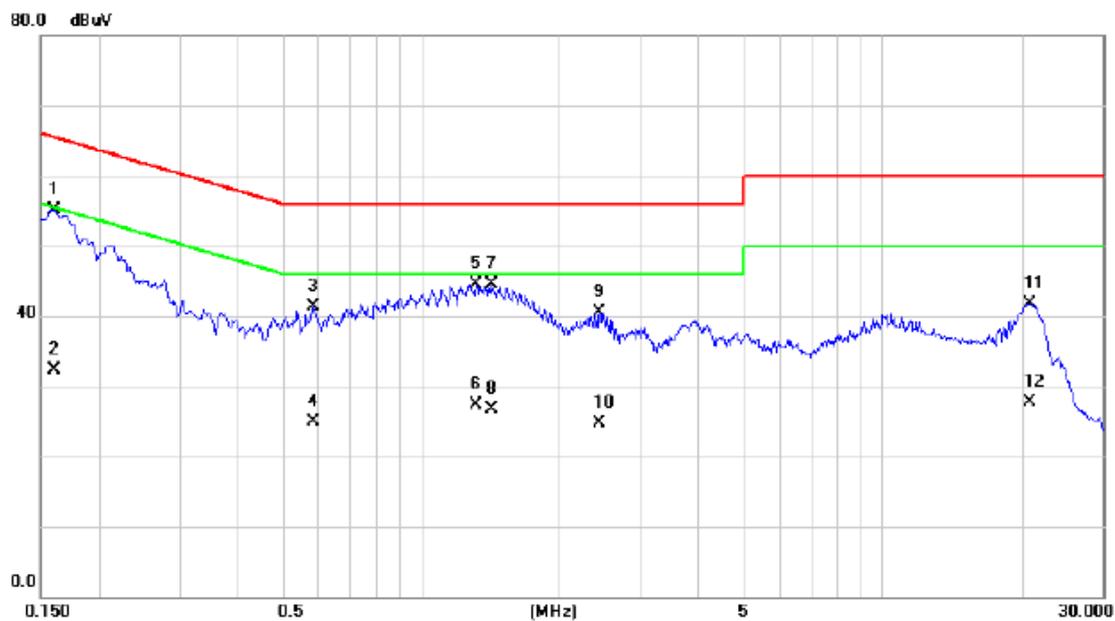

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1613	45.58	9.60	55.18	65.40	-10.22	QP	
2		0.1613	22.70	9.60	32.30	55.40	-23.10	AVG	
3		0.5842	31.66	9.67	41.33	56.00	-14.67	QP	
4		0.5842	15.20	9.67	24.87	46.00	-21.13	AVG	
5		1.3223	34.65	9.81	44.46	56.00	-11.54	QP	
6		1.3223	17.50	9.81	27.31	46.00	-18.69	AVG	
7		1.4303	34.62	9.82	44.44	56.00	-11.56	QP	
8		1.4303	16.80	9.82	26.62	46.00	-19.38	AVG	
9		2.4450	30.65	9.88	40.53	56.00	-15.47	QP	
10		2.4450	14.80	9.88	24.68	46.00	-21.32	AVG	
11		20.8028	31.44	10.30	41.74	60.00	-18.26	QP	
12		20.8028	17.50	10.30	27.80	50.00	-22.20	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Line

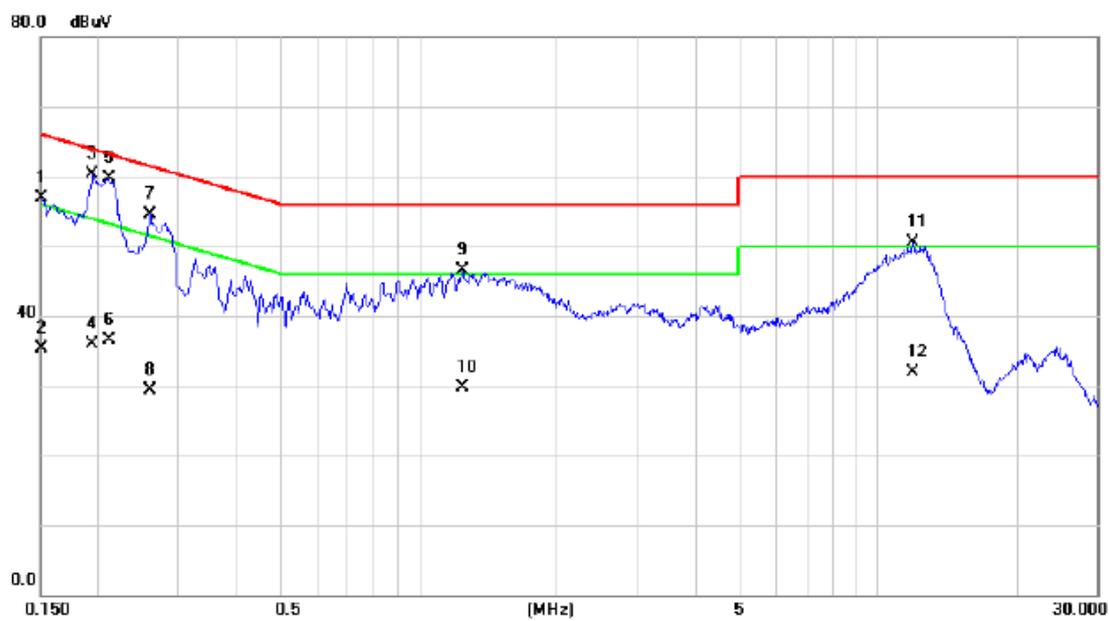

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	47.25	9.68	56.93	66.00	-9.07	QP	
2		0.1500	25.70	9.68	35.38	56.00	-20.62	AVG	
3		0.1950	50.53	9.71	60.24	63.82	-3.58	QP	
4		0.1950	26.10	9.71	35.81	53.82	-18.01	AVG	
5	*	0.2108	49.98	9.71	59.69	63.17	-3.48	QP	
6		0.2108	26.80	9.71	36.51	53.17	-16.66	AVG	
7		0.2602	44.81	9.74	54.55	61.43	-6.88	QP	
8		0.2602	19.60	9.74	29.34	51.43	-22.09	AVG	
9		1.2435	36.41	10.00	46.41	56.00	-9.59	QP	
10		1.2435	19.70	10.00	29.70	46.00	-16.30	AVG	
11		11.9400	40.38	10.14	50.52	60.00	-9.48	QP	
12		11.9400	21.70	10.14	31.84	50.00	-18.16	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Neutral

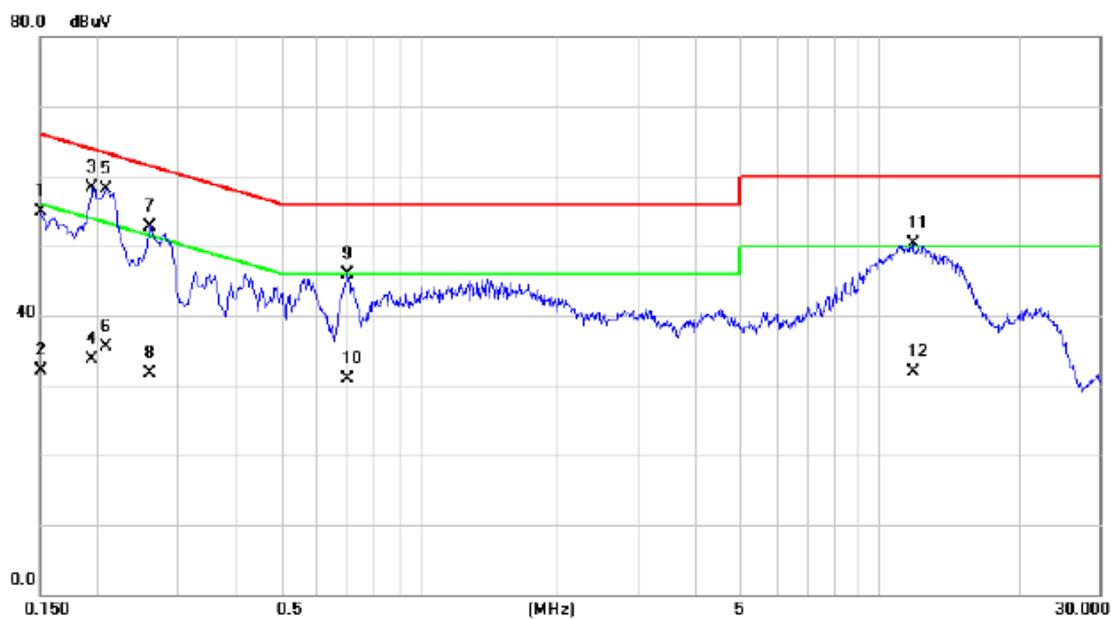

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	45.35	9.60	54.95	66.00	-11.05	QP	
2		0.1500	22.50	9.60	32.10	56.00	-23.90	AVG	
3		0.1950	48.66	9.61	58.27	63.82	-5.55	QP	
4		0.1950	24.10	9.61	33.71	53.82	-20.11	AVG	
5	*	0.2085	48.43	9.61	58.04	63.26	-5.22	QP	
6		0.2085	25.80	9.61	35.41	53.26	-17.85	AVG	
7		0.2602	43.14	9.62	52.76	61.43	-8.67	QP	
8		0.2602	22.10	9.62	31.72	51.43	-19.71	AVG	
9		0.6990	36.18	9.69	45.87	56.00	-10.13	QP	
10		0.6990	21.30	9.69	30.99	46.00	-15.01	AVG	
11		11.8073	40.17	10.13	50.30	60.00	-9.70	QP	
12		11.8073	21.70	10.13	31.83	50.00	-18.17	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


Line

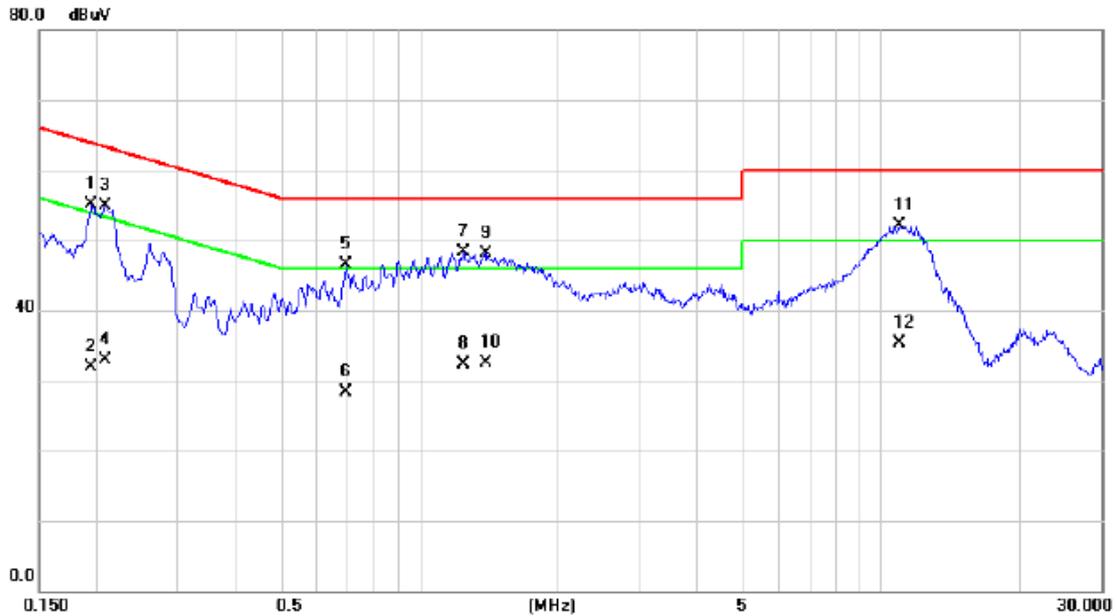

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1950	45.31	9.71	55.02	63.82	-8.80	QP	
2		0.1950	22.10	9.71	31.81	53.82	-22.01	AVG	
3		0.2085	45.22	9.71	54.93	63.26	-8.33	QP	
4		0.2085	23.10	9.71	32.81	53.26	-20.45	AVG	
5		0.6945	36.55	9.90	46.45	56.00	-9.55	QP	
6		0.6945	18.50	9.90	28.40	46.00	-17.60	AVG	
7	*	1.2435	38.23	10.00	48.23	56.00	-7.77	QP	
8		1.2435	22.40	10.00	32.40	46.00	-13.60	AVG	
9		1.3920	38.08	9.96	48.04	56.00	-7.96	QP	
10		1.3920	22.50	9.96	32.46	46.00	-13.54	AVG	
11		11.0085	41.92	10.10	52.02	60.00	-7.98	QP	
12		11.0085	25.30	10.10	35.40	50.00	-14.60	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


Neutral

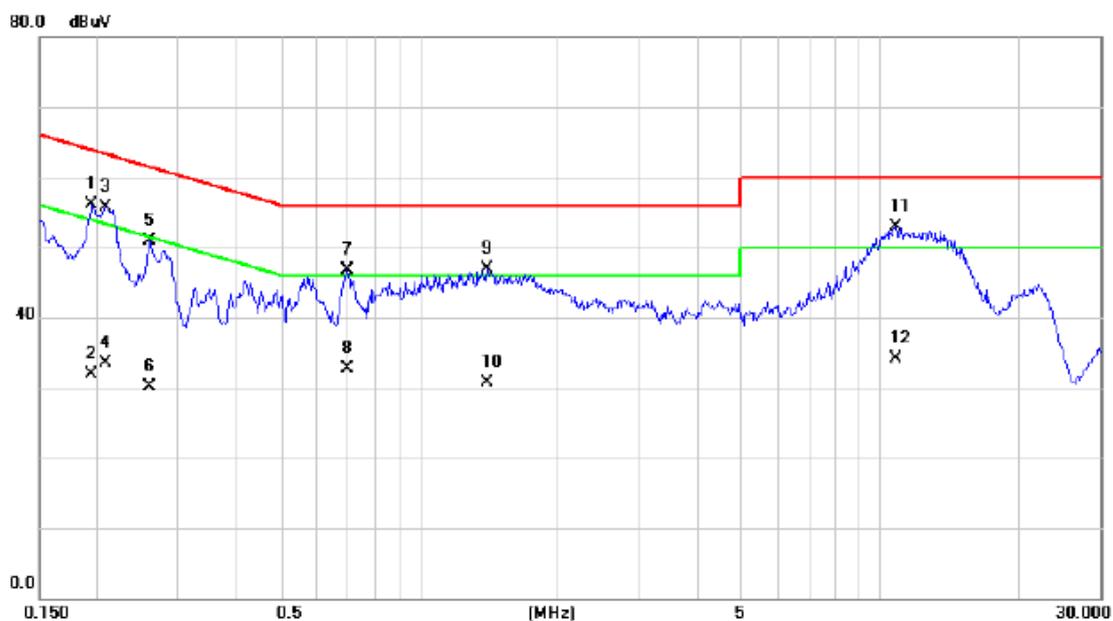

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1950	46.49	9.61	56.10	63.82	-7.72	QP	
2		0.1950	22.30	9.61	31.91	53.82	-21.91	AVG	
3		0.2085	46.16	9.61	55.77	63.26	-7.49	QP	
4		0.2085	23.80	9.61	33.41	53.26	-19.85	AVG	
5		0.2602	41.27	9.62	50.89	61.43	-10.54	QP	
6		0.2602	20.40	9.62	30.02	51.43	-21.41	AVG	
7		0.6990	37.07	9.69	46.76	56.00	-9.24	QP	
8		0.6990	23.00	9.69	32.69	46.00	-13.31	AVG	
9		1.4100	37.14	9.82	46.96	56.00	-9.04	QP	
10		1.4100	20.80	9.82	30.62	46.00	-15.38	AVG	
11	*	10.8015	42.74	10.08	52.82	60.00	-7.18	QP	
12		10.8015	24.00	10.08	34.08	50.00	-15.92	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Line

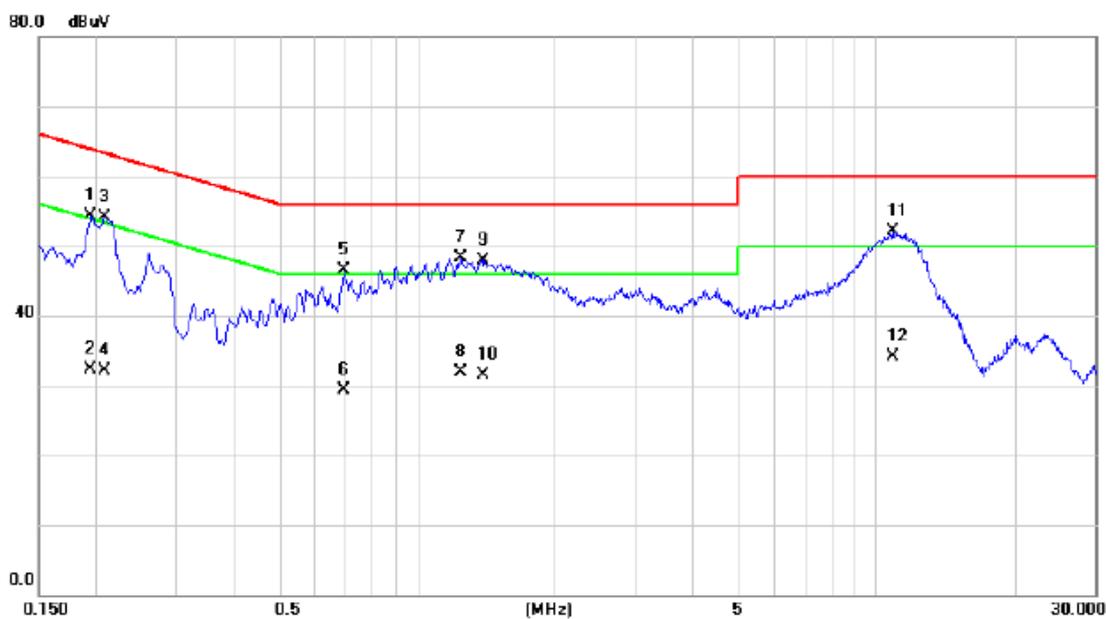

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1950	44.63	9.71	54.34	63.82	-9.48	QP	
2		0.1950	22.50	9.71	32.21	53.82	-21.61	AVG	
3		0.2085	44.31	9.71	54.02	63.26	-9.24	QP	
4		0.2085	22.30	9.71	32.01	53.26	-21.25	AVG	
5		0.6945	36.58	9.90	46.48	56.00	-9.52	QP	
6		0.6945	19.50	9.90	29.40	46.00	-16.60	AVG	
7	*	1.2435	38.34	10.00	48.34	56.00	-7.66	QP	
8		1.2435	22.00	10.00	32.00	46.00	-14.00	AVG	
9		1.3898	38.02	9.96	47.98	56.00	-8.02	QP	
10		1.3898	21.50	9.96	31.46	46.00	-14.54	AVG	
11		10.8533	41.95	10.09	52.04	60.00	-7.96	QP	
12		10.8533	24.00	10.09	34.09	50.00	-15.91	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Neutral

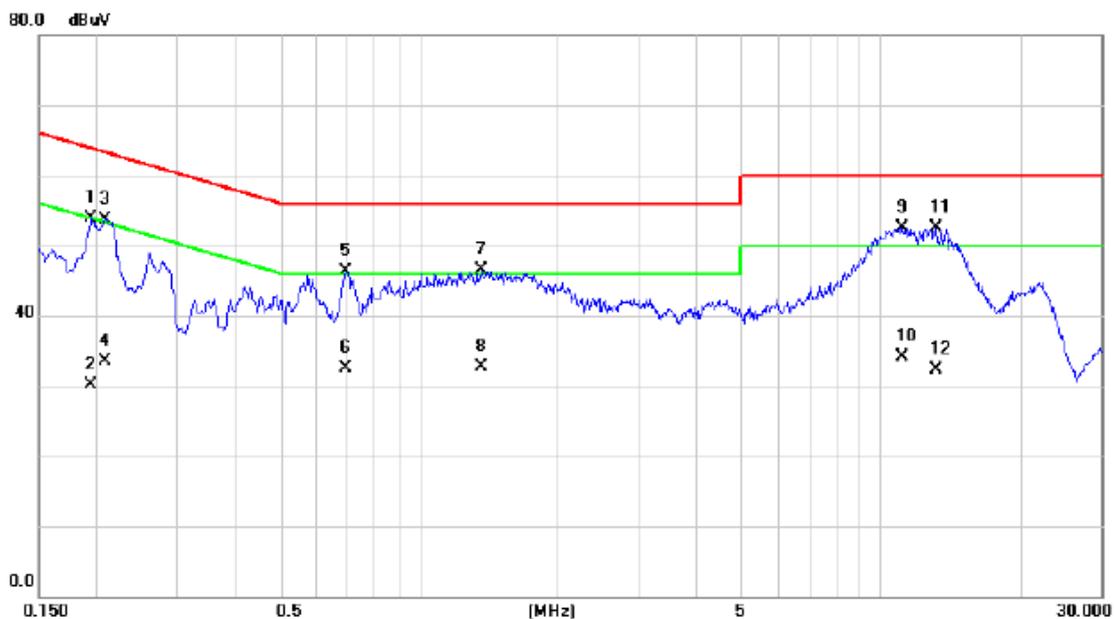

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1950	44.30	9.61	53.91	63.82	-9.91	QP	
2		0.1950	20.40	9.61	30.01	53.82	-23.81	AVG	
3		0.2085	44.10	9.61	53.71	63.26	-9.55	QP	
4		0.2085	23.80	9.61	33.41	53.26	-19.85	AVG	
5		0.6945	36.64	9.69	46.33	56.00	-9.67	QP	
6		0.6945	22.90	9.69	32.59	46.00	-13.41	AVG	
7		1.3673	36.78	9.82	46.60	56.00	-9.40	QP	
8		1.3673	22.90	9.82	32.72	46.00	-13.28	AVG	
9	*	11.1323	42.42	10.09	52.51	60.00	-7.49	QP	
10		11.1323	24.00	10.09	34.09	50.00	-15.91	AVG	
11		13.1325	42.26	10.18	52.44	60.00	-7.56	QP	
12		13.1325	22.10	10.18	32.28	50.00	-17.72	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Line

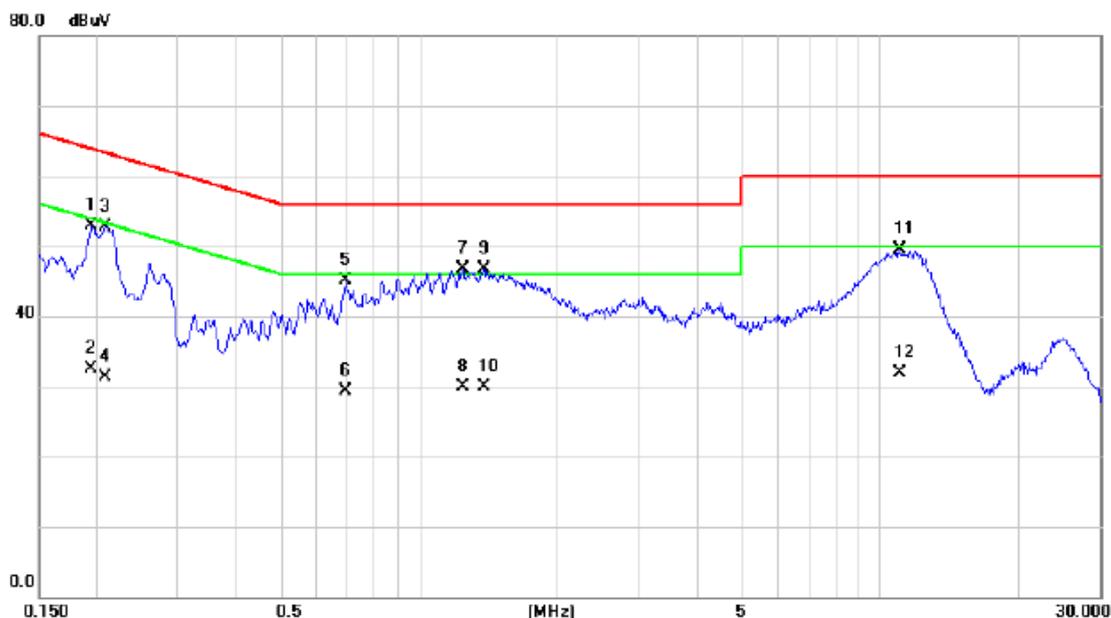

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1950	43.19	9.71	52.90	63.82	-10.92	QP	
2		0.1950	22.80	9.71	32.51	53.82	-21.31	AVG	
3		0.2085	42.93	9.71	52.64	63.26	-10.62	QP	
4		0.2085	21.50	9.71	31.21	53.26	-22.05	AVG	
5		0.6945	35.22	9.90	45.12	56.00	-10.88	QP	
6		0.6945	19.50	9.90	29.40	46.00	-16.60	AVG	
7	*	1.2480	36.63	10.00	46.63	56.00	-9.37	QP	
8		1.2480	20.00	10.00	30.00	46.00	-16.00	AVG	
9		1.3875	36.66	9.96	46.62	56.00	-9.38	QP	
10		1.3875	20.00	9.96	29.96	46.00	-16.04	AVG	
11		11.0715	39.37	10.10	49.47	60.00	-10.53	QP	
12		11.0715	21.80	10.10	31.90	50.00	-18.10	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Neutral

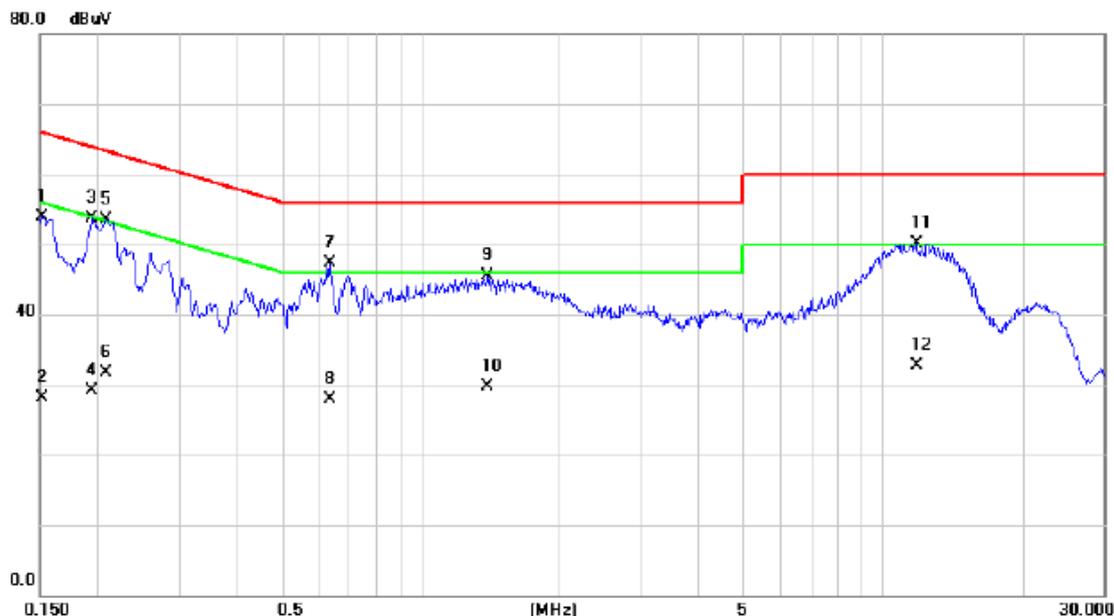

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	44.32	9.59	53.91	65.88	-11.97	QP	
2		0.1522	18.50	9.59	28.09	55.88	-27.79	AVG	
3		0.1950	44.10	9.61	53.71	63.82	-10.11	QP	
4		0.1950	19.50	9.61	29.11	53.82	-24.71	AVG	
5		0.2085	43.98	9.61	53.59	63.26	-9.67	QP	
6		0.2085	22.00	9.61	31.61	53.26	-21.65	AVG	
7	*	0.6360	37.57	9.68	47.25	56.00	-8.75	QP	
8		0.6360	18.20	9.68	27.88	46.00	-18.12	AVG	
9		1.3965	35.77	9.82	45.59	56.00	-10.41	QP	
10		1.3965	19.80	9.82	29.62	46.00	-16.38	AVG	
11		11.8658	39.99	10.13	50.12	60.00	-9.88	QP	
12		11.8658	22.50	10.13	32.63	50.00	-17.37	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Line

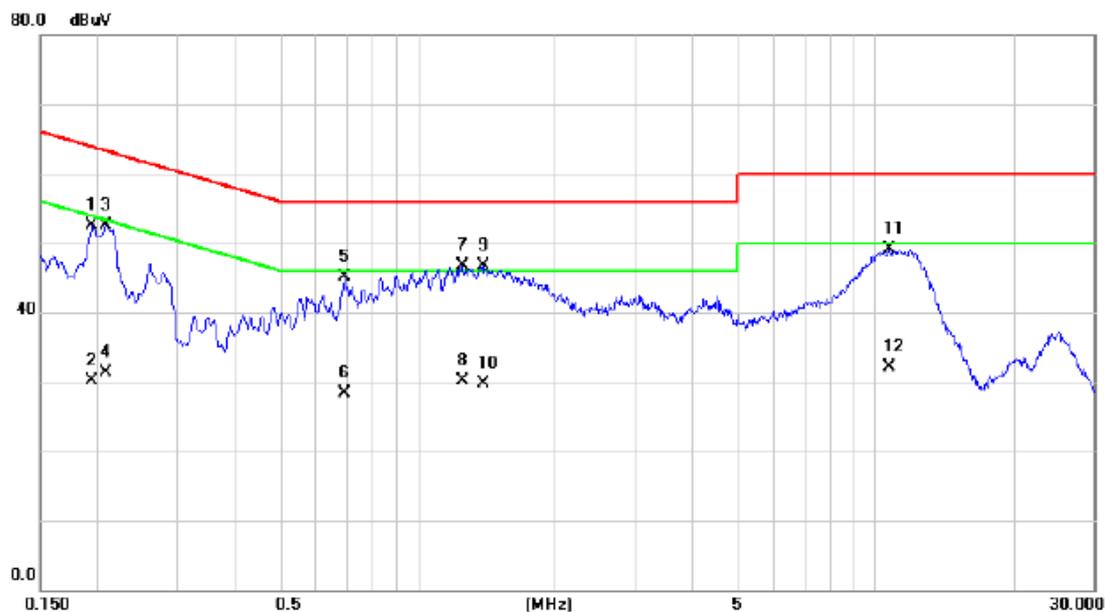

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1950	42.70	9.71	52.41	63.82	-11.41	QP	
2		0.1950	20.40	9.71	30.11	53.82	-23.71	AVG	
3		0.2085	42.71	9.71	52.42	63.26	-10.84	QP	
4		0.2085	21.50	9.71	31.21	53.26	-22.05	AVG	
5		0.6945	35.12	9.90	45.02	56.00	-10.98	QP	
6		0.6945	18.40	9.90	28.30	46.00	-17.70	AVG	
7	*	1.2525	36.67	10.01	46.68	56.00	-9.32	QP	
8		1.2525	20.10	10.01	30.11	46.00	-15.89	AVG	
9		1.3898	36.67	9.96	46.63	56.00	-9.37	QP	
10		1.3898	19.70	9.96	29.66	46.00	-16.34	AVG	
11		10.7790	39.08	10.09	49.17	60.00	-10.83	QP	
12		10.7790	22.00	10.09	32.09	50.00	-17.91	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Neutral

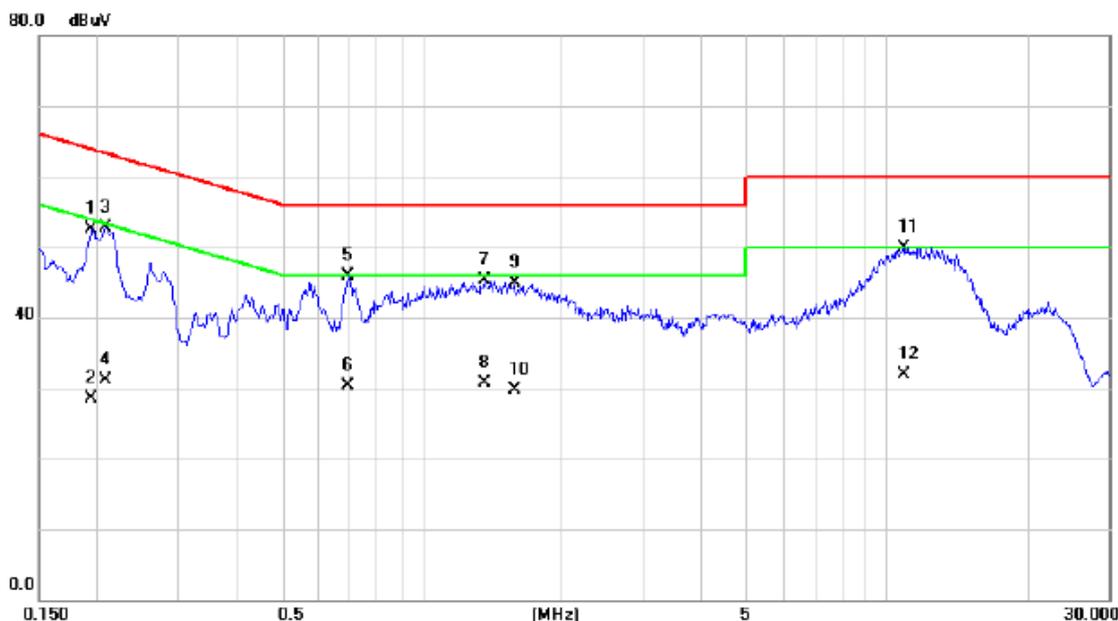

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1950	42.96	9.61	52.57	63.82	-11.25	QP	
2		0.1950	18.90	9.61	28.51	53.82	-25.31	AVG	
3		0.2085	43.02	9.61	52.63	63.26	-10.63	QP	
4		0.2085	21.50	9.61	31.11	53.26	-22.15	AVG	
5		0.6945	36.12	9.69	45.81	56.00	-10.19	QP	
6		0.6945	20.70	9.69	30.39	46.00	-15.61	AVG	
7		1.3650	35.39	9.82	45.21	56.00	-10.79	QP	
8		1.3650	20.80	9.82	30.62	46.00	-15.38	AVG	
9		1.5810	35.00	9.84	44.84	56.00	-11.16	QP	
10		1.5810	19.80	9.84	29.64	46.00	-16.36	AVG	
11	*	10.8488	39.85	10.08	49.93	60.00	-10.07	QP	
12		10.8488	21.80	10.08	31.88	50.00	-18.12	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Line

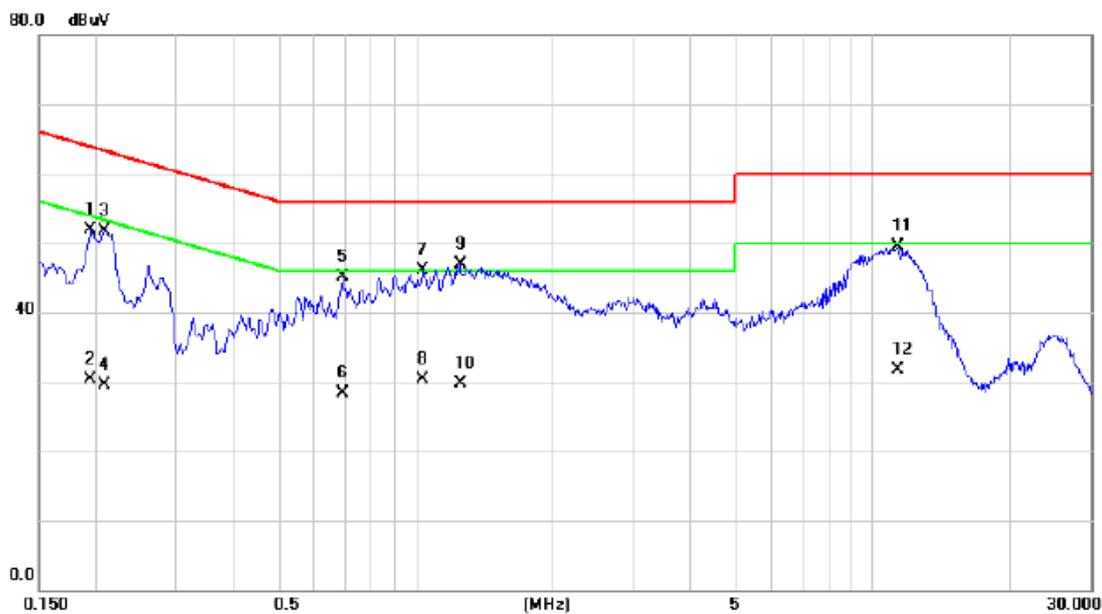

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1950	42.13	9.71	51.84	63.82	-11.98	QP	
2		0.1950	20.50	9.71	30.21	53.82	-23.61	AVG	
3		0.2085	42.02	9.71	51.73	63.26	-11.53	QP	
4		0.2085	19.70	9.71	29.41	53.26	-23.85	AVG	
5		0.6945	35.30	9.90	45.20	56.00	-10.80	QP	
6		0.6945	18.50	9.90	28.40	46.00	-17.60	AVG	
7		1.0410	36.05	9.99	46.04	56.00	-9.96	QP	
8		1.0410	20.40	9.99	30.39	46.00	-15.61	AVG	
9	*	1.2503	36.83	10.01	46.84	56.00	-9.16	QP	
10		1.2503	19.70	10.01	29.71	46.00	-16.29	AVG	
11		11.3640	39.47	10.12	49.59	60.00	-10.41	QP	
12		11.3640	21.50	10.12	31.62	50.00	-18.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Neutral

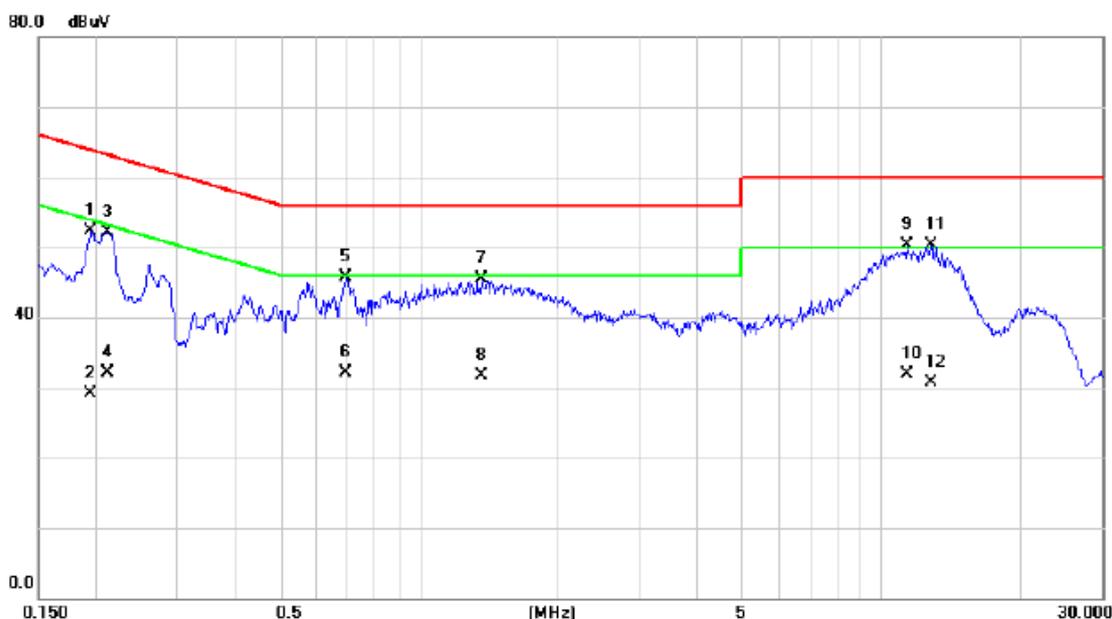

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1950	42.75	9.61	52.36	63.82	-11.46	QP	
2		0.1950	19.50	9.61	29.11	53.82	-24.71	AVG	
3		0.2108	42.45	9.61	52.06	63.17	-11.11	QP	
4		0.2108	22.50	9.61	32.11	53.17	-21.06	AVG	
5		0.6945	36.04	9.69	45.73	56.00	-10.27	QP	
6		0.6945	22.50	9.69	32.19	46.00	-13.81	AVG	
7		1.3673	35.62	9.82	45.44	56.00	-10.56	QP	
8		1.3673	21.80	9.82	31.62	46.00	-14.38	AVG	
9		11.3708	40.15	10.11	50.26	60.00	-9.74	QP	
10		11.3708	21.80	10.11	31.91	50.00	-18.09	AVG	
11	*	12.8445	40.18	10.17	50.35	60.00	-9.65	QP	
12		12.8445	20.60	10.17	30.77	50.00	-19.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Line

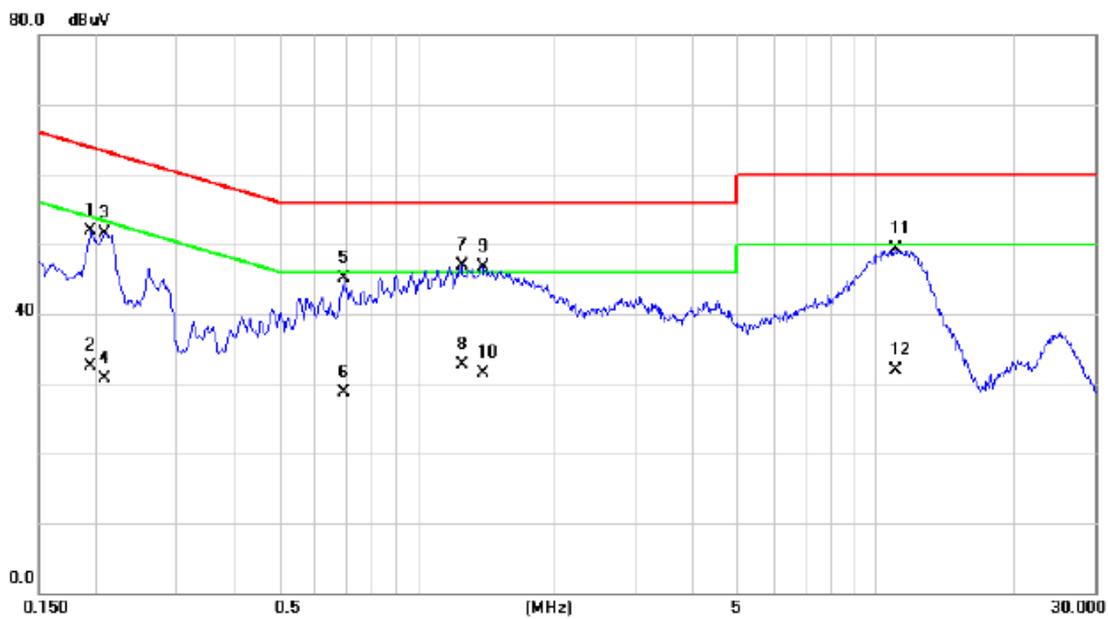

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1950	42.16	9.71	51.87	63.82	-11.95	QP	
2		0.1950	22.70	9.71	32.41	53.82	-21.41	AVG	
3		0.2085	41.77	9.71	51.48	63.26	-11.78	QP	
4		0.2085	20.90	9.71	30.61	53.26	-22.65	AVG	
5		0.6945	35.19	9.90	45.09	56.00	-10.91	QP	
6		0.6945	18.90	9.90	28.80	46.00	-17.20	AVG	
7	*	1.2525	36.81	10.01	46.82	56.00	-9.18	QP	
8		1.2525	22.70	10.01	32.71	46.00	-13.29	AVG	
9		1.3898	36.81	9.96	46.77	56.00	-9.23	QP	
10		1.3898	21.50	9.96	31.46	46.00	-14.54	AVG	
11		11.0625	39.14	10.10	49.24	60.00	-10.76	QP	
12		11.0625	21.90	10.10	32.00	50.00	-18.00	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Neutral

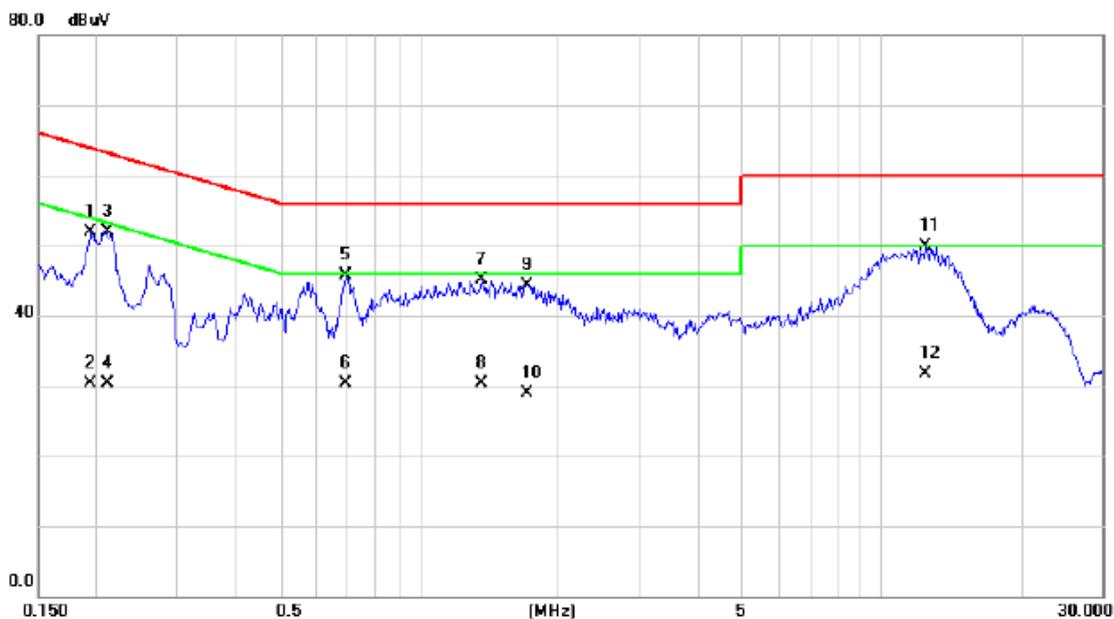

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1950	42.35	9.61	51.96	63.82	-11.86	QP	
2		0.1950	20.60	9.61	30.21	53.82	-23.61	AVG	
3		0.2108	42.24	9.61	51.85	63.17	-11.32	QP	
4		0.2108	20.70	9.61	30.31	53.17	-22.86	AVG	
5		0.6945	35.96	9.69	45.65	56.00	-10.35	QP	
6		0.6945	20.60	9.69	30.29	46.00	-15.71	AVG	
7		1.3673	35.28	9.82	45.10	56.00	-10.90	QP	
8		1.3673	20.40	9.82	30.22	46.00	-15.78	AVG	
9		1.7093	34.54	9.86	44.40	56.00	-11.60	QP	
10		1.7093	19.00	9.86	28.86	46.00	-17.14	AVG	
11	*	12.4958	39.68	10.15	49.83	60.00	-10.17	QP	
12		12.4958	21.50	10.15	31.65	50.00	-18.35	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


Line

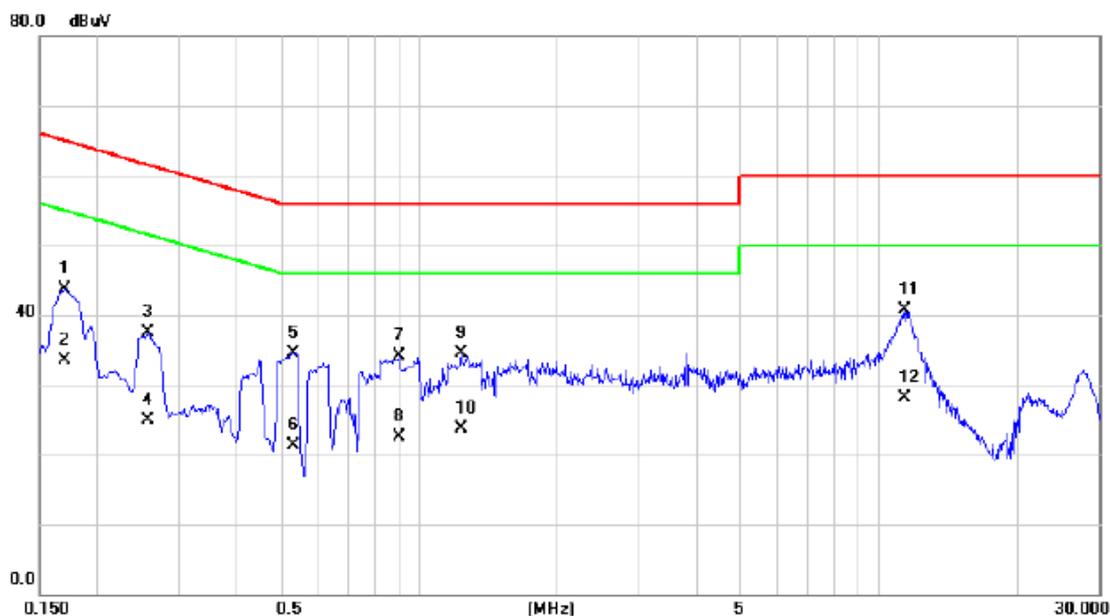

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1702	33.95	9.69	43.64	64.95	-21.31	QP	
2	0.1702	23.90	9.69	33.59	54.95	-21.36	AVG	
3	0.2580	27.84	9.73	37.57	61.50	-23.93	QP	
4	0.2580	15.20	9.73	24.93	51.50	-26.57	AVG	
5	0.5347	24.71	9.84	34.55	56.00	-21.45	QP	
6	0.5347	11.40	9.84	21.24	46.00	-24.76	AVG	
7	0.9082	24.18	9.95	34.13	56.00	-21.87	QP	
8	0.9082	12.60	9.95	22.55	46.00	-23.45	AVG	
9	1.2412	24.58	10.00	34.58	56.00	-21.42	QP	
10	1.2412	13.70	10.00	23.70	46.00	-22.30	AVG	
11 *	11.4360	30.60	10.12	40.72	60.00	-19.28	QP	
12	11.4360	17.90	10.12	28.02	50.00	-21.98	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


Neutral

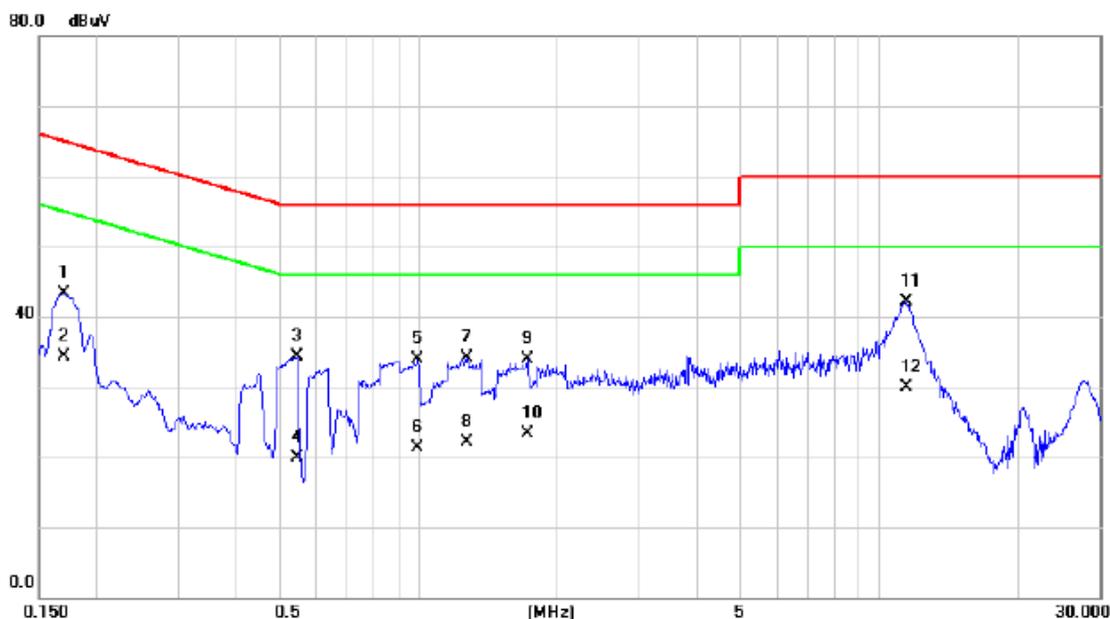

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1703	33.67	9.60	43.27	64.95	-21.68	QP	
2		0.1703	24.80	9.60	34.40	54.95	-20.55	AVG	
3		0.5437	24.61	9.66	34.27	56.00	-21.73	QP	
4		0.5437	10.21	9.66	19.87	46.00	-26.13	AVG	
5		0.9982	24.11	9.79	33.90	56.00	-22.10	QP	
6		0.9982	11.50	9.79	21.29	46.00	-24.71	AVG	
7		1.2705	24.28	9.81	34.09	56.00	-21.91	QP	
8		1.2705	12.30	9.81	22.11	46.00	-23.89	AVG	
9		1.7250	24.04	9.87	33.91	56.00	-22.09	QP	
10		1.7250	13.40	9.87	23.27	46.00	-22.73	AVG	
11	*	11.4473	31.96	10.11	42.07	60.00	-17.93	QP	
12		11.4473	19.80	10.11	29.91	50.00	-20.09	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN


Line

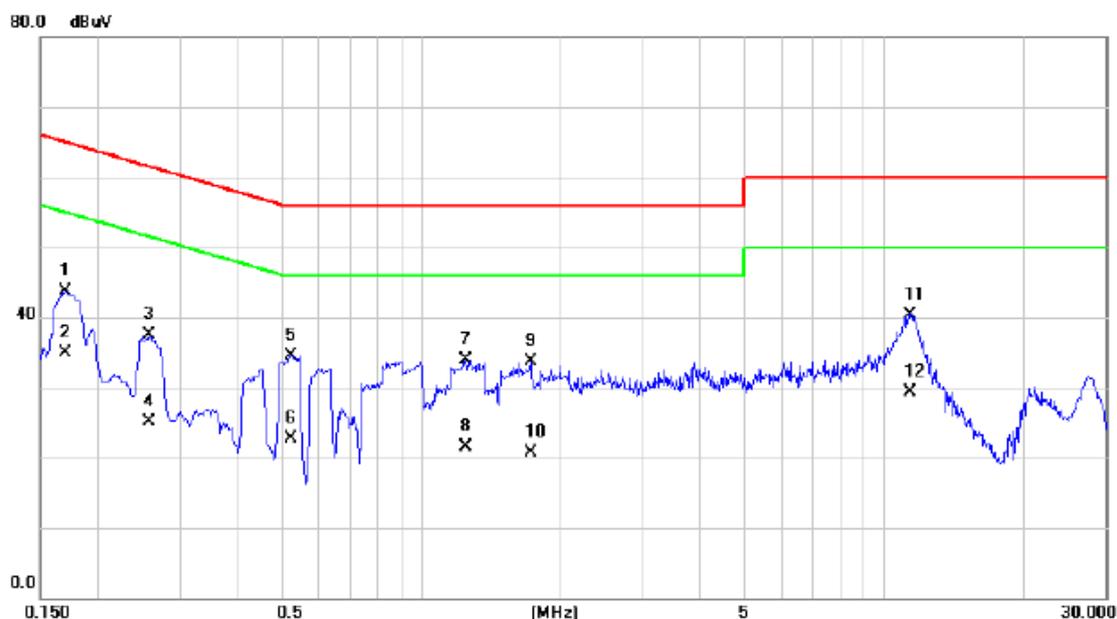

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1703	33.97	9.69	43.66	64.95	-21.29	QP	
2		0.1703	25.20	9.69	34.89	54.95	-20.06	AVG	
3		0.2580	27.68	9.73	37.41	61.50	-24.09	QP	
4		0.2580	15.30	9.73	25.03	51.50	-26.47	AVG	
5		0.5235	24.73	9.82	34.55	56.00	-21.45	QP	
6		0.5235	12.80	9.82	22.62	46.00	-23.38	AVG	
7		1.2435	23.95	10.00	33.95	56.00	-22.05	QP	
8		1.2435	11.60	10.00	21.60	46.00	-24.40	AVG	
9		1.7250	23.77	9.89	33.66	56.00	-22.34	QP	
10		1.7250	10.90	9.89	20.79	46.00	-25.21	AVG	
11	*	11.4563	30.17	10.12	40.29	60.00	-19.71	QP	
12		11.4563	19.20	10.12	29.32	50.00	-20.68	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN

Neutral

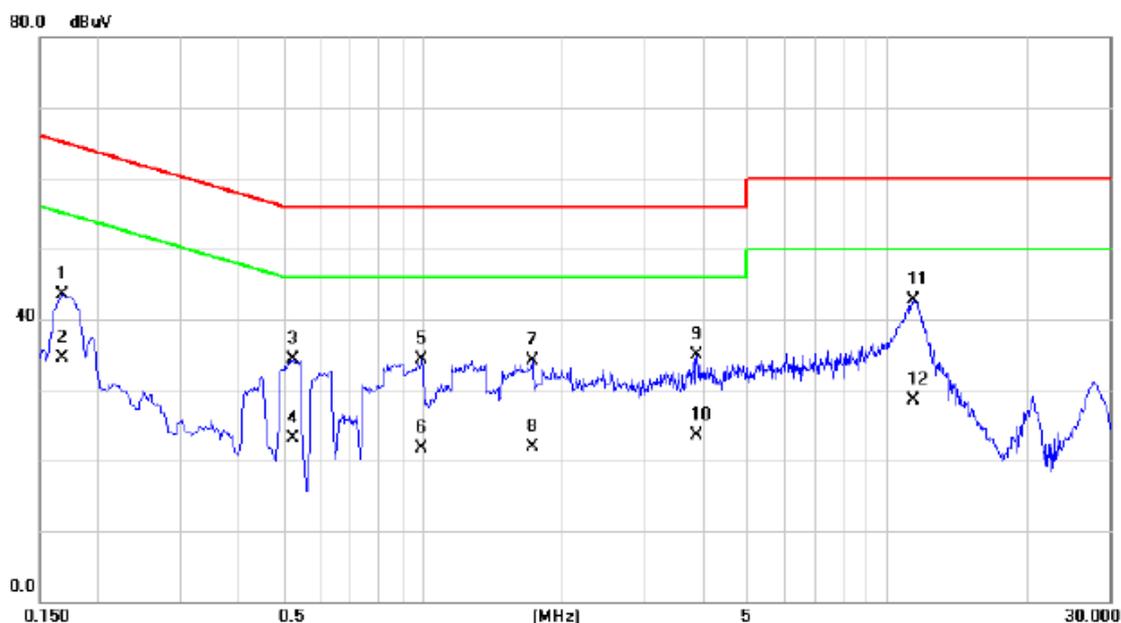


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1680	33.99	9.60	43.59	65.06	-21.47	QP	
2		0.1680	24.90	9.60	34.50	55.06	-20.56	AVG	
3		0.5257	24.58	9.65	34.23	56.00	-21.77	QP	
4		0.5257	13.50	9.65	23.15	46.00	-22.85	AVG	
5		0.9982	24.42	9.79	34.21	56.00	-21.79	QP	
6		0.9982	11.90	9.79	21.69	46.00	-24.31	AVG	
7		1.7250	24.25	9.87	34.12	56.00	-21.88	QP	
8		1.7250	12.10	9.87	21.97	46.00	-24.03	AVG	
9		3.8828	25.01	9.96	34.97	56.00	-21.03	QP	
10		3.8828	13.50	9.96	23.46	46.00	-22.54	AVG	
11	*	11.3235	32.51	10.10	42.61	60.00	-17.39	QP	
12		11.3235	18.40	10.10	28.50	50.00	-21.50	AVG	

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK


Vertical

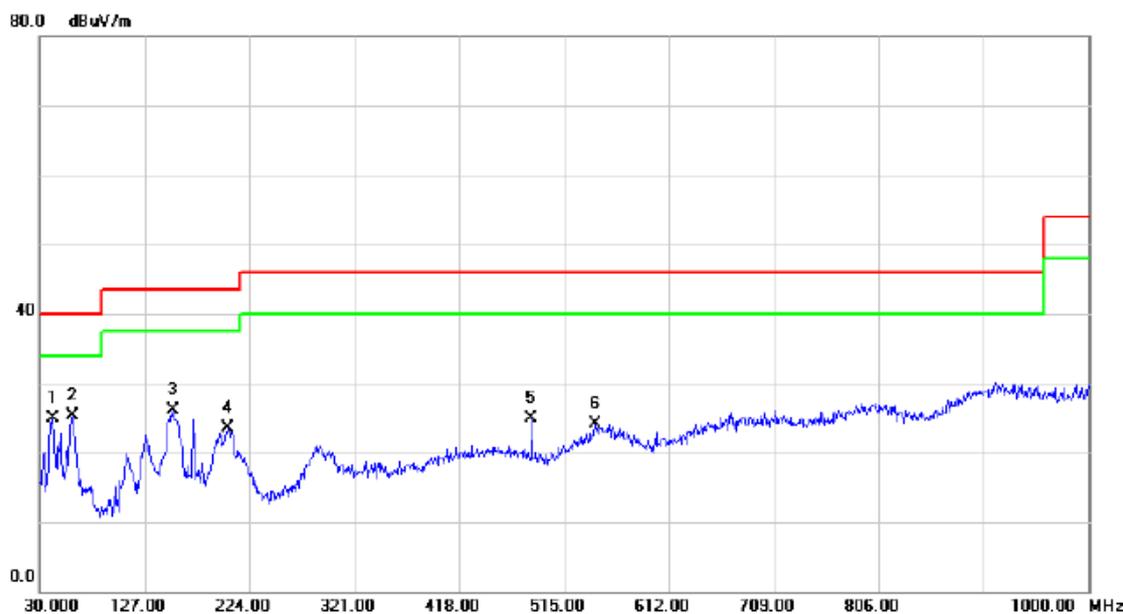

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		42.6100	38.82	-13.92	24.90	40.00	-15.10	QP	
2	*	60.0700	40.09	-14.75	25.34	40.00	-14.66	QP	
3		153.1900	40.04	-14.01	26.03	43.50	-17.47	QP	
4		203.6300	40.11	-16.66	23.45	43.50	-20.05	QP	
5		484.9300	34.38	-9.41	24.97	46.00	-21.03	QP	
6		544.1000	32.31	-8.14	24.17	46.00	-21.83	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: FOXCONN +Battery: Lishen + Earphone: GOERTEK

Horizontal

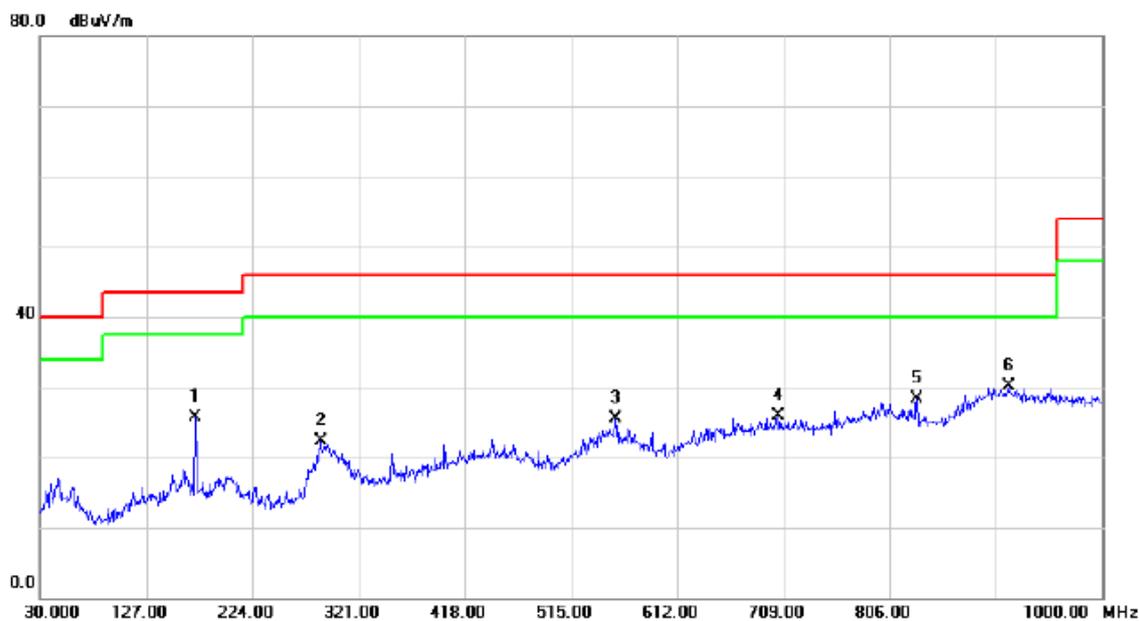

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		171.6200	40.31	-14.57	25.74	43.50	-17.76	QP	
2		286.0800	36.09	-13.80	22.29	46.00	-23.71	QP	
3		555.7400	33.46	-7.92	25.54	46.00	-20.46	QP	
4		704.1500	31.25	-5.39	25.86	46.00	-20.14	QP	
5		831.2200	32.54	-4.18	28.36	46.00	-17.64	QP	
6	*	914.6400	32.70	-2.52	30.18	46.00	-15.82	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1632B580A00

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.6400	38.00	-14.03	23.97	40.00	-16.03	QP	
2		154.1600	37.45	-14.00	23.45	43.50	-20.05	QP	
3		548.9500	32.29	-8.01	24.28	46.00	-21.72	QP	
4		681.8400	31.60	-5.96	25.64	46.00	-20.36	QP	
5		831.2200	33.83	-4.18	29.65	46.00	-16.35	QP	
6	*	901.0600	33.11	-2.81	30.30	46.00	-15.70	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1632B580A00

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.7000	33.94	-14.25	19.69	40.00	-20.31	QP	
2		368.5300	40.91	-11.88	29.03	46.00	-16.97	QP	
3	*	399.5700	41.12	-11.10	30.02	46.00	-15.98	QP	
4		558.6500	32.23	-7.89	24.34	46.00	-21.66	QP	
5		803.0900	31.88	-4.68	27.20	46.00	-18.80	QP	
6		911.7300	32.52	-2.59	29.93	46.00	-16.07	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1532B528000


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	39.27	-14.62	24.65	40.00	-15.35	QP	
2		54.2500	38.08	-14.14	23.94	40.00	-16.06	QP	
3		154.1600	37.45	-14.00	23.45	43.50	-20.05	QP	
4		548.9500	32.29	-8.01	24.28	46.00	-21.72	QP	
5	*	831.2200	36.33	-4.18	32.15	46.00	-13.85	QP	
6		933.0700	32.27	-2.13	30.14	46.00	-15.86	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: SCUD + Earphone: Lianchuang / MEMD1532B528000


Horizontal

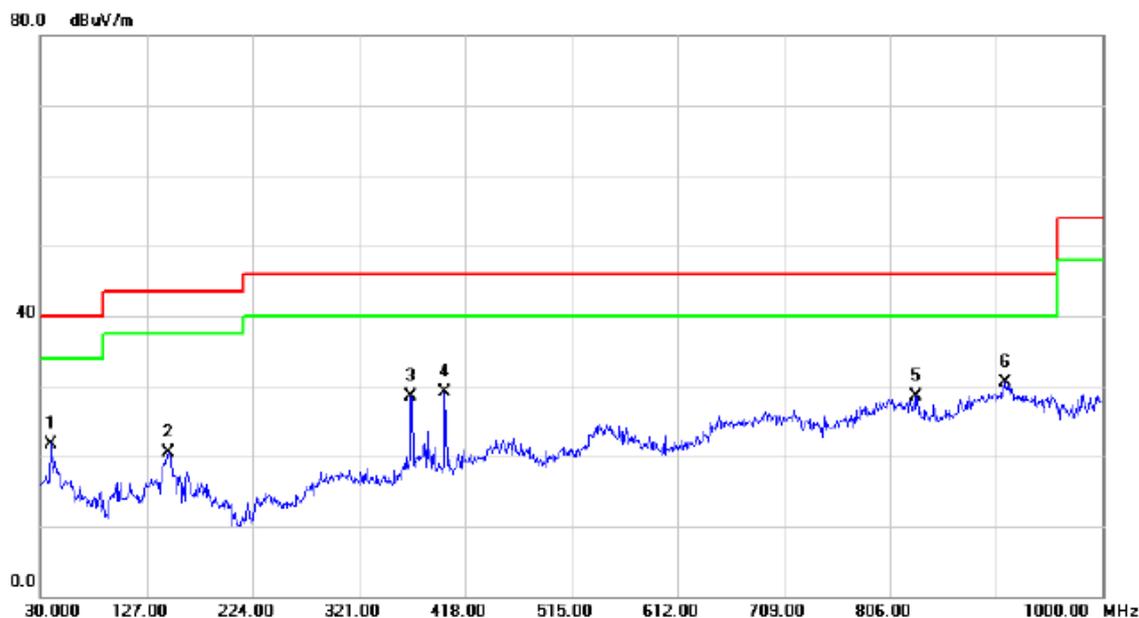

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.7000	35.94	-14.25	21.69	40.00	-18.31	QP	
2		147.3700	34.74	-14.15	20.59	43.50	-22.91	QP	
3		368.5300	40.41	-11.88	28.53	46.00	-17.47	QP	
4		399.5700	40.12	-11.10	29.02	46.00	-16.98	QP	
5		830.2500	32.64	-4.20	28.44	46.00	-17.56	QP	
6	*	911.7300	33.02	-2.59	30.43	46.00	-15.57	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: QUANCHENG / 1311-3291-3.5mm-178

Vertical

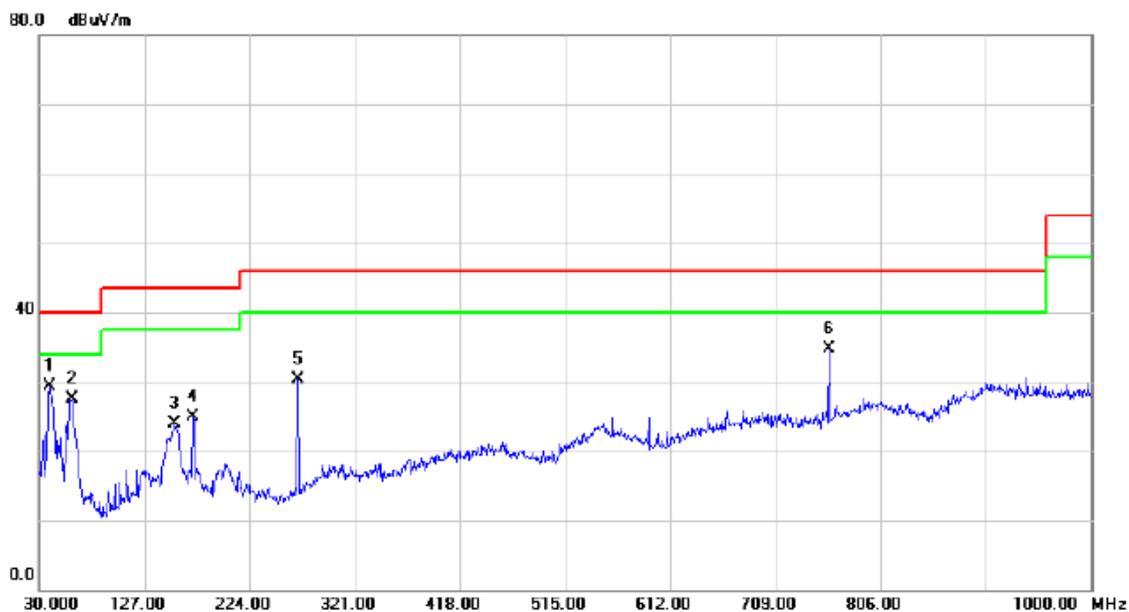

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39.7000	43.53	-14.25	29.28	40.00	-10.72	QP	
2		60.0700	42.19	-14.75	27.44	40.00	-12.56	QP	
3		155.1300	37.89	-13.99	23.90	43.50	-19.60	QP	
4		171.6200	39.44	-14.57	24.87	43.50	-18.63	QP	
5		268.6200	44.60	-14.26	30.34	46.00	-15.66	QP	
6		758.4700	39.61	-4.97	34.64	46.00	-11.36	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: QUANCHENG / 1311-3291-3.5mm-178


Horizontal



No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	171.6200	43.12	-14.57	28.55	43.50	-14.95	QP	
2	399.5700	35.13	-11.10	24.03	46.00	-21.97	QP	
3	550.8900	32.11	-7.97	24.14	46.00	-21.86	QP	
4	691.5400	31.30	-5.67	25.63	46.00	-20.37	QP	
5	808.9100	33.03	-4.58	28.45	46.00	-17.55	QP	
6	905.9100	32.66	-2.70	29.96	46.00	-16.04	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150

Vertical

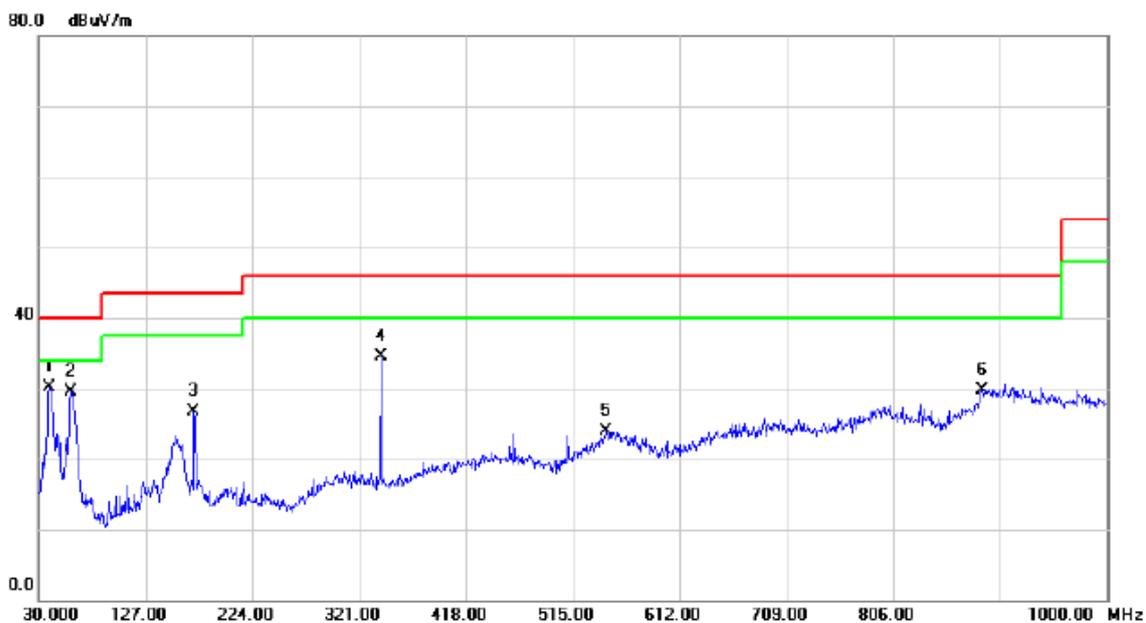

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39.7000	44.40	-14.25	30.15	40.00	-9.85	QP	
2		59.1000	44.15	-14.64	29.51	40.00	-10.49	QP	
3		170.6500	41.26	-14.49	26.77	43.50	-16.73	QP	
4		340.4000	47.04	-12.44	34.60	46.00	-11.40	QP	
5		545.0700	32.05	-8.12	23.93	46.00	-22.07	QP	
6		886.5100	32.81	-3.11	29.70	46.00	-16.30	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		171.6200	41.56	-14.57	26.99	43.50	-16.51	QP	
2		399.5700	32.99	-11.10	21.89	46.00	-24.11	QP	
3		542.1600	32.86	-8.19	24.67	46.00	-21.33	QP	
4		697.3600	31.38	-5.50	25.88	46.00	-20.12	QP	
5		809.8800	32.31	-4.56	27.75	46.00	-18.25	QP	
6	*	915.6100	32.85	-2.50	30.35	46.00	-15.65	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

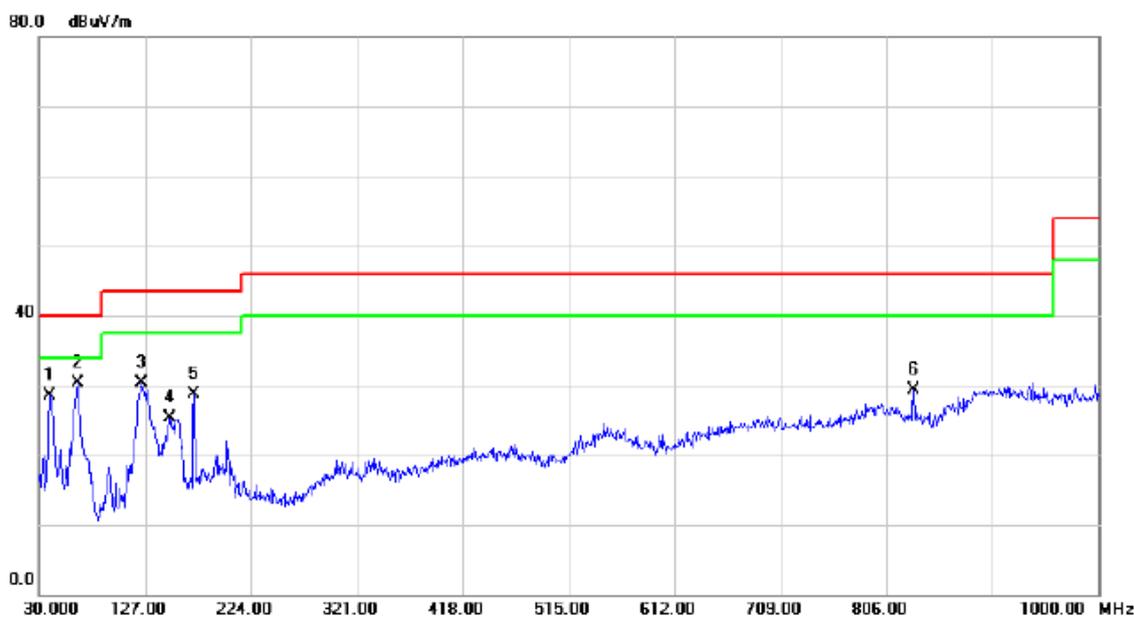

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.7000	42.74	-14.25	28.49	40.00	-11.51	QP	
2	*	64.9200	45.79	-15.49	30.30	40.00	-9.70	QP	
3		123.1200	46.19	-15.94	30.25	43.50	-13.25	QP	
4		149.3100	39.34	-14.07	25.27	43.50	-18.23	QP	
5		171.6200	43.18	-14.57	28.61	43.50	-14.89	QP	
6		831.2200	33.50	-4.18	29.32	46.00	-16.68	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

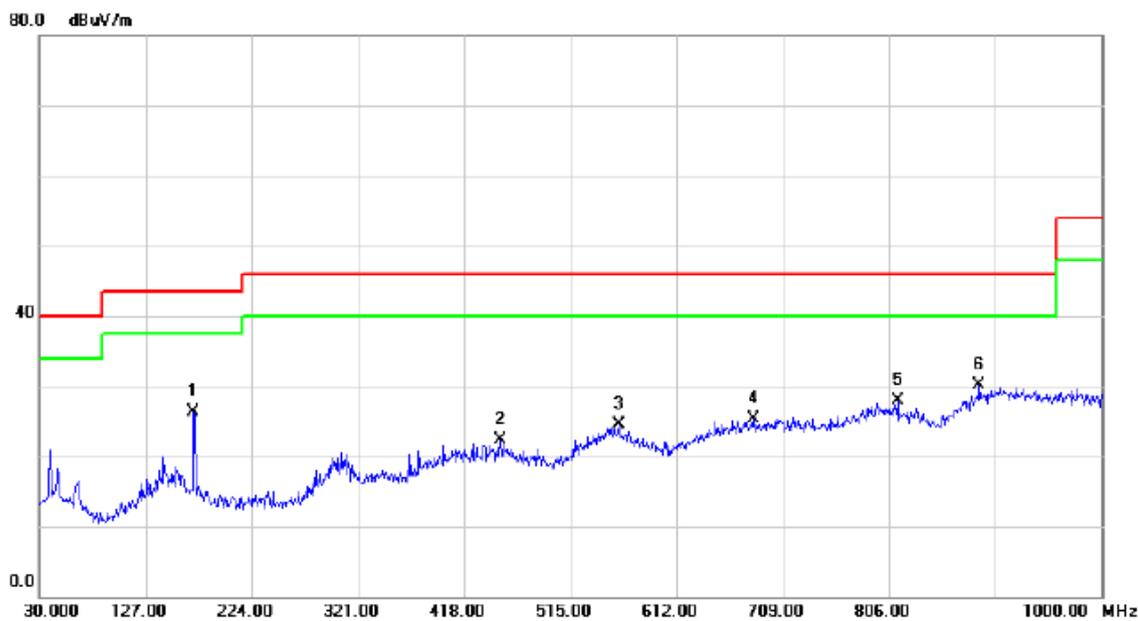

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		170.6500	40.72	-14.49	26.23	43.50	-17.27	QP	
2		450.9800	31.89	-9.66	22.23	46.00	-23.77	QP	
3		559.6200	32.33	-7.88	24.45	46.00	-21.55	QP	
4		681.8400	31.26	-5.96	25.30	46.00	-20.70	QP	
5		813.7600	32.38	-4.49	27.89	46.00	-18.11	QP	
6	*	888.4500	33.21	-3.06	30.15	46.00	-15.85	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

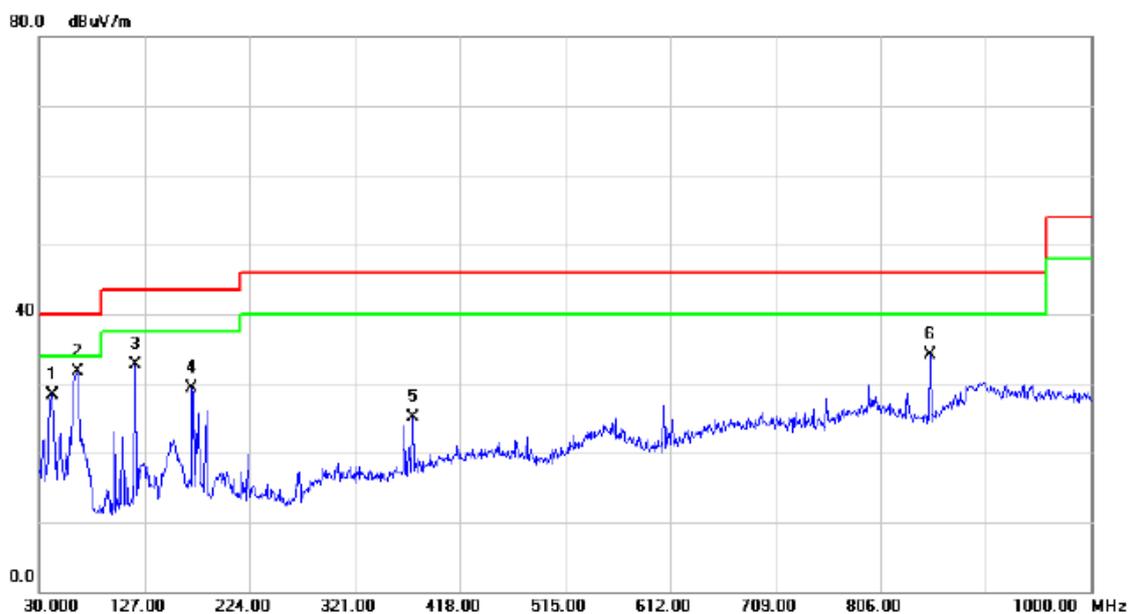

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		42.6100	42.19	-13.92	28.27	40.00	-11.73	QP	
2	*	64.9200	47.18	-15.49	31.69	40.00	-8.31	QP	
3		118.2700	49.05	-16.42	32.63	43.50	-10.87	QP	
4		170.6500	43.70	-14.49	29.21	43.50	-14.29	QP	
5		374.3500	36.83	-11.74	25.09	46.00	-20.91	QP	
6		851.5900	37.90	-3.81	34.09	46.00	-11.91	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

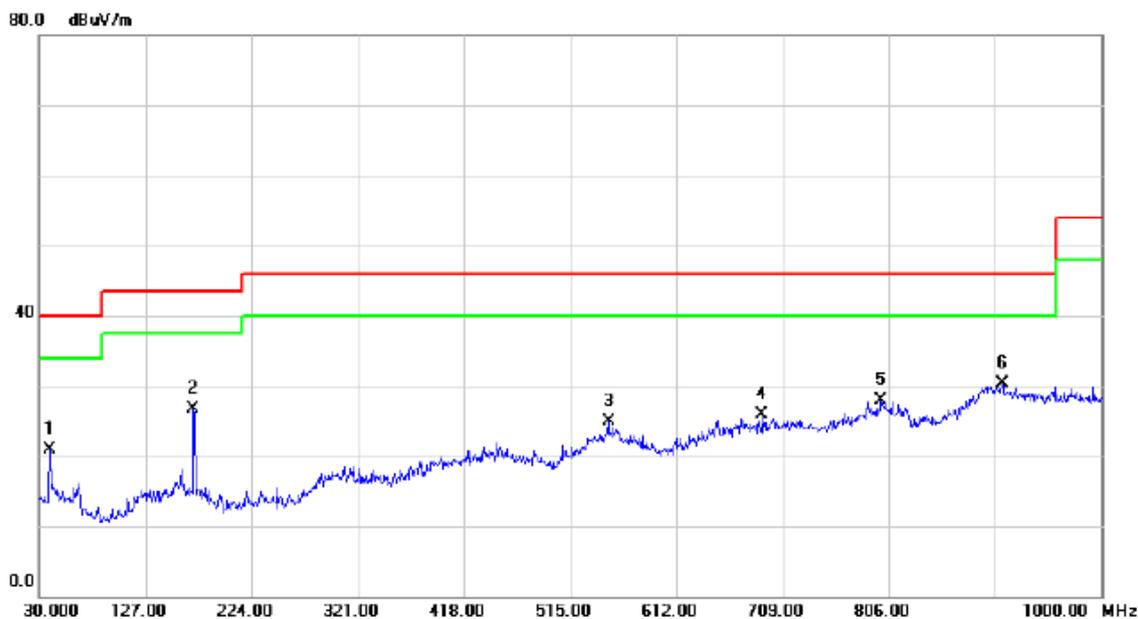

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.7000	35.23	-14.25	20.98	40.00	-19.02	QP	
2		170.6500	41.28	-14.49	26.79	43.50	-16.71	QP	
3		549.9200	32.84	-7.98	24.86	46.00	-21.14	QP	
4		690.5700	31.52	-5.70	25.82	46.00	-20.18	QP	
5		799.2100	32.64	-4.74	27.90	46.00	-18.10	QP	
6	*	909.7900	32.85	-2.62	30.23	46.00	-15.77	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150

Vertical

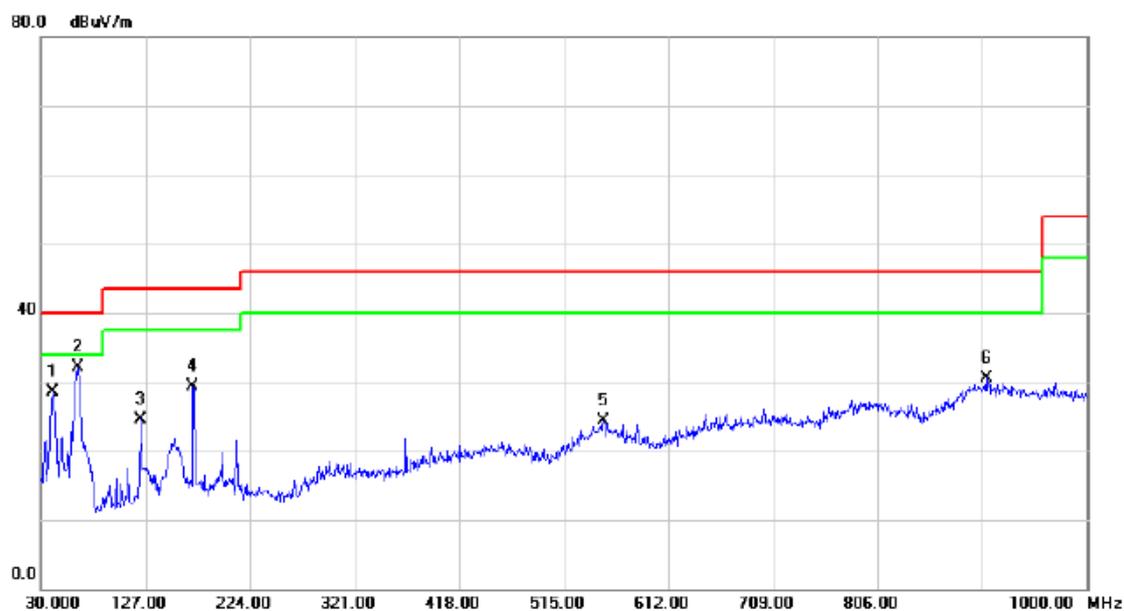

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		40.6700	42.65	-14.13	28.52	40.00	-11.48	QP	
2	*	63.9500	47.38	-15.34	32.04	40.00	-7.96	QP	
3		122.1500	40.62	-16.02	24.60	43.50	-18.90	QP	
4		170.6500	43.73	-14.49	29.24	43.50	-14.26	QP	
5		551.8600	32.28	-7.96	24.32	46.00	-21.68	QP	
6		906.8800	33.13	-2.67	30.46	46.00	-15.54	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.7000	35.36	-14.25	21.11	40.00	-18.89	QP	
2		170.6500	40.74	-14.49	26.25	43.50	-17.25	QP	
3		550.8900	32.53	-7.97	24.56	46.00	-21.44	QP	
4		718.7000	30.69	-5.27	25.42	46.00	-20.58	QP	
5		831.2200	31.97	-4.18	27.79	46.00	-18.21	QP	
6	*	913.6700	32.18	-2.54	29.64	46.00	-16.36	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150

Vertical

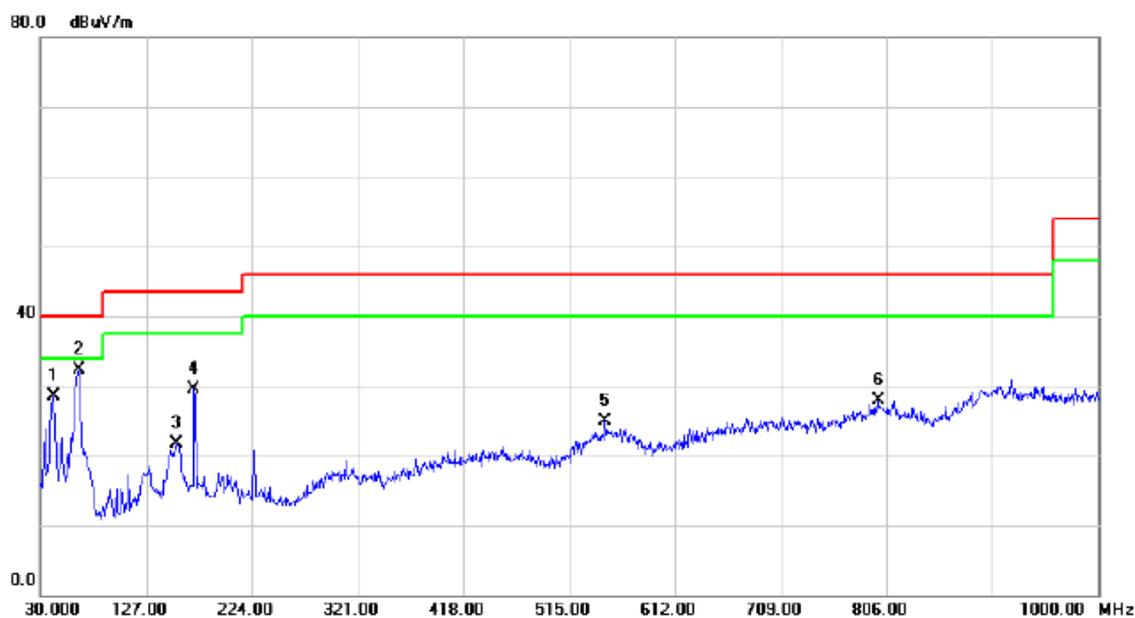

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.6400	42.51	-14.03	28.48	40.00	-11.52	QP	
2	*	64.9200	47.76	-15.49	32.27	40.00	-7.73	QP	
3		155.1300	35.64	-13.99	21.65	43.50	-21.85	QP	
4		170.6500	44.07	-14.49	29.58	43.50	-13.92	QP	
5		547.9800	33.00	-8.04	24.96	46.00	-21.04	QP	
6		798.2400	32.65	-4.76	27.89	46.00	-18.11	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: FOXCONN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.7000	35.06	-14.25	20.81	40.00	-19.19	QP	
2		170.6500	40.83	-14.49	26.34	43.50	-17.16	QP	
3		549.9200	32.55	-7.98	24.57	46.00	-21.43	QP	
4		787.5700	32.66	-4.81	27.85	46.00	-18.15	QP	
5		897.1800	32.38	-2.89	29.49	46.00	-16.51	QP	
6	*	951.5000	31.78	-1.74	30.04	46.00	-15.96	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		102.7500	45.04	-18.40	26.64	43.50	-16.86	QP	
2		230.7900	44.86	-15.78	29.08	46.00	-16.92	QP	
3		484.9300	38.70	-9.41	29.29	46.00	-16.71	QP	
4		564.4700	38.37	-7.83	30.54	46.00	-15.46	QP	
5		700.2700	33.71	-5.42	28.29	46.00	-17.71	QP	
6	*	945.6800	32.92	-1.85	31.07	46.00	-14.93	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


Horizontal

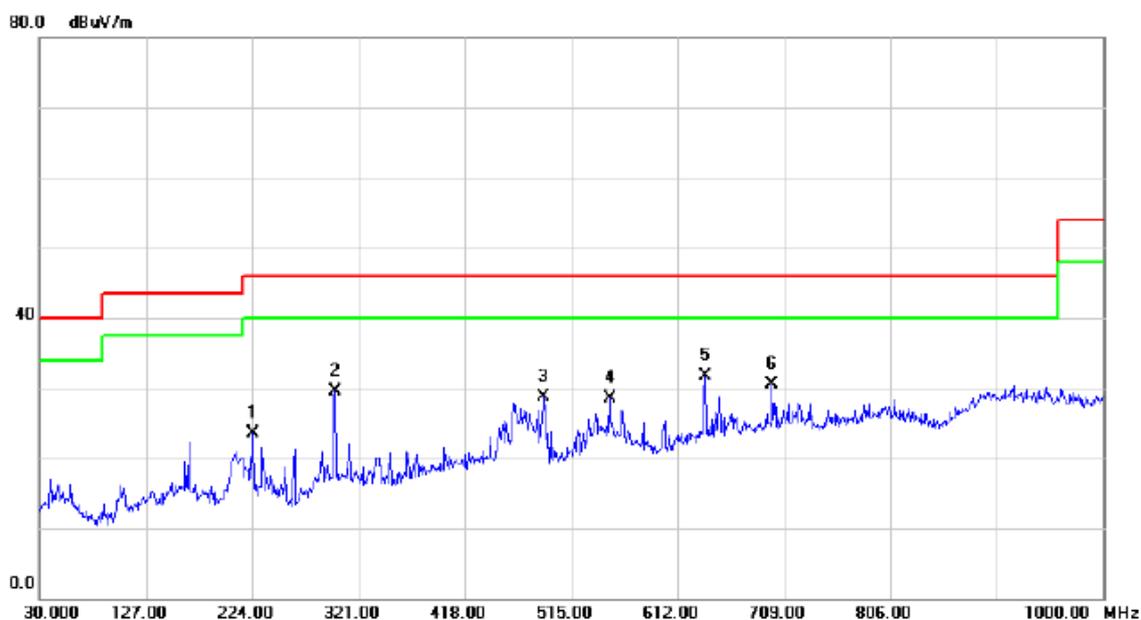

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		224.0000	39.71	-16.28	23.43	46.00	-22.57	QP	
2		299.6600	43.00	-13.50	29.50	46.00	-16.50	QP	
3		489.7800	38.11	-9.38	28.73	46.00	-17.27	QP	
4		549.9200	36.54	-7.98	28.56	46.00	-17.44	QP	
5	*	637.2200	38.84	-7.05	31.79	46.00	-14.21	QP	
6		698.3300	36.05	-5.47	30.58	46.00	-15.42	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN


Vertical

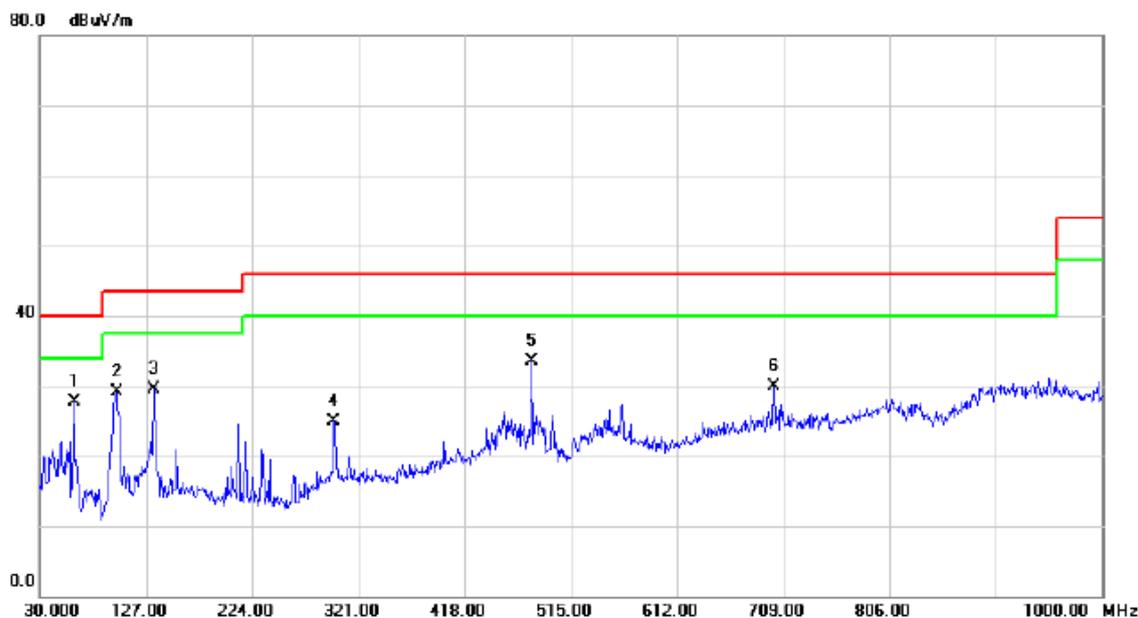

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	61.0400	42.66	-14.90	27.76	40.00	-12.24	QP	
2		99.8400	47.87	-18.84	29.03	43.50	-14.47	QP	
3		133.7900	44.55	-14.97	29.58	43.50	-13.92	QP	
4		298.6900	38.47	-13.52	24.95	46.00	-21.05	QP	
5		479.1100	43.04	-9.45	33.59	46.00	-12.41	QP	
6		700.2700	35.33	-5.42	29.91	46.00	-16.09	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN

Horizontal

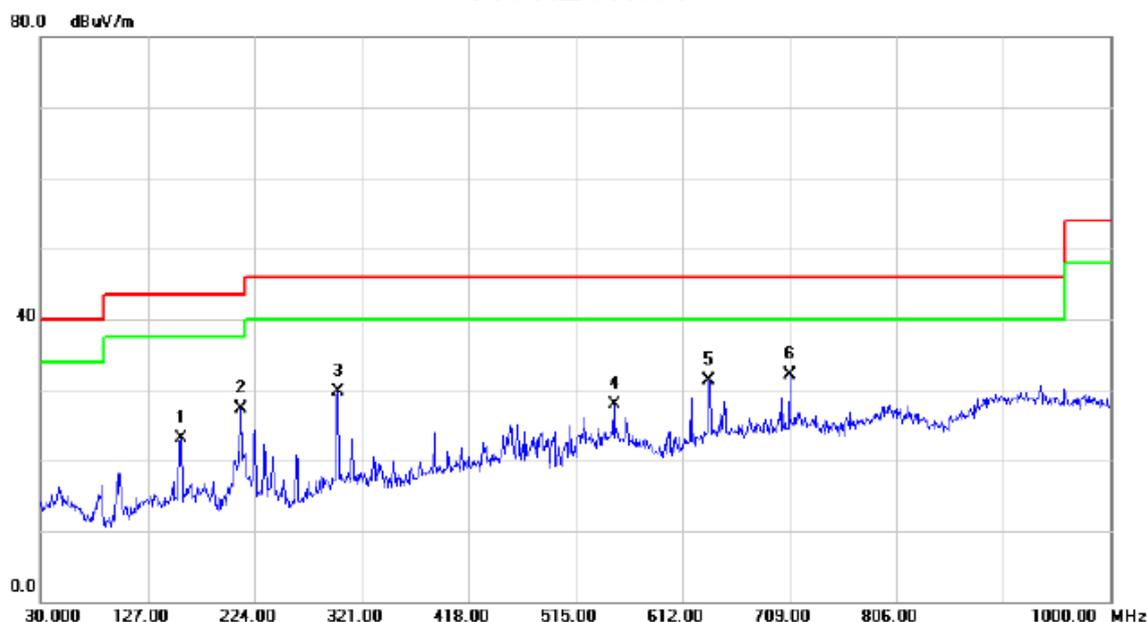

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		157.0700	37.08	-13.96	23.12	43.50	-20.38	QP	
2		211.3900	43.86	-16.55	27.31	43.50	-16.19	QP	
3		299.6600	43.27	-13.50	29.77	46.00	-16.23	QP	
4		549.9200	35.96	-7.98	27.98	46.00	-18.02	QP	
5		635.2800	38.34	-7.08	31.26	46.00	-14.74	QP	
6	*	709.0000	37.54	-5.35	32.19	46.00	-13.81	QP	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: HONGLIN +Battery: Lishen + Earphone: GOERTEK


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1765.000	43.67	-3.66	40.01	74.00	-33.99	peak	
2		1765.000	38.68	-3.66	35.02	54.00	-18.98	AVG	
3		2430.000	53.17	-0.81	52.36	74.00	-21.64	peak	
4	*	2430.000	40.93	-0.81	40.12	54.00	-13.88	AVG	
5		3907.500	41.88	5.14	47.02	74.00	-26.98	peak	
6		3907.500	32.71	5.14	37.85	54.00	-16.15	AVG	
7		5150.000	40.68	8.18	48.86	74.00	-25.14	peak	
8		5150.000	30.06	8.18	38.24	54.00	-15.76	AVG	
9		5672.500	39.91	9.47	49.38	74.00	-24.62	peak	
10		5672.500	29.98	9.47	39.45	54.00	-14.55	AVG	
11		5927.500	39.62	10.05	49.67	74.00	-24.33	peak	
12		5927.500	30.07	10.05	40.12	54.00	-13.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: HK +USB Cable: HONGLIN +Battery: Lishen + Earphone: GOERTEK


Horizontal

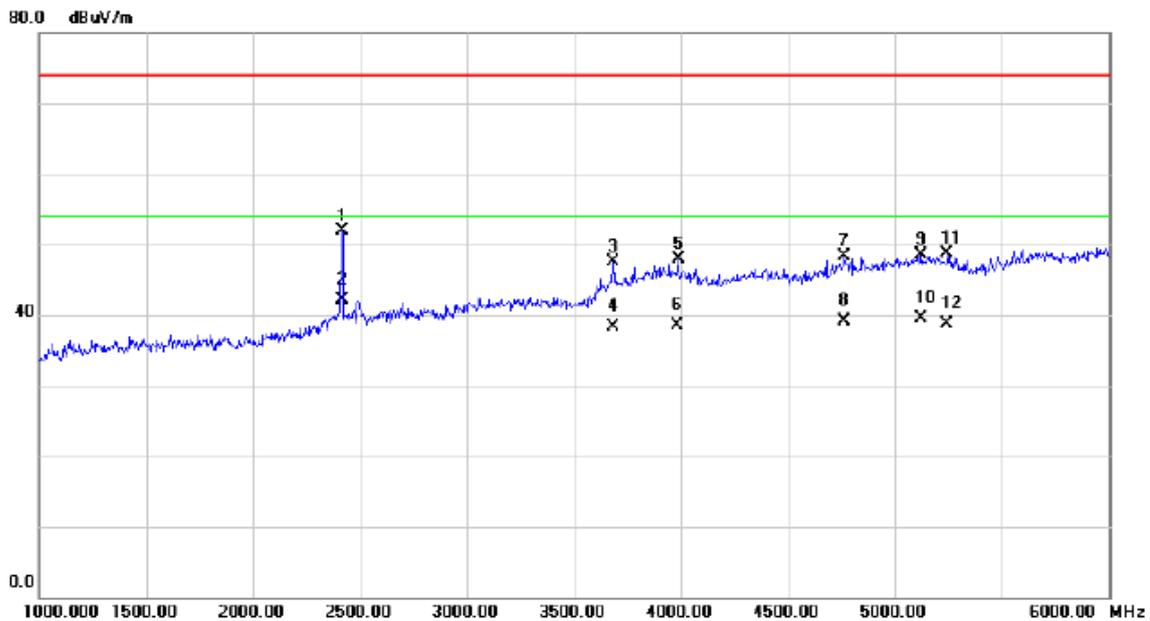

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2417.500	52.75	-0.88	51.87	74.00	-22.13	peak	
2	*	2417.500	42.99	-0.88	42.11	54.00	-11.89	AVG	
3		3685.000	43.63	3.87	47.50	74.00	-26.50	peak	
4		3685.000	34.53	3.87	38.40	54.00	-15.60	AVG	
5		3987.500	42.37	5.60	47.97	74.00	-26.03	peak	
6		3987.500	32.85	5.60	38.45	54.00	-15.55	AVG	
7		4765.000	41.23	7.04	48.27	74.00	-25.73	peak	
8		4765.000	32.08	7.04	39.12	54.00	-14.88	AVG	
9		5125.000	40.38	8.12	48.50	74.00	-25.50	peak	
10		5125.000	31.33	8.12	39.45	54.00	-14.55	AVG	
11		5245.000	40.23	8.43	48.66	74.00	-25.34	peak	
12		5245.000	30.35	8.43	38.78	54.00	-15.22	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: HONGLIN +Battery: SCUD + Earphone: Lianchuang / MEMD1632B580A00


Vertical

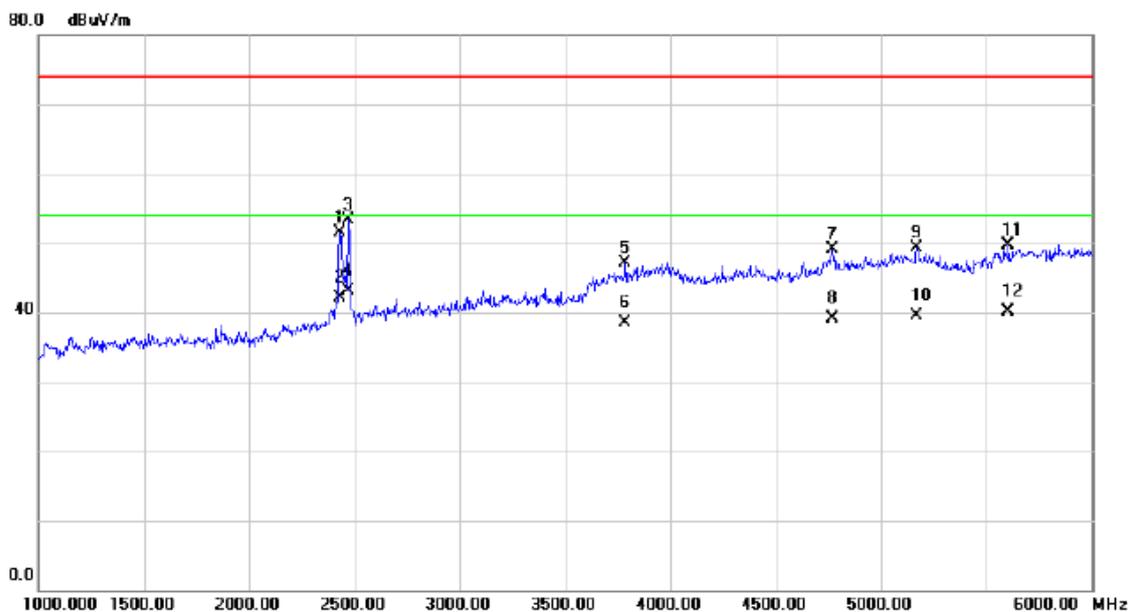

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2432.500	52.25	-0.79	51.46	74.00	-22.54	peak	
2		2432.500	42.91	-0.79	42.12	54.00	-11.88	AVG	
3		2472.500	53.92	-0.56	53.36	74.00	-20.64	peak	
4	*	2472.500	43.57	-0.56	43.01	54.00	-10.99	AVG	
5		3785.000	42.72	4.45	47.17	74.00	-26.83	peak	
6		3785.000	34.00	4.45	38.45	54.00	-15.55	AVG	
7		4770.000	41.96	7.06	49.02	74.00	-24.98	peak	
8		4770.000	32.06	7.06	39.12	54.00	-14.88	AVG	
9		5172.500	41.14	8.25	49.39	74.00	-24.61	peak	
10		5172.500	31.20	8.25	39.45	54.00	-14.55	AVG	
11		5605.000	40.38	9.32	49.70	74.00	-24.30	peak	
12		5605.000	30.80	9.32	40.12	54.00	-13.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: BYD +USB Cable: HONGLIN +Battery: SCUD + Earphone: Lianchuang / MEMD1632B580A00


Horizontal

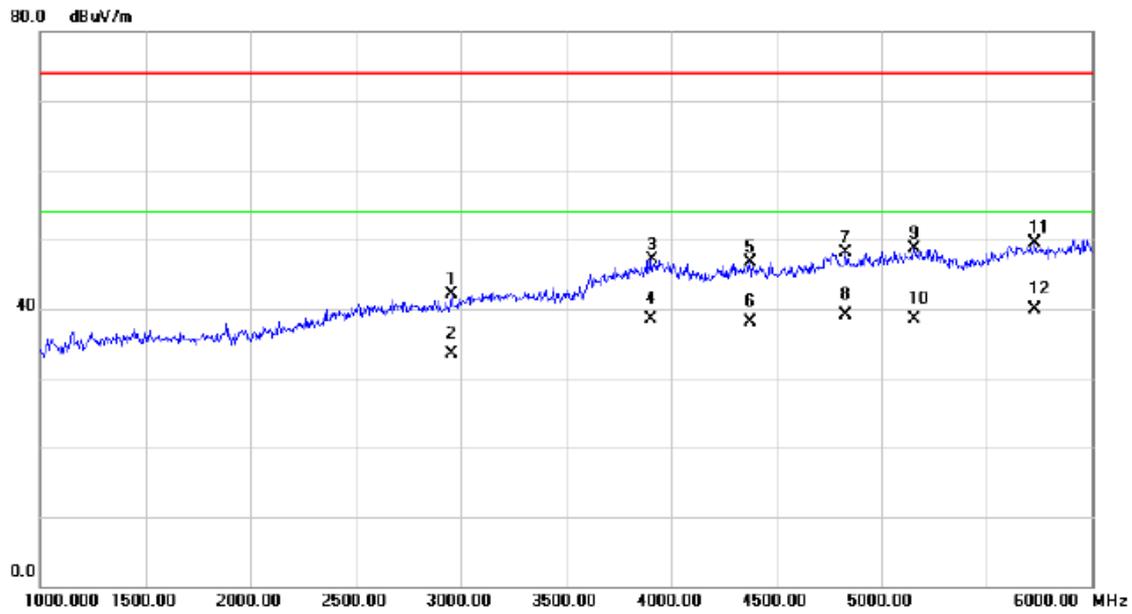

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2957.500	40.73	1.30	42.03	74.00	-31.97	peak	
2		2957.500	32.15	1.30	33.45	54.00	-20.55	AVG	
3		3907.500	41.90	5.14	47.04	74.00	-26.96	peak	
4		3907.500	33.31	5.14	38.45	54.00	-15.55	AVG	
5		4377.500	40.62	6.07	46.69	74.00	-27.31	peak	
6		4377.500	32.05	6.07	38.12	54.00	-15.88	AVG	
7		4832.500	40.80	7.26	48.06	74.00	-25.94	peak	
8		4832.500	31.86	7.26	39.12	54.00	-14.88	AVG	
9		5155.000	40.46	8.19	48.65	74.00	-25.35	peak	
10		5155.000	30.25	8.19	38.44	54.00	-15.56	AVG	
11		5730.000	39.90	9.61	49.51	74.00	-24.49	peak	
12	*	5730.000	30.23	9.61	39.84	54.00	-14.16	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Vertical

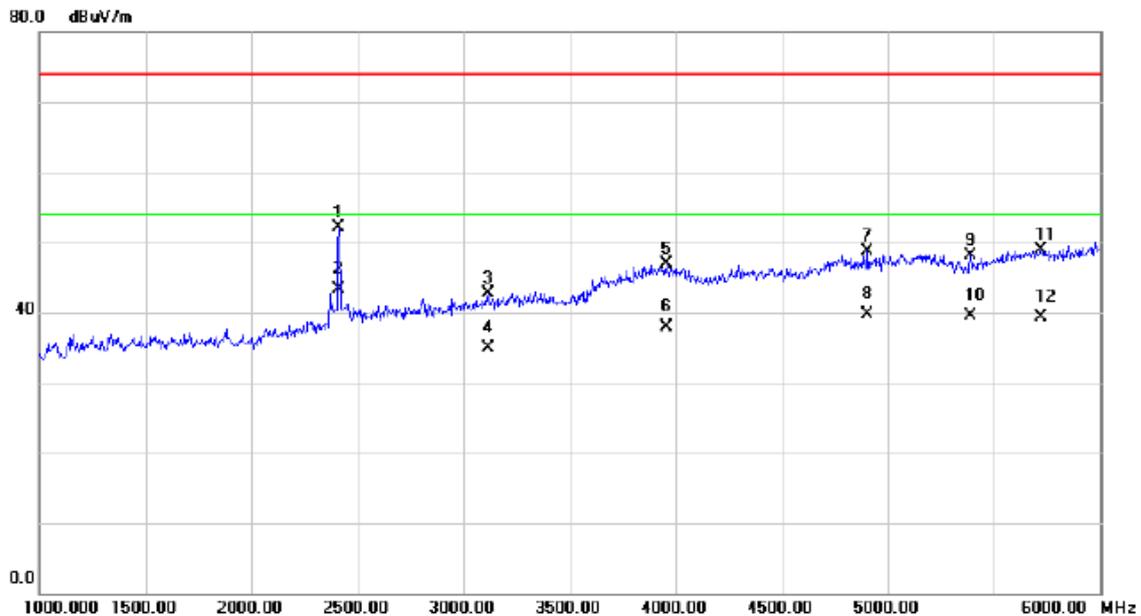

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2412.500	53.06	-0.91	52.15	74.00	-21.85	peak	
2	*	2412.500	44.23	-0.91	43.32	54.00	-10.68	AVG	
3		3115.000	40.91	1.78	42.69	74.00	-31.31	peak	
4		3115.000	33.18	1.78	34.96	54.00	-19.04	AVG	
5		3955.000	41.46	5.42	46.88	74.00	-27.12	peak	
6		3955.000	32.43	5.42	37.85	54.00	-16.15	AVG	
7		4905.000	41.12	7.50	48.62	74.00	-25.38	peak	
8		4905.000	32.13	7.50	39.63	54.00	-14.37	AVG	
9		5390.000	39.39	8.81	48.20	74.00	-25.80	peak	
10		5390.000	30.60	8.81	39.41	54.00	-14.59	AVG	
11		5720.000	39.29	9.58	48.87	74.00	-25.13	peak	
12		5720.000	29.67	9.58	39.25	54.00	-14.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: Sunwoda + Earphone: Lianchuang / MEMD1532B528000


Horizontal

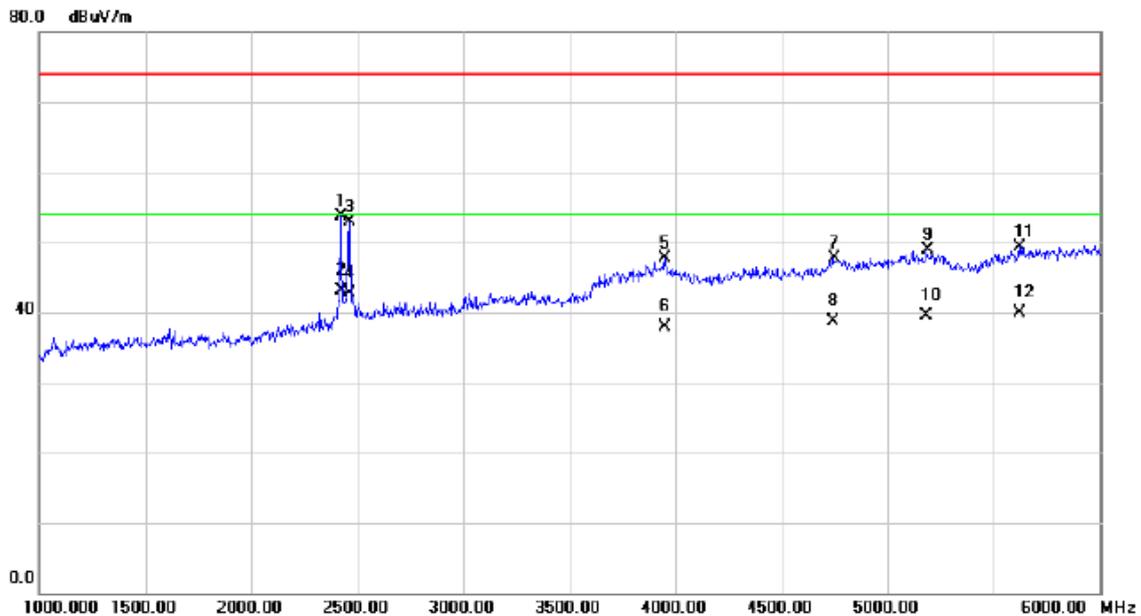

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2422.500	54.46	-0.85	53.61	74.00	-20.39	peak	
2 *	2422.500	44.02	-0.85	43.17	54.00	-10.83	AVG	
3	2462.500	53.58	-0.62	52.96	74.00	-21.04	peak	
4	2462.500	43.39	-0.62	42.77	54.00	-11.23	AVG	
5	3952.500	42.22	5.40	47.62	74.00	-26.38	peak	
6	3952.500	32.60	5.40	38.00	54.00	-16.00	AVG	
7	4747.500	40.79	6.98	47.77	74.00	-26.23	peak	
8	4747.500	31.76	6.98	38.74	54.00	-15.26	AVG	
9	5187.500	40.65	8.28	48.93	74.00	-25.07	peak	
10	5187.500	31.21	8.28	39.49	54.00	-14.51	AVG	
11	5622.500	40.04	9.36	49.40	74.00	-24.60	peak	
12	5622.500	30.51	9.36	39.87	54.00	-14.13	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


Vertical

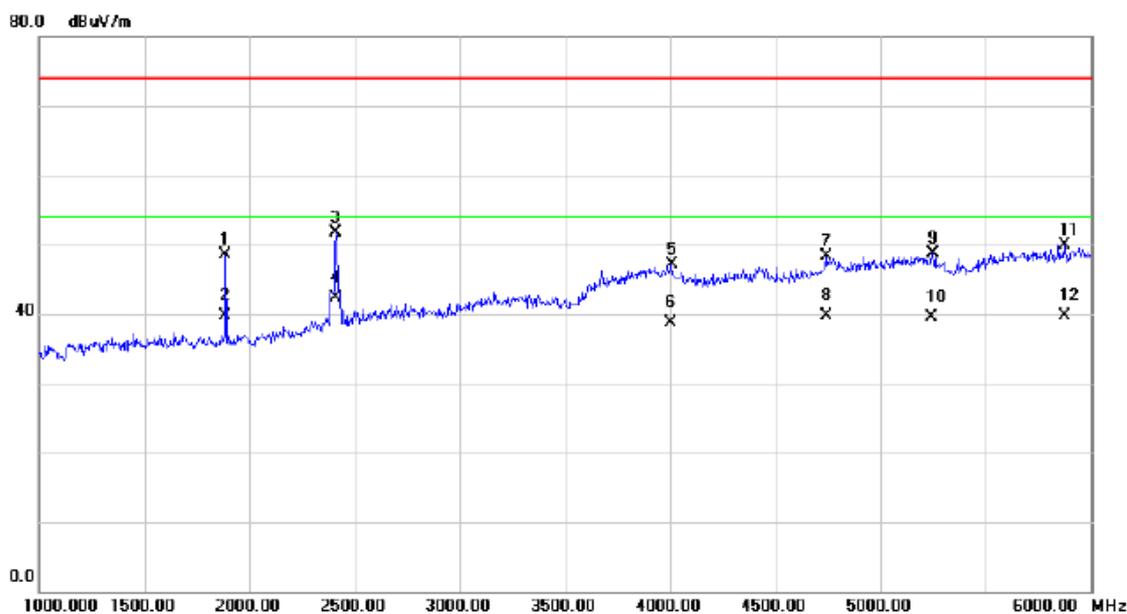

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1885.000	51.96	-3.50	48.46	74.00	-25.54	peak	
2		1885.000	43.28	-3.50	39.78	54.00	-14.22	AVG	
3		2412.500	52.58	-0.91	51.67	74.00	-22.33	peak	
4	*	2412.500	43.16	-0.91	42.25	54.00	-11.75	AVG	
5		4007.500	41.43	5.68	47.11	74.00	-26.89	peak	
6		4007.500	33.10	5.68	38.78	54.00	-15.22	AVG	
7		4745.000	41.25	6.98	48.23	74.00	-25.77	peak	
8		4745.000	32.79	6.98	39.77	54.00	-14.23	AVG	
9		5247.500	40.26	8.44	48.70	74.00	-25.30	peak	
10		5247.500	31.03	8.44	39.47	54.00	-14.53	AVG	
11		5875.000	39.95	9.93	49.88	74.00	-24.12	peak	
12		5875.000	29.85	9.93	39.78	54.00	-14.22	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: BYD + Earphone: QUANCHENG / 1311-3291-3.5mm-178


Horizontal

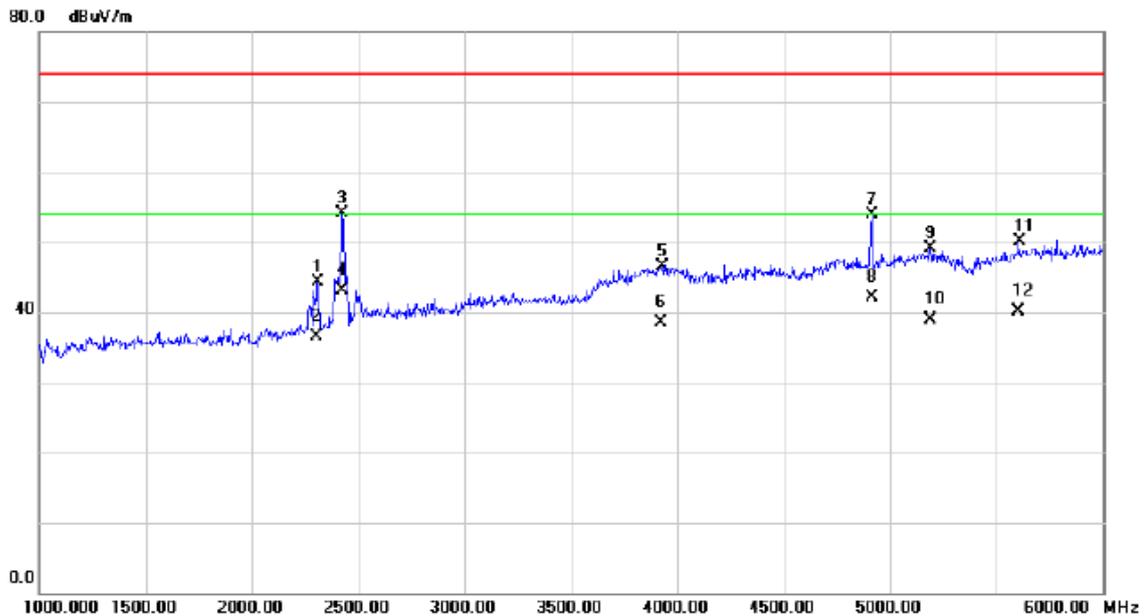

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2307.500	45.85	-1.52	44.33	74.00	-29.67	peak	
2		2307.500	37.99	-1.52	36.47	54.00	-17.53	AVG	
3		2425.000	54.93	-0.84	54.09	74.00	-19.91	peak	
4	*	2425.000	43.96	-0.84	43.12	54.00	-10.88	AVG	
5		3927.500	41.17	5.26	46.43	74.00	-27.57	peak	
6		3927.500	33.19	5.26	38.45	54.00	-15.55	AVG	
7		4915.000	46.45	7.53	53.98	74.00	-20.02	peak	
8		4915.000	34.59	7.53	42.12	54.00	-11.88	AVG	
9		5192.500	40.73	8.30	49.03	74.00	-24.97	peak	
10		5192.500	30.68	8.30	38.98	54.00	-15.02	AVG	
11		5607.500	40.82	9.32	50.14	74.00	-23.86	peak	
12		5607.500	30.80	9.32	40.12	54.00	-13.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

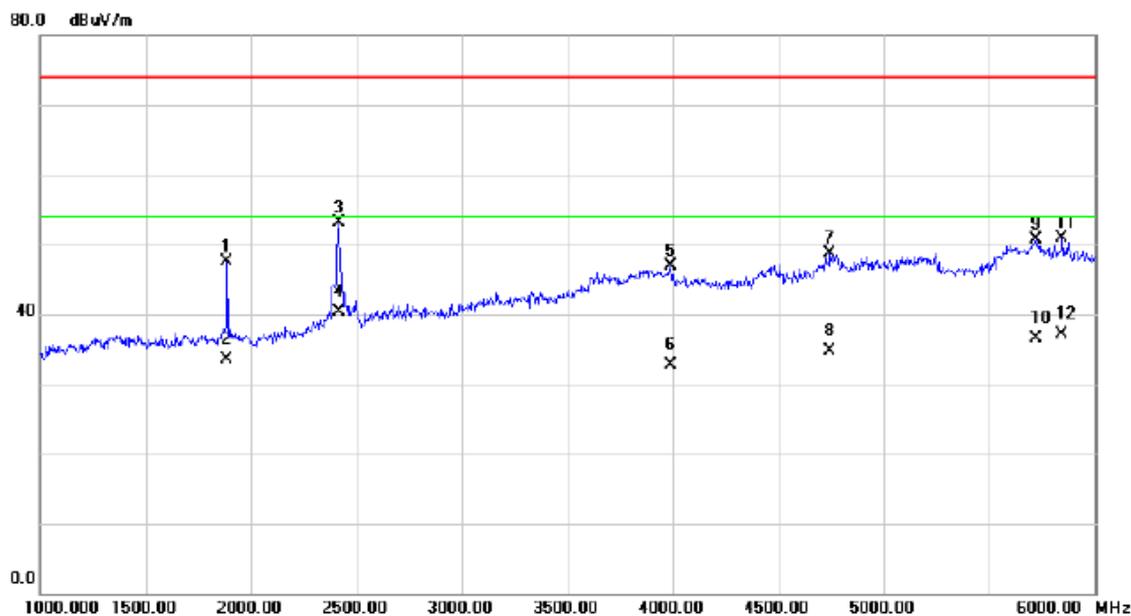

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1885.000	50.96	-3.50	47.46	74.00	-26.54	peak	
2		1885.000	37.07	-3.50	33.57	54.00	-20.43	AVG	
3		2415.000	53.92	-0.89	53.03	74.00	-20.97	peak	
4	*	2415.000	41.12	-0.89	40.23	54.00	-13.77	AVG	
5		3990.000	41.26	5.62	46.88	74.00	-27.12	peak	
6		3990.000	27.13	5.62	32.75	54.00	-21.25	AVG	
7		4745.000	41.75	6.98	48.73	74.00	-25.27	peak	
8		4745.000	27.69	6.98	34.67	54.00	-19.33	AVG	
9		5722.500	41.02	9.59	50.61	74.00	-23.39	peak	
10		5722.500	26.95	9.59	36.54	54.00	-17.46	AVG	
11		5845.000	40.97	9.86	50.83	74.00	-23.17	peak	
12		5845.000	27.29	9.86	37.15	54.00	-16.85	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+wifi+Gps+playing+Earphone
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

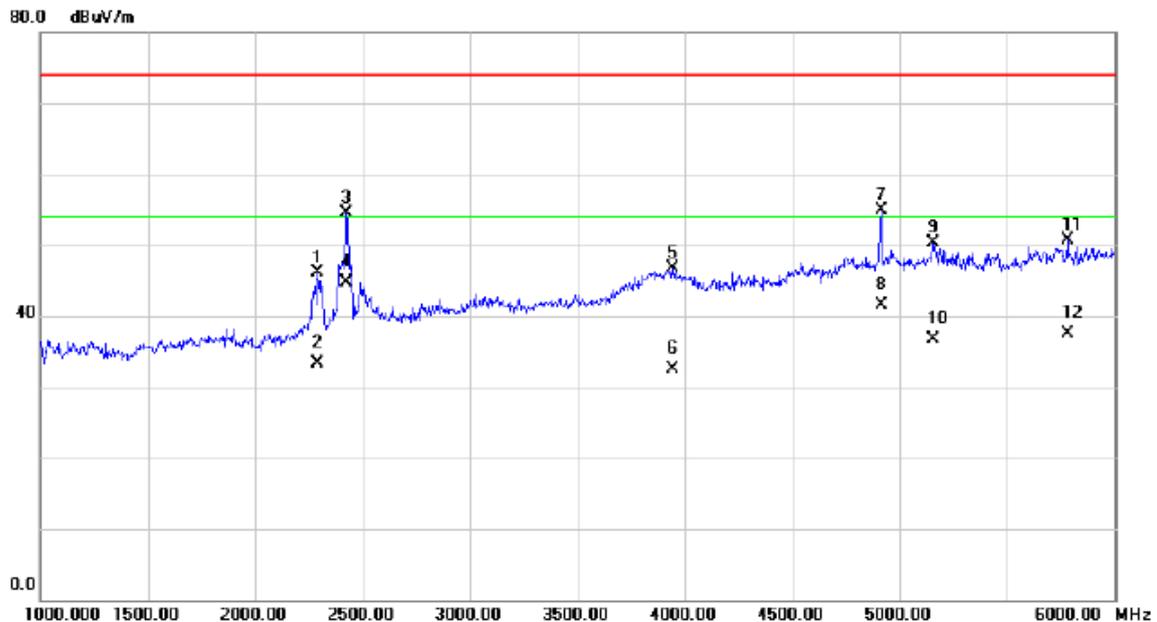

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2290.000	47.78	-1.63	46.15	74.00	-27.85	peak	
2		2290.000	34.87	-1.63	33.24	54.00	-20.76	AVG	
3		2425.000	55.43	-0.84	54.59	74.00	-19.41	peak	
4	*	2425.000	45.48	-0.84	44.64	54.00	-9.36	AVG	
5		3942.500	41.31	5.35	46.66	74.00	-27.34	peak	
6		3942.500	27.19	5.35	32.54	54.00	-21.46	AVG	
7		4915.000	47.45	7.53	54.98	74.00	-19.02	peak	
8		4915.000	34.02	7.53	41.55	54.00	-12.45	AVG	
9		5155.000	42.10	8.19	50.29	74.00	-23.71	peak	
10		5155.000	28.55	8.19	36.74	54.00	-17.26	AVG	
11		5782.500	41.07	9.72	50.79	74.00	-23.21	peak	
12		5782.500	27.70	9.72	37.42	54.00	-16.58	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

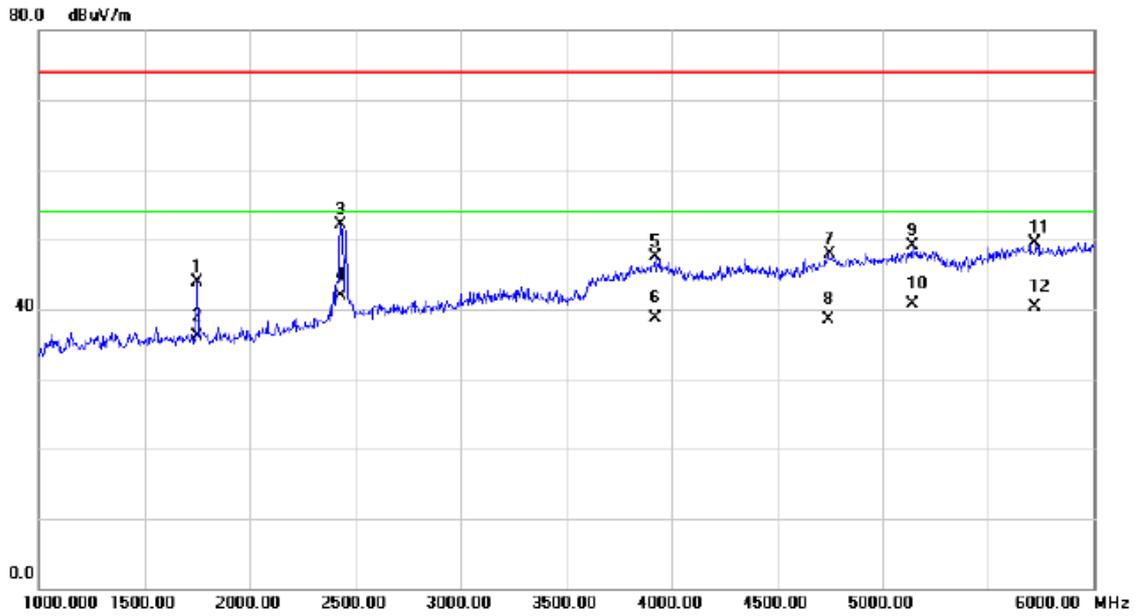

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1750.000	47.66	-3.69	43.97	74.00	-30.03	peak	
2		1750.000	39.71	-3.69	36.02	54.00	-17.98	AVG	
3		2432.500	52.89	-0.79	52.10	74.00	-21.90	peak	
4	*	2432.500	42.75	-0.79	41.96	54.00	-12.04	AVG	
5		3922.500	42.35	5.23	47.58	74.00	-26.42	peak	
6		3922.500	33.54	5.23	38.77	54.00	-15.23	AVG	
7		4747.500	40.91	6.98	47.89	74.00	-26.11	peak	
8		4747.500	31.58	6.98	38.56	54.00	-15.44	AVG	
9		5140.000	40.85	8.16	49.01	74.00	-24.99	peak	
10		5140.000	32.62	8.16	40.78	54.00	-13.22	AVG	
11		5725.000	39.84	9.59	49.43	74.00	-24.57	peak	
12		5725.000	30.66	9.59	40.25	54.00	-13.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+playing+speaker
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

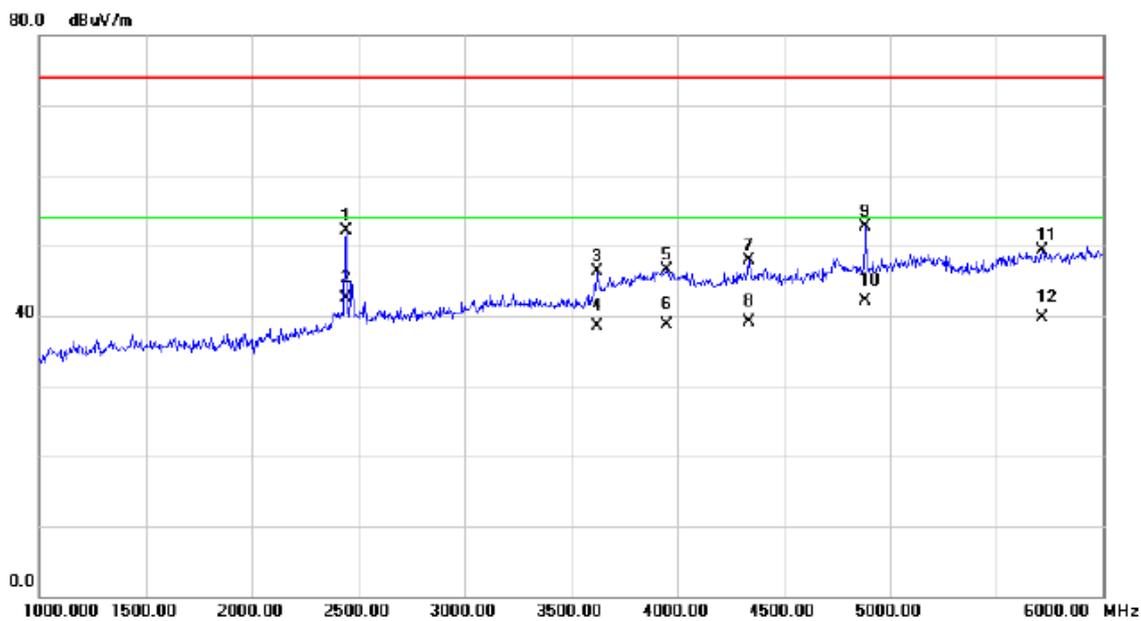

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2440.000	52.89	-0.75	52.14	74.00	-21.86	peak	
2	*	2440.000	43.27	-0.75	42.52	54.00	-11.48	AVG	
3		3625.000	42.81	3.53	46.34	74.00	-27.66	peak	
4		3625.000	34.92	3.53	38.45	54.00	-15.55	AVG	
5		3952.500	41.19	5.40	46.59	74.00	-27.41	peak	
6		3952.500	33.37	5.40	38.77	54.00	-15.23	AVG	
7		4337.500	41.91	6.02	47.93	74.00	-26.07	peak	
8		4337.500	33.12	6.02	39.14	54.00	-14.86	AVG	
9		4885.000	45.24	7.42	52.66	74.00	-21.34	peak	
10		4885.000	34.59	7.42	42.01	54.00	-11.99	AVG	
11		5717.500	39.73	9.58	49.31	74.00	-24.69	peak	
12		5717.500	30.19	9.58	39.77	54.00	-14.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150

Vertical

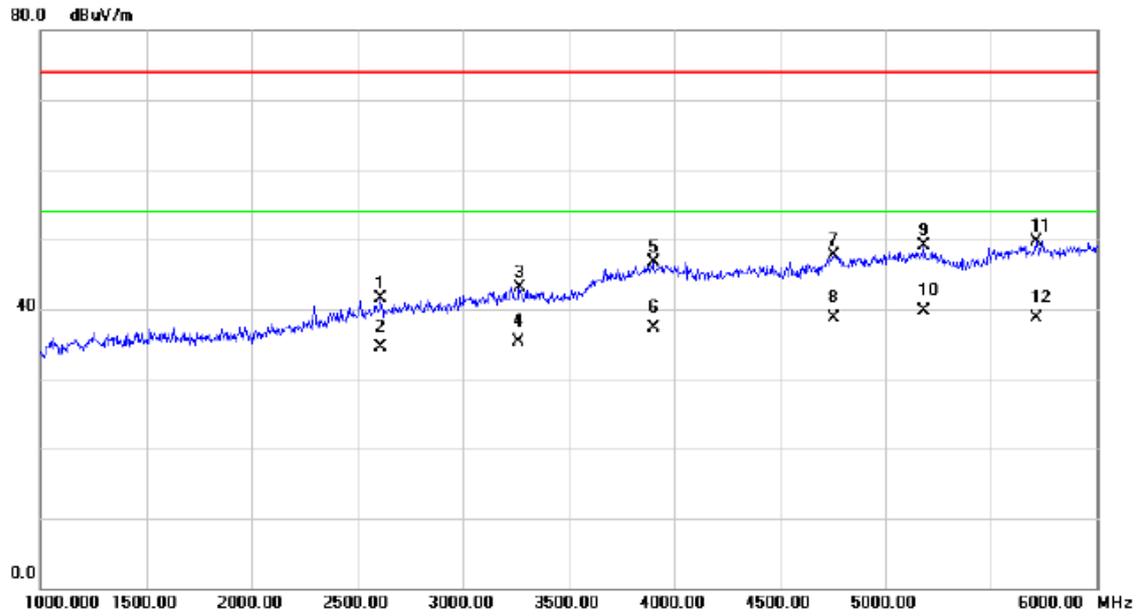

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2610.000	41.45	0.02	41.47	74.00	-32.53	peak	
2		2610.000	34.43	0.02	34.45	54.00	-19.55	AVG	
3		3267.500	40.91	2.18	43.09	74.00	-30.91	peak	
4		3267.500	33.18	2.18	35.36	54.00	-18.64	AVG	
5		3902.500	41.51	5.12	46.63	74.00	-27.37	peak	
6		3902.500	32.13	5.12	37.25	54.00	-16.75	AVG	
7		4757.500	40.75	7.02	47.77	74.00	-26.23	peak	
8		4757.500	31.61	7.02	38.63	54.00	-15.37	AVG	
9		5182.500	40.78	8.27	49.05	74.00	-24.95	peak	
10	*	5182.500	31.50	8.27	39.77	54.00	-14.23	AVG	
11		5715.000	40.21	9.57	49.78	74.00	-24.22	peak	
12		5715.000	29.22	9.57	38.79	54.00	-15.21	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+Gps+Camera on
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2300.000	46.39	-1.56	44.83	74.00	-29.17	peak	
2		2300.000	37.66	-1.56	36.10	54.00	-17.90	AVG	
3		2447.500	50.84	-0.71	50.13	74.00	-23.87	peak	
4		2447.500	40.49	-0.71	39.78	54.00	-14.22	AVG	
5		3895.000	42.69	5.06	47.75	74.00	-26.25	peak	
6		3895.000	33.39	5.06	38.45	54.00	-15.55	AVG	
7		4767.500	41.41	7.05	48.46	74.00	-25.54	peak	
8		4767.500	32.72	7.05	39.77	54.00	-14.23	AVG	
9		4945.000	44.41	7.62	52.03	74.00	-21.97	peak	
10	*	4945.000	33.63	7.62	41.25	54.00	-12.75	AVG	
11		5752.500	40.23	9.65	49.88	74.00	-24.12	peak	
12		5752.500	30.47	9.65	40.12	54.00	-13.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

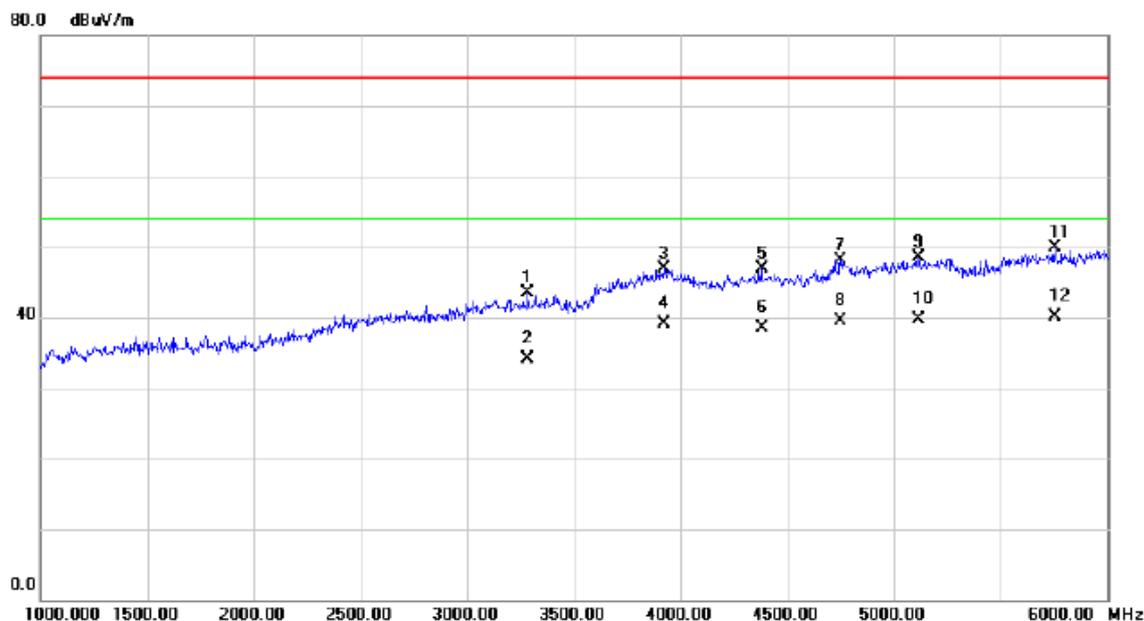

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3285.000	41.32	2.23	43.55	74.00	-30.45	peak	
2		3285.000	31.87	2.23	34.10	54.00	-19.90	AVG	
3		3920.000	41.79	5.21	47.00	74.00	-27.00	peak	
4		3920.000	33.91	5.21	39.12	54.00	-14.88	AVG	
5		4382.500	40.92	6.07	46.99	74.00	-27.01	peak	
6		4382.500	32.38	6.07	38.45	54.00	-15.55	AVG	
7		4752.500	41.11	7.00	48.11	74.00	-25.89	peak	
8		4752.500	32.45	7.00	39.45	54.00	-14.55	AVG	
9		5117.500	40.34	8.11	48.45	74.00	-25.55	peak	
10		5117.500	31.66	8.11	39.77	54.00	-14.23	AVG	
11		5757.500	40.15	9.66	49.81	74.00	-24.19	peak	
12	*	5757.500	30.46	9.66	40.12	54.00	-13.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

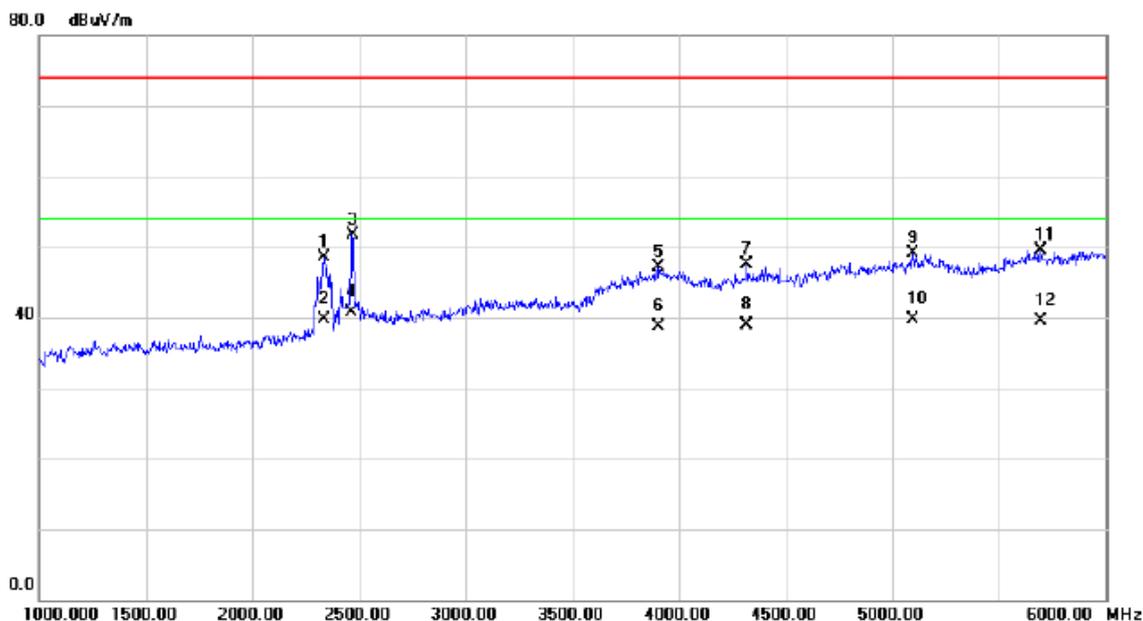

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2335.000	49.82	-1.36	48.46	74.00	-25.54	peak	
2		2335.000	41.14	-1.36	39.78	54.00	-14.22	AVG	
3		2467.500	52.20	-0.59	51.61	74.00	-22.39	peak	
4	*	2467.500	41.37	-0.59	40.78	54.00	-13.22	AVG	
5		3900.000	41.97	5.10	47.07	74.00	-26.93	peak	
6		3900.000	33.68	5.10	38.78	54.00	-15.22	AVG	
7		4317.500	41.51	6.00	47.51	74.00	-26.49	peak	
8		4317.500	32.99	6.00	38.99	54.00	-15.01	AVG	
9		5097.500	41.00	8.05	49.05	74.00	-24.95	peak	
10		5097.500	31.73	8.05	39.78	54.00	-14.22	AVG	
11		5695.000	39.89	9.52	49.41	74.00	-24.59	peak	
12		5695.000	29.93	9.52	39.45	54.00	-14.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

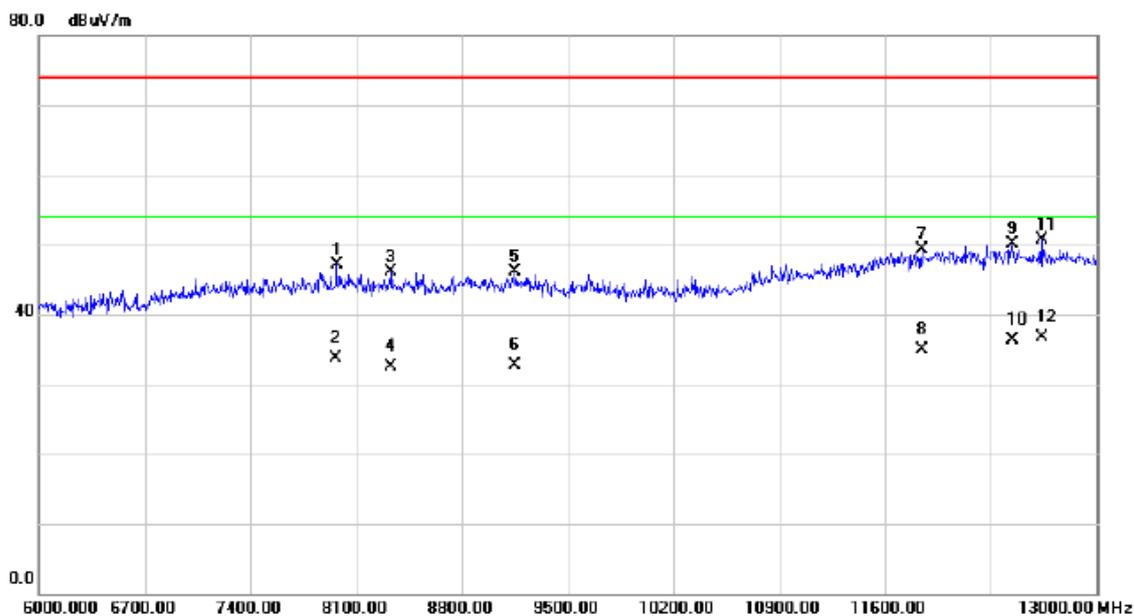

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7970.50	32.75	14.27	47.02	74.00	-26.98	peak	
2		7970.50	19.40	14.27	33.67	54.00	-20.33	AVG	
3		8331.00	31.94	14.20	46.14	74.00	-27.86	peak	
4		8331.00	18.25	14.20	32.45	54.00	-21.55	AVG	
5		9150.00	31.49	14.53	46.02	74.00	-27.98	peak	
6		9150.00	18.11	14.53	32.64	54.00	-21.36	AVG	
7		11848.50	29.33	19.95	49.28	74.00	-24.72	peak	
8		11848.50	15.00	19.95	34.95	54.00	-19.05	AVG	
9		12447.00	29.57	20.48	50.05	74.00	-23.95	peak	
10		12447.00	15.87	20.48	36.35	54.00	-17.65	AVG	
11		12639.50	30.04	20.61	50.65	74.00	-23.35	peak	
12	*	12639.50	16.14	20.61	36.75	54.00	-17.25	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

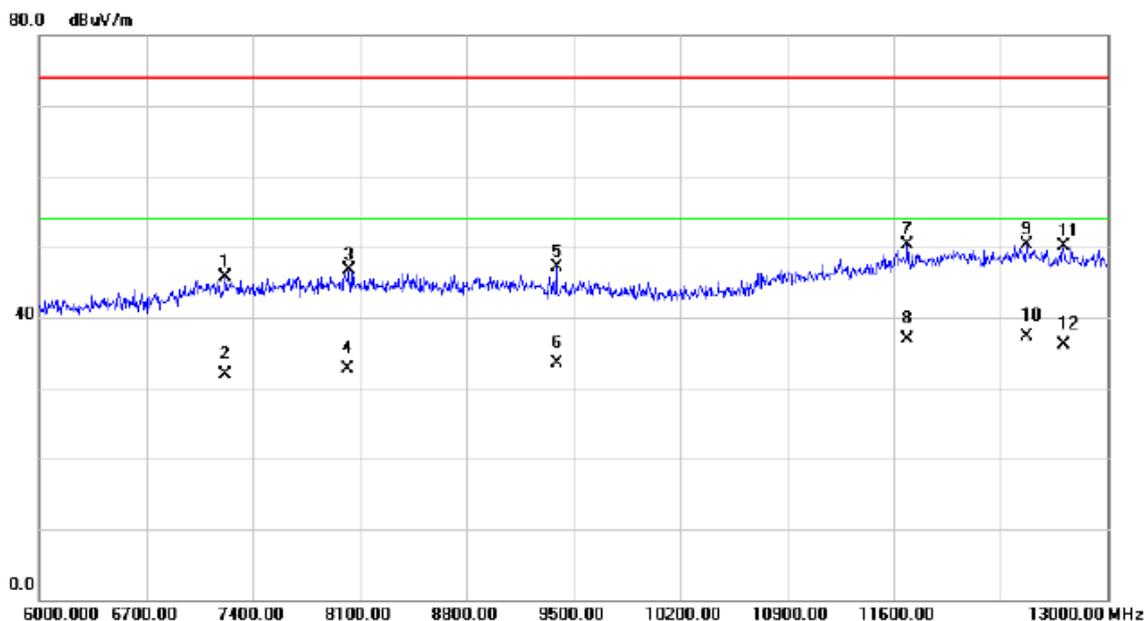

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7221.500	32.38	13.36	45.74	74.00	-28.26	peak	
2		7221.500	18.51	13.36	31.87	54.00	-22.13	AVG	
3		8026.500	32.41	14.30	46.71	74.00	-27.29	peak	
4		8026.500	18.35	14.30	32.65	54.00	-21.35	AVG	
5		9388.000	32.59	14.42	47.01	74.00	-26.99	peak	
6		9388.000	19.13	14.42	33.55	54.00	-20.45	AVG	
7		11691.00	30.76	19.48	50.24	74.00	-23.76	peak	
8		11691.00	17.37	19.48	36.85	54.00	-17.15	AVG	
9		12468.00	29.78	20.50	50.28	74.00	-23.72	peak	
10	*	12468.00	16.73	20.50	37.23	54.00	-16.77	AVG	
11		12713.00	29.46	20.67	50.13	74.00	-23.87	peak	
12		12713.00	15.44	20.67	36.11	54.00	-17.89	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

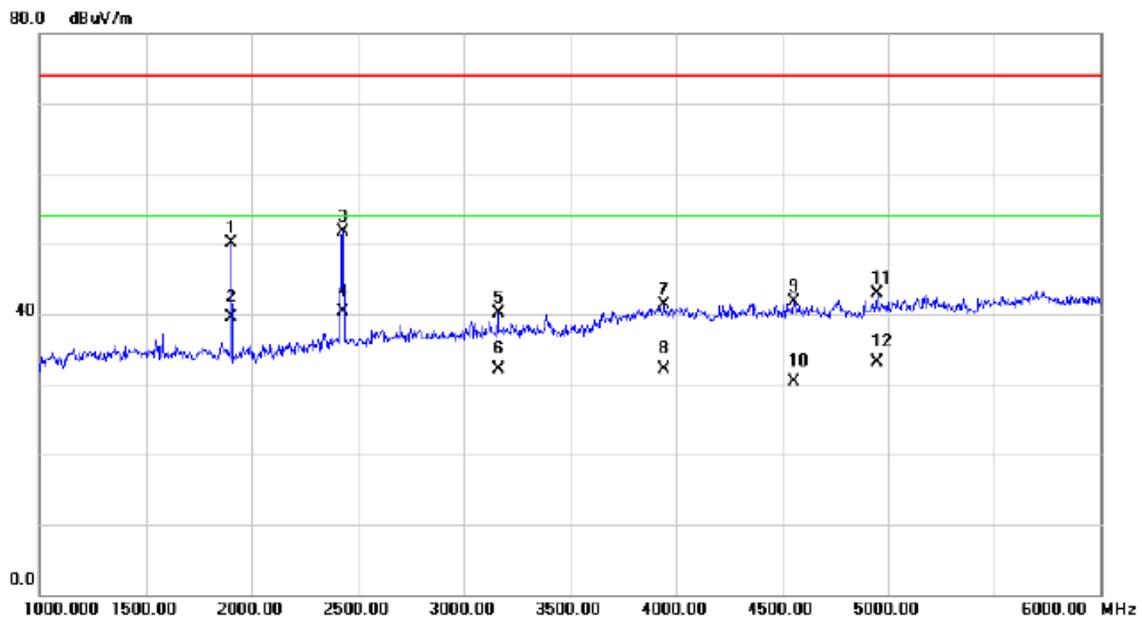

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1905.000	53.54	-3.46	50.08	74.00	-23.92	peak	
2		1905.000	42.90	-3.46	39.44	54.00	-14.56	AVG	
3		2430.000	52.53	-0.81	51.72	74.00	-22.28	peak	
4	*	2430.000	41.08	-0.81	40.27	54.00	-13.73	AVG	
5		3162.500	38.22	1.91	40.13	74.00	-33.87	peak	
6		3162.500	30.21	1.91	32.12	54.00	-21.88	AVG	
7		3945.000	36.02	5.36	41.38	74.00	-32.62	peak	
8		3945.000	26.65	5.36	32.01	54.00	-21.99	AVG	
9		4555.000	35.41	6.36	41.77	74.00	-32.23	peak	
10		4555.000	24.04	6.36	30.40	54.00	-23.60	AVG	
11		4952.500	35.22	7.65	42.87	74.00	-31.13	peak	
12		4952.500	25.47	7.65	33.12	54.00	-20.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Horizontal

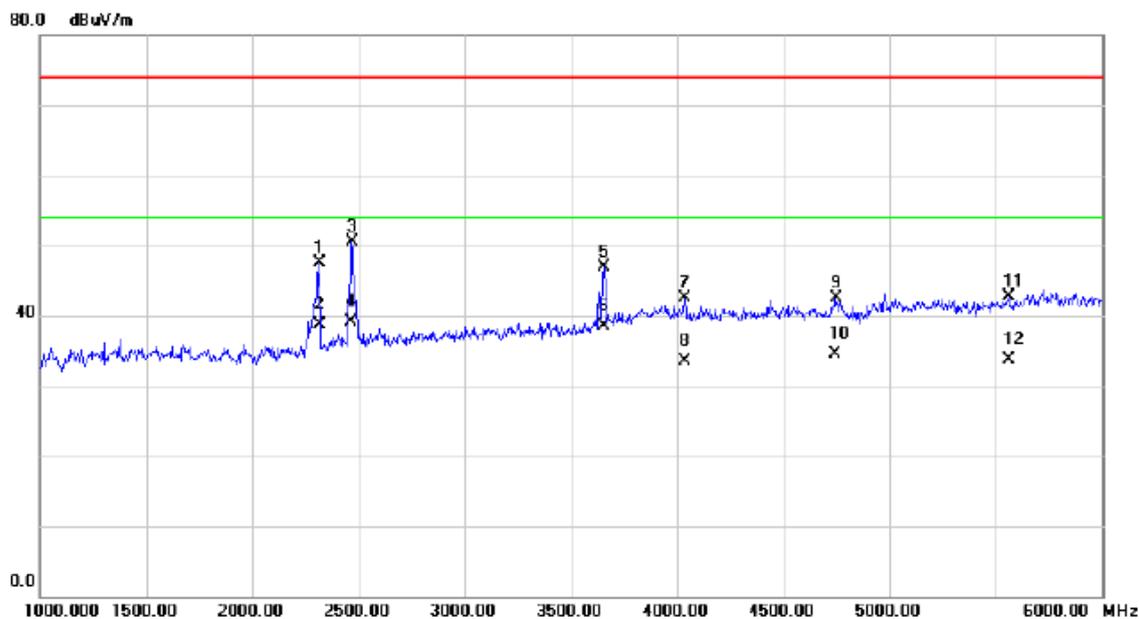

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2315.000	48.94	-1.48	47.46	74.00	-26.54	peak	
2		2315.000	40.26	-1.48	38.78	54.00	-15.22	AVG	
3		2467.500	51.04	-0.59	50.45	74.00	-23.55	peak	
4	*	2467.500	39.71	-0.59	39.12	54.00	-14.88	AVG	
5		3657.500	43.13	3.71	46.84	74.00	-27.16	peak	
6		3657.500	34.74	3.71	38.45	54.00	-15.55	AVG	
7		4035.000	36.75	5.71	42.46	74.00	-31.54	peak	
8		4035.000	27.74	5.71	33.45	54.00	-20.55	AVG	
9		4747.500	35.56	6.98	42.54	74.00	-31.46	peak	
10		4747.500	27.46	6.98	34.44	54.00	-19.56	AVG	
11		5560.000	33.53	9.21	42.74	74.00	-31.26	peak	
12		5560.000	24.56	9.21	33.77	54.00	-20.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150


Vertical

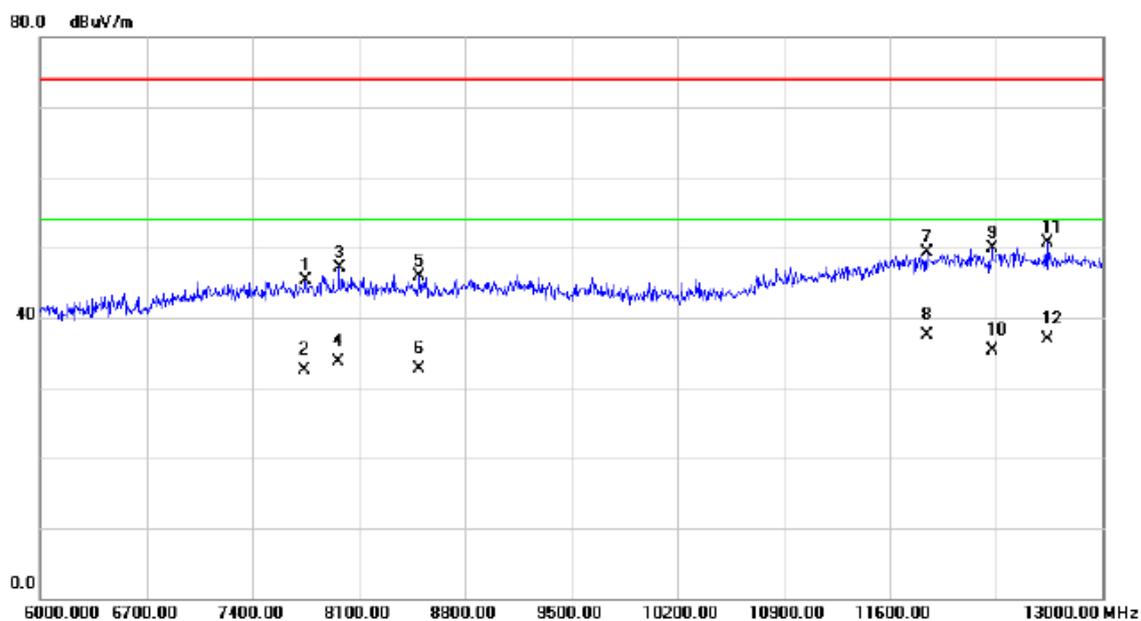

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7746.500	31.21	14.01	45.22	74.00	-28.78	peak	
2		7746.500	18.46	14.01	32.47	54.00	-21.53	AVG	
3		7970.500	32.75	14.27	47.02	74.00	-26.98	peak	
4		7970.500	19.35	14.27	33.62	54.00	-20.38	AVG	
5		8499.000	31.69	14.15	45.84	74.00	-28.16	peak	
6		8499.000	18.59	14.15	32.74	54.00	-21.26	AVG	
7		11848.50	29.33	19.95	49.28	74.00	-24.72	peak	
8	*	11848.50	17.57	19.95	37.52	54.00	-16.48	AVG	
9		12272.00	29.44	20.45	49.89	74.00	-24.11	peak	
10		12272.00	14.92	20.45	35.37	54.00	-18.63	AVG	
11		12639.50	30.04	20.61	50.65	74.00	-23.35	peak	
12		12639.50	16.36	20.61	36.97	54.00	-17.03	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+wifi+Gps
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Battery: BYD + Earphone: QUANCHENG / 1293#+3283# 3.5MM-150

Horizontal

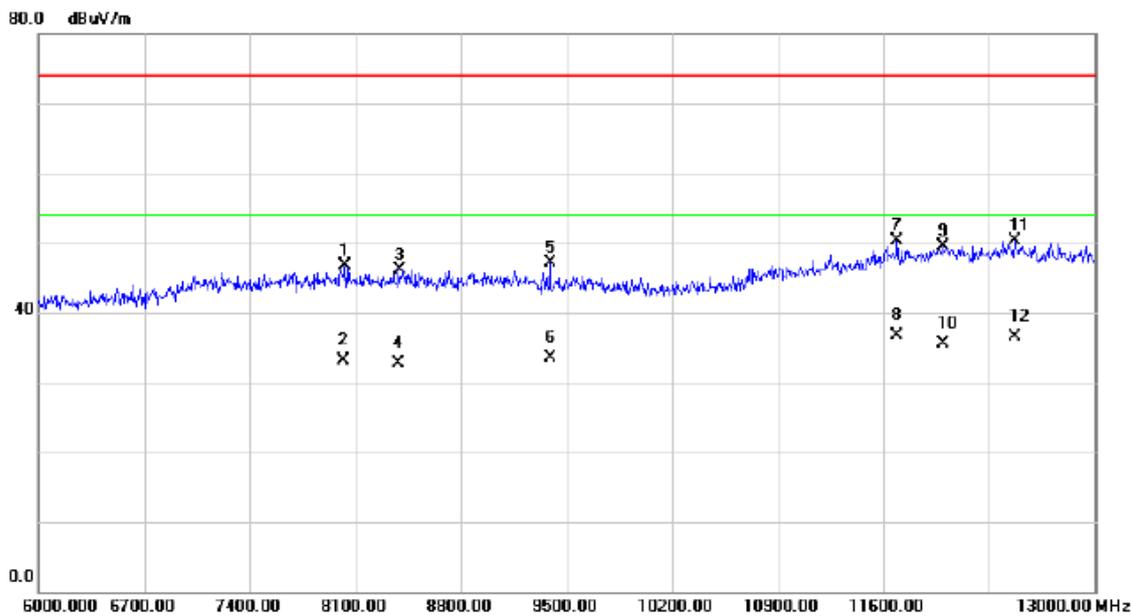

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		8026.500	32.41	14.30	46.71	74.00	-27.29	peak	
2		8026.500	18.87	14.30	33.17	54.00	-20.83	AVG	
3		8390.500	32.02	14.18	46.20	74.00	-27.80	peak	
4		8390.500	18.49	14.18	32.67	54.00	-21.33	AVG	
5		9388.000	32.59	14.42	47.01	74.00	-26.99	peak	
6		9388.000	19.14	14.42	33.56	54.00	-20.44	AVG	
7		11691.00	30.76	19.48	50.24	74.00	-23.76	peak	
8	*	11691.00	17.27	19.48	36.75	54.00	-17.25	AVG	
9		11999.00	29.09	20.40	49.49	74.00	-24.51	peak	
10		11999.00	15.08	20.40	35.48	54.00	-18.52	AVG	
11		12468.00	29.78	20.50	50.28	74.00	-23.72	peak	
12		12468.00	15.93	20.50	36.43	54.00	-17.57	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1112.500	51.40	-5.30	46.10	74.00	-27.90	peak	
2		1112.500	37.52	-5.30	32.22	54.00	-21.78	AVG	
3		1487.500	55.42	-4.08	51.34	74.00	-22.66	peak	
4		1487.500	42.77	-4.08	38.69	54.00	-15.31	AVG	
5		1900.000	58.04	-3.47	54.57	74.00	-19.43	peak	
6		1900.000	43.59	-3.47	40.12	54.00	-13.88	AVG	
7		2490.000	50.31	-0.46	49.85	74.00	-24.15	peak	
8	*	2490.000	50.31	-0.46	49.85	54.00	-4.15	AVG	
9		4465.000	45.98	6.15	52.13	74.00	-21.87	peak	
10		4465.000	33.51	6.15	39.66	54.00	-14.34	AVG	
11		5087.500	43.37	8.02	51.39	74.00	-22.61	peak	
12		5087.500	30.94	8.02	38.96	54.00	-15.04	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: HONGLIN

Horizontal

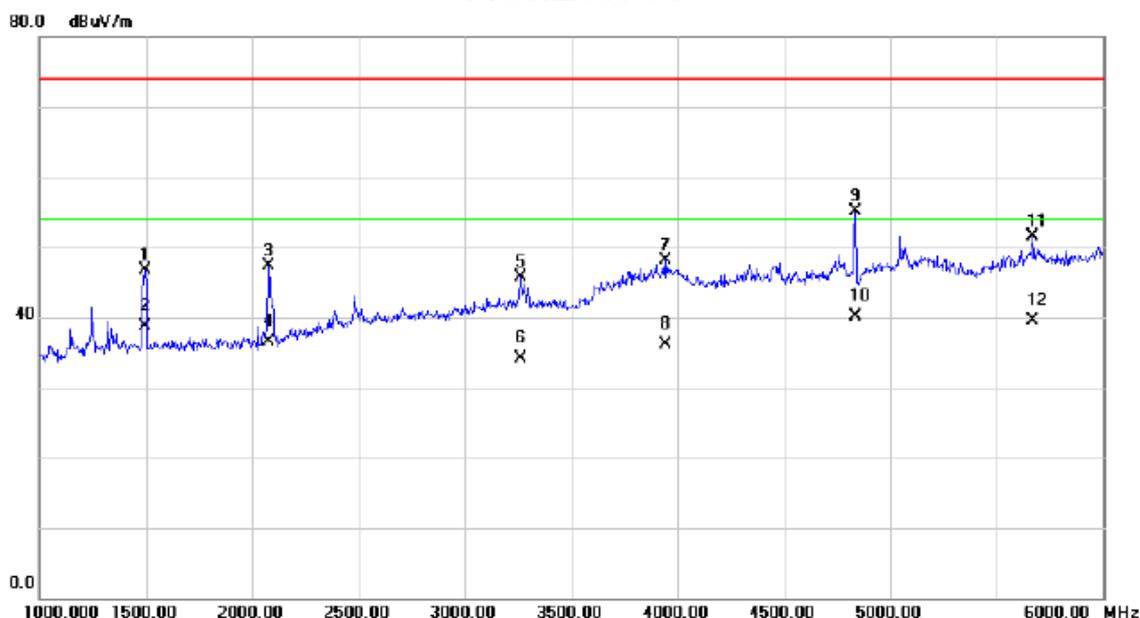

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1495.000	50.81	-4.06	46.75	74.00	-27.25	peak	
2	1495.000	42.69	-4.06	38.63	54.00	-15.37	AVG	
3	2075.000	50.23	-2.89	47.34	74.00	-26.66	peak	
4	2075.000	39.43	-2.89	36.54	54.00	-17.46	AVG	
5	3260.000	43.46	2.16	45.62	74.00	-28.38	peak	
6	3260.000	31.96	2.16	34.12	54.00	-19.88	AVG	
7	3940.000	42.80	5.33	48.13	74.00	-25.87	peak	
8	3940.000	30.78	5.33	36.11	54.00	-17.89	AVG	
9	4835.000	47.79	7.27	55.06	74.00	-18.94	peak	
10 *	4835.000	32.92	7.27	40.19	54.00	-13.81	AVG	
11	5672.500	41.96	9.47	51.43	74.00	-22.57	peak	
12	5672.500	29.98	9.47	39.45	54.00	-14.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2087.500	49.55	-2.82	46.73	74.00	-27.27	peak	
2		2087.500	35.17	-2.82	32.35	54.00	-21.65	AVG	
3		2435.000	52.54	-0.78	51.76	74.00	-22.24	peak	
4		2435.000	38.77	-0.78	37.99	54.00	-16.01	AVG	
5		2487.500	52.20	-0.47	51.73	74.00	-22.27	peak	
6	*	2487.500	40.33	-0.47	39.86	54.00	-14.14	AVG	
7		3852.500	45.25	4.83	50.08	74.00	-23.92	peak	
8		3852.500	33.29	4.83	38.12	54.00	-15.88	AVG	
9		4442.500	43.71	6.13	49.84	74.00	-24.16	peak	
10		4442.500	30.43	6.13	36.56	54.00	-17.44	AVG	
11		4995.000	44.21	7.79	52.00	74.00	-22.00	peak	
12		4995.000	30.96	7.79	38.75	54.00	-15.25	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+WIFI+GPS
Note:	USB Cable: FOXCONN

Horizontal

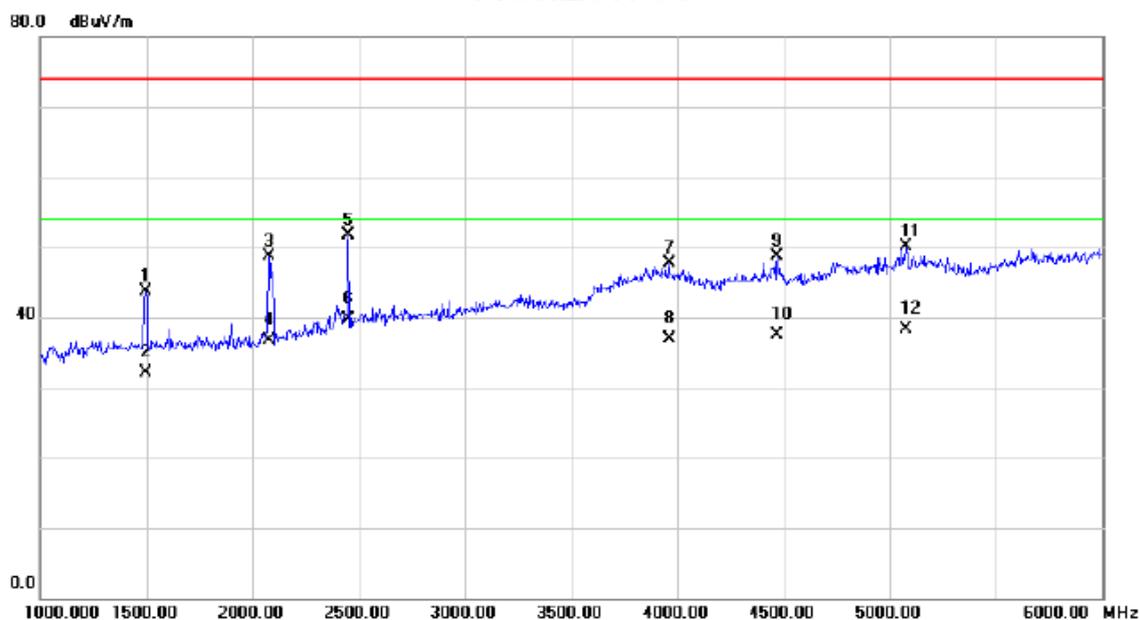

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1495.000	47.71	-4.06	43.65	74.00	-30.35	peak	
2		1495.000	36.20	-4.06	32.14	54.00	-21.86	AVG	
3		2077.500	51.60	-2.88	48.72	74.00	-25.28	peak	
4		2077.500	39.66	-2.88	36.78	54.00	-17.22	AVG	
5		2450.000	52.34	-0.69	51.65	74.00	-22.35	peak	
6	*	2450.000	40.34	-0.69	39.65	54.00	-14.35	AVG	
7		3962.500	42.22	5.46	47.68	74.00	-26.32	peak	
8		3962.500	31.43	5.46	36.89	54.00	-17.11	AVG	
9		4472.500	42.51	6.15	48.66	74.00	-25.34	peak	
10		4472.500	31.30	6.15	37.45	54.00	-16.55	AVG	
11		5077.500	42.03	8.00	50.03	74.00	-23.97	peak	
12		5077.500	30.26	8.00	38.26	54.00	-15.74	AVG	