



正基科技股份有限公司

SPECIFICATION

PRODUCT NAME : AP6575P

REVISION : 1.3

DATE : Nov 04th, 2020

Customer APPROVED	
Company	
Representative Signature	

PREPARED	REVIEW			APPROVED	DCC ISSUE
	PM	QA	ET		



正基科技股份有限公司



AP6575P Data Sheet

Address:

3F, No.15-1, Zhonghua Road, Hsinchu Industril Park, Hukou, Hsinchu,
Taiwan, 30352

Website: <http://www.ampak.com.tw/>



Revision

Revision	Date	Description	Revised By
0.1	2020/02/19	- Preliminary	Jason Shen
0.2	2020/03/09	- Modify RF Specification - Modify Pin-out	Jason Shen
0.3	2020/03/16	- Modify RF Specification	Jason Shen
0.4	2020/04/28	- Modify RF Specification	Jason Shen
0.5	2020/05/29	- Modify RF Specification	Jason Shen
0.6	2020/07/01	- Modify DC Characteristics	Jason Shen
0.7	2020/07/06	- Modify Pin outline	Jason Shen
0.8	2020/08/12	- Modify RF Specification	Jason Shen
0.9	2020/09/09	- Modify Pin-out Description	Jason Shen
1.0	2020/09/15	- Modify Block Diagram	Jason Shen
1.1	2020/09/22	- Modify Block Diagram	Jason Shen
1.2	2020/10/15	- Modify Pin outline	Jason Shen
1.3	2020/11/04	- Modify Module Dimensions	Jason Shen

Contents

1. Introduction	2
1.1 Overview	2
1.2 Product Features	3
2. General Specification	4
2.1 General Specification	4
2.2 DC Characteristics	4
2.2.1 Absolute Maximum Ratings	4
2.2.2 Recommended Operating Rating	5
3. Wi-Fi RF Specification	6
3.1 2.4GHz RF Specification	6
3.2 5GHz RF Specification	8
4. Bluetooth Specification	14
4.1 Bluetooth Specification	14
5. Pin Definition	15
5.1 Pin Outline	15
5.2 Pin Assignment	15
6. Reference Design	18
7. Dimensions	19
7.1 Module Dimensions	19
8. Host Interface Timing Diagram	20
8.1 Power-up Sequence Timing Diagram	20
8.2 PCIe Interface Description	22
9. Package Information.....	25
9.1 Tray box	25
9.2 Carton.....	26




1. Introduction

1.1 Overview

The AMPAK Technology® AP6575P is a fully Wi-Fi and Bluetooth functionalities 2230 M.2 card (KEY E) with seamless roaming capabilities and advance security, also it could interact with different vendors' 802.11a/b/g/n/ac/ax 2x2 Access Points with MIMO standard and can accomplish up to speed of 1200Mbps with dual stream in 802.11ax to connect the wireless LAN. Furthermore AP6575P included PCIe interface for Wi-Fi, UART/ PCM interface for Bluetooth

In addition, this compact module is a total solution for a combination of W i-Fi + BT technologies. The module is specifically developed for tablet, OTT box and portable devices.

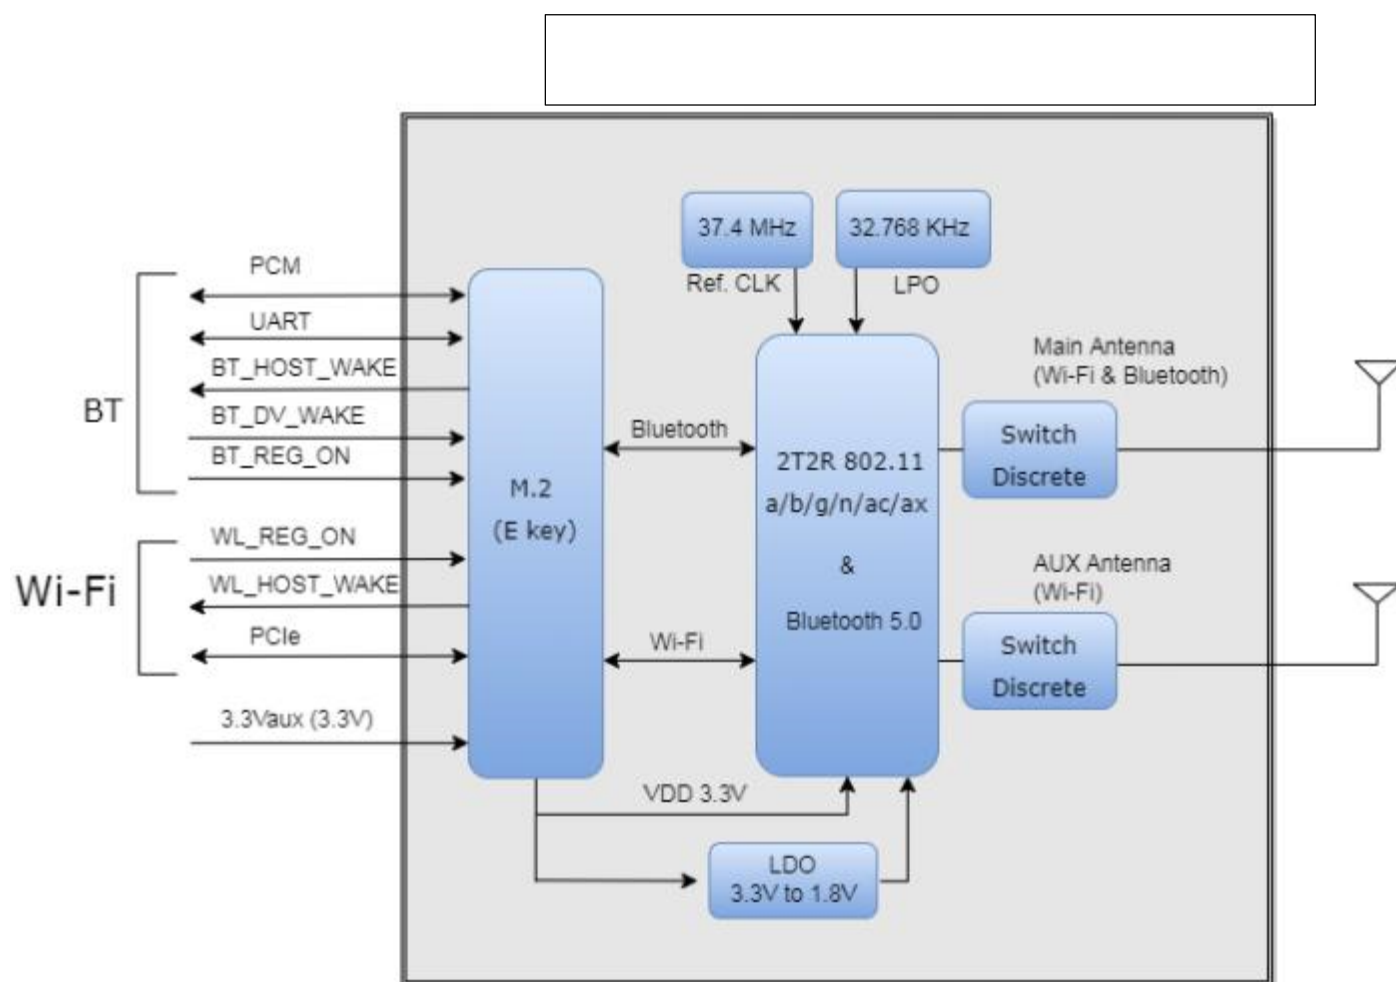

1.2 Product Features

IEEE 802.11 Key Feature

- Lead Free design which is compliant with ROHS requirements.
- TX and RX low-density parity check (LDPC) support for improved range and power efficiency.
- Dual-stream spatial multiplexing up to 1200 Mbps data rate.
- 20, 40, 80 MHz channels with optional SGI (1024 QAM modulation)
- IEEE 802.11ax beam forming.
- Client MU-MIMO.
- Supports 2 antennas with two for shared BT and WLAN port.
 - Supports PCI express revision 3.0 and power management running at Gen1 speeds.

Bluetooth Key Feature

- BT host digital interface:
 - HCI UART (up to 4 Mbps)
 - PCM for audio data
- Complies with Bluetooth Core Specification Version 5.0 with provisions for supporting future specifications. With Bluetooth Class 1 or Class2 transmitter operation.
- Supports extended synchronous connections (eSCO), for enhanced voice quality by allowing for retransmission of dropped packets.
- Adaptive frequency hopping (AFH) for reducing radio frequency interference.

A simplified block diagram of the module is depicted in the figure above.



2. General Specification

2.1 General Specification

Model Name	AP6575P
Product Description	2T2R 802.11 a/b/g/n/ac/ax Wi-Fi + BT 5.0 2230 M.2 card (KEY E)
Dimension	L x W : 30 x 22 mm (typical); H : 3.0 mm (max.)
WiFi Interface	PCI express revision 3.0 at Gen1 speeds
BT Interface	UART / PCM
Operating temperature	-30°C to 85°C
Storage temperature	-40°C to 105°C
Humidity	Operating Humidity 10% to 95% Non-Condensing Storage Humidity 5% to 95% Non-Condensing

Note: The optimal RF performance specified in the data sheet, however, is guaranteed only -10 °C to +55 °C and 3.2V < 3.3Vaux < 3.6V without derating performance.

2.2 DC Characteristics

2.2.1 Absolute Maximum Ratings

Symbol	Description	Min.	Max.	Unit
3.3Vaux	Input supply voltage	-0.5	4.5	V
WL_REG_ON	Used by PMU to power up or power down the internal regulators used by the WLAN section.	-0.5	4.5	V
BT_REG_ON	Used by PMU to power up or power down the internal regulators used by the Bluetooth section.			
CLKREQ0#	PCIe clock request, active low.			
PCIE_PERST_L	PCIe host indication to reset the device .			
Digital Bus	UART / PCM Bus	-0.5	2.07	V
WL_HOST_WAKE	WLAN device wake-up HOST			
BT_HOST_WAKE	Bluetooth device wake-up HOST			
BT_DEV_WAKE	HOST wake-up Bluetooth device			
PEWAKE0#	PCIe PME Wake, active low.			



Extreme caution must be exercised to prevent electrostatic discharge (ESD) damage.

Symbol	Condition	ESD Rating	Unit
ESD_HAND_HBM	Human body model contact discharge per JEDEC EID/JESD22-A114	1.5	kV
ESD_HAND_CDM	Charged device model contact discharge per JEDEC EIA/JESD22-C101	250	V

2.2.2 Recommended Operating Rating

Voltage rails	Min.	Typ.	Max.	Unit
3.3Vaux	3.0	3.3	3.6	V
WL_REG_ON	3.0	3.3	3.6	V
BT_REG_ON				
CLKREQ0#				
PCIE_PERST_L				
Digital Bus	1.62	1.8	1.98	V
WL_HOST_WAKE				
BT_HOST_WAKE				
BT_DEV_WAKE				
PEWAKE0#				

3.3Vaux current consumption 1200mA(Peak), when 3.3Vaux = 3.3V

I/O Voltage rails @ 1.8V	Min.	Max.	Unit
VIH	1.17	N/A	V
VIL	N/A	0.72	V

I/O Voltage rails @ 3.3V	Min.	Max.	Unit
VIH	2.31	N/A	V
VIL	N/A	0.99	V



3. Wi-Fi RF Specification

3.1 2.4GHz RF Specification

Conditions : 3.3V_{aux}=3.3V ; Temp:25°C

Feature		Description			
WLAN Standard		IEEE 802.11b/g/n/ax & Wi-Fi compliant			
Frequency Range		2.400 GHz ~ 2.4835 GHz (2.4GHz ISM Band)			
Number of Channels		2.4GHz ： Ch1 ~ Ch13			
Modulation		802.11b：DQPSK、DBPSK、CCK 802.11 g/n：OFDM /64-QAM、16-QAM、QPSK、BPSK 802.11ax：OFDM /256-QAM、64-QAM、16-QAM、QPSK、BPSK			
Output Power , tolerance ± 1.5 dB					
The transmit EVM quality & spectrum mask are compliant with IEEE 802.11 standard					
802.11b	1Mbps	2Mbps	5.5Mbps	11Mbps	
	18.5	18.5	18.5	18.5	
802.11g	6、9Mbps	12、18Mbps	24Mbps	36Mbps	48Mbps
	18	18	17.5	17.5	17
	54Mbps				
	17				
802.11n 20MHz	MCS0~2	MCS3	MCS4	MCS5	MCS6
	18	17.5	17.5	17	17
	MCS7				
	16				
802.11ax 20MHz	HE0~2	HE3	HE4	HE5	HE6
	18	17.5	17.5	17	17
	HE7	HE8	HE9		
	16	15	15		
Note: The specifications of RF output power are subject to change to fulfill the safety regulation and requirements in end-user product.					
Sensitivity, tolerance ± 2 dB					
CCK modulation PER ≦ 8%、OFDM modulation PER ≦ 10%					
802.11b	Data Rate	Spec.(dBm)			
	1Mbps	-96			
	2Mbps	-92			
	5.5Mbps	-90			
	11Mbps	-88			



802.11g SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	6Mbps	-92	24Mbps	-84
	9Mbps	-91	36Mbps	-81
	12Mbps	-90	48Mbps	-77
	18Mbps	-87	54Mbps	-75
802.11g MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	6Mbps	-94	24Mbps	-86
	9Mbps	-93	36Mbps	-83
	12Mbps	-92	48Mbps	-80
	18Mbps	-89	54Mbps	-77
802.11n_20MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-91	MCS4	-80
	MCS1	-88	MCS5	-78
	MCS2	-86	MCS6	-75
	MCS3	-83	MCS7	-74
802.11n_20MHz MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-92	MCS5	-79
	MCS1	-91	MCS6	-77
	MCS2	-89	MCS7	-75
	MCS3	-86	MCS8	-71
	MCS4	-82	MCS15	-72
802.11ax_20MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-92	HE6	-75
	HE1	-88	HE7	-75
	HE2	-86	HE8	-71
	HE3	-83	HE9	-69
	HE4	-80		
	HE5	-78		
Maximum Input Level	802.11b : -10 dBm			
	802.11g/n/ax : -20 dBm			



3.2 5GHz RF Specification

Conditions : 3.3Vaux=3.3V ; Temp:25°C

Feature		Description			
WLAN Standard		IEEE 802.11a/n/ac/ax & Wi-Fi compliant			
Frequency Range		5.15~5.35GHz 、 5.47~5.725GHz 、 5.725~5.85GHz （5GHz UNII Band）			
Number of Channels		5.15~5.35GHz ： Ch36 ~ Ch64 5.47~5.725GHz ： Ch100 ~ Ch140 5.725~5.85GHz ： Ch149 ~ Ch165			
Modulation		802.11a：OFDM /64-QAM 、 16-QAM 、 QPSK 、 BPSK 802.11n：OFDM /64-QAM 、 16-QAM 、 QPSK 、 BPSK 802.11ac：OFDM /256-QAM 、 OFDM /64-QAM 、 16-QAM 、 QPSK 、 BPSK 802.11ax：OFDM/ 1024-QAM 、 OFDM /256-QAM 、 OFDM /64-QAM 、 16-QAM 、 QPSK 、 BPSK			
Output Power , tolerance ± 2 dB					
The transmit EVM quality & spectrum mask are compliant with IEEE 802.11 standard					
802.11a	Frequency (MHz)	6~9Mbps	12~18Mbps	24Mbps	36Mbps
	5150~5350	15.5	15.5	15	15
	5470~5720	15.5	15.5	15	15
	5725~5845	15.5	15.5	15	15
	Frequency (MHz)	48Mbps	54Mbps		
	5150~5350	14.5	14.5		
	5470~5720	14.5	14.5		
	5725~5845	14.5	14.5		
802.11n 20MHz	Frequency (MHz)	MCS0~2	MCS3	MCS4	MCS5
	5150~5350	15	15	14.5	14.5
	5470~5720	15	15	14.5	14.5
	5725~5845	15	15	14.5	14.5
	Frequency (MHz)	MCS6	MCS7		
	5150~5350	13.5	13.5		
	5470~5720	13.5	13.5		
	5725~5845	13.5	13.5		



802.11n 40MHz	Frequency (MHz)	MCS0~2	MCS3	MCS4	MCS5
	5150~5350	15	15	14	14
	5470~5720	15	15	14	14
	5725~5845	15	15	14	14
	Frequency (MHz)	MCS6	MCS7		
	5150~5350	13.5	13.5		
	5470~5720	13.5	13.5		
	5725~5845	13.5	13.5		
802.11ac 20MHz	Frequency (MHz)	MCS0~2	MCS3	MCS4	MCS5
	5150~5350	15	15	14.5	14.5
	5470~5720	15	15	14.5	14.5
	5725~5845	15	15	14.5	14.5
	Frequency (MHz)	MCS6	MCS7	MCS8	
	5150~5350	13.5	13.5	11	
	5470~5720	13.5	13.5	11	
	5725~5845	13.5	13.5	11	
802.11ac 40MHz	Frequency (MHz)	MCS0~2	MCS3	MCS4	MCS5
	5150~5350	15	14	14	14
	5470~5720	15	14	14	14
	5725~5845	15	14	14	14
	Frequency (MHz)	MCS6	MCS7	MCS8	MCS9
	5150~5350	13.5	13.5	11	9
	5470~5720	13.5	13.5	11	9
	5725~5845	13.5	13.5	11	9
802.11ac 80MHz	Frequency (MHz)	MCS0~2	MCS3	MCS4	MCS5
	5150~5350	15	14	13.5	13.5
	5470~5720	15	14	13.5	13.5
	5725~5845	15	14	13.5	13.5
	Frequency (MHz)	MCS6	MCS7	MCS8	MCS9
	5150~5350	13	13	9	9
	5470~5720	13	13	9	9
	5725~5845	13	13	9	9



802.11ax 20MHz	Frequency (MHz)	HE0~2	HE3	HE4	HE5
	5150~5350	15	14.5	14.5	14.5
	5470~5720	15	14.5	14.5	14.5
	5725~5845	15	14.5	14.5	14.5
	Frequency (MHz)	HE6	HE7	HE8	HE9
	5150~5350	13.5	13.5	11	11
	5470~5720	13.5	13.5	11	11
	5725~5845	13.5	13.5	11	11
	Frequency (MHz)	HE10	HE11		
	5150~5350	9	9		
	5470~5720	9	9		
	5725~5845	9	9		
802.11ax 40MHz	Frequency (MHz)	HE0~2	HE3	HE4	HE5
	5150~5350	15	14	14	14
	5470~5720	15	14	14	14
	5725~5845	15	14	14	14
	Frequency (MHz)	HE6	HE7	HE8	HE9
	5150~5350	13.5	13.5	11	9
	5470~5720	13.5	13.5	11	9
	5725~5845	13.5	13.5	11	9
	Frequency (MHz)	HE10	HE11		
	5150~5350	7	7		
	5470~5720	7	7		
	5725~5845	7	7		
802.11ax 80MHz	Frequency (MHz)	HE0~2	HE3	HE4	HE5
	5150~5350	15	14	13.5	13.5
	5470~5720	15	14	13.5	13.5
	5725~5845	15	14	13.5	13.5
	Frequency (MHz)	HE6	HE7	HE8	HE9
	5150~5350	13	13	9	9
	5470~5720	13	13	9	9
	5725~5845	13	13	9	9
	Frequency (MHz)	HE10	HE11		
	5150~5350	7	7		
	5470~5720	7	7		
	5725~5845	7	7		

Note: The specifications of RF output power are subject to change to fulfill the safety regulation and requirements in end-user product.



Sensitivity, tolerance ± 2 dB				
OFDM modulation PER $\leq 10\%$				
802.11a SISO	Data Rate	Spec. (dBm)	Data Rate	Spec. (dBm)
	6Mbps	-89	24Mbps	-82
	9Mbps	-88	36Mbps	-79
	12Mbps	-87	48Mbps	-74
	18Mbps	-85	54Mbps	-72
MIMO802.11a MIMO	Data Rate	Spec. (dBm)	Data Rate	Spec. (dBm)
	6Mbps	-91	24Mbps	-85
	9Mbps	-90	36Mbps	-82
	12Mbps	-89	48Mbps	-77
	18Mbps	-88	54Mbps	-76
802.11n_20MHz SISO	Data Rate	Spec. (dBm)	Data Rate	Spec. (dBm)
	MCS0	-89	MCS4	-78
	MCS1	-87	MCS5	-75
	MCS2	-85	MCS6	-72
	MCS3	-82	MCS7	-70
802.11n_20MHz MIMO	Data Rate	Spec. (dBm)	Data Rate	Spec. (dBm)
	MCS0	-91	MCS5	-77
	MCS1	-90	MCS6	-75
	MCS2	-88	MCS7	-73
	MCS3	-85	MCS8	-88
	MCS4	-81	MCS15	-69
802.11n_40MHz SISO	Data Rate	Spec. (dBm)	Data Rate	Spec. (dBm)
	MCS0	-87	MCS4	-76
	MCS1	-85	MCS5	-71
	MCS2	-82	MCS6	-69
	MCS3	-79	MCS7	-67
802.11n_40MHz MIMO	Data Rate	Spec. (dBm)	Data Rate	Spec. (dBm)
	MCS0	-87	MCS5	-74
	MCS1	-87	MCS6	-72
	MCS2	-85	MCS7	-70
	MCS3	-82	MCS8	-85
	MCS4	-78	MCS15	-66



802.11ac_20MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-89	MCS5	-74
	MCS1	-87	MCS6	-72
	MCS2	-85	MCS7	-69
	MCS3	-82	MCS8	-67
	MCS4	-78		
802.11ac_20MHz MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0,NSS=1	-91	MCS6,NSS=1	-75
	MCS1,NSS=1	-90	MCS7,NSS=1	-74
	MCS2,NSS=1	-87	MCS8,NSS=1	-71
	MCS3,NSS=1	-84	MCS0,NSS=2	-87
	MCS4,NSS=1	-81	MCS8,NSS=2	-64
	MCS5,NSS=1	-76		
802.11ac_40MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-87	MCS5	-71
	MCS1	-85	MCS6	-69
	MCS2	-82	MCS7	-68
	MCS3	-79	MCS8	-64
	MCS4	-75	MCS9	-63
802.11ac_40MHz MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0,NSS=1	-89	MCS6,NSS=1	-72
	MCS1,NSS=1	-87	MCS7,NSS=1	-71
	MCS2,NSS=1	-85	MCS8,NSS=1	-67
	MCS3,NSS=1	-81	MCS9,NSS=1	-65
	MCS4,NSS=1	-78	MCS0,NSS=2	-85
	MCS5,NSS=1	-76	MCS9,NSS=2	-59
802.11ac_80MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-84	MCS5	-67
	MCS1	-81	MCS6	-66
	MCS2	-78	MCS7	-64
	MCS3	-75	MCS8	-61
	MCS4	-72	MCS9	-60



802.11ac_80MHz MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0,NSS=1	-86	MCS6,NSS=1	-69
	MCS1,NSS=1	-84	MCS7,NSS=1	-67
	MCS2,NSS=1	-81	MCS8,NSS=1	-65
	MCS3,NSS=1	-78	MCS9,NSS=1	-62
	MCS4,NSS=1	-75	MCS0,NSS=2	-82
	MCS5,NSS=1	-70	MCS9,NSS=2	-57
802.11ax_20MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-89	HE6	-72
	HE1	-87	HE7	-69
	HE2	-85	HE8	-67
	HE3	-82	HE9	-63
	HE4	-78	HE10	-58
	HE5	-74	HE11	-56
802.11ax_40MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-87	HE6	-69
	HE1	-85	HE7	-68
	HE2	-82	HE8	-64
	HE3	-79	HE9	-63
	HE4	-75	HE10	-59
	HE5	-71	HE11	-54
802.11ax_80MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-84	HE6	-66
	HE1	-81	HE7	-64
	HE2	-78	HE8	-61
	HE3	-75	HE9	-60
	HE4	-72	HE10	-54
	HE5	-67	HE11	-50
Maximum Input Level	802.11a/n/ac/ax : -30 dBm			



4. Bluetooth Specification

4.1 Bluetooth Specification

Conditions : 3.3Vaux=3.3V ; Temp:25°C

Feature	Description
General Specification	
Bluetooth Standard	BDR(1Mbps) 、 EDR(2 、 3Mbps) 、 LE(1Mbps) 、 2LE(2Mbps)
Host Interface	UART
Frequency Band	2402 MHz ~ 2480 MHz
Number of Channels	79 channels for classic 、 40 channels for BLE
Modulation	FHSS with GFSK, $\pi/4$ -DQPSK, 8DPSK
RF Specification	
Output Power , tolerance ± 1.5 dB	
	CL1 (dBm)
BDR Output Power	8
EDR Output Power	6
BLE Output Power	7
Sensitivity, tolerance ± 1.5 dB	
Sensitivity @ BER=0.1% for GFSK (1Mbps)	-88 dBm
Sensitivity @ BER=0.01% for $\pi/4$ -DQPSK (2Mbps)	-91 dBm
Sensitivity @ BER=0.01% for 8DPSK (3Mbps)	-85 dBm
Sensitivity @ BER=0.01% for LE (1Mbps)	-91 dBm
Sensitivity @ BER=0.01% for 2LE (2Mbps)	-90 dBm
Maximum Input Level	GFSK (1Mbps):-20dBm
	$\pi/4$ -DQPSK (2Mbps) :-20dBm
	8DPSK (3Mbps) :-20dBm

Note* : The Bluetooth BDR output power is able to be configured by firmware (hcd file).

AMPAK Technology Inc .



5. Pin Definition

5.1 Pin Outline

1	GND	2	3.3Vaux
3	NC	4	3.3Vaux
5	NC	6	NC
7	NC	8	NC
9	GND	10	PCM_CLK (1.8V)
11	NC	12	PCM_SY NC (1.8V)
13	NC	14	PCM_OUT (1.8V)
15	NC	16	PCM_IN (1.8V)
17	NC	18	NC
19	NC	20	GND
21	NC	22	BT_HOST_WAKE (1.8V)
23	NC	24	UART TXD (1.8V)
25	NC	26	Key
27	Key	28	Key
29	Key	30	Key
31	Key	32	Key
33	Key	34	UART RXD (1.8V)
35	GND	36	UART RTS (1.8V)
37	PERp0	38	UART CTS_N (1.8V)
39	PERn0	40	BT_DEV_WAKE (1.8V)
41	GND	42	WL_HOST_WAKE (1.8V)
43	PETp0	44	NC
45	PETn0	46	NC
47	GND	48	NC
49	REFCLKP0	50	NC
51	REFCLKN0	52	NC
53	GND	54	PERST0# (3.3V)
55	CLKREQ0# (3.3V)	56	BT_REG_ON (3.3V)
57	PEWake0# (1.8V)	58	WL_REG_ON (3.3V)
59	GND	60	NC
61	NC	62	NC
63	NC	64	NC
65	GND	66	NC
67	NC	68	NC
69	NC	70	NC
71	GND	72	NC
73	NC	74	3.3Vaux
75	NC		3.3Vaux
	GND		

5.2 Pin Assignment

NO	Name	Type	Description
TOP			
1	GND	G	Ground connections
3	NC	-	No connect
5	NC	-	No connect
7	GND	G	Ground connections
9	NC	-	No connect
11	NC	-	No connect
13	NC	-	No connect
15	NC	-	No connect
17	NC	-	No connect
19	NC	-	No connect
21	NC	-	No connect




23	NC	-	No connect
	Module Key	-	Mechanical Key
	Module Key	-	Mechanical Key
	Module Key	-	Mechanical Key
	Module Key	-	Mechanical Key
33	GND	G	Ground connections
35	PERp0	I	PCI Express receive data-Positive
37	PERn0	I	PCI Express receive data-Negative
39	GND	G	Ground connections
41	PETp0	O	PCI Express transmit data-Positive
43	PETn0	O	PCI Express transmit data-Negative
45	GND	G	Ground connections
47	REFCLKP0	I	PCI Express differential clock input-Positive
49	REFCLKN0	I	PCI Express differential clock input-Negative
51	GND	G	Ground connections
53	CLKREQ0# (3.3V)	I/O	PCIe clock request
55	PEWAKE0# (1.8V)	OD	PCIe PME Wake
57	GND	G	Ground connections
59	NC	-	No connect
61	NC	-	No connect
63	GND	G	Ground connections
65	NC	-	No connect
67	NC	-	No connect
69	GND	G	Ground connections
71	NC	-	No connect
73	NC	-	No connect
75	GND	G	Ground connections
BOTTOM			
2	3.3Vaux	P	VDD system power supply input
4	3.3Vaux	P	VDD system power supply input
6	NC	-	No connect
8	PCM_CLK (1.8V)	I/O	PCM clock
10	PCM_SYNC (1.8V)	I/O	PCM sync signal
12	PCM_OUT (1.8V)	O	PCM Data output
14	PCM_IN (1.8V)	I	PCM data input
16	NC	-	No connect



18	GND	G	Ground connections
20	BT_HOST_WAKE (1.8V)	O	Bluetooth wake up Host
22	UART_TXD (1.8V)	O	Bluetooth UART interface
	Module Key	-	Mechanical Key
	Module Key	-	Mechanical Key
	Module Key	-	Mechanical Key
	Module Key	-	Mechanical Key
32	UART_RXD (1.8V)	I	Bluetooth UART interface
34	UART_RTS_N (1.8V)	O	Bluetooth UART interface
36	UART_CTS_N (1.8V)	I	Bluetooth UART interface
38	BT_DEV_WAKE (1.8V)	I	HOST wake-up Bluetooth device
40	WL_HOST_WAKE (1.8V)	O	WLAN wake up HOST
42	NC	-	No connect
44	NC	-	No connect
46	NC	-	No connect
48	NC	-	No connect
50	NC	-	No connect
52	PERST0# (3.3V)	I	PCIe host indication to reset the device
54	BT_REG_ON (3.3V)	I	Used by PMU to power up or power down the internal module regulators used by the Bluetooth section.
56	WL_REG_ON (3.3V)	I	Used by PMU to power up or power down the internal module regulators used by the WLAN section.
58	NC	-	No connect
60	NC	-	No connect
62	NC	-	No connect
64	NC	-	No connect
66	NC	-	No connect
68	NC	-	No connect
70	NC	-	No connect
72	3.3Vaux	P	VDD system power supply input
74	3.3Vaux	P	VDD system power supply input





6. Reference Design

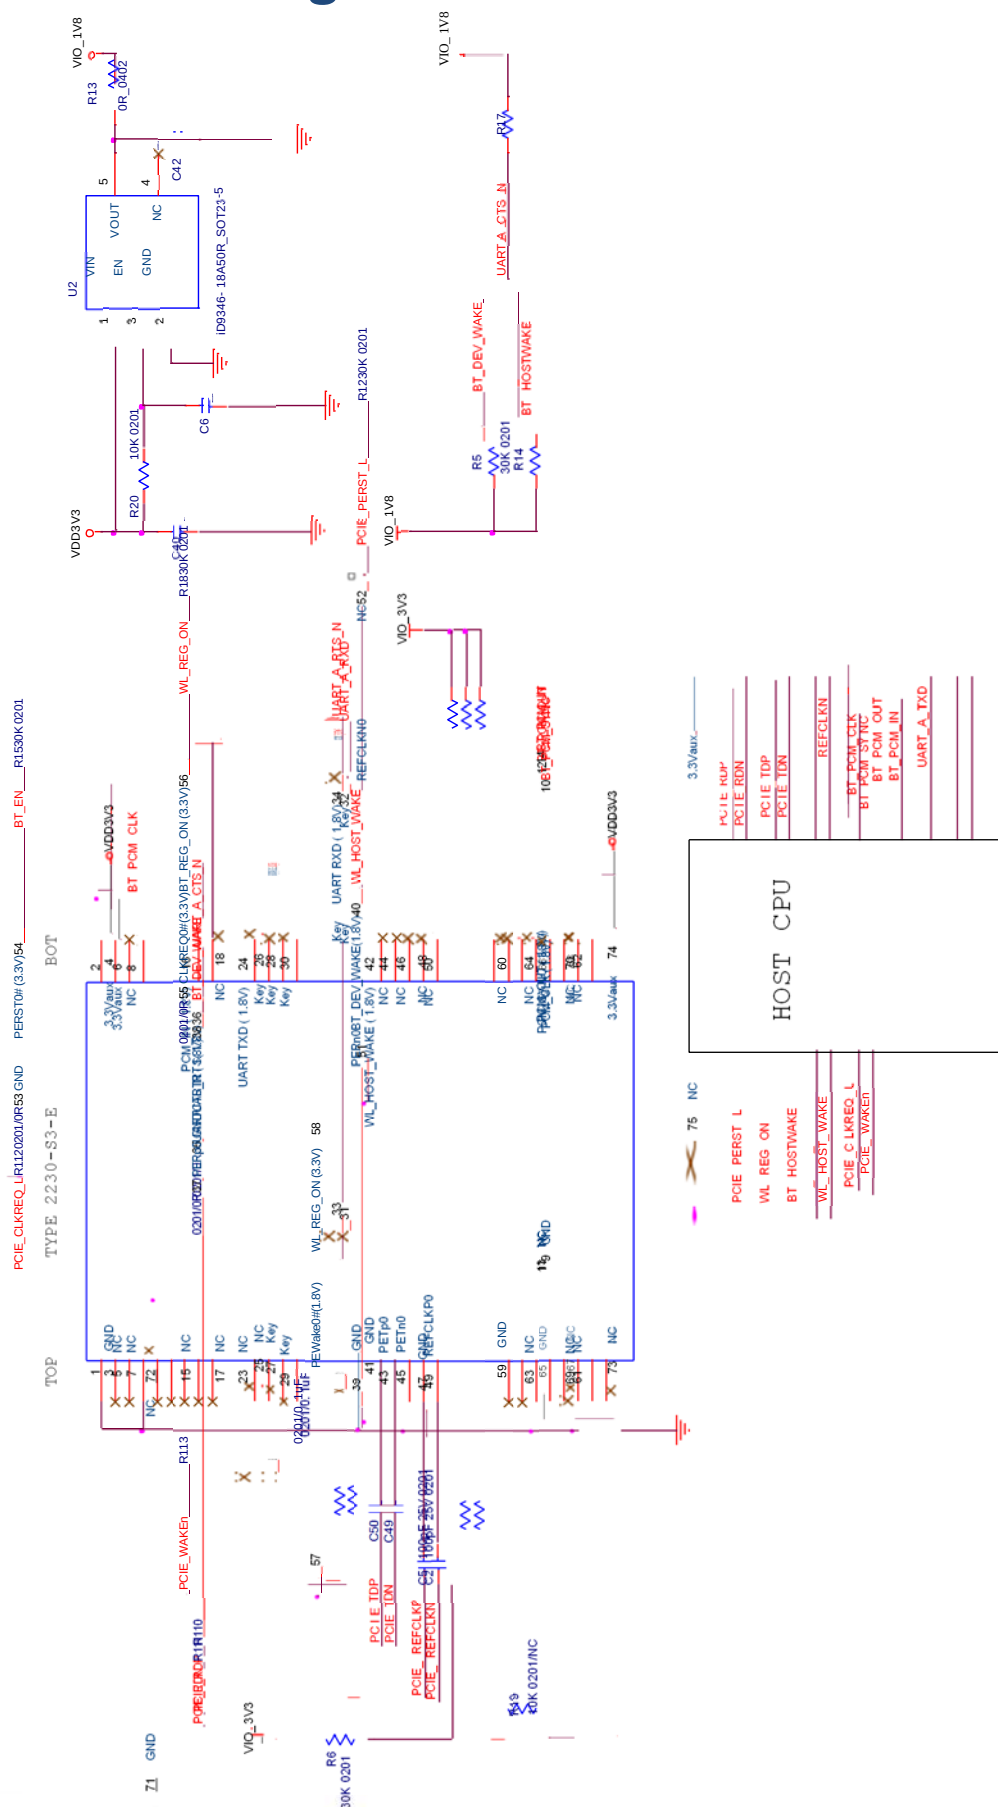

7. Dimensions

7.1 Module Dimensions

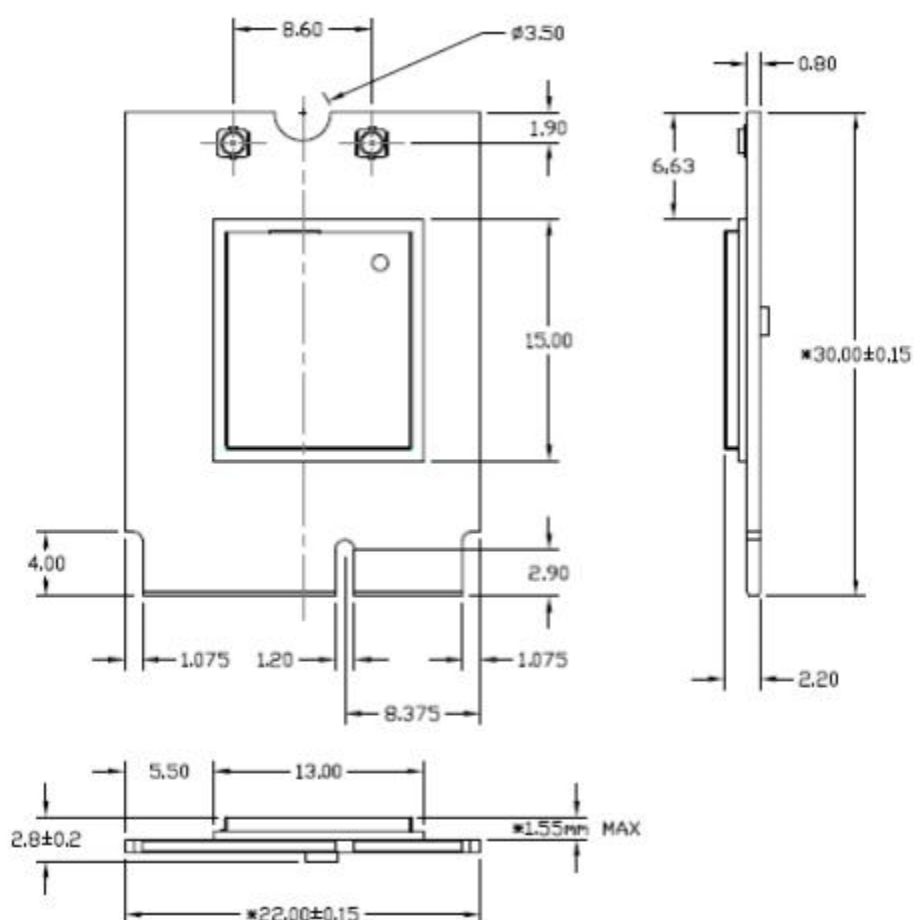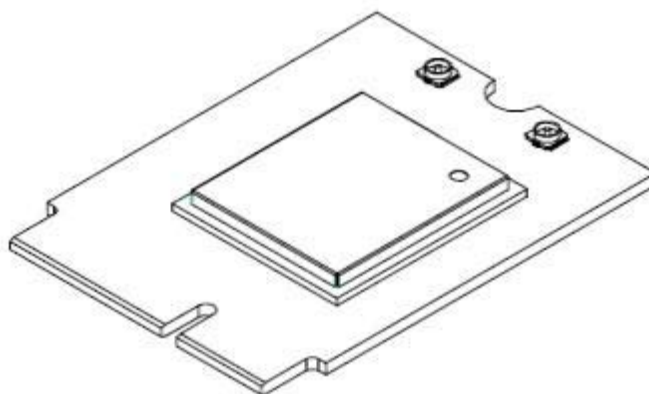

8. Host Interface Timing Diagram

8.1 Power-up Sequence Timing Diagram

The module has signals that allow the host to control power consumption by enabling or disabling the Bluetooth, WLAN and internal regulator blocks. These signals are described below.

Additionally, diagrams are provided to indicate proper sequencing of the signals for various operating states. The timing value indicated are minimum required values: longer delays are also acceptable.

- **WL_REG_ON:** This signal is used by the PMU to power up the WLAN section. It is also OR-gated with the BT_REG_ON input to control the internal regulators. When this pin is high, the regulators are enabled and the WLAN section is out of reset. When this pin is low, the WLAN section is in reset. If BT_REG_ON and WL_REG_ON are both low, the regulators are disabled. This pin has an internal 33k Ω pull-high resistor.
- **BT_REG_ON:** This signal is used by the PMU to decide whether or not to power down the internal regulators. If BT_REG_ON and WL_REG_ON are low, the regulators will be disabled. This pin has an internal 33 k Ω pull-high resistor.
- It suggests customers connect WL_REG_ON and BT_REG_ON to GPIOs for control, otherwise unexpected errors may occur when boot-up the device.
- In the figure, VBAT is represented as 3.3Vaux. The VDDIO power supply has been included in the module. When VBAT is power-up, VDDIO will rise to high level after 15 ms.
- The module main chip has an internal power-on reset (POR) circuit. The device will be held in reset for a maximum of 110 ms after VDDC and VDDIO have both passed the POR threshold. Wait at least 150 ms after VDDC and VDDIO are available before initiating PCIe accesses.



***Notes:**

1. The VBAT and VDDIO 10%–90% rise-time slopes must be greater than 50 microseconds/V.
2. VBAT should be up before or at the same time as VDDIO. VDDIO should NOT be present first or be held high before VBAT is high.

WLAN=ON, Bluetooth=ON






***Notes:**

1. The VBAT and VDDIO 10%–90% rise-time slopes must be greater than 50 microseconds/V.
2. VBAT should be up before or at the same time as VDDIO. VDDIO should NOT be present first or be held high before VBAT is high.


WLAN=OFF, Bluetooth=OFF

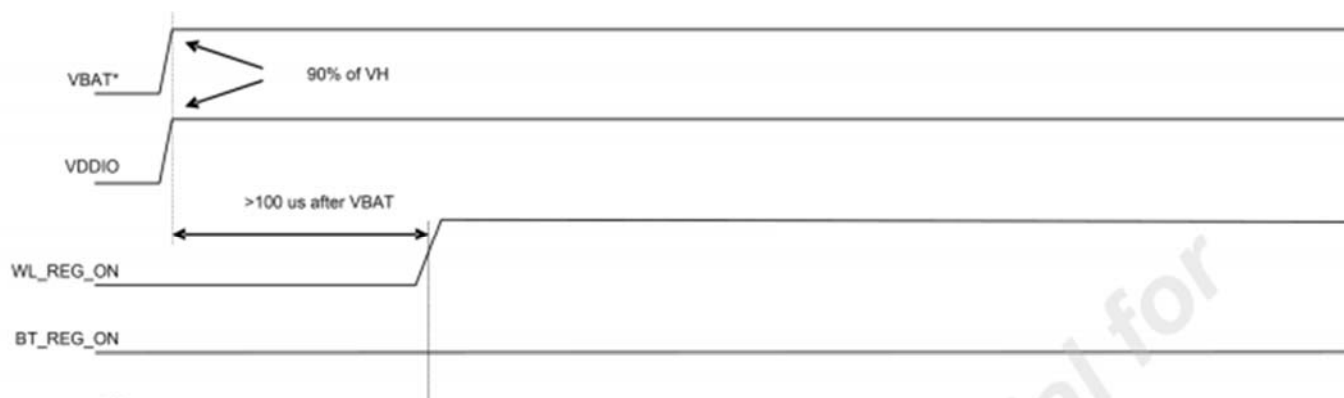

***Notes:**

1. The VBAT and VDDIO 10%–90% rise-time slopes must be greater than 50 microseconds/V.
2. VBAT should be up before or at the same time as VDDIO. VDDIO should NOT be present first or be held high before VBAT is high.

WLAN=ON, Bluetooth=OFF

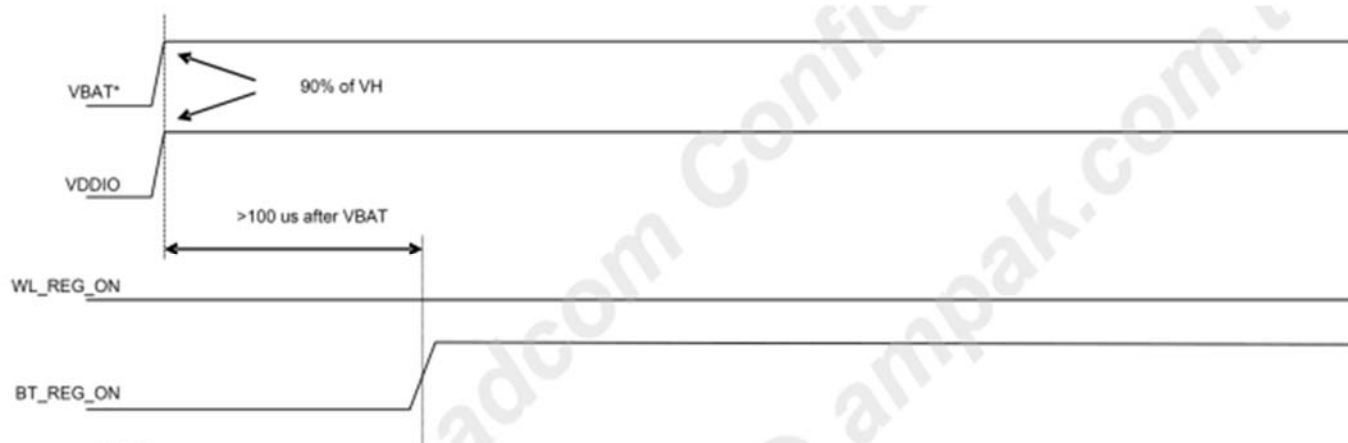

***Notes:**

1. The VBAT and VDDIO 10%–90% rise-time slopes must be greater than 50 microseconds/V.
2. VBAT should be up before or at the same time as VDDIO. VDDIO should NOT be present first or be held high before VBAT is high.

WLAN=OFF, Bluetooth=ON



8.2 PCIe Interface Description

The PCI Express(PCIe) core on the AP6275P is a high-performance serial I/O interconnect that is protocol compliant and electrically compatible with the PCI Express Base Specification v3.0 running at Gen2 speeds.

PCI Express Interface Parameters

Parameter	Symbol	Comments	Min.	Typ.	Max.	Unit
General^a						
Baud rate	BPS	—	—	5	—	Gbaud
Reference clock peak-to-peak differential ^b	Vref	LVPECL, AC coupled	0.95	—	—	V
Receiver						
Differential termination	ZRX-DIFF-DC	Differential termination	80	100	120	Ω
DC impedance	ZRX-DC	DC common-mode impedance	40	50	60	Ω
Powered down termination (POS)	ZRX-HIGH-IMP-DC-POS	Power-down or RESET high impedance	100k	—	—	Ω
Powered down termination (NEG)	ZRX-HIGH-IMP-DC-NEG	Power-down or RESET high impedance	1k	—	—	Ω
Input voltage	VRX-DIFFp-p	AC coupled, differential p-p	175	—	—	mV
Jitter tolerance	TRX-EYE	Minimum receiver eye width	0.4	—	—	UI
Differential return loss	RLRX-DIFF	Differential return loss	10	—	—	dB
Common-mode return loss	RLRX-CM	Common-mode return loss	6	—	—	dB
Unexpected electrical idle enter detect threshold integration time	TRX-IDEL-DET-DIFF-ENTERTIME	An unexpected electrical idle must be recognized no longer than this time to signal an unexpected idle condition.	—	—	10	ms
Signal detect threshold	VRX-IDLE-DET-DIFFp-p	Electrical idle detect threshold	65	—	175	mV
Transmitter						
Output voltage	VTX-DIFFp-p	Differential p-p, programmable in 16 steps	0.8	—	1200	mV
Output voltage rise time	VTX-RISE	20% to 80%	0.125 (2.5 GT/s) 0.15 (5 GT/s)	—	—	UI
Output voltage fall time	VTX-FALL	80% to 20%	0.125 (2.5 GT/s) 0.15 (5 GT/s)	—	—	UI
RX detection voltage swing	VTX-RCV-DETECT	The amount of voltage change allowed during receiver detection.	—	—	600	mV




PCI Express Interface Parameters (Continued)

Parameter	Symbol	Comments	Min.	Typ.	Max.	Unit
TX AC peak common-mode voltage (5 GT/s)	VTX-CM-AC-PP	TX AC common mode voltage (5 GT/s)	—	—	100	mV
TX AC peak common-mode voltage (2.5 GT/s)	VTX-CM-AC-P	TX AC common mode voltage (2.5 GT/s)	—	—	20	mV
Absolute delta of DC common-mode voltage during L0 and electrical idle	VTX-CM-DC-ACTIVE-IDLE-DELTA	Absolute delta of DC common-mode voltage during L0 and electrical idle.	0	—	100	mV
Absolute delta of DC common-mode voltage between D+ and D-	VTX-CM-DC-LINE-DELTA	DC offset between D+ and D-	0	—	25	mV
Electrical idle differential peak output voltage	VTX-IDLE-DIFF-AC-p	Peak-to-peak voltage	0	—	20	mV
TX short circuit current	ITX-SHORT	Current limit when TX output is shorted to ground.	—	—	90	mA
DC differential TX termination	ZTX-DIFF-DC	Low impedance defined during signaling (parameter is captured for 5.0 GHz by RLTX-DIFF)	80	—	120	Ω
Differential return loss	RLTX-DIFF	Differential return loss	10 (min) for 0.05: 1.25 GHz	—	—	dB
Common-mode return loss	RLTX-CM	Common-mode return loss	6	—	—	dB
TX eye width	TTX-EYE	Minimum TX eye width	0.75	—	—	UI



PCIe Power-On Timing

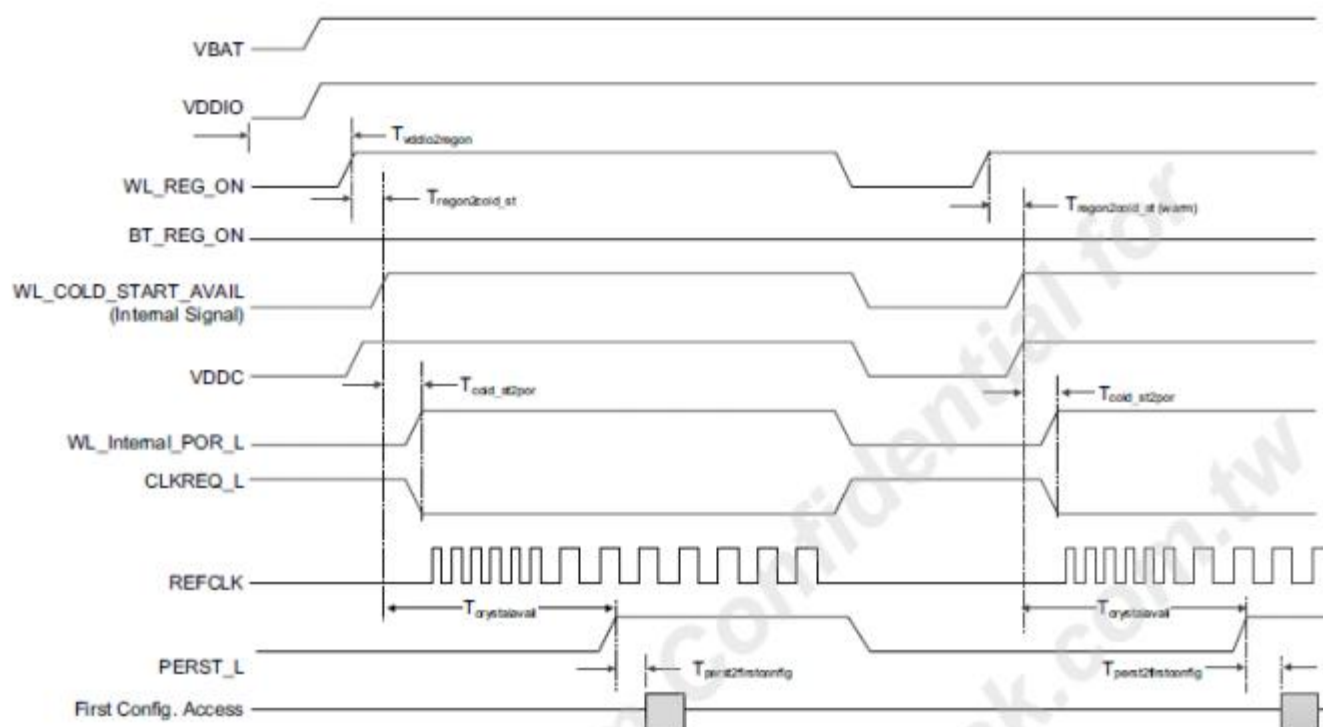

Timing Parameter	Notes	Value ^a	Unit
$T_{vddio2regon}$	—	0.1	ms
$T_{regon2cold_st}$	3.4 ms + 162 instruction-level parallelism (ILP) cycles	10.13	ms
T_{cold_st2por}	54 ILP cycles	2.24	ms
$T_{crystalavail}$	509 ILP cycles	21.17	ms
$T_{perst2firstconfig}$	—	6.0	ms
$T_{vddioon2firstconfig}$	$T_{vddio2regon} + T_{regon2cold_st} + T_{crystalavail} + T_{perst2firstconfig}$	37.4 ^b	ms
$T_{regon2cold_st (warm)}$	162 ILP cycles	6.73	ms

a. The time values assume an ILP tolerance of $\pm 30\%$.

b. With VDDIO as a reference, 37.4 ms is the minimum system wait time before issuing the first configuration access.

NOTICE:

- ◆please keep this product and accessories attached to the places which children can't touch;
- ◆do not splash water or other liquid onto this product, otherwise it may cause damage;
- ◆do not put this product near the heat source or direct sunlight, otherwise it may cause deformation or malfunction;
- ◆please keep this product away from flammable or naked flame;
- ◆please do not repair this product by yourself. Only qualified personnel can be repaired.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
 - (2) This device must accept any interference received, including interference that may cause undesired operation.
- Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Please notice that if the FCC identification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording such as the following: "Contains FCC ID:2A639-AP6575P" any similar wording that expresses the same meaning may be used.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The module is limited to OEM installation ONLY.

The OEM integrator is responsible for ensuring that the end-user has no manual instruction to remove or install module.

The module is limited to installation in mobile application.

A separate approval is required for all other operating configurations, including portable configurations with respect to Part 2.1093 and difference antenna configurations.

There is requirement that the grantee provide guidance to the host manufacturer for compliance with Part 15B requirements.

The module complies with FCC Part 15.247 / Part 15.407 and apply for Single module approval.

Trace antenna designs: Not applicable.

Antennas:

2.4G	5G
External antenna & 4.46 dBi	External antenna & 5.36 dBi

The antenna is permanently attached, can't be replaced.

Antenna manufacturer: Shenzhen Ruicai Electronic Technology Co., LTD

Model: 5DB SMA

Canada Statement

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage;
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Please notice that if the ISSED certification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording such as the following: "Contains IC:29997-AP6575P" any similar wording that expresses the same meaning may be used.

l'appareil hôte doit porter une étiquette donnant le numéro de certification du module d'Industrie Canada, précédé des mots « Contient un module d'émission », du mot « IC:29997-AP6575P » ou d'une formulation similaire exprimant le même sens, comme suit

The device for operation in the band 5150-5350 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems
for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits as appropriate;

Les dispositifs fonctionnant dans la bande 5150-5350 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux; pour les dispositifs munis d'antennes amovibles, le gain maximal d'antenne permis (pour les dispositifs utilisant la bande de 5 725 à 5 850 MHz) doit être conforme à la limite de la p.i.r.e. spécifiée, selon le cas;


Cet équipement respecte les limites d'exposition aux radiations fixées par la IC pour un environnement non contrôlé. Ces équipements doivent être installés et exploités à une distance minimale de 20cm entre le radiateur et votre corps. Cet émetteur ne doit pas être co-localisé ni fonctionner en conjonction avec une autre antenne ou un autre émetteur.

3.8.2 以下文字「取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規定作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。」

9. Package Information

9.1 Tray box

BOX : 100 PCS (100 PCS/Tray)

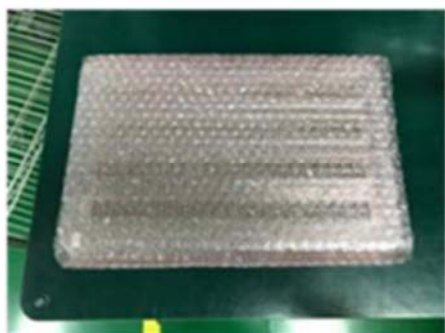

AMPAK Technology Inc.

3F, No.15-1, Zhonghua Road, Hsinchu Industril Park, Hukou, Hsinchu, Taiwan,
30352

25

<http://www.ampak.com.tw>



9.2 Carton

Carton: 400 PCS (Box*4/Carton)

