

FCC Radio Test Report

FCC ID: QISNXT-L09

This report concerns (check one): ☒Original Grant ☐Class II Change

Project No. : 1512C014
Equipment : Smart Phone
Model Name : HUAWEI NXT-L09
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : Dec. 02, 2015
Date of Test : Dec. 02, 2015 ~ Dec. 14, 2015
Issued Date : Dec. 15, 2015
Tested by : BTL Inc.

Testing Engineer : Shawn Xiao
(Shawn Xiao)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3 . GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	9
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.5 DESCRIPTION OF SUPPORT UNITS	10
4 . EMC EMISSION TEST	11
4.1 RADIATED EMISSION MEASUREMENT	11
4.1.1 RADIATED EMISSION LIMITS	11
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	12
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 EUT TEST CONDITIONS	13
4.1.7 TEST RESULTS (9K TO 30MHz)	14
4.1.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	14
4.1.9 TEST RESULTS (ABOVE 1000 MHz)	14
5 . MEASUREMENT INSTRUMENTS LIST	15
6 . EUT TEST PHOTOS	16
ATTACHMENT A - RADIATED EMISSION (9KHZ TO 30MHZ)	20
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	22
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	41

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1512C014	Original Issue.	Dec. 15, 2015

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : HUAWEI NXT-L09
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Test : Dec. 02, 2015 ~ Dec. 14, 2015
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1512C014) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E			
Standard(s) Section	Test Item	Judgment	Remark
15.407(a)	Radiated Emissions	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2 .The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone	
Brand Name	HUAWEI	
Model Name	HUAWEI NXT-L09	
Mode Different	N/A	
Product Description	Operation Frequency	UNII-1: 5150-5250MHz UNII-2A: 5250-5350MHz UNII-3: 5725-5850MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	150Mbps
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) Salcomp (Shenzhen)Co. , LLd . (2) HUIZHOU BYD ELECTRONIC CO., LTD. Model: HW-059200BHQ (UK) HW-059200EHQ (EU) HW-059200UHQ (US) HW-059200AHQ (AU) #2 Supplied from battery. Manufacturer: (1) Sunwoda Electronic Co., LTD (2) SCUD (FUJIAN) Electronics Co., Ltd Battery Model: HB396693ECW	
Power Rating	#1 I/P: -100V-240V-5V/9V 2A O/P: 5V/9V  2A #2 DC 3.8V	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
-

Item	Mfr/Brand	Model.
USB Cable	Unirise Communication Technology Co., Ltd.	LSA00714
	Connrex (Shen Zhen) Industrial, Ltd.	CD-U0405-1042
	Shen Zhen Pang Ngai Industrial Co.,Ltd.	H09-000543
Earphone	BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD.	1311-3292-3.5mm-174
	BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD.	1311-3291-3.5MM-178
	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	MEMD1632B580000
	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	MEMD1632B580A00

3. Channel List:

802.11a 802.11n 20MHz		802.11n 40MHz	
UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190
40	5200	46	5230
44	5220		
48	5240		

802.11a 802.11n 20MHz		802.11n 40MHz	
UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270
56	5280	62	5310
60	5300		
64	5320		

802.11a 802.11n 20MHz		802.11n 40MHz	
UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755
153	5765	159	5795
157	5785		
161	5805		
165	5825		

3.2 DESCRIPTION OF TEST MODES


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX A Mode / CH52, CH60, CH64 (UNII-2A)
Mode 5	TX N20 Mode / CH52, CH60, CH64 (UNII-2A)
Mode 6	TX N40 Mode / CH54, CH62 (UNII-2A)
Mode 7	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 8	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 9	TX N40 Mode / CH151,CH159 (UNII-3)

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX A Mode / CH52, CH60, CH64 (UNII-2A)
Mode 5	TX N20 Mode / CH52, CH60, CH64 (UNII-2A)
Mode 6	TX N40 Mode / CH54, CH62 (UNII-2A)
Mode 7	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 8	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 9	TX N40 Mode / CH151,CH159 (UNII-3)

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

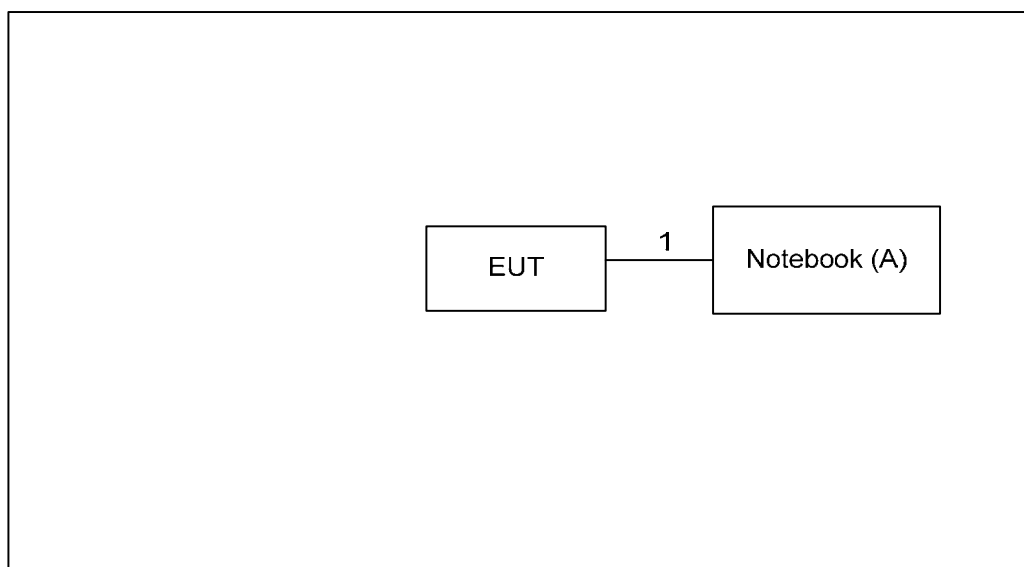

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	Notebook	DELL	INSPIRON 1420	DOC	JX193A01SDC2

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	0.5m	USB Cable

4. EMC EMISSION TEST

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 (beyond 10MHz of the band edge)	68.3
	-17 (within 10 MHz of band edge)	78.3

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength: $E = \frac{1000000 \sqrt{30P}}{3}$ μV/m, where P is the eirp (Watts)

4.1.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD


No deviation

4.1.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency 30 - 1000MHz

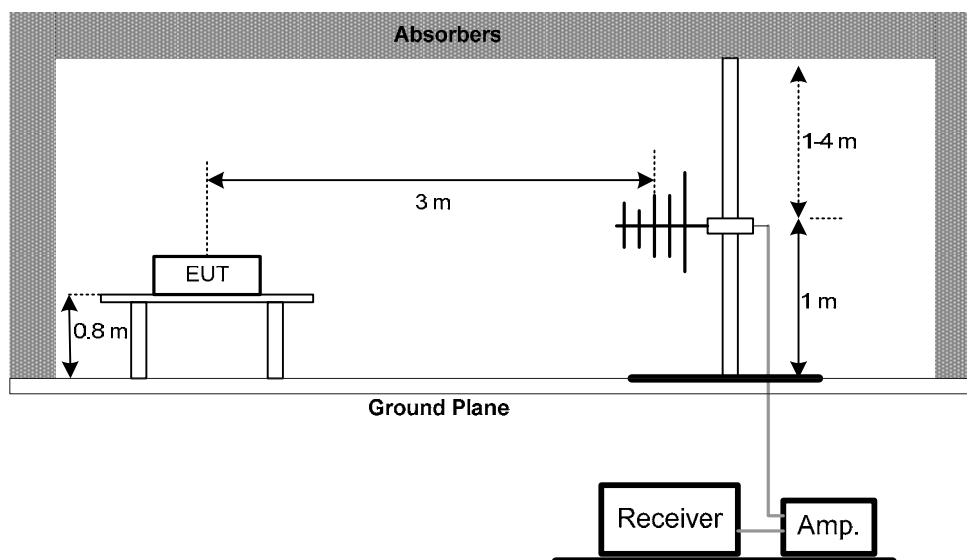

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

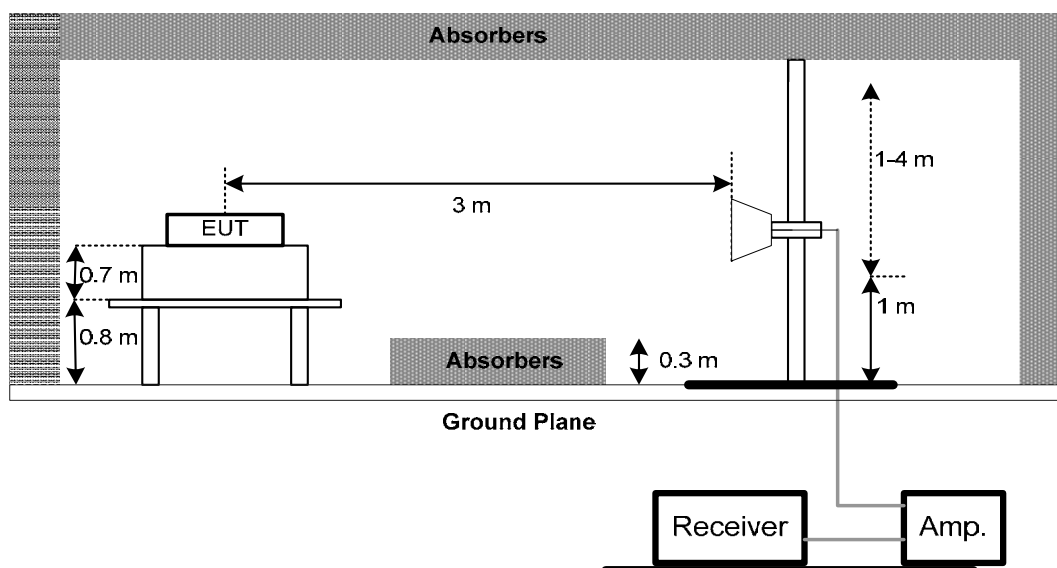

(C) Radiated emissions below 30MHz

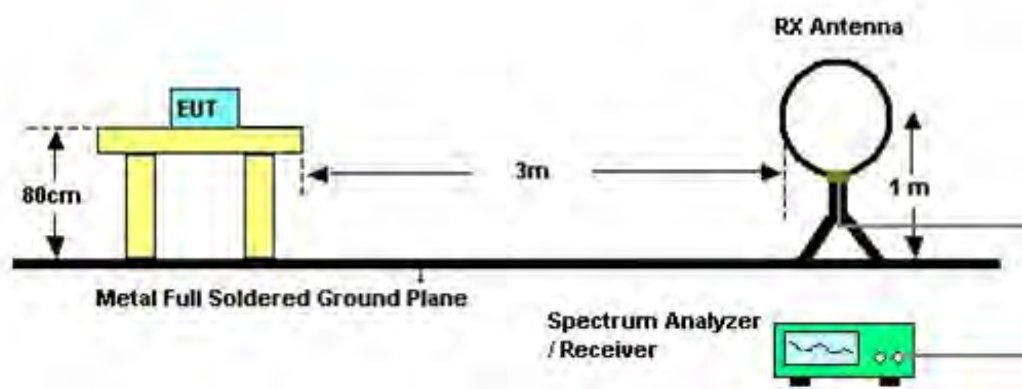

4.1.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS (9K TO 30MHz)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.1.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)

Please refer to the Attachment C.

4.1.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Attachment D.

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (2) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (4) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (5) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (6) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. MEASUREMENT INSTRUMENTS LIST


Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 28, 2016
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 28, 2016
5	Antenna	ETS	3115	00075789	Mar. 28, 2016
6	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
7	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
8	Test Cable	emci	EMC104-SM-S M-10000(1GHz – 26.5GHz)	C-68	Jun. 28, 2016
9	Controller	CT	SC100	N/A	N/A
10	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Mar. 28, 2016
11	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 28, 2016
12	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 07, 2016
13	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

6. EUT TEST PHOTOS

Radiated Measurement Photos

9KHz to 30MHz

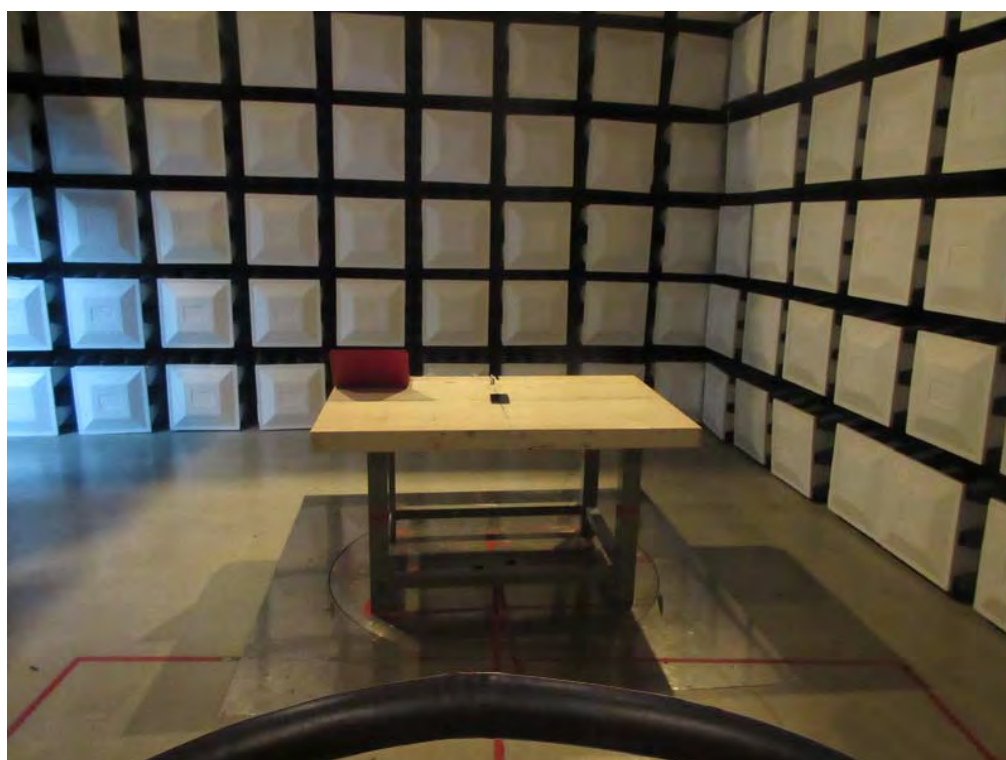

Radiated Measurement Photos

30MHz to 1000MHz




Radiated Measurement Photos

1GHz to 18G



Radiated Measurement Photos

18GHz to 40G

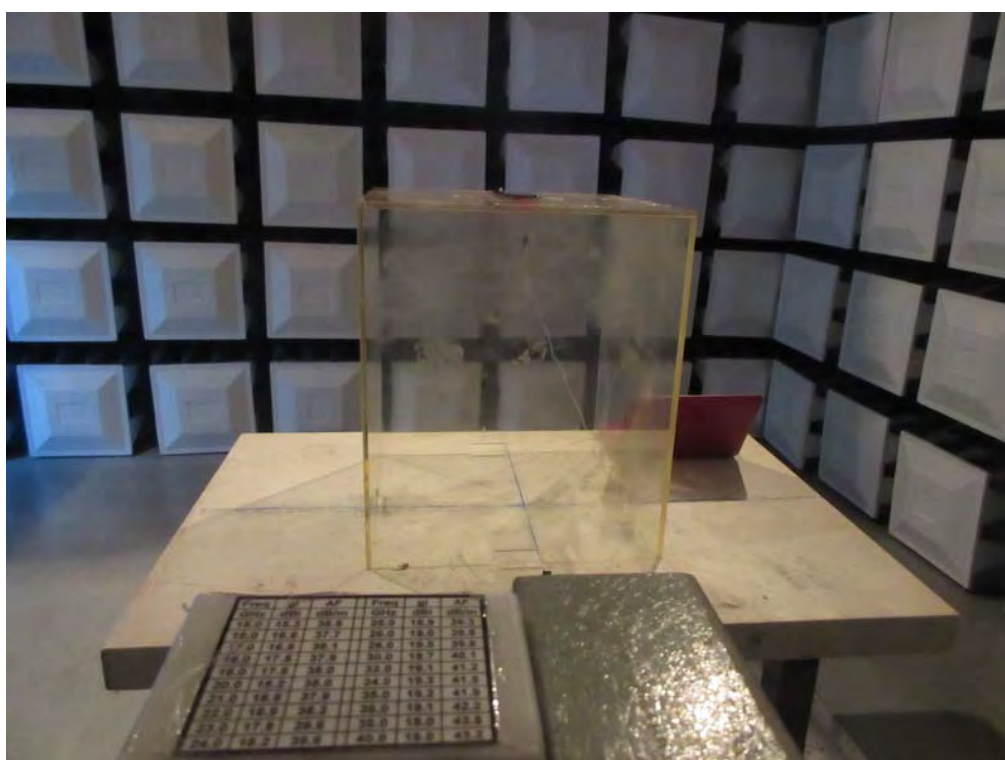

ATTACHMENT A - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode:	TX MODE
------------	---------


Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit(QP) (dBuV/m)	Margin (dB)	Note
0.0131	0°	13.52	24.74	38.26	125.26	-87.00	AVG
0.0131	0°	14.43	24.74	39.17	145.26	-106.09	PEAK
0.0262	0°	6.37	23.91	30.28	119.24	-88.96	AVG
0.0262	0°	8.24	23.91	32.15	139.24	-107.09	PEAK
0.0379	0°	3.29	23.17	26.46	116.03	-89.58	AVG
0.0379	0°	5.36	23.17	28.53	136.03	-107.51	PEAK
0.0544	0°	1.52	22.31	23.83	112.89	-89.06	AVG
0.0544	0°	2.61	22.31	24.92	132.89	-107.97	PEAK
0.5018	0°	19.37	19.81	39.18	73.59	-34.42	QP
1.9584	0°	23.64	19.50	43.14	69.54	-26.40	QP

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit(QP) (dBuV/m)	Margin (dB)	Note
0.0136	90°	13.32	24.30	37.62	124.93	-87.31	AVG
0.0136	90°	14.73	24.30	39.03	144.93	-105.90	PEAK
0.0252	90°	7.45	23.97	31.42	119.58	-88.16	AVG
0.0252	90°	8.76	23.97	32.73	139.58	-106.85	PEAK
0.0418	90°	5.39	22.92	28.31	115.18	-86.87	AVG
0.0418	90°	6.37	22.92	29.29	135.18	-105.89	PEAK
0.0559	90°	1.42	22.28	23.70	112.66	-88.95	AVG
0.0559	90°	2.53	22.28	24.81	132.66	-107.84	PEAK
0.6242	90°	22.38	20.20	42.58	71.70	-29.12	QP
2.0537	90°	24.60	19.47	44.07	69.54	-25.47	QP

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: UNII-1/TX A Mode 5180MHz


Vertical

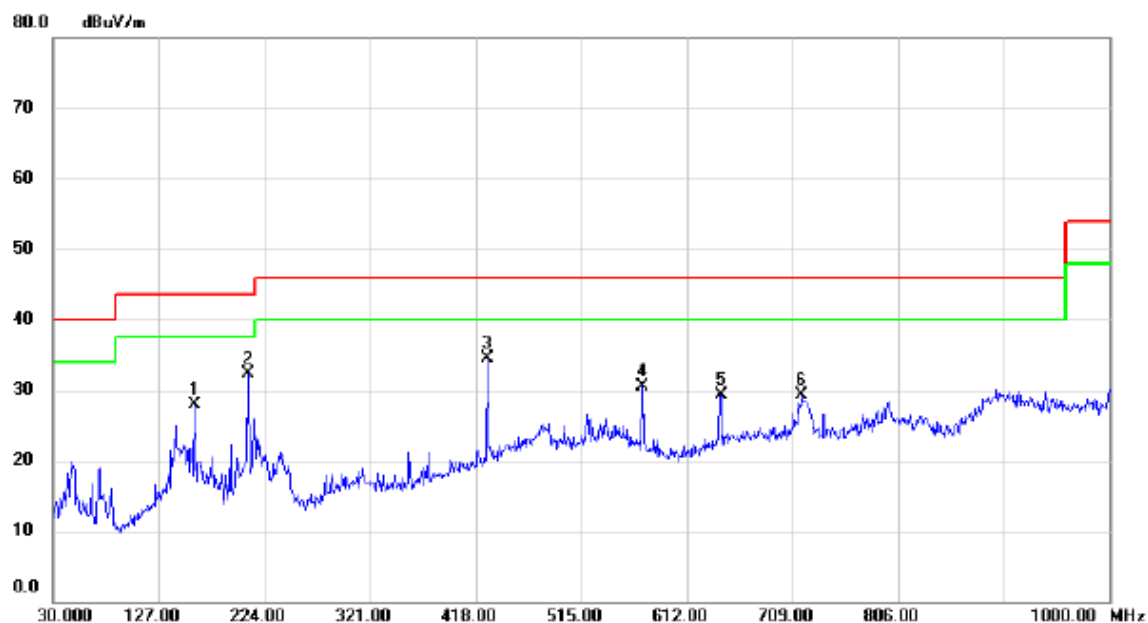

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		159.9800	40.30	-12.42	27.88	43.50	-15.62	peak	
2	*	208.4800	47.23	-14.89	32.34	43.50	-11.16	peak	
3		428.6700	43.07	-8.59	34.48	46.00	-11.52	peak	
4		571.2600	36.75	-6.30	30.45	46.00	-15.55	peak	
5		643.0400	34.78	-5.49	29.29	46.00	-16.71	peak	
6		717.7300	33.73	-4.34	29.39	46.00	-16.61	peak	

Test Mode: UNII-1/TX A Mode 5180MHz


Horizontal

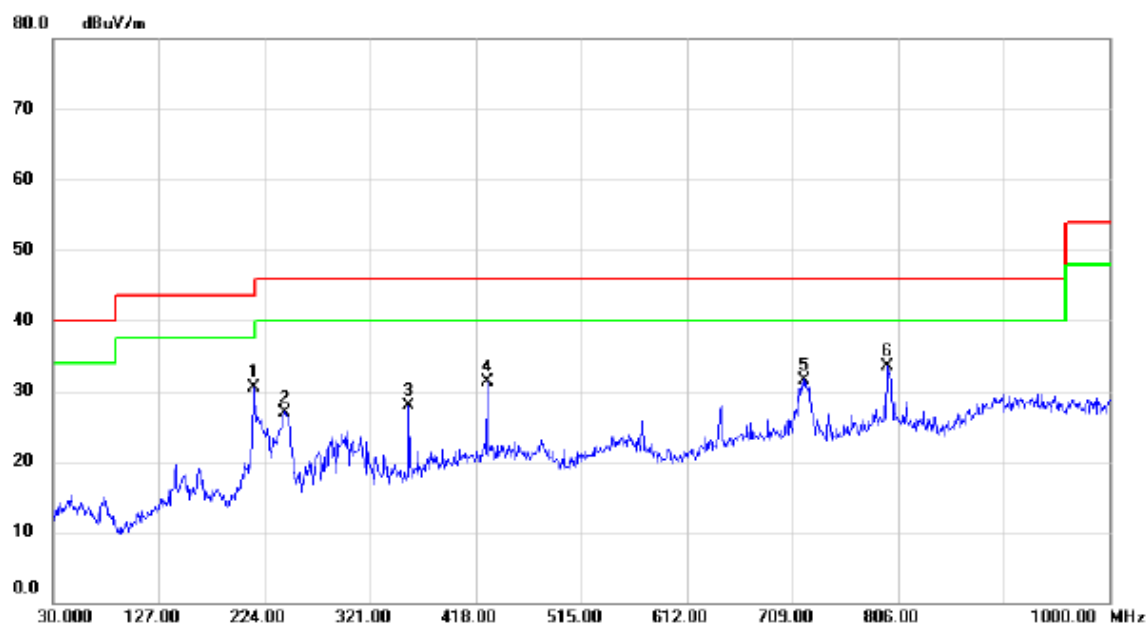

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment	dBuV/m	dB	Detector	Comment
1		214.3000	45.11	-14.62	30.49	43.50	-13.01	peak	
2		242.4300	41.18	-14.18	27.00	46.00	-19.00	peak	
3		356.8900	38.97	-11.05	27.92	46.00	-18.08	peak	
4		428.6700	39.94	-8.59	31.35	46.00	-14.65	peak	
5		719.6700	35.96	-4.36	31.60	46.00	-14.40	peak	
6	*	796.3000	35.84	-2.26	33.58	46.00	-12.42	peak	

Test Mode: UNII-1/TX A Mode 5200MHz


Vertical

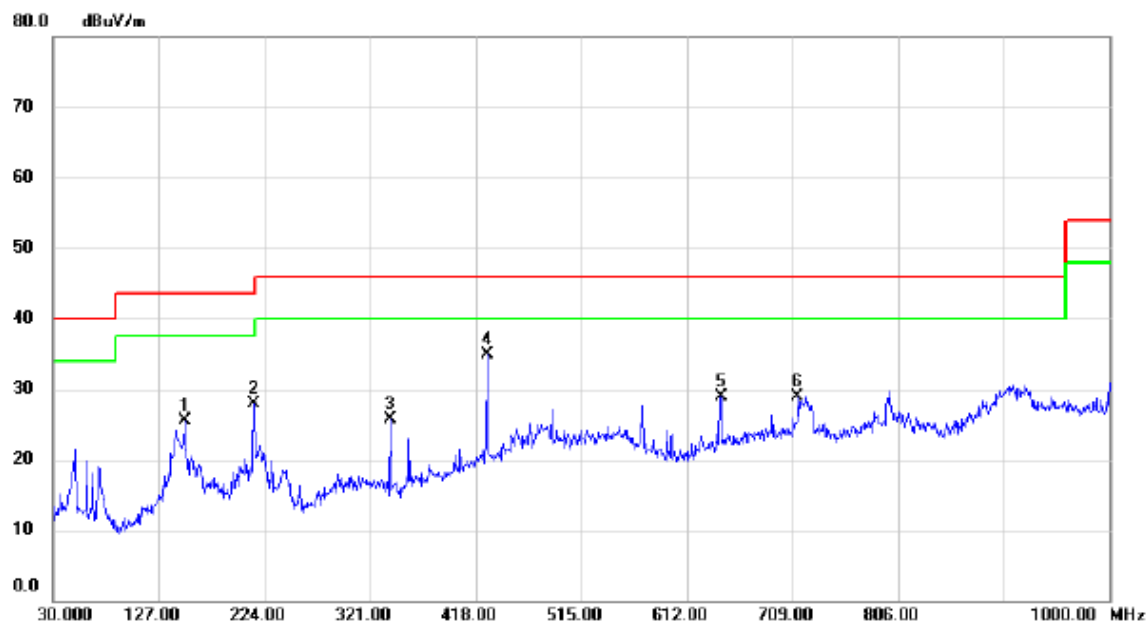

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		150.2800	38.43	-13.00	25.43	43.50	-18.07	peak	
2		214.3000	42.43	-14.62	27.81	43.50	-15.69	peak	
3		339.4300	36.77	-11.16	25.61	46.00	-20.39	peak	
4	*	428.6700	43.49	-8.59	34.90	46.00	-11.10	peak	
5		643.0400	34.43	-5.49	28.94	46.00	-17.06	peak	
6		713.8500	33.24	-4.31	28.93	46.00	-17.07	peak	

Test Mode: UNII-1/TX A Mode 5200MHz


Horizontal

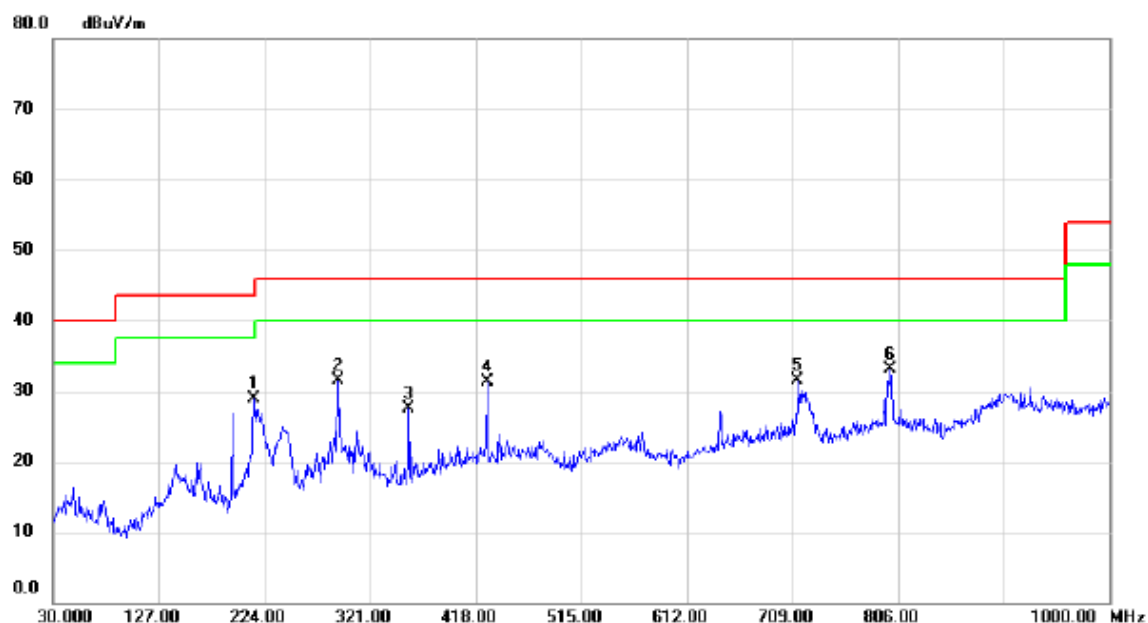

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		214.3000	43.44	-14.62	28.82	43.50	-14.68	peak	
2		291.9000	42.32	-10.91	31.41	46.00	-14.59	peak	
3		356.8900	38.63	-11.05	27.58	46.00	-18.42	peak	
4		428.6700	39.93	-8.59	31.34	46.00	-14.66	peak	
5		713.8500	35.87	-4.31	31.56	46.00	-14.44	peak	
6	*	799.2100	35.24	-2.11	33.13	46.00	-12.87	peak	

Test Mode: UNII-1/TX A Mode 5240MHz


Vertical

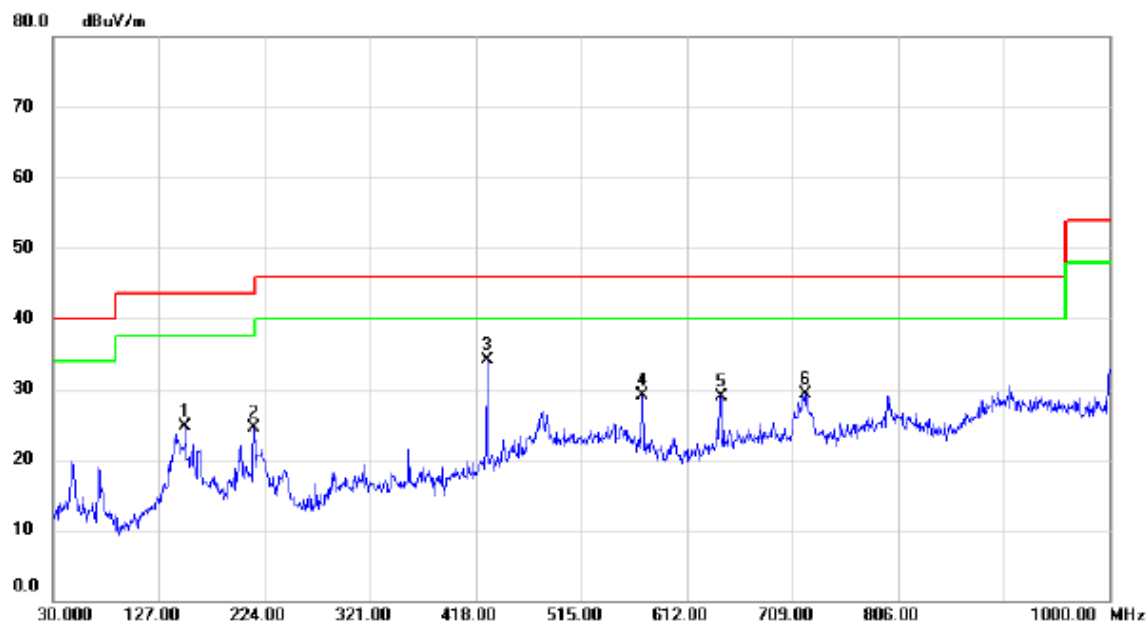

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		151.2500	37.57	-12.93	24.64	43.50	-18.86	peak	
2		214.3000	39.13	-14.62	24.51	43.50	-18.99	peak	
3	*	428.6700	42.74	-8.59	34.15	46.00	-11.85	peak	
4		571.2600	35.36	-6.30	29.06	46.00	-16.94	peak	
5		643.0400	34.46	-5.49	28.97	46.00	-17.03	peak	
6		721.6100	33.62	-4.38	29.24	46.00	-16.76	peak	

Test Mode: UNII-1/TX A Mode 5240MHz


Horizontal

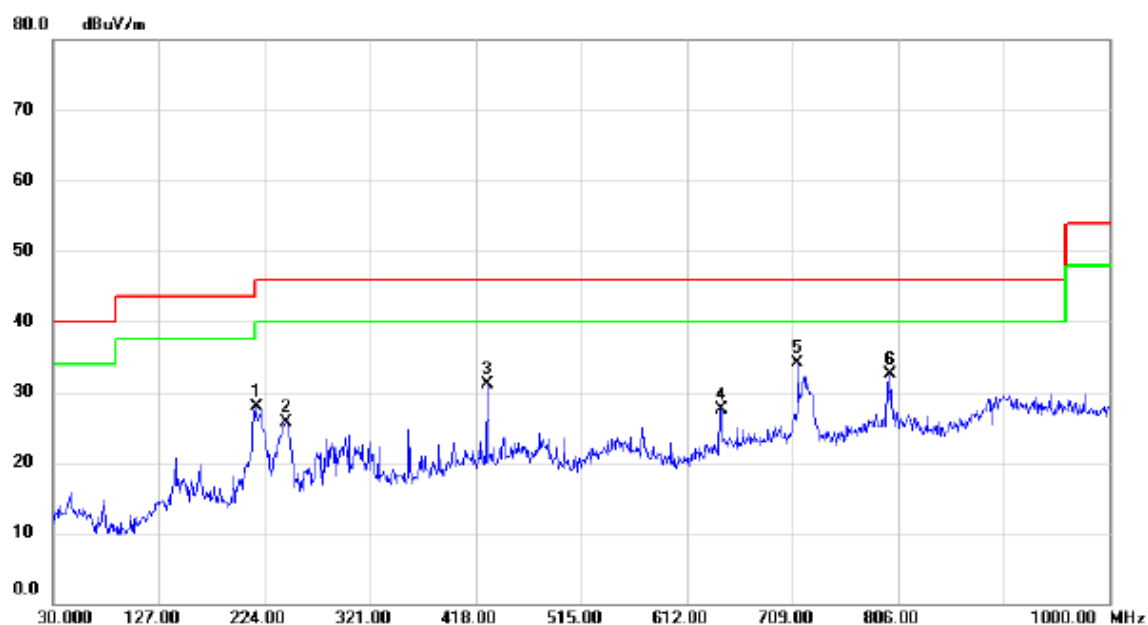

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		216.2400	42.45	-14.51	27.94	46.00	-18.06	peak	
2		244.3700	39.88	-14.20	25.68	46.00	-20.32	peak	
3		428.6700	39.66	-8.59	31.07	46.00	-14.93	peak	
4		643.0400	33.05	-5.49	27.56	46.00	-18.44	peak	
5	*	713.8500	38.32	-4.31	34.01	46.00	-11.99	peak	
6		799.2100	34.52	-2.11	32.41	46.00	-13.59	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz


Vertical

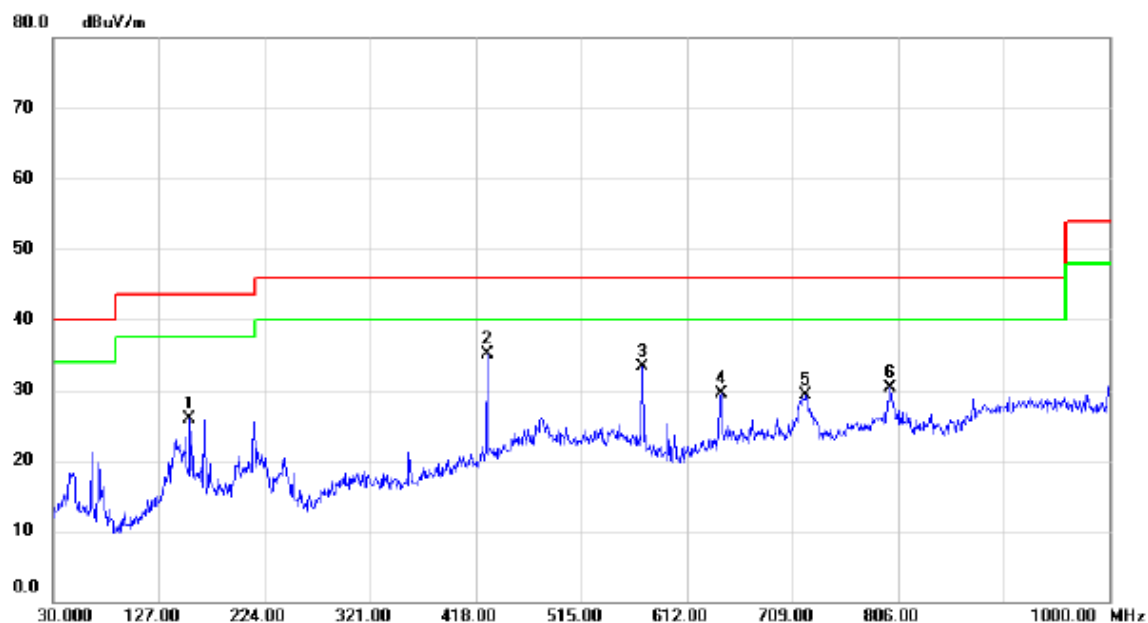

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		155.1300	38.55	-12.70	25.85	43.50	-17.65	peak	
2	*	428.6700	43.75	-8.59	35.16	46.00	-10.84	peak	
3		571.2600	39.66	-6.30	33.36	46.00	-12.64	peak	
4		643.0400	35.01	-5.49	29.52	46.00	-16.48	peak	
5		721.6100	33.59	-4.38	29.21	46.00	-16.79	peak	
6		799.2100	32.49	-2.11	30.38	46.00	-15.62	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz


Horizontal

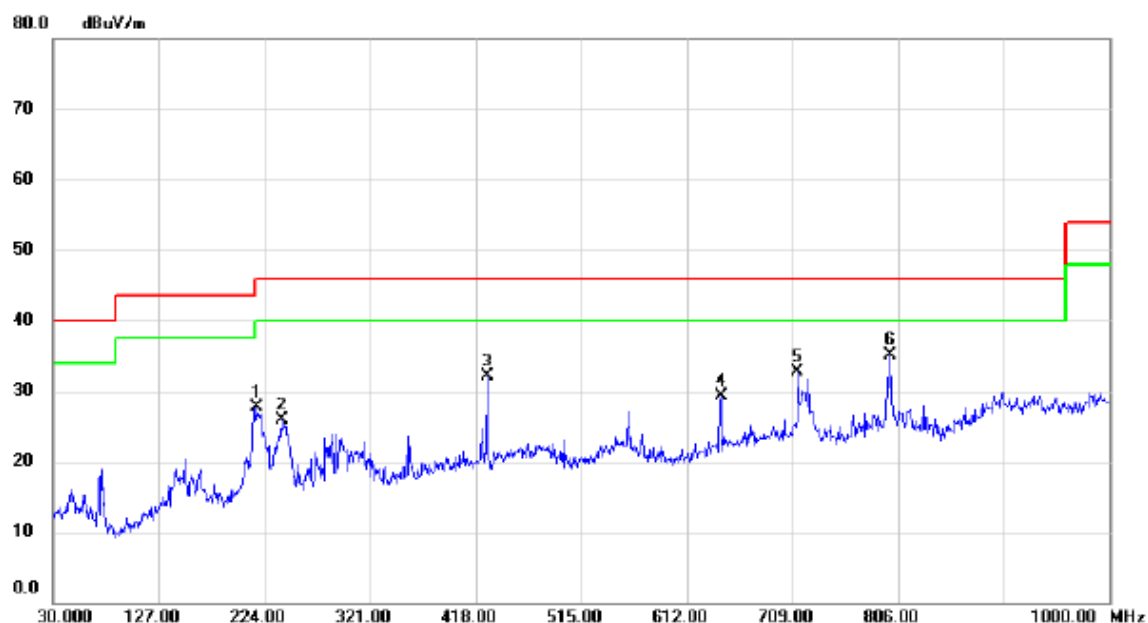

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		217.2100	42.25	-14.46	27.79	46.00	-18.21	peak	
2		239.5200	40.15	-14.15	26.00	46.00	-20.00	peak	
3		428.6700	40.64	-8.59	32.05	46.00	-13.95	peak	
4		643.0400	34.73	-5.49	29.24	46.00	-16.76	peak	
5		713.8500	36.97	-4.31	32.66	46.00	-13.34	peak	
6	*	799.2100	37.13	-2.11	35.02	46.00	-10.98	peak	

Test Mode: UNII-2A/TX A Mode 5300MHz


Vertical

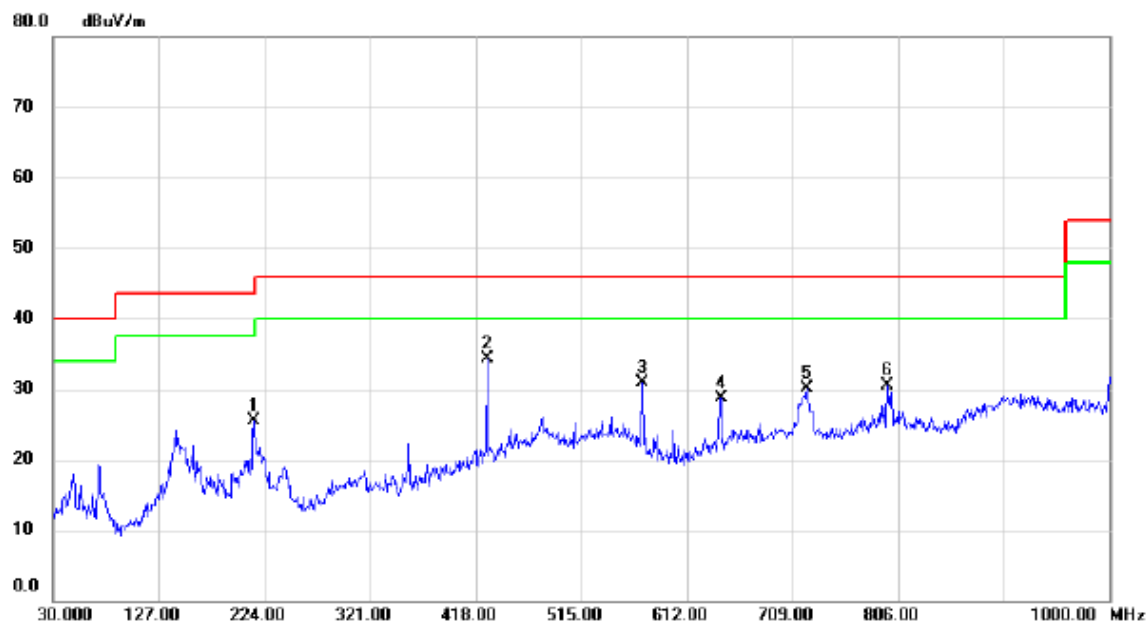

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		214.3000	40.14	-14.62	25.52	43.50	-17.98	peak	
2	*	428.6700	42.85	-8.59	34.26	46.00	-11.74	peak	
3		571.2600	37.24	-6.30	30.94	46.00	-15.06	peak	
4		643.0400	34.15	-5.49	28.66	46.00	-17.34	peak	
5		722.5800	34.54	-4.38	30.16	46.00	-15.84	peak	
6		796.3000	32.74	-2.26	30.48	46.00	-15.52	peak	

Test Mode: UNII-2A/TX A Mode 5300MHz


Horizontal

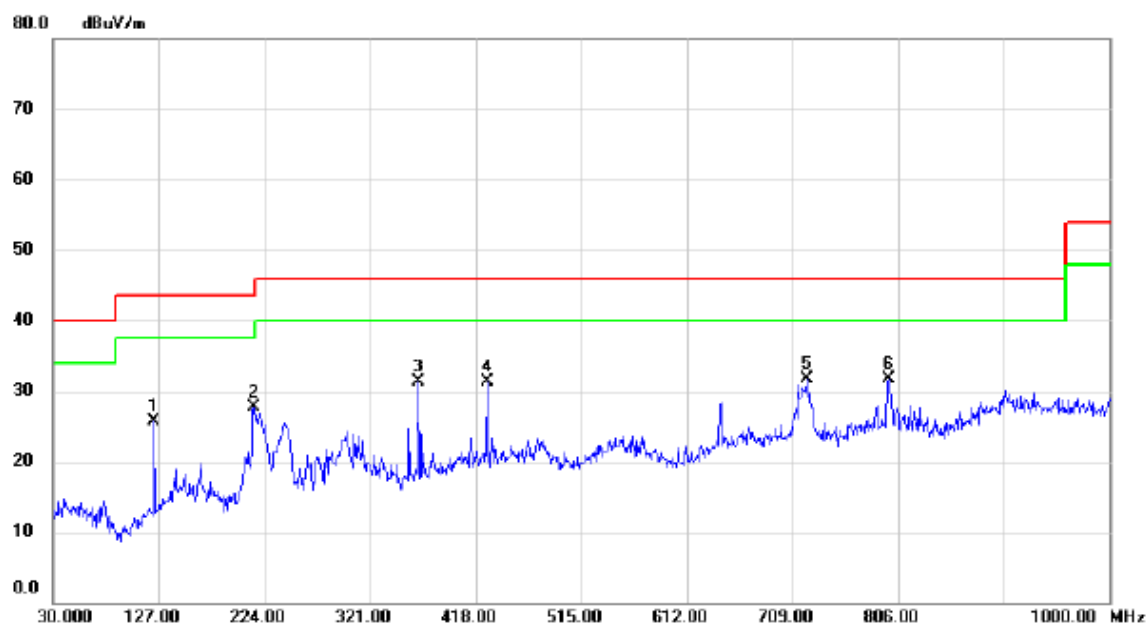

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		122.1500	39.58	-13.81	25.77	43.50	-17.73	peak	
2		214.3000	42.24	-14.62	27.62	43.50	-15.88	peak	
3		365.6200	41.97	-10.71	31.26	46.00	-14.74	peak	
4		428.6700	39.88	-8.59	31.29	46.00	-14.71	peak	
5	*	722.5800	36.11	-4.38	31.73	46.00	-14.27	peak	
6		797.2700	33.89	-2.21	31.68	46.00	-14.32	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz


Vertical

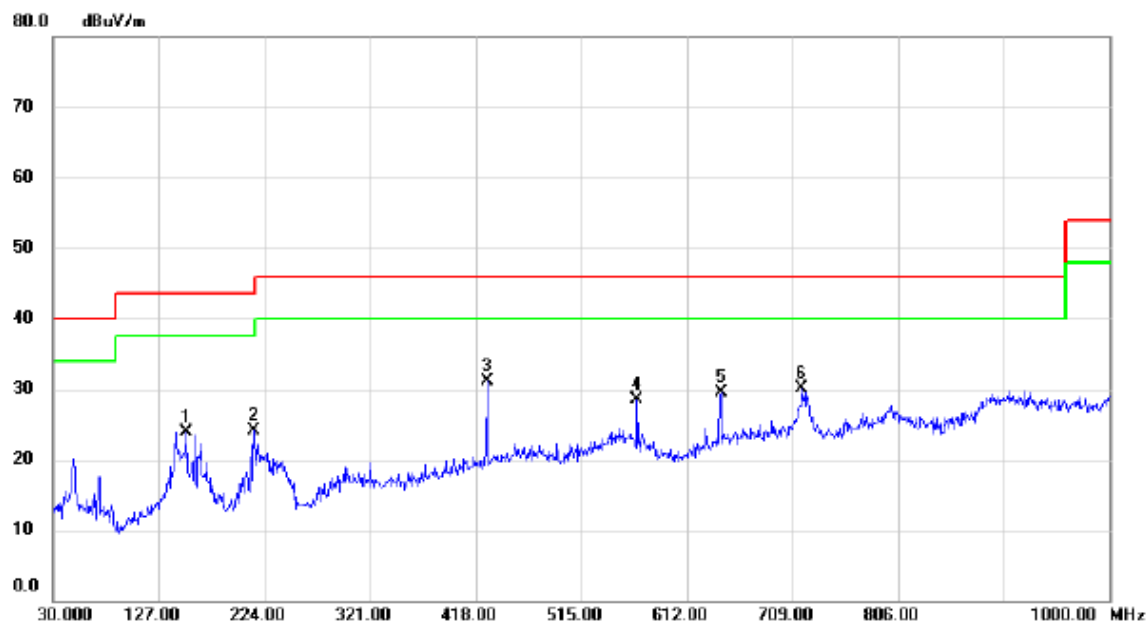

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		152.2200	36.86	-12.88	23.98	43.50	-19.52	peak	
2		214.3000	38.69	-14.62	24.07	43.50	-19.43	peak	
3	*	428.6700	39.65	-8.59	31.06	46.00	-14.94	peak	
4		566.4100	34.46	-6.03	28.43	46.00	-17.57	peak	
5		643.0400	34.91	-5.49	29.42	46.00	-16.58	peak	
6		717.7300	34.35	-4.34	30.01	46.00	-15.99	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz


Horizontal

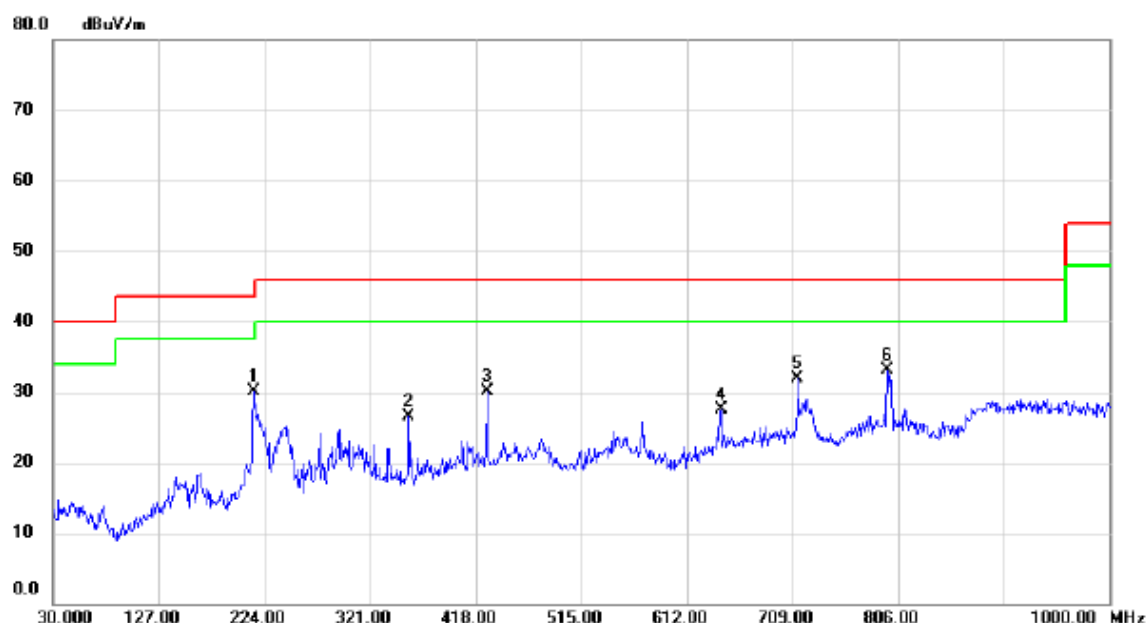

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		214.3000	44.78	-14.62	30.16	43.50	-13.34	peak	
2		356.8900	37.47	-11.05	26.42	46.00	-19.58	peak	
3		428.6700	38.62	-8.59	30.03	46.00	-15.97	peak	
4		643.0400	32.96	-5.49	27.47	46.00	-18.53	peak	
5		713.8500	36.17	-4.31	31.86	46.00	-14.14	peak	
6	*	796.3000	35.35	-2.26	33.09	46.00	-12.91	peak	

Test Mode: UNII-3/TX A Mode 5745MHz


Vertical

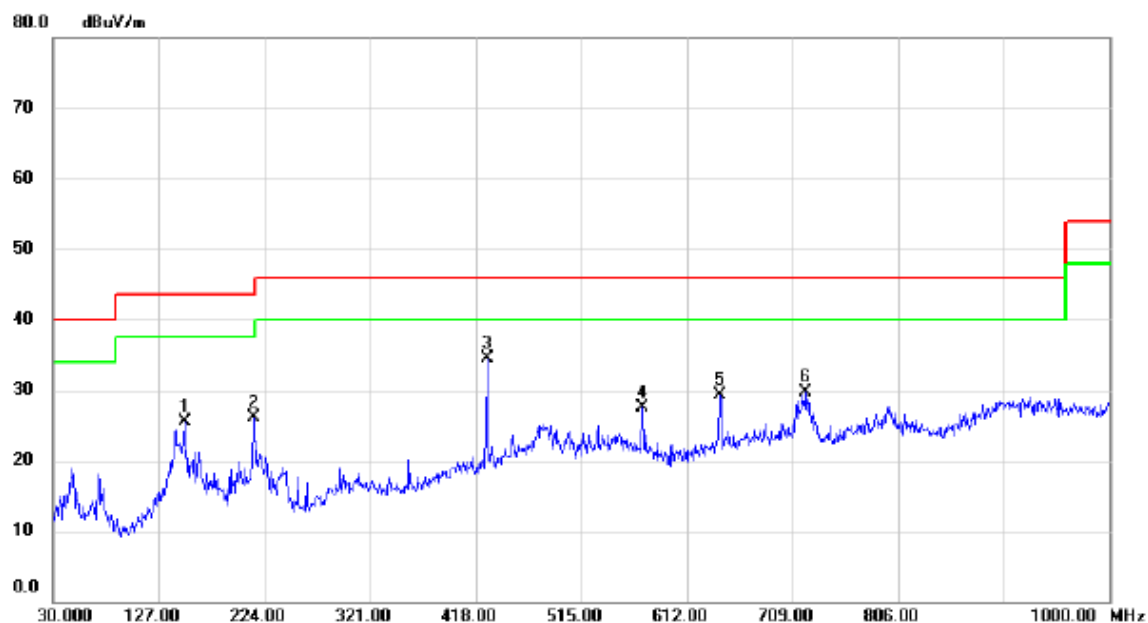

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		150.2800	38.46	-13.00	25.46	43.50	-18.04	peak	
2		214.3000	40.64	-14.62	26.02	43.50	-17.48	peak	
3	*	428.6700	43.07	-8.59	34.48	46.00	-11.52	peak	
4		571.2600	33.71	-6.30	27.41	46.00	-18.59	peak	
5		642.0700	34.75	-5.54	29.21	46.00	-16.79	peak	
6		721.6100	34.13	-4.38	29.75	46.00	-16.25	peak	

Test Mode: UNII-3/TX A Mode 5745MHz


Horizontal

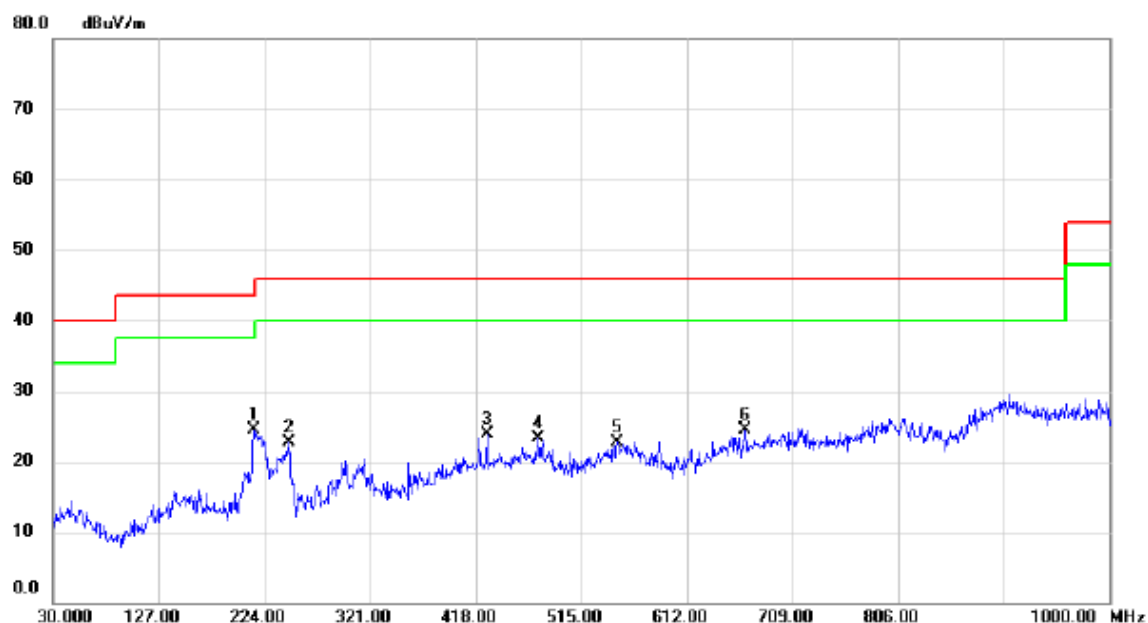

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	214.3000	39.22	-14.62	24.60	43.50	-18.90	peak	
2		246.3100	36.87	-14.24	22.63	46.00	-23.37	peak	
3		428.6700	32.55	-8.59	23.96	46.00	-22.04	peak	
4		475.2300	32.42	-9.03	23.39	46.00	-22.61	peak	
5		547.9800	28.13	-5.33	22.80	46.00	-23.20	peak	
6		665.3500	29.31	-4.82	24.49	46.00	-21.51	peak	

Test Mode: UNII-3/TX A Mode 5785MHz


Vertical

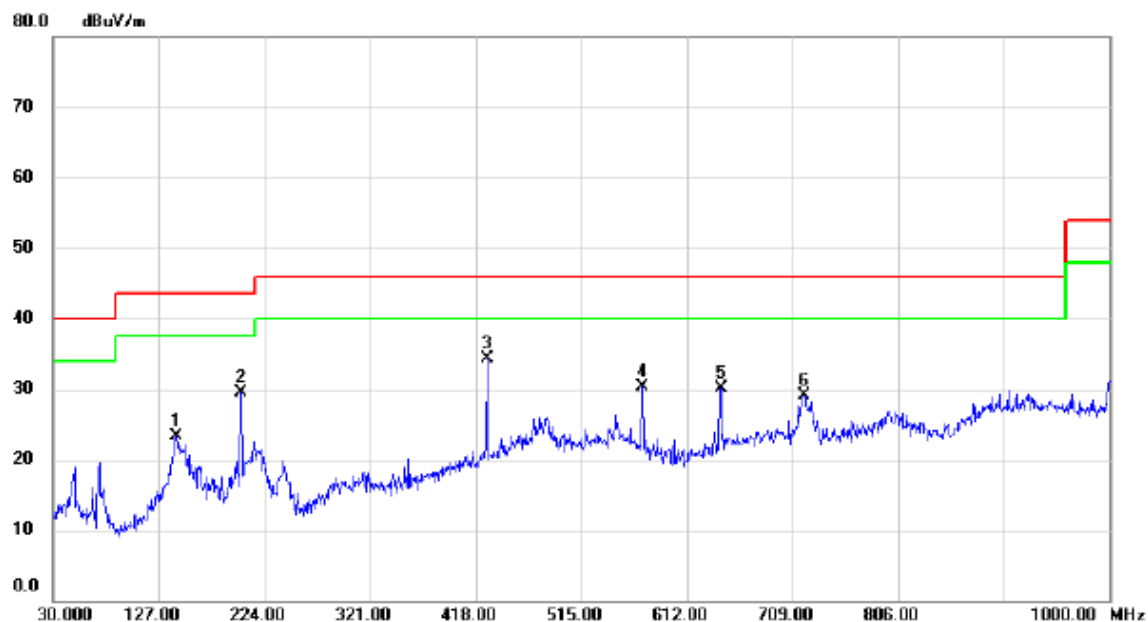

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		142.5200	37.13	-13.81	23.32	43.50	-20.18	peak	
2		202.6600	44.59	-15.06	29.53	43.50	-13.97	peak	
3	*	428.6700	42.89	-8.59	34.30	46.00	-11.70	peak	
4		571.2600	36.69	-6.30	30.39	46.00	-15.61	peak	
5		643.0400	35.55	-5.49	30.06	46.00	-15.94	peak	
6		719.6700	33.54	-4.36	29.18	46.00	-16.82	peak	

Test Mode: UNII-3/TX A Mode 5785MHz


Horizontal

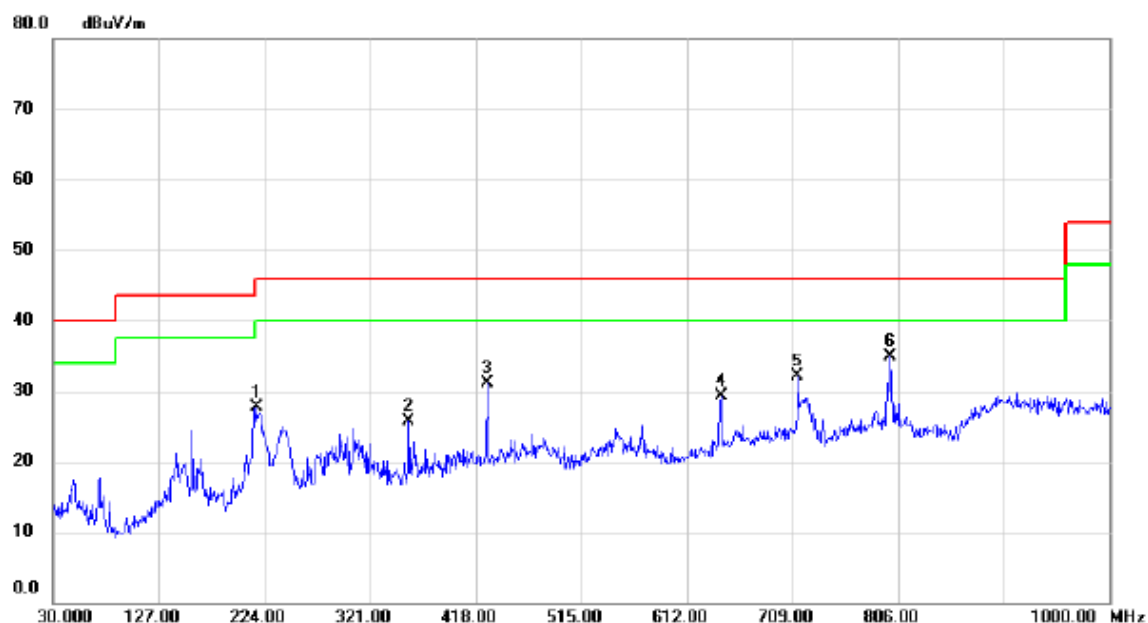

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		216.2400	42.17	-14.51	27.66	46.00	-18.34	peak	
2		356.8900	36.78	-11.05	25.73	46.00	-20.27	peak	
3		428.6700	39.78	-8.59	31.19	46.00	-14.81	peak	
4		643.0400	34.72	-5.49	29.23	46.00	-16.77	peak	
5		713.8500	36.48	-4.31	32.17	46.00	-13.83	peak	
6	*	799.2100	36.93	-2.11	34.82	46.00	-11.18	peak	

Test Mode: UNII-3/TX A Mode 5825MHz


Vertical

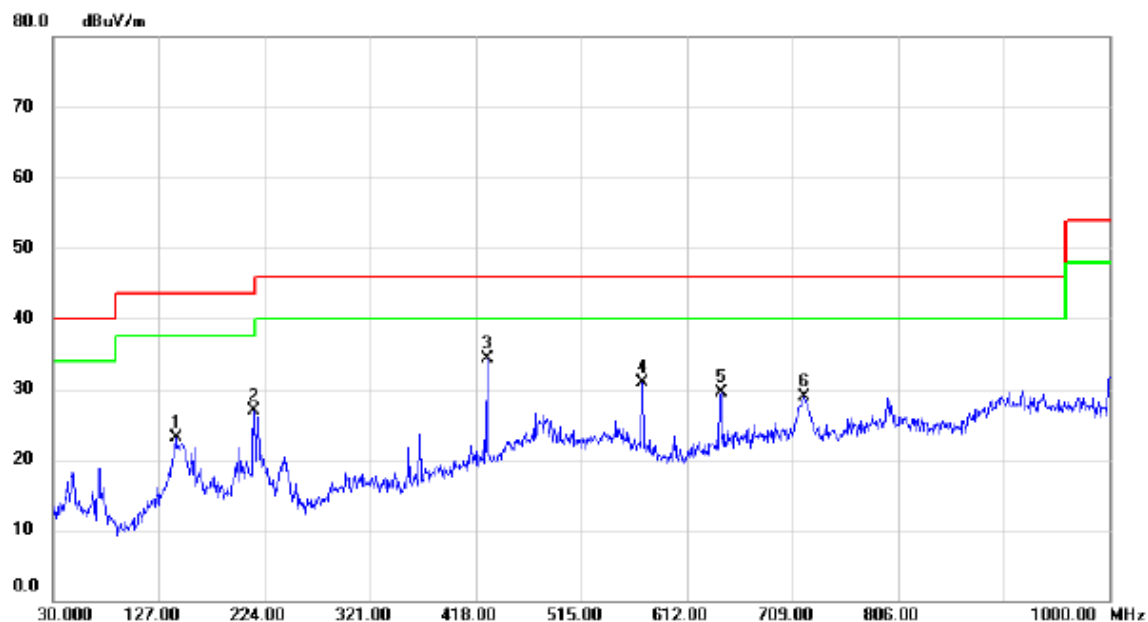

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		142.5200	36.94	-13.81	23.13	43.50	-20.37	peak	
2		214.3000	41.58	-14.62	26.96	43.50	-16.54	peak	
3	*	428.6700	42.82	-8.59	34.23	46.00	-11.77	peak	
4		571.2600	37.26	-6.30	30.96	46.00	-15.04	peak	
5		643.0400	35.01	-5.49	29.52	46.00	-16.48	peak	
6		719.6700	33.33	-4.36	28.97	46.00	-17.03	peak	

Test Mode: UNII-3/TX A Mode 5825MHz

Horizontal

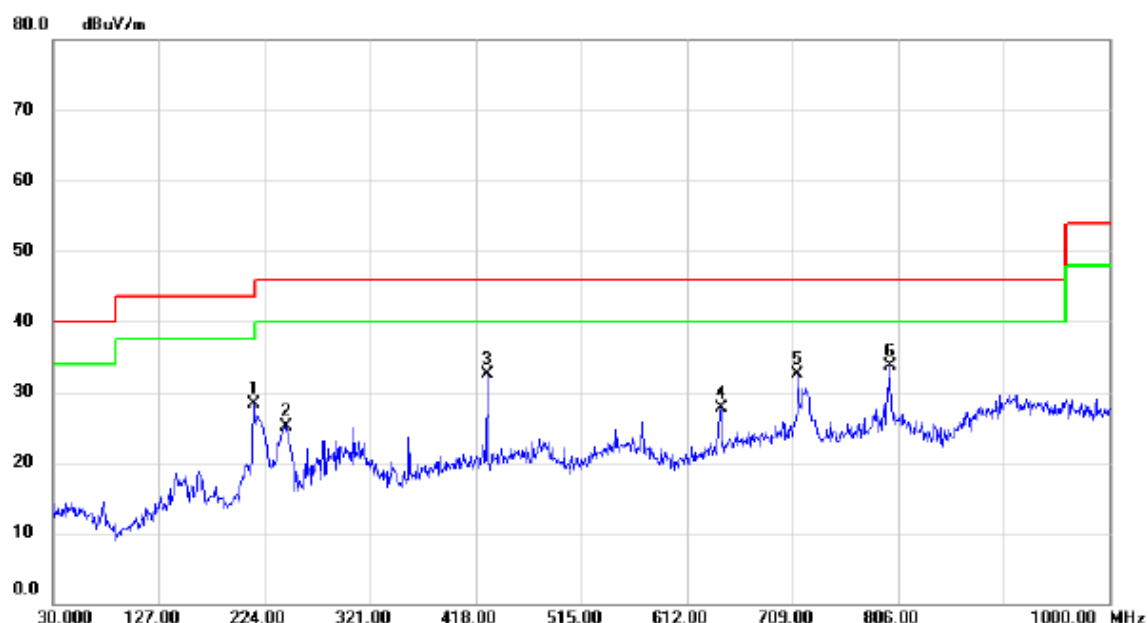


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		214.3000	42.96	-14.62	28.34	43.50	-15.16	peak	
2		243.4000	39.29	-14.20	25.09	46.00	-20.91	peak	
3		428.6700	41.02	-8.59	32.43	46.00	-13.57	peak	
4		643.0400	33.11	-5.49	27.62	46.00	-18.38	peak	
5		713.8500	36.73	-4.31	32.42	46.00	-13.58	peak	
6	*	798.2400	35.83	-2.16	33.67	46.00	-12.33	peak	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Vertical

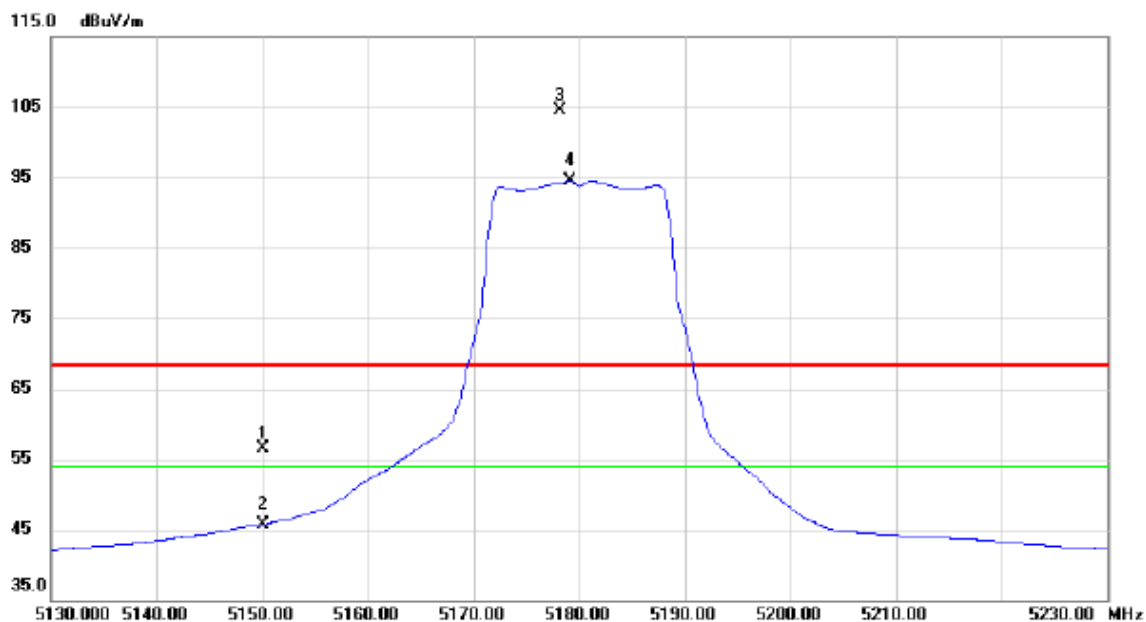


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	16.28	40.22	56.50	68.30	-11.80	peak	
2		5150.000	5.42	40.22	45.64	54.00	-8.36	AVG	
3	X	5178.200	64.22	40.28	104.50	68.30	36.20	peak	No Limit
4	*	5179.200	54.28	40.28	94.56	54.00	40.56	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Vertical

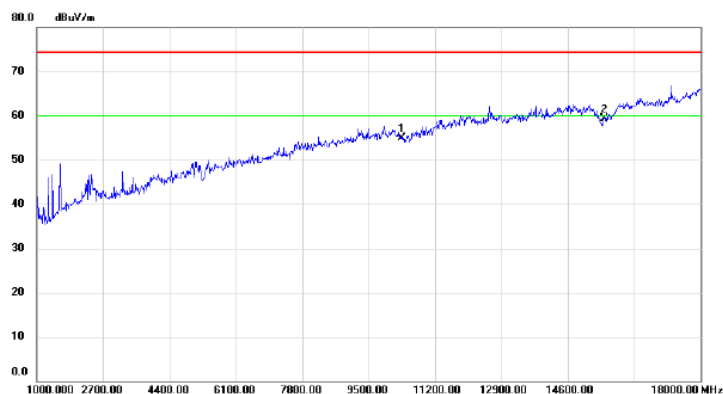

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10360.00	41.02	13.85	54.87	74.30	-19.43	peak	
2	*	15540.00	42.52	16.85	59.37	74.30	-14.93	peak	

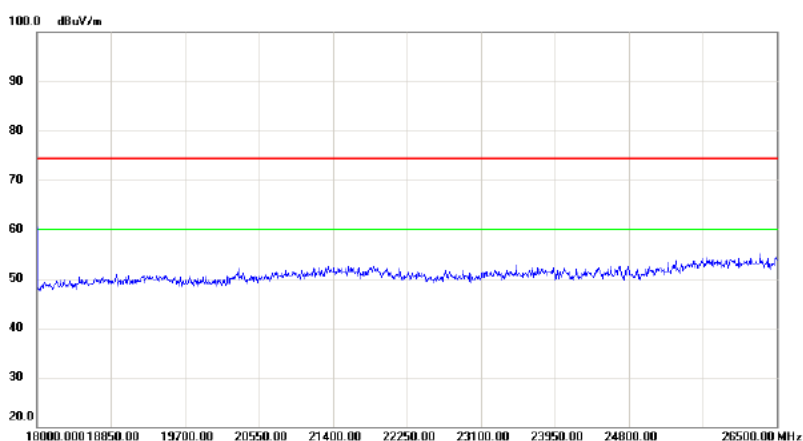


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

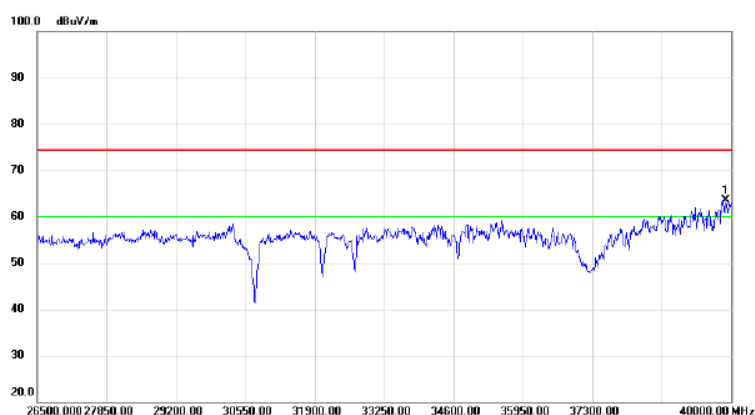

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39892.00	46.20	17.34	63.54	74.30	-10.76	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Horizontal

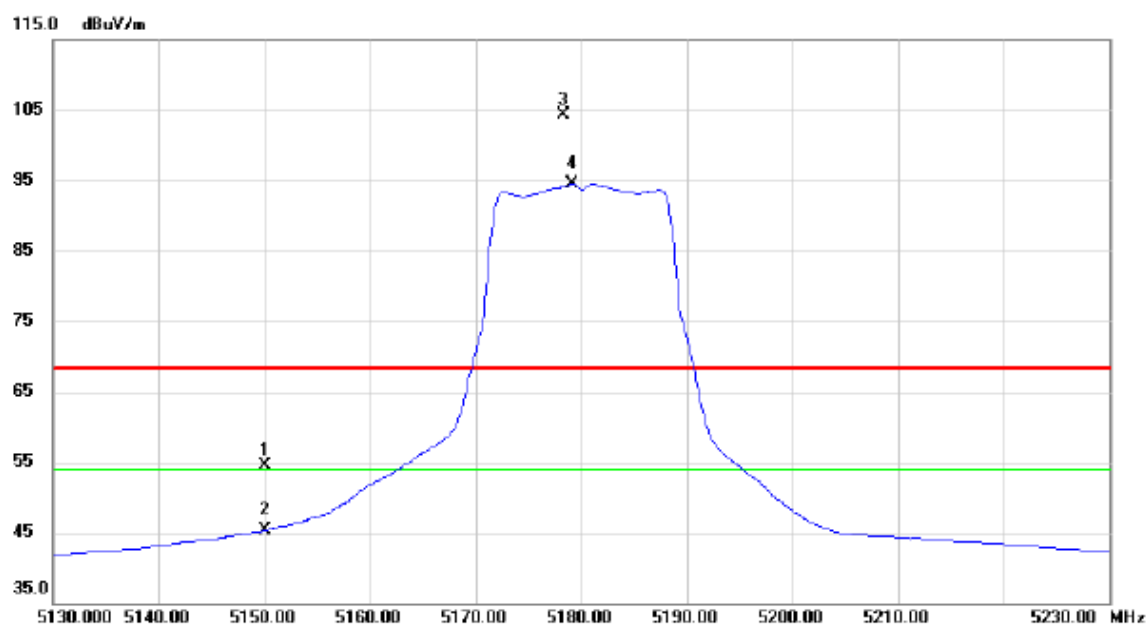


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	14.29	40.22	54.51	68.30	-13.79	peak	
2		5150.000	5.02	40.22	45.24	54.00	-8.76	AVG	
3	X	5178.300	64.08	40.28	104.36	68.30	36.06	peak	No Limit
4	*	5179.100	54.20	40.28	94.48	54.00	40.48	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Horizontal

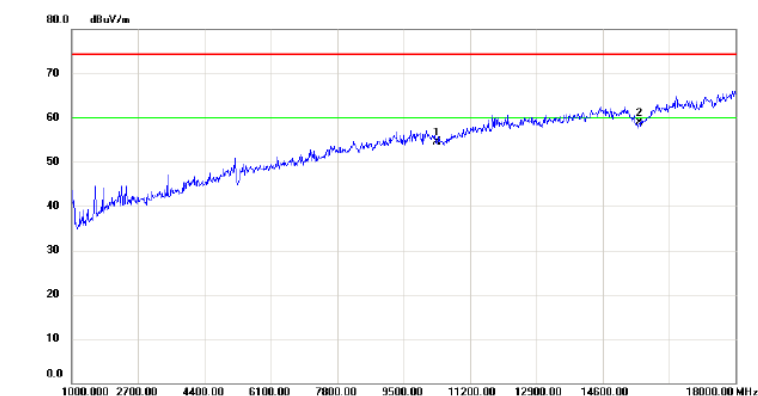

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10360.00	40.62	13.85	54.47	74.30	-19.83	peak	
2	*	15540.00	41.96	16.85	58.81	74.30	-15.49	peak	

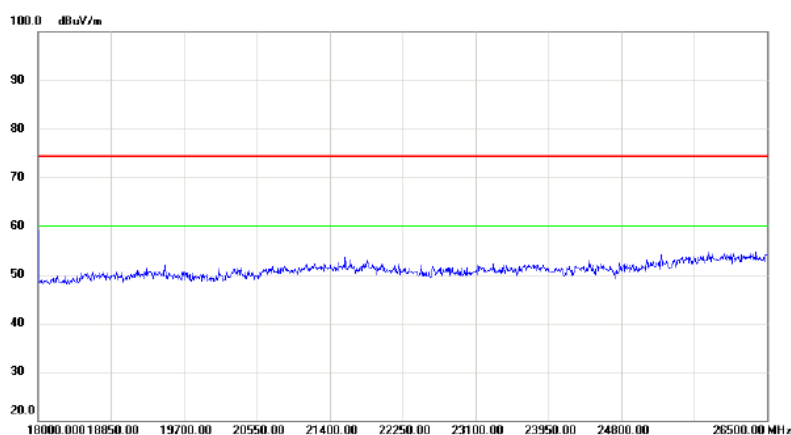


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

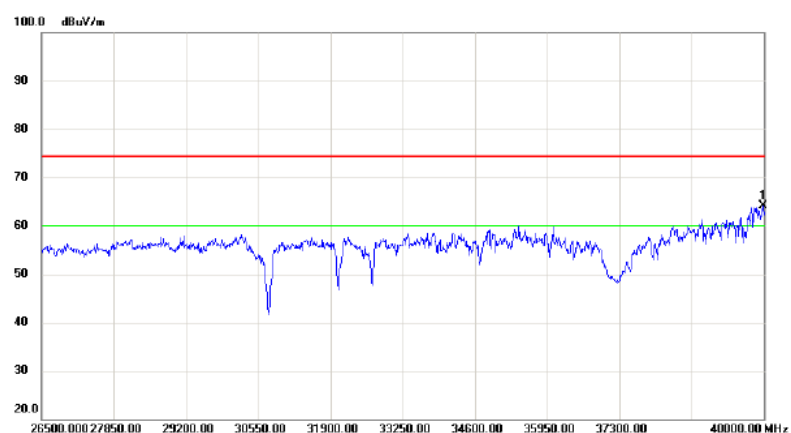

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39986.50	46.59	17.56	64.15	74.30	-10.15	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz


Vertical

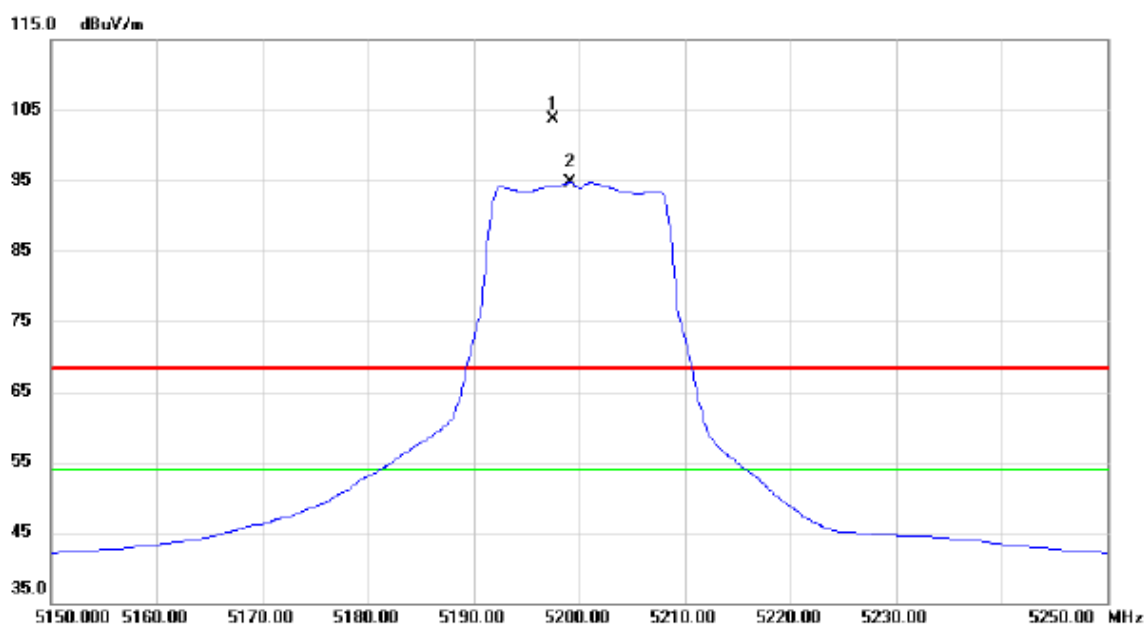


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5197.500	63.43	40.31	103.74	68.30	35.44	peak	No Limit
2	*	5199.100	54.35	40.32	94.67	54.00	40.67	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz


Vertical

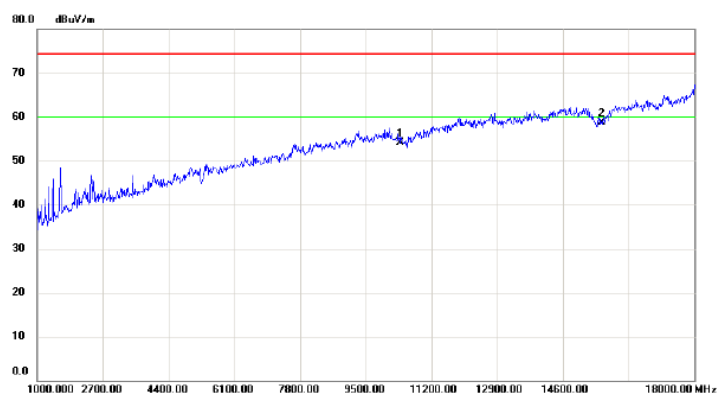

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10400.00	40.22	13.80	54.02	74.30	-20.28	peak	
2	*	15600.00	41.60	17.16	58.76	74.30	-15.54	peak	

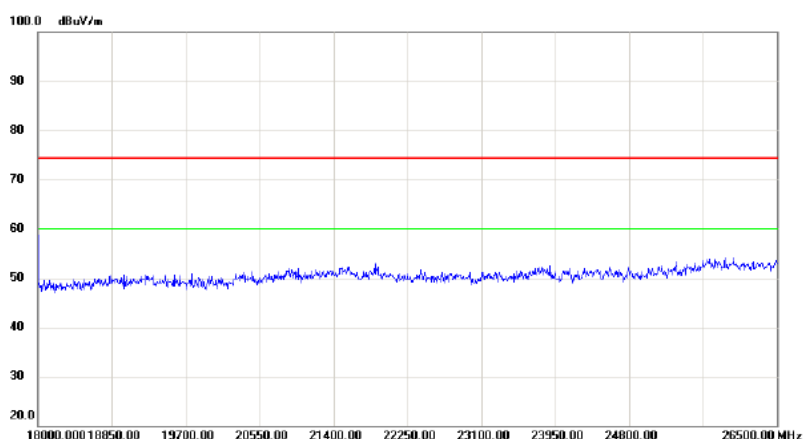


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

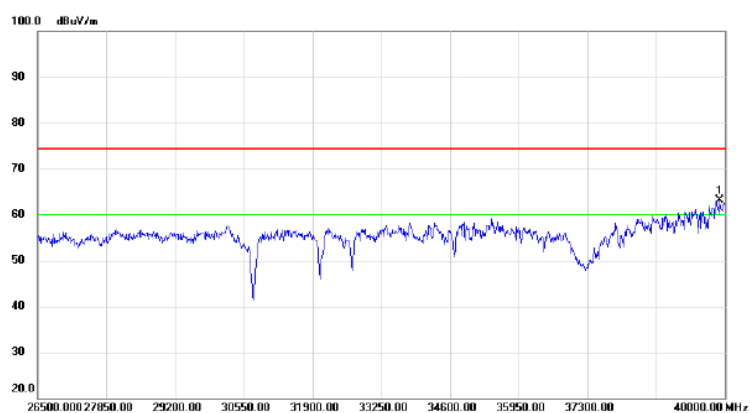

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39905.50	45.69	17.37	63.06	74.30	-11.24	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz


Horizontal

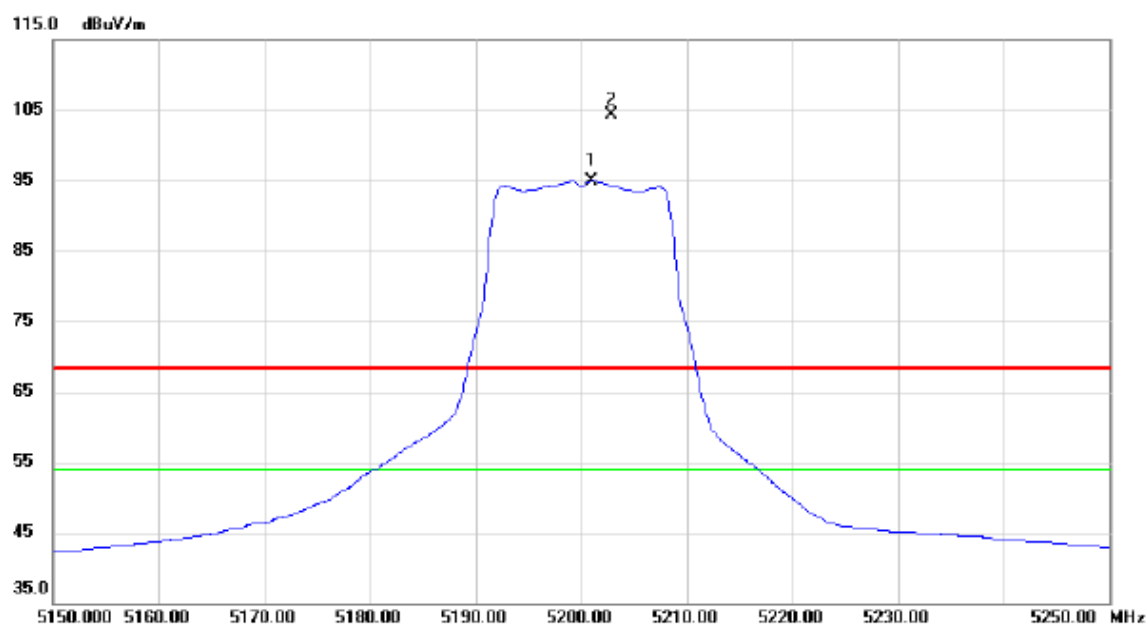


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5201.000	54.56	40.32	94.88	54.00	40.88	AVG	No Limit
2	X	5202.900	63.96	40.33	104.29	68.30	35.99	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz


Horizontal

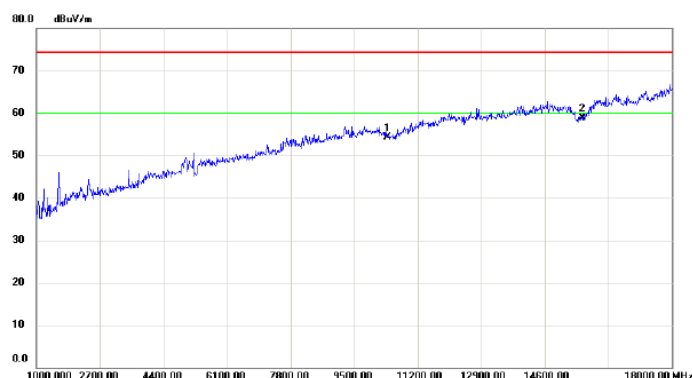

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10400.00	40.52	13.80	54.32	74.30	-19.98	peak	
2	*	15600.00	41.79	17.16	58.95	74.30	-15.35	peak	

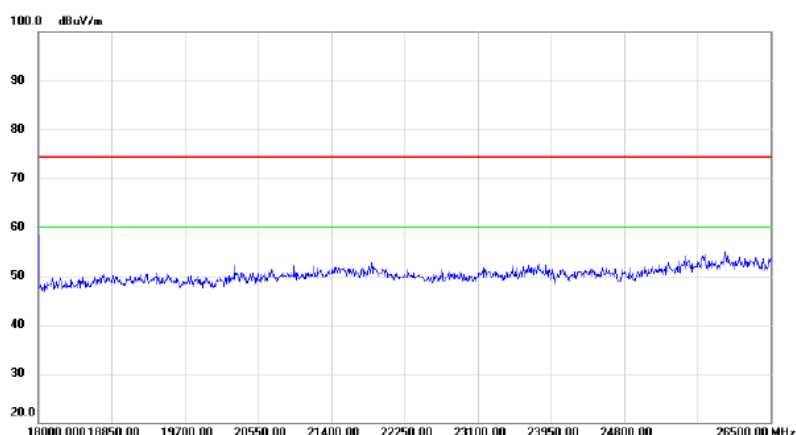


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

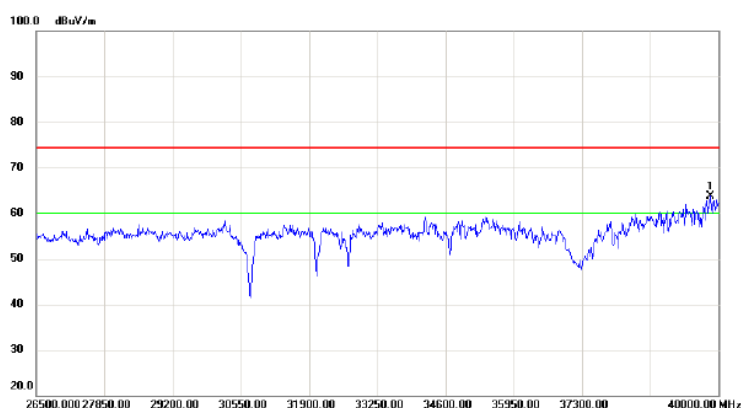

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39838.00	46.59	17.21	63.80	74.30	-10.50	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Vertical

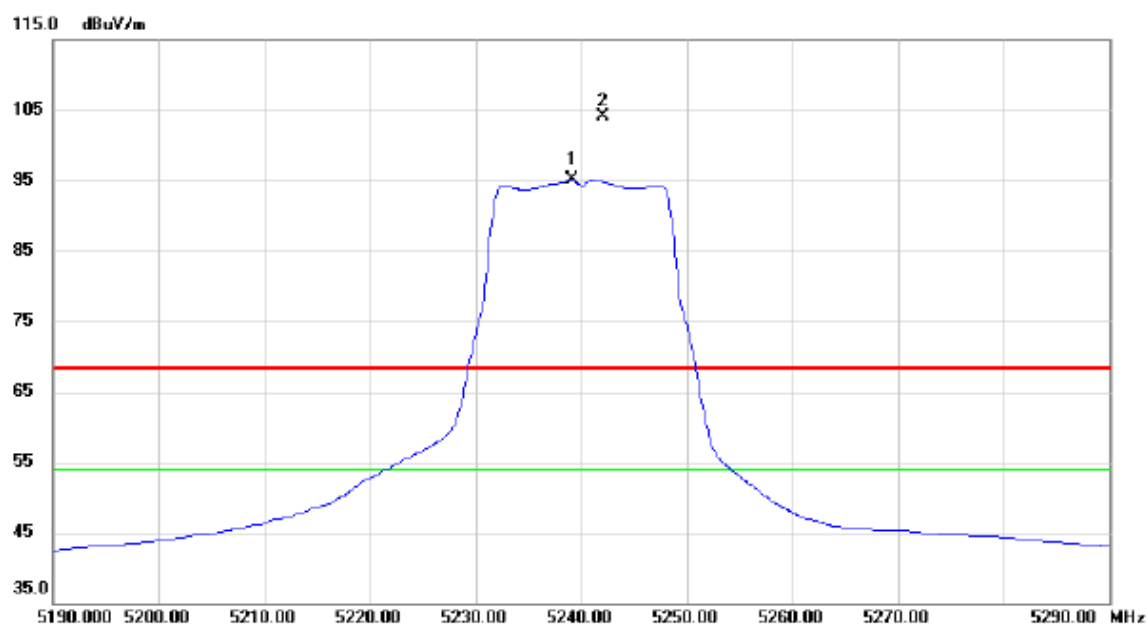


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5239.100	54.65	40.40	95.05	54.00	41.05	AVG	No Limit
2	X	5242.000	63.78	40.41	104.19	68.30	35.89	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Vertical

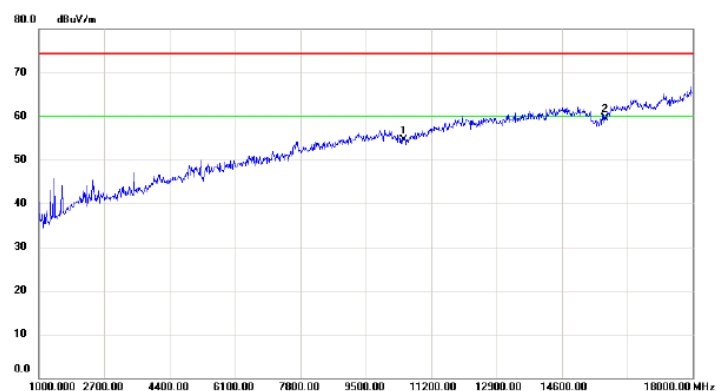

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10480.00	40.78	13.69	54.47	74.30	-19.83	peak	
2	*	15720.00	41.65	17.78	59.43	74.30	-14.87	peak	

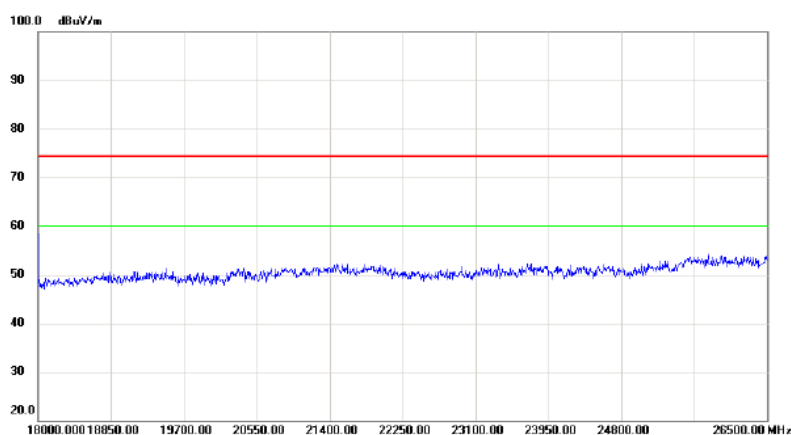


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

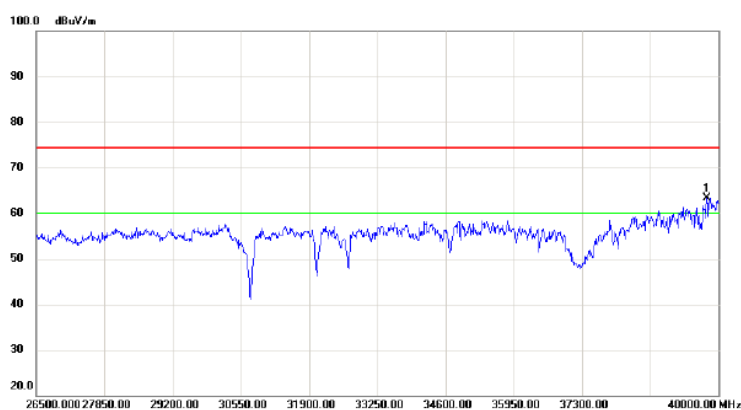

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39770.50	46.27	17.03	63.30	74.30	-11.00	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Horizontal

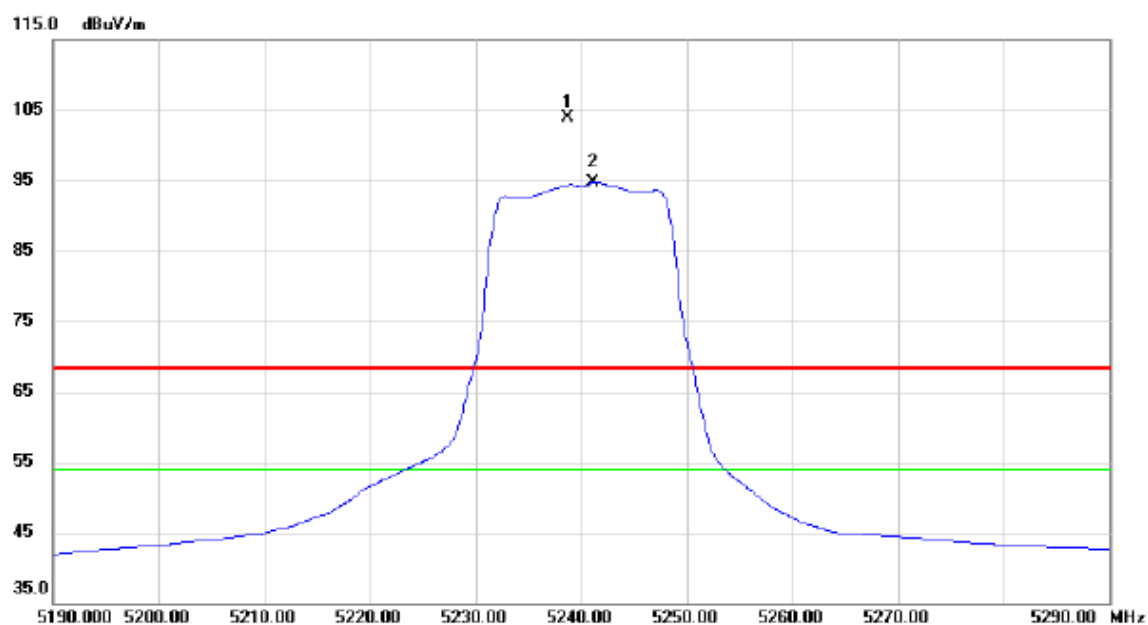


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5238.700	63.45	40.40	103.85	68.30	35.55	peak	No Limit
2	*	5241.200	54.29	40.41	94.70	54.00	40.70	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Horizontal

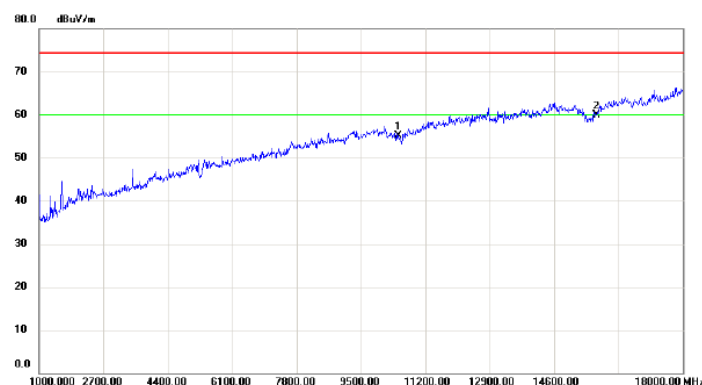

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10480.00	41.39	13.69	55.08	74.30	-19.22	peak	
2	*	15720.00	42.13	17.78	59.91	74.30	-14.39	peak	

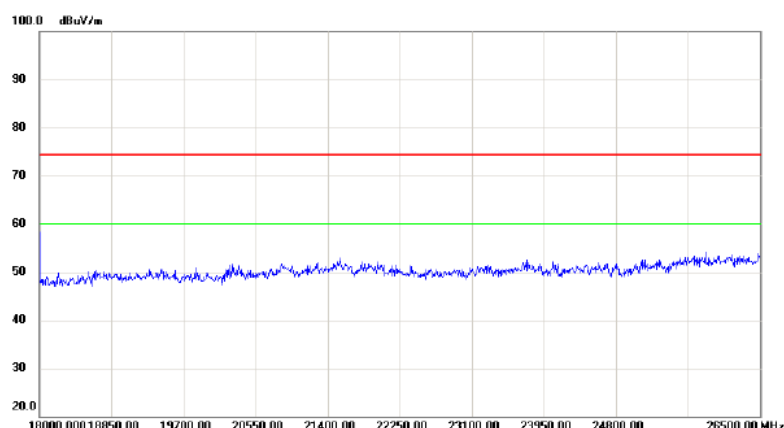


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

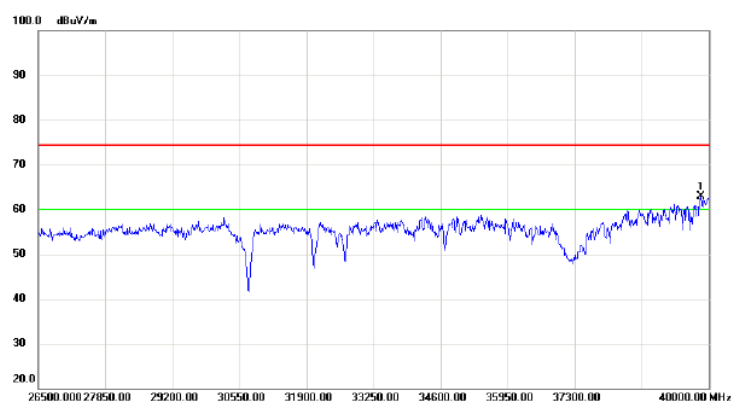

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39851.50	45.77	17.23	63.00	74.30	-11.30	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Vertical

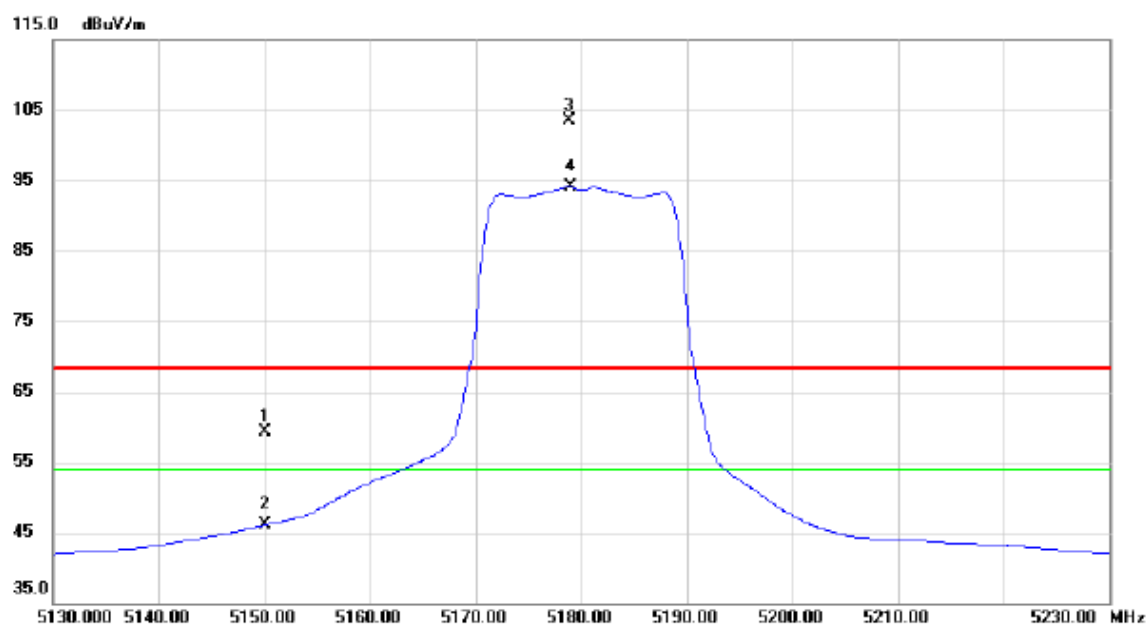


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	19.01	40.22	59.23	68.30	-9.07	peak	
2		5150.000	5.84	40.22	46.06	54.00	-7.94	AVG	
3	X	5178.800	63.25	40.28	103.53	68.30	35.23	peak	No Limit
4	*	5179.000	53.84	40.28	94.12	54.00	40.12	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Vertical

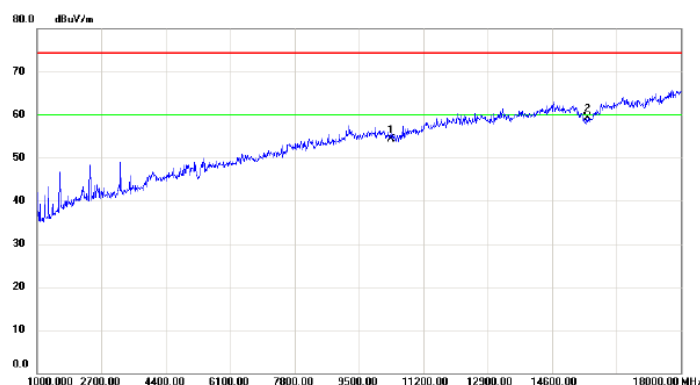

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10360.00	40.50	13.85	54.35	74.30	-19.95	peak	
2	*	15540.00	42.42	16.85	59.27	74.30	-15.03	peak	

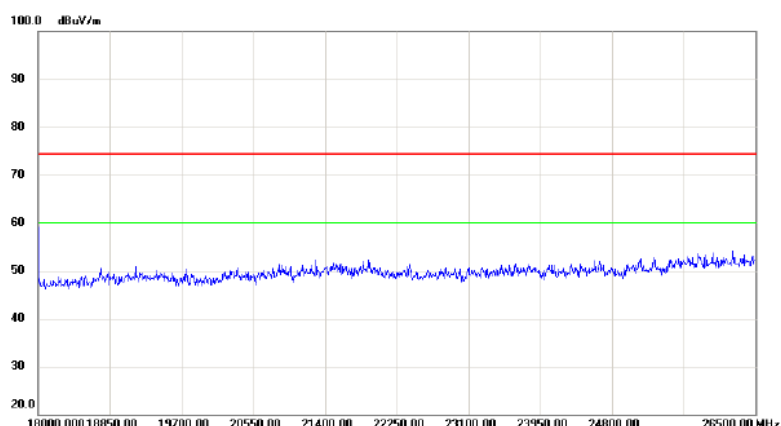


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

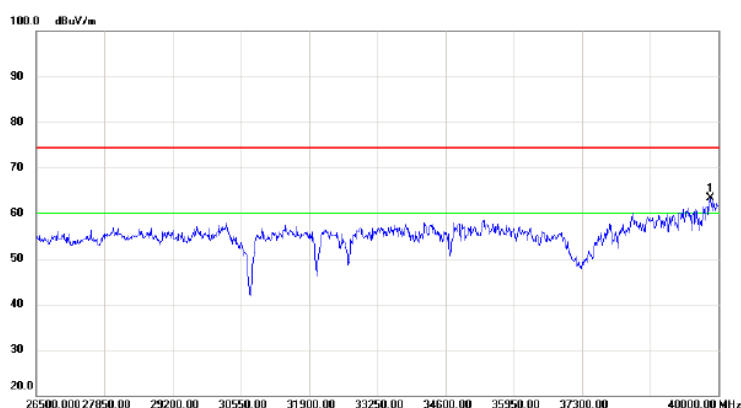

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39838.00	46.01	17.21	63.22	74.30	-11.08	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Horizontal

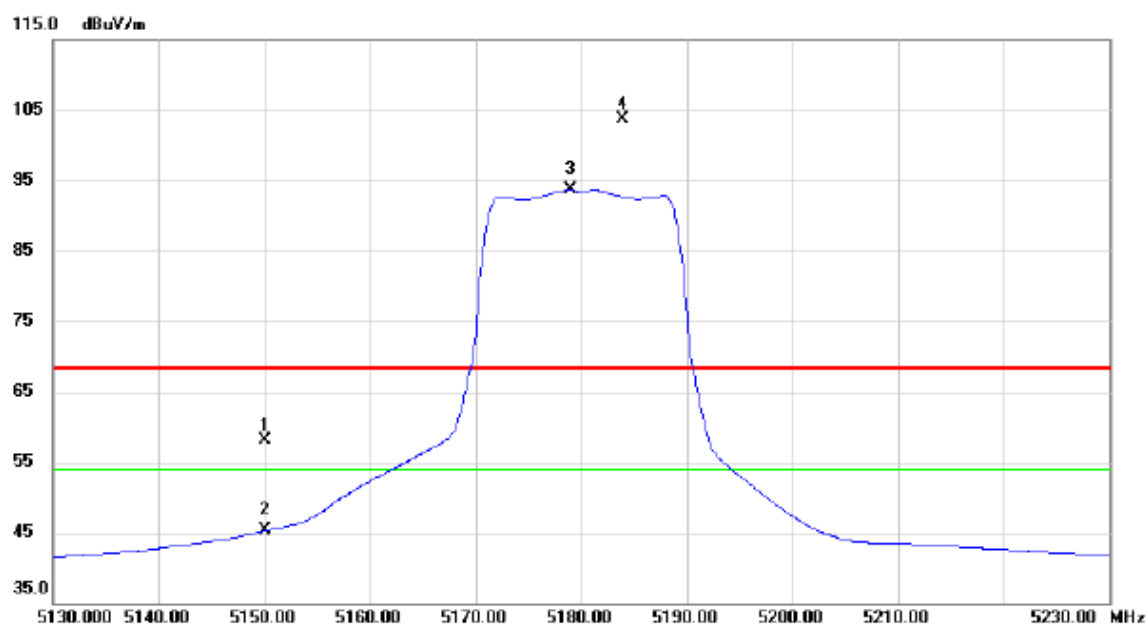


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	17.89	40.22	58.11	68.30	-10.19	peak	
2		5150.000	5.02	40.22	45.24	54.00	-8.76	AVG	
3	*	5179.000	53.50	40.28	93.78	54.00	39.78	AVG	No Limit
4	X	5183.900	63.40	40.29	103.69	68.30	35.39	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Horizontal

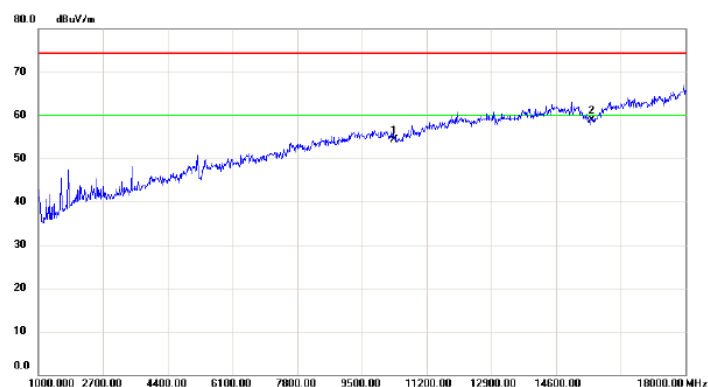

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10360.00	40.40	13.85	54.25	74.30	-20.05	peak	
2	*	15540.00	42.10	16.85	58.95	74.30	-15.35	peak	

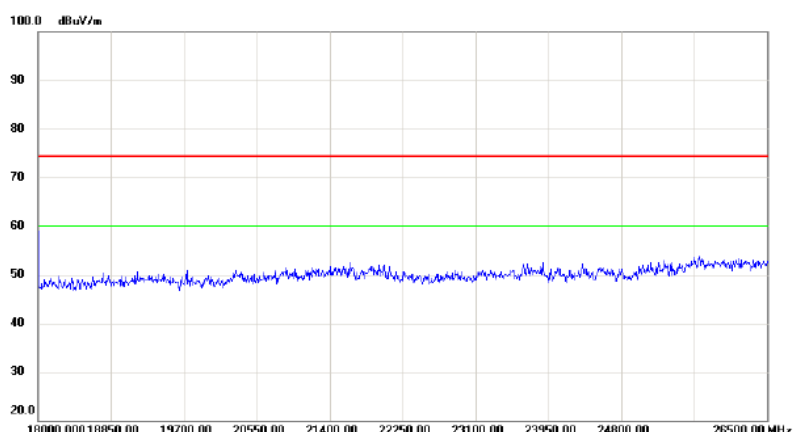


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

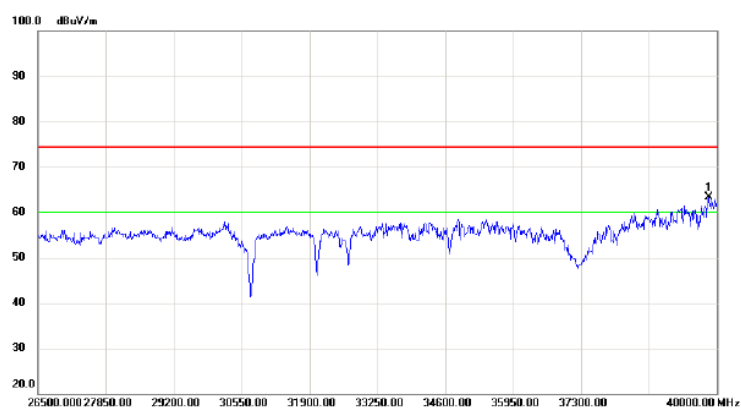

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39838.00	46.13	17.21	63.34	74.30	-10.96	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz




Vertical

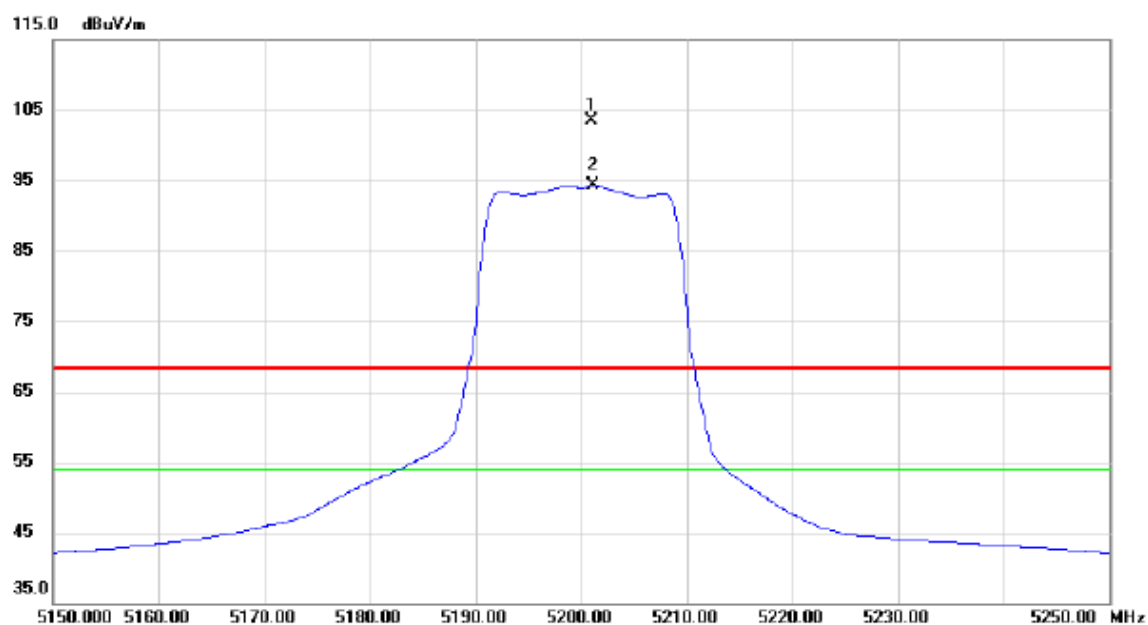

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5201.000	63.26	40.32	103.58	68.30	35.28	peak	No Limit
2	*	5201.100	54.07	40.32	94.39	54.00	40.39	AVG	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz

Vertical

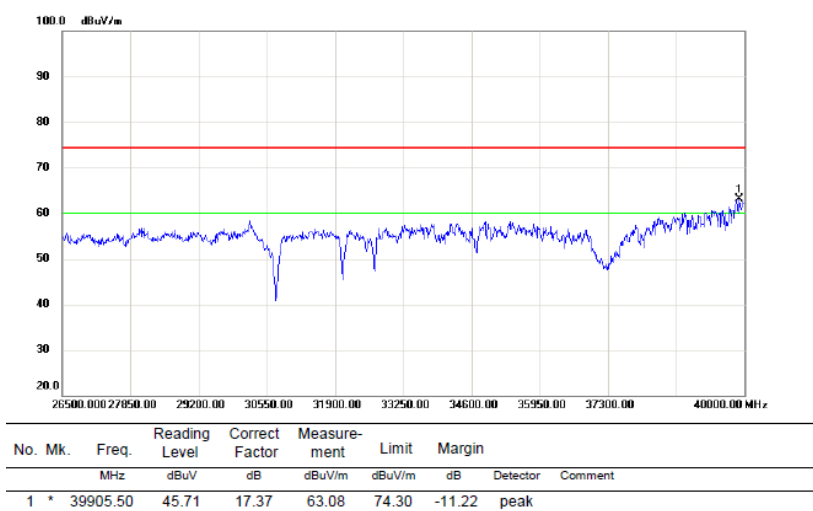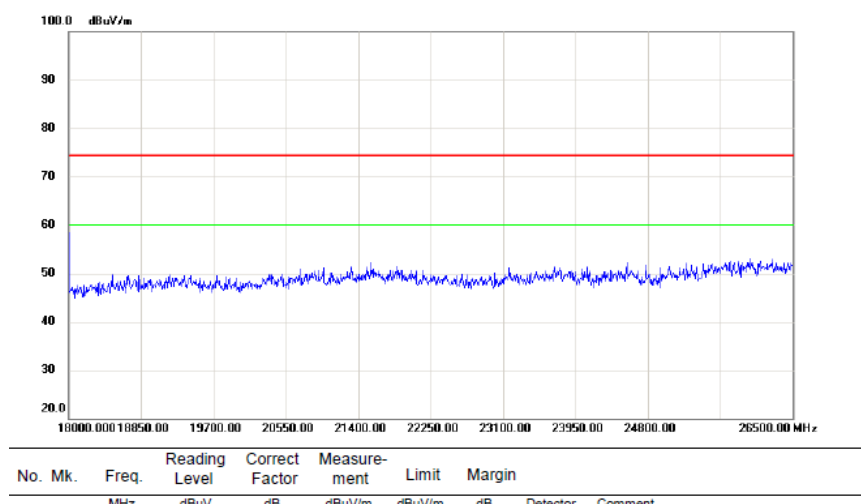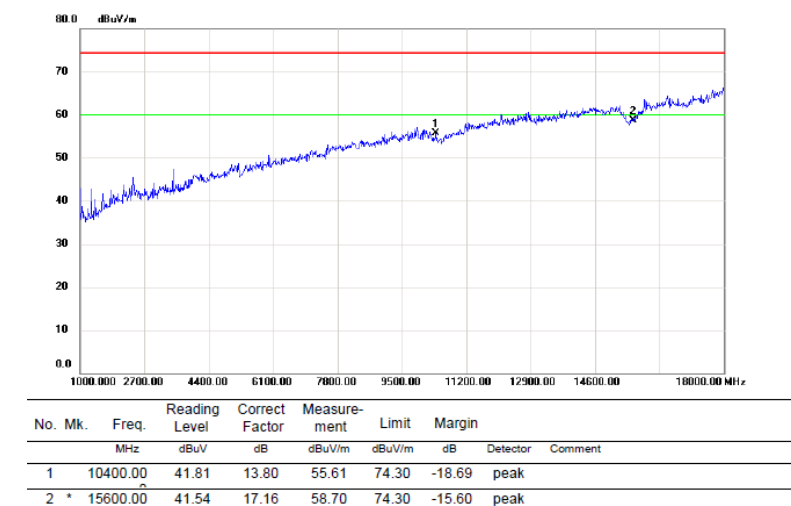

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Horizontal

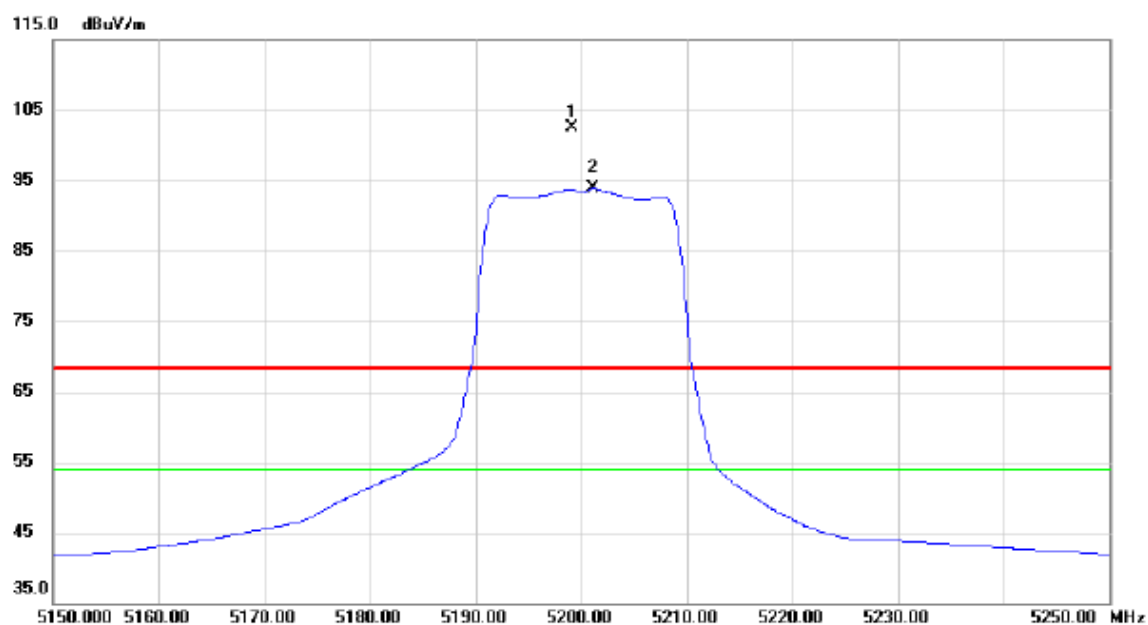


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5199.100	62.28	40.32	102.60	68.30	34.30	peak	No Limit
2	*	5201.100	53.53	40.32	93.85	54.00	39.85	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Horizontal

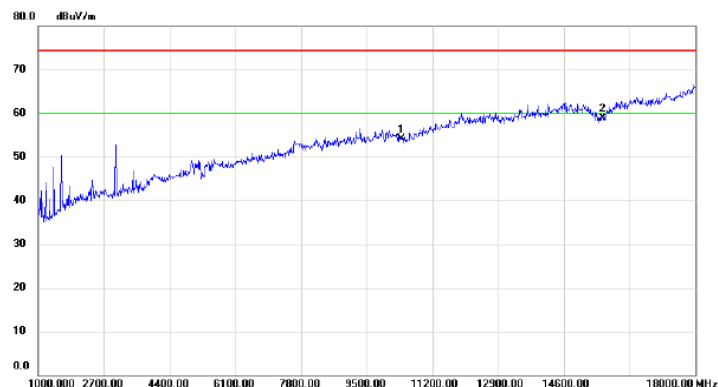

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10400.00	40.26	13.80	54.06	74.30	-20.24	peak	
2	*	15600.00	41.73	17.16	58.89	74.30	-15.41	peak	

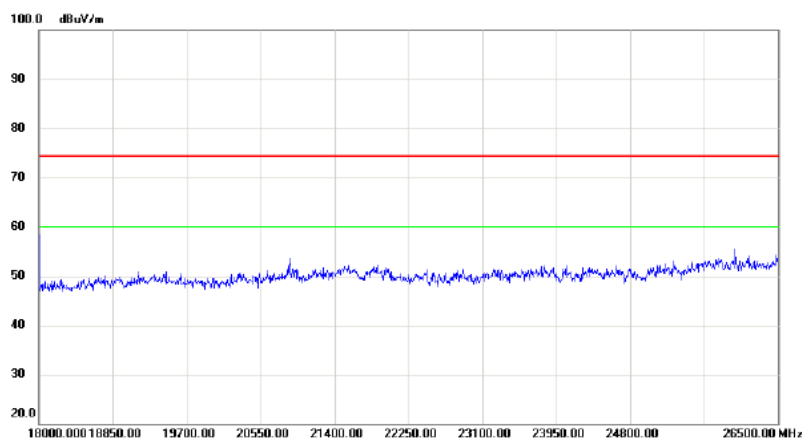


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

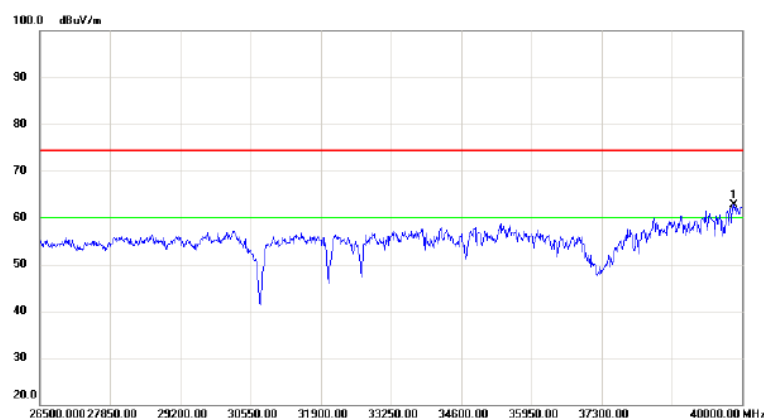

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39838.00	45.59	17.21	62.80	74.30	-11.50	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz




Vertical

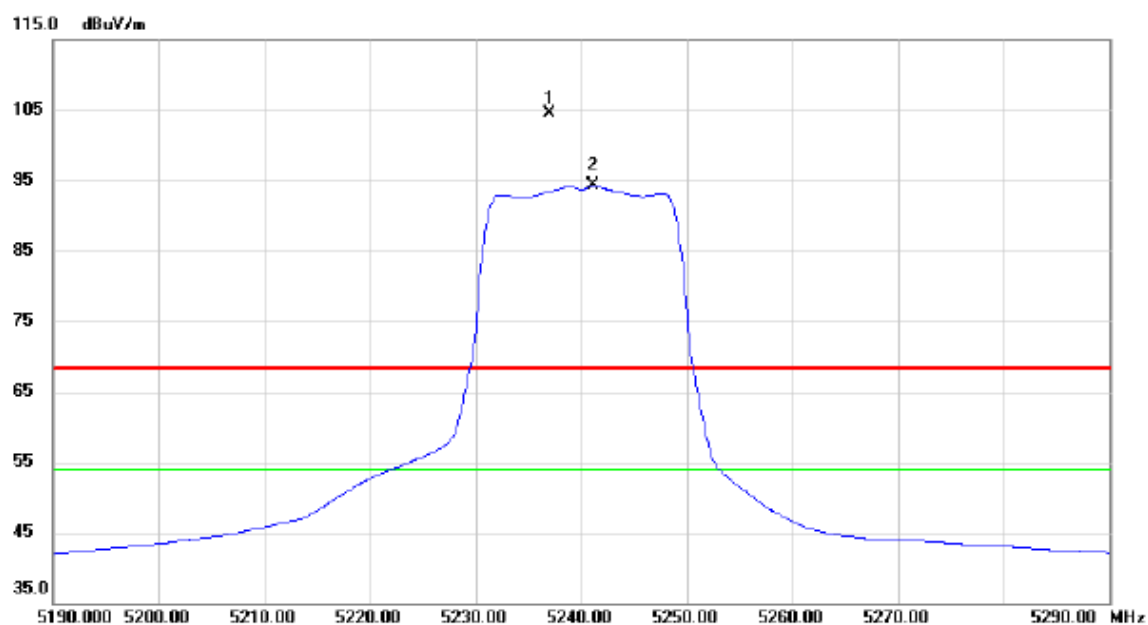

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5237.000	64.13	40.40	104.53	68.30	36.23	peak	No Limit
2	*	5241.100	53.82	40.41	94.23	54.00	40.23	AVG	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

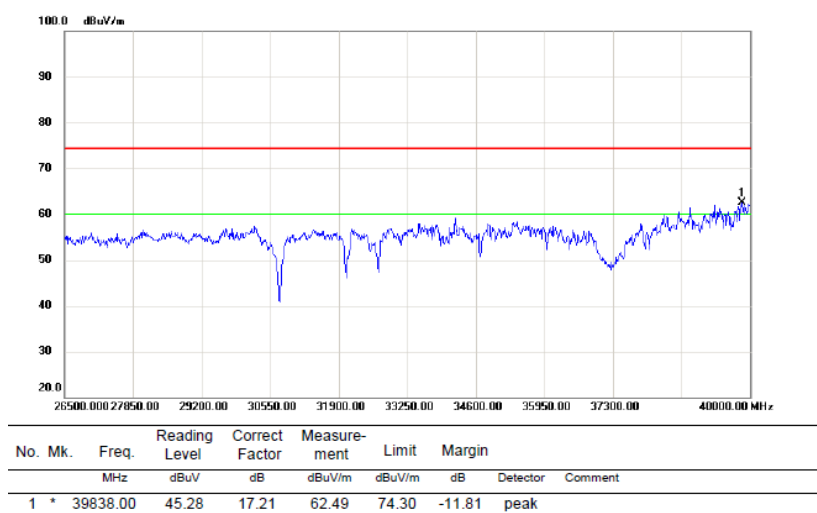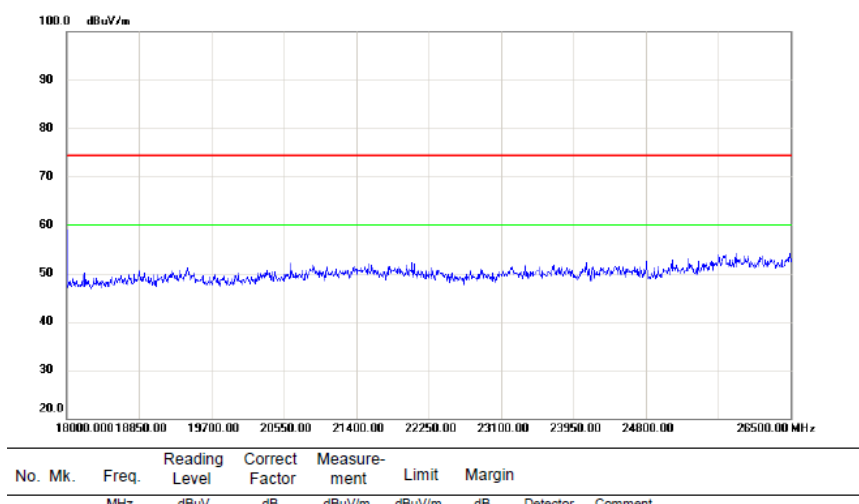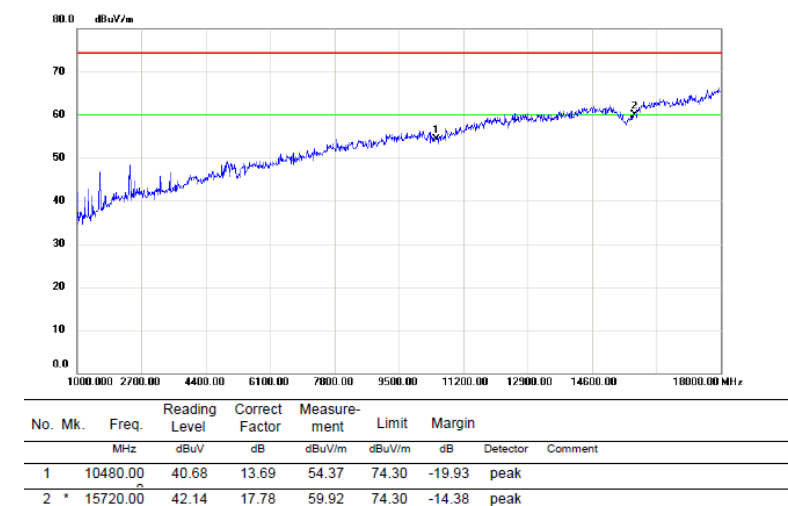

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

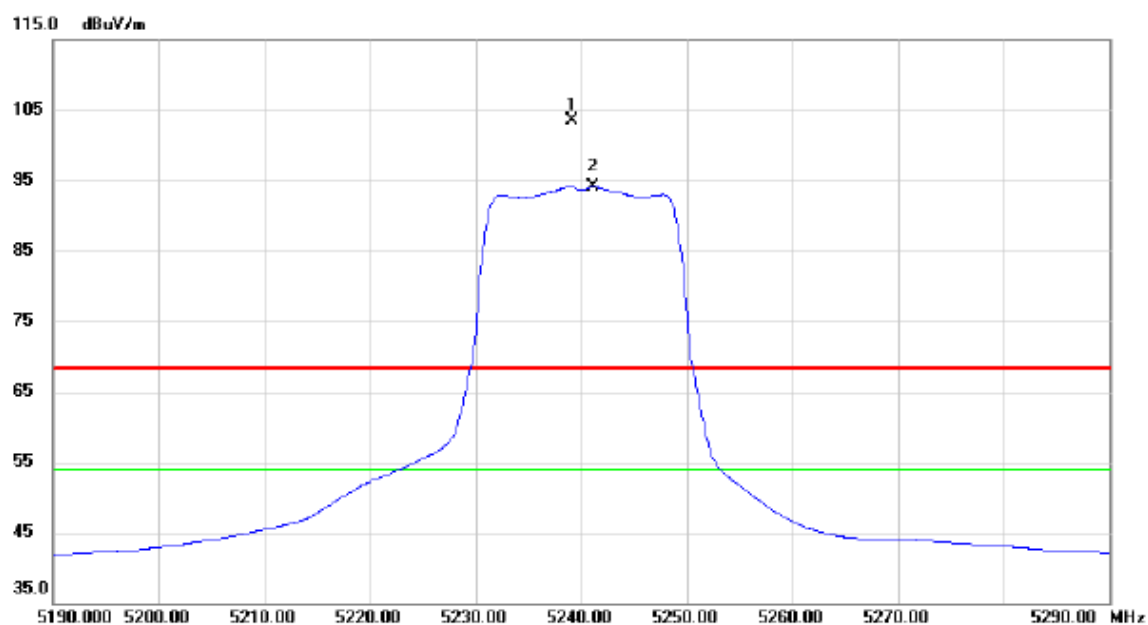


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5239.100	63.01	40.40	103.41	68.30	35.11	peak	No Limit
2	*	5241.100	53.74	40.41	94.15	54.00	40.15	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

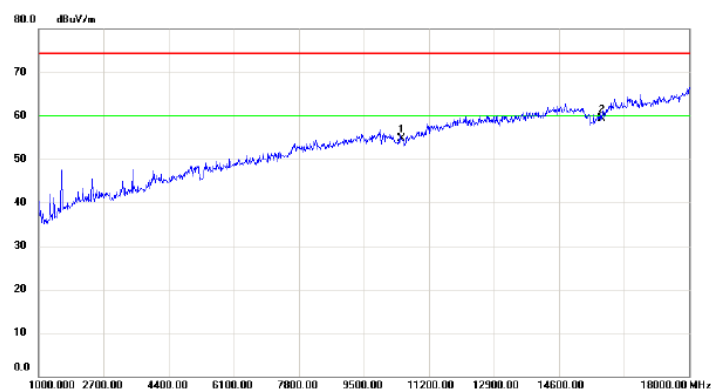

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		10480.00	41.08	13.69	54.77	74.30	-19.53	peak	
2	*	15720.00	41.53	17.78	59.31	74.30	-14.99	peak	

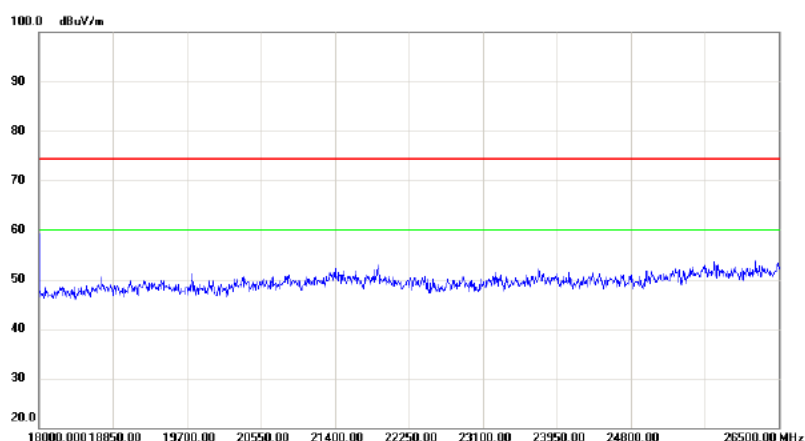


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		

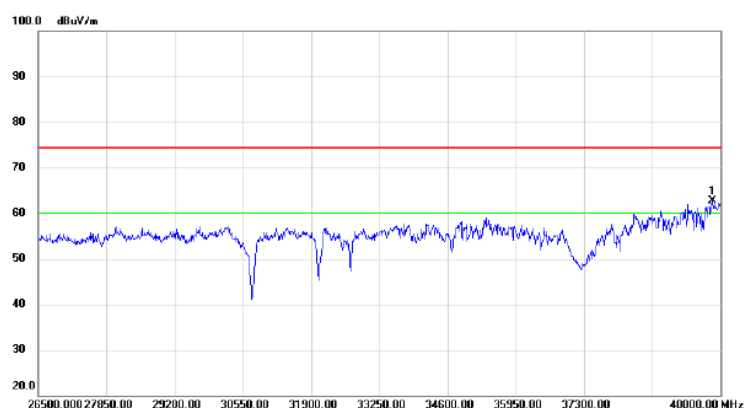

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39851.50	45.52	17.23	62.75	74.30	-11.55	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz




Vertical

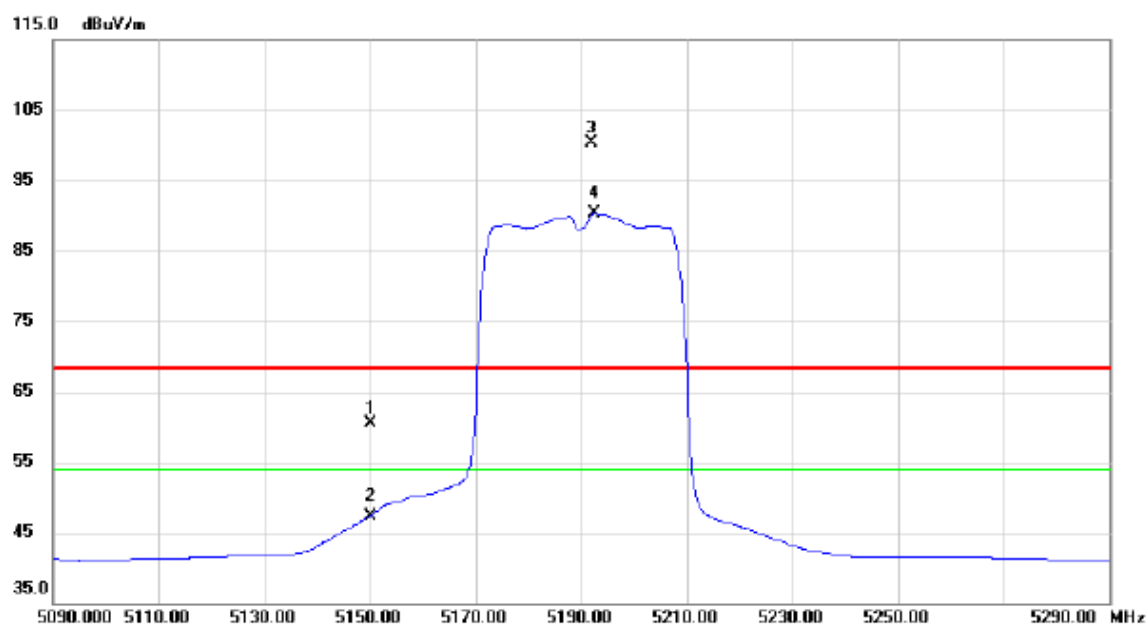

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	20.30	40.22	60.52	68.30	-7.78	peak	
2		5150.000	7.12	40.22	47.34	54.00	-6.66	AVG	
3	X	5192.000	60.08	40.31	100.39	68.30	32.09	peak	No Limit
4	*	5192.600	49.92	40.31	90.23	54.00	36.23	AVG	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

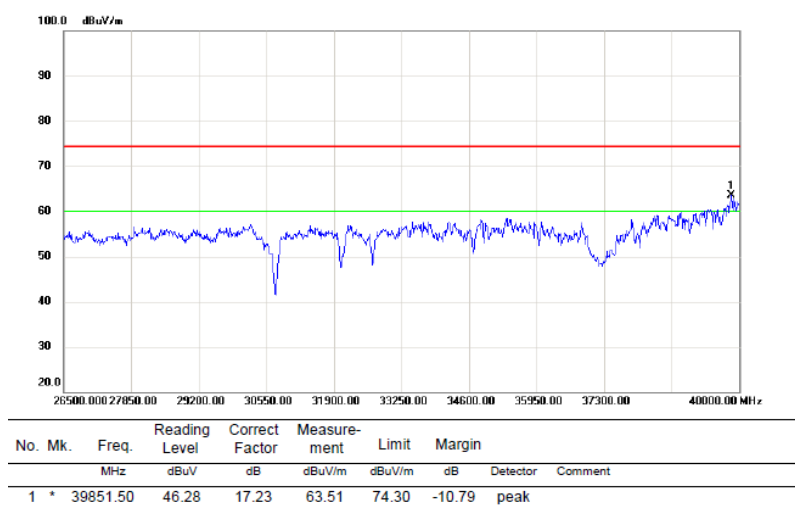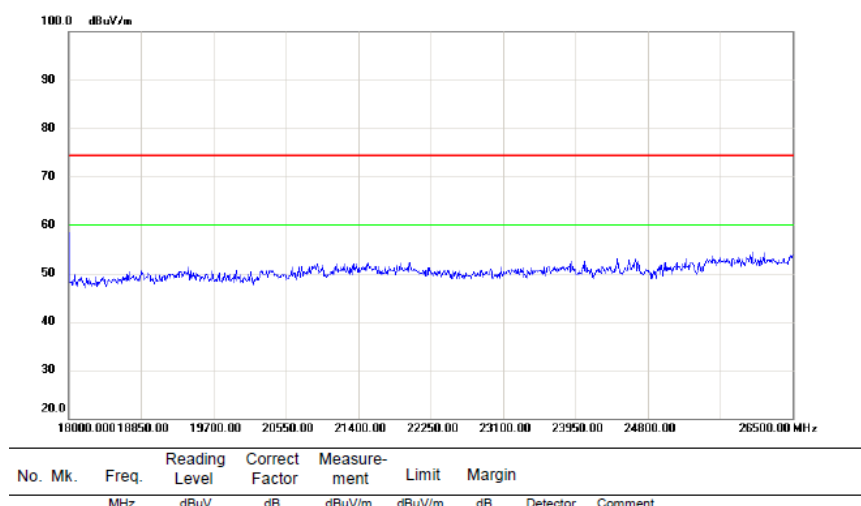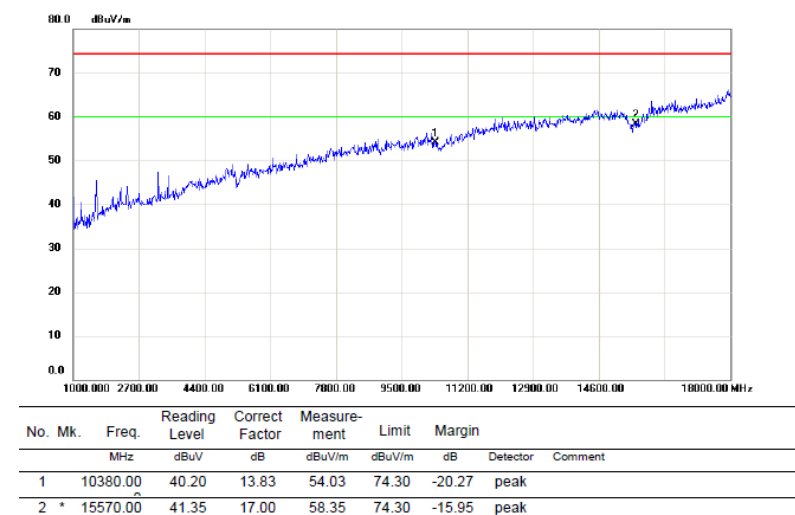

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

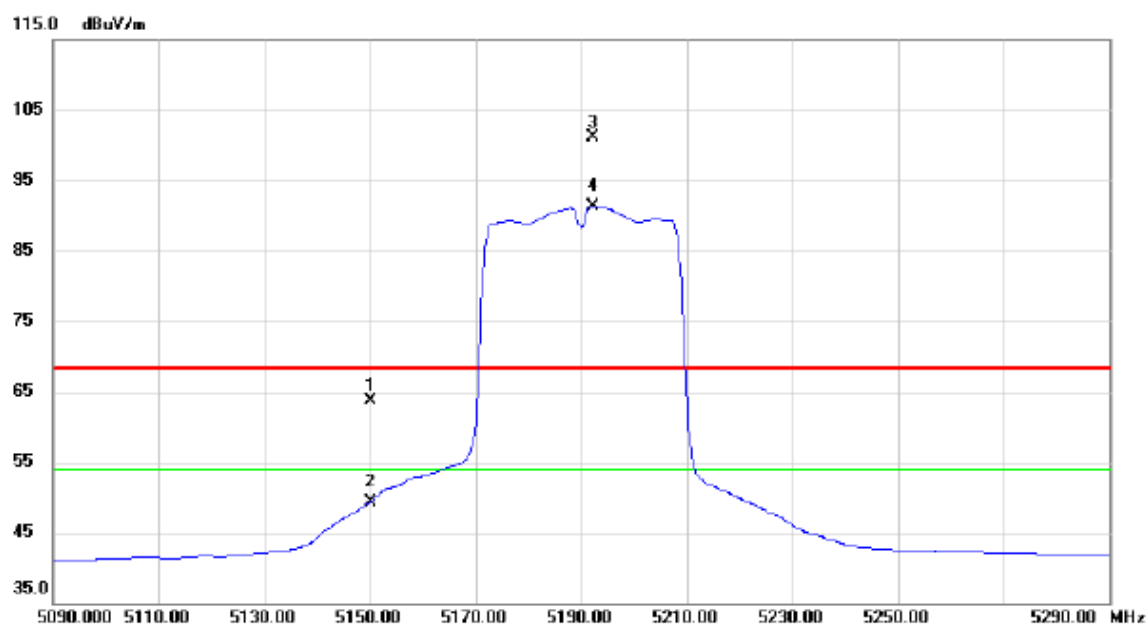


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	23.49	40.22	63.71	68.30	-4.59	peak	
2		5150.000	9.11	40.22	49.33	54.00	-4.67	AVG	
3	X	5192.200	60.81	40.31	101.12	68.30	32.82	peak	No Limit
4	*	5192.200	51.03	40.31	91.34	54.00	37.34	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

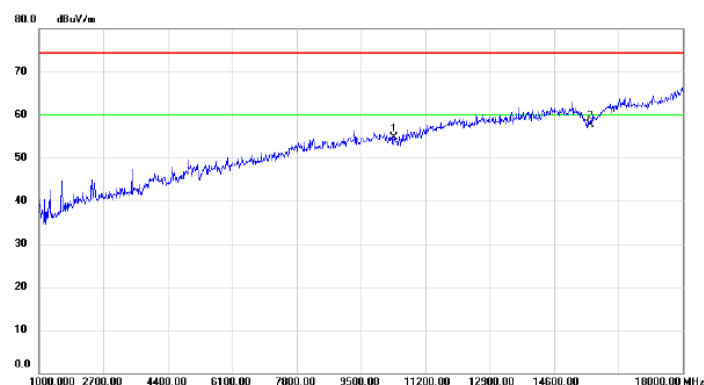

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10380.00	40.94	13.83	54.77	74.30	-19.53	peak	
2	*	15570.00	40.64	17.00	57.64	74.30	-16.66	peak	

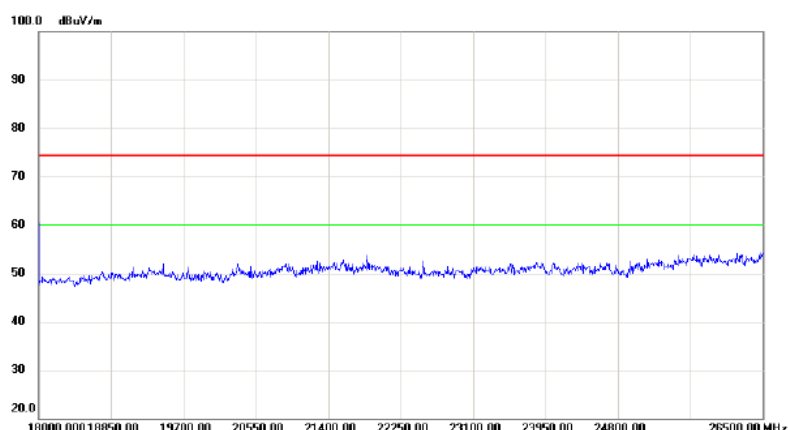


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

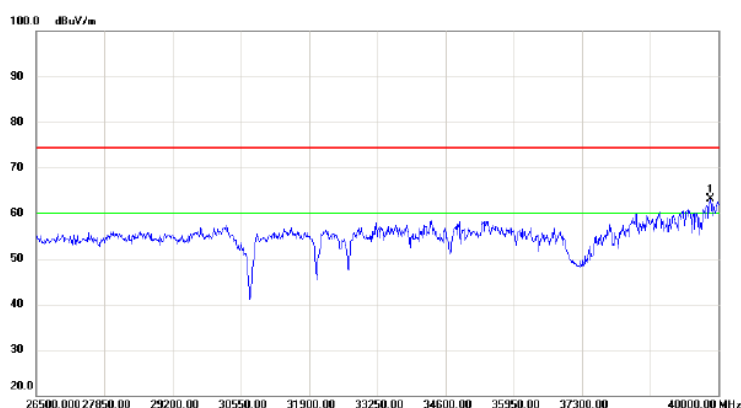

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39838.00	45.89	17.21	63.10	74.30	-11.20	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

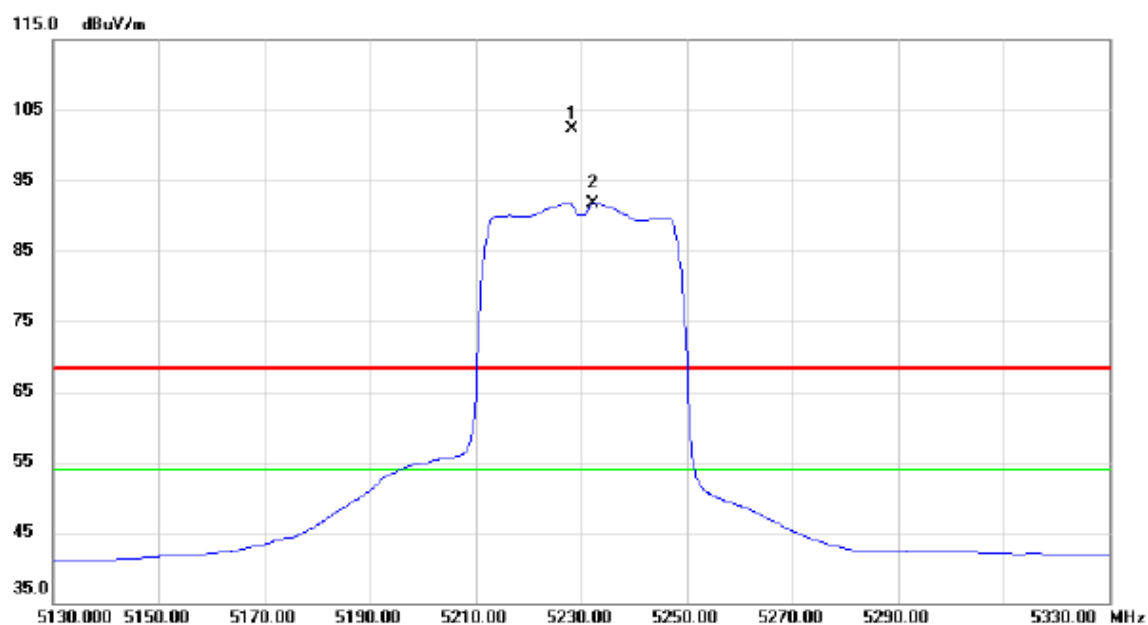


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5228.200	61.94	40.39	102.33	68.30	34.03	peak	No Limit
2	*	5232.400	51.40	40.39	91.79	54.00	37.79	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

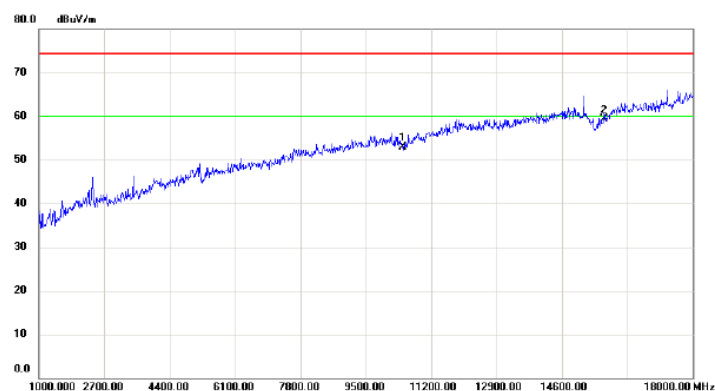

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10460.00	39.17	13.71	52.88	74.30	-21.42	peak	
2	*	15690.00	41.65	17.63	59.28	74.30	-15.02	peak	

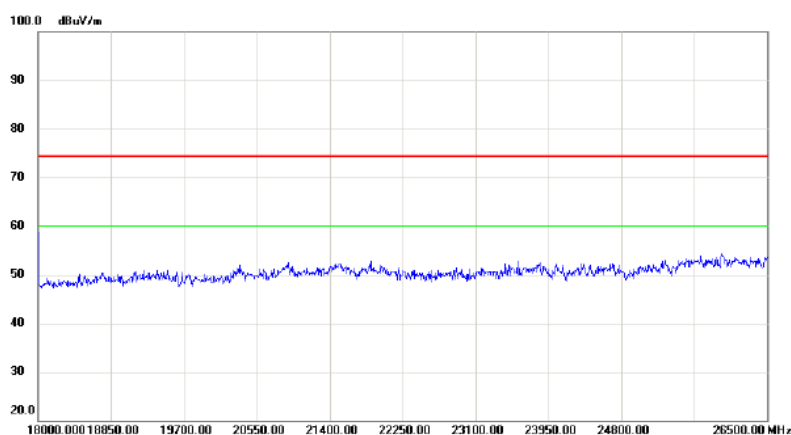


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

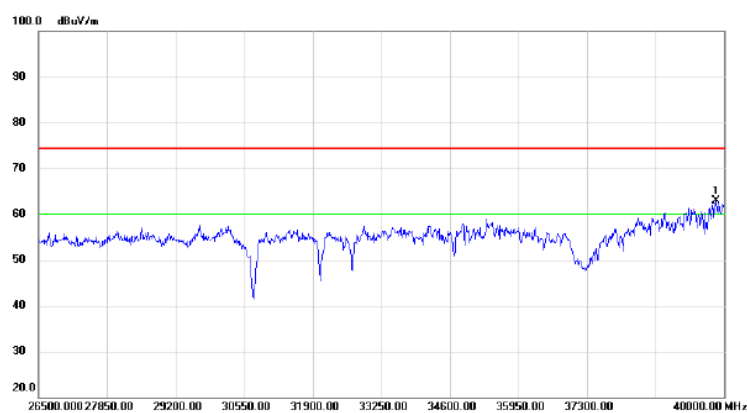

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39851.50	45.63	17.23	62.86	74.30	-11.44	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

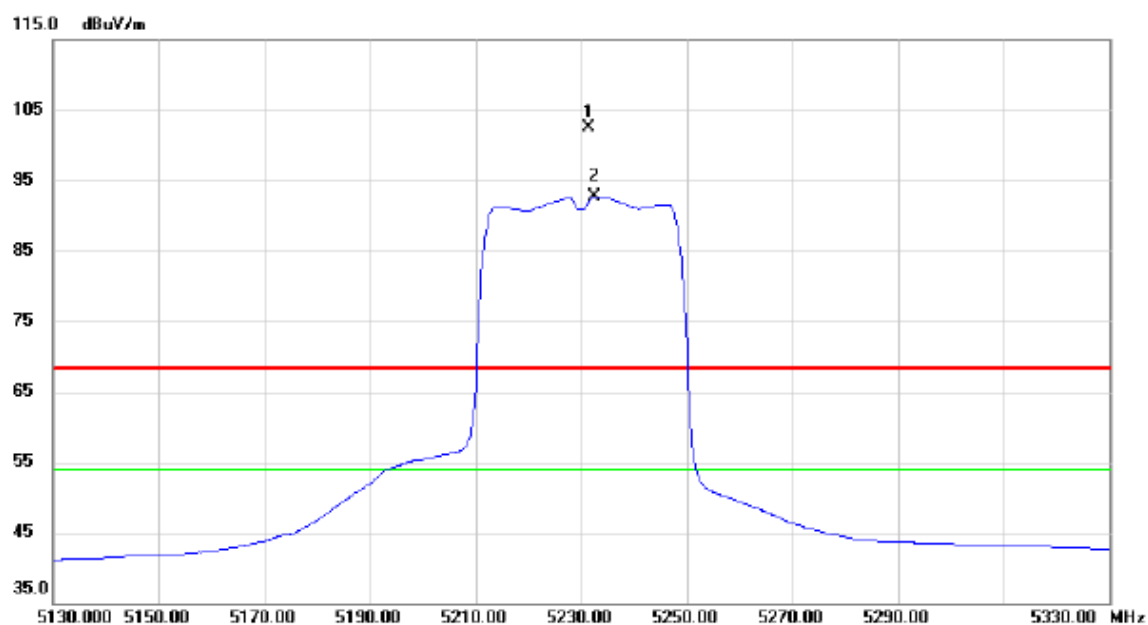


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5231.400	62.07	40.40	102.47	68.30	34.17	peak	No Limit
2	*	5232.600	52.38	40.39	92.77	54.00	38.77	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

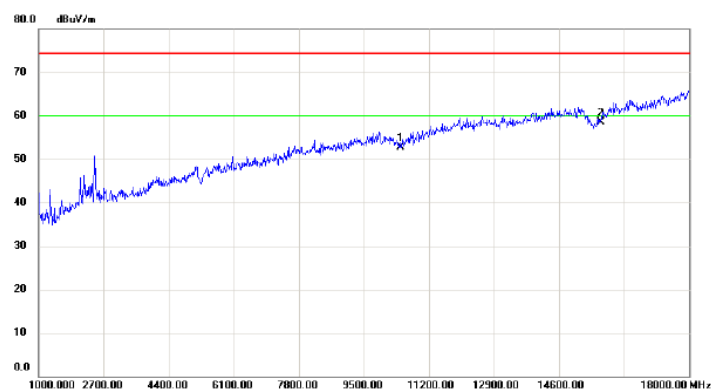

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		10460.00	39.06	13.71	52.77	74.30	-21.53	peak	
2	*	15690.00	40.87	17.63	58.50	74.30	-15.80	peak	

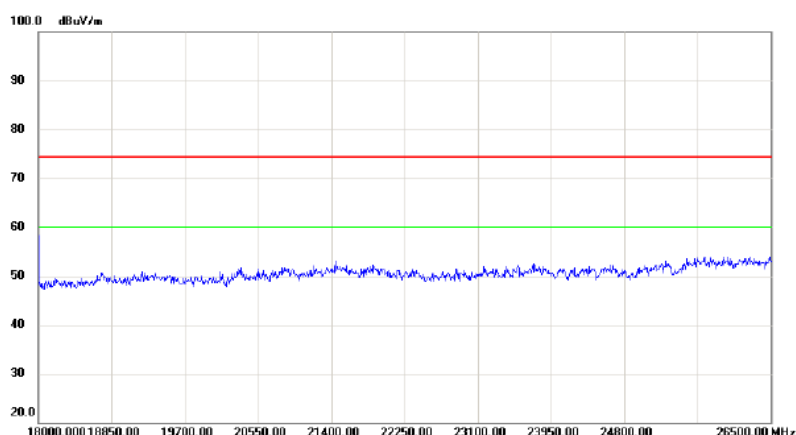


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		

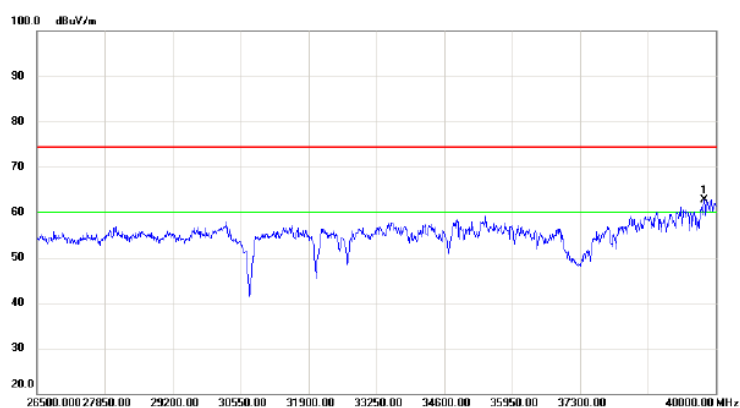

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39770.50	45.73	17.03	62.76	74.30	-11.54	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Vertical

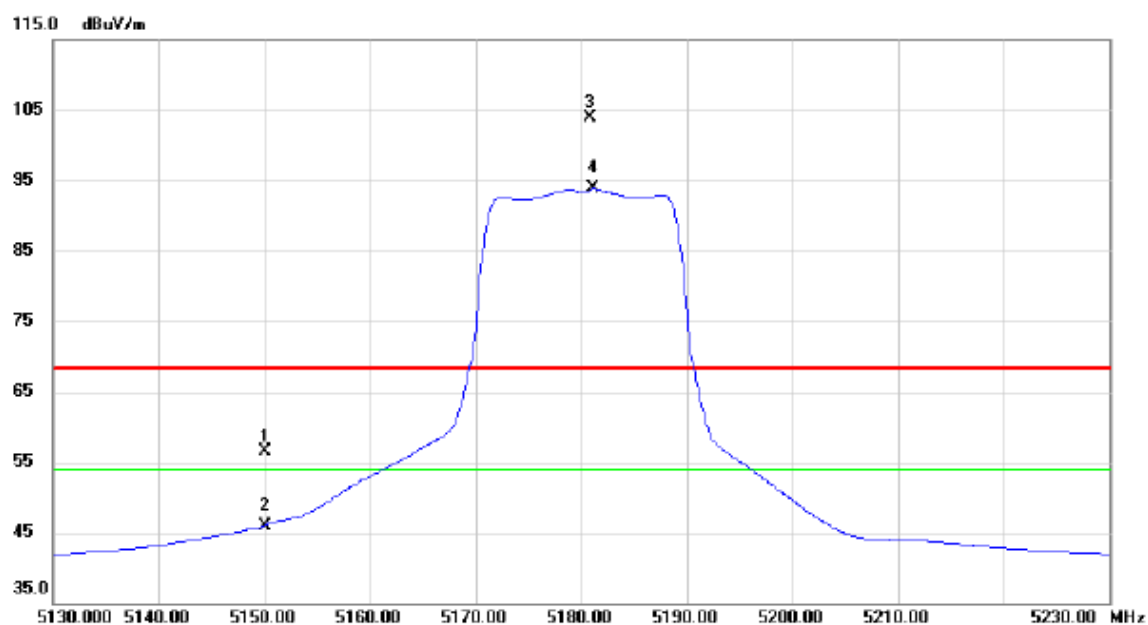


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	16.24	40.22	56.46	68.30	-11.84	peak	
2		5150.000	5.78	40.22	46.00	54.00	-8.00	AVG	
3	X	5180.900	63.64	40.28	103.92	68.30	35.62	peak	No Limit
4	*	5181.200	53.53	40.28	93.81	54.00	39.81	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Vertical

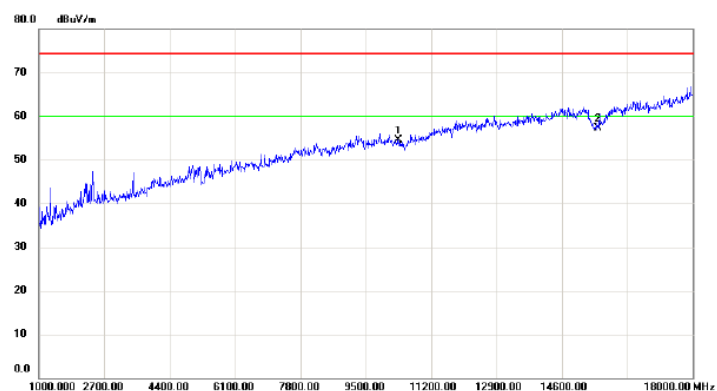

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10360.00	40.58	13.85	54.43	74.30	-19.87	peak	
2	*	15540.00	40.50	16.85	57.35	74.30	-16.95	peak	

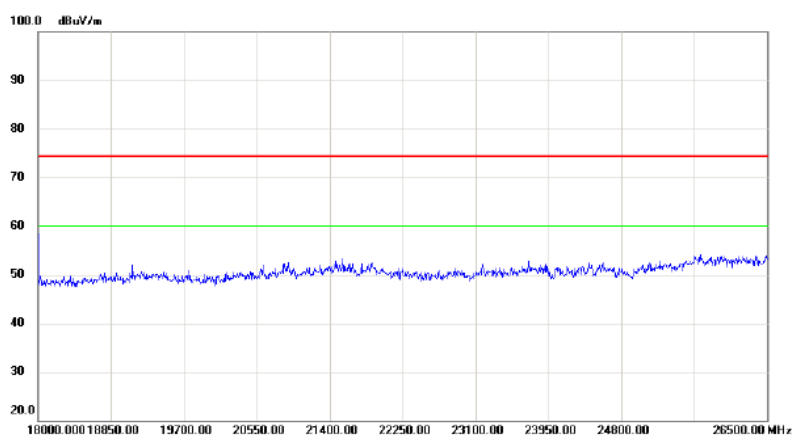


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

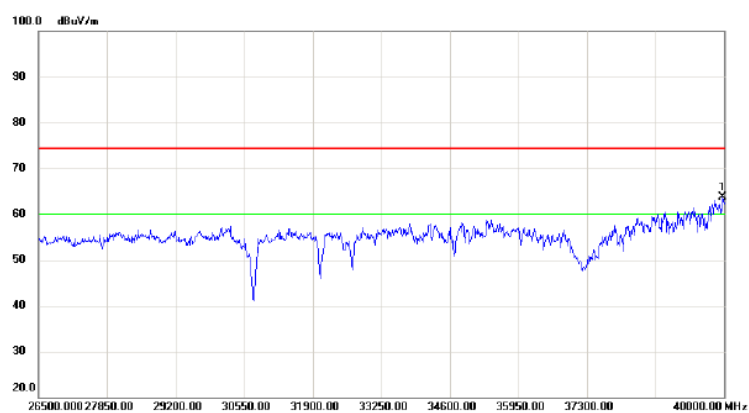

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39973.00	46.08	17.54	63.62	74.30	-10.68	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

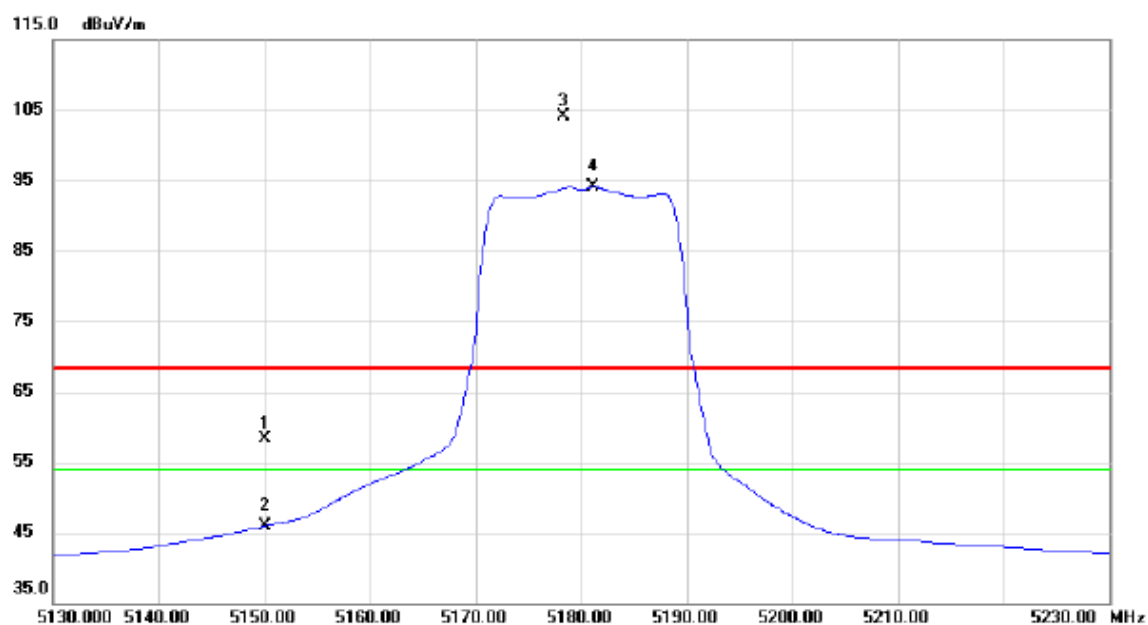


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	18.02	40.22	58.24	68.30	-10.06	peak	
2		5150.000	5.69	40.22	45.91	54.00	-8.09	AVG	
3	X	5178.300	63.85	40.28	104.13	68.30	35.83	peak	No Limit
4	*	5181.100	53.85	40.28	94.13	54.00	40.13	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

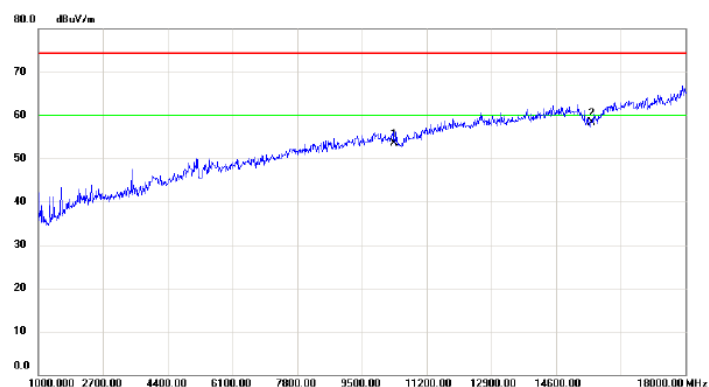

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10360.00	39.69	13.85	53.54	74.30	-20.76	peak	
2	*	15540.00	41.42	16.85	58.27	74.30	-16.03	peak	

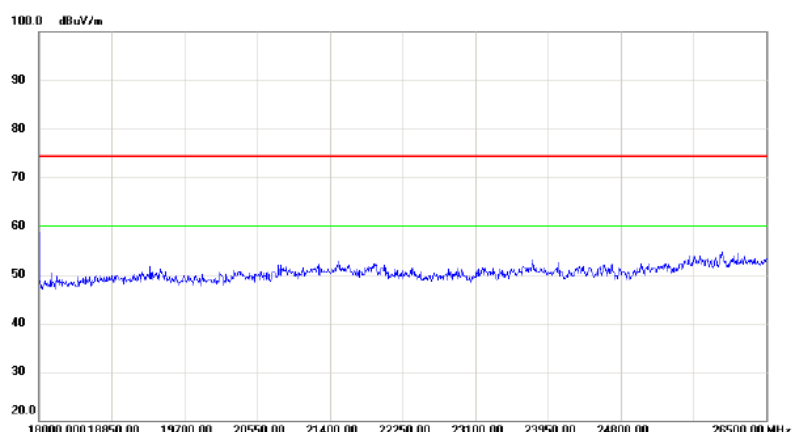


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

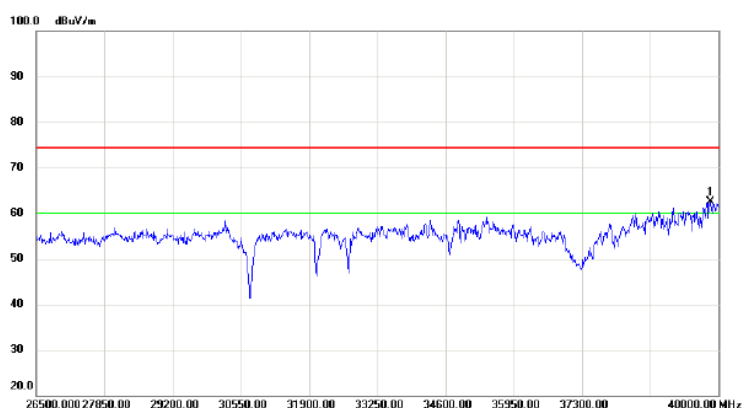

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39838.00	45.24	17.21	62.45	74.30	-11.85	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Vertical

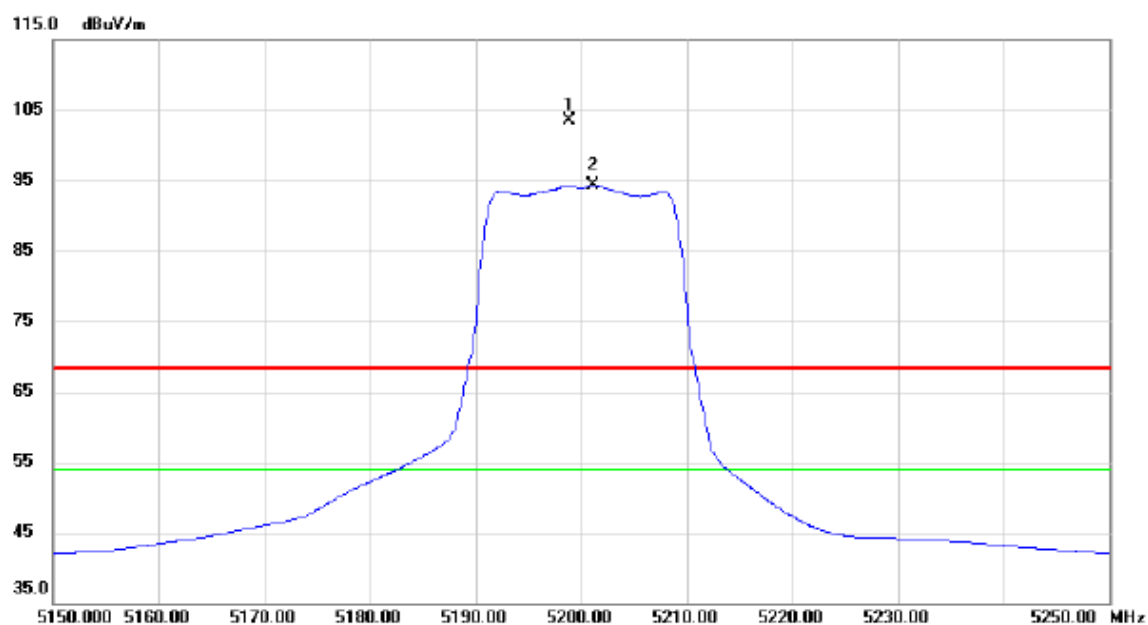


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5198.800	63.16	40.32	103.48	68.30	35.18	peak	No Limit
2	*	5201.100	54.05	40.32	94.37	54.00	40.37	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Vertical

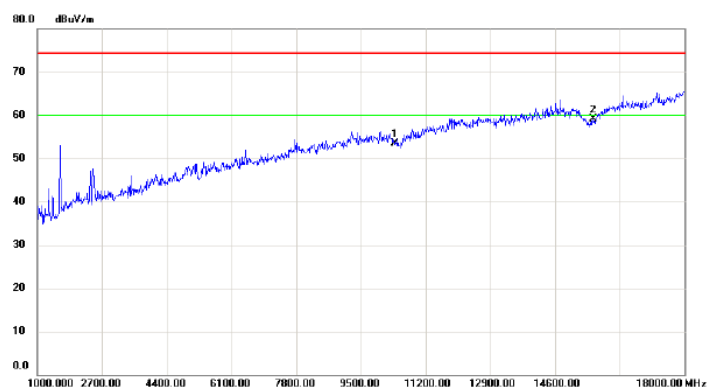

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10400.00	39.78	13.80	53.58	74.30	-20.72	peak	
2	*	15600.00	41.96	17.16	59.12	74.30	-15.18	peak	

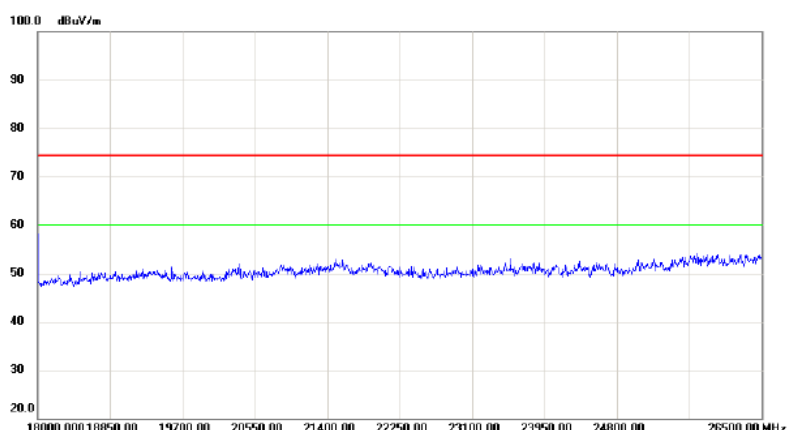


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

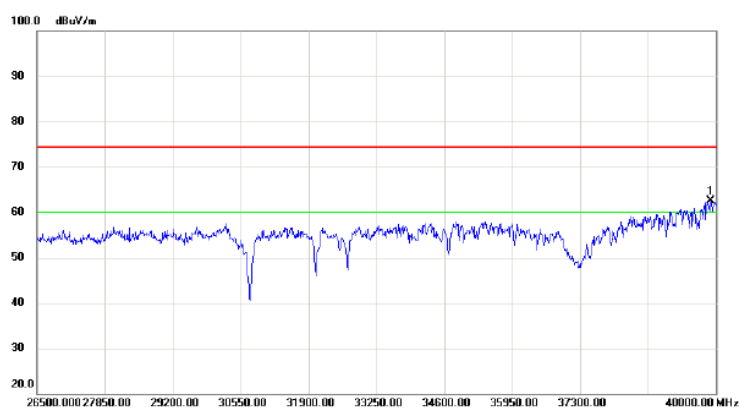

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39905.50	45.09	17.37	62.46	74.30	-11.84	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Horizontal

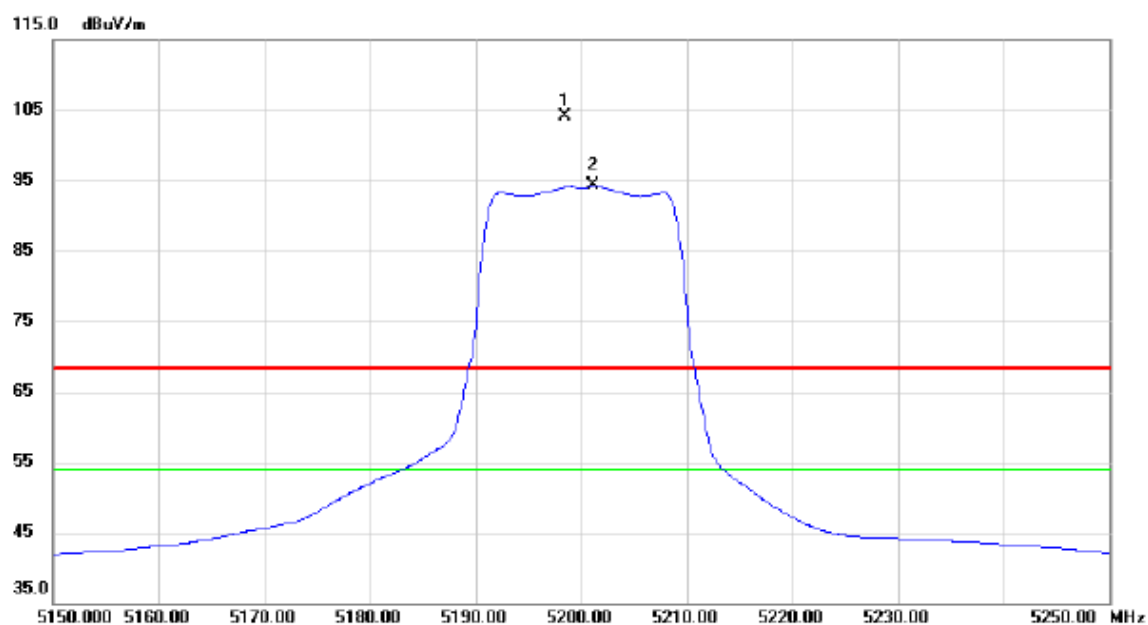


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5198.500	63.86	40.32	104.18	68.30	35.88	peak	No Limit
2	*	5201.200	53.99	40.32	94.31	54.00	40.31	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Horizontal

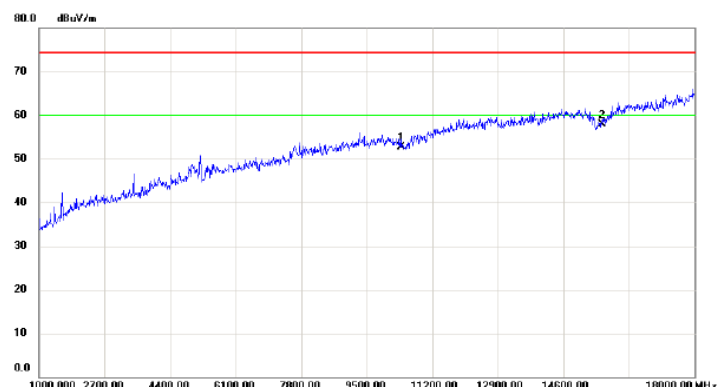

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10400.00	38.87	13.80	52.67	74.30	-21.63	peak	
2	*	15600.00	40.83	17.16	57.99	74.30	-16.31	peak	

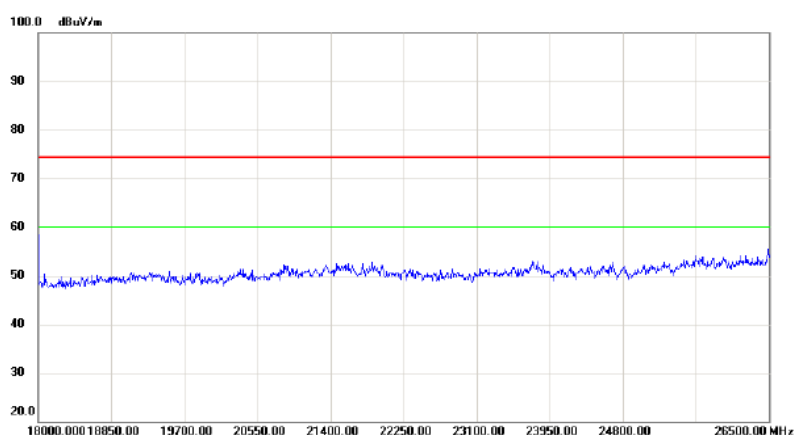


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

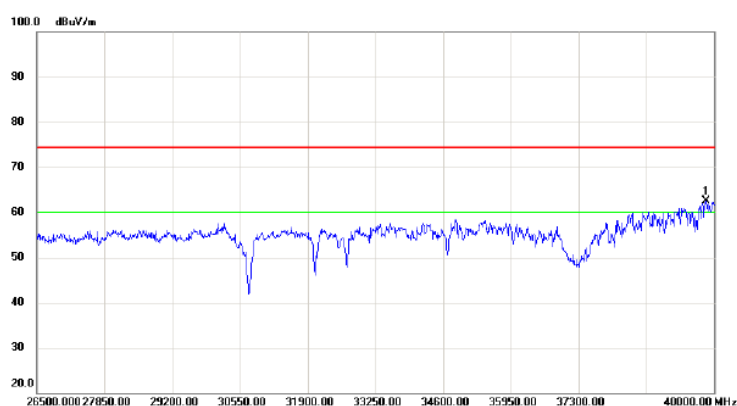

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39838.00	45.29	17.21	62.50	74.30	-11.80	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Vertical

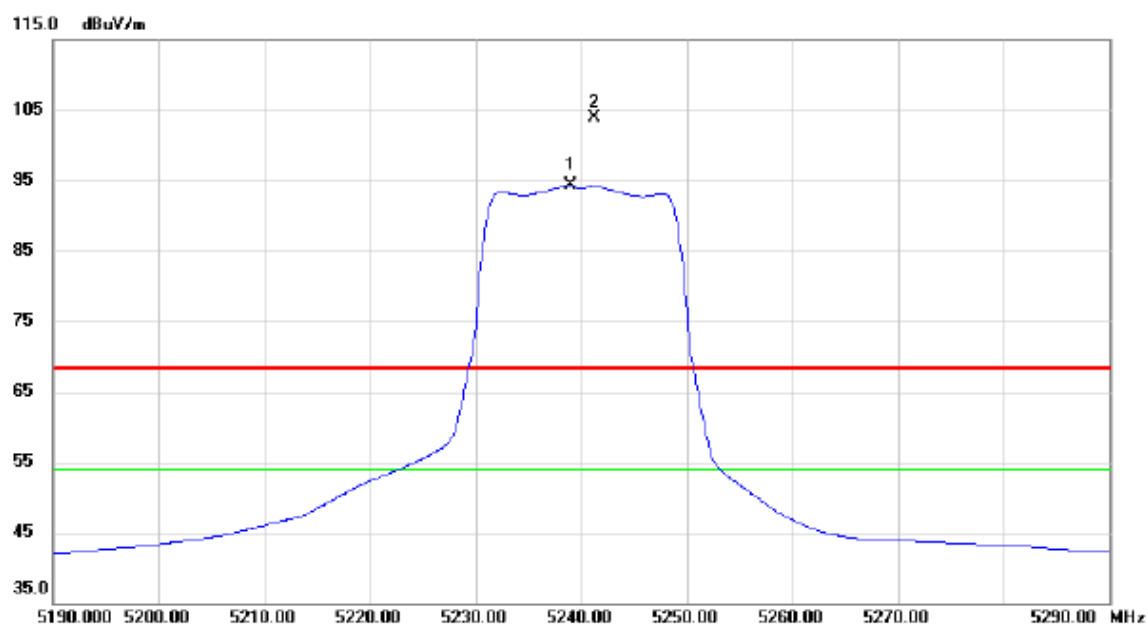


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5239.000	53.91	40.40	94.31	54.00	40.31	AVG	No Limit
2	X	5241.300	63.49	40.41	103.90	68.30	35.60	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Vertical

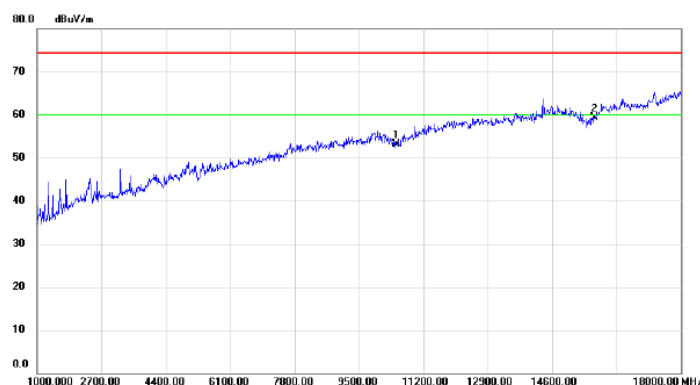

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10480.00	39.37	13.69	53.06	74.30	-21.24	peak	
2	*	15720.00	41.59	17.78	59.37	74.30	-14.93	peak	

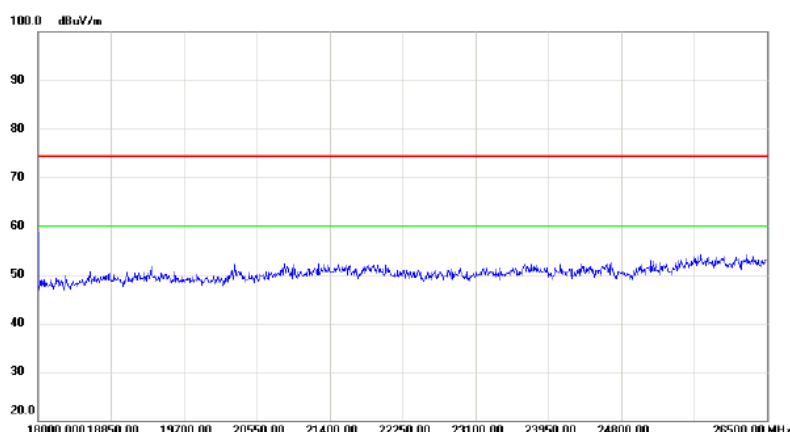


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

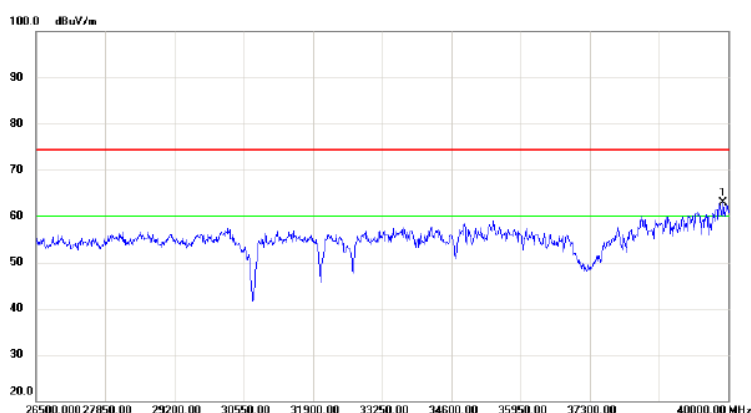

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39905.50	45.57	17.37	62.94	74.30	-11.36	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Horizontal

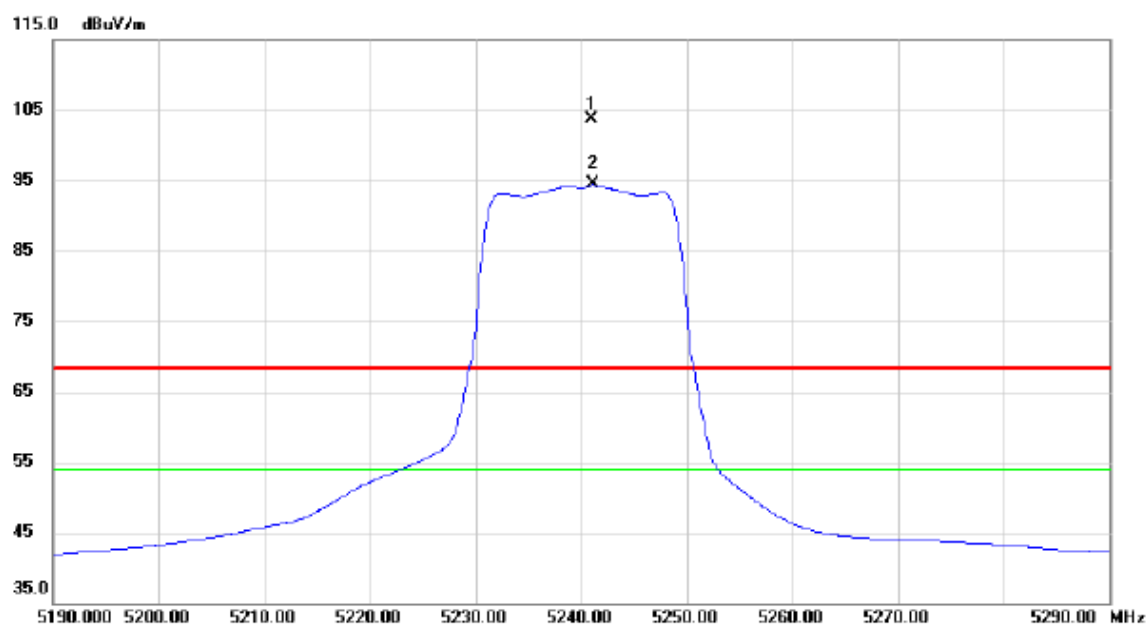


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5241.000	63.24	40.41	103.65	68.30	35.35	peak	No Limit
2	*	5241.200	54.00	40.41	94.41	54.00	40.41	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Horizontal

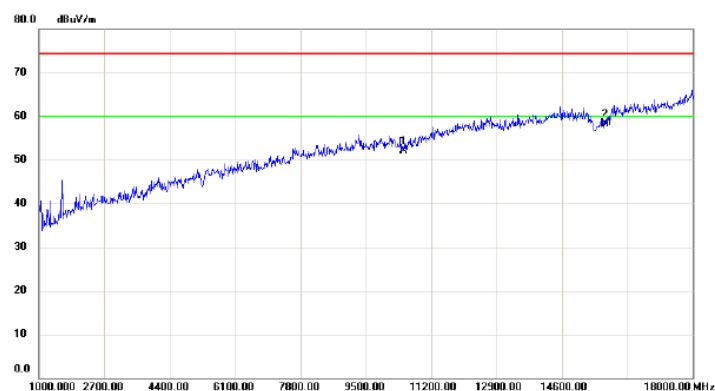

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10480.00	38.41	13.69	52.10	74.30	-22.20	peak	
2	*	15720.00	40.62	17.78	58.40	74.30	-15.90	peak	

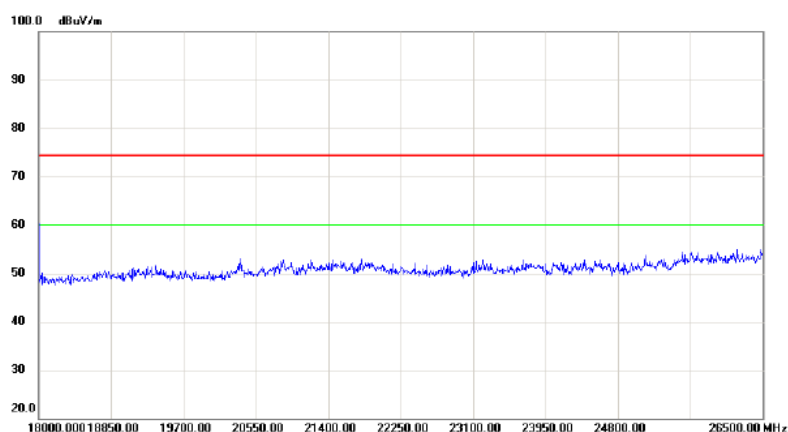


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

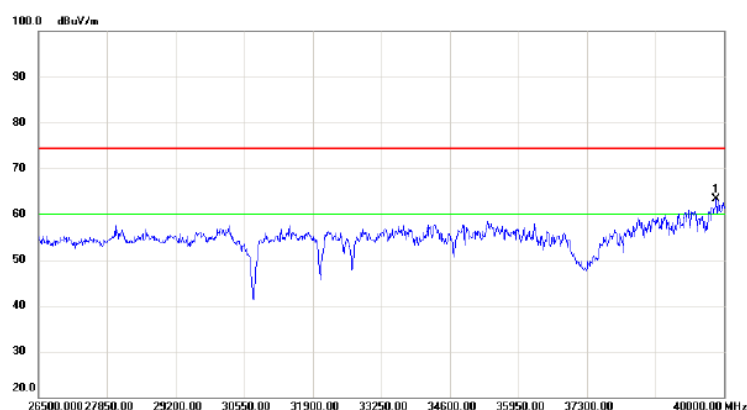

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39851.50	46.07	17.23	63.30	74.30	-11.00	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Vertical

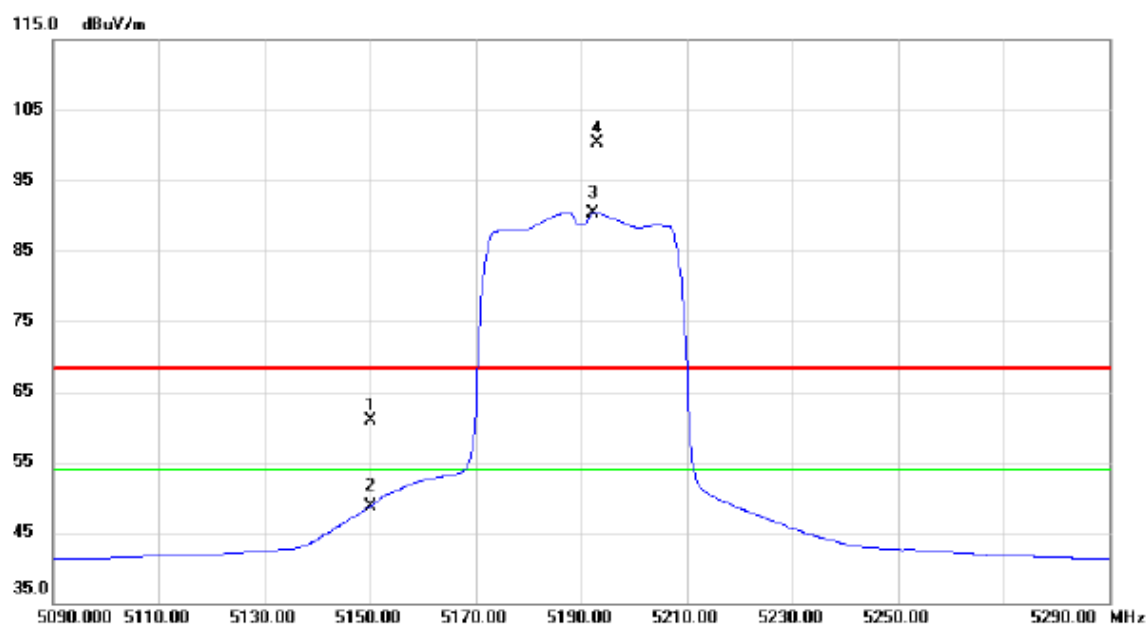


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	20.70	40.22	60.92	68.30	-7.38	peak	
2		5150.000	8.54	40.22	48.76	54.00	-5.24	AVG	
3	*	5192.400	50.09	40.31	90.40	54.00	36.40	AVG	No Limit
4	X	5193.200	60.05	40.31	100.36	68.30	32.06	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Vertical

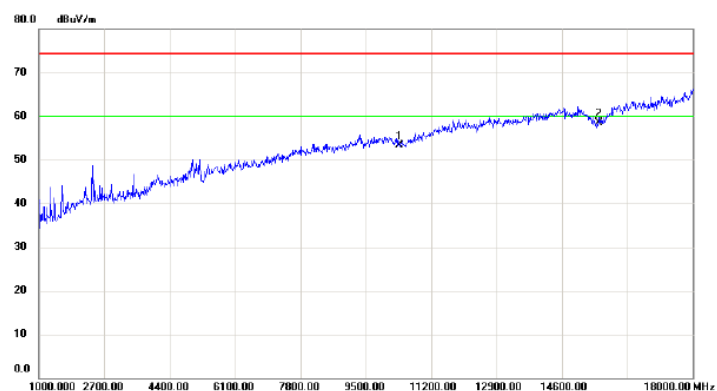

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		10380.00	39.43	13.83	53.26	74.30	-21.04	peak	
2	*	15570.00	41.52	17.00	58.52	74.30	-15.78	peak	

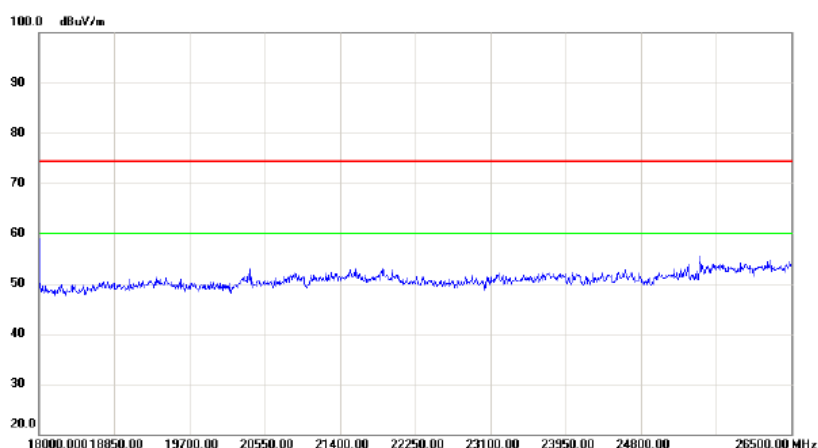


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		

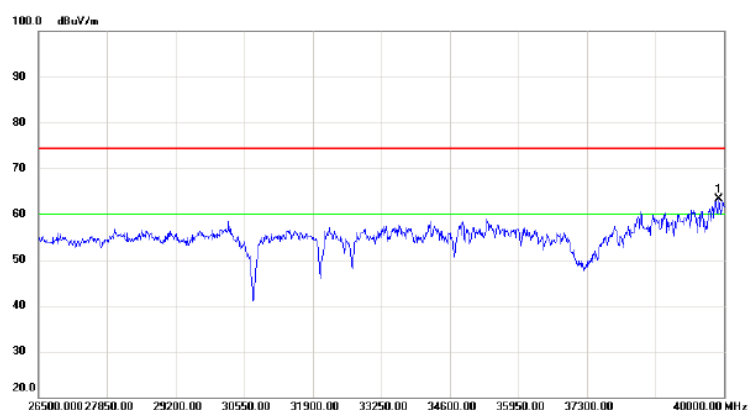

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39905.50	45.99	17.37	63.36	74.30	-10.94	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Horizontal

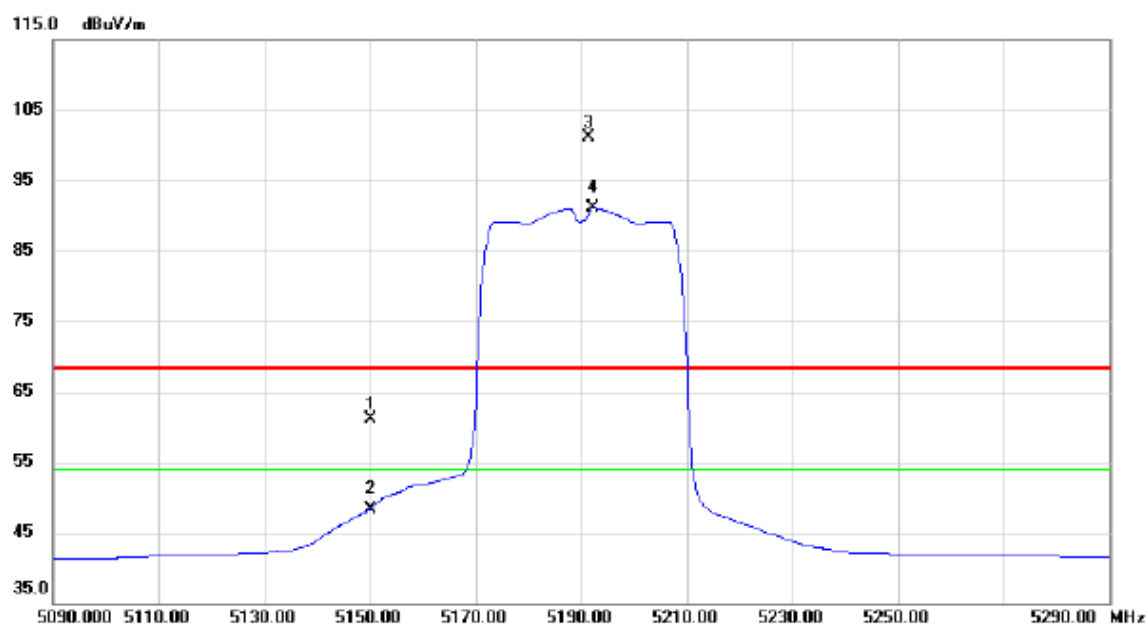


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5150.000	20.86	40.22	61.08	68.30	-7.22	peak	
2		5150.000	8.17	40.22	48.39	54.00	-5.61	AVG	
3	X	5191.400	60.75	40.31	101.06	68.30	32.76	peak	No Limit
4	*	5192.400	50.72	40.31	91.03	54.00	37.03	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Horizontal

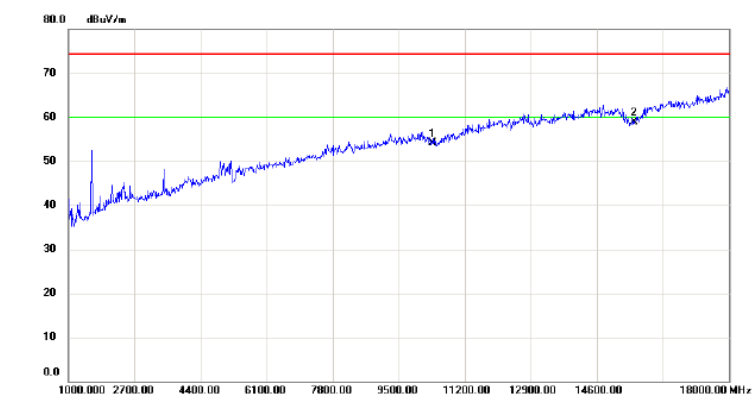

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10380.00	40.34	13.83	54.17	74.30	-20.13	peak	
2	*	15570.00	42.00	17.00	59.00	74.30	-15.30	peak	

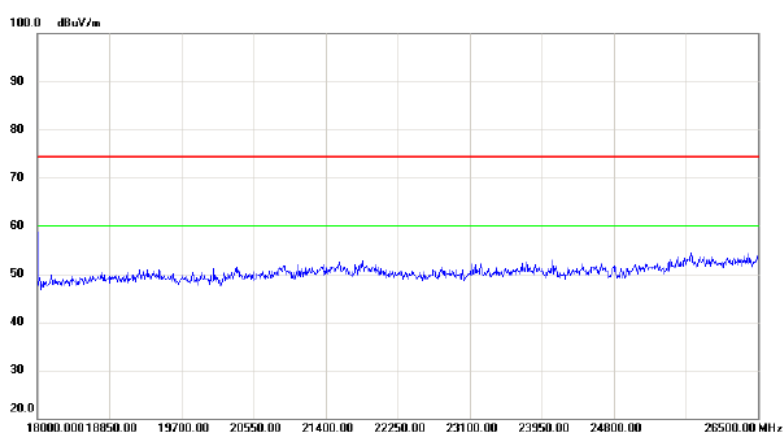


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

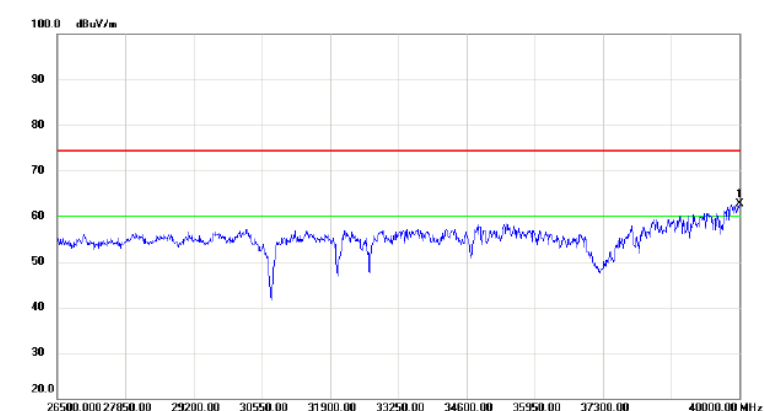

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	40000.00	45.01	17.60	62.61	74.30	-11.69	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz




Vertical

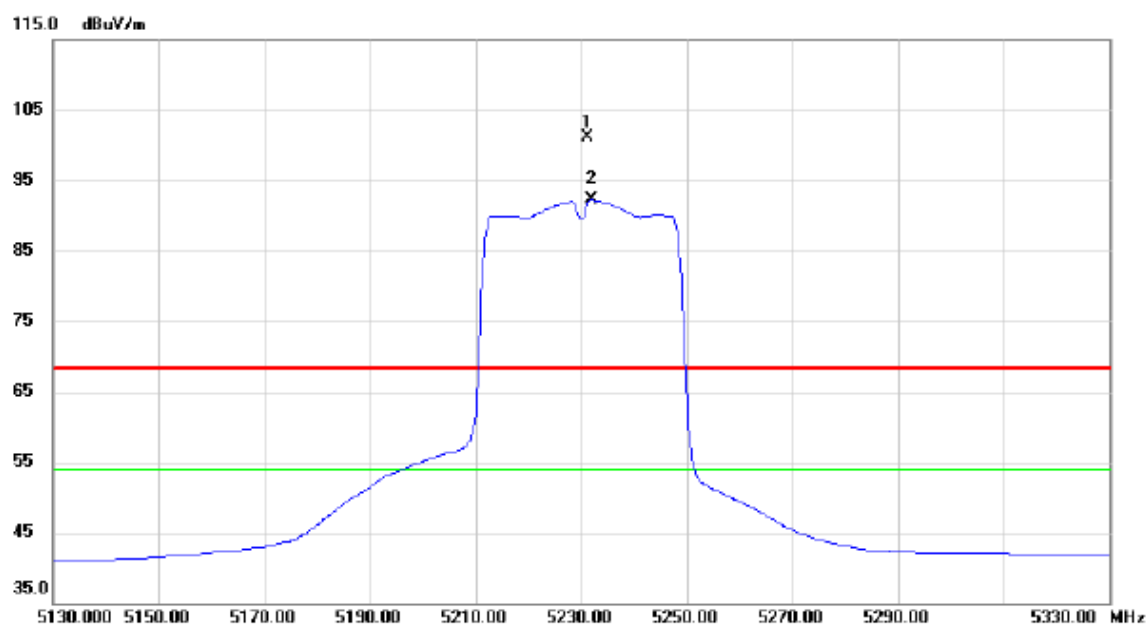

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5231.200	60.63	40.39	101.02	68.30	32.72	peak	No Limit
2	*	5232.000	51.87	40.40	92.27	54.00	38.27	AVG	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical

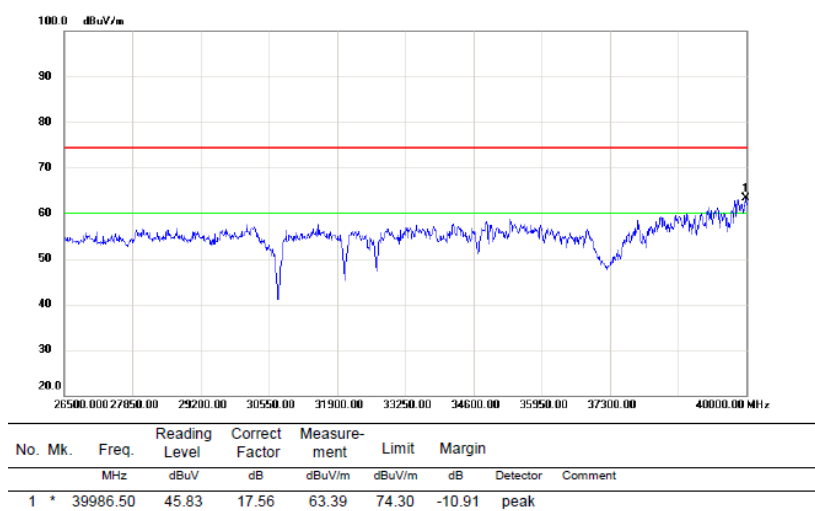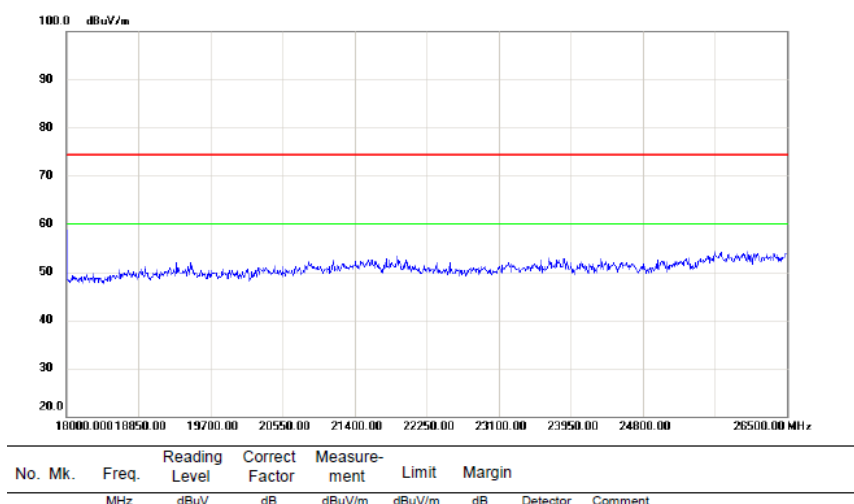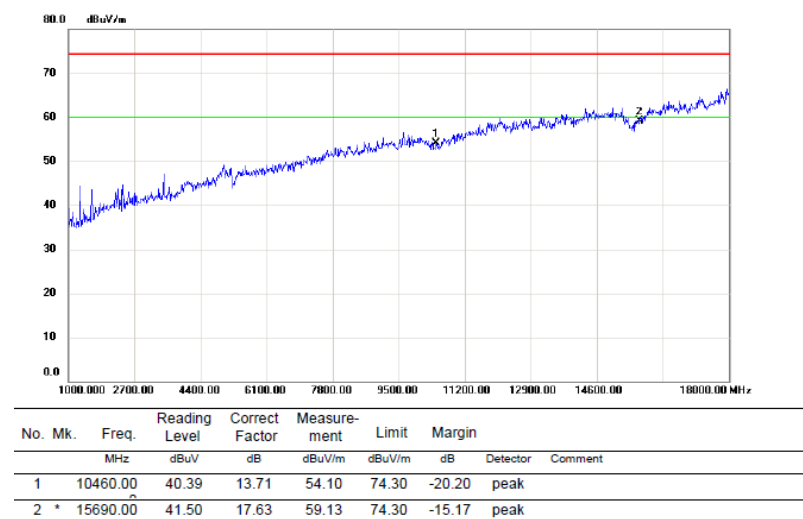

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz




Horizontal

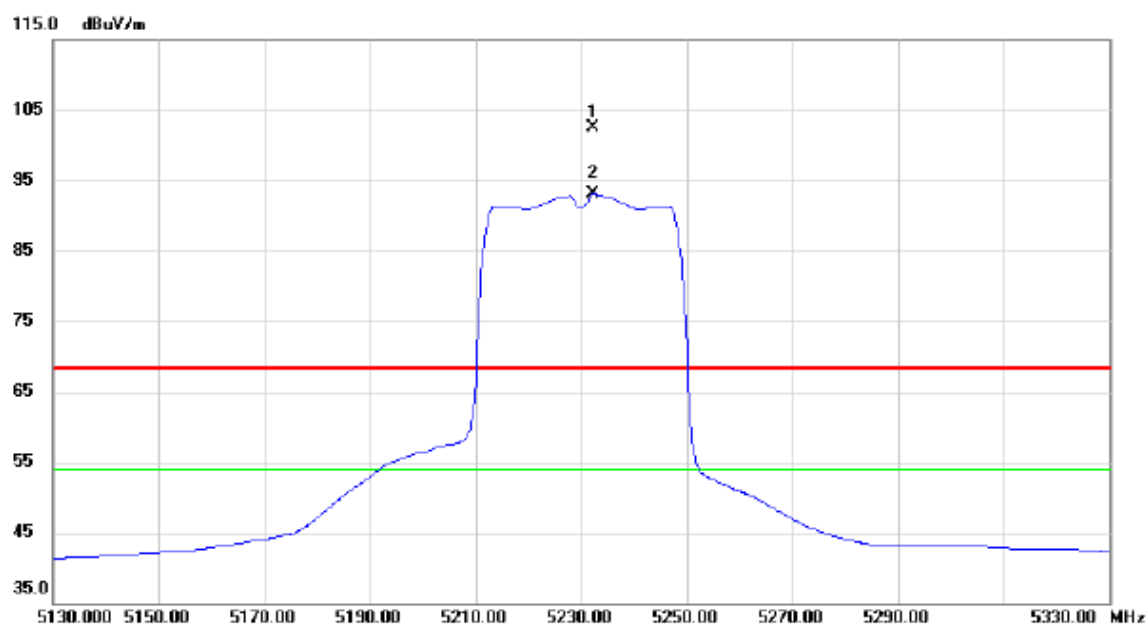

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5232.200	62.21	40.39	102.60	68.30	34.30	peak	No Limit
2	*	5232.400	52.68	40.39	93.07	54.00	39.07	AVG	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal

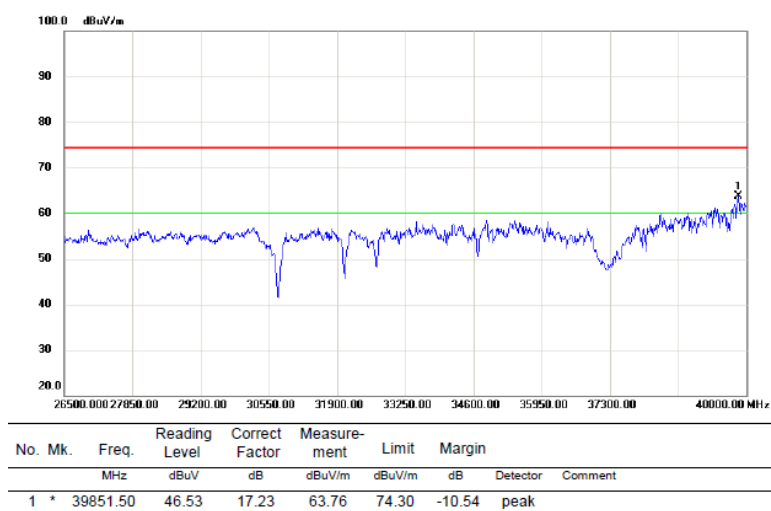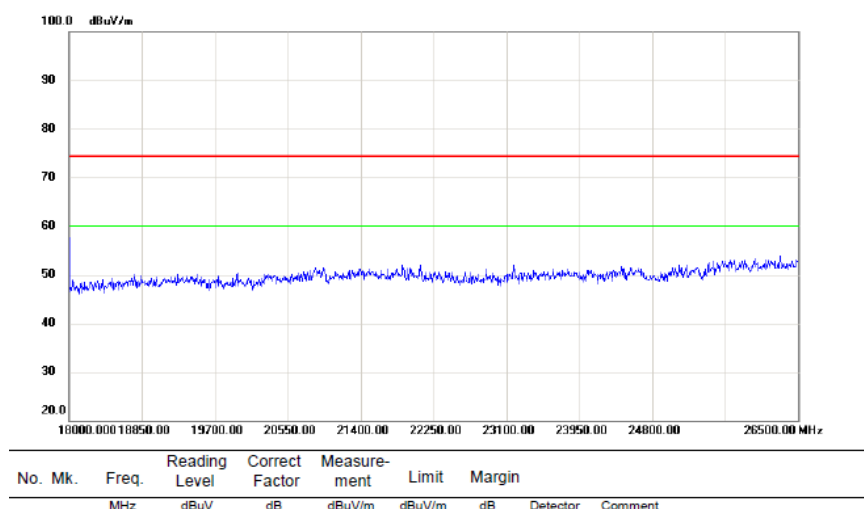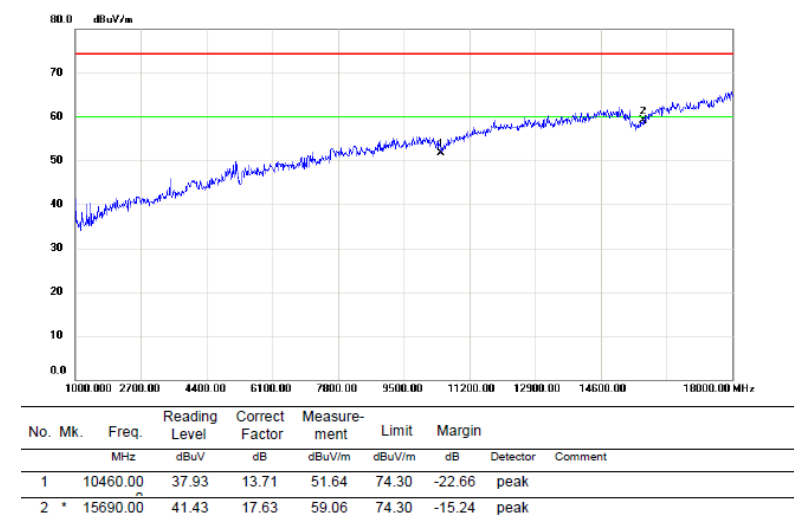

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz




Vertical

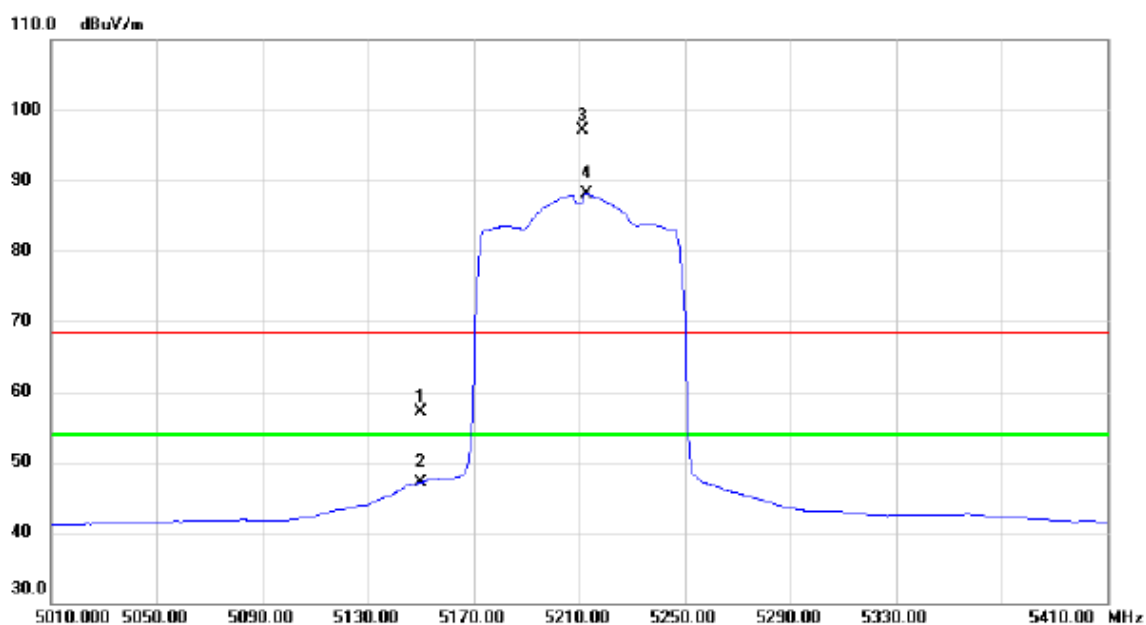

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	16.83	40.22	57.05	68.30	-11.25	peak	
2		5150.000	6.86	40.22	47.08	54.00	-6.92	AVG	
3	X	5211.200	56.71	40.35	97.06	68.30	28.76	peak	No Limit
4	*	5212.800	47.81	40.35	88.16	54.00	34.16	AVG	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

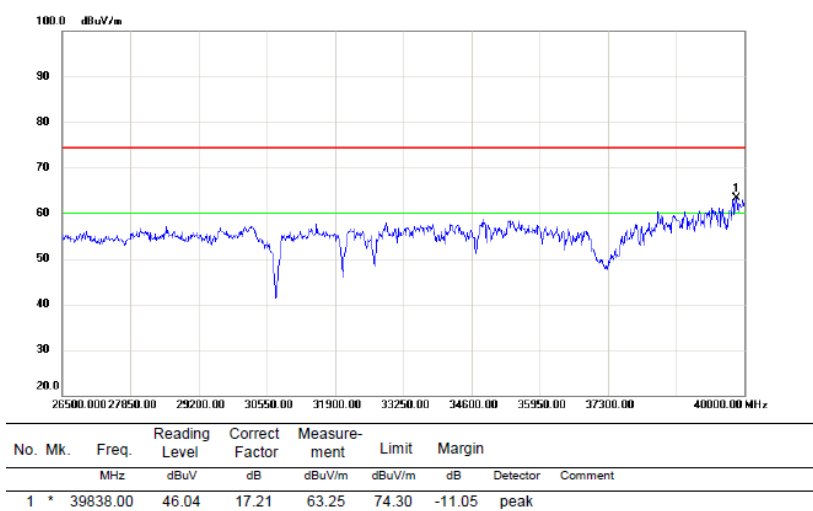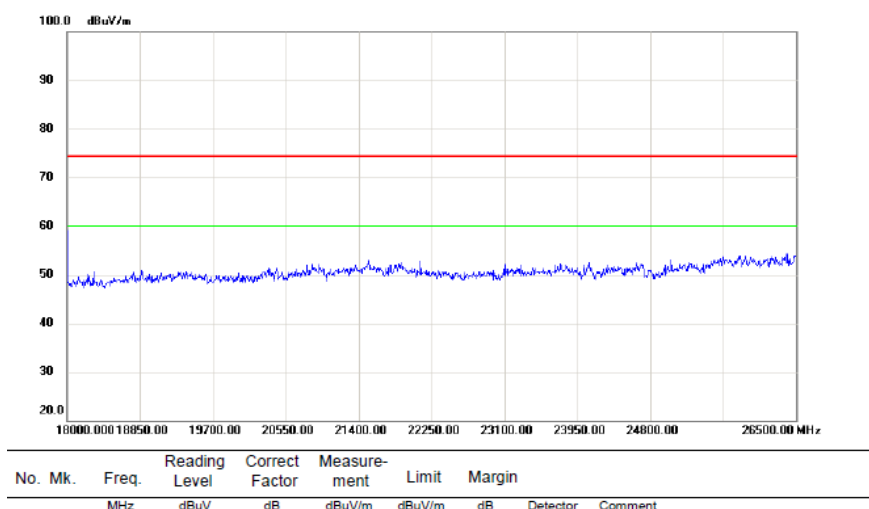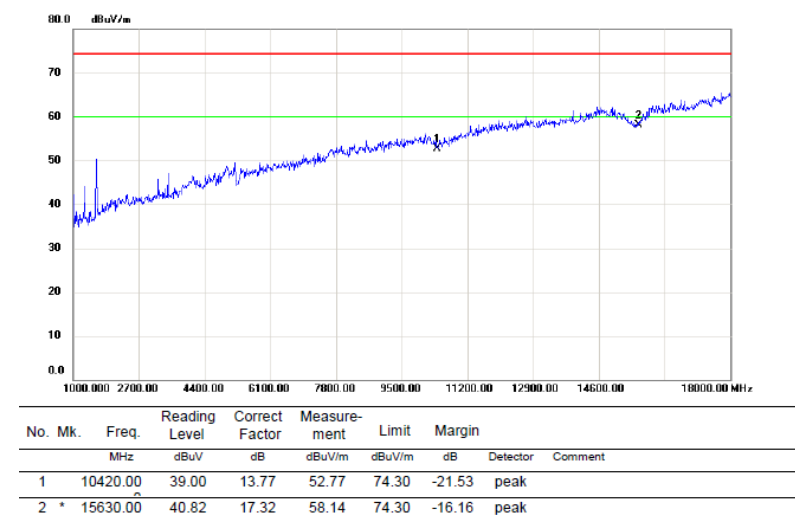

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

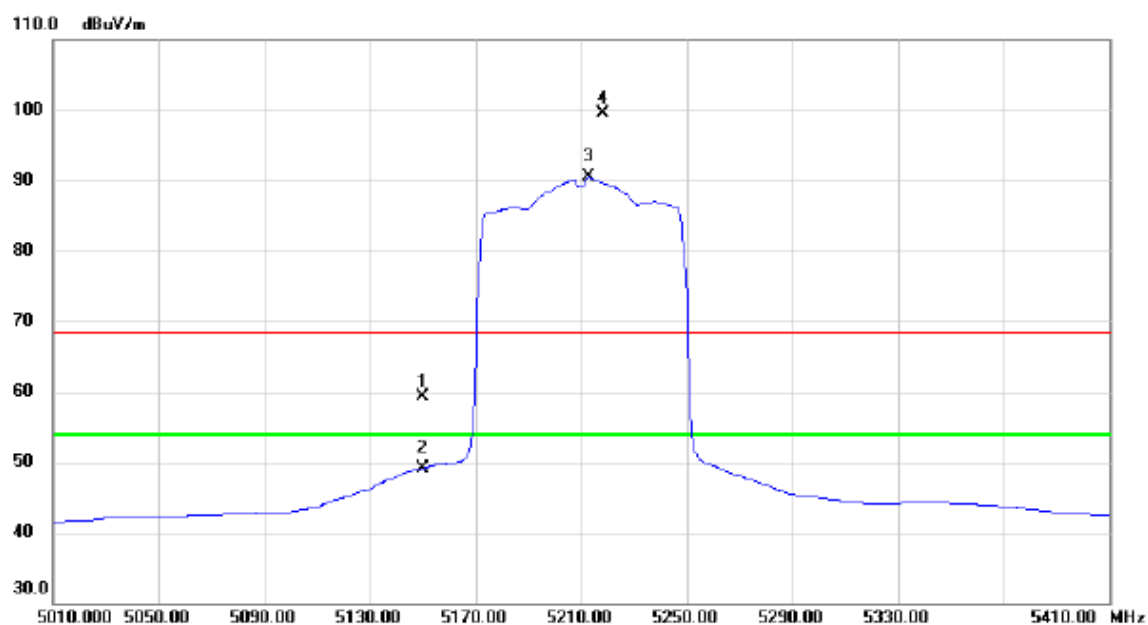


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	19.17	40.22	59.39	68.30	-8.91	peak	
2		5150.000	8.81	40.22	49.03	54.00	-4.97	AVG	
3	*	5212.800	50.08	40.35	90.43	54.00	36.43	AVG	No Limit
4	X	5218.400	59.23	40.36	99.59	68.30	31.29	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

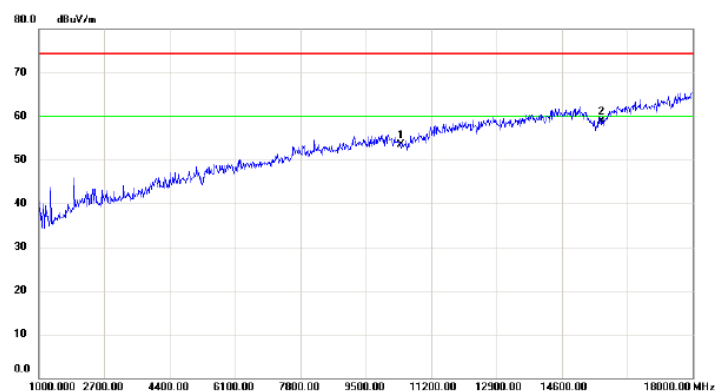

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10420.00	39.79	13.77	53.56	74.30	-20.74	peak	
2	*	15630.00	41.57	17.32	58.89	74.30	-15.41	peak	

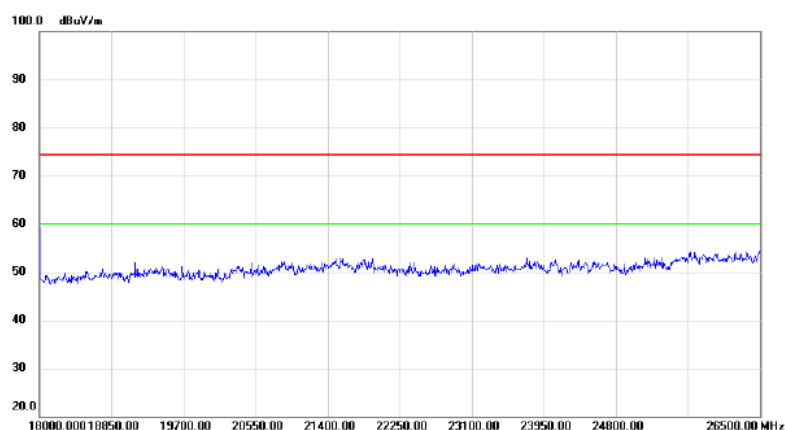


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

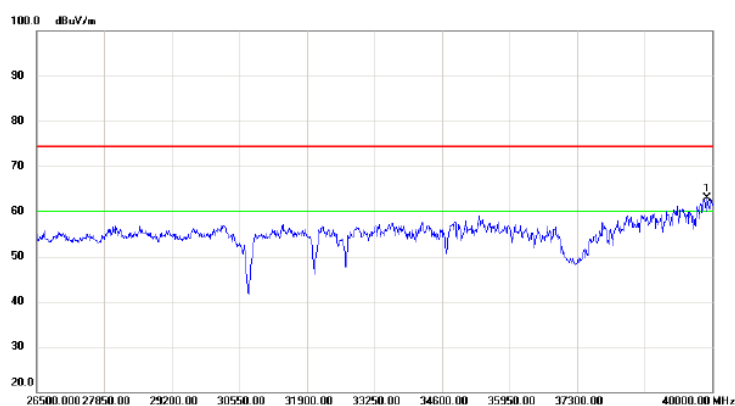

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39905.50	45.53	17.37	62.90	74.30	-11.40	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Vertical

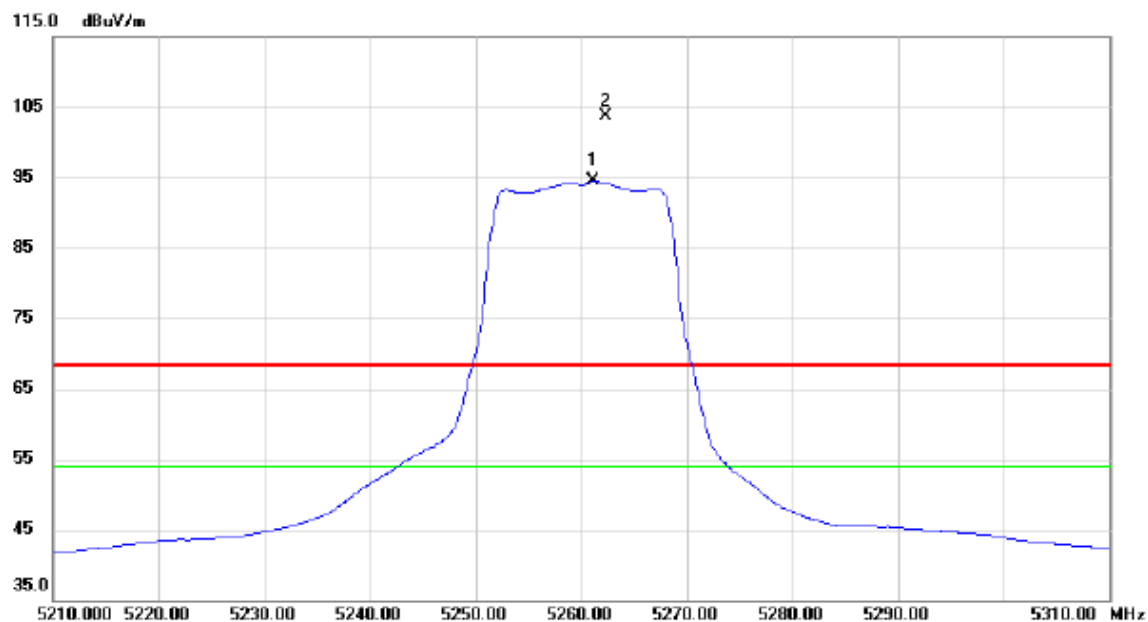


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5261.200	54.02	40.46	94.48	54.00	40.48	AVG	No Limit
2	X	5262.300	63.34	40.46	103.80	68.30	35.50	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Vertical

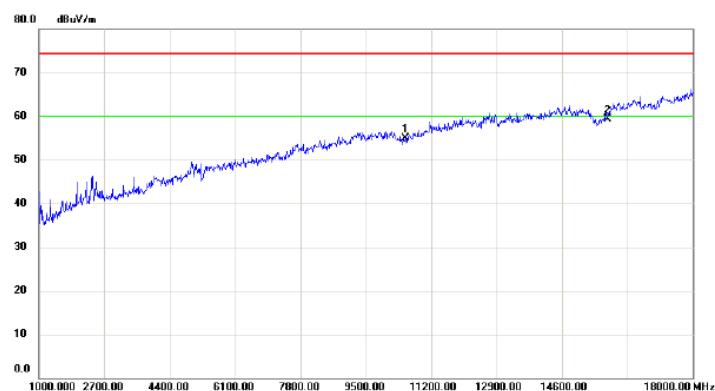

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		10520.00	41.10	13.75	54.85	74.30	-19.45	peak	
2	*	15780.00	41.20	18.10	59.30	74.30	-15.00	peak	

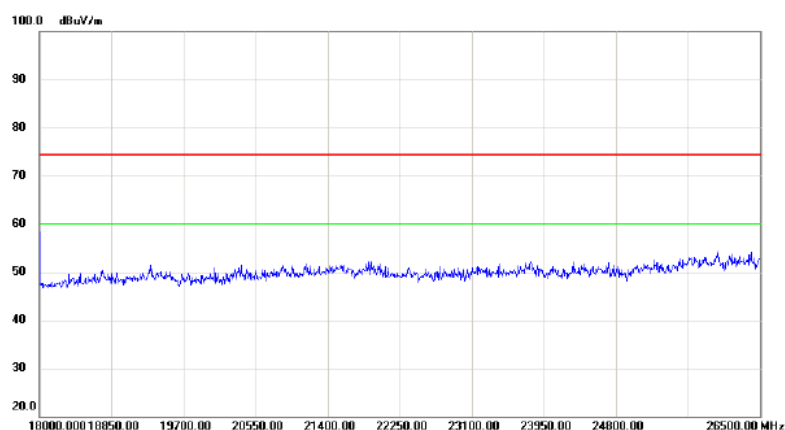


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		

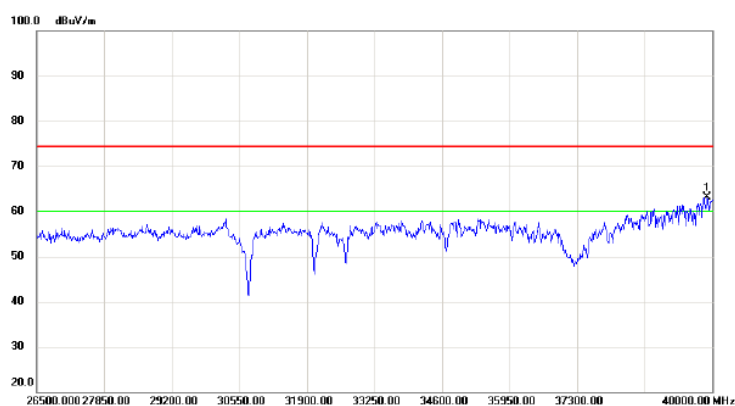

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39905.50	45.74	17.37	63.11	74.30	-11.19	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Horizontal

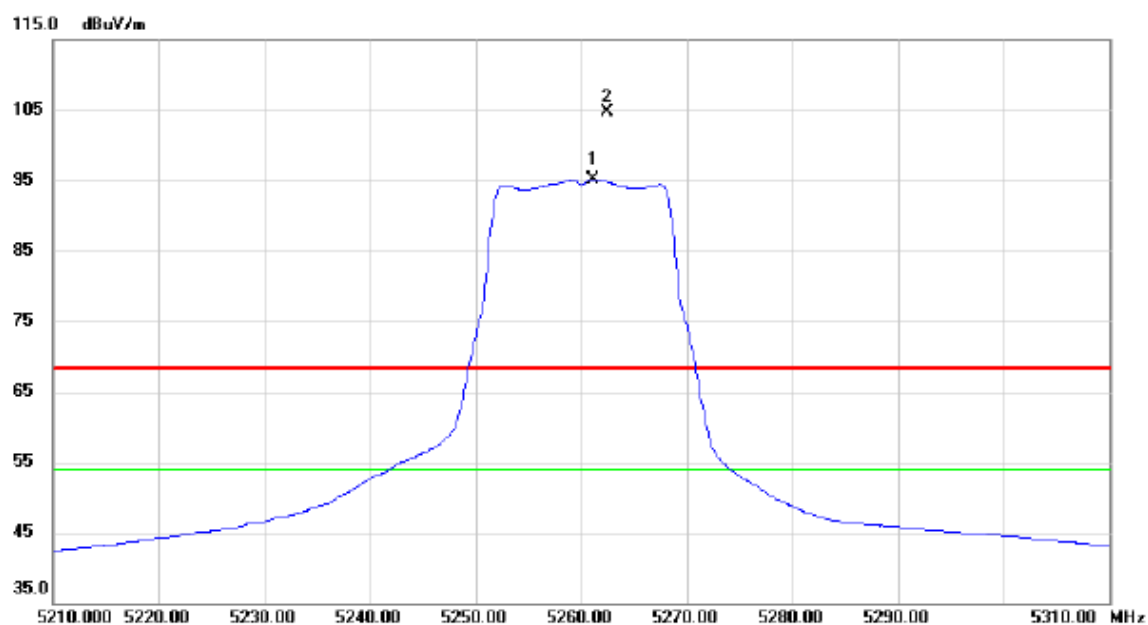


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5261.100	54.72	40.46	95.18	54.00	41.18	AVG	No Limit
2	X	5262.500	64.24	40.46	104.70	68.30	36.40	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Horizontal

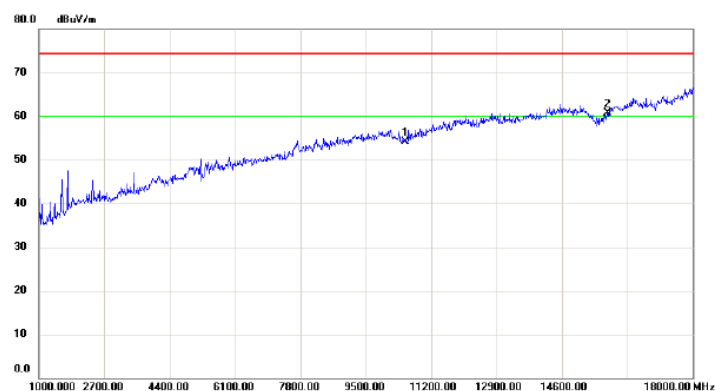

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10520.00	40.27	13.75	54.02	74.30	-20.28	peak	
2 *		15780.00	42.63	18.10	60.73	74.30	-13.57	peak	

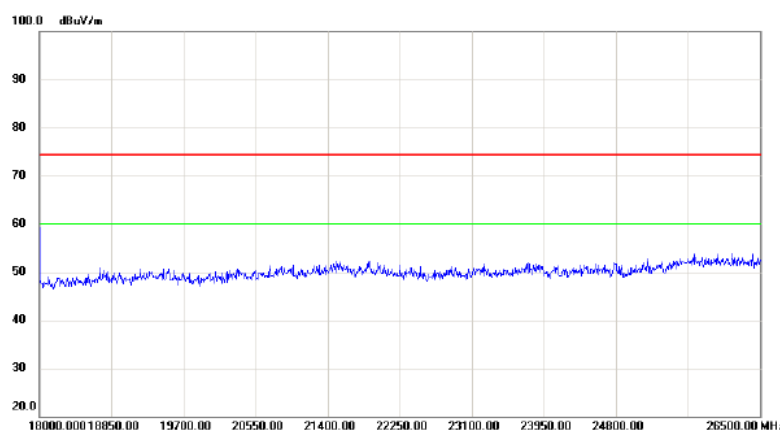


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

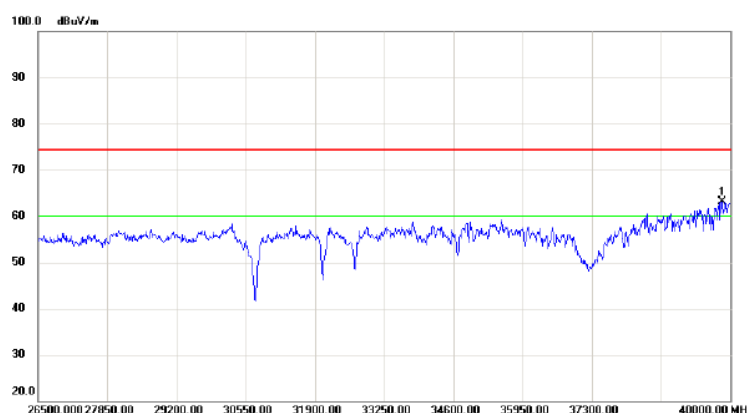

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *		39838.00	45.93	17.21	63.14	74.30	-11.16	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


Vertical

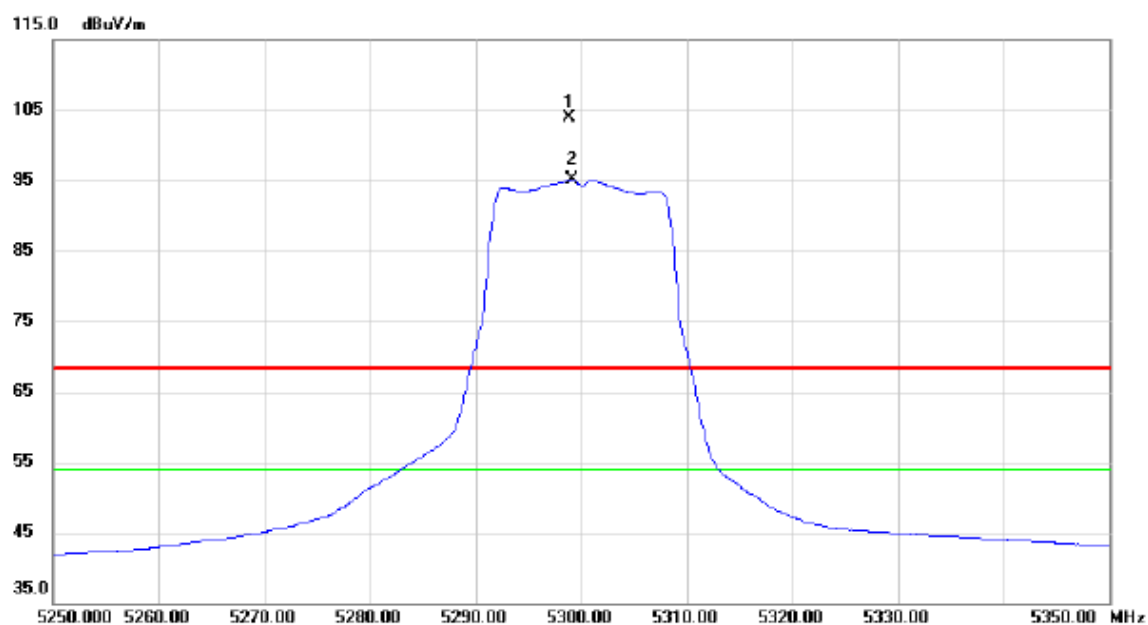


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5298.900	63.31	40.54	103.85	68.30	35.55	peak	No Limit
2	*	5299.100	54.55	40.54	95.09	54.00	41.09	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


Vertical

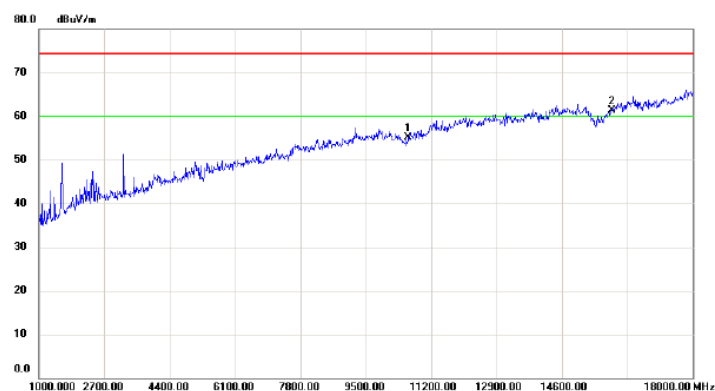

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.00	41.06	14.08	55.14	74.30	-19.16	peak	
2	*	15900.00	42.66	18.73	61.39	74.30	-12.91	peak	

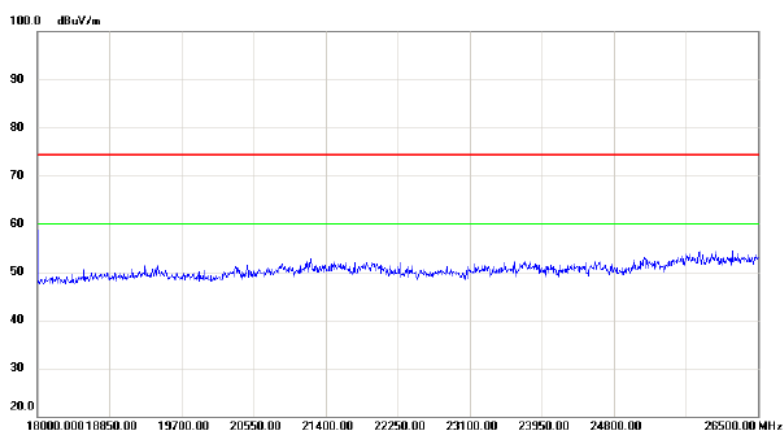


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

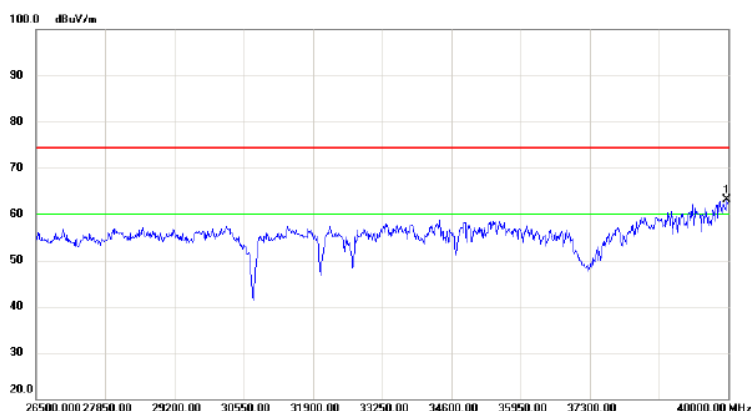

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39973.00	45.49	17.54	63.03	74.30	-11.27	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


Horizontal

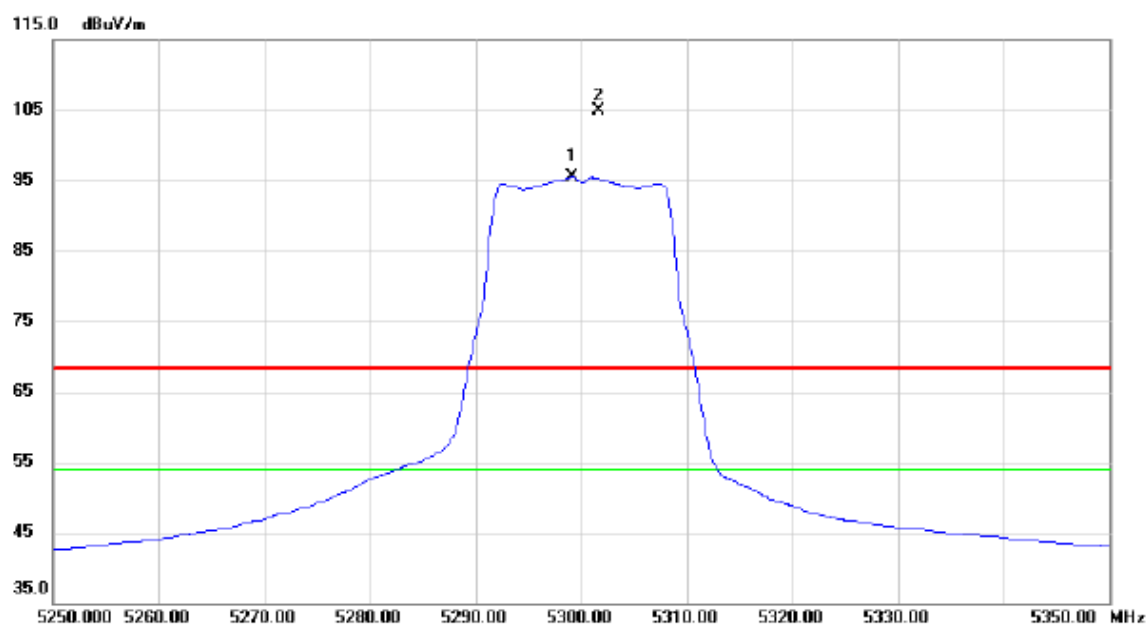


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5299.100	54.90	40.54	95.44	54.00	41.44	AVG	No Limit
2	X	5301.600	64.40	40.54	104.94	68.30	36.64	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


Horizontal

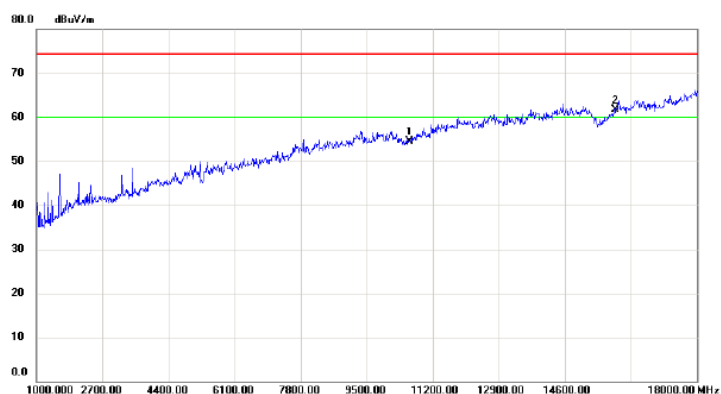

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.00	40.49	14.08	54.57	74.30	-19.73	peak	
2	*	15900.00	42.95	18.73	61.68	74.30	-12.62	peak	

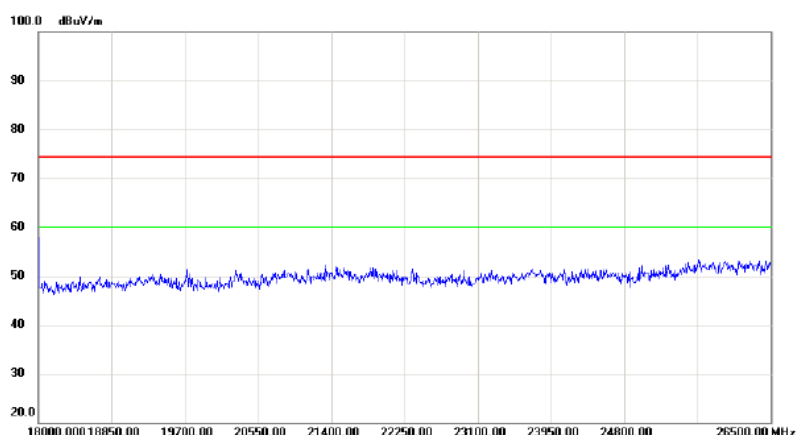


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

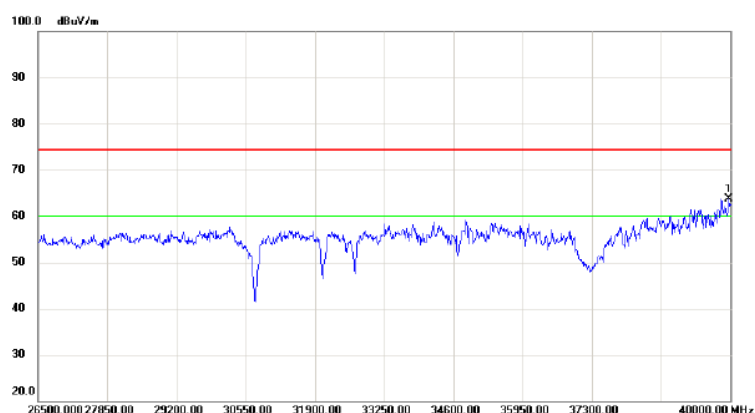

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39973.00	46.24	17.54	63.78	74.30	-10.52	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz




Vertical

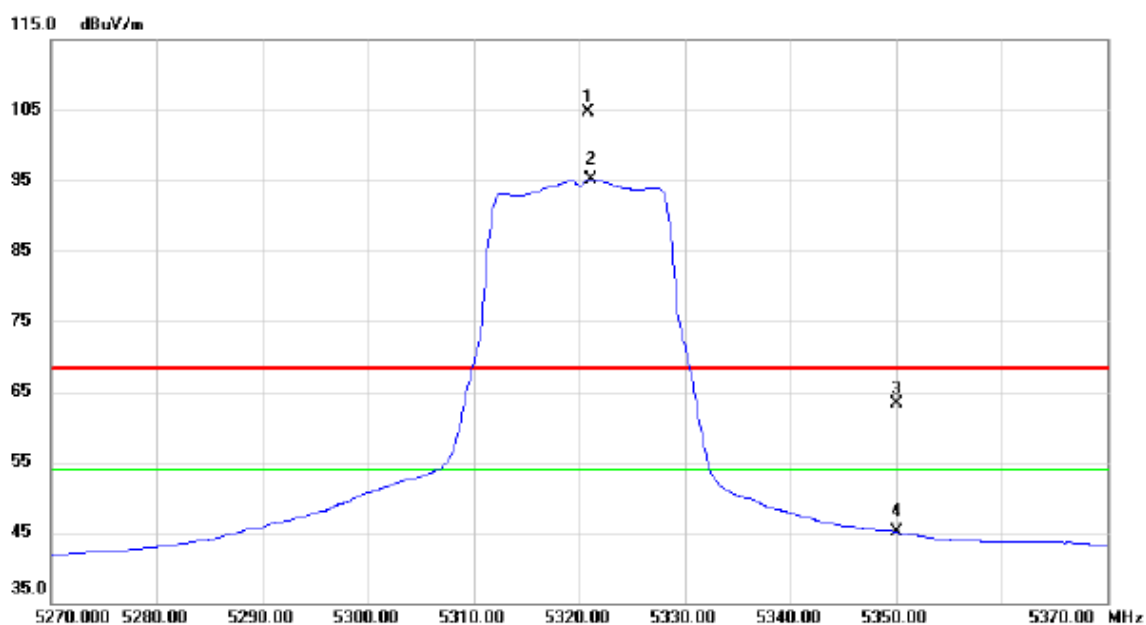

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5320.800	64.15	40.58	104.73	68.30	36.43	peak	No Limit
2	*	5321.100	54.56	40.58	95.14	54.00	41.14	AVG	No Limit
3		5350.000	22.69	40.64	63.33	68.30	-4.97	peak	
4		5350.000	4.41	40.64	45.05	54.00	-8.95	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

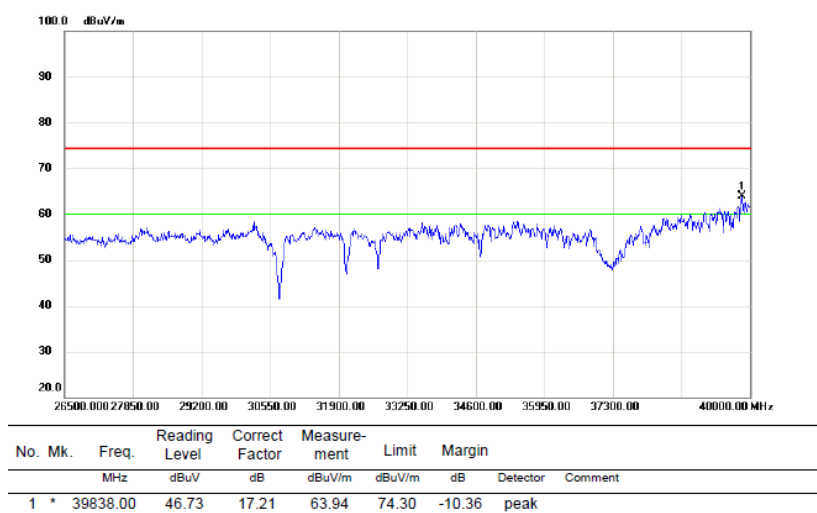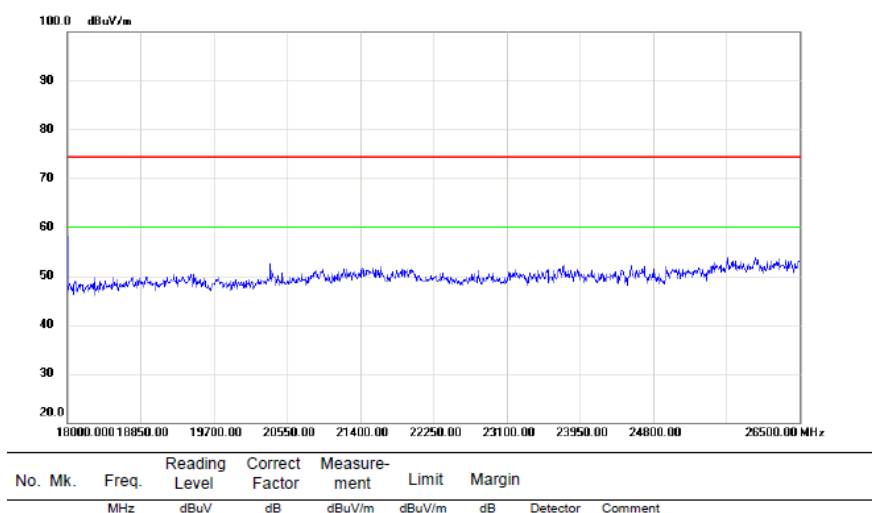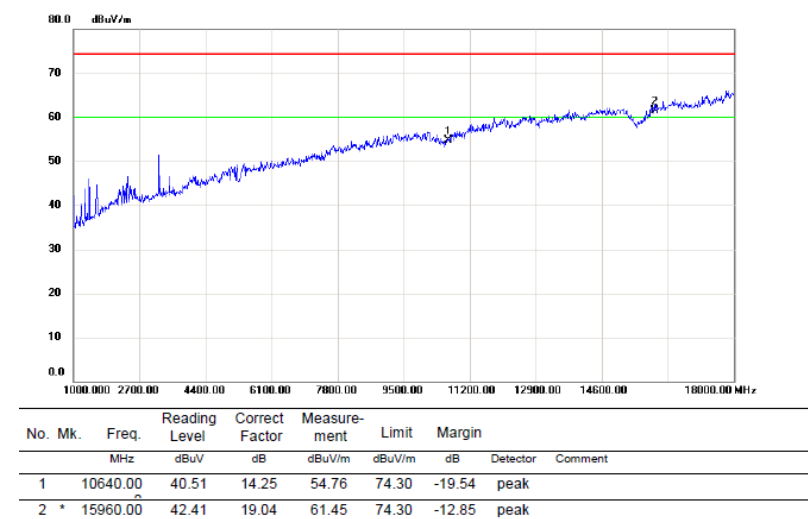

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz




Horizontal

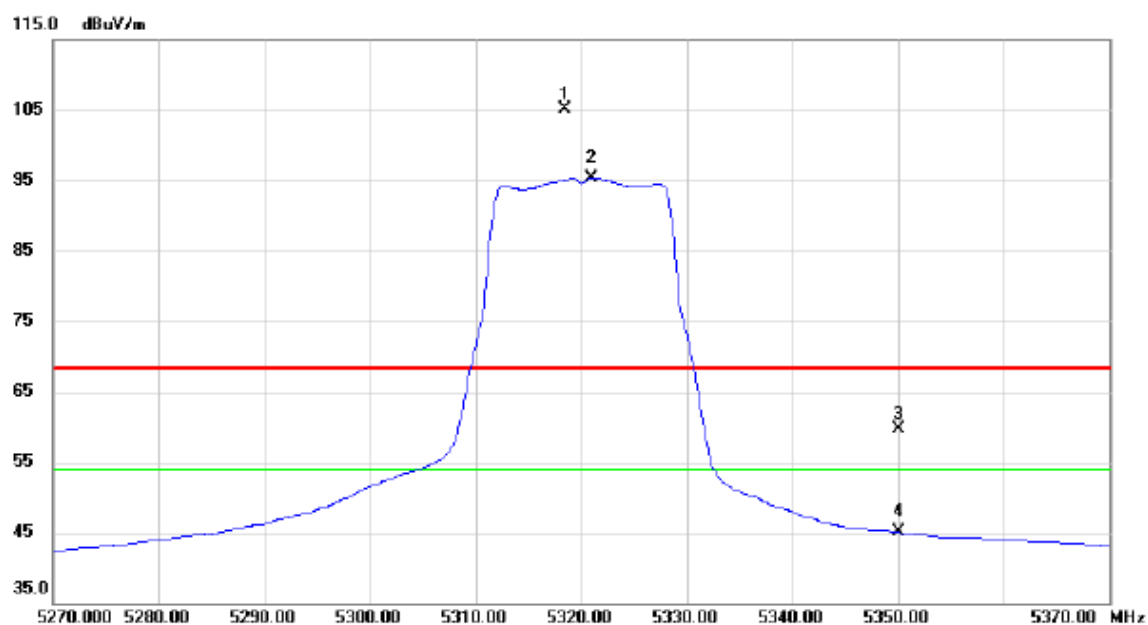

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5318.500	64.58	40.57	105.15	68.30	36.85	peak	No Limit
2	*	5321.000	54.80	40.58	95.38	54.00	41.38	AVG	No Limit
3		5350.000	19.13	40.64	59.77	68.30	-8.53	peak	
4		5350.000	4.39	40.64	45.03	54.00	-8.97	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal

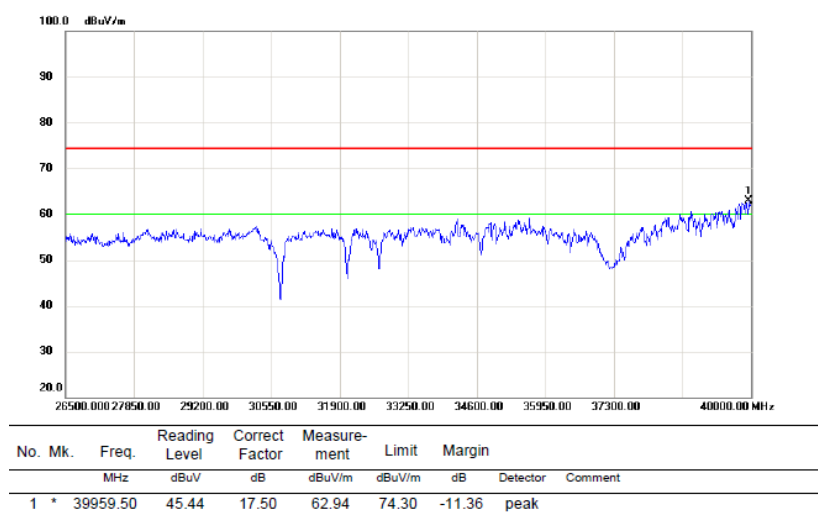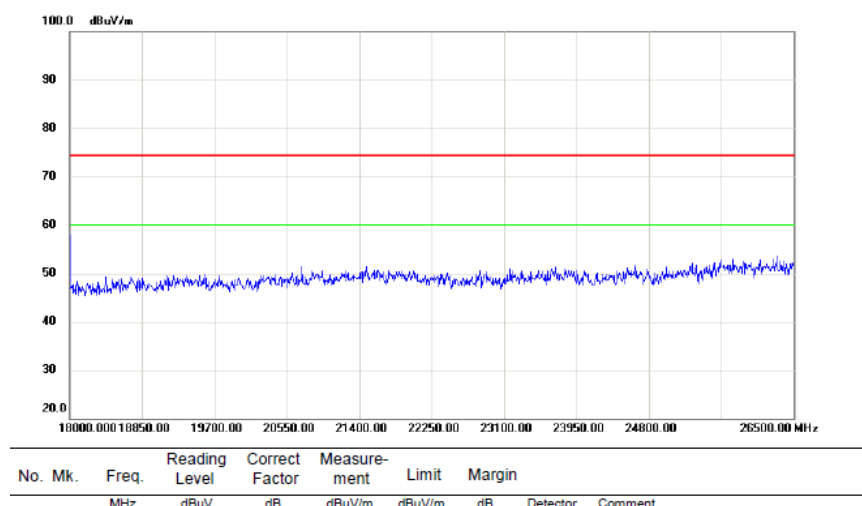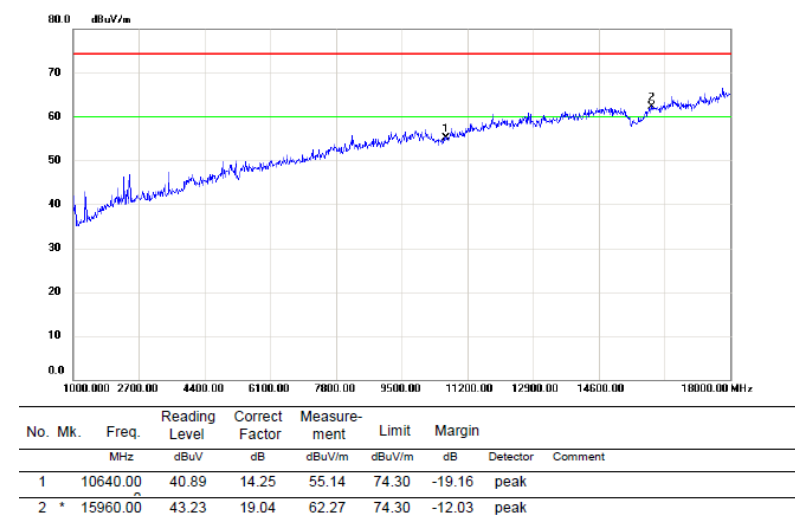

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz




Vertical

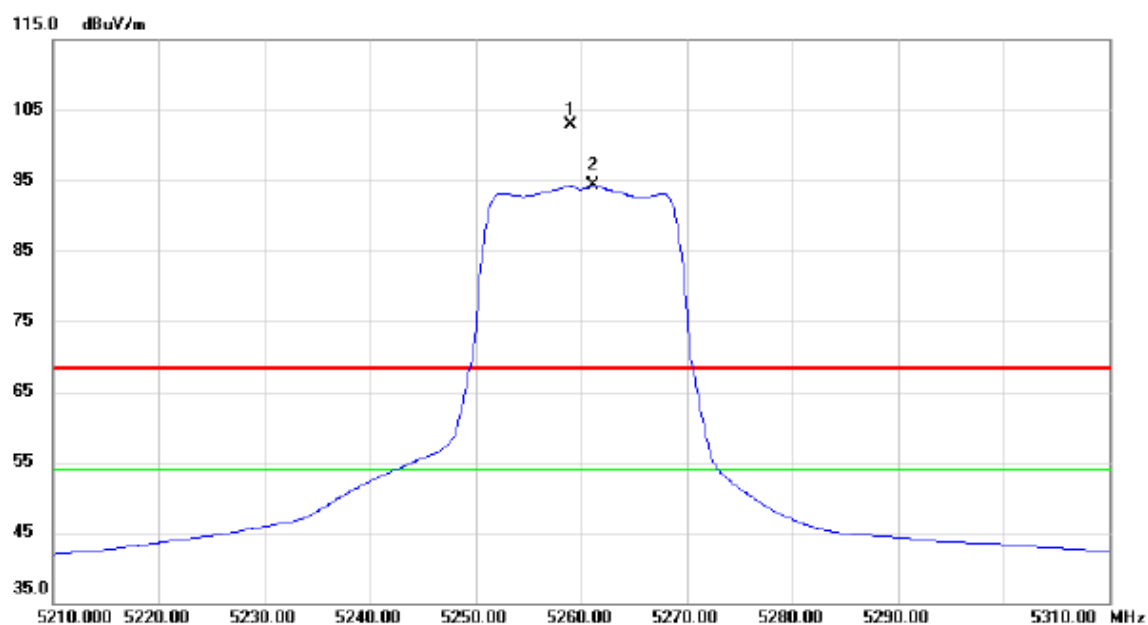

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5259.000	62.55	40.45	103.00	68.30	34.70	peak	No Limit
2	*	5261.100	53.82	40.46	94.28	54.00	40.28	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

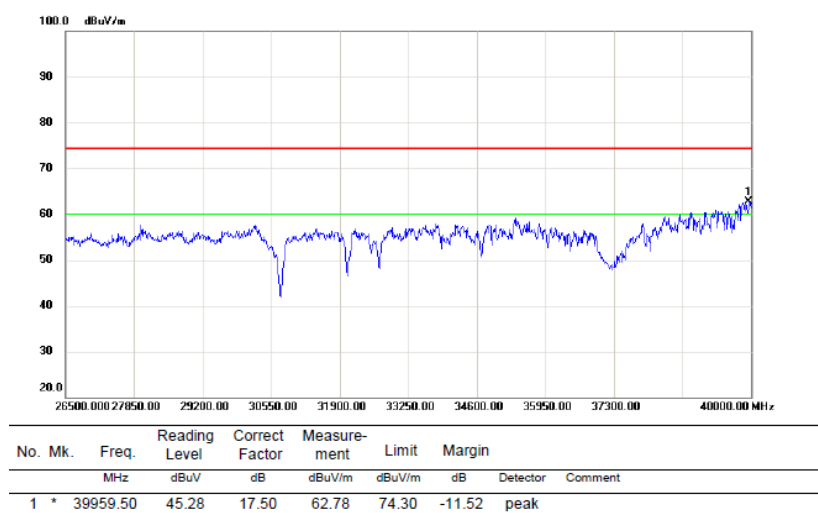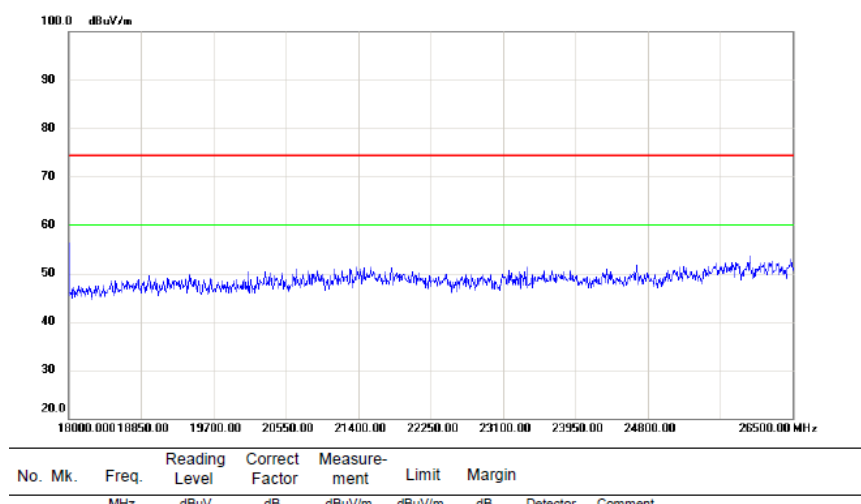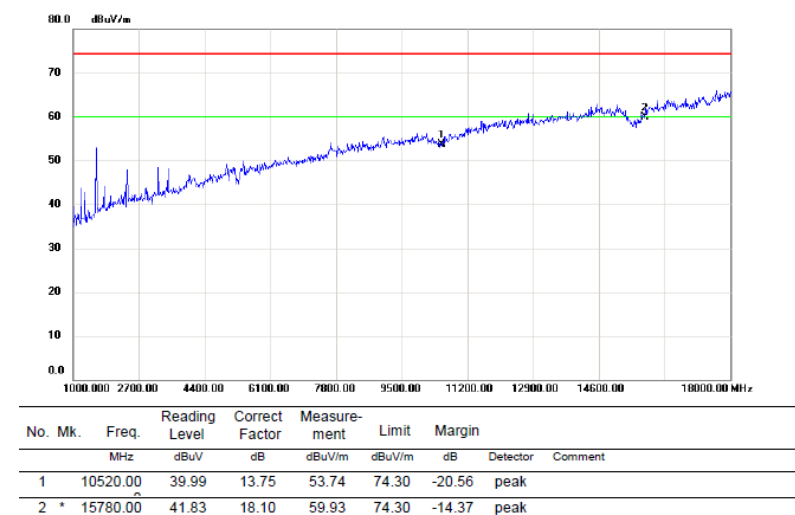

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Horizontal

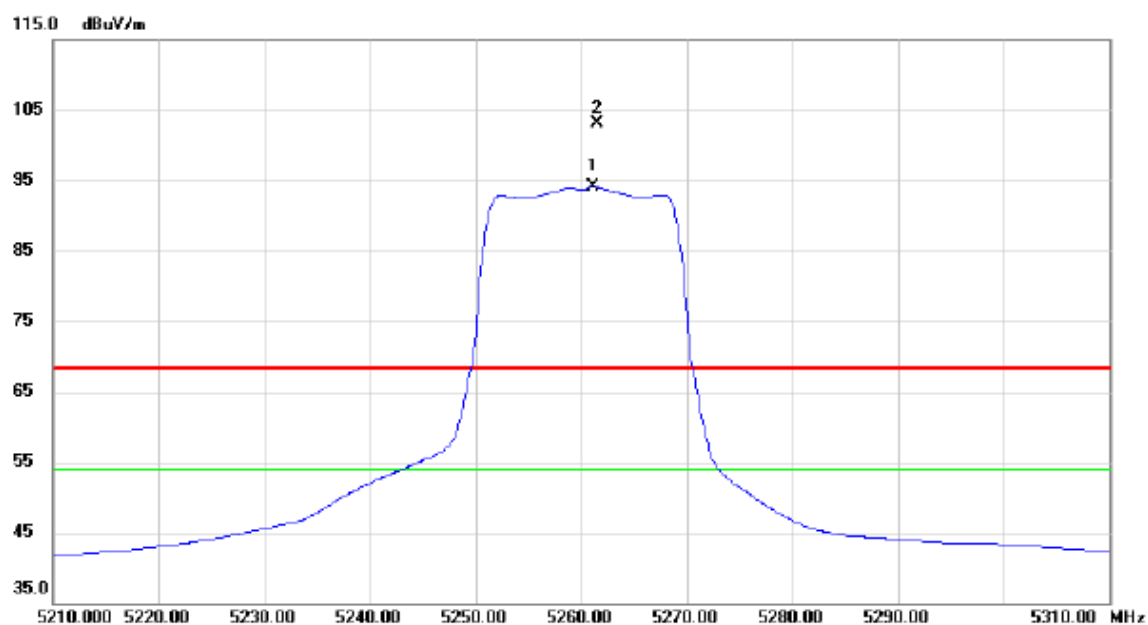


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5261.200	53.69	40.46	94.15	54.00	40.15	AVG	No Limit
2	X	5261.500	62.65	40.46	103.11	68.30	34.81	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Horizontal

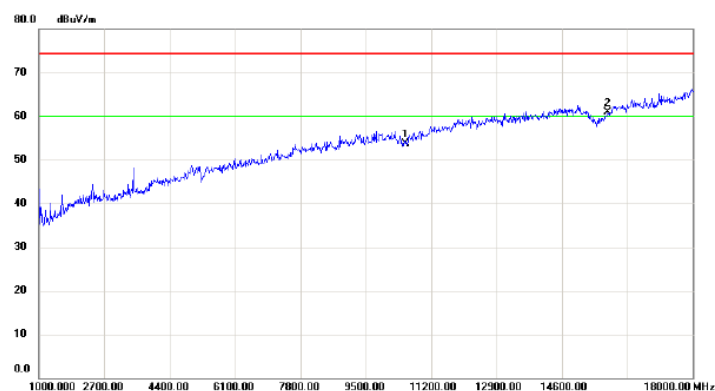

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10520.00	39.98	13.75	53.73	74.30	-20.57	peak	
2 *		15780.00	42.82	18.10	60.92	74.30	-13.38	peak	

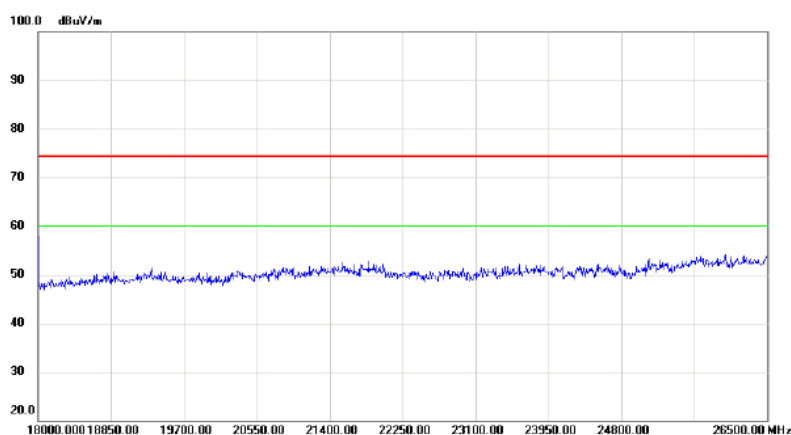


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

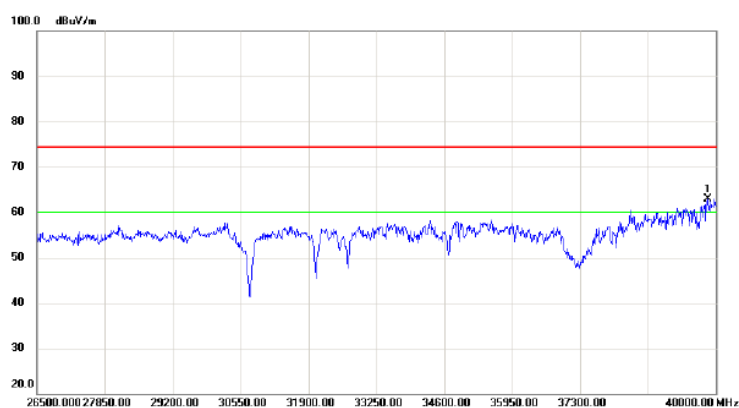

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *		39851.50	45.65	17.23	62.88	74.30	-11.42	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz


Vertical

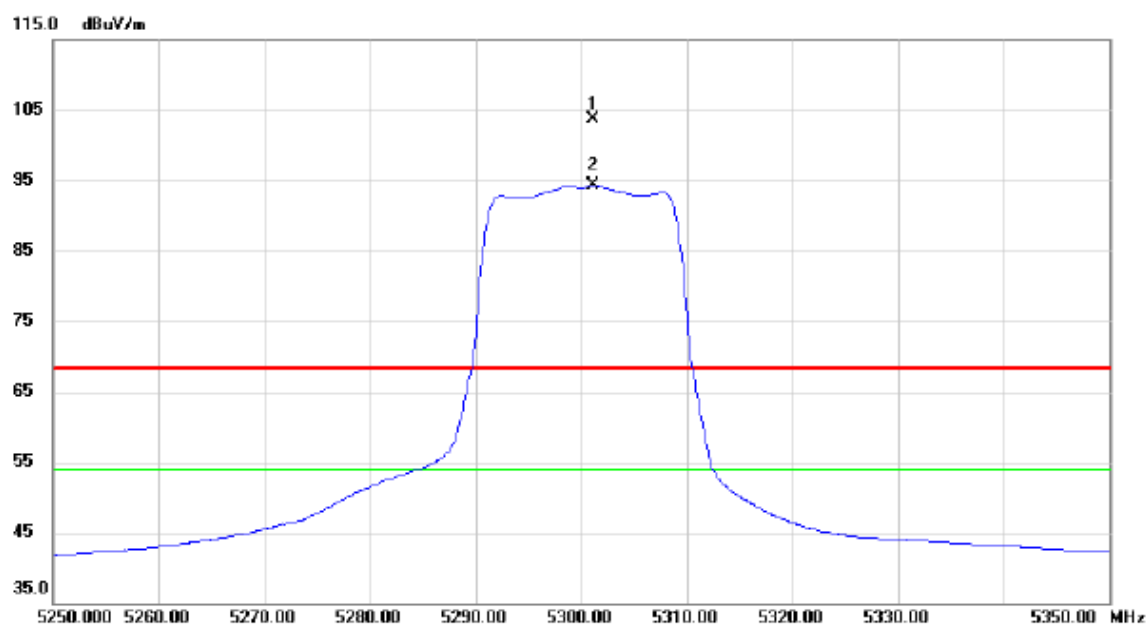


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5301.100	63.13	40.54	103.67	68.30	35.37	peak	No Limit
2	*	5301.100	53.85	40.54	94.39	54.00	40.39	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz


Vertical

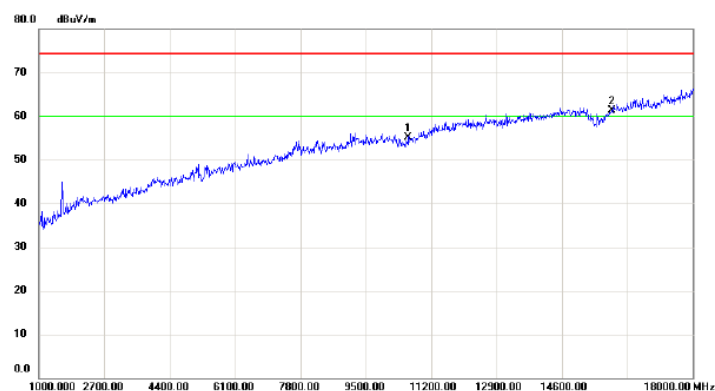

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		10600.00	41.00	14.08	55.08	74.30	-19.22	peak	
2	*	15900.00	42.59	18.73	61.32	74.30	-12.98	peak	

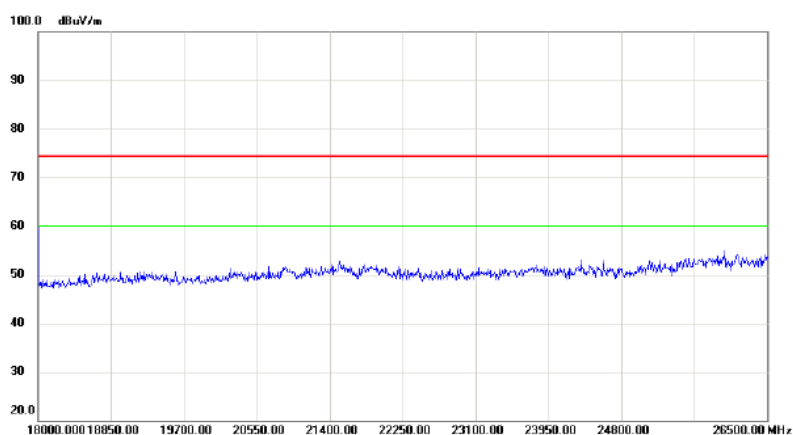


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		

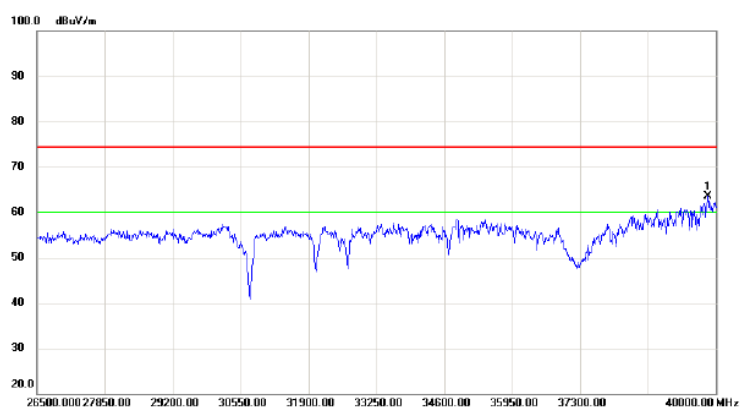

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39851.50	46.25	17.23	63.48	74.30	-10.82	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz


Horizontal

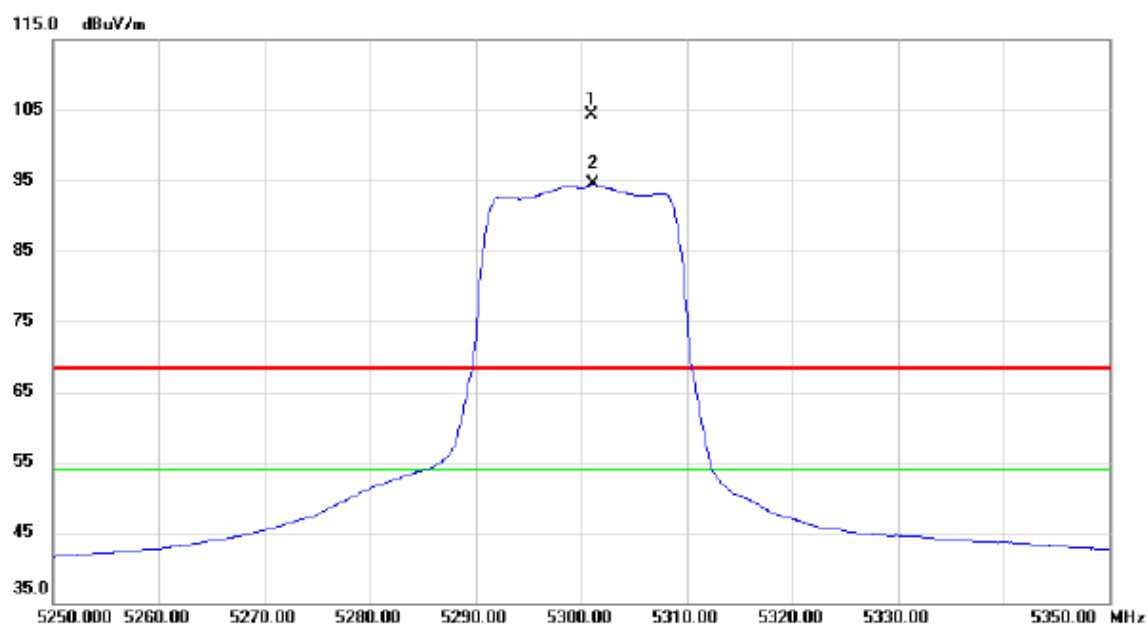


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5301.000	63.80	40.54	104.34	68.30	36.04	peak	No Limit
2	*	5301.100	53.88	40.54	94.42	54.00	40.42	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz


Horizontal

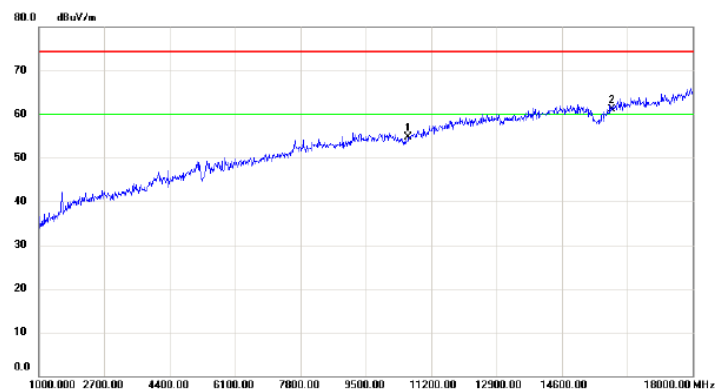

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.00	40.56	14.08	54.64	74.30	-19.66	peak	
2	*	15900.00	42.36	18.73	61.09	74.30	-13.21	peak	

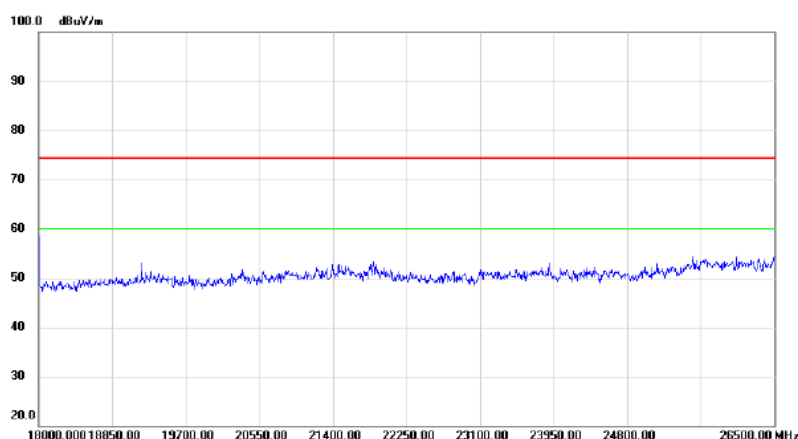


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

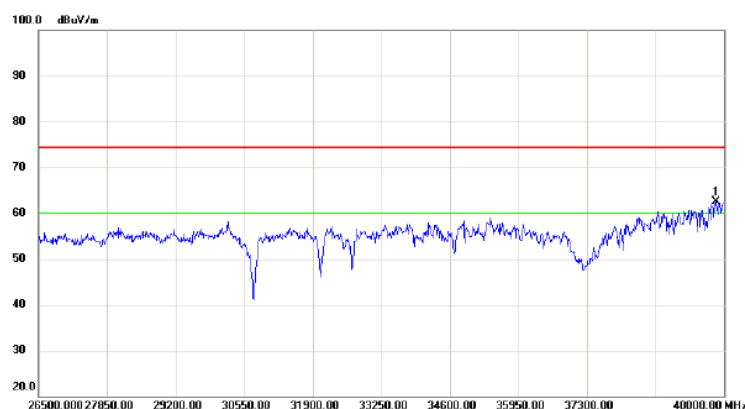

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39838.00	45.35	17.21	62.56	74.30	-11.74	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Vertical

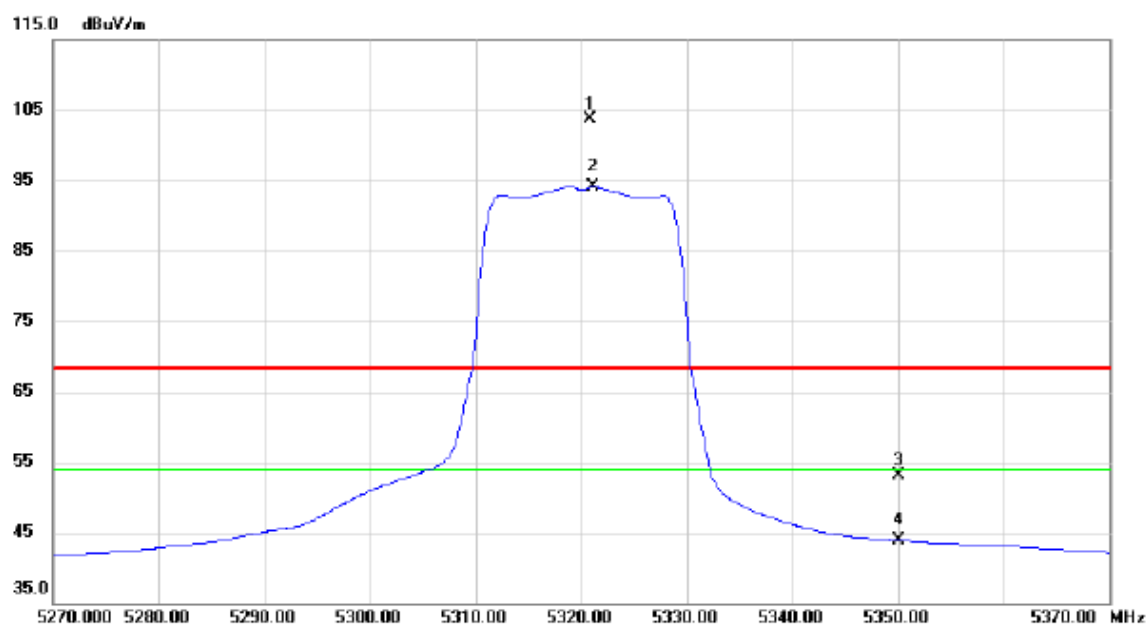


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5320.900	63.03	40.58	103.61	68.30	35.31	peak	No Limit
2	*	5321.200	53.60	40.58	94.18	54.00	40.18	AVG	No Limit
3		5350.000	12.54	40.64	53.18	68.30	-15.12	peak	
4		5350.000	3.28	40.64	43.92	54.00	-10.08	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Vertical

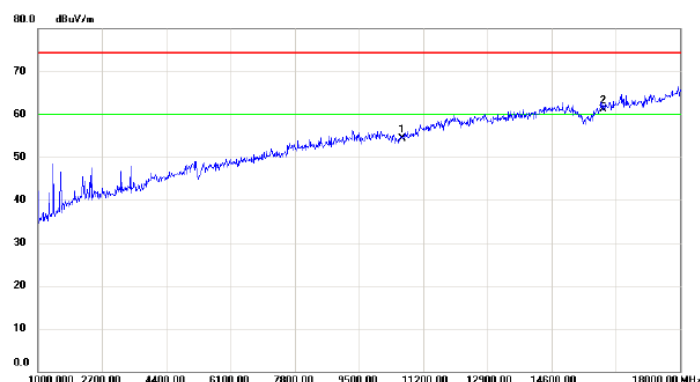

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	39.98	14.25	54.23	74.30	-20.07	peak	
2	*	15960.00	42.11	19.04	61.15	74.30	-13.15	peak	

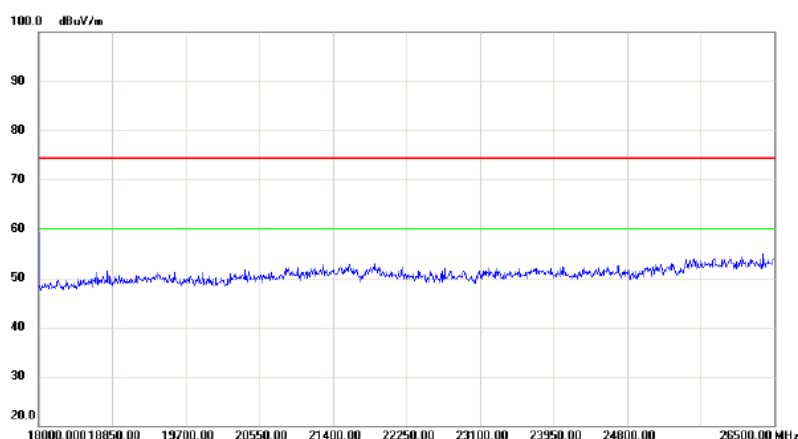


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

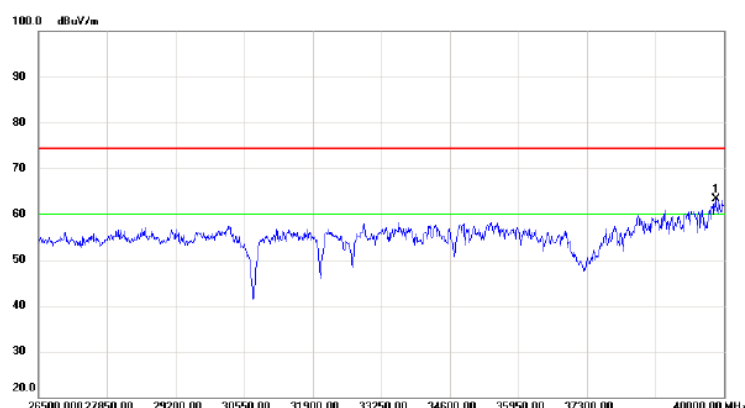

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39838.00	46.07	17.21	63.28	74.30	-11.02	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Horizontal

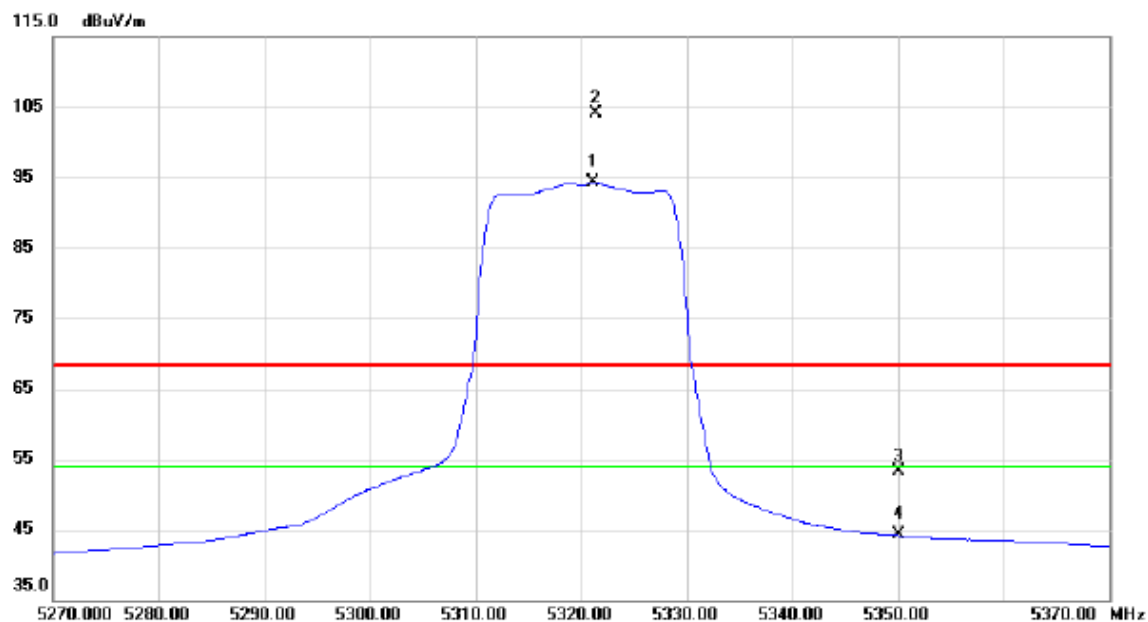


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5321.100	53.79	40.58	94.37	54.00	40.37	AVG	No Limit
2	X	5321.400	63.61	40.58	104.19	68.30	35.89	peak	No Limit
3		5350.000	12.73	40.64	53.37	68.30	-14.93	peak	
4		5350.000	3.56	40.64	44.20	54.00	-9.80	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Horizontal

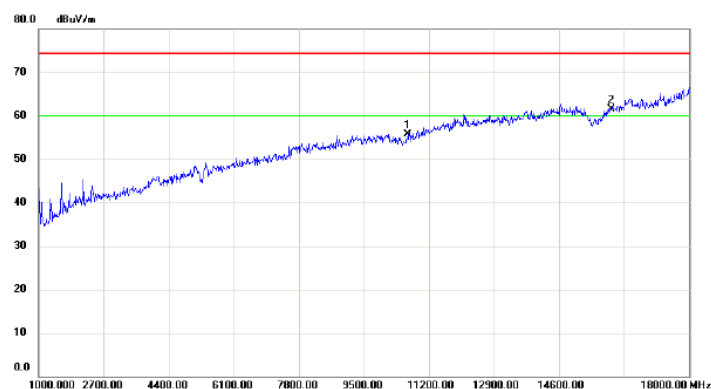

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.00	41.54	14.25	55.79	74.30	-18.51	peak	
2	*	15960.00	42.41	19.04	61.45	74.30	-12.85	peak	

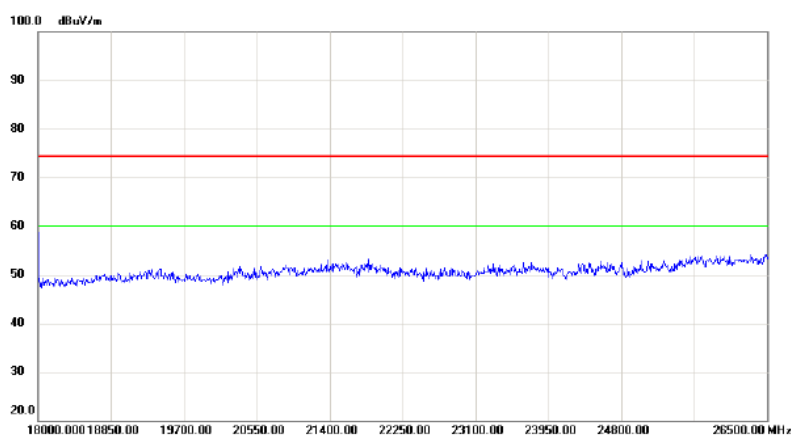


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

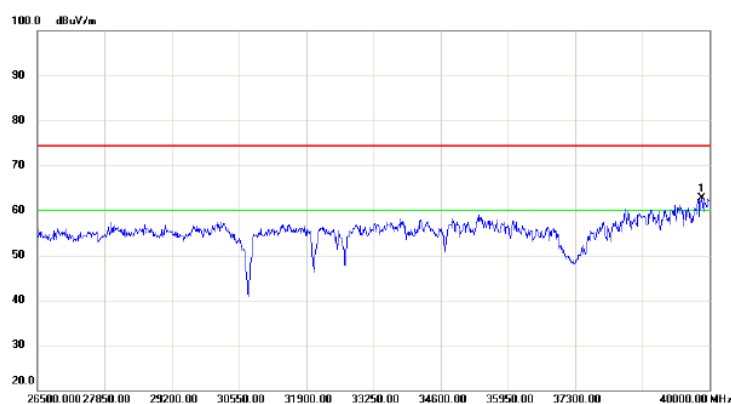

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39851.50	45.45	17.23	62.68	74.30	-11.62	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Vertical

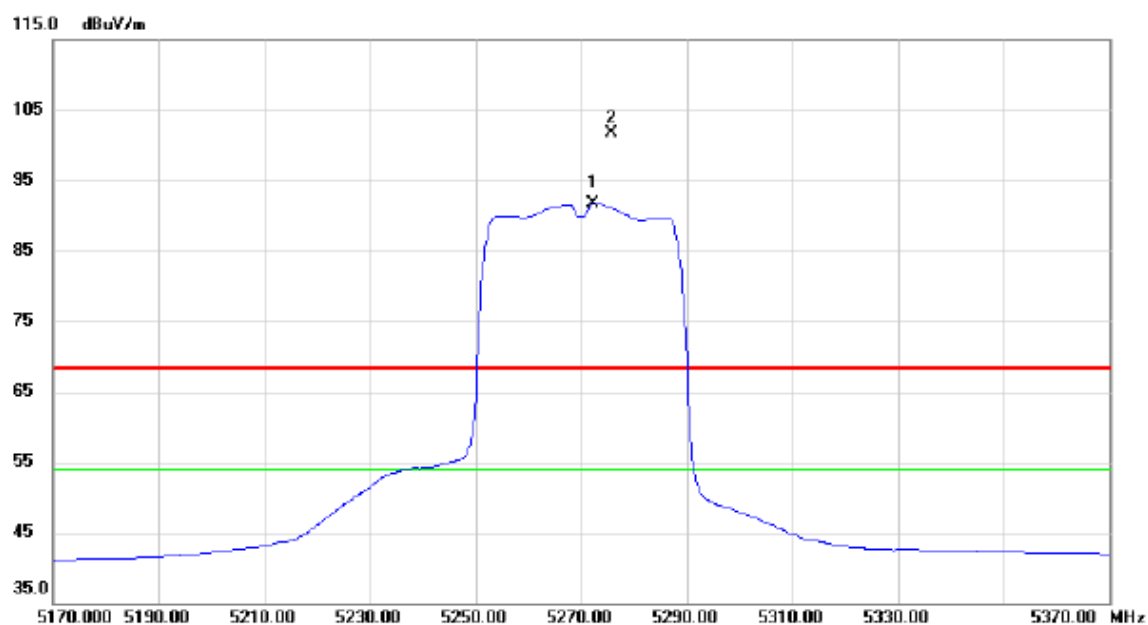


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5272.400	51.31	40.47	91.78	54.00	37.78	AVG	No Limit
2	X	5275.600	61.19	40.48	101.67	68.30	33.37	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Vertical

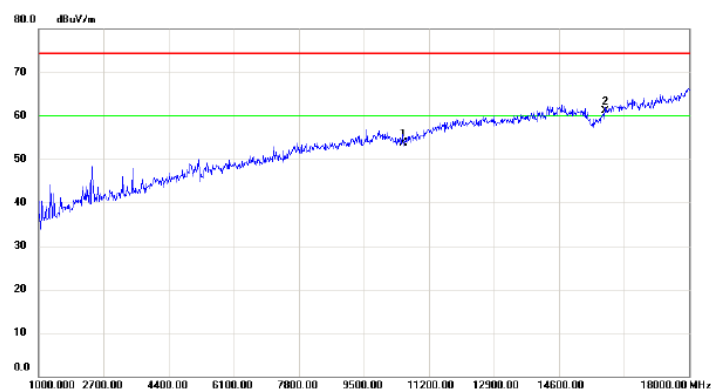

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10540.00	39.82	13.84	53.66	74.30	-20.64	peak	
2 *		15810.00	42.88	18.25	61.13	74.30	-13.17	peak	

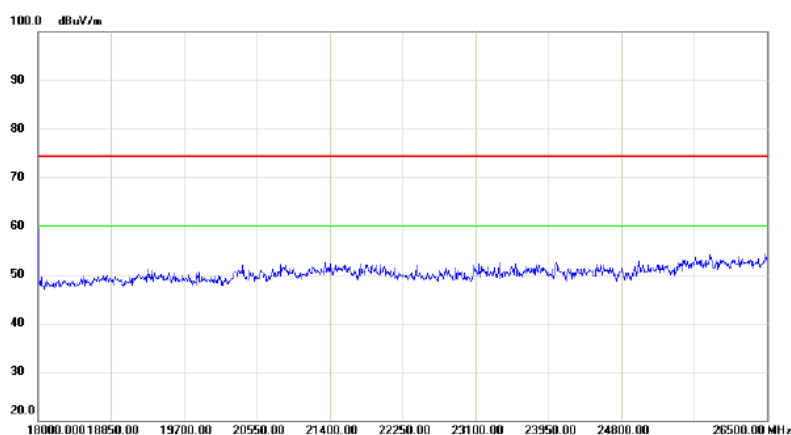


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

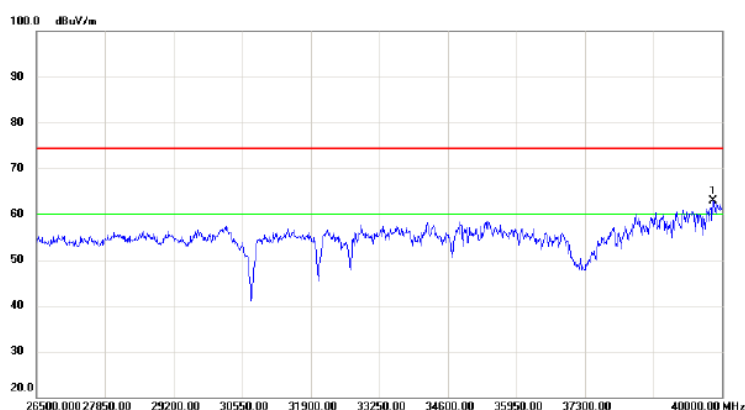

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *		39824.50	45.71	17.17	62.88	74.30	-11.42	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz




Horizontal

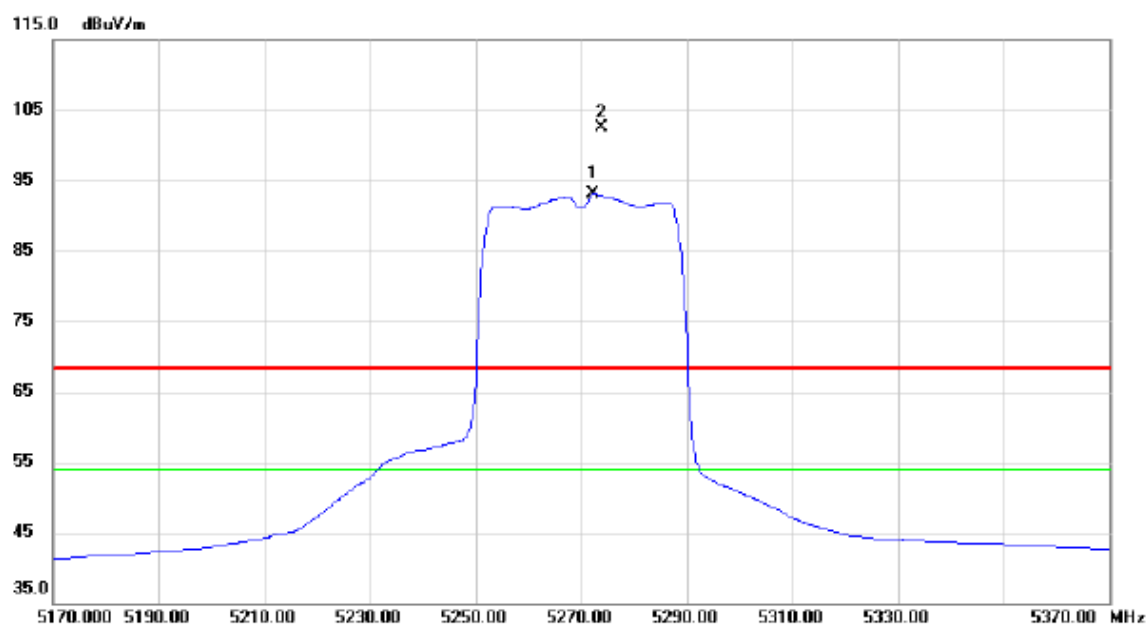

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5272.400	52.57	40.47	93.04	54.00	39.04	AVG	No Limit
2	X	5273.800	62.03	40.48	102.51	68.30	34.21	peak	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

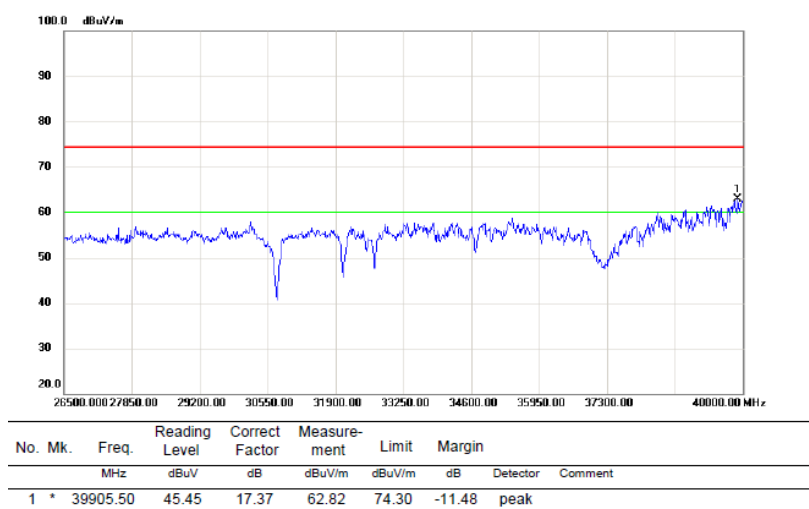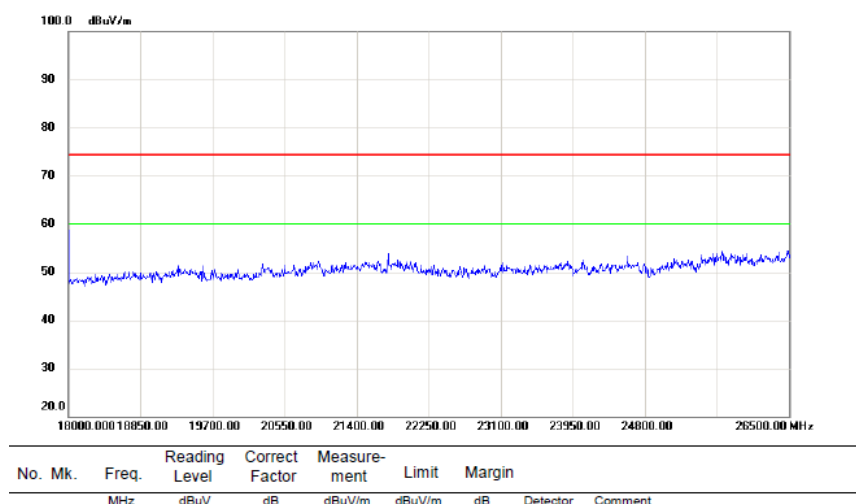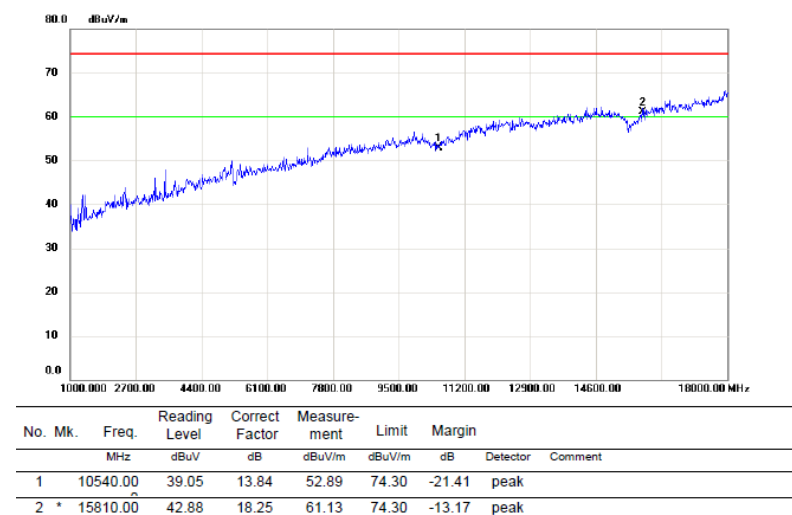

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Vertical

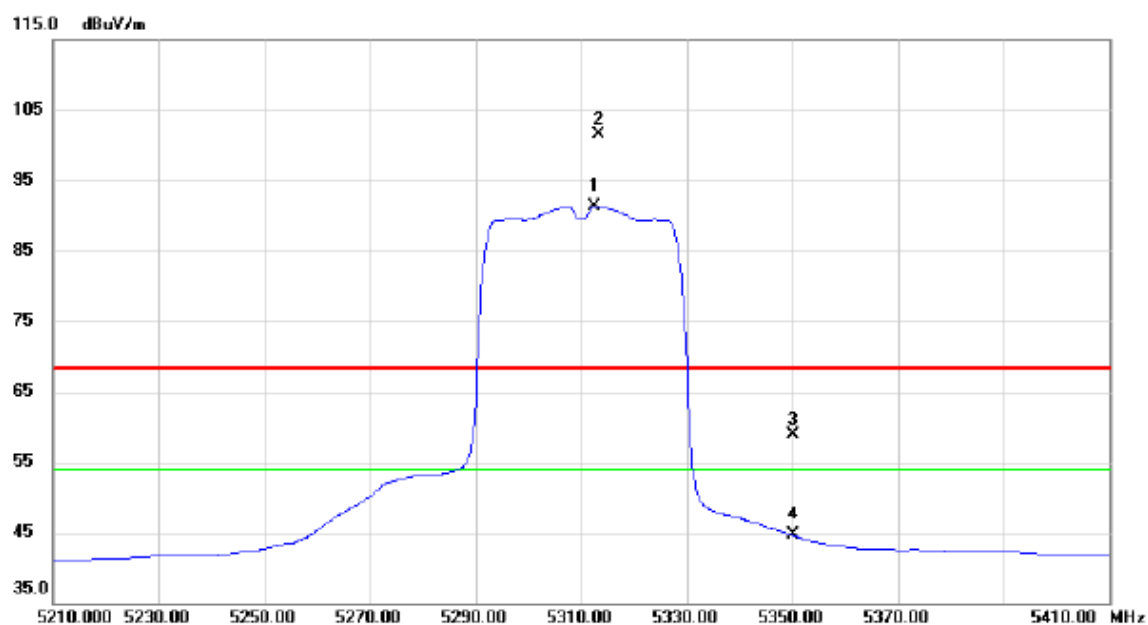


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5312.600	50.73	40.56	91.29	54.00	37.29	AVG	No Limit
2	X	5313.400	60.94	40.56	101.50	68.30	33.20	peak	No Limit
3		5350.000	18.33	40.64	58.97	68.30	-9.33	peak	
4		5350.000	3.99	40.64	44.63	54.00	-9.37	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Vertical

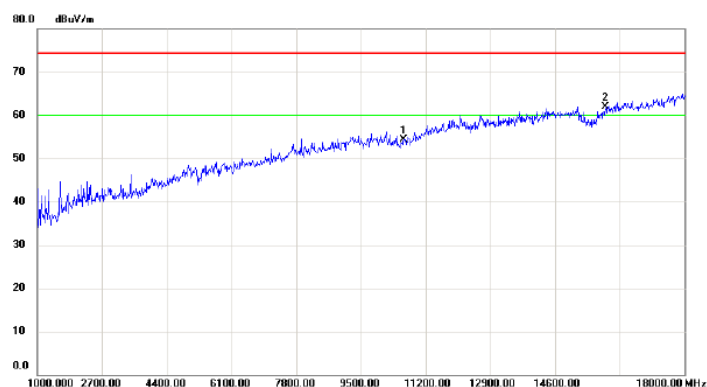

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.00	40.21	14.17	54.38	74.30	-19.92	peak	
2	*	15930.00	42.96	18.89	61.85	74.30	-12.45	peak	

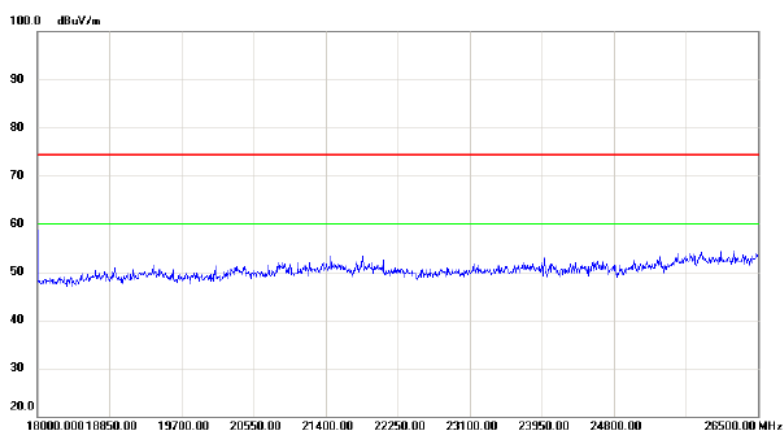


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

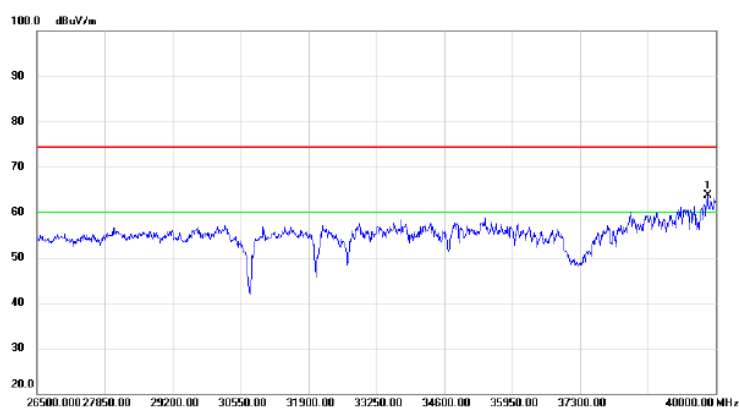

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39838.00	46.58	17.21	63.79	74.30	-10.51	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Horizontal

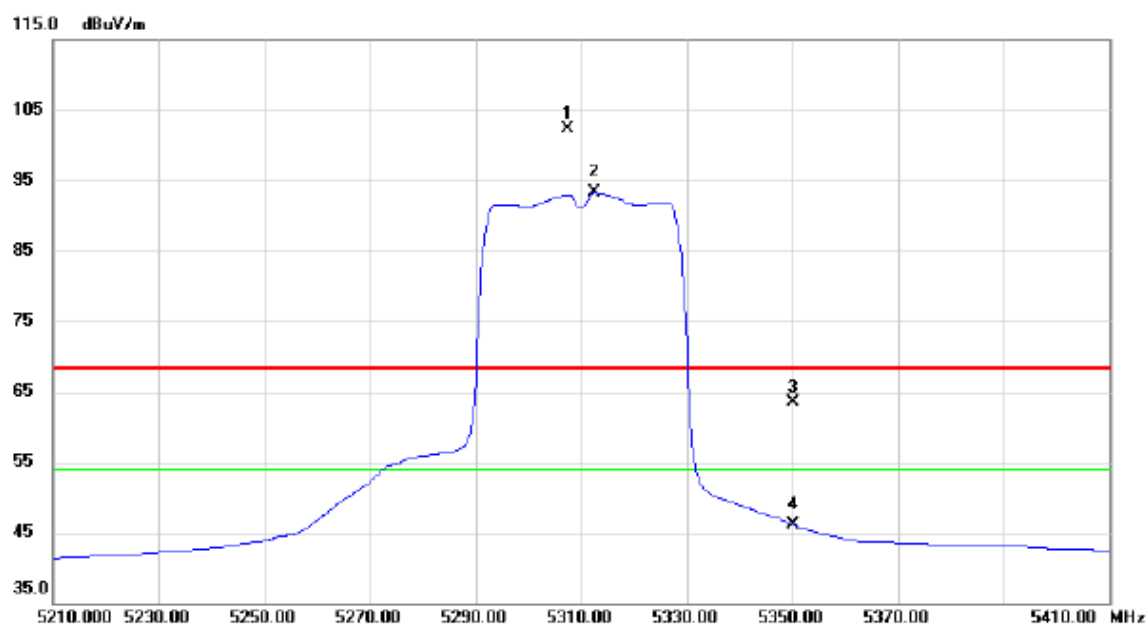


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5307.400	61.78	40.55	102.33	68.30	34.03	peak	No Limit
2	*	5312.600	52.65	40.56	93.21	54.00	39.21	AVG	No Limit
3		5350.000	22.89	40.64	63.53	68.30	-4.77	peak	
4		5350.000	5.48	40.64	46.12	54.00	-7.88	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Horizontal

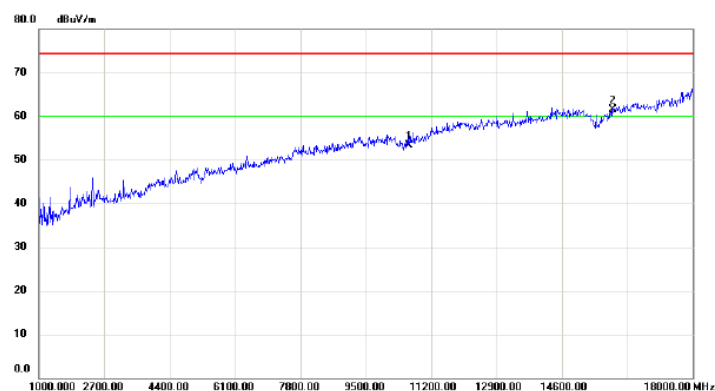

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.00	39.11	14.17	53.28	74.30	-21.02	peak	
2 *		15930.00	42.66	18.89	61.55	74.30	-12.75	peak	

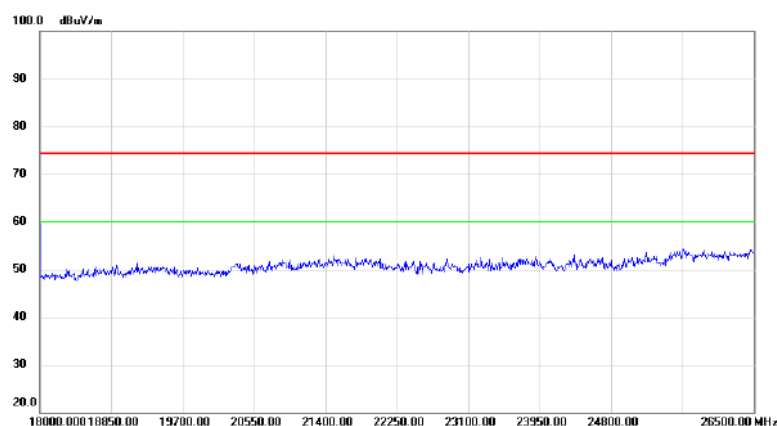


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

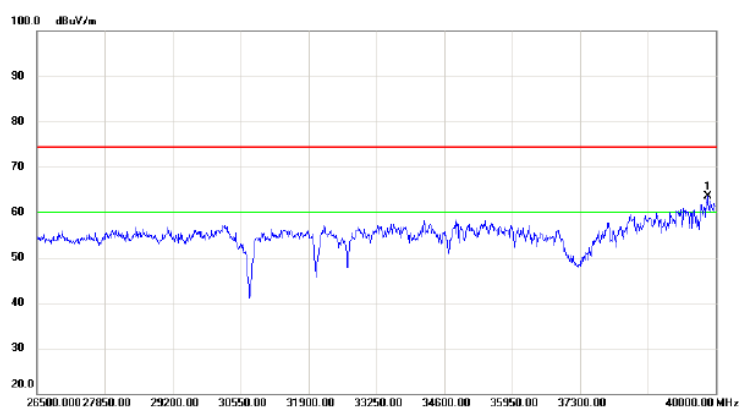

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *		39838.00	46.38	17.21	63.59	74.30	-10.71	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Vertical

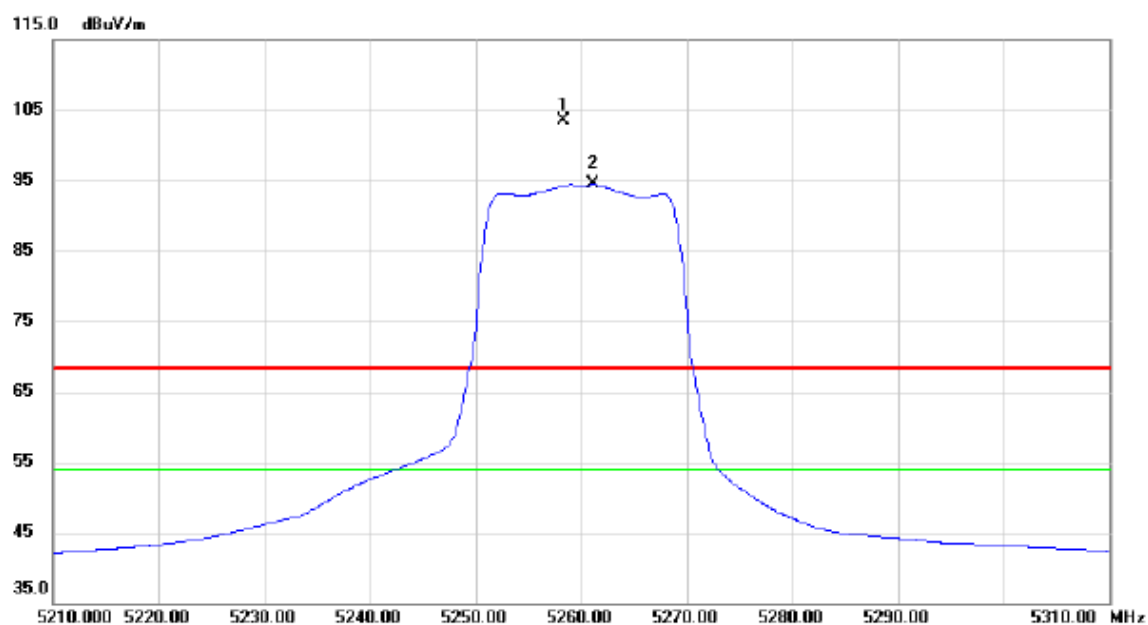


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5258.300	63.14	40.45	103.59	68.30	35.29	peak	No Limit
2	*	5261.100	54.04	40.46	94.50	54.00	40.50	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Vertical

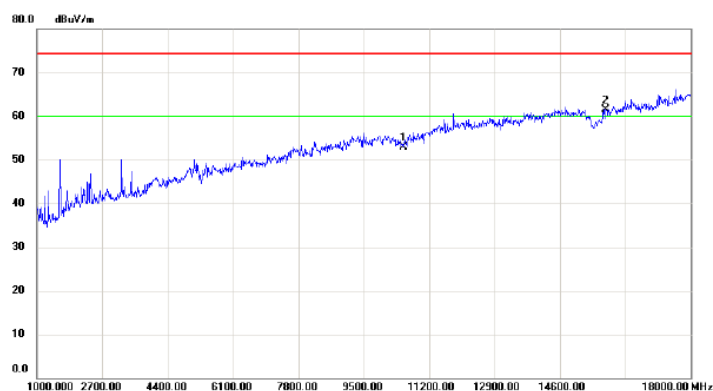

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10520.00	39.16	13.75	52.91	74.30	-21.39	peak	
2 *		15780.00	43.34	18.10	61.44	74.30	-12.86	peak	

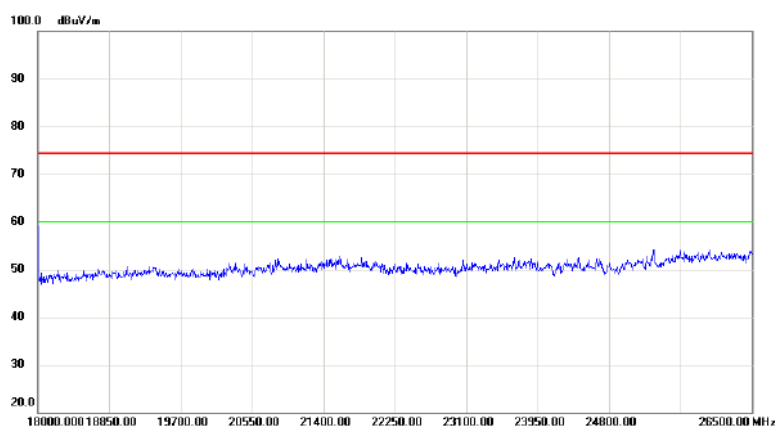


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

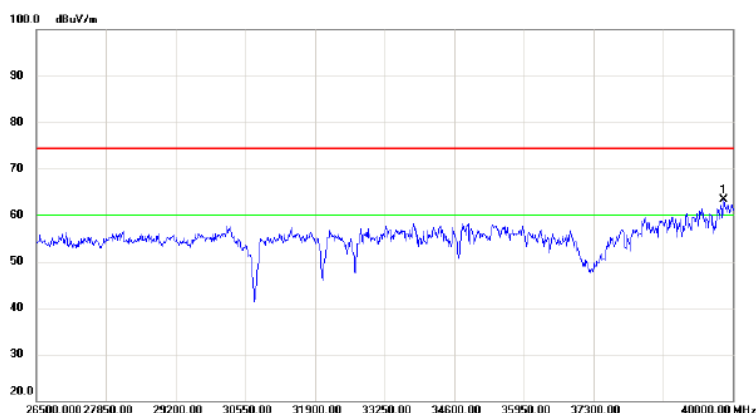

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *		39824.50	46.21	17.17	63.38	74.30	-10.92	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz




Horizontal

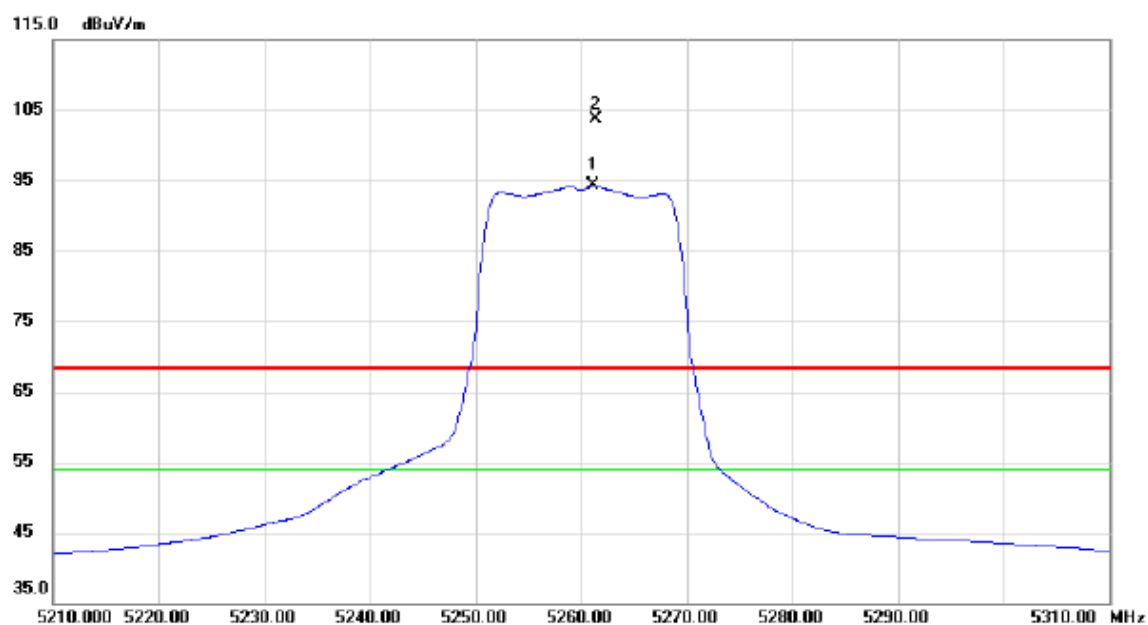

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5261.100	53.79	40.46	94.25	54.00	40.25	AVG	No Limit
2	X	5261.400	63.16	40.46	103.62	68.30	35.32	peak	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Horizontal

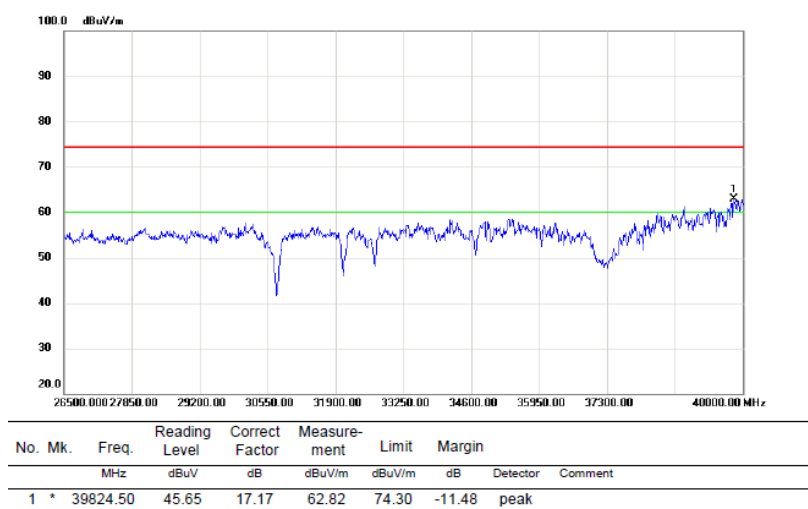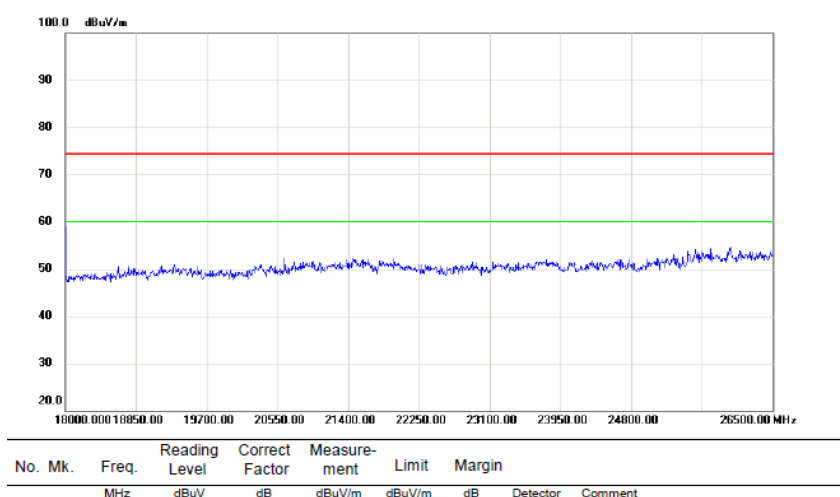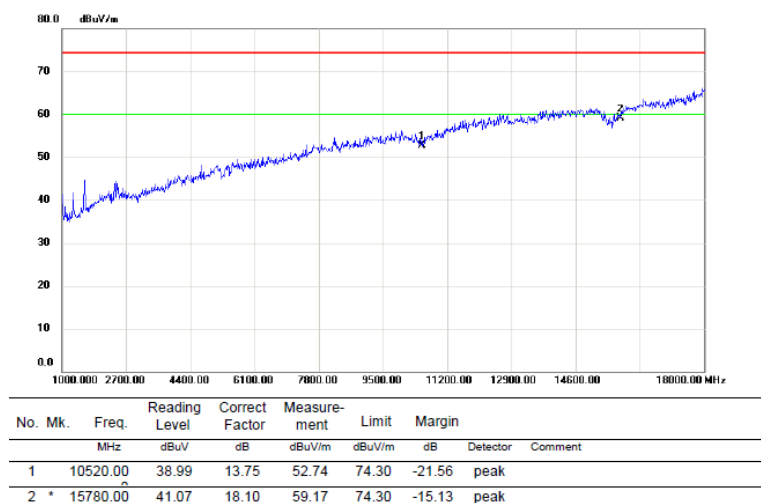

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz




Vertical

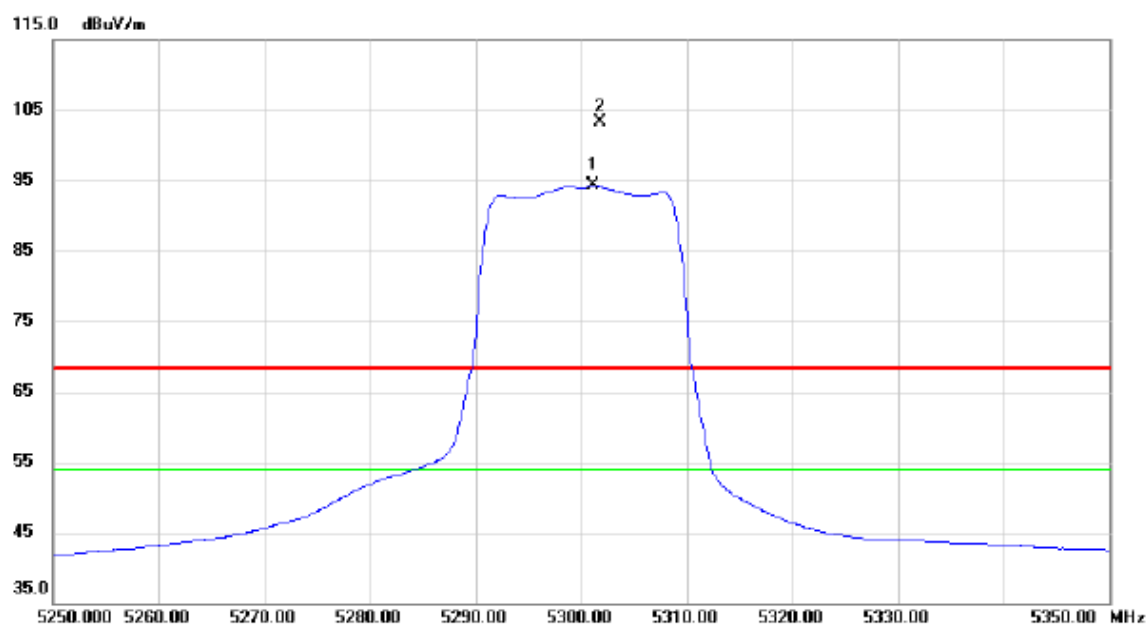

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5301.200	53.80	40.54	94.34	54.00	40.34	AVG	No Limit
2	X	5301.800	62.77	40.54	103.31	68.30	35.01	peak	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

Vertical

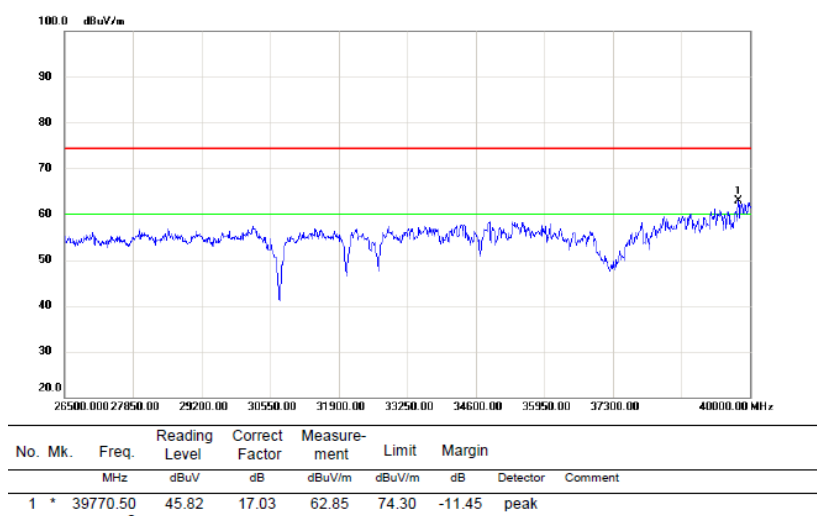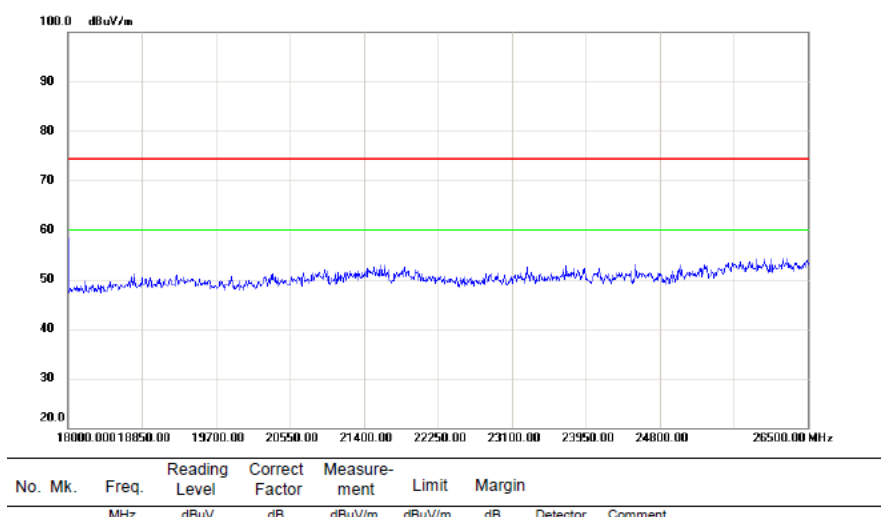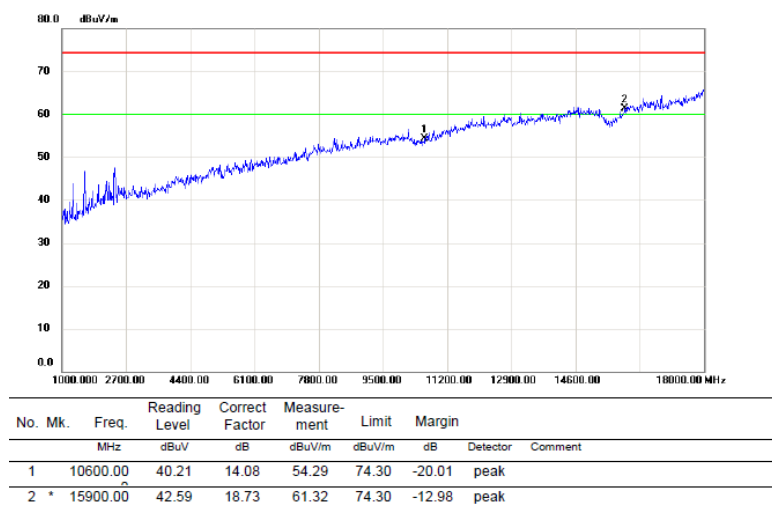

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz


Horizontal

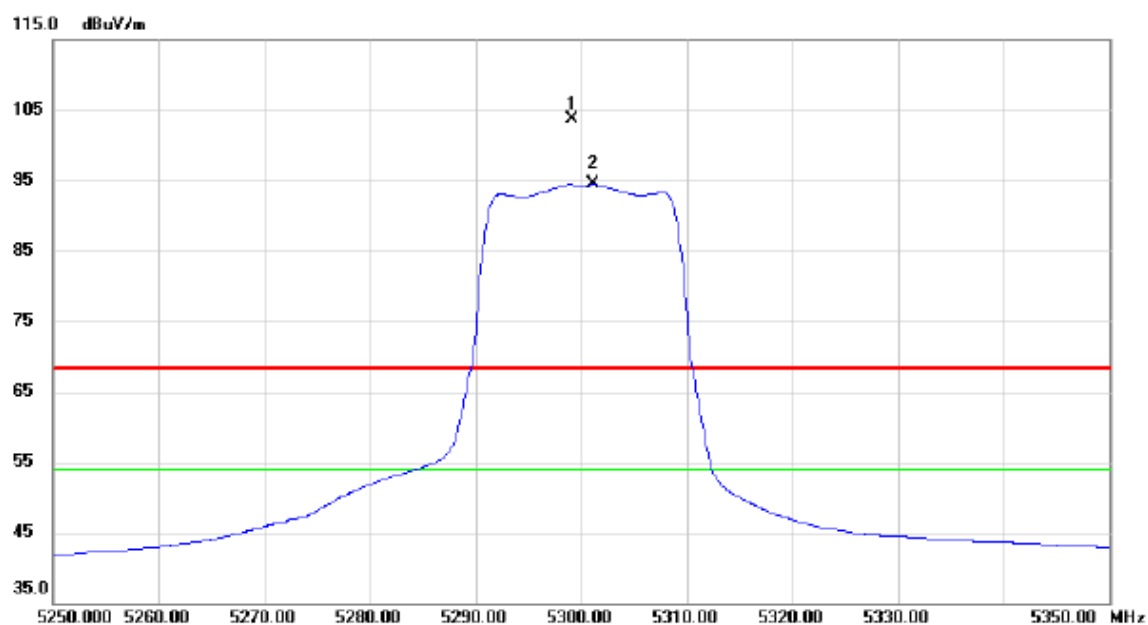


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5299.100	63.18	40.54	103.72	68.30	35.42	peak	No Limit
2	*	5301.100	53.98	40.54	94.52	54.00	40.52	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz


Horizontal

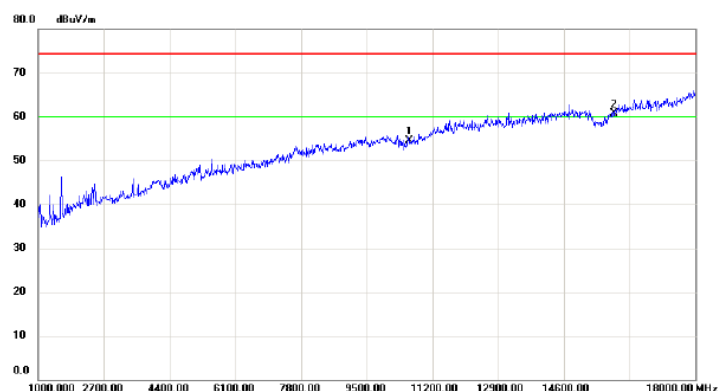

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.00	40.43	14.08	54.51	74.30	-19.79	peak	
2	*	15900.00	41.90	18.73	60.63	74.30	-13.67	peak	

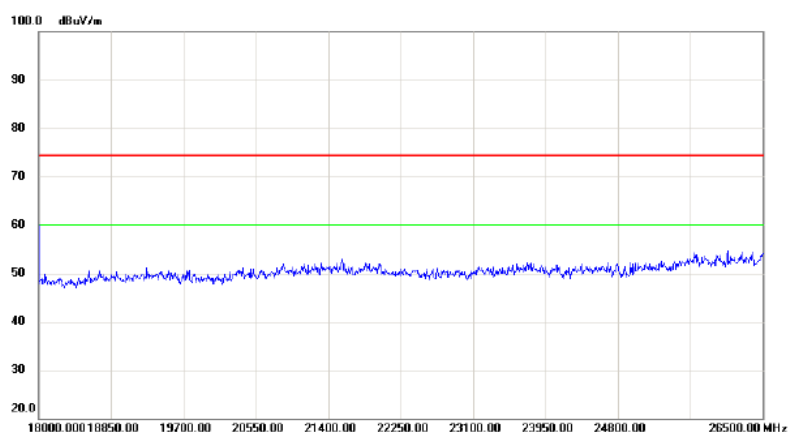


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

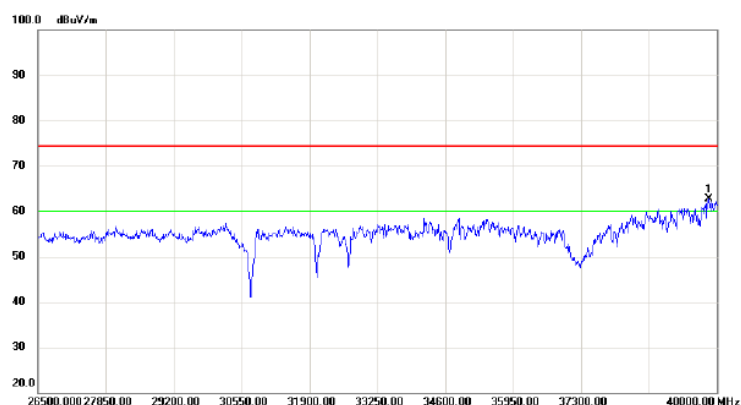

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39838.00	45.44	17.21	62.65	74.30	-11.65	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Vertical

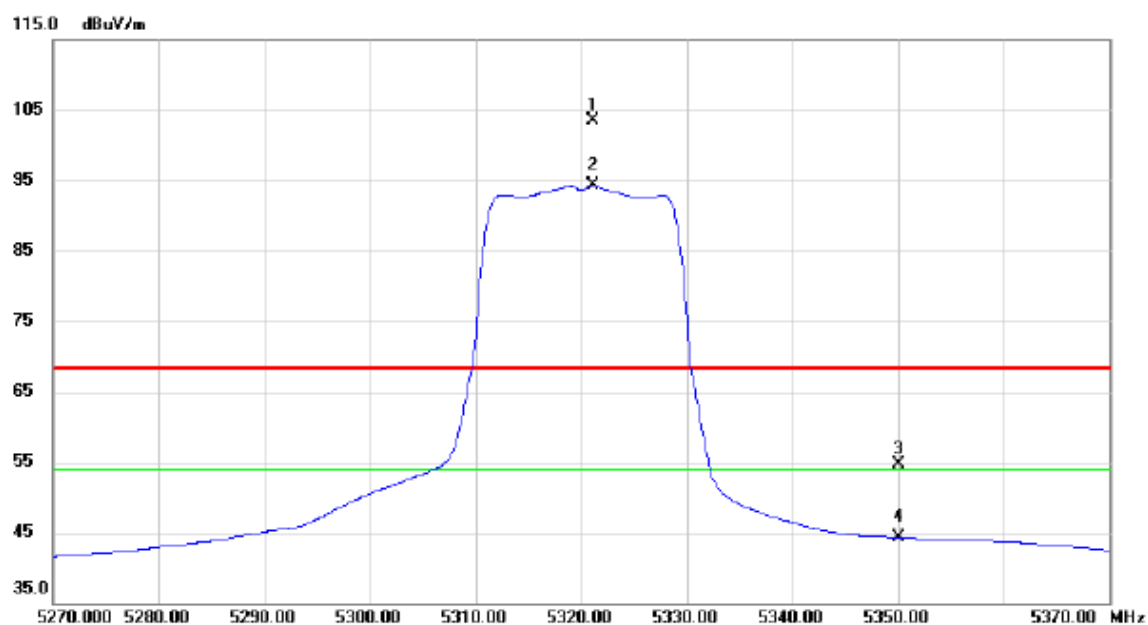


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5321.100	62.90	40.58	103.48	68.30	35.18	peak	No Limit
2	*	5321.100	53.64	40.58	94.22	54.00	40.22	AVG	No Limit
3		5350.000	14.04	40.64	54.68	68.30	-13.62	peak	
4		5350.000	3.70	40.64	44.34	54.00	-9.66	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Vertical

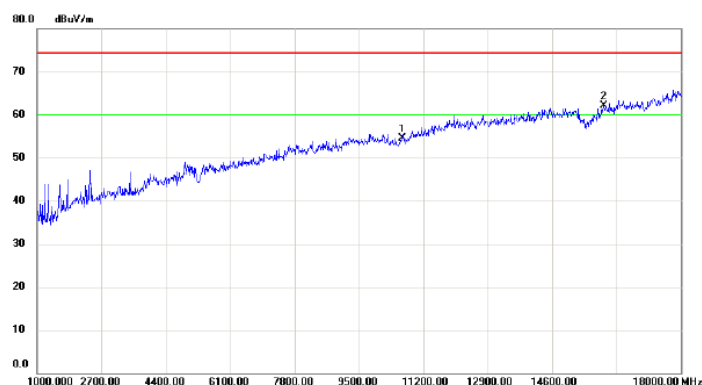

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.00	40.20	14.25	54.45	74.30	-19.85	peak	
2	*	15960.00	43.14	19.04	62.18	74.30	-12.12	peak	

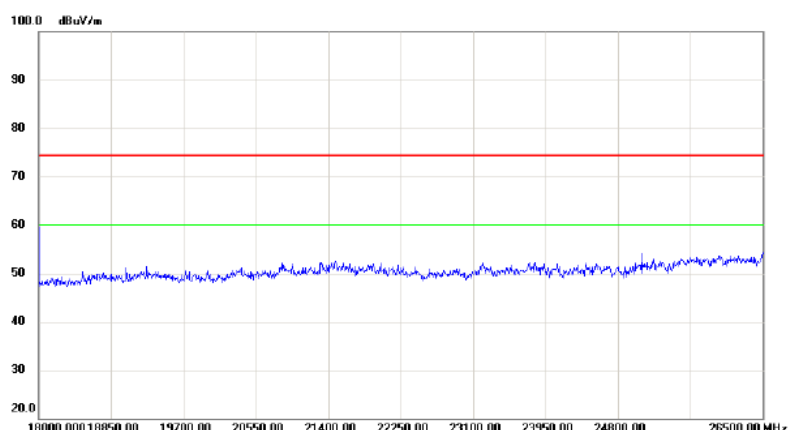


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

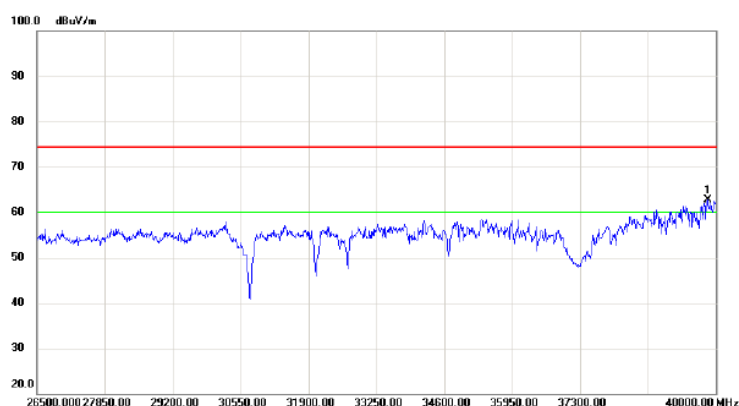

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39838.00	45.58	17.21	62.79	74.30	-11.51	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz




Horizontal

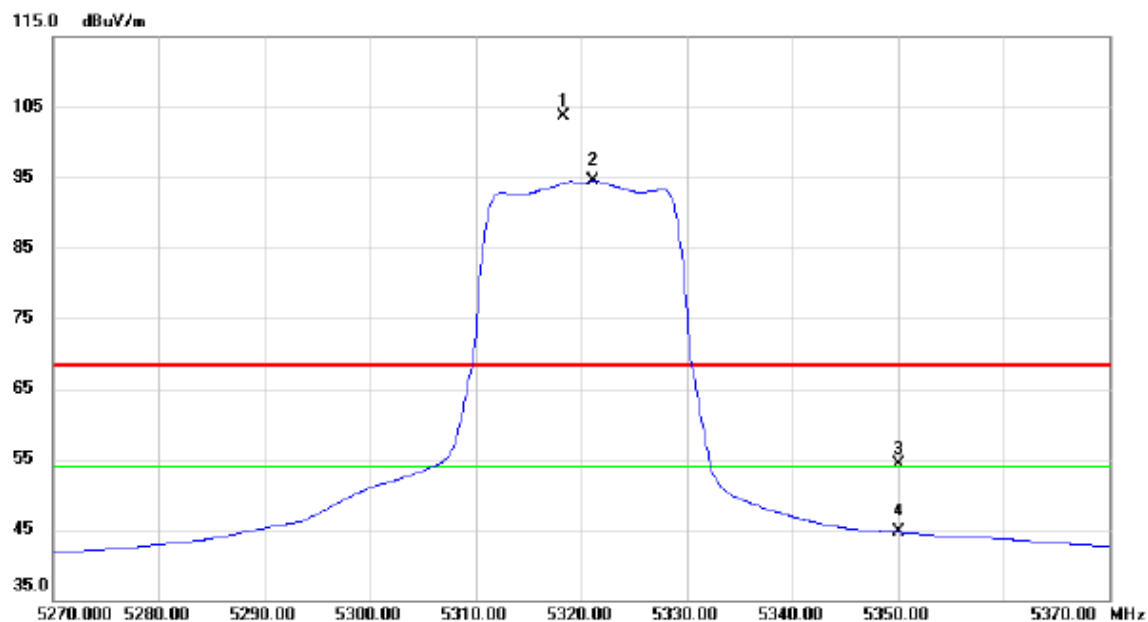

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5318.300	63.21	40.57	103.78	68.30	35.48	peak	No Limit
2	*	5321.200	54.00	40.58	94.58	54.00	40.58	AVG	No Limit
3		5350.000	13.69	40.64	54.33	68.30	-13.97	peak	
4		5350.000	4.00	40.64	44.64	54.00	-9.36	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Horizontal

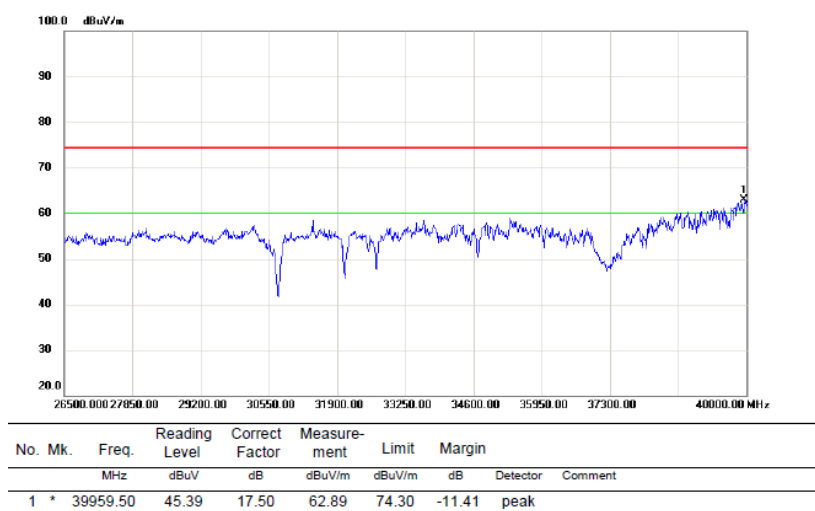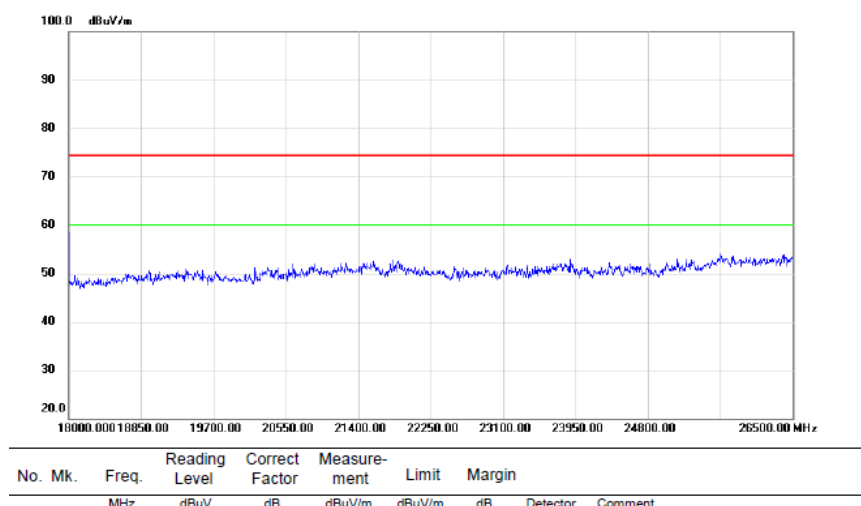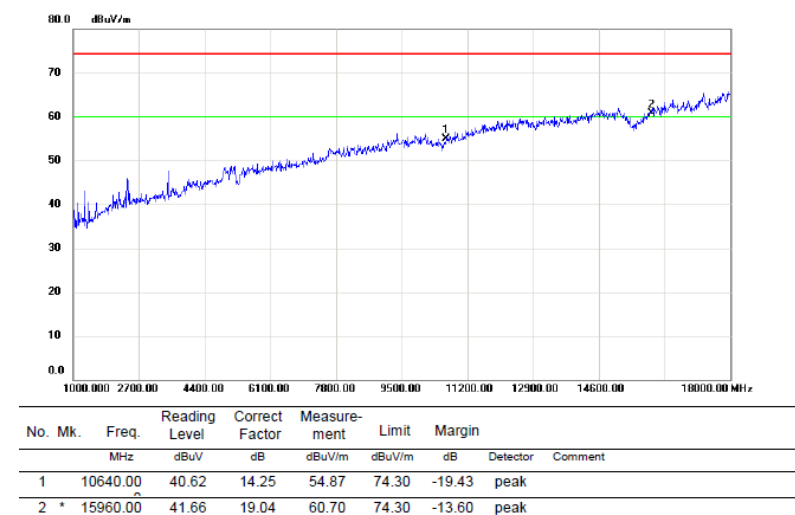

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz




Vertical

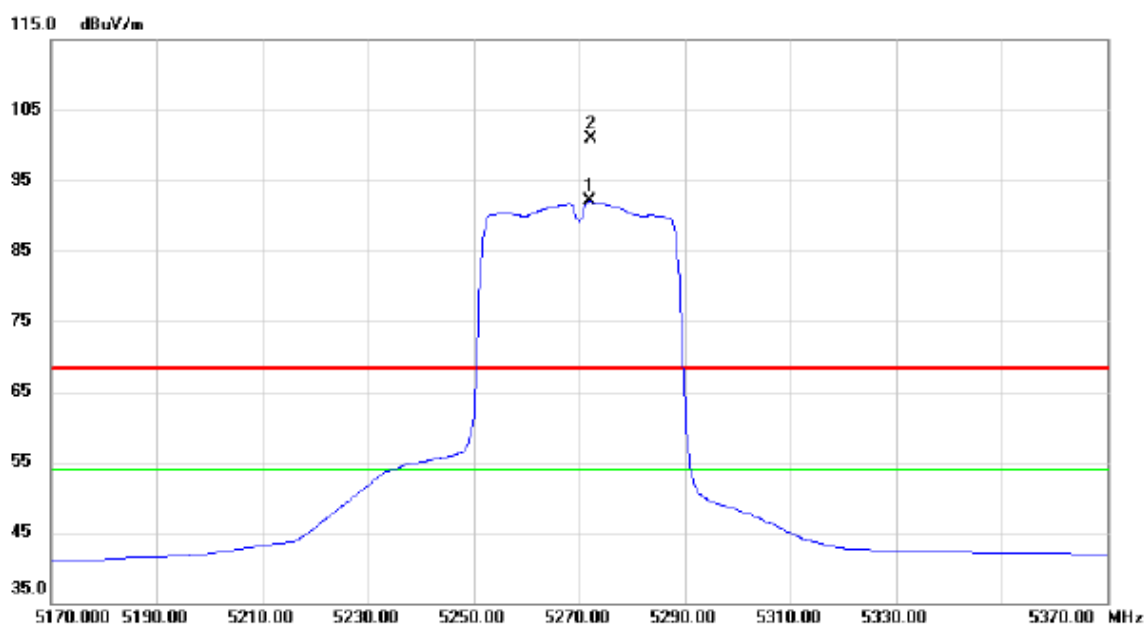

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5272.000	51.58	40.47	92.05	68.30	23.75	peak	No Limit
2	*	5272.200	60.52	40.47	100.99	68.30	32.69	peak	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Vertical

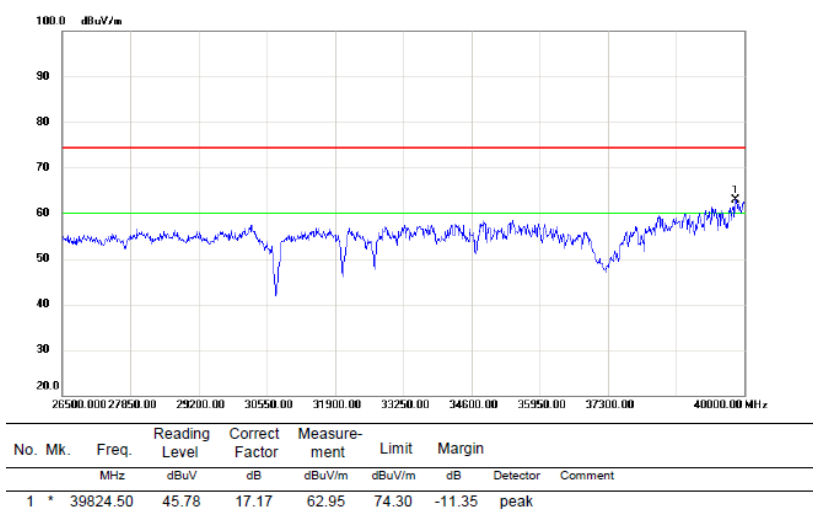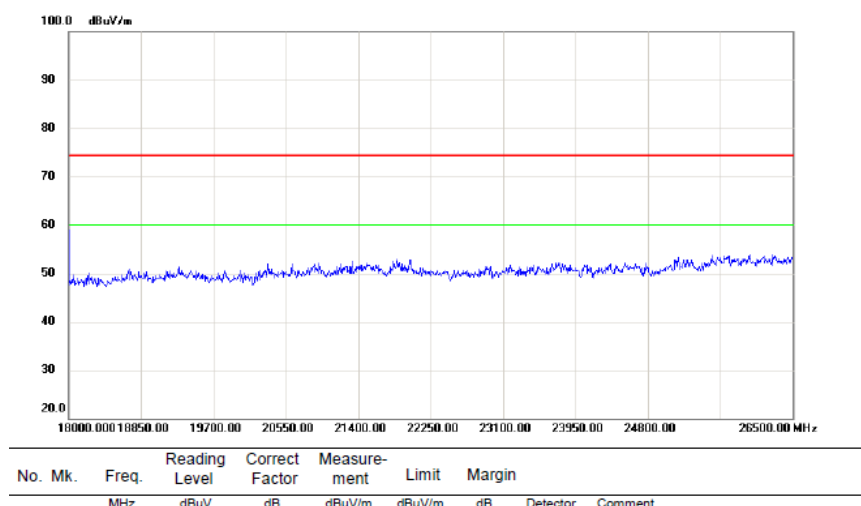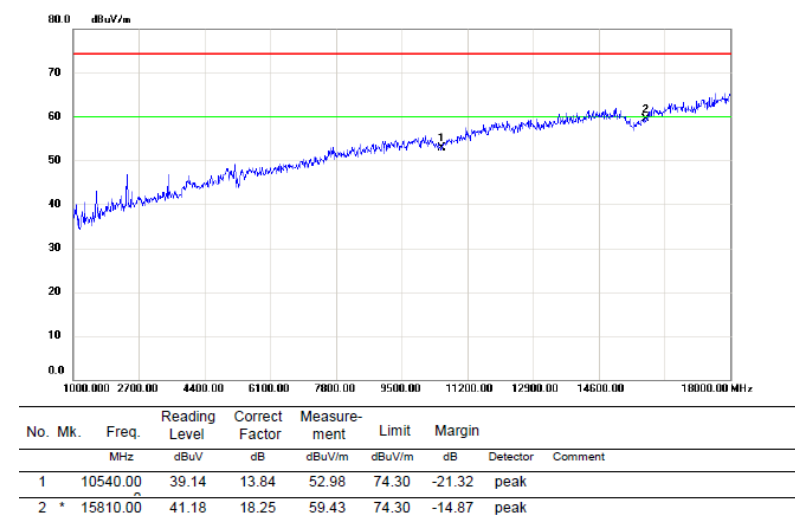

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz




Horizontal

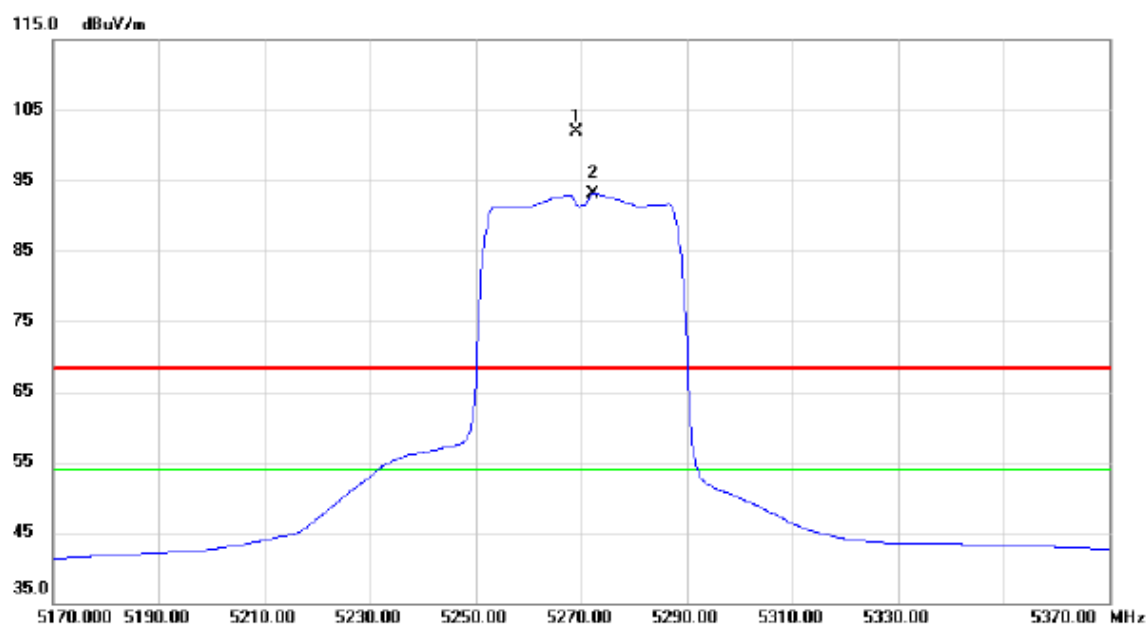

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5269.000	61.45	40.47	101.92	68.30	33.62	peak	No Limit
2	*	5272.400	52.69	40.47	93.16	54.00	39.16	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal

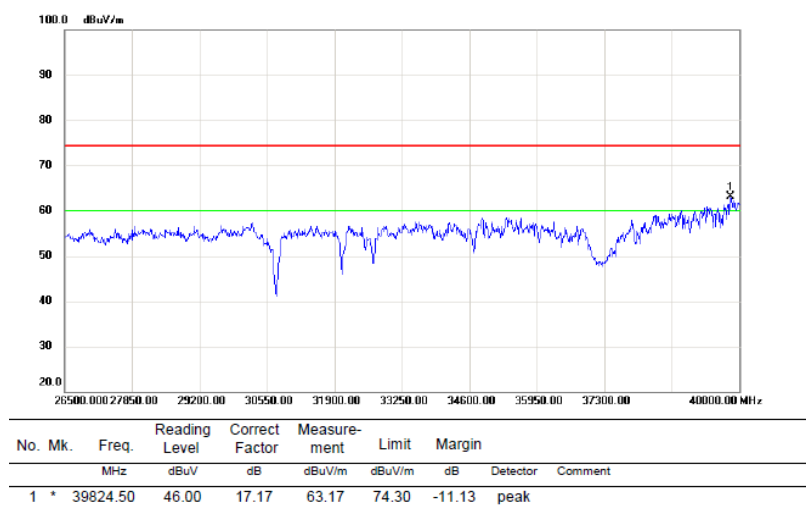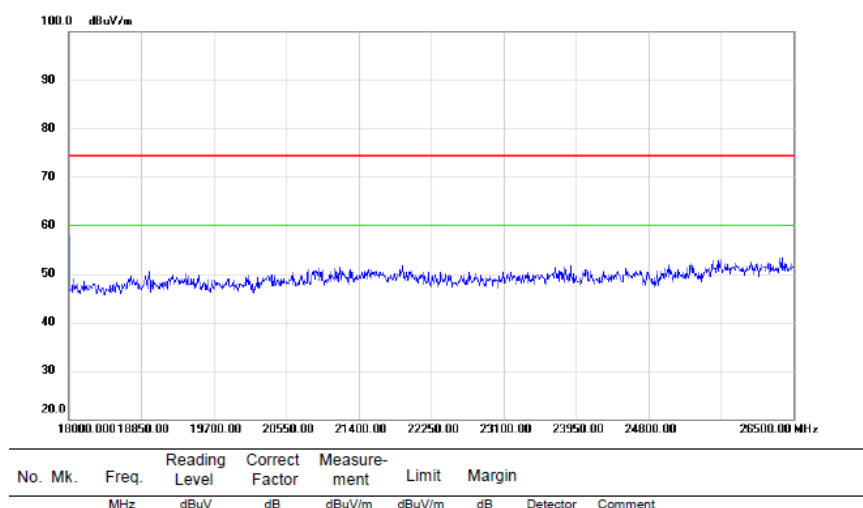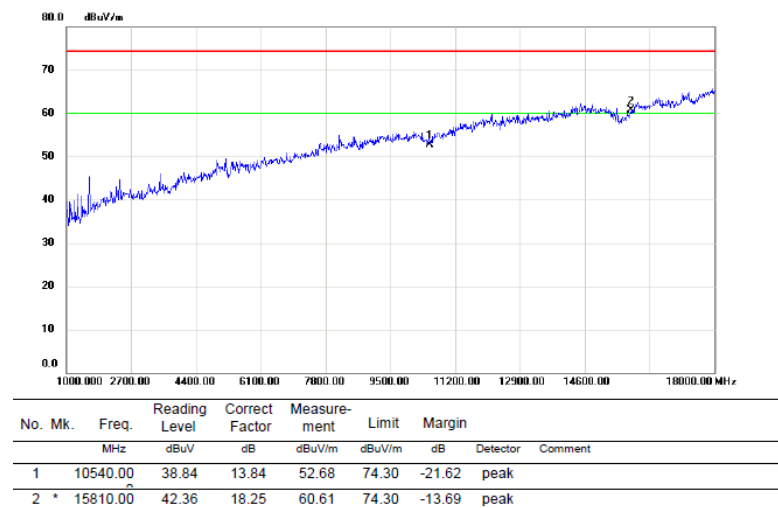

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


Vertical

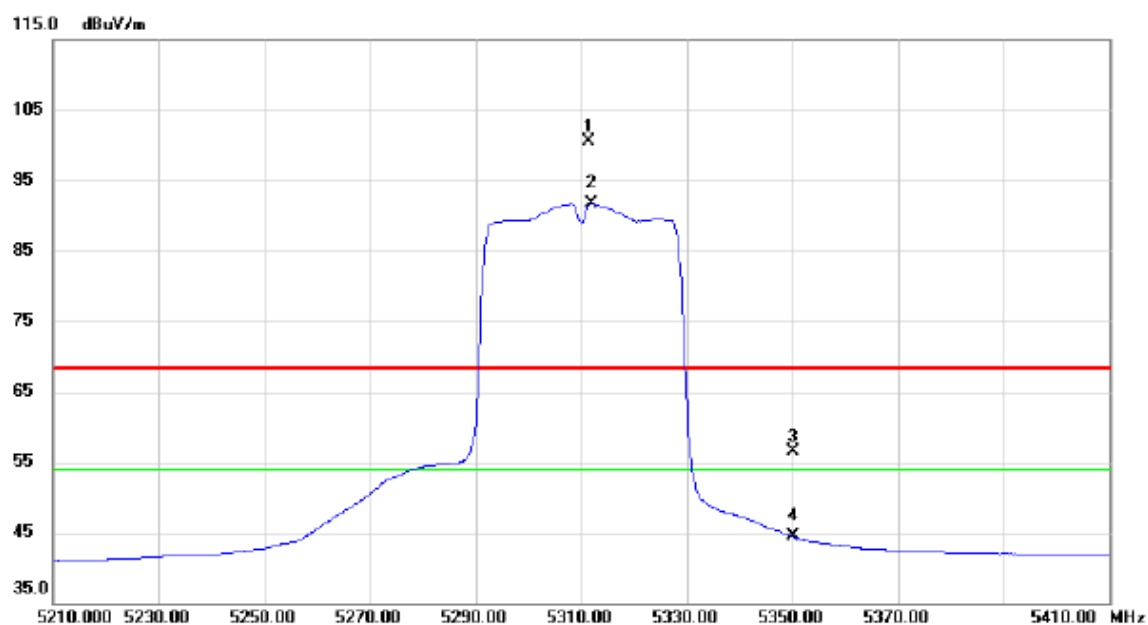


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5311.400	59.96	40.56	100.52	68.30	32.22	peak	No Limit
2	*	5312.000	51.12	40.56	91.68	54.00	37.68	AVG	No Limit
3		5350.000	15.96	40.64	56.60	68.30	-11.70	peak	
4		5350.000	3.88	40.64	44.52	54.00	-9.48	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


Vertical

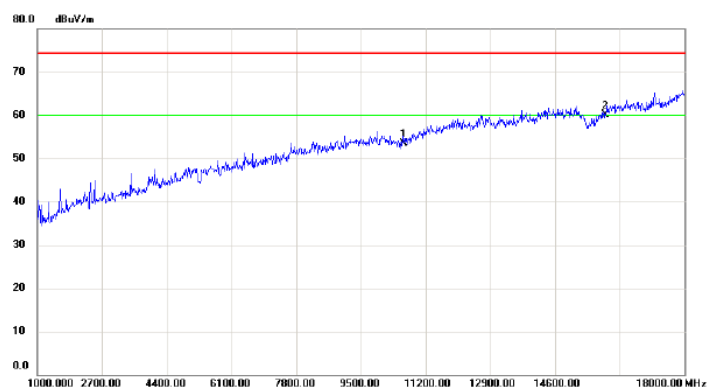

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.00	39.41	14.17	53.58	74.30	-20.72	peak	
2	*	15930.00	41.25	18.89	60.14	74.30	-14.16	peak	

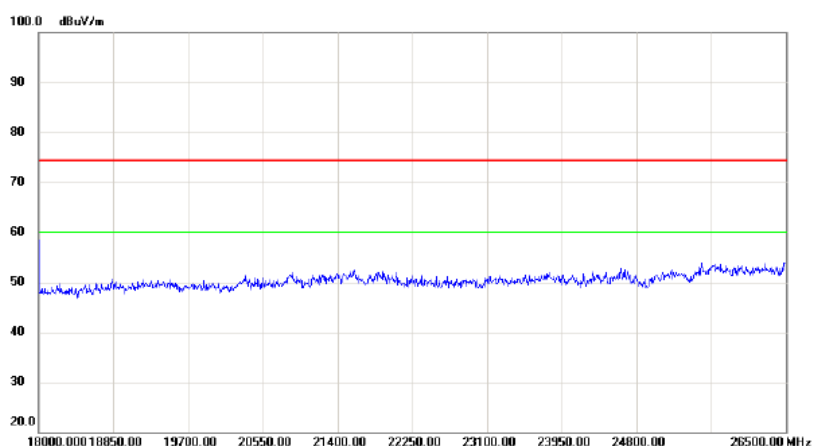


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

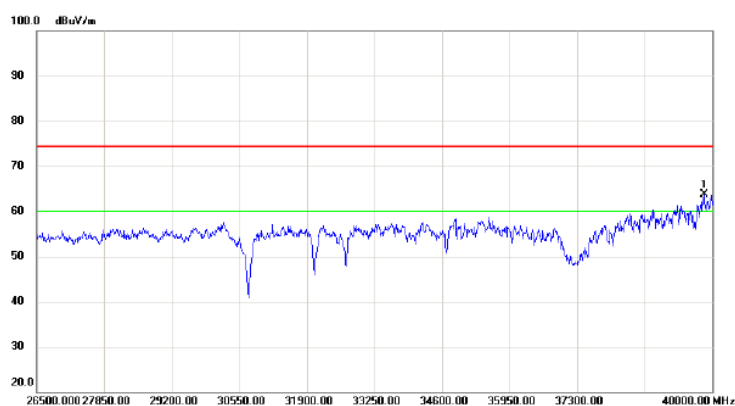

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39838.00	46.47	17.21	63.68	74.30	-10.62	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


Horizontal

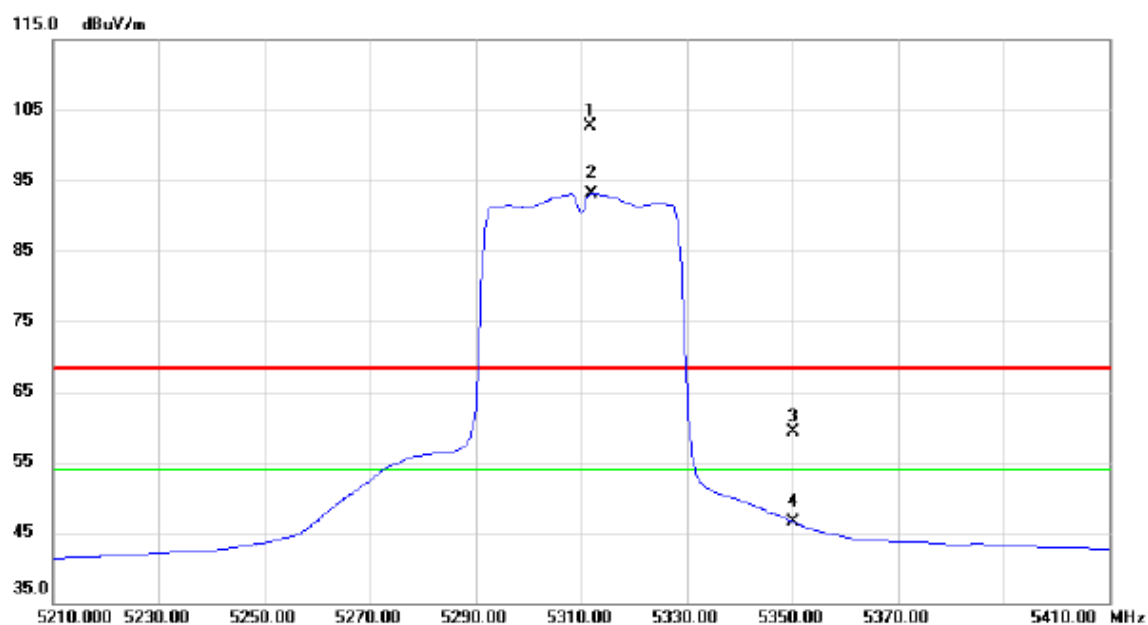


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5311.600	62.21	40.56	102.77	68.30	34.47	peak	No Limit
2	*	5312.000	52.61	40.56	93.17	54.00	39.17	AVG	No Limit
3		5350.000	18.72	40.64	59.36	68.30	-8.94	peak	
4		5350.000	5.93	40.64	46.57	54.00	-7.43	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


Horizontal

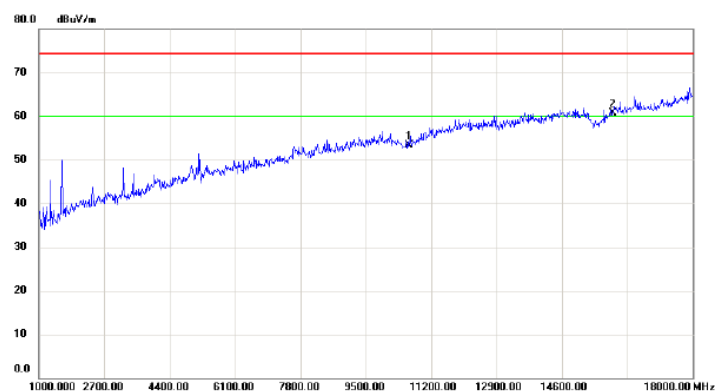

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.00	39.20	14.17	53.37	74.30	-20.93	peak	
2	*	15930.00	41.80	18.89	60.69	74.30	-13.61	peak	

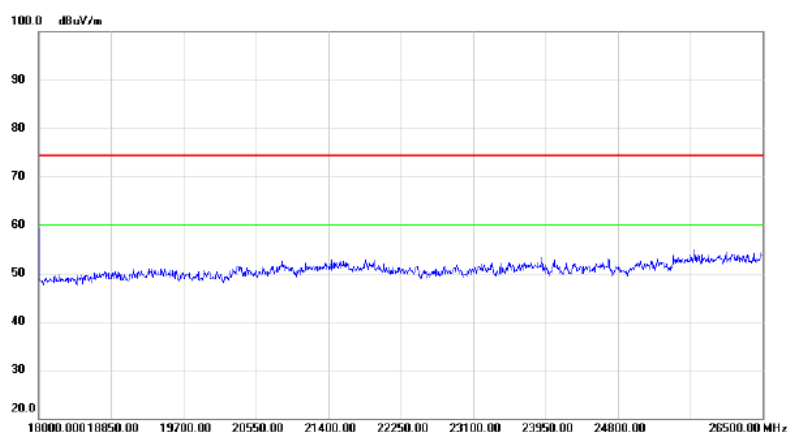


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

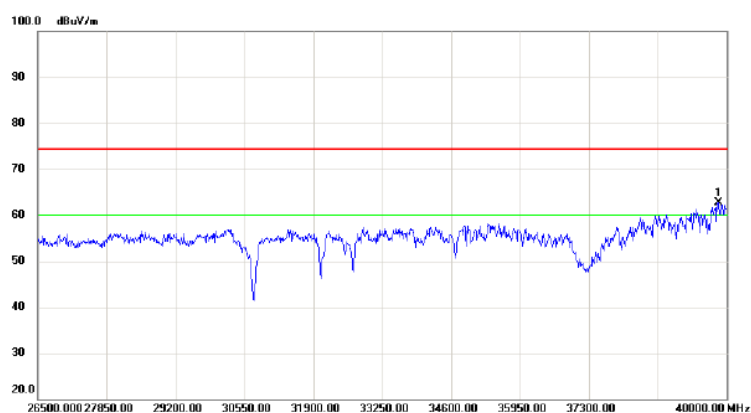

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39838.00	45.55	17.21	62.76	74.30	-11.54	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Vertical

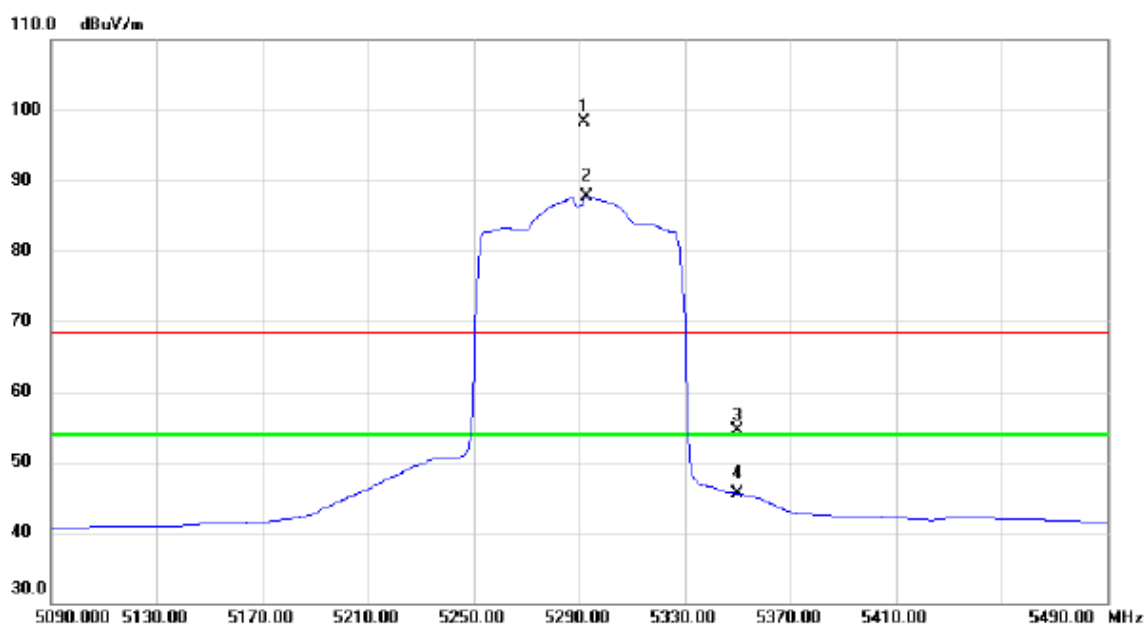


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5291.600	57.71	40.52	98.23	68.30	29.93	peak	No Limit
2	*	5293.200	47.23	40.52	87.75	54.00	33.75	AVG	No Limit
3		5350.000	13.78	40.64	54.42	68.30	-13.88	peak	
4		5350.000	4.91	40.64	45.55	54.00	-8.45	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Vertical

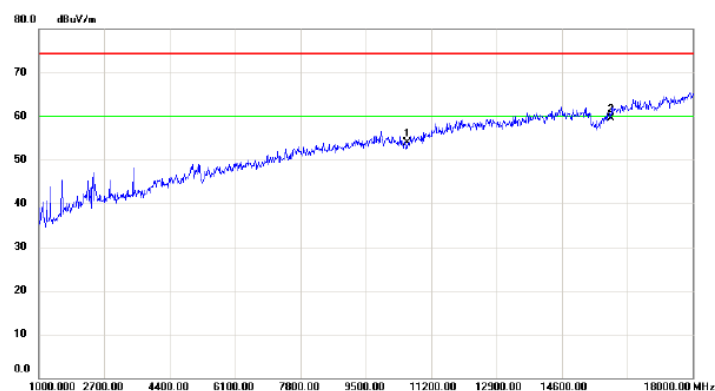

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10580.00	39.94	14.00	53.94	74.30	-20.36	peak	
2 *		15870.00	40.93	18.57	59.50	74.30	-14.80	peak	

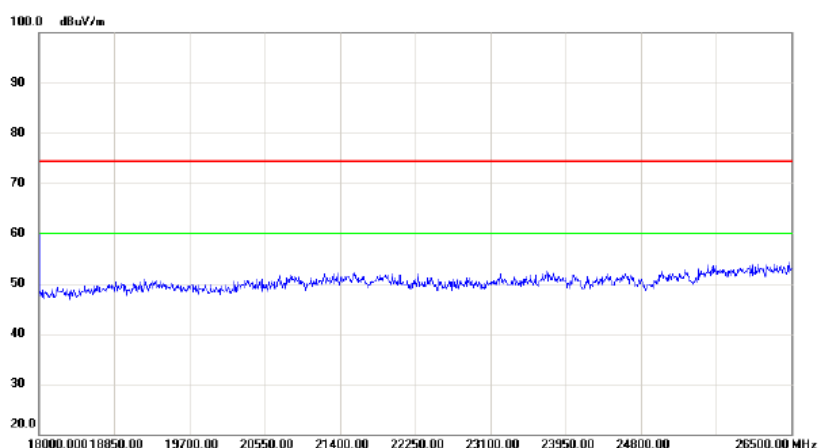


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

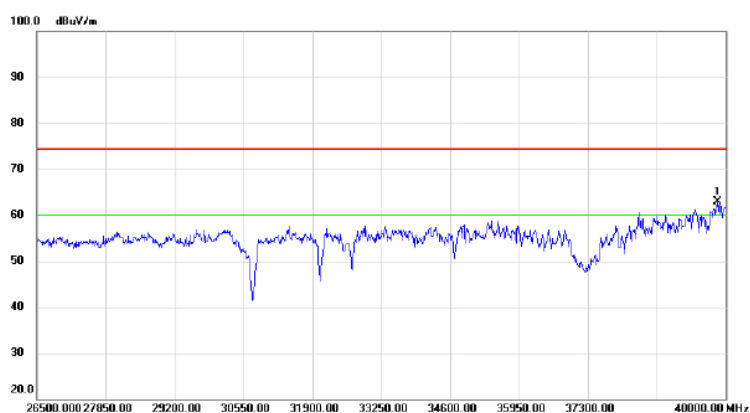

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *		39851.50	45.76	17.23	62.99	74.30	-11.31	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Horizontal

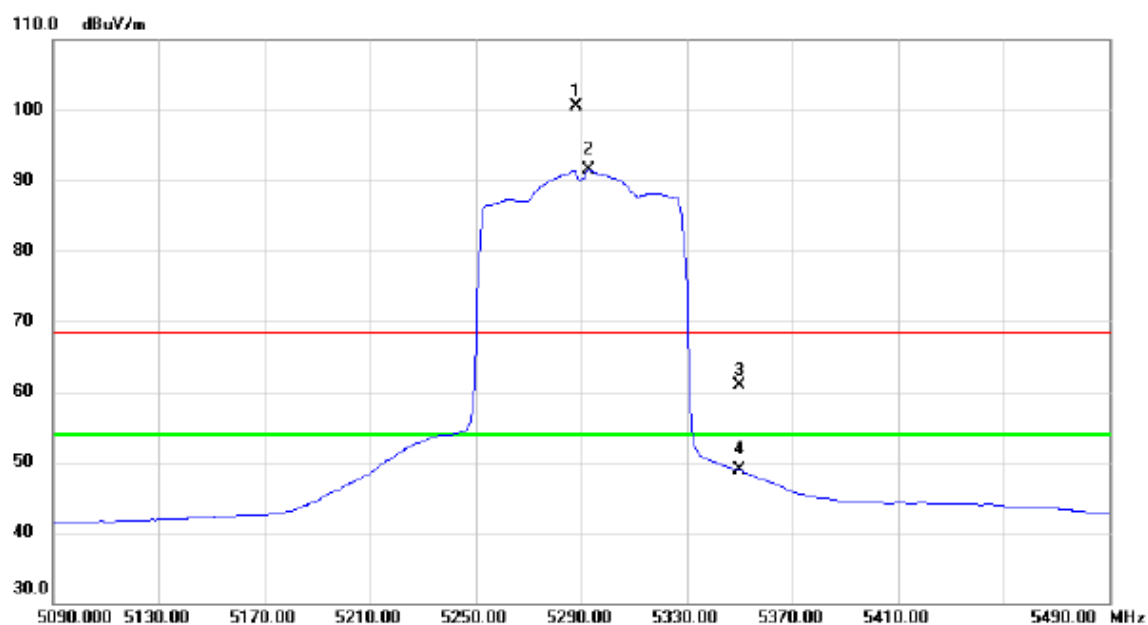


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5288.400	59.96	40.51	100.47	68.30	32.17	peak	No Limit
2	*	5292.800	50.92	40.52	91.44	54.00	37.44	AVG	No Limit
3		5350.000	20.35	40.64	60.99	68.30	-7.31	peak	
4		5350.000	8.25	40.64	48.89	54.00	-5.11	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Horizontal

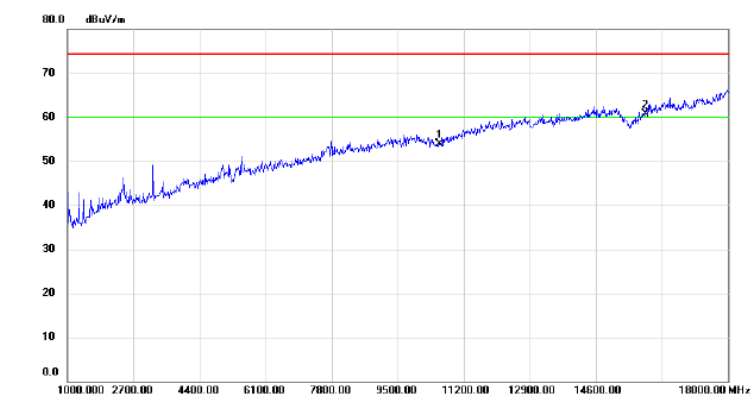

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10580.00	39.83	14.00	53.83	74.30	-20.47	peak	
2 *		15870.00	42.07	18.57	60.64	74.30	-13.66	peak	

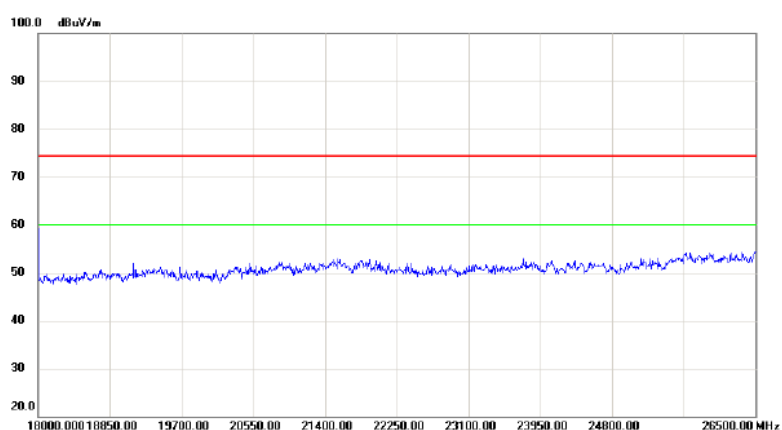


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

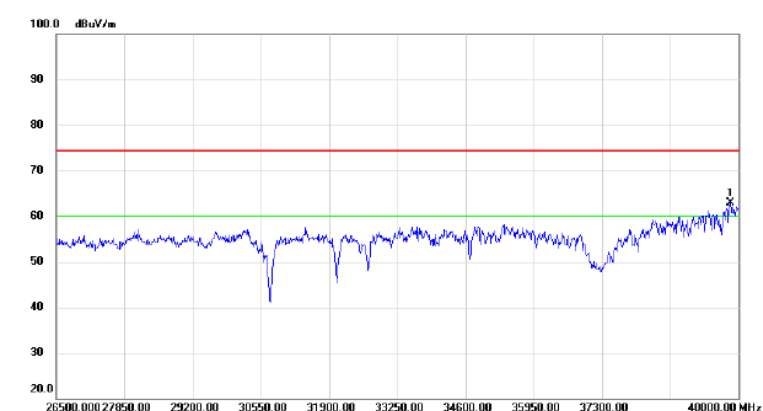

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *		39851.50	45.63	17.23	62.86	74.30	-11.44	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Vertical

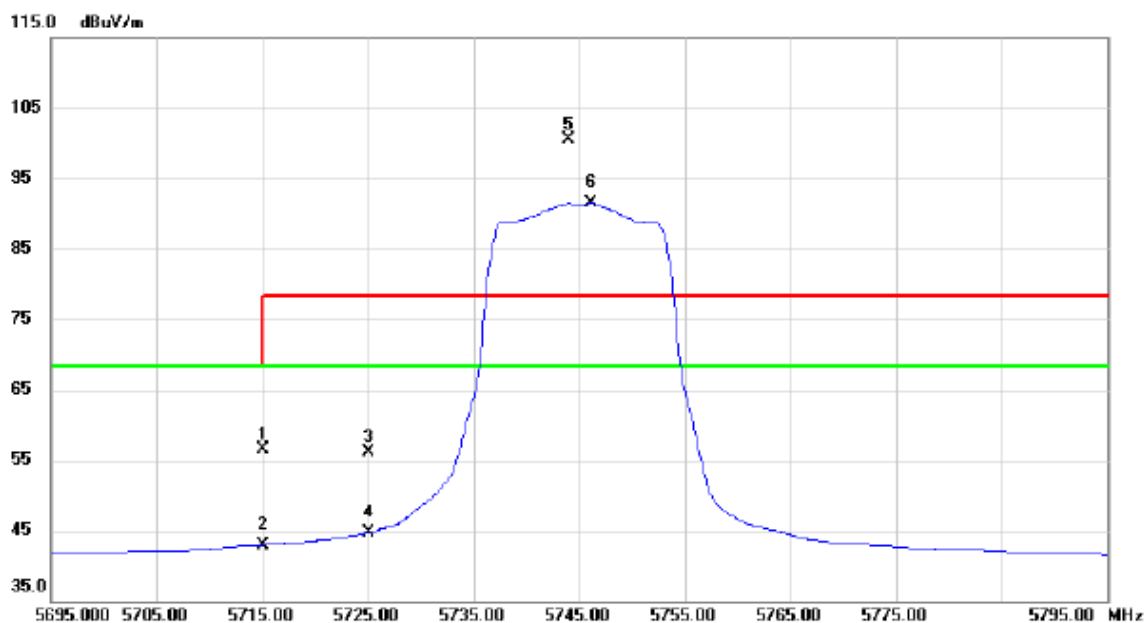


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	15.17	41.25	56.42	68.30	-11.88	peak	
2		5715.000	1.73	41.25	42.98	68.30	-25.32	AVG	
3		5725.000	14.84	41.27	56.11	78.30	-22.19	peak	
4		5725.000	3.45	41.27	44.72	68.30	-23.58	AVG	
5	X	5744.000	59.17	41.29	100.46	78.30	22.16	peak	No Limit
6	*	5746.100	50.21	41.29	91.50	68.30	23.20	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Vertical

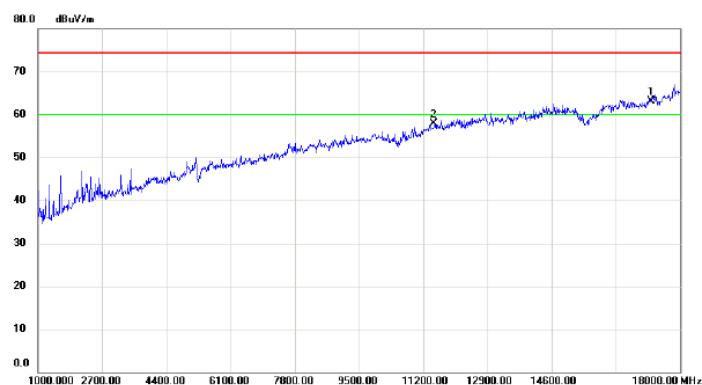

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	17235.00	41.63	21.53	63.16	74.30	-11.14	peak	
2		11490.00	40.90	16.91	57.81	74.30	-16.49	peak	

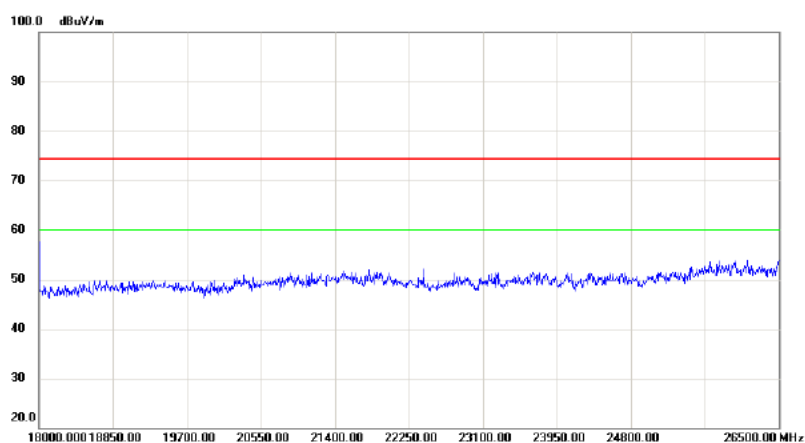


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		

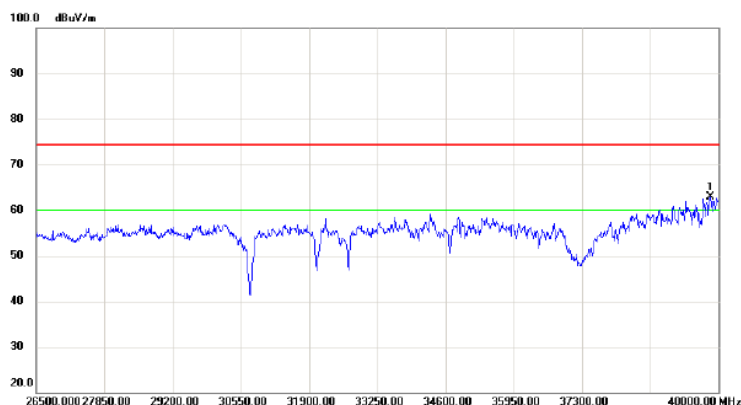

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39838.00	45.74	17.21	62.95	74.30	-11.35	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Horizontal

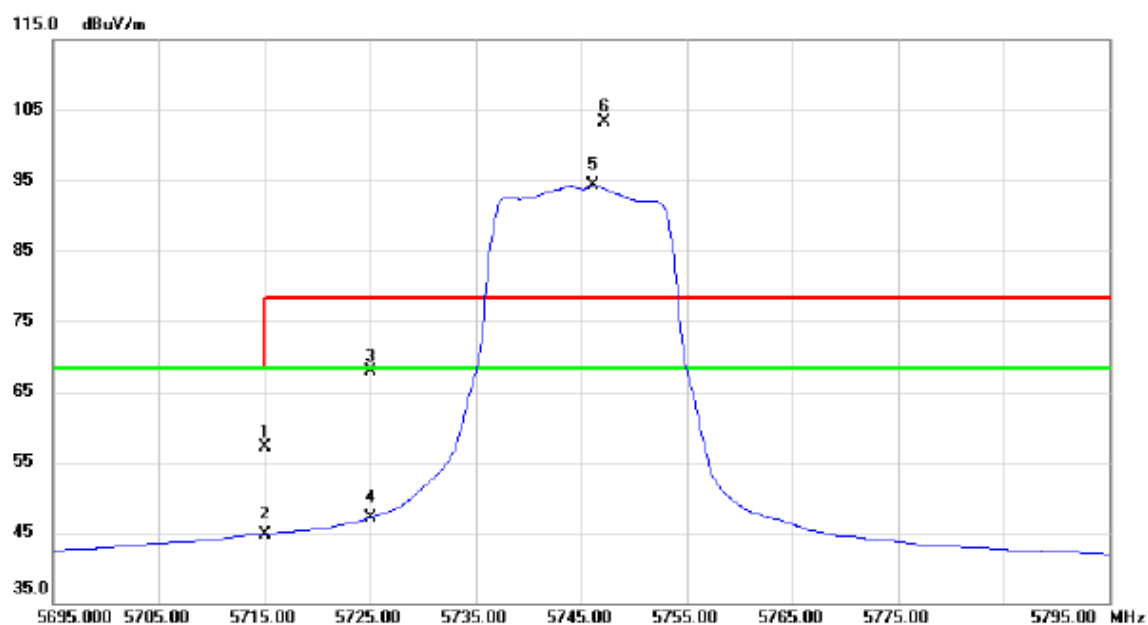


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	15.80	41.25	57.05	68.30	-11.25	peak	
2		5715.000	3.53	41.25	44.78	68.30	-23.52	AVG	
3		5725.000	26.60	41.27	67.87	78.30	-10.43	peak	
4		5725.000	5.87	41.27	47.14	68.30	-21.16	AVG	
5	*	5746.100	52.95	41.29	94.24	68.30	25.94	AVG	No Limit
6	X	5747.200	61.99	41.30	103.29	78.30	24.99	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Horizontal

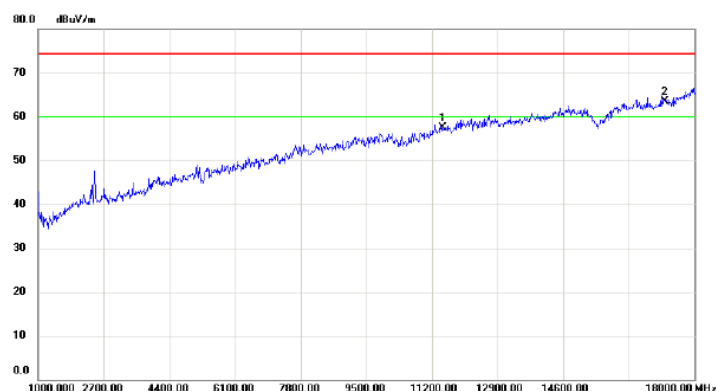

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	40.61	16.91	57.52	74.30	-16.78	peak	
2	*	17235.00	41.97	21.53	63.50	74.30	-10.80	peak	

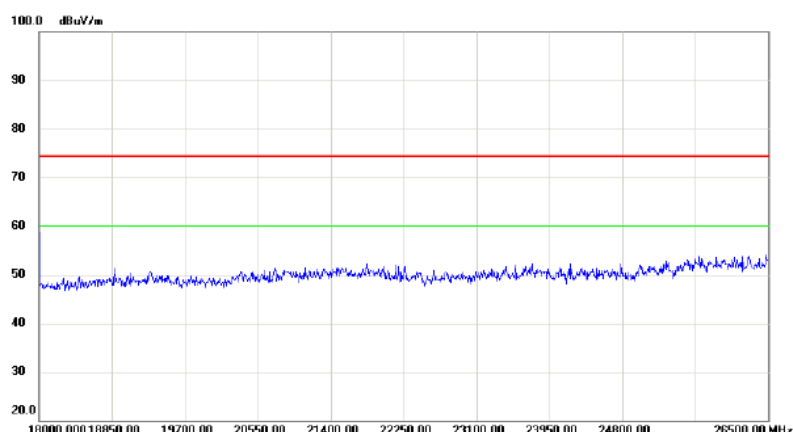


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39959.50	45.78	17.50	63.28	74.30	-11.02	peak	

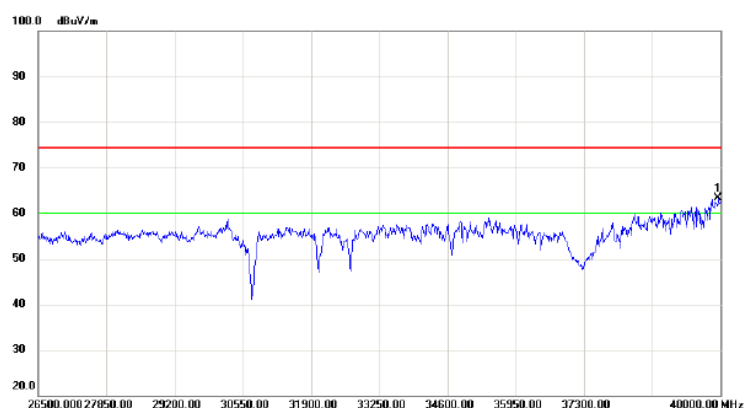

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39959.50	45.78	17.50	63.28	74.30	-11.02	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Vertical

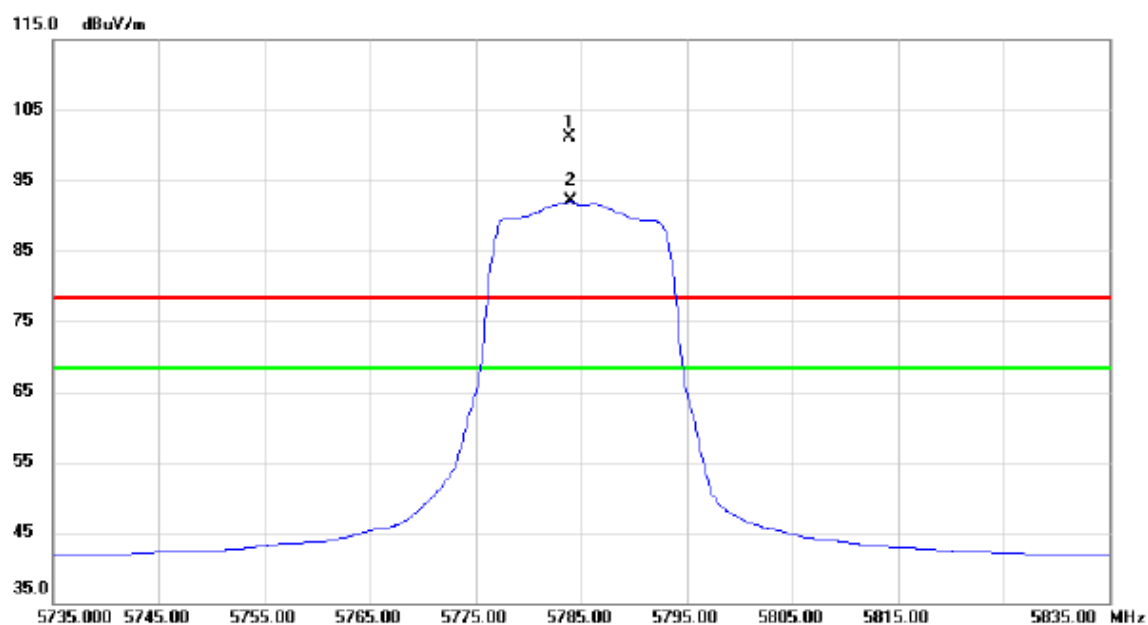


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5783.800	59.74	41.34	101.08	78.30	22.78	peak	No Limit
2	*	5784.000	50.70	41.34	92.04	68.30	23.74	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Vertical

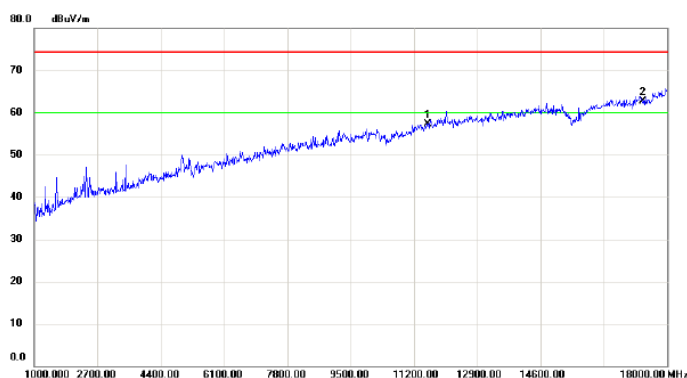

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	40.16	17.05	57.21	74.30	-17.09	peak	
2	*	17355.00	40.80	21.91	62.71	74.30	-11.59	peak	

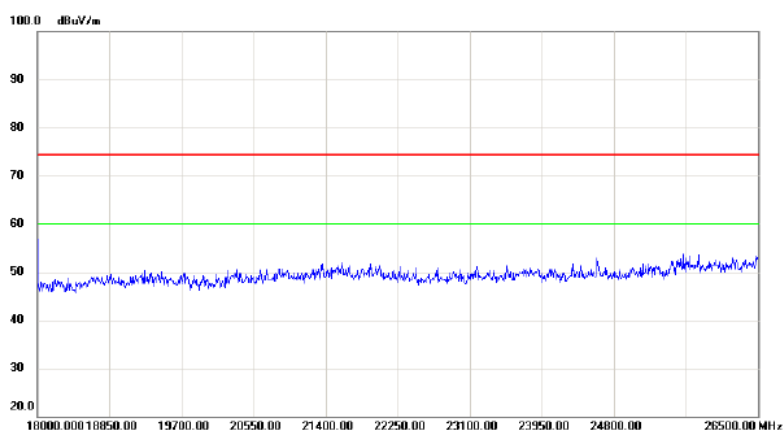


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

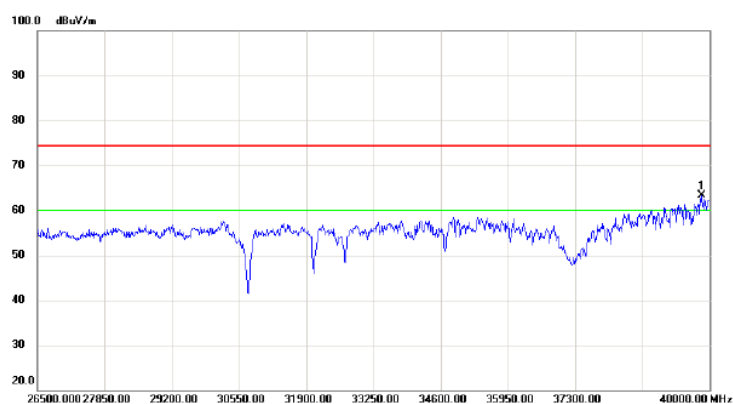

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39838.00	46.17	17.21	63.38	74.30	-10.92	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz




Horizontal

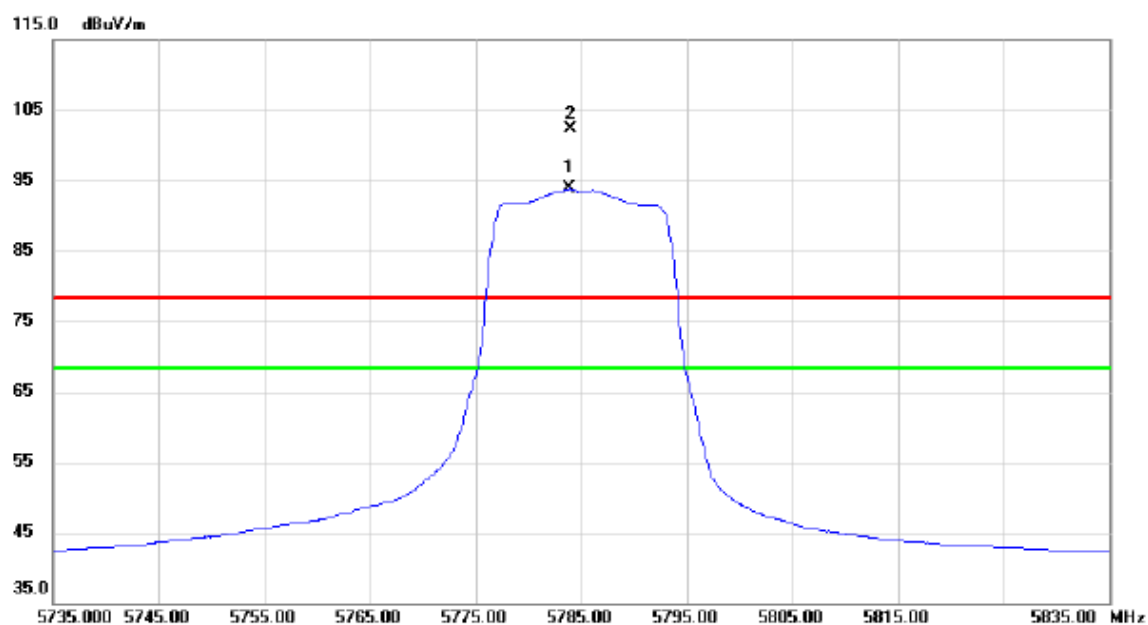

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5783.900	52.47	41.34	93.81	68.30	25.51	AVG	No Limit
2	X	5784.000	60.99	41.34	102.33	78.30	24.03	peak	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz

Horizontal

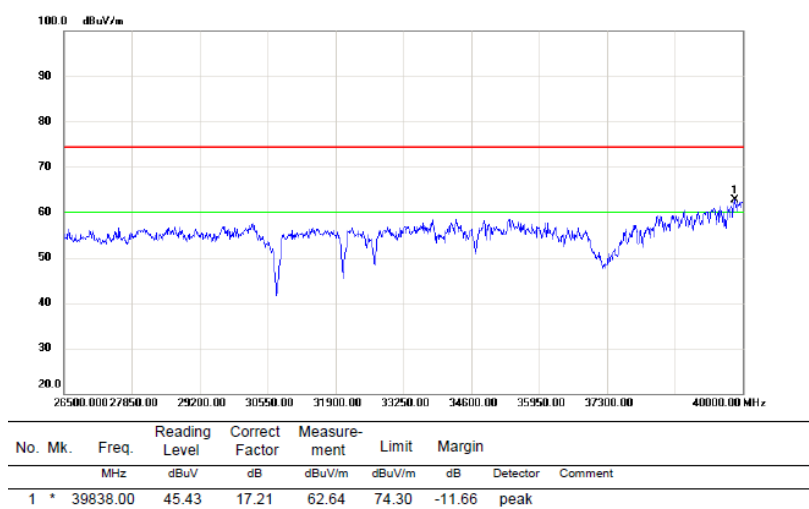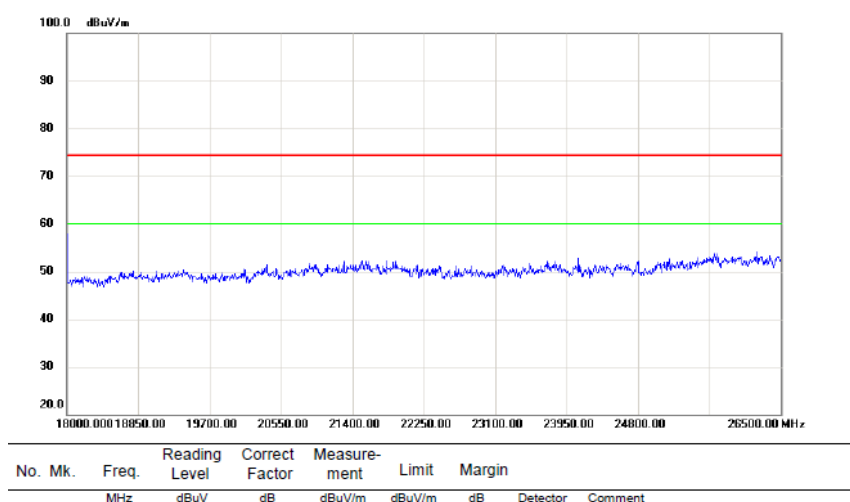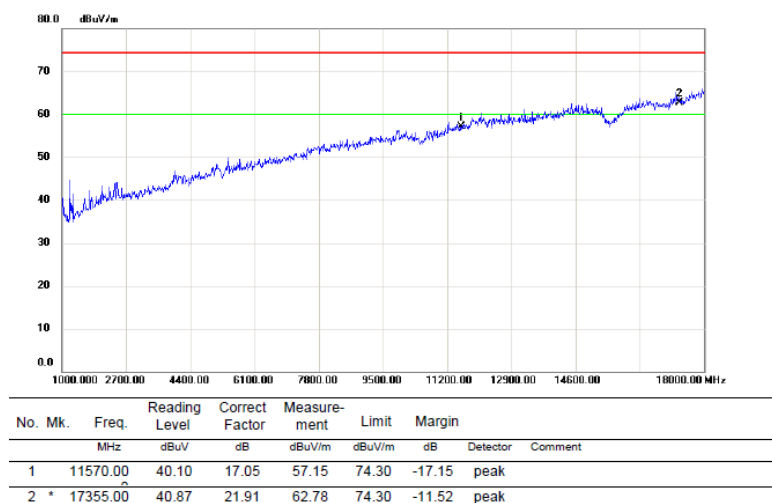

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Vertical

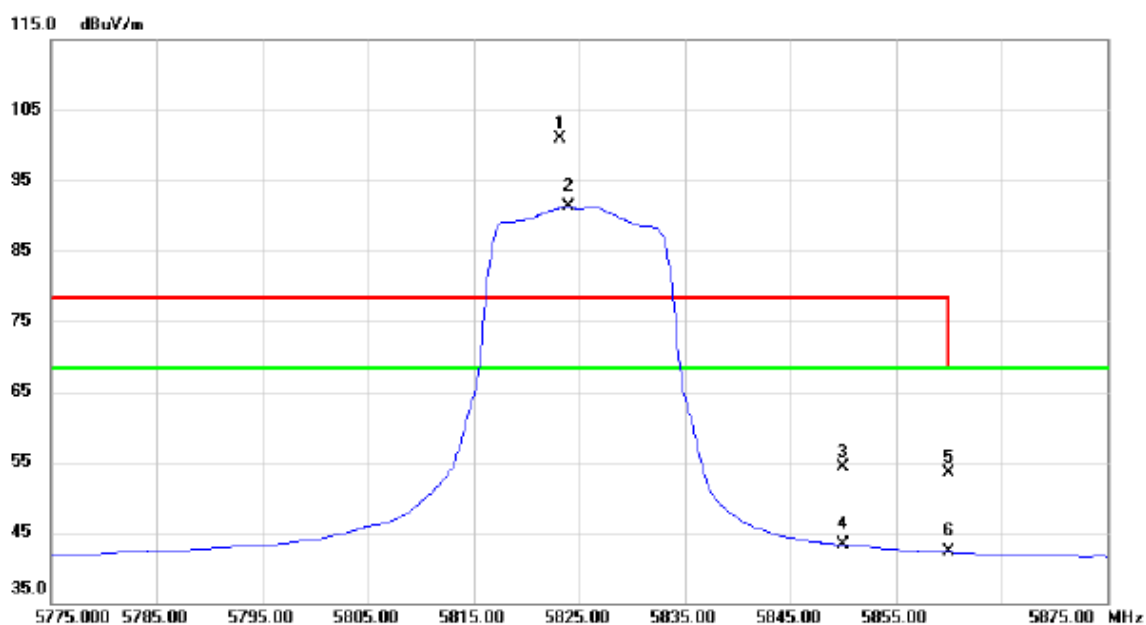


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5823.200	59.51	41.40	100.91	78.30	22.61	peak	No Limit
2	*	5824.000	49.99	41.40	91.39	68.30	23.09	AVG	No Limit
3		5850.000	12.77	41.44	54.21	78.30	-24.09	peak	
4		5850.000	1.86	41.44	43.30	68.30	-25.00	AVG	
5		5860.000	12.08	41.45	53.53	68.30	-14.77	peak	
6		5860.000	0.79	41.45	42.24	68.30	-26.06	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Vertical

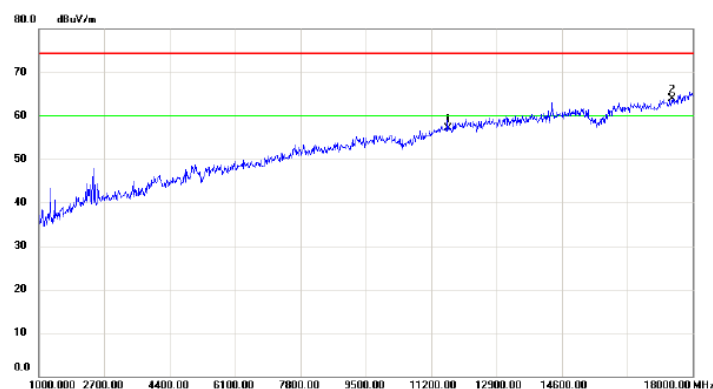

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	39.94	17.17	57.11	74.30	-17.19	peak	
2	*	17475.00	41.54	22.29	63.83	74.30	-10.47	peak	

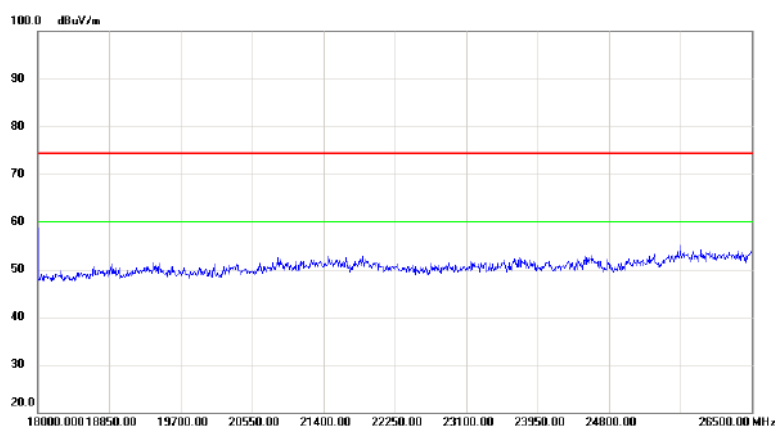


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

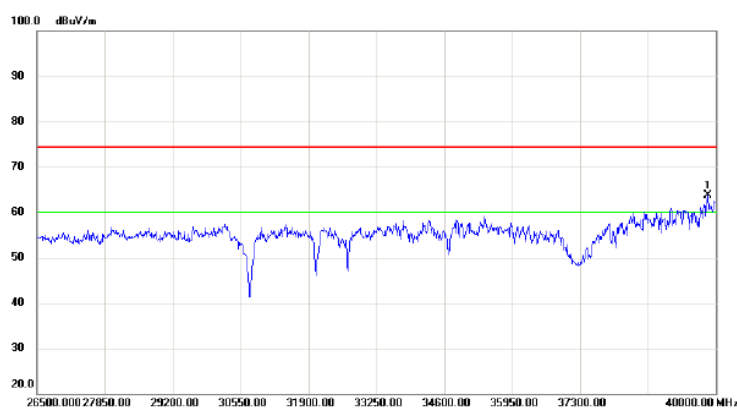

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39838.00	46.45	17.21	63.66	74.30	-10.64	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz




Horizontal

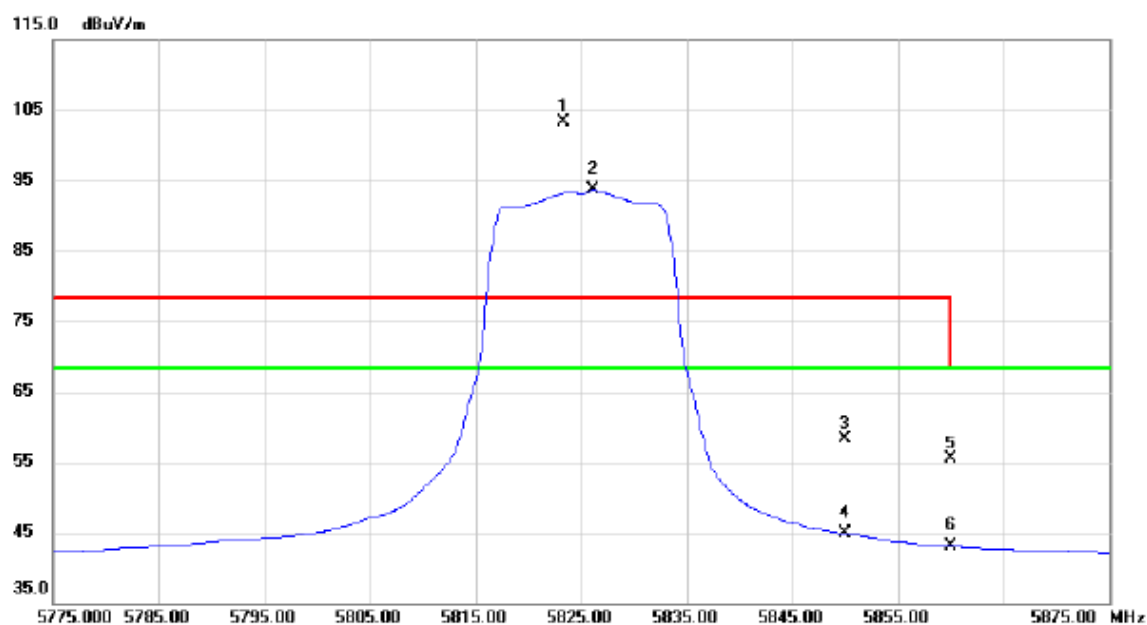

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5823.400	61.93	41.40	103.33	78.30	25.03	peak	No Limit
2	*	5826.200	52.24	41.40	93.64	68.30	25.34	AVG	No Limit
3		5850.000	16.91	41.44	58.35	78.30	-19.95	peak	
4		5850.000	3.42	41.44	44.86	68.30	-23.44	AVG	
5		5860.000	14.12	41.45	55.57	68.30	-12.73	peak	
6		5860.000	1.69	41.45	43.14	68.30	-25.16	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Horizontal

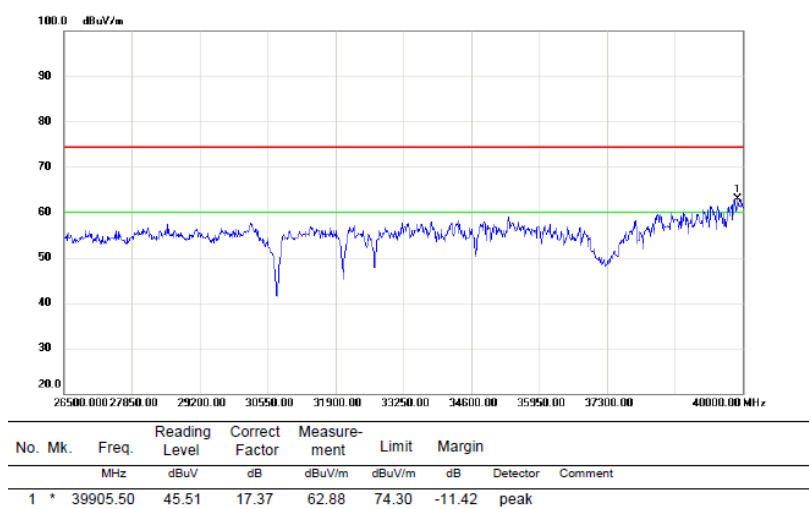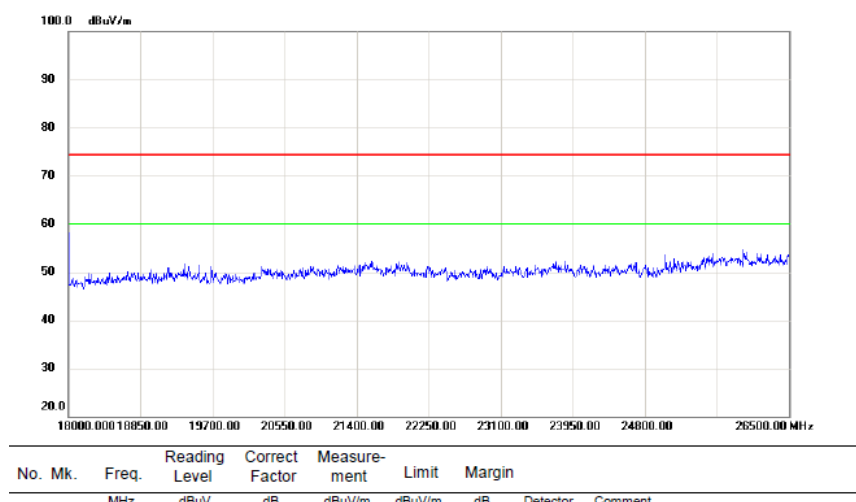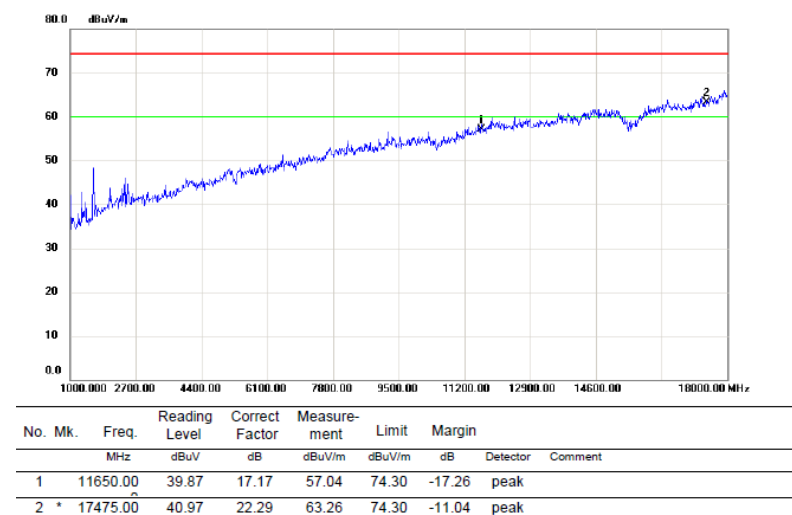

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical

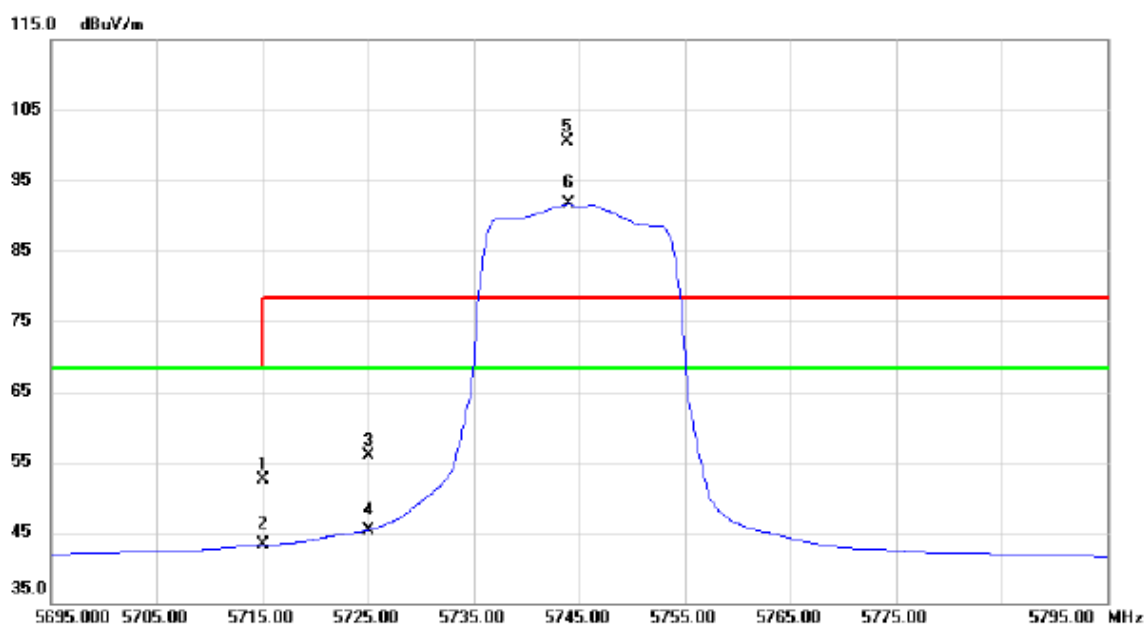

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	11.23	41.25	52.48	68.30	-15.82	peak	
2		5715.000	2.00	41.25	43.25	68.30	-25.05	AVG	
3		5725.000	14.56	41.27	55.83	78.30	-22.47	peak	
4		5725.000	4.09	41.27	45.36	68.30	-22.94	AVG	
5	X	5743.800	59.23	41.29	100.52	78.30	22.22	peak	No Limit
6	*	5744.000	50.37	41.29	91.66	68.30	23.36	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical

